

Parallel Radix Sort

Hennadiy Yatskov, Nico Mürdter

Karlsruhe Institute of Technology, Karlsruhe, Germany
hennadiy.yatskov@student.kit.edu, nico.muerdter@student.kit.edu

Abstract. Compare ... MCSTL und stdlib.

1 Algorithm

Explain your algorithm.

2 Implementation Details

Details.

3 Experimental Results

Your hardware.

What do you benchmark.

Running time 1 and speedup plots 2 (for each generator, 64-bit integer and 32-bit floating point (not for non-comparative integer sorting algorithms).

Interpretation.

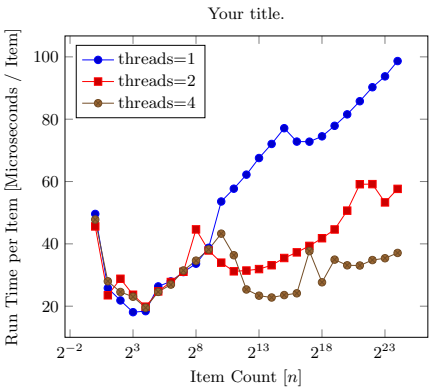


Fig. 1. Running times of `std::sort` with uniform input. Mean of 5 iterations.

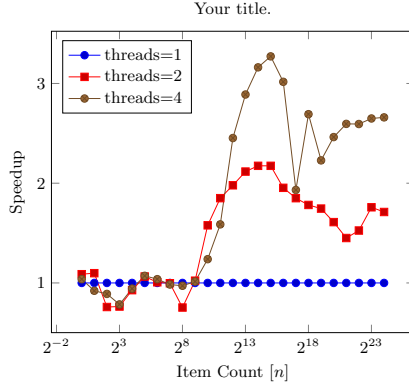


Fig. 2. Speedup of `std::sort` with uniform input. Mean of 5 iterations.

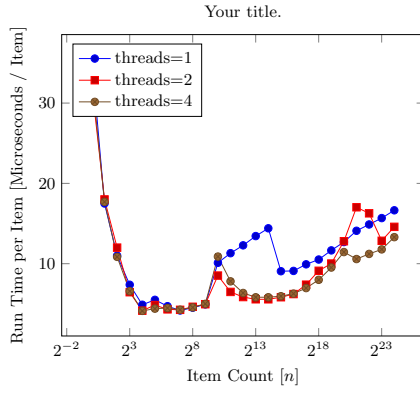


Fig. 3. Running times of `std::sort` with zero input. Mean of 5 iterations.

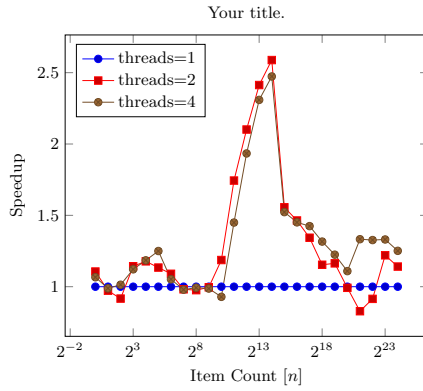


Fig. 4. Speedup of `std::sort` with zero input. Mean of 5 iterations.