



Abschlussarbeit im Masterstudiengang Physik der
Kondensierten Materie

Entwicklung eines diagonalen isometrischen Tensor Netzwerk Algorithmus

Development of a diagonal isometric Tensor Network Algorithm

Benjamin Sappler

18. April 2024

Erstgutachter (Themensteller): Prof. F. Pollmann
Zweitgutachter: Unknown

I hereby declare that this thesis is entirely the result of my own work except where otherwise indicated. I have only used the resources given in the list of references.

Munich, 99.99.2099

Benjamin Sappler

Abstract

The numerical simulation of strongly interacting quantum many-body systems is a challenging problem. In the last decades, Tensor Networks have emerged as the standard method for tackling this problem in one dimensional systems in the form of Matrix Product States (MPS). Tensor Networks have also been generalized for the highly relevant problem of two and more spatial dimensions. However, these so-called Projected Entangled Pair States (PEPS) are typically plagued by high computational complexity or drastic approximations. Recently, a new class of Tensor Networks, called isometric Tensor Networks, have been proposed for the simulation of two-dimensional quantum systems. This new class of Tensor Networks can be understood as a generalization of the one-dimensional Matrix Product States to higher dimensions. While isometric Tensor Networks generally capture only a subspace of the total Hilbert space, there are already promising results. In this work, we develop a new class of isometric Tensor Networks that has some key differences to the existing one. We show first numerical results for finding ground states of the Transverse Field Ising model.

Zusammenfassung



Contents

1	Introduction	1
2	Tensors and Tensor Networks	3
2.1	Conventions and Notation	3
2.2	Tensor Decompositions	7
2.3	Isometric Tensor Networks	8
2.4	Matrix Product States (MPS)	9
2.5	Isometric Tensor Product States in 2D	17
3	diagonal isometric Tensor Product States (disoDTPS)	23
3.1	Network Structure	23
3.2	Yang-Baxter Move	26
3.3	Time Evolving Block Decimation (TEBD)	31
4	Toric Code: An exactly representable Model	33
5	Transverse Field Ising Model: Ground State Search and Time Evolution	35
A	Optimization Problems for isometric Tensor Networks	37
A.1	The orthogonal Procrustes problem	38
A.2	The Evenbly-Vidal algorithm	39
A.3	Cost functions of multiple tensors	39
B	Riemannian Optimization of Isometries	41
B.1	The complex Stiefel manifold	41
B.2	Gradients, retractions, and vector transport	42
B.3	Conjugate Gradients	43
B.4	Trust Region Method	43
C	Initialization of the Disentangling Unitary	45
	Bibliography	47

Chapter 1

Introduction

Chapter 2

Tensors and Tensor Networks

In the following, a brief introduction to tensors, tensor networks, and tensor network algorithms is given. We start by defining the conventions and notation used in this thesis in section 2.1. In section 2.2, we introduce important tensor decompositions that are used extensively in tensor network algorithms. In section 2.3, we define isometric tensor networks and discuss their properties. Lastly, we give examples for physical states being represented in terms of isometric tensor networks, namely the popular Matrix Product States (MPS) in section 2.4 and the recently developed isometric tensor product states in 2D (isoTPS) in section 2.5.

2.1 Conventions and Notation

Tensors

For the purpose of this thesis we define a *tensor* T of rank n as an n -dimensional array of complex numbers

$$T \in \mathbb{C}^{\chi_1 \times \chi_2 \times \dots \times \chi_n}, \quad \chi_i \in \{1, 2, \dots\}$$

with entries

$$T_{i_1 i_2 \dots i_n} \in \mathbb{C}, \quad i_j \in \{1, 2, \dots, \chi_j\}.$$

For example, a rank-0 tensor is a scalar, a rank-1 tensor is a vector, and a tensor of rank-2 is a matrix.

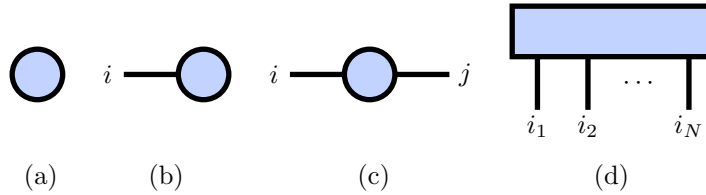


Figure 2.1: Tensors of different ranks are shown in diagrammatic notation. (a) A scalar, (b) a vector, (c) a matrix, (d) a general tensor of rank N .

An *index contraction* between two or more tensors is the linear operation that is performed by summing over a given set of indices. For example, the matrix product of two matrices $A \in \mathbb{C}^{\chi_1 \times \chi_2}$ and $B \in \mathbb{C}^{\chi_2 \times \chi_3}$ can be written as the index contraction

$$C_{ij} = \sum_{\alpha=1}^{\chi_2} A_{i\alpha} B_{\alpha j}. \quad (2.1)$$

A more involved example is the index contraction of two rank-3 tensors $A \in \mathbb{C}^{\chi_1 \times \chi_2 \times \chi_3}$, $B \in \mathbb{C}^{\chi_2 \times \chi_4 \times \chi_5}$ and one rank-4 tensor $C \in \mathbb{C}^{\chi_3 \times \chi_5 \times \chi_6 \times \chi_7}$, where we contract along the indices with dimension χ_2 , χ_3 and χ_5 . The result is a rank-4 tensor $D \in \mathbb{C}^{\chi_1 \times \chi_4 \times \chi_6 \times \chi_7}$:

$$D_{ijkl} = \sum_{\alpha=1}^{\chi_2} \sum_{\beta=1}^{\chi_3} \sum_{\gamma=1}^{\chi_5} A_{i\alpha\beta} B_{\alpha j\gamma} C_{\beta\gamma kl}. \quad (2.2)$$

More generally, given a rank- $(n + f)$ tensor $A \in \mathbb{C}^{\chi_1 \times \dots \times \chi_n \times \xi_1 \times \dots \times \xi_f}$ and a rank- $(m + f)$ tensor $B \in \mathbb{C}^{\lambda_1 \times \dots \times \lambda_m \times \xi_1 \times \dots \times \xi_f}$, the result of contracting A and B along the last f indices produces a new rank- $(m + n)$ tensor $C \in \mathbb{C}^{\chi_1 \times \dots \times \chi_n \times \lambda_1 \times \dots \times \lambda_m}$ as

$$C_{i_1 \dots i_n j_1 \dots j_m} := \sum_{\mu_1=1}^{\xi_1} \dots \sum_{\mu_f=1}^{\xi_f} A_{i_1 \dots i_n \mu_1 \dots \mu_f} B_{j_1 \dots j_m \mu_1 \dots \mu_f}. \quad (2.3)$$

Contractions over arbitrary indices can be reformulated as contractions over the last f indices by transposing the tensors. Contractions over more than two tensors can be decomposed into successive contractions of two tensors. Because tensor contractions are linear, the order in which tensors are contracted doesn't change the result. However, the computational complexity does in general depend on the order of contractions and can thus be minimized by choosing the optimal contraction order.

By counting the number of multiplications and additions that are necessary to perform the tensor contraction (2.3), the computational complexity can be determined as

$$\mathcal{O} \left(\prod_{\mu=1}^n \chi_{\mu} \prod_{\mu=1}^m \lambda_{\mu} \prod_{\mu=1}^f \xi_{\mu} \right).$$

Tensor Networks

A *tensor network* is defined as a collection of tensors that are contracted in a specified way. It is convenient to introduce a diagrammatic notation, where tensors are drawn as shapes and tensor indices are represented by lines emerging from these

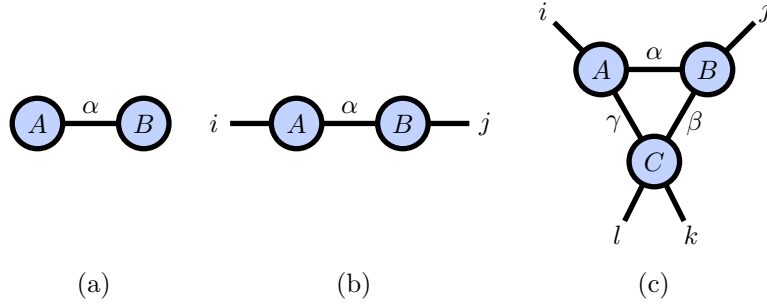


Figure 2.2: Tensor networks in diagrammatic notation. (a) Scalar product (2.4). (b) Matrix product (2.1). (c) More involved network consisting of three tensors (2.2).

shapes. To relate this diagrammatic notation to equations, one often decorates each line with the corresponding index i_j . A scalar, vector, matrix, and a general rank- n tensor are visualized in this notation in figure 2.1. Index contractions are depicted diagrammatically by connecting the lines corresponding to contracted indices. Lines connecting two tensors are sometimes called *bonds*, while indices not used in contractions are called *open indices*. The *bond dimension* χ_i denotes the number of different values an index i can take. It is often more convenient to discuss tensor network algorithms in terms of diagrams than in terms of equations. Two simple tensor networks are the scalar-product of two vectors

$$c = \sum_{\alpha=1}^{\chi} A_{\alpha} B_{\alpha} \quad (2.4)$$

and the matrix product (2.1). Both networks are shown as diagrams in figure 2.2(a) and 2.2(b) respectively. 2.2(c) depicts the more involved tensor network (2.2).

Isometries

Given two normed vector spaces V_1 and V_2 with $\dim(V_1) = m$, $\dim(V_2) = n$, $m \leq n$, an *isometry* (sometimes also called *semi-unitary*) is a linear, norm-preserving map $W : V_1 \rightarrow V_2$ from the smaller to the larger vector space. Each isometry can be represented by a $n \times m$ matrix W fulfilling the *isometry condition*

$$W^{\dagger}W = \mathbb{1}, \quad WW^{\dagger} = \mathbb{P}, \quad (2.5)$$

where $\mathbb{P} = \mathbb{P}^2$ is a projection. If $m = n$, it holds $\mathbb{P} = \mathbb{1}$ and W is a *unitary map*. An isometry tensor is a tensor that through grouping of indices and reshaping (i.e. matricization) becomes an isometry. In tensor network diagrams, we draw isometries by decorating lines with arrows. Following the convention of [1, 2], we denote the

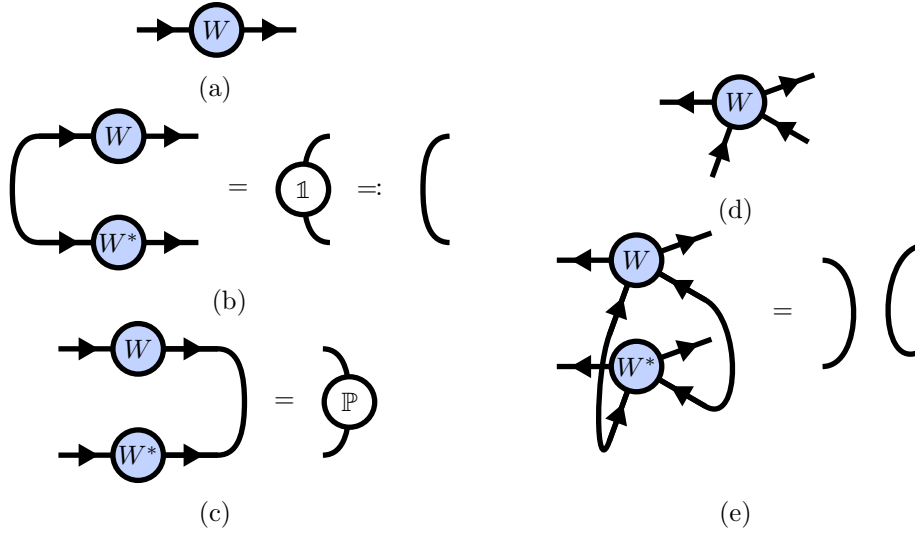


Figure 2.3: Isometric and unitary tensors are drawn by decorating indices with arrows. (a) diagrammatic notation of an isometric matrix (b) (c) The isometry condition (2.5) is depicted diagrammatically. (d) Isometric tensors of higher rank must fulfill the isometry condition by grouping of indices.

indices belonging to the larger vector space by incoming arrows and the indices belonging to the smaller vector space by outgoing arrows. Unitary tensors are decorated with bidirectional arrows on all indices, where the grouping must be inferred from the context. Ordinary tensors are drawn without arrows. Tensor diagrams for isometric and unitary tensors are shown in figure 2.3.

We lastly introduce an inner product for rank- n tensors $A, B \in \mathbb{C}^{\chi_1 \times \dots \times \chi_n}$, the *Frobenius inner product*

$$\langle A, B \rangle_F := \sum_{\mu_1=1}^{\chi_1} \dots \sum_{\mu_n=1}^{\chi_n} A_{\mu_1 \dots \mu_n}^* B_{\mu_1 \dots \mu_n} = \text{Tr} \left(A^\dagger B \right),$$

where the last equality holds only if $n = 2$. The Frobenius inner product induces a norm, the *Frobenius norm*

$$\|A\|_F = \sqrt{\langle A, A \rangle_F},$$

which can be used to define a measure of distance $\|A - B\|_F$ between tensors A and B .

2.2 Tensor Decompositions

There are two decompositions that are used extensively in this thesis: The QR-decomposition and the Singular Value Decomposition. Both decompositions are matrix decompositions but can be applied to tensors as well by first grouping indices and reshaping to a matrix, applying the decomposition, and reshaping the result back to the original bond dimensions.

The *reduced QR-decomposition* of a matrix $A \in \mathbb{C}^{n \times m}$ is the decomposition

$$A = QR, \quad (2.6)$$

where $Q \in \mathbb{C}^{n \times k}$ is an isometry, $R \in \mathbb{C}^{k \times m}$ is an upper triangular matrix and $k := \min(n, m)$. The computational complexity of the QR decomposition scales as

$$\mathcal{O}(n \cdot m \cdot \min(n, m)). \quad (2.7)$$

A diagrammatic depiction of the QR decomposition (2.6) is drawn in figure 2.4(a). The *Singular Value Decomposition* (SVD) of a matrix $A \in \mathbb{C}^{n \times m}$ is the decomposition

$$A = USV^\dagger, \quad (2.8)$$

where $U \in \mathbb{C}^{n \times k}$ and $V \in \mathbb{C}^{m \times k}$ are isometries, $S \in \mathbb{R}^{k \times k}$ is a diagonal real matrix of *singular values*, and $k := \min(n, m)$. The computational complexity of the SVD is the same as for the QR decomposition (2.7). However, while the scaling is the same, the prefactors are lower for the QR decomposition in most implementations, meaning that the QR decomposition is faster in practice. Moreover, in contrast to the SVD, the QR decomposition allows for highly efficient implementations on graphics processing units (GPUs), which enables decompositions of large matrices to be carried out significantly faster and more power efficiently. Thus, whenever the singular values are not needed, the QR decomposition is preferred over the SVD. Figure 2.4 shows a tensor network diagram of the SVD (2.8).

An important property of the SVD is that it can be used to approximate a matrix A by a matrix \tilde{A} of lower rank $\chi < \min(m, n)$. This *truncated SVD* can be performed by keeping only the largest $\chi < k$ singular values and omitting the corresponding columns of U and V :

$$A \approx \tilde{A} = \tilde{U} \tilde{S} \tilde{V},$$

with isometries $\tilde{U} \in \mathbb{C}^{n \times \chi}$, $\tilde{V} \in \mathbb{C}^{m \times \chi}$ and real diagonal matrix $\tilde{S} \in \mathbb{C}^{\chi \times \chi}$. It can be shown [3] that the truncated SVD minimizes the distance $\|A - \tilde{A}\|_F$ between A and \tilde{A} under the constraint $\text{rank}(\tilde{A}) = \chi$. The truncated SVD is frequently used in tensor network algorithms to truncate tensors to a maximum bond dimension χ_{\max} .

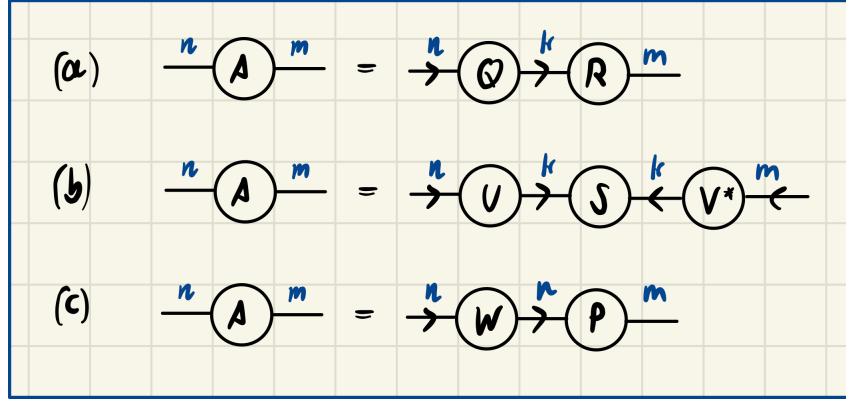


Figure 2.4: Different tensor decompositions are shown in tensor network diagram notation. The indices are decorated with bond dimensions. (a) QR decomposition (2.6). (b) Singular Value Decomposition (2.8)

2.3 Isometric Tensor Networks

An isometric tensor network is a tensor network whose diagrams bonds can be consistently assigned with arrows. In particular we will look at finite tensor networks where the arrows do not form any loops. In such networks, all arrows point to a single tensor, the *orthogonality center*. Such networks have the very useful property, that the error of local approximations around the orthogonality center can be computed locally (without contracting the full network). Let \mathcal{N} be the tensor that is the result of contracting the full network, and let \mathcal{M} be the tensor resulting from the contraction of a subregion of the network around the orthogonality center, where all arrows in the tensor network diagram point towards \mathcal{M} (see figure 2.5(a) for an example in tensor diagram notation). Let us now approximate the sub-network \mathcal{M} by a different sub-network \mathcal{M}' , which changes the contraction of the full network to \mathcal{N}' (see 2.5(b)). We can compute the error ε of this approximation as

$$\begin{aligned}
 \varepsilon^2 &= \|\mathcal{N} - \mathcal{N}'\|_F^2 \\
 &= \langle \mathcal{N} - \mathcal{N}', \mathcal{N} - \mathcal{N}' \rangle_F \\
 &= \|\mathcal{N}\|_F^2 + \|\mathcal{N}'\|_F^2 - 2 \operatorname{Re} \langle \mathcal{N}, \mathcal{N}' \rangle_F \\
 &= \|\mathcal{M}\|_F^2 + \|\mathcal{M}'\|_F^2 - 2 \operatorname{Re} \langle \mathcal{M}, \mathcal{M}' \rangle_F \\
 &= \|\mathcal{M} - \mathcal{M}'\|_F^2,
 \end{aligned}$$

where in the fourth step we used the fact that all tensors outside of the sub-network satisfy the isometry condition. As an example, the contraction of $\operatorname{Tr}(\mathcal{N}\mathcal{N}^\dagger)$ is shown in figure 2.5(c). As one can see, the computation of the error reduces to a

contraction of the local sub-networks. This greatly simplifies the computation of optimal approximations of tensors especially for large networks, because the full network doesn't need to be contracted. As will become clear in the next section, when the tensor network represents a quantum state, this also makes it very easy to compute local expectation values, because the computation of the overlap of the wavefunction can be simplified to a contraction of a local environment around the orthogonality center. Additionally, approximations made by the truncated SVD 2.2 and the isometrization using the polar decomposition ?? are, when performed at the orthogonality center, globally optimal for isometric tensor networks, instead of only locally optimal for non-isometric tensor networks.

2.4 Matrix Product States (MPS)

The Density Matrix Renormalization Group (DMRG) algorithm, which was subsequently understood as a variational method over the class of Matrix Product States (MPS), has developed to be the de-facto standard for the numerical simulation of one-dimensional quantum systems. The success of this method is due to the remarkable ability of MPS to capture the area-law entanglement characteristics of ground states of gapped Hamiltonians. Additionally, due to the elegant diagrammatic notation for tensor networks, new algorithms can be developed and discussed efficiently and intuitively. Applications of MPS include finding ground and thermal states, real and imaginary time evolution, and the computation of dynamical properties of lattice Hamiltonians. In the following we give a brief introduction to MPS, for a more in-depth discussion see [4–6]. The state of a quantum many-body system can be written as

$$|\Psi\rangle = \sum_{i_1=1}^{d_1} \sum_{i_2=1}^{d_2} \cdots \sum_{i_N=1}^{d_N} \Psi_{i_1 i_2 \dots i_N} |i_1\rangle \otimes |i_2\rangle \otimes \cdots \otimes |i_N\rangle.$$

where N is the number of subsystems (e.g. lattice sites or particles), and $\{|i_1\rangle \otimes |i_2\rangle \otimes \cdots \otimes |i_N\rangle\}$, $i_j = 0, \dots, d_j$ is a set of basis vectors of the full many-body Hilbert space

$$\mathcal{H} = \bigotimes_{j=1}^N \mathcal{H}_j,$$

with $\dim(\mathcal{H}_j) = d_j$ the dimension of the local Hilbert space of subsystem j . To simplify the notation, we will assume that the dimension of all local subsystems is the same, $d_j = d$. The d^N complex numbers $\Psi_{i_1 i_2 \dots i_N}$ fully describe the quantum many-body state, and one can think of $\Psi \in \mathbb{C}^{d \times \dots \times d}$ as a tensor of rank N . However, due to the size of the tensor scaling exponentially with system size, only very small

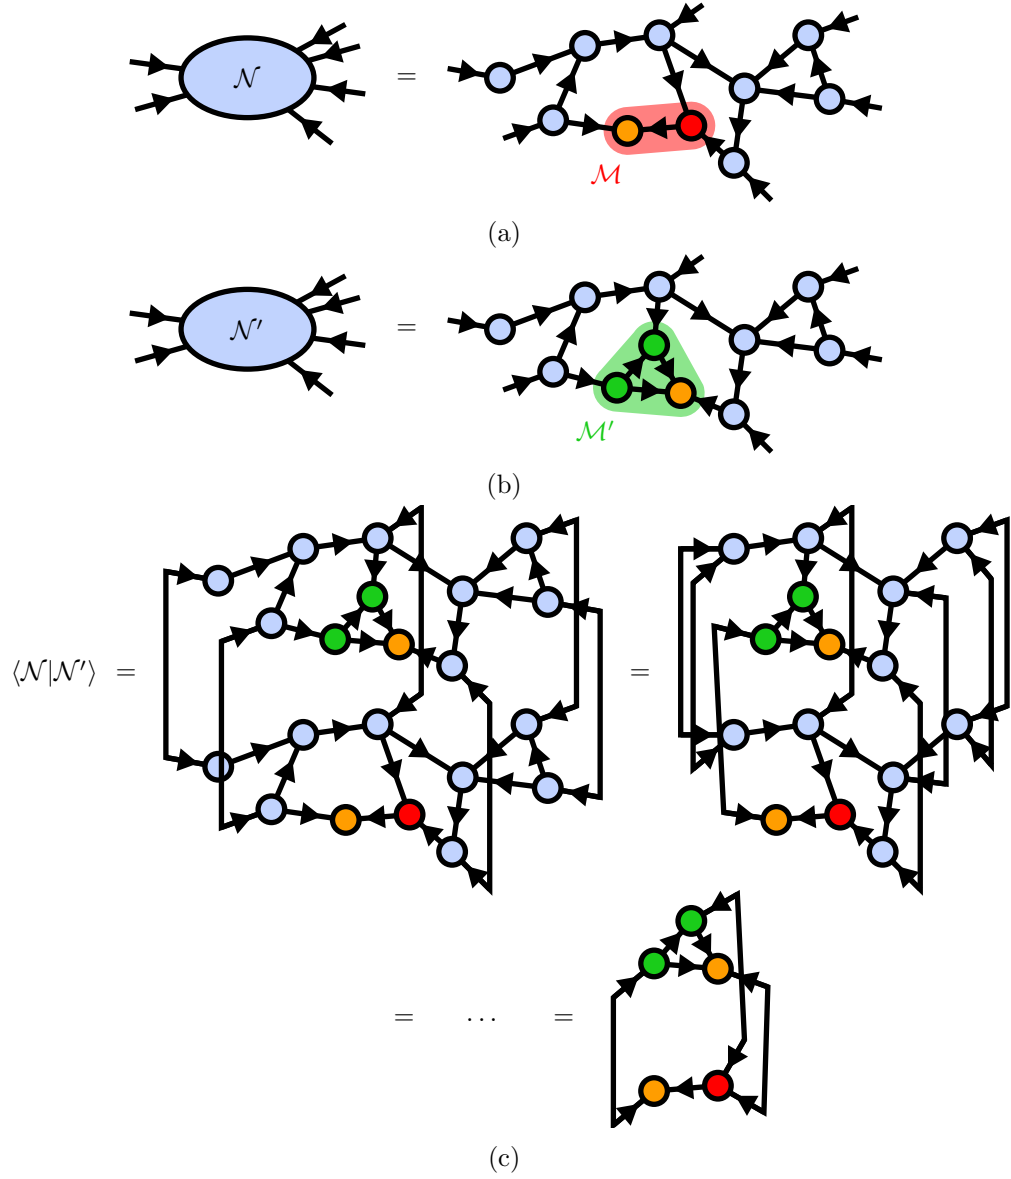


Figure 2.5: (a) An isometric tensor network \mathcal{N} with the orthogonality center depicted in orange. The sub-network \mathcal{M} is made up of all tensors in the red region. (b) The isometric tensor network \mathcal{N}' with an updated sub-network \mathcal{M}' . (c) The computation of the trace $\text{Tr}(\mathcal{N}\mathcal{N}')$ reduced to a contraction of the subregions $\text{Tr}(\mathcal{M}\mathcal{M}')$ because of the isometry condition.

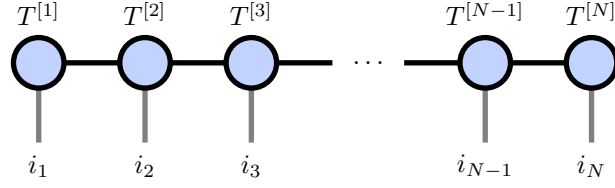


Figure 2.6: Diagrammatic representation of the Matrix Product State 2.9.



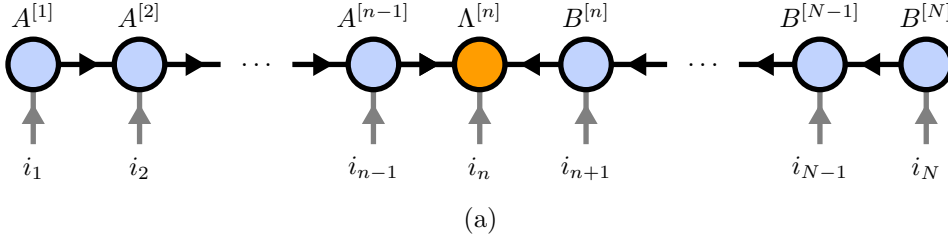


Figure 2.7: (a) Diagrammatic representation of an MPS in canonical form. (b) The isometry condition can be used to simplify contractions.

system sizes are accessible computationally. One proceeds by writing Ψ as a tensor network of smaller tensors. A *Matrix Product State* (MPS) is constructed by introducing N rank-3 tensors $A^{[n]} \in \mathbb{C}^{d \times \chi_{n-1} \times \chi_n}$ and contracting them in a chain as

$$\Psi_{i_1 i_2 \dots i_N} := \sum_{\alpha_1=1}^{\chi_1} \sum_{\alpha_2=1}^{\chi_2} \dots \sum_{\alpha_{N-1}=1}^{\chi_{N-1}} A_{1,\alpha_1}^{[1],i_1} A_{\alpha_1,\alpha_2}^{[1],i_2} \dots A_{\alpha_{N-1},1}^{[N],i_N}, \quad (2.9)$$

where we have written the physical indices i_n as superscripts, such that the sums are performed only over subscripts. Note that in this notation the bond dimensions at the two ends of the chain is $\chi_0 = \chi_N = 1$, and we can interpret the tensors $A^{[1]}$ and $A^{[N]}$ as tensors of rank-2. A tensor diagram of the MPS (2.9) is given in figure 2.6. An important property of MPS is the existence of a *canonical form* as an isometric tensor network, where a single tensor $A^{[n]}$ is selected as the orthogonality center.

One can bring an arbitrary MPS into this canonical form through successive QR-decompositions or SVDs, starting at the outer ends of the chain and isometrizing one tensor at a time, until the orthogonality center is reached [4]. In figure 2.7(a) an MPS in canonical with the orthogonality center at subsystem n is visualized in diagrammatic notation. The canonical form greatly simplifies many operations on MPS and allows for the formulation of efficient algorithms, where many contractions reduce to identity due to the isometry condition (2.5), see also figure 2.7(b). For example, the expectation value $\langle \Psi | \hat{O} | \Psi \rangle$ of a one-site operator $\hat{O} \in \mathbb{C}^{d \times d}$ acting on site n can for a general MPS be computed as

$$\begin{aligned} \langle \Psi | \hat{O} | \Psi \rangle &= \sum_{i_1, \dots, i_N, j_n=1}^d \Psi_{i_1, i_2, \dots, i_N} \Psi_{i_1, \dots, i_{n-1}, j_n, i_{n+1}, \dots, i_N}^* \langle j_n | \hat{O} | i_n \rangle \\ &= \sum_{i_1, \dots, i_N, j_n=1}^d \left(A^{[1], i_1} \dots A^{[N], i_N} \right) \\ &\quad \cdot \left(A^{[1], i_1^*} \dots A^{[N], j_n^*} \dots A^{[N], i_N^*} \right) \cdot \hat{O}_{i_n, j_n}, \end{aligned} \quad (2.10)$$

where the $A^{[n], i_n}$ are interpreted as matrices for $1 < n < N$ and as row/column vectors for $n = 1, N$ such that the product

$$\left(A^{[1], i_1} \dots A^{[N], i_N} \right)$$

gives a scalar. The contraction (2.10) is visualized as a tensor diagram in figure 2.8. Here, the advantage of the diagrammatic notation becomes apparent: It is much easier to understand how tensors are contracted when expressing the contraction in terms of tensor network diagrams. The computational cost of computing the expectation value like this scales linear with the system size $\mathcal{O}(N\chi^3d)$, where χ is the maximum virtual bond dimension $\chi = \max\{\chi_1, \dots, \chi_N\}$. If the MPS is however given in canonical form with the orthogonality center at site n , the computation reduces to a contraction of only three tensors as can be seen in figure 2.9, and the computational cost $\mathcal{O}(\chi^3d)$ becomes independent of system size.

Until now, the MPS representation of $|\Psi\rangle$ is still exact. One can approximate a MPS by restricting the virtual bond dimension to a maximal bond dimension $\chi_n < \chi_{\max}$. In this case, the number of parameters that need to be stored to describe the state is reduced from $\mathcal{O}(d^N)$ to $\mathcal{O}(N\chi_{\max}^2d)$. To arrive at this approximation, two neighbouring tensors can be contracted and split via a truncated SVD, keeping only the χ_{\max} largest singular values. If the orthogonality center of the MPS is at one of the two tensors, this approximation is globally optimal as explained in section 2.3. Additionally, this SVD at the orthogonality center is

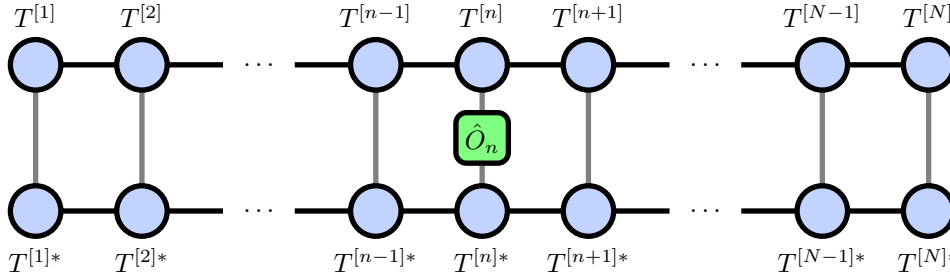


Figure 2.8: The computation of the expectation value of a local operator can be computed by contracting the MPS with its conjugate transpose, with the operator "sandwiched" between.

related to the Schimdt decomposition of a bipartite system

$$|\Psi\rangle = \sum_{\alpha=1}^{\chi_n} \lambda_{\alpha} \left| \Psi_{\alpha}^{[L]} \right\rangle \otimes \left| \Psi_{\alpha}^{[R]} \right\rangle,$$

where the chain is split into a left and right subsystem with orthogonal basis vectors $\left| \Psi_{\alpha}^{[L]} \right\rangle$ and $\left| \Psi_{\alpha}^{[R]} \right\rangle$ as visualized in figure ???. In this case, the Schmidt values $\lambda_{\alpha} \geq 0$ coincide with the singular values! One can further use this to compute the Von-Neumann entanglement entropy

$$S = - \sum_{\alpha=1}^{\chi_n} \lambda_{\alpha}^2 \log(\lambda_{\alpha}^2),$$

quantifying the amount of entanglement between the left and right subsystems. If the state is normalized, it additionally holds

$$\sum_{\alpha=1}^{\chi_n} \lambda_{\alpha}^2 = 1.$$

Thus, how well an MPS of a given bond dimension χ_{\max} is able to represent a given quantum state is highly dependent on the Schmidt spectrum $\{\lambda_{\alpha}\}$ at the different bipartitions of the chain. If the Schmidt values decrease exponentially, only an exponentially small part of the entanglement structure is truncated and the truncated MPS is a good approximation for the original state. It can be shown [7, 8] that for ground states of local, gapped, one dimensional Hamiltonians there holds an *area law*: The entanglement entropy at arbitrary bipartitions of the chain is bounded by a constant

$$S \leq S_{\max},$$

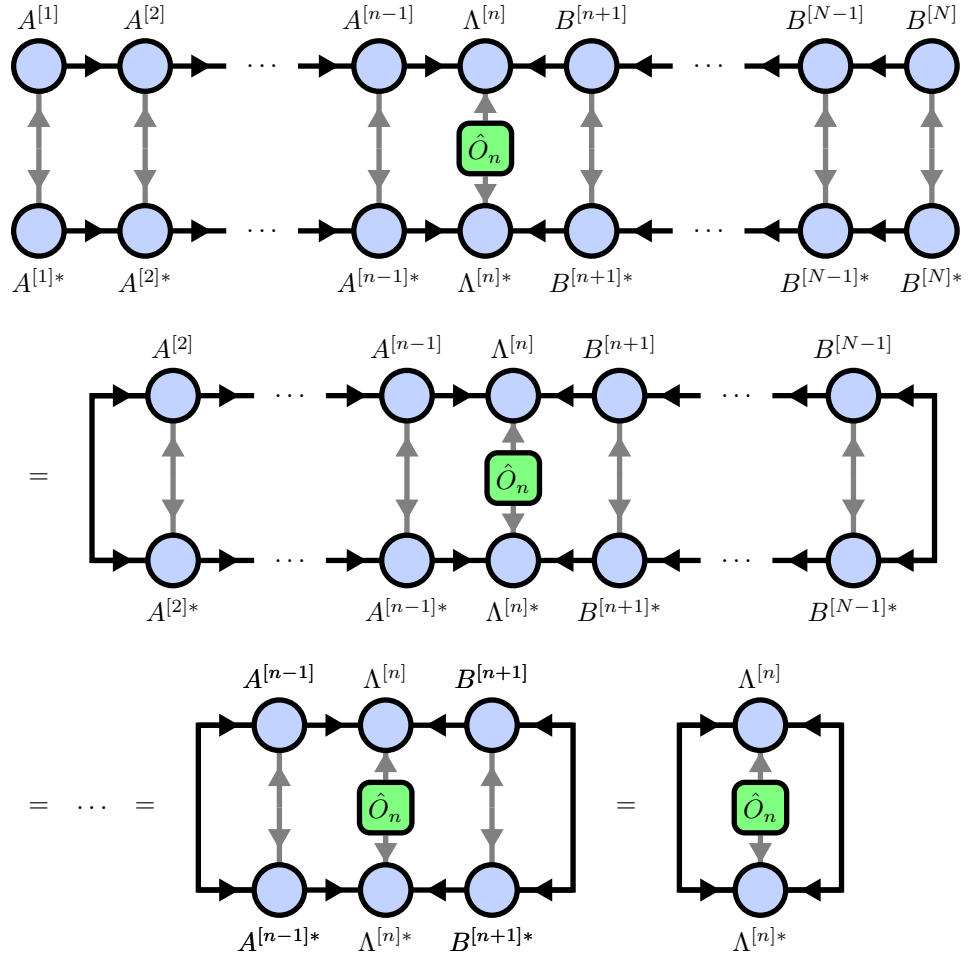


Figure 2.9: If the MPS is in canonical form, the computation of the expectation value of a local operator can be simplified to a contraction of three tensors using the isometry condition.

where S_{\max} is independent of the system size. This is in contrast to the fact that the entanglement of states drawn randomly from the many-body Hilbert space on average exhibits *volume law* scaling


$$\mathbb{E}[S] > \min(N_L, N_R) \log(d),$$

where N_L and N_R are the number of subsystems in the left and right bipartition. Hence, ground states of gapped Hamiltonians are very nongeneric. Note that the constant S_{\max} scales with the correlation length of the system, which diverges when approaching critical points.

It is immediately clear that truncated MPS by construction exhibit area law entanglement scaling, if the local subsystems that are represented by each tensor correspond to physical systems on a 1D chain. The maximal entanglement entropy for a bipartition can be reached when all Schmidt values are equal, $\lambda_\alpha = 1/\sqrt{\chi_n}$, and thus

$$S \leq \log(\chi_{\max})$$

for arbitrary bipartitions of the chain. One can conclude that MPS are good approximations for ground states of gapped 1D Hamiltonians away from criticality. For completeness we note that the truncation of all bonds of an MPS is a highly non-linear optimization problem and the naive algorithm of truncating each bond with an SVD does in general not lead to a minimal error. A variational compression procedure can often be used to obtain a lower error at the same maximum bond dimension χ_{\max} [4].

Many algorithms have been formulated in the language of MPS. Most notably, the Density Matrix Renormalization Group (DMRG) algorithm can be used for finding ground states of local lattice Hamiltonians [4]. Time evolution of MPS can be performed with the the Time Evolving Block Decimation (TEBD) algorithm [9, 10] or the Time Dependant Variational Principle (TDVP) [11, 12]. In the following, we will briefly discuss TEBD, as the algorithm can be generalized easily to isos^{tric} tensor product states of higher dimension, which we will do in section ??  Assume that we are given a quantum state $|\Psi\rangle$ in the form of an MPS and a Hamiltonian \hat{H} that can be written as a sum of nearest-neighbour operators $\hat{h}_{j,j+1}$,

$$\hat{H} = \sum_{j=1}^{N-1} \hat{h}^{[j,j+1]}.$$

The state $|\Psi\rangle$ can be evolved in time as

$$|\Psi(t)\rangle = \hat{U}(t) |\Psi\rangle = e^{-it\hat{H}} |\Psi\rangle,$$

where we set $\hbar = 1$. The time evolution operator $U(t)$ is in general very hard to compute and handle exactly. Thus, $U(t)$ is approximated using a Suzuki-Trotter

decomposition. We start by decomposing the time evolution into a series of K small time steps $\Delta t = t/K$ as

$$U(t) = e^{-it\hat{H}} = \left(e^{-i\Delta t\hat{H}}\right)^K = (U(\Delta t))^K.$$

Next, we split the Hamiltonian into terms acting on even and odd bonds

$$\hat{H} = \sum_{j \text{ even}} \hat{h}^{[j,j+1]} + \sum_{j \text{ odd}} \hat{h}^{[j,j+1]} =: H_{\text{even}} + H_{\text{odd}}.$$

Using the Baker-Campbell-Hausdorff formula we can then approximate

$$\begin{aligned} U(\Delta t) &= e^{-i\Delta t(H_{\text{even}}+H_{\text{odd}})} = e^{-i\Delta t H_{\text{even}}} e^{-i\Delta t H_{\text{odd}}} e^{-i\Delta t^2[H_{\text{even}}, H_{\text{odd}}]} \\ &= e^{-i\Delta t H_{\text{even}}} e^{-i\Delta t H_{\text{odd}}} + \mathcal{O}(\Delta t^2) = \hat{U}^{\text{TEBD1}}(\Delta t) + \mathcal{O}(\Delta t^2), \end{aligned}$$

which is called a Suzuki-Trotter decomposition of first order. Since operators acting on even bonds commute with operators acting on other even bonds, the exponentials $e^{-i\Delta t H_{\text{even}}}$ and $e^{-i\Delta t H_{\text{odd}}}$ factorize,

$$e^{-i\Delta t H_{\text{even}}} = e^{-i\Delta t \sum_{j \text{ even}} h^{[j,j+1]}} = \prod_{j \text{ even}} e^{-i\Delta t h^{[j,j+1]}}.$$

Each bond operator $e^{-i\Delta t h^{[j,j+1]}}$ acting on the combined Hilbert space of sites j and $j+1$ can be reshaped into a tensor of rank 4. The application of the operator $\hat{U}^{\text{TEBD1}}(\Delta t)$ to a state in MPS form can thus be written as the tensor network in figure ???. To perform a single TEBD iteration corresponding to a time evolution of Δt we want to approximate this tensor network by a new MPS. This can be done by moving the orthogonality center from left to right, applying the bond operators $e^{-i\Delta t h^{[j,j+1]}}$ while keeping the MPS structure. The process of applying a single bond operator is shown in figure ??. First, the two site tensors and $e^{-i\Delta t h^{[j,j+1]}}$ are contracted into a single tensor, that is then split and truncated again using an SVD. By sweeping twice across the MPS, first applying the bond operators on all even bonds and then the bond operators on all odd bonds, we perform a full TEBD iteration. There exist two sources of errors, the truncation error of the truncated SVD and the error of the Suzuki-Trotter decomposition. The truncation error can be controlled by choosing a larger bond dimension χ , allowing the representation of more entanglement and thus the evolution to larger times. However, generally the amount of entanglement grows exponentially in time, necessitating an exponentially growing bond dimension and practically limiting the algorithm to small times. A smaller Suzuki-Trotter error can be achieved by choosing higher-order Suzuki-Trotter decomposition. For example, a second order decomposition can be computed as

$$\begin{aligned} U(\Delta t) &= e^{-i\Delta t(H_{\text{even}}+H_{\text{odd}})} = e^{-i\frac{\Delta t}{2} H_{\text{even}}} e^{-i\Delta t H_{\text{odd}}} e^{-i\frac{\Delta t}{2} H_{\text{even}}} + \mathcal{O}(\Delta t^3) \\ &= \hat{U}^{\text{TEBD2}}(\Delta t) + \mathcal{O}(\Delta t^3). \end{aligned}$$

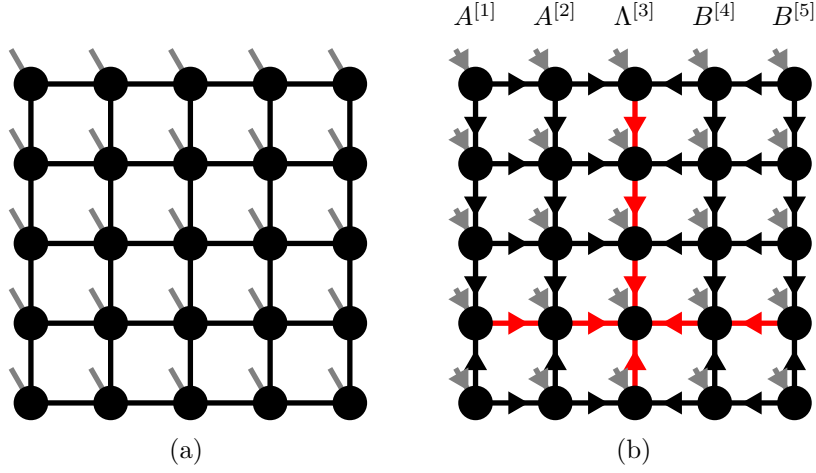


Figure 2.10: Tensor Networks representing two dimensional states on a square lattice. (a) A Projected Entangled Pair State (PEPS). (b) An isometric Tensor Product State (isoTPS).

Higher order Suzuki-Trotter decompositions are also possible [13].

2.5 Isometric Tensor Product States in 2D

The natural generalization of MPS to higher dimensional lattices is given by *Projected Entangled Pair States* (PEPS). A PEPS is constructed similar to a MPS by representing the local subsystem on each lattice site i with the index σ_i of a tensor $T_i^{\sigma_i}$ and connecting nearest-neighbour tensors with virtual bonds. The quantum state can then be written as

$$|\Psi\rangle = \sum_{\sigma_1, \sigma_2, \dots, \sigma_N} \mathcal{C}(T_1^{\sigma_1}, T_2^{\sigma_2}, \dots, T_N^{\sigma_N}) |\sigma_1, \sigma_2, \dots, \sigma_N\rangle,$$

where $\mathcal{C}(\dots)$ denotes the contraction of the full network along all virtual bonds. As an example, we draw a PEPS on a square lattice in figure 2.10a.

PEPS are able to efficiently represent area-law states in two and higher dimensions [5]. Remarkably, PEPS can even handle correlations decaying polynomially with separation distance [14], whereas MPS can only handle exponentially decaying correlations. Polynomially decaying correlations are characteristic for critical points. Unfortunately, it is not generally possible to bring a PEPS into an exact canonical form due to the presence of closed loops. Thus, already the computation of local expectation values scales exponentially with system size and can in practice be only done approximately, e.g. using the boundary MPS method [5] or corner transfer

matrices [15]. Moreover, algorithms for ground state search and time evolution have computational costs scaling with high powers of the bond dimension. For example the cost of a full update TEBD or DMRG iteration is dominated by the contraction of an effective environment, scaling as $\mathcal{O}(D^{10})$ [16].

Recently, the new class of *isometric Tensor Product States* (isoTPS) has been introduced [1, 17, 18], generalizing the canonical form of MPS to higher dimensions by enforcing isometry constraints. This allows for efficient computation of local expectation values and greatly lowers the cost of some algorithms. The downside to this approach is that the set of states representable by isoTPS is smaller than the set of state representable by PEPS. It is thus an interesting question to ask which kinds of states and, more generally, which kinds of quantum phases can still be represented by isoTPS.

In the following, we will give a brief introduction to the isoTPS defined in [1] and discuss their properties. A two-dimensional isoTPS on the square lattice is constructed by enforcing the isometry conditions shown in figure 2.10b. All isometries are chosen in such a way that all arrows point towards a special row and column, called the *orthogonality hypersurface* of the isoTPS. The term "hypersurface" is chosen in anticipation of a generalization to higher dimensions.

Because of the isometry condition, one can think of the contractions of each of the four regions outside the orthogonality hypersurface as orthogonal boundary maps [2]. The single tensor with only incoming arrows is called the *orthogonality center*. local expectation values of operators acting in the vicinity of the orthogonality center can be computed efficiently because most contractions reduce to identity, similar to the computation of local expectation values in MPS (see figure 2.9). The orthogonality center can be moved along the orthogonality hypersurface simply and exactly using a QR-decomposition as shown in figure 2.11a.

Moving the orthogonality surface is a harder problem, which in general can only be done approximately. In analogy to MPS and as shown in figure 2.10b, we call columns left of the orthogonality hypersurface A_l and tensors right of the orthogonality hypersurface B_l , with $l = 1, 2, \dots, L$ and L the linear system size. Moving the orthogonality hypersurface Λ_l one column to the right can be expressed as solving the problem

$$\Lambda_l B_{l+1} = A_l \Lambda_{l+1}, \quad (2.11)$$

where the notation $\Lambda_l B_{l+1}$ means the contraction of columns Λ_l and B_{l+1} along their connecting bonds. Instead of (2.11), one can solve the simpler auxillary problem

$$\Lambda_l = A^l \Lambda, \quad (2.12)$$

where Λ is a column of tensors with no physical indices, as shown in figure 2.11b. This column can then be absorbed into B_{l+1} via the standard algorithm of applying an MPO to an MPS and subsequent MPS compression [4]. One can variationally

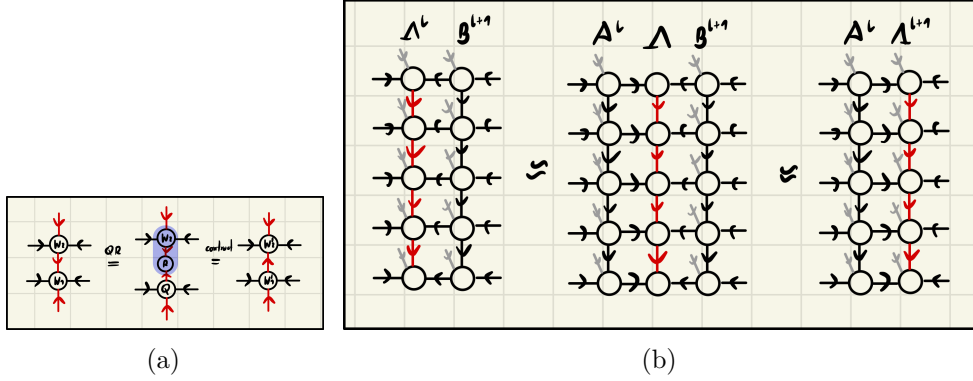



Figure 2.11: Moving the orthogonality center and the orthogonality hyper surface around is a central problem in isoTPS applications. (a) Moving the orthogonality center along the orthogonality hypersurface can be done easily via QR-decompositions. (b) An orthogonality column can be moved by first solving equation (2.12) variationally and then absorbing Λ into B_{l+1} via the standard MPO-MPS multiplication and MPS compression algorithms.

solve problem (2.12) by minimizing the distance $|\Lambda_l - A_l \Lambda|$, sweep  back and forth through the tensors while respecting the isometry condition. It is however found in [1] that a single unzipping sweep, called the *Moses Move* (MM), provides a solution very close to the variational one whilst being far quicker. The MM can also be used as a good initialization for the variational algorithm. We sketch the MM in figure 2.12a. We start from the bottom of the orthogonality hypersurface column and split the tensors one after the other using a tripartite decomposition. A single tripartite decomposition of a tensor W is shown in figure 2.12b. First, W is split into two tensors A and B via a truncated SVD $W = U(SV) = AB$ with A an isometry. The bond connecting A and B is reshaped into two bonds. Next, it is important to note that the full contraction is invariant under the insertion of a unitary and its conjugate transpose, $AB = (AU^\dagger)(UB)$, with (AU^\dagger) still satisfying the isometry condition. This degree of freedom can be used to *disentangle* the tensor B along the direction of the red bonds. Accordingly, we choose U such that the truncation error or some entanglement measure is minimized for splits along the direction of the red bonds. Choosing a good disentangling unitary is crucial for a successful tripartite decomposition and will be discussed further in section ??.

Assume for now that a good disentangling unitary has been found. After contracting (AU^\dagger) and (UB) , a truncated SVD is used to split (UB) into tensors B' and C' as shown in figure 2.12b, completing the tripartite decomposition.

Because the orthogonality center can be moved easily along the orthogonality hypersurface, one can think of the orthogonality hypersurface along a column or row

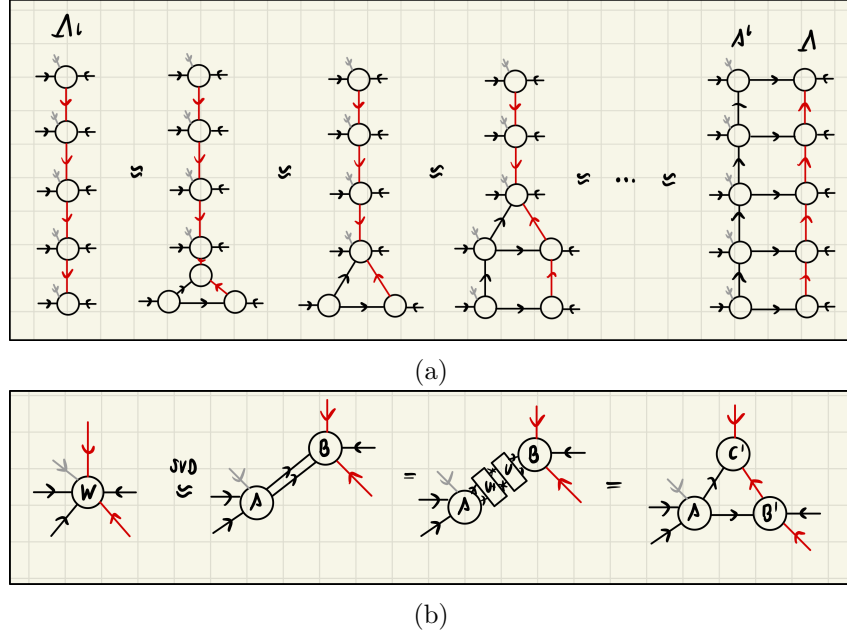


Figure 2.12: (a) The Moses Move (MM) splits the column Λ_l into A_l and Λ via a single unzipping sweep of tripartite decompositions. (b) Tripartite decomposition of the tensor W as explained in the text.

as a 1D MPS with an enlarged physical bond dimension grouping together the physical and the two ancilla legs protruding from the orthogonality hypersurface tensors. Standard MPS algorithms can then be generalized to isoTPS by performing one iteration of the algorithm on the orthogonality hypersurface MPS, before moving the hypersurface via MM or variational optimization and repeating the procedure. As an example, we will discuss TEBD^2 , the generalization of TEBD to an isoTPS on a 2D square lattice.

isoTPS are a new class of states that enable the implementation of faster algorithms for e.g. ground state search and time evolution, compared to PEPS. The expressional power of isoTPS has been studied in [19], where it was found that isoTPS with finite bond dimension can exactly represent ground state wavefunctions of string-net liquid models, showing that long-range entanglement does not form an obstruction for isoTPS representations and suggesting that the ground states of gapped Hamiltonians with gappable edges can be efficiently represented as an isoTPS. There have also been works discussing the computational complexity of isoTNS [20] and relating isoTNS to quantum circuits [21, 22]. In [23], topological phase transitions were studied with isoTPS, showing that isoTPS can represent some critical states with power-law correlations. A DMRG^2 -algorithm was

implemented on isoTPS in [2] and used to compute dynamical structure factors of ground states using real time evolution. IsoTPS were also extended to fermionic systems [24], to two dimensional strips of infinite length [25], and to three dimensional cubic lattices [26]. They have also been used to compute properties of two dimensional thermal states [27].

Chapter 3

diagonal isometric Tensor Product States (disoDTPS)

In the following, we will introduce a new class of isometric tensor tensor states which we call *diagonal isometric tensor product states* (disoTPS). This class of tensor product states is in many ways similar to the isometric tensor product states discussed in section 2.5, with some important differences.

3.1 Network Structure

The structure of a disoTPS on a square lattice is shown in figure 3.1. It can be constructed in three steps. First, a square PEPS is rotated by 45° . Next, the orthogonality hypersurface is constructed as a column of auxillary tensors. The auxillary tensors are connected in a line similar to an MPS and placed between between two columns of PEPS tensors. Note that, in contrast to the standard isoTPS the tensors of the orthogonality hypersurface do not carry any physical degrees of freedom and are only connected via virtual bonds to the neighboring tensors. Lastly, the isometry condition is enforced such that all arrows point towards the orthogonality hypersurface. Tensors left of the orthogonality surface are thus brought into a left-isometric form and tensors right of the orthogonality surface are brought into a right-isometric form, as shown in figure 3.1. The auxillary tensors making up the orthogonality hypersurface are isometrized such that all arrows point towards a single auxillary tensor, the orthogonality center.

In the following, we will denote the auxillary tensors by W_i , and the tensors carrying physical degrees of freedom with T_i . The bonds connecting two T -tensors or a T -tensor and a W -tensor are truncated to a maximal bond dimension of D , while the maximal bond dimension between two W -tensors is denoted as χ . In practice it is found that setting $\chi = f \cdot D$ with an integer $f \geq 1$ produces good results.

Similar to the standard isoTPS, the orthogonality center can easily and exactly be moved along the orthogonality hypersurface using QR-decompositions. Moving the orthogonality hypersurface to the left or to the right is a harder problem and will be discussed in section 3.2.

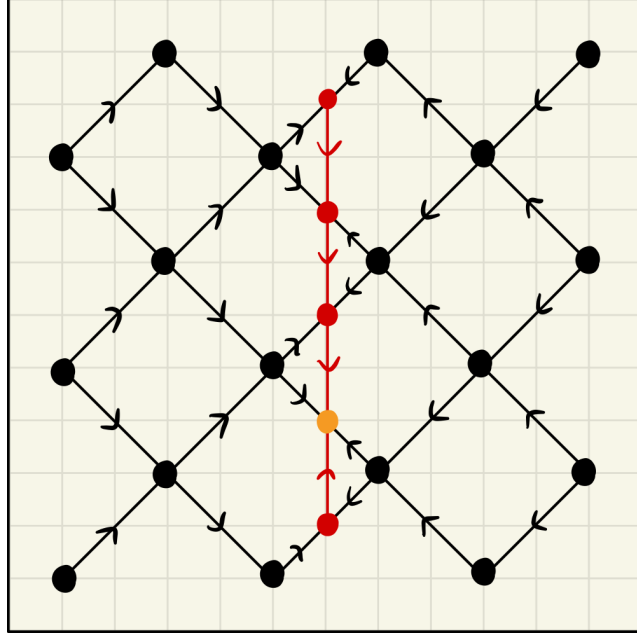


Figure 3.1: A diagonal isometric tensor network on a square lattice is constructed from site tensors T_i (drawn in black) and an orthogonality hypersurface of auxiliary tensors W_i (drawn in red). The orthogonality hypersurface is rotated by 45° with respect to the lattice.

As in MPS and standard isoTPS, disoTPS allow for the fast computation of expectation values of local operators. The expectation value $\langle \Psi | \hat{O}_i | \Psi \rangle$ of a one-site operator \hat{O}_i acting on site i can be computed as follows: First, the orthogonality center is moved next to site i . We next define the *one-site wavefunction* as the sub-network containing the site tensor T_i and the two connected W -tensors. Note that the one-site wavefunction is connected to its environment only by bonds with incoming arrows. Next the wavefunction is contracted with its complex conjugate, sandwiching the operator \hat{O}_i between the two. Due to the isometry condition, this reduces to a contraction of only the one-site wavefunction, its complex conjugate, and the operator \hat{O}_i , as shown in figure 3.2. This contraction has a computational cost scaling as $\mathcal{O}(\chi^3 D^3 + D^6 d^2)$ and gives as result the desired expectation value. The expectation value $\langle \Psi | \hat{O}_{ij} | \Psi \rangle$ of a two-site operator \hat{O}_{ij} acting on two neighbouring sites i and j , also called *bond operator*, can be computed similarly. First, the orthogonality center is moved such that it sits in the middle of the bond connecting sites i and j . The *two-site wavefunction* is then defined as the subnetwork containing the two site tensors T_i and T_j and three W -tensors as shown in figure 3.3, such that again all legs connecting the subnetwork to its environment

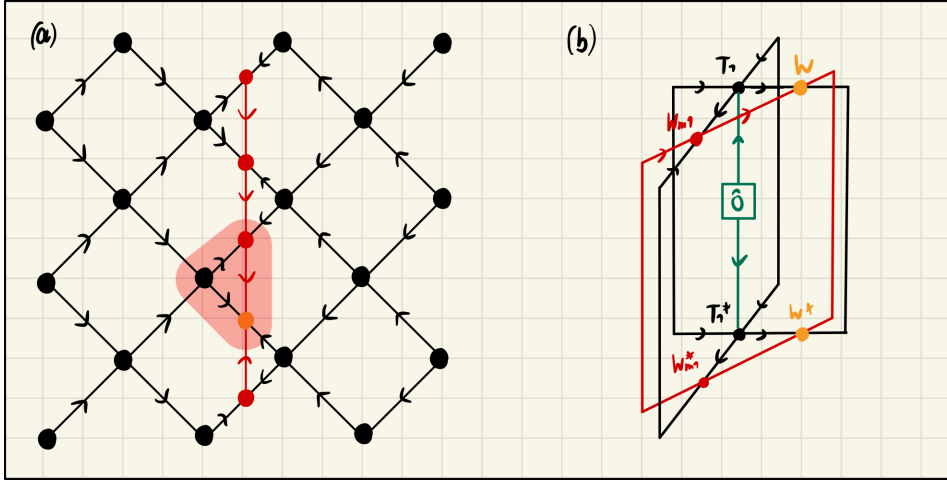


Figure 3.2: (a) The one-site wavefunction around a site i is the sub network containing the site tensor T_i and the two connected auxillary tensors. (b) Computation of a single site expectation value reduces to the shown contraction over a one-site wavefunction, its complex conjugate, and the one-site operator \hat{O}_i .

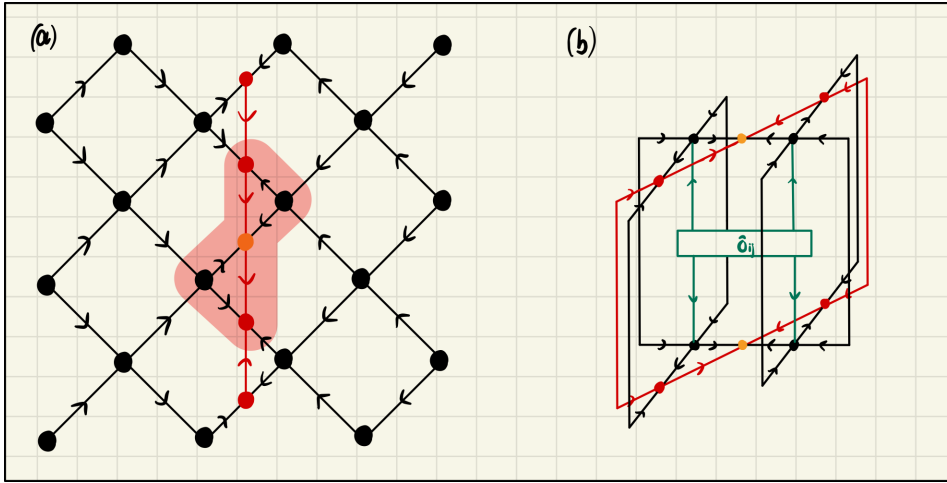


Figure 3.3: (a) The two-site wavefunction around neighboring sites i and j is the sub network containing the site tensors T_i and T_j and the three connected auxillary tensors. (b) Computation of a two-site expectation value reduces to the shown contraction over a two-site wavefunction, its complex conjugate, and the two-site operator \hat{O}_{ij} .

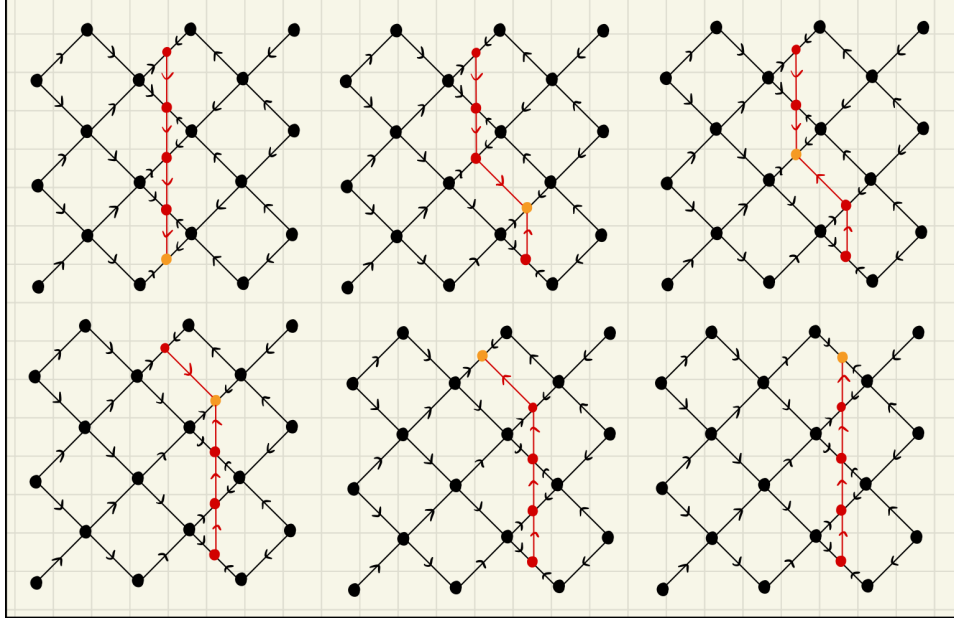


Figure 3.4: Two YB-moves are used to shift the orthogonality hypersurface one column to the right. In the last step, the orthogonality center can be moved across the T -tensor by contracting the two tensors and performing a QR-decomposition.

are only decorated with arrows pointing towards the two-site wavefunction. The computation of the expectation value then reduces to the contraction of only the two-site wavefunction with its complex conjugate and the bond operator \hat{O}_{ij} . The computational cost of this contraction scales as $\mathcal{O}(\chi^3 D^3 d^2)$.

3.2 Yang-Baxter Move

Most algorithms implemented on disoTPS require an efficient procedure for moving the orthogonality surface, where the error introduced by this procedure should be as small as possible. For isoTPS, the current best procedure is given by the Moses Move, followed by an optional variational optimization.

In analogy to the MM we look for a procedure to iteratively shift the orthogonality surface through one column of T -tensors as shown in figure 3.4. A single iteration of this process is shown in figure 3.5. The two tensors W_1 and W_2 , which are part of the orthogonality hypersurface, are "pulled through" the site tensor T , resulting in the updated tensors T' , W'_1 and W'_2 . To keep the isometric structure of the network, T' and W'_1 must be isometries, while W'_2 must be a tensor of norm one (the new

orthogonality center). Due to the visual similarity to the Yang-Baxter equation we call this procedure the *Yang-Baxter* (YB) move.

We denote the state represented by the disoTPS before the YB move by $|\Psi\rangle = |\Psi(W_1, W_2, T)\rangle$ and the state after the YB move by $|\Psi'\rangle = |\Psi'(W'_1, W'_2, T')\rangle$. One can think of the YB move as an optimization problem

$$(T'_{\text{opt}}, W'_{1,\text{opt}}, W'_{2,\text{opt}}) = \underset{T', W'_1, W'_2}{\operatorname{argmin}} \| |\Psi\rangle - |\Psi'\rangle \|_{\text{F}} \quad (3.1)$$

under the constraints

$$T'^{\dagger}T' = \mathbb{1}, \quad W_1'^{\dagger}W'_1 = \mathbb{1}, \quad \|W'_2\|_{\text{F}} = 1. \quad (3.2)$$

We further rewrite the error of the YB move as

$$\begin{aligned} \| |\Psi\rangle - |\Psi'\rangle \|_{\text{F}} &= \sqrt{\langle \Psi | \Psi \rangle + \langle \Psi' | \Psi' \rangle - 2 \operatorname{Re} \langle \Psi | \Psi' \rangle} \\ &= \sqrt{2 - 2 \operatorname{Re} \langle \Psi | \Psi' \rangle}, \end{aligned}$$

where in the second step we used the fact that the wave function is normalized to one, $\langle \Psi | \Psi \rangle = \langle \Psi' | \Psi' \rangle = 1$. It follows that the optimization problem of minimizing the error becomes the problem of maximizing the overlap

$$(T'_{\text{opt}}, W'_{1,\text{opt}}, W'_{2,\text{opt}}) = \underset{T', W'_1, W'_2}{\operatorname{argmax}} \operatorname{Re} \langle \Psi | \Psi' \rangle \quad (3.3)$$

under the constraints (3.2). Because the only tensors that are changed by the YB move are W_1 , W_2 and T and the three tensors make up a subregion of the full network with only incoming arrows, we can use the isometry condition and the computation of the overlap reduces to a contraction of only six tensors as shown in figure 3.6a.

In the following, we present two explicit algorithms for performing the YB move. The first algorithm (see section 3.2.1) is an iterative optimization using local updates respecting the constraints. The second algorithm (see section 3.2.2) is a tripartite decomposition with disentangling similar to the tripartite decomposition used in the MM. In section 3.2.3 we will compare the two algorithms.

3.2.1 Iterative optimization with local updates

To solve the constrained optimization problem (3.3) we proceed by maximizing the overlap while only varying the parameters of one of the three tensors T' , W'_1 or W'_2 , treating all other tensors as constant. For example, let us keep W'_1 and W'_2 fixed and optimize T' . We first contract all tensors except T' into an environment E as shown in figure 3.6(b). We can then write the optimization problem as

$$T'_{\text{opt}} = \underset{T'^{\dagger}T'=\mathbb{1}}{\operatorname{argmax}} \operatorname{Re} \langle \Psi | \Psi' \rangle = \underset{T'^{\dagger}T'=\mathbb{1}}{\operatorname{argmax}} \operatorname{Re} \langle T', E \rangle_{\text{F}} = \underset{T'^{\dagger}T'=\mathbb{1}}{\operatorname{argmax}} \operatorname{Re} \operatorname{Tr} (T'^{\dagger} E).$$

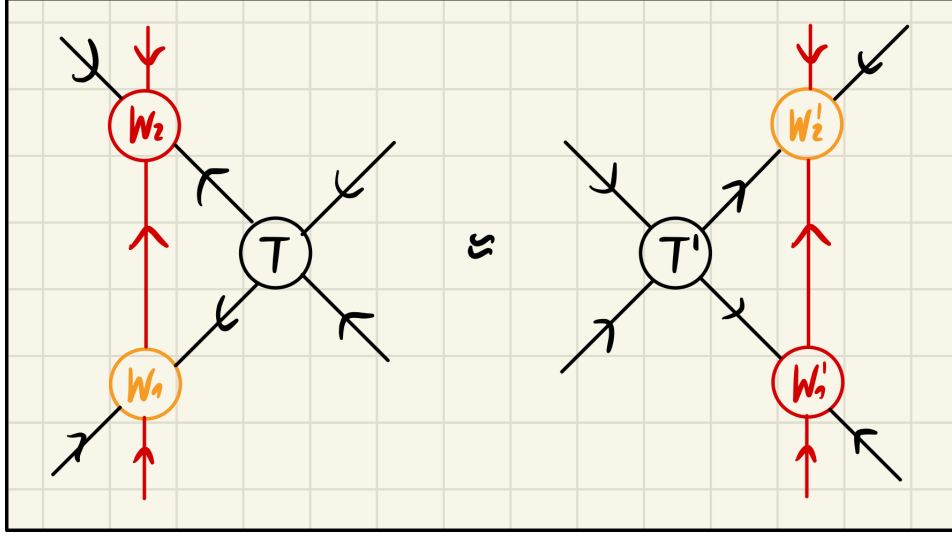



Figure 3.5: The Yang-Baxter (YB) move is the procedure of "pulling" two auxiliary tensors W_1 and W_2 through a site tensor T .

This problem is known as the *orthogonal Procrustes problem* and permits the closed form solution $T'_{\text{opt}} = UV^\dagger$, where U and V are computed using the SVD $E = USV^\dagger$. For the derivation of this solution see appendix A.1. The tensors W'_1 and W'_2 can be optimized similarly. The full algorithm is then performed by sweeping over the three tensors, optimizing them iteratively until convergence. Tensor diagrams for the algorithm are shown in figure 3.6. We discuss one iteration of the algorithm in more detail:

1. We contract all tensors except T' into an environment E and perform an SVD $E = USV$. The tensor T' is then updated as $T' \leftarrow UV^\dagger$. See figure 3.6(b).
2. We contract all tensors except W'_1 into an environment E and perform an SVD $E = USV$. The tensor W'_1 is then updated as $W'_1 \leftarrow UV^\dagger$. See figure 3.6(c).
3. We contract all tensors except W'_2 into an environment E . The tensor W'_1 is then updated as $W'_1 \leftarrow E / \|E\|$. See figure 3.6(d).

These three steps are repeated until a termination criterion is met, for example until the decrease in error after one iteration is smaller  a given threshold or if a given maximum number of iterations is exceeded.

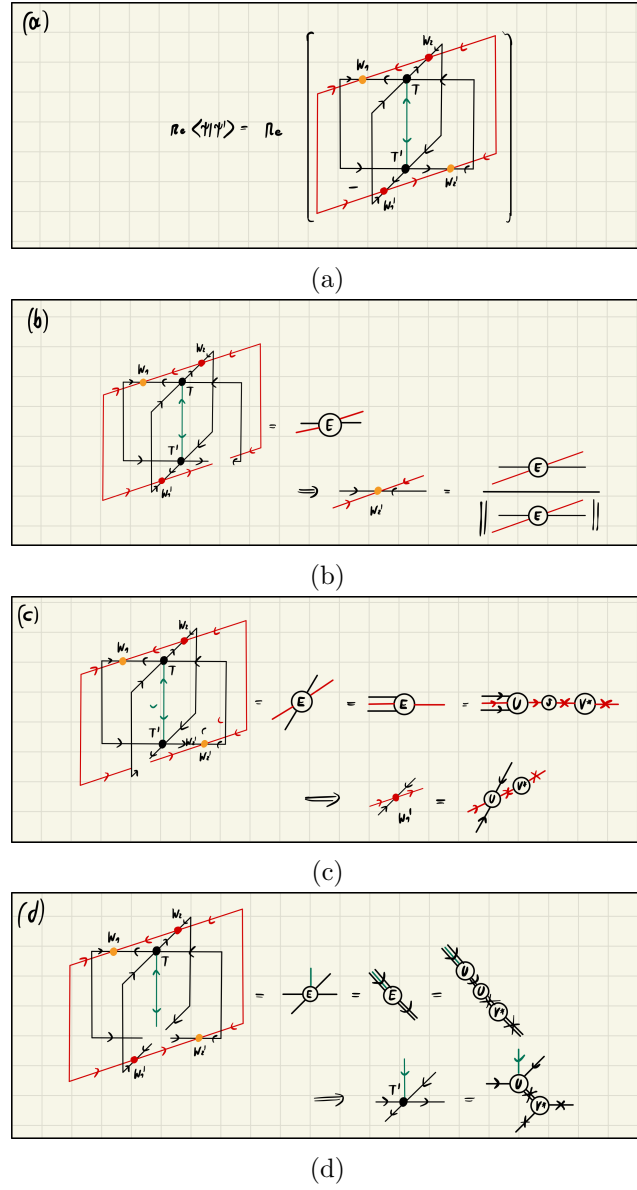


Figure 3.6: (a) The cost function of the optimization problem (3.3) can be computed as a contraction of only six tensors. (b) To optimize the tensor W_2' , all tensors except W_2' are contracted into the environment E . The updated tensor is then given as $W_2' = E/\|E\|$. (c) The tensor W_1' can be updated by contracting all tensors except W_1' into the environment E , which is subsequently isometrized using an SVD. (d) The tensor T' can be updated similarly by contracting all tensors except T' into the environment E and isometrizing E using an SVD.

3.2.2 Tripartite decompositon using an SVD and disentangling

Alternatively, the constrained optimization problem (3.1) can be solved via two successive SVDs with an optional disentangling prodcedure with the goal of reducing the truncation error or some entanglement measure. This is the same algorithm that was used for the MM in the original isoTPS [2]. The algorithm is sketched in figure ?? and is made up of three main steps.

1. We start by contracting the tensors T , W_1 and W_2 into a single tensor Ψ (figure ?? (b)). This tensor is then split from left to right via a truncated SVD

$$\Psi = XSZ^\dagger = X \left(SZ^\dagger \right) =: X\theta$$

as shown in figure ??(c). The bond dimension is truncated to D^2 .


2. Next, we split the index of the bond connecting X and θ into two indices of dimension D each, see figure ??(d). To proceed, we note that there exists a degree of freedom on the bonds connecting X and θ : A unitary U and its adjoint can be inserted as shwon in figure ??(e) without changing the result of the contraction

$$XU^\dagger U\theta = \left(XU^\dagger \right) (U\theta) =: T'\tilde{\theta}.$$

This unitary U can be chosen to minimize the truncation error of the next step by *disentangling* the tensor θ . We will discuss procedures of finding such a *disentangling unitary* on the next page.

3. In the last step, the tensor $\tilde{\theta}$ is split vertically into W'_1 and W'_2 using a truncated SVD as shown in figure ??(f). Here, the bond dimension is truncated to χ . We end up with the three tensors T' , W'_1 and W'_2 , completing the YB move.

Before we discuss the disentangling procedure, two comments about step two of the above algorithm are in order. Firstly, there exists a degree of freedom for splitting the bond index, because applying the same permutations to the columns of X and rows of θ does not change the result of contracting the network. Thus, there is no unique splitting that can be chosen. However, this degree of freedom is fixed by the disentangling process, making the exact permutation of the bond splitting irrelevant. Secondly, note that near the edges of the lattice it can happen that the matrized tensor Ψ has $\tilde{\chi} < D^2$ rows. In this case, the bond dimension after the SVD will also be $\tilde{\chi}$ and we cannot split the bond into two bonds of dimension $\chi_1 = \chi_2 = D$. Instead, we choose a splitting $\chi_1 \leq D$, $\chi_2 \leq D$ such that $\chi_1 \cdot \chi_2$ is maximized while it must still hold $\chi_1 \cdot \chi_2 \leq \tilde{\chi}$. We additionally prefer "equal" splittings $\chi_1 \approx \chi_2 \approx \sqrt{\tilde{\chi}}$ if possible. One can find such a splitting easily by computing all

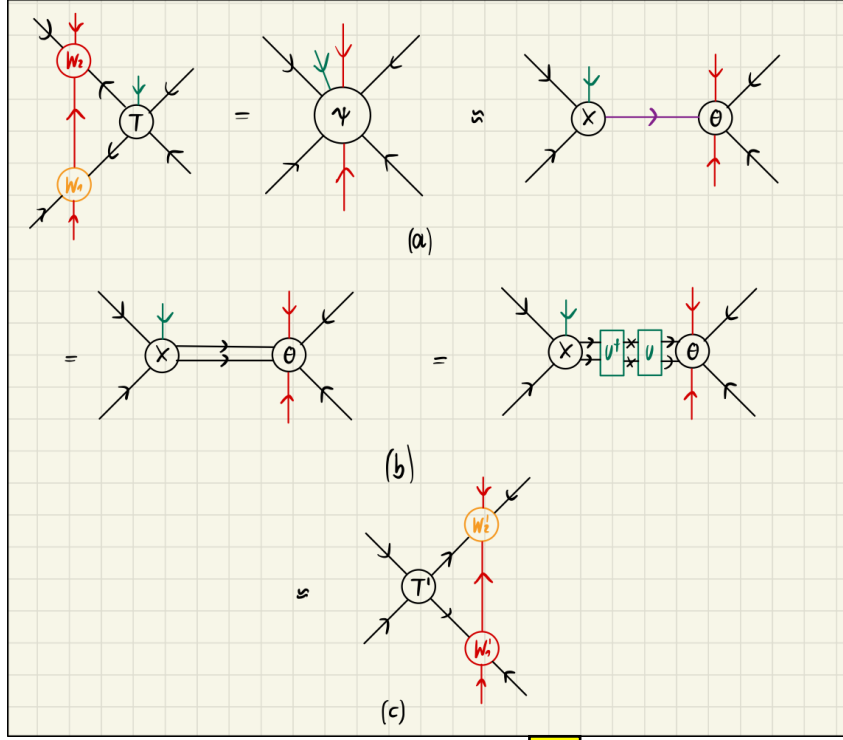

possible combinations of χ_1 and χ_2 and keeping only the best one. This has a computational cost of $\mathcal{O}(\sqrt{\chi}) = \mathcal{O}(D)$.

We will now discuss the problem of finding a good disentangling unitary U for step two of the above algorithm, which is crucial for the performance of the YB move.

The problem can be formulated as follows: Given the tensor θ that is obtained after splitting the index in step two, find a unitary U minimizing a cost function $f(\tilde{\theta})$, where $\tilde{\theta} = U\theta$ is computed as shown in figure ??.

3.2.3 Comparison of the two algorithms

3.3 Time Evolving Block Decimation (TEBD)

Chapter 4

Toric Code: An exactly representable Model

Chapter 5

Transverse Field Ising Model: Ground State Search and Time Evolution

Appendix A

Optimization Problems for isometric Tensor Networks

When discussing algorithms on isometric tensor networks, one often needs to find optimal tensors extremizing a given cost function f . In the most general case, f is a function

$$f : \mathbb{C}^{m_1 \times n_1} \times \dots \times \mathbb{C}^{m_K \times n_K} \rightarrow \mathbb{R},$$

mapping K tensors T_1, \dots, T_K to a scalar cost value. Here, the tensors have already been reshaped into matrices, grouping together legs with incoming arrows and legs with outgoing arrows respectively. The tensors must satisfy certain constraints. If a tensor T_i possesses both legs with incoming arrows and legs with outgoing arrows, it must satisfy the isometry constraint $T_i^\dagger T_i = \mathbb{1}$, where without loss of generalization we assumed $n_i \geq m_i$. If instead the tensor T_j possesses only legs with incoming arrows (and thus is an orthogonality center), it is constrained to be normalized to one, $\|T_j\|_F = 1$. To summarize, we want to solve the optimization problem

$$T_1^{\text{opt}}, \dots, T_K^{\text{opt}} = \underset{T_1, \dots, T_K}{\operatorname{argmax}} f(T_1, \dots, T_K) \quad (\text{A.1})$$

under the constraints

$$T_i^\dagger T_i = \mathbb{1}$$

for isometries T_i and

$$\|T_j\|_F = 1$$

for the orthogonality center T_j .

In the following, we will discuss several approaches for solving optimization problem (A.1). We will first assume that the input of the cost function is a single tensor T . If the cost function is linear, the problem is known as the *orthogonal Procrustes problem* and we discuss its closed form solution in section A.1. Non-linear cost functions can be optimized by using the Evenbly-Vidal algorithm, see section A.2. Finally, we will discuss how cost functions of multiple tensors can be optimized in section A.3.

A different, more involved approach to solving the optimization problem is given by Riemannian optimization, which we discuss in appendix B.

A.1 The orthogonal Procrustes problem

If the cost function is linear, it can be written as

$$f(T) = \sum_{i=1}^m \sum_{j=1}^n [\alpha_{i,j} \operatorname{Re}(T_{i,j}) + \beta_{i,j} \operatorname{Im}(T_{i,j})]$$

with parameters $\alpha_{i,j}, \beta_{i,j} \in \mathbb{R}$. Introducing the *environment tensor* $E \in \mathbb{C}^{m \times n}$ as $E_{i,j} = \alpha_{i,j} + i\beta_{i,j}$ we can write the cost function as

$$f(T) = \sum_{i=1}^m \sum_{j=1}^n \operatorname{Re}(E_{i,j}^* T_{i,j}) = \operatorname{Re} \operatorname{Tr}(E^\dagger T) = \operatorname{Re} \operatorname{Tr}(T^\dagger E).$$

Maximizing $f(T)$ under the isometry constraint $T^\dagger T = \mathbb{1}$ is known as the orthogonal Procrustes problem and permits the closed form solution

$$T^{\text{opt}} = \operatorname{argmax}_{T^\dagger T = \mathbb{1}} \operatorname{Re} \operatorname{Tr}(T^\dagger E) = UV^\dagger, \quad (\text{A.2})$$

where the matrices U and V are computed using an SVD $E = USV^\dagger$. To prove this result we insert the SVD into the cost function as

$$\begin{aligned} f(T) &= \operatorname{Re} \operatorname{Tr}(ET^\dagger) = \operatorname{Re} \operatorname{Tr}(USV^\dagger T^\dagger) = \operatorname{Re} \operatorname{Tr}\left[\left(U\sqrt{S}\right)\left(\sqrt{S}V^\dagger T^\dagger\right)\right] \\ &= \operatorname{Re} \left\langle \sqrt{S}U^\dagger, \sqrt{S}V^\dagger T^\dagger \right\rangle_{\text{F}}. \end{aligned}$$

We next use the fact that the Frobenius inner product satisfies the Cauchy-Schwarz inequality to obtain the upper bound

$$\begin{aligned} f(T) &= \operatorname{Re} \left\langle \sqrt{S}U^\dagger, \sqrt{S}V^\dagger T^\dagger \right\rangle_{\text{F}} \leq \left\| \sqrt{S}U^\dagger \right\|_{\text{F}} \left\| \sqrt{S}V^\dagger T^\dagger \right\|_{\text{F}} \\ &= \sqrt{\operatorname{Tr}(USU^\dagger) \operatorname{Tr}(TVSV^\dagger T^\dagger)} = \operatorname{Tr}(S), \end{aligned}$$

where in the last step we used $U^\dagger U = \mathbb{1}$, $V^\dagger V = \mathbb{1}$, $T^\dagger T = \mathbb{1}$ and the cyclic property of the trace. This upper bound is reached by the solution

$$F(T^{\text{opt}}) = \operatorname{Re} \operatorname{Tr}(USV^\dagger VU^\dagger) = \operatorname{Tr}(S),$$

proving (A.2).

If the tensor T must not satisfy the isometry condition but must be normalized to one, the closed form solution can be found as

$$T^{\text{opt}} = \operatorname{argmax}_{\|T\|=1} \operatorname{Re} \operatorname{Tr}(T^\dagger E) = E / \|E\|. \quad (\text{A.3})$$

We arrive at this solution through a similar argument as before. First, we obtain an upper bound

$$f(T) = \text{Re Tr} \left(T^\dagger E \right) = \text{Re} \langle T, E \rangle_F \leq \|T\| \|E\| = \|E\|$$

using the Cauchy-Schwarz inequality and the normalization constraint $\|T\| = 1$. We proceed by showing that the upper bound is reached by T^{opt} ,

$$f(T^{\text{opt}}) = \text{Re Tr} \left(E E^\dagger / \|E\| \right) = \|E\|,$$

proving (A.3).

A.2 The Evenbly-Vidal algorithm

In general the cost function $f(T)$ is not linear. For example, a non-linear cost function is encountered in the disentangling procedure when optimizing a MERA wave function [1]. It was proposed by Evenbly and Vidal [2] to linearize the cost function and to update the tensor T iteratively using the closed form solutions from section A.1. Let us assume that the cost function $f(T)$ can be written as the contraction of a tensor network, where in general the tensor T may appear multiple times. We contract all tensors except one of the tensors T into an environment tensor $E_T \in \mathbb{C}^{n \times n}$ and the cost function becomes


$$f(T) = \text{Re Tr} (E_T T).$$

We now keep the environment E_T fixed, treating it as if it were independent of T , and updating T with the closed form solutions (A.2) or (A.3). This is repeated until T is converged. If and how fast T converges depends on the details of the cost function, but convergence cannot be guaranteed for arbitrary cost functions. This procedure is discussed in more detail and for general cost functions in appendix ?? One can also use Riemannian optimization for the optimization of general non-linear cost functions of isometries. This method is more powerful but also more involved and is discussed in appendix B.

A.3 Cost functions of multiple tensors

cost functions of multiple tensors T_1, \dots, T_K can be optimized iteratively via an algorithm similar to the Evenbly-Vidal algorithm. The idea is to optimize one tensor at a time, keeping all other tensors fixed. To optimize the tensor T_i , we again contract all other tensors into an environment tensor E . If the environment tensor is independent of T_i (i.e. if the cost function is linear in T_i), we can update the tensor

with the closed form solutions of section A.1. Such an update is locally optimal in the sense that it maximizes $f(T_1, \dots, T_K)$ for fixed tensors T_j , $j \neq i$. If the environment tensor is dependant of T_i , we need to use the Evenbly-Vidal algorithm (see section A.2) or Riemannian optimization (see appendix B). If the cost function is linear in all tensors T_1, \dots, T_K and bounded $f(T_1, \dots, T_K) \leq c \in \mathbb{R}$, this algorithm is guaranteed to converge, since each local update is optimal and thus the cost function can never decrease.

An alternative approach for optimizing a cost function of multiple tensors is given by Riemannian  optimization over product manifolds [28], which we discuss briefly in appendix ??

Appendix B

Riemannian Optimization of Isometries

In this appendix we provide a brief introduction to the problem of optimizing a cost function on the constrained set of isometric matrices. This problem can be solved by performing Riemannian Optimization on the matrix manifold of isometric matrices, which is called the Stiefel manifold. For a more in-depth introduction to the topic we recommend the excellent book [29]. A discussion of Riemannian optimization of complex matrix manifolds in the context of quantum physics and isometric tensor networks can be found at [28, 30]. An implementation of Riemannian Optimization on the real Stiefel manifold and other matrix manifolds in python is given in [31]. Some parts of this implementation were also used in our implementation.

B.1 The complex Stiefel manifold

We define the *complex Stiefel manifold* $\text{St}(n, p)$ with $n \geq p$ as the set of all isometric $n \times p$ matrices:

$$\text{St}(n, p) := \left\{ X \in \mathbb{C}^{n \times p} : X^\dagger X = \mathbb{1} \right\}.$$

In particular, for $n = p$, the complex Stiefel manifold reduces to the set of unitary matrices $U(n)$. One can show, similar to [29], that the complex Stiefel manifold is naturally an embedded submanifold of the Euclidian vector space $\mathbb{C}^{n \times p} \cong \mathbb{R}^{2np}$ of general complex $n \times p$ matrices.

Tangent vectors on manifolds generalize the notion of directional derivatives. A mathematical definition of tangent vectors and tangent spaces of manifolds is given in [29]. The set of all tangent vectors to a point $X \in \text{St}(n, p)$ is called the *tangent space* $T_X \text{St}(n, p)$, which is given by [28, 29]

$$T_X \text{St}(n, p) = \left\{ Z \in \mathbb{C}^{n \times p} : X^\dagger Z + Z^\dagger X = 0 \right\}.$$

An arbitrary element $\xi \in \mathbb{C}^{n \times p}$ from the embedding space $\mathbb{C}^{n \times p}$ can be projected to the tangent space $T_X \text{St}(n, p)$ by [28, 29]

$$P_X \xi = \xi - \frac{1}{2} X \left(X^\dagger \xi + \xi^\dagger X \right). \quad (\text{B.1})$$

Additionally, we will also need to define a notion of length that we can apply to tangent vectors. This can be done in the form of an *inner product* on tangent spaces, called the *Riemannian metric*. A natural metric for the tangent space $T_X \text{St}(n, p)$ of the Stiefel manifold is the Euclidean metric of the embedding space $\mathbb{C}^{n \times p}$, which is given by the real part of the Frobenius inner product:

$$g_W : T_X \text{St}(n, p) \times T_X \text{St}(n, p) \rightarrow \mathbb{R}, \quad g_X(\xi_1, \xi_2) = \text{Re Tr} \left(\xi_1^\dagger \xi_2 \right). \quad (\text{B.2})$$

Equipped with a Riemannian metric the Stiefel manifold becomes a Riemannian submanifold of $\mathbb{C}^{n \times p}$.

With these definition, we can now formulate the optimization problem as the problem of finding the isometry $W_{\text{opt}} \in \text{St}(n, p)$ that minimizes the cost function

$$f : \text{St}(n, p) \rightarrow \mathbb{R}, \quad X \mapsto f(X). \quad (\text{B.3})$$

B.2 Gradients, retractions, and vector transport

First order optimization algorithms like Gradient Descent and Conjugate Gradients use the gradient of the cost function to update the search direction at each iteration. In the case of the Stiefel manifold and the cost function (B.3), we first define the matrix of partial derivatives $D \in \mathbb{C}^{n \times p}$ of f at $X \in \text{St}(n, p)$ by

$$D_{ij} := \left. \frac{\partial f}{\partial \text{Re}(X_{ij})} \right|_X + i \left. \frac{\partial f}{\partial \text{Im}(X_{ij})} \right|_X. \quad (\text{B.4})$$

With this definition, the directional derivative $\text{D}f(X)[Z]$ at $X \in \text{St}(n, p)$ in direction $Z \in \mathbb{C}^{n \times p}$ is simply given by an inner product of D with the direction Z , using the Riemannian metric (B.2):

$$\begin{aligned} g_X(D, Z) &= \text{Re Tr} \left(D^\dagger Z \right) = \text{Re} \sum_{ij} D_{ij}^* Z_{ij} \\ &= \sum_{ij} \left(\left. \frac{\partial f}{\partial \text{Re}(X_{ij})} \right|_X \text{Re } Z_{ij} + \left. \frac{\partial f}{\partial \text{Im}(X_{ij})} \right|_X \text{Im } Z_{ij} \right) \\ &=: \text{D}f(X)[Z]. \end{aligned}$$

With this we can now define the gradient $\nabla f(X)$ of f at $X \in \text{St}(n, p)$ as the projection of the partial derivative matrix (B.4) to the tangent space [28, 29]:

$$\nabla f(X) := P_X D = D - \frac{1}{2} X \left(X^\dagger D + D^\dagger X \right),$$

where we used the projection (B.1).

B.3 Conjugate Gradients

B.4 Trust Region Method

Appendix C

Initialization of the Disentangling Unitary

Bibliography

- [1] Michael P. Zaletel and Frank Pollmann. ‘Isometric Tensor Network States in Two Dimensions’. In: *Phys. Rev. Lett.* 124 (3 Jan. 2020), p. 037201. DOI: 10.1103/PhysRevLett.124.037201. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.124.037201>.
- [2] Sheng-Hsuan Lin, Michael P. Zaletel and Frank Pollmann. ‘Efficient simulation of dynamics in two-dimensional quantum spin systems with isometric tensor networks’. In: *Phys. Rev. B* 106 (24 Dec. 2022), p. 245102. DOI: 10.1103/PhysRevB.106.245102. URL: <https://link.aps.org/doi/10.1103/PhysRevB.106.245102>.
- [3] Carl Eckart and Gale Young. ‘The approximation of one matrix by another of lower rank’. In: *Psychometrika* 1.3 (1936), pp. 211–218.
- [4] Ulrich Schollwöck. ‘The density-matrix renormalization group in the age of matrix product states’. In: *Annals of physics* 326.1 (2011), pp. 96–192.
- [5] Román Orús. ‘A practical introduction to tensor networks: Matrix product states and projected entangled pair states’. In: *Annals of physics* 349 (2014), pp. 117–158.
- [6] Johannes Hauschild and Frank Pollmann. ‘Efficient numerical simulations with Tensor Networks: Tensor Network Python (TeNPy)’. In: *SciPost Phys. Lect. Notes* (2018), p. 5. DOI: 10.21468/SciPostPhysLectNotes.5. URL: <https://scipost.org/10.21468/SciPostPhysLectNotes.5>.
- [7] M B Hastings. ‘An area law for one-dimensional quantum systems’. In: *Journal of Statistical Mechanics: Theory and Experiment* 2007.08 (Aug. 2007), P08024. DOI: 10.1088/1742-5468/2007/08/P08024. URL: <https://dx.doi.org/10.1088/1742-5468/2007/08/P08024>.
- [8] J. Eisert, M. Cramer and M. B. Plenio. ‘Colloquium: Area laws for the entanglement entropy’. In: *Rev. Mod. Phys.* 82 (1 Feb. 2010), pp. 277–306. DOI: 10.1103/RevModPhys.82.277. URL: <https://link.aps.org/doi/10.1103/RevModPhys.82.277>.
- [9] Guifré Vidal. ‘Efficient simulation of one-dimensional quantum many-body systems’. In: *Physical review letters* 93.4 (2004), p. 040502.

- [10] Frank Verstraete, Juan J Garcia-Ripoll and Juan Ignacio Cirac. ‘Matrix product density operators: Simulation of finite-temperature and dissipative systems’. In: *Physical review letters* 93.20 (2004), p. 207204.
- [11] Jutho Haegeman et al. ‘Time-dependent variational principle for quantum lattices’. In: *Physical review letters* 107.7 (2011), p. 070601.
- [12] Jutho Haegeman et al. ‘Unifying time evolution and optimization with matrix product states’. In: *Physical Review B* 94.16 (2016), p. 165116.
- [13] Naomichi Hatano and Masuo Suzuki. ‘Finding exponential product formulas of higher orders’. In: *Quantum annealing and other optimization methods*. Springer, 2005, pp. 37–68.
- [14] F. Verstraete et al. ‘Criticality, the Area Law, and the Computational Power of Projected Entangled Pair States’. In: *Phys. Rev. Lett.* 96 (22 June 2006), p. 220601. DOI: 10.1103/PhysRevLett.96.220601. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.96.220601>.
- [15] RJ Baxter and IG Enting. ‘Series expansions from corner transfer matrices: the square lattice ising model’. In: *Journal of Statistical Physics* 21 (1979), pp. 103–123.
- [16] Michael Lubasch, J Ignacio Cirac and Mari-Carmen Banuls. ‘Unifying projected entangled pair state contractions’. In: *New Journal of Physics* 16.3 (2014), p. 033014.
- [17] Reza Haghshenas, Matthew J. O’Rourke and Garnet Kin-Lic Chan. ‘Conversion of projected entangled pair states into a canonical form’. In: *Phys. Rev. B* 100 (5 Aug. 2019), p. 054404. DOI: 10.1103/PhysRevB.100.054404. URL: <https://link.aps.org/doi/10.1103/PhysRevB.100.054404>.
- [18] Katharine Hyatt and E. M. Stoudenmire. *DMRG Approach to Optimizing Two-Dimensional Tensor Networks*. 2020. arXiv: 1908.08833 [cond-mat.str-el]. URL: <https://arxiv.org/abs/1908.08833>.
- [19] Tomohiro Soejima et al. ‘Isometric tensor network representation of string-net liquids’. In: *Phys. Rev. B* 101 (8 Feb. 2020), p. 085117. DOI: 10.1103/PhysRevB.101.085117. URL: <https://link.aps.org/doi/10.1103/PhysRevB.101.085117>.
- [20] Daniel Malz and Rahul Trivedi. *Computational complexity of isometric tensor network states*. 2024. arXiv: 2402.07975 [quant-ph]. URL: <https://arxiv.org/abs/2402.07975>.
- [21] Zhi-Yuan Wei, Daniel Malz and J. Ignacio Cirac. ‘Sequential Generation of Projected Entangled-Pair States’. In: *Phys. Rev. Lett.* 128 (1 Jan. 2022), p. 010607. DOI: 10.1103/PhysRevLett.128.010607. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.128.010607>.

- [22] Lucas Slattery and Bryan K. Clark. *Quantum Circuits For Two-Dimensional Isometric Tensor Networks*. 2021. arXiv: 2108.02792 [quant-ph]. URL: <https://arxiv.org/abs/2108.02792>.
- [23] Yu-Jie Liu, Kirill Shtengel and Frank Pollmann. *Topological quantum phase transitions in 2D isometric tensor networks*. 2024. arXiv: 2312.05079 [quant-ph]. URL: <https://arxiv.org/abs/2312.05079>.
- [24] Zhehao Dai et al. *Fermionic Isometric Tensor Network States in Two Dimensions*. 2024. arXiv: 2211.00043 [cond-mat.str-el]. URL: <https://arxiv.org/abs/2211.00043>.
- [25] Yantao Wu et al. ‘Two-dimensional isometric tensor networks on an infinite strip’. In: *Phys. Rev. B* 107 (24 June 2023), p. 245118. DOI: 10.1103/PhysRevB.107.245118. URL: <https://link.aps.org/doi/10.1103/PhysRevB.107.245118>.
- [26] Maurits S. J. Tepaske and David J. Luitz. ‘Three-dimensional isometric tensor networks’. In: *Phys. Rev. Res.* 3 (2 June 2021), p. 023236. DOI: 10.1103/PhysRevResearch.3.023236. URL: <https://link.aps.org/doi/10.1103/PhysRevResearch.3.023236>.
- [27] Wilhelm Kadow, Frank Pollmann and Michael Knap. ‘Isometric tensor network representations of two-dimensional thermal states’. In: *Phys. Rev. B* 107 (20 May 2023), p. 205106. DOI: 10.1103/PhysRevB.107.205106. URL: <https://link.aps.org/doi/10.1103/PhysRevB.107.205106>.
- [28] Markus Hauru, Maarten Van Damme and Jutho Haegeman. ‘Riemannian optimization of isometric tensor networks’. In: *SciPost Physics* 10.2 (Feb. 2021). ISSN: 2542-4653. DOI: 10.21468/scipostphys.10.2.040. URL: <http://dx.doi.org/10.21468/SciPostPhys.10.2.040>.
- [29] P.-A. Absil, R. Mahony and Rodolphe Sepulchre. *Optimization Algorithms on Matrix Manifolds*. Princeton: Princeton University Press, 2008. ISBN: 9781400830244. DOI: doi:10.1515/9781400830244. URL: <https://doi.org/10.1515/9781400830244>.
- [30] Ilia A Luchnikov, Mikhail E Krechetov and Sergey N Filippov. ‘Riemannian geometry and automatic differentiation for optimization problems of quantum physics and quantum technologies’. In: *New Journal of Physics* 23.7 (July 2021), p. 073006. ISSN: 1367-2630. DOI: 10.1088/1367-2630/ac0b02. URL: <http://dx.doi.org/10.1088/1367-2630/ac0b02>.
- [31] James Townsend, Niklas Koep and Sebastian Weichwald. *Pymanopt: A Python Toolbox for Optimization on Manifolds using Automatic Differentiation*. 2016. arXiv: 1603.03236 [cs.MS].