



Experiment 8

Student Name: Analava Bera
Branch: BE CSE
Semester: 6th
Subject Name: Full Stack
Development

UID: 23BCS13611
Section/Group: KRG 3A
Date of Performance: 06/04/26
Subject Code: 23CSH-309

Aim:

To understand and implement security in a full-stack application (LivePoll System) using Spring Security, OAuth (Google Login), role-based access control (RBAC), and integration with a React frontend.

Objective:

1. To understand the importance of security in backend applications
2. To learn how Spring Security manages authentication and authorization
3. To differentiate between authentication and authorization
4. To secure REST APIs using custom security configurations
5. To implement OAuth2.0 (Google Login)
6. To apply role-based access control (USER, ADMIN)

Implementation/Code:

AdminPollController.java package
com.ecotrack.livepoll.controller;

```
import com.ecotrack.livepoll.auth.AppUserPrincipal; import
com.ecotrack.livepoll.dto.PollDtos; import
com.ecotrack.livepoll.service.PollService; import jakarta.validation.Valid;
import org.springframework.http.HttpStatus; import
org.springframework.http.ResponseEntity; import
org.springframework.security.access.prepost.PreAuthorize; import
org.springframework.security.core.annotation.AuthenticationPrincipal; import
org.springframework.web.bind.annotation.DeleteMapping; import
org.springframework.web.bind.annotation.PathVariable; import
org.springframework.web.bind.annotation.PostMapping;
```



```
import org.springframework.web.bind.annotation.RequestBody; import
org.springframework.web.bind.annotation.RequestMapping; import
org.springframework.web.bind.annotation.RestController;
```

```
@RestController
@RequestMapping("/api/admin/polls")
@PreAuthorize("hasRole('ADMIN')") public
class AdminPollController {
```

```
    private final PollService pollService;
```

```
    public AdminPollController(PollService pollService) {
this.pollService = pollService;
    }
```

```
    @PostMapping
    public ResponseEntity<PollDtos.PollResponse> createPoll(@Valid @RequestBody
PollDtos.CreatePollRequest request,
                                                             @AuthenticationPrincipal AppUserPrincipal
principal) {        return ResponseEntity.status(HttpStatus.CREATED)
        .body(pollService.createPoll(request, principal.getUsername()));
    }
```

```
    @PostMapping("/{id}/close")
    public ResponseEntity<PollDtos.PollResponse> closePoll(@PathVariable Long id) {
return ResponseEntity.ok(pollService.closePoll(id));
    }
```


```
    @DeleteMapping("/{id}")
    public ResponseEntity<Void> deletePoll(@PathVariable Long id) {
pollService.deletePoll(id);        return
ResponseEntity.noContent().build();
    }
}
```



CHANDIGARH UNIVERSITY

Discover. Learn. Empower.

Output:

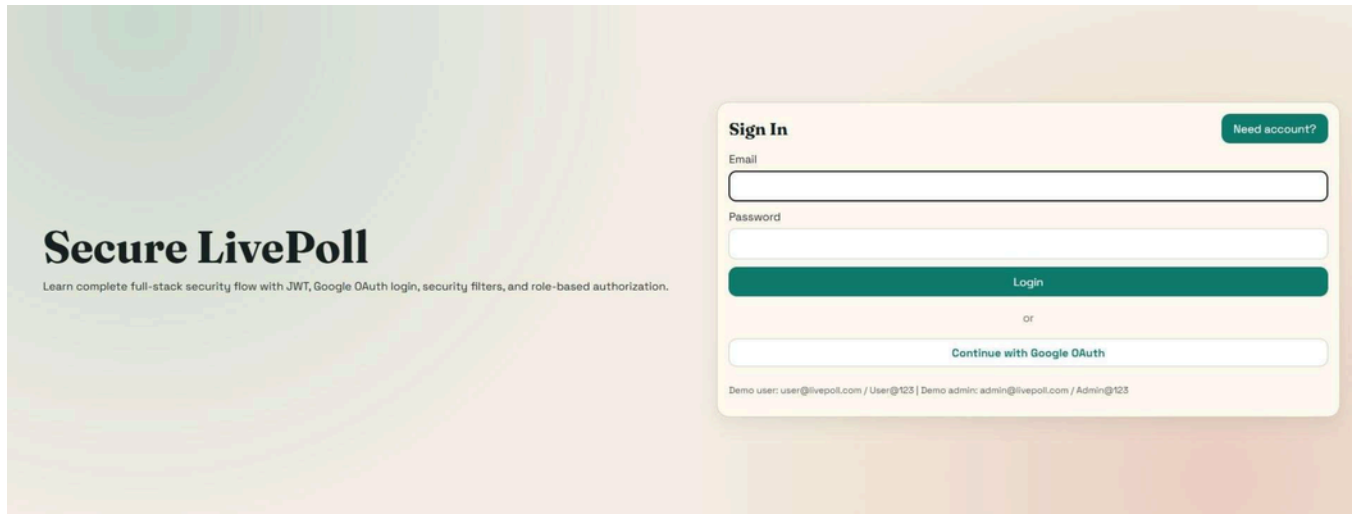

Learning Outcome:

- Learned how Spring Security secures backend APIs
- Understood authentication vs authorization clearly
- Implemented OAuth 2.0 login using Google
- Gained experience with role-based access control (RBAC)
- Learned how to integrate React frontend with secured backend
- Understood complete request flow with security filters
- Improved debugging and analysis of secured applications