

# Module 1-1

Command Line Shell & Version Control

# Module 1 Day 1

Can/Do you?

1. ... navigate files using the UI (Windows Explorer)?
2. ... find and open a command line application (Git BASH)?
3. ... pull your upstream repository (Lecture Code, Exercises and Solutions)?
4. ... open and use the Visual Studio Code text editor?
5. ... understand and use the command line?
6. ... understand Pathing and Hierarchical Structures (Parent\Child folder and file structures)?
7. ... remember the basic BASH commands cd, ls, and pwd?
8. ... understand what source control is?
9. ... understand what Git is and the workflow used in class?

# What is a File System?

- Files are the parts of the file system that contain the data we want.
- Folders hold other folders and files. ALL files exist in some folder of the File System.
- Folders and files BOTH have metadata used to describe them. Metadata includes information such as modified date, names, and permissions that are all attached to the files and folders as part of the File System.

# What is a Command Line Shell?

- A shell is the means by which the user interacts with the computer.
  - Shells can be in the form of a graphical user interface (i.e. Windows, MacOS)
  - Shells can also be in the form of a command line interface (CLI), or Command Line shells, in which users type in commands followed by parameters.
- Information Technology professionals should be familiar with **command line shells**.
- In this class we will be using the GitBash ***Command Line Shell***, which allows for UNIX commands from a windows workstation.

# Command Line Commands: Moving Around

- Data in your workstation are organized into files and folders.
- The main command to move around folder is **cd**. There are several variations of these:
  - **cd ~** : Returns you to your home directory.
  - **cd <directory name>** : Takes you to a specified directory i.e. cd workspace takes you to a folder called workspace
  - **cd ..** : Takes you one level up.
- You can always see what directory you're in by typing **pwd**.
- The **ls** command lists all the files in the current directory.

Let's Try this!

# Moving Around: Absolute Path

- When you used the `pwd` command, the output would have looked something like this:

```
Student@DELL-v-3 MINGw64 ~/workspace  
$ pwd  
/c/Users/Student/workspace
```

Recall that `pwd` displays the current directory. Note that the response from this command is an absolute path since it starts with a slash (/).

# Moving Around: Relative Path

- A relative path is differentiated from the absolute path by the absence of the initial slash:
  - **cd /c/Users/Student/workspace** uses an absolute path to get me to the workspace folder.
  - Alternatively, if I were already in my respective user folder (Student), typing **cd workspace** uses a relative path to get me to the workspace folder.



# Moving Around: The Tilde (~)

- The tilde (~) is a special symbol used to denote the home directory. For all of your workstations this has been set to: `/c/users/<Your username>`

```
Student@DELL-v-3 MINGW64 ~/workspace
```

```
$ cd ~/workspace
```

Therefore, the above command will take you to: `/c/Users/Student/workspace/`

# Moving Around: Making Directories

- To create a directory we use the **mkdir <filename>** command.

# Command Line Commands: Copying

- To copy a file from 1 directory to another: `cp <source> <destination>`

```
Student@DELL-v-3 MINGW64 ~
```

```
$ cp ~/testdir/file.txt ~/othertestdir
```

- To move a file from 1 directory to another: `mv <source> <destination>`

```
Student@DELL-v-3 MINGW64 ~
```

```
$ mv ~/othertestdir/file.txt ~/testdir/
```


- Copy and Move differ in that the latter will remove the file from the source. With copy, the source retains a copy (pun intended) of the file.

# Source Control : What it is

- Source control software allows developers to save and version their code.
- In this class, we will be using git / bitbucket.
- Git is an example of a distributed source control system, where a repository exists locally on your own workstation and on a central network location.

# Source Control : Git Flow (Checking In Changes)

- **git status**: See the current status of your files.
- **git add -A**: Stage any files you have changed.
- **git commit -m "Commit message"**: Save files to your local repository
- **git push origin master**: Push committed changes to network repository.

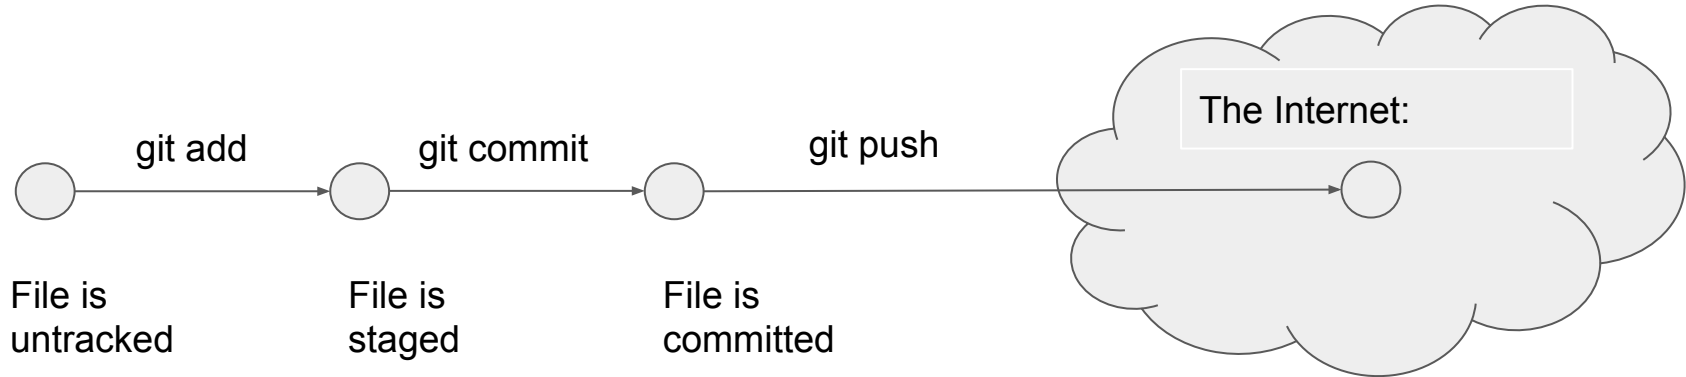

# Source Control : Git Flow (Pulling Changes)

- **git clone:** Pulls the entire repository (including all previous commits) to your local workstation.
- **git pull upstream master:** Pulls latest changes from the remote repository.
- In this class we make a distinction between “upstream master” and “origin master”. Always pull from upstream master and push to origin master! There are some circumstances where this will change - the instructor will let you know.

(And refer to your handy cheat sheet).

# Setup!

## 1. Clone your repository:

- By now you should have received access to your BitBucket repo. You should be able to go to the following URL on your browser:  
**<https://bitbucket.org/te-phl-cohort-2/<yourname>/src/master/>**
- At the top of the page there is a clone command, copy this, it should look something like this: **git clone**  
**<https://RSeedsTE@bitbucket.org/te-phl-cohort-2/richseeds.git>**
- Open Git Bash and navigate to your workspace folder. Paste the command you copied in and press enter. The shortcut for pasting things into Git Bash is **Shift+Ins**.

# Setup!

2. Run the setup script:

Hey, check out what happened! You have a folder now inside your workspace with your name on it. Go into that folder by typing: **cd <yourname>**. i.e. `cd johnsmith`

There is 1 file sitting inside the folder, it is a shell executable that we need to run. Go ahead and run it by typing: **sh setup.sh**

Follow the prompt instructions.

**This is the only time in the class you need to run this setup script!**



# Setup!

3. Let's do our first pull.

- Make sure you're in your name directory. Again, we can check with the **pwd** command. The output should be something like:  
**/c/Users/John Smith/workspace/cohort-1/johnsmith**
- Go ahead and type: **git pull upstream master**

# Final Notes

- You want to pull often:
  - Pull when your instructors ask you to.
  - Pull first thing in the morning when you get to class.
  - Pull when you get back from lunch
  - Pull before you plan to push an assignment.
- Instructors will only grade what has been pushed to the BitBucket git repository. You can always check the web version of the repository to do a spot check to make sure what you pushed is actually there:  
[\*\*https://bitbucket.org/te-phl-cohort-2/richseeds/src/master/\*\*](https://bitbucket.org/te-phl-cohort-2/richseeds/src/master/)