PENETRATION TESTING REPORT

FOOTPRINTING & NETWORK SCANNING PHASES

W2-PM-FINAL | CYBERSECURITY | NETWORKWALKS

Pentester Name (Cybersecurity Student)	Sneha Hariprasad Pillai
Program/Batch	B084-Networkwalks
Date	11 November 2026
Modules completed	W2-PM1 (Multiple kali tools), W2-PM2 (GHDB), W2-PM3 (Maltego), W2-PM4 (theHARVESTER), W2-PM5 (Zenmap Scanning)
Client/Target	1. Networkwalks (secured written permission already) 2. My own local LAN Network (192.168.1.0/24) 3. Microsoft.com (example target specified in the W2-PM4 module; public data sources only)
Permission secured from client?	Yes
Phases covered	**Phase 1:** Reconnaissance & Footprinting **Phase 2:** Scanning & Network Discovery **Phase 3-5:** In Progress

1. Liability Disclaimer

I have performed these activities only on the systems & devices where I had secured written permission or the devices/systems that I own myself. All these materials are for education and research purpose only. Do not use anything from here to break the law. The instructor, the authors and Networkwalks are not responsible for what you do with this knowledge. Every action you take is your own responsibility. Misuse can lead to criminal charges, heavy fines, loss of your job and a permanent record. In most countries unauthorised access is a crime even when nothing is damaged.

2. Introduction

This report covers footprinting the networkwalks.com domain using multiple Kali Linux tools (W2-PM1) and Maltego (W2-PM3), Google Hacking Database dorks (W2-PM2), theHarvester on microsoft.com (W2-PM4, the example target given in that module), and scanning my own local network with Zenmap (W2-PM5). Four modules cover the footprinting phase and one covers the scanning phase, so together they show how an attacker moves from gathering public information to mapping live hosts on a network. It is the Week 2 part of my ongoing internship program at Networkwalks.

The footprinting commands were run in Kali Linux (inside VirtualBox) and in Maltego Desktop on Windows. The GHDB dorks were searched through Google in a browser. The scanning was done on a

Windows PC with Zenmap installed. Every step below includes the exact command used, the result I observed, a screenshot as evidence, and a short note on why the finding matters from an attacker's point of view.

3. Tools Used

The table below lists each tool used in this report and its purpose.

Tool	Purpose
Kali Linux & Windows	Operating systems used for reconnaissance activities
WHOIS	Find domain registration details (owner, dates, name servers).
whatweb	Fingerprint web technologies (server, CMS, plugins, IP).
nslookup	Resolve the domain name to its IP address using DNS.
curl -I	Read the HTTP response headers of the website.
wafw00f	Detect whether a Web Application Firewall protects the site.
dnsrecon	Enumerate all DNS records (NS, MX, SPF, TXT, SRV).
Google Hacking Database (Exploit-DB)	Source of ready-made Google search queries (dorks).
Google Search (dorks)	Run the dorks to find publicly exposed devices and files without touching the target.
Maltego Desktop 4.14.0	Link-analysis tool; four email transforms ("To Emails @domain [Search Engine]", From whois info, PGP and Search Engine) find e-mail addresses for a domain.
theHarvester 4.11.1	OSINT tool that gathers e-mails, hosts/sub-domains, IPs, ASNs and URLs from public sources.
Windows CMD	Local IP and MAC address identification
Zenmap (Nmap GUI)	Scan the local subnet to find live hosts, IPs and MAC addresses.

4. Activities Performed

4.1 Footprinting & Reconnaissance

I performed footprinting and reconnaissance using four modules: multiple Kali Linux tools (W2-PM1), Google Hacking Database dorks (W2-PM2), Maltego (W2-PM3) and theHarvester (W2-PM4). Each module was used to collect a different type of public information without attacking the target.

4.1.1 Multiple Kali Tools (W2-PM1)

I performed reconnaissance against the `networkwalks.com` domain using six Kali Linux tools: **WHOIS, WhatWeb, Nslookup, Curl, Wafw00f and DNSRecon**.

First, I used **WHOIS** to obtain publicly available domain registration information and identify the domain's name servers. The results provided information about the domain registration and hosting infrastructure.

I then used **WhatWeb** to identify technologies used by the website. The results identified **WordPress 7.1.4** and **WordPress Download Manager 3.3.76**, along with other information exposed by the website.

Using **Nslookup**, I resolved the domain name to its IP address. The result identified **192.232.216.135**.

I used **Curl** with the `-I` option to inspect the HTTP response headers. This provided additional information about the web application and exposed the WordPress REST API endpoint `/wp-json/`.

Next, I used **Wafw00f** to determine whether a Web Application Firewall was protecting the website. The result identified **ModSecurity (SpiderLabs)**.

Finally, I used **DNSRecon** to enumerate DNS records. The results provided information relating to name servers, mail servers, SPF/TXT records, service records and DNS software information.

4.1.2 Google Hacking Database (W2-PM2)

I opened the GHDB on Exploit-DB, searched for relevant terms and copied the dorks one by one into Google. Google returned its indexed results, so the target systems were never contacted directly.

For Task 1, I used dorks such as `intitle:"webcamXP" inurl:8080` to look for exposed camera pages. I recorded each link and its dork in the table. For Task 2, I used the dork `intitle:index.of "parent directory" mathematics pdf` to find open directories that list downloadable mathematics PDF ebooks. I recorded 10 listings with their links and dorks. The links are hidden with red bands in this public copy for safety. No usernames or passwords were needed or used.

4.1.3 Maltego (W2-PM3)

I created a new graph in Maltego Desktop, added a Domain entity named networkwalks.com and ran four email transforms: `[Utilities] To Emails @domain [Search Engine]`, `To Email address [From whois info]`, `To Email Addresses [PGP]` and `To Email Addresses [Search Engine]`. Every transform returned **`info@networkwalks.com`**, so it is the only public company address found. The whois transform also returned **`abuse@godaddy.com`**, which is the domain registrar's abuse contact and not a Networkwalks mailbox. After all four runs, 148 credits remained.

Why it matters: a public contact address is normal for a business, but any published address can become a target for phishing or social engineering. It also confirms the naming convention used for the domain's mailboxes. The registrar contact shows which provider holds the domain.

4.1.4 theHarvester (W2-PM4)

I first ran theHarvester against a single source (Baidu) to understand the output. I then ran it against all supported sources with a result limit of 50. The target was microsoft.com, as specified in the W2-PM4 module, using public data sources only.

```
theHarvester -d microsoft.com -l 1000 -b baidu
```

Result: No IPs, e-mails, people or hosts were found. A single search engine returned nothing, which shows why several sources are normally combined.

```
theHarvester -d microsoft.com -l 50 -b all
```

The summary of what the tool reported is below.

Item	Result
ASNs found	9: AS8075 (Microsoft), AS13335 (Cloudflare), AS14618 (Amazon), AS16625 and AS20940 (Akamai), AS133618, AS206834, AS40034, AS47583
Interesting URLs	9 (including 4 Microsoft sign-in / OAuth URLs for QA and Intune applications that expose tenant and client IDs, plus mcp.microsoft.com, Azure Maps and privacy pages)
IP addresses	58 (46 IPv4 and 12 IPv6)
E-mail addresses	3: dotnet-docker-bot@microsoft.com, opencode@microsoft.com, secure@microsoft.com
People / LinkedIn	None found
Hosts / sub-domains	9,490 found
Hudson Rock (infostealer database)	621,809 total compromised credentials recorded for the domain, of which 16,601 employees and 600,418 users; 44 hosts extracted from employee URLs
Windvane fallback	No API key, so 14 sub-domains found with DNS pattern search

What the 9,490 host names show. I analysed the host list in the saved output. The counts below are approximate and overlap, because one name can match several patterns.

Pattern in host name	Approx. count	Meaning
contains “corp.microsoft.com”	3,300	Corporate / internal naming
contains “redmond”	1,680	Internal site naming
contains “dev”	950	Development systems
contains “test”	510	Test systems
contains “ppe” (pre-production)	510	Pre-production systems
contains “uat”	230	User-acceptance testing
contains “api.”	580	API endpoints
contains “login” or “auth”	120	Authentication services

Observations and limitations.

- More than 30 data sources failed because no API key was configured (for example Shodan, Censys, VirusTotal, SecurityTrails, Hunter, GitHub and HaveIBeenPwned). They are marked “Missing API key” in the output. The results above come only from sources that work without a key, so a fully configured run would very likely return more.

- Fofa returned an invalid-credentials error, LeakIX returned “Incorrect API Key” and ThreatCrowd gave no response. These were skipped by the tool.
- The raw list contains noise that has to be validated manually, for example URL-encoding artefacts (2Fblogs.microsoft.com), GUID-style names and wildcard entries (*.xxx). The list should not be treated as a confirmed asset inventory.
- Many names reveal internal, test and pre-production environments. An attacker can use them to guess naming conventions and pick weaker, less-monitored systems.

Why it matters: everything above was collected without sending a single packet to the target. An attacker could use the sub-domain list, IP ranges, ASNs and e-mail addresses to plan phishing, choose which systems to scan next, and prioritise forgotten test environments.

4.2 Network Scanning with Zenmap (W2-PM5)

For the second activity, I used **Zenmap** to perform network discovery on my local network. The practical required me to identify my local IP address and subnet, discover live hosts, identify their IP and MAC addresses, and generate a network topology.

I first used the Windows `ipconfig` command to identify my local IP address and LAN subnet. My Wi-Fi adapter has the IP address `192.168.1.6`, subnet mask `255.255.255.0` and default gateway `192.168.1.1`. I then entered the subnet `192.168.1.0/24` into Zenmap and selected **Ping Scan** to identify active hosts.

The scan (`nmap -sn 192.168.1.0/24`) identified six live hosts out of 256 addresses:

- `192.168.1.1` (the router, shown as “Unit”)
- `192.168.1.2`
- `192.168.1.3`
- `192.168.1.4`
- `192.168.1.5`
- `192.168.1.6` (my own PC, shown as host.docker.internal)

Zenmap does not list the MAC address of the scanning PC itself, so I read it with ipconfig /all (Wi-Fi adapter): D8:F3:BC:xx:xx:xx (last three bytes masked for privacy). The scan also returned five MAC addresses for the other devices:

- `2C:C1:F4:8A:AD:E1` (Nokia Solutions and Networks India)
- `EE:1E:0F:18:B1:18`
- `7A:6E:3F:BA:27:B0`
- `FE:33:2E:AF:65:B5`
- `1A:95:EC:3B:28:3A`

After completing the scan, I opened the **Topology** section in Zenmap, enabled the legend and saved the network topology in PDF format as required by the practical task (the saved file is included with this report as PM5_zenmap_topology.pdf). I also answered the questions on the Networkwalks Zenmap practice lab page.

5. Risk Analysis / Impact

Based on the information collected during the footprinting and network scanning activities, I identified the following potential risks.

#	Risk / Finding	Evidence / Observation	Potential Impact	Risk Level
1	Web technology information exposed	WhatWeb identified WordPress and WP Download Manager	Attackers may use exposed technology/version information to identify software requiring further security review	● **Medium**
2	Server IP address identifiable	Nslookup resolved the domain to `192.232.216.135`	Provides information about the network location of the web service	● **Low**
3	HTTP technical information exposed	Curl returned HTTP response headers and exposed `/wp-json/`	May assist technology fingerprinting and further enumeration	● **Low**
4	WAF technology identifiable	Wafw00f identified ModSecurity (SpiderLabs)	Reveals information about the web application's security architecture	● **Low**
5	DNS infrastructure information exposed	DNSRecon identified DNS, mail and service-related records	DNS information can help build a broader infrastructure profile	● **Medium**
6	Sensitive content discoverable through Google	GHDB dorks returned publicly indexed camera pages and open directory listings	Misconfigured systems can be found without contacting the target, which helps attackers choose victims	● **Medium**
7	Public e-mail address exposed	Maltego found info@networkwalks.com	Can be targeted by phishing and social engineering	● **Low**
8	Large number of sub-domains, including internal and test names	theHarvester returned 9,490 hosts for microsoft.com; thousands contain corp, dev, test, ppe or uat	Reveals naming conventions and non-production systems that may be less protected	● **Medium**
9	Infrastructure details exposed	58 IP addresses and 9 ASNs found for microsoft.com	Helps an attacker map hosting and choose targets for later scanning	● **Low**
10	Credential exposure indicators	Hudson Rock reported 621,809 compromised credentials linked to microsoft.com	Stolen credentials could allow account takeover if passwords are reused and MFA is missing	● **Medium**
11	Multiple live hosts visible on local network	Zenmap identified six live hosts; four have unknown (randomised) MAC addresses	Unknown or unauthorized devices may potentially be present on a network	● **Medium**

Risk level key: ● Critical ● Medium ● Low

The risks above are observations from the footprinting and scanning exercises, not confirmed vulnerabilities.

The practical exercises primarily involved information gathering and host discovery. No exploitation or vulnerability validation was performed as part of these two modules.

Therefore, the presence of information such as a software version, IP address or DNS record does not by itself mean that the system is vulnerable. Further authorized security testing would be required to confirm any actual vulnerability.

6. Recommendations

Based on the observations from these activities, I recommend the following security improvements:

1. **Limit what is publicly discoverable.** Review which sub-domains, certificates and e-mail addresses are public. Avoid putting internal or test host names in public certificates where possible, and use wildcard or private certificate authorities for internal systems.
2. **Use role-based mailboxes and protect them.** Keep public addresses such as info@ behind spam and phishing filtering, and train staff to recognise targeted phishing.
3. **Retire or protect non-production systems.** Dev, test, pre-production and UAT systems should be removed when not needed, patched, and placed behind authentication or VPN.
4. **Monitor for leaked credentials.** Enforce MFA, require password resets for accounts found in infostealer data, and monitor breach-intelligence sources.
5. **Review OAuth application exposure.** Check that QA and test application registrations are restricted and do not allow unintended sign-ins.
6. **Run OSINT checks on your own organisation regularly.** Run tools such as theHarvester with API keys configured and validate the results manually to remove false positives.
7. **Search for your own exposed data.** Defenders should run Google dorks against their own domains to find exposed files, directories and devices before attackers do.
8. **Scan your own network regularly.** Periodically run a discovery scan, compare the results with a known device list and investigate any unknown device.
9. **Secure the home or office router.** Change default passwords, keep firmware updated, use WPA3/WPA2 and a guest network for visitors' devices.
10. **Maintain network documentation.** Keep an updated list and topology diagram of devices and their MAC addresses.
11. **Test only with authorisation.** Reconnaissance and scanning should only be performed against systems and networks where permission has been given.

7. Conclusion

During Week 2 of my Cybersecurity & Ethical Hacking internship I completed practical activities covering footprinting, reconnaissance and network scanning.

In the footprinting activity I worked through four modules: multiple Kali tools (W2-PM1), GHDB (W2-PM2), Maltego (W2-PM3) and theHarvester (W2-PM4). I learned how WHOIS, WhatWeb, Nslookup, Curl, Wafw00f and DNSRecon each reveal a different part of a target, and how Google dorks can surface exposed devices and files without contacting the target. I used Maltego to find a public e-mail address for networkwalks.com and theHarvester to collect ASNs, IP addresses, e-mails, URLs and more than nine thousand host names for microsoft.com from public sources. I learned that many sources need API keys, that the output must be checked for false positives, and that even without touching a target an attacker can learn a great deal about its infrastructure.

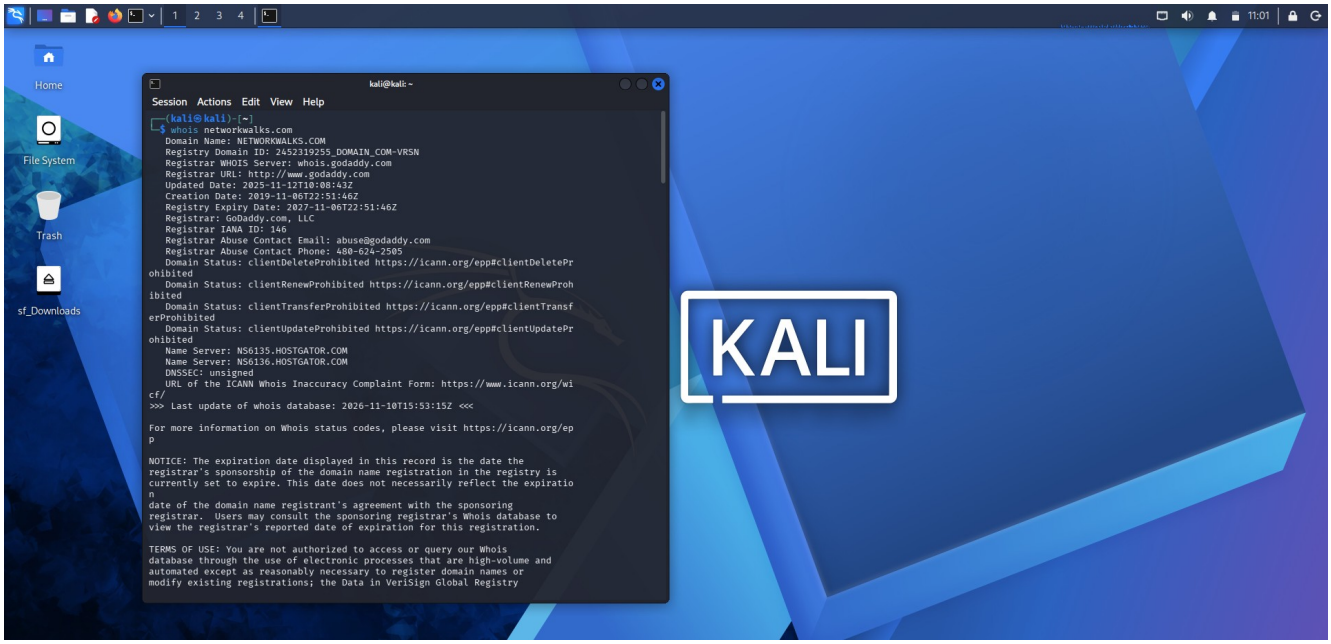
In the network scanning activity I used ipconfig and Zenmap to identify my subnet (192.168.1.0/24), discover six live hosts, collect their IP and MAC addresses, and create a network topology. I also learned how to read MAC addresses: the router was identified by its vendor, while four devices use randomised MAC addresses.

I also learned that technical findings should be documented clearly. A good cybersecurity report should explain what was performed, what was discovered, what the observation means, what risk it may create, and what can be done to reduce that risk.

Finally, reconnaissance and scanning must always be performed within an authorised scope. These activities were completed as part of the assigned educational cybersecurity lab.

8. Evidences Collected

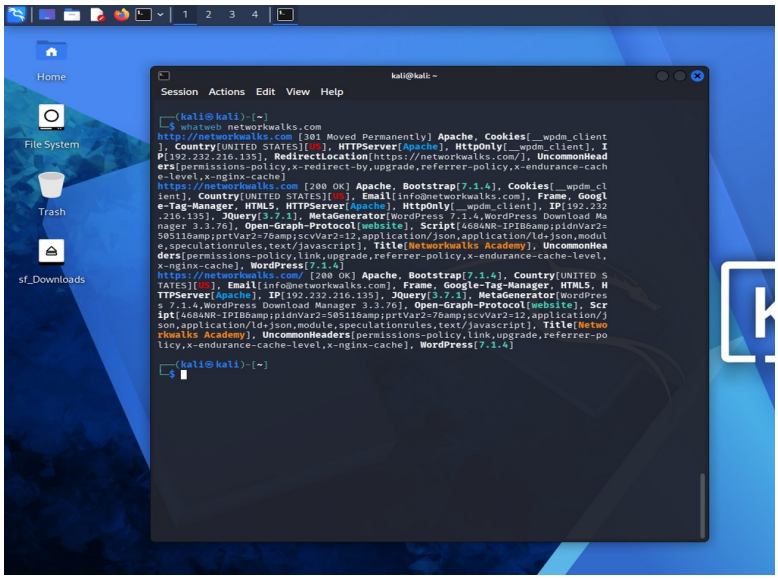
PM1-



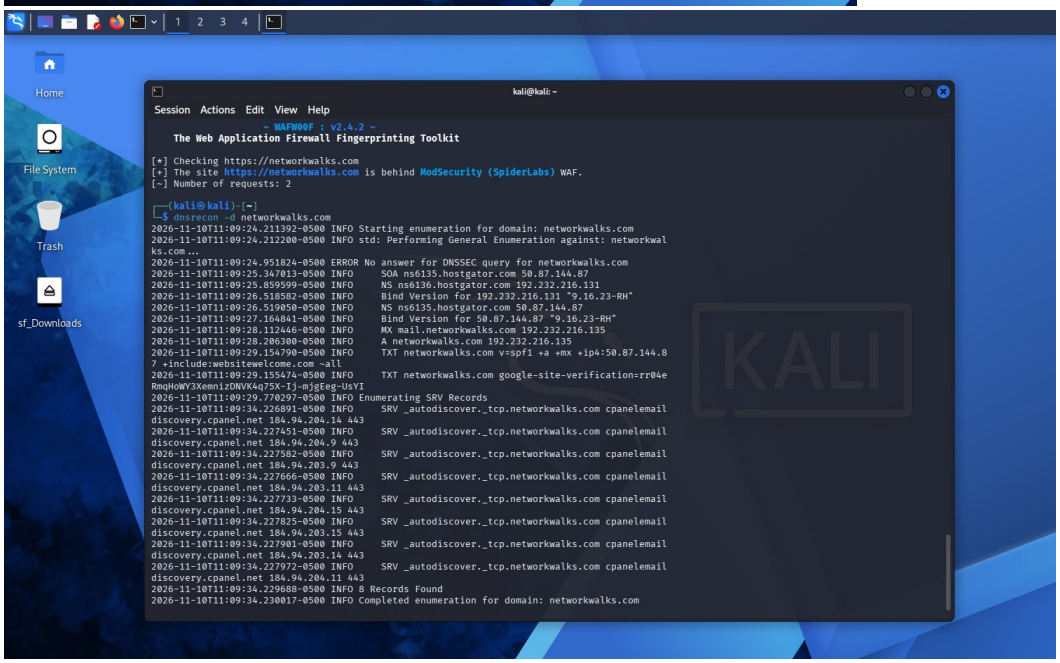



Home
File System
Trash
sf_Downloads
kali@kali: ~
Session Actions Edit View Help
Domain Status: clientUpdateProhibited https://icann.org/epp#clientUpdateProhibited
Domain Status: clientRenewProhibited https://icann.org/epp#clientRenewProhibited
Domain Status: clientDeleteProhibited https://icann.org/epp#clientDeleteProhibited
Registry Registrant ID: Not Available From Registry
Registrant Name: Registration Private
Registrant Organization: Domains By Proxy, LLC
Registrant Street: DomainsByProxy.com
Registrant Street: 100 S. Mill Ave, Suite 1600
Registrant City: Tempe
Registrant State/Province: Arizona
Registrant Postal Code: 85281
Registrant Country: US
Registrant Phone: +1.4806242599
Registrant Phone Ext:
Registrant Fax:
Registrant Fax Ext:
Registrant Email: https://www.godaddy.com/whois/results.aspx?domain=networkwalks.com&action=contactDomainOwner
Registry Tech ID: Not Available From Registry
Tech Name: Registration Private
Tech Organization: Domains By Proxy, LLC
Tech Street: DomainsByProxy.com
Tech Street: 100 S. Mill Ave, Suite 1600
Tech City: Tempe
Tech State/Province: Arizona
Tech Postal Code: 85281
Tech Country: US
Tech Phone: +1.4806242599
Tech Phone Ext:
Tech Fax:
Tech Fax Ext:
Tech Email: https://www.godaddy.com/whois/results.aspx?domain=networkwalks.com&action=contactDomainOwner
Name Server: NS6135.HOSTGATOR.COM
Name Server: NS6136.HOSTGATOR.COM
Name Server: NS29.DOMAINCONTROL.COM
Name Server: NS30.DOMAINCONTROL.COM
DNSSEC: unsigned
URL of the ICANN WHOIS Data Problem Reporting System: http://wdprs.internic.net/
KALI


Home
File System
Trash
sf_Downloads
kali@kali: ~
Session Actions Edit View Help
m&action=contactDomainOwner
Name Server: NS6135.HOSTGATOR.COM
Name Server: NS6136.HOSTGATOR.COM
Name Server: NS29.DOMAINCONTROL.COM
Name Server: NS30.DOMAINCONTROL.COM
DNSSEC: unsigned
URL of the ICANN WHOIS Data Problem Reporting System: http://wdprs.internic.net/
>>> Last update of WHOIS database: 2026-11-10T15:53:30Z <<<
For more information on Whois status codes, please visit https://icann.org/epp
TERMS OF USE: The data contained in this registrar's Whois database, while believed by the registrar to be reliable, is provided "as is" with no guarantee or warranties regarding its accuracy. This information is provided for the sole purpose of assisting you in obtaining information about domain name registration records. Any use of this data for any other purpose is expressly forbidden without the prior written permission of this registrar. By submitting an inquiry, you agree to these terms and limitations of warranty. In particular, you agree not to use this data to allow, enable, or otherwise support the dissemination or collection of this data, in part or in its entirety, for any purpose, such as transmission by e-mail, telephone, postal mail, facsimile or other means of mass unsolicited, commercial advertising or solicitations of any kind, including spam. You further agree not to use this data to enable high volume, automated or robotic electronic processes designed to collect or compile this data for any purpose, including mining this data for your own personal or commercial purposes. Failure to comply with these terms may result in termination of access to the Whois database. These terms may be subject to modification at any time without notice.
NOTICE This WHOIS server is being retired. Please use our RDAP service instead.
KALI


Home
File System
Trash
sf_Downloads
kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ whatweb networkwalks.com
http://networkwalks.com [301 Moved Permanently] Apache, Cookies[__wpdm_client], Country[UNITED STATES][US], HTTPServer[Apache], HttpOnly[__wpdm_client], IP[192.232.216.135], RedirectLocation[https://networkwalks.com/], UncommonHeaders[permissions-policy,x-redirect-by,upgrade,referrer-policy,x-endurance-cache-level,x-nginx-cache]
https://networkwalks.com [200 OK] Apache, Bootstrap[7.1.4], Cookies[__wpdm_client], Country[UNITED STATES][US], Email[info@networkwalks.com], Frame, Google-Tag-Manager, HTML5, HTTPServer[Apache], HttpOnly[__wpdm_client], IP[192.232.216.135], JQuery[3.7.1], MetaGenerator[WordPress 7.1.4,WordPress Download Manager 3.3.76], Open-Graph-Protocol[website], Script[4684NR-IPIBBamp;pidnVar2=505116amp;prtVar2=7bamp;scVar2=12,application/json,application/ld+json,module,speculationrules,text/javascript], Title[Networkwalks Academy], UncommonHeaders[permissions-policy,link,upgrade,referrer-policy,x-endurance-cache-level,x-nginx-cache], WordPress[7.1.4]
https://networkwalks.com/ [200 OK] Apache, Bootstrap[7.1.4], Country[UNITED STATES][US], Email[info@networkwalks.com], Frame, Google-Tag-Manager, HTML5, HTTPServer[Apache], IP[192.232.216.135], JQuery[3.7.1], MetaGenerator[WordPress 7.1.4,WordPress Download Manager 3.3.76], Open-Graph-Protocol[website], Script[4684NR-IPIBBamp;pidnVar2=505116amp;prtVar2=7bamp;scVar2=12,application/json,application/ld+json,module,speculationrules,text/javascript], Title[Networkwalks Academy], UncommonHeaders[permissions-policy,link,upgrade,referrer-policy,x-endurance-cache-level,x-nginx-cache], WordPress[7.1.4]
(kali㉿kali)-[~]
$


Minimize all open windows and show the desktop
Home
File System
Trash
sf_Downloads
kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ nslookup networkwalks.com
Server: 10.0.0.1
Address: 10.0.0.1#53
Non-authoritative answer:
Name: networkwalks.com
Address: 192.232.216.135
(kali㉿kali)-[~]
$ curl -I https://networkwalks.com
HTTP/2 200
permissions-policy: private-state-token-redemption=(self "https://www.google.com" "https://www.gstatic.com" "https://recaptcha.net" "https://challenges.cloudflare.com" "https://hcaptcha.com"), private-state-token-issuance=(self "https://www.google.com" "https://www.gstatic.com" "https://recaptcha.net" "https://challenges.cloudflare.com" "https://hcaptcha.com")
link: <https://networkwalks.com/wp-json/>; rel="https://api.w.org/", <https://networkwalks.com/wp-json/wp/v2/pages/53>; rel="alternate"; title="JSON"; type="application/json", <https://networkwalks.com/>; rel=shortlink
set-cookie: __wpdm_client=8c8069563544469e6d4e30fe0f6f733d8; path=/; domain=networkwalks.com; secure; HttpOnly
referrer-policy: no-referrer-when-downgrade
x-endurance-cache-level: 0
x-nginx-cache: WordPress
content-type: text/html; charset=UTF-8
date: Tue, 10 Nov 2026 16:08:10 GMT
server: Apache
(kali㉿kali)-[~]
$ wafw00f networkwalks.com
Woof!


Home
File System
Trash
sf_Downloads
kali@kali: ~
Session Actions Edit View Help
~ WAFW00F : v2.4.2 ~
The Web Application Firewall Fingerprinting Toolkit
[*] Checking https://networkwalks.com
[+] The site https://networkwalks.com is behind ModSecurity (SpiderLabs) WAF.
[~] Number of requests: 2
(kali㉿kali)-[~]
$ dnsrecon -d networkwalks.com
2026-11-10T11:09:24.211392-0500 INFO Starting enumeration for domain: networkwalks.com
2026-11-10T11:09:24.212200-0500 INFO std: Performing General Enumeration against: networkwalks.com ...
2026-11-10T11:09:24.951824-0500 ERROR No answer for DNSSEC query for networkwalks.com
2026-11-10T11:09:25.347013-0500 INFO SOA ns6135.hostgator.com 50.87.144.87
2026-11-10T11:09:25.859599-0500 INFO NS ns6136.hostgator.com 192.232.216.131
2026-11-10T11:09:26.518582-0500 INFO Bind Version for 192.232.216.131 "9.16.23-RH"
2026-11-10T11:09:26.519050-0500 INFO NS ns6135.hostgator.com 50.87.144.87
2026-11-10T11:09:27.164841-0500 INFO Bind Version for 50.87.144.87 "9.16.23-RH"
2026-11-10T11:09:28.112446-0500 INFO MX mail.networkwalks.com 192.232.216.135
2026-11-10T11:09:28.206300-0500 INFO A networkwalks.com 192.232.216.135
2026-11-10T11:09:29.154790-0500 INFO TXT networkwalks.com v=spf1 +a +mx +ip4:50.87.144.87 +include:websitewelcome.com ~all
2026-11-10T11:09:29.155474-0500 INFO TXT networkwalks.com google-site-verification=rr04eRmqHoWY3XemnizDNVK4q75X-Ij-mjgEeg-UsYI
2026-11-10T11:09:29.770297-0500 INFO Enumerating SRV Records
2026-11-10T11:09:34.226891-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.204.14 443
2026-11-10T11:09:34.227451-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.204.9 443
2026-11-10T11:09:34.227582-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.203.9 443
2026-11-10T11:09:34.227666-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.203.11 443
2026-11-10T11:09:34.227733-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.204.15 443
2026-11-10T11:09:34.227825-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.203.15 443
2026-11-10T11:09:34.227901-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.203.14 443
2026-11-10T11:09:34.227972-0500 INFO SRV _autodiscover._tcp.networkwalks.com cpanelemail discovery.cpanel.net 184.94.204.11 443
2026-11-10T11:09:34.229688-0500 INFO 8 Records Found
2026-11-10T11:09:34.230017-0500 INFO Completed enumeration for domain: networkwalks.com

PM2-

Tasks

Task1 Find 10x live vulnerable security camera links that are exposed & accessible from Internet. List them in below table along with their relevant dork that you have used.

No.	Link	Relevant Dork	Username /Password (if any)
1		intitle:"webcamXP" inurl:8080	---
2		intitle:"WebCam 7" "Network Camera Monitoring system" | "ActiveX Mode"	---
3		intitle:"WebcamXP 5" "mini"	---
4		inurl:"/cgi-bin/guestimage.html"	---
5		"Camera Live Image"	---
6		inurl:"guestimage.html"	---
7		inurl:"/cgi-bin/guestimage.html"	---
8		inurl:"/view/index.shtml" or intitle:"Live View / - AXIS"	---
9		inurl:"ViewerFrame?Mode=" or inurl:"ViewerFrame?Mode=Motion"	---
10		inurl:"CgiStart?page="	---
11		inurl:"CgiStart?page=Single"	---
12		inurl:"CgiStart?page=Single"	---

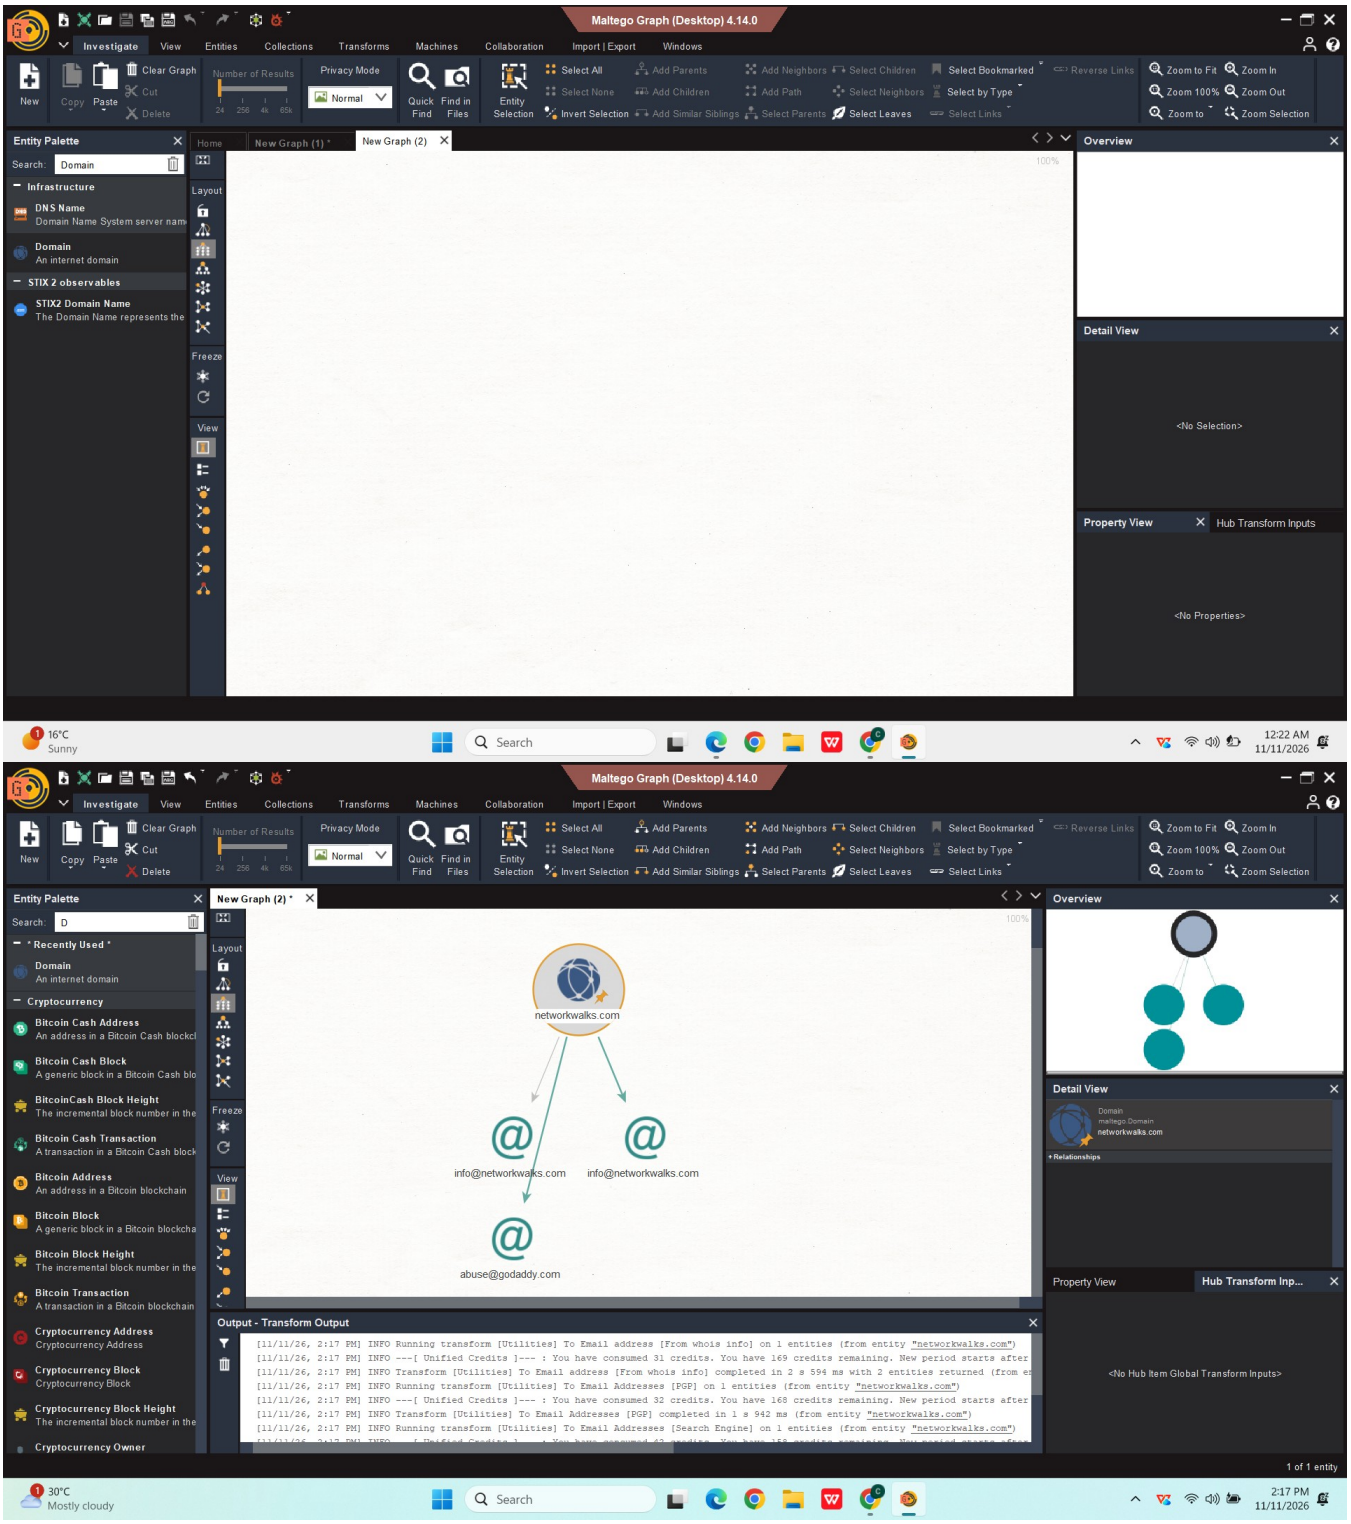
Links hidden (red bands) for public sharing.

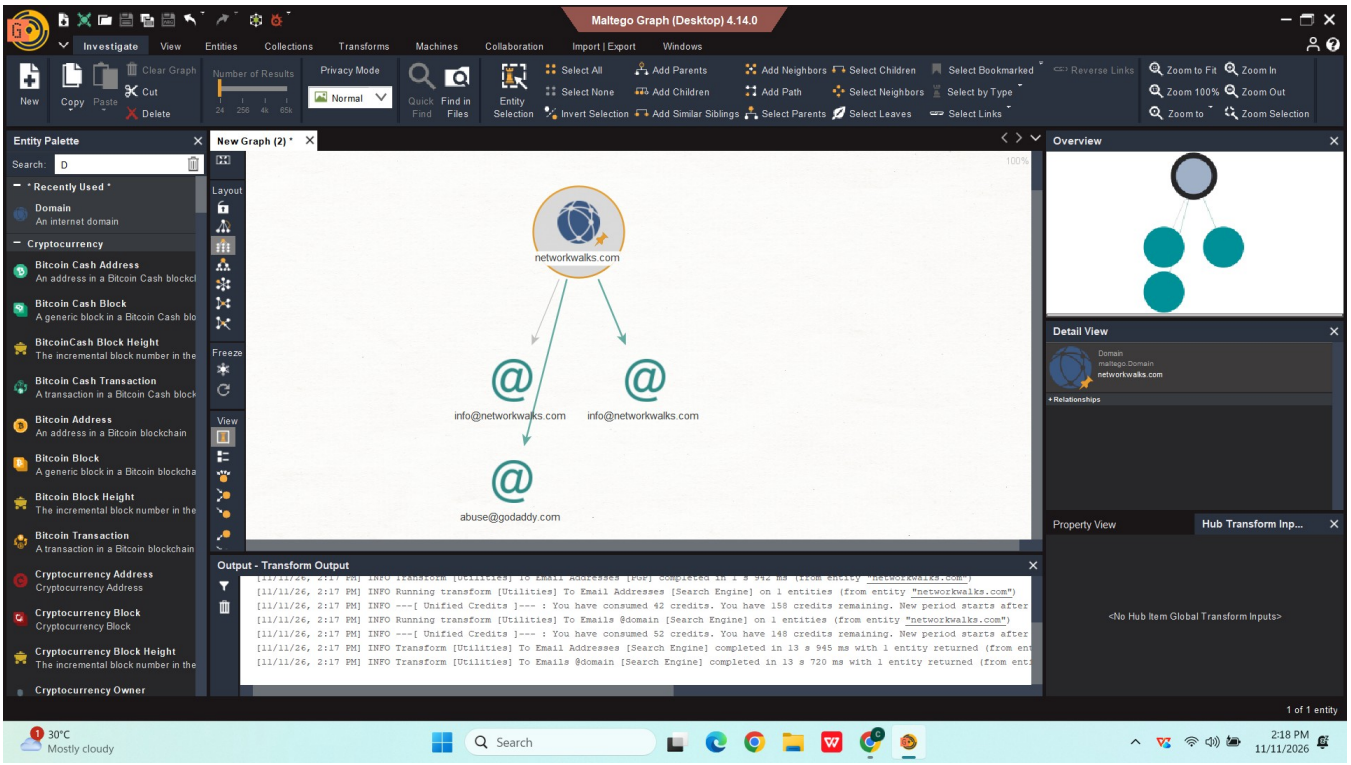
Task2 Find 10x listings which contain downloadable mathematics ebooks in PDF format:

No.	Link	Relevant Dork	Username /Password (if any)
1		intitle:index.of "parent directory" mathematics pdf	---
2		intitle:"index of" "document*.pdf"	---
3		intitle:"index of" "CD.pdf"	---
4		intitle:"index of" "-XML.pdf"	---
5		site:.edu intitle:"index of"	---
6		site:*.edu intitle:index of	---
7		intitle:"Index of" site:.edu	---
8		intitle:"Index of" public	---
9		intitle:"index of" "pub"	---
10		site:.edu intext:"Index of" intitle:"index of"	---

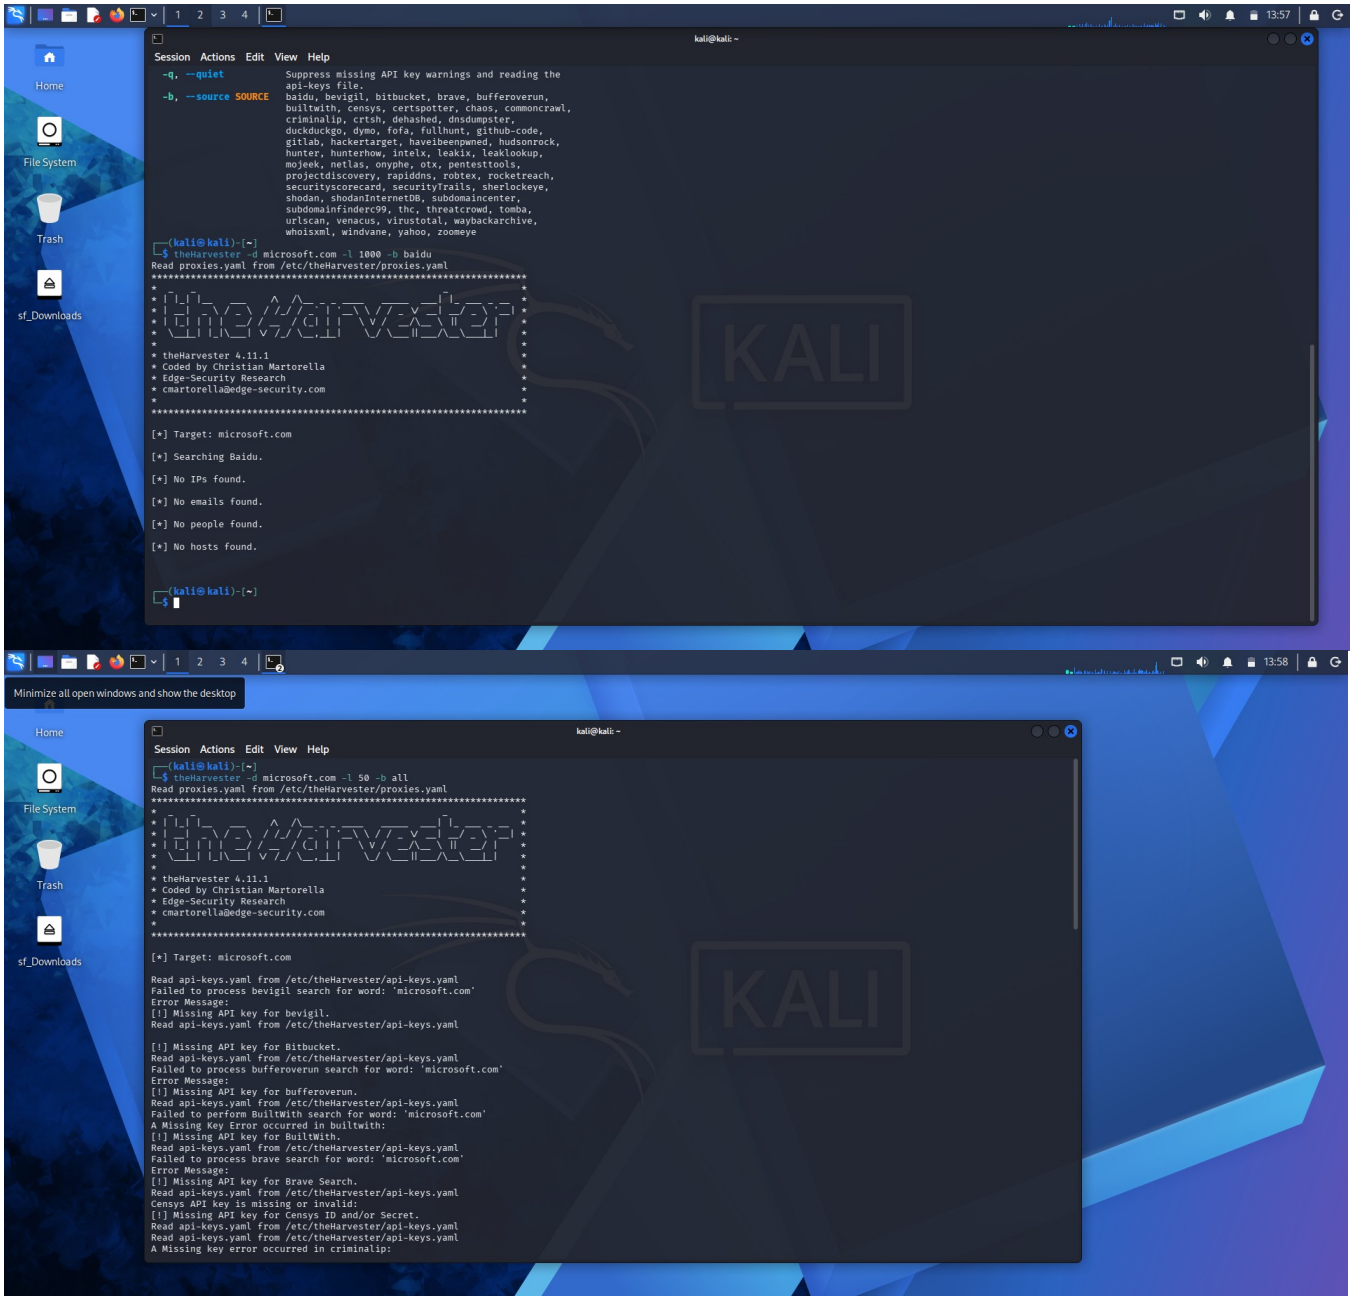
Links hidden (red bands) for public sharing.

PM3-

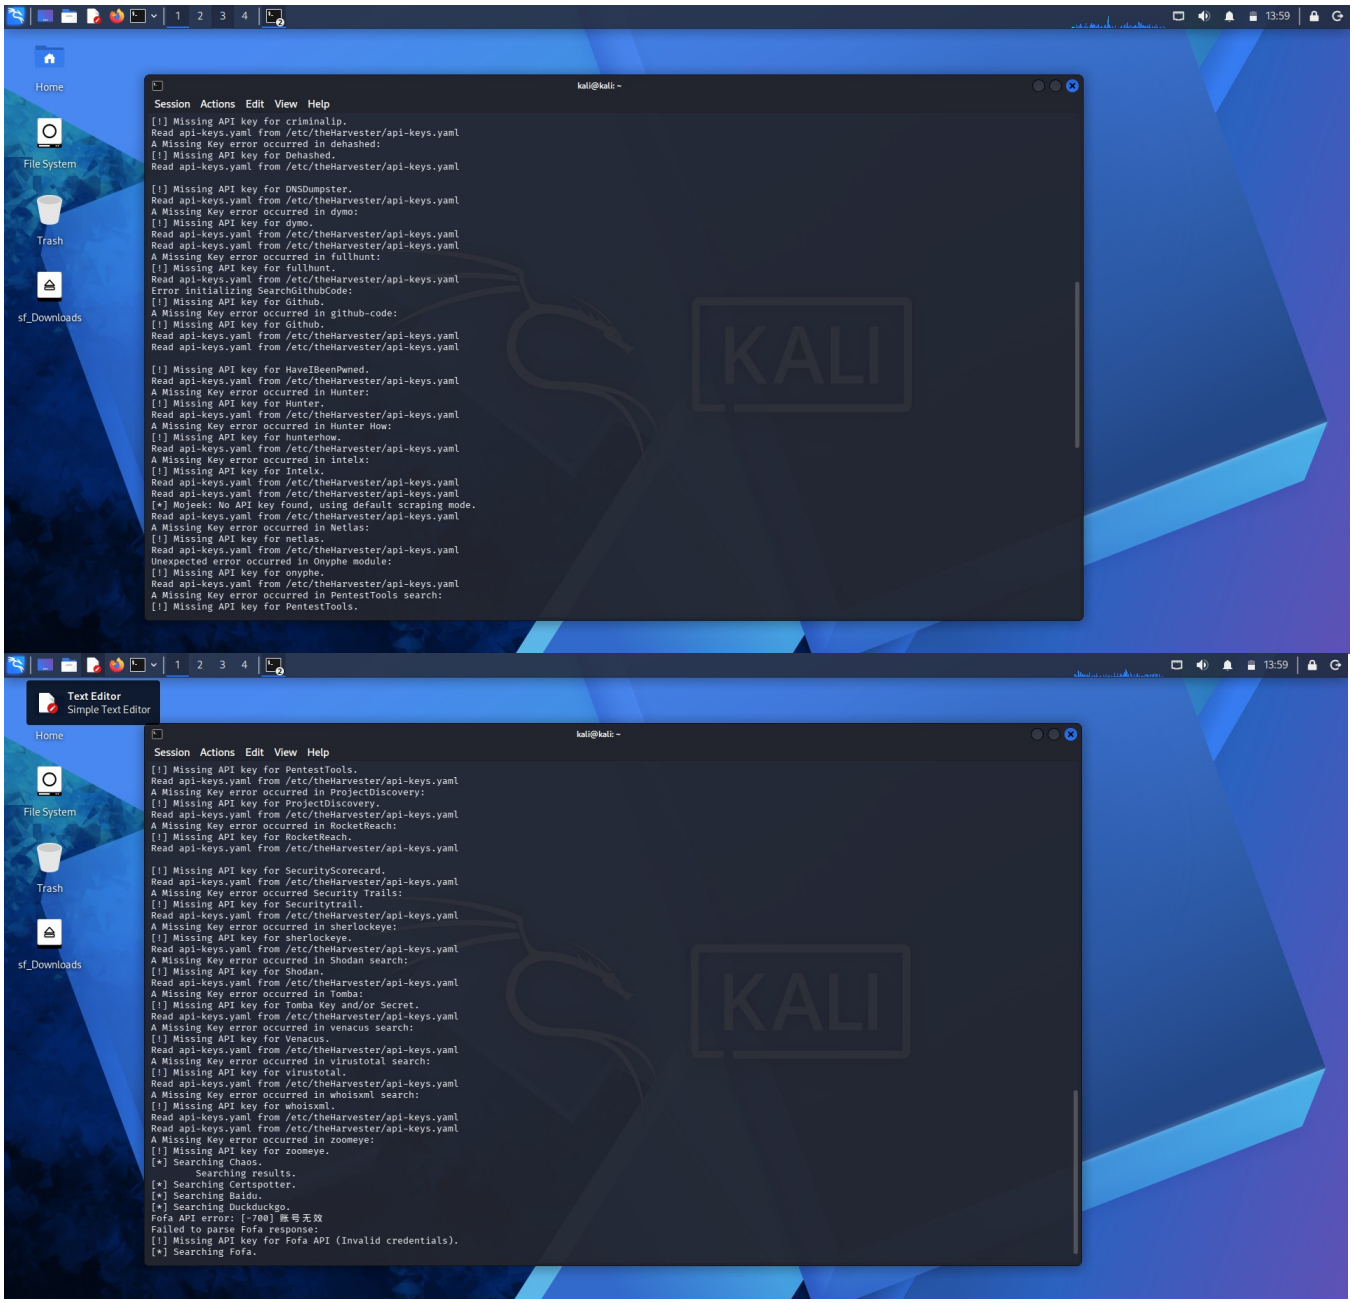

Maltego Graph (Desktop) 4.14.0
Entity Palette
Search: Domain
Infrastructure
DNS Name
Domain
STIX 2 observables
STIX2 Domain Name
New Graph (1)
New Graph (2)
Overview
Detail View
<No Selection>
Property View
Hub Transform Inputs
<No Properties>
Maltego Graph (Desktop) 4.14.0
Entity Palette
Search: D
Recently Used
Cryptocurrency
Bitcoin Cash Address
Bitcoin Cash Block
BitcoinCash Block Height
Bitcoin Cash Transaction
Bitcoin Address
Bitcoin Block
Bitcoin Block Height
Bitcoin Transaction
Cryptocurrency Address
Cryptocurrency Block
Cryptocurrency Block Height
Cryptocurrency Owner
New Graph (2)
networkwalks.com
info@networkwalks.com
info@networkwalks.com
abuse@godaddy.com
Output - Transform Output
Overview
Detail View
Property View
Hub Transform Inp...
<No Hub Item Global Transform Inputs>
1 of 1 entity


Maltego Graph (Desktop) 4.14.0
Investigate
View
Entities
Collections
Transforms
Machines
Collaboration
Import | Export
Windows
Entity Palette
New Graph (2)
networkwalks.com
info@networkwalks.com
info@networkwalks.com
abuse@godaddy.com
Overview
Detail View
Property View
Hub Transform Inp...
<No Hub Item Global Transform Inputs>
Output - Transform Output
[11/11/26, 2:17 PM] INFO Running transform [Utilities] To Email Addresses [Search Engine] on 1 entities (from entity "networkwalks.com")
[11/11/26, 2:17 PM] INFO ---[Unified Credits]--- : You have consumed 42 credits. You have 158 credits remaining. New period starts after
[11/11/26, 2:17 PM] INFO Running transform [Utilities] To Emails @domain [Search Engine] on 1 entities (from entity "networkwalks.com")
[11/11/26, 2:17 PM] INFO ---[Unified Credits]--- : You have consumed 52 credits. You have 148 credits remaining. New period starts after
[11/11/26, 2:17 PM] INFO Transform [Utilities] To Email Addresses [Search Engine] completed in 13 s 945 ms with 1 entity returned (from ent
[11/11/26, 2:17 PM] INFO Transform [Utilities] To Emails @domain [Search Engine] completed in 13 s 720 ms with 1 entity returned (from ent
1 of 1 entity
30°C
Mostly cloudy
Search
2:18 PM
11/11/2026

PM4-

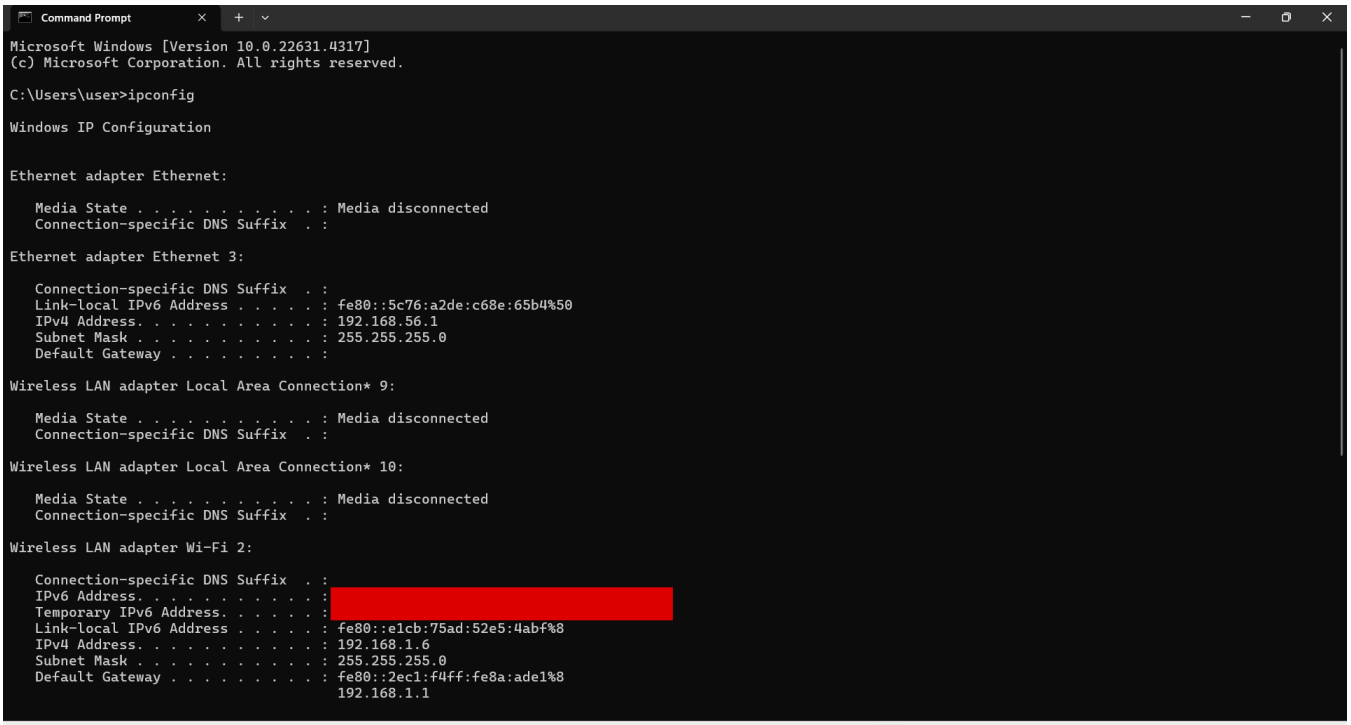

kali@kali: ~
Session Actions Edit View Help
-q, --quiet Suppress missing API key warnings and reading the api-keys file.
-b, --source SOURCE baidu, bevigil, bitbucket, brave, bufferoverun, builtwith, censys, certspotter, chaos, commoncrawl, criminalip, crtsh, dehashed, dnsdumpster, duckduckgo, dymo, fofa, fullhunt, github-code, gitlab, hackertarget, haveibeenpwned, hudsonrock, hunter, hunterhow, intelx, leakix, leaklookup, mojeek, netlas, onyphe, otx, pentesttools, projectdiscovery, rapiddns, robtex, rocketreach, securityscorecard, securityTrails, sherlockeye, shodan, shodanInternetDB, subdomaincenter, subdomainfinderc99, thc, threatcrowd, tomba, urlscan, venacus, virustotal, waybackarchive, whoisxml, windvane, yahoo, zoomeye
(kali㉿kali)-[~]
$ theHarvester -d microsoft.com -l 1000 -b baidu
Read proxies.yaml from /etc/theHarvester/proxies.yaml
* theHarvester 4.11.1
* Coded by Christian Martorella
* Edge-Security Research
* cmartorella@edge-security.com
[*] Target: microsoft.com
[*] Searching Baidu.
[*] No IPs found.
[*] No emails found.
[*] No people found.
[*] No hosts found.
(kali㉿kali)-[~]
$
Home
File System
Trash
sf_Downloads

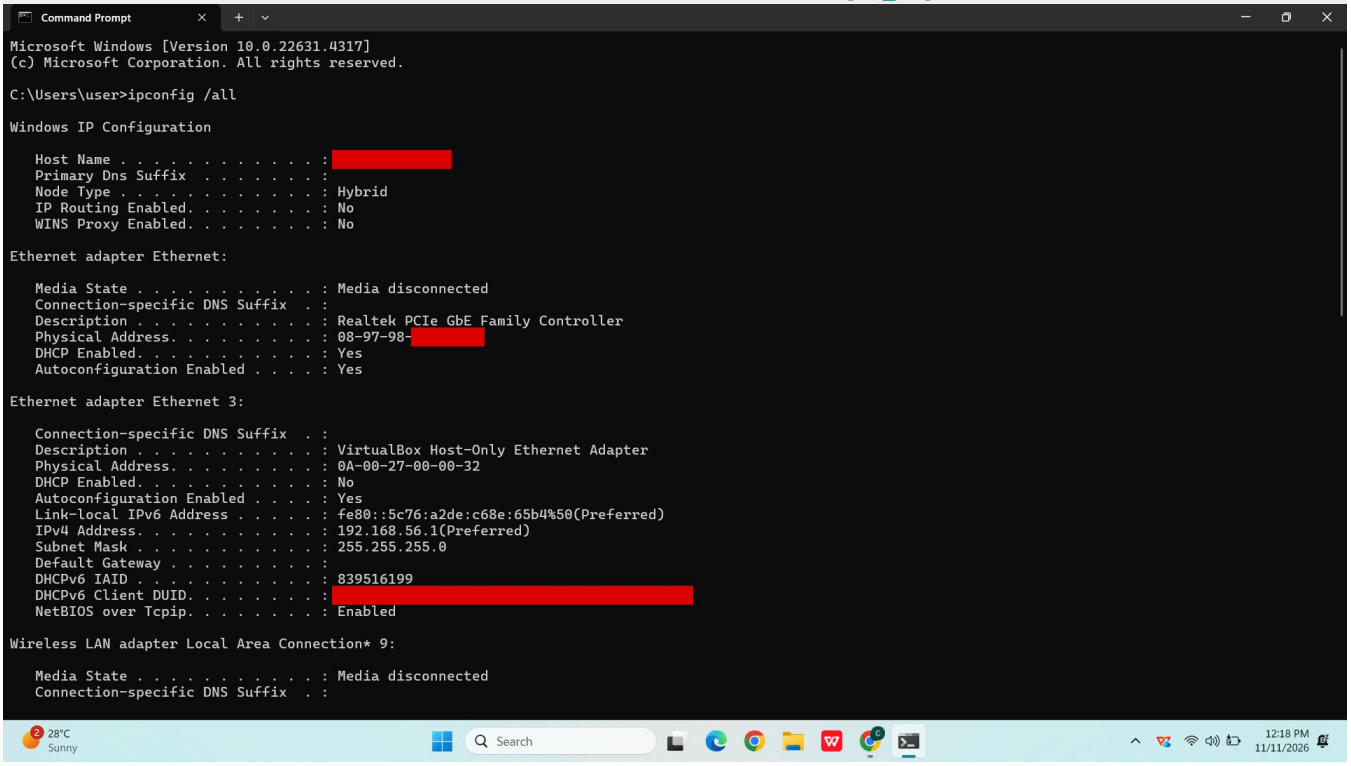
Minimize all open windows and show the desktop
kali@kali: ~
Session Actions Edit View Help
(kali㉿kali)-[~]
$ theHarvester -d microsoft.com -l 50 -b all
Read proxies.yaml from /etc/theHarvester/proxies.yaml
* theHarvester 4.11.1
* Coded by Christian Martorella
* Edge-Security Research
* cmartorella@edge-security.com
[*] Target: microsoft.com
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
Failed to process bevigil search for word: 'microsoft.com'
Error Message:
[!] Missing API key for bevigil.
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
[!] Missing API key for Bitbucket.
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
Failed to process bufferoverun search for word: 'microsoft.com'
Error Message:
[!] Missing API key for bufferoverun.
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
Failed to perform BuiltWith search for word: 'microsoft.com'
A Missing Key Error occurred in builtwith:
[!] Missing API key for BuiltWith.
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
Failed to process brave search for word: 'microsoft.com'
Error Message:
[!] Missing API key for Brave Search.
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
Censys API key is missing or invalid:
[!] Missing API key for Censys ID and/or Secret.
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
Read api-keys.yaml from /etc/theHarvester/api-keys.yaml
A Missing key error occurred in criminalip:
Home
File System
Trash
sf_Downloads

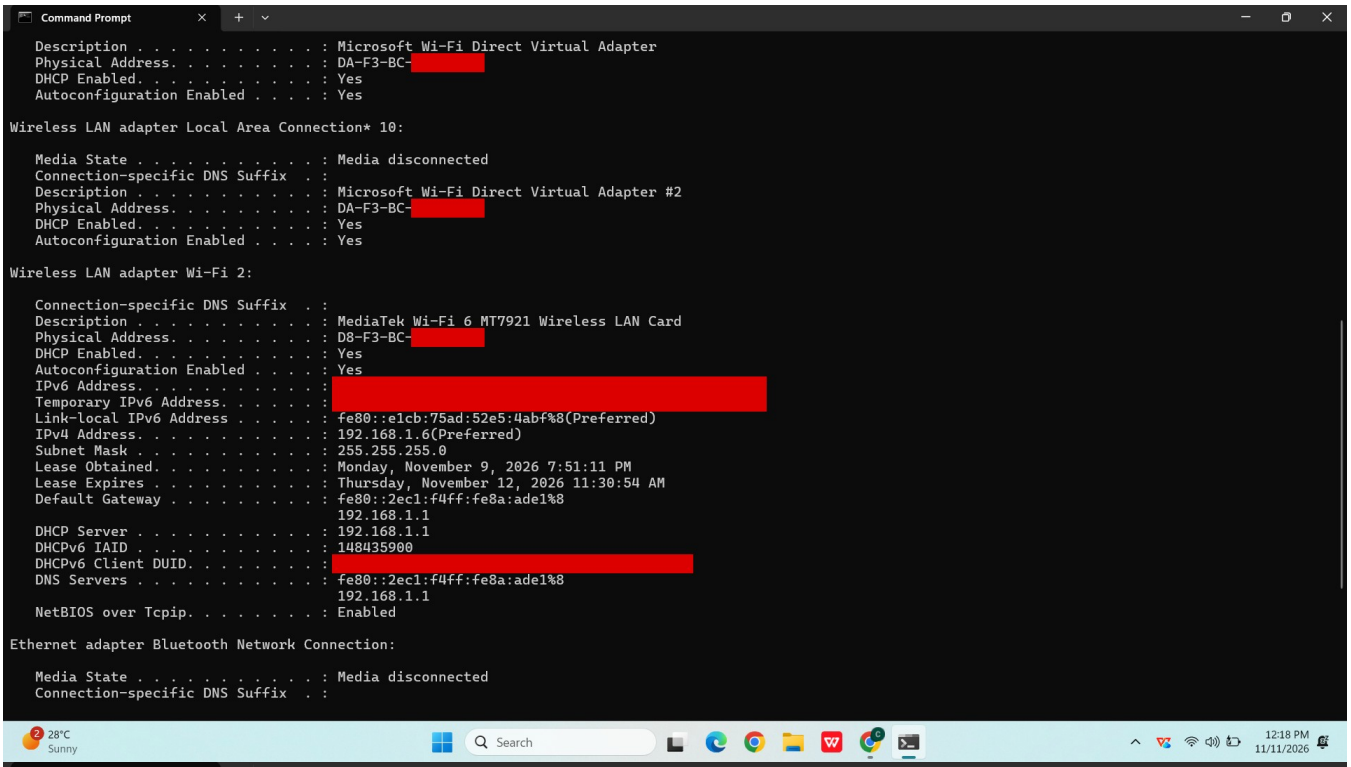


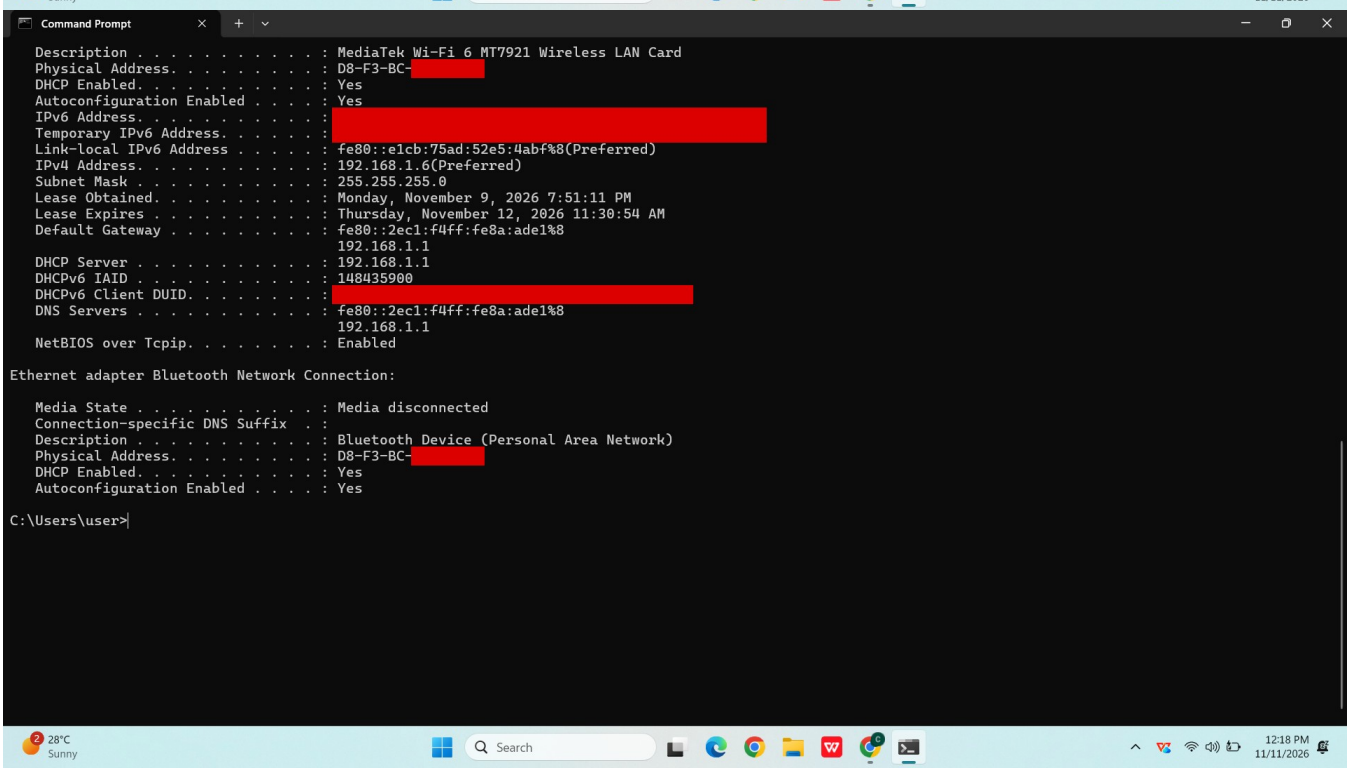
(REST COPIED IN TEXT FILES: W2-PM1_Kali_Tools_Output.txt and W2-PM4_theHarvester_Output.txt)

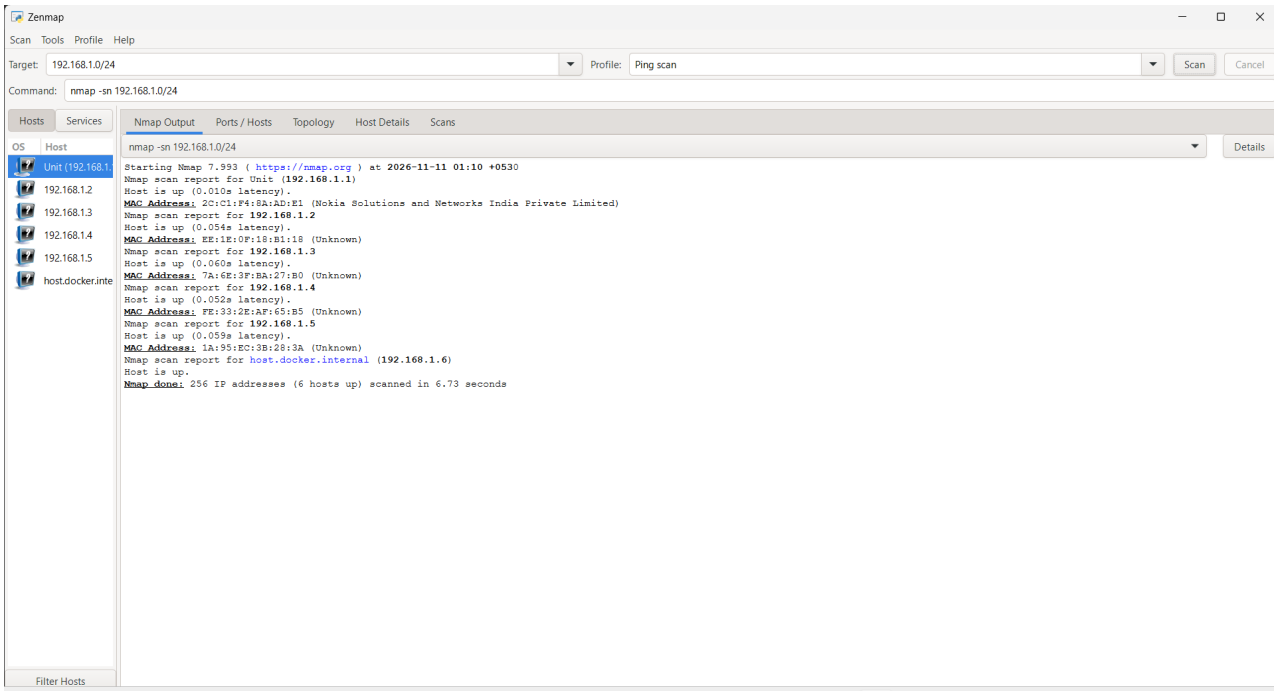
PM5-

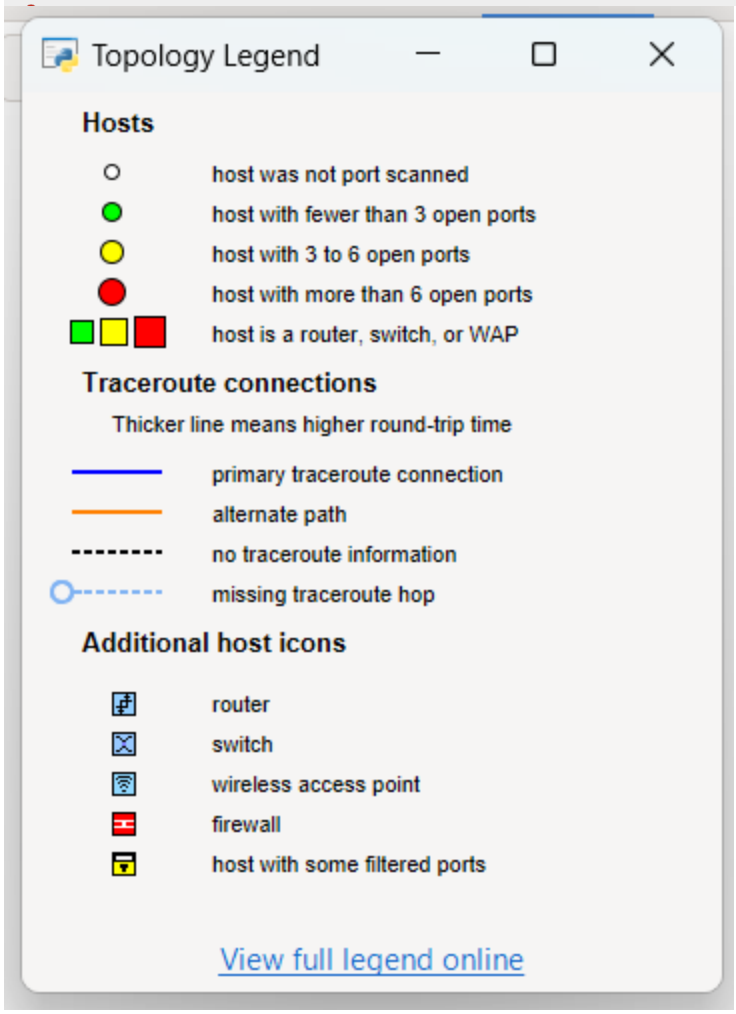

Command Prompt
Microsoft Windows [Version 10.0.22631.4317]
(c) Microsoft Corporation. All rights reserved.
C:\Users\user>ipconfig
Windows IP Configuration
Ethernet adapter Ethernet:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Ethernet adapter Ethernet 3:
Connection-specific DNS Suffix . :
Link-local IPv6 Address . . . . . : fe80::5c76:a2de:c68e:65b4%50
IPv4 Address. . . . . : 192.168.56.1
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . :
Wireless LAN adapter Local Area Connection* 9:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Wireless LAN adapter Local Area Connection* 10:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Wireless LAN adapter Wi-Fi 2:
Connection-specific DNS Suffix . :
IPv6 Address. . . . . : [redacted]
Temporary IPv6 Address. . . . . : [redacted]
Link-local IPv6 Address . . . . . : fe80::e1cb:75ad:52e5:4abf%8
IPv4 Address. . . . . : 192.168.1.6
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : fe80::2ec1:f4ff:fe8a:ade1%8
192.168.1.1
16°C
Sunny
Search
1:03 AM
11/11/2026

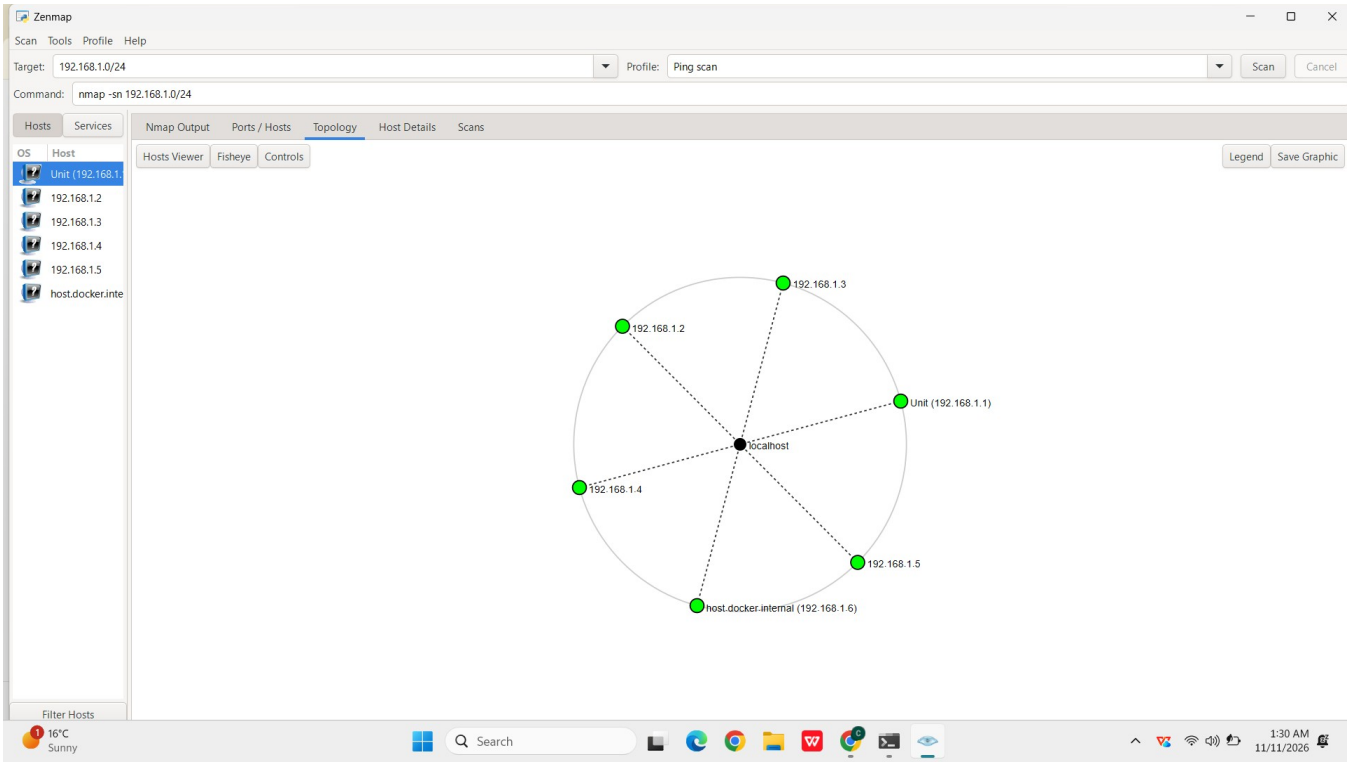

Command Prompt
Microsoft Windows [Version 10.0.22631.4317]
(c) Microsoft Corporation. All rights reserved.
C:\Users\user>ipconfig /all
Windows IP Configuration
Host Name . . . . . : [redacted]
Primary Dns Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No
Ethernet adapter Ethernet:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Description . . . . . : Realtek PCIe GbE Family Controller
Physical Address. . . . . : 08-97-98-[redacted]
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
Ethernet adapter Ethernet 3:
Connection-specific DNS Suffix . :
Description . . . . . : VirtualBox Host-Only Ethernet Adapter
Physical Address. . . . . : 0A-00-27-00-00-32
DHCP Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes
Link-local IPv6 Address . . . . . : fe80::5c76:a2de:c68e:65b4%50(Preferred)
IPv4 Address. . . . . : 192.168.56.1(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . :
DHCPv6 IAID . . . . . : 839516199
DHCPv6 Client DUID. . . . . : [redacted]
NetBIOS over Tcpip. . . . . : Enabled
Wireless LAN adapter Local Area Connection* 9:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
28°C
Sunny
Search
12:18 PM
11/11/2026


Command Prompt
Description . . . . . : Microsoft Wi-Fi Direct Virtual Adapter
Physical Address. . . . . : DA-F3-BC-[redacted]
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
Wireless LAN adapter Local Area Connection* 10:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Description . . . . . : Microsoft Wi-Fi Direct Virtual Adapter #2
Physical Address. . . . . : DA-F3-BC-[redacted]
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
Wireless LAN adapter Wi-Fi 2:
Connection-specific DNS Suffix . :
Description . . . . . : MediaTek Wi-Fi 6 MT7921 Wireless LAN Card
Physical Address. . . . . : D8-F3-BC-[redacted]
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
IPv6 Address. . . . . : [redacted]
Temporary IPv6 Address. . . . . : [redacted]
Link-local IPv6 Address . . . . . : fe80::e1cb:75ad:52e5:4abf%8(Preferred)
IPv4 Address. . . . . : 192.168.1.6(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : Monday, November 9, 2026 7:51:11 PM
Lease Expires . . . . . : Thursday, November 12, 2026 11:30:54 AM
Default Gateway . . . . . : fe80::2ec1:f4ff:fe8a:ade1%8
192.168.1.1
DHCP Server . . . . . : 192.168.1.1
DHCPv6 IAID . . . . . : 148435900
DHCPv6 Client DUID. . . . . : [redacted]
DNS Servers . . . . . : fe80::2ec1:f4ff:fe8a:ade1%8
192.168.1.1
NetBIOS over Tcpip. . . . . : Enabled
Ethernet adapter Bluetooth Network Connection:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
28°C
Sunny
Search
12:18 PM
11/11/2026


Command Prompt
Description . . . . . : MediaTek Wi-Fi 6 MT7921 Wireless LAN Card
Physical Address. . . . . : D8-F3-BC-[redacted]
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
IPv6 Address. . . . . : [redacted]
Temporary IPv6 Address. . . . . : [redacted]
Link-local IPv6 Address . . . . . : fe80::e1cb:75ad:52e5:4abf%8(Preferred)
IPv4 Address. . . . . : 192.168.1.6(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : Monday, November 9, 2026 7:51:11 PM
Lease Expires . . . . . : Thursday, November 12, 2026 11:30:54 AM
Default Gateway . . . . . : fe80::2ec1:f4ff:fe8a:ade1%8
192.168.1.1
DHCP Server . . . . . : 192.168.1.1
DHCPv6 IAID . . . . . : 148435900
DHCPv6 Client DUID. . . . . : [redacted]
DNS Servers . . . . . : fe80::2ec1:f4ff:fe8a:ade1%8
192.168.1.1
NetBIOS over Tcpip. . . . . : Enabled
Ethernet adapter Bluetooth Network Connection:
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Description . . . . . : Bluetooth Device (Personal Area Network)
Physical Address. . . . . : D8-F3-BC-[redacted]
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
C:\Users\user>
28°C
Sunny
Search
12:18 PM
11/11/2026


Zenmap
Scan Tools Profile Help
Target: 192.168.1.0/24
Profile: Ping scan
Scan
Cancel
Command: nmap -sn 192.168.1.0/24
Hosts
Services
OS
Host
Unit (192.168.1.
192.168.1.2
192.168.1.3
192.168.1.4
192.168.1.5
host.docker.inte
Filter Hosts
Nmap Output
Ports / Hosts
Topology
Host Details
Scans
nmap -sn 192.168.1.0/24
Details
Starting Nmap 7.993 (https://nmap.org) at 2026-11-11 01:10 +0530
Nmap scan report for Unit (192.168.1.1)
Host is up (0.010s latency).
MAC Address: 2C:C1:F4:8A:AD:E1 (Nokia Solutions and Networks India Private Limited)
Nmap scan report for 192.168.1.2
Host is up (0.054s latency).
MAC Address: EE:1E:0F:18:B1:18 (Unknown)
Nmap scan report for 192.168.1.3
Host is up (0.060s latency).
MAC Address: 7A:6E:3F:BA:27:B0 (Unknown)
Nmap scan report for 192.168.1.4
Host is up (0.052s latency).
MAC Address: FE:33:2E:AF:65:B5 (Unknown)
Nmap scan report for 192.168.1.5
Host is up (0.059s latency).
MAC Address: 1A:95:EC:3B:28:3A (Unknown)
Nmap scan report for host.docker.internal (192.168.1.6)
Host is up.
Nmap done: 256 IP addresses (6 hosts up) scanned in 6.73 seconds


Topology Legend
Hosts
host was not port scanned
host with fewer than 3 open ports
host with 3 to 6 open ports
host with more than 6 open ports
host is a router, switch, or WAP
Traceroute connections
Thicker line means higher round-trip time
primary traceroute connection
alternate path
no traceroute information
missing traceroute hop
Additional host icons
router
switch
wireless access point
firewall
host with some filtered ports
View full legend online



-End-

👤 Author

Sneha Hariprasad Pillai
Cybersecurity Student B084
LinkedIn: https://www.linkedin.com/in/sneha-pillai-16994342a/

📌 Project Information

Program Name: Cybersecurity program at Networkwalks | **Week:** 02 | **Repository:** GitHub