

Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)
MERN

Practical III

Roll No.: T027	Name: Sneha Nayak
Class: TYIT	Batch: 1
Date of Assignment: 10-07-26	Date/Time of Submission: 10-07-26

3.React Introduction and JSX

a. Create a React application using Vite/CRA and display “Welcome to MERN Stack Development”.

CODE

```
function App ()
{
  return (
    <div>
      <h1> Welcome to MERN Stack Development </h1>
      <p>Sneha T027</p>
    </div>
  );
}
```

export default App

OUTPUT

Welcome to MERN Stack Development

Sneha T027

b. Display dynamic data using JSX.

CODE 1

```
function App ()
{
  const emp = "Varun";
  const dept = "IT";
  const sal = "50000";
  return (
    <div>
      <h1> Employee Details </h1>
      <p>Name: {emp}</p>
      <p>Department: {dept}</p>
      <p>Salary: {sal}</p>
    </div>
  );
}
```

```
        <p>Sneha T027</p>
      </div>
    );
  }
export default App
```

OUTPUT

Employee Details

Name: Varun
Department: IT
Salary: 50000
Sneha T027

CODE 2

```
function App() {
  const studentName = "Varun";
  const totalClasses = 60;
  const attendedClasses = 50;

  const attendance = (attendedClasses / totalClasses) * 100;

  return (
    <div>
      <h1>Attendance Dashboard</h1>
      <p>Name: {studentName}</p>
      <p>Total Classes: {totalClasses}</p>
      <p>Classes Attended: {attendedClasses}</p>
      <p>Attendance: {attendance.toFixed(2)}%</p>
      <h3>
        Status: {attendance >= 75 ? "Eligible for exam" : "Not Eligible"}
      </h3>
      <p>Sneha T027</p>
    </div>
  );
}

export default App;
```

OUTPUT

Attendance Dashboard

Name: Varun
Total Classes: 60
Classes Attended: 50
Attendance: 83.33%

Status: Eligible for exam

Sneha T027

c. Declare variables and write a function to calculate the sum of two numbers and display the result.

CODE

```
function App() {
  const maths = 85;
  const sci = 90;

  function calculate(marks1, marks2){return marks1 + marks2;}

  return (
    <div>
      <h1>Student Marks</h1>
      <p>Mathematics Marks: {maths}</p>
      <p>Science Marks: {sci}</p>
      <h2>Attendance: {calculate(maths,sci)}</h2>
      <p>Sneha T027</p>
    </div>
  );
}

export default App;
```

OUTPUT

Student Marks

Mathematics Marks: 85

Science Marks: 90

Attendance: 175

Sneha T027

d. Apply basic CSS styling to a React component

CODE

App.jsx

```
import './App.css';


function App ()
{
  return (
    <div className = "container">
      <h1>Student Dashboard</h1>
      <p>Name: Sneha Nayak</p>
      <p>Roll Number: 27</p>
      <p>Course : IT</p>
      <p>Semester : V</p>
      <button>View Result</button>
    </div>
  );
}

export default App
```

App.css

```
.container{
  width:700px;
  margin:50px auto;
  padding:20px;
  border:2px solid black;
  border-radius:10px;
  background-color:whitesmoke;
  text-align:center;
}
h1{
  color:darkblue;
}
p{
font-size: 18px;
color: black;
}
button{
  background-color: green;
  color: white;
  border: none;
  padding: 10px 20px;
  font-size: 16px;
  border-radius: 5px;
  cursor:pointer;
}
button:hover{
  background-color: darkgreen;
}
```

OUTPUT

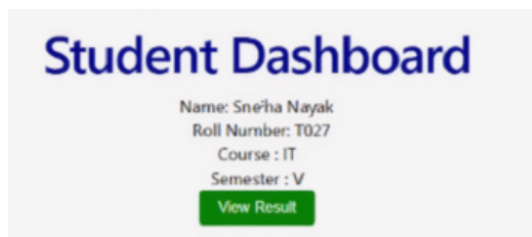

e)Create a simple functional component and render it in App.js.
Create folder component and file

CODE

Student.jsx

```
function Student() {
  return (
    <div>
```

```

    <h2>Student Components</h2>
    <p>Name : Sneha</p>
    <p>Course : MCA</p>
    <p>Semester : III</p>
  </div>
);
}
export default Student;

```


App.jsx

```

import Student from "./components/Student";
function App() {
  return (
    <div>
      <h1>This is fuctional component practical</h1>
      <hr />
      <Student />
    </div>
  );
}
export default App;

```

OUTPUT

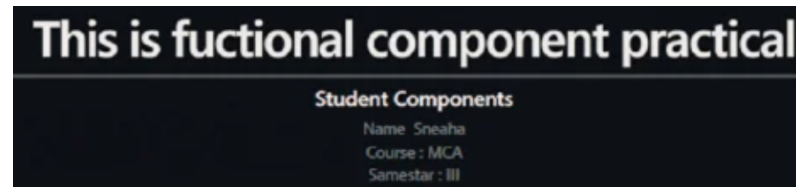

f. Create a React component that displays the current date and time dynamically using JavaScript.

CODE

```

function App ()
{
  const currentDate = new Date();
  return (
    <div>
      <h1>Currrent Date and Time</h1>
      <p>Date: {currentDate.toLocaleDateString()}</p>
      <p>Time: {currentDate.toLocaleTimeString()}</p>
      <p>Sneha T027</p>
    </div>
  );
}
export default App

```

OUTPUT

Current Date and Time

Date: 10/7/2026

Time:

Sneha T027

EXTRA

Code:

App.jsx:-

```
import Header from "../components/Header";
import Student from "../components/Student";
import Attendance from "../components/Attendance";
import Result from "../components/Result";
import Footer from "../components/Footer";

function App() {
  return (
    <div>
      <Header />
      <Student />
      <hr />
      <Attendance />
      <hr />
      <Result />
      <Footer />
    </div>
  );
}
export default App;
```

Student.jsx:-

```
function Student() {
  return (
    <div>
      <h2>Student Details</h2>
      <p>Name : Sneha</p>
      <p>Course : B.Sc.IT</p>
      <p>Semester : V</p>
    </div>
  );
}
export default Student;
```

Attendance.jsx:-

```
function Attendance() {
  const tc = 60;
```

```

const p = 55;
const per = (p / tc) * 100;
return (
  <div>
    <h2>Attendance</h2>

    <p>Total Classes : {tc}</p>
    <p>Present : {p}</p>
    <p>Attendance : {per.toFixed(2)}%</p>
  </div>
);
}
export default Attendance;

```

Footer.jsx:-

```

function Footer() {
  return (
    <div>
      <hr />
      <p>© 2026 Sheth L. U. J. & Sir M. V. College</p>
    </div>
  );
}
export default Footer;

```

Header:-

```

function Header() {
  return(
    <div>
      <h1>M.V.L.U. College Management System</h1>
    </div>
  );
}
export default Header;

```

Result:-

```

function Result() {
  const java = 90;
  const python = 95;
  const react = 93;

  return (
    <div>
      <h2>Result</h2>
      <p>Total Marks : {java + python + react}</p>
      <p>
        Percentage : {(((java + python + react) / 300) * 100).toFixed(2)}%
      </p>
    </div>
  );
}
export default Result;

```

```
    </p>
    <p>Grade : A+</p>
  </div>
);
}
export default Result;
```

OUTPUT

This is fuctional component practical

Student Components

Name : Sneaha

Course : MCA

Semestar : III