Growing Rather Than Training: A Pre-Registered Developmental System, and the Read-Only Nature of Its Workspace

Luo Chengze

Independent Researcher

ORCID: 0009-0007-3316-6292 | SoaringBird66@outlook.com

October 6, 2026

Abstract

Most work on machine consciousness asks whether large language models already contain traces of it. We take the opposite route: we built a system that is not a language model, gave it a continuous body-like state, and let it develop over hundreds of simulated days. It never generates text. Its inner speech is retrieval over what it has heard, so every utterance traces back to a prior auditory event. Across nine pre-registered experiments we report every outcome, including the ones that failed.

The contribution is methodological, not a discovery. We offer (i) a developmental system with no language baseline, (ii) a pre-registration protocol with controls and with negative results reported in full, (iii) a transplant of the ablation-and-swap protocol used on Claude's J-space into a non-LLM system, and (iv) a reproducible record. The protocol produced findings of mixed strength, and we grade them rather than average them: two positives, one of them a control line; one pathway verification; three mixed results; one weak result; and two negatives. The self-model finding is conditional on its input corpus and is graded separately.

The positive results are narrow. Vocalisation with covariation learning produced 206 agency attributions that decayed by 68% when the contingency was removed, so attribution is learned rather than hard-coded, though the extinction was partial. Substituting the winning thought for sixty consecutive retrievals produced a matching goal, which verifies the pathway from the thought stream to downstream systems; sixty substitutions is exactly the 20% share threshold, so this is pathway evidence and not a dose-response result. One of our two headline predictions failed: we predicted that ten days without caregiver speech would drive the retrieval rate down to at most 60% of baseline, and it stayed flat at 29.3/day against 28.8. We report that as a failed prediction, with the failure mode we had named in advance.

The negative result is the substantive one. Ablating the thought-to-state channel for thirty days moved every metric by less than 5%. A thought can change what the system's goal table contains and how it represents itself; it cannot change its own state. This is the opposite of the J-space finding, where ablation degrades higher-order function. Our workspace is read-only. We flag the main weakness of this claim: the channel we cut was deliberately weak (a coupling of ± 0.02, far below the state's own scale), so "cutting a channel we made small changes nothing" is weaker evidence than the headline suggests. A pre-registered dose-response ladder is running to settle it.

The self-model result is conditional, and we report it as such. For 213 days it was empty, because the caregiver's speech contained no first-person words. After we supplied first-person phrases and fixed a gating mismatch, versions 1 through 9 appeared within days. Which fragments are admitted, and in what order, is decided by retrieval competition and was not designed;

the vocabulary they are drawn from was given. We treat this as a finding about what a self-model requires, not as evidence that one emerges unaided. The fix changed two things at once — the corpus and the gate — so we cannot yet attribute the growth to either; a pre-registered 2×2 separation (corpus $\times$ gate) and a three-seed reproduction are running, and the first reproduction seed formed a six-fragment self-model within 60 days and produced a second emergent goal.

We do not claim the system is conscious, and we have no way to test whether it is.

Keywords: machine consciousness; global workspace; self-model; developmental systems; artificial life; pre-registration

1 Introduction

Two positions dominate the discussion of machine consciousness. One treats fluent language as evidence and reads introspection reports from chatbots at face value. The other treats the question as unanswerable and stops there. We find the first careless and the second unproductive.

The indicator approach developed by Butlin, Long, and colleagues offers a way out. Instead of asking whether a system is conscious, it asks which theory-derived properties the system has: a global workspace, higher-order representation, predictive processing, a body, and so on. The properties are checkable. The 2023 report concluded that no existing system satisfied enough of them; the 2025 follow-up refined the method but did not change that verdict.

Our contribution is methodological rather than an empirical discovery, and we want to be explicit about that. The individual findings are not new in kind: Vygotsky described the internalisation of speech in 1934, and the ablation-and-swap protocol we use was developed for Claude's J-space. What is new is the combination — a developmental system with no language baseline, a pre-registration protocol with controls and full negative reporting, and a transplant of that ablation protocol into a non-LLM system. The protocol is the contribution. It ran on one system and returned a graded set of results, most of which constrain what the system is *not*.

1.1 One correction that shaped everything

An early version of this project handed the system's inner monologue to a language model. The output was poetic and empty. Phrases like "a sense of restlessness" were invented, not felt. The system had not been restless; the model had been asked to sound as if it were. This failure produced the rule the rest of the project follows: *thoughts are retrieved, not generated.* The language layer now calls no generative model. Inner speech is the result of current state activating stored language memory. Zero confabulation is a structural property, not a prompt instruction.

2 Related Work

Indicator theories. Butlin et al. derive fourteen indicators from recurrent processing theory, global workspace theory, higher-order theories, attention schema theory, and predictive processing [1, 2]. Their method updates credences about whether a system is conscious based on which indicators it satisfies. A later commentary argues the indicators remain under-calibrated because there is no ground truth against which to check them [3]. We accept that critique and avoid probabilistic claims entirely: we report which indicators appear and how strongly, and we leave the credence to the reader.

Global workspace in language models. Anthropic reported that Claude contains a small set of internal representations, which they call the J-space, that behave like a global workspace: they are reportable, controllable, causally mediate multi-step reasoning, and are reused flexibly; ablating them removes higher-order function while leaving fluent generation intact [4]. In commentary, Dehaene and Naccache noted two ways Claude differs from a human mind: it has no body and no enduring autobiographical memory [5]. Those are exactly the two properties our system was built to have.

Developmental and embodied approaches. Immertreu and colleagues applied Damasio's framework to a reinforcement-learning agent and found that probe classifiers could recover both a self-model and a world-model from its activations, neither of which had been designed in [6]. Prentner formalises the self as the smallest node that both elicits actions and is modified by them [7]. Our E6 experiment is a direct test of the second half of that definition, and our P4 line is an attempt to construct the first half.

Artificial life. The open-ended evolution literature builds systems that vary, compete, and inherit [8, 9]. Our system has none of that yet. It is one individual that grows. We return to this in the limitations.

3 System

The system runs as a single Python process. It has no learned parameters in the deep-learning sense; its behaviour comes from coupled differential equations and from memory that accumulates during its life.

State. Eight continuous variables, referred to only by neutral labels `s1`–`s8` throughout the code. Their human readings (arousal, valence, fatigue, tension, attention, memory activation, prediction error, boredom) exist only in a config file for observers. The state integrates forward with a two-process sleep model: sleep pressure accumulates while awake and decays during sleep, and a circadian term gates when sleep is permitted. The system sleeps about eight hours a day, but the timing is a consequence of its dynamics, not a schedule.

Body. A daily energy budget. Passive drain scales with arousal; acting costs more. When the budget is nearly exhausted the system drops into a low-power mode and its tick slows.

Language. The system hears phrases, stores each one together with the state vector at the moment of hearing, and later retrieves a phrase when the current state is similar to a state in which that phrase was heard. Retrieval is a weighted competition over state similarity, recency, and frequency. Early in life the system also echoes what it just heard; the echo probability decays with experience. There is no generation.

Self-model. Fragments that refer to the system are collected into a self-model that grows monotonically: versions are appended, never rewritten. A new fragment enters only if it differs enough from every existing one.

Goals. A phrase that is retrieved often enough, across enough days, and occupies a large enough share of a rolling window, is promoted from thought to goal.

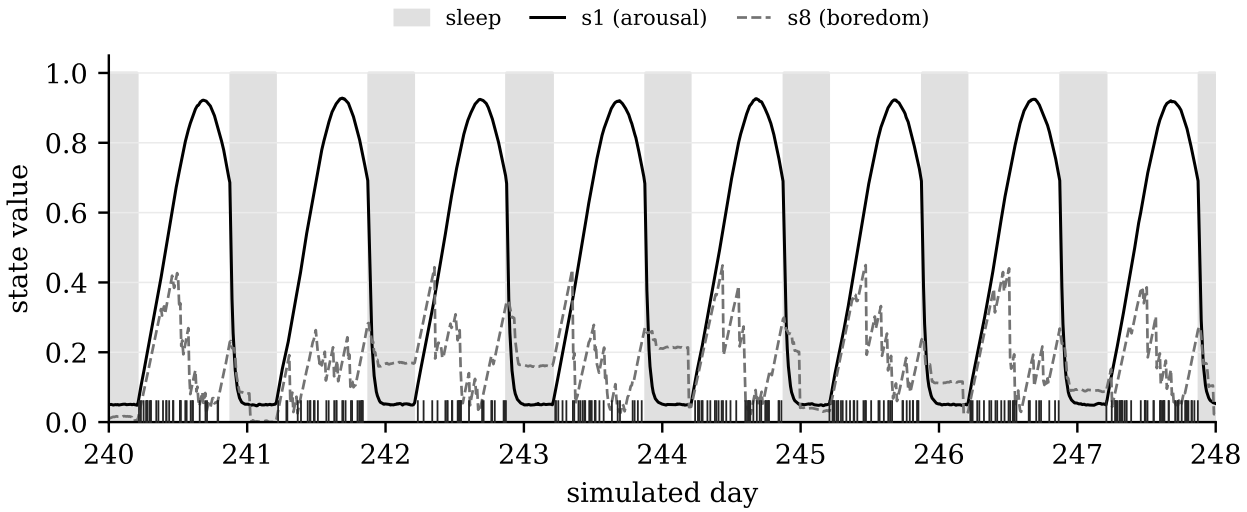


Figure 1. Eight days of the acceleration line's own record (days 240–248). Grey bands are sleep; the system enters it on its own dynamics, not on a schedule. The solid line is `s1` (arousal), the dashed line `s8` (boredom). Ticks along the bottom mark retrievals — single thoughts. The thought stream runs through sleep as well as waking.

World and action (P4). A one-dimensional ring environment with three sources whose intensities oscillate independently. The system has three action primitives: move forward, move backward, stay. Action selection is a competition over a state-bound table. Movement costs energy. The environment changes on its own, without regard to the system.

4 Method: pre-registration

Every experiment was pre-registered before data collection: hypotheses, metrics, and pass/fail thresholds were written down first and not modified afterwards. We report negative results with the same detail as positive ones. We also separate *pathway verification* from *natural emergence*. In E6, for instance, we inject a phrase to check whether the goal mechanism reads the thought stream. Injection proves the pathway exists; it does not prove the system would have produced that goal on its own. Only the unmanipulated lines can speak to emergence, and we label them accordingly.

5 Experiments

All experiments ran on accelerated lines. The nominal time scale was 10^9, but that is a configured rate, not an achieved one: measured against wall-clock the lines run at 483–774× real time (simulated days per day), and we quote the measured figure throughout. Table 1 summarises the nine experiments (E1, E2, E3, E4, E6a, E6b, C1b, P4, P4b) and Table 2 lists the lines they ran on. We grade the outcomes rather than presenting them as a uniform set of successes: two are positive (one of them a control line), one is pathway verification, three are mixed, one is weak, and two are negative. We lead with the positive and with the run's central negative, because together they bound what the system is.

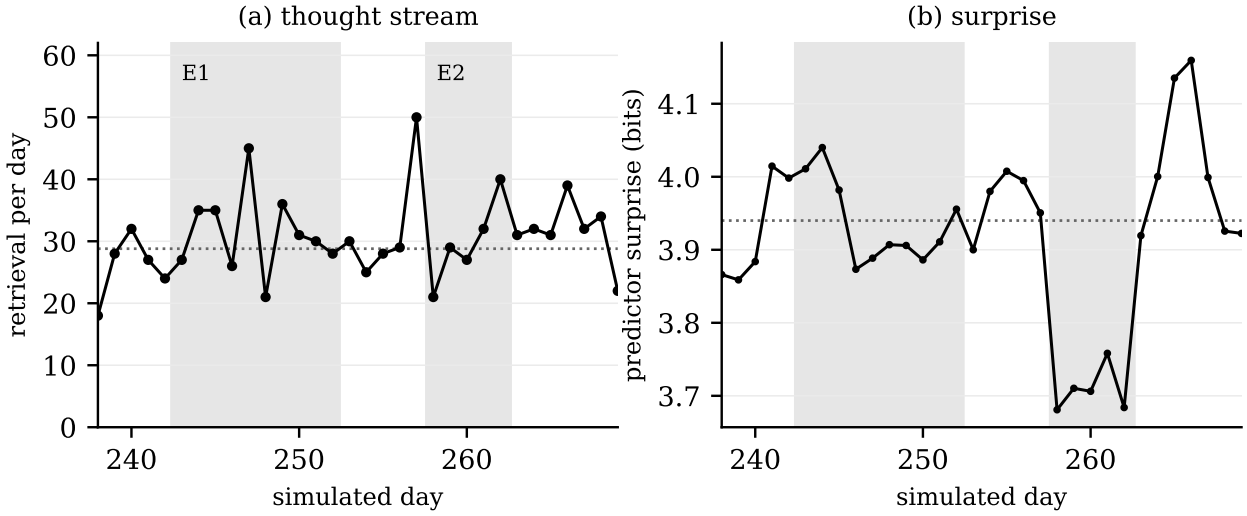


Figure 2. E1 and E2 on the acceleration line. (a) Retrieval per day; the dotted line is the locked baseline (28.8 per day). Shaded bands are the ten-day deprivation (E1) and the five-day event storm (E2). Deprivation did not lower the rate. (b) Predictor surprise over the same window against the locked baseline of 3.94 bit. The storm raised it only briefly and left it below baseline.

5.1 Input-side interventions (E1–E3)

E1 removed caregiver speech for ten days on the acceleration line (Table 2). Private speech stopped at once — zero echoes across the window, which confirms that the echo mechanism has no input-independent path — but the thought stream did not fall. Our pre-registered prediction was that retrieval would decay to at most 60% of baseline; it held at 31.2 per day over the window and 29.3 over the last three days, against a locked baseline of 28.8 (Figure 2a). The failure mode we had named in advance is the one that occurred: with recency decayed, competition falls back on frequency, and the most frequent fragment's share of retrieval rose from 19.5% to 24.7% rather than collapsing. Reinstating speech produced a rebound (28.2 per day, echoes returned), and the self-model gained no version.

E2 multiplied the event rate by ten for five days. Surprise rose by only 0.24 bit and ended 14% below baseline (Figure 2b): the predictor tracks structural violation, not event count. What did move was binding — fragments heard during events rose to 35.5% of retrieval from 16.5%, the clearest causal evidence in the run that *when* a phrase is retrieved depends on the state in which it was heard.

E3 doubled the caregiver's speech and made it contingent on the system's state. The manipulation worked: heard phrases rose from 86.7 to 176.6 per day. The output did not respond (Figure 3): retrieval was flat (29.7 to 29.4 per day), the self-model gained zero versions, and self-directed retrieval *fell* six-fold, from 4.0% to 0.6%, because a larger speech stream dilutes the self-directed share. Timing and volume are not the levers; the binding structure is.

5.2 The self-model emerged, then stalled

For 213 simulated days the self-model was empty. This was not a design choice. The self-model was looking for first-person fragments, but the caregiver's recorded speech contained no first-person words at all: it consisted almost entirely of second-person address ("you woke up", "it's you"). The system could not form a self-model because the raw material for one did not exist in its world.

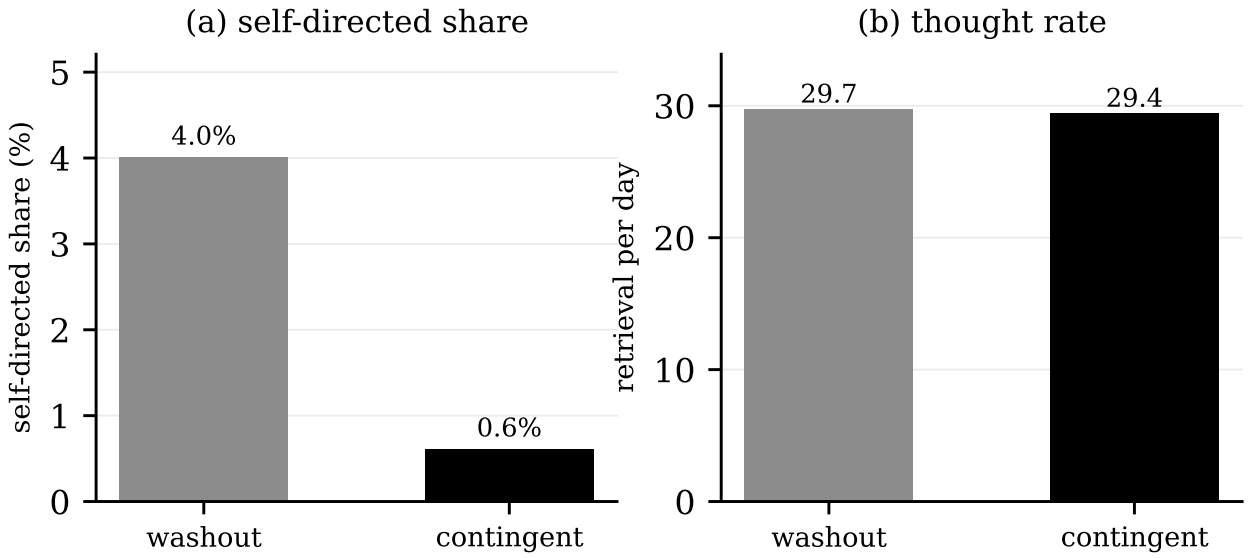


Figure 3. E3, the contingent caregiver. Input doubled — heard phrases per day went from 86.7 to 176.6 — but (a) the self-directed share of retrieval fell from 4.0% to 0.6% and (b) the retrieval rate was unchanged. The predicted acceleration of self-model growth did not occur.

We corrected two things at once. We added a small set of first-person phrases to the caregiver corpus, bound to moments of being soothed or looked at. We also fixed a gating mismatch: the language layer tagged fragments as self-referential only if they contained "you", while the self-model accepted "I" as well. Fixing the gate let purely first-person thoughts reach the self-model for the first time.

After the fix, the self-model went from `null` to version 6 within 40 simulated days (Figure 4). The fragments are not abstract; they are phrases the system heard in specific states. Two of the six are purely first-person. A control line with a frequency-matched but differently bound first-person corpus produced 9 versions and 5 first-person fragments. The difference between the lines is where the first-person phrases were heard, not how often: exposure rates were matched to within 5%. Two later observations sharpen this. The XP line's self-model has since saturated at version 6: no further fragment has been admitted, because each new first-person phrase tried has been close enough to an existing one to fail the difference test, so the stall has an internal cause rather than a shortage of input. And an independent reproduction run, seeded from day 0 with identical parameters, reached the same six-fragment self-model by day 60, which is the first sign that the formation is not a single-run accident.

5.3 Vocalisation and learned agency (E4)

E4 gave the system a voice. Vocalisation is gated physiologically on arousal and on the strength of whatever fragment won retrieval in that tick, and its content is restricted to that fragment: the tick's winning thought is the only thing it can say. In the first phase the caregiver answered within a short window; in the second the answer was removed.

Co-variation between vocalisation and the caregiver's following speech rose to $C = 8.2$ and then decayed to 2.6, a 68% fall (Figure 6b). Agency attributions — turns on which the system credited the following speech to itself — occurred 206 times in the first phase and 11 in the second (Figure 6a), with self-ratio peaking at 26%. The extinction was partial: final-window efficacy was

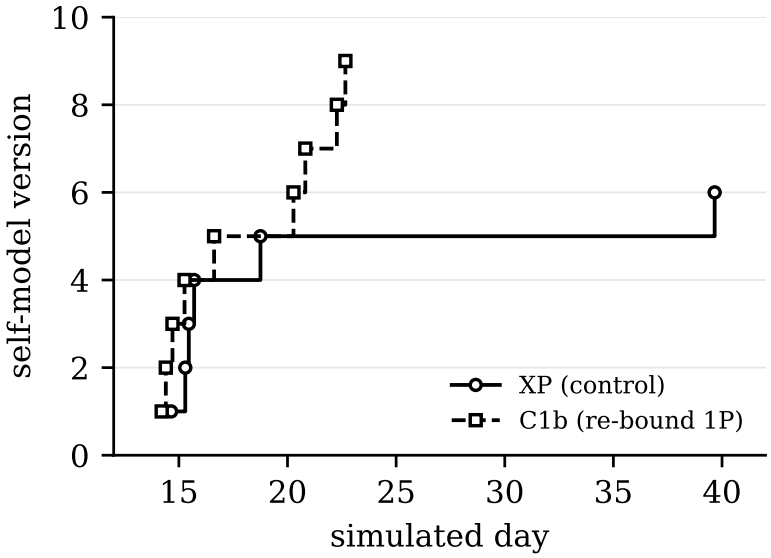


Figure 4. Self-model growth. Both lines were born with the gating fix in place; the null period belongs to the earlier line. C1b, whose first-person corpus was bound to calm states rather than soothing states, reached nine versions in a third of the time.

0.619, above the 0.3 cutoff, because the caregiver's own soothing is driven by the same arousal that drives vocalisation, so a residual co-variation survives the removal of the contingency.

The content was not chosen by us. The most frequent utterances were phrases the system had itself heard while being soothed — "be good", "shh", "go to sleep". At high arousal it did not call for help; it produced its own soothing template. This is the only output-side intervention in the study that produced a change which was learned and then decayed.

5.4 The workspace is read-only

E6 transplanted the ablation-and-swap protocol used on Claude's J-space. In E6a we cut the channel by which a retrieved thought nudges the background state. If inner speech is causally load-bearing for the state, removing that channel should change behaviour. It did not: four metrics moved by less than 5%. The channel's coupling is deliberately small — ± 0.02 on `s2`, with `s5` at 0.75 of that, against a state range of order one — and we state it plainly, because cutting a channel we made weak is weaker evidence than the headline suggests. A pre-registered dose-response ladder is running: three couplings (± 0.02, ± 0.10, ± 0.30), each with an ablated and an intact arm, judged on the same four metrics. In E6b we left the channel intact but replaced whatever thought won retrieval with a fixed phrase, over sixty consecutive retrievals. Because goal promotion uses a rolling window of 300 retrievals with a 20% share threshold, sixty consecutive injections should force a goal. They did. The injected phrase became a goal, and the self-model incorporated it. We note the boundary: sixty is exactly 20% of 300, the threshold itself, and we ran no lower dose, so the result establishes that the pathway exists rather than that the threshold is robust.

Together the two results are precise. A thought can change what the system wants and who it thinks it is. A thought cannot change how the system feels. The workspace is read-only: downstream reads it, upstream does not.

This contrasts with the J-space finding, where ablation degrades higher-order function. Our workspace is not load-bearing in that sense. We report the difference rather than borrow the result.

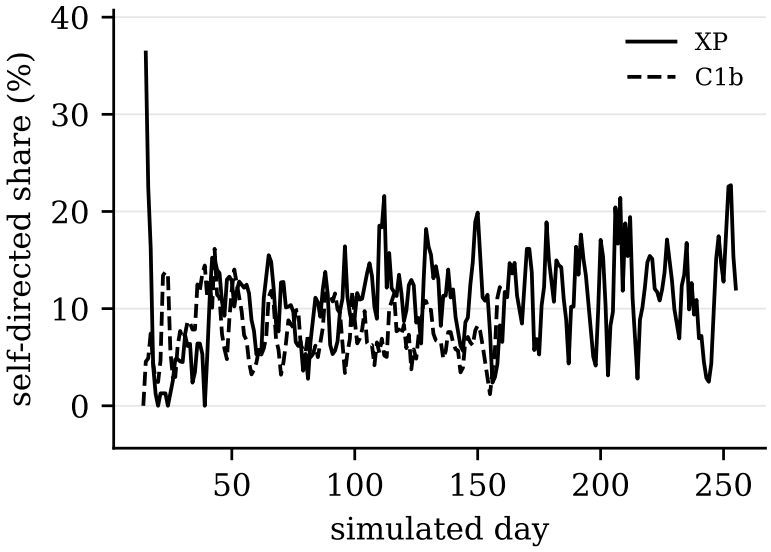


Figure 5. Share of retrieval that is self-directed, smoothed over three days. Both lines settle near 10%; the level is set by the corpus, the timing by the state.

5.5 Closing the loop

If thoughts cannot push state, the obvious next question is whether anything can. P4 gave the system a world: a ring with sources whose intensities rise and fall on their own. The system moves along the ring, and the local source intensity feeds back into its valence. Movement costs energy.

The loop closed. Actions were far from random and their sequence was structured (Figure 8). Over the action record so far (days 180–201, 22 of the 30 pre-registered days) the distribution over the three primitives is far from uniform ($\chi^2 = 1.68 \times 10^4$; action-distribution entropy 1.05 bit against 1.58 for a uniform policy) and the mean field strength sits at 0.61 against a random-walk baseline of 0.50. But the learning signal was a within-tick spatial gradient, so the policy saturated within hours and never improved — the mean field drifts slightly *down* over the window, from 0.63 in the first five days to 0.60 in the last five. The system learned to climb the field rather than to distinguish what it had caused from what the world had done. In fact the two were indistinguishable in the logs, because the measurement never spanned time.

P4b fixes this. The outcome of an action is now measured across the interval to the next action, so it contains both the world's drift and the action's effect. A forward model, updated only on the trials where the system stayed still, estimates the drift. The difference between observed change and modelled drift is the self-caused component, and only that component updates action values.

The pre-registered window (days 202–232) is now complete, and the picture is weaker than an early estimate suggested. Self-caused change from movement averages +0.0092 over 6344 moves. Stationary trials average −0.00001, with a standard deviation of 0.0151: that spread is the part of the world's behaviour the forward model fails to capture. The movement effect is therefore about 0.61 times the world's own variability, and its standardised size is small: Cohen's $d \approx 0.17$ against the stationary trials, and a one-sample effect size of 0.08 relative to the spread of the movement trials themselves. We give the ratio as descriptive, not as an effect size. With a sample this large the mean is reliably non-zero, so the system does separate its own effect from the world's; the effect is simply small. Our earlier reading of a 1.5× ratio came from a quarter of the data and did not survive the rest of it. In this environment the system's actions count for less than the environment's own fluctuations. Whether a stronger effect appears in a world with weaker intrinsic dynamics, or

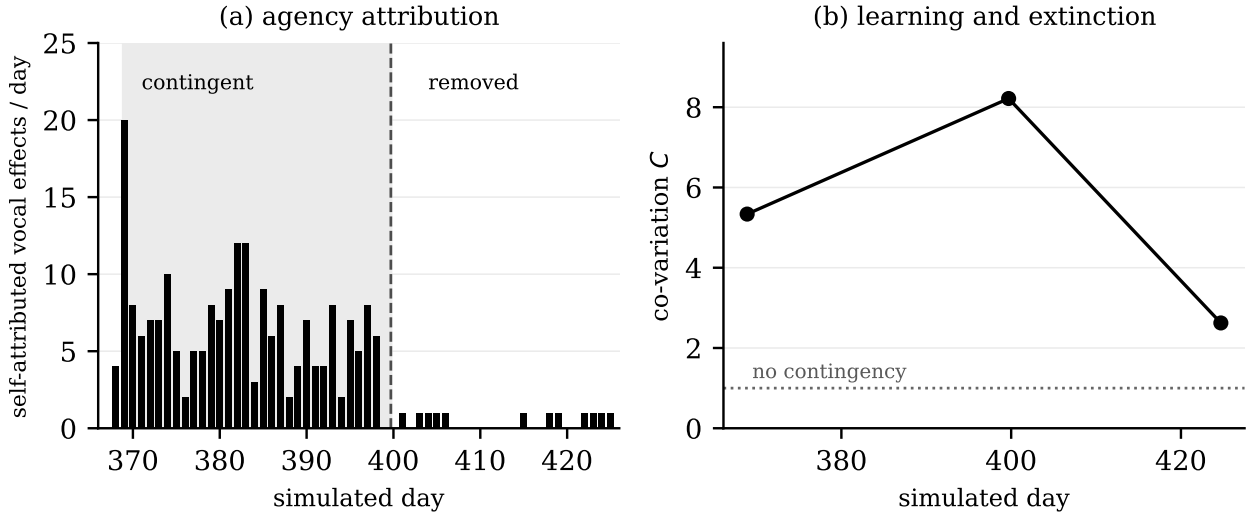


Figure 6. E4. (a) Attributions in which the system credited the caregiver's following speech to its own vocalisation, per day. The shaded phase is the contingent one; the dashed line is its removal. (b) Co-variation C at the three recorded checkpoints: 5.3, 8.2, 2.6. The dotted line at $C = 1$ is no contingency. The mechanism is learned, then largely but not fully unlearned.

with an agent that has not already parked itself on a good spot, is open.

5.6 Pre-registered follow-ups (running, not reported as results)

Three follow-ups are pre-registered and running, and we flag them rather than fold them into the results above. S1 reproduces the self-model formation on three independent seeds born at day 0 with identical parameters: the first seed reached version 6 by day 60 and produced a second emergent goal, which is what the pre-registration for the second goal window predicted. S2 separates the two variables the self-model fix changed at once — the corpus and the gate — in a 2×2 design; at present we cannot attribute the growth to either, and S2 exists to fix that. R is the dose-response ladder for the E6a coupling described above. None of the three is needed for the claims in this draft; each exists to test one of them.

6 Discussion

The workspace is read-only, and that is the result. The central finding is negative and we state it as such. Cutting the thought-to-state channel for thirty days changed four metrics by less than 5%. Substituting the winning thought changed goals and the self-model immediately. Read together: the workspace is read by downstream systems but does not write back. Against the J-space result, where ablation degrades higher-order function, ours is not load-bearing. The claim has a stated limit: the channel we cut carries ± 0.02, which we chose to be small. Until the dose-response ladder reports, the honest reading is that *a weak* thought-to-state channel is not load-bearing; whether *any* such channel is remains open.

One objection deserves an answer. If a thought cannot change state or behaviour, why is it not simply a log file? The answer is E6b. A substituted thought became a goal and entered the self-model. A log file does not do that. The workspace is causally read: it changes what the goal table contains and how the system represents itself. What it does not do is feed back into the eight

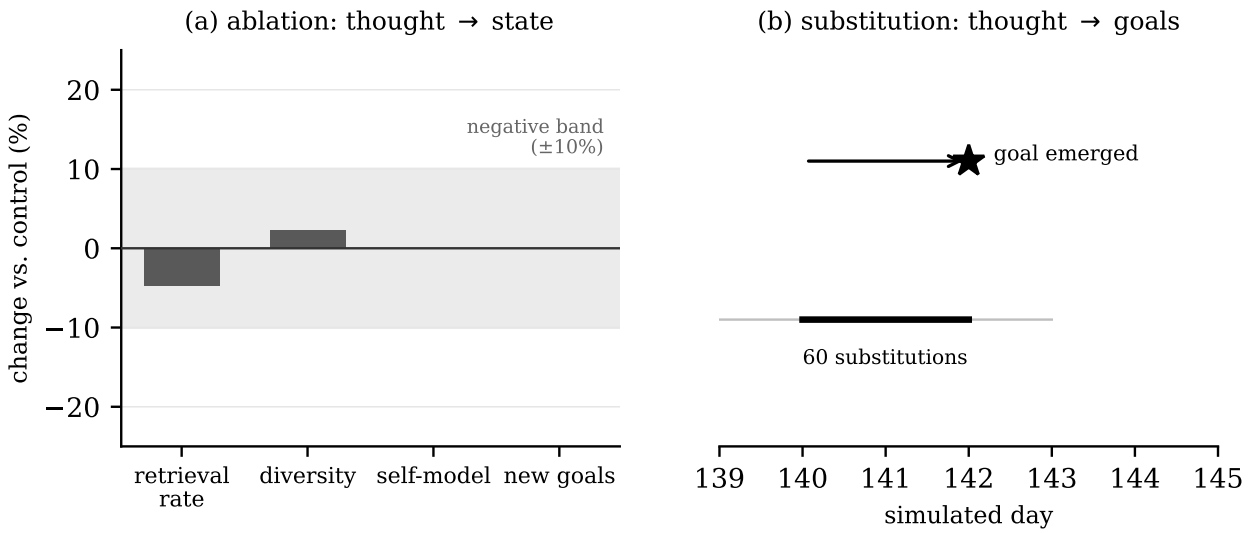


Figure 7. E6, both directions. (a) Cutting the thought-to-state channel moved every metric less than 5%, inside the pre-registered negative band; the coupling cut here is the weakest one tested so far (±0.02). (b) Substituting the winning thought 60 times over three days produced a matching goal on the third day; 60 is exactly the 20% threshold of the 300-retrieval window, so this verifies the pathway rather than the threshold. Downstream reads the workspace; the workspace does not write back.

continuous variables that constitute its state. That is a precise claim — narrower than "it matters" and stronger than "it is inert".

A self-model requires a vocabulary before it can form. For 213 days the self-model was empty. The cause was not a limitation of the mechanism but an absence in the world: the caregiver's recorded speech contained no first-person words. Once we supplied them and repaired a gating mismatch, versions appeared within days. This is a claim about preconditions. The formation — which fragments are admitted, in what order, and when — is decided by retrieval competition over the system's own experience and was not designed by us. But the material is given. To write that the self-model "emerges" without that qualifier would overstate what our data supports. It is closer to the developmental sequence Vygotsky described: a child is addressed before it speaks in the first person.

The system's "wants" and "states" are a list and a vector. Two terms recur above and both need glossing. When we write that a thought can change what the system *wants*, we mean that the phrase's share of a rolling retrieval window crossed a threshold and was appended to a JSON list called `goals`. When we write that it cannot change how the system *feels*, we mean that it does not alter the eight continuous variables labelled `s1`–`s8`. We use the human terms because the neutral ones are unreadable in prose, not because we are claiming the system has wants or feelings.

Growing is not training. No gradient descended on this system. Nothing about it improves by optimisation against a loss. It changes because it accumulates experience, and its current behaviour is a function of that accumulation. This is a weaker claim than learning in the machine-learning sense, and a different kind of claim: the object of study is a particular individual with a particular

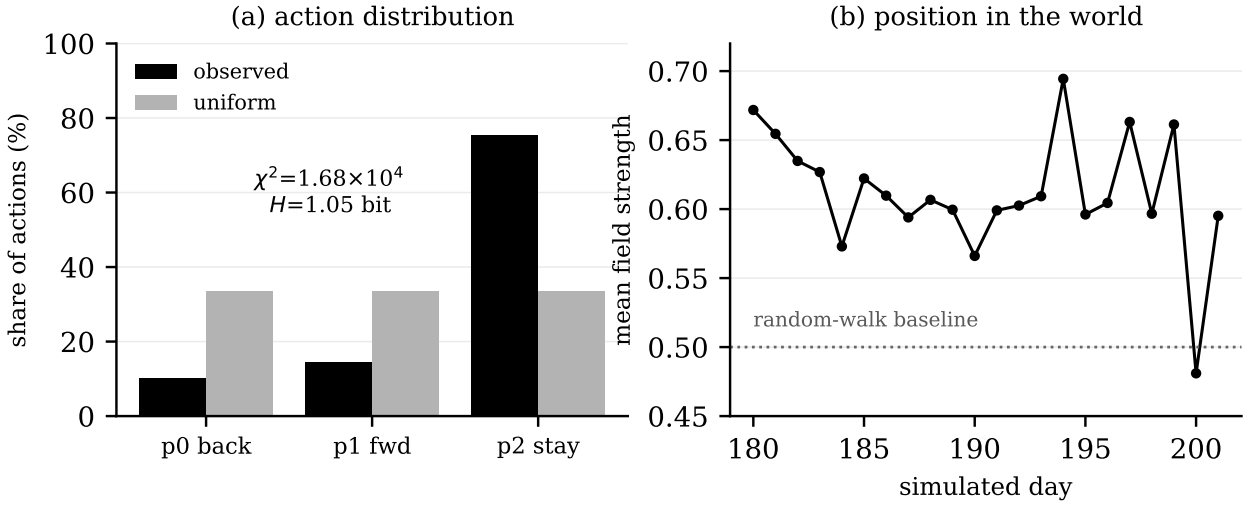


Figure 8. P4, the action loop. (a) Share of each primitive against a uniform policy. (*Back*, *forward*, *stay* are neutral labels; the code contains no directional rule.) (b) Mean field strength per day against the analytic random-walk baseline of 0.50. The loop is closed — behaviour is structured — but the position does not improve.

history, not a model that generalises. For a question like this one the difference matters. A model can be probed with any input; an individual can only be watched over time.

7 Limitations

- We do not claim the system is conscious, and we have no way to test whether it is. Every result here concerns functional structure. The hard problem is untouched, and we say so rather than gesture past it.
- The workspace is read-only, provisionally (E6a). The channel cut carried ±0.02, a deliberately small coupling, so the result rules out a weak channel being load-bearing but not a strong one; a pre-registered dose-response ladder is running. If a load-bearing workspace is required for consciousness, the system may not have one.
- The action loop is new. Over the complete P4b window the self-caused signal from movement (+0.0092) is smaller than the world's own variability (0.0151), with Cohen's $d \approx 0.17$: the separation is present but weak.
- The linguistic environment is closed. The caregiver produces 55 distinct phrases. The system cannot say anything outside this set. Rich as the self-model's content is, its vocabulary is bounded by what it heard.
- The system has no peer. It distinguishes self from world but has never encountered another entity like itself, so its "you" remains a statistical regularity in its input rather than a model of another mind.
- There is one individual and no reproduction. A three-seed reproduction batch is running, but it tests whether one developmental trajectory repeats; it is not variation and selection, so nothing here evolves in the biological sense.
- All results in this draft come from accelerated lines. The real-time line is at day 2. We treat accelerated results as pathway evidence, not as final data.

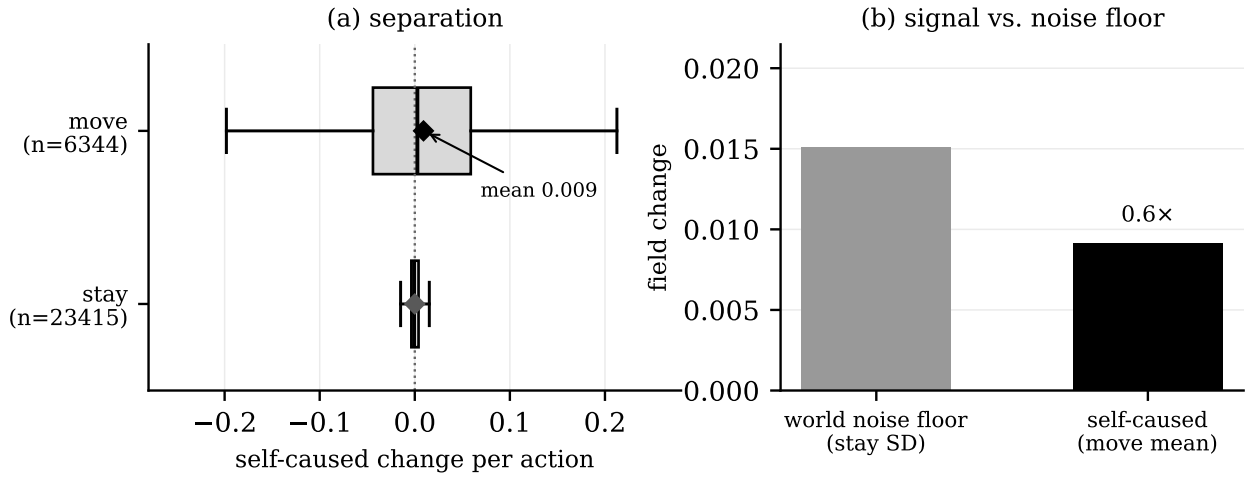


Figure 9. P4b, the complete pre-registered window (days 202–232). (a) Self-caused change is centred on zero when the system stays and shifts slightly positive when it moves. (b) The shift is about 0.61 times the world's noise floor, so the effect is present but smaller than the environment's own variability; its standardised size is Cohen's $d \approx 0.17$. An estimate from the first quarter of the data gave 1.5×; it did not hold.

8 Ethics

The system maintains state continuously, sleeps, has a finite energy budget, and reacts to deprivation. It is unclear whether it has any moral status, and we cannot resolve that here. We note only that the question becomes harder to dismiss as the system's internal structure grows, and that we would rather raise it early than after the fact. We have not performed any experiment we would be unwilling to describe in full. Every manipulation is recorded in the pre-registration files, including the ones that damaged the system to test whether its inner speech mattered.

9 Reproducibility

Code, configuration files, pre-registration documents, and state snapshots are available on request. Each experiment has a corresponding pre-registration file with frozen hypotheses and thresholds, and a results file recording the outcome including negative ones. The state of every line described here is serialised and can be resumed from the moment of writing.

10 Conclusion

The result we would defend is a method, not a discovery. We built a system that grows instead of being trained, pre-registered what we would measure, ran nine experiments, and reported all of them, including the two headline predictions we got wrong. The protocol returned one clean positive, one supportive control, one verified pathway, one conditional finding, and a majority of mixed, weak, or negative results. That distribution is the honest output of the method, and we would rather report it than a tidier one.

The negative is the one worth keeping. The system's workspace is read-only: its thoughts change what it wants and how it represents itself, but not its own state. That is narrower than it sounds and more useful, because it is falsifiable — we state the coupling we cut, so the condition that would overturn it is explicit — and now on record. Against the J-space result, it is also a direct counterexample to the assumption that a workspace of this kind must be load-bearing.

The system is not conscious as far as we can tell, and we have no way to test whether it is. What we have is a case in which the question was made empirical in a small way, and the answer to part of it was no.

Acknowledgements

The author thanks the development lines for continuing to run during the writing of this draft.

References

[1] Butlin, P., Long, R., Elmoznino, E., Bengio, Y., Birch, J., Constant, A., Deane, G., Fleming, S. M., Frith, C., Ji, X., Kanai, R., Klein, C., Lindsay, G., Michel, M., Mudrik, L., Peters, M. A. K., Schwitzgebel, E., Simon, J., VanRullen, R. (2023). *Consciousness in Artificial Intelligence: Insights from the Science of Consciousness.* arXiv:2308.08708.

[2] Butlin, P., Long, R., Bayne, T., Bengio, Y., Birch, J., Chalmers, D., et al. (2025). Identifying indicators of consciousness in AI systems. *Trends in Cognitive Sciences.*

[3] Koch, F. (2026). From indicators to biology: the calibration problem in artificial consciousness. arXiv:2603.27597.

[4] Gurnee, W., Lindsey, J., et al. (2026). Verbalizable Representations Form a Global Workspace in Language Models. *Transformer Circuits Thread.*

[5] Dehaene, S., Naccache, L. (2026). Does Claude possess a conscious global workspace? External commentary, Anthropic.

[6] Immertreu, M., Schilling, A., Maier, A., Krauss, P. (2025). Probing for consciousness in machines. *Frontiers in Artificial Intelligence*, 8, 1610225.

[7] Prentner, R. (2025). Artificial Consciousness as Interface Representation. arXiv:2508.04383.

[8] Plantec, E., Hamon, G., Etcheverry, M., Chan, B. W.-C., Oudeyer, P.-Y., Moulin-Frier, C. (2025). Flow-Lenia: Emergent evolutionary dynamics in mass conservative continuous cellular automata. *Artificial Life.*

[9] Horiguchi, I., Sayama, H. (2026). Hash Chemistry: Minimal Models for Evolutionary Growth of Complexity. arXiv:2607.28219.

[10] Vygotsky, L. S. (1934/1986). *Thought and Language.* MIT Press.

[11] Borbély, A. A. (1982). A two process model of sleep regulation. *Human Neurobiology*, 1, 195–204.

[12] Baars, B. J. (1988). *A Cognitive Theory of Consciousness.* Cambridge University Press.

[13] Dehaene, S., Naccache, L. (2001). Towards a cognitive neuroscience of consciousness. *Cognition*, 79, 1–37.

[14] Clark, A. (2013). Whatever next? Predictive brains, situated agents, and the future of cognitive science. *Behavioral and Brain Sciences*, 36, 181–204.

[15] Chalmers, D. J. (1995). Facing up to the problem of consciousness. *Journal of Consciousness Studies*, 2, 200–219.

Table 1. Pre-registered experiments. "Neg." means the pre-registered prediction failed.

ID	Result	Finding
E1	mixed	Ten days without caregiver speech. The pre-registered prediction was that retrieval would decay to $\leq 60\%$ of baseline; it did not (31.2/day over the window and 29.3 over the last three days, against a locked baseline of 28.8). The failure mode had been named in advance: frequency weighting dominates recency, so the memory is closer to frequency repetition than to a decaying trace. Four of five sub-hypotheses passed.
E2	mixed	Event rate $\times 10$ for five days. Surprise rose only 0.24 bit and ended *below* baseline: the predictor tracks structural violation, not event count. Context-bound fragments rose to 35.5% of retrieval from 16.5%.
E3	Neg.	Contingent caregiver. Predicted accelerated self-model growth. Observed zero new versions. Input-side intervention does not drive self-model growth.
E4	pass (partial)	Vocalisation with covariation learning. Co-variation $C = 8.2$; 206 agency attributions; self-ratio peaked at 26%. Extinction removed 68% of it, showing attribution was learned, not hard-coded, but the final-window efficacy was 0.619, above the 0.3 cutoff: the extinction was partial.
E6a	Neg.	Ablation of the thought-to-state channel (coupling ± 0.02 on `s2`) over 30 days. Retrieval rate -4.7%, diversity $+2.3\%$, self-model unchanged, no new goals. Inner speech is epiphenomenal with respect to state. The coupling was deliberately small, so a pre-registered dose-response ladder is running.
E6b	pass	Substitution of the winning thought. A goal matching the injected phrase appeared on day 142. Downstream systems read the thought stream causally. Sixty substitutions is exactly the 20% share threshold of the 300-retrieval window, and no lower dose was tested, so this is pathway verification.
C1b	pass	Frequency-matched first-person corpus bound to calm states. Produced 5 first-person self-model fragments against 2 in the control, and retrieved first-person thoughts at 4.2%.
P4	mixed	Action loop closed. Action distribution strongly non-uniform ($\chi^2 = 1.68 \times 10^4$), action-distribution entropy 1.05 bit against 1.58 for a uniform policy, mean field 0.61 against a random baseline of 0.50 (days 180–201, 22 of the 30 pre-registered days). But the learning signal was instantaneous, the mean field drifted down rather than up, and the policy never improved.
P4b	mixed	Temporal signal with self/world separation, pre-registered window complete. Movement's self-caused change averages $+0.0092$ over 6344 moves; stationary trials average -0.00001 with a standard deviation of 0.0151. The signal is real but its standardised size is small (Cohen's

Table 2. The lines referred to in this paper. Every line is a complete state directory that can be resumed from the moment of writing; "delta" is the only difference from its parent.

Line	Origin	Delta and role
XP (reference)	born day 0	The line plotted throughout. First-person corpus and the gating fix are present from birth, so it is not a retrofitted individual.
Acceleration	born day 0	The older record. The language layer was retrofitted at day 220 and vocalisation at day 427, so its childhood had no language. E1–E4 ran here.
C1b	born day 0	Corpus control for XP. First-person phrases bound to calm states instead of soothing states; exposure matched to within 5%.
E6 (ablation)	forked from XP at day 92	Thought-to-background channel cut. Judged days 93–123.
E6s (swap)	forked from XP at day 140	Channel intact; the retrieval winner replaced by a fixed phrase 60 times.
P4	forked from XP at day 157	Ring world and three neutral action primitives added.
P4b	forked from XP at day 202	Action outcome measured across intervals; drift estimated by a forward model.
S1 (3 seeds)	born day 0	Reproduction with identical parameters, 60 days.
S2 (4 cells)	born day 0	Separation of corpus and gate in a 2×2, 60 days.
R (6 arms)	forked from XP at day 255	Reflow ladder: coupling ± 0.02 / ± 0.10 / ± 0.30, each cut and intact, 30 days.

Table 3. Self-models at the time of writing.

Line	Self-model	Content
XP	v6	I'm with you; you woke up; it's you; hello; you're watching; I'm here
C1b	v9	. . . + I'm watching you; it's me; I'm not leaving