

# Generative models

## Outline


1. Preview: Auto-Encoders, VAE
2. Generative models with GAN
3. GAN architectures
4. Editing
- 5. Conditional GANs**

# Generative models

## Outline

1. Preview: Auto-Encoders, VAE
2. Generative models with GAN
3. GAN architectures
4. Editing
5. **Conditional GANs**
  1. Principle

# Motivation

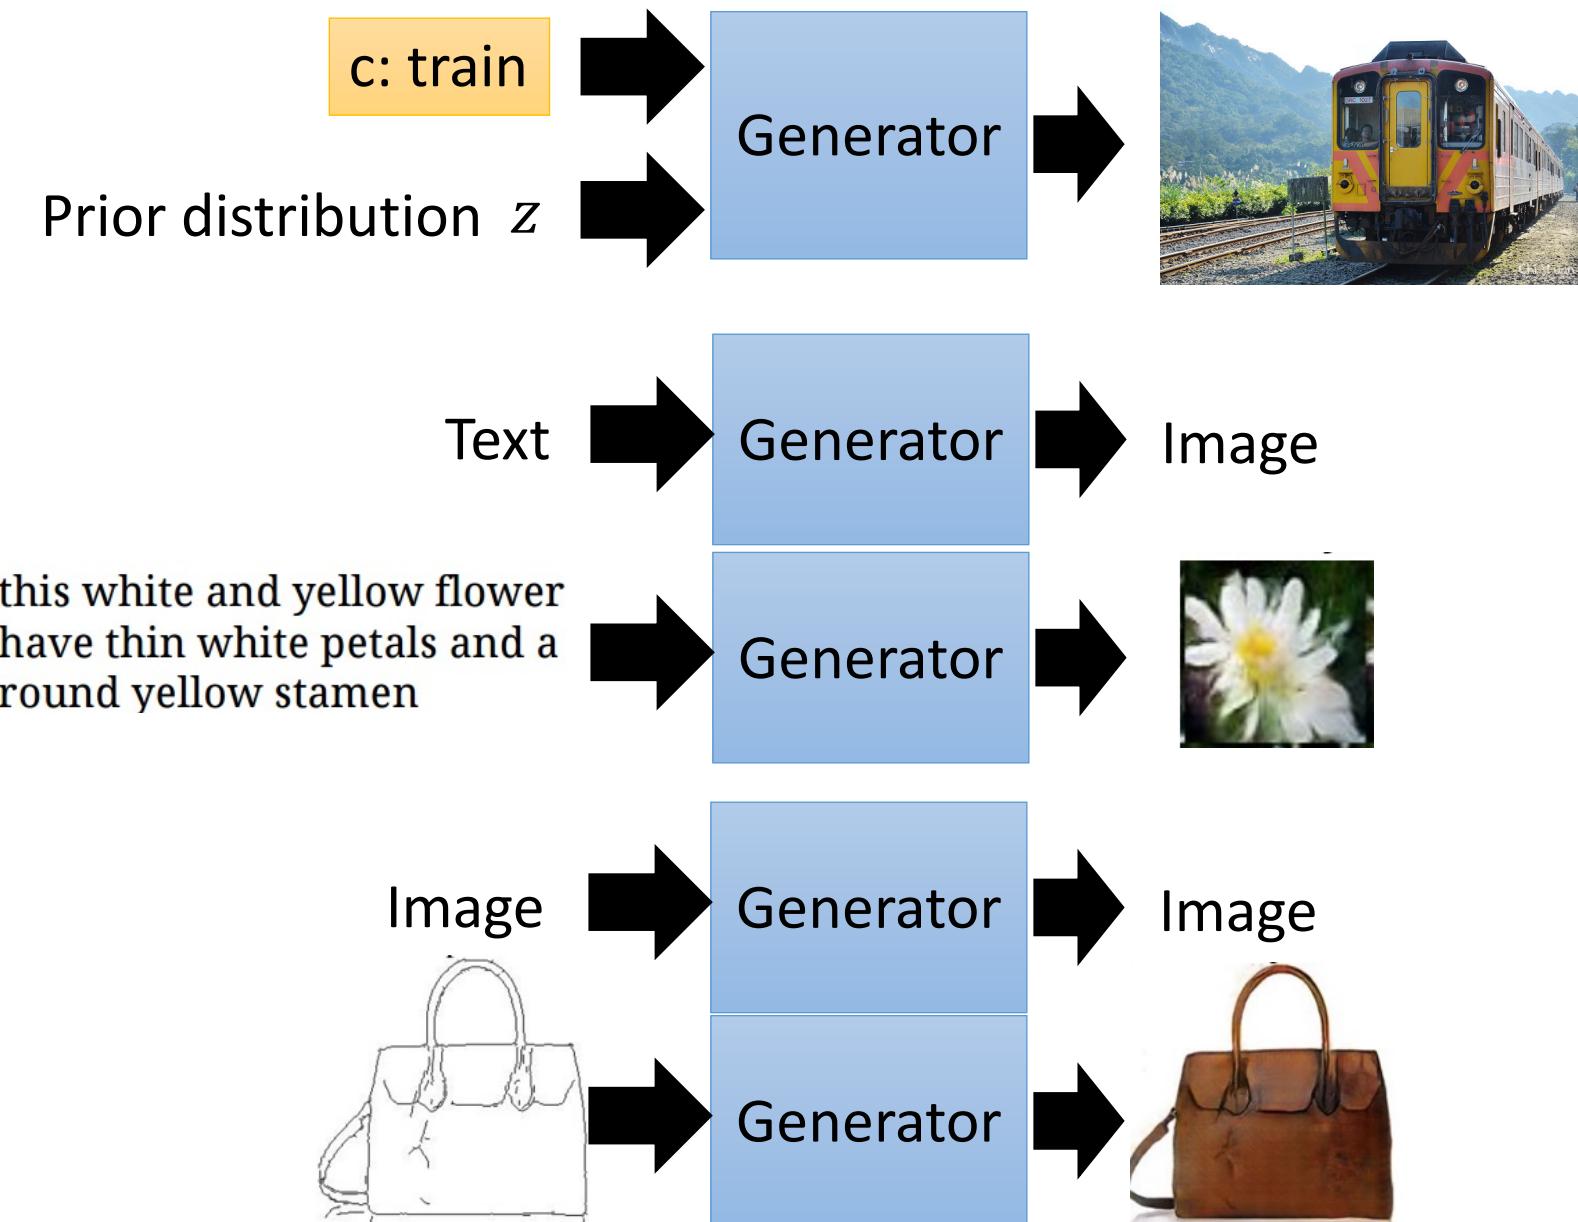

# Conditional GAN


$c^1$ : a dog is running     $\hat{x}^1$ :




$c^2$ : a bird is flying     $\hat{x}^2$ :




- **Text to image** by traditional supervised learning

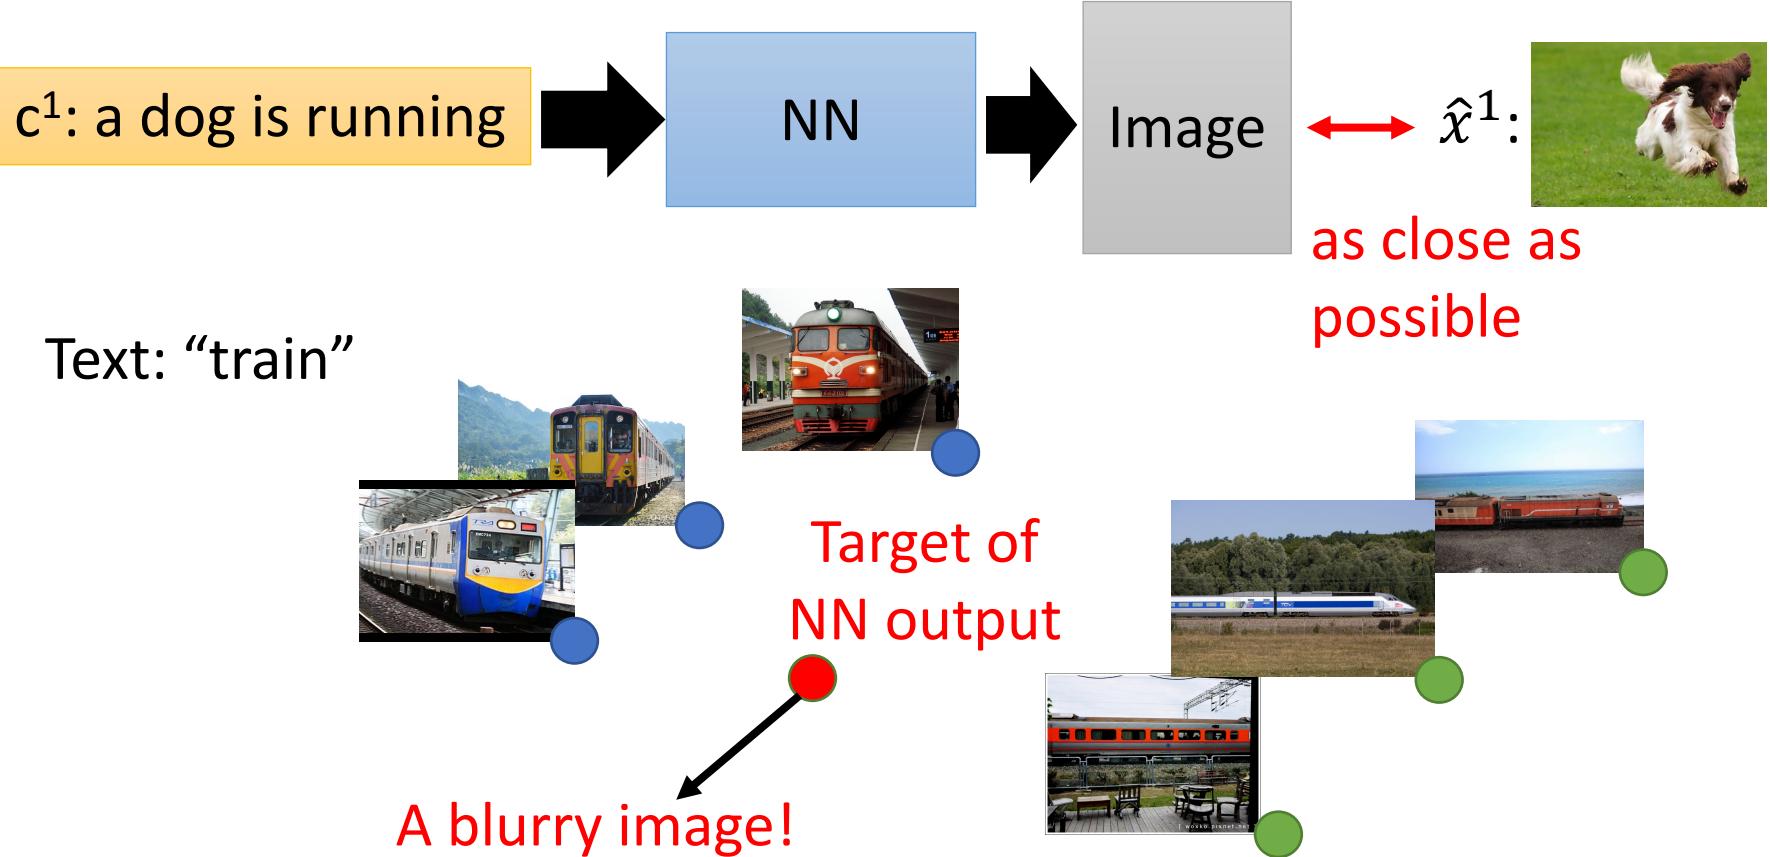


# Conditional GAN

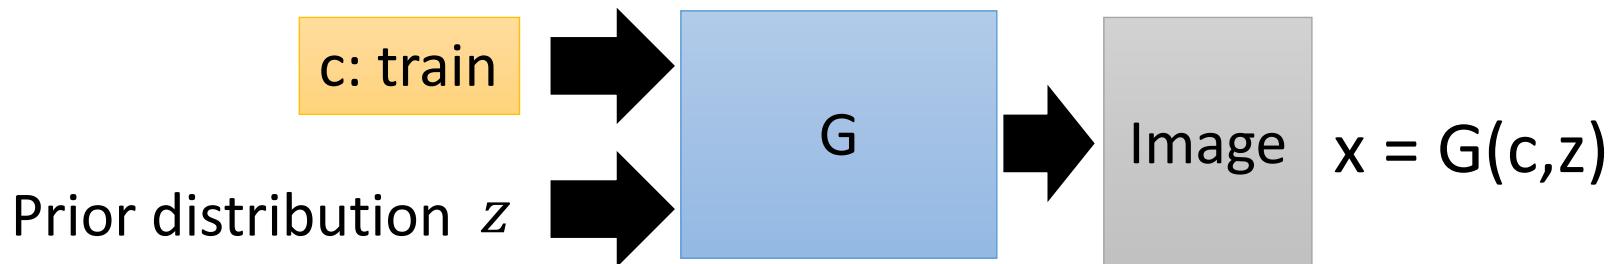



Text: “train”

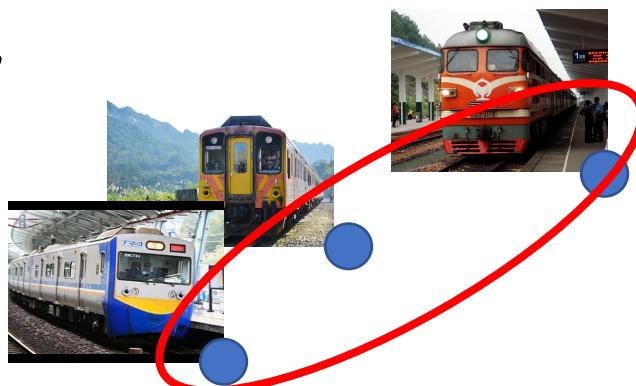

It is a distribution  
Approximate the  
distribution of real data

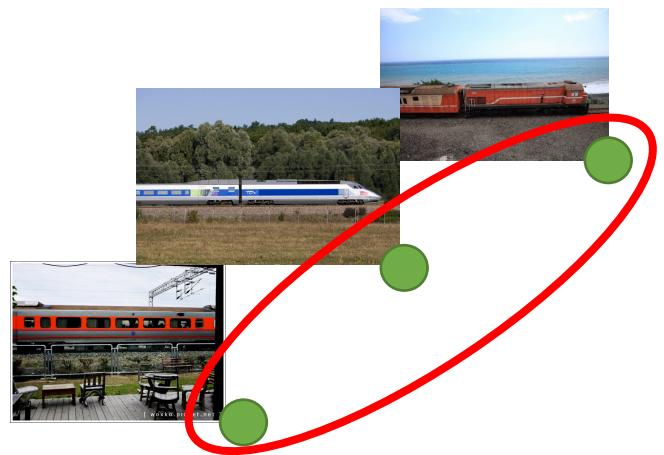


# Conditional GAN

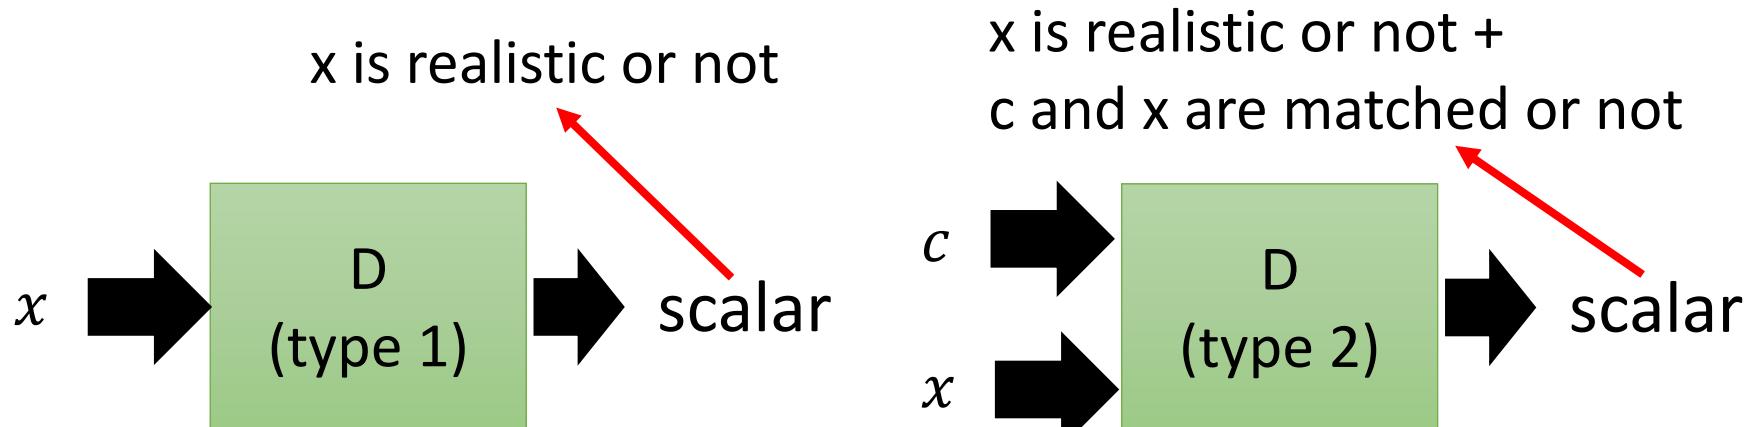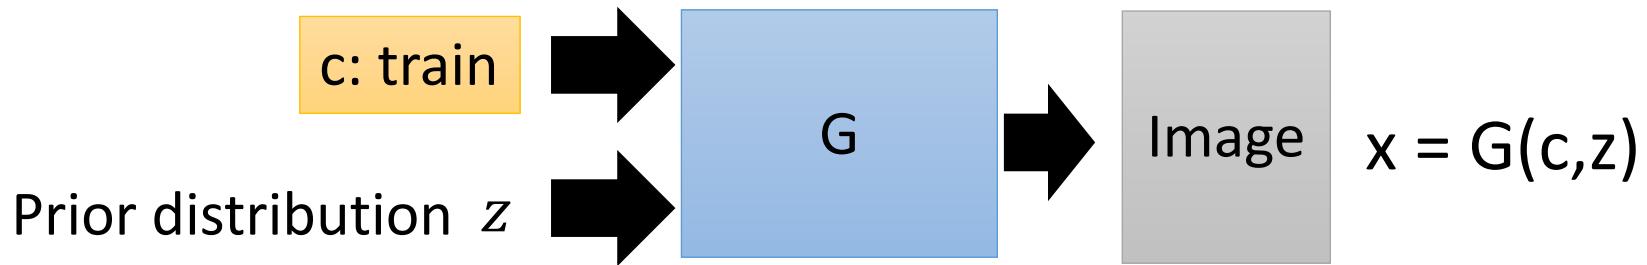

Positive example:  


Negative example:  

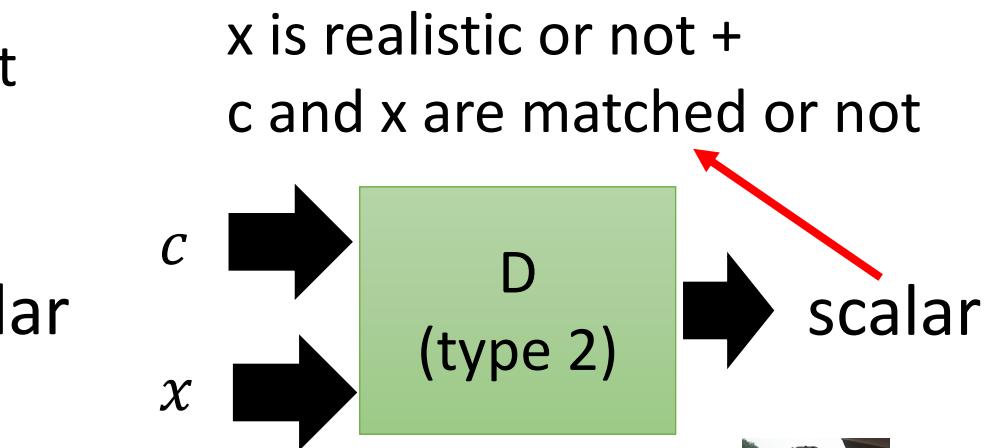
Positive example: (train ,  )

Negative example:

(train ,  ) (cat ,  )

# Conditional GAN (CGAN model)

$$\min_G \max_D \left( \mathbb{E}_{\mathbf{x}, \mathbf{y} \sim p_{\text{data}}(\mathbf{x}, \mathbf{y})} [\log D(\mathbf{x}, \mathbf{y})] + \mathbb{E}_{\mathbf{y} \sim p_y, \mathbf{z} \sim p_z(\mathbf{z})} [\log(1 - D(G(\mathbf{z}, \mathbf{y}), \mathbf{y}))] \right)$$

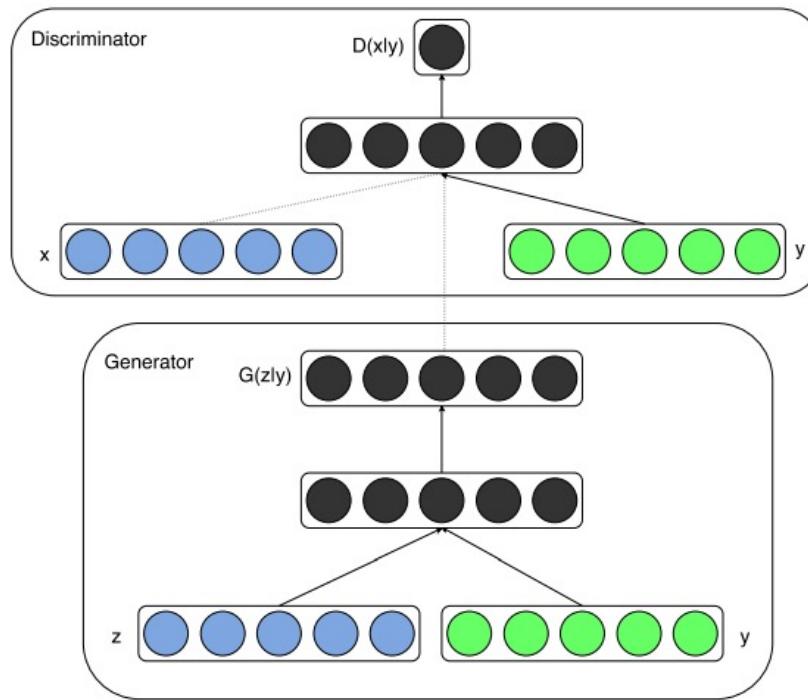


# Generative models

## Outline

1. Preview: Auto-Encoders, VAE
2. Generative models with GAN
3. GAN architectures
4. Editing
5. Conditional GANs
  1. Principle
  2. **Text2Image**

# Text2Image: architecture example


*This flower has small, round violet petals with a dark purple center*

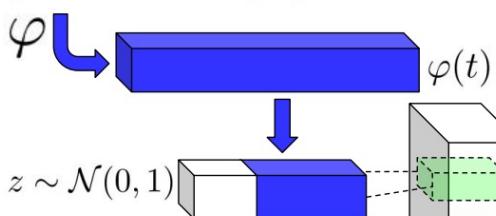

$$\hat{x} := G(z, \varphi(t))$$

Generator Network

*This flower has small, round violet petals with a dark purple center*

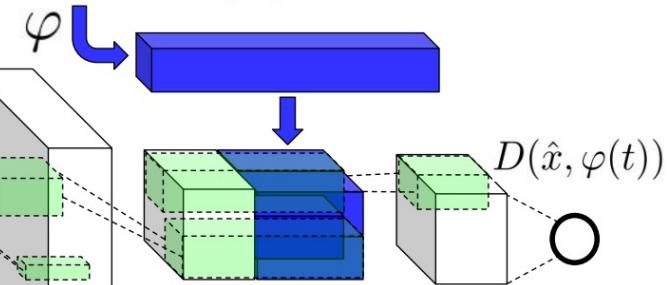

Discriminator Network

- Positive samples:
  - real image + right texts
- Negative samples:
  - fake image + right texts
  - Real image + wrong texts

# Text2Image results

this small bird has a pink breast and crown, and black primaries and secondaries.



this magnificent fellow is almost all black with a red crest, and white cheek patch.




the flower has petals that are bright pinkish purple with white stigma



this white and yellow flower have thin white petals and a round yellow stamen



# Text2Image results

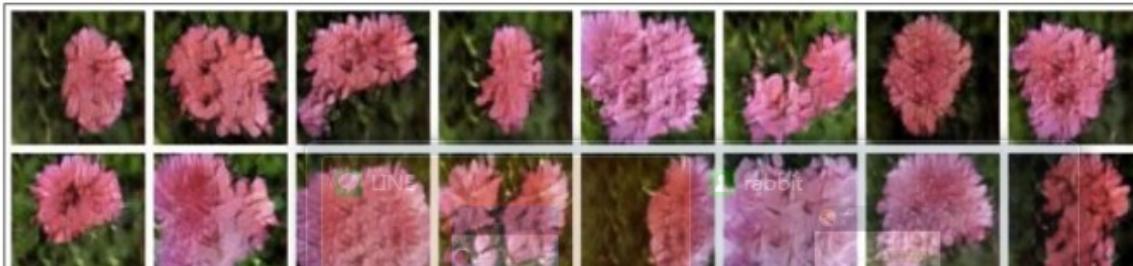Caption	Image
this flower has white petals and a yellow stamen	
the center is yellow surrounded by wavy dark purple petals	
this flower has lots of small round pink petals	

# Text2Image: architecture example (2)

StackGAN: similar idea with LapGan to generate higher resolution images


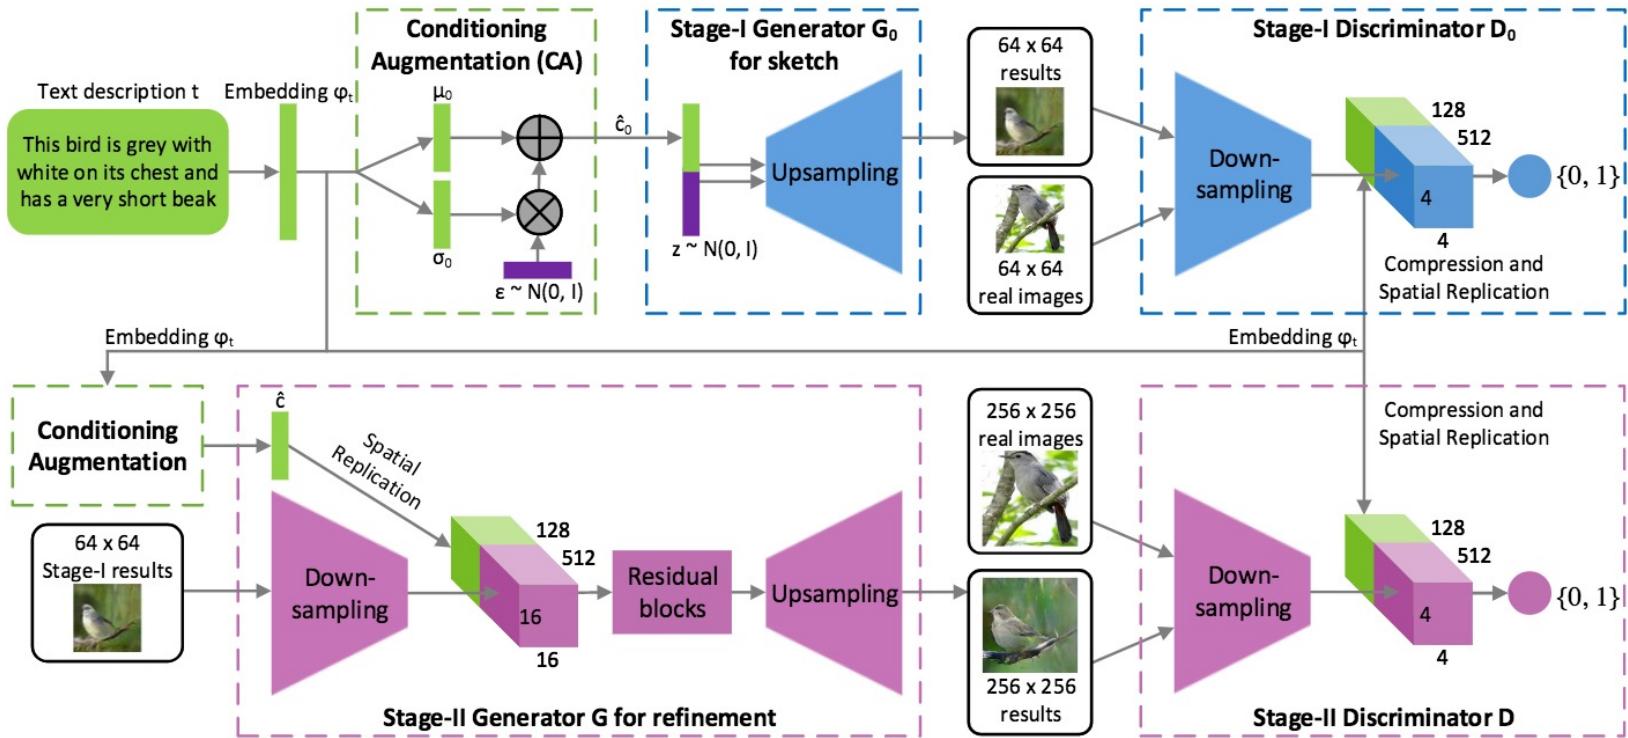


Figure 2. The architecture of the proposed StackGAN. The Stage-I generator draws a low-resolution image by sketching rough shape and basic colors of the object from the given text and painting the background from a random noise vector. Conditioned on Stage-I results, the Stage-II generator corrects defects and adds compelling details into Stage-I results, yielding a more realistic high-resolution image.

# StackGAN results

(a) Stage-I  
images

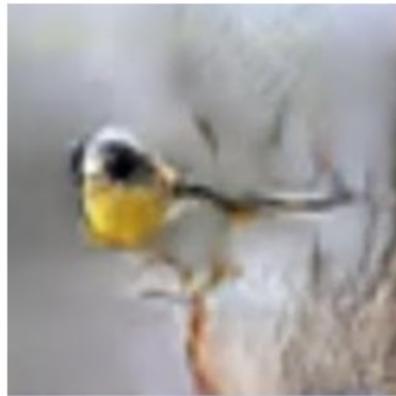

(b) Stage-II  
images



[[Zhang et al. 2016](#)]

# Text2Image results


Caption	Image
a pitcher is about to throw the ball to the batter	
a group of people on skis stand in the snow	
a man in a wet suit riding a surfboard on a wave	

# Generative models

## Outline


1. Preview: Auto-Encoders, VAE
2. Generative models with GAN
3. GAN architectures
4. Editing
5. Conditional GANs
  1. Principle
  2. Text2Image
  3. **Image2Image**

# Image-to-Image Translation pix2pix

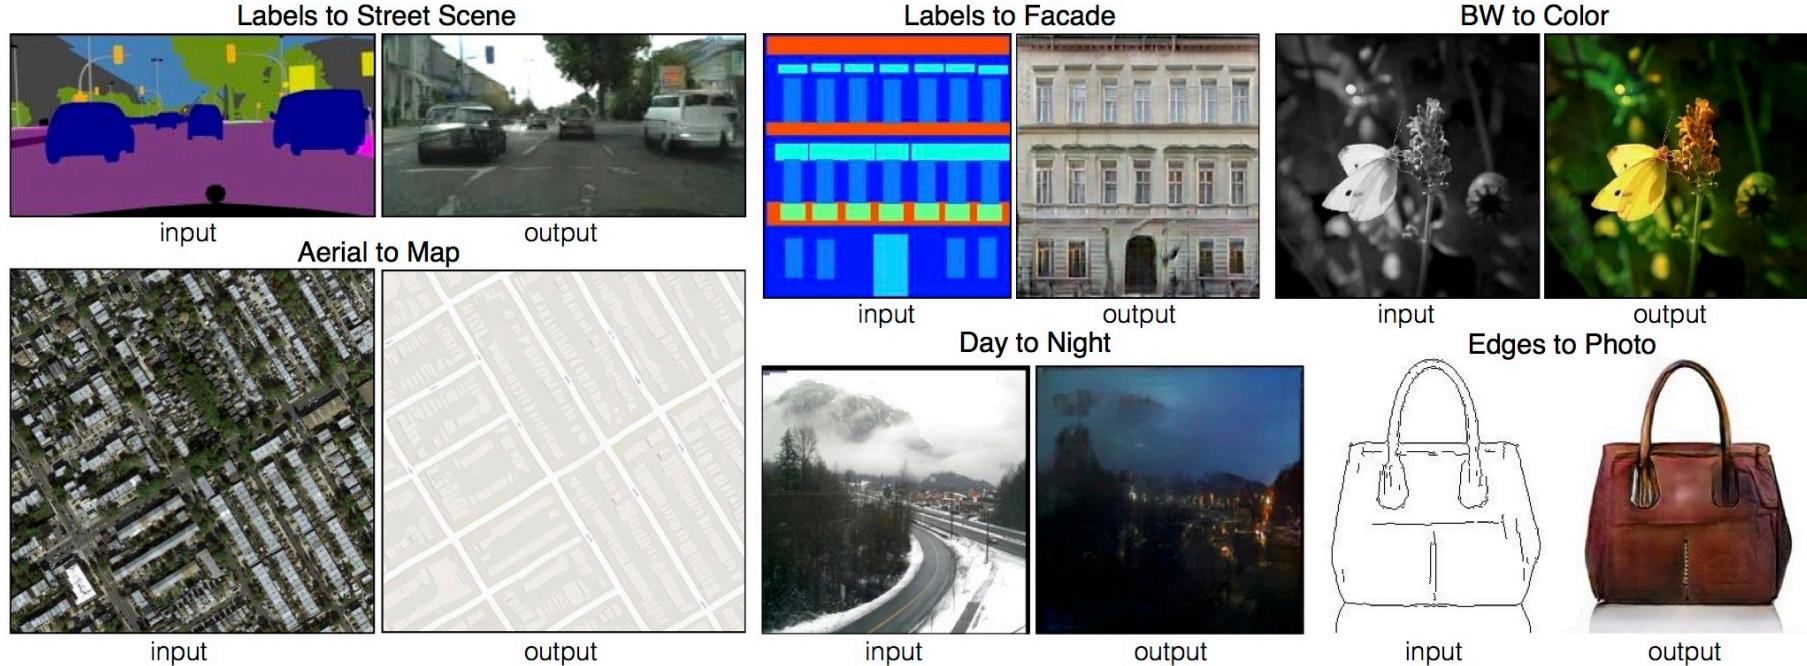

- Conditioned on an image of different modality
- No need to specify the loss function

# Image-to-image pix2pix

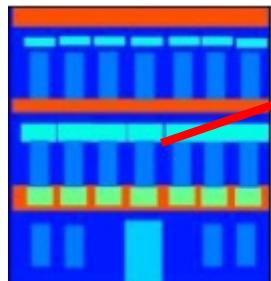

$c$   
 $z$

$G$

$$x = G(z | c)$$




Labels to Street Scene



input

output

Labels to Facade

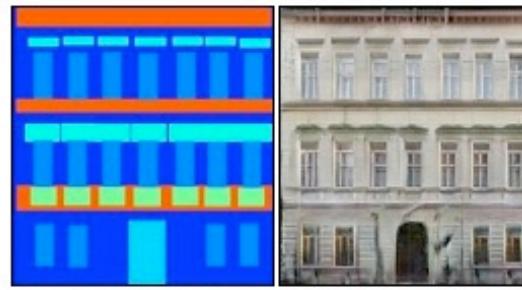

input

output

BW to Color



input

output

Aerial to Map



input

output

Day to Night



input

output


Edges to Photo




input

output


# Image-to-image pix2pix

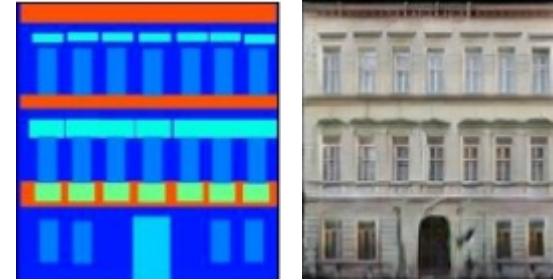


- Traditional supervised approach

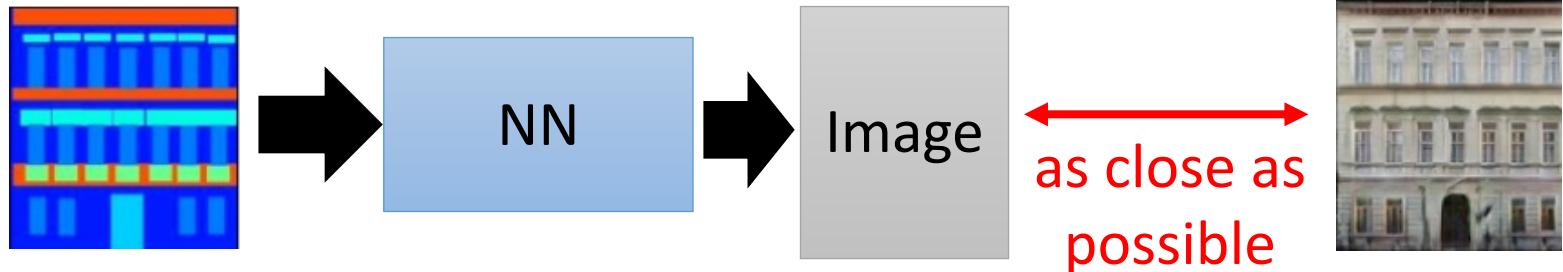

Testing:

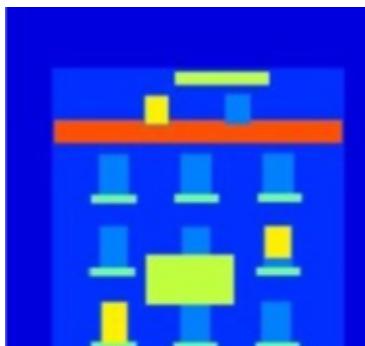


input

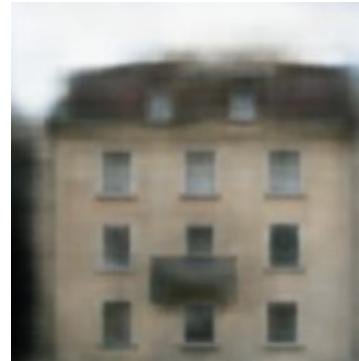


close

It is blurry  
because it is  
the average of  
several images.

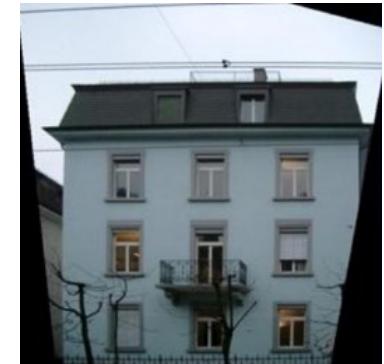


# Image-to-image


- Conditional GAN

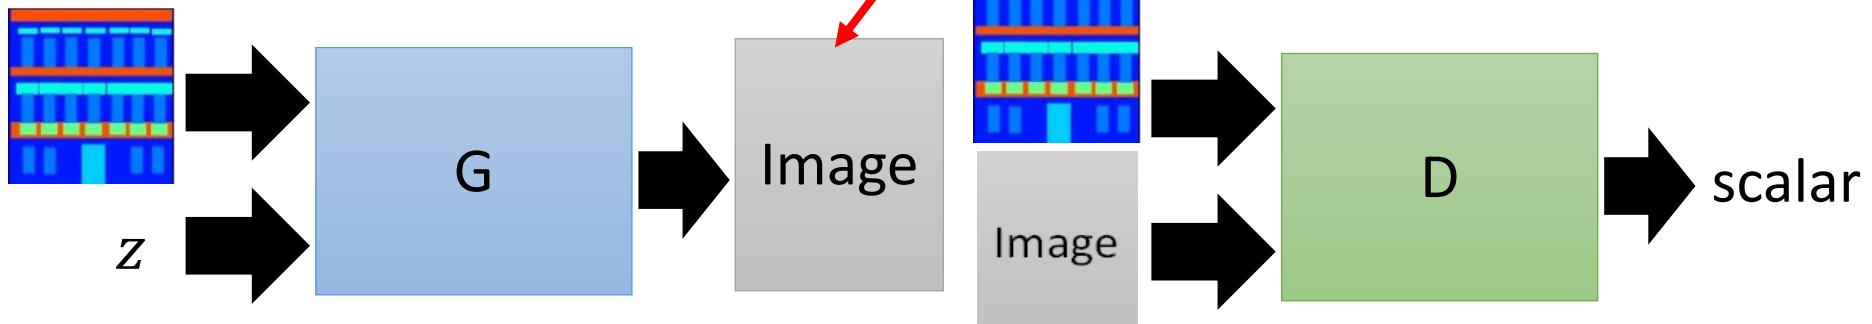

Testing:




input



close



GAN




GAN + close



GT

## Positive examples

Real or fake pair?

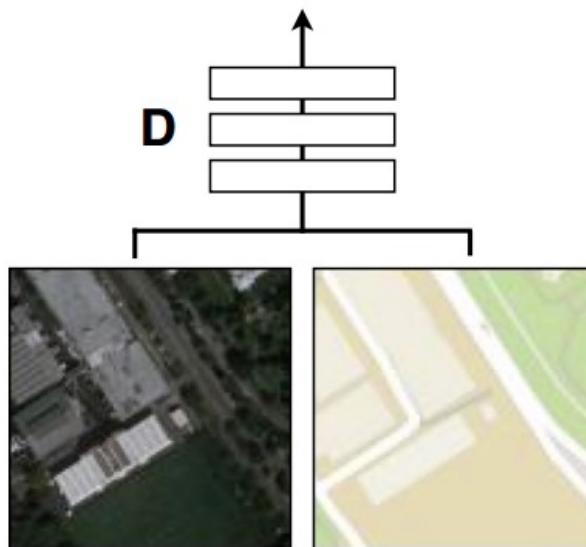


**G** tries to synthesize fake images that fool **D**

**D** tries to identify the fakes



## Negative examples

Real or fake pair?

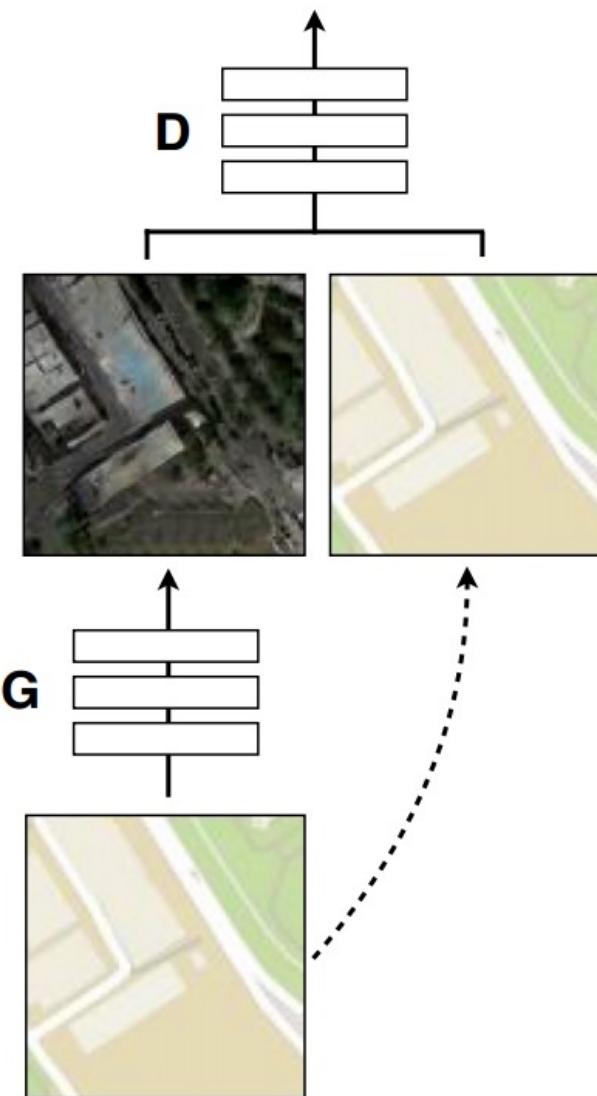

# Label2Image


Input

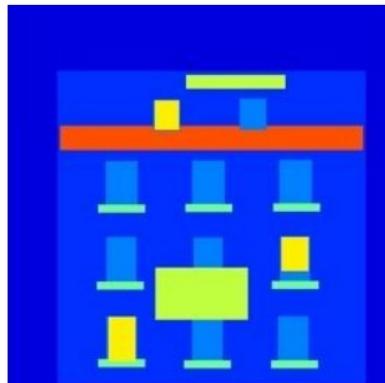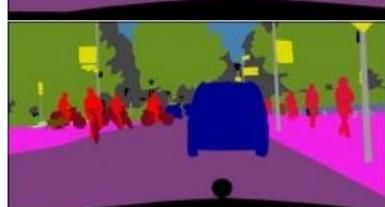

Ground truth



L1

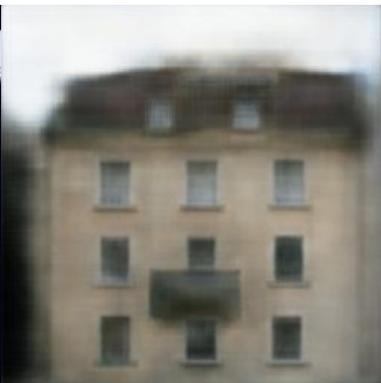

cGAN



L1 + cGAN



# Edges2Image



# Pix2pixHD [CVPR 2018]


High-Resolution Image Synthesis and Semantic Manipulation with Conditional GANs

Ting-Chun Wang, Ming-Yu Liu, Jun-Yan Zhu, Andrew Tao, Jan Kautz, Bryan Catanzaro




# Pix2pixHD [CVPR 2018]


*Coarse-to-fine Generator*

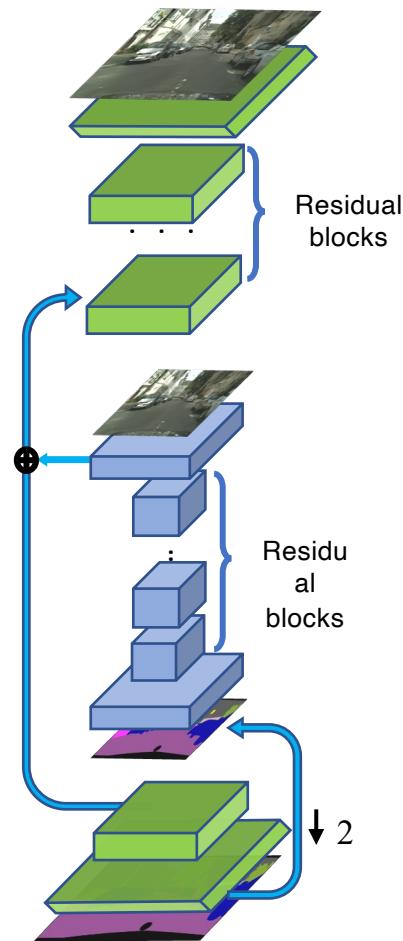

*Multi-scale Discriminators*

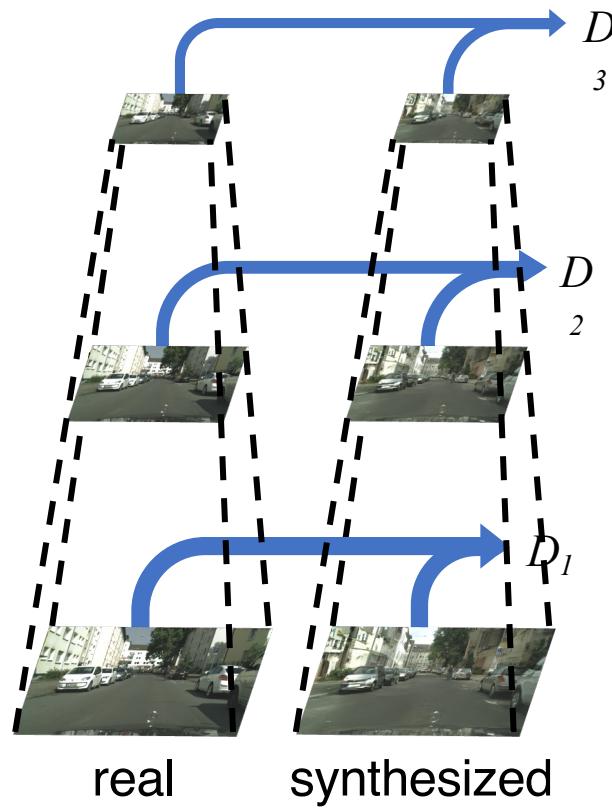

*Robust Objective*

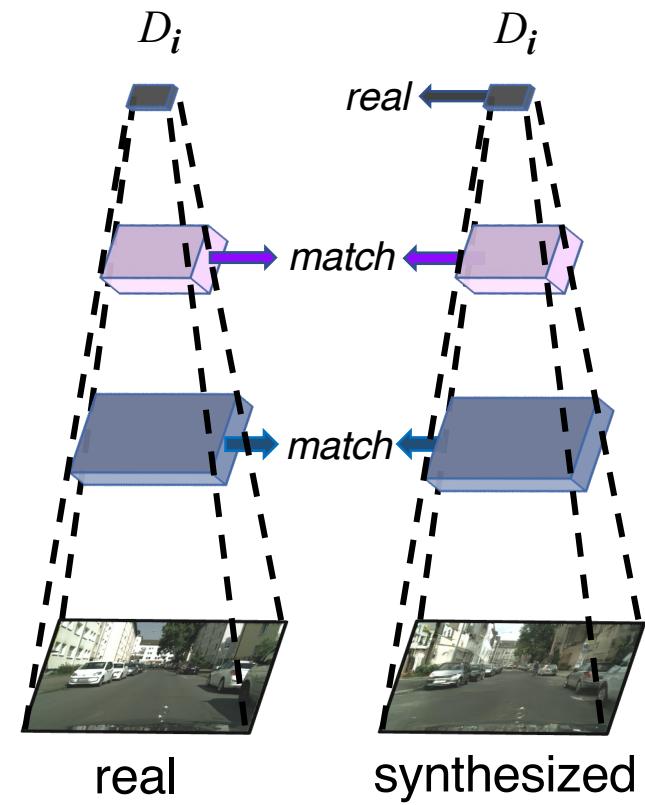



Semantic Map



pix2pix




CRN



Ours


# Improving Segmentation2Image strategy

[SPADE: Semantic Image Synthesis with Spatially-Adaptive Normalization, CVPR19]

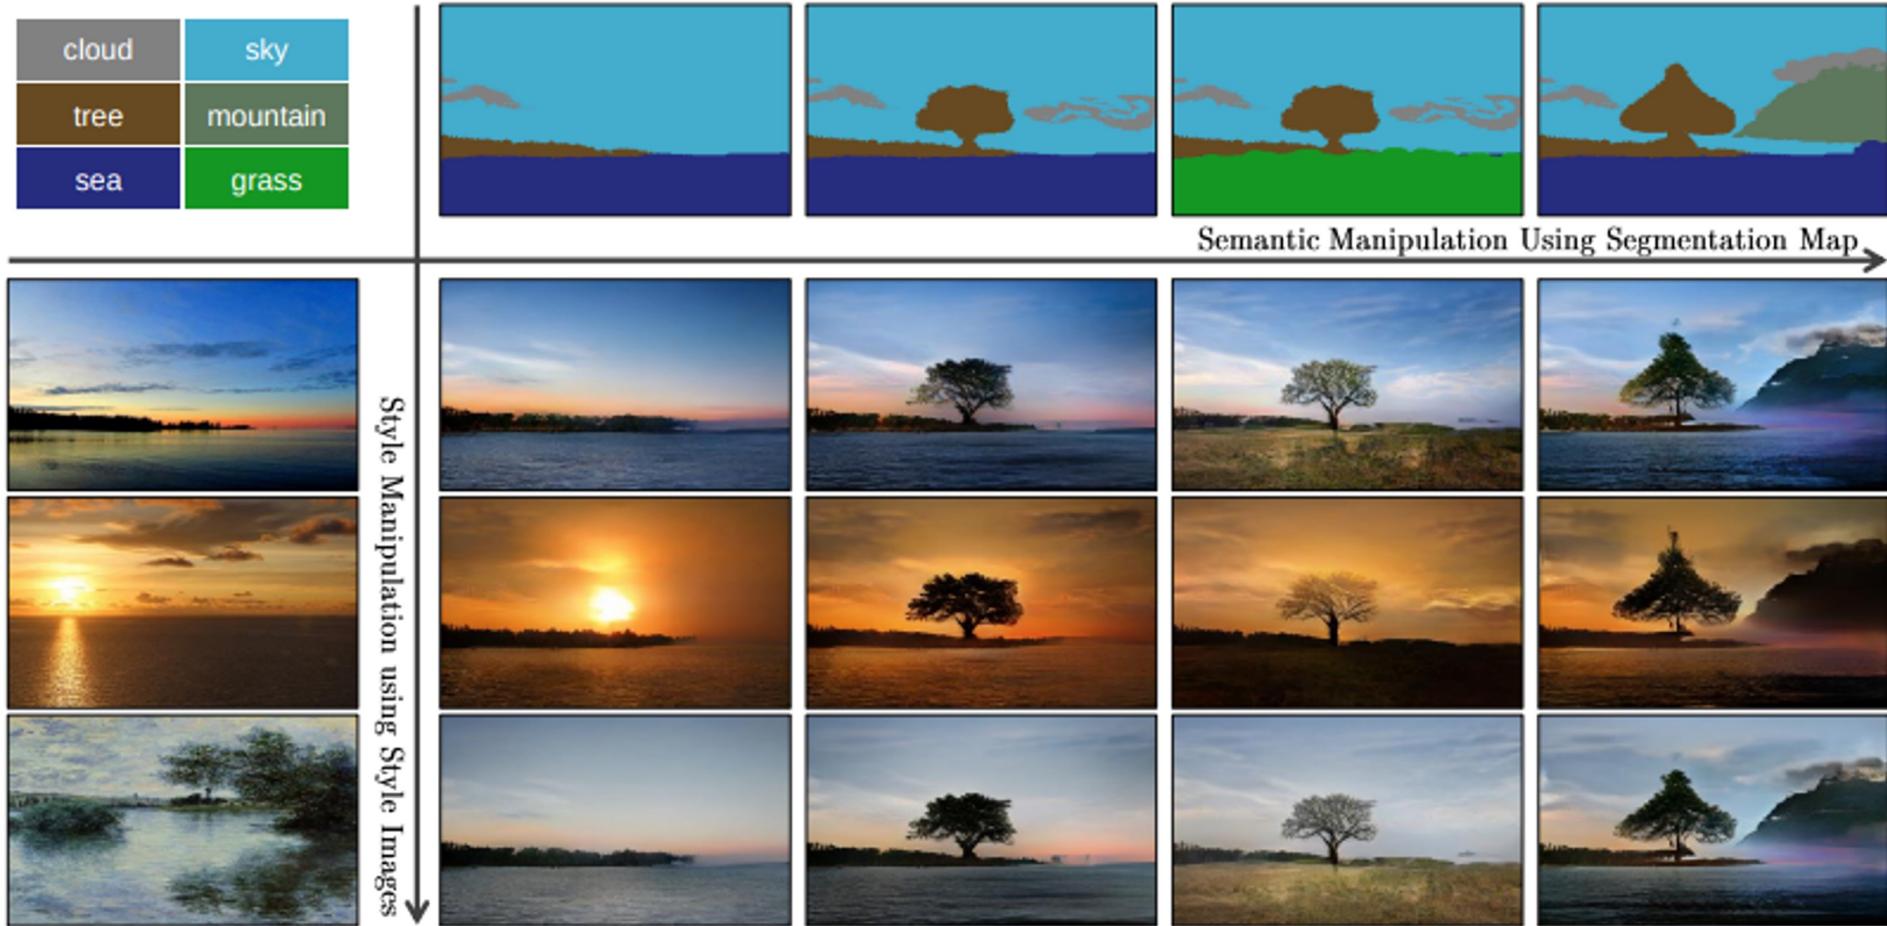

# Improving Segmentation2Image strategy

Previous approach:

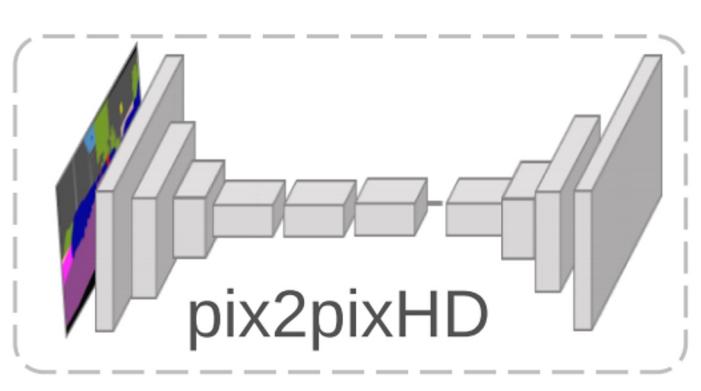

Directly feed the semantic layout as input to the deep network, which is processed through stacks of convolution, normalization, and nonlinearity layers.


However, this is suboptimal as the normalization layers tend to “wash away” semantic information in input semantic segmentation masks.

# Improving Segmentation2Image strategy

Proven effective for recent generative adversarial networks such as **StyleGAN**

Can we do the same for conditional GAN?


**Conditional Normalization Layers?**

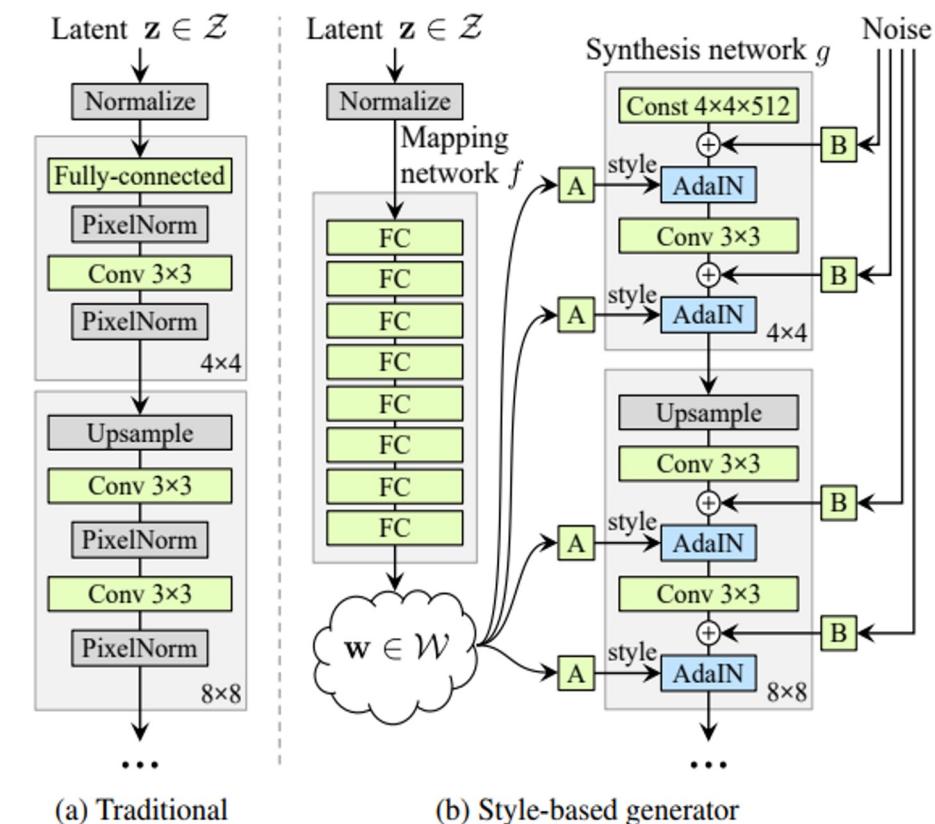

# Improving Segmentation2Image strategy

Recall: Adaptive instance normalization

$$\text{AdaIN}(x, y) = \sigma(y) \left( \frac{x - \mu(x)}{\sigma(x)} \right) + \mu(y)$$

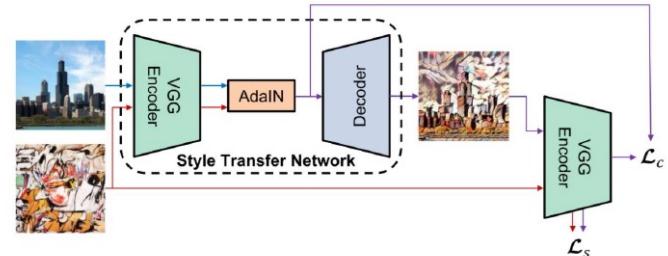


SPADE block= spatially-adaptive denormalization:  
Same idea but per class c over each channel i (N=batch size)

$$\gamma_{c,y,x}^i(\mathbf{m}) \frac{h_{n,c,y,x}^i - \mu_c^i}{\sigma_c^i} + \beta_{c,y,x}^i(\mathbf{m})$$


$$\mu_c^i = \frac{1}{NH^iW^i} \sum_{n,y,x} h_{n,c,y,x}^i$$

$$\sigma_c^i = \sqrt{\frac{1}{NH^iW^i} \sum_{n,y,x} (h_{n,c,y,x}^i)^2 - (\mu_c^i)^2}$$

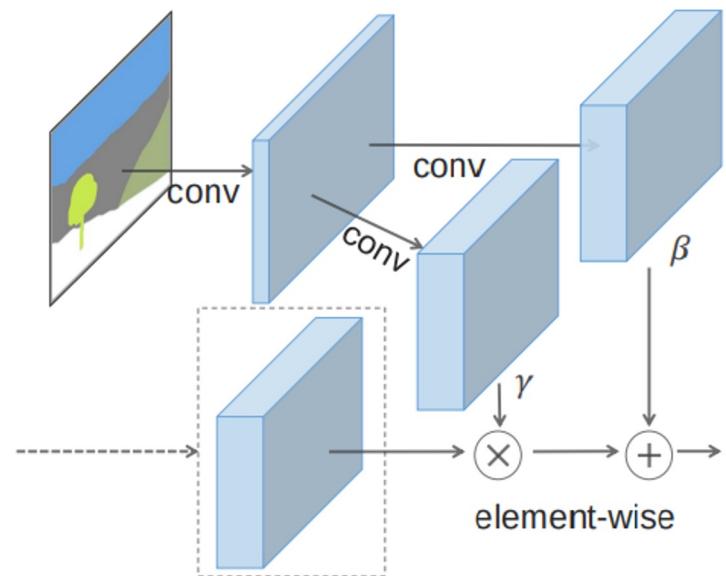


SPADE paper = [Semantic Image Synthesis with Spatially-Adaptive Normalization CVPR 2019]


# SPADE Generator

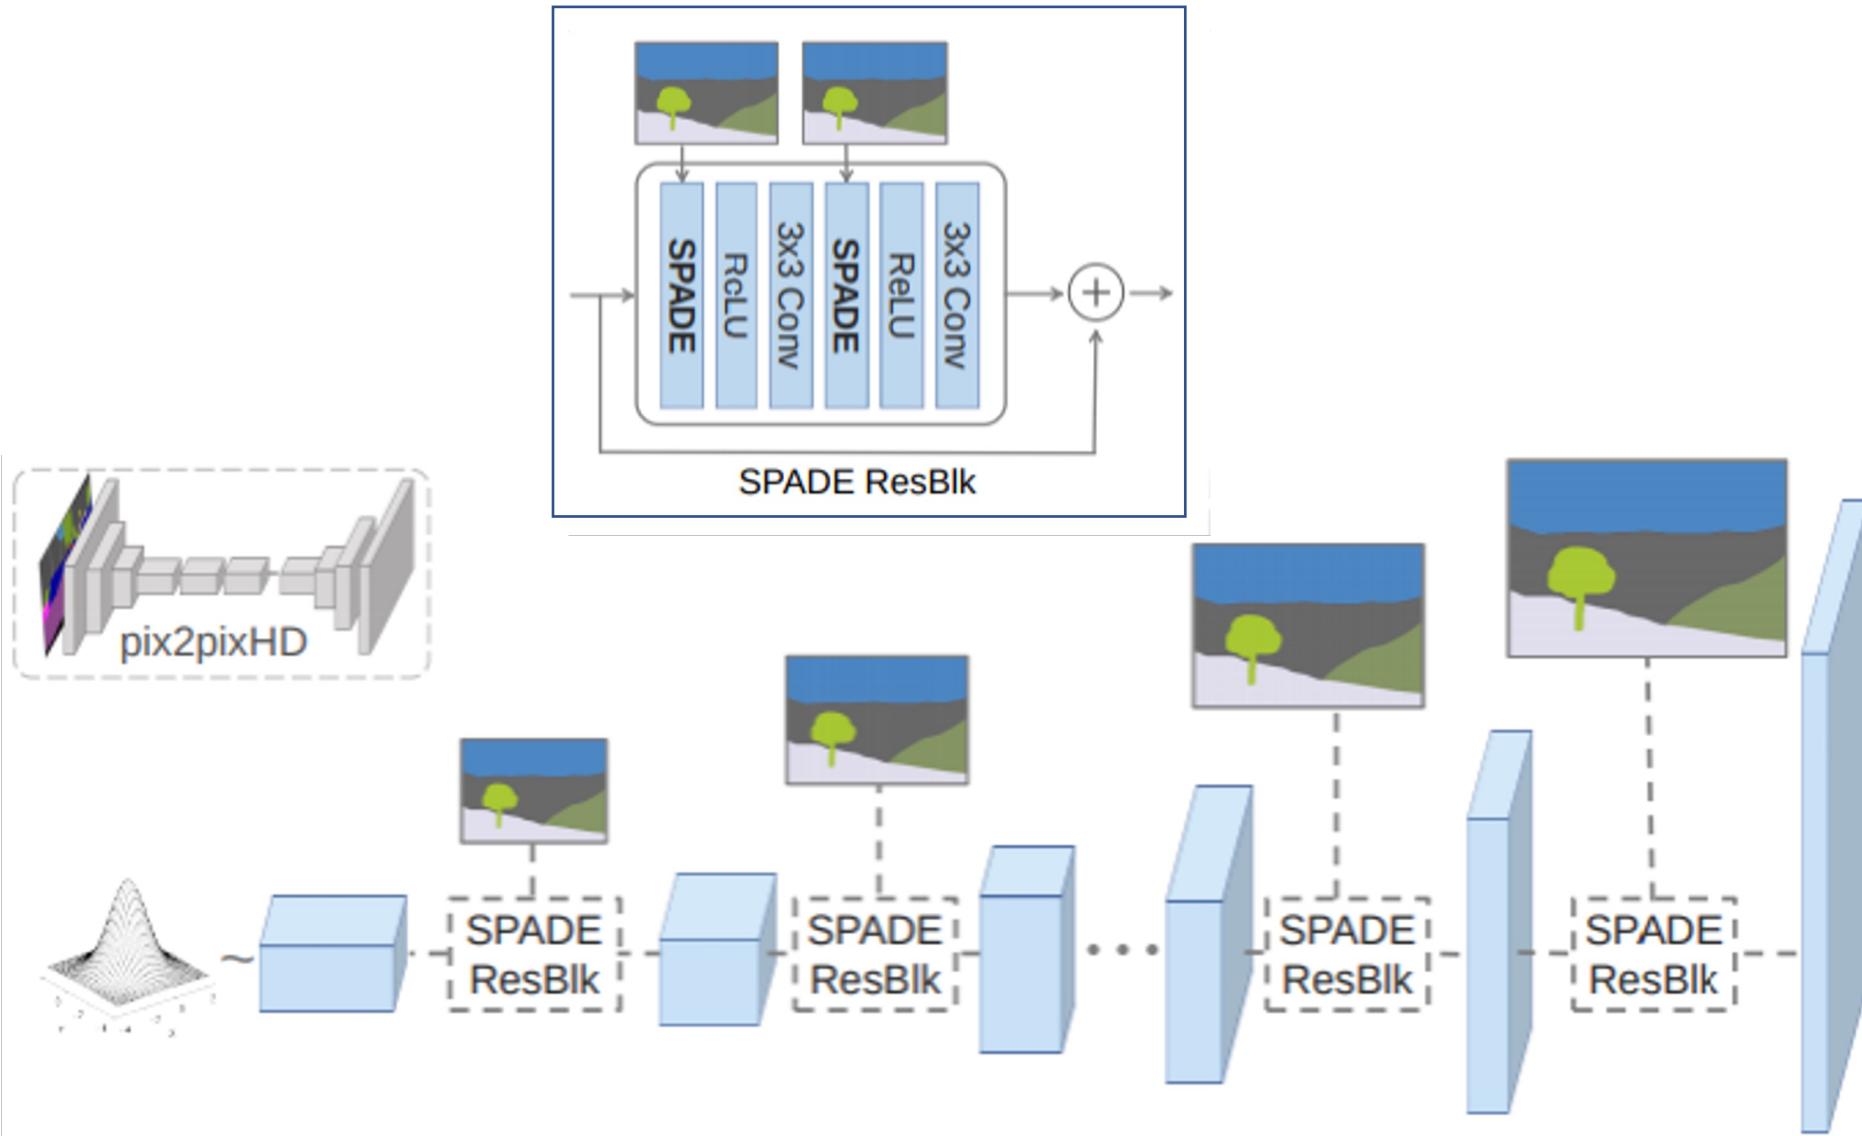


# SPADE Generator

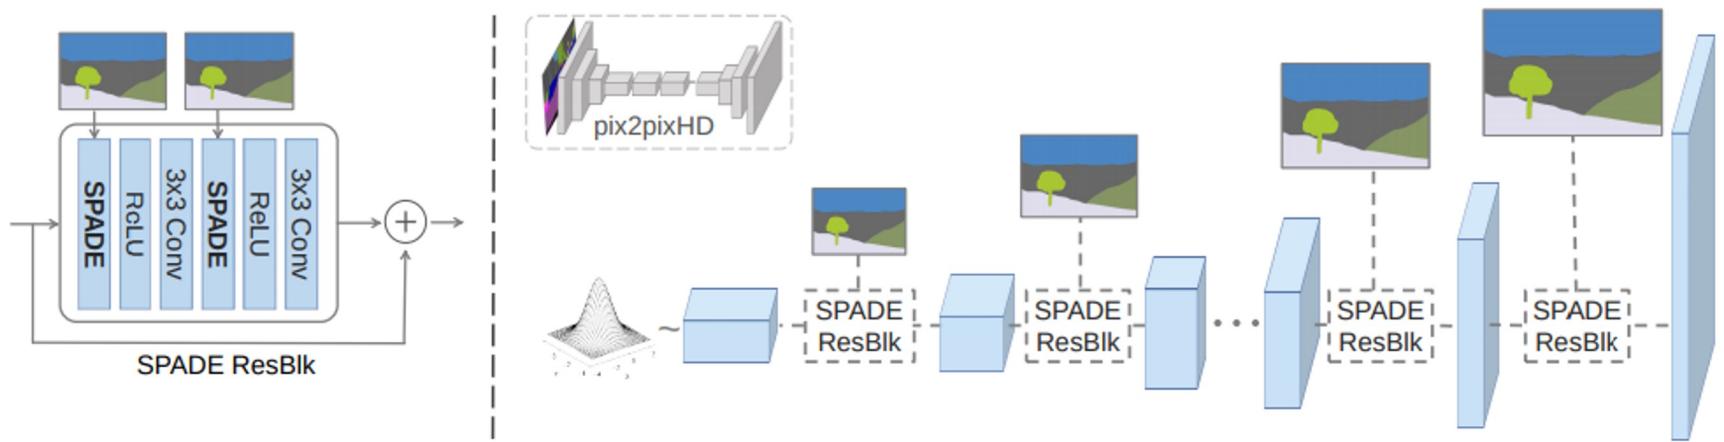


Better preserve semantic information  
against common normalization layers

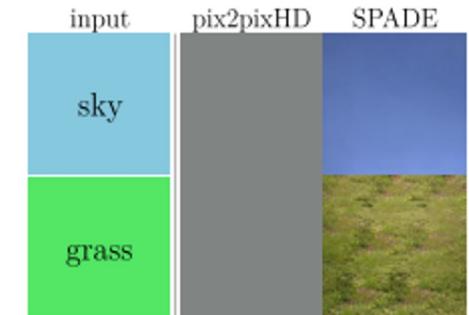




# SPADE results

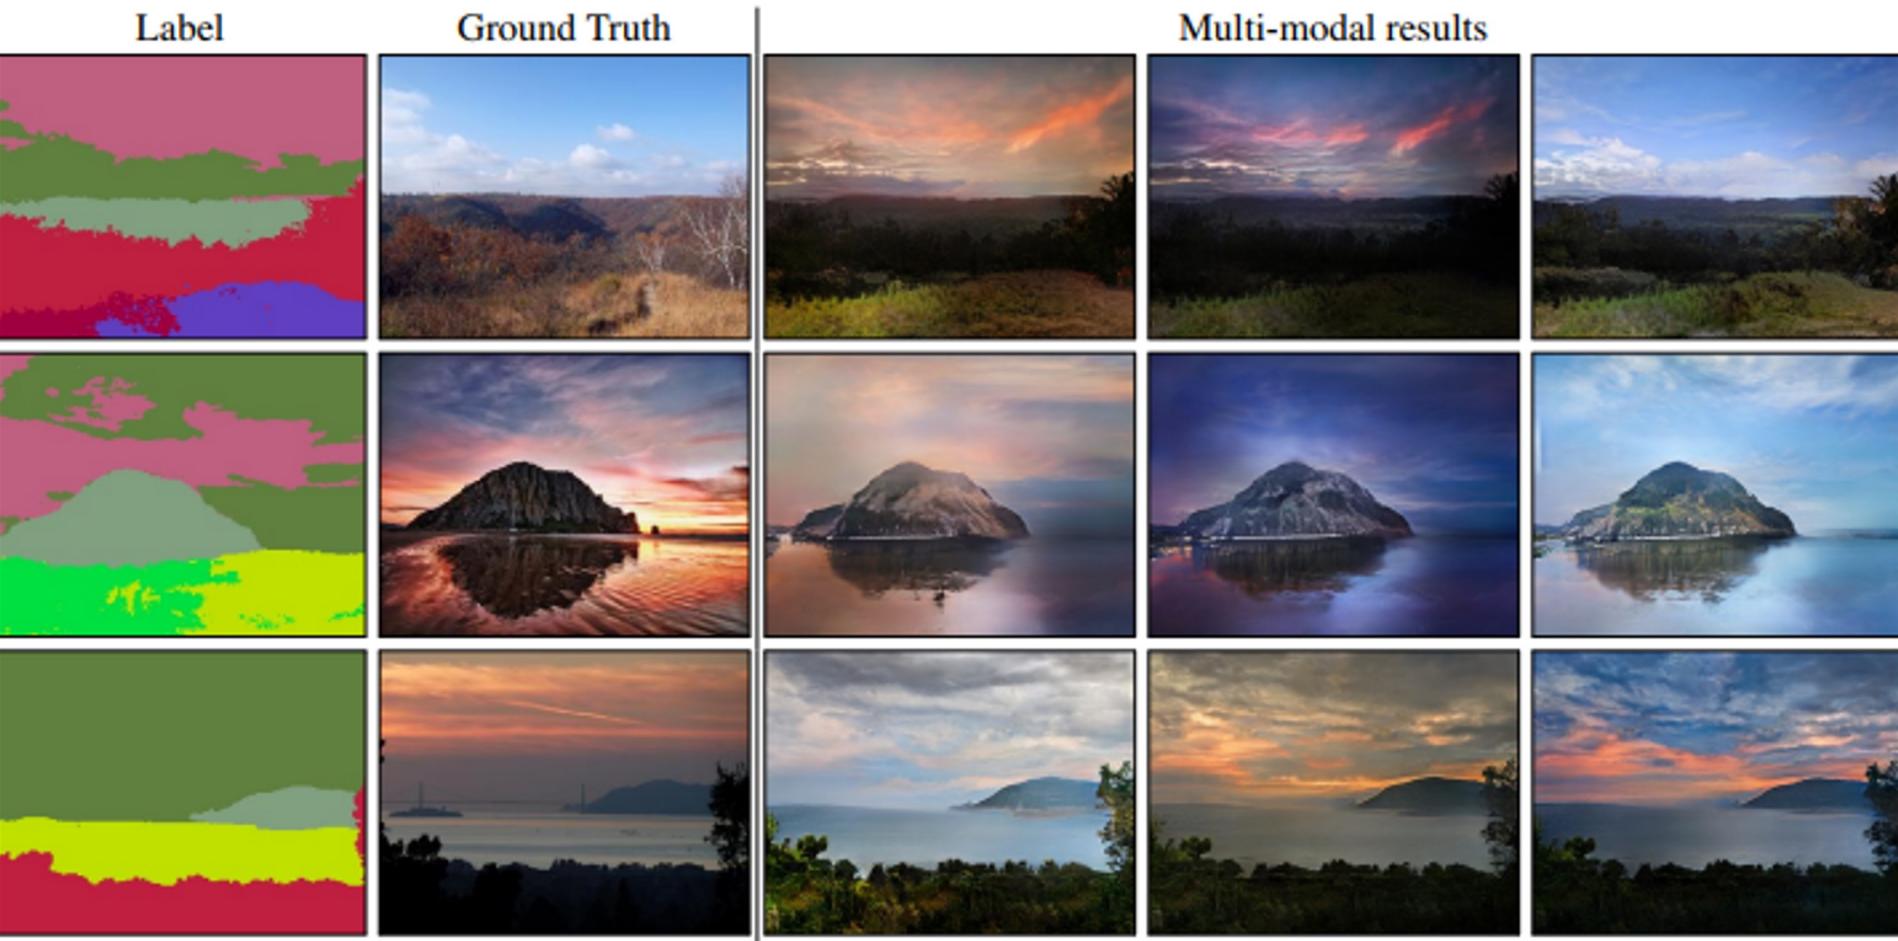

# SPADE with real image:

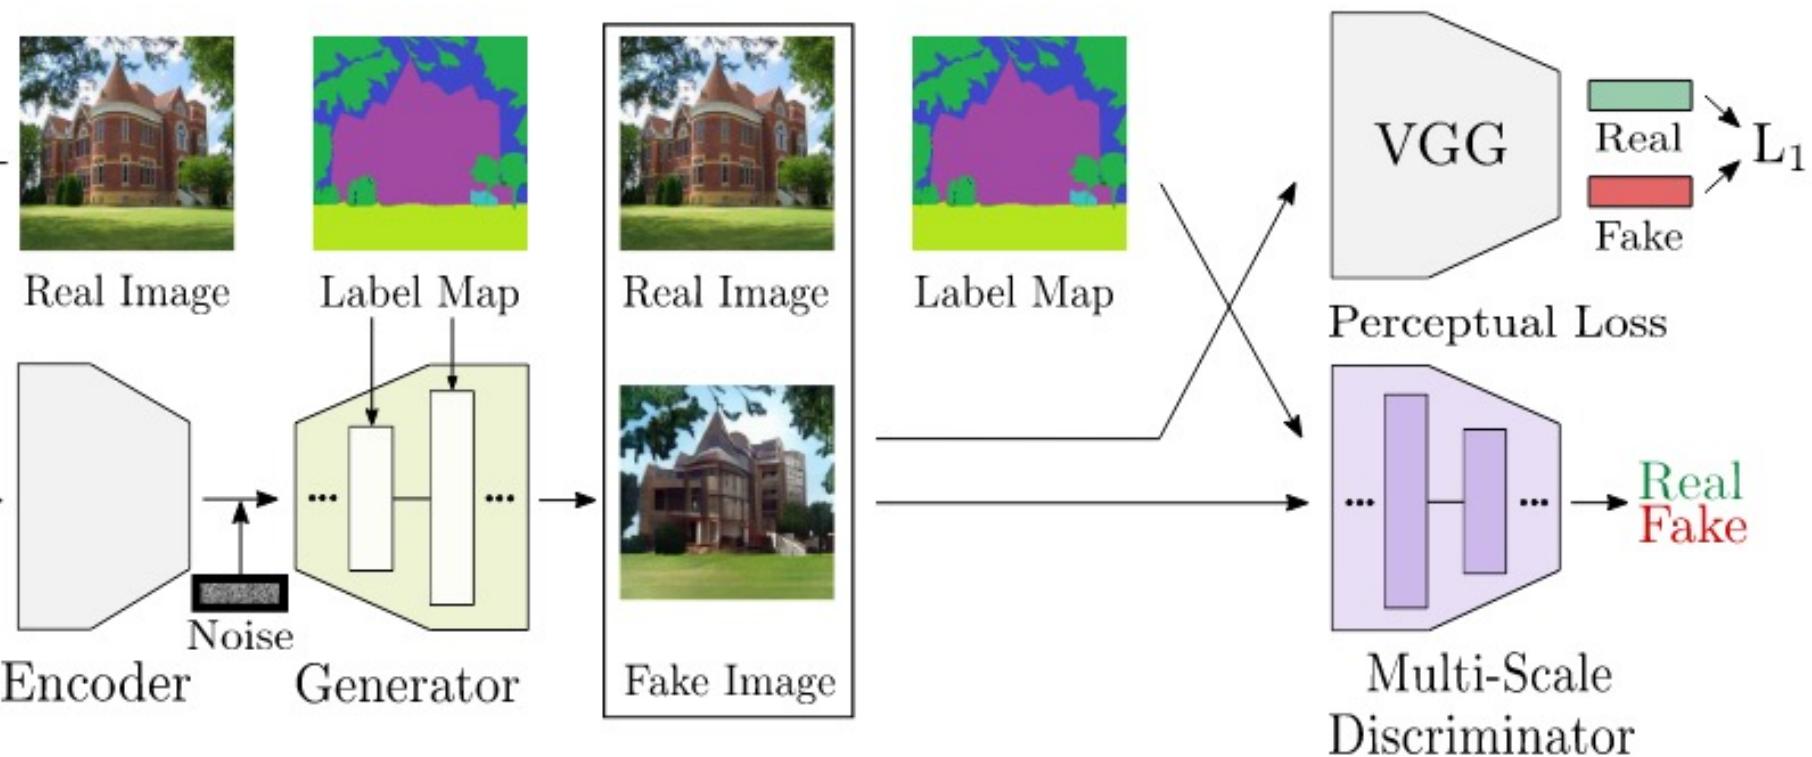

# [OASIS iclr 2021] (follow-up paper of SPADE) with real image:

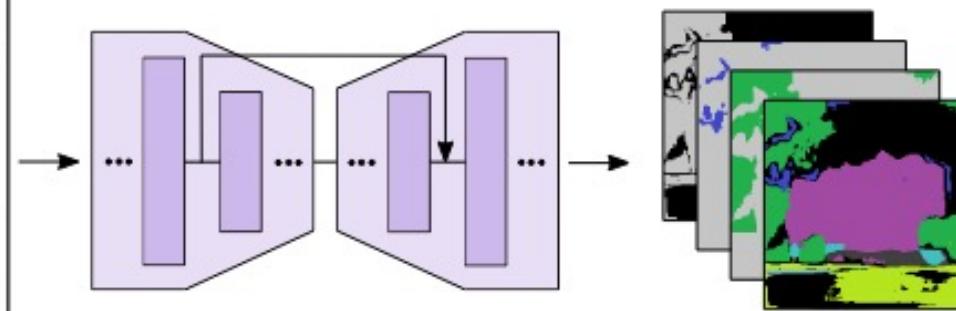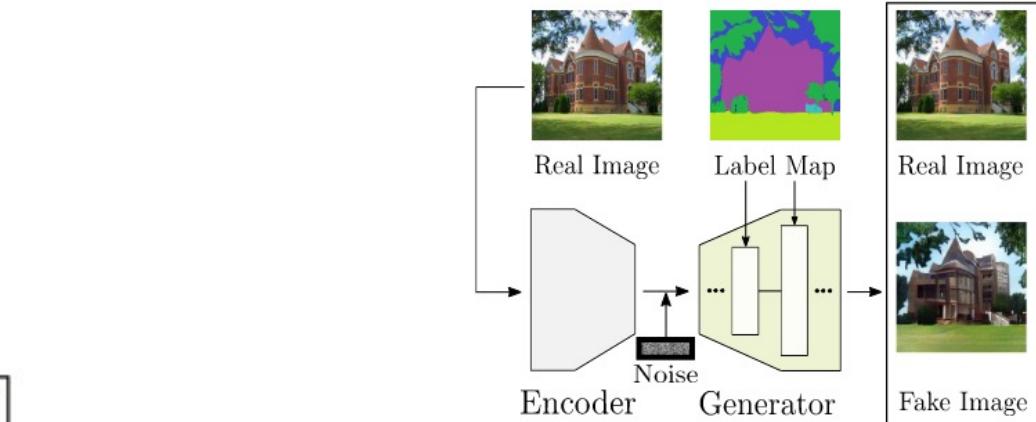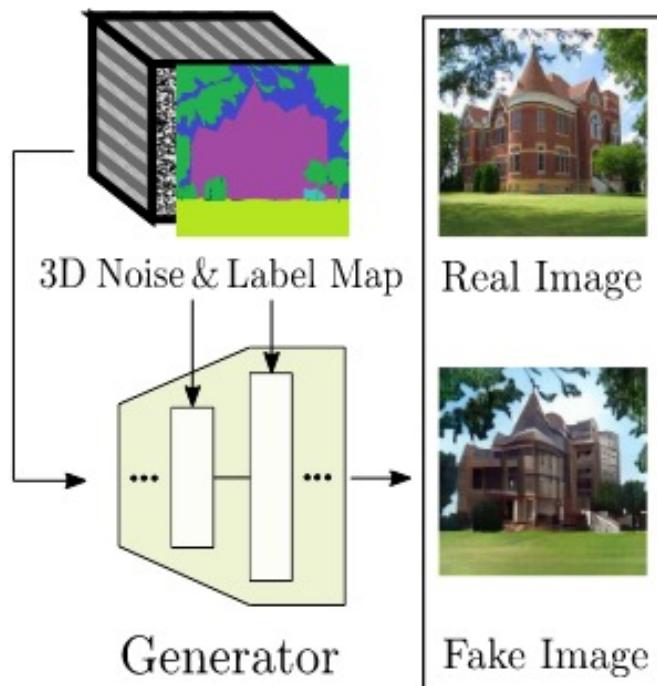


Segmentation-Based  
Discriminator

N **Real** /  
1 **Fake** Class

# [OASIS iclr 2021] (follow-up paper of SPADE) with real image:

Label map

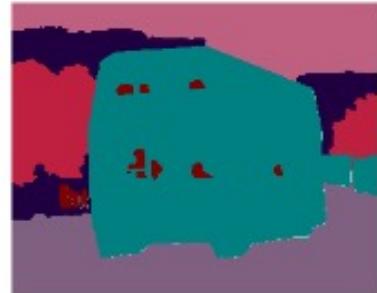

Ground truth



SPADE



CC-FPSE




OASIS



Label map



Label map

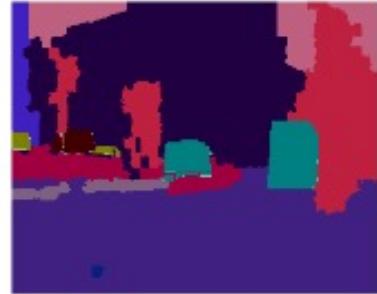



# Generative models

## Outline


1. Preview: Auto-Encoders, VAE
2. Generative models with GAN
3. GAN architectures
4. Editing
5. Conditional GANs
  1. Principle
  2. Text2Image
  3. Image2Image
  4. **Inpainting and general missing data encoder**

# Inpainting task

- Complete the missing part

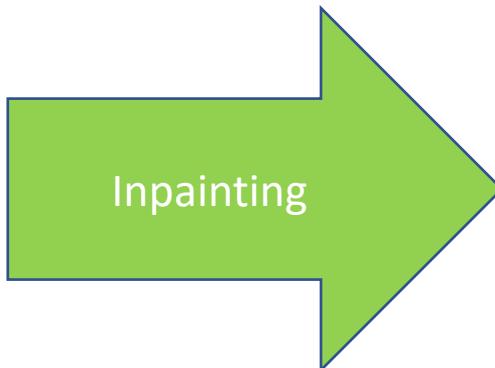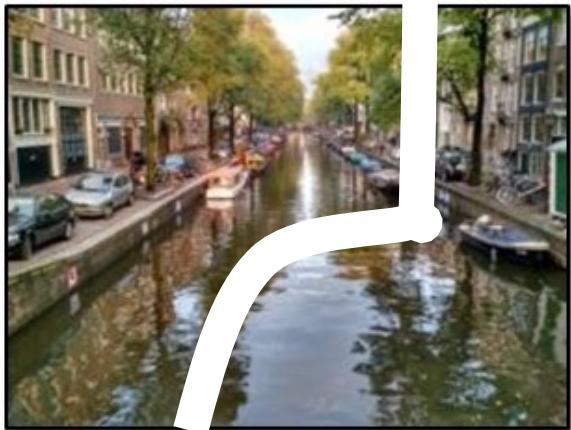

# Inpainting as unsupervised learning with GAN loss

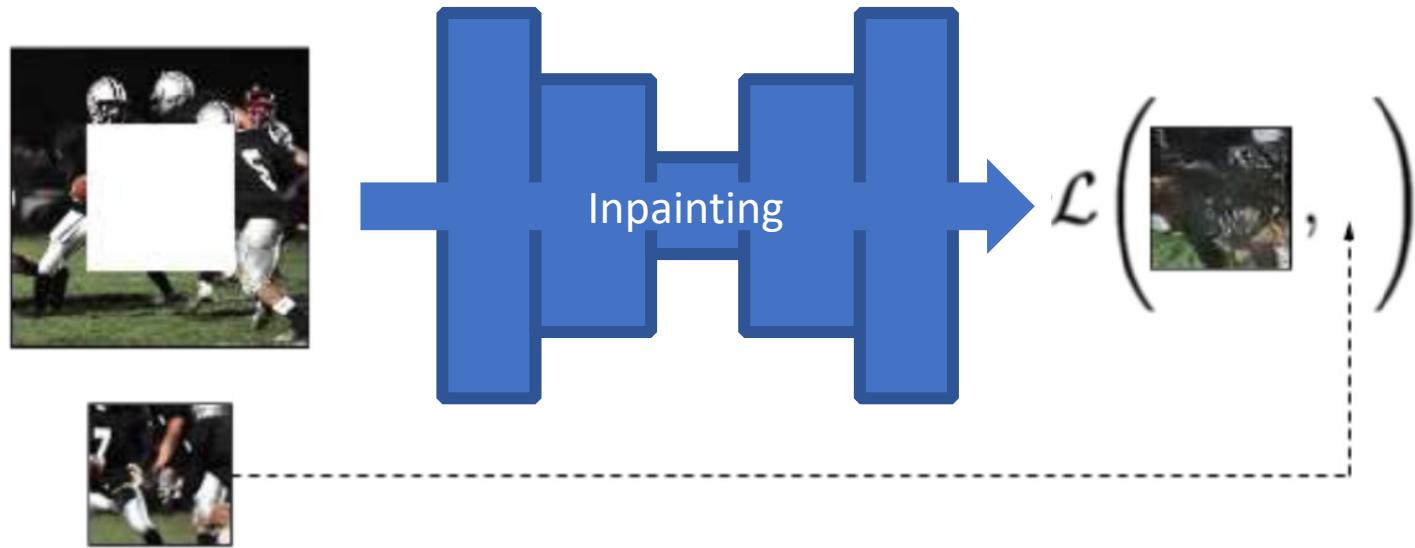


Reconstruct missing pixels by decoding using context

Loss defined on the predicted patch and the real one (known at training time)

# First proposition -- Architecture


- Architecture: Encoder/Fully connected/Decoder

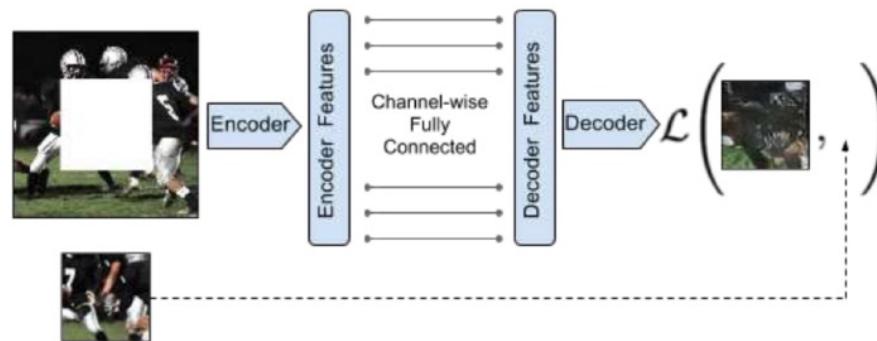

- DC-GAN for inpainting task
- **Input:**  $227 \times 227 \times 3$  image
- **Output:** encoder context features ( $6 \times 6 \times 256$ )

## Channel-wise fully-connected layer

- **Input / output:**  $6 \times 6 \times 256$  channels
- **First layer:** Channel-wise fully-connected  
(each  $6 \times 6$  input connected to the corresponding  $6 \times 6$  output)
- **Second layer:** Stride 1 convolution to mix channels

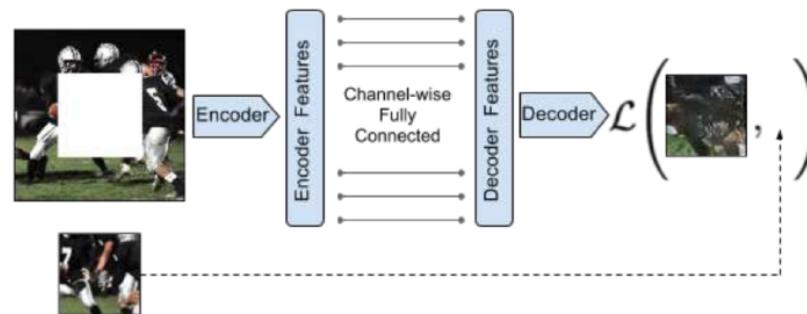


## Decoder

- **Architecture:** Same as DC-GAN: 5 up-convolutional layers (“deconv” + ReLU)
- **Input:** decoder context features  $6 \times 6 \times 256$
- **Output:**  $227 \times 227 \times 3$  image

# Training: Masking the images

- **How to define the mask ?**
  - ▶ Center region of the image
  - ▶ Random regions (chosen solution)
  - ▶ Random segmentation mask from VOC (said to be equivalent to random regions)
- **Formal definition:** Defined by a mask  $\hat{M} \in \{0, 1\}^{227 \times 227}$  with 1 if the pixel should be masked



# Training: Loss - Overview

- Trained completely from scratch to fill-up the masked areas
- **Problem:** multiple plausible solutions
- **Solution:** combining 2 losses:
  - ▶  $\mathcal{L}_{rec}$  **L2 reconstruction loss:** learn the structure of the missing region (average multiple modes in prediction)
  - ▶  $\mathcal{L}_{adv}$  **Adversarial loss:** make it look real (pick a mode from the distribution)

$$\min_F \mathcal{L} = \lambda_{rec} \mathcal{L}_{rec} + \lambda_{adv} \mathcal{L}_{adv}$$


$$\mathcal{L}_{rec}(x) = \left\| \hat{M} \odot \left( x - F((1 - \hat{M}) \odot x) \right) \right\|_2$$

$$\mathcal{L}_{adv} = \max_D \mathbb{E}_{x \in \mathcal{X}} \left[ \log(D(x)) + \log \left( 1 - D(F((1 - \hat{M}) \odot x)) \right) \right]$$

- Rq: The encoder-decoder is the generator, D is a CNN

# Results



## Dataset: StreetView Paris and ImageNet

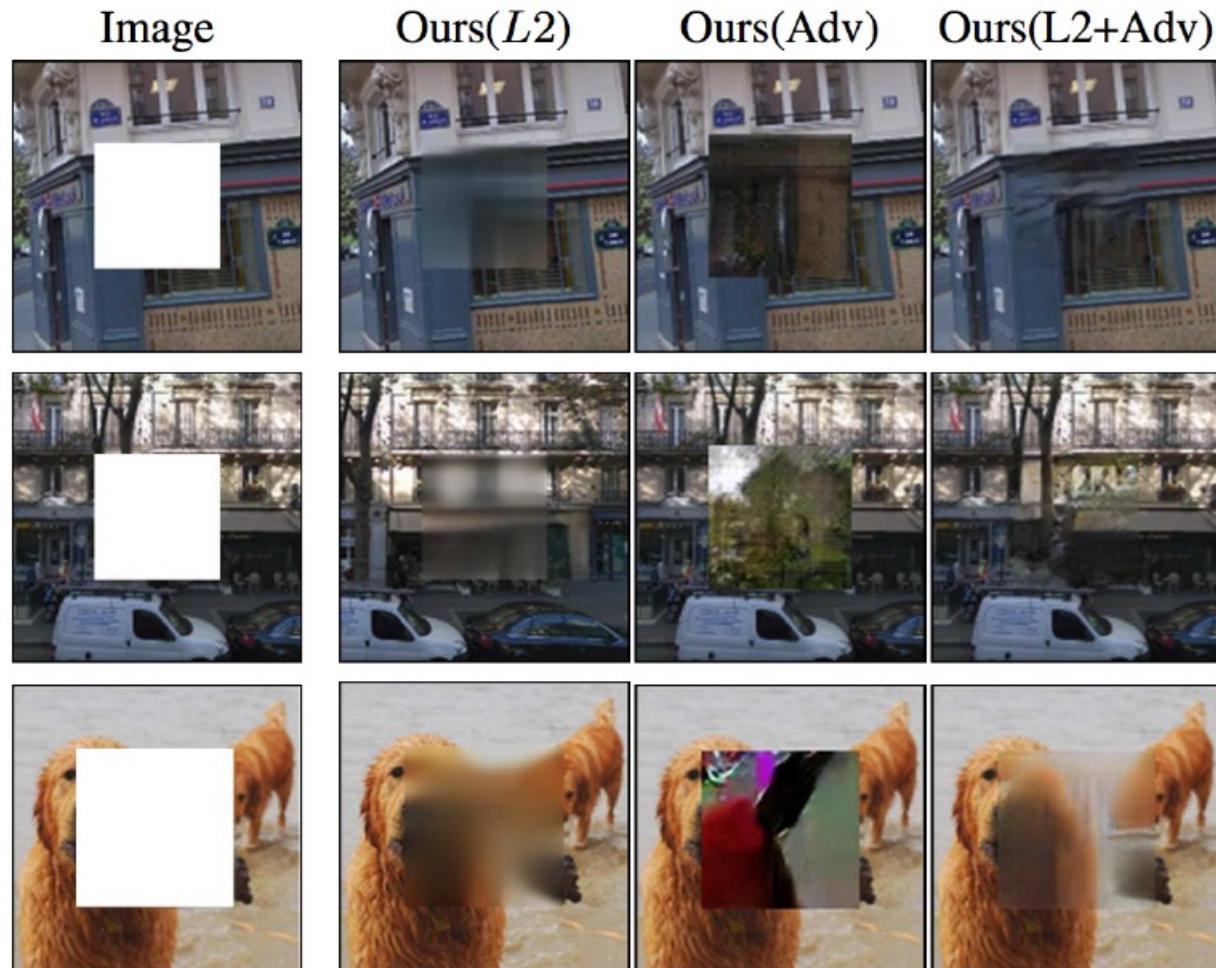


# Semantic inpainting - Qualitative results



# Generalizing inpainting: missing data encoder

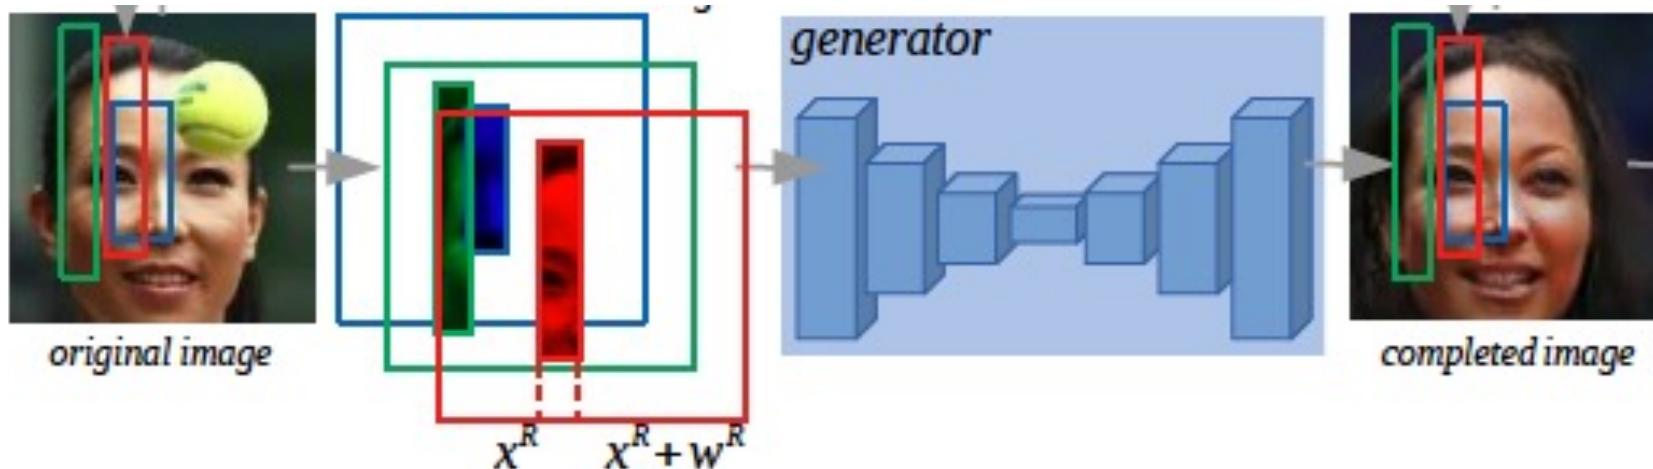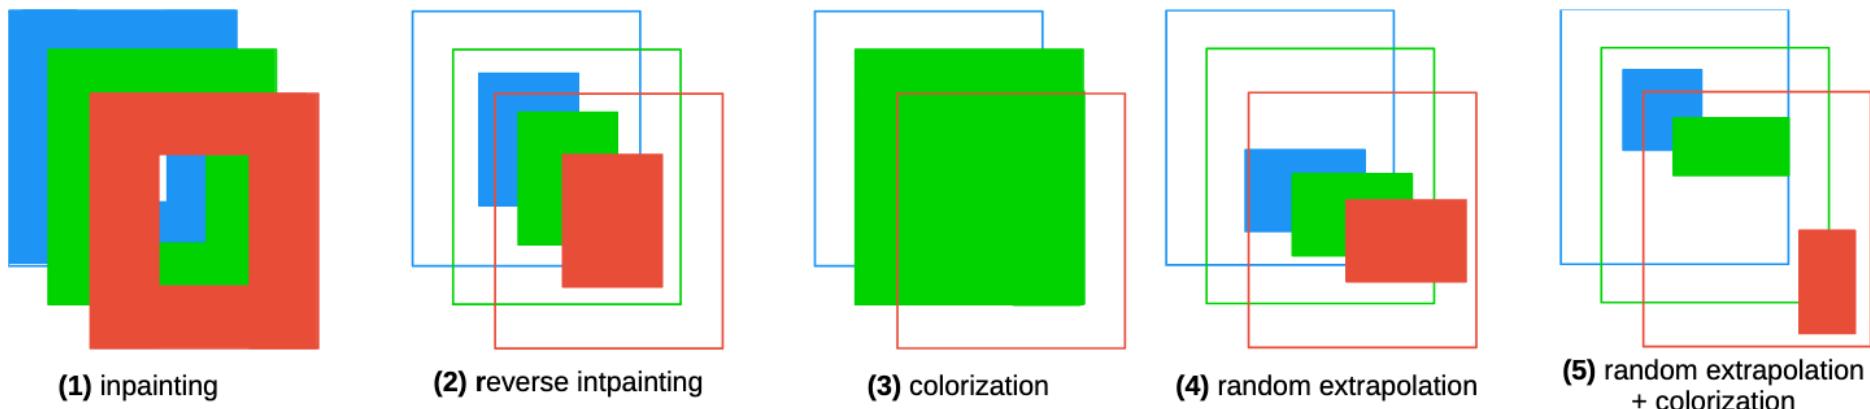

# Adding perceptual loss, BB regression loss

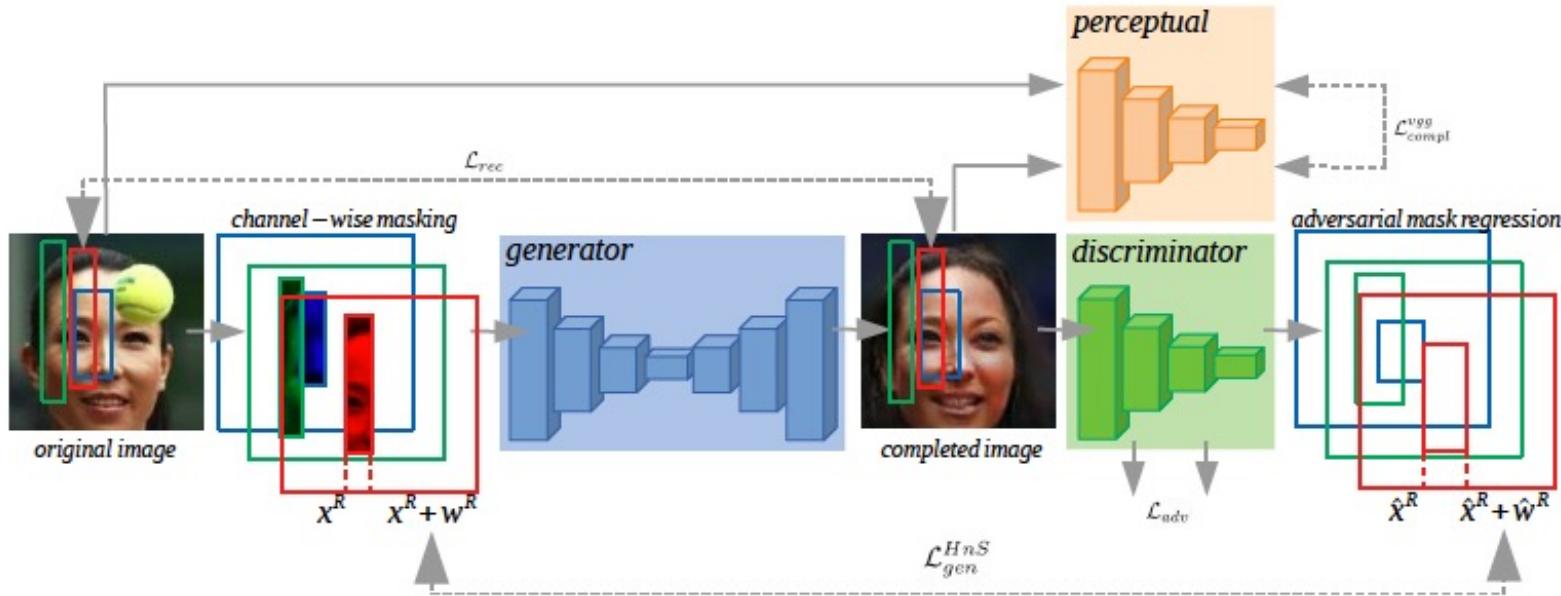




$$r^c = (x^c/W, y^c/H, (x^c + w^c)/W, (y^c + h^c)/H)$$

$$\mathcal{L}_{disc}^{HnS}(\theta_d) = \frac{1}{N} \sum_{i=1}^N \sum_{c=1}^C \| r_i^c - \hat{r}_i^c(\theta_g, \theta_d) \|$$


$$\mathcal{L}_{gen}^{HnS}(\theta_g) = \frac{1}{N} \sum_{i=1}^N \sum_{c=1}^C \| q_i^c - \hat{r}_i^c(\theta_g, \theta_d) \|$$

$$\mathcal{L}_{tot}(\theta_g, \theta_d) = \mathcal{L}_{rec}(\theta_g) + \lambda_{compl} \mathcal{L}_{compl}^{vgg}(\theta_g) + \lambda_{adv} \mathcal{L}_{adv}(\theta_g, \theta_d) + \lambda_{HnS} \mathcal{L}_{coord}^{HnS}(\theta_g, \theta_d)$$

# Results

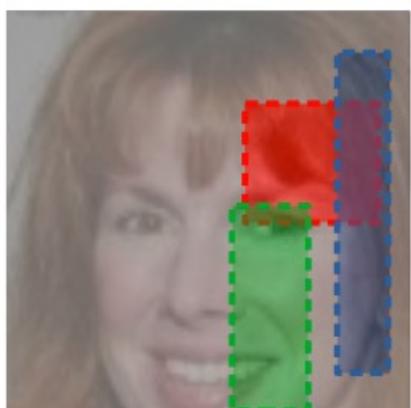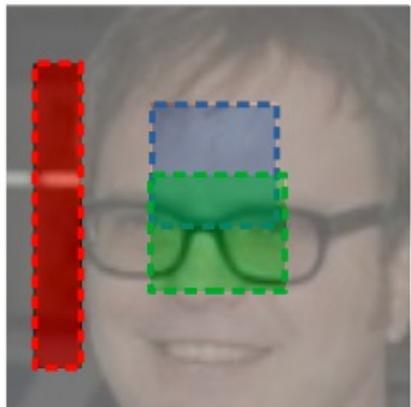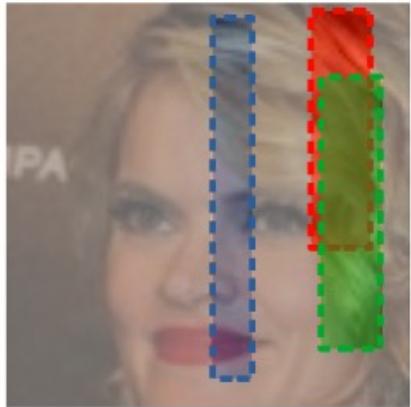

# Results

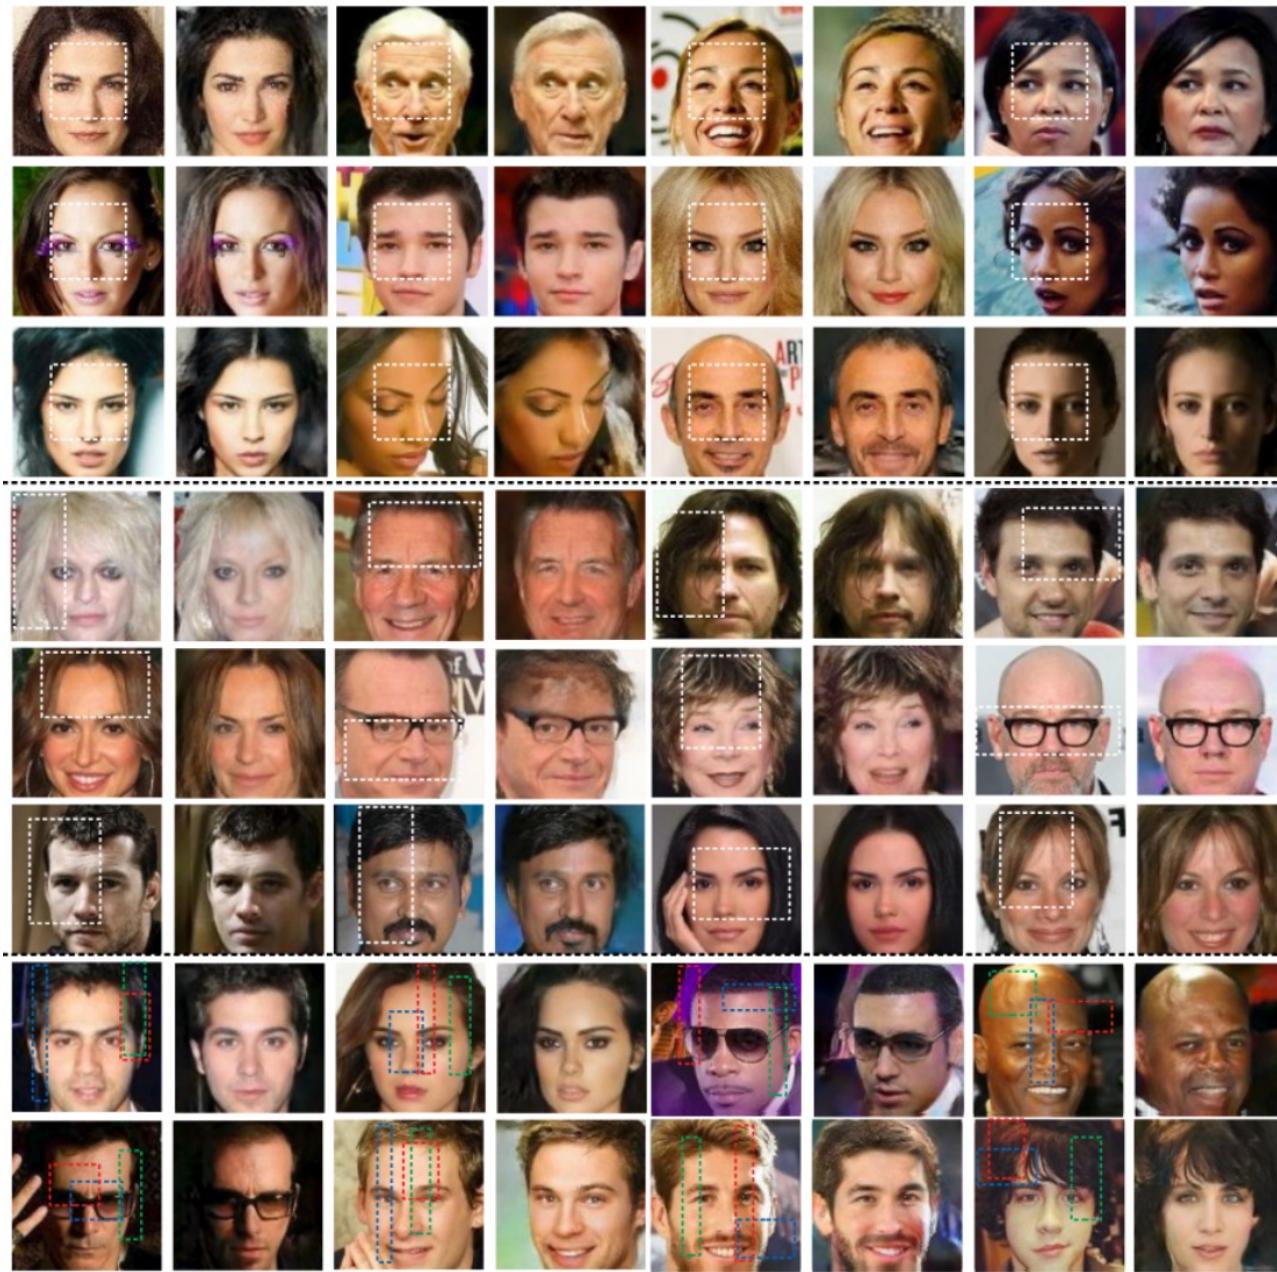


# Generative models

## Outline

1. Preview: Auto-Encoders, VAE
2. Generative models with GAN
3. GAN architectures
4. Editing
5. Conditional GANs
  1. Principle
  2. Text2Image
  3. Image2Image
  4. Inpainting and general missing data encoder
  5. **Learning unpaired Transformation**

# Unpaired Transformation

- Cycle GAN, Disco GAN

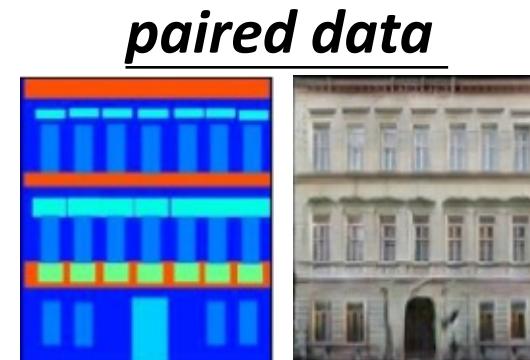

Transform an object from one domain to another ***without paired data***



photo



van Gogh



Domain X



Domain Y




# Cycle GAN

<https://arxiv.org/abs/1703.10593>

<https://junyanz.github.io/CycleGAN/>




Domain X

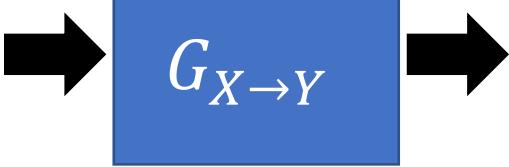


ignore input

Become similar  
to domain Y




Not what we want

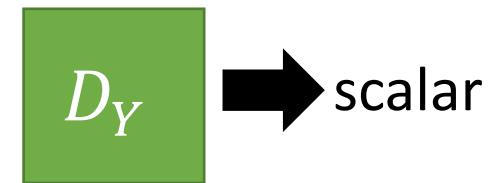

scalar

Input image  
belongs to  
domain Y or not



Domain Y

# Cycle GAN



Domain X



Domain Y



as close as possible



Lack of information  
for reconstruction



$G_{Y \rightarrow X}$

$D_Y$

scalar



Input image  
belongs to  
domain Y or not

Domain Y

# Cycle GAN

Domain X



Domain Y







as close as possible



scalar: belongs to domain X or not





scalar: belongs to domain Y or not



as close as possible



# Results -- Cycle GAN

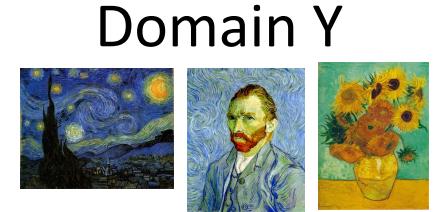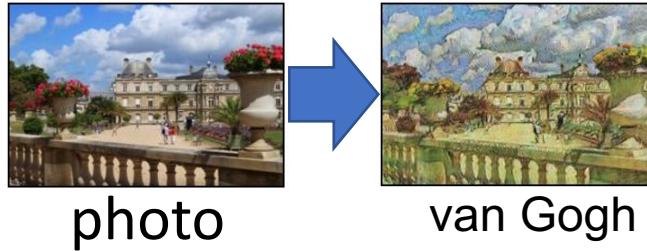

Monet ↪ Photos




Zebras ↪ Horses



Summer ↪ Winter



Monet → photo

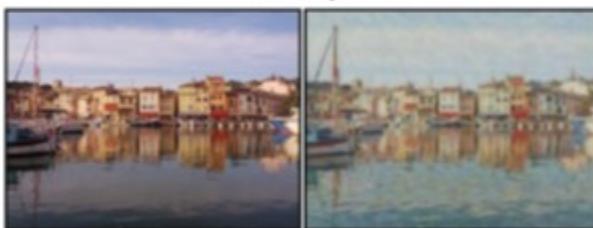


horse → zebra

winter → summer

# GANs: works in progress


A lot of things to better understand, to use, adapt, ...

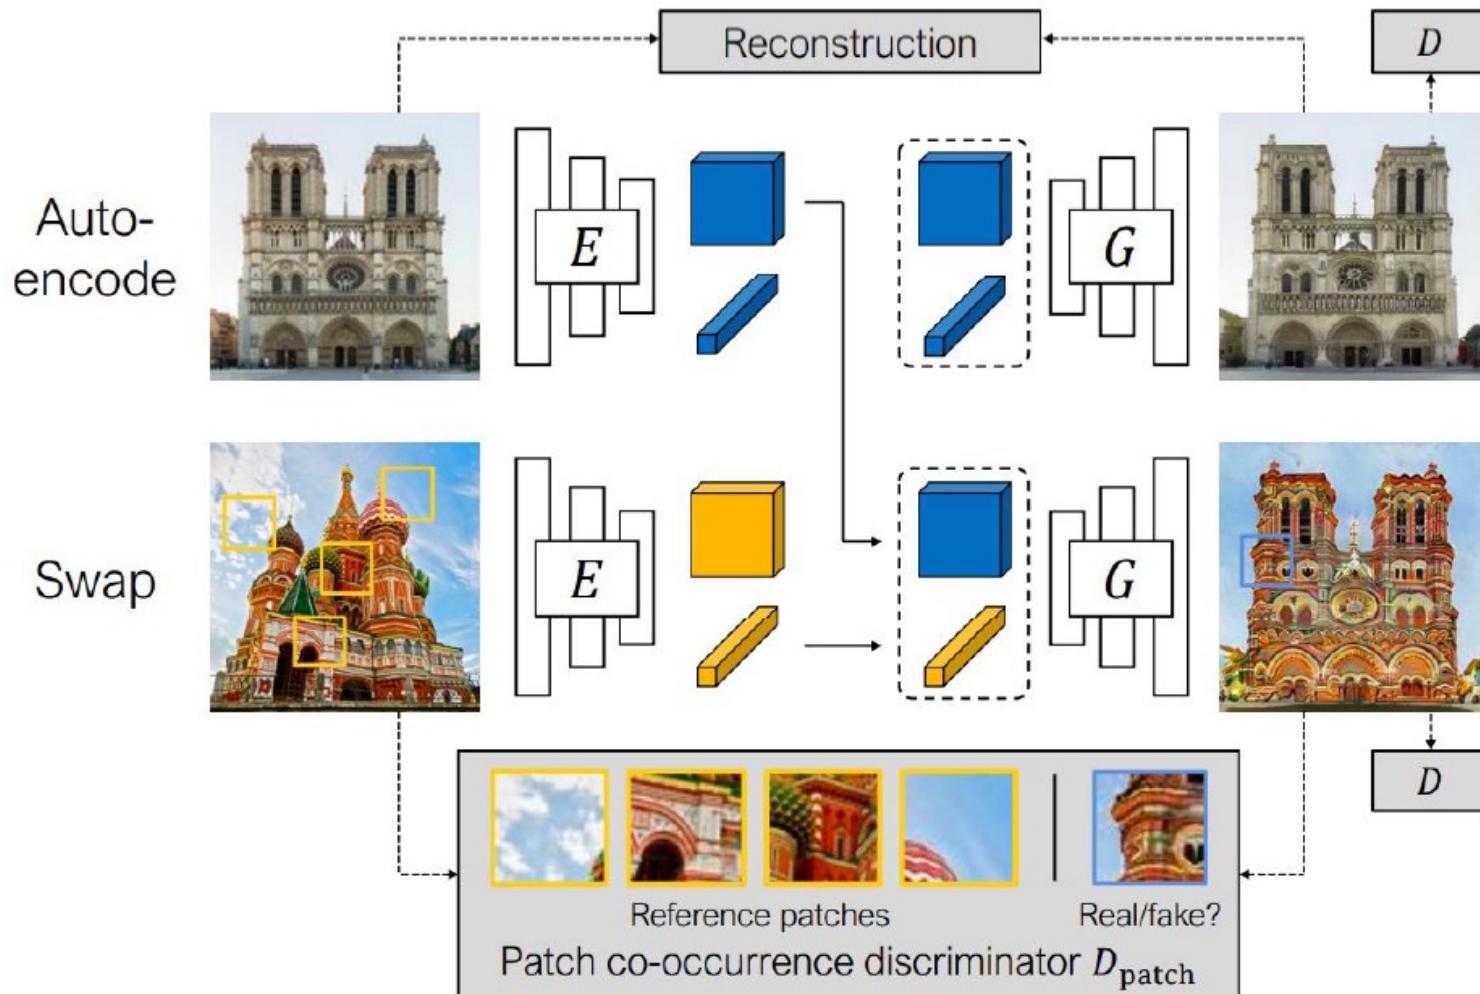

# Appendix

## GANs for Video, 3D, etc.

# Video GAN

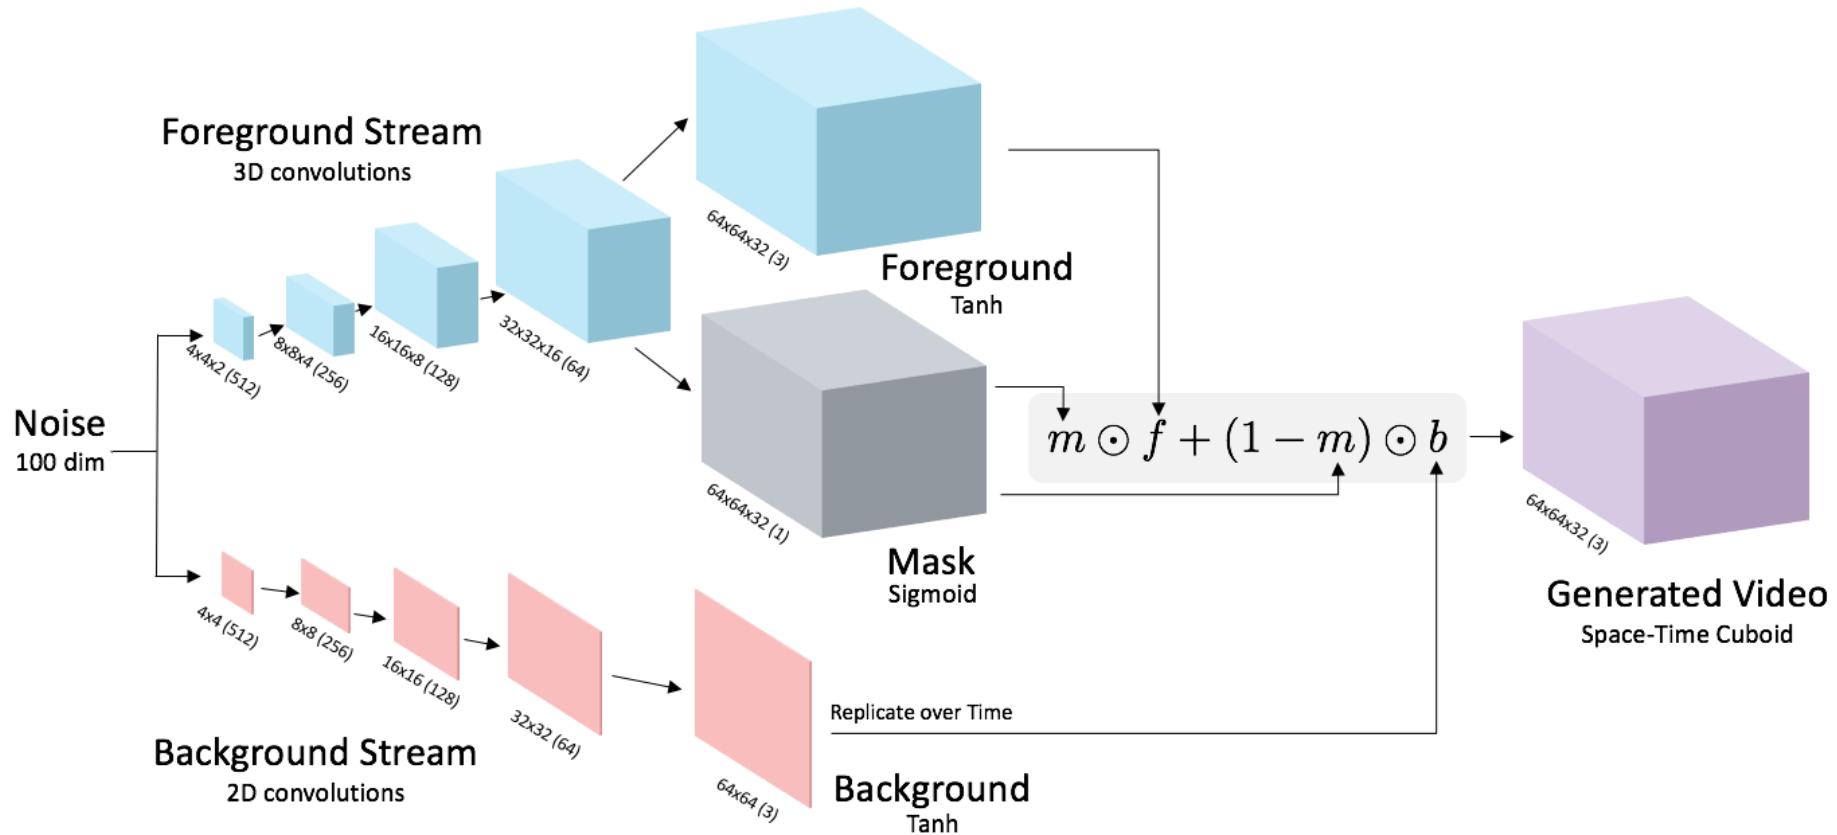

- Videos <http://web.mit.edu/vondrick/tinyvideo/>

# Shape modeling using 3D Generative Adversarial Network

