


ACME Runtime Topology

HTTP request path



Runtime dependencies

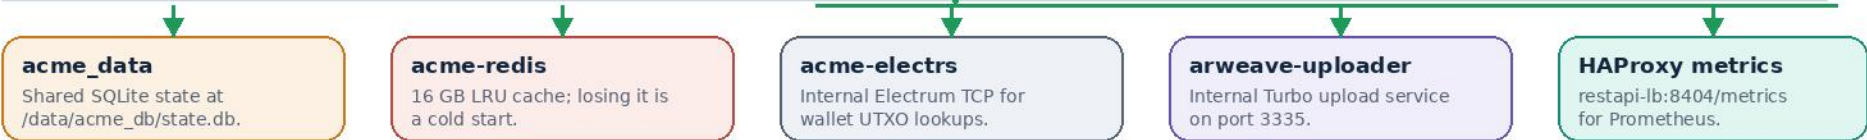

State writer and chain services



Default ACME chain: testnet4. REST and indexer point at testnet4-node; mainnet services are managed sidecars.

Only host loopback ports and Bitcoin P2P ports are published directly by compose; public HTTP goes through host nginx.

Published Ports

REST API	localhost:3333 -> HAProxy
HAProxy	localhost:8404 /metrics
Bitcoin RPC	127.0.0.1:48332 and 127.0.0.1:8332
Bitcoin P2P	0.0.0.0:48333 and 0.0.0.0:8333

Persistent Storage

acme_data	SQLite state under /data/acme_db.
bitcoin_data	Testnet4 chain data for ACME.
mainnet_data	Mainnet sidecar chain data.
electrs_*	Electrs index data for testnet4 and mainnet.

Operating Notes

Scale	REST replicas default to 3.
Singletons	Keep indexer and anchor single-instance.
SQLite	Shared writes serialize through one DB file.
Health	REST/LB health probes call /api/blocks/last.

ACME Monitoring and Alerting

Page 2 - Prometheus, Grafana, Alertmanager and exporter stack

Grafana

Prometheus

Alertmanager

Portainer

Monitoring Data Flow

Metrics and probes

Scrape sources

blackbox probes, docker-health-exporter, cAdvisor, node-exporter, redis-exporter, HAProxy metrics and service self-metrics.

Access surface

Loopback UIs are exposed through host nginx HTTPS hostnames for operators.

Loopback ports

9000/9443, 3000, 9090, 9093 and HAProxy 8404.

Prometheus

acme-prometheus

Scrapes the ACME stack and stores metrics with 30 day default retention.

alerts.yml

Rules for services, endpoints, containers, host pressure and Redis.

prometheus_data

Persistent time-series storage.

Dashboards

acme-grafana

Provisioned Prometheus datasource and ACME overview dashboard.

acme-overview.json

Panels for service health, alerts, HAProxy and resources.

acme-portainer

Docker administration UI with socket mount.

Alert routing

acme-alertmanager

Groups, deduplicates, silences and routes firing alerts.

Telegram optional

Enabled by token and chat id environment values.

No-op fallback

Alerts stay visible in the UI when Telegram is unset.

Prometheus also scrapes restapi-lb:8404/metrics for HAProxy response/backend health metrics.

All monitoring UIs bind to host loopback by default; nginx exposes selected HTTPS hostnames.

Alert Coverage

Services

REST, HAProxy, indexer, anchor, uploader, Electrs, Bitcoin, Redis.

Endpoints

REST HTTP, uploader, RPC/TCP, Redis and UIs.

Containers

Down, unhealthy, restarting and OOM-killed.

Host/Redis

Disk, memory, CPU and Redis pressure.

Bound Ports

Portainer

localhost:9000 and :9443.

Grafana

localhost:3000.

Prometheus

localhost:9090.

Alerts

localhost:9093.

Persistent Data

prometheus

Time-series data, default 30d retention.

alertmanager

Silences and notification state.

grafana

Grafana database and plugins.

portainer

Portainer configuration and state.