

TM Forum Specification

Stock Management User Guide

TMF687

Maturity Level: General Availability (GA)	Team Approved Date: 15-Sep-2026
Release Status: Preview	Approval status: Team Approved
Version: 5.0.0	IPR Mode: RAND

Notice

Copyright © TM Forum 2026. All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to TM FORUM, except as needed for the purpose of developing any document or deliverable produced by a TM FORUM Collaboration Project Team (in which case the rules applicable to copyrights, as set forth in the [TM FORUM IPR Policy](#), must be followed) or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by TM FORUM or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and TM FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Direct inquiries to the TM Forum office:

100 Enterprise Drive
Suite 301 #1649
Rockaway, NJ 070866, USA
Tel No. +1 862 227 1648
TM Forum Web Page: www.tmforum.org

Table of Contents

Notice	i
Introduction	1
Batch notification	2
CancelReserveStockLevel cancellation reason	2
StockLevel status and usage type	2
Status values	2
Typical status lifecycle	3
usageType values (typical)	4
Link between status and usageType	4
QueryStockLevel and searchCriteria	5
How searchCriteria works	5
Attributes commonly used as filters	6
Date fields on the Query task	6
Worked examples	6
Task resource item state aggregation	8
Task resource lifecycle	8
Major changes from v4 to v5	9
SAMPLE USE CASES	11
Product catalog view for the customer on a given configuration	11
StockLevel for web channel	12
StockLevel in a shop	14
Inventory view for the customer	14
Support of polymorphism and extension	16
RESOURCE MODEL	17
Managed Entity and Task Resource Models	17
StockLevel resource	17
AdjustStockLevel resource	26
CheckStockLevel resource	30
QueryStockLevel resource	39
ReserveStockLevel resource	45
CancelReserveStockLevel resource	52
Notification Resource Models	55
StockLevel	57

AdjustStockLevel	64
CheckStockLevel	66
QueryStockLevel.....	68
ReserveStockLevel.....	71
CancelReserveStockLevel	74
API OPERATIONS	77
Operations on StockLevel.....	77
Retrieves a stockLevel by ID	77
List or find stockLevel objects	79
Creates a stockLevel	81
Updates partially a stockLevel.....	82
Deletes a stockLevel	89
Operations on AdjustStockLevel.....	90
Retrieves a adjustStockLevel by ID	90
List or find adjustStockLevel objects	91
Creates a adjustStockLevel	92
Operations on CheckStockLevel	94
Retrieves a checkStockLevel by ID	94
List or find checkStockLevel objects	96
Creates a checkStockLevel.....	98
Operations on QueryStockLevel	100
Retrieves a queryStockLevel by ID.....	100
List or find queryStockLevel objects	102
Creates a queryStockLevel	104
Operations on ReserveStockLevel.....	106
Retrieves a reserveStockLevel by ID	106
List or find reserveStockLevel objects	108
Creates a reserveStockLevel	110
Operations on CancelReserveStockLevel	114
Retrieves a cancelReserveStockLevel by ID	114
List or find cancelReserveStockLevel objects	115
Creates a cancelReserveStockLevel	116
API NOTIFICATIONS	118
Register listener	118
Unregister listener	119



Publish Event to listener 119

Acknowledgements 121

Version History 121

Contributors to Document 122

Introduction

The following document is the specification of the REST API TMF687 for Stock Management. It includes the model definition as well as all available operations.

This API features several resources:

- **StockLevel** describes a stock of a StockItem. It includes quantity information (in stock, min, max, reorder) as well as place and related party references. This replaces the v4 ProductStock resource.
- **AdjustStockLevel** is a **task resource** used to request a stock level quantity adjustment. A reason for adjustment may be provided (for example, insufficient inventory).
- **CheckStockLevel** is a **task resource** used to check StockItem availability at a place and date. The server may provide alternate options when the requested item is not available.
- **QueryStockLevel** is a **task resource** used to retrieve a list of stock levels matching complex search criteria (for example, stock levels in a given state, at a place, and available for a channel).
- **ReserveStockLevel** is a **task resource** used to perform a reservation for a StockItem. The requester may specify a stock level to use. A related entity may link the reservation to another entity (such as a product order or quote).
- **CancelReserveStockLevel** is a **task resource** used to trigger cancellation of a reserve stock level task and to provide cancellation information (timestamp and reason).

Stock Management API performs the following operations

...on StockLevel:

- Retrieval of a stock level or a collection of stock levels depending on filter criteria
- Partial update of a stock level (including updating rules)
- Creation of a stock level
- Deletion of stock level (for administration purposes)
- Notification of events on stock level
 - stock level creation
 - stock level deletion
 - stock level attribute value change

- stock level state change
- stock level batch (used when multiple stock level events are reported together in a single notification)

Batch notification

The **batch** notification (`StockLevelBatchEvent`) is not one of the four standard notification types. It is used when an implementation reports **multiple StockLevel events in a single message**, for example after bulk updates or asynchronous inventory reconciliation.

CancelReserveStockLevel cancellation reason

`cancellationReason` is **mandatory** on `CancelReserveStockLevel`. Callers must supply the reason when creating the cancel task; there is no separate `informationRequired` notification for this API.

...on `AdjustStockLevel`, `CheckStockLevel`, `QueryStockLevel`, `ReserveStockLevel` and `CancelReserveStockLevel`:

- Retrieval of a task resource depending on filter criteria – or by id
- Creation of a task resource
- Notification of events
 - for creation
 - for state change

StockLevel status and usage type

`StockLevel` is a managed entity. Its **status** attribute describes whether the quantity can be allocated. Its **usageType** attribute describes the operational inventory category (for example, stock in the shop versus stock in transit). Implementations must interpret both attributes together.


status is a closed enumeration (`StockLevelStatusType`). **usageType** is an extensible string (`StockLevelUsageType`): the values listed below are typical, and implementations may define additional values.

Status values

Status	When to use
available	The quantity can be allocated or sold (for example, sellable stock of Galaxy S22 Ultra ready in the Lyon shop).
reserved	The quantity is held for a specific purpose (for example, a product order or quote) and must not be reallocated to another requester until the reservation is completed or cancelled.
unavailable	The quantity cannot be allocated (for example, damaged handsets awaiting write-off, or stock under quarantine).
unknown	The inventory status has not yet been determined (for example, newly created StockLevel before the first stock count).

Typical status lifecycle

The following diagram shows typical transitions. Implementations may apply additional business rules (for example, direct transitions after inventory adjustments).

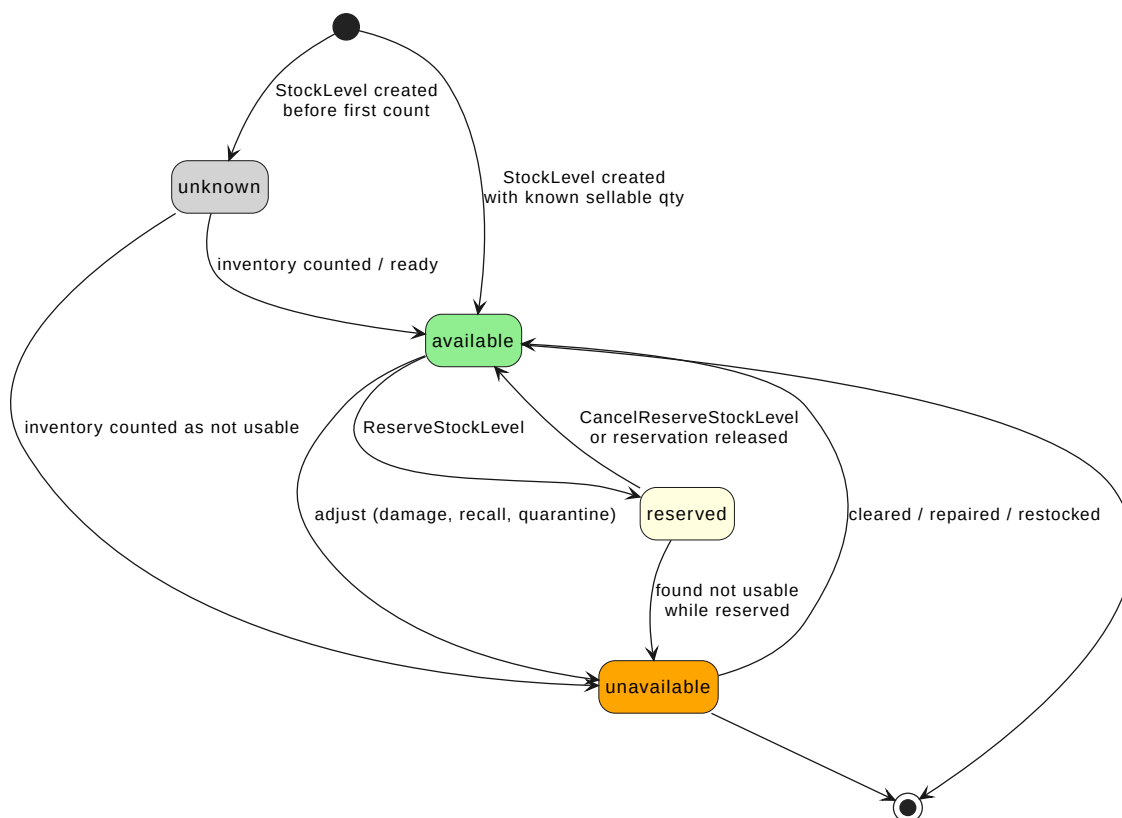

From	To	Typical trigger
unknown	available	First successful inventory count, or creation with known sellable quantity

From	To	Typical trigger
unknown	unavailable	First count finds the quantity not usable
available	reserved	Successful ReserveStockLevel task
reserved	available	Successful CancelReserveStockLevel , or reservation release after fulfilment
available	unavailable	AdjustStockLevel (or equivalent process) marking stock damaged, recalled, or quarantined
unavailable	available	Stock cleared for sale again (repair completed, quarantine lifted, returned items re-accepted)
reserved	unavailable	Reserved stock later found not usable (rare; usually handled by cancel then adjust)

usageType values (typical)

Value	Meaning (illustrative)
inShop	Quantity held in a retail shop (back store and/or sales floor), distinct from web-channel-only views.
onDisplay	Quantity on a storefront display (still typically available unless display units are not for sale).
inTransit	Quantity being shipped between locations; often unavailable for local allocation until receipt.
replenishmentInProgress	Additional quantity is expected soon; current recorded quantity may still be available or unavailable depending on what is already on hand.
returned	Quantity returned for inspection or restocking; often unavailable until accepted back into sellable stock.
damaged	Quantity that cannot be sold until repaired or written off; typically paired with status unavailable .

Link between status and usageType

- **status** answers: "Can this quantity be allocated now?"

- **usageType** answers: “What operational category is this quantity in?”

They are complementary, not substitutes. Examples:

- Lyon shop sellable handsets: **status=available, usageType=inShop**
- Handsets reserved for product order PO-123: **status=reserved, usageType=inShop**
- Damaged display units: **status=unavailable, usageType=damaged**
- Shipment to Lyon not yet received: **status=unavailable, usageType=inTransit**
- Returns awaiting inspection: **status=unavailable, usageType=returned**
- New StockLevel before first count: **status=unknown, usageType** may already be set (for example **inShop**) when the intended category is known

State change notifications for StockLevel should report the changed **status**. Usage-type changes are attribute value changes when only that field is updated.

QueryStockLevel and searchCriteria

QueryStockLevel is a task resource used to find matching **StockLevel** resources. Prefer GET **/stockLevel** with filter (or JSONPath) for simple lookups of known stock levels. Use **QueryStockLevel** when you need:

- multi-criteria template matching via **searchCriteria**
- optional asynchronous completion (**instantSyncCheck** set to false) with task state and notifications
- parity with the other stock task resources (Check, Reserve, Adjust)

How searchCriteria works

searchCriteria is an array of StockLevel templates. Each template lists only the attributes that should constrain the search.

- Within one template: supplied attributes are combined with AND (all must match).
- Across templates: each array entry is evaluated independently (OR). A StockLevel that matches any template is returned.
- Omit attributes that must not constrain the search. Unspecified fields are ignored as filters.
- On create, do not send server-managed fields (**id, href, creationDate, lastUpdate, lastInventoryDate**) or a full inventory snapshot unless your implementation documents them as filters. Typical create input uses identification and filter attributes

only (for example `stockItem`, optional `place` / `status` / `channel` / `usageType`).

Matching `StockLevel` instances are returned in `queryStockLevelItem` (a list of `StockLevel`, not `StockItem`).

Attributes commonly used as filters

Attribute	Role in the query
<code>stockItem</code> (<code>stockItemCode</code> / <code>codeModel</code>)	Primary logistics identity of what is stocked. Most queries include this.
<code>place</code>	Where the stock is held (for example a <code>GeographicSite</code> such as a shop or warehouse).
<code>status</code>	Availability filter (available, reserved, unavailable, unknown).
<code>usageType</code>	Operational category (for example <code>inShop</code> , <code>inTransit</code>).
<code>channel</code>	Sales or distribution channel(s) for which the stock level applies.
quantity thresholds (<code>minQuantity</code> , <code>maxQuantity</code> , <code>alertThreshold</code> , <code>reorderQuantity</code> , <code>quantity</code>)	Optional numeric constraints when the implementation supports filtering on levels; often omitted on create.

Date fields on the Query task

Field	Meaning
<code>requestedAvailabilityDate</code>	Business date for which stock must be available (inventory evaluation date).
<code>instantSyncCheck</code>	true: return matches immediately (HTTP 200). false: create a persisted task (HTTP 201) for asynchronous completion.

Use `requestedAvailabilityDate` for the inventory date that matters to the business (for example, stock that must be available next Monday). Task scheduling is left to the provider; a separate requester scheduling date is not modelled.

Worked examples

Example 1 — Find available Galaxy S22 Ultra stock by item code (synchronous)

Request body (illustrative):

```
{
  "instantSyncCheck": true,
  "requestedAvailabilityDate": "2020-09-24T10:24:04.602Z",
  "searchCriteria": [
    {
      "name": "query stock level criteria",
      "stockItem": {
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "@type": "QueryStockLevel"
}
```

This returns every matching StockLevel for that stock item (for example Lyon shop and another site) in [queryStockLevelItem](#).

Example 2 — Same item, only available stock in a given shop

Add status and place on the same template (AND within the template):

```
{
  "instantSyncCheck": true,
  "searchCriteria": [
    {
      "status": "available",
      "place": {
        "id": "89",
        "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "stockItem": {
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "@type": "QueryStockLevel"
}
```

Example 3 — Two alternative item codes (OR across templates)

```
{
```

```

    "instantSyncCheck": true,
    "searchCriteria": [
      {
        "stockItem": {
          "stockItemCode": "3501179503622",
          "codeModel": "EAN",
          "@type": "StockItem"
        },
        "@type": "StockLevel"
      },
      {
        "stockItem": {
          "stockItemCode": "3501179503635",
          "codeModel": "EAN",
          "@type": "StockItem"
        },
        "@type": "StockLevel"
      }
    ],
    "@type": "QueryStockLevel"
  }

```

A StockLevel matching either code is included in `queryStockLevelItem`.

Task resource item state aggregation


For multi-item task resources (`AdjustStockLevel`, `CheckStockLevel`, `ReserveStockLevel`), each item may carry its own `state`. The parent task state is consolidated as follows:

- If any item is `terminatedWithError` (or failed), the task is `terminatedWithError` / failed.
- Else if any item is `inProgress` or `acknowledged` while others are not yet complete, the task is `inProgress`.
- Else if all items are `done`, the task is `done`.

Partial failure is allowed: successful items are `done` and failed items remain in an error state, with the parent task in an error/failed state.

Task resource lifecycle

The state machine specifying the typical state change transitions for task resources is provided below. This is standard task resource lifecycle:

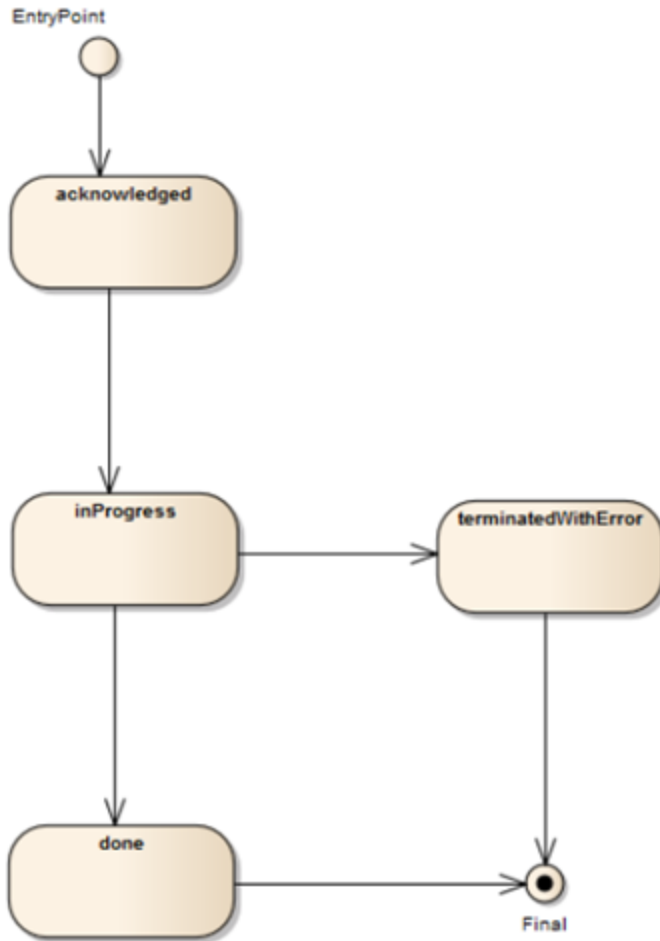

State	Definition
Acknowledged	The acknowledged state is where a task request has been received and has passed message and basic business validations.
InProgress	The In Progress state is when the task request is being processed by the stock management system.
TerminatedWithErrors	The task request could not be completed successfully. Task result is not available.
Done	The task request has been assessed and result available.

Major changes from v4 to v5

The main evolution from TMF687 v4 to v5 is the introduction of **StockItem** as the item

being stocked, and the replacement of the **ProductStock** managed entity with **StockLevel**. **StockLevel** describes inventory for a **StockItem** at a place (and optionally channel), rather than tying stock directly to a Product configuration. Task resources (Check, Query, Reserve, Cancel Reserve, and Adjust) operate on stock levels and stock items using this model.

SAMPLE USE CASES


We illustrate in this document several use cases:

- For StockLevel we illustrate a description of a stock item of “Galaxy S22 Ultra” in shop & available in the Lyon shop. We have all information related to this stock as min/max/reorder quantity or next replenishment date.
- For adjust StockLevel we request to change previous stock level quantity following an inventory check.
- For check, a requester asks for a 128GB Galaxy S22 Ultra availability in the Lyon shop. This item is not available but an alternate is available: a 256GB Galaxy S22 Ultra. Because request is ok to get alternate this proposal is sent in the response.
- For reserve StockLevel, we reserve this 256GB Galaxy S22 Ultra in the Lyon shop. The product order related to this reservation is part of the resource information.
- For query StockLevel we look for Galaxy S22 Ultra available in a defined search zone. In the response we have 2 shops listed with this stock item.

See [QueryStockLevel](#) and [searchCriteria](#) in the Introduction for how [searchCriteria](#) templates work (AND within a template, OR across templates), which attributes are typical filters, and JSON examples.

Product catalog view for the customer on a given configuration

- The customer configures its phone with selection.


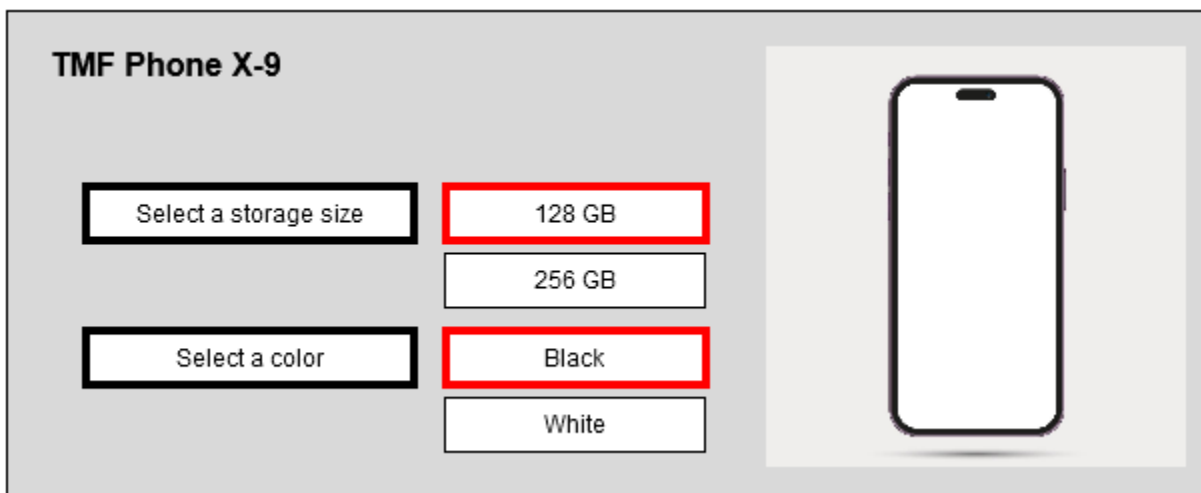


TMF Phone X-9

Select a storage size	128 GB
	256 GB
Select a color	Black
	White



- The configuration is an offer seen from the customer, defined by a product specification. Each configuration is realized by a stock item.

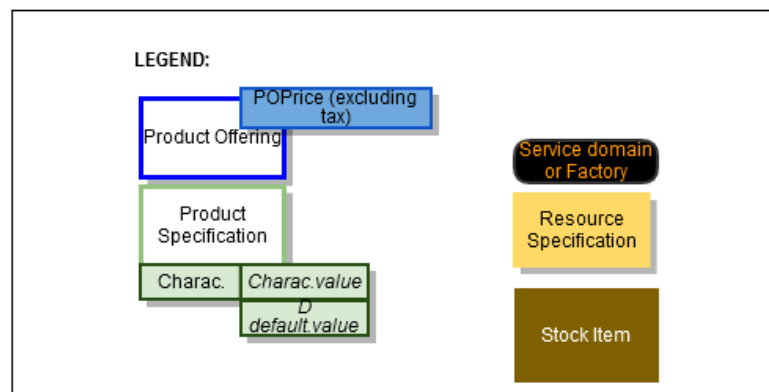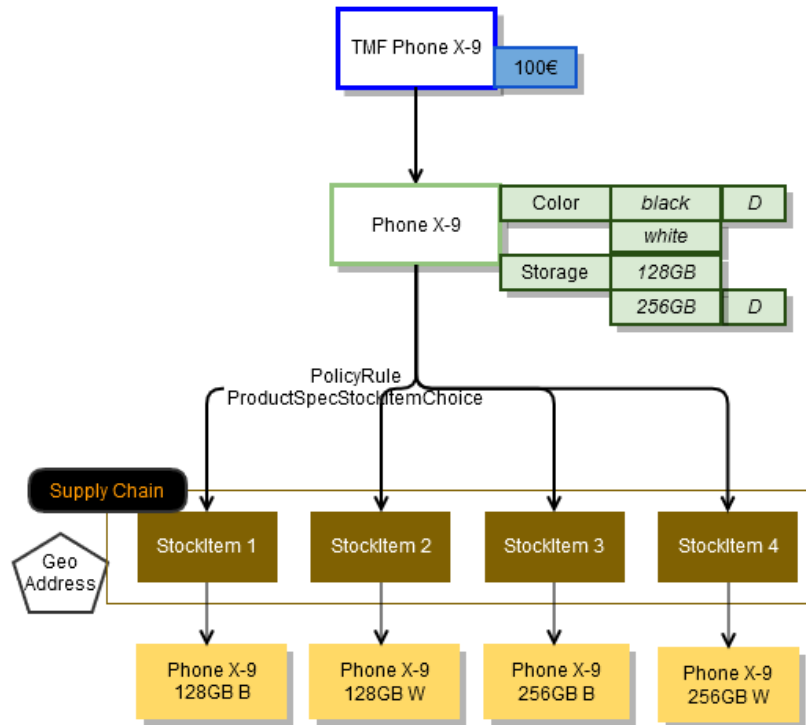

A StockItem might be realized by several resource specifications when different manufacturers produce the same StockItem (same characteristics and behaviour).

StockLevel for web channel

- For a given stock item, the stock level provides the status and the location/channel.

TMF Phone X-9

Select a storage size

128 GB

256 GB

Select a color

Black

White

2h pick-up at Lyon store


1 left

Home delivery

Available

In store delivery

Available

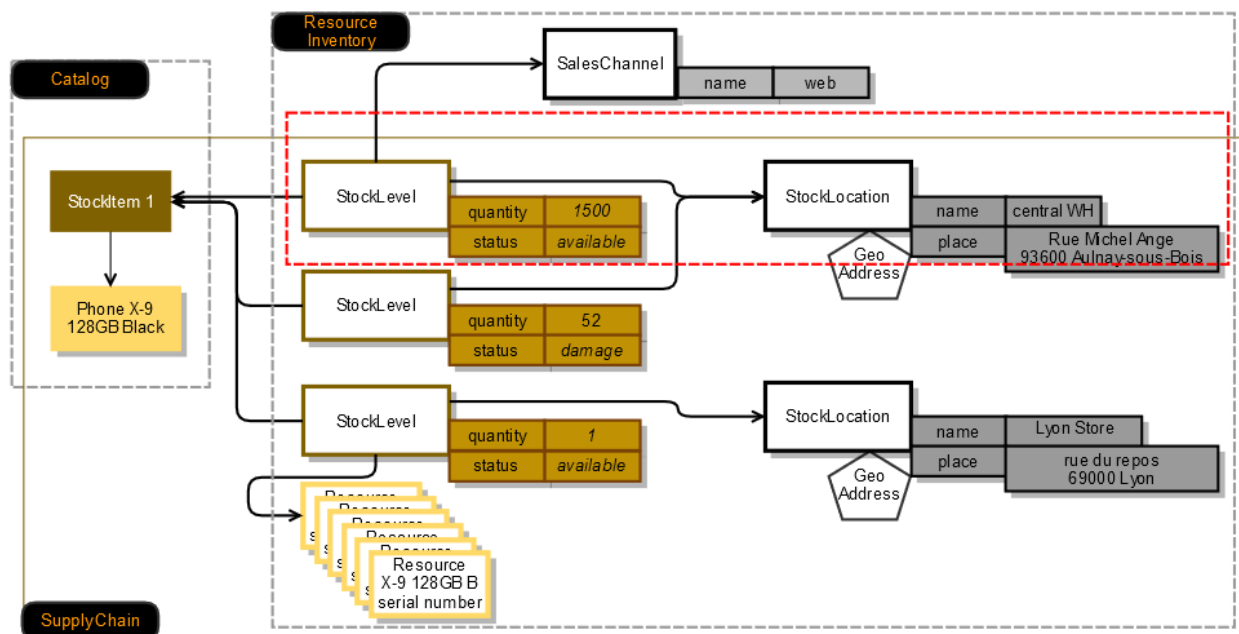

StockLevel in a shop

TMF Phone X-9


Select a storage size
128 GB
256 GB

Select a color
Black
White

2h pick-up at Lyon store
1 left



Home delivery
Available

In store delivery
Available

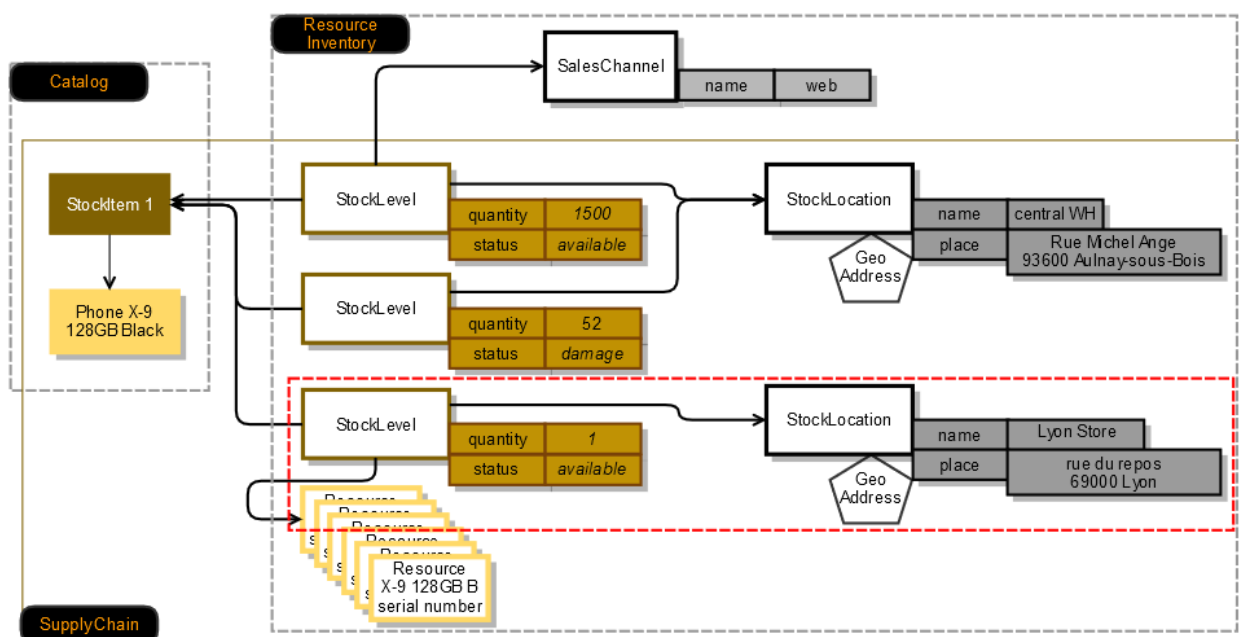

Inventory view for the customer

- The customer has no view on stock item. In case of issue with the handset, the vendor would replace or supply the resource directly (sometimes via the manufacturer).

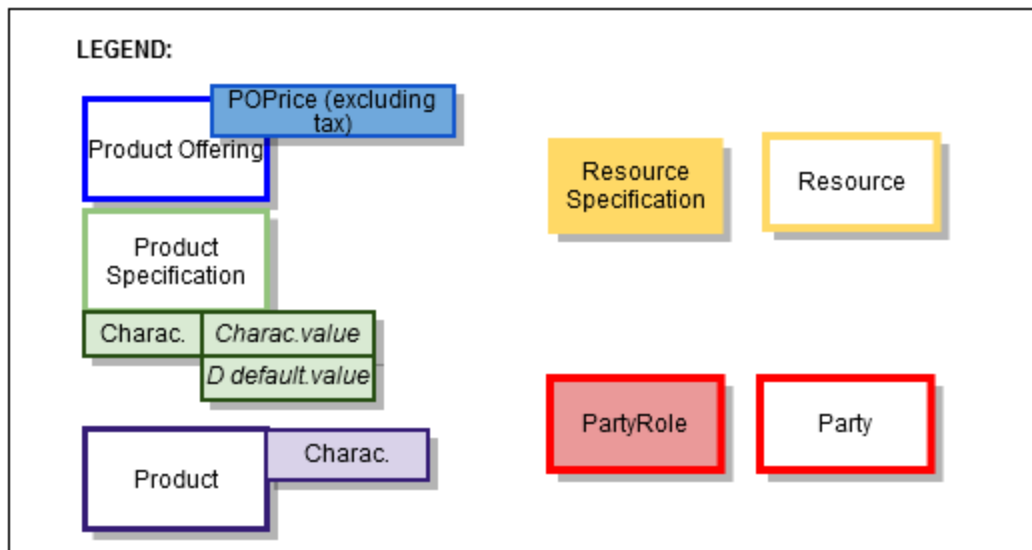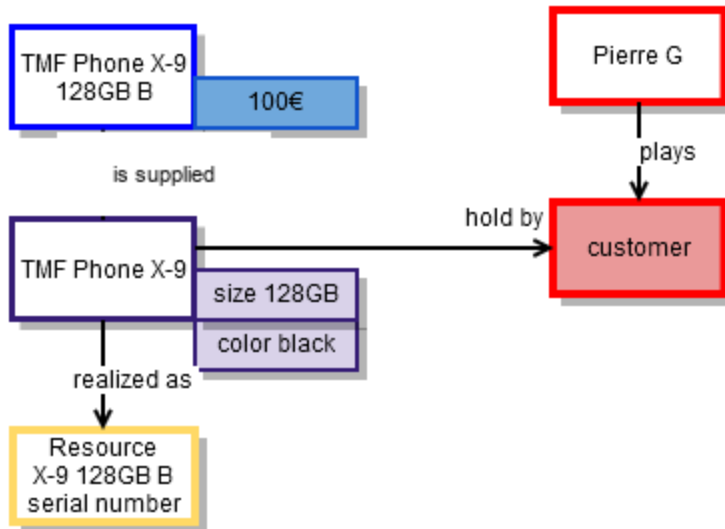

Support of polymorphism and extension

Support of polymorphic collections and types and schema based extension is provided by means of a list of generic meta-attributes that we describe below. Polymorphism in collections occurs when entities inherit from base entities, for instance a specialized stock level type inheriting properties from the base StockLevel entity.

Generic support of polymorphism and pattern extensions is described in the TMF API Guidelines v3.0 Part 2 document.

The `@type` attribute provides a way to represent the actual class type of an entity. For example, within a list of StockLevel instances some may be specialized subtypes of StockLevel. The `@type` gives this information. All resources and sub-resources of this API have a `@type` attributes that can be provided when this is useful.

The `@referredType` can be used within reference entities (for example StockLevelRef, PlaceRef, ChannelRef, or ProductSpecificationRef) to explicitly denote the actual entity type of the referred class. Notice that in reference entities the `@type`, when used, denotes the class type of the reference itself, such as StockLevelRef, and not the class type of the referred object. However since reference classes are rarely sub-classed, `@type` is generally not useful in reference objects.

The `@schemaLocation` property can be used in resources to allow specifying user-defined properties of an Entity or to specify the expected *characteristics* of an entity.

The `@baseType` attribute gives a way to provide explicitly the base of class of a given resource that has been extended

RESOURCE MODEL

Managed Entity and Task Resource Models

StockLevel resource

Represents the inventory level of a specific stock item at a particular location, including its quantity, availability status and related inventory management information.

Resource model

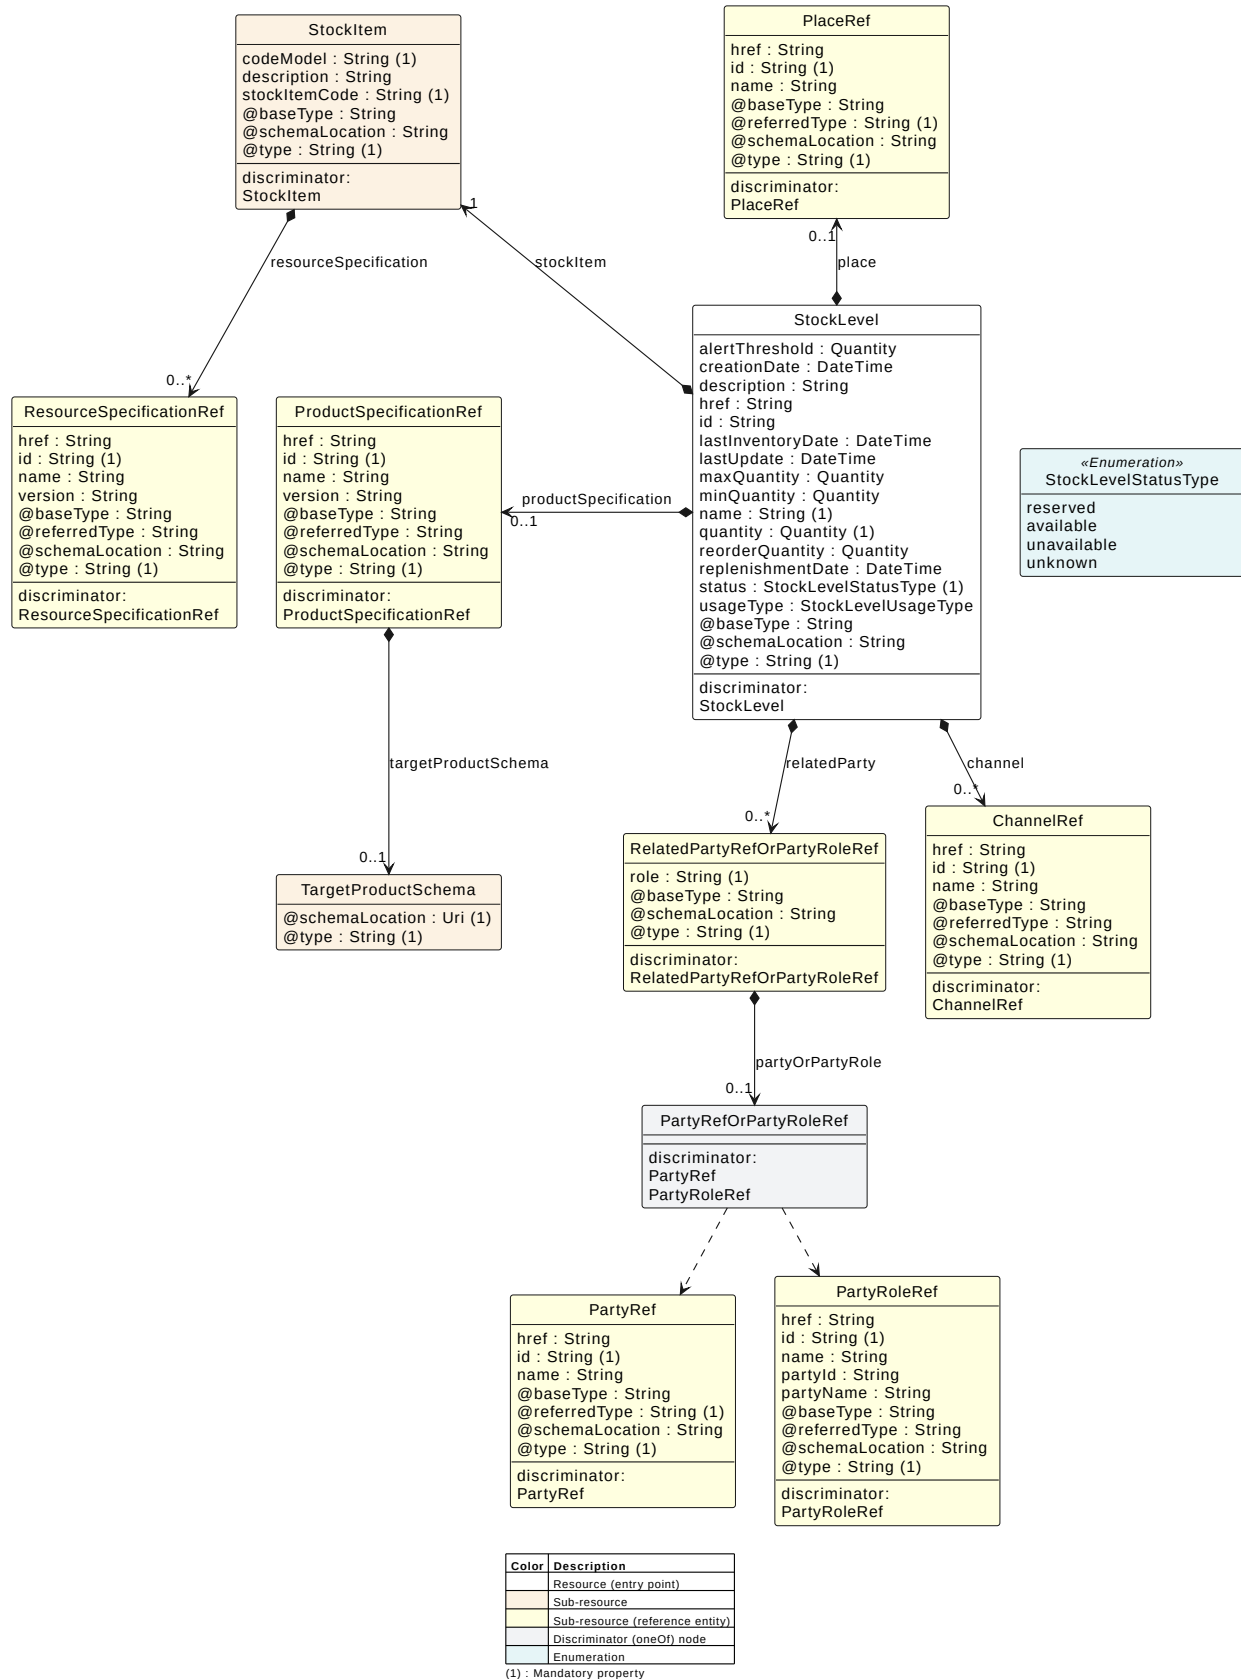


Figure 1 – StockLevel

Field descriptions

StockLevel fields

alertThreshold	A Quantity. An amount in a given unit.
channel	A ChannelRef [0..*]. Sales or distribution channel(s) for which this stock level applies (for example retail shop or web channel).
creationDate	A DateTime. Date when the StockLevel was created (whatever its status).
description	A String. Additional information describing the stock level and its intended usage.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
lastInventoryDate	A DateTime. Last inventory count date for this StockLevel.
lastUpdate	A DateTime. Last date when the StockLevel record was updated.
maxQuantity	A Quantity. An amount in a given unit.
minQuantity	A Quantity. An amount in a given unit.
name	A String [1]. Human-readable name assigned to the stock level.
place	A PlaceRef. A reference to a physical Place.
productSpecification	A ProductSpecificationRef. ProductSpecification reference. A product Specification represents entities that are orderable from the provider of the catalog.
quantity	A Quantity [1]. An amount in a given unit.
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..]. A list of related party references (RelatedParty []). A related party defines party or party role linked to a specific entity.
reorderQuantity	A Quantity. An amount in a given unit.
replenishmentDate	A DateTime. Planned date for future replenishment for this StockLevel.

status	A StockLevelStatusType [1]. Availability status of the stock represented by a StockLevel. Use available when the quantity can be allocated or sold; reserved when the quantity is held for a specific purpose (for example a product order or quote) and must not be reallocated; unavailable when the quantity cannot be allocated (for example damaged, quarantined, or otherwise not ready for use); unknown when the inventory status has not yet been determined (for example before the first stock count). ENUMERATED with values: * reserved * available * unavailable * unknown
stockItem	A StockItem [1]. Identification of the stock item used by the logistics system.
usageType	A StockLevelUsageType. Operational inventory category of the StockLevel. This is an extensible string (not a closed enumeration); implementations may define additional values. Typical values: inTransit (quantity currently being shipped between locations); onDisplay (quantity on a retail storefront display); damaged (quantity that cannot be sold until repaired, written off, or otherwise cleared); returned (quantity returned for inspection or restocking); replenishmentInProgress (additional quantity is expected soon); inShop (quantity held in a retail shop location, typically back-of-store or sales floor stock).
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ChannelRef sub-resource fields

A channel that is being referred to by a resource. For example: channel for selling product offerings, channel for opening a trouble ticket, etc.

href	A String. The URI of the referred entity.
------	---

id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PlaceRef sub-resource fields

A reference to a physical Place.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String [1]. The specific sub-type of Place being referred to (such as a GeographicAddress).
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ProductSpecificationRef sub-resource fields

ProductSpecification reference. A product Specification represents entities that are orderable from the provider of the catalog.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
targetProductSchema	A TargetProductSchema. The reference object to the schema and type of target product which is described by product specification.

version	A String. Version of the product specification.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

TargetProductSchema sub-resource fields

The reference object to the schema and type of target product which is described by product specification.

@schemaLocation	A Uri [1]. This field provides a link to the schema describing the target product.
@type	A String [1]. Class type of the target product.

RelatedPartyRefOrPartyRoleRef sub-resource fields

A reference to a Party or PartyRole playing a specific role in context of the entity to which it is related.

partyOrPartyRole	A PartyRefOrPartyRoleRef. A reference to a Party or a PartyRole.
role	A String [1]. The role the referred Party or PartyRole plays in the specific context of the entity it is linked to, such as 'initiator', 'customer', 'salesAgent', 'user'; NOTE: If used to refer to a PartyRole, the PartyRole describes the role the respective engagedParty plays in a more general context, like e.g. 'Customer', 'Manager'.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PartyRef sub-resource fields

A Party reference.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String [1]. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. ENUMERATED with values: * PartyRef

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
partyId	A String. The identifier of the engaged party that is linked to the PartyRole object.
partyName	A String. The name of the engaged party that is linked to the PartyRole object.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. ENUMERATED with values: * PartyRoleRef

StockItem sub-resource fields

Identification of the stock item used by the logistics system.

codeModel	A String [1]. Type of codification used for the stock item code.
description	A String. Description of the stock item.
resourceSpecification	A ResourceSpecificationRef [0..*]. A list of resource specifications that realize the stock item.
stockItemCode	A String [1]. Code of the stock item. A codeModel value must also be provided to specify the type of this code.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ResourceSpecificationRef sub-resource fields

Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
version	A String. Resource Specification version.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
-------	--

Json representation sample(s)

We provide below a JSON representation as example of the 'StockLevel' resource object.

```
{
  "@type": "StockLevel",
  "id": "42",
  "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
  "creationDate": "2020-01-14T08:31:48.243Z",
  "description": "Stock level for Galaxy S22 Ultra in the Lyon shop",
  "lastInventoryDate": "2020-09-24T08:31:48.243Z",
  "lastUpdate": "2020-09-24T08:31:48.243Z",
  "name": "Stock for Galaxy S22 Ultra",
  "replenishmentDate": "2020-09-28T08:31:48.243Z",
  "status": "available",
  "usageType": "inShop",
  "quantity": {
    "amount": 24,
    "units": "box"
  },
  "minQuantity": {
    "amount": 5,
    "units": "box"
  },
  "maxQuantity": {
    "amount": 40,
    "units": "box"
  },
  "reorderQuantity": {
    "amount": 10,
    "units": "box"
  },
  "alertThreshold": {
    "amount": 10,
    "units": "box"
  },
  "channel": [
    {
      "id": "11",
      "name": "Retail shop",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Lyon Shop",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
}
```

```

"relatedParty": [
  {
    "role": "stock owner",
    "@type": "RelatedPartyRefOrPartyRoleRef",
    "partyOrPartyRole": {
      "id": "111",
      "href": "https://serverlocation:port/partyManagement/v5/organization/111",
      "name": "Stock owner organization",
      "@type": "PartyRef",
      "@referredType": "Organization"
    }
  }
],
"stockItem": {
  "@type": "StockItem",
  "stockItemCode": "3501179503622",
  "codeModel": "EAN",
  "description": "Stock item for Galaxy S22 Ultra 256GB",
  "resourceSpecification": [
    {
      "id": "1004",
      "href":
"https://serverlocation:port/resourceCatalogManagement/v5/resourceSpecification/1004",
      "name": "Galaxy S22 Ultra Resource Specification",
      "version": "1.0.0",
      "@type": "ResourceSpecificationRef",
      "@referredType": "ResourceSpecification"
    }
  ]
},
"productSpecification": {
  "id": "23",
  "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
  "name": "Galaxy S22 Ultra",
  "version": "1.0.0",
  "@type": "ProductSpecificationRef",
  "@referredType": "ProductSpecification"
}
}

```

AdjustStockLevel resource

AdjustStockLevel is a task resource used to request one or more stock level quantity adjustments.

Resource model

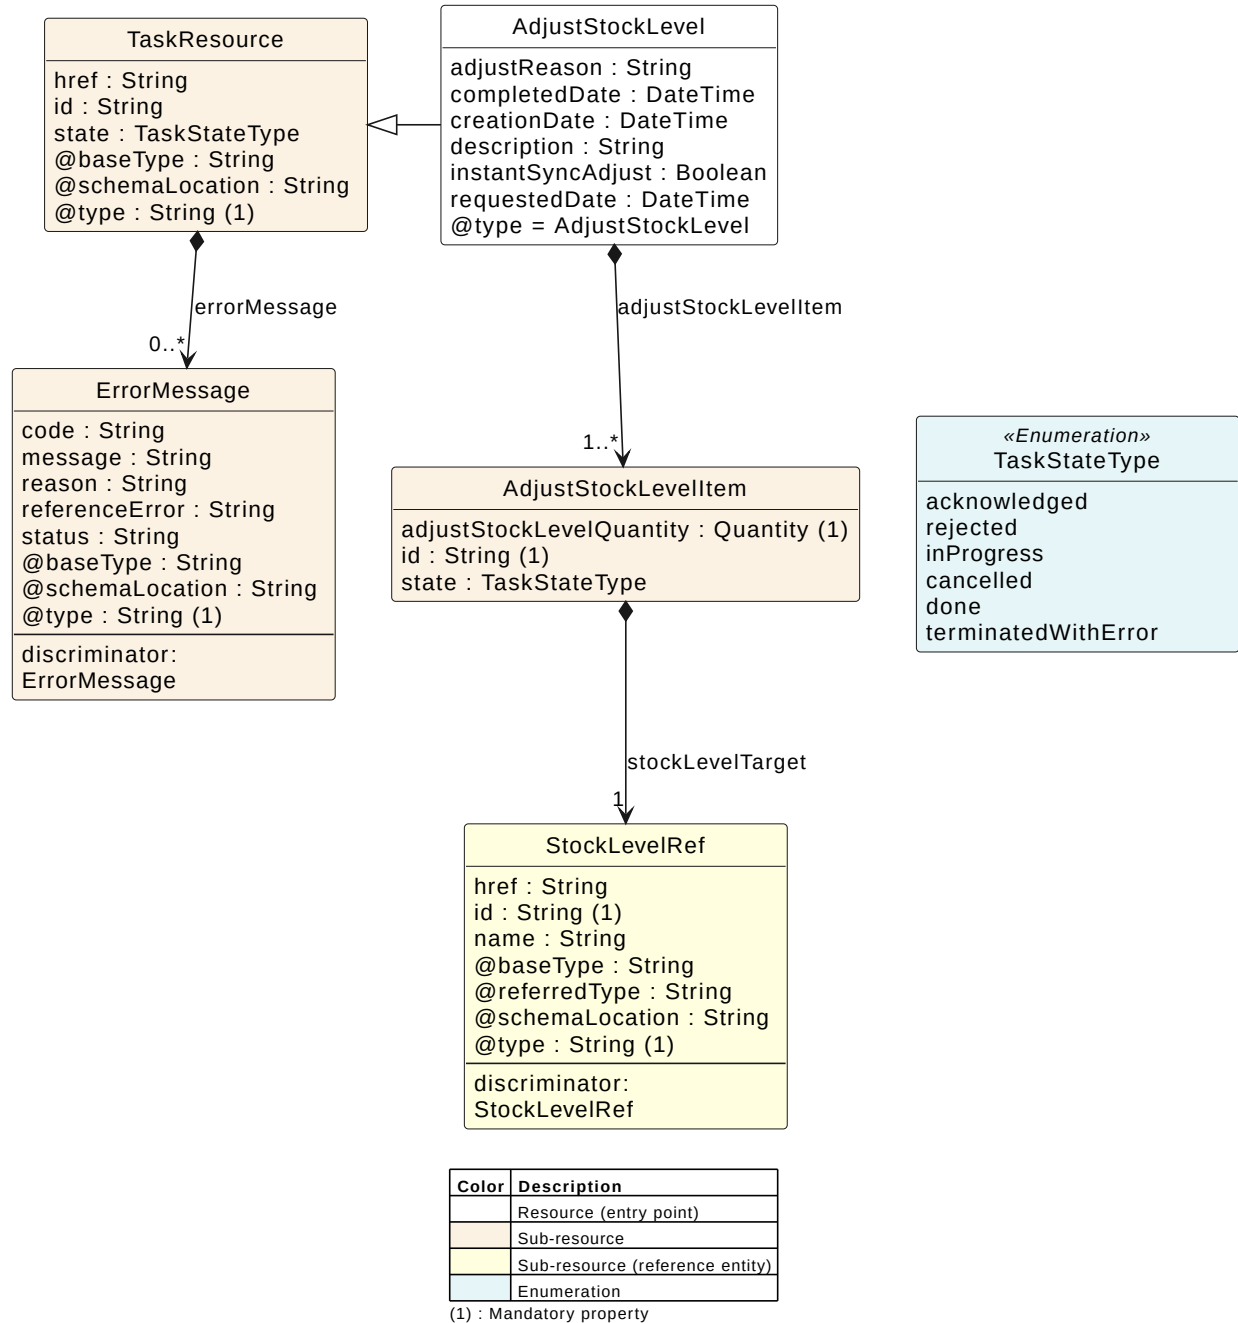


Figure 2 – AdjustStockLevel

Field descriptions

AdjustStockLevel fields

adjustReason	A String. A reason for this stock level adjustment like theft or wastage.
--------------	---

adjustStockLevelItem	An AdjustStockLevelItem [1..*]. A list of AdjustStockLevel items. Every item is a StockLevel adjustment request.
completedDate	A DateTime. Date when the AdjustStockLevel task was completed.
creationDate	A DateTime. Date when the AdjustStockLevel was created (whatever its status).
description	A String. Free-text description of the AdjustStockLevel.
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
instantSyncAdjust	A Boolean. An indicator which when the value is 'true' means that requester expects the adjustment immediately. If the indicator is true then the response code of 200 indicates the operation is successful otherwise a task is created with a response 201. The requestedDate will be ignored (or errored), since the task will be executed immediately.
requestedDate	A DateTime. Date when the stock level adjustment is requested. If not provided, the adjustment is performed as soon as possible.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

AdjustStockLevelItem sub-resource fields

A list of AdjustStockLevel items. Every item is a StockLevel adjustment request.

adjustStockLevelQuantity	A Quantity [1]. An amount in a given unit.
id	A String [1]. Unique identifier of the AdjustStockLevelItem.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
stockLevelTarget	A StockLevelRef [1]. StockLevelRef is a reference to a stock level.

StockLevelRef sub-resource fields

StockLevelRef is a reference to a stock level.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the StockLevelRef.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ErrorMessage sub-resource fields

Represents an Error.

code	A String. Error code.
message	A String. More details and corrective actions related to the error.
reason	A String. Explanation of the reason for the error.

referenceError	A String. URI of documentation describing the error.
status	A String. Error code extension like sys-ABC-2001.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Json representation sample(s)

We provide below a JSON representation as example of the 'AdjustStockLevel' resource object.

```
{
  "@type": "AdjustStockLevel",
  "adjustReason": "Inventory check",
  "completedDate": "2020-09-24T08:53:33.954Z",
  "description": "inventory check update",
  "instantSyncAdjust": true,
  "requestedDate": "2020-09-24T08:53:33.954Z",
  "state": "done",
  "adjustStockLevelItem": [
    {
      "id": "1",
      "adjustStockLevelQuantity": {
        "amount": 26,
        "units": "box"
      },
      "stockLevelTarget": {
        "id": "42",
        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
        "name": "Stock for Galaxy S22 Ultra",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel"
      },
      "state": "done"
    }
  ]
}
```

CheckStockLevel resource

CheckStockLevel is a task resource used to log and execute a check of stock level availability.

Resource model

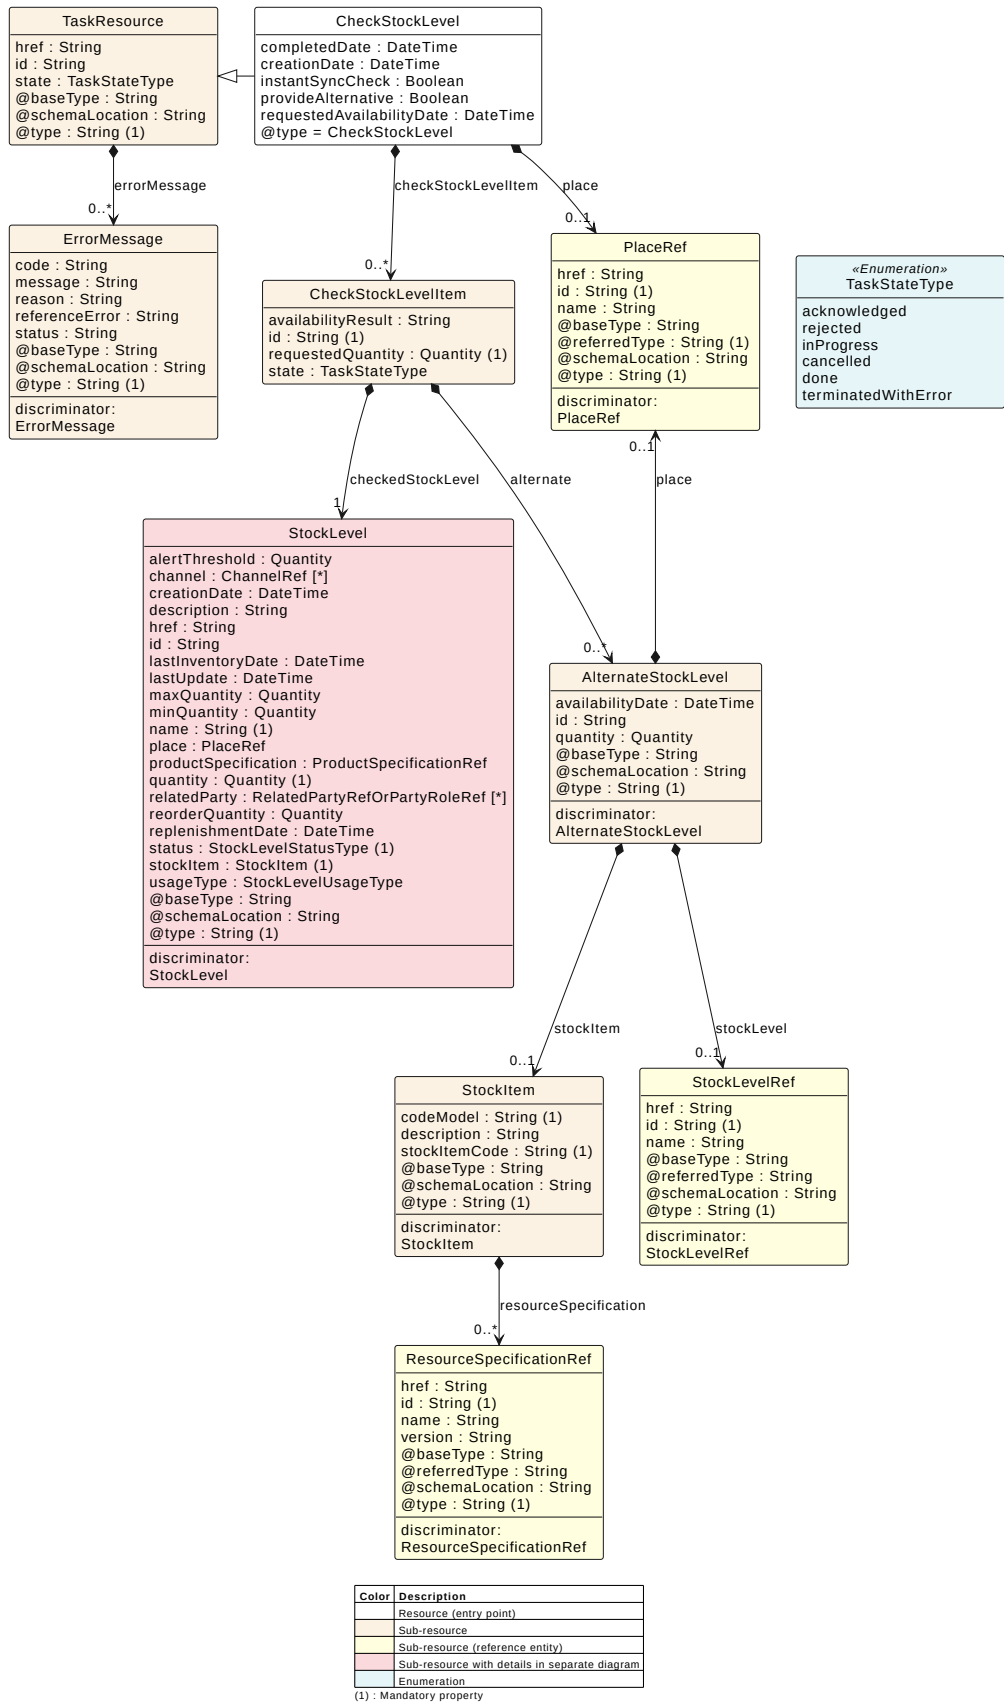


Figure 3 – CheckStockLevel

Field descriptions

CheckStockLevel fields

checkStockLevelItem	A CheckStockLevelItem [1..*]. A list of check stock level items.
completedDate	A DateTime. Date when the CheckStockLevel was completed.
creationDate	A DateTime. Date when the CheckStockLevel task was created (whatever its status).
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
instantSyncCheck	A Boolean. An indicator which when the value is 'true' means that requester expects to get result immediately in the response. If the indicator is true then the response code of 200 indicates the operation is successful otherwise a task is created with a response 201.
place	A PlaceRef. A reference to a physical Place.
provideAlternative	A Boolean. When the value is TRUE means that alternative proposal should be provided (from other stock level, different date or quantity).
requestedAvailabilityDate	A DateTime. Date when the stock availability should be checked.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.

@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.
-------	--

CheckStockLevelItem sub-resource fields

One StockItem availability check within a CheckStockLevel task.

alternate	An AlternateStockLevel [0..*]. Alternate proposals when availabilityResult is alternate (different stock item, place, quantity, or date).
availabilityResult	A String. Result of the availability check: available, not Available, or alternate (alternates are listed in alternate[]).
checkedStockLevel	A StockLevel [1]. Represents the inventory level of a specific stock item at a particular location, including its quantity, availability status and related inventory management information.
id	A String [1]. Unique identifier of the CheckStockLevelItem within the task.
requestedQuantity	A Quantity [1]. An amount in a given unit.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError

AlternateStockLevel sub-resource fields

Proposed alternate stock availability when the requested stock level is not available (different stock item, place, quantity, or availability date).

availabilityDate	A DateTime. Date when the alternate stock level quantity would be available.
id	A String. Identifier of this alternate proposal within the check result.
place	A PlaceRef. A reference to a physical Place.
quantity	A Quantity. An amount in a given unit.

stockItem	A StockItem. Identification of the stock item used by the logistics system.
stockLevel	A StockLevelRef. StockLevelRef is a reference to a stock level.
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

PlaceRef sub-resource fields

A reference to a physical Place.

See [\[PlaceRef\]](#) for details.

StockItem sub-resource fields

Identification of the stock item used by the logistics system.

See [\[StockItem\]](#) for details.

ResourceSpecificationRef sub-resource fields

Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.

See [\[ResourceSpecificationRef\]](#) for details.

StockLevelRef sub-resource fields

StockLevelRef is a reference to a stock level.

See [\[StockLevelRef\]](#) for details.

StockLevel sub-resource fields

Represents the inventory level of a specific stock item at a particular location, including its quantity, availability status and related inventory management information.

alertThreshold	A Quantity. An amount in a given unit.
channel	A ChannelRef [0..*]. Sales or distribution channel(s) for which this stock level applies (for example retail shop or web channel).
creationDate	A DateTime. Date when the StockLevel was created (whatever its status).
description	A String. Additional information describing the stock level and its intended usage.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
lastInventoryDate	A DateTime. Last inventory count date for this StockLevel.
lastUpdate	A DateTime. Last date when the StockLevel record was updated.
maxQuantity	A Quantity. An amount in a given unit.
minQuantity	A Quantity. An amount in a given unit.
name	A String [1]. Human-readable name assigned to the stock level.
place	A PlaceRef. A reference to a physical Place.
productSpecification	A ProductSpecificationRef. ProductSpecification reference. A product Specification represents entities that are orderable from the provider of the catalog.
quantity	A Quantity [1]. An amount in a given unit.
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. A list of related party references (RelatedParty []). A related party defines party or party role linked to a specific entity.
reorderQuantity	A Quantity. An amount in a given unit.
replenishmentDate	A DateTime. Planned date for future replenishment for this StockLevel.

status	A StockLevelStatusType [1]. Availability status of the stock represented by a StockLevel. Use available when the quantity can be allocated or sold; reserved when the quantity is held for a specific purpose (for example a product order or quote) and must not be reallocated; unavailable when the quantity cannot be allocated (for example damaged, quarantined, or otherwise not ready for use); unknown when the inventory status has not yet been determined (for example before the first stock count). ENUMERATED with values: * reserved * available * unavailable * unknown
stockItem	A StockItem [1]. Identification of the stock item used by the logistics system.
usageType	A StockLevelUsageType. Operational inventory category of the StockLevel. This is an extensible string (not a closed enumeration); implementations may define additional values. Typical values: inTransit (quantity currently being shipped between locations); onDisplay (quantity on a retail storefront display); damaged (quantity that cannot be sold until repaired, written off, or otherwise cleared); returned (quantity returned for inspection or restocking); replenishmentInProgress (additional quantity is expected soon); inShop (quantity held in a retail shop location, typically back-of-store or sales floor stock).
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ChannelRef sub-resource fields

A channel that is being referred to by a resource. For example: channel for selling product offerings, channel for opening a trouble ticket, etc.

See [\[ChannelRef\]](#) for details.

ProductSpecificationRef sub-resource fields

ProductSpecification reference. A product Specification represents entities that are orderable from the provider of the catalog.

See [\[ProductSpecificationRef\]](#) for details.

TargetProductSchema sub-resource fields

The reference object to the schema and type of target product which is described by product specification.

See [\[TargetProductSchema\]](#) for details.

RelatedPartyRefOrPartyRoleRef sub-resource fields

A reference to a Party or PartyRole playing a specific role in context of the entity to which it is related.

See [\[RelatedPartyRefOrPartyRoleRef\]](#) for details.

PartyRef sub-resource fields

A Party reference.

See [\[PartyRef\]](#) for details.

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

See [\[PartyRoleRef\]](#) for details.

ErrorMessage sub-resource fields

Represents an Error.

See [\[ErrorMessage\]](#) for details.

Json representation sample(s)


We provide below a JSON representation as example of the 'CheckStockLevel' resource object.

```
{
  "@type": "CheckStockLevel",
  "id": "32",
  ...
}
```

```

    "href": "https://serverlocation:port/stockManagement/v5/checkStockLevel/32",
    "completedDate": "2020-09-24T09:54:41.127Z",
    "creationDate": "2020-09-24T09:54:41.127Z",
    "instantSyncCheck": true,
    "provideAlternative": true,
    "requestedAvailabilityDate": "2020-09-24T09:54:41.127Z",
    "state": "done",
    "place": {
      "id": "89",
      "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
      "name": "Lyon Shop",
      "@type": "PlaceRef",
      "@referredType": "GeographicSite"
    },
    "checkStockLevelItem": [
      {
        "id": "1",
        "availabilityResult": "alternate",
        "requestedQuantity": {
          "amount": 1,
          "units": "box"
        },
        "state": "done",
        "checkedStockLevel": {
          "@type": "StockLevel",
          "name": "Stock for Galaxy S22 Ultra 128GB",
          "status": "unavailable",
          "quantity": {
            "amount": 0,
            "units": "box"
          },
          "stockItem": {
            "@type": "StockItem",
            "stockItemCode": "3501179503615",
            "codeModel": "EAN",
            "description": "Stock item for Galaxy S22 Ultra 128GB"
          }
        },
        "alternate": [
          {
            "@type": "AlternateStockLevel",
            "id": "1",
            "availabilityDate": "2020-09-24T09:54:41.127Z",
            "quantity": {
              "amount": 1,
              "units": "box"
            },
            "stockItem": {
              "@type": "StockItem",
              "stockItemCode": "3501179503622",
              "codeModel": "EAN",
              "description": "Stock item for Galaxy S22 Ultra 256GB"
            },
            "stockLevel": {
              "id": "42",
              "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
              "name": "Stock for Galaxy S22 Ultra",
              "@type": "StockLevelRef",
              "@referredType": "StockLevel"
            }
          }
        ]
      }
    ]
  }

```

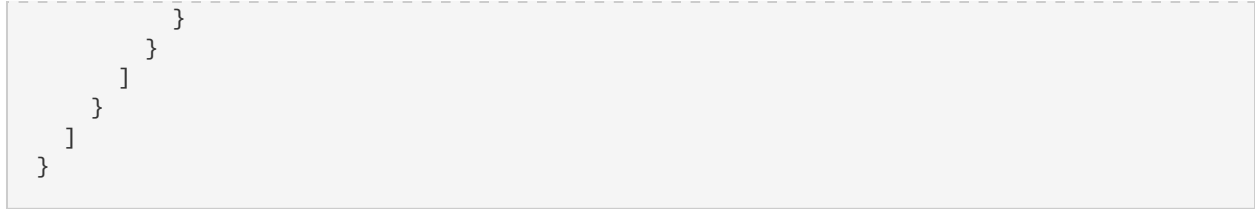

QueryStockLevel resource

Task resource used to query StockLevel availability across multiple places or complex criteria, with optional asynchronous completion. Prefer GET /stockLevel with filter (or JSONPath) for simple lookups of known StockLevel resources. Use this task when the client needs (1) multi-criteria template matching via searchCriteria, or (2) a durable task resource with state notifications. Carried from TMF687 v4 for parity with Check/Reserve/Adjust task patterns.

Resource model

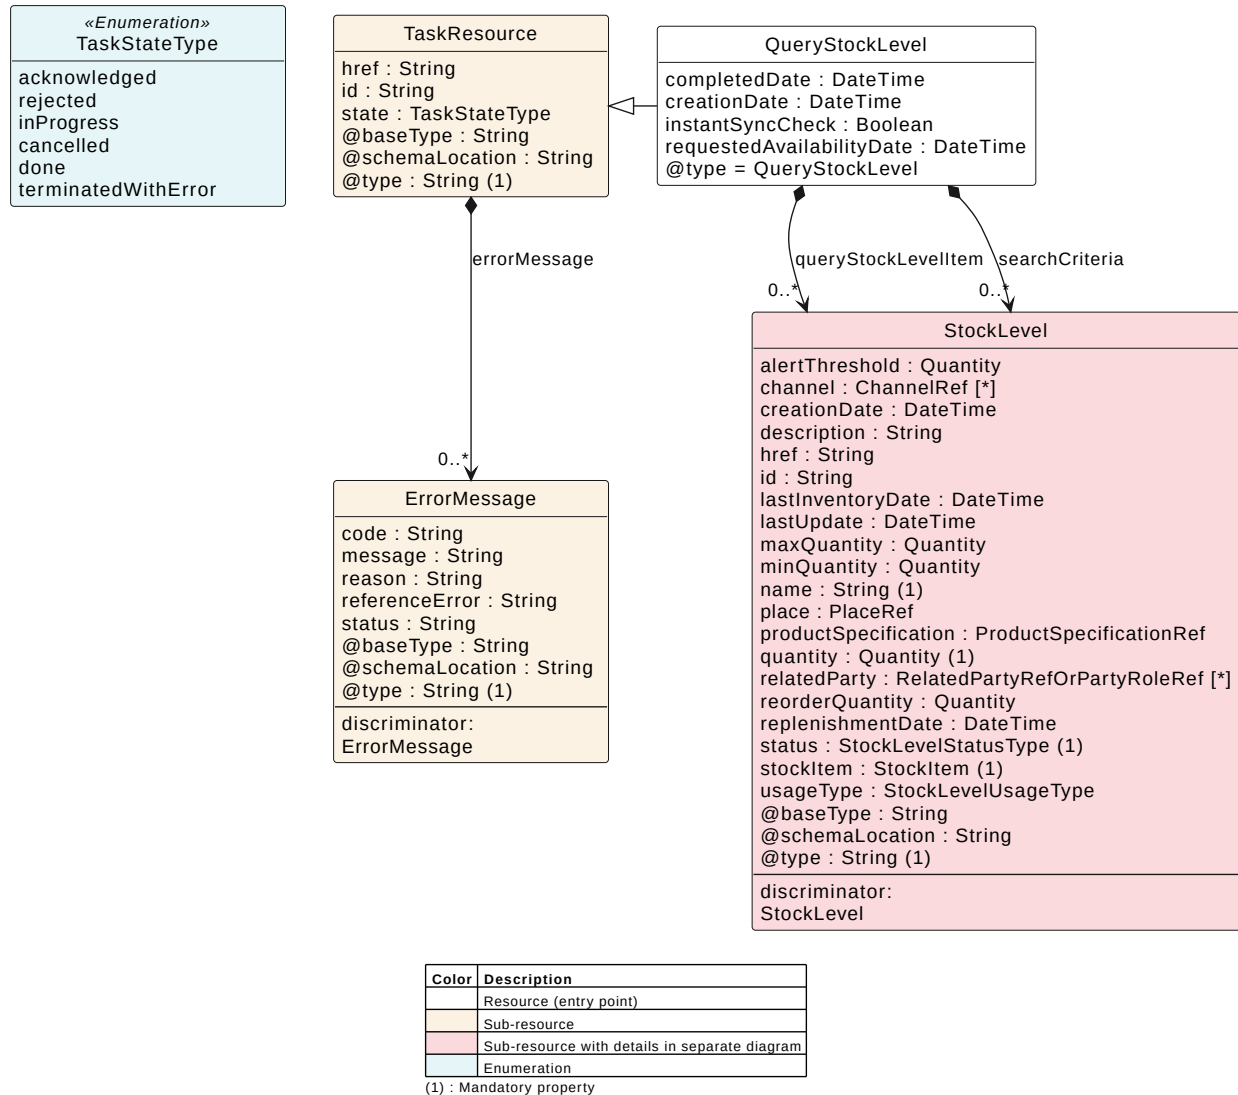


Figure 4 – QueryStockLevel

Field descriptions

QueryStockLevel fields

completedDate	A DateTime. Date when the QueryStockLevel task was completed.
creationDate	A DateTime. Date when the QueryStockLevel task was created (persisted tasks only).
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.

id	A String. Unique identifier.
instantSyncCheck	A Boolean. When true, the requester expects matching StockLevel results immediately (HTTP 200). When false, a task is created (HTTP 201) for asynchronous completion.
queryStockLevelItem	A StockLevel [0..*]. Matching StockLevel resources returned by the query (response only). This is a list of StockLevel, not StockItem.
requestedAvailabilityDate	A DateTime. Business date for which stock must be available (inventory evaluation date).
searchCriteria	A StockLevel [1..*]. One or more StockLevel templates that define what to match. Relevant attributes typically include: stockItem (stockItemCode/codeModel — primary logistics identity), place (where stock is held), status (available/reserved/unavailable/unknown), usageType (e.g. inShop), channel, and optionally quantity thresholds. Treat supplied attributes as AND filters within each template; omit attributes that should not constrain the search. Each array entry is evaluated independently (OR across entries). Matching StockLevel instances are returned in queryStockLevelItem. On create, server-managed Stock Level fields (id, href, dates) and full inventory snapshot fields are not used as create input — supply identification/filter attributes only.
state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ErrorMessage sub-resource fields

Represents an Error.

See [\[ErrorMessage\]](#) for details.

StockLevel sub-resource fields

Represents the inventory level of a specific stock item at a particular location, including its quantity, availability status and related inventory management information.

See [\[StockLevel\]](#) for details.

ChannelRef sub-resource fields

A channel that is being referred to by a resource. For example: channel for selling product offerings, channel for opening a trouble ticket, etc.

See [\[ChannelRef\]](#) for details.

PlaceRef sub-resource fields

A reference to a physical Place.

See [\[PlaceRef\]](#) for details.

ProductSpecificationRef sub-resource fields

ProductSpecification reference. A product Specification represents entities that are orderable from the provider of the catalog.

See [\[ProductSpecificationRef\]](#) for details.

TargetProductSchema sub-resource fields

The reference object to the schema and type of target product which is described by product specification.

See [\[TargetProductSchema\]](#) for details.

RelatedPartyRefOrPartyRoleRef sub-resource fields

A reference to a Party or PartyRole playing a specific role in context of the entity to which it is related.

See [\[RelatedPartyRefOrPartyRoleRef\]](#) for details.

PartyRef sub-resource fields

A Party reference.

See [\[PartyRef\]](#) for details.

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

See [\[PartyRoleRef\]](#) for details.

StockItem sub-resource fields

Identification of the stock item used by the logistics system.

See [\[StockItem\]](#) for details.

ResourceSpecificationRef sub-resource fields

Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.

See [\[ResourceSpecificationRef\]](#) for details.

Json representation sample(s)

We provide below a JSON representation as example of the 'QueryStockLevel' resource object.

```
{
  "@type": "QueryStockLevel",
  "id": "74",
  "href": "https://serverlocation:port/stockManagement/v5/queryStockLevel/74",
  "completedDate": "2020-09-24T10:24:04.602Z",
  "creationDate": "2020-09-24T10:24:04.602Z",
  "instantSyncCheck": true,
  "requestedAvailabilityDate": "2020-09-24T10:24:04.602Z",
  "state": "done",
  "searchCriteria": [
    {
      "@type": "StockLevel",
```

```

    "status": "available",
    "quantity": {
      "amount": 1,
      "units": "box"
    },
    "place": {
      "id": "98",
      "href":
"https://serverlocation:port/geographicLocationManagement/v5/geographicLocation/98",
      "name": "Search zone Lyon",
      "@type": "PlaceRef",
      "@referredType": "GeographicLocation"
    },
    "stockItem": {
      "@type": "StockItem",
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "description": "Stock item for Galaxy S22 Ultra 256GB"
    }
  },
  "queryStockLevelItem": [
    {
      "@type": "StockLevel",
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "status": "available",
      "quantity": {
        "amount": 24,
        "units": "box"
      },
      "place": {
        "id": "89",
        "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
        "name": "Lyon Shop",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "stockItem": {
        "@type": "StockItem",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "description": "Stock item for Galaxy S22 Ultra 256GB"
      }
    },
    {
      "@type": "StockLevel",
      "id": "52",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/52",
      "status": "available",
      "quantity": {
        "amount": 15,
        "units": "box"
      },
      "place": {
        "id": "123",
        "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/123",
        "name": "Villeurbanne Shop",

```

```
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "stockItem": {
    "@type": "StockItem",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "description": "Stock item for Galaxy S22 Ultra 256GB"
  }
}
]
```

ReserveStockLevel resource

ReserveStockLevel is used to request a stock level reservation.

Resource model

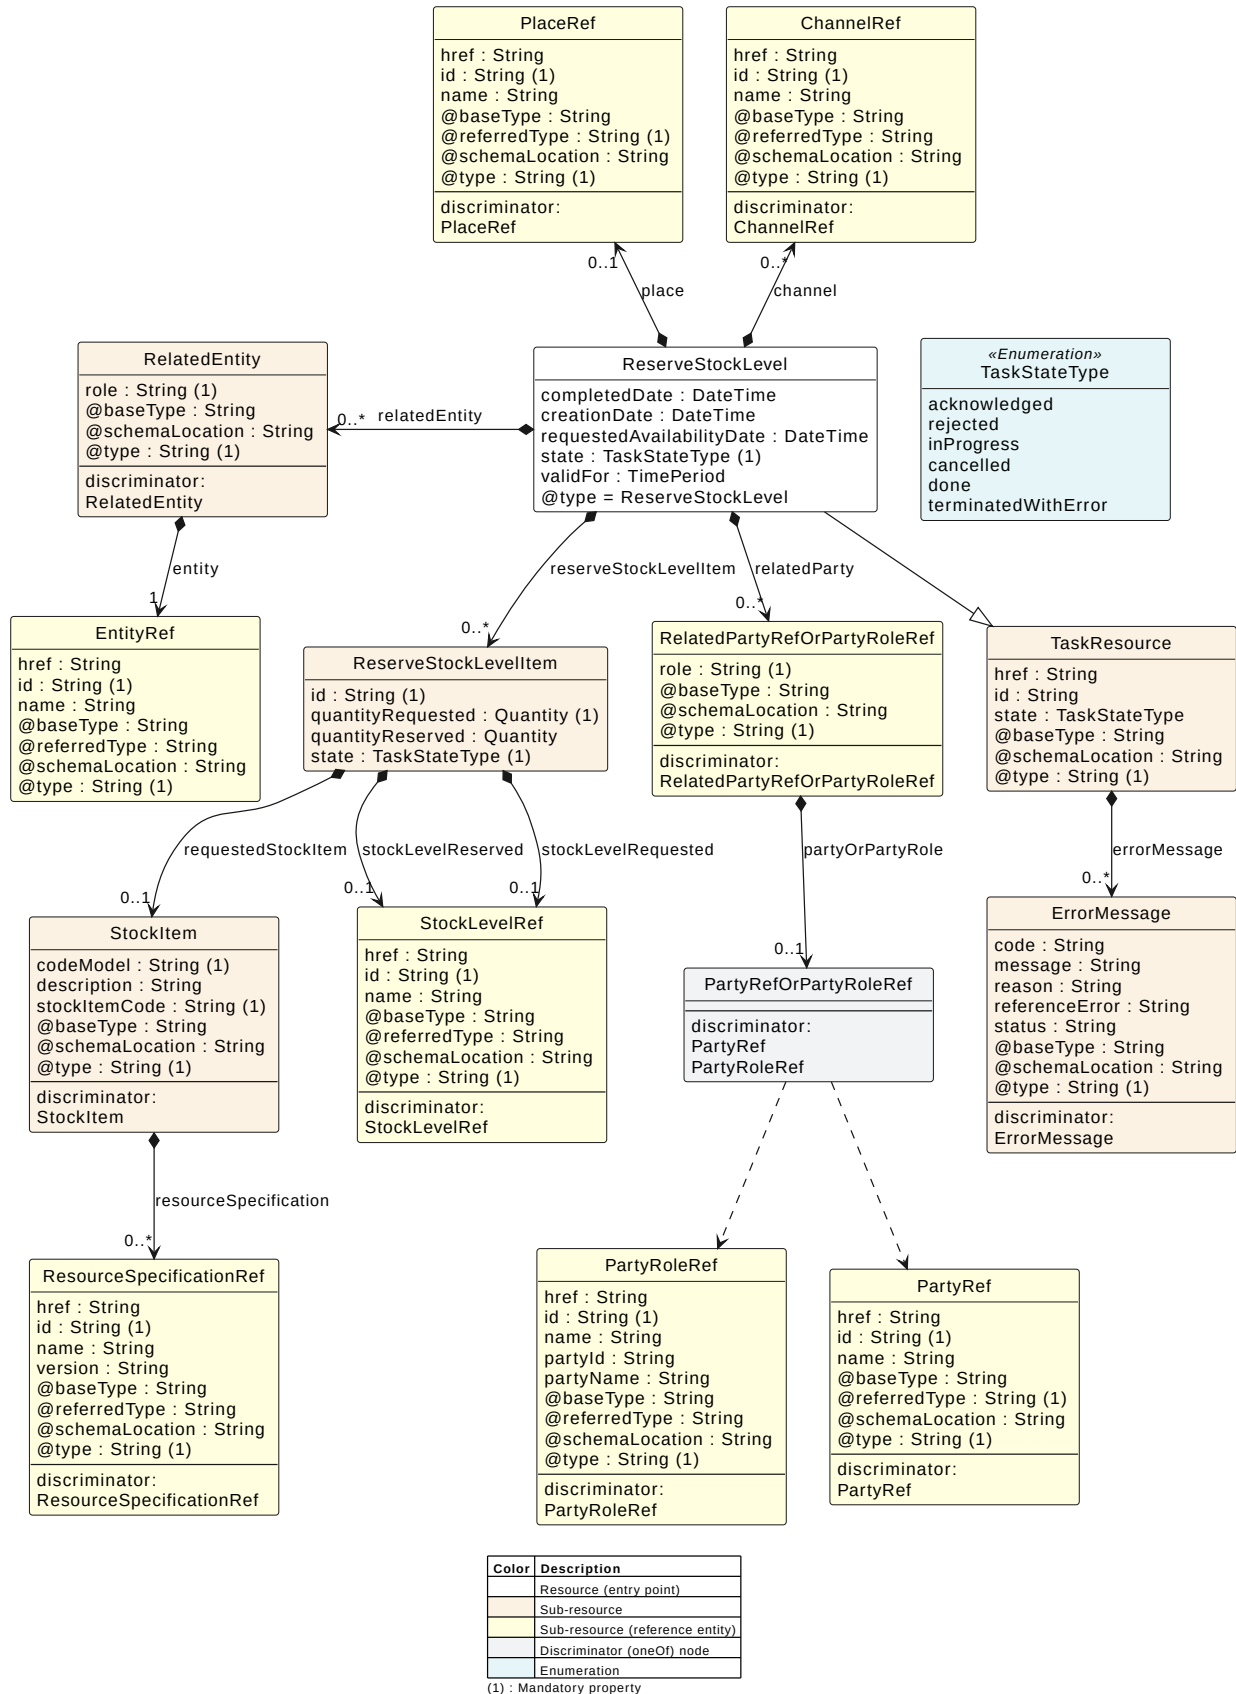


Figure 5 – ReserveStockLevel

Field descriptions

ReserveStockLevel fields

channel	A ChannelRef [0..*]. Channel(s) beneficiary(ies) for this reservation.
completedDate	A DateTime. Date when the ReserveStockLevel task was completed.
creationDate	A DateTime. Date when the ReserveStockLevel was created (whatever its status).
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
place	A PlaceRef. A reference to a physical Place.
relatedEntity	A RelatedEntity [0..*]. Optional correlation to the business context that caused this reservation (for example Product Order or Quote). The reservation algorithm does not change based on the related entity type; the link is for traceability, release, and audit only.
relatedParty	A RelatedPartyRefOrPartyRoleRef [0..*]. Party or party role associated with the reservation (for example the requester or stock owner organization).
requestedAvailabilityDate	A DateTime. Requested stock availability date for the reservation.
reserveStockLevelItem	A ReserveStockLevelItem [1..*]. A list of stock level item reservation.
state	A TaskStateType [1]. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
validFor	A TimePeriod. A period of time, either as a deadline (endDateTime only) a startDateTime only, or both.

@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ChannelRef sub-resource fields

A channel that is being referred to by a resource. For example: channel for selling product offerings, channel for opening a trouble ticket, etc.

See [\[ChannelRef\]](#) for details.

ErrorMessage sub-resource fields

Represents an Error.

See [\[ErrorMessage\]](#) for details.

PlaceRef sub-resource fields

A reference to a physical Place.

See [\[PlaceRef\]](#) for details.

RelatedEntity sub-resource fields

A reference to an entity, where the type of the entity is not known in advance.

entity	An EntityRef [1]. Entity reference schema to be use for all entityRef class.
role	A String [1].
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

EntityRef sub-resource fields

Entity reference schema to be use for all entityRef class.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

RelatedPartyRefOrPartyRoleRef sub-resource fields

A reference to a Party or PartyRole playing a specific role in context of the entity to which it is related.

See [\[RelatedPartyRefOrPartyRoleRef\]](#) for details.

PartyRef sub-resource fields

A Party reference.

See [\[PartyRef\]](#) for details.

PartyRoleRef sub-resource fields

Party role reference. A party role represents the part played by a party in a given context.

See [\[PartyRoleRef\]](#) for details.

ReserveStockLevelItem sub-resource fields

ReserveStockLevelItem is used to request a stock reservation for a StockItem.

id	A String [1]. Unique identifier of the ReserveStockLevel Item.
quantityRequested	A Quantity [1]. An amount in a given unit.
quantityReserved	A Quantity. An amount in a given unit.
requestedStockItem	A StockItem. Identification of the stock item used by the logistics system.

state	A TaskStateType [1]. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
stockLevelRequested	A StockLevelRef. StockLevelRef is a reference to a stock level.
stockLevelReserved	A StockLevelRef. StockLevelRef is a reference to a stock level.

StockItem sub-resource fields

Identification of the stock item used by the logistics system.

See [\[StockItem\]](#) for details.

ResourceSpecificationRef sub-resource fields

Resources are physical or non-physical components (or some combination of these) within an enterprise's infrastructure or inventory. They are typically consumed or used by services (for example a physical port assigned to a service) or contribute to the realization of a Product (for example, a SIM card). They can be drawn from the Application, Computing and Network domains, and include, for example, Network Elements, software, IT systems, content and information, and technology components. A ResourceSpecification is an abstract base class for representing a generic means for implementing a particular type of Resource. In essence, a ResourceSpecification defines the common attributes and relationships of a set of related Resources, while Resource defines a specific instance that is based on a particular ResourceSpecification.

See [\[ResourceSpecificationRef\]](#) for details.

StockLevelRef sub-resource fields

StockLevelRef is a reference to a stock level.

See [\[StockLevelRef\]](#) for details.

Json representation sample(s)

We provide below a JSON representation as example of the 'ReserveStockLevel' resource

object.

```
{
  "@type": "ReserveStockLevel",
  "id": "87",
  "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/87",
  "creationDate": "2020-09-24T10:12:23.664Z",
  "requestedAvailabilityDate": "2020-09-25T10:12:23.664Z",
  "state": "acknowledged",
  "channel": [
    {
      "id": "11",
      "name": "Retail shop",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Lyon Shop",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "relatedEntity": [
    {
      "role": "order triggering the reservation",
      "@type": "RelatedEntity",
      "entity": {
        "id": "56",
        "href": "https://serverlocation:port/productOrderManagement/v5/productOrder/56",
        "name": "Product order 56",
        "@type": "EntityRef",
        "@referredType": "ProductOrder"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "requester",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "45",
        "href": "https://serverlocation:port/partyManagement/v5/individual/45",
        "name": "Jean Dupont",
        "@type": "PartyRef",
        "@referredType": "Individual"
      }
    }
  ],
  "reserveStockLevelItem": [
    {
      "id": "1",
      "quantityRequested": {
        "amount": 1,

```

```

    "units": "box"
  },
  "quantityReserved": {
    "amount": 1,
    "units": "box"
  },
  "state": "acknowledged",
  "stockLevelReserved": {
    "id": "43",
    "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
    "name": "Stock for Galaxy S22 Ultra",
    "@type": "StockLevelRef",
    "@referredType": "StockLevel"
  },
  "requestedStockItem": {
    "@type": "StockItem",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "description": "Stock item for Galaxy S22 Ultra 256GB"
  },
  "stockLevelRequested": {
    "id": "43",
    "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
    "name": "Stock for Galaxy S22 Ultra",
    "@type": "StockLevelRef",
    "@referredType": "StockLevel"
  }
}
],
"validFor": {
  "startDateTime": "2020-09-24T23:20:50.52Z",
  "endDateTime": "2020-09-26T23:20:50.52Z"
}
}

```

CancelReserveStockLevel resource

CancelReserveStockLevel is a task resource used to cancel a stock level reservation request.

Resource model

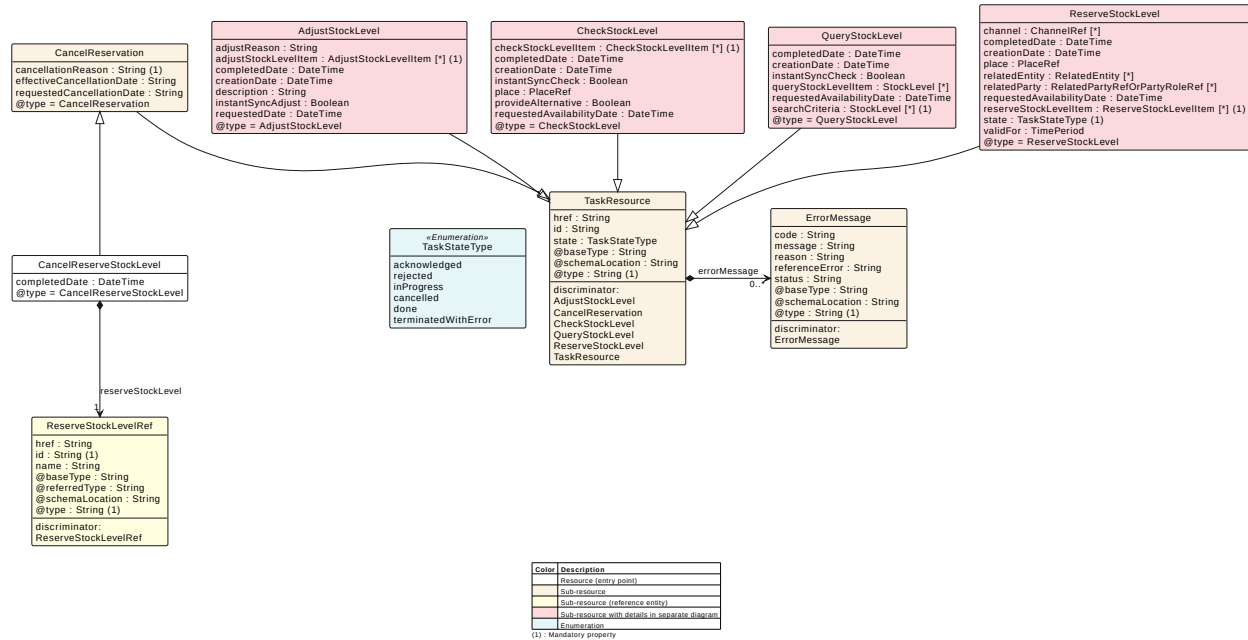


Figure 6 – CancelReserveStockLevel

Field descriptions

CancelReserveStockLevel fields

cancellationReason	A String [1]. Reason why the reservation is cancelled.
completedDate	A DateTime. Date when the CancelReserveStockLevel task was completed.
effectiveCancellationDate	A String. Date when the reservation is cancelled.
errorMessage	An ErrorMessage [0..*]. A list of error message contains the error that caused the termination of the task.
href	A String. Hyperlink reference.
id	A String. Unique identifier.
requestedCancellationDate	A String. Date when the submitter wants the reservation to be cancelled.
reserveStockLevel	A ReserveStockLevelRef [1]. Stock Level Reservation reference.

state	A TaskStateType. Possible values for the state of a task. ENUMERATED with values: * acknowledged * rejected * inProgress * cancelled * done * terminatedWithError
@baseType	A String. When sub-classing, this defines the super-class.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

ErrorMessage sub-resource fields

Represents an Error.

See [\[ErrorMessage\]](#) for details.

ReserveStockLevelRef sub-resource fields

Stock Level Reservation reference.

href	A String. The URI of the referred entity.
id	A String [1]. The identifier of the referred entity.
name	A String. Name of the referred entity.
@baseType	A String. When sub-classing, this defines the super-class.
@referredType	A String. The actual type of the target instance when needed for disambiguation.
@schemaLocation	A String. A URI to a JSON-Schema file that defines additional attributes and relationships.
@type	A String [1]. When sub-classing, this defines the sub-class Extensible name.

Json representation sample(s)

We provide below a JSON representation as example of the 'CancelReserveStockLevel' resource object.

```
{
  "@type": "CancelReserveStockLevel",
  "id": "789-fsds5-kjp",
  "href": "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
  "cancellationReason": "Duplicate reserve",
  "effectiveCancellationDate": "2021-08-30T11:14:46.145Z",
  "requestedCancellationDate": "2021-08-30T09:14:46.145Z",
  "state": "done",
  "reserveStockLevel": {
    "id": "45f-98f-ss45",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-98f-ss45",
    "name": "Reserve stock level 45f-98f-ss45",
    "@type": "ReserveStockLevelRef",
    "@referredType": "ReserveStockLevel"
  }
}
```

Notification Resource Models

15 notifications are defined for this API.

Notifications related to StockLevel:

- Batch Event
- Create Event
- Delete Event
- Attribute Value Change Event
- State Change Event

Notifications related to AdjustStockLevel:

- Create Event
- State Change Event

Notifications related to CheckStockLevel:

- Create Event
- State Change Event

Notifications related to QueryStockLevel:

- Create Event
- State Change Event

Notifications related to ReserveStockLevel:

- Create Event
- State Change Event

Notifications related to CancelReserveStockLevel:

- Create Event
- State Change Event

The notification structure for all notifications in this API follow the pattern depicted by the figure below. A notification event resource (depicted by "SpecificEvent" placeholder) is a sub class of a generic Event structure containing at least an id of the event occurrence (eventId), an event timestamp (eventTime), and the name of the resource (eventType). This notification structure owns an event payload structure ("SpecificEventPayload" placeholder) linked to the resource concerned by the notification using the resource name as access field ("resourceName" placeholder).

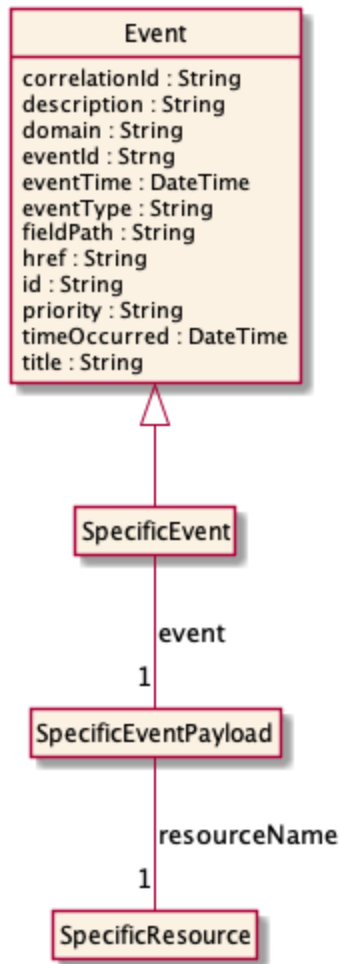


Figure 7 Notification Pattern

StockLevel

Batch Event

StockLevelBatchEvent — used when multiple StockLevel notifications are reported together in one message (for example after a bulk PATCH or asynchronous reconciliation).

```

Content-Type: application/json
{
  "correlationId": "a203d6f2-9555",
  "description": "StockLevelBatchEvent illustration",
  "domain": "Commercial",
  "eventId": "407b-b01e-1cdc0508431d",
  "eventTime": "2022-08-25T12:26:53.911Z",
  "eventType": "StockLevelBatchEvent",
  "priority": "4",
  "title": "StockLevelBatchEvent",
  "event": {
    "stockLevel": [
      {

```

```

    "id": "42",
    "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
    "creationDate": "2020-01-14T08:31:48.243Z",
    "description": "Stock Level for shop",
    "lastInventoryDate": "2020-09-24T08:31:48.243Z",
    "lastUpdate": "2020-09-24T08:31:48.243Z",
    "name": "Stock for Galaxy S22 Ultra",
    "replenishmentDate": "2020-09-28T08:31:48.243Z",
    "channel": [
      {
        "@type": "ChannelRef",
        "id": "11",
        "name": "retail",
        "@referredType": "SalesChannel",
        "href": "https://serverlocation:port/channelManagement/v5/channel/11"
      }
    ],
    "maxQuantity": {
      "amount": 40,
      "units": "box"
    },
    "minQuantity": {
      "amount": 5,
      "units": "box"
    },
    "place": {
      "id": "89",
      "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
      "@referredType": "GeographicSite",
      "@type": "PlaceRef",
      "name": "Lyon Shop"
    },
    "quantity": {
      "amount": 24,
      "units": "box"
    },
    "status": "available",
    "relatedParty": [
      {
        "role": "stock owner",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "111",
          "href":
"https://serverlocation:port/partyManagement/v5/organization/111",
          "@type": "PartyRef",
          "@referredType": "Organization",
          "name": "Stock owner organization"
        }
      }
    ],
    "reorderQuantity": {
      "amount": 10,
      "units": "box"
    },
    "alertThreshold": {
      "amount": 10,
      "units": "box"
    },
  },

```

```

    "stockItem": {
      "description": "Stock item for Galaxy S22 Ultra 256GB",
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "resourceSpecification": [
        {
          "id": "1004",
          "href":
"https://server:port/resourceCatalogManagement/v5/resourceSpecification/1004",
          "version": "1.0.0",
          "@type": "ResourceSpecificationRef",
          "@referredType": "ResourceSpecification"
        }
      ],
      "@type": "StockItem"
    },
    "productSpecification": {
      "id": "23",
      "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
      "name": "Galaxy S22 Ultra",
      "version": "1.0.0",
      "@type": "ProductSpecificationRef",
      "@referredType": "ProductSpecification"
    },
    "@type": "StockLevel",
    "usageType": "inShop"
  }
]
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "StockLevelBatchEvent",
"timeOccurred": "2022-08-25T12:26:49.221Z"
}

```

Create Event

Message example for StockLevelCreateEvent event

```

Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "StockLevelCreateEvent illustration",
  "domain": "Commercial",

```

```

"eventId": "4c32-920b-f262e931e657",
"eventTime": "2022-08-25T12:26:53.881Z",
"eventType": "StockLevelCreateEvent",
"priority": "3",
"title": "StockLevelCreateEvent",
"event": {
  "stockLevel": {
    "id": "42",
    "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
    "creationDate": "2020-01-14T08:31:48.243Z",
    "description": "Stock level for Galaxy S22 Ultra in the Lyon shop",
    "lastInventoryDate": "2020-09-24T08:31:48.243Z",
    "lastUpdate": "2020-09-24T08:31:48.243Z",
    "name": "Stock for Galaxy S22 Ultra",
    "replenishmentDate": "2020-09-28T08:31:48.243Z",
    "channel": [
      {
        "@type": "ChannelRef",
        "@referredType": "SalesChannel",
        "id": "11",
        "name": "retail",
        "href": "https://serverlocation:port/channelManagement/v5/channel/11"
      }
    ],
    "maxQuantity": {
      "amount": 40,
      "units": "box"
    },
    "minQuantity": {
      "amount": 5,
      "units": "box"
    },
    "place": {
      "id": "89",
      "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
      "name": "Lyon Shop site",
      "@type": "PlaceRef",
      "@referredType": "GeographicSite"
    },
    "quantity": {
      "amount": 24,
      "units": "box"
    },
    "status": "available",
    "relatedParty": [
      {
        "role": "stock owner",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "111",
          "href": "https://serverlocation:port/partyManagement/v5/organization/111",
          "@type": "PartyRef",
          "@referredType": "Organization",
          "name": "Stock owner organization"
        }
      }
    ],
    "reorderQuantity": {
      "amount": 10,

```

```

    "units": "box"
  },
  "alertThreshold": {
    "amount": 10,
    "units": "box"
  },
  "stockItem": {
    "description": "Stock item for Galaxy S22 Ultra 256GB",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "resourceSpecification": [
      {
        "id": "1004",
        "href":
"https://serverlocation:port/resourceCatalogManagement/v5/resourceSpecification/1004",
        "name": "Galaxy S22 Ultra Resource Specification",
        "version": "1.0.0",
        "@type": "ResourceSpecificationRef",
        "@referredType": "ResourceSpecification"
      }
    ],
    "@type": "StockItem"
  },
  "productSpecification": {
    "id": "23",
    "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
    "name": "Galaxy S22 Ultra",
    "version": "1.0.0",
    "@type": "ProductSpecificationRef",
    "@referredType": "ProductSpecification"
  },
  "@type": "StockLevel",
  "usageType": "inShop"
}
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "StockLevelCreateEvent",
"timeOccurred": "2022-08-25T12:26:46.953Z"
}

```

Delete Event

Message example for StockLevelDeleteEvent event

```
Content-Type: application/json
{
  "correlationId": "655b3569-bf20",
  "description": "StockLevelDeleteEvent illustration",
  "domain": "Commercial",
  "eventId": "48eb-a191-c1cd9fb4d9c9",
  "eventTime": "2022-08-25T12:26:53.730Z",
  "eventType": "StockLevelDeleteEvent",
  "priority": "3",
  "timeOccurred": "2022-08-25T12:26:50.914Z",
  "title": "StockLevelDeleteEvent",
  "event": {
    "stockLevel": {
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "@type": "StockLevel"
    }
  },
  "reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
    "@REFERREDType": "LogicalResource"
  },
  "source": {
    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@REFERREDType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "StockLevelDeleteEvent"
}
```

Attribute Value Change Event

Message example for StockLevelAttributeValueChangeEvent event

```
Content-Type: application/json
{
  "correlationId": "d8413a2d-bcfc",
  "description": "StockLevelAttributeValueChangeEvent illustration",
  "domain": "Commercial",
  "eventId": "471d-a53c-e0dfd8d012b0",
  "eventTime": "2022-08-25T12:26:53.890Z",
  "eventType": "StockLevelAttributeValueChangeEvent",
  "priority": "4",
  "title": "StockLevelAttributeValueChangeEvent",
  "event": {
    "stockLevel": {
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "quantity": {
        "amount": 11,
        "units": "box"
      }
    }
  }
}
```

```

    },
    "@type": "StockLevel",
    "status": "available",
    "stockItem": {
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "@type": "StockItem"
    }
  },
  "reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "StockLevelAttributeValueChangeEvent",
  "timeOccurred": "2022-08-25T12:26:45.335Z"
}

```

State Change Event

Message example for StockLevelStateChangeEvent event

```

Content-Type: application/json
{
  "correlationId": "cd359d72-887b",
  "description": "StockLevelStateChangeEvent illustration",
  "domain": "Commercial",
  "eventId": "41c0-a670-878a724380e8",
  "eventTime": "2022-08-25T12:26:53.899Z",
  "eventType": "StockLevelStateChangeEvent",
  "priority": "4",
  "title": "StockLevelStateChangeEvent",
  "event": {
    "stockLevel": {
      "id": "74",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/74",
      "@type": "StockLevel",
      "status": "reserved"
    }
  },
  "reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {

```

```

    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "StockLevelStateChangeEvent",
  "timeOccurred": "2022-08-25T12:26:53.236Z"
}

```

AdjustStockLevel

Create Event

Message example for AdjustStockLevelCreateEvent event

```

Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "AdjustStockLevelCreateEvent illustration",
  "domain": "Commercial",
  "eventId": "4c32-920b-f262e931e657",
  "eventTime": "2022-08-25T12:26:53.881Z",
  "eventType": "AdjustStockLevelCreateEvent",
  "priority": "3",
  "title": "AdjustStockLevelCreateEvent",
  "event": {
    "adjustStockLevel": {
      "id": "23",
      "href": "https://serverlocation:port/stockManagement/v5/adjustStockLevel/23",
      "adjustReason": "Inventory check",
      "completedDate": "2020-09-24T08:53:33.954Z",
      "creationDate": "2020-09-24T08:53:33.954Z",
      "description": "inventory check update",
      "instantSyncAdjust": true,
      "requestedDate": "2020-09-24T08:53:33.954Z",
      "adjustStockLevelItem": [
        {
          "id": "1",
          "adjustStockLevelQuantity": {
            "amount": 26,
            "units": "box"
          },
          "stockLevelTarget": {
            "id": "42",
            "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
            "@type": "StockLevelRef",
            "@referredType": "StockLevel"
          },
          "state": "acknowledged"
        }
      ],
      "state": "acknowledged",
      "@type": "AdjustStockLevel"
    }
  }
}

```

```

"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "AdjustStockLevelCreateEvent",
"timeOccurred": "2022-08-25T12:26:46.953Z"
}

```

State Change Event

Message example for AdjustStockLevelStateChangeEvent event

```

Content-Type: application/json
{
  "correlationId": "cd359d72-887b",
  "description": "AdjustStockLevelStateChangeEvent illustration",
  "domain": "Commercial",
  "eventId": "41c0-a670-878a724380e8",
  "eventTime": "2022-08-25T12:26:53.899Z",
  "eventType": "AdjustStockLevelStateChangeEvent",
  "priority": "4",
  "title": "AdjustStockLevelStateChangeEvent",
  "event": {
    "adjustStockLevel": {
      "id": "74",
      "href": "https://serverlocation:port/adjustStockLevel/74",
      "@type": "AdjustStockLevel",
      "state": "done"
    }
  },
  "reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "AdjustStockLevelStateChangeEvent",
  "timeOccurred": "2022-08-25T12:26:53.236Z"
}

```

CheckStockLevel

Create Event

Message example for CheckStockLevelCreateEvent event

```
Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "CheckStockLevelCreateEvent illustration",
  "domain": "Commercial",
  "eventId": "4c32-920b-f262e931e657",
  "eventTime": "2022-08-25T12:26:53.881Z",
  "eventType": "CheckStockLevelCreateEvent",
  "priority": "3",
  "title": "CheckStockLevelCreateEvent",
  "event": {
    "checkStockLevel": {
      "id": "32",
      "href": "https://serverlocation:port/stockManagement/v5/checkStockLevel/32",
      "completedDate": "2020-09-24T09:54:41.127Z",
      "creationDate": "2020-09-24T09:54:41.127Z",
      "instantSyncCheck": true,
      "provideAlternative": true,
      "requestedAvailabilityDate": "2020-09-24T09:54:41.127Z",
      "checkStockLevelItem": [
        {
          "id": "1",
          "availabilityResult": "alternate",
          "requestedQuantity": {
            "amount": 1,
            "units": "box"
          },
          "state": "done",
          "checkedStockLevel": {
            "@type": "StockLevel",
            "name": "Stock for Galaxy S22 Ultra 128GB",
            "status": "unavailable",
            "quantity": {
              "amount": 0,
              "units": "box"
            },
            "stockItem": {
              "@type": "StockItem",
              "stockItemCode": "3501179503615",
              "codeModel": "EAN",
              "description": "Stock item for Galaxy S22 Ultra 128GB"
            }
          },
          "alternate": [
            {
              "@type": "AlternateStockLevel",
              "id": "1",
              "availabilityDate": "2020-09-24T09:54:41.127Z",
              "quantity": {
                "amount": 1,
                "units": "box"
              }
            }
          ]
        }
      ]
    }
  }
}
```

```

    },
    "stockItem": {
      "@type": "StockItem",
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "description": "Stock item for Galaxy S22 Ultra 256GB"
    },
    "stockLevel": {
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "name": "Stock for Galaxy S22 Ultra",
      "@type": "StockLevelRef",
      "@referredType": "StockLevel"
    }
  ]
},
"place": {
  "id": "89",
  "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
  "name": "Lyon Shop",
  "@type": "PlaceRef",
  "@referredType": "GeographicSite"
},
"state": "done",
"@type": "CheckStockLevel"
}
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "CheckStockLevelCreateEvent",
"timeOccurred": "2022-08-25T12:26:46.953Z"
}

```

State Change Event

Message example for CheckStockLevelStateChangeEvent event

```

Content-Type: application/json
{
  "correlationId": "cd359d72-887b",
  "description": "CheckStockLevelStateChangeEvent illustration",
  "domain": "Commercial",

```

```

"eventId": "41c0-a670-878a724380e8",
"eventTime": "2022-08-25T12:26:53.899Z",
"eventType": "CheckStockLevelStateChangeEvent",
"priority": "4",
"title": "CheckStockLevelStateChangeEvent",
"event": {
  "checkStockLevel": {
    "id": "74",
    "href": "https://serverlocation:port/checkStockLevel/74",
    "@type": "CheckStockLevel",
    "state": "done"
  }
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "CheckStockLevelStateChangeEvent",
"timeOccurred": "2022-08-25T12:26:53.236Z"
}

```

QueryStockLevel

Create Event

Message example for QueryStockLevelCreateEvent event

```

Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "QueryStockLevelCreateEvent illustration",
  "domain": "Commercial",
  "eventId": "4c32-920b-f262e931e657",
  "eventTime": "2022-08-25T12:26:53.881Z",
  "eventType": "QueryStockLevelCreateEvent",
  "priority": "3",
  "title": "QueryStockLevelCreateEvent",
  "event": {
    "queryStockLevel": {
      "id": "74",
      "href": "https://serverlocation:port/queryStockLevel/74",
      "completedDate": "2020-09-24T10:24:04.602Z",
      "creationDate": "2020-09-24T10:24:04.602Z",
      "instantSyncCheck": true,
      "requestedAvailabilityDate": "2020-09-24T10:24:04.602Z",
      "queryStockLevelItem": [

```

```

      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "place": {
        "id": "89",
        "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
        "name": "Lyon Shop site 89",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "quantity": {
        "amount": 24,
        "units": "box"
      },
      "status": "available",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "productSpecification": {
        "id": "23",
        "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
        "name": "Galaxy S22 Ultra",
        "version": "1.0.0",
        "@type": "ProductSpecificationRef",
        "@referredType": "ProductSpecification"
      },
      "@type": "StockLevel",
      "name": "Stock for Galaxy S22 Ultra"
    },
    {
      "id": "52",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/52",
      "place": {
        "id": "89",
        "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
        "name": "Lyon Shop site 89",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "quantity": {
        "amount": 15,
        "units": "box"
      },
      "status": "available",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "productSpecification": {
        "id": "23",
        "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
        "name": "Galaxy S22 Ultra",

```

```

        "version": "1.0.0",
        "@type": "ProductSpecificationRef",
        "@referredType": "ProductSpecification"
    },
    "@type": "StockLevel",
    "name": "Stock for Galaxy S22 Ultra"
}
],
"searchCriteria": [
    {
        "place": {
            "id": "98",
            "href":
"https://serverlocation:port/geographicLocationManagement/v5/geographicLocation/98",
            "name": "Geographic location 98",
            "@type": "PlaceRef",
            "@referredType": "GeographicLocation"
        },
        "status": "available",
        "stockItem": {
            "description": "Stock item for Galaxy S22 Ultra 256GB",
            "stockItemCode": "3501179503622",
            "codeModel": "EAN",
            "@type": "StockItem"
        },
        "productSpecification": {
            "id": "23",
            "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
            "name": "Galaxy S22 Ultra",
            "version": "1.0.0",
            "@type": "ProductSpecificationRef",
            "@referredType": "ProductSpecification"
        },
        "@type": "StockLevel",
        "name": "Stock for Galaxy S22 Ultra",
        "quantity": {
            "amount": 24,
            "units": "box"
        }
    }
],
"state": "done",
"@type": "QueryStockLevel"
}
},
"reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
},
"source": {
    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "QueryStockLevelCreateEvent",

```

```

    "timeOccurred": "2022-08-25T12:26:46.953Z"
  }

```

State Change Event

Message example for QueryStockLevelStateChangeEvent event

```

Content-Type: application/json
{
  "correlationId": "cd359d72-887b",
  "description": "QueryStockLevelStateChangeEvent illustration",
  "domain": "Commercial",
  "eventId": "41c0-a670-878a724380e8",
  "eventTime": "2022-08-25T12:26:53.899Z",
  "eventType": "QueryStockLevelStateChangeEvent",
  "priority": "4",
  "title": "QueryStockLevelStateChangeEvent",
  "event": {
    "queryStockLevel": {
      "id": "74",
      "href": "https://serverlocation:port/queryStockLevel/74",
      "@type": "QueryStockLevel",
      "state": "done"
    }
  },
  "reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "QueryStockLevelStateChangeEvent",
  "timeOccurred": "2022-08-25T12:26:53.236Z"
}

```

ReserveStockLevel

Create Event

Message example for ReserveStockLevelCreateEvent event

```

Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "ReserveStockLevelCreateEvent illustration",

```

```

"domain": "Commercial",
"eventId": "4c32-920b-f262e931e657",
"eventTime": "2022-08-25T12:26:53.881Z",
"eventType": "ReserveStockLevelCreateEvent",
"priority": "3",
"title": "ReserveStockLevelCreateEvent",
"event": {
  "reserveStockLevel": {
    "id": "87",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/87",
    "creationDate": "2020-09-24T10:12:23.664Z",
    "requestedAvailabilityDate": "2020-09-25T10:12:23.664Z",
    "channel": [
      {
        "id": "11",
        "name": "retail",
        "@type": "ChannelRef",
        "@referredType": "SalesChannel",
        "href": "https://serverlocation:port/channelManagement/v5/channel/11"
      }
    ],
    "place": {
      "id": "89",
      "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
      "@referredType": "GeographicSite",
      "@type": "PlaceRef"
    },
    "relatedEntity": [
      {
        "role": "order triggering the reservation",
        "@type": "RelatedEntity",
        "entity": {
          "id": "56",
          "href":
"https://serverlocation:port/productOrderManagement/v5/productOrder/56",
          "@type": "EntityRef",
          "@referredType": "ProductOrder"
        }
      }
    ],
    "relatedParty": [
      {
        "role": "requester",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "45",
          "href": "https://serverlocation:port/partyManagement/v5/individual/45",
          "@type": "PartyRef",
          "@referredType": "Individual"
        }
      }
    ],
    "reserveStockLevelItem": [
      {
        "id": "1",
        "stockLevelReserved": {
          "id": "43",
          "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
          "@type": "StockLevelRef",

```

```

        "@referredType": "StockLevel"
      },
      "quantityRequested": {
        "amount": 1,
        "units": "box"
      },
      "quantityReserved": {
        "amount": 1,
        "units": "box"
      },
      "requestedStockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "state": "acknowledged",
      "stockLevelRequested": {
        "id": "43",
        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel"
      }
    }
  ],
  "state": "acknowledged",
  "validFor": {
    "endTime": "2020-09-26T23:20:50.52Z",
    "startTime": "2020-09-24T23:20:50.52Z"
  },
  "@type": "ReserveStockLevel"
}
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "ReserveStockLevelCreateEvent",
"timeOccurred": "2022-08-25T12:26:46.953Z"
}

```

State Change Event

Message example for ReserveStockLevelStateChangeEvent event

```

Content-Type: application/json
{

```

```

"correlationId": "cd359d72-887b",
"description": "ReserveStockLevelStateChangeEvent illustration",
"domain": "Commercial",
"eventId": "41c0-a670-878a724380e8",
"eventTime": "2022-08-25T12:26:53.899Z",
"eventType": "ReserveStockLevelStateChangeEvent",
"priority": "4",
"title": "ReserveStockLevelStateChangeEvent",
"event": {
  "reserveStockLevel": {
    "id": "74",
    "href": "https://serverlocation:port/reserveStockLevel/74",
    "@type": "ReserveStockLevel",
    "state": "done"
  }
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "ReserveStockLevelStateChangeEvent",
"timeOccurred": "2022-08-25T12:26:53.236Z"
}

```

CancelReserveStockLevel

Create Event

Message example for CancelReserveStockLevelCreateEvent event

```

Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "CancelReserveStockLevelCreateEvent illustration",
  "domain": "Resource",
  "eventId": "4c32-920b-f262e931e657",
  "eventTime": "2022-08-25T12:26:53.881Z",
  "eventType": "CancelReserveStockLevelCreateEvent",
  "priority": "3",
  "title": "CancelReserveStockLevelCreateEvent",
  "event": {
    "cancelReserveStockLevel": {
      "id": "789-fsds5-kjp",
      "href":
"https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
      "cancellationReason": "Duplicate reserve",
      "effectiveCancellationDate": "2021-08-30T11:14:46.145Z",

```

```

    "requestedCancellationDate": "2021-08-30T09:14:46.145Z",
    "reserveStockLevel": {
      "id": "45f-98f-ss45",
      "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-98f-ss45",
      "@type": "ReserveStockLevelRef",
      "@referredType": "ReserveStockLevel"
    },
    "state": "done",
    "@type": "CancelReserveStockLevel"
  }
},
"reportingSystem": {
  "id": "893",
  "name": "APP-774",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"source": {
  "id": "146",
  "name": "APP-521",
  "@type": "ReportingResource",
  "@referredType": "LogicalResource"
},
"@baseType": "Event",
"@type": "CancelReserveStockLevelCreateEvent",
"timeOccurred": "2022-08-25T12:26:46.953Z"
}

```

State Change Event

Message example for CancelReserveStockLevelStateChangeEvent event

```

Content-Type: application/json
{
  "correlationId": "37e989f0-5b4c",
  "description": "CancelReserveStockLevelStateChangeEvent illustration",
  "domain": "Resource",
  "eventId": "4c32-920b-f262e931e657",
  "eventTime": "2022-08-25T12:26:53.881Z",
  "eventType": "CancelReserveStockLevelStateChangeEvent",
  "priority": "3",
  "title": "CancelReserveStockLevelStateChangeEvent",
  "event": {
    "cancelReserveStockLevel": {
      "id": "789-fsds5-kjp",
      "href": "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
      "@type": "CancelReserveStockLevel",
      "state": "done"
    }
  },
  "reportingSystem": {
    "id": "893",
    "name": "APP-774",
    "@type": "ReportingResource",
  }
}

```

```
    "@referredType": "LogicalResource"
  },
  "source": {
    "id": "146",
    "name": "APP-521",
    "@type": "ReportingResource",
    "@referredType": "LogicalResource"
  },
  "@baseType": "Event",
  "@type": "CancelReserveStockLevelStateChangeEvent",
  "timeOccurred": "2022-08-25T12:26:46.953Z"
}
```

API OPERATIONS

Remember the following Uniform Contract:

Operation on Entities	Uniform API Operation	Description
Query Entities	GET Resource	GET must be used to retrieve a representation of a resource.
Create Entity	POST Resource	POST must be used to create a new resource
Partial Update of an Entity	PATCH Resource	PATCH must be used to partially update a resource
Remove an Entity	DELETE Resource	DELETE must be used to remove a resource
Execute an Action on an Entity	POST on TASK Resource	POST must be used to execute Task Resources
Other Request Methods	POST on TASK Resource	GET and POST must not be used to tunnel other request methods.

Filtering and attribute selection rules are described in the TMF REST Design Guidelines.

Notifications are also described in a subsequent section.

Operations on StockLevel

Retrieves a stockLevel by ID

GET /stockLevel/{id}?fields=...

Description

This operation retrieves a StockLevel entity. Attribute selection is enabled for all first level attributes.

Usage samples

Here's a sample of a request for retrieving a StockLevel resource based on its id

Request

```
GET /stockLevel/42
Content-Type: application/json
```

Response

```
200

{
  "id": "42",
  "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
  "creationDate": "2020-01-14T08:31:48.243Z",
  "description": "Stock level for Galaxy S22 Ultra in the Lyon shop",
  "lastInventoryDate": "2020-09-24T08:31:48.243Z",
  "lastUpdate": "2020-09-24T08:31:48.243Z",
  "name": "Stock for Galaxy S22 Ultra",
  "replenishmentDate": "2020-09-28T08:31:48.243Z",
  "channel": [
    {
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "id": "11",
      "name": "retail",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "maxQuantity": {
    "amount": 40,
    "units": "box"
  },
  "minQuantity": {
    "amount": 5,
    "units": "box"
  },
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Place 89",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "quantity": {
    "amount": 24,
    "units": "box"
  },
  "status": "available",
  "relatedParty": [
    {
      "role": "stock owner",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "111",
        "href": "https://serverlocation:port/partyManagement/v5/organization/111",
        "@type": "PartyRef",
        "@referredType": "Organization",
        "name": "Stock owner organization"
      }
    }
  ]
}
```

```

    }
  },
  "reorderQuantity": {
    "amount": 10,
    "units": "box"
  },
  "alertThreshold": {
    "amount": 10,
    "units": "box"
  },
  "stockItem": {
    "description": "Stock item for Galaxy S22 Ultra 256GB",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "resourceSpecification": [
      {
        "id": "1004",
        "href":
"https://serverlocation:port/resourceCatalogManagement/v5/resourceSpecification/1004",
        "name": "Galaxy S22 Ultra Resource Specification",
        "version": "1.0.0",
        "@type": "ResourceSpecificationRef",
        "@referredType": "ResourceSpecification"
      }
    ],
    "@type": "StockItem"
  },
  "productSpecification": {
    "id": "23",
    "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
    "name": "Galaxy S22 Ultra",
    "version": "1.0.0",
    "@type": "ProductSpecificationRef",
    "@referredType": "ProductSpecification"
  },
  "@type": "StockLevel",
  "usageType": "inShop"
}

```

List or find stockLevel objects

GET /stockLevel?fields=...&{filtering}

Description

This operation list StockLevel entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve StockLevel resources where quantity.amount is strictly less than

alertThreshold.amount, with field selection on id, href, quantity, and alertThreshold.

Request

```
GET
/stockLevel?filter=quantity.amount<alertThreshold.amount&fields=id,href,alertThreshold,
alertThreshold.amount,quantity,quantity.amount
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "42",
    "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
    "quantity": {
      "amount": 5,
      "units": "box"
    },
    "alertThreshold": {
      "amount": 10,
      "units": "box"
    },
    "status": "available",
    "stockItem": {
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "@type": "StockItem"
    },
    "@type": "StockLevel"
  },
  {
    "id": "112",
    "href": "https://serverlocation:port/stockManagement/v5/stockLevel/112",
    "quantity": {
      "amount": 3,
      "units": "box"
    },
    "alertThreshold": {
      "amount": 10,
      "units": "box"
    },
    "status": "available",
    "stockItem": {
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "@type": "StockItem"
    },
    "@type": "StockLevel"
  }
]
```

Creates a stockLevel

POST /stockLevel?fields=...&{filtering}

Description

This operation creates a StockLevel entity.

Mandatory Attributes

Mandatory Attributes	Rule
name	
stockItem	M
stockItem.codeModel	
stockItem.stockItemCode	
@type	

Usage samples

Creation of a new StockLevel with POST operation

Request

```
POST /stockLevel
Content-Type: application/json

{
  "description": "Stock Level for shop",
  "name": "Stock for Galaxy S22 Ultra",
  "stockItem": {
    "description": "Stock item for Galaxy S22 Ultra 256GB",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "@type": "StockItem"
  },
  "@type": "StockLevel"
}
```

Response

```
201

{
  "id": "42",
  "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
  "creationDate": "2020-01-14T08:31:48.243Z",
  "description": "Stock Level for shop",
}
```

```

{
  "name": "Stock for Galaxy S22 Ultra",
  "status": "available",
  "quantity": {
    "amount": 24,
    "units": "box"
  },
  "stockItem": {
    "description": "Stock item for Galaxy S22 Ultra 256GB",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "@type": "StockItem"
  },
  "@type": "StockLevel"
}

```

Updates partially a stockLevel

PATCH /stockLevel/{id}?fields=...

Description

This operation allows partial updates of a StockLevel entity. Support of json/merge (<https://tools.ietf.org/html/rfc7396>) is mandatory, support of json/patch (<http://tools.ietf.org/html/rfc5789>) is optional. Note: If the update operation yields to the creation of sub-resources or relationships, the same rules concerning mandatory sub-resource attributes and default value settings in the POST operation applies to the PATCH operation. Hence these tables are not repeated here.

Patchable and Non Patchable Attributes

Non Patchable Attributes	Rule
creationDate	
href	
id	
@baseType	@baseType is immutable
@schemaLocation	@schemaLocation is immutable
@type	@type is immutable

Patchable Attributes	Rule
alertThreshold	
channel	
description	

Patchable Attributes	Rule
lastInventoryDate	
lastUpdate	
maxQuantity	
minQuantity	
name	
place	
productSpecification	
quantity	
relatedParty	
reorderQuantity	
replenishmentDate	
status	
stockItem	
usageType	

Usage samples

Here's an example of a request using merge-patch syntax for patching a StockLevel resource (created via previous POST) with change on following attributes: minQuantity.amount, reorderQuantity.amount & replenishmentDate

Request

```
PATCH /stockLevel/42
Content-Type: application/merge-patch+json

{
  "replenishmentDate": "2020-10-05T08:31:48.243Z",
  "minQuantity": {
    "amount": 2,
    "units": "box"
  },
  "reorderQuantity": {
    "amount": 5,
    "units": "box"
  },
  "@type": "StockLevel",
  "name": "Stock for Galaxy S22 Ultra",
  "status": "available",
  "quantity": {
    "amount": 24,
```

```

    "units": "box"
  },
  "stockItem": {
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "@type": "StockItem"
  }
}

```

Response

```

200

{
  "id": "42",
  "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
  "creationDate": "2020-01-14T08:31:48.243Z",
  "description": "Stock level for Galaxy S22 Ultra in the Lyon shop",
  "lastInventoryDate": "2020-09-24T08:31:48.243Z",
  "lastUpdate": "2020-09-24T08:31:48.243Z",
  "name": "Stock for Galaxy S22 Ultra",
  "replenishmentDate": "2020-10-05T08:31:48.243Z",
  "channel": [
    {
      "id": "11",
      "name": "retail",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "maxQuantity": {
    "amount": 40,
    "units": "box"
  },
  "minQuantity": {
    "amount": 2,
    "units": "box"
  },
  "place": {
    "id": "89",
    "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Place 89",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "quantity": {
    "amount": 24,
    "units": "box"
  },
  "status": "available",
  "relatedParty": [
    {
      "role": "stock owner",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {

```

```

        "id": "111",
        "href": "https://serverlocation:port/partyManagement/v5/organization/111",
        "@type": "PartyRef",
        "@referredType": "Organization",
        "name": "Stock owner organization"
    }
}
],
"reorderQuantity": {
    "amount": 5,
    "units": "box"
},
"alertThreshold": {
    "amount": 10,
    "units": "box"
},
"stockItem": {
    "description": "Stock item for Galaxy S22 Ultra 256GB",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "resourceSpecification": [
        {
            "id": "1004",
            "href":
"https://serverlocation:port/resourceCatalogManagement/v5/resourceSpecification/1004",
            "name": "Galaxy S22 Ultra Resource Specification",
            "version": "1.0.0",
            "@type": "ResourceSpecificationRef",
            "@referredType": "ResourceSpecification"
        }
    ],
    "@type": "StockItem"
},
"productSpecification": {
    "id": "23",
    "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
    "name": "Galaxy S22 Ultra",
    "version": "1.0.0",
    "@type": "ProductSpecificationRef",
    "@referredType": "ProductSpecification"
},
"@type": "StockLevel",
"usageType": "inShop"
}

```

Here's an example of a request using json-patch syntax for patching a StockLevel resource (created via previous POST) with change on following attributes: minQuantity.amount, reorderQuantity.amount & replenishmentDate

Request

```

PATCH /stockLevel/42
Content-Type: application/json-patch+json

```

```
[
```

```
{
  "op": "replace",
  "path": "/replenishmentDate",
  "value": "2020-10-05T08:31:48.243Z"
},
{
  "op": "replace",
  "path": "/minQuantity/amount",
  "value": 2
},
{
  "op": "replace",
  "path": "/reorderQuantity/amount",
  "value": 5
}
]
```

Response

200

```
{
  "id": "42",
  "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
  "creationDate": "2020-01-14T08:31:48.243Z",
  "description": "Stock level for Galaxy S22 Ultra in the Lyon shop",
  "lastInventoryDate": "2020-09-24T08:31:48.243Z",
  "lastUpdate": "2020-09-24T08:31:48.243Z",
  "name": "Stock for Galaxy S22 Ultra",
  "replenishmentDate": "2020-10-05T08:31:48.243Z",
  "channel": [
    {
      "id": "11",
      "name": "retail",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "maxQuantity": {
    "amount": 40,
    "units": "box"
  },
  "minQuantity": {
    "amount": 2,
    "units": "box"
  },
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Place 89",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "quantity": {
    "amount": 24,
```

```

    "units": "box"
  },
  "status": "available",
  "relatedParty": [
    {
      "role": "stock owner",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "111",
        "href": "https://serverlocation:port/partyManagement/v5/organization/111",
        "@type": "PartyRef",
        "@referredType": "Organization",
        "name": "Stock owner organization"
      }
    }
  ],
  "reorderQuantity": {
    "amount": 5,
    "units": "box"
  },
  "alertThreshold": {
    "amount": 10,
    "units": "box"
  },
  "stockItem": {
    "description": "Stock item for Galaxy S22 Ultra 256GB",
    "stockItemCode": "3501179503622",
    "codeModel": "EAN",
    "resourceSpecification": [
      {
        "id": "1004",
        "href":
"https://serverlocation:port/resourceCatalogManagement/v5/resourceSpecification/1004",
        "name": "Galaxy S22 Ultra Resource Specification",
        "version": "1.0.0",
        "@type": "ResourceSpecificationRef",
        "@referredType": "ResourceSpecification"
      }
    ],
    "@type": "StockItem"
  },
  "productSpecification": {
    "id": "23",
    "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
    "name": "Galaxy S22 Ultra",
    "version": "1.0.0",
    "@type": "ProductSpecificationRef",
    "@referredType": "ProductSpecification"
  },
  "@type": "StockLevel",
  "usageType": "inShop"
}

```

Here's an example of a request using json-patch-query syntax for patching a StockLevel resource, selecting a relatedParty array element by role and updating that role.

Request

```
PATCH /stockLevel/42
Content-Type: application/json-patch-query+json

[
  {
    "op": "replace",
    "path": "/relatedParty[?(@.role=='stock owner')]/role",
    "value": "inventory owner"
  }
]
```

Response

```
200

{
  "id": "42",
  "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
  "creationDate": "2020-01-14T08:31:48.243Z",
  "description": "Stock level for Galaxy S22 Ultra in the Lyon shop",
  "lastInventoryDate": "2020-09-24T08:31:48.243Z",
  "lastUpdate": "2020-09-24T09:15:00.000Z",
  "name": "Stock for Galaxy S22 Ultra",
  "replenishmentDate": "2020-10-05T08:31:48.243Z",
  "channel": [
    {
      "id": "11",
      "name": "retail",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "maxQuantity": {
    "amount": 40,
    "units": "box"
  },
  "minQuantity": {
    "amount": 2,
    "units": "box"
  },
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Place 89",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "quantity": {
    "amount": 24,
    "units": "box"
  },
  "status": "available",
```

```

"relatedParty": [
  {
    "role": "inventory owner",
    "@type": "RelatedPartyRefOrPartyRoleRef",
    "partyOrPartyRole": {
      "id": "111",
      "href": "https://serverlocation:port/partyManagement/v5/organization/111",
      "@type": "PartyRef",
      "@referredType": "Organization",
      "name": "Stock owner organization"
    }
  }
],
"reorderQuantity": {
  "amount": 5,
  "units": "box"
},
"alertThreshold": {
  "amount": 10,
  "units": "box"
},
"stockItem": {
  "description": "Stock item for Galaxy S22 Ultra 256GB",
  "stockItemCode": "3501179503622",
  "codeModel": "EAN",
  "resourceSpecification": [
    {
      "id": "1004",
      "href":
"https://serverlocation:port/resourceCatalogManagement/v5/resourceSpecification/1004",
      "name": "Galaxy S22 Ultra Resource Specification",
      "version": "1.0.0",
      "@type": "ResourceSpecificationRef",
      "@referredType": "ResourceSpecification"
    }
  ],
  "@type": "StockItem"
},
"productSpecification": {
  "id": "23",
  "href":
"https://serverlocation:port/productCatalogManagement/v5/productSpecification/23",
  "name": "Galaxy S22 Ultra",
  "version": "1.0.0",
  "@type": "ProductSpecificationRef",
  "@referredType": "ProductSpecification"
},
"@type": "StockLevel",
"usageType": "inShop"
}

```

Deletes a stockLevel

DELETE /stockLevel/{id}?{filtering}

Description

This operation deletes a StockLevel entity.

Usage samples

Delete a StockLevel resource by id (no request or response body).

Request

```
DELETE /stockLevel/42
Content-Type: application/json
```

Response

```
204
```

Operations on AdjustStockLevel

Retrieves a adjustStockLevel by ID

GET /adjustStockLevel/{id}?fields=...

Description

This operation retrieves an AdjustStockLevel entity. Attribute selection is enabled for all first level attributes.

Usage samples

Here's an example of a adjust stock request retrieval. The given criteria is the adjust request id.

Request

```
GET /adjustStockLevel/23
Content-Type: application/json
```

Response

```
200

{
  "id": "23",
  "href": "https://serverlocation:port/stockManagement/v5/adjustStockLevel/23",
  "adjustReason": "Inventory check",
}
```

```
"completedDate": "2020-09-24T08:53:33.954Z",
"creationDate": "2020-09-24T08:53:33.954Z",
"description": "inventory check update",
"instantSyncAdjust": true,
"requestedDate": "2020-09-24T08:53:33.954Z",
"adjustStockLevelItem": [
  {
    "id": "1",
    "adjustStockLevelQuantity": {
      "amount": 26,
      "units": "box"
    },
    "stockLevelTarget": {
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "@type": "StockLevelRef",
      "@referredType": "StockLevel",
      "name": "Stock level 42"
    },
    "state": "done"
  }
],
"state": "done",
"@type": "AdjustStockLevel"
}
```

List or find adjustStockLevel objects

GET /adjustStockLevel?fields=...&{filtering}

Description

This operation list AdjustStockLevel entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Here's an example of a request for retrieving a list of Adjust Stock Level request(s). The given criteria is the state (accepted).

Request

```
GET /adjustStockLevel?fields=id,href,adjustReason,completedDate,requestedDate
Content-Type: application/json
```

Response

```
200
```

```
[
  {
    "id": "23",
    "href": "https://serverlocation:port/stockManagement/v5/adjustStockLevel/23",
    "adjustReason": "Inventory check",
    "completedDate": "2020-09-24T08:53:33.954Z",
    "requestedDate": "2020-09-24T08:53:33.954Z",
    "adjustStockLevelItem": [
      {
        "id": "1",
        "adjustStockLevelQuantity": {
          "amount": 26,
          "units": "box"
        },
        "stockLevelTarget": {
          "id": "42",
          "@type": "StockLevelRef",
          "@referredType": "StockLevel",
          "name": "Stock level 42",
          "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42"
        }
      }
    ],
    "@type": "AdjustStockLevel"
  },
  {
    "id": "36",
    "href": "https://serverlocation:port/stockManagement/v5/adjustStockLevel/36",
    "adjustReason": "Inventory check",
    "completedDate": "2020-09-24T08:53:33.954Z",
    "requestedDate": "2020-09-24T08:53:33.954Z",
    "adjustStockLevelItem": [
      {
        "id": "1",
        "adjustStockLevelQuantity": {
          "amount": 26,
          "units": "box"
        },
        "stockLevelTarget": {
          "id": "42",
          "@type": "StockLevelRef",
          "@referredType": "StockLevel",
          "name": "Stock level 42",
          "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42"
        }
      }
    ],
    "@type": "AdjustStockLevel"
  }
]
```

Creates a `adjustStockLevel`

POST `/adjustStockLevel?fields=...&{filtering}`

Description

This operation creates an AdjustStockLevel entity.

Mandatory Attributes

Mandatory Attributes	Rule
adjustStockLevelItem	
adjustStockLevelItem.adjustStockLevelQuantity	
adjustStockLevelItem.adjustStockLevelQuantity.amount	
adjustStockLevelItem.id	
adjustStockLevelItem.stockLevelTarget	
adjustStockLevelItem.stockLevelTarget.id	
@type	

Usage samples

Creation of a new AdjustStockLevel with POST operation

Request

```
POST /adjustStockLevel
Content-Type: application/json

{
  "adjustReason": "Inventory check",
  "description": "inventory check update",
  "instantSyncAdjust": true,
  "requestedDate": "2020-09-24T08:53:33.954Z",
  "adjustStockLevelItem": [
    {
      "id": "1",
      "adjustStockLevelQuantity": {
        "amount": 26,
        "units": "box"
      },
      "stockLevelTarget": {
        "id": "42",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel",
        "name": "Stock level 42",
        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42"
      }
    }
  ]
}
```

```

    ],
    "@type": "AdjustStockLevel"
  }

```

Response

```

201

{
  "id": "23",
  "href": "https://serverlocation:port/stockManagement/v5/adjustStockLevel/23",
  "adjustReason": "Inventory check",
  "completedDate": "2020-09-24T08:53:33.954Z",
  "creationDate": "2020-09-24T08:53:33.954Z",
  "description": "inventory check update",
  "instantSyncAdjust": true,
  "requestedDate": "2020-09-24T08:53:33.954Z",
  "adjustStockLevelItem": [
    {
      "id": "1",
      "adjustStockLevelQuantity": {
        "amount": 26,
        "units": "box"
      },
      "stockLevelTarget": {
        "id": "42",
        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel",
        "name": "Stock level 42"
      },
      "state": "done"
    }
  ],
  "state": "done",
  "@type": "AdjustStockLevel"
}

```

Operations on CheckStockLevel

Retrieves a checkStockLevel by ID

GET /checkStockLevel/{id}?fields=...

Description

This operation retrieves a CheckStockLevel entity. Attribute selection is enabled for all first level attributes.

Usage samples

Here's an example of a check stock level retrieval. The given criteria is the check stock level

id.

Request

```
GET /checkStockLevel/23
Content-Type: application/json
```

Response

```
200

{
  "id": "32",
  "href": "https://serverlocation:port/stockManagement/v5/checkStockLevel/32",
  "completedDate": "2020-09-24T09:54:41.127Z",
  "creationDate": "2020-09-24T09:54:41.127Z",
  "instantSyncCheck": true,
  "provideAlternative": true,
  "requestedAvailabilityDate": "2020-09-24T09:54:41.127Z",
  "checkStockLevelItem": [
    {
      "id": "1",
      "availabilityResult": "alternate",
      "requestedQuantity": {
        "amount": 1,
        "units": "box"
      },
      "state": "done",
      "checkedStockLevel": {
        "@type": "StockLevel",
        "name": "Stock for Galaxy S22 Ultra 128GB",
        "status": "unavailable",
        "quantity": {
          "amount": 0,
          "units": "box"
        },
        "stockItem": {
          "@type": "StockItem",
          "stockItemCode": "3501179503615",
          "codeModel": "EAN",
          "description": "Stock item for Galaxy S22 Ultra 128GB"
        }
      },
      "alternate": [
        {
          "@type": "AlternateStockLevel",
          "id": "1",
          "availabilityDate": "2020-09-24T09:54:41.127Z",
          "quantity": {
            "amount": 1,
            "units": "box"
          },
          "stockItem": {
            "@type": "StockItem",
            "stockItemCode": "3501179503622",

```

```

        "codeModel": "EAN",
        "description": "Stock item for Galaxy S22 Ultra 256GB"
    },
    "stockLevel": {
        "id": "42",
        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
        "name": "Stock for Galaxy S22 Ultra",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel"
    }
}
]
},
"place": {
    "id": "89",
    "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Lyon Shop",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
},
"state": "done",
"@type": "CheckStockLevel"
}

```

List or find checkStockLevel objects

GET /checkStockLevel?fields=...&{filtering}

Description

This operation list CheckStockLevel entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Here's an example of a request for retrieving a list of Check Stock Level request(s). The given criteria is the state (accepted).

Request

```

GET
/checkStockLevel?fields=id,href,creationDate,checkStockLevelItem,checkStockLevelItem.id
,checkStockLevelItem.availabilityResult
Content-Type: application/json

```

Response

200

```
[
  {
    "id": "32",
    "href": "https://serverlocation:port/stockManagement/v5/checkStockLevel/32",
    "creationDate": "2020-09-24T09:54:41.127Z",
    "checkStockLevelItem": [
      {
        "id": "1",
        "availabilityResult": "alternate",
        "requestedQuantity": {
          "amount": 1,
          "units": "box"
        },
        "checkedStockLevel": {
          "name": "Stock for Galaxy S22 Ultra",
          "status": "available",
          "quantity": {
            "amount": 24,
            "units": "box"
          },
          "stockItem": {
            "stockItemCode": "3501179503622",
            "codeModel": "EAN",
            "@type": "StockItem"
          },
          "@type": "StockLevel"
        }
      }
    ],
    "@type": "CheckStockLevel"
  },
  {
    "id": "36",
    "href": "https://serverlocation:port/stockManagement/v5/checkStockLevel/36",
    "creationDate": "2020-09-24T09:54:41.127Z",
    "checkStockLevelItem": [
      {
        "id": "1",
        "availabilityResult": "alternate",
        "requestedQuantity": {
          "amount": 1,
          "units": "box"
        },
        "checkedStockLevel": {
          "name": "Stock for Galaxy S22 Ultra",
          "status": "available",
          "quantity": {
            "amount": 24,
            "units": "box"
          },
          "stockItem": {
            "stockItemCode": "3501179503622",
            "codeModel": "EAN",
            "@type": "StockItem"
          },
          "@type": "StockLevel"
        }
      }
    ],
    "@type": "CheckStockLevel"
  }
]
```

```

    }
  ],
  "@type": "CheckStockLevel"
}
]

```

Creates a checkStockLevel

POST /checkStockLevel?fields=...&{filtering}

Description

This operation creates a CheckStockLevel entity.

Mandatory Attributes

Mandatory Attributes	Rule
checkStockLevelItem	
checkStockLevelItem.id	
checkStockLevelItem.requestedQuantity	
checkStockLevelItem.requestedQuantity.amount	
@type	

Usage samples

Creation of a new CheckStockLevel with POST operation

Request

```

POST /checkStockLevel
Content-Type: application/json

{
  "instantSyncCheck": true,
  "provideAlternative": true,
  "requestedAvailabilityDate": "2020-09-24T09:54:41.127Z",
  "checkStockLevelItem": [
    {
      "id": "1",
      "checkedStockLevel": {
        "name": "Stock for Galaxy S22 Ultra 128GB",
        "stockItem": {
          "@type": "StockItem",
          "stockItemCode": "3501179503615",
          "codeModel": "EAN",

```

```

        "description": "Stock item for Galaxy S22 Ultra 128GB"
      },
      "@type": "StockLevel"
    },
    "requestedQuantity": {
      "amount": 1,
      "units": "box"
    }
  }
],
"place": {
  "id": "89",
  "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
  "name": "Lyon Shop",
  "@type": "PlaceRef",
  "@referredType": "GeographicSite"
},
"@type": "CheckStockLevel"
}

```

Response

```

201

{
  "id": "32",
  "href": "https://serverlocation:port/stockManagement/v5/checkStockLevel/32",
  "completedDate": "2020-09-24T09:54:41.127Z",
  "creationDate": "2020-09-24T09:54:41.127Z",
  "instantSyncCheck": true,
  "provideAlternative": true,
  "requestedAvailabilityDate": "2020-09-24T09:54:41.127Z",
  "checkStockLevelItem": [
    {
      "id": "1",
      "availabilityResult": "alternate",
      "requestedQuantity": {
        "amount": 1,
        "units": "box"
      },
      "state": "done",
      "checkedStockLevel": {
        "@type": "StockLevel",
        "name": "Stock for Galaxy S22 Ultra 128GB",
        "status": "unavailable",
        "quantity": {
          "amount": 0,
          "units": "box"
        }
      },
      "stockItem": {
        "@type": "StockItem",
        "stockItemCode": "3501179503615",
        "codeModel": "EAN",
        "description": "Stock item for Galaxy S22 Ultra 128GB"
      }
    }
  ],
}

```

```

    "alternate": [
      {
        "@type": "AlternateStockLevel",
        "id": "1",
        "availabilityDate": "2020-09-24T09:54:41.127Z",
        "quantity": {
          "amount": 1,
          "units": "box"
        },
        "stockItem": {
          "@type": "StockItem",
          "stockItemCode": "3501179503622",
          "codeModel": "EAN",
          "description": "Stock item for Galaxy S22 Ultra 256GB"
        },
        "stockLevel": {
          "id": "42",
          "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
          "name": "Stock for Galaxy S22 Ultra",
          "@type": "StockLevelRef",
          "@referredType": "StockLevel"
        }
      }
    ],
    "place": {
      "id": "89",
      "href":
"https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
      "name": "Lyon Shop",
      "@type": "PlaceRef",
      "@referredType": "GeographicSite"
    },
    "state": "done",
    "@type": "CheckStockLevel"
  }

```

Operations on QueryStockLevel

Retrieves a queryStockLevel by ID

GET /queryStockLevel/{id}?fields=...

Description

This operation retrieves a QueryStockLevel entity. Attribute selection is enabled for all first level attributes.

Usage samples

Here's an example of a query stock level retrieval. The given criteria is the reserve stock level id.

Request

```
GET /queryStockLevel/74
Content-Type: application/json
```

Response

```
200

{
  "id": "74",
  "href": "https://serverlocation:port/stockManagement/v5/queryStockLevel/74",
  "completedDate": "2020-09-24T10:24:04.602Z",
  "creationDate": "2020-09-24T10:24:04.602Z",
  "instantSyncCheck": true,
  "requestedAvailabilityDate": "2020-09-24T10:24:04.602Z",
  "queryStockLevelItem": [
    {
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "name": "Stock for Galaxy S22 Ultra",
      "place": {
        "id": "89",
        "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
        "name": "Place 89",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "quantity": {
        "amount": 24,
        "units": "box"
      },
      "status": "available",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    },
    {
      "id": "52",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/52",
      "name": "Stock for Galaxy S22 Ultra (site 2)",
      "place": {
        "id": "123",
        "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/123",
        "name": "Place 123",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "quantity": {
        "amount": 15,
```

```

        "units": "box"
      },
      "status": "available",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "searchCriteria": [
    {
      "place": {
        "id": "98",
        "href":
"https://serverlocation:port/geographicLocationManagement/v5/geographicLocation/98",
        "name": "Place 98",
        "@type": "PlaceRef",
        "@referredType": "GeographicLocation"
      },
      "status": "available",
      "quantity": {
        "amount": 5,
        "units": "box"
      },
      "name": "query stock level criteria",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "state": "done",
  "@type": "QueryStockLevel"
}

```

List or find queryStockLevel objects

GET /queryStockLevel?fields=...&{filtering}

Description

This operation list QueryStockLevel entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Here's an example of a request for retrieving a list of Query Stock Level request(s). The

given criteria is the date.

Request

```
GET /queryStockLevel?fields=id,href
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "74",
    "href": "https://serverlocation:port/stockManagement/v5/queryStockLevel/74",
    "searchCriteria": [
      {
        "name": "query stock level criteria",
        "status": "available",
        "quantity": {
          "amount": 5,
          "units": "box"
        },
        "stockItem": {
          "stockItemCode": "3501179503622",
          "codeModel": "EAN",
          "@type": "StockItem"
        },
        "@type": "StockLevel"
      }
    ],
    "@type": "QueryStockLevel"
  },
  {
    "id": "112",
    "href": "https://serverlocation:port/stockManagement/v5/queryStockLevel/112",
    "searchCriteria": [
      {
        "name": "query stock level criteria",
        "status": "available",
        "quantity": {
          "amount": 5,
          "units": "box"
        },
        "stockItem": {
          "stockItemCode": "3501179503622",
          "codeModel": "EAN",
          "@type": "StockItem"
        },
        "@type": "StockLevel"
      }
    ],
    "@type": "QueryStockLevel"
  }
]
```

]

Creates a queryStockLevel

POST /queryStockLevel?fields=...&{filtering}

Description

This operation creates a QueryStockLevel entity.

Mandatory Attributes

Mandatory Attributes	Rule
searchCriteria	
searchCriteria.stockItem.code Model	
searchCriteria.stockItem.stockItemCode	
@type	

Usage samples

Creation of a new QueryStockLevel with POST operation

Request

```
POST /queryStockLevel
Content-Type: application/json

{
  "instantSyncCheck": true,
  "requestedAvailabilityDate": "2020-09-24T10:24:04.602Z",
  "searchCriteria": [
    {
      "name": "query stock level criteria",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "@type": "QueryStockLevel"
}
```

Response

```

201

{
  "id": "74",
  "href": "https://serverlocation:port/stockManagement/v5/queryStockLevel/74",
  "completedDate": "2020-09-24T10:24:04.602Z",
  "creationDate": "2020-09-24T10:24:04.602Z",
  "instantSyncCheck": true,
  "requestedAvailabilityDate": "2020-09-24T10:24:04.602Z",
  "queryStockLevelItem": [
    {
      "id": "42",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/42",
      "name": "Stock for Galaxy S22 Ultra",
      "place": {
        "id": "89",
        "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
        "name": "Place 89",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "quantity": {
        "amount": 24,
        "units": "box"
      },
      "status": "available",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    },
    {
      "id": "52",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/52",
      "name": "Stock for Galaxy S22 Ultra (site 2)",
      "place": {
        "id": "123",
        "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/123",
        "name": "Place 123",
        "@type": "PlaceRef",
        "@referredType": "GeographicSite"
      },
      "quantity": {
        "amount": 15,
        "units": "box"
      },
      "status": "available",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",

```

```

        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "searchCriteria": [
    {
      "place": {
        "id": "98",
        "href":
"https://serverlocation:port/geographicLocationManagement/v5/geographicLocation/98",
        "name": "Place 98",
        "@type": "PlaceRef",
        "@referredType": "GeographicLocation"
      },
      "status": "available",
      "quantity": {
        "amount": 5,
        "units": "box"
      },
      "name": "query stock level criteria",
      "stockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
      },
      "@type": "StockLevel"
    }
  ],
  "state": "done",
  "@type": "QueryStockLevel"
}

```

Operations on ReserveStockLevel

Retrieves a reserveStockLevel by ID

GET /reserveStockLevel/{id}?fields=...

Description

This operation retrieves a ReserveStockLevel entity. Attribute selection is enabled for all first level attributes.

Usage samples

Here's an example of a reserve stock level retrieval. The given criteria is the reserve stock level id.

Request

```
GET /reserveStockLevel/87
Content-Type: application/json
```

Response

```
200

{
  "id": "87",
  "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/87",
  "creationDate": "2020-09-24T10:12:23.664Z",
  "requestedAvailabilityDate": "2020-09-25T10:12:23.664Z",
  "channel": [
    {
      "id": "11",
      "name": "retail",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Place 89",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "relatedEntity": [
    {
      "role": "order triggering the reservation",
      "@type": "RelatedEntity",
      "entity": {
        "id": "56",
        "href": "https://serverlocation:port/productOrderManagement/v5/productOrder/56",
        "@type": "EntityRef",
        "@referredType": "ProductOrder",
        "name": "Entity 56"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "requester",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "45",
        "href": "https://serverlocation:port/partyManagement/v5/individual/45",
        "@type": "PartyRef",
        "@referredType": "Individual",
        "name": "Jean Dupont"
      }
    }
  ],
}
```

```

"reserveStockLevelItem": [
  {
    "id": "1",
    "stockLevelReserved": {
      "id": "43",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
      "@type": "StockLevelRef",
      "@referredType": "StockLevel",
      "name": "Stock level 43"
    },
    "quantityRequested": {
      "amount": 1,
      "units": "box"
    },
    "quantityReserved": {
      "amount": 1,
      "units": "box"
    },
    "requestedStockItem": {
      "description": "Stock item for Galaxy S22 Ultra 256GB",
      "stockItemCode": "3501179503622",
      "codeModel": "EAN",
      "@type": "StockItem"
    },
    "state": "acknowledged",
    "stockLevelRequested": {
      "id": "43",
      "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
      "@type": "StockLevelRef",
      "@referredType": "StockLevel",
      "name": "Stock level 43"
    }
  }
],
"state": "acknowledged",
"validFor": {
  "endDateTime": "2020-09-26T23:20:50.52Z",
  "startDateTime": "2020-09-24T23:20:50.52Z"
},
"@type": "ReserveStockLevel"
}

```

List or find reserveStockLevel objects

GET /reserveStockLevel?fields=...&{filtering}

Description

This operation list ReserveStockLevel entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Here's an example of a request for retrieving a list of Reserve Stock Level request(s). The

given criteria is the state (accepted).

Request

```
GET
/reserveStockLevel?fields=id,href,creationDate,reserveStockLevelItem,reserveStockLevelItem.id,reserveStockLevelItem.quantityReserved.amount,reserveStockLevelItem.quantityRequested.amount
Content-Type: application/json
```

Response

```
200

[
  {
    "id": "87",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/87",
    "creationDate": "2020-09-24T10:12:23.664Z",
    "state": "done",
    "reserveStockLevelItem": [
      {
        "id": "1",
        "state": "done",
        "quantityRequested": {
          "amount": 1,
          "units": "box"
        },
        "quantityReserved": {
          "amount": 1,
          "units": "box"
        }
      }
    ],
    "@type": "ReserveStockLevel"
  },
  {
    "id": "63",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/63",
    "creationDate": "2020-09-24T10:12:23.664Z",
    "state": "done",
    "reserveStockLevelItem": [
      {
        "id": "1",
        "state": "done",
        "quantityRequested": {
          "amount": 1,
          "units": "box"
        },
        "quantityReserved": {
          "amount": 1,
          "units": "box"
        }
      }
    ]
  }
],
```

```

    "@type": "ReserveStockLevel"
  }
]

```

Creates a reserveStockLevel

POST /reserveStockLevel?fields=...&{filtering}

Description

This operation creates a ReserveStockLevel entity.

Mandatory Attributes

Mandatory Attributes	Rule
channel.name	
place.@referredType	
relatedParty.partyOrPartyRole. @referredType	
relatedParty.partyOrPartyRole.i d	
reserveStockLevelItem	
reserveStockLevelItem.id	
reserveStockLevelItem.quantit yRequested	
reserveStockLevelItem.quantit yRequested.amount	
reserveStockLevelItem.request edStockItem.codeModel	
reserveStockLevelItem.request edStockItem.stockItemCode	
reserveStockLevelItem.state	
reserveStockLevelItem.stockL evelRequested.id	
@type	

Usage samples

Creation of a new ReserveStockLevel with POST operation

Request

```
POST /reserveStockLevel
Content-Type: application/json

{
  "requestedAvailabilityDate": "2020-09-25T10:12:23.664Z",
  "channel": [
    {
      "id": "11",
      "name": "retail",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "place": {
    "id": "89",
    "href": "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Lyon Shop site",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  },
  "relatedEntity": [
    {
      "role": "order triggering the reservation",
      "@type": "RelatedEntity",
      "entity": {
        "id": "56",
        "href": "https://serverlocation:port/productOrderManagement/v5/productOrder/56",
        "@type": "EntityRef",
        "@referredType": "ProductOrder",
        "name": "Entity 56"
      }
    }
  ],
  "relatedParty": [
    {
      "role": "requester",
      "@type": "RelatedPartyRefOrPartyRoleRef",
      "partyOrPartyRole": {
        "id": "45",
        "href": "https://serverlocation:port/partyManagement/v5/individual/45",
        "@type": "PartyRef",
        "@referredType": "Individual",
        "name": "Jean Dupont"
      }
    }
  ],
  "reserveStockLevelItem": [
    {
      "id": "1",
      "stockLevelReserved": {
        "id": "43",
```

```

        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel",
        "name": "Stock level 43"
    },
    "quantityRequested": {
        "amount": 1,
        "units": "box"
    },
    "quantityReserved": {
        "amount": 1,
        "units": "box"
    },
    "requestedStockItem": {
        "description": "Stock item for Galaxy S22 Ultra 256GB",
        "stockItemCode": "3501179503622",
        "codeModel": "EAN",
        "@type": "StockItem"
    },
    "state": "acknowledged",
    "stockLevelRequested": {
        "id": "43",
        "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
        "@type": "StockLevelRef",
        "@referredType": "StockLevel",
        "name": "Stock level 43"
    }
}
],
"@type": "ReserveStockLevel"
}

```

Response

```

201
{
  "id": "87",
  "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/87",
  "creationDate": "2020-09-24T10:12:23.664Z",
  "requestedAvailabilityDate": "2020-09-25T10:12:23.664Z",
  "channel": [
    {
      "id": "11",
      "name": "retail",
      "@type": "ChannelRef",
      "@referredType": "SalesChannel",
      "href": "https://serverlocation:port/channelManagement/v5/channel/11"
    }
  ],
  "place": {
    "id": "89",
    "href":
      "https://serverlocation:port/geographicSiteManagement/v5/geographicSite/89",
    "name": "Place 89",
    "@type": "PlaceRef",
    "@referredType": "GeographicSite"
  }
}

```

```

    },
    "relatedEntity": [
      {
        "role": "order triggering the reservation",
        "@type": "RelatedEntity",
        "entity": {
          "id": "56",
          "href":
"https://serverlocation:port/productOrderManagement/v5/productOrder/56",
          "@type": "EntityRef",
          "@referredType": "ProductOrder",
          "name": "Entity 56"
        }
      }
    ],
    "relatedParty": [
      {
        "role": "requester",
        "@type": "RelatedPartyRefOrPartyRoleRef",
        "partyOrPartyRole": {
          "id": "45",
          "href": "https://serverlocation:port/partyManagement/v5/individual/45",
          "@type": "PartyRef",
          "@referredType": "Individual",
          "name": "Jean Dupont"
        }
      }
    ],
    "reserveStockLevelItem": [
      {
        "id": "1",
        "stockLevelReserved": {
          "id": "43",
          "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
          "@type": "StockLevelRef",
          "@referredType": "StockLevel",
          "name": "Stock level 43"
        },
        "quantityRequested": {
          "amount": 1,
          "units": "box"
        },
        "quantityReserved": {
          "amount": 1,
          "units": "box"
        },
        "requestedStockItem": {
          "description": "Stock item for Galaxy S22 Ultra 256GB",
          "stockItemCode": "3501179503622",
          "codeModel": "EAN",
          "@type": "StockItem"
        },
        "state": "acknowledged",
        "stockLevelRequested": {
          "id": "43",
          "href": "https://serverlocation:port/stockManagement/v5/stockLevel/43",
          "@type": "StockLevelRef",
          "@referredType": "StockLevel",
          "name": "Stock level 43"
        }
      }
    ]
  }

```

```
}
],
"state": "acknowledged",
"validFor": {
  "endTime": "2020-09-26T23:20:50.52Z",
  "startTime": "2020-09-24T23:20:50.52Z"
},
"@type": "ReserveStockLevel"
}
```

Operations on CancelReserveStockLevel

Retrieves a cancelReserveStockLevel by ID

GET /cancelReserveStockLevel/{id}?fields=...

Description

This operation retrieves a CancelReserveStockLevel entity. Attribute selection is enabled for all first level attributes.

Usage samples

Retrieve a CancelReserveStockLevel request from its identifier

Request

```
GET /cancelReserveStockLevel/23
Content-Type: application/json
```

Response

```
200

{
  "id": "789-fsds5-kjp",
  "href": "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
  "cancellationReason": "Duplicate reserve",
  "effectiveCancellationDate": "2021-08-30T11:14:46.145Z",
  "requestedCancellationDate": "2021-08-30T09:14:46.145Z",
  "reserveStockLevel": {
    "id": "45f-98f-ss45",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-98f-ss45",
    "@type": "ReserveStockLevelRef",
    "@referredType": "ReserveStockLevel"
  },
  "state": "done",
  "@type": "CancelReserveStockLevel"
}
```

```
}

```

List or find cancelReserveStockLevel objects

GET /cancelReserveStockLevel?fields=...&{filtering}

Description

This operation list CancelReserveStockLevel entities. Attribute selection is enabled for all first level attributes. Filtering may be available depending on the compliance level supported by an implementation.

Usage samples

Retrieve a list of CancelReserveStockLevel(s)

Request

```
GET /cancelReserveStockLevel
Content-Type: application/json

```

Response

```
200

[
  {
    "id": "789-fsds5-kjp",
    "href":
    "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
    "cancellationReason": "Duplicate reserve",
    "effectiveCancellationDate": "2021-08-30T11:14:46.145Z",
    "requestedCancellationDate": "2021-08-30T09:14:46.145Z",
    "reserveStockLevel": {
      "id": "45f-98f-ss45",
      "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-98f-ss45",
      "@type": "ReserveStockLevelRef",
      "@referredType": "ReserveStockLevel"
    },
    "state": "done",
    "@type": "CancelReserveStockLevel"
  },
  {
    "id": "422PGEcd",
    "href":
    "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/422PGEcd",
    "cancellationReason": "Duplicate reserve",
    "effectiveCancellationDate": "2020-08-30T11:14:46.145Z",
    "requestedCancellationDate": "2020-08-30T09:14:46.145Z",
    "reserveStockLevel": {

```

```

    "id": "505",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/505",
    "@type": "ReserveStockLevelRef",
    "@referredType": "ReserveStockLevel"
  },
  "state": "done",
  "@type": "CancelReserveStockLevel"
}
]

```

Retrieve a list of CancelReserveStockLevel(s) with filter selection.

Request

```

GET /cancelReserveStockLevel?fields=@type,id,href,cancellationReason,reserveStockLevel
Content-Type: application/json

```

Response

```

200

[
  {
    "id": "789-fsds5-kjp",
    "href":
    "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
    "cancellationReason": "Duplicate reserve",
    "reserveStockLevel": {
      "id": "45f-98f-ss45",
      "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-
98f-ss45",
      "@type": "ReserveStockLevelRef",
      "@referredType": "ReserveStockLevel"
    },
    "@type": "CancelReserveStockLevel"
  }
]

```

Creates a cancelReserveStockLevel

POST /cancelReserveStockLevel?fields=...&{filtering}

Description

This operation creates a CancelReserveStockLevel entity.

Mandatory Attributes

Mandatory Attributes	Rule
cancellationReason	
reserveStockLevel	
@type	

Usage samples

Creation of a new CancelReserveStockLevel with POST operation

Request

```
POST /cancelReserveStockLevel
Content-Type: application/json

{
  "cancellationReason": "Duplicate reserve",
  "requestedCancellationDate": "2021-08-30T09:14:46.145Z",
  "reserveStockLevel": {
    "id": "45f-98f-ss45",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-98f-ss45",
    "@type": "ReserveStockLevelRef",
    "@referredType": "ReserveStockLevel"
  },
  "@type": "CancelReserveStockLevel"
}
```

Response

```
201

{
  "id": "789-fsds5-kjp",
  "href": "https://serverlocation:port/stockManagement/v5/cancelReserveStockLevel/789-fsds5-kjp",
  "cancellationReason": "Duplicate reserve",
  "effectiveCancellationDate": "2021-08-30T11:14:46.145Z",
  "requestedCancellationDate": "2021-08-30T09:14:46.145Z",
  "reserveStockLevel": {
    "id": "45f-98f-ss45",
    "href": "https://serverlocation:port/stockManagement/v5/reserveStockLevel/45f-98f-ss45",
    "@type": "ReserveStockLevelRef",
    "@referredType": "ReserveStockLevel"
  },
  "state": "done",
  "@type": "CancelReserveStockLevel"
}
```

API NOTIFICATIONS

For every single of operation on the entities use the following templates and provide sample REST notification POST calls.

It is assumed that the Pub/Sub uses the Register and UnRegister mechanisms described in the REST Guidelines reproduced below.

images::image1.jpeg[]

Register listener

POST /hub

Description

Sets the communication endpoint address the service instance must use to deliver information about its health state, execution state, failures and metrics. Subsequent POST calls will be rejected by the service if it does not support multiple listeners. In this case DELETE /api/hub/{id} must be called before an endpoint can be created again.

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 409 if request is not successful.

Usage Samples

Here's an example of a request for registering a listener.

Request

```
POST /api/hub

Accept: application/json

{
  "callback": "http://in.listener.com"
}
```

Response

```
201
```

```
Content-Type: application/json

Location: /api/hub/42

{
  "id": "42",
  "callback": "http://in.listener.com",
  "query": ""
}
```

Unregister listener

DELETE /hub/{id}

Description

Clears the communication endpoint address that was set by creating the Hub..

Behavior

Returns HTTP/1.1 status code 204 if the request was successful.

Returns HTTP/1.1 status code 404 if the resource is not found.

Usage Samples

Here's an example of a request for un-registering a listener.

Request

```
DELETE /api/hub/42

Accept: application/json
```

Response

```
204
```

Publish Event to listener

POST /client/listener

Description

Clears the communication endpoint address that was set by creating the Hub.

Provides to a registered listener the description of the event that was raised. The /client/listener url is the callback url passed when registering the listener.

Behavior

Returns HTTP/1.1 status code 201 if the service is able to set the configuration.

Usage Samples

Here's an example of a notification received by the listener. In this example "EVENT TYPE" should be replaced by one of the notification types supported by this API (see Notification resources Models section) and EVENT BODY refers to the data structure of the given notification type.

Request

```
POST /client/listener

Accept: application/json

{
  "event": {
    EVENT BODY
  },
  "eventType": "EVENT_TYPE"
}
```

Response

```
201
```

For detailed examples on the general TM Forum notification mechanism, see the TMF REST Design Guidelines.

Acknowledgements

Version History

Version Number	Date	Release led by:	Description
V4.0		Pierre Gauthier TM Forum pgauthier@tmforum.org Ludovic Robert Orange ludovic.robert@orange.com	First Release of the Document.
Version 5.0.0	02/27/2025	Anh Tuan NGUYEN (Orange)	Migration to OAS (Open API Specification 3) and introduction of StockItem
Version 5.0.0	07/14/2026	Sarabjit Gandhi (Jio Platforms Limited)	Address review comments, StockLevel status/usage clarification (AP-7582), and user guide updates. Reviewer: Jonathan Goldberg (TM Forum).
Version 5.0.0	07/20/2026	Sarabjit Gandhi (Jio Platforms Limited)	Address Jul 19 review feedback (examples, tasks, notifications, Cancel reason, Batch payload, UG). Reviewer: Jonathan Goldberg (TM Forum).
Version 5.0.0	07/22/2026	Sarabjit Gandhi (Jio Platforms Limited)	Remove requestedDate from Query/Check per review (keep requestedAvailabilityDate). Reviewer: Jonathan Goldberg (TM Forum).
Version 5.0.0	07/24/2026	Sarabjit Gandhi (Jio Platforms Limited)	Address Jul 22 review: UG heading levels; conformance checklist (CancelReserve section, stockLevelTarget typo, TimePeriod/Attachment/EntityRef comments, Hub condition, admin metadata). Reviewer: Jonathan Goldberg (TM Forum).

Contributors to Document

Name	Company	Role
Anh Tuan Nguyen anhtuan.nguyen@orange.com	Orange	Author
Pierre Gauthier pgauthier@tmforum.org	TM Forum	Author
Sarabjit Gandhi sarabjit.gandhi@ril.com	Jio Platforms Limited	Author
Jonathan Goldberg jgoldberg@tmforum.org	TM Forum	Reviewer
Knut Johannessen	Telenor	Tooling
Joel Burgess	Oracle	Tooling