



Revenue Management Developer Guide

Version 68.0, Winter '27



CONTENTS

Chapter 1: Get Started with Revenue Management Developer Resources	1
Chapter 2: Revenue Management Settings	4
Fields	5
Declarative Metadata Sample Definition	7
Wildcard Support in the Manifest File	8
Chapter 3: Revenue Management Deployment	9
Deployment Workflows and Sequence	10
Deployment Considerations	11
Global Unique ID Setup	11
Create a GUID Field	12
GUID Design and Usage	12
Managing Component States	13
Post-Deployment Steps	14
Deployment Scenarios	15
Object Deployment Reference	18
Product Catalog Management Objects	19
Salesforce Pricing Objects	22
Product Configurator Objects	24
Transaction Management Objects	25
Dynamic Revenue Orchestrator Objects	25
Usage Management Objects	26
Billing Objects	28
Salesforce Contracts Objects	29
Metadata Deployment Reference	29
Product Catalog Management Metadata	30
Salesforce Pricing Metadata	33
Product Configurator Metadata	35
Transaction Management Metadata	36
Dynamic Revenue Orchestrator Metadata	37
Usage Management Metadata	39
Billing Metadata	41
Industries Common Component Metadata	43
Salesforce Contracts Metadata	43
Additional Deployment Information	43
Product Catalog Management Additional Information	44
Salesforce Pricing Additional Information	45
Product Configurator Additional Information	47

Dynamic Revenue Orchestrator Additional Information	48
Usage Management Additional Information	51
Billing Additional Information	53
Business Rules Engine and Decision Tables Additional Information	57
Context Service Additional Information	58
Data Processing Engine Additional Information	59
Salesforce Contracts Additional Information	60
Chapter 4: Product Catalog Management	65
Product Catalog Management	66
Product Catalog Management Standard Objects	66
Product Catalog Management Fields on Standard Objects	104
Product Catalog Management Business APIs	110
Product Catalog Management Metadata API Types	258
Product Catalog Management Tooling API Objects	262
Product Discovery	267
Product Discovery Business APIs	268
Product Discovery Standard Invocable Actions	386
Product Discovery Apex Reference	467
Product Discovery Metadata API Types	628
Chapter 5: Salesforce Pricing	632
Salesforce Pricing Standard Objects	633
AttributeAdjustmentCondition	635
AttributeBasedAdjRule	637
AttributeBasedAdjustment	639
AttributeDefinition	642
BundleBasedAdjustment	645
CostBook	649
ContractItemPrice	650
CostBookEntry	653
PriceAdjustmentSchedule	655
PriceAdjustmentTier	658
PriceBook2	661
PriceBookEntry	663
PriceBookEntryDerivedPrice	666
PriceRevisionPolicy	669
PricingAdjBatchJob	671
PricingAdjBatchJobLog	674
PricingAPIExecution	676
PricingProcedureResolution	678
PricingProcessExecution	680
ProductPriceHistoryLog	682
ProductPriceRange	684

Contents

ProductSellingModel	686
ProductSellingModelDataTranslation	687
ProductSellingModelOption	688
ProcedurePlanCriterion	691
ProrationPolicy	692
Salesforce Pricing Fields on Standard Objects	693
IndexRate	693
Salesforce Pricing Business APIs	694
Resources	696
Request Bodies	729
Response Bodies	753
Salesforce Pricing Apex Reference	795
RevSignaling Namespace	795
Salesforce Pricing Standard Invocable Actions	801
Run Salesforce Headless Pricing Action	802
Run Salesforce Pricing Action	806
Salesforce Pricing Metadata API Types	808
Flow for Salesforce Pricing	808
IndustriesPricingSettings	809
PricingActionParameters	811
PricingRecipe	812
ProcedureOutputResolution	815
Salesforce Pricing Tooling API Objects	817
PricingActionParameters	818
PricingProcedureOutputMap	820
PricingRecipe	822
PricingRecipeTableMapping	824
ProcedureOutputResolution	826
ProcedurePlanCriterion	828
ProcedurePlanDefinition	830
ProcedurePlanDefinitionVersion	832
ProcedurePlanOption	834
ProcedurePlanSection	837
ProcedurePlanVariable	839
Chapter 6: Rate Management	841
Rate Management Standard Objects	842
BindingObjectCustomExt	843
BindingObjectRateAdjustment	844
BindingObjectRateCardEntry	845
PriceBookRateCard	849
RateAdjustmentByAttribute	850
RateAdjustmentByTier	854
RateCard	857

RateCardEntry	859
RatingFrequencyPolicy	863
RatingRequest	864
RatingRequestBatchJob	866
Rate Management Metadata API Types	868
IndustriesRatingSettings	868
Flow for Rate Management	869
Rate Management Business APIs	870
Resources	870
Response Bodies	872
Rate Management Standard Invocable Actions	876
Invoke Rating Service Action	876
Chapter 7: Product Configurator	879
Product Configurator Standard Objects	880
ProductConfigurationFlow	880
ProductConfigFlowAssignment	881
ProductConfigurationRule	882
Product Configurator Business APIs	885
Resources	887
Request Bodies	908
Response Bodies	932
Product Configurator Standard Invocable Actions	1010
Run Config Rules Action	1010
Product Configurator Metadata API Types	1013
Flow for Product Configurator	1013
ProductConfiguratorSettings	1013
Constraint Modeling Language	1015
Modeling a Generator Set	1016
Core Concepts	1016
Core Concept Examples	1073
Annotation Examples	1083
Constraint Modeling Language (CML) Best Practices	1130
Business-Centric Constraint Modeling Language (CML) Guidelines	1141
Debugging Constraint Modeling Language (CML)	1144
Model Structure	1146
Chapter 8: Transaction Management	1153
Transaction Management Standard Objects	1154
AssetActionSrcPriceAdjustment	1156
BindingObjUsageRsrcPlcy	1157
ContractItemPrice	1161
ContractItemPriceAdjTier	1164
ContractItemPriceHistory	1165

Contents

OrderItemAttribute	1168
OrderItemDetail	1170
OrderItemRateAdjustment	1172
OrderItemRateCardEntry	1173
OrderItemUsageRsrcGrant	1175
OrderItemUsageRsrcPlcy	1178
SalesTransactionType	1180
QuoteLineDetail	1181
QuoteLineGroup	1183
QuoteLineItemAttribute	1186
QuoteLineItemUseRsrcGrant	1188
QuoteLineItemUsageRsrcPlcy	1191
QuoteLineRateAdjustment	1193
QuoteLineRateCardEntry	1195
QuoteToOpportunitySyncEvent	1197
Transaction Management Fields on Standard Objects	1198
Transaction Management Fields on Object State Definition	1199
Transaction Management Fields on Object State Transition	1199
Transaction Management Fields on Object State Value	1200
Transaction Management Fields on Order	1200
Transaction Management Fields on Order Item	1204
Transaction Management Fields on Order Item Group	1209
Transaction Management Fields on Order Action	1212
Transaction Management Fields on Order Item Relationship	1212
Transaction Management Fields on Quote	1213
Transaction Management Fields on Quote Line Group	1216
Transaction Management Fields on Quote Line Item	1219
Transaction Management Fields on Quote Document	1222
Transaction Management Tooling API Objects	1223
TransactionProcessingType	1223
Transaction Management Platform Event	1226
QuoteSaveEvent	1227
Transaction Management Business APIs	1228
Resources	1231
Request Bodies	1288
Response Bodies	1352
Transaction Management Apex Reference	1386
CommerceOrders Namespace	1386
ConnectApi Namespace	1406
CommerceTax Namespace	1407
PlaceQuote Namespace	1408
renew_assets_summary Namespace	1428
RevSalesTrxn Namespace	1437
Transaction Management Standard Invocable Actions	1467

Create Contract Action	1468
Create or Update Asset From Order Action	1469
Create or Update Asset From Order Item Action	1470
Create Order From Quote Action	1471
Create Orders From Quote Action	1473
Deep Clone Sales Transaction	1476
Get Renewable Assets Summary Action	1477
Initiate Amendment Action	1479
Initiate Cancellation Action	1481
Initiate Renewal Action	1482
Initiate Rollback on Last Action	1484
Initiate Transfer Action	1485
Sync Quote to Opportunity Action	1488
Transaction Management Metadata API Types	1489
Flow for Transaction Management	1489
Chapter 9: Advanced Approvals	1491
Advanced Approvals Fields on Standard Objects	1492
ApprovalSubmission	1492
Advanced Approvals Fields on Approval Work Item	1495
Advanced Approvals Standard Invocable Actions	1496
Cancel Approval Submission Action	1497
Get Previous Related Record Details Action	1498
Override Approval Work Item Action	1499
Reassign Approval Work Item Action	1501
Recall Approval Submission Action	1502
Review Approval Work Item Action	1503
Advanced Approvals Business APIs	1504
Resources	1505
Request Bodies	1506
Response Bodies	1507
Advanced Approvals Metadata API Types	1514
Flow for Advanced Approvals	1514
Chapter 10: Dynamic Revenue Orchestrator	1516
Dynamic Revenue Orchestrator Standard Objects	1517
AssetFulfillmentDecomp	1519
FulfillmentAsset	1521
FulfillmentAssetAttribute	1523
FulfillmentAssetRelationship	1525
FulfillmentAssetStatePeriod	1526
FulfmtAssetStatePeriodAttr	1528
FulfillmentFalloutRule	1529
FulfillmentLineAttribute	1532

Contents

FulfillmentLineRel	1533
FulfillmentLineSourceRel	1535
FulfillmentPlan	1538
FulfillmentStep	1540
FulfillmentStepDefinition	1548
FulfillmentStepDefinitionGroup	1554
FulfillmentStepDependency	1555
FulfillmentStepDependencyDef	1556
FulfillmentStepJeopardyRule	1558
FulfillmentStepSource	1560
FulfillmentTaskAssignmentRule	1561
FulfillmentWorkspace	1564
FulfillmentWorkspaceItem	1565
ProductDecompEnrichmentRule	1566
ProdDecompEnrchVarMap	1569
ProductFulfillmentDecompRule	1571
ProductFulfillmentScenario	1573
SalesTrxnDeleteEvent	1576
SalesTransactionFulfillReq	1576
ValTfrm	1580
ValTfrmGrp	1582
Dynamic Revenue Orchestrator Standard Invocable Actions	1584
Decompose Sales Transaction Action	1585
Freeze Sales Transaction Action	1587
Get Point Of No Return Action	1589
Orchestrate Sales Transaction Action	1590
Orchestrate Transaction Action	1593
Submit Order Action	1594
Submit Sales Transaction Action	1607
Unfreeze Sales Transaction Action	1609
Dynamic Revenue Orchestrator Metadata API Types	1611
Flow for Dynamic Revenue Orchestrator	1611
DynamicFulfillmentOrchestratorSettings	1612
OrchestrationPlanCtxMapping	1613
Dynamic Revenue Orchestrator Tooling API Objects	1615
CustomFulfillmentScopeCnfg	1615
OrchestrationPlanCtxMapping	1618
Callouts in Dynamic Revenue Orchestrator	1620
Configure Callout Settings	1622
Standard Fulfillment Provider	1622
Apex Type Provider	1628
External Services Defined Provider	1633
Asynchronous Interaction Pattern	1634
Input and Output Transformation Processors	1636

Dynamic Revenue Orchestrator Platform Events	1636
FulfillmentSourceChangeEvent	1637
SalesTrxnDecompositionEvent	1638
Chapter 11: Usage Management	1640
Usage Management Standard Objects	1641
ProductUsageGrant	1642
ProductUsageResource	1647
ProductUsageResourcePolicy	1650
TransactionUsageEntitlement	1652
TransactionJournal	1658
UnitOfMeasure	1661
UnitOfMeasureClass	1663
UsageBillingPeriodItem	1665
UsageCmtAssetRelatedObj	1669
UsageCommitmentPolicy	1671
UsageEntitlementAccount	1672
UsageEntitlementBucket	1674
UsageEntitlementEntry	1678
UsageGrantRenewalPolicy	1681
UsageGrantRolloverPolicy	1683
UsageOveragePolicy	1684
UsagePrdGrantBindingPolicy	1685
UsageRatableSummary	1687
UsageRatableSumCmtAssetRt	1692
UsageResource	1694
UsageResourcePolicy	1696
UsageResourceBillingPolicy	1698
UsageSummary	1700
Usage Management Fields on Standard Objects	1704
Usage Management Fields on Product2	1704
Usage Management Standard Invocable Actions	1705
Invoke Summary Creation Action	1705
Process Consumption Overages Action	1706
Refresh Usage Entitlement Bucket Action	1707
Retrigger Entitlement Creation Process Action	1709
Usage Management Business APIs	1710
Resources	1711
Request Bodies	1719
Response Bodies	1721
Usage Management Metadata API Types	1776
Flow for Usage Management	1776
IndustriesUsageSettings	1777

Chapter 12: Billing	1779
Billing Standard Objects	1780
AccountingPeriod	1785
BillingArrangement	1787
BillingArrangementLine	1789
BillingBatchScheduler	1790
BillingBatchFilterCriteria	1795
BillingForecast	1799
BillingMilestonePlan	1804
BillingMilestonePlanItem	1806
BillingPeriodItem	1809
BillingPolicy	1813
BillingSchedule	1815
BillingScheduleGroup	1825
BillingTreatment	1832
BillingTreatmentItem	1835
BsgRelationship	1839
CaseServiceProcessExtension	1841
CreditMemo	1847
CreditMemoAddressGroup	1855
CreditMemoInvApplication	1856
CreditMemoLine	1860
CreditMemoLineInvoiceLine	1866
CreditMemoLineTax	1869
DebitMemo	1875
DebitMemoAddress	1880
DebitMemoLine	1882
DebitMemoLineTax	1886
GeneralLedgerAccount	1889
GeneralLedgerAcctAsgmtRule	1892
GeneralLdgrAcctPrdSummary	1895
GeneralLedgerJrnlEntryRule	1897
InvBatchDraftToPostedRun	1898
Invoice	1901
InvoiceAddressGroup	1912
InvoiceBatchRun	1913
InvoiceBatchRunCriteria	1921
InvoiceBatchRunRecovery	1924
InvoiceDocument	1926
InvoiceLine	1927
InvoiceLineRelationship	1937
InvoiceLineTax	1939
LegalEntity	1946
LegalEntyAccountingPeriod	1948

Contents

PaymentAdviceInvoiceRecile	1951
PaymentAdviceReconciliation	1954
PaymentBatchRun	1959
PaymentLineInvoiceLine	1962
PaymentRetryRule	1966
PaymentRetryRuleSet	1968
PaymentSchedule	1970
PaymentSchedulePolicy	1974
PaymentScheduleTreatment	1976
PaymentScheduleTreatmentDtl	1978
PymtSchdDistributionMethod	1981
PaymentScheduleItem	1983
PaymentTerm	1988
PaymentTermItem	1990
RefundLineCreditMemo	1992
RefundLineCreditMemoLine	1995
RevenueTransactionErrorLog	1998
SeqPolicySelectionCondition	2003
SequenceGapReconciliation	2006
SequencePolicy	2008
TaxEngine	2012
TaxEngineInteractionLog	2015
TaxEngineProvider	2018
TaxPolicy	2020
TaxTreatment	2021
Tax Treatment Item	2024
Billing Fields on Standard Objects	2026
Billing Fields on AccountBillingAccount	2027
Billing Fields on AssetActionSource	2028
Billing Fields on BillingAccount	2028
Billing Fields on CollectionPlan	2032
Billing Fields on CollectionPlanItem	2033
Billing Fields on ExpressionSet	2034
Billing Fields on Dispute	2035
Billing Fields on DisputeItem	2036
Billing Fields on OrderItem	2037
Billing Fields on Payment	2039
Billing Fields on PaymentLineInvoice	2041
Billing Fields on QuoteLineItem	2042
Billing Fields on Refund	2043
Billing Fields on RefundLinePayment	2046
Billing Fields on TaxRate	2046
Billing Fields on TransactionJournal	2049
Salesforce Payments Objects in Billing	2053

Contents

Billing Platform Events	2053
BillingScheduleCreatedEvent	2054
CreditInvoiceProcessedEvent	2057
CreditMemoProcessedEvent	2060
InvoiceProcessedEvent	2062
NegInvLineProcessedEvent	2067
SequenceAssignedEvent	2070
VoidInvoiceProcessedEvent	2072
Billing Standard Invocable Actions	2074
Create Collection Plan Action	2076
Apply Credit Action	2079
Apply Payments and Credits by Rules Action	2080
Automate Refund Action	2082
Process Refund Credit Memo Action	2085
Create Billing Schedules From Billing Transaction Action	2087
Create Standalone Billing Schedules Action	2089
Extend Invoice Due Date Action	2090
Generate Account Statement	2092
Generate Invoice Documents Action	2094
Issue Credit Memo Action	2095
Post Draft Credit Memo Action	2097
Post Draft Invoice Action	2098
Post Draft Invoice Batch Run Action	2099
Recover Billing Schedules Action	2101
Send Dunning Email Action	2102
Suspend Billing Action	2103
Update Bill To Contact Action	2105
Unapply Credit Action	2106
Unapply Payment Action	2108
Void Posted Credit Memo Action	2109
Write Off Invoices Action	2110
Billing Business APIs	2112
Billing Business API Limits	2118
Resources	2120
Request Bodies	2208
Response Bodies	2362
Billing Apex Reference	2415
ConnectApi Namespace	2417
InvoiceWriteOff Namespace	2457
IssueCreditMemo Namespace	2466
RulesAppln Namespace	2474
TaxEngineAdapter Interface	2482
Billing Metadata API Types	2497
BillingSettings	2497

Contents

Flow for Billing	2502
PaymentsSharingSettings	2503
Chapter 13: Revenue Management Associated Objects	2506
StandardObjectNameChangeEvent	2507
StandardObjectNameFeed	2509
Fields	2509
Usage	2514
StandardObjectNameHistory	2515
Fields	2515
StandardObjectNameOwnerSharingRule	2516
Fields	2516
StandardObjectNameShare	2517
Fields	2518
Event	2518
Fields	2519
Usage	2530
Associated Objects	2535
Task	2535
Fields	2535
Usage	2544
Associated Objects	2546

CHAPTER 1 Get Started with Revenue Management Developer Resources

Get a single, unified system to automate your CRM processes. Use the developer sources of Revenue Management to automate the backend work to support the end-to-end revenue solution.

Revenue Cloud is now Revenue Management. You may see references to Revenue Cloud in our application and documentation.

Revenue Management provides extensible and API-first business components of the product-to-cash processes. Learn more about the developer resources that are available for these components.

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise, Unlimited, and Developer Editions**

Product Catalog Management

Create and manage an entire product portfolio with components such as attributes, product classifications, simple and bundled products, and rules.

- Use [standard objects](#) and fields to manage products, rules, and catalogs.
- Use [business APIs](#) to serve catalog definitions to users or applications.
- Use [metadata API](#) types to access and manage the metadata types, such as product specification type and product specification record types.
- Use [tooling API](#) objects to retrieve and manage smaller pieces of metadata types through SOQL capabilities. Use REST or SOAP to access metadata.
- Use [Product Discovery business APIs](#), which are composite APIs, to search products or to discover catalogs, products, and categories.

Salesforce Pricing

Create a reliable pricing solution for your users through customized price adjustment schedules. Get accurate pricing for your entire product portfolio.

- Use [standard objects](#) and fields to manage pricing processes such as product management, and the calculation and application of discounts.
- Use [business APIs](#) to get unified pricing experiences across product lines.
- Use [invocable actions](#) to invoke the pricing Connect API by providing the pricing, context, and price waterfall details.
- Use [metadata API](#) types to work with the metadata associated with Flows and Salesforce Pricing settings.

- Use [tooling API](#) objects to retrieve and manage smaller pieces of metadata types through SOQL capabilities such as pricing action parameters, pricing procedure output map, and pricing recipe details. Use REST or SOAP to access metadata.

Product Configurator

Customize the components and attributes of a product to meet the business requirement expectations.

- Use [standard objects](#) to manage product-related information.
- Use the [business APIs](#) to retrieve and update a product's configuration from a configurator or to access configurator capabilities by integrating with any front-end application.
- Use [constraint modeling language](#) on page 1015 to enforce business logic declaratively, without the need for extensive code in a general-purpose programming language.

Transaction Management

Manage subscription lifecycles from quotes and orders to contracts, assets, amendments, and renewals. Get insights into customer assets and see a consolidated list of all assets that belong to an account.

- Use [standard objects](#) and fields to manage transactions and details of a customer asset. Use the QuoteSaveEvent [platform event](#) to notify subscribers after saving of a quote is processed.
- Use [business APIs](#) to place, clone, or supplement a sales transaction. You can also initiate amendment, renewal, or cancellation of assets by using APIs.
- Use [invocable actions](#) to create and activate an order from a quote, or to initiate amendment, renewal, or cancellation of assets through invocable actions.
- Use [metadata API](#) types to work with the metadata associated with Flows.
- Use built-in [Apex classes and interfaces](#) grouped by namespace.

Usage Management

Ensure transparent, accurate, and efficient management of usage data and estimated usage amount.

- Use [standard objects](#) and fields to set up and manage consumption of usage-based products.
- Use [metadata API](#) types to work with the metadata associated with Usage Management.
- Use [business APIs](#) to get details of a usage-based product that's associated with an asset, an order item, or a quote line item.
- Use [invocable actions](#) to invoke usage summaries, process consumption overages, and refresh usage entitlements.

Rate Management

Quote and price products based on predefined rates for future use of the product or service.

- Use [standard objects](#) and fields to manage rates and discounts for a product's resource consumption.
- Use [metadata API](#) types to work with the metadata associated with Rate Management settings.
- Use [business APIs](#) to get details of a rate plan and persisted rating waterfall.

- Use [invocable action](#) to invoke the rating service to rate the usage records.

Dynamic Revenue Orchestrator

Get visibility into a product's fulfillment journey. Also, get a view of the entire fulfillment design processes.

- Use [standard objects](#) to manage details of a product's fulfillment.
- Use [invocable actions](#) to submit an order or a sales transaction to Dynamic Revenue Orchestrator for fulfillment.
- Use [metadata API](#) types to work with the metadata associated with Flows.
- Use [callout](#) step types to make HTTP calls to an external system.

Billing

Get an integrated and extensible subscription and usage-based billing solution. Automate processes such as payment processing, invoice generation, and usage-based billing.

- Use [standard objects](#) to manage billing and tax configurations, credit memos, and invoices.
- Use [platform events](#) types to know more about standard platform events.
- Use [invocable actions](#) to manage credit application, billing schedules, and invoices.
- Use [business APIs](#) to manage credit application and to handle billing scenarios.
- Use built-in [Apex classes](#) to access the same capabilities that are available in the Billing Business APIs.
- Use [metadata API](#) types to work with the metadata associated with Billing settings and Flows.

See the [RevenueManagementSettings](#) on page 4 metadata type to set up Revenue Management through configuration settings.

SEE ALSO:

[Business Rules Engine](#)
[Context Service](#)
[Salesforce Contracts](#)

CHAPTER 2 RevenueManagementSettings

In this chapter ...

- [Fields](#)
- [Declarative Metadata Sample Definition](#)
- [Wildcard Support in the Manifest File](#)

Represents the configuration settings to set up Revenue Management.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the "Settings" name. See [Settings](#) for more details.

File Suffix and Directory Location

`RevenueManagementSettings` values are stored in the `revenuemanagement.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there's only one settings file for each settings component.

Version

`RevenueManagementSettings` is available in API version 60.0 and later.

Special Access Rules

This metadata settings type is available with Revenue Management.

Fields

enableAdvCreateOrdersFromQuote

Type: boolean

Description: Indicates whether to enable users to choose a method for generating multiple orders from a single quote (`true`) or not (`false`). This setting updates the functionality of the Create Order capability on quotes. Available in API version 65.0 and later.

enableAdvancedDetailLinePricing

Type: boolean

Description: Indicates whether to enable advanced pricing for quote and order detail line items (`true`) or not (`false`). The default value is `false`. Available in API version 65.0 and later.

enableAsIsRenewals

Type: boolean

Description: Indicates whether users can enable as-is renewals capability for existing assets (`true`) or not (`false`). The default value is `false`. Available in API version 64.0 and later.

enableAutoAddDerivedAsset

Type: boolean

Description: Indicates whether to automatically add assets with derived pricing to a quote or an order when contributing products are added to it (`true`) or not (`false`). Available in API version 62.0 and later.

enableAutoLineItemSequencing

Type: boolean

Description: Indicates whether to enable automatic line item sequencing (`true`) or not (`false`). If set to `true`, the system maintains a consistent, automated sequence of transaction line items on quotes and orders, ensuring line items created from a quote appear in the same sequential order on the resulting order. Available in API version 66.0 and later.

enableCoreCPQ

Type: boolean

Description: Indicates whether to enable read and write access to Revenue Management features and objects (`true`) or not (`false`). See [Enable Revenue Management Features in Your Scratch Org](#).

enableDeltaPricing

Type: boolean

Description: Indicates whether to reprice faster by processing only the changes (delta) made to quotes and orders (`true`) or not (`false`). The default value is `false`. Available in API version 63.0 and later.

enableGroupRamp

Type: boolean

Description: Reserved for internal use.

enableGroupRampMultiSchedulePref

Type: boolean

Description: Indicates whether to enable support for multiple ramp schedules per transaction (`true`) or not (`false`). The default value is `false`. Available in API version 66.0 and later.

enableGroupRampPref

Type: boolean

Description: Indicates whether to create ramp deals for multiple products by creating group ramp segments (`true`) or not (`false`). The default value is `false`. Configure group ramp segments with specific start dates and end dates, and different product quantities and prices. Available in API version 65.0 and later.

Before you enable this setting, ensure the `groupsEnabled` and `enableTransactionCloning` fields are set to `true`.

enableGroupRampTrialSegmentPref

Type: boolean

Description: Indicates whether to enable trial segments within group ramp deals (`true`) or not (`false`). The default value is `false`. If set to `true`, this setting defines a trial pricing segment as part of a ramp schedule on groups to support promotional or introductory pricing tiers in multi-year subscription ramp deals. Available in API version 67.0 and later.

enableRampDeal

Type: boolean

Description: Indicates whether to create ramp deals for individual line items by creating segments with specific start dates, end dates, quantities, and prices (`true`) or not (`false`). Available in API version 62.0 and later.

enableRevUnifiedSetup

Type: boolean

Description: Indicates whether to enable the usage of a procedure plan for price calculation (`true`) or not (`false`).

enableTransactionCloning

Type: boolean

Description: Indicates whether to clone quotes or orders with their line items and groups, or clone the individual line items and groups of line items. Available in API version 64.0 and later.

enableTransactionProcessor

Type: boolean

Description: Indicates whether to enable transaction types for quotes and orders (`true`) or not (`false`). Transaction types optimize the way transactions are processed, depending on their size, complexity, and the business needs of the org. You can't turn off transaction processing after it's turned on. Available in API version 63.0 and later.

To set a default transaction type, create transaction types, and select the default. After you select a default transaction type, you can't be without a default.

groupsEnabled

Type: boolean

Description: Indicates whether users can group line items in quotes and orders (`true`) or not (`false`). Available in API version 62.0 and later.

hidePriceRefreshNtfcn

Type: boolean

Description: Indicates whether to hide the notification that appears when quote or order prices aren't updated (`true`) or not (`false`). Hiding this notification may affect saving quotes and creating orders because you could be using outdated prices. The default value is `false`. Available in API version 65.0 and later.

relaxUniqueCipValidation

Type: boolean

Description: Indicates whether to enable fully customizable extensions to contract item prices by ignoring record validations (`true`) or not (`false`). Available in API version 64.0 and later.

skipOrgStfPricing

Type: boolean

Description: Indicates whether to skip the default pricing procedure and any pricing procedure set for a sales transaction with quote or order type (`true`) or not (`false`). To enable this field, you must enable the `enableRevUnifiedSetup` field.

Declarative Metadata Sample Definition

Here's an example of a RevenueManagementSettings component.

```
<?xml version="1.0" encoding="UTF-8"?>
<RevenueManagementSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableCoreCPQ>true</enableCoreCPQ>
  <enableDeltaPricing>true</enableDeltaPricing>
  <enableTransactionProcessor>true</enableTransactionProcessor>
  <enableAutoAddDerivedAsset>true</enableAutoAddDerivedAsset>
  <enableRampDeal>true</enableRampDeal>
  <enableRevUnifiedSetup>true</enableRevUnifiedSetup>
</RevenueManagementSettings>
```

```

    <groupsEnabled>true</groupsEnabled>
    <enableTransactionCloning>true</enableTransactionCloning>
    <relaxUniqueCipValidation>true</relaxUniqueCipValidation>
    <skipOrgSttPricing>true</skipOrgSttPricing>
    <enableAsIsRenewals>true</enableAsIsRenewals>
    <enableAdvCreateOrdersFromQuote>true</enableAdvCreateOrdersFromQuote>
    <enableAdvancedDetailLinePricing>true</enableAdvancedDetailLinePricing>
    <enableGroupRampPref>true</enableGroupRampPref>
    <hidePriceRefreshNtfcn>true</hidePriceRefreshNtfcn>
  </RevenueManagementSettings>

```

This example `package.xml` references the previous definition.

```

<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>RevenueManagement</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>

```

Wildcard Support in the Manifest File

The wildcard character * (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

CHAPTER 3 Revenue Management Deployment

In this chapter ...

- [Deployment Workflows and Sequence](#)
- [Deployment Considerations](#)
- [Global Unique ID Setup](#)
- [Managing Component States](#)
- [Post-Deployment Steps](#)
- [Deployment Scenarios](#)
- [Object Deployment Reference](#)
- [Metadata Deployment Reference](#)
- [Additional Deployment Information](#)

This section provides a clear roadmap for accurately and efficiently deploying Revenue Management objects and metadata between development, staging, sandbox, and production orgs.

Developing and maintaining complex business applications on the platform requires a structured approach to managing changes and deployments. This is especially true for Revenue Management, which involves a complex data model and metadata components.

The interconnected nature of Revenue Management's architecture requires a meticulous and well-defined development operations (DevOps) process. Without it, organizations face significant risks, including data corruption, deployment failures, and disruption to critical business processes.

Who This Section Is For

This section is intended for advanced users who are familiar with Salesforce development, established DevOps concepts, and Salesforce administration.


What's Not Included

- This section doesn't include information about data migration from external or legacy systems.
- There's no built-in, Revenue Management-specific deployment tool. Select the Salesforce or third-party deployment tools appropriate for your use case.
- Every Salesforce implementation is unique. This guide doesn't address how to deploy your custom objects, fields, Apex classes, metadata, Lightning Web Components (LWCs), and so on.

Deployment Workflows and Sequence

A typical dev ops cycle involves managing test orgs, sandboxes, and a production org. Your deployment workflow can be a simple deployment of all setup and data from a development org to production. Or, it can be much more complex, involving multiple staging and testing orgs before any changes are sent to production.

Here's a diagram illustrating several potential deployment plans.

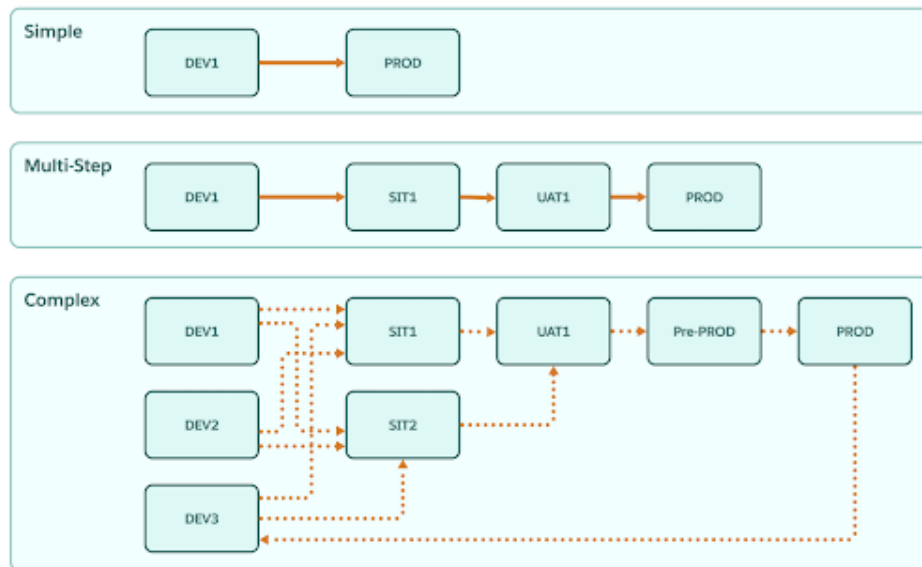

Full vs. Incremental Deployment

Deployments take two primary forms: full and incremental.

A full deployment involves migrating the entire set of relevant metadata such as objects, fields, classes, triggers, and potentially a significant volume of data from a source org. This ensures that the target org is a complete, synchronized replica of the source at that point in time.

Full deployments are best suited for initial setup, major releases, or when deploying to a completely new, or non-synced environment, such as the first deployment to a sandbox or staging org.

Incremental deployments are used for ongoing DevOps activities. They focus only on the specific metadata components and associated data records that have been created, modified, or deleted since the last successful deployment.

This incremental approach is faster, reduces deployment risk by minimizing the scope of changes, and is essential for maintaining business continuity in a live production environment. Critical to this process is a version control system to track and compare differences between environments, ensuring only the necessary "delta" is packaged and deployed.

Planning for incremental deployments requires change tracking, dependency analysis, and careful sequencing of data and metadata components to ensure that all prerequisites are met in the target environment.

Deployment Sequence and Dependencies

The deployment process must navigate intricate dependencies involving both metadata and the data records themselves. For instance, before deploying the data records for an object, the necessary metadata must be in place first to ensure that the destination org is structurally prepared to receive the data.

Also, there are dependencies based on the record relationships. For example, if you're deploying a custom object with a lookup to the standard Account object, the Account records must be created first to satisfy the lookup relationship when the custom object's child records are subsequently inserted. You must also account for parent-child or master-detail relationships, requiring the parent record to be deployed before the child, to preserve referential integrity. Proper assessment and sequencing of these interdependent data and metadata components is vital to avoid validation errors and data corruption.

Sometimes, there are loops in the inter-relationships. For example, an object A depends on object B being deployed earlier, and object B depends on object A being deployed earlier. Let's say object A goes first, then object B goes next. Because of circular dependencies, one has to redeploy object A a second time to ensure all the references are properly populated.

Here are a few deployment dependency examples.

- The Product Specification Record Type must be deployed before you can insert any Product records.
- The Attribute Based Adjustment Rule must be deployed before you can insert any Attribute Based Adjustment records.
- Decision Tables (metadata records) must be deployed before deploying Pricing Recipes (metadata records).

 **Note:** For complete information on the required deployment sequence, see [Object Deployment Sequence](#) and [Metadata Deployment Reference](#).

Deployment Considerations

In any deployment scenario, you must understand all dependencies and prerequisites related to your planned changes.

Here's a list of things to consider and plan for.

Key considerations include:

- What's the sequence followed for object deployment? What dependencies exist on related objects?
- Do your objects have Draft, Active, or Inactive states?
- Does activation occur through an API or by simply setting a boolean field (active flag)?
- Are there special fields to consider, such as text fields with embedded IDs, JSON, or fields populated via triggers?
- Are there fields or objects that represent unique or sequential data that must be preserved in the target org?
- How would you handle system settings between the orgs? For example, making sure that a feature toggle is turned off in the target org so that automation doesn't start executing when you insert data from your source org.
- What's the impact of versioning on your deployment? For example, schema, app, or API versions.

 **Note:** For detailed information about these deployment considerations, see [Additional Deployment Information](#).

Global Unique ID Setup

The establishment of a Global Unique ID (GUID) column on all objects during day-one initialization is a recommended practice for Salesforce DevOps.

Salesforce uses its own internal ID for records, but this ID isn't portable. The same record in a testing, sandbox, or production org has different Salesforce IDs. This makes tracking a single piece of data across environments nearly impossible. By introducing your own custom, externally set GUID, you have a single, immutable, and universally consistent identifier.

 **Note:** You can also choose your preferred method to maintain the mapping of records IDs across orgs.

Before performing any deployment work, establish your GUID across all database objects, and across all Salesforce orgs involved in your deployment plan.

 **Note:** Add a GUID field to all objects used during your deployment. Since you can't add fields to metadata types (such as a Flow), use the API name for each metadata type as the unique identifier.

[Create a GUID Field](#)

Add a GUID field to all objects used during your deployment to ensure unique identification of records across environments.

[GUID Design and Usage](#)

The format and values of the Global Unique ID (GUID) are up to you. Here's some guidance on what makes a good versus poor GUID for deployment tracking.

Create a GUID Field

Add a GUID field to all objects used during your deployment to ensure unique identification of records across environments.

1. From Setup, in the Quick Find box, find and select **Object Manager**.
2. Select an object.
3. Click **Fields & Relationships**.
4. Click **New**.
5. Select **Text** for the data type.
6. Enter a field label and field name.
7. Enter a length.

We recommend 255 to avoid any errors related to ID length.

8. Select **Unique** and **External ID**.



Important: Selecting these attributes ensures that every record gets a unique ID.

9. Click **Next**.
10. Select the appropriate profiles for field access, optionally add the field to page layouts, and then click **Save**.
11. Repeat this process for all Salesforce objects related to your deployment plan.

 **Note:** Alternatively, you can create GUID fields by using the Metadata API. For more information, see [Understanding Metadata API](#) and the [Custom Field](#) metadata type.

GUID Design and Usage

The format and values of the Global Unique ID (GUID) are up to you. Here's some guidance on what makes a good versus poor GUID for deployment tracking.

The format and values of the GUID itself are up to you. Here's some guidance on what makes a good versus poor GUID.

A good GUID design includes these characteristics.

- Immutable
- Unique globally
- Non-translatable
- A single key
- Generated programmatically, and not manually

Poor GUID design includes these characteristics.

- Record Name field (mutable)
- Combination of mutable attributes such as Name + Version + Sequence
- Concatenated keys
- Conditional keys (Pricebook + Product OR Pricebook + Product + ISO Code)

Populate a GUID

Once you have created the GUID field on all the Salesforce objects related to your deployment plan, you're ready to populate the field with data.


Add the GUID column to your import spreadsheets or import file definitions. Populate the field with the GUID format you've chosen. Now, you're ready to use the GUID in your deployment process.

Important: You must populate the GUID field not only at the beginning of your deployment process, but you must also populate it for any new records you generate along the way.

Usage of GUID in the Deployment Cycle

The GUID is the cornerstone of your deployment and data migration strategy. During the deployment process, leverage the GUID for accurate upserts and data mapping. When migrating data records from one org to another, your deployment method must use the GUID as the external ID field for lookup and matching. This practice ensures that updates are applied precisely to the correct record, preventing data duplication or corruption.

In the event of a deployment failure or a post-deployment data issue, administrators can use the GUID to quickly and confidently locate the problematic records in all orgs for precise auditing and troubleshooting.

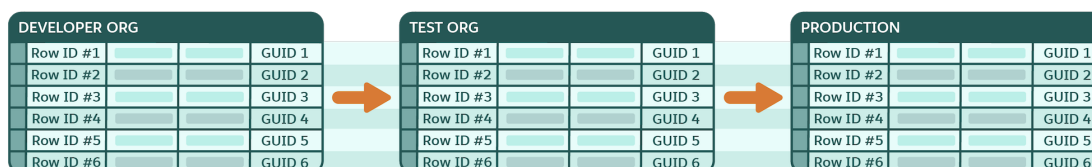

Non-Extensible Objects

A few Revenue Management objects are protected, and therefore non-extensible. You can't add a GUID field to these objects. Instead, create an external reference table to store your GUID. Use this reference table to track the non-extensible object throughout your deployment process.

Managing Component States

Manage activation, versioning, and dependencies for components and objects as part of your deployment plan. A successful deployment makes sure that the system executes the intended, final, and active logic, preventing failures caused by stale or inactive component dependencies.

A component's state is its operational status, which includes the:

- Active, inactive, or draft state
- Component version

- Dependencies on other components and objects
- Component-specific attributes like rank on expression sets

Components like decision tables, expression sets, and context definitions must be deployed taking their state into account. Also, some objects use an Active checkbox to determine if their records must be used during run time operations or not.

You must also make sure that all related dependencies are moved correctly and in the proper sequence from the source org to the target org.

State Management Scenarios

Component deployments usually fall into one of these categories:

Deploy a New Component: If the target org doesn't contain the component that you want to migrate, deploy it along with its versions from the source org to the target org.

Deploy Component Updates: When the target org already contains the component you want to migrate, then state and version management take effect. For example, with expression sets, you must deactivate the version in the target org where you want to deploy changes. If you try to deploy to an active version, the deployment fails.

Deploy Components with Dependencies: All related dependencies must be moved correctly and in the proper sequence from the source org to the target org. For example, expression sets reference elements such as decision matrices, decision tables, subexpressions, context definitions, field and object aliases, and explainability message templates. Migrate the dependent elements independently before you migrate the expression set version.

Helpful Links

Refer to these links for examples and component-specific information:

- [Considerations for Migrating Decision Tables](#)
- [Considerations for Migrating Expression Sets](#)
- [Migration of Expression Sets with Dependencies](#)
- [Migrate Context Definitions](#)



Note: Some Revenue Management components have unique activation requirements. For complete information about state management for these components, see [Additional Deployment Information](#).

Post-Deployment Steps

Most deployments require that you take some actions after the deployment to the target org is complete to ensure proper functionality and data integrity.

Here are some examples of common post-deployment tasks.

- Refresh decision tables
- Sync pricing data
- Rebuild the product index
- Manually create elements that couldn't be deployed through the API
- Create or activate user accounts for testing and validation



Note: For information about the post-deployment steps necessary for each Revenue Cloud feature, see [Additional Deployment Information](#).

Deployment Scenarios

Learn about specific deployment scenarios including new environment setup, refreshes, retiring records, deploying patches, and many more.

Product Catalog Management

Table 1: Product Definition: Full Deployment Scenarios

Scenario	Impact	Validation and Dependencies
Large Catalog Refresh. Introduce 200+ new SKUs for accessories line.	Metadata: See Additional Deployment Information . Data: bulk product load, product classes, selling models, price book entries, discount schedules, association to categories, catalogs.	In the target org: Align baseline metadata. Validation: Run automated regression tests on bundles and pricing. Validate sample SKUs across categories.

Table 2: Product Definition: Incremental Deployment Scenarios

Scenario	Impact	Validation and Dependencies
New Product Launch. Introduce a new product (simple) of type one time, subscription, and usage with standard pricing.	Metadata: product record type, updated page layouts, product catalog management, pricing, usage, and rating metadata. Data: product records, product classifications, attributes, attribute picklists, price book entries, rate card entries, subscription term details.	In the target org, a price book and rate card must exist, and billing rules are configured. Validation: Create a test quote with products, confirm price flows into quote or order, validate subscription billing cycle, validate rates.
Bundle Creation. Launch a new product bundle that includes core products, add-ons, and attribute configurations with standard pricing.	Metadata: none. Data: bundle definition, child products, option groups, option attribute configurations, bundle pricing.	In the target org, attributes and picklists must be created or updated, child products must be created or updated, and a price book must exist. Validation: Configure a bundle in a quote, test configuration options, and ensure correct pricing roll up.
Update Product Classification Properties. Add new attributes and update existing attribute properties to existing product classification.	Metadata: none. Data: new attributes, new and updated product class attribute assignments.	In the target org, attributes and picklists must be created or updated first. Validation: Generate a quote with updated product, and validate that product attributes appear correctly.
Update Product Classification Hierarchy. Add a new sub-classification, configure attributes, and create a product by using the sub-class.	Metadata: none. Data: new class, class relationship, and class attribute assignments.	In the target org, attributes and picklists must be created or updated first. Validation: Generate a quote with a new product. Validate product attributes correctly appear.
Product Retirement. Deactivate legacy products.	Metadata: none. Data: Set product status to Inactive. Remove the product from active price books.	Active quotes with retired products must be closed or replaced. Validation: Attempt to add a retired product to the quote and

Scenario	Impact	Validation and Dependencies
		confirm it's blocked. Make sure that reporting reflects retirement.
Update Product Discovery Setup. Change qualification procedure, product discovery flow, and turn on Indexed Product feature.	Metadata: See Appendix C . Data: Index configuration (searchable, filterable, languages).	In target org, make sure that baseline metadata is created. Run full indexing in the target org before you enable the feature. Validation: Validate the product discovery setup changes and product indexing process status. Verify by discovering products with term-based and faceted search.

Table 3: Catalog, Categories & Related Products: Full Deployment Scenarios

Scenario	Impact	Validation and Dependencies
New Catalog Creation. Introduce a new catalog for a business line. For example, Cloud Services.	Metadata: Catalog object configuration, and Salesforce Configure, Price, Quote (CPQ) page layouts. Data: Create catalog records and linked products.	Products must exist before adding to the catalog. Validation: Validate that the catalog is visible in quotes and orders. Confirm that all linked products appear.
Large Catalog Expansion. Add 500+ new SKUs across multiple categories.	Metadata: Update catalog metadata if new categories are required. Data: Bulk product-category relationships, and new catalog entries.	In the target org, make sure that baseline metadata is created. Validation: Confirm that sample SKUs appear in the correct categories. Perform a regression test of the catalog navigation.

Table 4: Catalog, Categories & Related Products: Incremental Deployment Scenarios

Scenario	Impact	Validation and Dependencies
Add New Category. Add the Security Services category under the existing catalog.	Metadata: Update category hierarchy metadata. Data: Create category record, and link products.	Parent catalog must exist in the target org. Validation: Confirm that products appear under the new category in the catalog browser.
Category Reorganization. Move products from the Hardware category to the Accessories category.	Metadata: Update category hierarchy and associations. Data: Update category-to-product mappings.	Validation: Validate that moved products appear only in the new category and that the old category is clean.
Product Retirement from Category. Remove retired products from catalog and related category.	Metadata: Update product visibility settings. Data: Update product-category relationships.	Validation: Validate that the products aren't visible in the category browser or guided selling.
Seasonal Category. Introduce a temporary Holiday Deals category.	Metadata: Configure the category (and time-based visibility if applicable). Data: Establish product-category relationships with seasonal tag.	Products must exist and be tagged for promotion. Validation: Confirm that the category is visible during the correct time period only. Verify that the correct products are included.

Table 5: Qualification Rules: Full Deployment Scenarios

Scenario	Impact	Validation and Dependencies
Large-Scale Decision Table Migration. Introduce 100+ new eligibility conditions, such as new geographies and pricing models.	Metadata: Qualification Rule framework and Expression Set alignment. Data: Insert decision tables in bulk.	Perform target org metadata baseline alignment and staging of decision tables for verification. Validation: Regression test eligibility across multiple conditions and customer profiles.
Composite Qualification Rule. Combine multiple decision tables and expression sets into a new guided selling path.	Metadata: Create parent qualification rule, and update multiple expression sets. Data: Populate multiple decision tables with new mappings.	All child rules and data mappings must exist in the target org. Validation: Test end-to-end guided selling to confirm the composite flow works correctly.

Table 6: Qualification Rules: Incremental Deployment Scenarios

Scenario	Impact	Validation and Dependencies
New Qualification Rule with Decision Table. Create a qualification rule to enforce eligibility for product bundles based on region and customer tier.	Metadata: New qualification rule metadata, and context definition setup. Data: Populate decision table entries with region and tier mappings.	Product catalog and customer tiers must be available in the target org. Validation: Create test quotes for each region and tier. Confirm that only eligible products appear.
Update Existing Decision Table Entries. Add new conditions to an existing qualification rule such as adding a new country to eligibility.	Metadata: none. Data: Update and add rows in decision tables.	Make sure that new values are aligned with the active product catalog. Validation: Confirm that the rule returns the correct product eligibility for the new condition.
Modify Expression Set. Change logical criteria from OR to AND in the qualification logic. For example, the customer must be an enterprise and have a support contract.	Metadata: Update expression set definition. Data: none.	Make sure that the dependent context variable exists. Validation: Confirm both the positive and negative test cases (eligible vs. non-eligible customers).
Context Definition Expansion. Add a new attribute to the context (for example, Industry) for use in qualification rules.	Metadata: Add field reference in context definition. Data: None (until data is mapped into a decision table).	Ensure that the Industry field exists and is populated. Validation: Test that qualification rules can read Industry context during quote creation.
Retirement of Qualification Rule. Deactivate old eligibility rule no longer needed such as a legacy discount program.	Metadata: Update rule status to inactive, and remove references from related expression set. Data: Remove or disable related decision table entries.	Make sure that the rule isn't referenced by other bundles or flows. Validation: Confirm that the retired rule no longer impacts guided selling or product selection.

Salesforce Pricing

Table 7: Pricing: Incremental Deployment Scenarios

Scenario	Impact	Validation and Dependencies
Pricing Update. Update base license cost by +5% for existing products.	Metadata: None (if there are no new rules). Data: Update price book entries and adjust discount tiers.	Make sure that no dependent contracts reference the old pricing. Validation: Generate a quote with the updated product. Confirm that pricing reflects the new value. Confirm no impact to active contracts.
Promotional Discount. Introduce a three-month promotional discount for enterprise customers.	Metadata: New time-based pricing rule and approval process update. Data: Create a discount schedule and promo product entry.	Approval workflow for discount must be active. Validation: Confirm that the discount applies only during the promotion period and verify that approvals trigger correctly.

Object Deployment Reference

Get to know the object deployment sequence and associated properties.

[Product Catalog Management Objects](#)

This table provides the deployment sequence, object types, API names, lookup fields, and data translation requirements for Product Catalog Management objects in Revenue Cloud.

[Salesforce Pricing Objects](#)

This table provides the deployment sequence, object types, API names, lookup fields, and data translation requirements for Salesforce Pricing objects in Revenue Management.

[Product Configurator Objects](#)

This table provides the object deployment sequence and properties for Product Configurator in Revenue Management, including object types, API names, deployment sequences, and lookup fields.

[Transaction Management Objects](#)

This table provides the deployment sequence, object types, and API names for Transaction Management objects in Revenue Management.

[Dynamic Revenue Orchestrator Objects](#)

This table provides the deployment sequence, object types, API names, and lookup fields for Dynamic Revenue Orchestrator objects in Revenue Management.

[Usage Management Objects](#)

This table provides the deployment sequence, object types, API names, and lookup fields for Usage Management objects in Revenue Management.

[Billing Objects](#)

This table provides the deployment sequence, object types, API names, and lookup fields for Billing objects in Revenue Management.

[Salesforce Contracts Objects](#)

This table provides the deployment sequence, object types, API names, and lookup fields for Salesforce Contracts in Revenue Management.

Product Catalog Management Objects

This table provides the deployment sequence, object types, API names, lookup fields, and data translation requirements for Product Catalog Management objects in Revenue Cloud.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

 **Note:** Internal objects aren't accessible.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Metadata	Product Specification Type	ProductSpecificationType	1	User
Metadata	Product Specification Record Type	ProductSpecification Record Type	2	Product Specification Type
Configuration	Attribute Picklist	AttributePickist	3	User, User Group, Unit of Measure
Configuration	Attribute Picklist Value. Translation table: Attribute Picklist Value Data Translation.	AttributePicklistValue. Translation table: AttributePicklistValueData Translation.	4 46.	User, Attribute Picklist (Master-Detail)
Configuration	Unit of Measure Class	UnitOfMeasureClass	5	User, Unit of Measure
Configuration	Unit of Measure	UnitOfMeasure	6	User Group, Unit of Measure Class
Configuration	Attribute Definition. Translation table: Attribute Definition Data Translation.	AttributeDefinition. Translation table: AttributeDefinitionData Translation.	7 47.	User, Attribute Picklist, Unit of Measure
Configuration	Attribute Category. Translation table: Attribute Category Data Translation.	AttributeCategory. Translation table: AttributeCategoryData Translation.	8 48.	User Group
Configuration	Attribute Category Attribute	AttributeCategoryAttribute	9	User Group, Attribute Category, Attribute Definition
Configuration	Product Classification. Translation table: Product Classification Data Translation.	ProductClassification. Translation table: ProductClassificationData Translation.	10 49.	User, User Group, Product Classification
Configuration	Product Classification Attribute. Translation table: Product Classification Attribute Data Translation.	ProductClassificationAttr. Translation table: ProductClassificationAttrData Translation.	11 50.	Attribute Definition, Attribute Category, Product Classification Attribute, Product Classification Attribute, User, User Group, Unit of Measure
Configuration	Tax Policy	TaxPolicy	12	User, Tax Treatment

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Product. Translation table: Product2 Data Translation.	Product2. Translation table: Product2DataTranslation.	13 51.	Product Classification, Billing Policy, User, External Data Source, Tax Policy, Unit of Measure
Configuration	Tax Engine	TaxEngine	14	Named Credential, Tax Engine Provider
Configuration	Tax Treatment	TaxTreatment	15	Legal Entity, Product, Tax Policy, Tax Engine
Configuration	Product Attribute Definition	ProductAttributeDefinition	16	Attribute Definition, Attribute Category, User, Product Attribute Definition, Product Classification Attribute, Unit of Measure
Configuration	Attribute Picklist Excluded Value	AttrPicklistExcludedValue	17	Product Classification Attribute, Product Attribute Definition (polymorphic), Attribute Picklist Value
Configuration	Product Attribute Scope	ProdAttrScope	18	User, User Group
Configuration	Product Attribute Mapped Scope	ProdAttrMappedScope	19	Product Classification Attribute, Product Attribute Definition (polymorphic), Product Attribute Mapped Scope, Product Attribute Scope
Configuration	Product Selling Model	ProductSellingModel	20	User
Configuration	Product Selling Model Option	ProductSellingModelOption	21	User, Product Selling Model, Proration Policy
Configuration	Product Ramp Segment	ProductRampSegment	22	User, Product Selling Model, Product
Configuration	Product Relationship Type	ProductRelationshipType	23	User
Configuration	Product Component Group	ProductComponentGroup	24	User, User Group, Product Component Group
Configuration	Product Related Component	ProductRelatedComponent	25	User, Product, Product Classification, Product Selling Model, Product Component Group, Product Relationship Type, Unit of Measure
Configuration	Product Related Group Override	ProductComponentGrpOverride	26	User, User Group, Product, Product Component Group

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Product Related Component Override	ProductRelComponentOverride	27	UserGroup, Product, Product Related Component, Unit of Measure
Configuration	Catalog. Translation table: Product Catalog Data Translation.	ProductCatalog. Translation table: ProductCatalogDataTranslation.	28 52.	User, User Group
Configuration	Category. Translation table: Product Category Data Translation.	ProductCategory. Translation table: ProductCategoryDataTranslation.	29 53.	User, Catalog (Master-Detail)
Configuration	Product Category Product	ProductCategoryProduct	30	Product, Category (Master-Detail)
Configuration	Product Qualification	ProductQualification	31	User, User Group, Product
Configuration	Product Disqualification	ProductDisqualification	32	User, User Group, Product
Configuration	Product Category Qualification	ProductCategoryQualification	33	User, User Group, Category
Configuration	Product Category Disqualification	ProductCategoryDisqual	34	User, User Group, Category
Configuration	Runtime Catalog Index Settings (Internal)	RuntimeCatalogIndexSetting	35	
Configuration	WebStore Search Attr Settings (Internal)	WebStoreSearchAttrSettings	36	
Configuration	Assessment Question	AssessmentQuestion	37	Assessment Question Version, Assessment Question, User, User Group
Configuration	Assessment Question Version	AssessmentQuestionVersion	38	Assessment Question (Master-Detail)
Configuration	Assessment	Assessment	39	Account, Contact, User, User Group, Omni Process, Assessment
Configuration	Assessment Question Response	AssessmentQuestionResponse	40	Assessment Question Version, Assessment (Master-Detail), User, User Group
Configuration	Omni Process	OmniProcess	41	User, User Group
Configuration	Omni Process Element	OmniProcessElement	42	Omni Process (Master-Detail), Omni Process Element
Configuration	OmniProcess Assessment Question Version	OmniProcessAsmtQuestionVer	43	Assessment Question Version, Omni Process, Omni Process Element, User Group
Configuration	Assessment Question Set	AssessmentQuestionSet	44	User, User Group

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Assessment Question Assignment	AssessmentQuestionAssignment	45	Assessment Question Set, User, User Group

SEE ALSO:

[Revenue Cloud Developer Guide: Product Catalog Management Standard Objects](#)

[Explore the Revenue Cloud Data Model](#)

Salesforce Pricing Objects

This table provides the deployment sequence, object types, API names, lookup fields, and data translation requirements for Salesforce Pricing objects in Revenue Management.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.



Note: Internal objects aren't accessible.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Product Selling Model. Translation table: Product Selling Model Data Translation.	ProductSellingModel. Translation table: ProductSellingModelData Translation.	1	
Configuration	Product Selling Model Option. Translation table: Product Selling Model Option Data Translation.	ProductSellingModelOption. Translation table: ProductSellingModelOptionDataTranslation.	2	ProductSellingModel (Master-Detail), Product2 (Foreign key), ProrationPolicy (Foreign key)
Configuration	Price Book	Pricebook2	3	Pricebook2 (Foreign Key)
Configuration	Cost Book	CostBook	4	
Configuration	Price Book Entry	PriceBookEntry	5	Pricebook2 (Foreign Key), Product2 (Foreign key), ProductSellingModel (Foreign Key)
Configuration	Cost Book Entry	CostBookEntry	6	CostBook (Master-Detail), Product (Foreign Key)
Configuration	Price Adjustment Schedule	PriceAdjustmentSchedule	7	Pricebook2 (Foreign Key), Contract (Foreign Key)
Configuration	Price Adjustment Tier	Price Adjustment Tier	8	PriceAdjustmentSchedule (Master-Detail), ProductSellingModel (Foreign Key), Product2 (Foreign key)

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Price Book Entry Derived Price	PriceBookEntryDerivedPrice	9	Product2 (Foreign Key), PricebookEntry (Foreign Key), Pricebook2 (Foreign Key), ProductSellingModel (Foreign Key)
Configuration	Bundle Based Adjustment	BundleBasedAdjustment	10	PriceAdjustmentSchedule (Master-Detail), Product2 (Foreign key), ProductSellingModel (Foreign Key)
Configuration	Attribute Based Adjustment Rule	AttributeBasedAdjRule	11	
Configuration	Attribute Adjustment Condition	AttributeAdjustmentCondition	12	AttributeBasedAdjRule (Master-Detail), AttributeDefinition (Foreign Key), Product2 (Foreign Key)
Configuration	Attribute Based Adjustment	AttributeBasedAdjustment	13	PriceAdjustmentSchedule (Master-Detail), ProductSellingModel (Foreign Key), AttributeBasedAdjRule (Foreign Key), Product2 (Foreign key)
Configuration	Index rate (extended from Financial Services Cloud)	IndexRate	30	
Metadata	Price Book Price Guidance	PriceBookPriceGuidance	35	PricebookEntry (Foreign Key), Pricebook (Foreign Key), Product (Foreign Key), ProductSellingModel (Foreign Key)
Metadata	Pricing Procedure Resolution	PricingProcedureResolution	40	ExpressionSet (Foreign Key)
Configuration	Pricing Procedure Output Map	PricingProcedureOutputMap	40	PricingRecipeTableMapping (Foreign Key), OutputFieldName (Foreign Key)
Metadata	Pricing Recipe	PricingRecipe	50	ExpressionSetDefinition (Foreign Key)
Configuration	Proration Policy	ProrationPolicy	50	
Configuration	Product Price Range	ProductPriceRange	90	Pricebook2 (Foreign Key)
Configuration	Price Revision Policy	PriceRevisionPolicy		
Metadata	Pricing Recipe Table Mapping (Internal)	PricingRecipeTableMapping		PricingRecipe (Master-Detail), LookupTable (Foreign Key)

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Product Price History Log (Internal)	ProductPriceHistoryLog		ProductPriceRange (Master-Detail)
Configuration	Pricing Adjustment Batch Job (Internal)	PricingAdjBatchJob		
Configuration	Pricing Adjustment Batch Job Log (Internal)	PricingAdjBatchJobLog		PricingAdjBatchJob (Master-Detail)
Configuration	Procedure Plan Definition (Internal)	ProcedurePlanDefinition		
Configuration	Procedure Plan Definition Version (Internal)	ProcedurePlanDefinitionVersion		ProcedurePlanDefinition (Master-Detail)
Configuration	Procedure Plan Criterion (Internal)	ProcedurePlanCriterion		ProcedurePlanOption (Master-Detail), DecisionTableParameter (Foreign Key)
Configuration	Procedure Plan Option (Internal)	ProcedurePlanOption		ProcedurePlanSection (Master-Detail), ExpressionSetDefinition (Foreign Key), DecisionTable (Foreign Key), DecisionTableParameter (Foreign Key), DecisionTableParameter (Foreign Key), DecisionTableParameter (Foreign Key), ApexClass (Foreign Key)
Configuration	Procedure Plan Variable (Internal)	ProcedurePlanVariable		ProcedurePlanDefinitionVersion (Master-Detail)
Configuration	Procedure Plan Section (Internal)	ProcedurePlanSection		ProcedurePlanDefinitionVersion (Master-Detail)

SEE ALSO:

[Revenue Cloud Developer Guide: Salesforce Pricing Standard Objects](#)

[Explore the Revenue Cloud Data Model](#)

Product Configurator Objects

This table provides the object deployment sequence and properties for Product Configurator in Revenue Management, including object types, API names, deployment sequences, and lookup fields.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Product Configuration Rule	ProductConfigurationRule	1	User
Configuration	Product Configuration Flow	ProductConfigurationFlow	1	UserFlowIdentifier
Configuration	ExpressionSetConstraintObj	ExpressionSetConstraintObj	1	ExpressionSetId, ReferenceObjectId (Polymorphic)
Configuration	Product Configuration Flow Assignment	ProductConfigFlowAssignment	2	User, ProductId, ProductClassificationId, ProductConfigurationFlow

Transaction Management Objects

This table provides the deployment sequence, object types, and API names for Transaction Management objects in Revenue Management.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Metadata	App Usage Assignment	AppUsageAssignment	1	Order, Quote, Contract, Asset
Metadata	Sales Transaction Type	SalesTransactionType	1	PricingProcedure
Metadata	Quote Template Rich Text Data	QuoteTemplateRichTextData	1	None
Metadata	Transaction Processing Type	TransactionProcessingType	1	None

SEE ALSO:

[Revenue Cloud Developer Guide: Transaction Management Standard Objects](#)

[Explore the Revenue Cloud Data Model](#)

Dynamic Revenue Orchestrator Objects

This table provides the deployment sequence, object types, API names, and lookup fields for Dynamic Revenue Orchestrator objects in Revenue Management.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Fulfillment Step Definition Group	FulfillmentStepDefinitionGroup	1	None
Configuration	Fulfillment Step Definition	FulfillmentStepDefinition	2	Ruleset, ExpressionSet, FulfillmentStepDefinitionGroup, IntegrationProviderDef, User, Queue

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Fulfillment Step Dependency Definition	FulfillmentStepDependencyDef	3	FulfillmentStepDefinition
Configuration	Product Fulfillment Scenario	ProductFulfillmentScenario	4	FulfillmentStepDefinitionGroup, Ruleset, Product2, ProductClassification, FlowDefinition, StageDefinition, FlowRecord, FlowOrchestration
Configuration	Fulfillment Workspace	FulfillmentWorkspace	5	None
Configuration	Fulfillment Workspace Item	FulfillmentWorkspaceItem	6	FulfillmentWorkspace, FulfillmentStepDefinitionGroup
Configuration	Fulfillment Fallout Rule	FulfillmentFalloutRule	7	IntegrationProviderDef, Group
Configuration	Fulfillment Step Jeopardy Rule	FulfillmentStepJeopardyRule	8	IntegrationProviderDef
Configuration	Fulfillment Task Assignment Rule	FulfillmentTaskAssignmentRule	9	Ruleset, ExpressionSet, User, Queue
Configuration	Product Fulfillment Decomposition Rule	ProductFulfillmentDecompRule	1	Ruleset, Product2, ProductClassification
Configuration	Value Transformation Group	ValTfrmGrp	2	None
Configuration	Value Transformation	ValTfrm	3	ValTfrmGrp, AttributePicklistValue
Configuration	Product Decomposition Enrichment Rule	ProductDecompEnrichmentRule	4	ProductFulfillmentDecompRule, ExpressionSet, AttributeDefinition, ValTfrmGrp, DecisionMatrixDefinition
Configuration	Product Decomposition Enrichment Variable Mapping	ProdtDecompEnrchVarMap	5	ProductDecompEnrichmentRule, AttributeDefinition

SEE ALSO:

[Revenue Cloud Developer Guide: Dynamic Revenue Orchestrator Standard Objects](#)

[Explore the Revenue Cloud Data Model](#)

Usage Management Objects

This table provides the deployment sequence, object types, API names, and lookup fields for Usage Management objects in Revenue Management.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Usage Aggregation Policy	UsageResourceBillingPolicy	1	None
Configuration	Usage Grant Rollover Policy	UsageGrantRolloverPolicy	2	None
Configuration	Usage Grant Renewal Policy	UsageGrantRenewalPolicy	3	None
Configuration	Usage Overage Policy	UsageOveragePolicy	4	None
Configuration	Usage Commitment Policy	UsageCommitmentPolicy	5	None
Configuration	Rate Card	RateCard	6	None
Configuration	Usage Resource	UsageResource	7	UnitOfMeasure, UnitOfMeasureClass, Product2, UsageResourceBillingPolicy
Configuration	Price Book Rate Card	PriceBookRateCard	8	PriceBook2, RateCard
Configuration	Rating Frequency Policy	RatingFrequencyPolicy	9	Product2, UsageResource
Configuration	Product Usage Resource	ProductUsageResource	10	Product2, UsageResource
Configuration	Rate Card Entry	RateCardEntry	11	RateCard, UnitOfMeasure, UnitOfMeasureClass, UsageResource, Product2, ProductSellingModel
Configuration	Usage Resource Policy	UsageResourcePolicy	12	UsageResource, UsageOveragePolicy, RatingFrequencyPolicy, UsageResourceBillingPolicy, UsageCommitmentPolicy
Configuration	Product Usage Grant	ProductUsageGrant	13	ProductUsageResource, UnitOfMeasure, UnitOfMeasureClass, UsageGrantRolloverPolicy, UsageGrantRenewalPolicy, Product2, ProductSellingModel
Configuration	Product Usage Resource Policy	ProductUsageResourcePolicy	14	ProductUsageResource, UsageOveragePolicy, RatingFrequencyPolicy, UsageResourceBillingPolicy, UsageCommitmentPolicy, ProductSellingModel
Configuration	Rate Adjustment By Tier	RateAdjustmentByTier	15	RateCardEntry

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Rate Adjustment By Attribute	RateAdjustmentByAttribute	16	RateCardEntry, AttributeBasedAdjRule

SEE ALSO:

[Revenue Cloud Developer Guide: Usage Management Standard Objects](#)

[Explore the Revenue Cloud Data Model](#)

Billing Objects

This table provides the deployment sequence, object types, API names, and lookup fields for Billing objects in Revenue Management.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Profile	Profile	1	None
Configuration	User	User	2	None
Configuration	User Role	UserRole	3	None
Configuration	Legal Entity	LegalEntity	4	None
Configuration	Billing Policy	BillingPolicy	5	None
Configuration	Billing Treatment	BillingTreatment	6	LegalEntity, BillingPolicy
Configuration	Billing Treatment Item	BillingTreatmentItem	7	BillingTreatment
Configuration	Tax Engine Provider	TaxEngineProvider	8	ApexAdapter
Configuration	Tax Engine	TaxEngine	9	NamedCredential, TaxEngineProvider
Configuration	Tax Policy	TaxPolicy	10	None
Configuration	Tax Treatment	TaxTreatment	11	TaxEngine, TaxPolicy
Configuration	Tax Treatment Item	TaxTreatmentItem	12	Product2
Configuration	Payment Term	PaymentTerm	13	None
Configuration	Payment Term Item	PaymentTermItem	14	PaymentTerm
Configuration	Accounting Period	AccountingPeriod	15	None
Configuration	Legal Entity Accounting Period	LegalEntityAccountingPeriod	16	LegalEntity, AccountingPeriod
Configuration	General Ledger Account	GeneralLedgerAccount	17	LegalEntity
Configuration	General Ledger Account Assignment Rules	GeneralLedgerAcctAsgntRule	18	LegalEntity, GeneralLedgerAccount

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Configuration	Payment Schedule Policy	PaymentSchedulePolicy	19	None
Configuration	Payment Schedule Treatment	PaymentScheduleTreatment	20	PaymentSchedulePolicy
Configuration	Payment Schedule Treatment Detail	PaymentScheduleTreatmentDtl	21	PaymentScheduleTreatment, PymtSchdDistributionMethod
Configuration	Payment Schedule Distribution Method	PymtSchdDistributionMethod	22	None
Configuration	Billing Milestone Plan	BillingMilestonePlan	23	BillingTreatment
Configuration	Billing Milestone Plan Item	BillingMilestonePlanItem	24	BillingMilestonePlan
Configuration	General Ledger Journal Entry Rule	GeneralLedgerJrnlEntryRule	25	GeneralLedgerAccount, GeneralLedgerAcctAsgntRule
Configuration	Payment Retry Rule	PaymentRetryRule	26	PaymentGateway
Configuration	Payment Retry Rule Set	PaymentRetryRuleSet	27	None
Configuration	Billing Arrangement	BillingArrangement	28	None
Configuration	Billing Arrangement Line	BillingArrangementLine	29	Account, BillingAccount

SEE ALSO:

[Revenue Cloud Developer Guide: Billing Standard Objects](#)

[Explore the Revenue Cloud Data Model](#)

Salesforce Contracts Objects

This table provides the deployment sequence, object types, API names, and lookup fields for Salesforce Contracts in Revenue Management.

Object Use Type	Object Name	Object API	Deployment Sequence	Lookup Fields (Foreign Keys)
Metadata	Clause Category Configuration	ClauseCatgConfiguration	1	None
Configuration	Document Clause Set	DocumentClauseSet	2	ClauseCatgConfiguration
Configuration	Document Clause	DocumentClause	3	DocumentClauseSet, ContentDocument

Metadata Deployment Reference

Get to know the metadata deployment sequence and associated details.

[Product Catalog Management Metadata](#)

This table provides the metadata deployment reference for Product Catalog Management in Revenue Management, including setup paths and configuration details.

[Salesforce Pricing Metadata](#)

This table provides the metadata deployment reference for Salesforce Pricing in Revenue Cloud, including setup paths and configuration details.

[Product Configurator Metadata](#)

This table provides the metadata deployment reference for Product Configurator in Revenue Management, including setup paths and configuration details.

[Transaction Management Metadata](#)

This table provides the metadata deployment reference for Transaction Management in Revenue Management, including setup paths and configuration details.

[Dynamic Revenue Orchestrator Metadata](#)

This table provides the metadata deployment reference for Dynamic Revenue Orchestrator (DRO) in Revenue Management, including setup paths and configuration details.

[Usage Management Metadata](#)

This table provides the metadata deployment reference for Usage Management in Revenue Cloud, including setup paths and configuration details.

[Billing Metadata](#)

This table provides the metadata deployment reference for Billing in Revenue Management, including setup paths and configuration details.

[Industries Common Component Metadata](#)

This table provides the metadata deployment reference for Industries common components in Revenue Management, including setup paths and configuration details.

[Salesforce Contracts Metadata](#)

This table provides the metadata deployment reference for Salesforce Contracts in Revenue Management, including setup paths and configuration details.

Product Catalog Management Metadata

This table provides the metadata deployment reference for Product Catalog Management in Revenue Management, including setup paths and configuration details.

Type	Label	Setup Path	Details
Setup	Omnistudio Settings	Setup > Apps > Packaging > Installed Packages	Prerequisite: Omnistudio Managed package must be installed.
Flag	Managed Package Runtime	Setup > Feature Settings > Omni interaction > Omnistudio Settings	Disable
Flag	Define Custom Lightning Web Components in Standard Runtime	Setup > Feature Settings > Omni interaction > Omnistudio Settings	Enable

Type	Label	Setup Path	Details
Setup	Discovery Framework	Setup > Discovery Framework	Prerequisite: Enable guided product selection through this path. Setup> Product Discovery > Product Discovery Settings- > Guided Product Selection
Flag	Discovery Framework	Setup > Discovery Framework > General Settings	Enable
Flag	Import & Export	Setup > Discovery Framework > General Settings	Enable
Flag	Sample Templates	Setup > Discovery Framework > General Settings	Enable. Also, refer to these steps. In the Sample Templates section, click the Discovery Framework Sample Template page link. The Discovery Framework Sample Templates page appears; or Click Deploy if not already deployed.
Setup	Procedure Plan Definition	Procedure Plan Setup > Procedure Plan Definitions	
Setup	Product Discovery Settings	Setup> Product Discovery > Product Discovery Settings	
Field	Select Context Definition	Setup> Product Discovery > Product Discovery Settings	
Field + Flag	Select Pricing Procedure	Setup> Product Discovery > Product Discovery Settings	
Field + Flag	Select Qualification Procedure	Setup> Product Discovery > Product Discovery Settings	
Field	Select a Custom Flow for Browsing and Adding Products in Revenue Cloud	Setup> Product Discovery > Product Discovery Settings	
Field	Select Default Catalog	Setup> Product Discovery > Product Discovery Settings	
Flag	Product Field Search	Setup> Product Discovery > Product Discovery Settings	
Flag	Use Indexed Data for Product Listing and Search	Setup> Product Discovery > Product Discovery Settings	
Flag	Dynamic Product Facets	Setup> Product Discovery > Product Discovery Settings	

Type	Label	Setup Path	Details
Flag	Semantic Search	Setup> Product Discovery > Product Discovery Settings	
Flag	Guided Product Selection	Setup> Product Discovery > Product Discovery Settings	
Flag	Generate Product Descriptions with Einstein AI	Setup> Product Discovery > Product Discovery Settings	
Flag	Product Catalog Management Cache	Setup> Product Discovery > Product Discovery Settings	
Permission Sets	Product Catalog Management Customer Community User	Setup > Users > Permission Sets	
Permission Sets	Product Catalog Management Partner Community User	Setup > Users > Permission Sets	
Permission Sets	Product Catalog Management Cache	Setup > Users > Permission Sets	
Permission Sets	Product Discovery Admin	Setup > Users > Permission Sets	
Permission Sets	Product Discovery User	Setup > Users > Permission Sets	
Permission Sets	ProductImport API	Setup > Users > Permission Sets	
Permission Sets	DecimalQuantityDesignTime	Setup > Users > Permission Sets	
Permission Sets	DecimalQuantityRuntime	Setup > Users > Permission Sets	
Permission Sets	Advanced CSV Data Import	Setup > Users > Permission Sets	Data Processing Engine (DPE) is included. Data Cloud is licensed and deployed separately.
Permission Sets	Basic CSV Data Import	Setup > Users > Permission Sets	
Permission Sets	Context Service Admin	Setup > Users > Permission Sets	
Permission Sets	Context Service Runtime	Setup > Users > Permission Sets	
Permission Sets	Fulfillment Designer	Setup > Users > Permission Sets	
Permission Sets	Omnistudio Admin	Setup > Users > Permission Sets	
Permission Sets	Omnistudio User	Setup > Users > Permission Sets	
Flow	Discover Products	Setup > Flow	Supports Flow version, activation, and deactivation
Omniscrypt	ProductGuidedSelectionIntegration	All Apps > Omnistudio	Supports Omniscrypt version, activation, and deactivation

Type	Label	Setup Path	Details
Decision Table Definition	ProductQualificationDT	Setup > Decision Table	
Decision Table Definition	ProductDisqualificationQualificationDT	Setup > Decision Table	
Decision Table Definition	ProductCategoryQualificationDT	Setup > Decision Table	
Decision Table Definition	ProductCategory DisqualificationQualificationDT	Setup > Decision Table	

Salesforce Pricing Metadata

This table provides the metadata deployment reference for Salesforce Pricing in Revenue Cloud, including setup paths and configuration details.

Type	Label	Setup Path	Details
Setup	Context Service	Context Service > Context Service Settings	Enable. This is a prerequisite to Salesforce Pricing settings.
Setup	Salesforce Pricing Settings	Setup > Salesforce Pricing > Salesforce Pricing Settings	Enable
Setup	Pricing Recipes	Setup > Salesforce Pricing > Pricing Recipes	
Setup	Salesforce Pricing Setup	Setup > Salesforce Pricing > Salesforce Pricing Setup	
Field	Select a Pricing Recipe	Setup > Salesforce Pricing > Salesforce Pricing Setup	
Field	Select a Pricing Procedure	Setup > Salesforce Pricing > Salesforce Pricing Setup	
Flag	Sync Pricing Data	Setup > Salesforce Pricing > Salesforce Pricing Setup	Decision tables are refreshed.
Flag	Activate Price Waterfall for API Responses	Setup > Salesforce Pricing > Salesforce Pricing Setup	
Flag	Turn On Price Waterfall Persistence	Setup > Salesforce Pricing > Salesforce Pricing Setup	
Field	Price Tracking History	Setup > Salesforce Pricing > Salesforce Pricing Setup	Includes two fields of type flag. 1. Enable Maximum Price 2. Enable Minimum Price
Field	Proration Settings	Setup > Salesforce Pricing > Salesforce Pricing Setup	Includes two fields of type field. 1. Evergreen 2. One Time
Flag	Turn On Price Logs Capture	Setup > Salesforce Pricing > Salesforce Pricing Setup	

Type	Label	Setup Path	Details
Flag	Turn on Parallel Execution	Setup > Salesforce Pricing > Salesforce Pricing Setup	
Setup	Procedure Plan Definition	Procedure Plan Setup > Procedure Plan Definitions	For Procedure Plan definitions, if Apex is selected, the Apex class must be migrated. Packaging isn't supported in Winter' 26. See Customize Your Procedure Plans With Apex Hooks .
Permission Sets	Salesforce Pricing Admin	Setup > Users > Permission Sets	
Permission Sets	Salesforce Pricing Design Time User	Setup > Users > Permission Sets	
Permission Sets	Salesforce Pricing Manager	Setup > Users > Permission Sets	
Permission Sets	Salesforce Pricing Run Time User	Setup > Users > Permission Sets	
Decision Table Definition	Asset Action Source Entries	Setup > Decision Table	
Decision Table Definition	Asset Action Source Entries V2	Setup > Decision Table	
Decision Table Definition	Attribute Discount Entries	Setup > Decision Table	
Decision Table Definition	Bundle Based Adjustment Entries	Setup > Decision Table	
Decision Table Definition	Contract Pricing Adjustment Tiers	Setup > Decision Table	
Decision Table Definition	Contract Pricing Entries	Setup > Decision Table	
Decision Table Definition	Contract Pricing Volume Tiers	Setup > Decision Table	
Decision Table Definition	Contract Pricing Volume Tiers V2	Setup > Decision Table	
Decision Table Definition	Derived Pricing Entries	Setup > Decision Table	
Decision Table Definition	Index Rate	Setup > Decision Table	

Type	Label	Setup Path	Details
Decision Table Definition	Price Book Entries	Setup > Decision Table	
Decision Table Definition	Price Book Entries V2	Setup > Decision Table	
Decision Table Definition	Pricebook Rate Card Entries	Setup > Decision Table	
Decision Table Definition	Product Price Range Entries	Setup > Decision Table	
Decision Table Definition	Product Price Range Entries V2	Setup > Decision Table	
Decision Table Definition	Tiered Adjustment Entries	Setup > Decision Table	
Decision Table Definition	Volume Discount Entries	Setup > Decision Table	

Product Configurator Metadata

This table provides the metadata deployment reference for Product Configurator in Revenue Management, including setup paths and configuration details.

Type	Label	Setup Path	Comments
Setup	Context Service	Context Service > Context Service Settings	Enable (prerequisite to Product Configurator).
Setup	Configure Products at Runtime	Setup > Feature Settings > Revenue Cloud > Revenue Settings	
Setup	Set Up Configuration Rules with Business Rules Engine	Setup > Feature Settings > Revenue Cloud > Revenue Settings	Standard Configurator Prerequisite: Create a Rule Library Version (Set Up Configurator With Business Rules Engine)
Setup	Set Up Configuration Rules and Constraints with Constraints Engine	Setup > Feature Settings > Revenue Cloud > Revenue Settings	
Setup	Transaction processing for quotes and orders	Setup > Feature Settings > Revenue Cloud > Revenue Settings	If both Business Rules Engine and Constraint Builder are enabled in the org, ConstraintBuilder is used. Exception is Transaction Processing Type on Quotes and Orders override.

Type	Label	Setup Path	Comments
Setup	Set Up Asset Context for Product Configurator	Setup > Feature Settings > Revenue Cloud > Revenue Settings	
Custom Field	ConstraintEngineNodeStatus (Text Area (Long), length 5000)	Setup > Object Manager > Quote Line Item	Prerequisite for Constraint Builder.
Custom Field	ConstraintEngineNodeStatus (Text Area (Long), length 5000)	Setup > Object Manager > Order Product	Prerequisite for Constraint Builder.
Custom Field	ConstraintEngineNodeStatus (Text Area (Long), length 5000)	Setup > Object Manager > Asset Action Source	Prerequisite for Constraint Builder.
Context Mapping	ConstraintEngineNodeStatus	Setup > Feature Settings > Context Definitions > [Context]	Map the three custom fields, which are mentioned in the previous rows, with the ConstraintEngineNodeStatus tag.
Permission Set	Product Configurator	Setup > Users > Permission Sets	
Permission Set	Product Configuration Rules Designer	Setup > Users > Permission Sets	Prerequisite for Business Rules Engine Configurator.
Permission Set	Product Configuration Constraints Designer	Setup > Users > Permission Sets	Prerequisite for Constraint Builder.
Flow	Default Product Configurator Flow	Setup > Flow	Supports Flow version, and activation or deactivation. Other Flows can be created.

Transaction Management Metadata

This table provides the metadata deployment reference for Transaction Management in Revenue Management, including setup paths and configuration details.

Label	Setup Path
App Usage Type	
Transaction Processing Type	
RevenueManagement	Setup > Revenue Cloud > Revenue Settings
IncludeEstTaxInQuoteCPQ	Setup > Revenue Cloud > Revenue Settings
Quote	Setup > Feature Settings > Sales > Quotes > Quote Settings
Order	Setup > Feature Settings > Sales > Order Settings
LargeQuotesandOrdersForRlm	Setup > Revenue Cloud > Revenue Settings
User UI Preference	

Dynamic Revenue Orchestrator Metadata

This table provides the metadata deployment reference for Dynamic Revenue Orchestrator (DRO) in Revenue Management, including setup paths and configuration details.

Type	Label	Setup Path	Details
Setup	Dynamic Revenue Orchestrator	Setup > Feature Settings > Dynamic Revenue Orchestrator	
Flag	Dynamic Revenue Orchestrator	Setup > Feature Settings > Dynamic Revenue Orchestrator > Dynamic Revenue Orchestrator Settings	
Flag	In-flight Amendments	Setup > Feature Settings > Dynamic Revenue Orchestrator > Dynamic Revenue Orchestrator Settings	
Flag	Future Dated Steps	Setup > Feature Settings > Dynamic Revenue Orchestrator > Dynamic Revenue Orchestrator Settings	
Flag	Link Task to Step Source	Setup > Feature Settings > Dynamic Revenue Orchestrator > Dynamic Revenue Orchestrator Settings	
Field	Fulfillment User	Setup > Feature Settings > Dynamic Revenue Orchestrator > Dynamic Revenue Orchestrator Settings	
Field	Context Definition	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Sales Transaction Header	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context field for Orchestration Group Key (Optional)	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Sales Transaction Item	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Sales Transaction Item Relationship	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Sales Transaction Item Attribute	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Fulfillment Transaction	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Fulfillment Transaction Item	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Fulfillment Transaction Item Relationship	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Fulfillment Transaction Item Attribute	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	
Field	Context Node for Fulfillment Transaction Item Source Relationship	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Sales Transaction Context Definition)	

Type	Label	Setup Path	Details
Field	Context Definition	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Fulfillment Asset Context Definition)	
Field	Context Node for Fulfillment Asset	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Fulfillment Asset Context Definition)	
Field	Context Node for Fulfillment Asset Attribute	Setup > Feature Settings > Dynamic Revenue Orchestrator > Context Definition Settings (Fulfillment Asset Context Definition)	
Flag	Fallout	Setup > Feature Settings > Dynamic Revenue Orchestrator > Fallout and SLA Settings	
Flag	Service Level Agreement	Setup > Feature Settings > Dynamic Revenue Orchestrator > Fallout and SLA Settings	
Permission Sets	DRO Admin User	Setup > Users > Permission Sets	
Permission Sets	Submit Transactions and Fulfillment User	Setup > Users > Permission Sets	
Permission Sets	Fulfillment Designer	Setup > Users > Permission Sets	
Permission Sets	Fulfillment Manager/Operator	Setup > Users > Permission Sets	
Setup	Procedure Plan Definition	Procedure Plan Setup > Procedure Plan Definitions	The value of <code>UsageType</code> field is <code>DFO</code> . This is used to define an alternate context mapping for sales transaction context in an order submission flow. See Submit Orders for Decomposition and Order Fulfillment
User Permission	Submit Transactions and Orchestrate User		Enables user to submit and orchestrate transactions for any object by using Dynamic Revenue Orchestrator.

SEE ALSO:

[Revenue Cloud Developer Guide: DynamicFulfillmentOrchestratorSettings](#)

Usage Management Metadata

This table provides the metadata deployment reference for Usage Management in Revenue Cloud, including setup paths and configuration details.

Type	Label	Setup Path	Details
Setup	Context Service	Context Service > Context Service Settings	Enable
Setup	Rate Management	Setup > Usage Management > Usage Management Settings	Enable Rate Management.
Setup	Rating Setup	Setup > Usage Management > Rate Management Setup	Rating Waterfall -> Enable / Disable based on preference. Rating Waterfall Persistence -> Enable / Disable based on preference.
Permission Sets	Rate Management: Admin	Setup > Users > Permission Sets	
Permission Sets	Rate Management: Design Time User	Setup > Users > Permission Sets	
Permission Sets	Rate Management: Manager	Setup > Users > Permission Sets	
Permission Sets	Rate Management Run Time User	Setup > Users > Permission Sets	
Decision Table Definition	Binding Object Rate Adjustment Resolution Entries	Setup > Decision Tables	
Decision Table Definition	Binding Object Rate Card Entry Resolution Entries	Setup > Decision Tables	
Decision Table Definition	Rate Card Entry Resolution Entries 2	Setup > Decision Tables	
Decision Table Definition	Rate Adjustment by Attribute Resolution Entries	Setup > Decision Tables	
Decision Table Definition	Rate Adjustment by Tier Resolution Entries	Setup > Decision Tables	
Decision Table Definition	Pricebook Rate Card Entries	Setup > Decision Tables	
Decision Table Definition	Binding Object Volume-based Rate Adjustment	Setup > Decision Tables	
Decision Table Definition	Binding Object Rate	Setup > Decision Tables	

Type	Label	Setup Path	Details
Decision Table Definition	Binding Object Tier-based Rate Adjustment	Setup > Decision Tables	
Decision Table Definition	Binding Object Rate Card Entry	Setup > Decision Tables	
Decision Table Definition	Asset Volume-based Rate Adjustment	Setup > Decision Tables	
Decision Table Definition	Asset Rate	Setup > Decision Tables	
Decision Table Definition	Asset Rate Card Entry	Setup > Decision Tables	
Decision Table Definition	Asset Tier-based Rate Adjustment	Setup > Decision Tables	
Decision Table Definition	Attribute-based Rate Adjustment by Rate Card Entry ID	Setup > Decision Tables	
Decision Table Definition	Volume-based Rate Adjustment by Rate Card Entry ID	Setup > Decision Tables	
Decision Table Definition	Tier-based Rate Adjustment by Rate Card Entry ID	Setup > Decision Tables	
Decision Table Definition	Rate Adjustment by Attribute Entries 2	Setup > Decision Tables	
Decision Table Definition	Rate Adjustment by Tier Entries 2	Setup > Decision Tables	
Decision Table Definition	Rate Adjustment by Volume Entries 2	Setup > Decision Tables	
Decision Table Definition	Rate Card Entries 2	Setup > Decision Tables	
Flow	Call Rating Service	Setup > Flows	
Flow	Call Entitlement Refresh Service	Setup > Flows	
Flow	Create Summary	Setup > Flows	
Flow	Generate Liable Summary	Setup > Flows	
Flow	Generate Usage Rateable Summary	Setup > Flows	
Flow	Generate Usage Summary	Setup > Flows	
Flow	Orchestrate Usage Management	Setup > Flows	

Type	Label	Setup Path	Details
Data Processing Engine	Create Liable Summary Template	Setup > Data Processing Engine	
Data Processing Engine	Create Usage Summary Template	Setup > Data Processing Engine	

Billing Metadata

This table provides the metadata deployment reference for Billing in Revenue Management, including setup paths and configuration details.

Type	Label	Setup Path	Details
Setup	Context Service	Context Service > Context Service Settings	
Setup	Data Pipeline	Setup > Feature Settings > Analytics > Data Pipeline	
Permission Set Assignment	Billing Admin	Setup > Users > Permission Sets	
Setup	Enable Billing	Setup > Feature Settings > Billing > Billing Settings	
Setup	Document Generation		
Setup	Create Transaction Journals for Transactions	Setup > Feature Settings > Billing > Billing Settings	
Setup	Apply Credits to Posted Invoices	Setup > Feature Settings > Billing > Billing Settings	
Setup	Enable Foreign Exchange Transaction Journal		
Setup	Apply Credits to Posted Invoices	Setup > Feature Settings > Billing > Billing Settings	
Setup	Configure Email Delivery Settings	Setup > Feature Settings > Billing > Billing Settings	
Setup	Configure Gapless Sequential Numbering for Billing	Setup > Feature Settings > Billing > Billing Settings	
Setup	Store Transaction Amounts in Corporate Currency	Setup > Feature Settings > Billing > Billing Settings	
Setup	Create Payment Schedules and Payment Schedule Items	Setup > Feature Settings > Billing > Billing Settings	
Setup	Share Payment Accounts	Setup > Feature Settings > Billing > Billing Settings	
Setup	Convert Negative Invoice Lines to Credit Memo Lines	Setup > Feature Settings > Billing > Billing Settings	

Type	Label	Setup Path	Details
Setup	Credit and Payment Application Level	Setup > Feature Settings > Billing > Billing Settings	
Setup	Select Default Credit Memo Flow	Setup > Feature Settings > Billing > Billing Settings	
Permission Sets	Data Pipeline User	Setup > Users > Permission Sets	
Permission Sets	Billing Admin	Setup > Users > Permission Sets	
Permission Sets	Context Service Admin	Setup > Users > Permission Sets	
Permission Sets	Tableau Next Admin	Setup > Users > Permission Sets	For Analytics Dashboard Enabling
Permission Sets	Data Cloud Admin	Setup > Users > Permission Sets	For Analytics Dashboard Enabling
Permission Sets	BillingAdvancedPaymentAdministrator	Setup > Users > Permission Sets	
Permission Sets	RevenueLifecycleManagementBillingCustomerService	Setup > Users > Permission Sets	
Permission Sets	BillingAdvancedPaymentOperations	Setup > Users > Permission Sets	
Permission Sets	RevenueLifecycleManagementBillingCreditMemoOperations	Setup > Users > Permission Sets	
Setup	Default Invoice Template		
Setup	FX Gain/Loss Account Lookups		
Setup	Context Definition		
Setup	Context Mapping		
Setup	Intra Context Custom Mapping		
Setup	Default DPE Definition to Close Legal Entity Accounting Periods		
Setup	Default Invoice Preview Template		
Setup	Default Invoice Email Template		
Setup	Default Credit Memo Flow		

Industries Common Component Metadata

This table provides the metadata deployment reference for Industries common components in Revenue Management, including setup paths and configuration details.

Type	Label	Setup Path	Details
Setup	Context Service	Context Service > Context Service Settings	Enable
Permission Sets	Permission Sets	Setup > Users > Permission Sets	Data Pipeline User
Permission Sets	Permission Sets	Setup > Users > Permission Sets	Data Cloud Admin
Data Processing Engine (DPE) Definition	datasources -> sourceName	v{}/tooling/subjects/BatchCalcJobDefinition	Read permission to the user who is creating the Data Processing Engine (DPE) with the data sources and fields.
Data Processing Engine (DPE) Definition	datasources -> sourceName	v{}/tooling/subjects/BatchCalcJobDefinition	Read permission to the Analytics Integration User with the data sources and fields.
Data Processing Engine (DPE) Definition	writebacks -> targetObjectName	v{}/tooling/subjects/BatchCalcJobDefinition	Create, update, or delete permission on the targetObjectName object based on the operationType value defined in the writebacks.
Data Processing Engine (DPE) Definition	writebacks -> writebackUser	v{}/tooling/subjects/BatchCalcJobDefinition	Delete this value if it exists.

Salesforce Contracts Metadata

This table provides the metadata deployment reference for Salesforce Contracts in Revenue Management, including setup paths and configuration details.

Type	Label	Setup Path
Flag	Document Templates Export	Setup > Document Generation > General Settings
Setup	Context Service	Context Service > Context Service Settings > Context Definitions

Additional Deployment Information

Get to know additional deployment information for each Revenue Management feature domain, ensuring successful deployments and migrations.

[Product Catalog Management Additional Information](#)

Get to know additional deployment information for Product Catalog Management in Revenue Cloud, including active or inactive states, object information, and migration considerations.

[Salesforce Pricing Additional Information](#)

Get to know additional deployment information for Salesforce Pricing in Revenue Management, including active or inactive states, object information, and migration considerations.

[Product Configurator Additional Information](#)

Get to know additional deployment information for Product Configurator in Revenue Cloud, including active or inactive states, object information, and migration considerations.

[Dynamic Revenue Orchestrator Additional Information](#)

Get to know additional deployment information for Dynamic Revenue Orchestrator (DRO) in Revenue Management, including active or inactive states, object information, and migration considerations.

[Usage Management Additional Information](#)

Get to know additional deployment information for Usage Management in Revenue Management, including active or inactive states, object information, and migration considerations.

[Billing Additional Information](#)

Get to know additional deployment information for Billing in Revenue Management, including active or inactive states, object information, and migration considerations.

[Business Rules Engine and Decision Tables Additional Information](#)

Get to know additional Revenue Management deployment information for Industries common features such as Business Rules Engine, Expression Sets, and Decision Tables.

[Context Service Additional Information](#)

Get to know additional deployment information for Context Service in Revenue Cloud.

[Data Processing Engine Additional Information](#)

Get to know additional deployment information for Data Processing Engine in Revenue Cloud.

[Salesforce Contracts Additional Information](#)

Get to know additional deployment information for Salesforce Contracts in Revenue Cloud, including active or inactive states, and migration considerations.

Product Catalog Management Additional Information

Get to know additional deployment information for Product Catalog Management in Revenue Cloud, including active or inactive states, object information, and migration considerations.

Object-Specific Information

Object Name	Object API	Notes
Product Qualification	ProductQualification	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Product Disqualification	ProductDisqualification	Considerations for Migrating Decision Tables ; Considerations for Migrating

Object Name	Object API	Notes
		Expression Sets ; or Migrate Context Definitions .
Product Category Qualification	ProductCategoryQualification	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Product Category Disqualification	ProductCategoryDisqual	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .

Other Information

- All product data (product, class, product attributes, attributes, picklist, catalog, categories, and so on) definitions must be active to appear in the sales channels.
 - These definitions need not be deactivated in the target to propagate updates as part of an org-to-org deployment. Exceptions are qualification rules that use decision tables, expression sets, and context definitions. The definitions in the target org must be deactivated to promote changes.
- Use the Full Index Rebuild to rebuild the entire search index, when enabling the feature for the first time, or changing the index settings. Use the Partial Index Rebuild to update recent changes to products and categories assignment. For more information about indexing products, see [Manage Your Product Index](#) .
 - If indexing is enabled in source but not enabled in the target, then while deploying the indexing flag (enable indexed product=true), the Full indexing must be run on the target org before the feature flag can be enabled.
- Migrating qualification rules records requires refreshing Qualification Rules Decision Table definitions (Product and Category Qualification and Disqualification Decision Tables).
- Migrating price book Entries requires Decision Table refresh for Product Discovery to show list price.
- Core to Near Core Sync Processes—[Configure Product Catalog Management Cache](#) in the new org to populate the product details cache, essential for large-scale implementations.
- Cross-Module Synchronization—Synchronization of catalog data to Constraint Modeling Language (CML) to support constraint rules.
- Incremental Changes and cohesive Sync (Recommended)—Depending on the deployment scenario, for example, new or changed product, new or changed price, new price book, new or changed rules, and so on.

Salesforce Pricing Additional Information

Get to know additional deployment information for Salesforce Pricing in Revenue Management, including active or inactive states, object information, and migration considerations.

Object-Specific Information

Object Name	Object API	Notes
Attribute Based Adjustment	AttributeBasedAdjustment	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Price Adjustment Tier	PriceAdjustmentTier	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Bundle Based Adjustment	BundleBasedAdjustment	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Product Price Range	ProductPriceRange	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .

Other Information

- You need active context definitions for pricing recipes. A pricing recipe is marked as default in an org. A System Admin can access the PricingRecipe object whereas a Pricing Admin can't access this object internally. You can't create or update fields of a PricingRecipe object.
- You must activate decision tables and pricing procedures.
- You need a refresh of the decision table for any new or modified records. For example, any modification in price book entries requires a refresh of the Price Book Entries decision table.
- You must migrate the Apex class if Apex is selected for Procedure Plan definitions. See [Customize Your Procedure Plans with Apex Hooks](#).
- You can't delete a standard price book. A price book can be deleted after all references are removed. Instead, set the price book to Inactive status.
- If you delete a price adjustment schedule, all associated data is deleted without any warning or error messages. The adjustment method and status of a price adjustment schedule aren't considered for resolution. If you edit or delete an active price adjustment schedule, an error is thrown.
- The EffectiveFrom and EffectiveTo field values of a price adjustment tier, attribute-based adjustment, and bundle-based adjustment must be within the EffectiveFrom and EffectiveTo field values.
- Product and product selling model must be a part of the product selling model option before you create values in a price book entry.
- You can't delete an inactive or active product selling model. You can delete a draft product selling model by deleting all references. You can't change status from Active or Inactive to Draft.
- You can't edit a product price range after you've created it. Enable price tracking to edit a product price range.
- Salesforce Pricing doesn't consider the Active status of a price book when fetching the values. Also, it doesn't consider the validity date ranges of a price book.

- The pricing term and pricing term unit of a price adjustment tier aren't considered for resolution.
- The IsActive field of a price book entry and price adjustment schedule aren't considered for resolution.

[Salesforce Pricing Migration Scenarios](#)

Review these considerations to understand the Salesforce Pricing data migration process along with migration order and prerequisites.

Salesforce Pricing Migration Scenarios

Review these considerations to understand the Salesforce Pricing data migration process along with migration order and prerequisites.

Here are the possible migration scenarios.

- One sandbox org to another sandbox org
- Sandbox org to production org

To migrate pricing procedures, see [Export and Import Procedure Plans](#).

To import and export pricing data, see [Considerations for Importing and Exporting Pricing Data](#). Keep these considerations in mind for first-time migration.

First-Time Migration

- You must migrate metadata in this specific sequence to ensure a successful deployment.
 - You must migrate context definitions before any pricing procedures. If multiple pricing procedures are linked to various context definitions, include all associated definitions in the migration.
 - You must deploy all decision tables (DTs) before you migrate the pricing procedures that reference them.
 - Pricing recipe migration also migrates the associated default pricing procedure.
- You must manually refresh decision tables after migration within the target environment to make sure that the data is updated and active. If a decision table migration encounters missing metadata, such as a custom field or element, the deployment fails.
- You must manually update any pricing procedure constants that contain reference sandbox org IDs to the corresponding production org IDs. This step is required before migration to avoid logic failures in the production environment.
- You must manually update the price adjustment schedule IDs in the pricing procedure constants of the production org before or after migration.

Subsequent Production Migrations

- You must migrate context definitions before you migrate pricing procedures. If multiple pricing procedures are linked to various context definitions, then you must migrate all associated metadata to ensure system integrity.
- You must migrate decision tables along with any relevant metadata changes. If a decision table migration fails, the system must roll back to the previous snapshot, making sure that the existing decision tables are usable.
- You must migrate pricing procedures and expression set versions after the successful deployment of context definitions, decision tables, and pricing recipes in a sequential order.

Product Configurator Additional Information

Get to know additional deployment information for Product Configurator in Revenue Cloud, including active or inactive states, object information, and migration considerations.

Object-Specific Information

Object Name	Object API	Notes
Product Configuration Rule	ProductConfigurationRule	ProductConfigurationRule has a Binary Large Object (BLOB) for the rule content. ConfigurationRuleDefinition contains a JSON with the rules details. The BLOB references product IDs, which can't be migrated as is. You must use the npm migration utility for the migration. ProductConfigurationRule has a status field.
Product Configuration Flow	ProductConfigurationFlow	ProductConfigurationFlow has a status field. You don't require an API to set the status.
ExpressionSetConstraintObj	ExpressionSetConstraintObj	The ExpressionSet for Constraints has a status field. The ReferenceObjectId lookup field is polymorphic and references object IDs.

Other Information

- You can't update rules in active status.
- Product catalog management data must be migrated before the associations (ExpressionSetConstraintObj) are migrated and before the Business Rules Engine rules (ProductConfigurationRule) are migrated. When updating an Expression Set (Constraint Model), the target must be deactivated.
- Cross-Module Synchronization—Constraint Modeling Language (CML) and Business Rules Engine rules both reference product catalog management data. This data must be migrated before the business rules or the constraint rules.
- These components have dependencies on Industries common features.
 - Business Rules Product Configuration Rules—Business Rules Engine and Context Service
 - Constraint Builder Product Configuration Rules—Expression Set and Context Service
 - Product Configurator—Flow

In a future version of this guide, we plan to add information for moving Constraint Modeling Language (CML) code and related expression sets.

Dynamic Revenue Orchestrator Additional Information

Get to know additional deployment information for Dynamic Revenue Orchestrator (DRO) in Revenue Management, including active or inactive states, object information, and migration considerations.

RuleSet API Naming Pattern

In API version 67.0 and later, RuleSet API naming is decoupled from the parent record ID and uses a global key (UUID). This naming pattern removes the pre-commit dependency on record IDs and enables condition JSON processing during INSERT operation for records.

Existing RuleSet records that use the legacy record ID-based naming patterns keep their original API naming pattern and aren't automatically renamed. Legacy and current naming patterns can coexist in the same org. No mandatory migration is required solely to normalize RuleSet API names.

Special Fields

- These objects use a large text field to contain a JSON representation of Dynamic Revenue Orchestrator (DRO) condition data, backed up by internal Business Rules Engine (BRE) RuleSet objects.
 - FulfillmentStepDefinition
 - ExecuteOnConditionData. This is related to ExecuteOnRule field (RuleSet reference).
 - ResumeOnConditionData. This is related to ResumeOnRule field (RuleSet reference).
 - ProductFulfillmentScenario
 - ConditionData. This is related to ScenarioRule field (RuleSet reference).
 - ProductFulfillmentDecompRule
 - ConditionData. This is related to ExecuteOnRule field (RuleSet reference).
 - FulfillmentTaskAssignmentRule
 - ConditionData. This is related to Condition field (RuleSet reference).
- Condition JSON fields support full lifecycle behavior for global key-based naming pattern records. You can provide condition JSON at insert, modify it through updates, and remove it to delete associated RuleSet artifacts where applicable. Here are the details for each operation type.
 - You can create the record and provide condition JSON in the same transaction, including bulk operations.
 - When you change condition JSON, the related RuleSet reference and runtime evaluation logic are updated.
 - When you remove condition JSON, the related RuleSet artifacts are deleted where applicable, including resume on rule scenarios.

Object-Specific Information

Object Name	Object API	Notes
Product Fulfillment Decomposition Rule. Fulfillment Step Definition. Product Fulfillment Scenario. Fulfillment Task Assignment Rule.	ProductFulfillmentDecompRule. FulfillmentStepDefinition. ProductFulfillmentScenario. FulfillmentTaskAssignmentRule.	
Fulfillment Fallout Rule	FulfillmentFalloutRule	After migration, refresh the related Decision Tables.
Orchestration Plan Context Mapping	OrchestrationPlanCtxMapping	This setup object is always active after creation. Here are some considerations. The object must have an active context definition to create the mapping, The context definition must remain active for the mapping to be valid, or Context nodes or referenced mappings must exist in the active context definition version.

Other Information

- Migration Prerequisites
 - When DRO is enabled in a new org, the system provides a built-in library named as DRORuleLibrary. See [Dynamic Fulfillment Orchestrator Settings](#).
 - Context rules library is Active with `Usage Type=Dfo` and is linked with Sales Context Definition.
 - The active rule library version must point to the context definition currently configured in the DRO Admin settings. If you change the context definition in the settings, you must create a new rule library version that links to the new definition and activate it.

When creating a version, you must clone from the latest rule library version. If you clone from an older version instead of the latest, any rule sets created in the latest version is lost in any other newly created version. This leads to evaluation errors where rules evaluate to `false` as the engine is unable to find the rule set in the active library.

When moving to a new version, you must first deactivate the older version and then activate the cloned version.

- Context definitions must have the necessary nodes, mappings, and context tags used in rule sets.
- DRO rules include Product Fulfillment Decomposition Rule, Fulfillment Step Definition, Product Fulfillment Scenario, and Fulfillment Task Assignment Rule objects. To migrate DRO rules or scenarios, make sure the `AttributeDefinition` and `AttributePicklistValue` records are referenced in condition data fields by attribute code and picklist value name in the org before migration. The code value is defined in product management records.
- The `SourceAttributeIdentifier` and `DestinationAttributeIdentifier` fields of a `ProductDecompEnrichmentRule` record can include attribute IDs from the source org, leading to invalid references in the target org. Refresh the identifier fields by saving the `ProductDecompEnrichmentRule` records again. You can also set the identifier fields to null during migration to make sure that they auto-populate correctly.
- Before you can migrate the Product Fulfillment Decomposition Rule, Fulfillment Step Definition, Product Fulfillment Scenario, and Fulfillment Task Assignment Rule objects with their related child records, several other key records must exist in the target Salesforce org. Migrating these records first is crucial to maintain data integrity and to make sure that the relationships are correctly established in rules.

Here are the required records in the target org as per the required migration sequence.

- Products (`Product2`)—The top-level `ProductFulfillmentDecompRule` record is directly linked to a specific product via the `ProductId` field. You can't create the rule without associating it with an existing product record.
Make sure that the `Product2` records in the source and target orgs can be uniquely identified. For example, use a custom external ID field such as `GlobalKey__c` or any other `ExternalId` field, or use the standard `ProductCode` field.
- Attribute Definitions (`AttributeDefinition`)—The `ProductDecompEnrichmentRule` records, which are children of the decomposition rule, use attribute definitions to specify which product attributes to use for enrichment or transformation. These rules reference `AttributeDefinition` records in fields, such as `SourceAttributeDefinitionId` and `TargetAttributeDefinitionId`. DRO Condition Data fields and rule sets use `AttributeCode` values in Condition Expressions.
Attribute Definitions must be migrated before the enrichment rules to make sure that the lookup relationships are resolved successfully. Attribute Code values must be defined as these values are used in DRO Conditions as unique identifiers for attribute-type expressions.
- Attribute Definition Picklist Values (`AttributePicklistValue`)—The `ValTfrm` (Value Transform) records, which are used for mapping and transforming data, often rely on picklist values defined in the `AttributePicklistValue` object. These records define the specific values used in the transformation logic. DRO Condition Data fields and rule sets use `AttributeCode` values in Condition Expressions.
If your transformation rules involve picklist fields, you must migrate the corresponding `AttributePicklistValue` records first.

- DRO Rules and Scenario Migration

- Internal rule set tables may contain attribute ID values, which are the Salesforce IDs of the relevant AttributeDefinition records of the Product or Product Classification.
- DRO stores rule set-related data in string representation with AttributeDefinition. During migration, the JSON representation of a rule set uses Attribute Code as the natural key to resolve AttributeDefinition records and set as key in internal rule set tables. As a prerequisite, make sure that attribute code values are populated and consistent in both the source and target orgs before you migrate DRO rules.
- Rule sets also contain attribute picklist values in condition expressions. The AttributePicklistValue records of the associated AttributeDefinition records must exist in target org before you migrate DRO rules.
- In API version 67.0 and later, you can insert DRO rule and scenario records with condition JSON in one transaction, including bulk inserts, when prerequisites are satisfied.
- Deleting a DRO parent record also deletes related RuleSet and rule artifacts to prevent orphan records. If condition JSON is removed from a record, related RuleSet artifacts are also removed where applicable.
- After Migration:
 - Refresh the Decision Tables (DT) used by DRO Fallout Management—Migrating the Fulfillment Fallout Rules records requires a refreshed Fallout Rules DT definition.
 - Refresh DTs used by DRO Jeopardy Management—Migrating the Fulfillment Step Jeopardy Rule records requires a refreshed Fulfillment Step Jeopardy Rule DT definition.
 - Activate technical products in your target org as part of your deployment.
- These components have dependencies on specific features.
 - Enrichment Rule—Expression Set
 - Decomposition Rule with condition—Business Rules Engine Context Rule and Context Service
 - Callout step—Integration Definition
 - Autotask step—Flow
 - Manual Task step—Queue
 - Product Fulfillment Scenario with condition—Business Rules Engine Context Rule and Context Service

SEE ALSO:

[Bulk API 2.0 and Bulk API Developer Guide: Introduction to Bulk API 2.0 and Bulk API](#)

Usage Management Additional Information

Get to know additional deployment information for Usage Management in Revenue Management, including active or inactive states, object information, and migration considerations.

Object-Specific Information

Object Name	Object API	Notes
Rate Card	RateCard	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .

Object Name	Object API	Notes
Price Book Rate Card	PriceBookRateCard	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Product Usage Resource	ProductUsageResource	Effective end date can be extended in Active state.
Rate Card Entry	RateCardEntry	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; Migrate Context Definitions ; or No updates are allowed in Active or Inactive state.
Product Usage Grant	ProductUsageGrant	The Effective End Date can be extended in Active state.
Rate Adjustment By Tier	RateAdjustmentByTier	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Rate Adjustment By Attribute	RateAdjustmentByAttribute	Considerations for Migrating Decision Tables ; Considerations for Migrating Expression Sets ; or Migrate Context Definitions .
Usage Commitment Asset Related Object	UsageCmtAssetRelatedObj	The RelatedObjectId lookup field is polymorphic.

Other Information

- For Selling (Revenue Cloud Advanced), perform these actions:
 - Confirm that Rates, Grants, and Policies for usage products are set up correctly.
 - Extend and sync the SalesTransaction context definition.
 - Confirm that the pricing procedure is active and set up correctly in Revenue Settings.
 - Refresh Decision Tables (DT) being referred in pricing procedures.
 - Set up and activate the rating discovery procedure.
 - Sync the RatingDiscovery context definition.
 - Refresh all Decision Tables (DTs) being used in the rating discovery procedure.
- For Consumption (Revenue Cloud Billing), perform these actions:
 - Clone and set up the Orchestration Flow.
 - Configure the Data Processing Engine (DPE) jobs.
 - Set up and activate the rating procedure.
 - Sync the Rate Management context definition.
 - Refresh all Decision Tables (DTs) being used in the rating procedure.

- These components have dependencies on Industries common Features:
 - Rating or Discovery Procedures: Expression Set
 - Rating, Discovery, or Selling Journey: Business Rules Engine and Context Service
 - Rating or summary creation: Batch and Data Processing Engine
- After migration, selling and consumption-related object records such as UnitOfMeasureClass, UsageResource, RateCardEntry, ProductUsageResource, ProductUsageGrant must be active before you use it.

For ProductUsageResource and ProductUsageGrant objects, review these considerations.

- You can delete records in Draft or Inactive states. You can't delete a record in Active state.
- After you activate a record, you can extend end date only.
- The applicable status transitions are Draft, Active, and Inactive.

You can edit a RateCardEntry object in Draft status only. You can't edit this object after you've activated it. The applicable status transitions are:

- Draft, Active, and Inactive
- Inactive and Active

Billing Additional Information

Get to know additional deployment information for Billing in Revenue Management, including active or inactive states, object information, and migration considerations.

Object-Specific Information

Object Name	Object API	Notes
Legal Entity	LegalEntity	This object contains a polymorphic field for address.
Billing Policy	BillingPolicy	Activate after Billing Treatment is activated.
Billing Treatment	BillingTreatment	Activate after Billing Treatment Item is activated.
Billing Treatment Item	BillingTreatmentItem	Activate first when activating Billing Policy.
Tax Policy	TaxPolicy	Activate after Tax Treatment is activated.
Tax Treatment	TaxTreatment	Activate first when activating Tax Policy.
Tax Treatment	TaxTreatment	Review these considerations for the TaxTreatment object. Create a tax treatment in Draft or Active status. While the tax treatment is Active, you can't edit LegalEntity, TaxEngine, TaxCode, ProductCode, IsTaxable, or ShouldUseTaxTreatmentItems, or Status can move among Draft, Active, and Inactive states.

Object Name	Object API	Notes
Payment Term	PaymentTerm	Activate after Payment Term Item is activated.
Payment Term Item	PaymentTermItem	Activate first when activating Payment Term.
Payment Schedule Policy	PaymentSchedulePolicy	Activate after Payment Schedule Treatment is activated
Payment Schedule Treatment	PaymentScheduleTreatment	Activate first when activating Payment Schedule Policy.
Payment Retry Rule	PaymentRetryRule	If <code>RetryIntervalType</code> field value is specified, you must also specify values for <code>IntervalUnit</code> and <code>IntervalValue</code> fields.
Payment Retry Rule Set	PaymentRetryRuleSet	You can't delete or modify the active org-default rule set after the feature is enabled. The org can't have multiple active org-default rule sets.
Tax Treatment Item	TaxTreatmentItem	You can't delete a tax treatment item when the parent tax treatment is active.
Accounting Period	AccountingPeriod	Review these considerations for the AccountingPeriod object. The <code>StartDate</code> , <code>EndDate</code> , and <code>FinancialYear</code> fields can't be edited if child records exist; The <code>Name</code> field is auto-populated; The <code>Status</code> field is mutable; The <code>TotalAssetsAmount</code> , <code>TotalLiabilitiesAmount</code> , <code>TotalEquitiesAmount</code> , <code>TotalRevenueAmount</code> , and <code>TotalExpensesAmount</code> are derived or read-only fields; The creation of a record can happen only in Open status; or For AccountingPeriod as a parent record and LegalEntyAccountingPeriod as a child record, the status of the parent record must be Open when the child is created. The parent record can't close if any non-closed child record exists. The parent fields, such as <code>StartDate</code> , <code>EndDate</code> , or <code>FinancialYear</code> , become immutable if any child record exists.
Billing Arrangement	BillingArrangement	Review these considerations for the BillingArrangement object. You can create a billing arrangement only in Draft status, Before you activate it, add at least one billing arrangement line, You can't change <code>ShouldBillRemainderToAccount</code> field after the billing arrangement is linked to a billing

Object Name	Object API	Notes
		schedule group, or Status can move among Draft, Active, and Inactive states.
Billing Arrangement Line	BillingArrangementLine	Review these considerations for the BillingArrangementLine object. You can't insert or update a line while the parent billing arrangement is in Inactive status or You can delete a line only when the parent billing arrangement is in Draft status.
Billing Milestone Plan	BillingMilestonePlan	Review these considerations for the BillingMilestonePlan object. Create the plan in Draft status, Activate only after you add at least one billing milestone plan item, Updates apply only to lines that use the latest version number, You can't delete a line that has ShouldBillRemainder field set to true, The related billing treatment must be active before you activate the plan, At least one billing milestone plan item must exist before activation, While the plan is active, you can't edit Referenceltem, ExternalReference, ReferenceltemAmount, BillingTreatment, Name, or Description fields, You can't change Referenceltem or ExternalReference fields after the plan is linked to a billing schedule, Status can move among Draft, Active, and Inactive states, or The plan must be in Draft status before you can delete it.
Billing Milestone Plan Item	BillingMilestonePlanItem	Review these considerations for the BillingMilestonePlanItem object. Create items while the record is in Draft status or The parent billing milestone plan must stay in Draft status while you create, update, or delete items.
General Ledger Account	GeneralLedgerAccount	Review these considerations for the GeneralLedgerAccount object. You can't edit LegalEntity after the account is tied to a general ledger account assignment rule, This object doesn't use status transitions, or A general ledger account assignment rule can be active only when both a credit and a debit general ledger account are set.
General Ledger Account Assignment Rules	GeneralLedgerAcctAsgntRule	Review these considerations for the GeneralLedgerAcctAsgntRule object. While

Object Name	Object API	Notes
		the rule is active, you can't edit the debit account, credit account, or currency fields, Status can move from Inactive to Active states, or The rule can be active only when both a credit and a debit general ledger account are present.
General Ledger Journal Entry Rule	GeneralLedgerJrnlEntryRule	Review these considerations for the GeneralLedgerJrnlEntryRule object. You can't edit the journal entry rule while its general ledger account assignment rule is active, This object doesn't use status transitions, or The credit account, debit account, and assignment rule must belong to the same legal entity.
Legal Entity Accounting Period	LegalEntityAccountingPeriod	Review these considerations for the LegalEntityAccountingPeriod object. After creation, you can't change the AccountingPeriod or LegalEntity fields; The Name and CurrencyIsoCode fields are auto-populated; You can change status according to the product's transition rules. For example, Open to Pending Closure, Pending Closure to Closed or Error, Closed to Pending Reopen, and related paths for Reopened and Error; The TotalAssetsAmount, TotalLiabilitiesAmount, TotalEquitiesAmount, TotalRevenueAmount, and TotalExpensesAmount fields are derived or read-only; The ClosureStage field is read-only; Create a record only when the status is Open; When AccountingPeriod record is the parent and LegalEntityAccountingPeriod is the child record, the parent record must be Open when the child record is created. The parent record can't close if any child record is still open. The StartDate, EndDate, and FinancialYear fields on the parent record can't be edited if any child record exists; When LegalEntity record is the parent record, it must be active when the child record is created. It can't move to Inactive status when any child accounting period is open; or For LegalEntityAccountingPeriod

Object Name	Object API	Notes
		as parent record and <code>GeneralLdgrAcctPrdSummary</code> as child record, the parent can't be deleted if children exist. Children can be created or updated only when the parent is Open or Reopened. Child summary records can't be deleted.
Payment Schedule Treatment Detail	PaymentScheduleTreatmentDtl	Review these considerations for the <code>PaymentScheduleTreatmentDtl</code> object. While the parent payment schedule treatment is Active, Inactive, or Canceled, you can't change the <code>InstallmentPaymentType</code> , <code>Percentage</code> , <code>ProcessingDateReference</code> , <code>DateOffset</code> , <code>PaymentMethodSelectionType</code> , <code>PymtSchdDistributionMethod</code> , or <code>PaymentRunMatchingValue</code> fields, Create a detail record only when the parent payment schedule treatment is in Draft status, or Delete a detail record only when the parent payment schedule treatment is in Draft status.

Other Information

- Data pipeline must be enabled before enabling Billing.
- Order to Billing Schedule Flow must be copied from the template and activated.

Business Rules Engine and Decision Tables Additional Information

Get to know additional Revenue Management deployment information for Industries common features such as Business Rules Engine, Expression Sets, and Decision Tables.

Object-Specific Information

Object Name	Object API	Notes
Expression Set Definition	ExpressionSetDefinition	Only call the setup object via Metadata API to get child setup objects.
Expression Set Definition Version	ExpressionSetDefinitionVersion	Only call the setup object via Metadata API to get child setup objects.
Rule Library	RuleLibrary	Not supported by Metadata API.
Rule Library Version	RuleLibraryVersion	Not supported by Metadata API.

Helpful Links

- [Considerations for Migrating Expression Sets](#)
- [Migration of Expression Sets with Dependencies](#)

Deployment Considerations

- Initial Deployment—Expression Sets Decision Tables can be deployed in any state during their first deployment to a target org.
- Subsequent Updates—To update an expression set that exists in the target org, migrate a new expression set version with the updates. You must not update the existing active version.
- When deploying an active decision table, it goes through activation again in the target org and may fail if the required custom object isn't present in the target org.
- Two expression set versions of the same parent expression set can't have the same rank, regardless of the `Draft` or `Active` states. In this case:
 - Create an expression set version in the source org with the updates.
 - Activate the new version in the source org.
 - Then, migrate the new version or the entire expression set to the target org.
 - The migrated expression set version is invoked in the target org as per the specified rank.
 - Migration fails if the target org contains an expression set version with the specified rank.
- Activate and refresh of decision tables after deployment.
- Activate sub expressions after deployment.
- Dynamic rules are stored in platform objects, and not in setup objects. There's no platform support for deploying dynamic rules.

Dependencies

- Industries common features can have dependencies among themselves. For example, expression sets can have sub expressions and reference decision tables or context definitions. Decision Tables can have a dependency on a custom object, and so on.
- For a deployment to be successful, all dependent components must be migrated correctly before the expression set version itself.
- You must migrate dependencies before the expression sets that reference them. If there are nested dependencies, you must migrate the lowest-level components first. Here's a general deployment order.
 - Standard and custom objects
 - Context Definitions, Decision Tables, Decision Matrices, Object Aliases, and Explainability Message Templates
 - Sub Expression Sets
 - Parent Expression Set Version

Other Information

- Both Expression Set and Decision Matrix have versioned objects.
- Decision Tables don't have versions.

Context Service Additional Information

Get to know additional deployment information for Context Service in Revenue Cloud.

Helpful Links

- [Migrate Context Definitions](#)

Deployment Considerations

- Context tags and individual sObject mappings must be unique for every definition.
- Deployment can lead to conflict if there are multiple tags with the same name, or if there are multiple mappings to the same sObject and sObject fields.
- Standard definitions are versioned and new changes must have a higher version than the version, which is available in the org.
- You can deploy updates that introduce new custom nodes, attributes, and their corresponding mappings to existing context definitions.
- Deployments that modify (update or delete) existing custom mappings for context definitions in an activated or a deactivated state are supported.

Unsupported Deployment Scenarios

- Deploying context definitions from the current release to an older release is not supported.
- Modifying custom nodes and attributes for context definitions that are in a deactivated state aren't supported. To make changes, replicate your desired modifications manually on the target context definition. You can also delete the context definition on the target org and deploy again.
- Modifying standard nodes and attributes for context definitions that are in an activated state isn't supported. To make changes, deactivate the definition on the target org first, make your desired modifications, and then activate the context definition again.
- You can't activate or deactivate an active context definition as an action within a deployment package. Activation or deactivation must be performed as a separate, manual step outside the deployment process.
- You can't make a context mapping default or non-default as an action within a deployment. Changing the default status of context mappings must be done as a separate, manual step.

Data Processing Engine Additional Information

Get to know additional deployment information for Data Processing Engine in Revenue Cloud.

Deployment Considerations

- Data Processing Engine objects have `Draft` and `Active` states.
- The objects must be created in `Draft` state and activated later. The activation is done through API.
- Configuration can't be changed after an object is updated to `Active` state.
- Set the state of the object to `Inactive` for any modifications, and then set the state to `Active`.

Other Information

- Data Processing Engine has dependencies on these components.
 - CRM Analytics or Data Cloud
 - Bulk API

- You can deploy Data Processing Engine definitions from one organization to another. Both organizations must be on the same Salesforce release version.

Salesforce Contracts Additional Information

Get to know additional deployment information for Salesforce Contracts in Revenue Cloud, including active or inactive states, and migration considerations.

Document clauses can be in different states, such as Draft, In Approval, Active, and Archived. Keep these considerations in mind regarding the clause statuses.

- A clause is created in Draft status.
- During the import process, the clause must be in Draft status. You can update the status after you complete the import process.
- An archived clause can't be updated.
- An active clause can't be updated, but it can change to Draft status only if it's not used.
- An active clause must be moved to Draft status before you update it to Active status.

Clause Migration Considerations

Clause migration is a prerequisite for Microsoft 365 template migration. Review these considerations to understand how clause structure, versions, and relationships must exist in the target org before migrating document templates.

Clause Validations and Migration Constraints

Validation rules, data model constraints, and known migration behaviors that affect clause records during migration. Review this reference to understand sequencing, status handling, and dependency requirements that can impact migration success.

Clause Migration Considerations

Clause migration is a prerequisite for Microsoft 365 template migration. Review these considerations to understand how clause structure, versions, and relationships must exist in the target org before migrating document templates.

Clause migration prepares the target org with all required clause data so that template migration can resolve clause references correctly. Clause records don't retain source org record IDs during migration. Instead, template migration resolves references based on clause attributes and relationships that already exist in the target org.

Clause migration requires careful sequencing and coordination because clause records enforce strict validation rules around status, hierarchy, and versioning.

Microsoft 365 template migration requires all clause records, clause categories, and related clause sets to exist in the target org.

During template migration, clause references resolve in the target org by matching this combination of attributes. Make sure that the target org contains clauses with the exact attribute values referenced by the Microsoft 365 template.

- ClauseSetName
- ClauseName
- ClauseVersion
- ClauseLanguage

If a referenced clause is missing in the target org, template migration stops to prevent broken references. This alignment helps maintain template integrity and reduces the need for manual corrections after migration.

Migrate clause-related objects separately by using a data migration tool, such as Data Loader.

Migrate the three document clause objects in the required order.

- Clause Category Configuration
- Document Clause Set
- Document Clause

 **Important:** Avoid modifying clause data in the target org after migration to prevent mismatches between source and target. Avoid modifying clause data in the source org after exporting clause data and before Microsoft 365 template migration to prevent reference mismatches.

Clause Category Configuration

Clause Category Configuration is a setup object that you migrate by using metadata deployment tools, such as Package Manager, and Salesforce CLI. Migrate all clause categories referenced by your clause sets.

Clause Set

Clause sets must be migrated before you can migrate clauses. This needs to be either created explicitly on the target org or migrated from the source org by using data migration utilities. Resolve these clause category configuration references to IDs on the target org in your export set before you migrate.

- `CategoryReferenceId`—Replace with the mapped ID obtained from clause category migration
- `Category`—This is a 15-character ID of the clause category. Update `CategoryReferenceId` by removing the last three characters.

For iterative migrations, use upsert operation to update existing clause sets and insert newly created clause sets since the previous migration.

Clause

Migrate clause category configuration and clause sets before initiating clause migration. Resolve the clause set references (`DocumentClauseSet`) to the IDs on the target in your export set before migrating.

 **Important:** All clauses are inserted only in Draft status, regardless of their source status. Run a subsequent migration that includes status mapping to update the clauses to the correct status. See [Clause Status Mapping During Migration](#) on page 63.

First-Time Migration

Use this approach when migrating clause data for the first time from the source org to the destination org for Microsoft 365 template migration. Clauses enforce validation rules that affect insert and update operations during migration.

- Insert main clauses before alternate clauses.
- Clauses are inserted in Draft status. Run a subsequent migration to update the clause status. See [Clause Status Mapping During Migration](#) on page 63 for details on how clause statuses are applied and updated.

Iterative Migration

Use iterative migration when clause data exists in the target org and you must migrate updates or newly created clauses from the source org. Track the timestamp of the last successful export and migrate only records that were created or updated after that timestamp. This approach avoids validation failures when attempting to update unchanged clauses, especially clauses in Archived status.

- Migrate clause records that were modified after the last export timestamp and created on or before the last export timestamp. This step migrates only updated records and preserves the correct status for existing clauses before introducing new draft versions.

- Migrate main clause records that were created after the last export timestamp. Clauses are inserted in Draft status. Run a subsequent migration to update the clause status. See [Clause Status Mapping During Migration](#) on page 63 for details on how clause statuses are applied and updated.
- Migrate alternate clause records that were created after the last export timestamp. Clauses are inserted in Draft status. Run a subsequent migration to update the status.

Clause Validations and Migration Constraints

Validation rules, data model constraints, and known migration behaviors that affect clause records during migration. Review this reference to understand sequencing, status handling, and dependency requirements that can impact migration success.

Clause Migration Validations

These validations apply during insert, update, and delete operations on clause records. Operations fail when a validation is violated.

Operation	Validation	Description
Insert	Draft-only creation	Allows only Draft clauses during initial insert operations.
Insert	Version conflict prevention	Prevents inserting a clause when a Draft version exists for the same clause.
Insert	Clause set requirement	Requires each clause to reference a valid DocumentClauseSet that exists in the target org.
Insert	Main and alternate clause hierarchy	Requires an existing main clause before inserting alternate clauses and allows only one main clause per clause group or Allows only one main clause per language within a clause set, and allows multiple alternate clauses for the same language.
Update	Restricted fields	Prevents updating the DocumentClauseSet, Language, IsAlternateClause, and Version fields after clause creation.
Update	Status transition rules	Allows changing an Active clause only to Draft (without modifying other fields) or to Archived.
Update	Archived clause immutability	Prevents updates to Archived clauses.
Update	Content requirement for activation	Requires clause content before changing status to Active.
Delete	Status-based deletion	Allows deletion of Draft and Archived clauses only.
Delete	Main clause protection	Prevents deleting a main clause while alternate clauses still exist.

Clause Status Mapping During Migration

Clauses insert only in Draft status, regardless of their source status. Run a subsequent migration with status mapping to update the clause statuses. For example, a clause in the source org has three versions: Version 1 is Archived, Version 2 is Active, and Version 3 is Draft. When the clause is inserted, all three versions are created in Draft status in the target org. Perform a follow-up upsert migration with status mapping to align each clause version with its source org status.

Source Org Status (Pre-Migration)	Guidance
Archived	Archived clauses insert as Draft. Run a subsequent migration with status mapping to restore the Archived status. After a clause is archived, you can't change its status.
Active	Active clauses insert as Draft. Run a subsequent migration with status mapping to restore the Active status.
Draft	Draft clauses insert as Draft, so no status change is required.
In Approval	You must not migrate In Approval clauses because their workflows don't migrate. However, if In Approval clauses are migrated, they're inserted in Draft status, and the approval process must be reinitiated from the UI.

Clause Migration Constraints

These constraints describe behavioral rules, sequencing requirements, and tooling limitations that affect clause migration, especially during iterative and incremental migrations.

Category	Constraint	Description
Tooling	No automated migration	Requires that you use supported data migration tools, such as Data Loader, because no automated clause migration utility exists.
Tooling	Authentication requirements for Data Loader	Requires OAuth-based authentication. Enforcing OAuth, Proof Key for Code Exchange (PKCE), or IP restrictions requires completing additional connected app and access configuration.
Data Model	Clause category limitations	Prevents adding custom fields to Clause Category Configuration because it's a setup object.
Data Model	Manual ID creation	Creation of an external ID field in the target org to store source org IDs for upsert operations on clause sets and clause records.
Data Model	Manual ID mapping	Requires manually mapping clause category IDs between source and target orgs.

Category	Constraint	Description
Data Dependency	Clause set dependency	Requires clause sets and clause category configuration to exist in the target org before importing clauses.
Iterative Migration	Migration order dependency	Requires that you update existing clauses before you insert newly created clauses. Also, insert main clauses before alternate clauses.
Template Dependency	Missing clause references	Prevents template migration when referenced clauses, versions, or languages don't exist in the target org.
Template Dependency	Duplicate clauses	Can cause clause reference mismatches during template migration when duplicate clauses exist in the target org.
Template Dependency	Office Open XML failures	Can cause template migration to fail when Office Open XML updates fail during document import.

CHAPTER 4 Product Catalog Management

In this chapter ...

- [Product Catalog Management](#)
- [Product Discovery](#)

Create and manage a product catalog with components, such as attributes, product classifications, simple and bundled products, and rules.

Product Catalog Management

Manage an entire product portfolio with components such as attributes, product classifications, simple and bundled products, and rules.

[Product Catalog Management Standard Objects](#)

The Product Catalog Management data model provides objects and fields to manage products, rules, and catalogs.

[Product Catalog Management Fields on Standard Objects](#)

Product Catalog Management adds standard and custom fields to some standard Salesforce objects. These fields are available only in orgs where Product Catalog Management is enabled. This object is available in API version 60.0 and later.

[Product Catalog Management Business APIs](#)

Use primitive APIs of Product Catalog Management that serve catalog definitions to users or applications.

[Product Catalog Management Metadata API Types](#)

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Product Catalog Management Tooling API Objects](#)

Tooling API exposes metadata used in developer tooling that you can access through REST or SOAP. Tooling API's SOQL capabilities for many metadata types allow you to retrieve smaller pieces of metadata.

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise, Unlimited, and Developer** Editions of Revenue Management

SEE ALSO:

[Salesforce Help: Product Catalog Management Permission Set Licenses](#)

[Salesforce Help: User Permissions for Product Catalog Management](#)

Product Catalog Management Standard Objects

The Product Catalog Management data model provides objects and fields to manage products, rules, and catalogs.

[AttributeCategory](#)

Represents a logical grouping of attributes that can be reused while defining products. Attribute Categories are used for searching and managing product attributes. For example, the "Mobile Handset Properties" category has color, storage and make model, and size attributes. This object is available in API version 60.0 and later.

[AttributeCategoryAttribute](#)

Represents a relationship between an attribute category and the attribute definition. This object is available in API version 60.0 and later.

[AttrPicklistExcludedValue](#)

Represents the excluded picklist values for a product classification attribute or a product attribute definition. This object is available in API version 61.0 and later.

[ProductAttributeDefinition](#)

Represents the relationship between a product and its attributes. This object is available in API version 60.0 and later.

[ProductCategoryDisqual](#)

Represents disqualification rules for product categories. The rules determine when the product category doesn't qualify to be displayed to users. This object is available in API version 60.0 and later.

[ProductCategoryQualification](#)

Represents qualification rules for product categories. The rules determine when the product category qualifies to be displayed to users. This object is available in API version 60.0 and later.

[ProductClassification](#)

Represents a template that holds a collection of dynamic attributes. Product classification is used to quickly define and create multiple products that are similar yet different. This object is available in API version 60.0 and later.

[ProductClassificationAttr](#)

Represents the relationship between a product classification and its attributes. This is the default configuration for products based on the product classification. This object is available in API version 60.0 and later.

[ProductComponentGrpOverride](#)

Represents override information for a Product Component Group. The cardinality of the product component group can be overridden in the context of a product bundle. This object is available in API version 60.0 and later.

[ProductDisqualification](#)

Represents disqualification rules for products. The rules determine when the product doesn't qualify to be displayed to users. The rules are based on user context. This object is available in API version 60.0 and later.

[ProductQualification](#)

Represents qualification rules for products. The rules determine when the product qualifies to be displayed to users. The rules are based on user context. This object is available in API version 60.0 and later.

[ProductRampSegment](#)

Represents the ramp period within a ramp deal where terms, volumes, and other commitments change over time. This object is available in API version 62.0 and later.

[ProductRelComponentOverride](#)

Represents the cardinality overrides for product components in a bundle. This object is available in API version 60.0 and later.

[ProductSpecificationRecType](#)

Represents the relationship between industry-specific product specifications and the product record type. This object is available in API version 60.0 and later.

[ProductSpecificationType](#)

Represents the type of product specification provided by the user to make the product terminology unique to an industry. A product specification type is associated with a product specification record type. This object is available in API version 60.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

AttributeCategory

Represents a logical grouping of attributes that can be reused while defining products. Attribute Categories are used for searching and managing product attributes. For example, the "Mobile Handset Properties" category has color, storage and make model, and size attributes. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The unique code for the attribute category. The maximum size is 80 alphanumeric characters. The code can include the following special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ % " .

Description

Type: textarea

Properties: Create, Nillable, Update

Description: The description of the attribute category that's used only during design time.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute category was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute category was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The unique name of the attribute category. The maximum length is 80 characters (of any type).

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the attribute category.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttributeCategoryFeed on page 2509: Feed tracking is available for the object.

AttributeCategoryHistory on page 2515: History is available for tracked fields of the object.

AttributeCategoryShare on page 2517: Sharing is available for the object.

AttributeCategoryAttribute

Represents a relationship between an attribute category and the attribute definition. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

AttributeCategoryId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the attribute category that the attribute is associated with. The ID is unique within the organization.

This field is a relationship field.

Relationship Name: AttributeCategory

Relationship Type: Lookup

Refers To: AttributeCategory

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the attribute definition associated with the attribute category. The ID is unique within the organization.

This field is a relationship field.

Relationship Name: AttributeDefinition

Relationship Type: Lookup

Refers To: AttributeDefinition

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute category attribute was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute category attribute was last viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: A unique name for the attribute. The maximum length is 80 characters (of any type).

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the attribute category attribute.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AttributeCategoryAttributeFeed](#) on page 2509: Feed tracking is available for the object.

[AttributeCategoryAttributeHistory](#) on page 2515: History is available for tracked fields of the object.

[AttributeCategoryAttributeShare](#) on page 2517: Sharing is available for the object.

AttrPicklistExcludedValue

Represents the excluded picklist values for a product classification attribute or a product attribute definition. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

Attributeld

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product classification attribute or the product attribute definition of the picklist data type.

This field is a polymorphic relationship field.

Relationship Name: Attribute

Relationship Type: Lookup

Refers To: ProductAttributeDefinition, ProductClassificationAttr

AttributePicklistValueld

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the attribute picklist value that's excluded in the product classification attribute or product attribute definition.

This field is a relationship field.

Relationship Name: AttributePicklistValue

Relationship Type: Lookup

Refers To: AttributePicklistValue

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the excluded attribute picklist value was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the excluded attribute picklist value was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the excluded attribute picklist value.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the excluded attribute picklist value.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttrPicklistExcludedValueFeed on page 2509: Feed tracking is available for the object.

AttrPicklistExcludedValueHistory on page 2515: History is available for tracked fields of the object.

AttrPicklistExcludedValueShare on page 2517: Sharing is available for the object.

ProductAttributeDefinition

Represents the relationship between a product and its attributes. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

AttributeCategoryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the attribute category assigned to the parent object.

This field is a relationship field.

Relationship Name: AttributeCategory

Relationship Type: Lookup

Refers To: AttributeCategory

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the attribute associated with the product.

This field is a relationship field.

Relationship Name: AttributeDefinition

Relationship Type: Lookup

Refers To: AttributeDefinition

AttributeNameOverride

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name to display for the attribute when shown for this object. This display name overrides the name on the attribute. For example, the attribute "Color" is overridden to display as "Laptop Color." The maximum size is 255 alphanumeric characters. The name can include these special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ ".

DefaultValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default value for the product attribute. The attribute value can be changed. This default overrides the default value set for a picklist for the attribute.

Description

Type: textarea

Properties: Create, Nillable, Update

Description: A description of the attribute definition. The maximum size is 32,000 alphanumeric characters. The description can include these special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ ".

DisplayType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type to display data for the selected data type.

Possible values are:

- `CheckBox`—Checkbox
- `ComboBox`—Combobox
- `Date`
- `Datetime`—Date Time
- `Number`
- `RadioButton`—Radio Button

- `Slider`—Available in API version 61.0 and later
- `Text`
- `Toggle`

HelpText

Type: `textarea`

Properties: Create, Nillable, Update

Description: The help text to display when end users are configuring this attribute. This field overrides the help text defined for the attribute itself.

IsHidden

Type: `boolean`

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if this product attribute is hidden from end users in the run time (`true`) or not (`false`).

The default value is `false`.

IsPriceImpacting

Type: `boolean`

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this attribute dictates the price of a product (`true`) or not (`false`).

The default value is `false`.

IsReadOnly

Type: `boolean`

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the attribute is read-only for users in the run time (`true`) or not (`false`).

The default value is `false`.

IsRequired

Type: `boolean`

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this attribute requires a value when assigned to a parent object (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The date the product attribute was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product attribute was last viewed.

MaximumCharacterCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of characters that can be entered for an attribute value.

MaximumValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum value that can be entered as an attribute value.

MinimumCharacterCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum number of characters that can be entered for an attribute value.

MinimumValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum value that can be entered as an attribute value.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the product attribute.

OverriddenProductAttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID associated with the overridden product attribute definition.

This field is a relationship field.

Relationship Name: OverriddenProductAttributeDefinition

Relationship Type: Lookup

Refers To: ProductAttributeDefinition

OverrideContextId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID associated with the root product record in a bundle.

This field is a polymorphic relationship field.

Relationship Name: OverrideContext

Relationship Type: Lookup

Refers To: Product2

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the product attribute definition.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Product2Id

Type: reference

Properties: Create, Filter, Group, Sort

Description: The product ID associated with the product attribute definition.

This field is a relationship field.

Relationship Name: Product2

Relationship Type: Lookup

Refers To: Product2

ProductClassificationAttributeId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the attribute assigned to the product classification.

This field is a relationship field.

Relationship Name: ProductClassificationAttribute

Relationship Type: Lookup

Refers To: ProductClassificationAttr

Sequence

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The display sequence of the attribute when configuring the product during run time.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The lifecycle state of the product attribute definition.

Valid values are:

- Active
- Draft
- Inactive

The default value is `Draft`.

StepValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The increment or decrement by which a slider's value changes as the user adjusts the product attribute value. Available in API version 61.0 and later.

ValueDescription

Type: textarea

Properties: Create, Nillable, Update

Description: The description of the value assigned to this attribute. This field takes on the value description from the attribute definition.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ProductAttributeDefinitionFeed](#) on page 2509: Feed tracking is available for the object.

[ProductAttributeDefinitionHistory](#) on page 2515: History is available for tracked fields of the object.

[ProductAttributeDefinitionShare](#) on page 2517: Sharing is available for the object.

ProductCategoryDisqual

Represents disqualification rules for product categories. The rules determine when the product category doesn't qualify to be displayed to users. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

CategoryId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The product category associated with the product disqualification record.

This field is a relationship field.

Relationship Name: Category

Relationship Type: Lookup

Refers To: ProductCategory

EffectiveFromDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date from which the disqualification rule for the product category comes into effect.

EffectiveToDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date to which the disqualification rule for the product category ceases to be in effect.

IsDisqualified

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the product category is disqualified (`true`) or not (`false`) based on the disqualification rules.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product category disqualification record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product category disqualification record was last viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product category disqualification record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the product category disqualification record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Reason

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reason to disqualify the product category.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductCategoryDisqualFeed on page 2509: Feed tracking is available for the object.

ProductCategoryDisqualHistory on page 2515: History is available for tracked fields of the object.

ProductCategoryDisqualShare on page 2517: Sharing is available for the object.

ProductCategoryQualification

Represents qualification rules for product categories. The rules determine when the product category qualifies to be displayed to users. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

CategoryId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The product category associated with the category qualification record.

This field is a relationship field.

Relationship Name: Category

Relationship Type: Lookup

Refers To: ProductCategory

EffectiveFromDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date from which the qualification rule for the product category comes into effect.

EffectiveToDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date to which the qualification rule for the product category ceases to be in effect.

IsQualified

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the product category is qualified (`true`) or not (`false`) based on the qualification rules.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product category qualification record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product category qualification record was last viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product category qualification record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the product category qualification record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductCategoryQualificationFeed on page 2509: Feed tracking is available for the object.

ProductCategoryQualificationHistory on page 2515: History is available for tracked fields of the object.

ProductCategoryQualificationShare on page 2517: Sharing is available for the object.

ProductClassification

Represents a template that holds a collection of dynamic attributes. Product classification is used to quickly define and create multiple products that are similar yet different. This object is available in API version 60.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),  
retrieve(), search(), undelete(), update(), upsert()
```

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: A unique code for the product classification. The maximum size is 80 alphanumeric characters. The code can include the following special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ " .

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product classification record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product classification record was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the product classification. The maximum length is 80 characters (of any type).

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the product classification.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The lifecycle status of the product classification.

Possible values are:

- Active
- Draft
- Inactive

The default value is `Draft`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductClassificationFeed on page 2509: Feed tracking is available for the object.

ProductClassificationHistory on page 2515: History is available for tracked fields of the object.

: Sharing rules are available for the object.

ProductClassificationShare on page 2517: Sharing is available for the object.

ProductClassificationAttr

Represents the relationship between a product classification and its attributes. This is the default configuration for products based on the product classification. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

AttributeCategoryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the attribute category assigned to the parent object.

This field is a relationship field.

Relationship Name: AttributeCategory

Relationship Type: Lookup

Refers To: AttributeCategory

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the attribute assigned to the parent object.

This field is a relationship field.

Relationship Name: AttributeDefinition

Relationship Type: Lookup

Refers To: AttributeDefinition

AttributeNameOverride

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The overridden attribute name to display for the attribute when shown for this object. For example, "Color" overridden to "Laptop Color."

DefaultValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default value of the attribute for a product based on the product classification. This value can be changed.

Description

Type: textarea

Properties: Create, Nillable, Update

Description: The description of this product classification attribute definition.

DisplayType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type to display data for the selected data type.

Valid values are:

- CheckBox—Checkbox
- ComboBox—Combobox
- Date
- Datetime—Date Time
- Number
- RadioButton—Radio Button
- Slider—Available in API version 61.0 and later
- Text
- Toggle

ExcludedPicklistValues

Type: textarea

Properties: Create, Nillable, Update

Description: The picklist values excluded from the attribute picklist. This field ensures that the product classification attribute only has valid values.

HelpText

Type: textarea

Properties: Create, Nillable, Update

Description: The help text to display when end users are configuring this attribute. This field overrides the help text defined for the attribute itself.

IsHidden

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if this product attribute is hidden from end users in the run time (`true`) or not (`false`).

The default value is `false`.

IsPriceImpacting

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this attribute dictates the price of a product (`true`) or not (`false`).

The default value is `false`.

IsReadOnly

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the attribute is read-only for users in the run time (`true`) or not (`false`).

The default value is `false`.

IsRequired

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this attribute requires a value when assigned to a parent object (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product classification attribute was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product classification attribute was last viewed.

MaximumCharacterCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of characters that can be entered for an attribute value.

MaximumValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum value that can be entered as an attribute value.

MinimumCharacterCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum number of characters that can be entered for an attribute value.

MinimumValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum value that can be entered as an attribute value.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the product classification attribute.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the product classification attribute owner.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ProductClassificationId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product classification that the attribute is associated with. This field is unique within your organization.

This field is a relationship field.

Relationship Name: ProductClassification

Relationship Type: Lookup

Refers To: ProductClassification

Sequence

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The display sequence of the attribute when configuring the product during run time.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The lifecycle status of the product classification attribute.

Valid values are:

- Active
- Draft
- Inactive

The default value is Draft.

StepValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The increment or decrement by which a slider's value changes as the user adjusts the product classification attribute value. Available in API version 61.0 and later.

ValueDescription

Type: textarea

Properties: Create, Nillable, Update

Description: The description of the value assigned to this attribute. This field takes on the value description from the attribute definition.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductClassificationAttrFeed on page 2509: Feed tracking is available for the object.

ProductClassificationAttrHistory on page 2515: History is available for tracked fields of the object.

: Sharing rules are available for the object.

ProductClassificationAttrShare on page 2517: Sharing is available for the object.

ProductComponentGrpOverride

Represents override information for a Product Component Group. The cardinality of the product component group can be overridden in the context of a product bundle. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

IsExcluded

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the product component group is excluded from the product bundle in the runtime. Excluding a group automatically excludes all child components of the group.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product component override record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product component override record was last viewed.

MaxBundleComponents

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of components that can be added to a group.

MinBundleComponents

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum number of components that must be added to a group.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the overridden product component group.

OverrideContextId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The root bundle product in whose context the group cardinality is overridden.

This field is a polymorphic relationship field.

Relationship Name: OverrideContext

Relationship Type: Lookup

Refers To: Product2

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the product component group override record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ProductComponentGroupId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product component group record.

This field is a relationship field.

Relationship Name: ProductComponentGroup

Relationship Type: Lookup

Refers To: ProductComponentGroup

ProductDisqualification

Represents disqualification rules for products. The rules determine when the product doesn't qualify to be displayed to users. The rules are based on user context. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

EffectiveFromDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date from which the disqualification rule for the product comes into effect.

EffectiveToDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date to which the disqualification rule for the product ceases to be in effect.

IsDisqualified

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the product is disqualified based on the disqualification rules (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product disqualification record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product disqualification record was last viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product disqualification record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the product disqualification record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ParentProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the immediate parent product in the product bundle hierarchy.

This field is a relationship field.

Relationship Name: ParentProduct

Relationship Type: Lookup

Refers To: Product2

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The product for which the disqualification rule is defined.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

Reason

Type: textarea

Properties: Create, Nillable, Update

Description: The reason to disqualify the product.

RootProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the root product in the product bundle hierarchy.

This field is a relationship field.

Relationship Name: RootProduct

Relationship Type: Lookup

Refers To: Product2

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductDisqualificationFeed on page 2509: Feed tracking is available for the object.

ProductDisqualificationHistory on page 2515: History is available for tracked fields of the object.

ProductDisqualificationShare on page 2517: Sharing is available for the object.

ProductQualification

Represents qualification rules for products. The rules determine when the product qualifies to be displayed to users. The rules are based on user context. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

EffectiveFromDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date from which the qualification rule for the product comes into effect.

EffectiveToDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date to which the qualification rule for the product ceases to be in effect.

IsQualified

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the product is qualified based on the qualification rules (`true`) or not (`false`). For a product to qualify, this field should be true.

The default value is `false`.

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The date the product qualification record was last referenced.

LastViewedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The date the product qualification record was last viewed.

Name

Type: `string`

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product qualification record.

OwnerId

Type: `reference`

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the product qualification record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ParentProductId

Type: `reference`

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the immediate parent product in the product bundle hierarchy.

This field is a relationship field.

Relationship Name: ParentProduct

Relationship Type: Lookup

Refers To: Product2

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The product for which the qualification rule is defined.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

RootProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the root product in the product bundle hierarchy.

This field is a relationship field.

Relationship Name: RootProduct

Relationship Type: Lookup

Refers To: Product2

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductQualificationFeed on page 2509: Feed tracking is available for the object.

ProductQualificationHistory on page 2515: History is available for tracked fields of the object.

ProductQualificationShare on page 2517: Sharing is available for the object.

ProductRampSegment

Represents the ramp period within a ramp deal where terms, volumes, and other commitments change over time. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

DurationType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit of time within which users can try the product for free.

Valid values are:

- Days
- Months

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product ramp segment was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the product ramp segment was last viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product ramp segment.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the product ramp segment.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProductId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product associated with the product ramp segment.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product selling model associated with the product ramp segment.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

SegmentType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The time duration within the ramp deal where specific terms, volumes, and commitments are applied to the subscription product.

Valid values are:

- Custom
- FreeTrial
- Yearly

The default value is `Yearly`.

TrialDuration

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The duration within which users can try the product for free.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductRampSegmentFeed on page 2509: Feed tracking is available for the object.

ProductRampSegmentHistory on page 2515: History is available for tracked fields of the object.

ProductRampSegmentShare on page 2517: Sharing is available for the object.

ProductRelComponentOverride

Represents the cardinality overrides for product components in a bundle. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

DoesBundlePriceIncludeChild

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the bundle price includes the associated child component's price (`true`) or not (`false`).

The default value is `false`.

IsComponentRequired

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the component is a required component in the product bundle.

The default value is `false`.

IsDefaultComponent

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this component is included in the product component group by default.

The default value is `false`.

IsExcluded

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the bundle excludes the component (`true`) or not (`false`).

The default value is `false`.

IsQuantityEditable

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the product component quantity can be edited (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate**Type:** dateTime**Properties:** Filter, Nillable, Sort**Description:** The date the product related component override record was last referenced.**LastViewedDate****Type:** dateTime**Properties:** Filter, Nillable, Sort**Description:** The date the product related component override record was last viewed.**MaxQuantity****Type:** double**Properties:** Create, Filter, Nillable, Sort, Update**Description:** The maximum quantity for the product component in the product bundle.**MinQuantity****Type:** double**Properties:** Create, Filter, Nillable, Sort, Update**Description:** The minimum quantity for the product component in the product bundle**Name****Type:** string**Properties:** Autonumber, Defaulted on create, Filter, idLookup, Sort**Description:** The name of the product related component override. The maximum length is 255 characters (of any type).**OverrideContextId****Type:** reference**Properties:** Create, Filter, Group, Sort**Description:** The ID associated with the root product in a bundle.

This field is a polymorphic relationship field.

Relationship Name: OverrideContext**Relationship Type:** Lookup**Refers To:** Product2**OwnerId****Type:** reference**Properties:** Create, Defaulted on create, Filter, Group, Sort, Update**Description:** The owner ID of the product related component override record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ProductRelatedComponentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID associated with the product related component record.

This field is a relationship field.

Relationship Name: ProductRelatedComponent

Relationship Type: Lookup

Refers To: ProductRelatedComponent

Quantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The default number of child product related components.

QuantityScaleMethod

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The scaling method that determines how the child product quantity changes as the quantity of the parent product changes in the runtime cart.

Possible values are:

- Constant
- Proportional

The default value is `Proportional`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductRelComponentOverrideFeed on page 2509: Feed tracking is available for the object.

ProductRelComponentOverrideHistory on page 2515: History is available for tracked fields of the object.

ProductRelComponentOverrideShare on page 2517: Sharing is available for the object.

ProductSpecificationRecType

Represents the relationship between industry-specific product specifications and the product record type. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the ProductSpecificationRecType object in the API. The name:

- must be 40 characters or fewer.
- can contain only underscores and alphanumeric characters.
- must begin with a letter.
- can contain only underscores and alphanumeric characters.
- can't include spaces
- can't end with an underscore
- can't contain 2 consecutive underscores

IsCommercial

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the product is sold commercially (`true`) or not (`false`)

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The combined language and locale ISO code, which controls the language of the Product Specification Record Type.

Possible values are:

- `da`—Danish
- `de`—German
- `en_US`—English
- `es`—Spanish

- `es_MX`—Spanish (Mexico)
- `fi`—Finnish
- `fr`—French
- `it`—Italian
- `ja`—Japanese
- `ko`—Korean
- `nl_NL`—Dutch
- `no`—Norwegian
- `pt_BR`—Portuguese (Brazil)
- `ru`—Russian
- `sv`—Swedish
- `th`—Thai
- `zh_CN`—Chinese (Simplified)
- `zh_TW`—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Label for this Product Specification Record Type value. This display value is the internal label that doesn't get translated.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the

namespacePrefix_componentName

The namespace prefix can have one of the following values.

- In Developer Edition orgs, `NamespacePrefix` is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.
- In orgs that aren't Developer Edition orgs, `NamespacePrefix` is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

ProductSpecificationType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The product specification type that's associated with the record type.

RecordTypeId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the record type that's associated with the product specification type.

This field is a relationship field.

Relationship Name: RecordType

Relationship Type: Lookup

Refers To: RecordType

ProductSpecificationType

Represents the type of product specification provided by the user to make the product terminology unique to an industry. A product specification type is associated with a product specification record type. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Product Catalog Management must be enabled to access this object.

Fields

Description

Type: textarea

Properties: Create, Nillable, Update

Description: The description of the Product Specification Type.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the Product Specification Type object in the API. The name:

- must be 40 characters or fewer.
- can contain only underscores and alphanumeric characters.
- must begin with a letter.
- can contain only underscores and alphanumeric characters.
- can't include spaces
- can't end with an underscore
- can't contain 2 consecutive underscores

In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The combined language and locale ISO code, which controls the language of the Product Specification Type.

Possible values are:

- `da`—Danish
- `de`—German
- `en_US`—English
- `es`—Spanish
- `es_MX`—Spanish (Mexico)
- `fi`—Finnish
- `fr`—French
- `it`—Italian
- `ja`—Japanese
- `ko`—Korean
- `nl_NL`—Dutch
- `no`—Norwegian
- `pt_BR`—Portuguese (Brazil)
- `ru`—Russian
- `sv`—Swedish
- `th`—Thai
- `zh_CN`—Chinese (Simplified)
- `zh_TW`—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Label for this Product Specification Type value. This display value is the internal label that doesn't get translated.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the

namespacePrefix_componentName

The namespace prefix can have one of the following values.

- In Developer Edition orgs, `NamespacePrefix` is set to the namespace prefix of the org for all objects that support it, unless an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition org of the package developer.

- In orgs that aren't Developer Edition orgs, `NamespacePrefix` is set only for objects that are part of an installed managed package. All other objects have no namespace prefix.

Product Catalog Management Fields on Standard Objects

Product Catalog Management adds standard and custom fields to some standard Salesforce objects. These fields are available only in orgs where Product Catalog Management is enabled. This object is available in API version 60.0 and later.

[Product Catalog Management Fields on Attribute Definition](#)

Standard and custom fields extend the standard Attribute Definition object for use in Product Catalog Management.

[Product Catalog Management Fields on Product2](#)

Standard and custom fields extend the standard Product2 object for use in Product Catalog Management to represent information about products.

[Product Catalog Management Fields on Product Catalog](#)

Standard and custom fields extend the standard Product Catalog object for use in Product Catalog Management. This object is available in API version 60.0 and later.

[Product Catalog Management Fields on Product Category](#)

Standard and custom fields extend the standard Product Category object for use in Product Catalog Management.

[Product Catalog Management Fields on Product Component Group](#)

Standard and custom fields extend the standard Product Component Group object for use in Product Catalog Management.

[Product Catalog Management Fields on Product Related Component](#)

Standard and custom fields extend the standard Product Related Component object for use in Product Catalog Management.

[Product Catalog Management Fields on Product Relationship Type](#)

Standard and custom fields extend the standard Product Relationship Type object for use in Product Catalog Management.

[Product Catalog Management Fields on Product Selling Model Option](#)

Standard and custom fields extend the standard Product Selling Model Option object for use in Product Catalog Management. This object is available in API version 60.0 and later.

Product Catalog Management Fields on Attribute Definition

Standard and custom fields extend the standard Attribute Definition object for use in Product Catalog Management.

SEE ALSO:

[Attribute Definition](#)

Fields

DataType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The data type of the attribute definition.

Valid values are:

- Checkbox
- Currency—Available in API version 61.0 and later
- Date
- Datetime
- Number
- Percent—Available in API version 61.0 and later
- Picklist
- Text

Product Catalog Management Fields on Product2

Standard and custom fields extend the standard Product2 object for use in Product Catalog Management to represent information about products.

SEE ALSO:

[Product2](#)

Fields

Based On

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the product classification from which this product inherits.

This field is a relationship field.

Relationship Name: BasedOn

Relationship Type: Lookup

Refers To: ProductClassification

Help Text

Type: textarea

Properties: Create, Nillable, Update

Description: The help text that appears at runtime for the product. The maximum size is 32,000 alphanumeric characters. The help text can include these special characters: @ ! - < > * ? + = % # () / \ & ' £ € \$ ".

Availability Date

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date when the product is available.

CanRamp

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the product's terms, volumes, and other commitments can be ramped (true) at run time or not (false)

The default value is `false`.

Discontinued Date

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date when the product is discontinued.

End Of Life Date

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time after which a product isn't supported, ordered, or maintained.

Specification Type

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The type of product specification that's being created.

DecompositionScope

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The number of fulfillment order line items that must be generated. Available in API version 61.0 and later.

Valid values are:

- Account
- Bundle
- Order
- OrderLineItem

FulfillmentQtyCalcMethod

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Determines whether the quantity of fulfillment order line items must always be one or must be aggregated from the source line items. Available in API version 61.0 and later.

Valid values are:

- Aggregate

- AlwaysOne

UsageModelType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of usage model for a product or service. Anchor is the main subscription product or service. Pack is the add-on product or service that grants additional usage resources for consumption. Available in API version 62.0 and later.

Valid values are:

- Anchor
- Pack

Product Catalog Management Fields on Product Catalog

Standard and custom fields extend the standard Product Catalog object for use in Product Catalog Management. This object is available in API version 60.0 and later.

SEE ALSO:

[Product Catalog](#)

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: A unique ID associated with the catalog. The maximum size is 80 alphanumeric characters.

Description

Type: textarea

Properties: Create, Nillable, Update

Description: The description of the catalog that's used during design time. The maximum size is 255 alphanumeric characters.

EffectiveEndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date after which the product catalog is unavailable to end users.

EffectiveStartDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date on which the product catalog is available to end users.

CatalogType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The category of an entry in the catalog.

Possible values are:

- Sales
- ServiceProcess—Service Process

The default value is `Sales`.

Product Catalog Management Fields on Product Category

Standard and custom fields extend the standard Product Category object for use in Product Catalog Management.

SEE ALSO:

[Product Category](#)

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: A unique ID associated with the catalog. The maximum size is 80 alphanumeric characters.

IsNavigational

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the category or subcategory is shown in the menu as a navigational breadcrumb (`true`) or not (`false`).

Available in API version 62.0 and later.

The default value is `false`.

Product Catalog Management Fields on Product Component Group

Standard and custom fields extend the standard Product Component Group object for use in Product Catalog Management.

SEE ALSO:

[Product Component Group](#)

Fields

ParentGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The parent product component group in a nested group hierarchy for the same parent product. Available in API version 62.0 and later.

This field is a relationship field.

Relationship Name: ParentGroup

Refers To: ProductComponentGroup

Product Catalog Management Fields on Product Related Component

Standard and custom fields extend the standard Product Related Component object for use in Product Catalog Management.

SEE ALSO:

[Product Related Component](#)

Fields

ChildProductClassificationId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The child product classification that's associated with a product.

This field is a relationship field.

Relationship Name: ChildProductClassification

Refers To: ProductClassification

QuoteVisibility

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the product-related component to display as a quote line item in the Transaction Line Editor and the quote document. The default value is Always.

Possible values are:

- Always
- Transaction Line Editor Only
- Quote Document Only
- Never

Product Catalog Management Fields on Product Relationship Type

Standard and custom fields extend the standard Product Relationship Type object for use in Product Catalog Management.

SEE ALSO:

[Product Relationship Type](#)

Fields

AssociatedProductRoleCat

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The role that the associated component plays in the relationship.

Valid values are:

- `BundleComponent`— The associated product is part of a bundle.
- `ClassificationComponent`— The associated component is a product classification. Available in API version 61.0 and later

Product Catalog Management Fields on Product Selling Model Option

Standard and custom fields extend the standard Product Selling Model Option object for use in Product Catalog Management. This object is available in API version 60.0 and later.

SEE ALSO:

[Product Selling Model Option](#)

Fields

IsDefault

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates the default product selling model for a product. Setting a product selling model as default is optional. A product can only have one default product selling model.

The default value is `false`.

Product Catalog Management Business APIs

Use primitive APIs of Product Catalog Management that serve catalog definitions to users or applications.

This table lists the available Product Catalog Management resources.

Resource	Description
/connect/pcm/catalogs (POST)	Retrieve, search, filter, or sort catalog records.
/connect/pcm/catalogs/catalogId (GET)	Retrieve details of catalog records based on a catalog ID.
/connect/pcm/catalogs/catalogId/categories (GET)	Retrieve the root-level categories of a catalog based on a catalog ID, or subcategories based on a parent category. You can also search, filter, or sort the categories.
/connect/pcm/categories/categoryId (GET)	Retrieve details of individual category records based on a category ID.
/connect/pcm/products (POST)	Retrieve products. You can also search, filter, or sort the products.
/connect/pcm/products/productId (GET)	Retrieve details of individual product records or a bundle based on a product ID.
/revenue/product-catalog-management/product-classifications/details (POST)	Retrieve the details for a list of product classification records.
/revenue/product-discovery/products/recommendations (POST)	Get a list of recommended products based on your underlying business rules.
/revenue/product-configurator/rules/actions/execute (POST)	This API is used in Product Catalog Management to disable rules, get product recommendations, and get message rules.
/connect/pcm/products/bulk (POST)	Retrieve details for multiple products.
/connect/pcm/products/variants (POST)	Retrieve the variation product associated with one or more parent variant products.
/connect/pcm/index/configurations (GET, PUT)	Retrieve the saved index configurations. Additionally, you can persist the index configuration.
/connect/pcm/relatedRecords/entityName (POST)	Retrieve related ProductRampSegment or

Resource	Description
	ProductUsageGrant records for Product2 object.
/connect/pcm/index/snapshots (GET)	Retrieve the created snapshots and snapshot indexes.
/connect/pcm/index/deploy (POST)	Create indexes for a snapshot. Indexes improve search results and make it easier to find products at run time through search terms.
/connect/pcm/index/setting (GET, PATCH)	Fetch and update settings related to indexing and search.
/connect/pcm/index/error (GET)	Get the count and details of the errors that occurred during the indexing process.
/connect/pcm/deep-clone (POST)	Copy related records of an object along with the main product record.
/connect/pcm/unit-of-measure/info (GET)	Get details about the unit of measure for a specific set of records.
/connect/pcm/unit-of-measure/rounded-data (POST)	Round off and scale decimal data for a specific set of fields.

Resources

Learn more about the available Product Catalog Management API resources.

Request Bodies

Learn more about the available Product Catalog Management API request bodies.

Response Bodies

Learn more about the available Product Catalog Management API response bodies.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

Resources

Learn more about the available Product Catalog Management API resources.

Bulk Product Details (POST)

Retrieve details for multiple products.

[Catalog List \(POST\)](#)

Retrieve, search, filter, or sort catalog records.

[Catalog By ID \(GET\)](#)

Retrieve details of catalog records based on a catalog ID.

[Categories List \(GET\)](#)

Retrieve the root-level categories of a catalog based on a catalog ID, or subcategories based on a parent category. You can also search, filter, or sort the categories.

[Category By ID \(GET\)](#)

Retrieve details of individual category records based on a category ID.

[Deep Clone \(POST\)](#)

Copy related records of an object along with the main product record.

[Index Configuration Collection \(GET, PUT\)](#)

Retrieve the saved index configurations. Additionally, you can persist the index configuration.

[Index Setting \(GET, PATCH\)](#)

Fetch and update settings related to indexing and search.

[Product Classification Details \(POST\)](#)

Retrieve the details for a list of product classification records.

[Product Classification List \(POST\)](#)

Retrieve a list of product classification records. You can also search, filter, or sort the product classifications.

[Product Details \(GET\)](#)

Retrieve details of individual product records or a bundle based on a product ID.

[Product Related Records List \(POST\)](#)

Retrieve related ProductRampSegment or ProductUsageGrant records for Product2 object.

[Products List \(POST\)](#)

Retrieve products. You can also search, filter, or sort the products.

[Product Variants \(POST\)](#)

Retrieve the variation product associated with one or more parent variant products.

[Snapshot Collection \(GET\)](#)

Retrieve the created snapshots and snapshot indexes.

[Snapshot Deployment \(POST\)](#)

Create indexes for a snapshot. Indexes improve search results and make it easier to find products at run time through search terms.

[Snapshot Index Error \(GET\)](#)

Get the count and details of the errors that occurred during the indexing process.

[Unit of Measure Info \(GET\)](#)

Get details about the unit of measure for a specific set of records.

[Unit of Measure Rounded Data \(POST\)](#)

Round off and scale decimal data for a specific set of fields.

Bulk Product Details (POST)

Retrieve details for multiple products.

Resource

```
/connect/pcm/products/bulk
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/products/bulk
```

Available Version: 61.0**HTTP Methods:** POST**Request Body for POST****JSON Example**

```
{
  "correlationId": "cbfabffb-093f-45b3-8c2d-88b4acbd4867",
  "productIds": [
    "01tT1000000F0afIAC",
    "01tT1000000F0afIAC"
  ],
  "uptoLevel": 1,
  "language": "french",
  "additionalFields": {
    "Product2": {
      "fields": [
        "code__c"
      ]
    },
    "ProductAttributeDefinition": {
      "fields": [
        "scope"
      ]
    }
  }
}
```

This example shows a sample request to fetch data from Enterprise Product Catalog.

```
{
  "productIds": [
    "01tLT000009vGXfYAM"
  ],
  "catalogSystems": [
    "epc"
  ],
  "additionalFields": {
    "AttributeDefinition": {
      "fields": [
        "OptOutAssetization",
        "OptOutDecompositionAction",
        "OptOutSupplementalAction"
      ]
    }
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
<code>additionalFields</code>	Map<String, Additional Fields Input >	Map of object and list of additional standard or custom fields to be included in the response. The supported objects are Product2 and ProductAttributeDefinition. If the fields defined for the ProductAttributeDefinition object aren't available for the ProductClassificationAttr object, then the API request fails. If the Dynamic Revenue Orchestrator permission is enabled, then this property supports AttributeDefinition as key with these supported values: OptOutAssetization, OptOutDecompositionAction, or OptOutSupplementalAction.	Optional	61.0
<code>catalogSystems</code>	String[]	Name of the catalog system. Valid values are <code>epc</code> —Enterprise Product Catalog or <code>pcm</code> —Product Catalog Management. Although this property accepts a list, you can pass only one value. If you don't specify a value, the default behavior is to fetch data from the <code>pcm</code> catalog.	Optional	66.0
<code>correlationId</code>	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	61.0
<code>language</code>	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
<code>productIds</code>	String[]	List of product IDs that details must be returned for. If any product ID is blank, invalid, or not found, then the request is processed with valid and available product IDs.	Required	61.0
<code>uptoLevel</code>	Integer	Hierarchy level to follow to return the product details. For a bundle, this property determines the number of levels of child components to be returned. You can specify up to a hierarchy level of 1. If unspecified, the default level is the full bundle hierarchy.	Optional	61.0

Response Body for POST: [Products Output](#)**Catalog List (POST)**

Retrieve, search, filter, or sort catalog records.

Resource

```
/connect/pcm/catalogs
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/catalogs
```

Available Version: 60.0

Requires Chatter: No

HTTP Methods: POST

Note: The POST method is used to retrieve the catalog records instead of the GET method as a request payload is sent to filter the records.

Request Body for POST**JSON Example**

This example shows how to retrieve catalogs that contain `apple` in the catalog name.

```
{
  "pageSize": 100,
  "offset": 0,
  "language": "french",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "contains",
        "value": "apple"
      }
    ]
  }
}
```

This example shows how to retrieve catalogs with `ServiceProcess` as the catalog type.

```
{
  "pageSize": 100,
  "offset": 0,
  "sort": {
    "orders": [
      {
        "property": "name",
        "direction": "desc"
      }
    ]
  },
  "filter": {
    "criteria": [
      {

```

```

"property": "catalogType",
"operator": "eq",
"value": "ServiceProcess"
}
]
}
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0
filter	Filter	Criteria to filter the records. Filters are applicable to the fields of the ProductCatalog object. The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . The supported properties are <code>name</code> and <code>catalogType</code> .	Optional	60.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
offset	Integer	Number of records to skip. The default value is 0.	Optional	60.0
pageSize	Integer	Number of records per page. Valid values are from 1 through 100. If unspecified, defaults to 100.	Optional	60.0
sort	Sort	Sort order of the catalog records. The supported operators are <code>asc</code> or <code>desc</code> .	Optional	60.0

Response Body for POST: [Catalogs Output](#)

Catalog By ID (GET)

Retrieve details of catalog records based on a catalog ID.

Resource

```
/connect/pcm/catalogs/catalogId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/catalogs/0ZST100000000kUQAQ
```

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/catalogs/0ZST100000000kUQAQ?language=spanish
```

Available Version: 60.0**Requires Chatter:** No**HTTP Methods:** GET**Request Parameters for GET**

Parameter Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0
fields	String[]	For internal use only.	Optional	60.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0

Response Body for GET: [Catalogs Output](#)**Categories List (GET)**

Retrieve the root-level categories of a catalog based on a catalog ID, or subcategories based on a parent category. You can also search, filter, or sort the categories.

Resource

```
/connect/pcm/catalogs/catalogId/categories
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/catalogs/0ZST100000000kUQAQ/categories
```

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/catalogs/0ZST100000000kUQAQ/categories?language=spanish
```

Available Version: 60.0**Requires Chatter:** No**HTTP Methods:** GET**Request Parameters for GET**

Parameter Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0
depth	Integer	Number of levels in the category hierarchy to return. The default value is 1.	Optional	60.0
fields	String[]	For internal use only.	Optional	60.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
parent CategoryId	String	ID of the category to fetch the associated hierarchy of subcategories. If unspecified, then the root-level categories are returned.	Optional	60.0

Response Body for GET: [Categories Output](#)

Category By ID (GET)

Retrieve details of individual category records based on a category ID.

Resource

```
/connect/pcm/categories/categoryId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/categories/0ZGT100000000qqQAA
```

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/categories/0ZGT100000000qqQAA?language=spanish
```

Available Version: 60.0

Requires Chatter: No

HTTP Methods: GET

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0

Parameter Name	Type	Description	Required or Optional	Available Version
fields	String[]	For internal use only.	Optional	60.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0

Response Body for GET: [Categories Output](#)

Deep Clone (POST)

Copy related records of an object along with the main product record.

Resource

```
/connect/pcm/deep-clone
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/deep-clone
```

Available Version: 63.0

HTTP Methods: POST

Request Body for POST

JSON Example

```
{
  "mainRecordId": "01tSG0000028kcSYAQ",
  "mainObjectApiName": "Product2",
  "mainRecordFieldValues": {
    "Name": "New Cloud Storage"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
mainObjectApiName	String	API name of the object. The supported object is Product2.	Required	63.0
mainRecordFieldValues	Map<String, String>	Mapping of the API name of the field to its value. The values passed through this map are set for the created record. You can pass the Name field only through this map.	Optional	63.0
mainRecordId	String	ID of the record.	Required	63.0

Response Body for POST: [Deep Clone Response](#)

Index Configuration Collection (GET, PUT)

Retrieve the saved index configurations. Additionally, you can persist the index configuration.

Resource

```
/connect/pcm/index/configurations
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/index/configurations
```

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/index/configurations?includeMetadata=false&fieldTypes=Standard,Custom
```

Available Version: 62.0

HTTP Methods: GET, PUT

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	62.0
fieldTypes	String[]	Filters and returns only the persisted index configurations, based on the index configuration type specified in the query parameters. The supported types of filters are STANDARD, CUSTOM, ProductDynamicAttribute, ProductAttributeDefinitionStandard, or ProductAttributeDefinitionCustom	Optional	62.0
include Metadata	Boolean	Indicates whether to include metadata (true) or not (false).	Optional	62.0

Response Body for GET: [Index Configuration Collection](#)

Request Body for PUT

JSON Example

```
{
  "correlationId": "8545b5aa-f3e6-429a-8f21-9cc4ce50b1d7",
  "indexConfigurations": [
    {
      "attributeDefinitionId": "0tjT1000000002bIAA",
      "name": "Color",

```

```

    "type": "ProductDynamicAttribute",
    "isSearchable": true
  },
  {
    "attributeFieldId": "00Nxx000001FwnABII",
    "name": "Message__c",
    "type": "Custom",
    "isSearchable": true
  },
  {
    "name": "Code",
    "type": "Standard",
    "isSearchable": true
  },
  {
    "facetDisplayRank": 1,
    "isFacetable": false,
    "isSearchable": true,
    "name": "Family",
    "type": "Standard"
  }
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	62.0
index Configurations	Index Configuration Input[]	List of index configurations.	Required	62.0

Response Body for PUT: [Index Configurations Update](#)

Index Setting (GET, PATCH)

Fetch and update settings related to indexing and search.

Resource

```
/connect/pcm/index/setting
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/index/setting
```

Available Version: 63.0

HTTP Methods: GET, PATCH

Response Body for GET: [Index Setting Results](#)

Request Body for PATCH

JSON Example

```
{
  "setting" : {
    "supportedLanguages" : ["en_US", "ja", "es", "nl_NL"],
    "defaultLanguage" : "en_US",
    "productsGrouping": "GROUPING_VARIATION"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
setting	Setting Input	Object containing the setting-related details.	Required	63.0

Request Parameters for PATCH

Parameter Name	Type	Description	Required or Optional	Available Version
settingId	String	ID of the setting to update the details for.	Required	63.0

Response Body for PATCH: [Index Setting Update](#)

Product Classification Details (POST)

Retrieve the details for a list of product classification records.

This API fetches metadata, attributes, and attribute categories associated with product classifications across supported catalog systems.

Resource

```
/revenue/product-catalog-management/product-classifications/details
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/product-catalog-management/product-classifications/details
```

Available Version: 66.0

HTTP Methods: POST

Request Body for POST

JSON Example

```
{
  "productClassificationIds": [
    "01txx0000006iFMAAY",
    "01txx0000006iGxAAY"
  ],
}
```

```

    "catalogSystems": [
      "epc"
    ]
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
catalogSystems	String[]	Name of the catalog system. Valid value is <code>epc</code> —Enterprise Product Catalog.	Optional	66.0
productClassificationIds	String[]	List of product classification IDs for which you want to retrieve product details. In the <code>epc</code> catalog system, these values are the <code>Product2</code> record IDs.	Required	66.0

Response Body for POST: [Product Classification Details Collection](#) on page 194

Product Classification List (POST)

Retrieve a list of product classification records. You can also search, filter, or sort the product classifications.

This API retrieves a paginated list of product classification records from the Product Catalog Management (PCM) or Enterprise Product Catalog (EPC) catalog system. You can search for product classifications by name, apply filters, and sort the results.

Resource

```
/revenue/product-catalog-management/product-classifications/list
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/product-catalog-management/product-classifications/list
```

Available Version: 67.0

HTTP Methods: POST

Note: POST methods typically create an item, but for this resource POST is used to retrieve information.

Request Body for POST

JSON Example

```

{
  "catalogSystem": "pcm",
  "searchTerm": "Mobile",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "contains",
        "value": "Mobile"
      }
    ]
  }
},

```

```

    "sort": {
      "orders": [
        {
          "property": "name",
          "direction": "asc"
        }
      ]
    },
    "pageSize": 25,
    "offset": 0
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
catalogSystem	String	Name of the catalog system. Valid values are <code>pcm</code> —Product Catalog Management or <code>epc</code> —Enterprise Product Catalog. If unspecified, the default catalog system is <code>pcm</code> .	Optional	67.0
filter	Criteria Input	Criteria to filter the product classification records. The supported property is <code>name</code> . The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . If multiple criteria are specified, they're combined by using the <code>and</code> operator. Each criterion supports only the <code>property</code> , <code>operator</code> , and <code>value</code> fields.	Optional	67.0
offset	Integer	Number of records to skip. The default value is 0.	Optional	67.0
pageSize	Integer	Specifies the number of records per page. Valid values are 5, 10, 25, 50, and 100. If unspecified, the default value is 100.	Optional	67.0
searchTerm	String	String used to search for product classifications with the product classification name containing the search term.	Optional	67.0
sort	Order Input	Sort order for the product classifications. If unspecified, the default sort order is by name in ascending order.	Optional	67.0

Response Body for POST: [Product Classification List Collection](#) on page 196

Product Details (GET)

Retrieve details of individual product records or a bundle based on a product ID.

Resource

```
/connect/pcm/products/productId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/products/01tT1000000F0aFIAC
```

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/products/01tT1000000F0aFIAC?language=spanish
```

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/products/01tT1000000F0aFIAC/catalogSystems=epc
```

Available Version: 60.0**Requires Chatter:** No**HTTP Methods:** GET

Note: You must invoke this API request by using GET method only. If the request is invoked by using POST method, the request is considered as a [Products List](#) API request.

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
catalogSystems	String[]	Name of the catalog system. Valid values are <code>epc</code> —Enterprise Product Catalog or <code>pcm</code> —Product Catalog Management. Although this parameter accepts a list, you can pass only one value. If you don't specify a value, the default behavior is to fetch data from the <code>pcm</code> catalog.	Optional	66.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0
fields	String[]	For internal use only.	Optional	60.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0

Response Body for GET: [Products](#)**Product Related Records List (POST)**

Retrieve related ProductRampSegment or ProductUsageGrant records for Product2 object.

Resource

```
/connect/pcm/relatedRecords/entityName
```


The supported entity or object is Product2.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/relatedRecords/product2
```

Available Version: 62.0

HTTP Methods: POST

Note: POST methods typically create an item, but for this resource POST is used to retrieve information.

Request Body for POST

JSON Example

```
{
  "recordIds": [
    "01txx00000006i44AAA",
    "01txx00000006i5gAAA"
  ],
  "relatedObjectNodes": [
    {
      "relatedObjectAPIName": "ProductRampSegment",
      "pageSize": 20,
      "offset": 0
    },
    {
      "relatedObjectAPIName": "ProductUsageGrant",
      "pageSize": 10,
      "offset": 0,
      "filter": {
        "criteria": [
          {
            "property": "status",
            "operator": "eq",
            "value": "active"
          },
          {
            "property": "effectivestartdate",
            "operator": "lte",
            "value": "2024-06-25"
          },
          {
            "criteriaType": "CustomWhereCondition",
            "value": "(effectiveenddate = null OR effectiveenddate >= 2024-06-25)"
          }
        ]
      }
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	62.0
recordIds	String[]	List of record IDs to return the relatedObjects records for. The maximum number of record IDs supported is 20.	Required	62.0
relatedObjectNodes	Related Object Node Input []	List of nodes for the related objects. The maximum number of related object nodes supported is two.	Required	62.0

Response Body for POST: [Related Records List](#)

Products List (POST)

Retrieve products. You can also search, filter, or sort the products.

Resource

```
/connect/pcm/products
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/products?productClassificationId=11BT10000004C9SMAU
```

Available Version: 60.0

Requires Chatter: No

HTTP Methods: POST

Note: POST methods typically create an item, but for this resource POST is used to retrieve information.

Request Body for POST

JSON Example

This example is a search request for products that contain `Bundle Product` in the product name.

```
{
  "catalogIds": [
    "0ZST10000004D03OAE"
  ],
  "language": "spanish",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "contains",
        "value": "Bundle Product"
      }
    ]
  }
}
```

```
    ]
  },
  "relatedObjectFilters": [
    {
      "objectName": "ProductSpecificationRecType",
      "criteria": [
        {
          "property": "IsCommercial",
          "operator": "eq",
          "value": false
        }
      ]
    },
    {
      "additionalFields": {
        "Product2": {
          "fields": [
            "code__c"
          ]
        }
      }
    }
  ]
}
```

This example is a search request for products that contain the specified search term in the product name and are part of a catalog.

```
{
  "catalogIds": [
    "0ZSDU0000002Og54AE"
  ],
  "searchTerm": "Slack"
}
```

Query Parameters

Name	Type	Description	Required or Optional	Available Version
product Classification Id	String	ID of the product classification template that contains a collection of dynamic attributes and can be reused to create multiple products. Products that are based on a product classification inherit all the attributes of the product classification. Specify either the product classification ID, list of category IDs, or list of catalog IDs to retrieve products.	Optional	60.0

Properties

Name	Type	Description	Required or Optional	Available Version
additionalFields	Map<String, Additional Fields Input >	Map of the object and the list of standard and custom fields to be queried along with the standard response. The supported object is Product2.	Optional	61.0
catalogIds	List<String>	List of comma-separated catalog IDs. The API returns the list of product records that are associated with the specified catalog IDs. Specify either the product classification ID, list of category IDs, or list of catalog IDs to retrieve products.	Optional	60.0
categoryIds	List<String>	List of comma-separated category IDs. The API returns the list of product records that are associated with the specified category IDs. If unspecified, then returns all products that are added to at least one category. Specify either the product classification ID, list of category IDs, or list of catalog IDs to retrieve products.	Optional	60.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0
filter	Criteria Input	Criteria to filter the records. Filters are applicable to the fields of Product2 object. The supported operators are <code>eq</code> , <code>in</code> , <code>contains</code> —This value isn't applicable if the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled; <code>gt</code> —Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>lt</code> —Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>gte</code> —Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; or <code>lte</code> —Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only. If multiple criteria are specified,	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		then the criteria are combined by using the <code>and</code> operator. The supported properties are <code>name</code> , <code>description</code> , and <code>isActive</code> . If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then the supported property is <code>name</code> only.		
<code>language</code>	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
<code>offset</code>	Integer	Number of records to skip. The default value is 0.	Optional	60.0
<code>pageSize</code>	Integer	Specifies the number of records per page. Valid values are from 1 through 200. If the value is unspecified, it defaults to 100.	Optional	60.0
<code>relatedObjectFilters</code>	Related Object Filter[]	Criteria for the related objects to filter the records. The supported operator is <code>eq</code> . The supported object is <code>ProductSpecificationRecType</code> . The supported values are <code>true</code> and <code>false</code> . The supported property is <code>IsCommercial</code> .	Optional	60.0
<code>searchTerm</code>	String	String used to get products with the product name containing the search term. See Search Considerations When Using Indexed Data .	Optional	62.0
<code>sort</code>	Sort	Sort order for the products. If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then you can sort products by using <code>name</code> only.	Optional	60.0

Response Body for POST: [Products Output](#)

Product Variants (POST)

Retrieve the variation product associated with one or more parent variant products.

A parent variant product is a non-purchasable product that groups related variations. Use this API to retrieve the mapping between parent variant product IDs and their associated variation product IDs.

Resource

```
/connect/pcm/products/variants
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/products/variants
```

Available Version: 67.0**Requires Chatter:** No**HTTP Methods:** POST**Note:** POST methods typically create an item, but for this resource POST is used to retrieve information.**Request Body for POST****JSON Example**

```
{
  "correlationId": "9b6bc520-3c82-4d6c-a458-47590370681a",
  "parentVariantsIds": [
    "01tT1000000F0afIAC",
    "01tT1000000F0agIAC"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique ID to track and associate related events or transactions. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	67.0
parentVariantsIds	String[]	List of product IDs for parent variant products whose variations you want to retrieve. If any product ID is blank, invalid, or not found, the API skips that ID and processes the remaining valid IDs. The skipped IDs appear in the <code>invalidProductIds</code> response property. If a product ID is valid but isn't a parent variant product, the API includes it in the <code>nonVariantParentIds</code> response property.	Required	67.0

Response Body for POST: [Product Variants](#)**Snapshot Collection (GET)**

Retrieve the created snapshots and snapshot indexes.

Resource

```
/connect/pcm/index/snapshots
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/index/snapshots
```

Available Version: 62.0**HTTP Methods:** GET**Query Parameter for GET**

Parameter Name	Type	Description	Required or Optional	Available Version
numberOfIndexLogs	Integer	Number of index logs to include in the response. Specify a number from 0 through 100. The default value is 25.	Optional	63.0

Response Body for GET: [Snapshot Collection](#)**Snapshot Deployment (POST)**

Create indexes for a snapshot. Indexes improve search results and make it easier to find products at run time through search terms.

Resource

```
/connect/pcm/index/deploy
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/index/deploy
```

Available Version: 62.0**HTTP Methods:** POST**Request Body for POST****JSON Example**

This example shows a sample request to build a new snapshot with immediate activation.

```
{
  "snapshot": {
    "activationType": "IMMEDIATE"
  },
  "buildType": "FULL"
}
```

This example shows a sample request to rebuild a snapshot in the `active` status.

```
{
  "snapshot": {
    "activationType": "IMMEDIATE",
    "id": "1Avxx0000005DFe1AM"
  },
}
```

```
"buildType": "FULL"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
buildType	String	Build type of the snapshot index. Valid value is <code>FULL</code> —Specifies a full index build or <code>INCREMENTAL</code> —Specifies an incremental index build. Available from API version 63.0 and later.	Required	62.0
snapshot	Run-time Catalog Snapshot Input[]	Snapshot to deploy.	Required	62.0

Response Body for POST: [Snapshot Deployment](#)**Snapshot Index Error (GET)**

Get the count and details of the errors that occurred during the indexing process.

Resource

```
/connect/pcm/index/error
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/index/error
```

Available Version: 63.0

HTTP Methods: GET

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
indexId	String	ID of the index.	Required	63.0
snapshot IndexId	String	ID of the snapshot index.	Required	63.0

Response Body for GET: [Snapshot Index Error](#)**Unit of Measure Info (GET)**

Get details about the unit of measure for a specific set of records.

Resource

```
/connect/pcm/unit-of-measure/info
```


Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/unit-of-measure/info
```

Available Version: 63.0**HTTP Methods:** GET**Query Parameters for GET**

Parameter Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	63.0
ids	String	IDs of the unit of measure records.	Optional	63.0

Response Body for GET: [Bulk Unit Of Measure Info](#)**Unit of Measure Rounded Data (POST)**

Round off and scale decimal data for a specific set of fields.

Resource

```
/connect/pcm/unit-of-measure/rounded-data
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/pcm/unit-of-measure/rounded-data
```

Available Version: 63.0**HTTP Methods:** POST**Request Body for POST****JSON Example**

```
{
  "dataRowInputs": [
    {
      "key": "PRC1",
      "fieldDataInputs": [
        {
          "fieldApiName": "MaxQuantity",
          "originalValue": 1234.5678,
          "unitOfMeasureId": "0hExx0000000001EAA"
        },
        {
          "fieldApiName": "MinQuantity",
          "originalValue": "987462848934739347.32232590183756545",
          "unitOfMeasureId": "0hExx000000001dEAA"
        }
      ]
    }
  ]
}
```

```

    }
  ]
},
{
  "key": "PRC2",
  "fieldDataInputs": [
    {
      "fieldApiName": "MaxQuantity",
      "originalValue": 1234.5678,
      "unitOfMeasureId": "uomId1"
    },
    {
      "fieldApiName": "MinQuantity",
      "originalValue": 987.4628,
      "unitOfMeasureId": "Kgs Id"
    }
  ]
},
{
  "key": "PRC3",
  "fieldDataInputs": [
    {
      "fieldApiName": "MaxQuantity",
      "originalValue": 0.437584,
      "unitOfMeasureId": "uomId2"
    },
    {
      "fieldApiName": "MinQuantity",
      "originalValue": 7364.58923,
      "unitOfMeasureId": "uomId2"
    }
  ]
}
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	63.0
dataRowInputs	Data Row Input []	List of row inputs for rounding the data.	Required	63.0

Response Body for POST: [Data Rounding](#)

Request Bodies

Learn more about the available Product Catalog Management API request bodies.

[Additional Fields Input](#)

Input representation of the additional standard or custom fields to be included in the response.

[Bulk Product Details Input](#)

Input representation of the request to retrieve the details of multiple products.

[Catalog Input](#)

Input representation of the request to retrieve catalog records.

[Criteria Input](#)

Input representation of the filter criteria item request.

[Data Rounding Input](#)

Input representation of the details of the data rounding input.

[Data Row Input](#)

Input representation of the details of the input for a data rounding request.

[Deep Clone Input](#)

Input representation of the details of the object and associated record to be cloned.

[Field Data Input](#)

Input representation of the details of the field data input.

[Filter Input](#)

Input representation of the filter request.

[Include Object Input](#)

Input representation of the object to include in the response.

[Index Configuration Collection Input](#)

Input representation of the collection of index configurations.

[Index Configuration Input](#)

Input representation of the request to persist the index configuration.

[Index Setting Input](#)

Input representation of the index setting.

[Options Input](#)

Reserved for internal use.

[Order Input](#)

Input representation of the sort order item request.

[Product Classification Details Input](#)

Input representation of the request to fetch details of product classification records, including their attributes and attribute categories.

[Product Classification List Input](#)

Input representation of the request to retrieve a list of product classification records.

[Product Input](#)

Input representation of a product in the catalog.

[Product Variants Input](#)

Input representation of the request to retrieve the variation products associated with parent variant products.

[Related Object Filters Input](#)

Input representation of the request to filter related objects.

[Related Object Node Input](#)

Input representation of the details of a related object node.

[Related Records Input](#)

Input representation of the request to retrieve related ProductRampSegment or ProductUsageGrant records for Product2 object.

[Run-time Catalog Snapshot Input](#)

Input representation of the details of a run-time catalog snapshot for deployment.

[Setting Input](#)

Input representation of the details of the index setting.

[Snapshot Deployment Input](#)

Input representation of the request to deploy a run-time catalog snapshot.

[Sort Input](#)

Input representation of the sort request.

Additional Fields Input

Input representation of the additional standard or custom fields to be included in the response.

JSON Example

```
"additionalFields": {
  "Product2": {
    "fields": [
      "code__c"
    ]
  }
}
```

This example shows a sample request with attribute definition field details.

```
"additionalFields":{
  "OptOutAssetization":true
  "OptOutDecompositionAction":false
  "OptOutSupplementalAction":false
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
fields	String[]	List of additional standard or custom fields to be included in the response.	Required	61.0

Bulk Product Details Input

Input representation of the request to retrieve the details of multiple products.

JSON Example

```
{
  "correlationId": "cbfabffb-093f-45b3-8c2d-88b4acbd4867",
  "productIds": [
    "01tT1000000F0afiAC",
    "01tT1000000F0afiAC"
  ],
  "uptoLevel": 1,
  "language": "french",
  "additionalFields": {
    "Product2": {
      "fields": [
        "code__c"
      ]
    },
    "ProductAttributeDefinition": {
      "fields": [
        "scope"
      ]
    }
  }
}
```

This example shows a sample request to fetch data from Enterprise Product Catalog.

```
{
  "productIds": [
    "01tLT000009vGXfYAM"
  ],
  "catalogSystems": [
    "epc"
  ],
  "additionalFields": {
    "AttributeDefinition": {
      "fields": [
        "OptOutAssetization",
        "OptOutDecompositionAction",
        "OptOutSupplementalAction"
      ]
    }
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additional Fields	Map<String, Additional Fields Input >	Map of object and list of additional standard or custom fields to be included in the response. The supported objects are Product2 or ProductAttributeDefinition—If the fields defined for the ProductAttributeDefinition object aren't	Optional	61.0

Name	Type	Description	Required or Optional	Available Version
		available for the ProductClassificationAttr object, then the API request fails. If the Dynamic Revenue Orchestrator permission is enabled, then this property supports AttributeDefinition as key with these supported values. OptOutAssetization, OptOutDecompositionAction, or OptOutSupplementalAction.		
catalogSystems	String[]	Name of the catalog system. Valid values are <code>epc</code> —Enterprise Product Catalog or <code>pcm</code> —Product Catalog Management. Although this property accepts a list, you can pass only one value. If you don't specify a value, the default behavior is to fetch data from the <code>pcm</code> catalog.	Optional	66.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	61.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
productIds	String[]	List of product IDs that details must be returned for. If any product ID is blank, invalid, or not found, then the request is processed with valid and available product IDs.	Required	61.0
uptoLevel	Integer	Hierarchy level to follow to return the product details. For a bundle, this property determines the number of levels of child components to be returned. You can specify up to a hierarchy level of 1. If unspecified, the default level is the full bundle hierarchy.	Optional	61.0

Catalog Input

Input representation of the request to retrieve catalog records.

JSON Example

This example shows how to retrieve catalogs that contain `apple` in the catalog name.

```
{
  "pageSize": 100,
  "offset": 0,
  "language": "french",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "contains",
        "value": "apple"
      }
    ]
  }
}
```

This example shows how to retrieve catalogs with `ServiceProcess` as the catalog type.

```
{
  "pageSize": 100,
  "offset": 0,
  "sort": {
    "orders": [
      {
        "property": "name",
        "direction": "desc"
      }
    ]
  },
  "filter": {
    "criteria": [
      {
        "property": "catalogType",
        "operator": "eq",
        "value": "ServiceProcess"
      }
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
<code>correlationId</code>	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	60.0
<code>filter</code>	Filter	Criteria to filter the records. Filters are applicable to the fields of the <code>ProductCatalog</code> object. The supported	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . The supported properties are <code>name</code> and <code>catalogType</code> .		
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
offset	Integer	Number of records to skip. The default value is 0.	Optional	60.0
pageSize	Integer	Number of records per page. Valid values are from 1 through 100. If unspecified, defaults to 100.	Optional	60.0
sort	Sort	Sort order of the catalog records. The supported operators are <code>asc</code> or <code>desc</code> .	Optional	60.0

Criteria Input

Input representation of the filter criteria item request.

JSON Example

```
"criteria":
[
  {
    "attributeType": "ProductStandard",
    "property": "name",
    "operator": "eq",
    "value": "iPhone"
  },
  {
    "criteriaType": "CustomWhereCondition",
    "value": "(effectiveenddate = null OR effectiveenddate >= 2024-06-25)"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
attributeType	String	Search attribute type of the facet for a faceted search. Valid values are <code>ProductStandard</code> , <code>ProductCustom</code> , <code>ProductDynamicAttribute</code> , <code>ProductAttributeStandard</code> , or <code>ProductAttributeCustom</code> . This	Optional	63.0

Name	Type	Description	Required or Optional	Available Version
		property is applicable if the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled.		
criteriaType	String	Type of criteria for the filter. Valid value is <code>CustomWhereCondition</code> .	Required	60.0
operator	String	Operator used for the filter criteria.	Required	60.0
property	String	Property name to use in the filter, which must be the same as the object field.	Required	60.0
value	Object	Value for the filter criteria.	Required	60.0

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.
- `gt`—Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lt`—Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `gte`—Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lte`—Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.

Data Rounding Input

Input representation of the details of the data rounding input.

JSON Example

```
{
  "dataRowInputs": [
    {
      "key": "PRC1",
      "fieldDataInputs": [
        {
          "fieldApiName": "MaxQuantity",
          "originalValue": 1234.5678,
          "unitOfMeasureId": "0hExx0000000001EAA"
        },
        {
          "fieldApiName": "MinQuantity",
          "originalValue": "987462848934739347.32232590183756545",
          "unitOfMeasureId": "0hExx0000000001dEAA"
        }
      ]
    }
  ]
}
```

```

    ]
  },
  {
    "key": "PRC2",
    "fieldDataInputs": [
      {
        "fieldApiName": "MaxQuantity",
        "originalValue": 1234.5678,
        "unitOfMeasureId": "uomId1"
      },
      {
        "fieldApiName": "MinQuantity",
        "originalValue": 987.4628,
        "unitOfMeasureId": "Kgs Id"
      }
    ]
  },
  {
    "key": "PRC3",
    "fieldDataInputs": [
      {
        "fieldApiName": "MaxQuantity",
        "originalValue": 0.437584,
        "unitOfMeasureId": "uomId2"
      },
      {
        "fieldApiName": "MinQuantity",
        "originalValue": 7364.58923,
        "unitOfMeasureId": "uomId2"
      }
    ]
  }
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	63.0
dataRowInputs	Data Row Input []	List of row inputs for rounding the data.	Required	63.0

Data Row Input

Input representation of the details of the input for a data rounding request.

JSON Example

JSON example

```
{
  "dataRowInputs": [
    {
      "key": "PRC1",
      "fieldDataInputs": [
        {
          "fieldApiName": "MaxQuantity",
          "originalValue": 1234.5678,
          "unitOfMeasureId": "0hExx0000000001EAA"
        },
        {
          "fieldApiName": "MinQuantity",
          "originalValue": "987462848934739347.32232590183756545",
          "unitOfMeasureId": "0hExx000000001dEAA"
        }
      ]
    },
    {
      "key": "PRC2",
      "fieldDataInputs": [
        {
          "fieldApiName": "MaxQuantity",
          "originalValue": 1234.5678,
          "unitOfMeasureId": "uomId1"
        },
        {
          "fieldApiName": "MinQuantity",
          "originalValue": 987.4628,
          "unitOfMeasureId": "Kgs Id"
        }
      ]
    },
    {
      "key": "PRC3",
      "fieldDataInputs": [
        {
          "fieldApiName": "MaxQuantity",
          "originalValue": 0.437584,
          "unitOfMeasureId": "uomId2"
        },
        {
          "fieldApiName": "MinQuantity",
          "originalValue": 7364.58923,
          "unitOfMeasureId": "uomId2"
        }
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
fieldDataInputs	Field Data Input []	List of field-level data inputs.	Required	63.0
key	String	Key that identifies a unique data row.	Required	63.0

Deep Clone Input

Input representation of the details of the object and associated record to be cloned.

JSON Example

```
{
  "mainRecordId": "01tSG0000028kcSYAQ",
  "mainObjectApiName": "Product2",
  "mainRecordFieldValues": {
    "Name": "New Cloud Storage"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
mainObjectApiName	String	API name of the object. The supported object is Product2.	Required	63.0
mainRecordFieldValues	Map<String,String>	Mapping of the API name of the field to its value. The values passed through this map are set for the created record. You can pass the Name field only through this map.	Optional	63.0
mainRecordId	String	ID of the record.	Required	63.0

Field Data Input

Input representation of the details of the field data input.

JSON Example

```
"fieldDataInputs": [
  {
    "fieldApiName": "MaxQuantity",
    "originalValue": 0.437584,
    "unitOfMeasureId": "uomId2"
  },
  {
    "fieldApiName": "MinQuantity",
    "originalValue": 7364.58923,
    "unitOfMeasureId": "uomId2"
  }
]
```

```
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
fieldApiName	String	Unique API name of the field.	Required	63.0
originalValue	String	Original value of the fields.	Required	63.0
unitOfMeasureId	String	ID of the unit of measure record that's associated to the field.	Required	63.0

Filter Input

Input representation of the filter request.

JSON Example

```
"filter":
{
  "criteria": [ {
    "property": "name",
    "operator": "eq",
    "value": "iPhone"
  },
  {
    "criteriaType": "CustomWhereCondition",
    "value": "(effectiveenddate = null OR effectiveenddate >= 2024-06-25)"
  }
]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
criteria	Criteria []	Details of the filter criteria.	Required if the <code>filter</code> property is specified.	60.0

Include Object Input

Input representation of the object to include in the response.

JSON Example

```
"includeObjects":
[ {
```

```
"objectName": "ProductCategory"
}]
```

Properties

Name	Type	Description	Required or Optional	Available Version
objectName	String	Name of the object to include in the response. The supported object is ProductCategory.	Required if the options property is specified.	60.0

Index Configuration Collection Input

Input representation of the collection of index configurations.

JSON Example

```
{
  "correlationId": "8545b5aa-f3e6-429a-8f21-9cc4ce50b1d7",
  "indexConfigurations": [
    {
      "attributeDefinitionId": "0tjT1000000002bIAA",
      "name": "Color",
      "type": "ProductDynamicAttribute",
      "isSearchable": true
    },
    {
      "attributeFieldId": "00Nxx000001FwnABII",
      "name": "Message__c",
      "type": "Custom",
      "isSearchable": true
    },
    {
      "name": "Code",
      "type": "Standard",
      "isSearchable": true
    },
    {
      "facetDisplayRank": 1,
      "isFacetable": false,
      "isSearchable": true,
      "name": "Family",
      "type": "Standard"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	62.0
index Configurations	Index Configuration Input[]	List of index configurations.	Required	62.0

Index Configuration Input

Input representation of the request to persist the index configuration.

JSON Example

```
"indexConfigurations": [
  {
    "attributeDefinitionId": "0tjT1000000002bIAA",
    "name": "Color",
    "type": "ProductDynamicAttribute",
    "isSearchable": true
  },
  {
    "attributeFieldId": "00Nxx000001FwnABII",
    "name": "Message__c",
    "type": "Custom",
    "isSearchable": true
  },
  {
    "name": "Code",
    "type": "Standard",
    "isSearchable": true
  },
  {
    "facetDisplayRank": 1,
    "isFacetable": false,
    "isSearchable": true,
    "name": "Family",
    "type": "Standard"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
attribute DefinitionId	String	ID of the attribute definition.	Required if the attribute FieldId property isn't specified.	62.0

Name	Type	Description	Required or Optional	Available Version
attribute FieldId	String	ID of the attribute field.	Required if the attribute DefinitionId property isn't specified.	62.0
facet DisplayRank	Integer	Sort order for displaying the facets at run time.	Optional	63.0
isFacetable	Boolean	Indicates whether the field is facetable (<code>true</code>) or not (<code>false</code>).	Optional	63.0
isSearchable	Boolean	Indicates whether the index-configured field is searchable (<code>true</code>) or not (<code>false</code>).	Optional	62.0
name	String	Name of the index-configured field.	Required	62.0
type	String	Type of the index-configured field.	Required	62.0

Index Setting Input

Input representation of the index setting.

JSON Example

```
{
  "setting" : {
    "supportedLanguages" : ["en_US","ja","es","nl_NL"],
    "defaultLanguage" : "en_US",
    "productsGrouping": "GROUPING_VARIATION"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
setting	Setting Input	Object containing the setting-related details.	Required	63.0

Options Input

Reserved for internal use.

Reserved for internal use.

Order Input

Input representation of the sort order item request.

JSON Example

```
"sort":{
"orders":
[
  {
    "property": "name",
    "direction": "asc"
  }
]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
direction	String	Direction to sort the list items, such as in ascending order or descending order.	Required	60.0
property	String	Property to use for the sorting of the list items.	Required	60.0

Product Classification Details Input

Input representation of the request to fetch details of product classification records, including their attributes and attribute categories.

JSON Example

```
{
  "productClassificationIds": [
    "01txx0000006iFMAAY",
    "01txx0000006iGxAAY"
  ],
  "catalogSystems": [
    "epc"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
catalogSystems	String[]	Name of the catalog system. Valid value is <code>epc</code> —Enterprise Product Catalog.	Optional	66.0
productClassificationIds	String[]	List of product classification IDs for which you want to retrieve product details. In the <code>epc</code> catalog system, these values are the <code>Product2</code> record IDs.	Required	66.0

Product Classification List Input

Input representation of the request to retrieve a list of product classification records.

JSON Example

```
{
  "catalogSystem": "pcm",
  "searchTerm": "Mobile",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "contains",
        "value": "Mobile"
      }
    ]
  },
  "sort": {
    "orders": [
      {
        "property": "name",
        "direction": "asc"
      }
    ]
  },
  "pageSize": 25,
  "offset": 0
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
catalogSystem	String	Name of the catalog system. Valid values are <code>pcm</code> —Product Catalog Management or <code>epc</code> —Enterprise Product Catalog. If unspecified, the default catalog system is <code>pcm</code> .	Optional	67.0
filter	Criteria Input	Criteria to filter the product classification records. The supported property is <code>name</code> . The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . If multiple criteria are specified, they're combined by using the <code>and</code> operator. Each criterion supports only the <code>property</code> , <code>operator</code> , and <code>value</code> fields.	Optional	67.0
offset	Integer	Number of records to skip. The default value is 0.	Optional	67.0
pageSize	Integer	Specifies the number of records per page. Valid values are 5, 10, 25, 50, and 100. If unspecified, the default value is 100.	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
searchTerm	String	String used to search for product classifications with the product classification name containing the search term.	Optional	67.0
sort	Order Input	Sort order for the product classifications. If unspecified, the default sort order is by name in ascending order.	Optional	67.0

Product Input

Input representation of a product in the catalog.

JSON Example

This example is a search request for products that contain `Bundle Product` in the product name.

```
{
  "catalogIds": [
    "0ZST10000004D03OAE"
  ],
  "language": "spanish",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "contains",
        "value": "Bundle Product"
      }
    ]
  },
  "relatedObjectFilters": [
    {
      "objectName": "ProductSpecificationRecType",
      "criteria": [
        {
          "property": "IsCommercial",
          "operator": "eq",
          "value": false
        }
      ]
    },
    {
      "additionalFields": {
        "Product2": {
          "fields": [
            "code__c"
          ]
        }
      }
    }
  ]
}
```

This example is a search request for products that contain the specified search term in the product name and are part of a catalog.

```
{
  "catalogIds": [
    "0ZSDU00000020g54AE"
  ],
  "searchTerm": "Slack"
}
```

Query Parameters

Name	Type	Description	Required or Optional	Available Version
product Classification Id	String	ID of the product classification template that contains a collection of dynamic attributes and can be reused to create multiple products. Products that are based on a product classification inherit all the attributes of the product classification. Specify either the product classification ID, list of category IDs, or list of catalog IDs to retrieve products.	Optional	60.0

Properties

Name	Type	Description	Required or Optional	Available Version
additional Fields	Map<String, Additional Fields Input >	Map of the object and the list of standard and custom fields to be queried along with the standard response. The supported object is Product2.	Optional	61.0
catalogIds	List<String>	List of comma-separated catalog IDs. The API returns the list of product records that are associated with the specified catalog IDs. Specify either the product classification ID, list of category IDs, or list of catalog IDs to retrieve products.	Optional	60.0
categoryIds	List<String>	List of comma-separated category IDs. The API returns the list of product records that are associated with the specified category IDs. If unspecified, then returns all products that are added to at least one category. Specify either the product classification ID, list of category IDs, or list of catalog IDs to retrieve products.	Optional	60.0
correlationId	String	Unique token to track and associate related events or transactions across different	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.		
filter	Criteria Input	Criteria to filter the records. Filters are applicable to the fields of Product2 object. If multiple criteria are specified, then the criteria are combined by using the <code>and</code> operator. The supported properties are <code>name</code> , <code>description</code> , and <code>isActive</code> . If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then the supported property is <code>name</code> only.	Optional	60.0
language	String	Custom language that you can specify to get translated data for the fields of an object that's enabled for translation. See Translate Product and Product Category Data .	Optional	64.0
offset	Integer	Number of records to skip. The default value is 0.	Optional	60.0
pageSize	Integer	Specifies the number of records per page. Valid values are from 1 through 200. If the value is unspecified, it defaults to 100.	Optional	60.0
relatedObjectFilters	Related Object Filter[]	Criteria for the related objects to filter the records. The supported operator is <code>eq</code> . The supported object is <code>ProductSpecificationRecType</code> . The supported values are <code>true</code> and <code>false</code> . The supported property is <code>IsCommercial</code> .	Optional	60.0
searchTerm	String	String used to get products with the product name containing the search term. See Search Considerations When Using Indexed Data .	Optional	62.0
sort	Sort	Sort order for the products. If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then you can sort products by using name only.	Optional	60.0

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.
- `gt`—Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lt`—Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `gte`—Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lte`—Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.

Product Variants Input

Input representation of the request to retrieve the variation products associated with parent variant products.

JSON Example

```
{
  "correlationId": "9b6bc520-3c82-4d6c-a458-47590370681a",
  "parentVariantsIds": [
    "01tT1000000F0afIAC",
    "01tT1000000F0agIAC"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
<code>correlationId</code>	String	Unique ID to track and associate related events or transactions. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	67.0
<code>parentVariantsIds</code>	String[]	List of product IDs for parent variant products whose variations you want to retrieve. If any product ID is blank, invalid, or not found, the API skips that ID and processes the remaining valid IDs. The skipped IDs appear in the <code>invalidProductIds</code> response property. If a product ID is valid but isn't a parent variant product, the API includes it in the <code>nonVariantParentIds</code> response property.	Required	67.0

Related Object Filters Input

Input representation of the request to filter related objects.

JSON Example

```
"relatedObjectFilters":
[
  {
    "criteria": [
      {
        "property": "IsCommercial",
        "operator": "eq",
        "value": true
      }
    ],
    "objectName": "ProductSpecificationRecType"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
criteria	Criteria []	Criteria to filter the related objects.	Required if the relatedObjectFilters property is specified.	60.0
objectName	String	API name of the object that's related to the main object.	Required if the relatedObjectFilters property is specified.	60.0

Related Object Node Input

Input representation of the details of a related object node.

JSON Example

```
"relatedObjectNodes": [
  {
    "relatedObjectAPIName": "ProductRampSegment",
    "pageSize": 20,
    "offSet": 0
  },
  {
    "relatedObjectAPIName": "ProductUsageGrant",
    "pageSize": 10,
    "offSet": 0,
    "filter": {
      "criteria": [
        {
          "property": "status",
          "operator": "eq",
          "value": "active"
        },
        {
          "property": "effectivestartdate",
          "operator": "lte",
          "value": "2024-06-25"
        }
      ]
    }
  }
]
```

```
    {
      "criteriaType": "CustomWhereCondition",
      "value": "(effectiveenddate = null OR effectiveenddate >= 2024-06-25) "
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
filter	Criteria[]	Criteria to filter records. The supported properties are StartDate, EndDate, or Status. The supported operators are eq, gte, or lte. The supported related object is ProductUsageGrant. If multiple criteria are specified, then the resultant criteria are combined by using the and operator.	Optional	62.0
offset	Integer	Number of records to skip. The default value is 0.	Optional	62.0
pageSize	Integer	Number of records per page. Valid values are from 1 through 100. If unspecified, the default value is 100.	Optional	62.0
relatedObjectAPIName	String	API name of the related object to return the records for. The supported related objects are ProductRampSegment and ProductUsageGrant.	Required	62.0

Related Records Input

Input representation of the request to retrieve related ProductRampSegment or ProductUsageGrant records for Product2 object.

JSON Example

```
{
  "recordIds": [
    "01txx0000006i44AAA",
    "01txx0000006i5gAAA"
  ],
  "relatedObjectNodes": [
    {
      "relatedObjectAPIName": "ProductRampSegment",
      "pageSize": 20,
      "offset": 0
    },
    {
      "relatedObjectAPIName": "ProductUsageGrant",
```



```
    "pageSize": 10,
    "offset": 0,
    "filter": {
      "criteria": [
        {
          "property": "status",
          "operator": "eq",
          "value": "active"
        },
        {
          "property": "effectivestartdate",
          "operator": "lte",
          "value": "2024-06-25"
        },
        {
          "criteriaType": "CustomWhereCondition",
          "value": "(effectiveenddate = null OR effectiveenddate >= 2024-06-25)"
        }
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	62.0
recordIds	String[]	List of record IDs to return the relatedObjects records for. The maximum number of record IDs supported is 20.	Required	62.0
relatedObjectNodes	Related Object Node Input []	List of nodes for the related objects. The maximum number of related object nodes supported is two.	Required	62.0

Run-time Catalog Snapshot Input

Input representation of the details of a run-time catalog snapshot for deployment.

JSON Example

```
{
  "snapshot": {
    "activationType": "IMMEDIATE",
    "activationDate": "2024-05-06T05:12:59.000Z",
    "id": "1Avxx0000005DFe1AM"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
activationDate	String	Activation date of the snapshot.	Optional	62.0
activationType	String	Activation type of the snapshot. Valid value is IMMEDIATE—Snapshot is activated immediately after a successful build.	Required	62.0
id	String	ID of the snapshot.	Required	62.0

Setting Input

Input representation of the details of the index setting.

JSON Example

```
"setting" : {
  "supportedLanguages" : ["en_US", "ja", "es", "nl_NL"],
  "defaultLanguage" : "en_US"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
default Language	String	Default language for the API.	Required	63.0
supported Languages	String[]	List of supported language locales for indexing.	Required	63.0

Snapshot Deployment Input

Input representation of the request to deploy a run-time catalog snapshot.

JSON Example

This example shows a sample request to build a new snapshot with immediate activation.

```
{
  "snapshot": {
    "activationType": "IMMEDIATE"
  },
  "buildType": "FULL"
}
```

This example shows a sample request to rebuild a snapshot in the `active` status.

```
{
  "snapshot": {
    "activationType": "IMMEDIATE",
```

```
    "id": "1Avxx0000005DFe1AM"
  },
  "buildType": "FULL"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
buildType	String	Build type of the snapshot index. Valid value is <code>FULL</code> —Specifies a full index build or <code>INCREMENTAL</code> —Specifies an incremental index build. Available from API version 63.0 and later.	Required	62.0
snapshot	Run-time Catalog Snapshot Input[]	Snapshot to deploy.	Required	62.0

Sort Input

Input representation of the sort request.

JSON Example

```
"sort":
{
  "orders":
  [{
    "property": "name",
    "direction": "asc"
  }]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
orders	Order[]	Details of the sort order.	Required if the <code>sort</code> property is specified.	60.0

Response Bodies

Learn more about the available Product Catalog Management API response bodies.

[Attribute Category](#)

Output representation of the attribute category.

[Attribute Definition](#)

Output representation of the attribute definition.

[Attribute Picklist](#)

Output representation of the attribute picklist.

[Attribute Picklist Value](#)

Output representation of the attribute picklist value.

[Bulk Unit Of Measure Info](#)

Output representation of the details of the unit of measure records along with error details.

[Data Rounding](#)

Output representation of the data rounding response.

[Data Row](#)

Output representation of the details of a data row.

[Catalog Output](#)

Output representation of the catalog definition.

[Catalogs Output](#)

Output representation of the retrieved catalog result.

[Categories Output](#)

Output representation of the retrieved categories result.

[Category Output](#)

Output representation of the category definition.

[Deep Clone Error](#)

Output representation of the error details related to the deep clone request.

[Deep Clone Record Response](#)

Output representation of the details of the cloned related records.

[Deep Clone Response](#)

Output representation of the details of the cloned record.

[Error Output](#)

Output representation of the error details.

[Facet Value](#)

Output representation of the facet values found in the search result.

[Field Data](#)

Output representation of the field data.

[Fields Info](#)

Output representation of the metadata fields in an object.

[Index Configuration Collection](#)

Output representation of the collection of index configuration details.

[Index Configuration Field](#)

Output representation of the details of the index-configured field.

[Index Configurations Update](#)

Output representation of the updated index configuration.

[Index Error](#)

Output representation of the error details related to an index.

[Index Setting](#)

Output representation of the retrieved index settings.

[Index Setting Update](#)

Output representation of the details of the updated index setting.

[Invalid Related Object Node](#)

Output representation of the invalid related object node with details of errors.

[Metadata](#)

Output representation of the metadata details for objects.

[Object Info](#)

Output representation of the object details along with its fields.

[Product Catalog Management Error](#)

Output representation that contains error details, including error codes and messages.

[Product Classification](#)

Output representation of the product classification details.

[Product Classification Details](#)

Output representation that contains the details of a single product classification, including its attributes and categories.

[Product Classification Details Collection](#)

Output representation that contains a collection of product classification details along with any processing errors.

[Product Classification List Collection](#)

Output representation that contains a collection of product classification records along with any processing errors.

[Product Component Group](#)

Output representation of the product component group.

[Product](#)

Output representation of the product definition.

[Product Related Component](#)

Output representation of the product-related component.

[Product Selling Model](#)

Output representation of the definition of the product selling model.

[Product Selling Model Option](#)

Output representation of the definition of the product selling model option.

[Product Specification Type](#)

Output representation of the product specification type.

[Products](#)

Output representation of the list of retrieved products.

[Product Variants](#)

Output representation of the variation products associated with the specified parent variant products.

[Related Object Records](#)

Output representation of the related records for a specified record ID and related object API name.

[Related Records](#)

Output representation of the list of relatedObject records for a specified record ID.

[Related Records List](#)

Output representation of the list of related records.

[Search Facet](#)

Output representation of the details of the faceted search.

[Setting](#)

Output representation of the setting that's used in indexing.

[Setting Metadata](#)

Output representation of the metadata associated with a setting.

[Snapshot](#)

Output representation of the list of active snapshots.

[Snapshot Collection](#)

Output representation of the retrieved snapshot collection.

[Snapshot Deployment](#)

Output representation of the snapshot deployment.

[Snapshot Index](#)

Output representation of the snapshot index of a run-time catalog.

[Snapshot Index Error](#)

Output representation of the error details related to a snapshot index.

[Snapshot Index Info](#)

Output representation of the details of a snapshot index.

[Snapshot Index Log](#)

Output representation of a snapshot index log.

[Status](#)

Output representation of the status of the request.

[Unit of Measure Error](#)

Output representation of the details of errors encountered during the processing of the Unit of Measure API request.

[Unit of Measure Info](#)

Output representation of the details of a unit of measure record.

[Unit of Measure Status](#)

Output representation of the status of the Unit of Measure API request.

Attribute Category

Output representation of the attribute category.

JSON Example

```
"attributeCategory": [  
  {  
    "attributes": [  
      {  
        "additionalFields": {  
          "scope": "Order"  
        }  
      }  
    ]  
  }  
]
```

```

    },
    "attributeNameOverride": "AD Text",
    "code": "AD02",
    "dataType": "Text",
    "defaultValue": "AD Text DV",
    "description": "AD Text Desc",
    "displayType": "Text",
    "helpText": "AD Text DHT",
    "id": "0tjT1000000002bIAA",
    "isHidden": false,
    "isPriceImpacting": true,
    "isReadOnly": true,
    "isRequired": true,
    "label": "AD Text Label",
    "maximumCharacterCount": "20",
    "maximumValue": "100",
    "minimumCharacterCount": "1",
    "minimumValue": "50",
    "name": "AD Text",
    "sequence": 1,
    "status": "Active",
    "valueDescription": "AD Text VD"
  }
],
"code": "AC001",
"id": "0v3T1000000000BIAQ",
"name": "build and make",
"sequence": 1
}
]

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
attributes	Attribute Definition[]	List of categorized attributes associated with the product	Small, 60.0	60.0
code	String	Code of the attribute category	Small, 60.0	60.0
id	String	ID associated with the attribute category	Small, 60.0	60.0
name	String	Name of the attribute category. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
sequence	Integer	Display order of the attribute category in a product's details	Small, 68.0	68.0

Attribute Definition

Output representation of the attribute definition.

JSON Example

```
"attributes": [
  {
    "additionalFields": {
      "scope": "Order"
    },
    "attributeNameOverride": "AD Text",
    "code": "AD02",
    "dataType": "Text",
    "defaultValue": "AD Text DV",
    "description": "AD Text Desc",
    "displayType": "Text",
    "helpText": "AD Text DHT",
    "id": "0tjT1000000002bIAA",
    "isHidden": false,
    "isPriceImpacting": true,
    "isReadOnly": true,
    "isRequired": true,
    "label": "AD Text Label",
    "maximumCharacterCount": 20,
    "maximumValue": "100",
    "minimumCharacterCount": 1,
    "minimumValue": "50",
    "name": "AD Text",
    "sequence": 1,
    "status": "Active",
    "valueDescription": "AD Text VD"
  },
  {
    "code": "AC001",
    "id": "0v3T1000000000BIAQ",
    "name": "build and make"
  }
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
additional Fields	Map<String, Additional Fields Input >	Key-value pair of additional standard or custom fields to include in the response.	Small, 61.0	61.0
attributeName Override	String	Name to display for the attribute, which overrides the name on the attribute. For example, the Color attribute is overridden to display as Laptop Color.	Small, 60.0	60.0
code	String	Unique code of the attribute definition.	Small, 60.0	60.0
dataType	String	Data type of the attribute definition value.	Small, 60.0	60.0
defaultValue	String	Default value of the attribute.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
description	String	Description of the attribute.	Small, 60.0	60.0
displayType	String	Display types of the attribute. Valid values are Radio Button, Checkbox, Toggle, Input Date, DateTime, Currency Symbol, Currency Code, Currency Name, Percentage, Text, Combobox, Radio Button, MultiSelect, or MultiSelectCheckboxes.	Small, 60.0	60.0
helpText	String	Help text that appears at run time for the attribute. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
id	String	ID of the attribute definition.	Small, 60.0	60.0
is Configurable	Boolean	Reserved for future use.	Small, 60.0	60.0
isHidden	Boolean	Indicates whether to hide the attribute from the users in the order capture interface (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isPrice Impacting	Boolean	Indicates whether the attribute impacts the product price (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isReadOnly	Boolean	Indicates whether the product attribute is read-only for the end users in the order capture page (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isRequired	Boolean	Indicates whether a value for the attribute is required for the assigned parent object (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isValue Cloneable	Boolean	Reserved for future use.	Small, 60.0	60.0
label	String	Label of the attribute. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
maximum Character Count	Integer	Maximum number of alphanumeric characters that can be entered for attributes of type number and text in run time.	Small, 60.0	60.0
maximumValue	String	Maximum value that can be entered for attributes of type number, currency, and percent in run time.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
minimum Character Count	Integer	Minimum number of alphanumeric characters that can be entered for attributes of type number and text in run time. The minimum character count must be less than or equal to the maximum character count.	Small, 60.0	60.0
minimumValue	String	Minimum value that can be entered for attributes of type number, currency, and percent in run time. The minimum value must be less than or equal to the maximum value.	Small, 60.0	60.0
name	String	Name of the attribute.	Small, 60.0	60.0
picklist	Attribute Picklist	ID of the attribute picklist that provides the valid values for the attribute.	Small, 60.0	60.0
sequence	Integer	Order in which the attribute values appear in the attribute definition when the product is configured at run time.	Small, 60.0	60.0
status	String	Lifecycle state of the attribute picklist. Valid values are Active , Draft , or Inactive .	Small, 60.0	60.0
stepValue	String	Reserved for future use.	Small, 60.0	60.0
valueDecoder	String	Reserved for future use.	Small, 60.0	60.0
value Description	String	Description of the value assigned to the attribute.	Small, 60.0	60.0

Attribute Picklist

Output representation of the attribute picklist.

JSON Example

```
"picklist": {
  "dataType": "Text",
  "description": "Fabric Module options",
  "id": "0v51Q000000TNDkQAO",
  "name": "Fabric Module options",
  "values": [
    {
      "abbreviation": "IFM1"
      "code": "PV0051",
      "displayValue": "25G Intelligent Fabric Module with 8x 25G SFP28 ports",
      "id": "0v61Q0000008OMYQA2",
      "name": "25G Intelligent Fabric Module with 8x 25G SFP28 ports",
```

```

    "sequence": "1",
    "value": "25G Intelligent Fabric Module with 8x 25G SFP28 ports",
    "status" : "Active"
  },
  {
    "abbreviation": "IFM2"
    "code": "PV0052",
    "displayValue": "100G Intelligent Fabric Module with 8x 100G QSFP28 ports",
    "id": "0v61Q0000008OMZQA2",
    "name": "100G Intelligent Fabric Module with 8x 100G QSFP28 ports",
    "sequence": "2",
    "value": "100G Intelligent Fabric Module with 8x 100G QSFP28 ports",
    "status" : "Active"
  }
]
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
dataType	String	Data type of the values in the picklist. Valid values are Boolean, Date, Datetime, Number, Text, Currency, or Percent.	Small, 60.0	60.0
description	String	Description of the picklist, such as the picklist purpose or the associated product.	Small, 60.0	60.0
id	String	ID associated with the attribute picklist record.	Small, 60.0	60.0
name	String	Name of the picklist value.	Small, 60.0	60.0
values	Attribute Picklist Value[]	List of values associated with the picklist.	Small, 60.0	60.0

Attribute Picklist Value

Output representation of the attribute picklist value.

JSON Example

```

"values": [
  {
    "abbreviation": "IFM1"
    "code": "PV0051",
    "displayValue": "25G Intelligent Fabric Module with 8x 25G SFP28 ports",
    "id": "0v61Q0000008OMYQA2",
    "name": "25G Intelligent Fabric Module with 8x 25G SFP28 ports",
    "sequence": "1",

```

```

    "value": "25G Intelligent Fabric Module with 8x 25G SFP28 ports",
    "status" : "Active"
  }
]

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
abbreviation	String	Name of the picklist value that appears at run time.	Small, 60.0	60.0
code	String	Unique code of the picklist value within the picklist.	Small, 60.0	60.0
displayValue	String	Picklist value that appears at run time in the order capture page. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
id	String	ID associated with the attribute picklist value.	Small, 60.0	60.0
name	String	Name of the picklist value.	Small, 60.0	60.0
sequence	String	Order in which the picklist value appears in the picklist.	Small, 60.0	60.0
status	String	Status of the attribute picklist value.	Small, 62.0	62.0
value	String	Value of the picklist item. Value must be unique within the picklist.	Small, 60.0	60.0

Bulk Unit Of Measure Info

Output representation of the details of the unit of measure records along with error details.

JSON Example

```

{
  "correlationId": "928ea35f-8a2f-4932-9f7e-ec6cdbcabdbe",
  "errorCodeToErrorMap": {
    "UNIT_OF_MEASURE_INFO_INVALID_UOM_IDS": {
      "errorCode": "UOM_INFO_API_003",
      "messageDetail": "Invalid uomId is passed. Please specify a valid uomId.",
      "messageTitle": "Invalid uomId is passed.",
      "recordIds": [
        "sample"
      ],
    },
    "source": "Unit_Of_Measure_Info_Api"
  }
},

```

```

{
  "status": {
    "errors": [],
    "httpStatusCode": "200",
    "message": " Successfully fetched UnitOfMeasure Info. "
  },
  "uomIdToUnitOfMeasureInfo": {
    "0hEU200000003M5MAI": {
      "id": "0hEU200000003M5MAI",
      "name": "Pounds",
      "roundingMethod": "Nearest",
      "scale": 1,
      "unitCode": "Pounds"
    },
    "0hEU200000003KTMAY": {
      "id": "0hEU200000003KTMAY",
      "name": "Grams",
      "roundingMethod": "Down",
      "scale": 5,
      "unitCode": "Grams"
    }
  }
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 63.0	63.0
errorCodeToErrorMap	Map<String, Unit Of Measure Error >	Error codes mapped to their details.	Small, 63.0	63.0
status	Unit Of Measure Status []	Status of the API request.	Small, 63.0	63.0
uomIdToUnitOfMeasureInfo	Map<String, Unit Of Measure Info >	Unit of measure record IDs mapped to their details.	Small, 63.0	63.0

Data Rounding

Output representation of the data rounding response.

JSON Example

```

{
  "keyToUomDataRowOutput": {
    "PRC1": {

```

```

    "key": "PRC1",
    "fieldApiNameToFieldDataOutput": {
      "MaxQuantity": {
        "fieldApiName": "MaxQuantity",
        "originalValue": 1234.5678,
        "isRoundingApplicable": true,
        "roundedValue": 1234.56,
        "unitOfMeasureId": "uomId1",
        "errorCodeToErrorMap" : []
      },
      "MinQuantity": {
        "fieldApiName": "MinQuantity",
        "originalValue": 643.1,
        "isRoundingApplicable": true,
        "roundedValue": 643.1,
        "unitOfMeasureId": "uomId1"
      }
    },
    "errorCodeToErrorMap" : []
  },
  "PRC2": {
    "key": "PRC2",
    "fieldApiNameToFieldDataOutput": {
      "MaxQuantity": {
        "fieldApiName": "MaxQuantity",
        "originalValue": 1234.5678,
        "isRoundingApplicable": true,
        "roundedValue": 1234.56,
        "unitOfMeasureId": "uomId1"
      },
      "MinQuantity": {
        "fieldApiName": "MinQuantity",
        "originalValue": 987.4628,
        "isRoundingApplicable": true,
        "errorCodeToErrorMap": {
          "message": "arithrmetic operation"
        },
        "unitOfMeasureId": "uomId1"
      }
    },
    "errorCodeToErrorMap": []
  },
  "PRC3": {
    "key": "PRC3",
    "fieldApiNameToFieldDataOutput": {
      "MaxQuantity": {
        "fieldApiName": "MaxQuantity",
        "originalValue": 1234.5678,
        "isRoundingApplicable": false,
        "unitOfMeasureId": "uomId2"
      },
      "MinQuantity": {
        "fieldApiName": "MinQuantity",
        "originalValue": 987.4628,

```

```

        "isRoundingApplicable": false,
        "unitOfMeasureId": "uomId2"
      }
    },
    "errorCodeToErrorMap": []
  }
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 63.0	63.0
errorCodeToErrorMap	Map<String, Unit Of Measure Error >	Error codes mapped to their details.	Small, 63.0	63.0
keyToDataRowOutput	Map<String, Data Row >	Data row key mapped to the associated data row.	Small, 63.0	63.0
status	Unit Of Measure Status []	Status of the API request.	Small, 63.0	63.0

Data Row

Output representation of the details of a data row.

JSON Example

```

{
  "keyToUomDataRowOutput": {
    "PRC1": {
      "key": "PRC1",
      "fieldApiNameToFieldDataOutput": {
        "MaxQuantity": {
          "fieldApiName": "MaxQuantity",
          "originalValue": 1234.5678,
          "isRoundingApplicable": true,
          "roundedValue": 1234.56,
          "unitOfMeasureId": "uomId1",
          "errorCodeToErrorMap" : []
        },
        "MinQuantity": {
          "fieldApiName": "MinQuantity",
          "originalValue": 643.1,
          "isRoundingApplicable": true,

```

```

        "roundedValue": 643.1,
        "unitOfMeasureId": "uomId1"
    }
},
"errorCodeToErrorMap" : []
},
"PRC2": {
    "key": "PRC2",
    "fieldApiNameToFieldDataOutput": {
        "MaxQuantity": {
            "fieldApiName": "MaxQuantity",
            "originalValue": 1234.5678,
            "isRoundingApplicable": true,
            "roundedValue": 1234.56,
            "unitOfMeasureId": "uomId1"
        },
        "MinQuantity": {
            "fieldApiName": "MinQuantity",
            "originalValue": 987.4628,
            "isRoundingApplicable": true,
            "errorCodeToErrorMap": {
                "message": "arithrmetic operation"
            },
            "unitOfMeasureId": "uomId1"
        }
    },
    "errorCodeToErrorMap": []
},
"PRC3": {
    "key": "PRC3",
    "fieldApiNameToFieldDataOutput": {
        "MaxQuantity": {
            "fieldApiName": "MaxQuantity",
            "originalValue": 1234.5678,
            "isRoundingApplicable": false,
            "unitOfMeasureId": "uomId2"
        },
        "MinQuantity": {
            "fieldApiName": "MinQuantity",
            "originalValue": 987.4628,
            "isRoundingApplicable": false,
            "unitOfMeasureId": "uomId2"
        }
    },
    "errorCodeToErrorMap": []
}
}
}

```


Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errorCodeToErrorMap	Map<String, Unit Of Measure Error >	Map of error codes to their details.	Small, 63.0	63.0
fieldApiNameToFieldDataOutput	Map<String, Field Data >	Map of field API name to associated field data.	Small, 63.0	63.0
key	String	Unique key of the data row.	Small, 63.0	63.0

Catalog Output

Output representation of the catalog definition.

JSON Example

```
catalogs": [
  {
    "catalogType": "Sales",
    "code": "CAT009",
    "description": "SmartBytes B2B Catalog",
    "effectiveEndDate": "31-07-2023",
    "effectiveStartDate": "24-07-2023",
    "id": "0ZS1Q000000XbZAWA0",
    "name": "SmartBytes B2B Catalog",
    "numberOfCategories": 8
  }
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
catalogType	String	The category of an entry in the catalog, which is customizable. For example, catalog types, such as sellable products, services, parts, technical services, or technical resources.	Small, 60.0	60.0
code	String	Unique ID associated with the catalog.	Small, 60.0	60.0
description	String	Description of the catalog. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
effectiveEndDate	String	Date and time from when the catalog isn't available to the end users.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
effectiveStartDate	String	Date and time from when the catalog is available to the end users.	Small, 60.0	60.0
id	String	ID of the catalog.	Small, 60.0	60.0
name	String	Name of the catalog. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
numberOfCategories	Integer	Number of categories in the catalog.	Small, 60.0	60.0

Catalogs Output

Output representation of the retrieved catalog result.

JSON Example

```
{
  "catalogs": [
    {
      "catalogType": "Sales",
      "code": "CAT009",
      "id": "0Zs1Q000000XbzAWA0",
      "name": "SmartBytes B2B Catalog",
      "numberOfCategories": 8
    }
  ],
  "correlationId": "0b7b6a30-895c-407a-91b3-e67482d339a3",
  "count": 1,
  "status": {
    "code": "200",
    "errors": [],
    "message": "Successfully fetched the catalog records."
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
catalogs	Catalog Output[]	List of the catalogs.	Small, 60.0	60.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
count	Integer	Total number of the catalog records retrieved after the query execution, wherein the <code>pageSize</code> property determines the number of records returned in every page.	Small, 60.0	60.0
status	Status	Status of the request.	Small, 60.0	60.0

Categories Output

Output representation of the retrieved categories result.

JSON Example

```
{
  "categories": [
    {
      "catalogId": "0ZS1Q000000XbZAWA0",
      "code": "B2B Category",
      "description": "Products Category",
      "hasSubCategories": true,
      "id": "0ZG1Q000000XbVGWA0",
      "name": "Unified Computing",
      "numberOfProducts": 2,
      "parentCategoryId": "0ZGT100000000q10AA",
      "sortOrder": 2,
      "subCategories": [],
      "isNavigational": false
    }
  ],
  "correlationId": "30230973-0a09-405e-b148-f085bb6dd66e",
  "status": {
    "code": "200",
    "errors": [],
    "message": "Successfully fetched the category records."
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
categories	Category Output []	List of the retrieved categories.	Small, 60.0	60.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
status	Status	Status of the request.	Small, 60.0	60.0

Category Output

Output representation of the category definition.

JSON Example

```
"categories": [
  {
    "catalogId": "0ZS1Q000000XbZAWA0",
    "code": "B2B Category",
    "description": "Products Category",
    "hasSubCategories": true,
    "id": "0ZG1Q000000XbVGWA0",
    "name": "Unified Computing",
    "numberOfProducts": 2,
    "parentCategoryId": "0ZGT100000000q10AA",
    "sortOrder": 2,
    "subCategories": [],
    "isNavigational": false
  }
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
catalogId	String	ID of the catalog that the category is associated with.	Small, 60.0	60.0
code	String	Unique code of the product category.	Small, 60.0	60.0
description	String	Description of the category. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
hasSub Categories	Boolean	Indicates whether the subcategories are available (true) or not (false).	Small, 60.0	60.0
id	String	ID of the category.	Small, 60.0	60.0
isNavigational	Boolean	Indicates whether the category node is navigational (true) or not (false).	Small, 62.0	62.0
name	String	Name of the category. If data translation is set up and specified in the org, the translated name is available.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
numberOfProducts	Integer	Number of products associated with the category.	Small, 60.0	60.0
parentCategoryId	String	ID of the parent category.	Small, 60.0	60.0
sortOrder	Integer	Display order of the product category relative to the siblings with the same parent category.	Small, 60.0	60.0
subCategories	Category Output[]	List of subcategories, if available. This property is returned with the Categories List (GET) API response.	Small, 60.0	60.0

Deep Clone Error

Output representation of the error details related to the deep clone request.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code of the error message related to the deep clone request.	Small, 63.0	63.0
errorMessage	String	Details of the error message related to the deep clone request.	Small, 63.0	63.0

Deep Clone Record Response

Output representation of the details of the cloned related records.

JSON Example

```
"createdRecordList": [
  {
    "createdRecordId": "01tSG0000030Yb3YAE",
    "entityApiName": "Product2",
    "entityLabel": "Product"
  },
  {
    "createdRecordId": "0iOSG0000002rMn2AI",
    "entityApiName": "ProductSellingModelOption",
    "entityLabel": "Product Selling Model Option"
  },
  {
    "createdRecordId": "0v7SG0000001ktdYAA",
    "entityApiName": "ProductAttributeDefinition",
    "entityLabel": "Product Attribute Definition"
  }
]
```

```
}  
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
created RecordId	String	ID of the created related record.	Small, 63.0	63.0
entityApiName	String	API name of the created object.	Small, 63.0	63.0
entityLabel	String	Label of the created object.	Small, 63.0	63.0

Deep Clone Response

Output representation of the details of the cloned record.

JSON Example

```
{  
  "createdRecordList": [  
    {  
      "createdRecordId": "01tSG0000030Yb3YAE",  
      "entityApiName": "Product2",  
      "entityLabel": "Product"  
    },  
    {  
      "createdRecordId": "0iOSG0000002rMn2AI",  
      "entityApiName": "ProductSellingModelOption",  
      "entityLabel": "Product Selling Model Option"  
    },  
    {  
      "createdRecordId": "0v7SG0000001ktdYAA",  
      "entityApiName": "ProductAttributeDefinition",  
      "entityLabel": "Product Attribute Definition"  
    }  
  ],  
  "createdRootRecordId": "01tSG0000030Yb3YAE",  
  "errorList": [],  
  "isSuccessful": true  
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
created RecordList	Deep Clone Record Response[]	List of cloned related records of the main record.	Small, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
createdRootRecordId	String	ID of the created root record.	Small, 63.0	63.0
errorList	Deep Clone Error[]	Details of errors, if any.	Small, 63.0	63.0
errorMessage	String	Error message if the API request fails.	Small, 63.0	63.0
isSuccessful	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0

Error Output

Output representation of the error details.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code of the error message.	Small, 60.0	60.0
messageDetail	String	Details of the error message.	Small, 60.0	60.0
messageTitle	String	Title of the error message.	Small, 60.0	60.0
nodeProductId	String	ID of the product node.	Small, 61.0	61.0
recordId	String	ID of the record.	Small, 60.0	60.0
recordName	String	Name of the record.	Small, 60.0	60.0
relatedObjectNodes	Invalid Related Object Node[]	List of related object nodes with errors.	Small, 62.0	62.0
source	String	Name of the API that's the source of the error.	Small, 60.0	60.0

Facet Value

Output representation of the facet values found in the search result.

JSON Example

```
"values": [
  {
    "displayName": "Simple",
    "nameOrId": "Simple",
    "productCount": 9
  }
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
displayName	String	Display name of the facet value.	Small, 63.0	63.0
nameOrId	String	Facet value name or ID. Reserved for internal use.	Small, 63.0	63.0
productCount		Number of products in the search result that match the facet value.	Small, 63.0	63.0

Field Data

Output representation of the field data.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode ToErrorMap	Map<String, Unit Of Measure Error >	Error codes mapped to their details.	Small, 63.0	63.0
fieldApiName	String	Unique API Name of the field.	Small, 63.0	63.0
isRounding Applicable	Boolean	Indicates whether data rounding is applicable to the decimal (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0
originalValue	String	Original value of the field.	Small, 63.0	63.0
roundedValue	String	Rounded field value that corresponds to the original value, if data rounding is applicable.	Small, 63.0	63.0
unitOf MeasureId	String	ID of the unit of measure record that's associated to the field.	Small, 63.0	63.0

Fields Info

Output representation of the metadata fields in an object.

JSON Example

```
"fields": [
  {
    "dataType": "text",
    "isFacetableConfigurable": true,
    "isSearchableConfigurable": false,
    "label": "Product Name",
    "name": "Name",
    "type": "Standard"
  },
  {
```



```

        "dataType": "multilinetext",
        "isFacetableConfigurable": false,
        "isSearchableConfigurable": true,
        "label": "Product Description",
        "name": "Description",
        "type": "Standard"
    }
]

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
customFieldId	String	ID of the custom field.	Small, 62.0	62.0
dataType	String	Type of data.	Small, 62.0	62.0
is Configurable	Boolean	Reserved for internal use.	Small, 62.0	62.0
isFacetable Configurable	Boolean	Indicates whether the field is facetable (true) or not (false).	Small, 63.0	Small, 63.0
isSearchable Configurable	Boolean	Indicates whether the field is searchable (true) or not (false).	Small, 63.0	Small, 63.0
label	String	Label of the object field.	Small, 62.0	62.0
name	String	Name of the object field.	Small, 62.0	62.0
type	String	Type of the object field.	Small, 62.0	62.0

Index Configuration Collection

Output representation of the collection of index configuration details.

JSON Example

```

{
  "correlationId": "ad960cb6-392d-4d11-bac3-3824baedf67e",
  "errors": [],
  "indexConfigurations": [
    {
      "isSearchable": true,
      "name": "Name",
      "type": "Standard"
    }
  ],
  "metadata": {
    "objectInfos": [
      {
        "fields": [

```

```

    {
      "dataType": "text",
      "isFacetableConfigurable": true,
      "isSearchableConfigurable": false,
      "label": "Product Name",
      "name": "Name",
      "type": "Standard"
    },
    {
      "dataType": "multilinetext",
      "isFacetableConfigurable": false,
      "isSearchableConfigurable": true,
      "label": "Product Description",
      "name": "Description",
      "type": "Standard"
    }
  ],
  "name": "Product2"
},
{
  "fields": [
    {
      "dataType": "stringplusclob",
      "label": "Description",
      "name": "Description",
      "type": "ProductAttributeDefinitionStandard"
    },
    {
      "dataType": "text",
      "label": "Name",
      "name": "Name",
      "type": "ProductAttributeDefinitionStandard"
    }
  ],
  "name": "ProductAttributeDefinition"
}
]
},
"statusCode": "200"
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 62.0	62.0
errors	Error Output[]	List of errors, if any.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
index Configurations	Index Configuration Field[]	Details of the index-configured fields.	Small, 62.0	62.0
metadata	Metadata[]	Details of the metadata for objects.	Small, 62.0	62.0
statusCode	String	Code that indicates the status of the request.	Small, 62.0	62.0

Index Configuration Field

Output representation of the details of the index-configured field.

JSON Example

```
"indexConfigurations": [  
  {  
    "attributeDefinitionId": "0tjT1000000002bIAA",  
    "name": "Color",  
    "type": "ProductDynamicAttribute",  
    "isSearchable": true  
  },  
  {  
    "attributeFieldId": "00Nxx000001FwnABII",  
    "name": "Message__c",  
    "type": "Custom",  
    "isSearchable": true  
  },  
  {  
    "name": "Code",  
    "type": "Standard",  
    "isSearchable": true  
  },  
  {  
    "facetDisplayRank": 1,  
    "isFacetable": false,  
    "isSearchable": true,  
    "name": "Family",  
    "type": "Standard"  
  }  
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
attribute DefinitionId	String	ID of the attribute definition.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
attributeFieldId	String	ID of the attribute field.	Small, 62.0	62.0
facetDisplayRank	Integer	Sort order for displaying the facets at run time.	Small, 63.0	63.0
isFacetable	Boolean	Indicates whether the field is facetable (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0
isSearchable	Boolean	Indicates whether the index-configured field is searchable (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
name	String	Name of the index-configured field.	Small, 62.0	62.0
type	String	Type of the index-configured field.	Small, 62.0	62.0

Index Configurations Update

Output representation of the updated index configuration.

JSON Example

```
{
  "correlationId": "8545b5aa-f3e6-429a-8f21-9cc4ce50b1d7",
  "errors": [],
  "indexConfigurations": [
    {
      "attributeDefinitionId": "0tjT1000000002bIAA",
      "name": "Color",
      "type": "ProductDynamicAttribute",
      "isSearchable": true
    },
    {
      "attributeFieldId": "00Nxx000001FwnABII",
      "name": "Message__c",
      "type": "Custom",
      "isSearchable": true
    },
    {
      "name": "Code",
      "type": "Standard",
      "isSearchable": true
    },
    {
      "facetDisplayRank": 1,
      "isFacetable": false,
      "isSearchable": true,
      "name": "Family",
      "type": "Standard"
    }
  ]
}
```

```
"statusCode": "200"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 62.0	62.0
errors	Error Output[]	List of errors, if any.	Small, 62.0	62.0
index Configurations	Index Configuration Field[]	Details of the index-configured fields.	Small, 62.0	62.0
statusCode	String	Code that indicates the status of the request.	Small, 62.0	62.0

Index Error

Output representation of the error details related to an index.

JSON Example

```
"indexErrorDetails": {
  "errorFileId": "069xx0000004C92AAE",
  "indexCreatedDate": "2024-10-03T05:24:18.000Z",
  "indexErrorsCount": 1,
  "indexLastUpdatedDate": "2024-10-03T05:27:00.000Z",
  "itemLevelErrorsCount": 1
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errorFileId	String	ID of the exported error file that contains the index errors.	Small, 63.0	63.0
indexCreated Date	String	Date on which the index was created.	Small, 63.0	63.0
index ErrorsCount	Integer	Number of index-level errors.	Small, 63.0	63.0
indexLast UpdatedDate	String	Date on which the index was last updated.	Small, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
itemLevelErrorsCount	Integer	Number of item-level errors.	Small, 63.0	63.0

Index Setting

Output representation of the retrieved index settings.

JSON Example

```
{
  "errors": [],
  "metadata": {
    "activeLanguages": ["en_US", "ja", "es", "nl_NL"]
  },
  "setting": {
    "defaultLanguage": "en_US",
    "id": "1JySG0000000GUb0AM",
    "supportedLanguages": ["en_US", "ja", "es", "nl_NL"]
  },
  "statusCode": "200"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Output[]	List of errors, if any.	Small, 63.0	63.0
metadata	Setting Metadata[]	Metadata associated with the setting.	Small, 63.0	63.0
setting	Setting[]	Setting that's used in indexing and maintained for an org.	Small, 63.0	63.0
statusCode	String	Code that indicates the status of the request.	Small, 63.0	63.0

Index Setting Update

Output representation of the details of the updated index setting.

JSON Example

```
{
  "setting" : {
    "supportedLanguages" : ["en_US", "ja", "es", "nl_NL"],
    "id": "1JySG0000000GUb0AM",
    "defaultLanguage" : "en_US"
  },
}
```

```
"errors" : [],
"statusCode" : "200"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Output[]	List of errors, if any.	Small, 63.0	63.0
setting	Setting[]	Setting that's used in indexing and maintained for an org.	Small, 63.0	63.0
statusCode	String	Code that indicates the status of the API request.	Small, 63.0	63.0

Invalid Related Object Node

Output representation of the invalid related object node with details of errors.

JSON Example

```
To add
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errorMessages	String[]	List of error messages.	Small, 62.0	62.0
relatedObject APIName	String	API name of the related object.	Small, 62.0	62.0

Metadata

Output representation of the metadata details for objects.

JSON Example

```
"metadata": {
  "objectInfos": [
    {
      "fields": [
        {
          "dataType": "text",
          "isFacetableConfigurable": true,
          "isSearchableConfigurable": false,
          "label": "Product Name",

```

```
      "name": "Name",
      "type": "Standard"
    },
    {
      "dataType": "multilinetext",
      "isFacetableConfigurable": false,
      "isSearchableConfigurable": true,
      "label": "Product Description",
      "name": "Description",
      "type": "Standard"
    }
  ],
  "name": "Product2"
},
{
  "fields": [
    {
      "dataType": "stringplusclob",
      "label": "Description",
      "name": "Description",
      "type": "ProductAttributeDefinitionStandard"
    },
    {
      "dataType": "text",
      "label": "Name",
      "name": "Name",
      "type": "ProductAttributeDefinitionStandard"
    }
  ],
  "name": "ProductAttributeDefinition"
}
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
objectInfos	Object Info []	Metadata details for objects.	Small, 62.0	62.0

Object Info

Output representation of the object details along with its fields.

JSON Example

```
"objectInfos": [
  {
    "fields": [
      {
        "dataType": "text",
```



```
      "isFacetableConfigurable": true,
      "isSearchableConfigurable": false,
      "label": "Product Name",
      "name": "Name",
      "type": "Standard"
    },
    {
      "dataType": "multilinetext",
      "isFacetableConfigurable": false,
      "isSearchableConfigurable": true,
      "label": "Product Description",
      "name": "Description",
      "type": "Standard"
    }
  ],
  "name": "Product2"
},
{
  "fields": [
    {
      "dataType": "stringplusclob",
      "label": "Description",
      "name": "Description",
      "type": "ProductAttributeDefinitionStandard"
    },
    {
      "dataType": "text",
      "label": "Name",
      "name": "Name",
      "type": "ProductAttributeDefinitionStandard"
    }
  ],
  "name": "ProductAttributeDefinition"
}
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
fields	Fields Info[]	Fields of the object.	Small, 62.0	62.0
name	String	Name of the object.	Small, 62.0	62.0

Product Catalog Management Error

Output representation that contains error details, including error codes and messages.

JSON Example

```
{
  "errorCode": "INSUFFICIENT_ACCESS",
  "message": "Insufficient access rights on cross-reference ID"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Error code that identifies the type of error.	Small, 66.0	66.0
message	String	Message that explains the reason for the error.	Small, 66.0	66.0

Product Classification

Output representation of the product classification details.

JSON Example

```
{
  "productClassification": {
    "id": "11BT10000004C9SMAU",
    "name": "class",
    "code": "code",
    "parentProductClassificationId": "11BDU0000004JXq2AM",
    "status": "Active"
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Code of the product classification record.	Small, 61.0	61.0
id	String	ID of the product classification record.	Small, 60.0	60.0
name	String	Name of the product classification record. If data translation is set up and specified in the org, the translated description is available.	Small, 61.0	61.0
parentProduct Classification Id	String	ID of the parent product classification.	Small, 65.0	65.0
status	String	Status of the product classification record.	Small, 61.0	61.0

Product Classification Details

Output representation that contains the details of a single product classification, including its attributes and categories.

JSON Example

```
{
  "id": "dummyId",
  "name": "Dummy Product Classification",
  "code": "DUMMY_CODE",
  "attributeCategories": [{
    "attributes": [
      {
        "attributeNameOverride": "Dummy_Attribute__c",
        "code": "ATTR_CODE_1",
        "dataType": "String",
        "defaultValue": "default",
        "description": "A dummy attribute for demonstration.",
        "developerName": "Dummy_Attribute",
        "displayType": "Text",
        "helpText": "Help text for dummy attribute",
        "id": "attrId1",
        "isConfigurable": true,
        "isHidden": false,
        "isPriceImpacting": false,
        "isReadOnly": false,
        "isRequired": false,
        "isValueCloneable": true,
        "label": "Dummy Attribute Label",
        "maximumCharacterCount": 100,
        "maximumValue": "100",
        "minimumCharacterCount": 1,
        "minimumValue": "1",
        "name": "Dummy Attribute",
        "sequence": 1,
        "status": "Active",
        "stepValue": "1"
      }
    ],
    "code": "GENERAL",
    "id": "catId1",
    "name": "General"
  }],
  "attributes": [{
    "attributeNameOverride": "Dummy_Attribute__c",
    "code": "ATTR_CODE_1",
    "dataType": "String",
    "defaultValue": "default",
    "description": "A dummy attribute for demonstration.",
    "developerName": "Dummy_Attribute",
    "displayType": "Text",
    "helpText": "Help text for dummy attribute",
    "id": "attrId1",
    "isConfigurable": true,
```

```
        "isHidden": false,
        "isPriceImpacting": false,
        "isReadOnly": false,
        "isRequired": false,
        "isValueCloneable": true,
        "label": "Dummy Attribute Label",
        "maximumCharacterCount": 100,
        "maximumValue": "100",
        "minimumCharacterCount": 1,
        "minimumValue": "1",
        "name": "Dummy Attribute",
        "sequence": 1,
        "status": "Active",
        "stepValue": "1"
    }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
attributeCategories	Product Classification Attribute Category[]	List of attribute categories applicable to the product classification.	Small, 66.0	66.0
attributes	Product Classification Attribute Definition[]	List of uncategorized attributes applicable to the product classification.	Small, 66.0	66.0
code	String	Code of the product classification.	Small, 66.0	66.0
id	String	ID of the product classification.	Small, 66.0	66.0
name	String	Name of the product classification.	Small, 66.0	66.0

Product Classification Details Collection

Output representation that contains a collection of product classification details along with any processing errors.

JSON Example

```
{
  "success": false,
  "errors": [
    {
      "errorCode": "INSUFFICIENT_ACCESS",
      "message": "Insufficient access rights on cross-reference ID"
    }
  ],
  "productClassifications": [
    {
```

```

    "id": "dummyId",
    "name": "Dummy Product Classification",
    "code": "DUMMY_CODE",
    "attributeCategories": [
      {
        "attributes": [
          {
            "attributeNameOverride": "Dummy_Attribute__c",
            "code": "ATTR_CODE_1",
            "dataType": "String",
            "defaultValue": "default",
            "description": "A dummy attribute for demonstration.",
            "developerName": "Dummy_Attribute",
            "displayType": "Text",
            "helpText": "Help text for dummy attribute",
            "id": "attrId1",
            "isConfigurable": true,
            "isHidden": false,
            "isPriceImpacting": false,
            "isReadOnly": false,
            "isRequired": false,
            "isValueCloneable": true,
            "label": "Dummy Attribute Label",
            "maximumCharacterCount": 100,
            "maximumValue": "100",
            "minimumCharacterCount": 1,
            "minimumValue": "1",
            "name": "Dummy Attribute",
            "sequence": 1,
            "status": "Active",
            "stepValue": "1"
          }
        ],
        "code": "GENERAL",
        "id": "catId1",
        "name": "General"
      }
    ],
    "attributes": [
      {
        "attributeNameOverride": "Dummy_Attribute__c",
        "code": "ATTR_CODE_1",
        "dataType": "String",
        "defaultValue": "default",
        "description": "A dummy attribute for demonstration.",
        "developerName": "Dummy_Attribute",
        "displayType": "Text",
        "helpText": "Help text for dummy attribute",
        "id": "attrId1",
        "isConfigurable": true,
        "isHidden": false,
        "isPriceImpacting": false,
        "isReadOnly": false,
        "isRequired": false,

```

```
        "isValueCloneable": true,
        "label": "Dummy Attribute Label",
        "maximumCharacterCount": 100,
        "maximumValue": "100",
        "minimumCharacterCount": 1,
        "minimumValue": "1",
        "name": "Dummy Attribute",
        "sequence": 1,
        "status": "Active",
        "stepValue": "1"
      }
    ]
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Product Catalog Management Error[]	List of errors encountered during the processing of the API request.	Small, 66.0	66.0
productClassifications	Product Classification Details on page 193[]	List of product classification detail records that match the requested product classification IDs.	Small, 66.0	66.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or has failed (<code>false</code>).	Small, 66.0	66.0

Product Classification List Collection

Output representation that contains a collection of product classification records along with any processing errors.

JSON Example

```
{
  "success": true,
  "errors": [],
  "productClassifications": [
    {
      "id": "11BT10000004C9SMAU",
      "name": "Mobile Devices",
      "code": "MOB_DEV",
      "parentProductClassificationId": "11BDU0000004JXq2AM",
      "status": "Active"
    },
    {
      "id": "11BT10000004C9TMAU",
      "name": "Mobile Accessories",
      "code": "MOB_ACC",

```

```

        "status": "Active"
      }
    ]
  }
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Product Catalog Management Error []	List of errors encountered during the processing of the API request.	Small, 67.0	67.0
productClassifications	Product Classification []	List of product classification records that match the request query.	Small, 67.0	67.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or has failed (<code>false</code>).	Small, 67.0	67.0

Product Component Group

Output representation of the product component group.

JSON Example

```

"productComponentGroups": [
  {
    "childGroups": [
      {
        "childGroups": [],
        "components": [
          {
            "additionalFields": {},
            "attributeCategory": [],
            "attributes": [],
            "catalogs": [],
            "categories": [],
            "childProducts": [],
            "id": "01txx0000006i2aAAA",
            "isActive": true,
            "isAssetizable": true,
            "isSoldOnlyWithOtherProds": true,
            "name": "GenWatt Diesel 1000kW",
            "nodeType": "simpleProduct",
            "productCode": "GC1060",
            "productComponentGroups": [],
            "productRelatedComponent": {
              "childProductId": "01txx0000006i2aAAA",
              "doesBundlePriceIncludeChild": true,
              "id": "0dSxx00000001P7EAI",
              "isComponentRequired": false,

```

```

    "isDefaultComponent":true,
    "isExcluded":false,
    "isQuantityEditable":false,
    "parentProductId":"01txx0000006iC8AAI",
    "productRelationshipTypeId":"0yoxx000000001dAAA",
    "quantity":1,
    "quantityScaleMethod":"Proportional"
  },
  "productSellingModelOptions":[]
},
{
  "additionalFields":{},
  "attributeCategory":[],
  "attributes":[],
  "catalogs":[],
  "categories":[],
  "childProducts":[],
  "id":"01txx0000006i2TAAQ",
  "isActive":true,
  "isAssetizable":true,
  "isSoldOnlyWithOtherProds":true,
  "name":"GenWatt Diesel 10kW",
  "nodeType":"simpleProduct",
  "productCode":"GC1020",
  "productComponentGroups":[],
  "productRelatedComponent":{
    "childProductId":"01txx0000006i2TAAQ",
    "doesBundlePriceIncludeChild":true,
    "id":"0dSxx00000001P8EAI",
    "isComponentRequired":false,
    "isDefaultComponent":true,
    "isExcluded":false,
    "isQuantityEditable":false,
    "parentProductId":"01txx0000006iC8AAI",
    "productRelationshipTypeId":"0yoxx000000001dAAA",
    "quantity":1,"quantityScaleMethod":"Proportional"
  },
  "productSellingModelOptions":[]
},
{
  "additionalFields":{},
  "attributeCategory":[],
  "attributes":[],
  "catalogs":[],
  "categories":[],
  "childProducts":[],
  "id":"01txx0000006i2SAAQ",
  "isActive":true,
  "isAssetizable":true,
  "isSoldOnlyWithOtherProds":true,
  "name":"GenWatt Diesel 200kW",
  "nodeType":"simpleProduct",
  "productCode":"GC1040",
  "productComponentGroups":[],

```



```

    "productRelatedComponent":
    {
      "childProductId": "01txx0000006i2SAAQ",
      "doesBundlePriceIncludeChild": true,
      "id": "0dSxx00000001P9EAI",
      "isComponentRequired": false,
      "isDefaultComponent": true,
      "isExcluded": false,
      "isQuantityEditable": false,
      "parentProductId": "01txx0000006iC8AAI",
      "productRelationshipTypeId": "0yoxx000000001dAAA",
      "quantity": 1,
      "quantityScaleMethod": "Proportional"
    },
    "productSellingModelOptions": []
  },
  "id": "0y7xx000000015lAAA",
  "isExcluded": false,
  "name": "G1.1",
  "parentGroupId": "0y7xx0000000149AAA",
  "parentProductId": "01txx0000006iC8AAI"
}
],
"components": [],
"id": "0y7xx0000000149AAA",
"isExcluded": false,
"name": "G1",
"parentProductId": "01txx0000006iC8AAI"
}
]

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Unique code of the product component group, which is used only during design time.	Small, 60.0	60.0
components	Product[]	List of the product details.	Small, 60.0	60.0
childGroups	Product Component Group[]	List of child product components groups.	Small, 62.0	62.0
description	String	Description of the product component group.	Small, 60.0	60.0
id	String	ID of the record.	Small, 60.0	60.0
isExcluded	Boolean	Indicates whether the product component group is excluded from the product bundle	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
		for selection in the run time (<code>true</code>) or not (<code>false</code>).		
maxBundleComponents	Integer	Maximum number of product components that can be added to a group.	Small, 60.0	60.0
minBundleComponents	Integer	Minimum number of product components that can be added to a group.	Small, 60.0	60.0
name	String	Name of the record. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
parentProductId	String	ID associated with the parent product record.	Small, 60.0	60.0
parentGroupId	String	ID of the parent group record.	Small, 62.0	62.0
sequence	Integer	Order in which the groups are listed in the bundle.	Small, 60.0	60.0

Product

Output representation of the product definition.

JSON Example

This example shows a sample of the Product List (POST) API response.

```
{
  "products": [
    {
      "additionalFields": {
        "code__c": "SWX445"
      },
      "attributeCategory": [
        {
          "attributes": [
            {
              "additionalFields": {
                "scope": "Order"
              },
              "attributeNameOverride": "AD Text",
              "code": "AD02",
              "dataType": "Text",
              "displayType": "Text",
              "minimumCharacterCount": "1",
              "maximumCharacterCount": "20",
              "defaultValue": "AD Text DV",
              "description": "AD Text Desc",
              "helpText": "AD Text DHT",

```

```

        "id": "0tjT1000000002bIAA",
        "isHidden": false,
        "isPriceImpacting": true,
        "isReadOnly": true,
        "isRequired": true,
        "label": "AD Text Label",
        "name": "AD Text",
        "sequence": 1,
        "status": "Active",
        "valueDescription": "AD Text VD"
    }
],
"code": "AC001",
"id": "0v3T1000000000BIAQ",
"name": "build and make"
}
],
"attributes": [
{
    "additionalFields": {
        "scope": "SWX445"
    },
    "attributeNameOverride": "AD Picklist",
    "code": "AD001",
    "dataType": "Picklist",
    "defaultValue": "Red",
    "description": "AD Picklist Description",
    "helpText": "AD Picklist DHT",
    "id": "0tjT1000000002WIAQ",
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "AD Picklist Label",
    "name": "AD Picklist",
    "picklist": {
        "dataType": "Text",
        "description": "APV Description",
        "id": "0v5T10000000001IAA",
        "name": "Color",
        "values": [
            {
                "abbreviation": "Blue Abb",
                "code": "APV03",
                "displayValue": "Blue DV",
                "id": "0v6T10000000006IAA",
                "name": "Blue",
                "sequence": "3",
                "value": "Blue b",
                "status": "Active"
            },
            {
                "abbreviation": "Red Abb",
                "code": "APV04",

```

```

        "displayValue": "Red",
        "id": "0v6T10000000001IAA",
        "name": "Red",
        "sequence": "4",
        "value": "Red",
        "status": "Active"
    },
    {
        "abbreviation": "One Abb",
        "code": "APV02",
        "displayValue": "One DV",
        "id": "0v6T1000000000uIAA",
        "name": "One",
        "sequence": "2",
        "value": "One 1",
        "status": "Active"
    },
    {
        "abbreviation": "Red Abbreviation",
        "code": "APV01",
        "displayValue": "Red Display Value",
        "id": "0v6T10000000001OIAQ",
        "name": "Red",
        "sequence": "1",
        "value": "red12",
        "status": "Active"
    }
]
},
"sequence": 1,
"status": "Active",
"valueDescription": "AD Picklist VD"
}
],
"categories": [],
"childProducts": [
    {
        "attributeCategory": [],
        "attributes": [],
        "categories": [],
        "childProducts": [],
        "configureDuringSale": "NotAllowed",
        "id": "01tZ70000000AJkaIAG",
        "isActive": false,
        "isAssetizable": true,
        "isSoldOnlyWithOtherProds": false,
        "name": "Earphones",
        "nodeType": "bundleProduct",
        "productComponentGroups": [],
        "productRelatedComponent": {
            "childProductId": "01tZ70000000AJkaIAG",
            "doesBundlePriceIncludeChild": true,
            "id": "0dSZ700000000cdMAA",
            "isComponentRequired": false,

```

```

        "isDefaultComponent": true,
        "isExcluded": false,
        "isQuantityEditable": false,
        "parentProductId": "01tZ70000000AJXOIA4",
        "productRelationshipTypeId": "0yoZ700000000kPIAQ",
        "quantity": 1,
        "quantityScaleMethod": "Proportional"
    },
    "productSellingModelOptions": []
}
],
"description": "Keep your organization connected with seamless collaboration across distributed teams. No matter where employees are located, organizations are seeking stronger employee engagement and customer experiences to enable more productivity and greater business agility. More effective collaboration helps organizations work smarter.",

"displayUrl": "https://dispatch.m.io/wp-content/uploads/2023/01/History-of-Webex.png",

"id": "01t1Q000008CD2eQAG",
"isActive": true,
"isAssetizable": true,
"isSoldOnlyWithOtherProds": false,
"name": "SmartBytes Collaboration Suite",
"nodeType": "bundleProduct",
"productClassification": {
    "id": "11B1Q0000008OMGUA2"
},
"productCode": "P0143",
"productComponentGroups": [
    {
        "components": [
            {
                "attributeCategory": [],
                "attributes": [],
                "categories": [],
                "childProducts": [],
                "id": "01tZ70000000AJXTIA4",
                "isActive": false,
                "isAssetizable": true,
                "isSoldOnlyWithOtherProds": false,
                "name": "Charger",
                "nodeType": "bundleProduct",
                "productComponentGroups": [],
                "productRelatedComponent": {
                    "childProductId": "01tZ70000000AJXTIA4",
                    "doesBundlePriceIncludeChild": true,
                    "id": "0dSZ700000000YLMAY",
                    "isComponentRequired": false,
                    "isDefaultComponent": true,
                    "isExcluded": false,
                    "isQuantityEditable": false,
                    "parentProductId": "01tZ70000000AJXOIA4",
                    "productRelationshipTypeId": "0yoZ700000000kPIAQ",
                    "quantity": 1,

```

```

        "quantityScaleMethod": "Proportional"
      },
      "productSellingModelOptions": []
    }
  ],
  "id": "0y7Z700000000TtIAI",
  "isExcluded": false,
  "name": "Box",
  "parentProductId": "01tZ70000000AJXOIA4"
}
],
"productSellingModelOptions": [
  {
    "id": "0iO1Q0000008OkeUAE",
    "productId": "01t1Q0000008CD2eQAG",
    "productSellingModel": {
      "id": "0jP1Q000000CaVFUA0",
      "isDefault": true,
      "name": "One Time",
      "sellingModelType": "OneTime",
      "status": "Active"
    }
  }
],
"productSpecificationType": {
  "name": "None"
}
}
],
"status": {
  "code": "200",
  "correlationId": "fd158d80-d73c-4a1f-a009-9225db804d70",
  "errors": [],
  "message": "Successfully fetched product records."
}
}

```

This example shows a sample of the Bulk Product Details (POST) API response.

```

{
  "products": [
    {
      "additionalFields": {
        "code__c": "SWX445"
      },
      "attributeCategory": [
        {
          "attributes": [
            {
              "additionalFields": {
                "scope": "Order"
              },
              "attributeNameOverride": "AD Text",
              "code": "AD02",
              "dataType": "Text",

```

```

        "displayType": "Text",
        "minimumCharacterCount": "1",
        "maximumCharacterCount": "20",
        "defaultValue": "AD Text DV",
        "description": "AD Text Desc",
        "helpText": "AD Text DHT",
        "id": "0tjT1000000002bIAA",
        "isHidden": false,
        "isPriceImpacting": true,
        "isReadOnly": true,
        "isRequired": true,
        "label": "AD Text Label",
        "name": "AD Text",
        "sequence": 1,
        "status": "Active",
        "valueDescription": "AD Text VD"
    }
],
"code": "AC001",
"id": "0v3T1000000000BIAQ",
"name": "build and make"
}
],
"attributes": [
{
    "additionalFields": {
        "scope": "SWX445"
    },
    "attributeNameOverride": "AD Picklist",
    "code": "AD001",
    "dataType": "Picklist",
    "defaultValue": "Red",
    "description": "AD Picklist Description",
    "helpText": "AD Picklist DHT",
    "id": "0tjT1000000002WIAQ",
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "AD Picklist Label",
    "name": "AD Picklist",
    "picklist": {
        "dataType": "Text",
        "description": "APV Description",
        "id": "0v5T10000000001IAA",
        "name": "Color",
        "values": [
            {
                "abbreviation": "Blue Abb",
                "code": "APV03",
                "displayValue": "Blue DV",
                "id": "0v6T10000000006IAA",
                "name": "Blue",
                "sequence": "3",

```

```

        "value": "Blue b",
        "status": "Active"
    },
    {
        "abbreviation": "Red Abb",
        "code": "APV04",
        "displayValue": "Red",
        "id": "0v6T10000000001IAA",
        "name": "Red",
        "sequence": "4",
        "value": "Red",
        "status": "Active"
    },
    {
        "abbreviation": "One Abb",
        "code": "APV02",
        "displayValue": "One DV",
        "id": "0v6T1000000000uIAA",
        "name": "One",
        "sequence": "2",
        "value": "One 1",
        "status": "Active"
    },
    {
        "abbreviation": "Red Abbreviation",
        "code": "APV01",
        "displayValue": "Red Display Value",
        "id": "0v6T10000000010IAQ",
        "name": "Red",
        "sequence": "1",
        "value": "red12",
        "status": "Active"
    }
]
},
"sequence": 1,
"status": "Active",
"valueDescription": "AD Picklist VD"
}
],
"categories": [],
"childProducts": [
    {
        "attributeCategory": [],
        "attributes": [],
        "categories": [],
        "childProducts": [],
        "configureDuringSale": "NotAllowed",
        "id": "01tZ7000000AJkaIAG",
        "isActive": false,
        "isAssetizable": true,
        "isSoldOnlyWithOtherProds": false,
        "name": "Earphones",
        "nodeType": "bundleProduct",

```



```

    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01tZ7000000AJkaIAG",
      "doesBundlePriceIncludeChild": true,
      "id": "0dsZ700000000cdMAA",
      "isComponentRequired": false,
      "isDefaultComponent": true,
      "isExcluded": false,
      "isQuantityEditable": false,
      "parentProductId": "01tZ7000000AJXOIA4",
      "productRelationshipTypeId": "0yoZ700000000kPIAQ",
      "quantity": 1,
      "quantityScaleMethod": "Proportional"
    },
    "productSellingModelOptions": []
  },
  ],
  "description": "Keep your organization connected with seamless collaboration across distributed teams. No matter where employees are located, organizations are seeking stronger employee engagement and customer experiences to enable more productivity and greater business agility. More effective collaboration helps organizations work smarter.",
  "displayUrl": "https://dispatch.m.io/wp-content/uploads/2023/01/History-of-Webex.png",
  "id": "01t1Q000008CD2eQAG",
  "isActive": true,
  "isAssetizable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "SmartBytes Collaboration Suite",
  "nodeType": "bundleProduct",
  "productClassification": {
    "id": "11B1Q0000008OMGUA2",
    "name": "class",
    "code": "code",
    "status": "Active"
  },
  "productCode": "P0143",
  "productComponentGroups": [
    {
      "components": [
        {
          "attributeCategory": [],
          "attributes": [],
          "categories": [],
          "childProducts": [],
          "id": "01tZ7000000AJXTIA4",
          "isActive": false,
          "isAssetizable": true,
          "isSoldOnlyWithOtherProds": false,
          "name": "Charger",
          "nodeType": "bundleProduct",
          "productComponentGroups": [],
          "productRelatedComponent": {
            "childProductId": "01tZ7000000AJXTIA4",

```

```

        "doesBundlePriceIncludeChild": true,
        "id": "0dSZ700000000YLMAY",
        "isComponentRequired": false,
        "isDefaultComponent": true,
        "isExcluded": false,
        "isQuantityEditable": false,
        "parentProductId": "01tZ70000000AJXOIA4",
        "productRelationshipTypeId": "0yoZ700000000kPIAQ",
        "quantity": 1,
        "quantityScaleMethod": "Proportional"
    },
    "productSellingModelOptions": []
}
],
"id": "0y7Z700000000TtIAI",
"isExcluded": false,
"name": "Box",
"parentProductId": "01tZ70000000AJXOIA4"
}
],
"productSellingModelOptions": [
{
    "id": "0iO1Q00000008OkeUAE",
    "productId": "01t1Q00000008CD2eQAG",
    "productSellingModel": {
        "id": "0jPlQ0000000CaVFUA0",
        "isDefault": true,
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
    }
}
],
"productSpecificationType": {
    "name": "None"
}
}
],
"status": {
    "code": "200",
    "correlationId": "fd158d80-d73c-4a1f-a009-9225db804d70",
    "errors": [],
    "message": "Successfully fetched product records."
}
}

```

This example shows a sample of the Product By ID (GET) API response.

```

{
  "products": [
    {
      "attributeCategory": [
        {
          "attributes": [
            {

```

```

        "attributeNameOverride": "AD Text",
        "code": "AD02",
        "dataType": "Text",
        "displayType": "Text",
        "minimumCharacterCount": "1",
        "maximumCharacterCount": "20",
        "defaultValue": "AD Text DV",
        "description": "AD Text Desc",
        "helpText": "AD Text DHT",
        "id": "0tjT1000000002bIAA",
        "isHidden": false,
        "isPriceImpacting": true,
        "isReadOnly": true,
        "isRequired": true,
        "label": "AD Text Label",
        "name": "AD Text",
        "sequence": 1,
        "status": "Active",
        "valueDescription": "AD Text VD"
    }
],
"code": "AC001",
"id": "0v3T1000000000BIAQ",
"name": "build and make"
}
],
"attributes": [
{
    "attributeNameOverride": "AD Picklist",
    "code": "AD001",
    "dataType": "Picklist",
    "defaultValue": "Red",
    "description": "AD Picklist Description",
    "helpText": "AD Picklist DHT",
    "id": "0tjT1000000002WIAQ",
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "AD Picklist Label",
    "name": "AD Picklist",
    "picklist": {
        "dataType": "Text",
        "description": "APV Description",
        "id": "0v5T10000000001IAA",
        "name": "Color",
        "values": [
            {
                "abbreviation": "Blue Abb",
                "code": "APV03",
                "displayValue": "Blue DV",
                "id": "0v6T10000000006IAA",
                "name": "Blue",
                "sequence": "3",

```

```

        "value": "Blue b",
        "status": "Active"
    },
    {
        "abbreviation": "Red Abb",
        "code": "APV04",
        "displayValue": "Red",
        "id": "0v6T10000000001IAA",
        "name": "Red",
        "sequence": "4",
        "value": "Red",
        "status": "Active"
    },
    {
        "abbreviation": "One Abb",
        "code": "APV02",
        "displayValue": "One DV",
        "id": "0v6T10000000000uIAA",
        "name": "One",
        "sequence": "2",
        "value": "One 1",
        "status": "Active"
    },
    {
        "abbreviation": "Red Abbreviation",
        "code": "APV01",
        "displayValue": "Red Display Value",
        "id": "0v6T100000000010IAQ",
        "name": "Red",
        "sequence": "1",
        "value": "red12",
        "status": "Active"
    }
]
},
"sequence": 1,
"status": "Active",
"valueDescription": "AD Picklist VD"
}
],
"availabilityDate": "2023-07-12T19:00:00.000Z",
"categories": [],
"childProducts": [],
"configureDuringSale": "Allowed",
"description": "Bundle Product Description",
"discontinuedDate": "2023-07-27T19:00:00.000Z",
"displayUrl": "www.google.com",
"endOfLifeDate": "2023-07-31T19:00:00.000Z",
"id": "01tT1000000F0afiAC",
"isActive": true,
"isAssetizable": true,
"isSoldOnlyWithOtherProds": true,
"name": "Bundle Product",
"nodeType": "bundleProduct",

```

```

"productClassification": {
  "id": "11BT10000004C9SMAU",
  "name" : "class",
  "code" : "code",
  "status" : "Active"
},
"productCode": "P001",
"productComponentGroups": [
  {
    "code": "PCG002",
    "components": [
      {
        "attributeCategory": [],
        "attributes": [],
        "categories": [],
        "childProducts": [],
        "nodeType": "productClass",
        "productClassification": {
          "id": "11BT10000004C9SMAU",
          "name" : "class",
          "code" : "code",
          "status" : "Active"
        },
        "productComponentGroups": [],
        "productRelatedComponent": {
          "childSellingModelId": "0jPT10000004CAfMAM",
          "doesBundlePriceIncludeChild": true,
          "id": "0dST100000000rlMAA",
          "isComponentRequired": false,
          "isDefaultComponent": false,
          "isQuantityEditable": true,
          "maxQuantity": 5,
          "minQuantity": 1,
          "parentProductId": "01tT1000000F0afiAC",
          "productClassificationId": "11BT10000004C9SMAU",
          "productRelationshipTypeId": "0yoT10000004CBEIA2",
          "quantity": 1,
          "quantityScaleMethod": "Proportional",
          "sequence": 2,
          "isExcluded": false
        },
        "productSellingModelOptions": []
      }
    ],
    "description": "PCG002 desc",
    "id": "0y7T10000004C9IIAU",
    "maxBundleComponents": 5,
    "minBundleComponents": 1,
    "name": "PCG002",
    "parentProductId": "01tT1000000F0afiAC",
    "sequence": 2,
    "isExcluded": false
  },
  {

```

```

"code": "PCG001",
"components": [
  {
    "attributeCategory": [],
    "attributes": [
      {
        "attributeNameOverride": "AD Picklist",
        "code": "AD001",
        "dataType": "Picklist",
        "defaultValue": "Red",
        "description": "AD Picklist Description",
        "helpText": "AD Picklist DHT",
        "id": "0tjT1000000002WIAQ",
        "isHidden": false,
        "isPriceImpacting": false,
        "isReadOnly": false,
        "isRequired": true,
        "label": "AD Picklist Label",
        "name": "AD Picklist",
        "picklist": {
          "dataType": "Text",
          "description": "APV Description",
          "id": "0v5T10000000001IAA",
          "name": "Color",
          "values": [
            {
              "abbreviation": "Blue Abb",
              "code": "APV03",
              "displayValue": "Blue DV",
              "id": "0v6T10000000006IAA",
              "name": "Blue",
              "sequence": "3",
              "value": "Blue b",
              "status": "Active"
            },
            {
              "abbreviation": "Red Abb",
              "code": "APV04",
              "displayValue": "Red",
              "id": "0v6T10000000001IAA",
              "name": "Red",
              "sequence": "4",
              "value": "Red",
              "status": "Active"
            },
            {
              "abbreviation": "One Abb",
              "code": "APV02",
              "displayValue": "One DV",
              "id": "0v6T1000000000uIAA",
              "name": "One",
              "sequence": "2",
              "value": "One 1",
              "status": "Active"
            }
          ]
        }
      }
    ]
  }
]

```

```

        },
        {
            "abbreviation": "Red Abbreviation",
            "code": "APV01",
            "displayValue": "Red Display Value",
            "id": "0v6T1000000001OIAQ",
            "name": "Red",
            "sequence": "1",
            "value": "red12",
            "status": "Active"
        }
    ]
},
"sequence": 1,
"status": "Active",
"valueDescription": "AD Picklist VD"
},
{
    "attributeNameOverride": "AD Text",
    "code": "AD02",
    "dataType": "Text",
    "displayType": "Text",
    "minimumCharacterCount": "1",
    "maximumCharacterCount": "20",
    "defaultValue": "AD Text DV",
    "description": "AD Text Desc",
    "helpText": "AD Text DHT",
    "id": "0tjT1000000002bIAA",
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "AD Text Label",
    "name": "AD Text",
    "status": "Active",
    "valueDescription": "AD Text VD"
}
],
"availabilityDate": "2023-07-17T19:00:00.000Z",
"categories": [],
"childProducts": [],
"configureDuringSale": "Allowed",
"description": "P003 desc",
"discontinuedDate": "2023-07-19T19:00:00.000Z",
"displayUrl": "www.google.com",
"endOfLifeDate": "2023-07-28T19:00:00.000Z",
"id": "01tT1000000F0YyIAK",
"isActive": false,
"isAssetizable": true,
"isSoldOnlyWithOtherProds": false,
"name": "Child1 - Bundle with PCG",
"nodeType": "bundleProduct",
"productClassification": {
    "id": "11BT10000004C9SMAU",

```

```

    "name" : "class",
    "code" : "code",
    "status" : "Active"
  },
  "productCode": "P003",
  "productComponentGroups": [
    {
      "code": "PCG2",
      "components": [
        {
          "attributeCategory": [],
          "attributes": [],
          "categories": [],
          "childProducts": [],
          "id": "01tT1000000F0Z8IAK",
          "isActive": false,
          "isAssetizable": true,
          "isSoldOnlyWithOtherProds": false,
          "name": "Super Child2 - Bundle with PCG",
          "nodeType": "bundleProduct",
          "productComponentGroups": [],
          "productRelatedComponent": {
            "childProductId": "01tT1000000F0Z8IAK",
            "doesBundlePriceIncludeChild": true,
            "id": "0dST10000000rWMAQ",
            "isComponentRequired": false,
            "isDefaultComponent": false,
            "isQuantityEditable": false,
            "parentProductId": "01tT1000000F0YyIAK",
            "productRelationshipTypeId": "0yoT1000000002WIAQ",
            "quantity": 1,
            "quantityScaleMethod": "Proportional",
            "sequence": 2,
            "isExcluded": false
          },
          "productSellingModelOptions": [],
          "productSpecificationType": {
            "name": "NonCommercialSpecType",
            "productSpecificationRecordType": null
          }
        },
        {
          "attributeCategory": [],
          "attributes": [],
          "availabilityDate": "2023-07-15T19:00:00.000Z",
          "categories": [],
          "childProducts": [],
          "configureDuringSale": "Allowed",
          "discontinuedDate": "2023-07-16T19:00:00.000Z",
          "displayUrl": "Test",
          "endOfLifeDate": "2023-07-17T19:00:00.000Z",
          "id": "01tT1000000F0YzIAK",
          "isActive": false,
          "isAssetizable": true,

```



```

    "isSoldOnlyWithOtherProds": false,
    "name": "SuperChild1 - Bundle with PCG",
    "nodeType": "bundleProduct",
    "productCode": "Test",
    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01tT1000000F0YzIAK",
      "doesBundlePriceIncludeChild": true,
      "id": "0dST100000000rXMAQ",
      "isComponentRequired": false,
      "isDefaultComponent": false,
      "isQuantityEditable": false,
      "parentProductId": "01tT1000000F0YyIAK",
      "productRelationshipTypeId": "0yoT1000000002WIAQ",
      "quantity": 1,
      "quantityScaleMethod": "Proportional",
      "sequence": 1,
      "isExcluded": false
    },
    "productSellingModelOptions": [],
    "productSpecificationType": {
      "name": "NonCommercialSpecType",
      "productSpecificationRecordType": null
    }
  },
  {
    "attributeCategory": [],
    "attributes": [],
    "categories": [],
    "childProducts": [],
    "configureDuringSale": "Allowed",
    "id": "01tT1000000F0apIAC",
    "isActive": false,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "Bundle2",
    "nodeType": "bundleProduct",
    "productCode": "PC003",
    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01tT1000000F0apIAC",
      "doesBundlePriceIncludeChild": true,
      "id": "0dST100000000rqMAA",
      "isComponentRequired": false,
      "isDefaultComponent": false,
      "isQuantityEditable": false,
      "parentProductId": "01tT1000000F0YyIAK",
      "productRelationshipTypeId": "0yoT1000000002WIAQ",
      "quantity": 1,
      "quantityScaleMethod": "Proportional",
      "isExcluded": false
    },
    "productSellingModelOptions": [],
    "productSpecificationType": {

```

```

        "name": "NonCommercialSpecType",
        "productSpecificationRecordType": null
    }
}
],
"description": "Group for components at level 2",
"id": "0y7T10000004C98IAE",
"maxBundleComponents": 5,
"minBundleComponents": 1,
"name": "PCG2",
"parentProductId": "01tT1000000F0YyIAK",
"isExcluded": false
}
],
"productRelatedComponent": {
    "childProductId": "01tT1000000F0YyIAK",
    "childSellingModelId": "0jPT10000004CAfMAM",
    "doesBundlePriceIncludeChild": true,
    "id": "0dST100000000rgMAA",
    "isComponentRequired": false,
    "isDefaultComponent": false,
    "isQuantityEditable": true,
    "maxQuantity": 3,
    "minQuantity": 1,
    "parentProductId": "01tT1000000F0afiAC",
    "parentSellingModelId": "0jPT10000004CAfMAM",
    "productRelationshipTypeId": "0yoT1000000002WIAQ",
    "quantity": 1,
    "quantityScaleMethod": "Proportional",
    "sequence": 1,
    "isExcluded": false
},
"productSellingModelOptions": [
    {
        "id": "0iOT10000004CMrMAM",
        "productId": "01tT1000000F0YyIAK",
        "isDefault": false,
        "productSellingModel": {
            "id": "0jPT10000004CAfMAM",
            "name": "OneTimePSM",
            "sellingModelType": "OneTime",
            "status": "Active"
        }
    }
]
],
"productSpecificationType": {
    "name": "NonCommercialSpecType",
    "productSpecificationRecordType": null
}
}
],
"description": "PCG001 Description",
"id": "0y7T10000004C9DIAU",
"maxBundleComponents": 5,

```

```

        "minBundleComponents": 1,
        "name": "PCG001",
        "parentProductId": "01tT1000000F0afiAC",
        "sequence": 1,
        "isExcluded": false
    }
],
"productSellingModelOptions": [
    {
        "id": "0iOT10000004CMmMAM",
        "productId": "01tT1000000F0afiAC",
        "productSellingModel": {
            "id": "0jPT10000004CAfMAM",
            "name": "OneTimePSM",
            "sellingModelType": "OneTime",
            "status": "Active"
        }
    }
],
"productSpecificationType": {
    "name": "NonCommercialSpecType",
    "productSpecificationRecordType": null
}
},
{
    "attributeCategory": [
        {
            "attributes": [
                {
                    "attributeNameOverride": "AD Text",
                    "code": "AD02",
                    "dataType": "Text",
                    "displayType": "Text",
                    "minimumCharacterCount": "1",
                    "maximumCharacterCount": "20",
                    "defaultValue": "AD Text DV",
                    "description": "AD Text Desc",
                    "helpText": "AD Text DHT",
                    "id": "0tjT1000000002bIAA",
                    "isHidden": false,
                    "isPriceImpacting": true,
                    "isReadOnly": true,
                    "isRequired": true,
                    "label": "AD Text Label",
                    "name": "AD Text",
                    "sequence": 1,
                    "status": "Active",
                    "valueDescription": "AD Text VD"
                }
            ],
            "code": "AC001",
            "id": "0v3T1000000000BIAQ",
            "name": "build and make"
        }
    ]
}

```

```

],
"attributes": [
  {
    "attributeNameOverride": "AD Picklist",
    "code": "AD001",
    "dataType": "Picklist",
    "defaultValue": "Red",
    "description": "AD Picklist Description",
    "helpText": "AD Picklist DHT",
    "id": "0tjT1000000002WIAQ",
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "AD Picklist Label",
    "name": "AD Picklist",
    "picklist": {
      "dataType": "Text",
      "description": "APV Description",
      "id": "0v5T10000000001IAA",
      "name": "Color",
      "values": [
        {
          "abbreviation": "Blue Abb",
          "code": "APV03",
          "displayValue": "Blue DV",
          "id": "0v6T10000000006IAA",
          "name": "Blue",
          "sequence": "3",
          "value": "Blue b",
          "status": "Active"
        },
        {
          "abbreviation": "Red Abb",
          "code": "APV04",
          "displayValue": "Red",
          "id": "0v6T10000000001IAA",
          "name": "Red",
          "sequence": "4",
          "value": "Red",
          "status": "Active"
        },
        {
          "abbreviation": "One Abb",
          "code": "APV02",
          "displayValue": "One DV",
          "id": "0v6T1000000000uIAA",
          "name": "One",
          "sequence": "2",
          "value": "One 1",
          "status": "Active"
        },
        {
          "abbreviation": "Red Abbreviation",

```

```

        "code": "APV01",
        "displayValue": "Red Display Value",
        "id": "0v6T1000000001OIAQ",
        "name": "Red",
        "sequence": "1",
        "value": "red12",
        "status": "Active"
    }
]
},
"sequence": 1,
"status": "Active",
"valueDescription": "AD Picklist VD"
}
],
"availabilityDate": "2023-07-12T19:00:00.000Z",
"categories": [],
"childProducts": [],
"configureDuringSale": "Allowed",
"description": "Bundle Product Description",
"discontinuedDate": "2023-07-27T19:00:00.000Z",
"displayUrl": "www.google.com",
"endOfLifeDate": "2023-07-31T19:00:00.000Z",
"id": "0ltT1000000F0afiAC",
"isActive": true,
"isAssetizable": true,
"isSoldOnlyWithOtherProds": true,
"name": "Bundle Product",
"nodeType": "bundleProduct",
"productClassification": {
    "id": "11BT10000004C9SMAU",
    "name": "class",
    "code": "code",
    "status": "Active"
},
"productCode": "P001",
"productComponentGroups": [
    {
        "code": "PCG002",
        "components": [
            {
                "attributeCategory": [],
                "attributes": [],
                "categories": [],
                "childProducts": [],
                "nodeType": "productClass",
                "productClassification": {
                    "id": "11BT10000004C9SMAU",
                    "name": "class",
                    "code": "code",
                    "status": "Active"
                },
                "productComponentGroups": [],
                "productRelatedComponent": {

```

```

        "childSellingModelId": "0jPT10000004CAfMAM",
        "doesBundlePriceIncludeChild": true,
        "id": "0dST100000000rlMAA",
        "isComponentRequired": false,
        "isDefaultComponent": false,
        "isQuantityEditable": true,
        "maxQuantity": 5,
        "minQuantity": 1,
        "parentProductId": "01tT1000000F0afiAC",
        "productClassificationId": "11BT10000004C9SMAU",
        "productRelationshipTypeId": "0yoT10000004CBEIA2",
        "quantity": 1,
        "quantityScaleMethod": "Proportional",
        "sequence": 2,
        "isExcluded": false
    },
    "productSellingModelOptions": []
}
],
"description": "PCG002 desc",
"id": "0y7T10000004C9IIAU",
"maxBundleComponents": 5,
"minBundleComponents": 1,
"name": "PCG002",
"parentProductId": "01tT1000000F0afiAC",
"sequence": 2,
"isExcluded": false
},
{
    "code": "PCG001",
    "components": [
        {
            "attributeCategory": [],
            "attributes": [
                {
                    "attributeNameOverride": "AD Picklist",
                    "code": "AD001",
                    "dataType": "Picklist",
                    "defaultValue": "Red",
                    "description": "AD Picklist Description",
                    "helpText": "AD Picklist DHT",
                    "id": "0tjT1000000002WIAQ",
                    "isHidden": false,
                    "isPriceImpacting": false,
                    "isReadOnly": false,
                    "isRequired": true,
                    "label": "AD Picklist Label",
                    "name": "AD Picklist",
                    "picklist": {
                        "dataType": "Text",
                        "description": "APV Description",
                        "id": "0v5T10000000001IAA",
                        "name": "Color",
                        "values": [

```

```

    {
      "abbreviation": "Blue Abb",
      "code": "APV03",
      "displayValue": "Blue DV",
      "id": "0v6Tl0000000006IAA",
      "name": "Blue",
      "sequence": "3",
      "value": "Blue b",
      "status": "Active"
    },
    {
      "abbreviation": "Red Abb",
      "code": "APV04",
      "displayValue": "Red",
      "id": "0v6Tl0000000001IAA",
      "name": "Red",
      "sequence": "4",
      "value": "Red",
      "status": "Active"
    },
    {
      "abbreviation": "One Abb",
      "code": "APV02",
      "displayValue": "One DV",
      "id": "0v6Tl000000000uIAA",
      "name": "One",
      "sequence": "2",
      "value": "One 1",
      "status": "Active"
    },
    {
      "abbreviation": "Red Abbreviation",
      "code": "APV01",
      "displayValue": "Red Display Value",
      "id": "0v6Tl0000000010IAQ",
      "name": "Red",
      "sequence": "1",
      "value": "red12",
      "status": "Active"
    }
  ]
},
"sequence": 1,
"status": "Active",
"valueDescription": "AD Picklist VD"
},
{
  "attributeNameOverride": "AD Text",
  "code": "AD02",
  "dataType": "Text",
  "displayType": "Text",
  "MinimumCharacterCount": "1",
  "MaximumCharacterCount": "20",
  "defaultValue": "AD Text DV",

```

```

        "description": "AD Text Desc",
        "helpText": "AD Text DHT",
        "id": "0tjT100000002bIAA",
        "isHidden": false,
        "isPriceImpacting": false,
        "isReadOnly": false,
        "isRequired": true,
        "label": "AD Text Label",
        "name": "AD Text",
        "status": "Active",
        "valueDescription": "AD Text VD"
    }
],
"availabilityDate": "2023-07-17T19:00:00.000Z",
"categories": [],
"childProducts": [],
"configureDuringSale": "Allowed",
"description": "P003 desc",
"discontinuedDate": "2023-07-19T19:00:00.000Z",
"displayUrl": "www.google.com",
"endOfLifeDate": "2023-07-28T19:00:00.000Z",
"id": "01tT1000000F0YyIAK",
"isActive": false,
"isAssetizable": true,
"isSoldOnlyWithOtherProds": false,
"name": "Child1 - Bundle with PCG",
"nodeType": "bundleProduct",
"productClassification": {
    "id": "11BT10000004C9SMAU",
    "name": "class",
    "code": "code",
    "status": "Active"
},
"productCode": "P003",
"productComponentGroups": [
    {
        "code": "PCG2",
        "components": [
            {
                "attributeCategory": [],
                "attributes": [],
                "categories": [],
                "childProducts": [],
                "id": "01tT1000000F0Z8IAK",
                "isActive": false,
                "isAssetizable": true,
                "isSoldOnlyWithOtherProds": false,
                "name": "Super Child2 - Bundle with PCG",
                "nodeType": "bundleProduct",
                "productComponentGroups": [],
                "productRelatedComponent": {
                    "childProductId": "01tT1000000F0Z8IAK",
                    "doesBundlePriceIncludeChild": true,
                    "id": "0dST100000000rWMAQ",

```



```

        "isComponentRequired": false,
        "isDefaultComponent": false,
        "isQuantityEditable": false,
        "parentProductId": "01tT1000000F0YyIAK",
        "productRelationshipTypeId": "0yoT1000000002WIAQ",
        "quantity": 1,
        "quantityScaleMethod": "Proportional",
        "sequence": 2,
        "isExcluded": false
    },
    "productSellingModelOptions": [],
    "productSpecificationType": {
        "name": "NonCommercialSpecType",
        "productSpecificationRecordType": null
    }
},
{
    "attributeCategory": [],
    "attributes": [],
    "availabilityDate": "2023-07-15T19:00:00.000Z",
    "categories": [],
    "childProducts": [],
    "configureDuringSale": "Allowed",
    "discontinuedDate": "2023-07-16T19:00:00.000Z",
    "displayUrl": "Test",
    "endOfLifeDate": "2023-07-17T19:00:00.000Z",
    "id": "01tT1000000F0YzIAK",
    "isActive": false,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "SuperChild1 - Bundle with PCG",
    "nodeType": "bundleProduct",
    "productCode": "Test",
    "productComponentGroups": [],
    "productRelatedComponent": {
        "childProductId": "01tT1000000F0YzIAK",
        "doesBundlePriceIncludeChild": true,
        "id": "0dST100000000rXMAQ",
        "isComponentRequired": false,
        "isDefaultComponent": false,
        "isQuantityEditable": false,
        "parentProductId": "01tT1000000F0YyIAK",
        "productRelationshipTypeId": "0yoT1000000002WIAQ",
        "quantity": 1,
        "quantityScaleMethod": "Proportional",
        "sequence": 1,
        "isExcluded": false
    },
    "productSellingModelOptions": [],
    "productSpecificationType": {
        "name": "NonCommercialSpecType",
        "productSpecificationRecordType": null
    }
},

```

```

    {
      "attributeCategory": [],
      "attributes": [],
      "categories": [],
      "childProducts": [],
      "configureDuringSale": "Allowed",
      "id": "01tT1000000F0apIAC",
      "isActive": false,
      "isAssetizable": true,
      "isSoldOnlyWithOtherProds": false,
      "name": "Bundle2",
      "nodeType": "bundleProduct",
      "productCode": "PC003",
      "productComponentGroups": [],
      "productRelatedComponent": {
        "childProductId": "01tT1000000F0apIAC",
        "doesBundlePriceIncludeChild": true,
        "id": "0dST100000000rqMAA",
        "isComponentRequired": false,
        "isDefaultComponent": false,
        "isQuantityEditable": false,
        "parentProductId": "01tT1000000F0YyIAK",
        "productRelationshipTypeId": "0yoT1000000002WIAQ",
        "quantity": 1,
        "quantityScaleMethod": "Proportional",
        "isExcluded": false
      },
      "productSellingModelOptions": [],
      "productSpecificationType": {
        "name": "NonCommercialSpecType",
        "productSpecificationRecordType": null
      }
    }
  ],
  "description": "Group for components at level 2",
  "id": "0y7T10000004C98IAE",
  "maxBundleComponents": 5,
  "minBundleComponents": 1,
  "name": "PCG2",
  "parentProductId": "01tT1000000F0YyIAK",
  "isExcluded": false
}
],
"productRelatedComponent": {
  "childProductId": "01tT1000000F0YyIAK",
  "childSellingModelId": "0jPT10000004CAfMAM",
  "doesBundlePriceIncludeChild": true,
  "id": "0dST100000000rgMAA",
  "isComponentRequired": false,
  "isDefaultComponent": false,
  "isQuantityEditable": true,
  "maxQuantity": 3,
  "minQuantity": 1,
  "parentProductId": "01tT1000000F0afiAC",

```

```

        "parentSellingModelId": "0jPT10000004CAfMAM",
        "productRelationshipTypeId": "0yoT1000000002WIAQ",
        "quantity": 1,
        "quantityScaleMethod": "Proportional",
        "sequence": 1,
        "isExcluded": false
    },
    "productSellingModelOptions": [
        {
            "id": "0iOT10000004CMrMAM",
            "productId": "01tT1000000F0YyIAK",
            "isDefault": false,
            "productSellingModel": {
                "id": "0jPT10000004CAfMAM",
                "name": "OneTimePSM",
                "sellingModelType": "OneTime",
                "status": "Active"
            }
        }
    ],
    "productSpecificationType": {
        "name": "NonCommercialSpecType",
        "productSpecificationRecordType": null
    }
},
"description": "PCG001 Description",
"id": "0y7T10000004C9DIAU",
"maxBundleComponents": 5,
"minBundleComponents": 1,
"name": "PCG001",
"parentProductId": "01tT1000000F0afIAC",
"sequence": 1,
"isExcluded": false
}
],
"productSellingModelOptions": [
    {
        "id": "0iOT10000004CMmMAM",
        "productId": "01tT1000000F0afIAC",
        "productSellingModel": {
            "id": "0jPT10000004CAfMAM",
            "name": "OneTimePSM",
            "sellingModelType": "OneTime",
            "status": "Active"
        }
    }
],
"productSpecificationType": {
    "name": "NonCommercialSpecType",
    "productSpecificationRecordType": null
}
}
],

```

```

{
  "status": {
    "code": "200",
    "correlationId": "fd158d80-d73c-4a1f-a009-9225db804d70",
    "errors": [],
    "message": "Successfully fetched Product records."
  }
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
additional Fields	Map<String, Additional Fields Input >	Key-value pair of additional standard or custom fields with their values.	Small, 61.0	61.0
attribute Category	Attribute Category []	List of categorized attributes related to the product.	Small, 60.0	60.0
attributes	Attribute Definition []	List of uncategorized attributes related to the product.	Small, 60.0	60.0
availability Date	String	Date when the part is used in the product or is made available for sale.	Small, 60.0	60.0
catalogs	Catalog []	List of the associated catalogs returned with the Product List API (POST) response. The Product By ID API (GET) returns an empty catalog list in the response. Returns the <code>name</code> and <code>id</code> values only.	Small, 61.0	61.0
categories	Category []	List of the associated categories returned with the Product List API (POST) response. The Product By ID API (GET) returns an empty category list in the response. Returns the <code>name</code> and <code>id</code> values only.	Small, 60.0	60.0
childProducts	Product []	Hierarchy of the child products.	Small, 60.0	60.0
configure DuringSale	String	Determines whether to allow or prevent configuration when a bundle is sold.	Small, 60.0	60.0
description	String	Description of the product. If data translation is set up and specified in the org, the translated description is available.	Small, 60.0	60.0
discontinued Date	String	Date from when the part can't be used in the product or sold.	Small, 60.0	60.0
displayUrl	String	Display image URL of the product.	Small, 60.0	60.0
endOfLifeDate	String	Date after which a product isn't supported, ordered, or maintained.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the product.	Small, 60.0	60.0
isActive	Boolean	Indicates if the product is active (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isAssetizable	Boolean	Indicates if the product instance remains a customer asset after it's purchased (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isSoldOnly WithOther Prods	Boolean	Indicates whether the product can't be sold separately (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
name	String	Name of the product. If data translation is set up and specified in the org, the translated name is available.	Small, 60.0	60.0
nodeType	String	Type of the node, such as a product or bundled product.	Small, 60.0	60.0
product Classification	Product Classification	Details of the product classification that the product is based on.	Small, 60.0	60.0
productCode	String	Universal product code that's used to track the part that's used in the product.	Small, 60.0	60.0
product Component Groups	Product Component Group[]	Logical grouping of the component products in a bundle and the group cardinality for ordering the product components.	Small, 60.0	60.0
product Related Component	Product Related Component	Details of the related components of a product.	Small, 60.0	60.0
product SellingModel Options	Product Selling Model Option[]	Details of the product selling model options.	Small, 60.0	60.0
product Specification Type	Product Specification Type	Details of the product specification type.	Small, 60.0	60.0
quantityScale Method	String	Method to scale the quantity of the child product in relation to the quantity of the parent.	Small, 60.0	60.0

Product Related Component

Output representation of the product-related component.

JSON Example

```

"productRelatedComponent": {
  "childProductId": "01tT1000000F0YyIAK",
  "childSellingModelId": "0jPT10000004CAfMAM",
  "doesBundlePriceIncludeChild": true,
  "id": "0dST100000000rgMAA",
  "isComponentRequired": false,
  "isDefaultComponent": false,
  "isExcluded": false,
  "isQuantityEditable": true,
  "maxQuantity": 3,
  "minQuantity": 1,
  "parentProductId": "01tT1000000F0afiAC",
  "parentSellingModelId": "0jPT10000004CAfMAM",
  "productClassificationId": "11BRO00000000222AA",
  "productRelationshipTypeId": "0yoT1000000002WIAQ",
  "quantity": 1,
  "quantityScaleMethod": "Proportional",
  "quoteVisibility": "Quote Document Only",
  "sequence": 1
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
childProduct Id	String	Lookup to the child product in the bundle.	Small, 60.0	60.0
childSelling ModelId	String	ID of the child product selling model record.	Small, 60.0	60.0
doesBundle PriceInclude Child	Boolean	Indicates whether the price of the bundle includes the child product (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
id	String	ID of the record.	Small, 60.0	60.0
isComponent Required	Boolean	Indicates whether the component is required in the bundle (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isDefault Component	Boolean	Indicates whether to select the component in the bundle group by default (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isExcluded	Boolean	Indicates whether the component is excluded in the bundle group (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
isQuantity Editable	Boolean	Indicates whether to allow changes to the quantity of the component in the bundle (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
maxQuantity	Double	Maximum quantity of the product in the opportunity, quote, or order line item.	Small, 60.0	60.0
minQuantity	Double	Minimum quantity of the product in the opportunity, quote, or order line item.	Small, 60.0	60.0
parentProductId	String	Lookup to the parent product.	Small, 60.0	60.0
parentSelling ModelId	String	ID of the product selling model record.	Small, 60.0	60.0
product Classification Id	String	ID of the product classification record.	Small, 60.0	60.0
productInstance Reuse	String	Reserved for future use.	Small, 62.0	62.0
product Relationship TypeId	String	ID of the product relationship type record.	Small, 60.0	60.0
quantity	Double	Quantity of the child products.	Small, 60.0	60.0
quantityScale Method	String	Method to scale the quantity of the child product in relation to the quantity of the parent. Valid values are <code>Constant</code> or <code>Proportional</code> .	Small, 60.0	60.0
quote Visibility	String	Specifies whether a quote line item must be shown on the transaction line editor or quote document. Valid values are <code>Always</code> , <code>Transaction Line Editor Only</code> —Specifies whether to show a quote line item on quote editor only, <code>Quote Document Only</code> —Specifies whether to show a quote line item on quote proposal only, or <code>Never</code> . The API returns this property only if the CoreCPQ permission set is available.	Small, 64.0	64.0
sequence	Integer	Order in which the child products are displayed.	Small, 60.0	60.0

Product Selling Model

Output representation of the definition of the product selling model.

JSON Example

```
"productSellingModel":  
{  
  "id": "0jPT10000004CAfMAM",  
  "name": "OneTimePSM",  
  "pricingTerm": 1,  
  "pricingTermUnit": "Months",  
  "sellingModelType": "TermDefined",  
  "status": "Active"  
}  
}]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the record.	Small, 60.0	60.0
name	String	Name of the record.	Small, 60.0	60.0
pricingTerm	Integer	Duration of the selling model.	Small, 60.0	60.0
pricingTerm Unit	String	Units of the pricing term.	Small, 60.0	60.0
sellingModel Type	String	Different models of selling the product. Valid values are OneTime, TermDefined, or Evergreen.	Small, 60.0	60.0
status	String	Status of the selling model. For example, whether the selling model is active and can be used in transactions.	Small, 60.0	60.0

Product Selling Model Option

Output representation of the definition of the product selling model option.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

JSON Example

```
"productSellingModelOptions": [  
  {  
    "id": "0iOT10000004CMrMAM",  
    "isDefault": false,  
    "productId": "01tT1000000F0YyIAK",  
  }  
]
```



```
"productSellingModel": {
  "id": "0jPT10000004CAfMAM",
  "name": "OneTimePSM",
  "pricingTerm": 1,
  "pricingTermUnit": "Months",
  "sellingModelType": "TermDefined",
  "status": "Active"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the record.	Small, 60.0	60.0
isDefault	Boolean	Indicates whether this model option is the default product selling model option (true) or not (false).	Small, 60.0	60.0
productId	String	ID of the product.	Small, 60.0	60.0
productSellingModel	Product Selling Model	Master-detail field to the product selling model.	Small, 60.0	60.0

Product Specification Type

Output representation of the product specification type.

JSON Example

```
"productSpecificationType":
{
  "name": "NonCommercialSpecType",
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
name	String	Name of the product specification type.	Small, 60.0	60.0

Products

Output representation of the list of retrieved products.

JSON Example

```

{
  "correlationId": "9b6bc520-3c82-4d6c-a458-47590370681a",
  "facets": [
    {
      "attributeType": "ProductStandard",
      "displayName": "Product Type",
      "displayRank": 1,
      "displayType": "MultiSelect",
      "nameOrId": "Type",
      "values": [
        {
          "displayName": "Simple",
          "nameOrId": "Simple",
          "productCount": 9
        }
      ]
    },
    {
      "attributeType": "ProductStandard",
      "displayName": "Active",
      "displayRank": 2,
      "displayType": "MultiSelect",
      "nameOrId": "IsActive",
      "values": [
        {
          "displayName": "true",
          "nameOrId": "true",
          "productCount": 47
        }
      ]
    }
  ],
  "count": 3,
  "products": [
    {
      "attributeCategory": [],
      "attributes": [],
      "categories": [],
      "childProducts": [],
      "description": "Keep your organization connected with seamless collaboration across distributed teams. No matter where employees are located, organizations are seeking stronger employee engagement and customer experiences to enable more productivity and greater business agility. More effective collaboration helps organizations work smarter.",
      "displayUrl": "https://dispatch.m.io/wp-content/uploads/2023/01/History-of-Webex.png",
      "id": "01t1Q000008CD2eQAG",
      "isActive": true,
      "isAssetizable": true,
      "isSoldOnlyWithOtherProds": false,
      "name": "SmartBytes Collaboration Suite",
      "nodeType": "bundleProduct",
      "productClassification": {

```

```

      "id": "11B1Q0000008OMGUA2"
    },
    "productCode": "P0143",
    "productComponentGroups": [],
    "productSellingModelOptions": [
      {
        "id": "0iO1Q0000008OkeUAE",
        "productId": "01t1Q0000008CD2eQAG",
        "productSellingModel": {
          "id": "0jP1Q000000CaVFUA0",
          "name": "One Time",
          "sellingModelType": "OneTime",
          "status": "Active"
        }
      }
    ],
    "productSpecificationType": {
      "name": "None"
    }
  },
  {
    "attributeCategory": [],
    "attributes": [],
    "categories": [],
    "childProducts": [],
    "configureDuringSale": "Allowed",
    "displayUrl":
https://www.cisco.com/c/en/us/products/collateral/wireless/sell-brief-30-series-wireless-access-points/data-c8-72143-do\_jr-otat-editions/data-c8-721431-jr,
    "id": "01t1Q0000008CD36QAG",
    "isActive": true,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "SmartBytes Repeater",
    "nodeType": "simpleProduct",
    "productClassification": {
      "id": "11B1Q0000008OMMUA2"
    },
    "productCode": "BS_R001",
    "productComponentGroups": [],
    "productSellingModelOptions": [
      {
        "id": "0iO1Q0000008OlsUAE",
        "productId": "01t1Q0000008CD36QAG",
        "productSellingModel": {
          "id": "0jP1Q000000CaVFUA0",
          "name": "One Time",
          "sellingModelType": "OneTime",
          "status": "Active"
        }
      }
    ],
    "productSpecificationType": {
      "name": "COM_Offer"
    }
  }
]

```

```

    }
  },
  {
    "attributeCategory": [],
    "attributes": [],
    "categories": [],
    "childProducts": [],
    "configureDuringSale": "Allowed",
    "description": "A converged data center architecture that integrates computing,
networking and storage resources to increase efficiency and enable centralized management.
UCS products are designed and configured to work together effectively.",
    "displayUrl":
https://www.cisco.com/c/eda/products/data-center-unified-computing-systems/data-center-unified-computing-systems/related-products/ucscs/ucscs-300,

    "id": "01t1Q000008CD2sQAG",
    "isActive": true,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "SmartBytes Unified Computing System",
    "nodeType": "bundleProduct",
    "productCode": "P0157",
    "productComponentGroups": [],
    "productSellingModelOptions": [
      {
        "id": "0iO1Q000008OkzUAE",
        "productId": "01t1Q000008CD2sQAG",
        "productSellingModel": {
          "id": "0jP1Q000000CaVFUA0",
          "name": "One Time",
          "sellingModelType": "OneTime",
          "status": "Active"
        }
      }
    ],
    {
      "id": "0iO1Q000008OlWUAU",
      "productId": "01t1Q000008CD2sQAG",
      "productSellingModel": {
        "id": "0jP1Q000000CaVHUA0",
        "name": "Evergreen",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "Evergreen",
        "status": "Active"
      }
    }
  ],
  "productSpecificationType": {
    "name": "None"
  }
}
],
"status": {
  "code": "200",
  "errors": [],

```

```

    "message": "Successfully fetched the product records."
  }
}

```

This example shows a sample response with data from Enterprise Product Catalog.

```

{
  "correlationId": "4cf1997d-5d86-4997-9c6b-55842442f325",
  "facets": [],
  "products": [
    {
      "additionalFields": {},
      "attributeCategory": [
        {
          "attributes": [
            {
              "additionalFields": {
                "OptOutAssetization": true,
                "OptOutDecompositionAction": false,
                "OptOutSupplementalAction": false
              },
              "attributeNameOverride": "ATTRIBUTE-ABP-INT",
              "code": "ABP-INT",
              "dataType": "Number",
              "developerName": "ABP-INT",
              "id": "ABP-INT",
              "isHidden": false,
              "isPriceImpacting": false,
              "isReadOnly": false,
              "isRequired": false,
              "name": "ATTRIBUTE-ABP-INT",
              "sequence": 3,
              "status": "Active"
            },
            {
              "additionalFields": {
                "OptOutAssetization": false,
                "OptOutDecompositionAction": false,
                "OptOutSupplementalAction": false
              },
              "attributeNameOverride": "ATTRIBUTE-ABP-CHECKBOX",
              "code": "ABP-CHECKBOX",
              "dataType": "Checkbox",
              "developerName": "ABP-CHECKBOX",
              "id": "ABP-CHECKBOX",
              "isHidden": false,
              "isPriceImpacting": false,
              "isReadOnly": false,
              "isRequired": false,
              "name": "ATTRIBUTE-ABP-CHECKBOX",
              "sequence": 2,
              "status": "Active"
            }
          ],
          "code": "CATEGORY-ABP",

```

```

        "id": "a0Zxx000000c3tNEAQ",
        "name": "ATTRIBUTE_CATEGORY-ABP"
    }
],
"attributes": [],
"catalogs": [],
"categories": [],
"childProducts": [],
"id": "0ltxx0000006kFYAAY",
"isActive": true,
"isAssetizable": true,
"name": "ARProduct",
"nodeType": "simpleProduct",
"productCode": "ARProduct",
"productComponentGroups": [],
"productSellingModelOptions": [],
"productUnitOfMeasures": []
}
],
"status": {
    "code": "200",
    "errors": [],
    "message": "Successfully fetched Product records."
}
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 60.0	60.0
count	Integer	Total count of the products matching the request query.	Small, 60.0	60.0
facets	Search Facet	Details of the faceted search. This property is applicable if the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled.	Small, 63.0	63.0
products	Product[]	List of products matching the request query.	Small, 60.0	60.0
status	Status	Status of the request.	Small, 60.0	60.0

Product Variants

Output representation of the variation products associated with the specified parent variant products.

JSON Example

```
{
  "correlationId": "9b6bc520-3c82-4d6c-a458-47590370681a",
  "count": 2,
  "details": {
    "01tT1000000F0afiAC": [
      "01tT1000000F0ahiAC",
      "01tT1000000F0aiiAC"
    ],
    "01tT1000000F0agiAC": [
      "01tT1000000F0ajIAC"
    ]
  },
  "invalidProductIds": [],
  "nonVariantParentIds": [],
  "status": {
    "code": "200",
    "errors": [],
    "message": "Successfully fetched the product variants."
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique ID to track and associate related events or transactions.	Small, 67.0	67.0
count	Integer	Number of parent variant products in the response that have at least one associated variation.	Small, 67.0	67.0
details	Map<String, String[]>	Specifies a map where each key is a parent variant product ID and the value is a list of its associated variation product IDs. Only parent variants that have at least one variation are included in this map.	Small, 67.0	67.0
invalidProductIds	String[]	List of product IDs from the request that are blank, invalid, or not found in the org. The API excludes these IDs from processing but doesn't fail the request.	Small, 67.0	67.0
nonVariantParentIds	String[]	List of product IDs from the request that are valid products but don't have the <code>VariationParent</code> product class. For	Small, 67.0	67.0

Property Name	Type	Description	Filter Group and Version	Available Version
		example, simple products or bundle products passed in the request appear in this list.		
status	Status	Status of the request.	Small, 67.0	67.0

Related Object Records

Output representation of the related records for a specified record ID and related object API name.

JSON Example

```

"relatedObjectRecords": [
  {
    "count": 2,
    "records": [
      {
        "SegmentType": "Yearly",
        "DurationType": "Months",
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx000000001dEAA",
        "ProductId": "01txx0000006i44AAA",
        "Id": "1FTxx0000004CDtGAM",
        "Name": "PPRS-000000005"
      },
      {
        "SegmentType": "FreeTrial",
        "DurationType": "Days",
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx000000001dEAA",
        "ProductId": "01txx0000006i44AAA",
        "Id": "1FTxx0000004CFUGA2",
        "Name": "PPRS-000000006"
      }
    ]
  },
  {
    "relatedObjectAPIName": "ProductRampSegment"
  },
  {
    "count": 2,
    "records": [
      {
        "UsageMetricId": "1BRxx0000004CAeGAM",
        "UsageMetricName": "Test Usage Metric 2",
        "UsageDefinitionProductId": null,
        "Label": "PUG-103",
        "Quantity": 100,
        "Id": "1BXxx0000004CCGGA2"
      },
      {
        "UsageMetricId": "1BRxx0000004CCGGA2",

```



```
        "UsageMetricName": "Test Usage Metric 3",
        "UsageDefinitionProductId": "01txx0000006i2eAAA",
        "Label": "PUG-105",
        "Quantity": 500,
        "Id": "1BXxx0000004CFUGA2"
    }
],
"relatedObjectAPIName": "ProductUsageGrant"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
count	Integer	Total count of the related records that are returned.	Small, 62.0	62.0
records	Map<String, Object>	List of related object records.	Small, 62.0	62.0
relatedObject APIName	String	API name of the related object to return the records for.	Small, 62.0	62.0

Related Records

Output representation of the list of relatedObject records for a specified record ID.

JSON Example

```
"relatedRecords": [
  {
    "recordId": "01txx0000006i44AAA",
    "relatedObjectRecords": [
      {
        "count": 2,
        "records": [
          {
            "SegmentType": "Yearly",
            "DurationType": "Months",
            "TrialDuration": null,
            "ProductSellingModelId": "0jPxx000000001dEAA",
            "ProductId": "01txx0000006i44AAA",
            "Id": "1FTxx0000004CDtGAM",
            "Name": "PPRS-000000005"
          },
          {
            "SegmentType": "FreeTrial",
            "DurationType": "Days",
            "TrialDuration": null,
            "ProductSellingModelId": "0jPxx000000001dEAA",
```

```

        "ProductId": "01txx0000006i44AAA",
        "Id": "1FTxx0000004CFUGA2",
        "Name": "PPRS-000000006"
    }
],
"relatedObjectAPIName": "ProductRampSegment"
},
{
    "count": 2,
    "records": [
        {
            "UsageMetricId": "1BRxx0000004CAeGAM",
            "UsageMetricName": "Test Usage Metric 2",
            "UsageDefinitionProductId": null,
            "Label": "PUG-103",
            "Quantity": 100,
            "Id": "1BXxx0000004CCGGA2"
        },
        {
            "UsageMetricId": "1BRxx0000004CCGGA2",
            "UsageMetricName": "Test Usage Metric 3",
            "UsageDefinitionProductId": "01txx0000006i2eAAA",
            "Label": "PUG-105",
            "Quantity": 500,
            "Id": "1BXxx0000004CFUGA2"
        }
    ],
    "relatedObjectAPIName": "ProductUsageGrant"
}
]
},
{
    "recordId": "01txx0000006i5gAAA",
    "relatedObjectRecords": [
        {
            "count": 4,
            "records": [
                {
                    "SegmentType": "Yearly",
                    "DurationType": "Months",
                    "TrialDuration": null,
                    "ProductSellingModelId": "0jPxx0000000001EAA",
                    "ProductId": "01txx0000006i5gAAA",
                    "Id": "1FTxx0000004C92GAE",
                    "Name": "PPRS-000000001"
                },
                {
                    "SegmentType": "Custom",
                    "DurationType": "Days",
                    "TrialDuration": null,
                    "ProductSellingModelId": "0jPxx0000000001EAA",
                    "ProductId": "01txx0000006i5gAAA",
                    "Id": "1FTxx0000004CAeGAM",
                    "Name": "PPRS-000000002"
                }
            ]
        }
    ]
}

```

```

    },
    {
      "SegmentType": "FreeTrial",
      "DurationType": "Months",
      "TrialDuration": 6,
      "ProductSellingModelId": "0jPxx0000000001EAA",
      "ProductId": "01txx0000006i5gAAA",
      "Id": "1FTxx0000004CCGGA2",
      "Name": "PPRS-000000003"
    },
    {
      "SegmentType": "Custom",
      "DurationType": null,
      "TrialDuration": null,
      "ProductSellingModelId": "0jPxx0000000001EAA",
      "ProductId": "01txx0000006i5gAAA",
      "Id": "1FTxx0000004CDsGAM",
      "Name": "PPRS-000000004"
    }
  ],
  "relatedObjectAPIName": "ProductRampSegment"
},
{
  "count": 0,
  "records": [],
  "relatedObjectAPIName": "ProductUsageGrant"
}
]
}
]

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
recordId	String	ID of the record.	Small, 62.0	62.0
relatedObject Records	Related Object Records[]	List of related object records.	Small, 62.0	62.0

Related Records List

Output representation of the list of related records.

JSON Example

```

{
  "correlationId": "f4d6b42a-d9b7-49c9-8fa8-1c7bb6fe99aa",
  "relatedRecords": [
    {
      "recordId": "01txx0000006i44AAA",

```

```

"relatedObjectRecords": [
  {
    "count": 2,
    "records": [
      {
        "SegmentType": "Yearly",
        "DurationType": "Months",
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx000000001dEAA",
        "ProductId": "01txx0000006i44AAA",
        "Id": "1FTxx0000004CDtGAM",
        "Name": "PPRS-000000005"
      },
      {
        "SegmentType": "FreeTrial",
        "DurationType": "Days",
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx000000001dEAA",
        "ProductId": "01txx0000006i44AAA",
        "Id": "1FTxx0000004CFUGA2",
        "Name": "PPRS-000000006"
      }
    ],
    "relatedObjectAPIName": "ProductRampSegment"
  },
  {
    "count": 2,
    "records": [
      {
        "UsageMetricId": "1BRxx0000004CAeGAM",
        "UsageMetricName": "Test Usage Metric 2",
        "UsageDefinitionProductId": null,
        "Label": "PUG-103",
        "Quantity": 100,
        "Id": "1BXxx0000004CCGGA2"
      },
      {
        "UsageMetricId": "1BRxx0000004CCGGA2",
        "UsageMetricName": "Test Usage Metric 3",
        "UsageDefinitionProductId": "01txx0000006i2eAAA",
        "Label": "PUG-105",
        "Quantity": 500,
        "Id": "1BXxx0000004CFUGA2"
      }
    ],
    "relatedObjectAPIName": "ProductUsageGrant"
  }
],
{
  "recordId": "01txx0000006i5gAAA",
  "relatedObjectRecords": [
    {
      "count": 4,

```

```

    "records": [
      {
        "SegmentType": "Yearly",
        "DurationType": "Months",
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx0000000001EAA",
        "ProductId": "01txx0000006i5gAAA",
        "Id": "1FTxx0000004C92GAE",
        "Name": "PPRS-000000001"
      },
      {
        "SegmentType": "Custom",
        "DurationType": "Days",
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx0000000001EAA",
        "ProductId": "01txx0000006i5gAAA",
        "Id": "1FTxx0000004CAeGAM",
        "Name": "PPRS-000000002"
      },
      {
        "SegmentType": "FreeTrial",
        "DurationType": "Months",
        "TrialDuration": 6,
        "ProductSellingModelId": "0jPxx0000000001EAA",
        "ProductId": "01txx0000006i5gAAA",
        "Id": "1FTxx0000004CCGA2",
        "Name": "PPRS-000000003"
      },
      {
        "SegmentType": "Custom",
        "DurationType": null,
        "TrialDuration": null,
        "ProductSellingModelId": "0jPxx0000000001EAA",
        "ProductId": "01txx0000006i5gAAA",
        "Id": "1FTxx0000004CDsGAM",
        "Name": "PPRS-000000004"
      }
    ],
    "relatedObjectAPIName": "ProductRampSegment"
  },
  {
    "count": 0,
    "records": [],
    "relatedObjectAPIName": "ProductUsageGrant"
  }
]
}
],
"status": {
  "code": "200",
  "errors": [
  ],
  "message": ""
}

```

```

    }
  }
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 62.0	62.0
related Records	Related Records []	List of related records.	Small, 62.0	62.0
status	Status []	Status of the API request.	Small, 62.0	62.0

Search Facet

Output representation of the details of the faceted search.

JSON Example

```

"facets": [
  {
    "attributeType": "ProductStandard",
    "displayName": "Product Type",
    "displayRank": 1,
    "displayType": "MultiSelect",
    "nameOrId": "Type",
    "values": [
      {
        "displayName": "Simple",
        "nameOrId": "Simple",
        "productCount": 9
      }
    ]
  },
  {
    "attributeType": "ProductStandard",
    "displayName": "Active",
    "displayRank": 2,
    "displayType": "MultiSelect",
    "nameOrId": "IsActive",
    "values": [
      {
        "displayName": "true",
        "nameOrId": "true",
        "productCount": 47
      }
    ]
  }
]

```

```

    }
  ]
}
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
attributeType	String	Search attribute type of the facet.	Small, 63.0	63.0
displayName	String	Display name of the facet.	Small, 63.0	63.0
displayRank	Integer	Display rank of the facet.	Small, 63.0	63.0
displayType	String	Display type of the face.	Small, 63.0	63.0
nameOrId	String	Facet name or ID. Reserved for internal use.	Small, 63.0	63.0
values	Facet Value[]	Values of the facet found in the search result. Sorted by display name in alphabetical order.	Small, 63.0	63.0

Setting

Output representation of the setting that's used in indexing.

JSON Example

```

"setting": {
  "defaultLanguage": "en_US",
  "id": "1JySG0000000GUb0AM",
  "supportedLanguages": ["en_US", "ja", "es", "nl_NL"]
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
defaultLanguage	String	Default language for the API.	Small, 63.0	63.0
id	String	ID of the setting.	Small, 63.0	63.0
supportedLanguages	String[]	List of supported language locales for indexing.	Small, 63.0	63.0

Setting Metadata

Output representation of the metadata associated with a setting.

JSON Example

```
"metadata": {
  "activeLanguages": [
    "en_US"
  ]
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
active Languages	String[]	List of active languages in an org.	Small, 63.0	63.0

Snapshot

Output representation of the list of active snapshots.

JSON Example

```
"snapshots": [
  {
    "activationDate": "2024-11-06T06:58:02.000Z",
    "activationStatus": "ACTIVE",
    "activationType": "IMMEDIATE",
    "id": "1Avxx0000004C92CAE",
    "snapshotIndexes": [
      {
        "createdDate": "2024-11-06T06:56:49.000Z",
        "id": "1D6xx0000004C92CAE",
        "indexBuildType": "FULL",
        "indexInfos": [
          {
            "buildType": "FULL",
            "id": "0axxx0000000T3AAI",
            "isIncrementable": true,
            "usageType": "LIVE"
          }
        ]
      }
    ],
    "indexLogs": [
      {
        "catalogSnapshotTime": "2024-11-06T16:14:30.000Z",
        "completionTime": "2024-11-06T16:16:02.000Z",
        "createdById": "005xx000001X7x7AAC",
        "indexBuildStatus": "COMPLETED",

```



```
        "indexBuildType": "FULL",
        "indexId": "0axxx00000000T3AAI",
        "numberOfChanges": 7
    },
    {
        "catalogSnapshotTime": "2024-11-06T15:03:32.000Z",
        "completionTime": "2024-11-06T15:05:02.000Z",
        "createdById": "005xx000001X7x7AAC",
        "indexBuildStatus": "COMPLETED_WITH_ERRORS",
        "indexBuildType": "INCREMENTAL",
        "indexId": "0axxx00000000RRAAY",
        "message": "Warning: Product errors found.",
        "numberOfChanges": 3
    },
    {
        "catalogSnapshotTime": "2024-11-06T12:35:34.000Z",
        "completionTime": "2024-11-06T12:35:34.000Z",
        "createdById": "005xx000001X7x7AAC",
        "indexBuildStatus": "COMPLETED",
        "indexBuildType": "INCREMENTAL",
        "indexId": "0axxx00000000RRAAY",
        "message": "There are no changes for the partial update.",
        "numberOfChanges": 0
    },
    {
        "catalogSnapshotTime": "2024-11-06T12:07:32.000Z",
        "completionTime": "2024-11-06T12:09:02.000Z",
        "createdById": "005xx000001X7x7AAC",
        "indexBuildStatus": "COMPLETED_WITH_ERRORS",
        "indexBuildType": "FULL",
        "message": "Warning: Product errors found.",
        "numberOfChanges": 1
    }
],
"indexType": "PRODUCT",
"lastBuildStatus": "IN_PROGRESS",
"venueId": "1D6xx0000004C92CAE"
}
]
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
activation Date	String	Activation date of the snapshot.	Small, 62.0	62.0
activation Status	String	Activation status of the snapshot. Valid values are NONE, ACTIVE—Snapshot is	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
		in active status, or EXPIRED—Snapshot is in expired status.		
activation Type	String	Activation type of the snapshot. Valid values are IMMEDIATE—Snapshot is activated immediately after a successful build.	Small, 62.0	62.0
id	String	ID of the snapshot.	Small, 61.0	61.0
snapshot Indexes	Snapshot Index[]	List of indexes created in the snapshot.	Small, 62.0	62.0

Snapshot Collection

Output representation of the retrieved snapshot collection.

JSON Example

```
{
  "errors": [],
  "snapshots": [
    {
      "activationDate": "2024-11-06T06:58:02.000Z",
      "activationStatus": "ACTIVE",
      "activationType": "IMMEDIATE",
      "id": "1Avxx0000004C92CAE",
      "snapshotIndexes": [
        {
          "createdDate": "2024-11-06T06:56:49.000Z",
          "id": "1D6xx0000004C92CAE",
          "indexBuildType": "FULL",
          "indexInfos": [
            {
              "buildType": "FULL",
              "id": "0axxx0000000T3AAI",
              "isIncrementable": true,
              "usageType": "LIVE"
            }
          ]
        },
      ],
      "indexLogs": [
        {
          "catalogSnapshotTime": "2024-11-06T16:14:30.000Z",
          "completionTime": "2024-11-06T16:16:02.000Z",
          "createdById": "005xx000001X7x7AAC",
          "indexBuildStatus": "COMPLETED",
          "indexBuildType": "FULL",
          "indexId": "0axxx0000000T3AAI",
          "numberOfChanges": 7
        },
      ],
    }
  ]
}
```

```
      "catalogSnapshotTime": "2024-11-06T15:03:32.000Z",
      "completionTime": "2024-11-06T15:05:02.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED_WITH_ERRORS",
      "indexBuildType": "INCREMENTAL",
      "indexId": "0axxx00000000RRAAY",
      "message": "Warning: Product errors found.",
      "numberOfChanges": 3
    },
    {
      "catalogSnapshotTime": "2024-11-06T12:35:34.000Z",
      "completionTime": "2024-11-06T12:35:34.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED",
      "indexBuildType": "INCREMENTAL",
      "indexId": "0axxx00000000RRAAY",
      "message": "There are no changes for the partial update.",
      "numberOfChanges": 0
    },
    {
      "catalogSnapshotTime": "2024-11-06T12:07:32.000Z",
      "completionTime": "2024-11-06T12:09:02.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED_WITH_ERRORS",
      "indexBuildType": "FULL",
      "message": "Warning: Product errors found.",
      "numberOfChanges": 1
    }
  ],
  "indexType": "PRODUCT",
  "lastBuildStatus": "IN_PROGRESS",
  "venueId": "1D6xx0000004C92CAE"
}

]
}
],
"statusCode": "200"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Output[]	List of errors, if any.	Small, 62.0	62.0
snapshots	Snapshot[]	List of active snapshots.	Small, 62.0	62.0
statusCode	String	Code indicating the status of the request.	Small, 62.0	62.0

Snapshot Deployment

Output representation of the snapshot deployment.

JSON Example

This example shows a sample response to the request to build a new snapshot with immediate activation.

```
{
  "errors": [],
  "snapshot": {
    "activationStatus": "NONE",
    "activationType": "IMMEDIATE",
    "id": "1Avxx0000004CFU",
    "snapshotIndexes": [
      {
        "createdDate": "2024-07-24T21:10:48.000Z",
        "id": "1D6xx0000004CFU",
        "indexBuildType": "FULL",
        "indexType": "PRODUCT",
        "lastBuildStatus": "IN_PROGRESS"
      }
    ]
  },
  "statusCode": "200"
}
```

This example shows a sample response of the request to rebuild a snapshot in the `active` status.

```
{
  "errors": [],
  "snapshot": {
    "activationStatus": "NONE",
    "activationType": "IMMEDIATE",
    "id": "1Avxx0000004CH6",
    "snapshotIndexes": [
      {
        "createdDate": "2024-07-24T21:13:05.000Z",
        "id": "1D6xx0000004CH6",
        "indexBuildType": "FULL",
        "indexType": "PRODUCT",
        "lastBuildStatus": "IN_PROGRESS"
      }
    ]
  },
  "statusCode": "200"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Output[]	List of errors, if any.	Small, 62.0	62.0
snapshot	Snapshot[]	Run-time catalog snapshot associated with the created index.	Small, 62.0	62.0
statusCode	String	Code indicating the status of the request.	Small, 62.0	62.0

Snapshot Index

Output representation of the snapshot index of a run-time catalog.

JSON Example

```
"snapshotIndexes": [
  {
    "createdDate": "2024-11-06T06:56:49.000Z",
    "id": "1D6xx0000004C92CAE",
    "indexBuildType": "FULL",
    "indexInfos": [
      {
        "buildType": "FULL",
        "id": "0axxx0000000T3AAI",
        "isIncrementable": true,
        "usageType": "LIVE"
      }
    ]
  },
  "indexLogs": [
    {
      "catalogSnapshotTime": "2024-11-06T16:14:30.000Z",
      "completionTime": "2024-11-06T16:16:02.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED",
      "indexBuildType": "FULL",
      "indexId": "0axxx0000000T3AAI",
      "numberOfChanges": 7
    },
    {
      "catalogSnapshotTime": "2024-11-06T15:03:32.000Z",
      "completionTime": "2024-11-06T15:05:02.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED_WITH_ERRORS",
      "indexBuildType": "INCREMENTAL",
      "indexId": "0axxx0000000RRAAY",
      "message": "Warning: Product errors found.",
      "numberOfChanges": 3
    },
    {
      "catalogSnapshotTime": "2024-11-06T12:35:34.000Z",
      "completionTime": "2024-11-06T12:35:34.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED",
      "indexBuildType": "INCREMENTAL",
      "indexId": "0axxx0000000RRAAY",
      "message": "There are no changes for the partial update.",
      "numberOfChanges": 0
    },
    {
      "catalogSnapshotTime": "2024-11-06T12:07:32.000Z",
      "completionTime": "2024-11-06T12:09:02.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED_WITH_ERRORS",
```

```

        "indexBuildType": "FULL",
        "message": "Warning: Product errors found.",
        "numberOfChanges": 1
    },
    "indexType": "PRODUCT",
    "lastBuildStatus": "IN_PROGRESS",
    "venueId": "1D6xx0000004C92CAE"
}
]

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
completedDate	String	Completed date of the snapshot index.	Small, 62.0	62.0
createdDate	String	Created date of the snapshot index.	Small, 62.0	62.0
id	String	ID of the snapshot index.	Small, 62.0	62.0
indexBuild Type	String	Build type of the snapshot index. Valid value is <code>FULL</code> —Specifies a full index build or <code>INCREMENTAL</code> —Specifies an incremental index build. Available in API version 63.0 and later.	Small, 62.0	62.0
indexInfos	Index Info	Index information records associated with the snapshot index.	Small, 63.0	63.0
indexLogs	Index Logs[]	Index logs associated with the snapshot index.	Small, 63.0	63.0
indexType	String	Index type of the snapshot index. Valid value is <code>PRODUCT</code> —Snapshot index is of product type.	Small, 62.0	62.0
lastBuild Status	String	Last build status of the snapshot index. Valid values are <code>IN_PROGRESS</code> —Snapshot index build is in progress, <code>FAILED</code> —Snapshot index build failed, or <code>COMPLETED</code> —Snapshot index build completed successfully.	Small, 62.0	62.0
numberOf Records	Integer	Number of indexed records.	Small, 62.0	62.0
venueId	String	Venue ID of the snapshot index.	Small, 63.0	63.0

Snapshot Index Error

Output representation of the error details related to a snapshot index.

JSON Example

```
{
  "errors": [],
  "indexErrorDetails": {
    "errorFileId": "069xx0000004C92AAE",
    "indexCreatedDate": "2024-10-03T05:24:18.000Z",
    "indexErrorsCount": 1,
    "indexLastUpdatedDate": "2024-10-03T05:27:00.000Z",
    "itemLevelErrorsCount": 1
  },
  "statusCode": "200"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Output[]	List of errors encountered during the processing of the API request.	Small, 63.0	63.0
indexErrorDetails	Index Error[]	Count and details of errors that occurred during indexing.	Small, 63.0	63.0
statusCode	String	Code that indicates the status of the API request.	Small, 63.0	63.0

Snapshot Index Info

Output representation of the details of a snapshot index.

JSON Example

```
"indexInfos": [
  {
    "buildType": "FULL",
    "id": "0axxx00000000T3AAI",
    "isIncrementable": true,
    "usageType": "LIVE"
  }
]
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
buildType	String	Build type of the index. Valid values are FULL—Specifies a full index build or INCREMENTAL—Specifies an incremental	Small, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
		index build. Available in API version 63.0 and later.		
id	String	ID of the index information record.	Small, 63.0	63.0
isIncrementable	Boolean	Indicates whether a partial build is enabled (<code>true</code>) or disabled (<code>false</code>).	Small, 63.0	63.0
usageType	String	Usage type of the index. Valid values are <code>LIVE</code> —Index usage type is live or <code>OUT_OF_USE</code> —Index usage type is out of use.	Small, 63.0	63.0

Snapshot Index Log

Output representation of a snapshot index log.

JSON Example

```
"indexLogs": [
  {
    "catalogSnapshotTime": "2024-11-06T16:14:30.000Z",
    "completionTime": "2024-11-06T16:16:02.000Z",
    "createdById": "005xx000001X7x7AAC",
    "indexBuildStatus": "COMPLETED",
    "indexBuildType": "FULL",
    "indexId": "0axxx00000000T3AAI",
    "numberOfChanges": 7
  },
  {
    "catalogSnapshotTime": "2024-11-06T15:03:32.000Z",
    "completionTime": "2024-11-06T15:05:02.000Z",
    "createdById": "005xx000001X7x7AAC",
    "indexBuildStatus": "COMPLETED_WITH_ERRORS",
    "indexBuildType": "INCREMENTAL",
    "indexId": "0axxx00000000RRAAY",
    "message": "Warning: Product errors found.",
    "numberOfChanges": 3
  },
  {
    "catalogSnapshotTime": "2024-11-06T12:35:34.000Z",
    "completionTime": "2024-11-06T12:35:34.000Z",
    "createdById": "005xx000001X7x7AAC",
    "indexBuildStatus": "COMPLETED",
    "indexBuildType": "INCREMENTAL",
    "indexId": "0axxx00000000RRAAY",
    "message": "There are no changes for the partial update.",
    "numberOfChanges": 0
  },
  {

```



```
      "catalogSnapshotTime": "2024-11-06T12:07:32.000Z",
      "completionTime": "2024-11-06T12:09:02.000Z",
      "createdById": "005xx000001X7x7AAC",
      "indexBuildStatus": "COMPLETED_WITH_ERRORS",
      "indexBuildType": "FULL",
      "message": "Warning: Product errors found.",
      "numberOfChanges": 1
    }
  ]
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
catalog SnapshotTime	String	Catalog snapshot time of the index.	Small, 63.0	63.0
completion Time	String	Completion time of the index.	Small, 63.0	63.0
createdById	String	ID of the user that initiated the index build.	Small, 63.0	63.0
indexBuild Status	String	Status of the index build.	Small, 63.0	63.0
indexBuild Type	String	Type of the index build. Valid values are FULL—Specifies a full index build or INCREMENTAL—Specifies an incremental index build. Available in API version 63.0 and later.	Small, 63.0	63.0
indexId	String	ID of the index.	Small, 63.0	63.0
message	String	Message for the index status.	Small, 63.0	63.0
numberOf Changes	Integer	Number of new or changed products included in the index.	Small, 63.0	63.0

Status

Output representation of the status of the request.

JSON Example

```
"status": {
  "code": "200",
  "errors": [],
  "message": "Successfully fetched the catalog records."
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Code of the error message.	Small, 60.0	60.0
errors	Error[]	Details of the error.	Small, 60.0	60.0
message	String	Error message.	Small, 60.0	60.0

Unit of Measure Error

Output representation of the details of errors encountered during the processing of the Unit of Measure API request.

JSON Example

```
"errorCodeToErrorMap": {
  "UNIT_OF_MEASURE_INFO_INVALID_UOM_IDS": {
    "errorCode": "UOM_INFO_API_003",
    "messageDetail": "Invalid uomId is passed. Please specify a valid uomId.",
    "messageTitle": "Invalid uomId is passed.",
    "recordIds": [
      "sample"
    ],
    "source": "Unit_Of_Measure_Info_Api"
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Localized error code.	Small, 63.0	63.0
messageDetail	String	Localized details of the error message.	Small, 63.0	63.0
messageTitle	String	Localized title of the error message.	Small, 63.0	63.0
recordIds	String[]	List of erroneous record IDs.	Small, 63.0	63.0
source	String	Localized source of the error.	Small, 63.0	63.0

Unit of Measure Info

Output representation of the details of a unit of measure record.

JSON Example

```
"uomIdToUnitOfMeasureInfo": {
  "0hEU200000003M5MAI": {
```

```
{
  "id": "0hEU200000003M5MAI",
  "name": "Pounds",
  "roundingMethod": "Nearest",
  "scale": 1,
  "unitCode": "Pounds"
},
"0hEU200000003KTMAI": {
  "id": "0hEU200000003KTMAI",
  "name": "Grams",
  "roundingMethod": "Down",
  "scale": 5,
  "unitCode": "Grams"
}
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the unit of measure record.	Small, 63.0	63.0
name	String	Name of the unit of measure record.	Small, 63.0	63.0
roundingMethod	String	Data rounding method of the unit of measure record.	Small, 63.0	63.0
scale	Integer	Scale of the unit of measure record.	Small, 63.0	63.0
unitCode	String	Code of the unit of measure record.	Small, 63.0	63.0

Unit of Measure Status

Output representation of the status of the Unit of Measure API request.

JSON Example

```
{
  "status": {
    "errors": [],
    "httpStatusCode": "200",
    "message": " Successfully fetched UnitOfMeasure Info. "
  }
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Unit Of Measure Error[]	Errors encountered during the processing of the API request.	Small, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
httpStatus Code	String	HTTP status code of the API request.	Small, 63.0	63.0
message	String	Localized response message.	Small, 63.0	63.0

Product Catalog Management Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[ProductCatalogManagementSettings](#)

Represents the settings for Product Catalog Management.

[ProductSpecificationType](#)

Represents the specification types in your org that define products with unique terminology specific to the industry.

[ProductSpecificationRecType](#)

Represents the association of a product specification type with record types defined on the Product object. The product specification record type also determines if the product specification is sold commercially or not.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

ProductCatalogManagementSettings

Represents the settings for Product Catalog Management.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

`ProductCatalogManagementSettings` values are stored in the `ProductCatalogManagementSettings.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there is only one settings file for each settings component.

Version

`ProductCatalogManagementSettings` components are available in API version 64.0 and later.

Special Access Rules

These settings are available when Product Catalog Management is enabled.

Fields

Field Name	Field Type	Description
<code>productDeepCloneContextDefOrgValue</code>	string	Name of the context definition that you want to use to deep clone the product.
<code>productDeepCloneExpressionSetOrgValue</code>	string	Expression set that contains the rules that you want to apply to deep clone the product.

Declarative Metadata Sample Definition

The following is an example of a `ProductCatalogManagementSettings` component.

```
<ProductCatalogManagementSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <productDeepCloneContextDefOrgValue>ProductDeepCloneContextDefinition</productDeepCloneContextDefOrgValue>
  <productDeepCloneExpressionSetOrgValue>ProductDeepCloneExpressionSet</productDeepCloneExpressionSetOrgValue>
</ProductCatalogManagementSettings>
```

The following is an example `package.xml` that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>ProductCatalogManagement</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character `*` (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

ProductSpecificationType

Represents the specification types in your org that define products with unique terminology specific to the industry.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

File Suffix and Directory Location

`ProductSpecificationType` components have the suffix `.productSpecificationType` and are stored in the `productSpecificationTypes` folder.

Version

ProductSpecificationType components are available in API version 60.0 and later.

Special Access Rules

Ensure Product Catalog Management is enabled to access this metadata type.

Fields

Field Name	Field Type	Description
description	string	Required. Description of the product specification type.
masterLabel	string	Required. A user-friendly name for the product specification record type, which is defined when the metadata component is created.

Declarative Metadata Sample Definition

The following is an example of a ProductSpecificationType component.

```
<ProductSpecificationType xmlns="http://soap.sforce.com/2006/04/metadata">
  <masterLabel>sample</masterLabel>
  <description>Sample Description</description>
</ProductSpecificationType>
```

The following is an example package.xml that references the previous definition.

```
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>*</members>
    <name>ProductSpecificationType</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

ProductSpecificationRecType

Represents the association of a product specification type with record types defined on the Product object. The product specification record type also determines if the product specification is sold commercially or not.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

File Suffix and Directory Location

`ProductSpecificationRecType` components have the suffix `.productSpecificationRecType` and are stored in the `productSpecificationRecTypes` folder.

Version

`ProductSpecificationRecType` components are available in API version 60.0 and later.

Special Access Rules

Ensure Product Catalog Management is enabled to access this metadata type.

Fields

Field Name	Field Type	Description
<code>isCommercial</code>	boolean	Required. Indicates whether the product is sold commercially (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .
<code>masterLabel</code>	string	Required. A user-friendly name for the product specification record type, which is defined when the metadata component is created.
<code>productSpecificationType</code>	string	Required. Product specification type that's associated with the record type. This field is unique within your organization.
<code>recordType</code>	string	Required. Custom record type of Product2 object.

Declarative Metadata Sample Definition

The following is an example of a `ProductSpecificationRecType` component.

```
<ProductSpecificationRecType xmlns="http://soap.sforce.com/2006/04/metadata">
  <masterLabel>sample</masterLabel>
  <recordType>Product2.Offer</recordType>
  <productSpecificationType>Placeholder</productSpecificationType>
  <isCommercial>true</isCommercial>
</ProductSpecificationRecType>
```

The following is an example `package.xml` that references the previous definition.

```
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>*</members>
    <name>ProductSpecificationRecType</name>
  </types>
</Package>
```

```

    <members>*</members>
    <name>ProductSpecificationType</name>
  </types>
  <types>
    <members>Product2.Offer</members>
    <name>RecordType</name>
  </types>
  <version>68.0</version>
</Package>

```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the `package.xml` manifest file. For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

Product Catalog Management Tooling API Objects

Tooling API exposes metadata used in developer tooling that you can access through REST or SOAP. Tooling API's SOQL capabilities for many metadata types allow you to retrieve smaller pieces of metadata.

[ProductSpecificationType](#)

Represents the specification types in your org that define products with unique terminology specific to the industry. This object is available in API version 60.0 and later.

[ProductSpecificationRecType](#)

Represents the association of a product specification type with record types defined on the Product object. The product specification record type also determines if the product specification is sold commercially or not. This object is available in API version 60.0 and later.

SEE ALSO:

[Tooling API Developer Guide: Introducing Tooling API](#)

ProductSpecificationType

Represents the specification types in your org that define products with unique terminology specific to the industry. This object is available in API version 60.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Special Access Rules

Ensure Product Catalog Management is enabled to access this object.

Fields

Description

Type: textarea

Properties: Create, Nillable, Update

Description: Description of the product specification type.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is **Record Type Name**.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Language of the product specification type instance.

Possible values are:

- da—Danish
- de—German
- en_US—English
- es—Spanish
- es_MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl_NL—Dutch
- no—Norwegian
- pt_BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai

- zh_CN—Chinese (Simplified)
- zh_TW—Chinese (Traditional)

ManageableState

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Type: ManageableState enumerated list

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates the manageable state of the specified component that is contained in a package:

- beta
- deleted
- deprecated
- deprecatedEditable
- installed
- installedEditable
- released
- unmanaged

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Label assigned to the ProductSpecificationType object.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the ***namespacePrefix__componentName*** notation. The namespace prefix can have one of the following values:

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are not Developer Edition organizations, **NamespacePrefix** is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.

ProductSpecificationRecType

Represents the association of a product specification type with record types defined on the Product object. The product specification record type also determines if the product specification is sold commercially or not. This object is available in API version 60.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Special Access Rules

Ensure Product Catalog Management is enabled to access this object.

Fields

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is **Record Type Name**.

IsCommercial

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the product is sold commercially (`true`) or not (`false`). The default value is `true`.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Language of the product specification record type instance.

Possible values are:

- `da`—Danish
- `de`—German
- `en_US`—English
- `es`—Spanish
- `es_MX`—Spanish (Mexico)
- `fi`—Finnish
- `fr`—French

- `it`—Italian
- `ja`—Japanese
- `ko`—Korean
- `nl_NL`—Dutch
- `no`—Norwegian
- `pt_BR`—Portuguese (Brazil)
- `ru`—Russian
- `sv`—Swedish
- `th`—Thai
- `zh_CN`—Chinese (Simplified)
- `zh_TW`—Chinese (Traditional)

ManageableState

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Type: ManageableState enumerated list

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates the manageable state of the specified component that is contained in a package:

- `beta`
- `deleted`
- `deprecated`
- `deprecatedEditable`
- `installed`
- `installedEditable`
- `released`
- `unmanaged`

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Label assigned to the ProductSpecificationRecType object.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the **`namespacePrefix__componentName`** notation. The namespace prefix can have one of the following values:

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are not Developer Edition organizations, `NamespacePrefix` is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.

ProductSpecificationType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Product specification type that's associated with the record type. This field is unique within your organization. The picklist values that are available to you depend on your industry solution and permission sets.

RecordType

Type: sObject

Properties: Nillable

Description: Custom record type of Product2 object.

RecordTypeId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. ID of the product record type associated with the product specification type. This field is unique within your organization.

This field is a relationship field.

Relationship Name: RecordType

Relationship Type: Lookup

Refers To: RecordType

Product Discovery

Product Discovery provides a hierarchical catalog browsing experience to identify suitable products with text-based and faceted search.

[Product Discovery Business APIs](#)

Use the Product Discovery Business APIs, which are composite APIs, to search products or to discover catalogs, products, and categories during the product browsing experience.

[Product Discovery Standard Invocable Actions](#)

Use the standard invocable actions available with Product Discovery to find and retrieve product, category, and catalog details. Additionally, execute a qualification procedure, and search products with guided selection.

[Product Discovery Apex Reference](#)

Use built-in Apex classes and interfaces grouped by namespace.

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions of Revenue Management

[Product Discovery Metadata API Types](#)

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

SEE ALSO:

[Salesforce Help: Configure Product Discovery Settings](#)

[Salesforce Help: Invoke Qualification Procedures During Product Discovery](#)

Product Discovery Business APIs

Use the Product Discovery Business APIs, which are composite APIs, to search products or to discover catalogs, products, and categories during the product browsing experience.

This table lists the available Product Discovery resources.

Resource	Description
/connect/cpq/catalogs/catalogId (POST)	Get catalog details for a specified catalog ID. This API is a composite API for Product Discovery.
/connect/cpq/catalogs (POST)	Get a paginated list of catalogs. This API is a composite API for Product Discovery.
/connect/cpq/categories (POST)	Get a list of categories and subcategories of a specified catalog. This API is a composite API for Product Discovery.
/connect/cpq/categories/categoryId (POST)	Get details of a category for a specified category ID. This API is a composite API for Product Discovery.
/connect/cpq/qualification (POST)	Run the qualification procedure on a list of product IDs. This API is a composite API for Product Discovery.
/connect/cpq/products/search (POST)	Retrieves a list of products based on a search query or search term. This API is a composite API for Product Discovery.
/connect/cpq/products/productId (POST)	Get product details, such as attributes, hierarchy, or cardinality, for a specified product ID. This API is a

Resource	Description
	composite API for Product Discovery.
/connect/cpq/products (POST)	Get a list of products for a specified catalog, category, or subcategory. This API is a composite API for Product Discovery.
/connect/cpq/products/bulk (POST)	Retrieve details for multiple products. This API is a composite API for Product Discovery.
/connect/cpq/products/guided-selection (POST)	Retrieve a list of products based on the response identifier or search terms of a guided selection. Guided selection captures user requirements to show suitable products.
/revenue/product-discovery/products/recommendations (POST)	Get a list of recommended products based on your underlying business rules.

Resources

Learn more about the available Product Discovery API resources.

Request Bodies

Learn more about the available Product Discovery API request bodies.

Response Bodies

Learn more about the available Product Discovery API response bodies.

Resources

Learn more about the available Product Discovery API resources.

Catalog Details (POST)

Get catalog details for a specified catalog ID. This API is a composite API for Product Discovery.

Catalog List (POST)

Get a paginated list of catalogs. This API is a composite API for Product Discovery.

Categories List (POST)

Get a list of categories and subcategories of a specified catalog. This API is a composite API for Product Discovery.

Category Details (POST)

Get details of a category for a specified category ID. This API is a composite API for Product Discovery.

[Bulk Product Details \(POST\)](#)

Retrieve details for multiple products. This API is a composite API for Product Discovery.

[Global Search \(POST\)](#)

Retrieves a list of products based on a search query or search term. This API is a composite API for Product Discovery.

[Guided Selection \(POST\)](#)

Retrieve a list of products based on the response identifier or search terms of a guided selection. Guided selection captures user requirements to show suitable products.

[Product Details \(POST\)](#)

Get product details, such as attributes, hierarchy, or cardinality, for a specified product ID. This API is a composite API for Product Discovery.

[Product Recommendations \(POST\)](#)

Get a list of recommended products based on your underlying business rules.

[Products List \(POST\)](#)

Get a list of products for a specified catalog, category, or subcategory. This API is a composite API for Product Discovery.

[Qualification \(POST\)](#)

Run the qualification procedure on a list of product IDs. This API is a composite API for Product Discovery.

Catalog Details (POST)

Get catalog details for a specified catalog ID. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/catalogs/catalogId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/catalogs/0ZSxx000000009hGAA
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```



```
}
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Response Body for POST

[CPQ Base Details](#)

Catalog List (POST)

Get a paginated list of catalogs. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/catalogs
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/catalogs
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "limit": 10,
  "offset": 0,
  "orderBy": [
    "name:asc",
  ]
}
```

```
    "id:desc"
  ],
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
limit	Integer	Number of items to include in the response.	Optional	60.0
offset	Integer	Offset size from which to get the catalog count.	Optional	60.0
orderBy	String[]	Sort order for the catalogs.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Response Body for POST

[CPQ Base List](#)

Categories List (POST)

Get a list of categories and subcategories of a specified catalog. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/categories
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/categories
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "catalogId": "0ZSxx000000009hGAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample request to get a list of categories with eligible promotions.

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "catalogId": "0ZSxx000000009hGAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "usePromotions": true
}
```

Response Body for POST

[CPQ Base List](#)

Category Details (POST)

Get details of a category for a specified category ID. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/categories/categoryId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/categories/0ZGxx000000001dGAA
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample request to get category details with eligible promotions.

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "usePromotions": true
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
customFields	String[]	List of category fields to retrieve in the response.	Optional	60.0
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		references to a particular transaction or event chain.		
enableQualification	Boolean	Indicates whether to enable qualification rules for the categories (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
filter	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . The supported operators are <code>eq</code> ; <code>in</code> ; <code>contains</code> ; <code>gt</code> —Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>lt</code> —Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>gte</code> —Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; or <code>lte</code> —Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only. If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	60.0
qualificationProcedure	String	API name of the custom qualification procedure that's used for the qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0
usePromotions	Boolean	Indicates whether to fetch eligible promotions from Global Promotion Management (GPM) for the requested	Optional	66.0

Name	Type	Description	Required or Optional	Available Version
		category and its products (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .		

Response Body for POST

[CPQ Base Details](#)

Bulk Product Details (POST)

Retrieve details for multiple products. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/products/bulk
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/products/bulk
```

Available Version

61.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "productData": [
    {
      "productId": "01txx0000006ivJAAQ",
      "productSellingModelId": "0jPxx000000009hEAA"
    },
    {
      "productId": "01txx0000006ivLAAQ",
      "productSellingModelId": "0jPxx000000009iEAAB"
    }
  ],
  "correlationId": "de9a674c-1807-438c-ac78-2c96f4655325",
}
```

```
"priceBookId" : "01sxx0000005qxxAAA",
"userContext": {
  "accountId": "001xx0000000001AAA",
  "contactId": "003xx00000000D7AAI"
}
}
```

This example shows a sample request with proration policy details requested through the `additionalFields` property.

```
{
  "additionalFields": {
    "ProductSellingModelOption": {
      "additionalFields": {
        "ProrationPolicy": {
          "fields": [
            "ArePartialPeriodsAllowed",
            "ProrationPolicyType"
          ]
        }
      }
    }
  },
  "productData": [
    {
      "productId": "01txx0000006ivJAAQ",
      "productSellingModelId": "0jPxx000000009hEAA"
    },
    {
      "productId": "01txx0000006ivLAAQ",
      "productSellingModelId": "0jPxx000000009iEAABB"
    }
  ],
  "correlationId": "de9a674c-1807-438c-ac78-2c96f4655325",
  "priceBookId": "01sxx0000005qxxAAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx00000000D7AAI"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input[]	Additional nodes to add to the custom or default context definition. This data is appended to the context input and sent for hydration and qualification. The maximum limit of supported nodes is 10.	Optional	61.0
additional Fields	Map<String, Additional Fields Input>	Additional standard or custom fields of the Product2 object to include in the response. The field values are returned in the response for each of the products. In API version 66.0	Optional	61.0

Name	Type	Description	Required or Optional	Available Version
		and later, you can request proration policy details in the response for each product selling model option through this property.		
context Definition	String	Name of the custom context definition that's sent for the context creation. If unspecified, the default context definition is used.	Optional	61.0
context Mapping	String	Context mapping details from the context definition. If specified, the API validates if the context mapping belongs to the specified context definition and considers the mapping for hydration. If unspecified, the default context mapping of the context definition is used.	Optional	61.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	61.0
currencyCode	String	Currency code to consider for pricing and filtering.	Optional	61.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.	Optional	61.0
enable Qualification	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the	Optional	61.0

Name	Type	Description	Required or Optional	Available Version
		qualificationContext property in the API response isn't returned.		
priceBookId	String	ID of the price book to fetch the prices from.	Optional	61.0
pricing Procedure	String	Name of the custom pricing procedure to send for processing. If unspecified, the default pricing procedure is executed.	Optional	61.0
productData	Product Data Input[]	List of maps that contain product IDs and product selling model IDs.	Required	61.0
qualification Procedure	String	Name of the custom qualification procedure to send for processing. If unspecified, the default qualification procedure is executed.	Optional	61.0
userContext	User Context Input[]	User context details. For example, account ID or contact ID.	Optional	61.0

Response Body for POST

[Bulk Product Details](#)

Global Search (POST)

Retrieves a list of products based on a search query or search term. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/products/search
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/products/search
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request to search products by using a query.

```
{
  "query": {
    "textQuery": {
      "searchPhrase": "firstproduct"
    }
  },
  "catalogId": "0ZSxx0000000001GAA",
  "categoryId": "0ZGT100000000q1OAA",
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNg==",
  "orderBy": [
    "name:asc",
    "id:desc"
  ],
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "additionalFields": {
    "Product2": {
      "fields": [
        "CustomField1__c",
        "CustomField2__c",
        "StandardField1"
      ]
    }
  }
}
```

This example shows a sample request to search products by using the `searchTerm` property.

```
{
  "searchTerm": "Laptop",
  "catalogId": "0ZSDU00000002Og64AE",
  "categoryId": "0ZGDU00000002P0A4AU",
  "correlationId": "d9d8f898-19f5-464a-ba2b-6a070783f6c4",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNw==",
  "orderBy": [
    "name:asc",
    "id:desc"
  ],
  "userContext": {
    "accountId": "001DU000001o2V0YAI"
  }
}
```

If a parent category ID is specified in the request body, then the API returns all products associated to all child categories.

This example shows a sample request to search products with eligible promotions. To fetch eligible promotions, specify a value for the `query` or `searchTerm` property, and set the `usePromotions` property to `true`.

```
{
  "query": {
    "textQuery": {
      "searchPhrase": "laptop"
    }
  },
  "catalogId": "0ZSxx0000000001GAA",
  "categoryId": "0ZGT100000000q10AA",
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNg==",
  "orderBy": [
    "name:asc",
    "id:desc"
  ],
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "additionalFields": {
    "Product2": {
      "fields": [
        "CustomField1__c",
        "CustomField2__c",
        "StandardField1"
      ]
    }
  },
  "usePromotions": true
}
```

This example shows a sample request to run visibility rules.

```
{
  "enableQualification": true,
  "enablePricing": true,
  "includeCatalogDetails": true,
  "searchTerm": "128GB LRDIMM",
  "catalogId": "0ZSVW000000AhdC4AS",
  "limit": 12,
  "userContext": {
    "accountId": null
  },
  "priceBookId": "01sVW0000024PZlYAM",
  "currencyCode": "USD",
  "transactionId": "0Q0VW000001190f0AA",
  "filter": {
    "criteria": [
      {
        "property": "isActive",
        "operator": "eq",
        "value": true
      }
    ]
  }
}
```

```

    },
    {
      "property": "UsedFor",
      "operator": "eq",
      "value": ""
    }
  ],
  "orderBy": [
    "name:asc"
  ],
  "executeConfigurationRules": true
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
additional Fields	Map<String, Additional Fields Input>	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	61.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
categoryId	String	ID of the category. If the category ID isn't specified, then the API returns the matching query offers from the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier of the request.	Optional	60.0
currencyCode	String	Currency code that's considered for pricing and filtering request.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
<code>cursor</code>	String	Unique ID to represent the position of each product in the dataset.	Optional	60.0
<code>enablePricing</code>	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.	Optional	60.0
<code>enableQualification</code>	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
<code>executeConfigurationRules</code>	Boolean	Indicates whether to execute configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	67.0
<code>filter</code>	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . The supported operators are <code>eq</code> ; <code>in</code> ; <code>contains</code> ; <code>gt</code> —Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>lt</code> —Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>gte</code> —Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; or <code>lte</code> —Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only. If multiple criteria are specified,	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		then the resultant criteria are combined by using the <code>and</code> operator.		
<code>includeCatalogDetails</code>	Boolean	Indicates whether to include catalog details in the response (<code>true</code>) or not (<code>false</code>).	Optional	61.0
<code>limit</code>	Integer	Number of items to include in the response. The default value is 10.	Optional	60.0
<code>offset</code>	Integer	Reserved for internal use.	Optional	60.0
<code>orderBy</code>	String[]	Sort order of the results, which is either ascending or descending order. The default sort order is ascending order. The default value is <code>asc</code> .	Optional	60.0
<code>priceBookId</code>	String	ID of the price book to get the prices from. If this property isn't specified, then prices from the standard price book are fetched.	Optional	60.0
<code>pricingProcedure</code>	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	60.0
<code>productClassificationId</code>	String	ID of the product classification.	Optional	60.0
<code>qualificationProcedure</code>	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
<code>query</code>	Map<String, Object>	Query to search the products.	Required	60.0
<code>relatedObjectFilter</code>	Related Object Filter Input[]	Filter records based on supported criteria for related objects. The supported object is <code>ProductSpecificationRecType</code> . The supported property is <code>IsCommerical</code> . The supported operator is <code>eq</code> . The supported values are <code>true</code> and <code>false</code> .	Optional	60.0
<code>searchTerm</code>	String	String used to get products with the product name containing the search term. See Search Considerations When Using Indexed Data .	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
transactionContextId	String	ID of the transaction context.	Optional	66.0
transactionId	String	ID of the transaction.	Optional	66.0
usePromotions	Boolean	Indicates whether to retrieve eligible promotions from Global Promotion Management (GPM) for each product in the search results (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Response Body for POST

[CPQ Base List](#)

Guided Selection (POST)

Retrieve a list of products based on the response identifier or search terms of a guided selection. Guided selection captures user requirements to show suitable products.

Resource

```
/connect/cpq/products/guided-selection
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/products/guided-selection
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "corrId",
```

```

"catalogId": "0ZSxx0000000001GAA",
"priceBookId": "pricebookId",
"limit": 10,
"cursor": "MTAwMDAwMDAwNg==",
"userContext": {
  "accountId": "accId"
},
"guidedSelectionResponseId": "ABCxx0000000001GAA",
"searchTerms": [
  {
    "term": "IPhone",
    "tags": [
      "deviceType",
      "mobile"
    ]
  },
  {
    "term": "4GB",
    "tags": [
      "RAM"
    ]
  },
  {
    "term": "64GB",
    "tags": [
      "Storage"
    ]
  }
],
"enableQualification": true,
"enablePricing": true,
"includeCatalogDetails": false
}

```

This example shows a sample request to fetch eligible promotions.

```

{
  "correlationId": "corrId",
  "catalogId": "0ZSxx0000000001GAA",
  "priceBookId": "pricebookId",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNg==",
  "userContext": {
    "accountId": "accId"
  },
  "guidedSelectionResponseId": "ABCxx0000000001GAA",
  "searchTerms": [
    {
      "term": "IPhone",
      "tags": [
        "deviceType",
        "mobile"
      ]
    },
    {

```



```

    "term": "4GB",
    "tags": [
      "RAM"
    ]
  },
  {
    "term": "64GB",
    "tags": [
      "Storage"
    ]
  }
],
"enableQualification": true,
"enablePricing": true,
"includeCatalogDetails": false,
"transactionContextId": "context123",
"transactionId": "trans456",
"usePromotions": true
}

```

This example shows a sample request to run visibility rules.

```

{
  "catalogId": "0ZSVW000000AhdC4AS",
  "currencyCode": "USD",
  "enablePricing": true,
  "enableQualification": true,
  "executeConfigurationRules": true,
  "filter": {
    "criteria": [
      {
        "property": "isActive",
        "operator": "eq",
        "value": true
      },
      {
        "property": "UsedFor",
        "operator": "eq",
        "value": ""
      }
    ]
  },
  "guidedSelectionResponseId": "0U3VW0000000alt0AA",
  "includeCatalogDetails": true,
  "limit": 12,
  "offset": 0,
  "orderBy": [
    "name:asc"
  ],
  "priceBookId": "01sVW0000024PZlYAM",
  "transactionId": "0Q0VW000001190f0AA",
  "userContext": {
    "accountId": null
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input []	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	62.0
additional Fields	Map<String, Additional Fields Input >	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	62.0
catalogId	String	ID of the catalog.	Required	62.0
categoryId	String	ID of the category.	Optional	62.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	62.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	62.0
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	62.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled for the org, then the <code>currencyCode</code> property is required.	Optional	62.0
cursor	String	Unique ID to represent the position of each product in the dataset.	Optional	62.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	62.0
enable Qualification	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	62.0
execute ConfigurationRules	Boolean	Indicates whether to execute configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
filter	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	62.0
guided Selection ResponseId	String	Response identifier of the guided selection.	Required if the <code>searchTerms</code> property isn't specified.	62.0
include Catalog Details	Boolean	Indicates whether to include catalog details in the response (<code>true</code>) or not (<code>false</code>).	Optional	62.0
limit	Integer	Number of items to include in the response. The default value is 10.	Optional	62.0
orderBy	String[]	Sort order of the results, which is either ascending (<code>asc</code>) or descending order (<code>desc</code>). The default sort order is ascending order. The default value is <code>asc</code> . If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then you can sort products by using name only.	Optional	62.0
priceBookId	String	ID of the price book to get the prices from. If this property isn't specified, then prices from the standard price book are fetched.	Required	62.0
pricing Procedure	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	62.0
product Classification Id	String	ID of the product classification.	Optional	62.0
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	62.0
searchTerms	Guided Selection Search Term Input[]	Search terms of the guided selection.	Required if the <code>guided Selection ResponseId</code>	62.0

Name	Type	Description	Required or Optional	Available Version
			property isn't specified.	
transactionContextId	String	ID of the transaction context.	Optional	67.0
transactionId	String	ID of the transaction.	Optional	67.0
usePromotions	Boolean	Indicates whether to fetch applicable promotions from Global Promotion Management (GPM) for the guided selection (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	62.0

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.

If both the `guidedSelectionResponseId` and `searchTerms` properties are specified, then the `searchTerms` property is considered in the input request.

Response Body for POST

[Guided Selection](#)

Product Details (POST)

Get product details, such as attributes, hierarchy, or cardinality, for a specified product ID. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/products/productId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/products/01txx0000006j08AAA
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "catalogId": "0ZSxx0000000001GAA",
  "priceBookId": "01s26000002ZT71AAG",
  "productSellingModelId": "0jP1Q000000CaVFUA0",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "enablePricing": true,
  "enableQualification": true,
  "qualificationProcedure": "QualificationProcedure",
  "pricingProcedure": "Preview",
  "contextDefinition": "TestDefinition",
  "contextMapping": "TestDefinitionNode",
  "additionalFields": {
    "ProductSellingModelOption": {
      "additionalFields": {
        "ProrationPolicy": {
          "fields": [
            "ArePartialPeriodsAllowed",
            "ProrationPolicyType"
          ]
        }
      }
    },
    "Product2": {
      "fields": [
        "field1",
        "field2"
      ]
    },
    "ProductAttributeDefinition": {
      "fields": [
        "field3",
        "field4"
      ]
    }
  },
  "additionalContextData": [
    {
      "nodeName": "Contract",
      "nodeData": {
```

```

        "id": "xxxxx231",
        "name": "Contract1"
    },
    {
        "nodeName": "Lead",
        "nodeData": {
            "id": "111111131",
            "name": "Lead1"
        }
    }
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
additional Fields	Map<String, Additional Fields Input>	Additional standard or custom fields to include in the response. The supported objects are Product2 or ProductAttributeDefinition—If the fields defined for the ProductAttributeDefinition object aren't available for the ProductClassificationAttr object, then the API request fails. In API version 66.0 and later, you can request proration policy details in the response for each product selling model option through this property.	Optional	61.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled for the org, then the <code>currencyCode</code> property is required.	Optional	60.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.	Optional	60.0
enableQualification	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
priceBookId	String	ID of the price book to fetch the prices from. If this property isn't specified, then the prices from the standard price book are fetched.	Required	60.0
pricingProcedure	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	60.0
productSellingModelId	String	ID of the product selling model.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Response Body for POST

[CPQ Base Details](#)

Product Recommendations (POST)

Get a list of recommended products based on your underlying business rules.

This API returns a list of products based on the current quote or order and applicable constraint rules, along with the recommendation reasons and compatibility indicators. This enables sales reps to define accurate and complete, quoting process, minimizing both manual effort and errors.

Resource

```
/revenue/product-discovery/products/recommendations
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v67.0/revenue/product-discovery/products/recommendations
```

Available Version

67.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "currencyCode": "USD",
  "enablePricing": true,
  "enableQualification": true,
  "filter": {
    "criteria": [
      {
```



```

        "property": "isActive",
        "operator": "eq",
        "value": true
    },
    {
        "property": "isQualified",
        "operator": "eq",
        "value": true
    }
]
},
"limit": 12,
"priceBookId": "01sSG00000DQCjhYAH",
"transactionId": "0Q0SG0000014Ui50AE"
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	67.0
additionalFields	Map<String, AdditionalField>	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	67.0
catalogId	String	ID of the catalog to fetch the recommended products from.	Optional	67.0
contextDefinition	String	API name of the custom context definition that's sent for context creation. If you don't specify this property, then the default context definition is used.	Optional	67.0
contextMapping	String	Default context mapping of the context definition. If you specify a context mapping, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	67.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled in the org, then the <code>currencyCode</code> property is required. If you don't specify a currency code, then the value is fetched from the account.	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
cursor	String	Unique ID to represent the position of each product in the data set.	Optional	67.0
enablePricing	Boolean	Indicates whether to enable pricing for products in orgs where Salesforce Pricing is enabled (<code>true</code>) or not (<code>false</code>). Set the value to <code>false</code> to skip the execution of Salesforce Pricing. In orgs where Salesforce Pricing is disabled, you can't override this value to <code>true</code> . The default value is <code>true</code> .	Optional	67.0
enableQualification	Boolean	Indicates whether to enable qualification rules for products in orgs where Qualification Procedure is enabled (<code>true</code>) or not (<code>false</code>). Set the value to <code>false</code> to skip the execution of Business Rules Engine qualification rules. In orgs where Qualification Procedure is disabled, you can't override this value to <code>true</code> . The default value is <code>true</code> .	Optional	67.0
filter	Filter Input[]	Filters records based on supported criteria. The supported property is <code>name</code> . The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> —This value isn't applicable if the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled. If you specify multiple criteria, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	67.0
limit	Integer	Number of recommended products to include in the response. The default value is 10.	Optional	67.0
priceBookId	String	ID of the price book to get prices from. If you don't specify a price book ID, then prices from the standard price book are fetched.	Optional	67.0
pricingProcedure	String	API name of the custom pricing procedure that's used for the pricing process. If you don't specify this property, then the default pricing procedure is executed.	Optional	67.0
qualificationProcedure	String	API name of the custom qualification procedure that's used for the product qualification process. If you don't specify	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
		this property, then the default qualification procedure is executed.		
transactionContextId	String	ID of the sales transaction context instance.	Optional	67.0
transactionId	String	ID of the quote or order.	Optional	67.0
usePromotions	Boolean	Indicates whether to fetch applicable promotions from Global Promotion Management (GPM) for the guided selection (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Optional	67.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	67.0

Response Body for POST

[Product Recommendations](#)

Products List (POST)

Get a list of products for a specified catalog, category, or subcategory. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/products
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/products
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "eeaa1db2-f371-4227-a886-c77e2f66ce1d",
  "limit": 60,
  "cursor": "MTAwMDAwMDAwNg==",
```

```

"orderBy": [
  "name:asc"
],
"catalogId": "0ZSDU0000002Og74AE",
"categoryId": "0ZGDU0000002P0H4AU",
"priceBookId": "01sDU000000JVsVYAW",
"productClassificationId": "11BDU0000002TCC2A2",
"currencyCode": "USD",
"userContext": {
  "accountId": "001DU000001o2UzYAI"
},
"includeCatalogDetails": true,
"enableQualification": true,
"enablePricing": true,
"qualificationProcedure": "ProductQualification",
"pricingProcedure": "pricingProcedure",
"contextDefinition": "BrowseContextDefinitionExt",
"contextMapping": "ProductDiscoveryMapping",
"filter": {
  "criteria": [
    {
      "property": "name",
      "operator": "eq",
      "value": "Laptop Pro Bundle"
    }
  ]
},
"relatedObjectFilters": [
  {
    "objectName": "ProductSpecificationRecType",
    "criteria": [
      {
        "property": "IsCommercial",
        "operator": "eq",
        "value": true
      }
    ]
  }
],
"additionalContextData": [
  {
    "nodeName": "Account",
    "nodeData": {
      "id": "001DU000001o2UzYAI",
      "name": "Cloud Kicks"
    }
  }
],
"additionalFields": {
  "Product2": {
    "fields": [
      "CanRamp",
      "DecompositionScope",
      "ProductCode"
    ]
  }
}

```

```

    ]
  }
}
}

```

If a parent category ID is specified in the request body, then the API returns all products associated to all child categories.

This example shows a sample request to retrieve a product list with promotions.

```

{
  "correlationId": "eeaa1db2-f371-4227-a886-c77e2f66ce1d",
  "limit": 60,
  "cursor": "MTAwMDAwMDAwNg==",
  "orderBy": [
    "name:asc"
  ],
  "catalogId": "0ZSDU0000002Og74AE",
  "categoryId": "0ZGDU0000002POH4AU",
  "priceBookId": "01sDU000000JVsvYAW",
  "productClassificationId": "11BDU0000002TCC2A2",
  "currencyCode": "USD",
  "userContext": {
    "accountId": "001DU000001o2UzYAI"
  },
  "includeCatalogDetails": true,
  "enableQualification": true,
  "enablePricing": true,
  "qualificationProcedure": "ProductQualification",
  "pricingProcedure": "pricingProcedure",
  "contextDefinition": "BrowseContextDefinitionExt",
  "contextMapping": "ProductDiscoveryMapping",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "eq",
        "value": "Laptop Pro Bundle"
      }
    ]
  },
  "relatedObjectFilters": [
    {
      "objectName": "ProductSpecificationRecType",
      "criteria": [
        {
          "property": "IsCommercial",
          "operator": "eq",
          "value": true
        }
      ]
    }
  ],
  "additionalContextData": [
    {
      "nodeName": "Account",

```

```

        "nodeData": {
            "id": "001DU000001o2UzYAI",
            "name": "Cloud Kicks"
        }
    },
    "additionalFields": {
        "Product2": {
            "fields": [
                "CanRamp",
                "DecompositionScope",
                "ProductCode"
            ]
        }
    },
    "executeConfigurationRules": false,
    "transactionContextId": "a1b2c3d4e5f6",
    "transactionId": "trans789",
    "usePromotions": true
}

```

This example shows a sample request to run visibility rules.

```

{
    "enableQualification": true,
    "enablePricing": true,
    "includeCatalogDetails": true,
    "catalogId": "0ZSVW000000AhdC4AS",
    "limit": 12,
    "offset": 0,
    "userContext": {
        "accountId": null
    },
    "priceBookId": "01sVW0000024PZ1YAM",
    "currencyCode": "USD",
    "transactionId": "0Q0VW000001190f0AA",
    "filter": {
        "criteria": [
            {
                "property": "isActive",
                "operator": "eq",
                "value": true
            },
            {
                "property": "UsedFor",
                "operator": "eq",
                "value": ""
            }
        ]
    },
    "orderBy": [
        "name:asc"
    ],
    "executeConfigurationRules": true
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input []	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
additional Fields	Map<String, Additional Fields Input >	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	61.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
categoryId	String	ID of the category. If the category ID isn't specified, then the API returns the list of offers from the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier of the request.	Optional	60.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled for the org, then the <code>currencyCode</code> property is required.	Optional	60.0
cursor	String	Unique ID to represent the position of each product in the dataset.	Optional	60.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.		
<code>enableQualification</code>	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
<code>executeConfigurationRules</code>	Boolean	Indicates whether to execute configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	67.0
<code>filter</code>	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	60.0
<code>includeCatalogDetails</code>	Boolean	Indicates whether to include catalog details in the response (<code>true</code>) or not (<code>false</code>).	Optional	61.0
<code>limit</code>	Integer	Number of items to include in the response. The default value is 10.	Optional	60.0
<code>offset</code>	Integer	Reserved for internal use.	Optional	60.0
<code>orderBy</code>	String[]	Sort order of the results, which is either ascending (<code>asc</code>) or descending order (<code>desc</code>). The default sort order is ascending order. The default value is <code>asc</code> . If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then you can sort products by using name only.	Optional	60.0
<code>priceBookId</code>	String	ID of the price book to get the prices from. If this property isn't specified, then prices from the standard price book are fetched.	Required	60.0
<code>pricingProcedure</code>	String	API name of the custom pricing procedure that's used for the pricing process. If this	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		property isn't specified, then the default pricing procedure is executed.		
product Classification Id	String	ID of the product classification.	Optional	60.0
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
relatedObject Filters	Related Object Filter Input[]	Filter records based on supported criteria for related objects. The supported object is <code>ProductSpecificationRecType</code> . The supported property is <code>IsCommerical</code> . The supported operator is <code>eq</code> . The supported values are <code>true</code> and <code>false</code> .	Optional	60.0
transaction ContextId	String	ID of the transaction context.	Optional	67.0
transactionId	String	ID of the transaction.	Optional	67.0
usePromotions	Boolean	Indicates whether to fetch applicable promotions from Global Promotion Management (GPM) for each product in the list (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.

Response Body for POST

[CPQ Base List](#)

Qualification (POST)

Run the qualification procedure on a list of product IDs. This API is a composite API for Product Discovery.

Resource

```
/connect/cpq/qualification
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/qualification
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "productIds": [
    "01txx0000006i7PAAQ",
    "01txx0000006i7QAAQ",
    "01txx0000006i7IAAQ"
  ],
  "userContext": {
    "accountId": "001xx000003GZHgAAO"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
catalogId	String	ID of the catalog.	Optional	60.0
categoryId	String	ID of the category.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, the default context definition is used.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier of the request.	Optional	60.0
productIds	String[]	List of product IDs for qualification check.	Required	60.0
qualification Procedure	String	API name of the custom qualification procedure that's sent for processing. If this property isn't specified, the default qualification procedure is executed.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Response Body for POST

[CPQ Base List](#)

Request Bodies

Learn more about the available Product Discovery API request bodies.

[Additional Fields Input](#)

Input representation of the additional standard or custom fields to include in the response.

[Bulk Product Details Input](#)

Input representation of the request to retrieve details of multiple products.

[Catalog Details Input](#)

Input representation of the request to get the catalog details.

[Catalog List Input](#)

Input representation of the request to get a list of catalogs.

[Category Details Input](#)

Input representation of the request to get category details.

[Category List Input](#)

Input representation of the request to get a list of categories.

[Context Data Input](#)

Input representation of the context data.

[Guided Selection Input](#)

Input representation of the guided selection details.

[Guided Selection Search Term Input](#)

Input representation of the search terms of a guided selection.

[Filter Criteria Input](#)

Input representation of the criteria to filter records based on supported properties.

[Filter Input](#)

Input representation of the request to filter records.

[Product Details Input](#)

Input representation of the request to get product details.

[Product Data Input](#)

Input representation of the product details such as the product ID and product selling model ID.

[Product List Input](#)

Input representation of the request to retrieve a list of products.

[Product Recommendation Input](#)

Input representation of the details of a request to get product recommendations.

[Products Search Input](#)

Input representation of the request to search products.

[QOC Qualification](#)

Input representation of the qualification request.

[Related Object Filter Input](#)

Input representation of the request to filter records of a related object.

[User Context Input](#)

Input representation of the details with the user context.

Additional Fields Input

Input representation of the additional standard or custom fields to include in the response.

JSON Example

```
"additionalFields" : {
  "Product2" : {
    "fields" : ["CustomField1__c","StandardField1"]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
fields	String[]	List of additional standard or custom fields to include in the response.	Optional	61.0

Bulk Product Details Input

Input representation of the request to retrieve details of multiple products.

JSON Example

```
{
  "productData": [
    {
      "productId": "01txx0000006ivJAAQ",
      "productSellingModelId": "0jPxx000000009hEAA"
    },
    {
      "productId": "01txx0000006ivLAAQ",
      "productSellingModelId": "0jPxx000000009iEAABB"
    }
  ],
  "correlationId": "de9a674c-1807-438c-ac78-2c96f4655325",
  "priceBookId" : "01sxx0000005qxxAAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample request with proration policy details requested through the `additionalFields` property.

```
{
  "additionalFields": {
    "ProductSellingModelOption": {
      "additionalFields": {
        "ProrationPolicy": {
          "fields": [
            "ArePartialPeriodsAllowed",
            "ProrationPolicyType"
          ]
        }
      }
    }
  },
  "productData": [
    {
      "productId": "01txx0000006ivJAAQ",
      "productSellingModelId": "0jPxx000000009hEAA"
    },
    {
      "productId": "01txx0000006ivLAAQ",
      "productSellingModelId": "0jPxx000000009iEAABB"
    }
  ],
  "correlationId": "de9a674c-1807-438c-ac78-2c96f4655325",
  "priceBookId": "01sxx0000005qxxAAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

```

    }
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalContextData	Context Data Input []	Additional nodes to add to the custom or default context definition. This data is appended to the context input and sent for hydration and qualification. The maximum limit of supported nodes is 10.	Optional	61.0
additionalFields	Map<String, Additional Fields Input >	Additional standard or custom fields of the Product2 object to include in the response. The field values are returned in the response for each of the products. In API version 66.0 and later, you can request proration policy details in the response for each product selling model option through this property.	Optional	61.0
contextDefinition	String	Name of the custom context definition that's sent for the context creation. If unspecified, the default context definition is used.	Optional	61.0
contextMapping	String	Context mapping details from the context definition. If specified, the API validates if the context mapping belongs to the specified context definition and considers the mapping for hydration. If unspecified, the default context mapping of the context definition is used.	Optional	61.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Optional	61.0
currencyCode	String	Currency code to consider for pricing and filtering.	Optional	61.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then	Optional	61.0

Name	Type	Description	Required or Optional	Available Version
		setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.		
<code>enableQualification</code>	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	61.0
<code>priceBookId</code>	String	ID of the price book to fetch the prices from.	Optional	61.0
<code>pricingProcedure</code>	String	Name of the custom pricing procedure to send for processing. If unspecified, the default pricing procedure is executed.	Optional	61.0
<code>productData</code>	Product Data Input[]	List of maps that contain product IDs and product selling model IDs.	Required	61.0
<code>qualificationProcedure</code>	String	Name of the custom qualification procedure to send for processing. If unspecified, the default qualification procedure is executed.	Optional	61.0
<code>userContext</code>	User Context Input[]	User context details. For example, account ID or contact ID.	Optional	61.0

Catalog Details Input

Input representation of the request to get the catalog details.

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Catalog List Input

Input representation of the request to get a list of catalogs.

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "limit": 10,
  "offset": 0,
  "orderBy": [
    "name:asc",
    "id:desc"
  ],
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
limit	Integer	Number of items to include in the response.	Optional	60.0
offset	Integer	Offset size from which to get the catalog count.	Optional	60.0
orderBy	String[]	Sort order for the catalogs.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Category Details Input

Input representation of the request to get category details.

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample request to get category details with eligible promotions.

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "usePromotions": true
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
customFields	String[]	List of category fields to retrieve in the response.	Optional	60.0
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
enable Qualification	Boolean	Indicates whether to enable qualification rules for the categories (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
filter	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . The supported operators are <code>eq</code> ; <code>in</code> ; <code>contains</code> ; <code>gt</code> —Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>lt</code> —Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>gte</code> —Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; or <code>lte</code> —Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only. If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
qualification Procedure	String	API name of the custom qualification procedure that's used for the qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0
usePromotions	Boolean	Indicates whether to fetch eligible promotions from Global Promotion Management (GPM) for the requested category and its products (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0

Category List Input

Input representation of the request to get a list of categories.

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "catalogId": "0ZSxx000000009hGAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample request to get a list of categories with eligible promotions.

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "catalogId": "0ZSxx000000009hGAA",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "usePromotions": true
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
catalogId	String	ID of the catalog.	Required	60.0
contextDefinition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
contextMapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
customFields	String[]	List of additional custom fields to include in the response.	Optional	60.0
depth	Integer	Specifies the levels of subcategories to retrieve beneath the parent category. This parameter only applies when <code>parentCategoryId</code> is provided.	Optional	61.0
enableQualification	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	60.0
filter	Filter Input	Filters records based on supported criteria. The supported property is <code>isQualified</code> .	Optional	62.0
parentCategoryId	String	ID of the parent category whose subcategories you want to retrieve. If not specified, only root-level categories from the catalog are returned.	Optional	61.0
qualificationProcedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
usePromotions	Boolean	Indicates whether to fetch eligible promotions from Global Promotion Management (GPM) for the requested category and its products (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.

Context Data Input

Input representation of the context data.

JSON Example

```
"additionalContextData": [
  {
    "nodeName": "Contract",
    "nodeData": {
      "id": "xxxxxx231",
      "name": "Contract1"
    }
  },
  {
    "nodeName": "Lead",
    "nodeData": {
      "id": "111111131",
      "name": "Lead1"
    }
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
nodeData	Map<String, Object>	Details of the node.	Optional	60.0
nodeName	String	Name of the node.	Optional	60.0

Guided Selection Input

Input representation of the guided selection details.

JSON Example

```
{
  "correlationId": "corrId",
  "catalogId": "0ZSxx0000000001GAA",
  "priceBookId": "pricebookId",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNg==",
  "userContext": {
    "accountId": "accId"
  },
  "guidedSelectionResponseId": "ABCxx0000000001GAA",
  "searchTerms": [
    {
      "term": "iPhone",
      "tags": [
        "deviceType",
        "mobile"
      ]
    },
    {
      "term": "4GB",
      "tags": [
        "RAM"
      ]
    },
    {
      "term": "64GB",
      "tags": [
        "Storage"
      ]
    }
  ],
  "enableQualification": true,
  "enablePricing": true,
  "includeCatalogDetails": false
}
```

This example shows a sample request to fetch eligible promotions.

```
{
  "correlationId": "corrId",
  "catalogId": "0ZSxx0000000001GAA",
  "priceBookId": "pricebookId",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNg==",
  "userContext": {
    "accountId": "accId"
  },
  "guidedSelectionResponseId": "ABCxx0000000001GAA",
  "searchTerms": [
    {
      "term": "IPhone",
      "tags": [
        "deviceType",
        "mobile"
      ]
    },
    {
      "term": "4GB",
      "tags": [
        "RAM"
      ]
    },
    {
      "term": "64GB",
      "tags": [
        "Storage"
      ]
    }
  ],
  "enableQualification": true,
  "enablePricing": true,
  "includeCatalogDetails": false,
  "transactionContextId": "context123",
  "transactionId": "trans456",
  "usePromotions": true
}
```

This example shows a sample request to run visibility rules.

```
{
  "catalogId": "0ZSVW000000Ahdc4AS",
  "currencyCode": "USD",
  "enablePricing": true,
  "enableQualification": true,
  "executeConfigurationRules": true,
  "filter": {
    "criteria": [
      {
        "property": "isActive",
        "operator": "eq",
        "value": true
      }
    ]
  }
}
```

```

    },
    {
      "property": "UsedFor",
      "operator": "eq",
      "value": ""
    }
  ]
},
"guidedSelectionResponseId": "0U3VW0000000a1t0AA",
"includeCatalogDetails": true,
"limit": 12,
"offset": 0,
"orderBy": [
  "name:asc"
],
"priceBookId": "01sVW0000024PZ1YAM",
"transactionId": "0Q0VW000001190f0AA",
"userContext": {
  "accountId": null
}
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input []	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	62.0
additional Fields	Map<String, Additional Fields Input >	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	62.0
catalogId	String	ID of the catalog.	Required	62.0
categoryId	String	ID of the category.	Optional	62.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	62.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
<code>correlationId</code>	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	62.0
<code>currencyCode</code>	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled for the org, then the <code>currencyCode</code> property is required.	Optional	62.0
<code>cursor</code>	String	Unique ID to represent the position of each product in the dataset.	Optional	62.0
<code>enablePricing</code>	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	62.0
<code>enableQualification</code>	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	62.0
<code>executeConfigurationRules</code>	Boolean	Indicates whether to execute configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	67.0
<code>filter</code>	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	62.0
<code>guidedSelectionResponseId</code>	String	Response identifier of the guided selection.	Required if the <code>searchTerms</code> property isn't specified.	62.0
<code>includeCatalogDetails</code>	Boolean	Indicates whether to include catalog details in the response (<code>true</code>) or not (<code>false</code>).	Optional	62.0
<code>limit</code>	Integer	Number of items to include in the response. The default value is 10.	Optional	62.0
<code>orderBy</code>	String[]	Sort order of the results, which is either ascending (<code>asc</code>) or descending order (<code>desc</code>). The default sort order is ascending order. The default value is <code>asc</code> . If the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then you can sort products by using name only.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
priceBookId	String	ID of the price book to get the prices from. If this property isn't specified, then prices from the standard price book are fetched.	Required	62.0
pricing Procedure	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	62.0
product Classification Id	String	ID of the product classification.	Optional	62.0
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	62.0
searchTerms	Guided Selection Search Term Input	Search terms of the guided selection.	Required if the <code>guided Selection ResponseId</code> property isn't specified.	62.0
transaction ContextId	String	ID of the transaction context.	Optional	67.0
transactionId	String	ID of the transaction.	Optional	67.0
usePromotions	Boolean	Indicates whether to fetch applicable promotions from Global Promotion Management (GPM) for the guided selection (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	62.0

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.

If both the `guidedSelectionResponseId` and `searchTerms` properties are specified, then the `searchTerms` property is considered in the input request.

Guided Selection Search Term Input

Input representation of the search terms of a guided selection.

JSON Example

```
"searchTerms": [
  {
    "term": "iPhone",
    "tags": [
      "deviceType",
      "mobile"
    ]
  },
  {
    "term": "4GB",
    "tags": [
      "RAM"
    ]
  },
  {
    "term": "64GB",
    "tags": [
      "Storage"
    ]
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
tags	String[]	Search term tags for the guided selection.	Optional	62.0
term	String	Search term for the guided selection.	Required	62.0

Filter Criteria Input

Input representation of the criteria to filter records based on supported properties.

JSON Example

```
"criteria":
[
  {
    "attributeType": "ProductStandard",
```

```
"property": "name",
"operator": "eq",
"value": "iPhone"
}]
```

Properties

Name	Type	Description	Required or Optional	Available Version
attributeType	String	Search attribute type of the facet for a faceted search.	Optional	63.0
operator	String	Operator used for the filter criteria.	Required	60.0
property	String	Property name to use in the filter, which must be the same as the object field. The supported property is <code>name</code> .	Required	60.0
value	Object	Value for the filter criteria.	Required	60.0

Valid values are:

- `ProductStandard`
- `ProductCustom`
- `ProductDynamicAttribute`
- `ProductAttributeStandard`
- `ProductAttributeCustom`

The supported operators are:

- `eq`
- `in`
- `contains`
- `gt`—Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lt`—Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `gte`—Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lte`—Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.

Filter Input

Input representation of the request to filter records.

JSON Example

```
"filter":
{
  "criteria":
```

```
[ {
  "attributeType": "ProductStandard",
  "property": "name",
  "operator": "eq",
  "value": "iPhone"
}]}
```

Properties

Name	Type	Description	Required or Optional	Available Version
criteria	Filter Criteria Input []	Filter criteria to filter the records.	Optional	60.0

Product Details Input

Input representation of the request to get product details.

JSON Example

```
{
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
  "catalogId": "0ZSxx0000000001GAA",
  "priceBookId": "01s26000002ZT71AAG",
  "productSellingModelId": "0jP1Q000000CaVFUA0",
  "userContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "enablePricing": true,
  "enableQualification": true,
  "qualificationProcedure": "QualificationProcedure",
  "pricingProcedure": "Preview",
  "contextDefinition": "TestDefinition",
  "contextMapping": "TestDefinitionNode",
  "additionalFields": {
    "ProductSellingModelOption": {
      "additionalFields": {
        "ProrationPolicy": {
          "fields": [
            "ArePartialPeriodsAllowed",
            "ProrationPolicyType"
          ]
        }
      }
    }
  },
  "Product2": {
    "fields": [
      "field1",
      "field2"
    ]
  }
},
```

```

    "ProductAttributeDefinition": {
      "fields": [
        "field3",
        "field4"
      ]
    },
    "additionalContextData": [
      {
        "nodeName": "Contract",
        "nodeData": {
          "id": "xxxxxx231",
          "name": "Contract1"
        }
      },
      {
        "nodeName": "Lead",
        "nodeData": {
          "id": "1111111131",
          "name": "Lead1"
        }
      }
    ]
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
additionalFields	Map<String, Additional Fields Input>	Additional standard or custom fields to include in the response. The supported objects are Product2 or ProductAttributeDefinition—If the fields defined for the ProductAttributeDefinition object aren't available for the ProductClassificationAttr object, then the API request fails. In API version 66.0 and later, you can request proration policy details in the response for each product selling model option through this property.	Optional	61.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier value that's attached to the requests and messages, and accepts references to a particular transaction or event chain.	Optional	60.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled for the org, then the <code>currencyCode</code> property is required.	Optional	60.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.	Optional	60.0
enable Qualification	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
priceBookId	String	ID of the price book to fetch the prices from. If this property isn't specified, then the prices from the standard price book are fetched.	Required	60.0

Name	Type	Description	Required or Optional	Available Version
pricing Procedure	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	60.0
product SellingModel Id	String	ID of the product selling model.	Optional	60.0
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Product Data Input

Input representation of the product details such as the product ID and product selling model ID.

JSON Example

```
"productData": [  
  {  
    "productId": "01txx0000006ivJAAQ",  
    "productSellingModelId": "0jPxx000000009hEAA"  
  },  
  {  
    "productId": "01txx0000006ivLAAQ",  
    "productSellingModelId": "0jPxx000000009iEAABB"  
  }  
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
productId	String	ID of the product.	Required	61.0
product SellingModelId	String	ID of the product selling model.	Optional	61.0

Product List Input

Input representation of the request to retrieve a list of products.

JSON Example

```
{
  "correlationId": "eeaa1db2-f371-4227-a886-c77e2f66ce1d",
  "limit": 60,
  "cursor": "MTAwMDAwMDAwNg==",
  "orderBy": [
    "name:asc"
  ],
  "catalogId": "0ZSDU0000002Og74AE",
  "categoryId": "0ZGDU0000002P0H4AU",
  "priceBookId": "01sDU000000JVsVYAW",
  "productClassificationId": "11BDU0000002TCC2A2",
  "currencyCode": "USD",
  "userContext": {
    "accountId": "001DU000001o2UzYAI"
  },
  "includeCatalogDetails": true,
  "enableQualification": true,
  "enablePricing": true,
  "qualificationProcedure": "ProductQualification",
  "pricingProcedure": "pricingProcedure",
  "contextDefinition": "BrowseContextDefinitionExt",
  "contextMapping": "ProductDiscoveryMapping",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "eq",
        "value": "Laptop Pro Bundle"
      }
    ]
  },
  "relatedObjectFilters": [
    {
      "objectName": "ProductSpecificationRecType",
      "criteria": [
        {
          "property": "IsCommercial",
          "operator": "eq",
          "value": true
        }
      ]
    }
  ],
  "additionalContextData": [
    {
      "nodeName": "Account",
      "nodeData": {
        "id": "001DU000001o2UzYAI",

```

```

        "name": "Cloud Kicks"
      }
    }
  ],
  "additionalFields": {
    "Product2": {
      "fields": [
        "CanRamp",
        "DecompositionScope",
        "ProductCode"
      ]
    }
  }
}

```

If a parent category ID is specified in the request body, then the API returns all products associated to all child categories.

This example shows a sample request to retrieve a product list with promotions.

```

{
  "correlationId": "eeaa1db2-f371-4227-a886-c77e2f66ce1d",
  "limit": 60,
  "cursor": "MTAwMDAwMDAwNg==",
  "orderBy": [
    "name:asc"
  ],
  "catalogId": "0ZSDU0000002Og74AE",
  "categoryId": "0ZGDU0000002P0H4AU",
  "priceBookId": "01sDU000000JVsvYAW",
  "productClassificationId": "11BDU0000002TCC2A2",
  "currencyCode": "USD",
  "userContext": {
    "accountId": "001DU0000001o2UzYAI"
  },
  "includeCatalogDetails": true,
  "enableQualification": true,
  "enablePricing": true,
  "qualificationProcedure": "ProductQualification",
  "pricingProcedure": "pricingProcedure",
  "contextDefinition": "BrowseContextDefinitionExt",
  "contextMapping": "ProductDiscoveryMapping",
  "filter": {
    "criteria": [
      {
        "property": "name",
        "operator": "eq",
        "value": "Laptop Pro Bundle"
      }
    ]
  },
  "relatedObjectFilters": [
    {
      "objectName": "ProductSpecificationRecType",
      "criteria": [
        {

```

```

        "property": "IsCommercial",
        "operator": "eq",
        "value": true
      }
    ]
  },
  "additionalContextData": [
    {
      "nodeName": "Account",
      "nodeData": {
        "id": "001DU000001o2UzYAI",
        "name": "Cloud Kicks"
      }
    }
  ],
  "additionalFields": {
    "Product2": {
      "fields": [
        "CanRamp",
        "DecompositionScope",
        "ProductCode"
      ]
    }
  },
  "executeConfigurationRules": false,
  "transactionContextId": "a1b2c3d4e5f6",
  "transactionId": "trans789",
  "usePromotions": true
}

```

This example shows a sample request to run visibility rules.

```

{
  "enableQualification": true,
  "enablePricing": true,
  "includeCatalogDetails": true,
  "catalogId": "0ZSVW000000AhdC4AS",
  "limit": 12,
  "offset": 0,
  "userContext": {
    "accountId": null
  },
  "priceBookId": "01sVW0000024PZlYAM",
  "currencyCode": "USD",
  "transactionId": "0Q0VW000001190f0AA",
  "filter": {
    "criteria": [
      {
        "property": "isActive",
        "operator": "eq",
        "value": true
      },
      {
        "property": "UsedFor",

```

```

        "operator": "eq",
        "value": ""
      }
    ],
    "orderBy": [
      "name:asc"
    ],
    "executeConfigurationRules": true
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
additional Fields	Map<String, Additional Fields Input>	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	61.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
categoryId	String	ID of the category. If the category ID isn't specified, then the API returns the list of offers from the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier of the request.	Optional	60.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled for the org, then the <code>currencyCode</code> property is required.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
<code>cursor</code>	String	Unique ID to represent the position of each product in the dataset.	Optional	60.0
<code>enablePricing</code>	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.	Optional	60.0
<code>enableQualification</code>	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
<code>executeConfigurationRules</code>	Boolean	Indicates whether to execute configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	67.0
<code>filter</code>	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	60.0
<code>includeCatalogDetails</code>	Boolean	Indicates whether to include catalog details in the response (<code>true</code>) or not (<code>false</code>).	Optional	61.0
<code>limit</code>	Integer	Number of items to include in the response. The default value is 10.	Optional	60.0
<code>offset</code>	Integer	Reserved for internal use.	Optional	60.0
<code>orderBy</code>	String[]	Sort order of the results, which is either ascending (<code>asc</code>) or descending order (<code>desc</code>). The default sort order is ascending order. The default value is <code>asc</code> . If the Use	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is enabled, then you can sort products by using name only.				
priceBookId	String	ID of the price book to get the prices from. If this property isn't specified, then prices from the standard price book are fetched.	Required	60.0
pricing Procedure	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	60.0
product Classification Id	String	ID of the product classification.	Optional	60.0
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
relatedObject Filters	Related Object Filter Input[]	Filter records based on supported criteria for related objects. The supported object is <code>ProductSpecificationRecType</code> . The supported property is <code>IsCommerical</code> . The supported operator is <code>eq</code> . The supported values are <code>true</code> and <code>false</code> .	Optional	60.0
transaction ContextId	String	ID of the transaction context.	Optional	67.0
transactionId	String	ID of the transaction.	Optional	67.0
usePromotions	Boolean	Indicates whether to fetch applicable promotions from Global Promotion Management (GPM) for each product in the list (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .	Optional	66.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

The supported operators are:

- eq
- in
- contains—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.

Product Recommendation Input

Input representation of the details of a request to get product recommendations.

JSON Example

```
{
  "currencyCode": "USD",
  "enablePricing": true,
  "enableQualification": true,
  "filter": {
    "criteria": [
      {
        "property": "isActive",
        "operator": "eq",
        "value": true
      },
      {
        "property": "isQualified",
        "operator": "eq",
        "value": true
      }
    ]
  },
  "limit": 12,
  "priceBookId": "01sSG00000DQCjhYAH",
  "transactionId": "0Q0SG0000014Ui50AE"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalContextData	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	67.0
additionalFields	Map<String, AdditionalFieldResponse >	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
catalogId	String	ID of the catalog to fetch the recommended products from.	Optional	67.0
contextDefinition	String	API name of the custom context definition that's sent for context creation. If you don't specify this property, then the default context definition is used.	Optional	67.0
contextMapping	String	Default context mapping of the context definition. If you specify a context mapping, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	67.0
currencyCode	String	Currency code that's considered for pricing and filtering request. If multiple currencies are enabled in the org, then the <code>currencyCode</code> property is required. If you don't specify a currency code, then the value is fetched from the account.	Optional	67.0
cursor	String	Unique ID to represent the position of each product in the data set.	Optional	67.0
enablePricing	Boolean	Indicates whether to enable pricing for products in orgs where Salesforce Pricing is enabled (<code>true</code>) or not (<code>false</code>). Set the value to <code>false</code> to skip the execution of Salesforce Pricing. In orgs where Salesforce Pricing is disabled, you can't override this value to <code>true</code> . The default value is <code>true</code> .	Optional	67.0
enableQualification	Boolean	Indicates whether to enable qualification rules for products in orgs where Qualification Procedure is enabled (<code>true</code>) or not (<code>false</code>). Set the value to <code>false</code> to skip the execution of Business Rules Engine qualification rules. In orgs where Qualification Procedure is disabled, you can't override this value to <code>true</code> . The default value is <code>true</code> .	Optional	67.0
filter	Filter Input[]	Filters records based on supported criteria. The supported property is <code>name</code> . The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> —This value isn't applicable if the Use Indexed Data For Product Listing and Search toggle from the Product Discovery Settings page from Setup is	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
		enabled. If you specify multiple criteria, then the resultant criteria are combined by using the <code>and</code> operator.		
<code>limit</code>	Integer	Number of recommended products to include in the response. The default value is 10.	Optional	67.0
<code>priceBookId</code>	String	ID of the price book to get prices from. If you don't specify a price book ID, then prices from the standard price book are fetched.	Optional	67.0
<code>pricingProcedure</code>	String	API name of the custom pricing procedure that's used for the pricing process. If you don't specify this property, then the default pricing procedure is executed.	Optional	67.0
<code>qualificationProcedure</code>	String	API name of the custom qualification procedure that's used for the product qualification process. If you don't specify this property, then the default qualification procedure is executed.	Optional	67.0
<code>transactionContextId</code>	String	ID of the sales transaction context instance.	Optional	67.0
<code>transactionId</code>	String	ID of the quote or order.	Optional	67.0
<code>usePromotions</code>	Boolean	Indicates whether to fetch applicable promotions from Global Promotion Management (GPM) for the guided selection (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Optional	67.0
<code>userContext</code>	User Context Input	User context details. For example, account ID or contact ID.	Optional	67.0

Products Search Input

Input representation of the request to search products.

JSON Example

This example shows a sample request to search products by using a query.

```
{
  "query": {
    "textQuery": {
      "searchPhrase": "firstproduct"
    }
  },
}
```

```

"catalogId": "0ZSxx0000000001GAA",
"categoryId": "0ZGT100000000q1OAA",
"correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
"limit": 10,
"cursor": "MTAwMDAwMDAwNg==",
"orderBy": [
  "name:asc",
  "id:desc"
],
"userContext": {
  "accountId": "001xx0000000001AAA",
  "contactId": "003xx000000000D7AAI"
},
"additionalFields": {
  "Product2": {
    "fields": [
      "CustomField1__c",
      "CustomField2__c",
      "StandardField1"
    ]
  }
}
}

```

This example shows a sample request to search products by using the `searchTerm` property.

```

{
  "searchTerm": "Laptop",
  "catalogId": "0ZSDU0000002Og64AE",
  "categoryId": "0ZGDU0000002P0A4AU",
  "correlationId": "d9d8f898-19f5-464a-ba2b-6a070783f6c4",
  "limit": 10,
  "cursor": "MTAwMDAwMDAwNw==",
  "orderBy": [
    "name:asc",
    "id:desc"
  ],
  "userContext": {
    "accountId": "001DU000001o2V0YAI"
  }
}

```

If a parent category ID is specified in the request body, then the API returns all products associated to all child categories.

This example shows a sample request to search products with eligible promotions. To fetch eligible promotions, specify a value for the `query` or `searchTerm` property, and set the `usePromotions` property to `true`.

```

{
  "query": {
    "textQuery": {
      "searchPhrase": "laptop"
    }
  },
  "catalogId": "0ZSxx0000000001GAA",
  "categoryId": "0ZGT100000000q1OAA",
  "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",

```

```

"limit": 10,
"cursor": "MTAwMDAwMDAwNg==",
"orderBy": [
  "name:asc",
  "id:desc"
],
"userContext": {
  "accountId": "001xx0000000001AAA",
  "contactId": "003xx000000000D7AAI"
},
"additionalFields": {
  "Product2": {
    "fields": [
      "CustomField1__c",
      "CustomField2__c",
      "StandardField1"
    ]
  }
},
"usePromotions": true
}

```

This example shows a sample request to run visibility rules.

```

{
  "enableQualification": true,
  "enablePricing": true,
  "includeCatalogDetails": true,
  "searchTerm": "128GB LRDIMM",
  "catalogId": "0ZSVW000000Ahdc4AS",
  "limit": 12,
  "userContext": {
    "accountId": null
  },
  "priceBookId": "01sVW00000024PZ1YAM",
  "currencyCode": "USD",
  "transactionId": "0Q0VW0000001190f0AA",
  "filter": {
    "criteria": [
      {
        "property": "isActive",
        "operator": "eq",
        "value": true
      },
      {
        "property": "UsedFor",
        "operator": "eq",
        "value": ""
      }
    ]
  },
  "orderBy": [
    "name:asc"
  ],
}

```

```

    "executeConfigurationRules": true
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
additional ContextData	Context Data Input []	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
additional Fields	Map<String, Additional Fields Input >	Additional standard or custom fields of the Product2 object to include in the response. If the requested fields are invalid or access to fields isn't available, then the API throws an error.	Optional	61.0
catalogId	String	ID of the catalog. If the catalog ID is specified, then the API returns the list of offers from the catalog with the pricing details related to the catalog.	Optional	60.0
categoryId	String	ID of the category. If the category ID isn't specified, then the API returns the matching query offers from the catalog.	Optional	60.0
context Definition	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, then the default context definition is used.	Optional	60.0
context Mapping	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
correlationId	String	Unique identifier of the request.	Optional	60.0
currencyCode	String	Currency code that's considered for pricing and filtering request.	Optional	60.0
cursor	String	Unique ID to represent the position of each product in the dataset.	Optional	60.0
enablePricing	Boolean	Indicates whether to enable pricing for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Pricing Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		Pricing Procedure toggle is disabled, then setting the <code>enablePricing</code> property to <code>true</code> has no effect and the <code>prices</code> property in the API response is returned empty.		
<code>enableQualification</code>	Boolean	Indicates whether to enable qualification rules for the products (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . The Qualification Procedure toggle from the Product Discovery Settings page from Setup overrides this property. For example, if the Qualification Procedure toggle is disabled, then setting the <code>enableQualification</code> property to <code>true</code> has no effect and the <code>qualificationContext</code> property in the API response isn't returned.	Optional	60.0
<code>executeConfigurationRules</code>	Boolean	Indicates whether to execute configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	67.0
<code>filter</code>	Filter Input	Filters records based on supported criteria. The supported property is <code>name</code> . The supported operators are <code>eq</code> ; <code>in</code> ; <code>contains</code> ; <code>gt</code> —Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>lt</code> —Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; <code>gte</code> —Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only; or <code>lte</code> —Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only. If multiple criteria are specified, then the resultant criteria are combined by using the <code>and</code> operator.	Optional	60.0
<code>includeCatalogDetails</code>	Boolean	Indicates whether to include catalog details in the response (<code>true</code>) or not (<code>false</code>).	Optional	61.0
<code>limit</code>	Integer	Number of items to include in the response. The default value is 10.	Optional	60.0
<code>offset</code>	Integer	Reserved for internal use.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
orderBy	String[]	Sort order of the results, which is either ascending or descending order. The default sort order is ascending order. The default value is <code>asc</code> .	Optional	60.0
priceBookId	String	ID of the price book to get the prices from. If this property isn't specified, then prices from the standard price book are fetched.	Optional	60.0
pricingProcedure	String	API name of the custom pricing procedure that's used for the pricing process. If this property isn't specified, then the default pricing procedure is executed.	Optional	60.0
product ClassificationId	String	ID of the product classification.	Optional	60.0
qualification Procedure	String	API name of the custom qualification procedure that's used for the product qualification process. If this property isn't specified, then the default qualification procedure is executed.	Optional	60.0
query	Map<String, Object>	Query to search the products.	Required	60.0
related ObjectFilter	Related Object Filter Input[]	Filter records based on supported criteria for related objects. The supported object is <code>ProductSpecificationRecType</code> . The supported property is <code>IsCommerical</code> . The supported operator is <code>eq</code> . The supported values are <code>true</code> and <code>false</code> .	Optional	60.0
searchTerm	String	String used to get products with the product name containing the search term. See Search Considerations When Using Indexed Data .	Optional	62.0
transaction ContextId	String	ID of the transaction context.	Optional	66.0
transactionId	String	ID of the transaction.	Optional	66.0
usePromotions	Boolean	Indicates whether to retrieve eligible promotions from Global Promotion Management (GPM) for each product in the search results (<code>true</code>) or not (<code>false</code>). If Promotion feature is enabled in the org and this property isn't specified, then the default	Optional	66.0

Name	Type	Description	Required or Optional	Available Version
		value is <code>true</code> . If the Promotion feature isn't enabled, the default value is <code>false</code> .		
<code>userContext</code>	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

QOC Qualification

Input representation of the qualification request.

JSON Example

```
{
  "productIds": [
    "01txx0000006i7PAAQ",
    "01txx0000006i7QAAQ",
    "01txx0000006i7IAAQ"
  ],
  "userContext": {
    "accountId": "001xx000003GZHgAAO"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
<code>additionalContextData</code>	Context Data Input[]	Additional nodes that are added to the custom or default context definition. The maximum number of supported nodes is 10.	Optional	60.0
<code>catalogId</code>	String	ID of the catalog.	Optional	60.0
<code>categoryId</code>	String	ID of the category.	Optional	60.0
<code>contextDefinition</code>	String	API name of the custom context definition that's sent for context creation. If this property isn't specified, the default context definition is used.	Optional	60.0
<code>contextMapping</code>	String	Default context mapping of the context definition. If a context mapping is specified, then the API checks whether the mapping belongs to the specified context definition to process the details for hydration.	Optional	60.0
<code>correlationId</code>	String	Unique identifier of the request.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
productIds	String[]	List of product IDs for qualification check.	Required	60.0
qualification Procedure	String	API name of the custom qualification procedure that's sent for processing. If this property isn't specified, the default qualification procedure is executed.	Optional	60.0
userContext	User Context Input	User context details. For example, account ID or contact ID.	Optional	60.0

Related Object Filter Input

Input representation of the request to filter records of a related object.

JSON Example

```
"relatedObjectFilters":
[
  {
    "objectName": "ProductSpecificationRecType",
    "criteria":
    [
      {
        "property": "IsCommercial",
        "operator": "eq",
        "value": true
      }
    ]
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
criteria	Filter Criteria Input []	Criteria to filter the related objects.	Required if the <code>relatedObjectFilters</code> property is specified.	60.0
objectName	String	Name of the object that's related to the main object.	Required if the <code>relatedObjectFilters</code> property is specified.	60.0

User Context Input

Input representation of the details with the user context.

JSON Example

```
"userContext": {  
  "accountId": "001xx0000000001AAA",  
  "contactId": "003xx000000000D7AAI",  
  "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"  
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account in a user context.	Optional	60.0
contactId	String	ID of the contact in a user context.	Optional	60.0
contextId	String	ID of the context that represents the created session.	Optional	60.0

Response Bodies

Learn more about the available Product Discovery API response bodies.

[API Status](#)

Output representation of the API status.

[Catalog Details](#)

Output representation of the details of a catalog definition.

[Category Details](#)

Output representation of the details of a category.

[Bulk Product Details](#)

Output representation of the response that contains the details of multiple products.

[CPQ Base Details](#)

Output representation of the catalog, category, or product details based on the request.

[CPQ Base List](#)

Output representation of the list of catalogs, categories, or products based on the request.

[CPQ Message](#)

Output representation of the API messages.

[Facet Value](#)

Output representation of the facet values found in the search result.

[Guided Selection](#)

Output representation of the details of a guided selection.

[Guided Selection Search Term](#)

Output representation of the search term details for a guided selection.

[Pricing Model](#)

Output representation of the details of the pricing model.

[Product Classification](#)

Output representation of the details of a product classification.

[Product Configuration Rule Details](#)

Output representation of the product configuration rule details.

[Product Configuration Rules](#)

Output representation of the details of the product configuration rules.

[Product Prices](#)

Output representation of the details of the product prices.

[Product Quantity](#)

Output representation of the details of the quantity constraints and current quantity for a product in the product discovery context.

[Product Recommendation Errors](#)

Output representation of the details of the errors encountered during the processing of the Product Recommendations API request.

[Product Recommendations](#)

Output representation of the fetched product recommendations.

[Product Selling Model Option](#)

Output representation of the product selling model option component.

[Product Selling Model](#)

Product Selling Model Component output representation

[Product Specification Record Type](#)

Output representation of the details of the product specification record type.

[Product Specification Type](#)

Output representation of the details of the product specification type.

[Promotion Details](#)

Output representation of the details of applicable promotions.

[Proration Policy](#)

Output representation of the details of the proration policy component.

[Qualification Context](#)

Output representation of the details about the product qualification.

[Recommended Products](#)

Output representation of the list of recommended products.

[Search Products Facet](#)

Output representation of the details of the faceted search.

[User Context](#)

Output representation of the user context details.

API Status

Output representation of the API status.

Property Name	Type	Description	Filter Group and Version	Available Version
messages	CPQ Message[]	Status messages of the API execution.	Small, 60.0	60.0
statusCode	String	Status code of the API execution.	Small, 60.0	60.0
statusMessage	String	Display label for the API status.	Small, 60.0	60.0

Catalog Details

Output representation of the details of a catalog definition.

JSON Example

```
{
  "catalogs": [
    {
      "customFields": {},
      "id": "0ZSSG00000187504AQ",
      "name": "Hardware Catalog",
      "numberOfCategories": 4
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
catalogCode	String	Unique ID associated with the catalog.	Small, 67.0	67.0
catalogType	String	Category of an entry in the catalog, which is customizable. For example, catalog types, such as sellable products, services, parts, technical services, or technical resources.	Small, 67.0	67.0
customFields	Map<String, Object>	Details of the custom fields associated with a catalog.	Small, 67.0	67.0
description	String	Description of the catalog.	Small, 67.0	67.0
effectiveEndDate	String	Date and time from when the catalog isn't available to the end users.	Small, 67.0	67.0
effectiveStartDate	String	Date and time from when the catalog is available to the end users.	Small, 67.0	67.0
id	String	ID of the catalog.	Small, 67.0	67.0
name	String	Name of the catalog.	Small, 67.0	67.0
numberOfCategories	Integer	Number of categories in the catalog.	Small, 67.0	67.0
status	String	Status of the catalog.	Small, 67.0	67.0

Category Details

Output representation of the details of a category.

JSON Example

```
{
  "categories": [
    {
      "catalogId": "0ZSSG00000187504AQ",
      "childCategories": [],
      "customFields": {},
      "eligiblePromotions": [],
      "id": "0ZGSG000001DJtv4AG",
      "name": "Accessories",
      "qualificationContext": {
        "isQualified": true
      }
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
catalogId	String	ID of the catalog the requested category belong to.	Small, 67.0	67.0
customFields	Map<String, Object>	Details of the custom fields associated with a catalog.	Small, 67.0	67.0
description	String	Description of the category.	Small, 67.0	67.0
eligiblePromotions	Promotion Output[]	List of eligible promotions for the product.	Small, 67.0	67.0
hasSubCategories	Boolean	Indicates whether the subcategories are available (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
id	String	ID of the category.	Small, 67.0	67.0
isNavigational	Boolean	Indicates whether the category node is navigational (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
name	String	Name of the category.	Small, 67.0	67.0
parentCategoryId	String	ID of the parent category.	Small, 67.0	67.0
qualificationContext	Qualification Context Output[]	Context details of a user, which are used for qualification rules.	Small, 67.0	67.0
sortOrder	Integer	Display order of the product category relative to the siblings with the same parent category.	Small, 67.0	67.0

Bulk Product Details

Output representation of the response that contains the details of multiple products.

JSON Example

```
{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "contextId": "c68c7c7e85f3ea5b0e7bcfefc0f2dba9bbd24bfe2f4240ca589af50e473e2242",
  "correlationId": "de9a674c-1807-438c-ac78-2c96f4655325",
  "result": [
    {
      "additionalFields": [],
      "attributeCategories": [],
      "attributes": [],
      "catalogs": [],
      "childProducts": [],
      "id": "01txx0000006ivJAAQ",
      "isActive": true,
      "isAssetizable": true,
      "isSoldOnlyWithOtherProds": false,
      "name": "iPhone12",
      "nodeType": "simpleProduct",
      "prices": [
        {
          "currencyIsoCode": "USD",
          "isDefault": false,
          "isSelected": true,
          "price": 100,
          "priceBookEntryId": "01uxx0000008zUkAAI",
          "priceBookId": "01sxx0000005qxxAAA",
          "pricingModel": {
            "id": "0jPxx000000009hEAA",
            "name": "OneTime",
            "pricingModelType": "OneTime"
          }
        }
      ],
    },
    {
      "currencyIsoCode": "USD",
      "isDefault": true,
      "isSelected": false,
      "price": 15,
      "priceBookEntryId": "01uxx0000008zUmAAI",
      "priceBookId": "01sxx0000005qxxAAA",
      "pricingModel": {
        "frequency": "Months",
        "id": "0jPxx000000009iEAA",
        "name": "Monthly",
        "occurrence": 1,
        "pricingModelType": "TermDefined"
      }
    }
  ]
}
```

```

    }
  ],
  "productClassification": {},
  "productCode": "iPhone12",
  "productComponentGroups": [],
  "productSellingModelOptions": [
    {
      "id": "0iOxx00000000EfEAI",
      "productId": "0ltxx0000006ivJAAQ",
      "productSellingModel": {
        "id": "0jPxx000000009iEAA",
        "name": "Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000009iEAA"
    },
    {
      "id": "0iOxx00000000EgEAI",
      "productId": "0ltxx0000006ivJAAQ",
      "productSellingModel": {
        "id": "0jPxx000000009hEAA",
        "name": "OneTime",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000009hEAA"
    }
  ],
  "productSpecificationType": {
    "name": "ProdSpecRecType1",
    "productSpecificationRecordType": {}
  },
  "qualificationContext": {
    "isQualified": true
  }
},
{
  "additionalFields": [],
  "attributeCategories": [],
  "attributes": [],
  "catalogs": [],
  "childProducts": [],
  "id": "0ltxx0000006ivLAAQ",
  "isActive": true,
  "isAssetizable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "iPhone13",
  "nodeType": "simpleProduct",
  "prices": [
    {
      "currencyIsoCode": "USD",

```

```

        "isDefault": true,
        "isSelected": false,
        "price": 1520,
        "priceBookEntryId": "01uxx0000008zUpAAI",
        "priceBookId": "01sxx0000005qxxAAA",
        "pricingModel": {
            "id": "0jPxx000000009hEAA",
            "name": "OneTime",
            "pricingModelType": "OneTime"
        }
    },
    {
        "currencyIsoCode": "USD",
        "isDefault": false,
        "isSelected": false,
        "price": 152,
        "priceBookEntryId": "01uxx0000008zUqAAI",
        "priceBookId": "01sxx0000005qxxAAA",
        "pricingModel": {
            "frequency": "Months",
            "id": "0jPxx000000009iEAA",
            "name": "Monthly",
            "occurrence": 1,
            "pricingModelType": "TermDefined"
        }
    }
],
"productClassification": {},
"productCode": "iPhone13",
"productComponentGroups": [],
"productSellingModelOptions": [
    {
        "id": "0iOxx00000000EbEAI",
        "productId": "01txx0000006ivLAAQ",
        "productSellingModel": {
            "id": "0jPxx000000009iEAA",
            "name": "Monthly",
            "pricingTerm": 1,
            "pricingTermUnit": "Months",
            "sellingModelType": "TermDefined",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000009iEAA"
    },
    {
        "id": "0iOxx00000000EeEAI",
        "productId": "01txx0000006ivLAAQ",
        "productSellingModel": {
            "id": "0jPxx000000009hEAA",
            "name": "OneTime",
            "sellingModelType": "OneTime",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000009hEAA"
    }
]

```

```
    }
  ],
  "productSpecificationType": {
    "name": "ProdSpecRecType1",
    "productSpecificationRecordType": {}
  },
  "qualificationContext": {
    "isQualified": true
  }
}
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
apiStatus	API Status []	Status of the API request.	Small, 61.0	61.0
contextId	String	ID of the context.	Small, 61.0	61.0
correlationId	String	Unique identifier of the request.	Small, 61.0	61.0
result	Any response body	Result that contains the details of products.	Small, 61.0	61.0
userContext	User Context []	User context details. For example, account ID or contact ID.	Small, 61.0	61.0

CPQ Base Details

Output representation of the catalog, category, or product details based on the request.

JSON Example

This example shows the sample catalog details.

```
{
  "apiStatus": {
    "messages": [

    ],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "32595ed6-1922-41f7-9c2c-373c677a7d62",
  "result": {
    "catalogCode": "Mobiles",
    "catalogType": "Sales",
    "description": "Catalog for mobile phones",
    "effectiveEndDate": "2028-04-01T19:00Z",
    "effectiveStartDate": "2024-04-01T19:00Z",
    "id": "0ZSxx0000000001GAA",
    "name": "Mobiles",
    "numberOfCategories": 3
  }
}
```


This example shows the sample category details.

```
{
  "apiStatus": {
    "messages": [

    ],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "f9fb90de-36aa-44a1-9961-a9ef5fc0cad8",
  "result": {
    "catalogId": "0ZSxx0000000001GAA",
    "childCategories": [

    ],
    "description": "Category for Samsung phones",
    "id": "0ZGxx0000000004rGAA",
    "name": "Samsung",
    "isNavigational": true,
    "sortOrder": 2
  }
}
```

This example shows the sample product details.

```
{
  "apiStatus": {
    "messages": [

    ],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "822a8941-7412-4883-bb80-e488f908471e",
  "result": {
    "additionalFields": {
      "CustomField1__c": "TextValue",
      "CustomField2__c": "10",
      "StandardField1": "false"
    },
    "attributeCategories": [

    ],
    "attributes": [

    ],
    "catalogs": [

    ],
    "childProducts": [

    ],
    "id": "01txx00000006i2WAAQ",
    "isActive": true,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
  }
}
```

```

    "name": "iPhone15",
    "nodeType": "simpleProduct",
    "prices": [

    ],
    "productClassification": {

    },
    "productCode": "iPhone15",
    "productComponentGroups": [

    ],
    "productSellingModelOptions": [
      {
        "id": "0iOxx0000000003EAA",
        "productId": "01txx0000006i2WAAQ",
        "productSellingModel": {
          "id": "0jPxx0000000001EAA",
          "name": "OneTime",
          "sellingModelType": "OneTime",
          "status": "Active"
        },
        "productSellingModelId": "0jPxx0000000001EAA"
      },
      {
        "id": "0iOxx0000000004EAA",
        "productId": "01txx0000006i2WAAQ",
        "productSellingModel": {
          "id": "0jPxx0000000002EAA",
          "name": "Monthly",
          "pricingTerm": 1,
          "pricingTermUnit": "Months",
          "sellingModelType": "TermDefined",
          "status": "Active"
        },
        "productSellingModelId": "0jPxx0000000002EAA"
      }
    ],
    "productSpecificationType": {
      "name": "ProdSpecRecType1",
      "productSpecificationRecordType": {

      }
    }
  }
}

```

This example shows a sample of category details with eligible promotions.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "f9fb90de-36aa-44a1-9961-a9ef5fc0cad8",

```

```
"result": {
  "catalogId": "0ZSxx0000000001GAA",
  "childCategories": [],
  "description": "Category for Samsung phones",
  "id": "0ZGxx0000000004rGAA",
  "name": "Samsung",
  "isNavigational": true,
  "sortOrder": 2,
  "eligiblePromotions": [
    {
      "id": "0ZPxx0000000001AAA",
      "name": "Summer Sale 2025",
      "displayName": "Summer Electronics Sale",
      "description": "Get 20% off on all Samsung devices",
      "priority": 100,
      "startDateTime": "2025-06-01T00:00:00Z",
      "endDateTime": "2025-08-31T23:59:59Z",
      "isAutomatic": true,
      "isCategoryPromo": true,
      "isProductPromo": false,
      "couponCode": null,
      "termsAndConditions": "Valid on all Samsung products. Cannot be combined with other offers."
    },
    {
      "id": "0ZPxx0000000002AAA",
      "name": "Electronics Bundle Deal",
      "displayName": "Bundle & Save",
      "description": "Save 15% when you buy 2 or more items",
      "priority": 90,
      "startDateTime": "2025-05-15T00:00:00Z",
      "endDateTime": "2025-12-31T23:59:59Z",
      "isAutomatic": false,
      "isCategoryPromo": false,
      "isProductPromo": true,
      "couponCode": "BUNDLE15",
      "termsAndConditions": "Minimum 2 items required."
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
apiStatus	API Status	Status of the API request.	Small, 60.0	60.0
contextId	String	ID of the context.	Small, 60.0	60.0
correlationId	String	Unique identifier of the request.	Small, 60.0	60.0
result	Any response body	Result that contains the details of catalogs, categories, or products as per the requested resource.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
userContext	User Context	User context details. For example, account ID or contact ID.	Small, 60.0	60.0

CPQ Base List

Output representation of the list of catalogs, categories, or products based on the request.

JSON Example

This example shows a sample catalog list.

```
{
  "apiStatus": {
    "messages": [

    ],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "9f417514-9587-4063-9e48-18a2cf2477c0",
  "limit": 10,
  "offset": 0,
  "query": {

  },
  "result": [
    {
      "catalogCode": "Mobiles",
      "catalogType": "Sales",
      "description": "Catalog for mobile phones",
      "effectiveEndDate": "2028-04-01T19:00Z",
      "effectiveStartDate": "2024-04-01T19:00Z",
      "id": "0ZSxx0000000001GAA",
      "name": "Mobiles",
      "numberOfCategories": 3
    }
  ],
  "total": 1
}
```

This example shows a sample category list.

```
{
  "apiStatus": {
    "messages": [

    ],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "3f2a8f45-e7d2-42ec-bc4c-b981d750e912",
  "query": {

  }
```

```

},
"result": [
  {
    "catalogId": "0ZSxx0000000001GAA",
    "childCategories": [

    ],
    "description": "Category for Apple phones and iPads",
    "id": "0ZGxx0000000001GAA",
    "name": "Apple",
    "sortOrder": 1,
    "isNavigational": true
  },
  {
    "catalogId": "0ZSxx0000000001GAA",
    "childCategories": [

    ],
    "description": "Category for Samsung phones",
    "id": "0ZGxx000000004rGAA",
    "name": "Samsung",
    "sortOrder": 2,
    "isNavigational": true
  },
  {
    "catalogId": "0ZSxx0000000001GAA",
    "childCategories": [

    ],
    "description": "Category for Android phones",
    "id": "0ZGxx000000006TGAQ",
    "name": "Android",
    "isNavigational": true
  }
],
"total": 3
}

```

This example shows a sample product list.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "contextId": "f36f8e73f1fc338cc4e93c61613cba07a6a0129941d97e5dd6e52a2885776ce4",
  "correlationId": "eeaaldb2-f371-4227-a886-c77e2f66ce1d",
  "cursor": "MTAwMDAwMDAwNg==",
  "query": {},
  "result": [
    {
      "additionalFields": {
        "DecompositionScope": "OrderLineItem",
        "ProductCode": "LPB001",
        "CanRamp": false
      }
    }
  ]
}

```

```

    },
    "attributeCategories": [],
    "catalogs": [
      {
        "customFields": {},
        "id": "0ZSDU0000002Og74AE",
        "name": "Service Catalog",
        "numberOfCategories": 5
      }
    ],
    "categories": [
      {
        "catalogId": "0ZSDU0000002Og74AE",
        "childCategories": [],
        "customFields": {},
        "hasSubCategories": false,
        "id": "0ZGDU0000002P0H4AU",
        "name": "Cloud Services",
        "qualificationContext": {
          "isQualified": true
        }
      }
    ],
    "childProducts": [],
    "configureDuringSale": "Allowed",
    "description": "The laptop pro bundle includes a Laptop, mouse, warranty for 2 years, premium support and printer bundle",
    "displayUrl":
      "https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcSCrGjPR1fvJqg4yP3RMycqjI0H9eL6tk1fvzw&usqp=CAU",

    "id": "0ltDU000000ExkZYAS",
    "isActive": true,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "Laptop Pro Bundle",
    "nodeType": "bundleProduct",
    "prices": [],
    "productClassification": {},
    "productCode": "LPB001",
    "productComponentGroups": [],
    "productSellingModelOptions": [
      {
        "id": "0iODU0000002TBN2A2",
        "productId": "0ltDU000000ExkZYAS",
        "productSellingModel": {
          "id": "0jPDU0000002OTv2AM",
          "name": "One Time",
          "sellingModelType": "OneTime",
          "status": "Active"
        },
        "productSellingModelId": "0jPDU0000002OTv2AM"
      }
    ],
    "productSpecificationType": {

```

```

        "name": "Commercial",
        "productSpecificationRecordType": {}
    },
    "productType": "Bundle",
    "qualificationContext": {
        "isQualified": true
    }
}
]
}

```

This example shows a sample of the list of products retrieved based on the `Laptop` search term.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "d9d8f898-19f5-464a-ba2b-6a070783f6c4",
  "cursor": "MTAwMDAwMDAwMw==",
  "facets": [
    {
      "attributeType": "ProductStandard",
      "displayName": "Product Type",
      "displayRank": 2,
      "nameOrId": "Type",
      "values": [
        {
          "displayName": "Bundle",
          "nameOrId": "Bundle"
        }
      ]
    },
    {
      "attributeType": "ProductDynamicAttribute",
      "displayName": "Display",
      "displayRank": 3,
      "nameOrId": "0tjDU0000003K5BYAU",
      "values": [
        {
          "displayName": "1080p Built-in Display",
          "nameOrId": "1080p Built-in Display"
        },
        {
          "displayName": "2k Built-in Display",
          "nameOrId": "2k Built-in Display"
        },
        {
          "displayName": "4k Built-in Display",
          "nameOrId": "4k Built-in Display"
        }
      ]
    }
  ],
  "limit": 10,

```

"<https://elasticsearch.org/123859/bu/3/illustration-also-include-also-without-same-also-tips-6262ap-flap-2ap-se65168d-3-8-b7c602b>",


```

    "qualificationContext": {
      "isQualified": true
    }
  },
  {
    "additionalFields": {},
    "attributeCategories": [],
    "catalogs": [],
    "categories": [
      {
        "catalogId": "0ZSDU0000002Og64AE",
        "childCategories": [],
        "customFields": {},
        "hasSubCategories": false,
        "id": "0ZGDU0000002P0A4AU",
        "name": "Laptops",
        "qualificationContext": {
          "isQualified": true
        }
      }
    ]
  },
  "configureDuringSale": "Allowed",
  "description": "The laptop basic bundle includes a Laptop, mouse, and warranty for
1 year.",
  "displayUrl":
"https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcTbf49JG4zZogCmZMJuXU38qOkR9X36MN4bSw&usqp=CAU",

  "id": "0ltDU000000ExkXYAS",
  "isActive": true,
  "isAssetizable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "Laptop Basic Bundle",
  "nodeType": "bundleProduct",
  "prices": [],
  "productClassification": {},
  "productCode": "LB001",
  "productComponentGroups": [],
  "productSellingModelOptions": [
    {
      "id": "0iODU0000002TBD2A2",
      "productId": "0ltDU000000ExkXYAS",
      "productSellingModel": {
        "id": "0jPDU0000002OTv2AM",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPDU0000002OTv2AM"
    }
  ],
  "productSpecificationType": {
    "name": "Commercial",
    "productSpecificationRecordType": {}
  },

```

```

    "productType": "Bundle",
    "qualificationContext": {
      "isQualified": true
    }
  },
  {
    "additionalFields": {},
    "attributeCategories": [],
    "catalogs": [],
    "categories": [
      {
        "catalogId": "0ZSDU0000002Og64AE",
        "childCategories": [],
        "customFields": {},
        "hasSubCategories": false,
        "id": "0ZGDU0000002P0A4AU",
        "name": "Laptops",
        "qualificationContext": {
          "isQualified": true
        }
      }
    ]
  },
  "configureDuringSale": "Allowed",
  "description": "The laptop pro bundle includes a Laptop, mouse, warranty for 2 years, premium support and printer bundle",
  "displayUrl":
    "https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcSCrGjPR1fvJqg4yP3RMycqjIOH9eL6tk1fvzw&usqp=CAU",

  "id": "01tDU000000ExkZYAS",
  "isActive": true,
  "isAssetizable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "Laptop Pro Bundle",
  "nodeType": "bundleProduct",
  "prices": [],
  "productClassification": {},
  "productCode": "LPB001",
  "productComponentGroups": [],
  "productSellingModelOptions": [
    {
      "id": "0iODU0000002TBN2A2",
      "productId": "01tDU000000ExkZYAS",
      "productSellingModel": {
        "id": "0jPDU0000002OTv2AM",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPDU0000002OTv2AM"
    }
  ],
  "productSpecificationType": {
    "name": "Commercial",
    "productSpecificationRecordType": {}
  }

```

```

    },
    "productType": "Bundle",
    "qualificationContext": {
      "isQualified": true
    }
  },
  {
    "additionalFields": {},
    "attributeCategories": [],
    "catalogs": [],
    "categories": [
      {
        "catalogId": "0ZSDU0000002Og64AE",
        "childCategories": [],
        "customFields": {},
        "hasSubCategories": false,
        "id": "0ZGDU0000002P0A4AU",
        "name": "Laptops",
        "qualificationContext": {
          "isQualified": true
        }
      }
    ],
    "configureDuringSale": "Allowed",
    "description": "Laptop, Laptop Bag, Laptop stand, Mouse, Keyboard, USB-C Hub, External Hard Drive, Noise Cancelling Headphones, office 365",
    "displayUrl": "https://m.media-amazon.com/images/I/613Fno-NLYL._AC_SL1000_.jpg",
    "id": "01tDU000000ExlAYAS",
    "isActive": true,
    "isAssetizable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "Laptop Productivity Bundle",
    "nodeType": "bundleProduct",
    "prices": [],
    "productClassification": {},
    "productCode": "LPB001",
    "productComponentGroups": [],
    "productSellingModelOptions": [
      {
        "id": "0iODU0000002TBq2AM",
        "productId": "01tDU000000ExlAYAS",
        "productSellingModel": {
          "id": "0jPDU0000002OTv2AM",
          "name": "One Time",
          "sellingModelType": "OneTime",
          "status": "Active"
        },
        "productSellingModelId": "0jPDU0000002OTv2AM"
      }
    ],
    "productSpecificationType": {
      "name": "Commercial",
      "productSpecificationRecordType": {}
    }
  },

```

```

        "productType": "Bundle",
        "qualificationContext": {
            "isQualified": true
        }
    },
    ],
    "total": 4
}

```

This example shows a sample of the results of a qualification procedure that's executed on a list of product IDs.

```

{
  "apiStatus": {
    "messages": [

    ],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708",
  "correlationId": "c280c1b0-fd3f-4eac-9b08-075bdf1cbefc",
  "query": {

  },
  "result": [
    {
      "productId": "01txx0000006i7PAAQ",
      "qualificationContext": {
        "isQualified": true
      }
    },
    {
      "productId": "01txx0000006i7QAAQ",
      "qualificationContext": {
        "isQualified": true
      }
    },
    {
      "productId": "01txx0000006i7IAAQ",
      "qualificationContext": {
        "isQualified": true
      }
    }
  ]
}

```

This example shows a list of products with eligible promotions.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "f9fb90de-36aa-44a1-9961-a9ef5fc0cad8",
  "result": {
    "catalogId": "0ZSxx0000000001GAA",

```

```

    "childCategories": [],
    "description": "Category for Samsung phones",
    "id": "0ZGxx000000004rGAA",
    "name": "Samsung",
    "isNavigational": true,
    "sortOrder": 2,
    "eligiblePromotions": [
      {
        "id": "0ZPxx0000000001AAA",
        "name": "Summer_Sale_2025",
        "displayName": "Summer Electronics Sale",
        "description": "Get 20% off on all Samsung devices",
        "priority": 100,
        "startDateTime": "2025-06-01T00:00:00Z",
        "endDateTime": "2025-08-31T23:59:59Z",
        "isAutomatic": true,
        "isCategoryPromo": true,
        "isProductPromo": false,
        "couponCode": null,
        "termsAndConditions": "Valid on all Samsung products. Cannot be combined with other offers."
      },
      {
        "id": "0ZPxx0000000002AAA",
        "name": "Electronics_Bundle",
        "displayName": "Bundle & Save",
        "description": "Save 15% when you buy 2 or more items",
        "priority": 90,
        "startDateTime": "2025-05-15T00:00:00Z",
        "endDateTime": "2025-12-31T23:59:59Z",
        "isAutomatic": false,
        "isCategoryPromo": false,
        "isProductPromo": true,
        "couponCode": "BUNDLE15",
        "termsAndConditions": "Minimum 2 items required."
      }
    ]
  }
}

```

This example shows a sample response with visibility rule details.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "contextId": "0000000r25tp21g002517756484726523db13b6a0ce245dc98062eb32a583a69",
  "correlationId": "81e072e2-e1ae-4321-9b73-d591f75854ec",
  "cursor": "MTAwMDAwMDAwNg==",
  "facets": [],
  "limit": 12,
  "query": {},
  "result": [
    {

```

```

"additionalFields": {},
"attributeCategories": [],
"catalogs": [
  {
    "customFields": {},
    "id": "0ZSVW000000AhdC4AS",
    "name": "QuantumBit Hardware",
    "numberOfCategories": 11
  }
],
"categories": [
  {
    "catalogId": "0ZSVW000000AhdC4AS",
    "childCategories": [],
    "customFields": {},
    "eligiblePromotions": [],
    "id": "0ZGVW000000IUEC4A4",
    "name": "Memory"
  }
],
"childVariationIds": [],
"configurationRules": [
  {
    "details": [
      {
        "message": "32GB RDIMM disables 128GB LRDIMM"
      }
    ],
    "type": "disable"
  }
],
"configureDuringSale": "Allowed",
"description": "128GB RDIMM",
"displayUrl": "/resource/ram_32GB_RDIMM",
"eligiblePromotions": [],
"id": "01tVW0000003l7v5YAA",
"isActive": true,
"isAssetizable": true,
"isSoldOnlyWithOtherProds": false,
"name": "128GB LRDIMM",
"nodeType": "simpleProduct",
"prices": [
  {
    "currencyIsoCode": "USD",
    "isDefault": true,
    "isDerived": false,
    "isSelected": false,
    "price": 0,
    "priceBookEntryId": "01uVW000000jzfJYAQ",
    "priceBookId": "01sVW00000024PZlYAM",
    "pricingModel": {
      "id": "0jPVW0000001fh42AA",
      "name": "One-Time",
      "pricingModelType": "OneTime"
    }
  }
]

```

```

    }
  },
  ],
  "productClass": "Simple",
  "productClassification": {},
  "productCode": "QB-MEM 128GB",
  "productComponentGroups": [],
  "productSellingModelOptions": [
    {
      "id": "0iOVW00000049xS2AQ",
      "isDefault": true,
      "productId": "0ltVW00000317v5YAA",
      "productSellingModel": {
        "doesAutoRenewByDefault": false,
        "id": "0jPVW0000001fh42AA",
        "name": "One-Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPVW0000001fh42AA"
    },
  ],
  "productUnitOfMeasures": []
}
],
"total": 1
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
apiStatus	API Status	Status of the API request.	Small, 60.0	60.0
contextId	String	ID of the context.	Small, 60.0	60.0
correlationId	String	Unique ID of the request.	Small, 60.0	60.0
cursor	String	Unique ID to represent the position of each product in the dataset.	Small, 60.0	60.0
facets	Search Products Facet	Details of the faceted search.	Small, 63.0	63.0
limit	Integer	Number of items fetched in the response.	Small, 60.0	60.0
offset	Integer	Offset size from which the item count is fetched.	Small, 60.0	60.0
query	Map<String, Object>	Query that was used for the search request.	Small, 60.0	60.0
result	Any response body	Result that contains the list of catalogs, categories, or products as per the requested resource.	Small, 60.0	60.0
total	Integer	Number of fetched records.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
userContext	User Context	User context details. For example, account ID or contact ID.	Small, 60.0	60.0

CPQ Message

Output representation of the API messages.

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Code specifying the type of message. Valid value is <code>CartValidationError</code> .	Small, 60.0	60.0
detail	String	Required details other than the message text.	Small, 60.0	60.0
message	String	Text of the API message.	Small, 60.0	60.0
severity	String	Severity of the API message. Valid values are <code>Error</code> , <code>Info</code> , or <code>Warning</code> .	Small, 60.0	60.0

Facet Value

Output representation of the facet values found in the search result.

JSON Example

```
"values": [  
  {  
    "displayName": "1080p Built-in Display",  
    "nameOrId": "1080p Built-in Display"  
  },  
  {  
    "displayName": "2k Built-in Display",  
    "nameOrId": "2k Built-in Display"  
  },  
  {  
    "displayName": "4k Built-in Display",  
    "nameOrId": "4k Built-in Display"  
  }  
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
displayName	String	Display name of the facet value.	Small, 63.0	63.0
nameOrId	String	ID or the internal name of the facet value.	Small, 63.0	63.0

Guided Selection

Output representation of the details of a guided selection.

JSON Example

```
{
  "apiStatus": {
    "messages": [],
    "statusCode": "FETCHED_DETAILS_SUCCESSFULLY"
  },
  "correlationId": "corrId",
  "cursor": "MTAwMDAwMDAwNg==",
  "searchTerms": [
    {
      "term": "iPhone"
    },
    {
      "term": "4GB"
    },
    {
      "term": "64GB"
    }
  ],
  "result": [
    {
      "additionalFields": {
        "CustomField1__c": "TextValue",
        "CustomField2__c": "10",
        "StandardField1": "false"
      },
      "description": "iPhone-13",
      "id": "01txx0000006kYwAAI",
      "name": "Sample product 1",
      "prices": [
        {
          "price": 150,
          "priceBookEntryId": "12Axx0000004DF7EAM",
          "priceBookId": "01sxx0000005puLAAQ",
          "pricingModel": {
            "frequency": "Monthly",
            "id": "12Bxx000000CicDEA0",
            "name": "iPhone-13",
            "occurrence": 6,
            "pricingModelType": "Recurring"
          }
        },
        {
          "price": 400,
          "priceBookEntryId": "12Axx0000004DGjEAM",
          "priceBookId": "01sxx0000005puLAAQ",
          "pricingModel": {
            "id": "12Bxx000000CicCEA0",
            "name": "iPhone-13",
```

```

        "pricingModelType": "OneTime"
      }
    },
    "qualificationContext": {
      "isQualified": true
    }
  }
]
}

```

This example shows a sample response with details of eligible promotions.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FETCHED_DETAILS_SUCCESSFULLY"
  },
  "correlationId": "corrId",
  "cursor": "MTAwMDAwMDAwNg==",
  "searchTerms": [
    {
      "term": "IPhone",
      "tags": [
        "deviceType",
        "mobile"
      ]
    },
    {
      "term": "4GB",
      "tags": [
        "RAM"
      ]
    },
    {
      "term": "64GB",
      "tags": [
        "Storage"
      ]
    }
  ],
  "result": [
    {
      "additionalFields": {
        "CustomField1__c": "TextValue",
        "CustomField2__c": "10",
        "StandardField1": "false"
      },
      "description": "IPhone-13",
      "id": "01txx0000006kYwAAI",
      "name": "Sample product 1",
      "prices": [
        {
          "price": 150,
          "priceBookEntryId": "12Axx0000004DF7EAM",

```

```

    "priceBookId": "01sxx0000005puLAAQ",
    "pricingModel": {
      "frequency": "Monthly",
      "id": "12Bxx000000CiCDEA0",
      "name": "iPhone-13",
      "occurrence": 6,
      "pricingModelType": "Recurring"
    }
  },
  {
    "price": 400,
    "priceBookEntryId": "12Axx0000004DGjEAM",
    "priceBookId": "01sxx0000005puLAAQ",
    "pricingModel": {
      "id": "12Bxx000000CiCCEA0",
      "name": "iPhone-13",
      "pricingModelType": "OneTime"
    }
  }
],
"qualificationContext": {
  "isQualified": true
},
"eligiblePromotions": [
  {
    "id": "0ZPxx0000000001AAA",
    "name": "iPhone_Promotion_2025",
    "displayName": "iPhone Special Offer",
    "description": "Get 15% off on iPhone 13",
    "priority": 100,
    "startDateTime": "2025-03-01T00:00:00Z",
    "endDateTime": "2025-03-31T23:59:59Z",
    "isAutomatic": true,
    "isCategoryPromo": false,
    "isProductPromo": true,
    "couponCode": null,
    "termsAndConditions": "Valid on iPhone 13 models only."
  },
  {
    "id": "0ZPxx0000000002AAA",
    "name": "Memory_Upgrade_Deal",
    "displayName": "Free Memory Upgrade",
    "description": "Upgrade to 128GB for the price of 64GB",
    "priority": 90,
    "startDateTime": "2025-02-01T00:00:00Z",
    "endDateTime": "2025-12-31T23:59:59Z",
    "isAutomatic": false,
    "isCategoryPromo": false,
    "isProductPromo": true,
    "couponCode": "MEMORY128",
    "termsAndConditions": "Applies to select iPhone models."
  }
]
}

```

```

    ]
  }

```

This example shows a sample request to run visibility rules.

```

{
  "apiStatus": {
    "messages": [],
    "statusCode": "FetchedDetailsSuccessfully"
  },
  "correlationId": "ef4f324d-b6d9-47ca-9e78-c6ec60ca5b23",
  "cursor": "MTAwMDAwMDAwNg==",
  "offset": 1,
  "result": [
    {
      "additionalFields": {},
      "attributeCategories": [],
      "catalogs": [
        {
          "customFields": {},
          "id": "0ZSVW000000AhdC4AS",
          "name": "QuantumBit Hardware",
          "numberOfCategories": 11
        }
      ],
      "categories": [
        {
          "catalogId": "0ZSVW000000AhdC4AS",
          "childCategories": [],
          "customFields": {},
          "eligiblePromotions": [],
          "id": "0ZGVW000000IUEC4A4",
          "name": "Memory"
        }
      ],
      "childProducts": [],
      "childVariationIds": [],
      "configurationRules": [
        {
          "details": [
            {
              "message": "32GB RDIMM disables 128GB LRDIMM"
            }
          ],
          "type": "disable"
        }
      ],
      "configureDuringSale": "Allowed",
      "description": "128GB RDIMM",
      "displayUrl": "/resource/ram_32GB_RDIMM",
      "eligiblePromotions": [],
      "id": "01tVW00000317v5YAA",
      "isActive": true,
      "isAssetizable": true,
      "isSoldOnlyWithOtherProds": false,

```

```

    "name": "128GB LRDIMM",
    "nodeType": "simpleProduct",
    "prices": [
      {
        "currencyIsoCode": "USD",
        "isDefault": true,
        "isDerived": false,
        "isSelected": false,
        "price": 0,
        "priceBookEntryId": "01uVW000000jzfJYAQ",
        "priceBookId": "01sVW0000024PZlYAM",
        "pricingModel": {
          "id": "0jPVW0000001fh42AA",
          "name": "One-Time",
          "pricingModelType": "OneTime"
        }
      }
    ],
    "productClass": "Simple",
    "productClassification": {},
    "productCode": "QB-MEM 128GB",
    "productComponentGroups": [],
    "productSellingModelOptions": [
      {
        "id": "0iOVW00000049xS2AQ",
        "isDefault": true,
        "productId": "01tVW000003l7v5YAA",
        "productSellingModel": {
          "doesAutoRenewByDefault": false,
          "id": "0jPVW0000001fh42AA",
          "name": "One-Time",
          "sellingModelType": "OneTime",
          "status": "Active"
        },
        "productSellingModelId": "0jPVW0000001fh42AA"
      }
    ],
    "productUnitOfMeasures": []
  },
  "searchTerms": [
    {
      "tags": [],
      "term": "128GB LRDIMM"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
apiStatus	API Status	Status of the API request.	Small, 62.0	62.0
correlationId	String	Unique ID of the request.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
cursor	String	Unique ID to represent the position of each product in the dataset.	Small, 62.0	62.0
result	Any response body	Result that contains the list of products as per the requested resource.	Small, 62.0	62.0
searchTerms	Guided Selection Search Term[]	Search terms for the guided selection.	Small, 62.0	62.0

Guided Selection Search Term

Output representation of the search term details for a guided selection.

JSON Example

```
{
  "searchTerms": [
    {
      "term": "iPhone",
      "tags": [
        "deviceType",
        "mobile"
      ]
    },
    {
      "term": "4GB",
      "tags": [
        "RAM"
      ]
    },
    {
      "term": "64GB",
      "tags": [
        "Storage"
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
tags	String[]	Search term tags for the guided selection.	Small, 62.0	62.0
term	String	Search term value for the guided selection.	Small, 62.0	62.0

Pricing Model

Output representation of the details of the pricing model.

JSON Example

```
{
  "pricingModel": {
    "id": "0jPSG000000AvCv2AC",
    "name": "One Time",
    "pricingModelType": "OneTime"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
frequency	String	Details about the frequency of recurrence of the pricing model.	Small, 67.0	67.0
id	String	ID of the pricing model.	Small, 67.0	67.0
name	String	Name of the pricing model.	Small, 67.0	67.0
occurrence	Integer	Details about the number of occurrences of the pricing model.	Small, 67.0	67.0
pricingModelType	String	Type of the pricing model.	Small, 67.0	67.0
unitOfMeasure	String	Unit of measure for the pricing model.	Small, 67.0	67.0

Product Classification

Output representation of the details of a product classification.

JSON Example

```
{
  "productClassification": {
    "id": "11BSG000000UNijx2AD"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Code of the product classification.	Small, 67.0	67.0
id	String	ID of the product classification.	Small, 67.0	67.0
name	String	Name of the product classification.	Small, 67.0	67.0
status	String	Status of the product classification.	Small, 67.0	67.0

Product Configuration Rule Details

Output representation of the product configuration rule details.

JSON Example

```
{
  "configurationRules": [
    {
      "details": [
        {
          "message": "recommend Mouse from monitor"
        }
      ],
      "type": "recommend"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
message	String	Message associated with the product configuration rule.	Small, 67.0	67.0

Product Configuration Rules

Output representation of the details of the product configuration rules.

JSON Example

```
{
  "configurationRules": [
    {
      "details": [
        {
          "message": "recommend Mouse from monitor"
        }
      ],
      "type": "recommend"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
details	Product Configuration Rule Details[]	Details of the product configuration rule.	Small, 67.0	67.0
type	String	Type of the product configuration rule.	Small, 67.0	67.0

Product Prices

Output representation of the details of the product prices.

JSON Example

```
{
  "prices": [
    {
      "currencyIsoCode": "USD",
      "isDefault": true,
      "isDerived": false,
      "isSelected": false,
      "price": 7.99,
      "priceBookEntryId": "01uSG000004wTsEYAU",
      "priceBookId": "01sSG00000DQCjhYAH",
      "pricingModel": {
        "id": "0jPSG000000Avcv2AC",
        "name": "One Time",
        "pricingModelType": "OneTime"
      }
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
currencyIsoCode	String	Currency ISO code of the given price.	Small, 67.0	67.0
effectiveFrom	String	Date from when the given price is effective.	Small, 67.0	67.0
effectiveTo	String	Date until when the given price is effective.	Small, 67.0	67.0
isDefault	Boolean	Indicates whether the given price is default (true) or not (false).	Small, 67.0	67.0
isDerived	Boolean	Indicates whether the given price is derived (true) or not (false).	Small, 67.0	67.0
isSelected	Boolean	Indicates whether the given price is selected (true) or not (false).	Small, 67.0	67.0
price	Double	Price of the product.	Small, 67.0	67.0
priceBookEntryId	String	Price book entry ID of the given price.	Small, 67.0	67.0
priceBookId	String	Price book ID of the given price.	Small, 67.0	67.0
pricingModel	Pricing Model []	Pricing model of the given price.	Small, 67.0	67.0

Product Quantity

Output representation of the details of the quantity constraints and current quantity for a product in the product discovery context.

Property Name	Type	Description	Filter Group and Version	Available Version
maxQuantity	Double	Maximum quantity allowed for a product.	Small, 67.0	67.0

Property Name	Type	Description	Filter Group and Version	Available Version
minQuantity	Double	Minimum quantity allowed for a product.	Small, 67.0	67.0
quantity	Double	Default or current quantity of the product.	Small, 67.0	67.0

Product Recommendation Errors

Output representation of the details of the errors encountered during the processing of the Product Recommendations API request.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code that indicates the type of error.	Small, 66.0	66.0
message	String	Message stating the reason for error, if any.	Small, 66.0	66.0

Product Recommendations

Output representation of the fetched product recommendations.

JSON Example

```
{
  "cursor": "MTAwMDAwMDAwNQ==",
  "errors": [],
  "products": [
    {
      "additionalFields": {},
      "catalogs": [
        {
          "customFields": {},
          "id": "0ZSSG000001875O4AQ",
          "name": "Hardware Catalog",
          "numberOfCategories": 4
        }
      ],
      "categories": [
        {
          "catalogId": "0ZSSG000001875O4AQ",
          "childCategories": [],
          "customFields": {},
          "eligiblePromotions": [],
          "id": "0ZGSG000001DJtv4AG",
          "name": "Accessories",
          "qualificationContext": {
            "isQualified": true
          }
        }
      ],
      "configurationRules": [
```

```

    {
      "details": [
        {
          "message": "recommend Mouse from monitor"
        }
      ],
      "type": "recommend"
    }
  ],
  "configureDuringSale": "Allowed",
  "description": "HeyMicky Mouse compatible comes with choice of USB or Wireless connectivity.",
  "displayUrl": "https://5.imimg.com/data5/IS/JP/MY-58678879/computer-mouse.jpg",
  "eligiblePromotions": [],
  "id": "01tSG00000BiywkYAB",
  "isActive": true,
  "isAssetizable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "Mouse",
  "nodeType": "simpleProduct",
  "prices": [
    {
      "currencyIsoCode": "USD",
      "isDefault": true,
      "isDerived": false,
      "isSelected": false,
      "price": 7.99,
      "priceBookEntryId": "01uSG000004wTsEYAU",
      "priceBookId": "01sSG00000DQCjhYAH",
      "pricingModel": {
        "id": "0jPSG000000Avcv2AC",
        "name": "One Time",
        "pricingModelType": "OneTime"
      }
    }
  ],
  "productClassification": {
    "id": "11BSG00000UNijx2AD"
  },
  "productCode": "MOU001",
  "productSellingModelOptions": [
    {
      "id": "0iOSG000000J64x2AC",
      "isDefault": true,
      "productId": "01tSG00000BiywkYAB",
      "productSellingModel": {
        "doesAutoRenewByDefault": false,
        "id": "0jPSG000000Avcv2AC",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPSG000000Avcv2AC"
    }
  ]
}

```

```

    ],
    "productSpecificationType": {
      "name": "Commercial",
      "productSpecificationRecordType": {}
    },
    "qualificationContext": {
      "isQualified": true
    }
  }
],
"success": true,
"transactionContextId": "0000000p18dq18g002917732061529307c5e047346664b2f81ff3d4845acf2d0"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
cursor	String	Unique ID to represent the position of each product in the data set.	Small, 67.0	67.0
errors	Product Recommendation Errors[]	List of errors encountered during the processing of the API request.	Small, 67.0	67.0
products	Recommended Products[]	List of recommended products.	Small, 67.0	67.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
transactionContextId	String	ID of the sales transaction context.	Small, 67.0	67.0

Product Selling Model Option

Output representation of the product selling model option component.

JSON Example

```

{
  "productSellingModelOptions": [
    {
      "id": "0iOSG000000J64x2AC",
      "isDefault": true,
      "productId": "01tSG00000BiywkYAB",
      "productSellingModel": {
        "doesAutoRenewByDefault": false,
        "id": "0jPSG000000Avcv2AC",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPSG000000Avcv2AC"
    }
  ]
}

```

```

    ]
  }

```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the product selling model option.	Small, 67.0	67.0
isDefault	Boolean	Indicates whether this product selling model option is default (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
productId	String	ID of the product.	Small, 67.0	67.0
productSellingModel	Product Selling Model[]	Details of the product selling model.	Small, 67.0	67.0
productSellingModelId	String	ID of the product selling model.	Small, 67.0	67.0
prorationPolicy	Proration Policy[]	Details of the proration policy.	Small, 67.0	67.0

Product Selling Model

Product Selling Model Component output representation

JSON Example

```

{
  "productSellingModel": {
    "doesAutoRenewByDefault": false,
    "id": "0jPSG000000Avcv2AC",
    "name": "One Time",
    "sellingModelType": "OneTime",
    "status": "Active"
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
doesAutoRenewByDefault	Boolean	Indicates whether the product is automatically renewed by default (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
id	String	ID of the product selling model.	Small, 67.0	67.0
name	String	Name of the product selling model.	Small, 67.0	67.0
pricingTerm	Integer	Pricing term of the product selling model.	Small, 67.0	67.0
pricingTermUnit	String	Pricing term unit of the product selling model.	Small, 67.0	67.0
sellingModelType	String	Selling model type associated with the product selling model.	Small, 67.0	67.0

Property Name	Type	Description	Filter Group and Version	Available Version
status	String	Status of the product selling model.	Small, 67.0	67.0

Product Specification Record Type

Output representation of the details of the product specification record type.

Property Name	Type	Description	Filter Group and Version	Available Version
isCommercial	Boolean	Indicates whether this product specification record type is commercial (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0

Product Specification Type

Output representation of the details of the product specification type.

Property Name	Type	Description	Filter Group and Version	Available Version
name	String	Name of the product specification type.	Small, 67.0	67.0
productSpecificationRecordType	Product Specification Record Type	Details of the product specification record type.	Small, 67.0	67.0

Promotion Details

Output representation of the details of applicable promotions.

Property Name	Type	Description	Filter Group and Version	Available Version
couponCode	String	Coupon code for the promotion.	Small, 67.0	67.0
description	String	Description of the promotion.	Small, 67.0	67.0
displayName	String	Display name of the promotion.	Small, 67.0	67.0
endDateTime	String	End date and time of the promotion.	Small, 67.0	67.0
id	String	ID of the promotion.	Small, 67.0	67.0
isAutomatic	Boolean	Indicates whether the promotion is automatic (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
isCategoryPromo	Boolean	Indicates whether the promotion is a category-level promotion (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0

Property Name	Type	Description	Filter Group and Version	Available Version
isProductPromo	Boolean	Indicates whether the promotion is a product-level promotion (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
name	String	Name of the promotion.	Small, 67.0	67.0
priority	Integer	Priority of the promotion.	Small, 67.0	67.0
startDateTime	String	Start date and time of the promotion.	Small, 67.0	67.0
termsAndConditions	String	Terms and conditions of the promotion.	Small, 67.0	67.0

Proration Policy

Output representation of the details of the proration policy component.

Property Name	Type	Description	Filter Group and Version	Available Version
additionalFields	Map<String, Object>	Fields associated with the proration policy.	Small, 67.0	67.0
id	String	ID of the proration policy.	Small, 67.0	67.0

Qualification Context

Output representation of the details about the product qualification.

JSON Example

```
{
  "qualificationContext": {
    "isQualified": true
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
isQualified	Boolean	Indicates whether the product is qualified (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
reason	String	Specifies the reason for product qualification or disqualification.	Small, 67.0	67.0

Recommended Products

Output representation of the list of recommended products.

JSON Example

```

{
  "products": [
    {
      "additionalFields": {},
      "catalogs": [
        {
          "customFields": {},
          "id": "0ZSSG00000187504AQ",
          "name": "Hardware Catalog",
          "numberOfCategories": 4
        }
      ],
      "categories": [
        {
          "catalogId": "0ZSSG00000187504AQ",
          "childCategories": [],
          "customFields": {},
          "eligiblePromotions": [],
          "id": "0ZGSG000001DJtv4AG",
          "name": "Accessories",
          "qualificationContext": {
            "isQualified": true
          }
        }
      ],
      "configurationRules": [
        {
          "details": [
            {
              "message": "recommend Mouse from monitor"
            }
          ],
          "type": "recommend"
        }
      ],
      "configureDuringSale": "Allowed",
      "description": "HeyMicky Mouse compatible comes with choice of USB or Wireless connectivity.",
      "displayUrl": "https://5.imimg.com/data5/IS/JP/MY-58678879/computer-mouse.jpg",
      "eligiblePromotions": [],
      "id": "0ltSG00000BiywkYAB",
      "isActive": true,
      "isAssetizable": true,
      "isSoldOnlyWithOtherProds": false,
      "name": "Mouse",
      "nodeType": "simpleProduct",
      "prices": [
        {
          "currencyIsoCode": "USD",
          "isDefault": true,
          "isDerived": false,
          "isSelected": false,
          "price": 7.99,

```



```

    "priceBookEntryId": "01uSG000004wTsEYAU",
    "priceBookId": "01sSG00000DQCjhYAH",
    "pricingModel": {
      "id": "0jPSG000000Avcv2AC",
      "name": "One Time",
      "pricingModelType": "OneTime"
    }
  ],
  "productClassification": {
    "id": "11BSG00000UNijx2AD"
  },
  "productCode": "MOU001",
  "productSellingModelOptions": [
    {
      "id": "0iOSG000000J64x2AC",
      "isDefault": true,
      "productId": "01tSG00000BiywkYAB",
      "productSellingModel": {
        "doesAutoRenewByDefault": false,
        "id": "0jPSG000000Avcv2AC",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPSG000000Avcv2AC"
    }
  ],
  "productSpecificationType": {
    "name": "Commercial",
    "productSpecificationRecordType": {}
  },
  "qualificationContext": {
    "isQualified": true
  }
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
additionalFields	Map<String, Object>	Additional fields of the product.	Small, 67.0	67.0
availabilityDate	String	Date when the part is used in the product or is made available for sale.	Small, 67.0	67.0
catalogs	Catalog []	List of the associated catalogs. This property returns the name and id values only.	Small, 67.0	67.0
categories	Category []	List of the associated categories. This property returns the name and id values only.	Small, 67.0	67.0

Property Name	Type	Description	Filter Group and Version	Available Version
configurationRules	Product Configuration Rules []	List of configuration rules of the product.	Small, 67.0	67.0
configureDuringSale	String	Specifies whether to allow or prevent configuration when a bundle is sold.	Small, 67.0	67.0
description	String	Description of the product.	Small, 67.0	67.0
discontinuedDate	String	Date from when the part can't be used in the product or sold.	Small, 67.0	67.0
displayUrl	String	Display image URL of the product.	Small, 67.0	67.0
eligiblePromotions	Promotion Details []	List of applicable promotions of the product.	Small, 67.0	67.0
endOfLifeDate	String	Date after which a product isn't supported, ordered, or maintained.	Small, 67.0	67.0
id	String	ID of the product.	Small, 67.0	67.0
isActive	Boolean	Indicates whether the product is active (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
isAssetizable	Boolean	Indicates whether a product instance remains a customer asset after it's purchased (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Small, 67.0	67.0
isComponentRequired	Boolean	Indicates whether a product component is required (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
isDefaultComponent	Boolean	Indicates whether a product component is a default component (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
isQuantityEditable	Boolean	Indicates whether the quantity of a product is editable (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
isSoldOnlyWithOtherProducts	Boolean	Indicates whether a product can be sold only with other products (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
name	String	Name of the product.	Small, 67.0	67.0
nodeType	String	Specifies whether a node is a product node or a product classification node.	Small, 67.0	67.0
prices	Product Prices []	Pricing details of a product.	Small, 67.0	67.0
productClassification	Product Classification []	Details of the product classification that the product is based on.	Small, 67.0	67.0
productCode	String	Universal product code that's used to track the part that's used in the product.	Small, 67.0	67.0

Property Name	Type	Description	Filter Group and Version	Available Version
productQuantity	Product Quantity[]	Quantity details of a product.	Small, 67.0	67.0
productSellingModelOptions	Product Selling Model Option[]	Details of the product selling model options.	Small, 67.0	67.0
productSpecificationType	Product Specification Type[]	Details of the product specification type.	Small, 67.0	67.0
productType	String	Details about the product type.	Small, 67.0	67.0
qualificationContext	Qualification Context[]	Context details of a user, which are used for qualification rules.	Small, 67.0	67.0
status	String	Status of the product, such as active or inactive.	Small, 67.0	67.0

Search Products Facet

Output representation of the details of the faceted search.

JSON Example

```
"facets": [
  {
    "attributeType": "ProductStandard",
    "displayName": "Product Type",
    "displayRank": 2,
    "nameOrId": "Type",
    "values": [
      {
        "displayName": "Bundle",
        "nameOrId": "Bundle"
      }
    ]
  },
  {
    "attributeType": "ProductDynamicAttribute",
    "displayName": "Display",
    "displayRank": 3,
    "nameOrId": "0tjDU0000003K5BYAU",
    "values": [
      {
        "displayName": "1080p Built-in Display",
        "nameOrId": "1080p Built-in Display"
      },
      {
        "displayName": "2k Built-in Display",
        "nameOrId": "2k Built-in Display"
      },
      {
        "displayName": "4k Built-in Display",
```

```

        "nameOrId": "4k Built-in Display"
      }
    ]
  }
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
attributeType	String	Search attribute type of the facet.	Small, 63.0	63.0
displayName	String	Display name of the facet.	Small, 63.0	63.0
displayRank	Integer	Display rank for the facet.	Small, 63.0	63.0
nameOrId	String	ID or the internal name of the facet.	Small, 63.0	63.0
values	Facet Value[]	Values of the facet found in the search result. Sorted by display name in alphabetical order.	Medium, 63.0	63.0

User Context

Output representation of the user context details.

Property Name	Type	Description	Filter Group and Version	Available Version
contextId	String	ID of the context.	Small, 60.0	60.0

Product Discovery Standard Invocable Actions

Use the standard invocable actions available with Product Discovery to find and retrieve product, category, and catalog details. Additionally, execute a qualification procedure, and search products with guided selection.

[Find Products Action](#)

Search for the products from a catalog, category, or subcategory by using the specified search term.

[Execute Qualification Procedure Action](#)

Execute a qualification procedure, which returns the qualification status for the specified products.

[Get Catalogs Action](#)

Get a list of catalog records.

[Get Catalog Details Action](#)

Get details of a catalog record.

[Get Categories Action](#)

Get the list of categories associated with a catalog record.

[Get Category Details Action](#)

Get details of a category record.

[Get Multiple Product Details Action](#)

Get product details for a list of products.

[Get Products Action](#)

Get products from the specified catalog, category, or subcategory, including product qualification and pricing details.

[Get Product Details Action](#)

Get details such as attributes, hierarchy, and cardinality for the specified product.

[Search Product with Guided Selection Action](#)

Use guided product selection to search for products.

[Get Product Recommendations Action](#)

Retrieve a list of recommended products for a quote or order by using the Constraint Rule Engine.

Find Products Action

Search for the products from a catalog, category, or subcategory by using the specified search term.

This action is available in API version 62.0 and later.

Special Access Rules

The Find Products action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

You can invoke this action via Apex and Flows only.

Inputs

Input	Type	Description
<code>additionalContextData</code>	Apex-defined	An array of Apex runtime_industries_cpq.AdditionalContextData records that contain the additional nodes that are used along with the context definition nodes for data hydration. The maximum number of supported nodes is 10.
<code>additionalFields</code>	Apex-defined	An Apex runtime_industries_cpq.AdditionalFields record that contains an array of additional standard or custom fields to include in the response. The supported objects are <code>Product2</code> or <code>ProductAttributeDefinition</code> —If the fields defined for the <code>ProductAttributeDefinition</code> object aren't available for the <code>ProductClassificationAttr</code> object, then the API request fails.
<code>catalogId</code>	string	Catalog ID that's used to find and retrieve the products.
<code>categoryId</code>	string	ID of the category or subcategory to get the products for.
<code>contextDefinition</code>	string	API name of the context definition used for context creation. If you don't specify a value, the context selected on the Product Discovery Settings page from Setup is used.
<code>contextMapping</code>	string	API name of the context mapping that's used for data hydration. The value of this parameter is used only if it belongs to the specified context definition.
<code>correlationId</code>	string	Currency code that's used to calculate and show prices. Only the products with the currency code matching the specified currency code are fetched.
<code>currencyCode</code>	string	Currency code that's used to calculate and show prices.

Input	Type	Description
cursor	string	A unique identifier that represents the position of the product from which the next set of results are retrieved.
executeConfigurationRules	boolean	Indicates whether configuration rules must run (<code>true</code>) or not (<code>false</code>). Available in API version 67.0 and later.
enablePricing	boolean	Indicates whether the pricing procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, you must enable the Pricing Procedure setting from Setup.
enableQualification	boolean	Indicates whether the qualification procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, you must enable the Qualification Procedure setting from Setup.
filter	Apex-defined	A collection of Apex runtime_industries_cpq.FilterInputRepresentation records where each record contains a related object and the filter criteria that's applied on the object. The <code>filter</code> parameter supports only the <code>name</code> property. The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . If this parameter contains multiple criteria, all the criteria are applied.
includeCatalogDetails	boolean	Indicates whether catalog details must be included in the response (<code>true</code>) or not (<code>false</code>).
limit	integer	Maximum number of results to be returned in the response. Enter a value from 1 through 100. The default value is 10.
orderBy	string	Comma-separated string of key-value pairs that specify how results are sorted. Each string must contain a field name and its sort order. For example, <code>["name:asc","custom_field:asc"]</code> .
priceBookId	string	ID of the pricebook from which you want to retrieve the pricing details.
productClassificationId	string	ID of the product classification that's used to filter products.
pricingProcedure	string	API name of the pricing procedure to calculate product prices. If you don't specify a value, the pricing procedure selected on the Product Discovery Settings page from Setup is used.
qualificationProcedure	string	API name of the qualification procedure to evaluate product eligibility. If you don't specify a value, the qualification procedure selected on the Product Discovery Settings page from Setup is used.
transactionContextId	string	Context ID of the quote or order. Available in API version 67.0 and later.
transactionId	string	ID of the quote or order. Available in API version 67.0 and later.
relatedObjectFilters	Apex-defined	A collection of Apex runtime_industries_cpq.RelatedObjectFilterInputRepresentation records, where each record contains a related object and the filter criteria that's applied on the object.
searchTerm	string	Required. Search term to find and retrieve products.

Input	Type	Description
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextInputRepresentation</code> record that contains the user details to evaluate product eligibility and calculate prices.

Outputs

Output	Type	Description
apiStatus	Apex-defined	An Apex <code>runtime_industries_cpq.ApiStatusRepresentation</code> record that contains a status code and message.
contextId	string	ID of the context that's created by using the specified context definition.
correlationId	string	ID to reference a series of related actions.
cursor	string	Unique identifier that represents the position of the next product in the dataset. It's used as an input to retrieve the next set of products.
facets	Apex-defined	Collection of Apex <code>ProductFacetsRepresentation</code> records that contain details of the facet that's retrieved.
results	Apex-defined	An Apex <code>runtime_industries_cpq.SearchProductsRepresentation</code> record that contains the products that match the query.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextRepresentation</code> record that includes the user details.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action = Invocable.Action.createStandardAction('findProducts');
action.setInvocationParameter('searchTerm', 'Additional API');
action.setInvocationParameter('executeConfigurationRules', true);
action.setInvocationParameter('catalogId', '0ZSVW000000AhdB4AS');
action.setInvocationParameter('transactionId', '0Q0VW0000018J6X0AU');
List<String> orderBy = new List<String>();
orderBy.add('name:asc');
action.setInvocationParameter('orderBy', orderBy);
List<Invocable.Action.Result> results = action.invoke();

for (Invocable.Action.Result res : results) {
    if (res.isSuccess()) {
        Map<String, Object> outMap = res.getOutputParameters();
        String jsonOutput = JSON.serialize(outMap);
        System.debug(jsonOutput);
    }
}

```

Here's a sample response for this action.

```
{
  "facets": [],
  "apiStatus": {
    "statusMessage": null,
    "statusCode": "FetchedDetailsSuccessfully",
    "messages": []
  },
  "results": [
    {
      "unitOfMeasure": null,
      "status": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "productType": null,
      "productSpecificationType": null,
      "productSellingModelOptions": [
        {
          "productSellingModelId": "0jPVW0000001fh32AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "TermDefined",
            "pricingTermUnit": "Annual",
            "pricingTerm": 1,
            "name": "Term Annual",
            "id": "0jPVW0000001fh32AA"
          },
          "productId": "01tVW00000317txYAA",
          "id": "0iOVW00000049w22AA"
        },
        {
          "productSellingModelId": "0jPVW0000001fh52AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "Evergreen",
            "pricingTermUnit": "Months",
            "pricingTerm": 1,
            "name": "Evergreen Monthly",
            "id": "0jPVW0000001fh52AA"
          },
          "productId": "01tVW00000317txYAA",
          "id": "0iOVW00000049w12AA"
        },
        {
          "productSellingModelId": "0jPVW0000001fh62AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "TermDefined",
            "pricingTermUnit": "Months",
            "pricingTerm": 1,
            "name": "Term Monthly",
            "id": "0jPVW0000001fh62AA"
          }
        }
      ]
    }
  ]
}
```



```

    },
    "productId": "01tVW00000317txYAA",
    "id": "0iOVW00000049w32AA"
  }
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API",
"productClassification": {
  "id": "11BVW0000041jiz2AQ"
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "01sVW0000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzfGYAQ",
    "price": 15000,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "Evergreen",
      "occurrence": 1,
      "name": "Evergreen Monthly",
      "id": "0jPVW0000001fh52AA",
      "frequency": "Months"
    },
    "priceBookId": "01sVW0000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzg8YAA",
    "price": 2000,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },
  {

```

```

    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Monthly",
      "id": "0jPVW0000001fh62AA",
      "frequency": "Months"
    },
    "priceBookId": "01sVW00000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzg9YAA",
    "price": 1500,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
],
"nodeType": "simpleProduct",
"name": "Additional API",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000000317txYAA",
"endOfLifeDate": null,
"displayUrl": "/resource/add_api",
"discontinuedDate": null,
"description": null,
"configureDuringSale": "Allowed",
"configurationRules": [
  {
    "type": "disable",
    "details": [
      {
        "message": "This is disabled"
      }
    ]
  }
]
},
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
},
{
  "unitOfMeasure": null,
  "status": null,
  "qualificationContext": {
    "reason": null,
    "isQualified": true
  }
}

```

```

    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "0ltVW0000003l7tyYAA",
        "id": "0iOVW00000049w42AA"
      }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-API-FLEX",
    "productClassification": {
      "id": null
    },
    "prices": [
      {
        "pricingModel": {
          "unitOfMeasure": null,
          "pricingModelType": "TermDefined",
          "occurrence": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA",
          "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZlYAM",
        "priceBookEntryId": "01uVW000000jzFfYAQ",
        "price": 450,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
      }
    ],
    "nodeType": "simpleProduct",
    "name": "Additional API Flex (100M)",
    "isSoldOnlyWithOtherProds": false,
    "isQuantityEditable": null,
    "isDefaultComponent": null,
    "isComponentRequired": null,

```

```

    "isAssetizable": true,
    "isActive": true,
    "id": "01tVW000003l7tyYAA",
    "endOfLifeDate": null,
    "displayUrl": "/resource/api_flex",
    "discontinuedDate": null,
    "description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
    "configureDuringSale": null,
    "configurationRules": [],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "01tVW000003l7tzYAA",
        "id": "0iOVW00000049w52AA"
      }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-API-GOVT",
    "productClassification": {
      "id": null
    },
    "prices": [
      {
        "pricingModel": {
          "unitOfMeasure": null,
          "pricingModelType": "TermDefined",

```

```

        "occurrence": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA",
        "frequency": "Annual"
    },
    "priceBookId": "01sVW00000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzfHYAQ",
    "price": 1450,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
],
"nodeType": "simpleProduct",
"name": "Additional API Govt",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW0000003l7tzYAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_govt",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
},
{
  "unitOfMeasure": null,
  "status": null,
  "qualificationContext": {
    "reason": null,
    "isQualified": true
  },
  "productType": null,
  "productSpecificationType": null,
  "productSellingModelOptions": [
    {
      "productSellingModelId": "0jPVW0000001fh32AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "TermDefined",
        "pricingTermUnit": "Annual",

```

```

        "pricingTerm": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA"
    },
    "productId": "0ltVW0000003l7u0YAA",
    "id": "0iOVW00000049w92AA"
}
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API-PREP",
"productClassification": {
    "id": null
},
"prices": [
    {
        "pricingModel": {
            "unitOfMeasure": null,
            "pricingModelType": "TermDefined",
            "occurrence": 1,
            "name": "Term Annual",
            "id": "0jPVW0000001fh32AA",
            "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZlYAM",
        "priceBookEntryId": "01uVW000000jzfSYAQ",
        "price": 3240,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    }
],
"nodeType": "simpleProduct",
"name": "Additional API Pre-Prod",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "0ltVW0000003l7u0YAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_preprod",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,

```

```

    "configurationRules": [],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "01tVW000000317u1YAA",
        "id": "0iOVW000000049wA2AQ"
      }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-API-PROD",
    "productClassification": {
      "id": null
    },
    "prices": [
      {
        "pricingModel": {
          "unitOfMeasure": null,
          "pricingModelType": "TermDefined",
          "occurrence": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA",
          "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZ1YAM",
        "priceBookEntryId": "01uVW0000000jzfdYAA",
        "price": 3240,
        "isSelected": false,
        "isDerived": false,

```

```

        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    }
],
"nodeType": "simpleProduct",
"name": "Additional API Prod",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000003l7u1YAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_prod",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
}
],
"contextId": "0000000r25tp21g002517775323419202e0743b1f275423d8a489c12ca99da72",
"correlationId": "4ac34e38-13d6-4720-97c4-4db7b3d41678"
}

```

Usage of an Apex-Defined Data Type in a Flow

To use an Apex-defined input parameter in a flow, follow these guidelines.

Create an Apex Class

Create an Apex class defining the input and output parameters. In the flow, include the Apex-defined input parameters for which you want to add the details. In this example, we've created a class named `ProductServiceAction` that takes an object's API name and record ID as input, and returns the additional context data.

```

public class ProductServiceAction {
    // Define input parameters
    public class FlowInput{
        @InvocableVariable(required=false)
        public String objectApiName;

        @InvocableVariable(required=false)
        public String recordId;
    }

    // Define output parameters
    public class FlowOutput{

```



```

        @invocableVariable
        public runtime_industries_cpq.AdditionalContextData additionalContextDataFinalOutput
= new runtime_industries_cpq.AdditionalContextData();
    }

    // This method is invoked from a Flow
    @InvocableMethod(label='Process Input' description='Creates the Array of ContextDataInput
for additional Context Data')
    public static List<FlowOutput> processContextData(List<FlowInput> inputs){
        String apiName;
        String recId;
        FlowOutput output = new FlowOutput();

        // Capture input from the flow
        for(FlowInput input: inputs){
            apiName = input.objectApiName;
            recId = input.recordId;
        }

        // Populate the ContextDataInput list to store additional context data
        List<runtime_industries_cpq.ContextDataInput> listContextData = new
List<runtime_industries_cpq.ContextDataInput>();
        runtime_industries_cpq.ContextDataInput cd1 = new
runtime_industries_cpq.ContextDataInput();
        cd1.nodeName = apiName;
        cd1.nodeData = new Map<String, Object>();
        cd1.nodeData.put('id', recId);
        listContextData.add(cd1);

        output.additionalContextDataFinalOutput.additionalContextData = listContextData;
        List<FlowOutput> flowOutputs = new List<FlowOutput>();
        flowOutputs.add(output);

        List<runtime_industries_cpq.RelatedObjectFilter> relatedObjectFilterList = new
List<runtime_industries_cpq.RelatedObjectFilter>();

        runtime_industries_cpq.RelatedObjectFilter relatedObjectFilter = new
runtime_industries_cpq.RelatedObjectFilter();

        relatedObjectFilter.objectName = 'ProductSpecificationRecType';
        List<runtime_industries_cpq.FilterCriteriaInputRepresentation> criteriaList = new
List<runtime_industries_cpq.FilterCriteriaInputRepresentation>();
        runtime_industries_cpq.FilterCriteriaInputRepresentation criteria = new
runtime_industries_cpq.FilterCriteriaInputRepresentation();
        criteria.property = 'IsCommercial';
        criteria.operator = 'eq';
        criteria.value = 'true';
        criteriaList.add(criteria);
        relatedObjectFilter.criteria = criteriaList;

        relatedObjectFilterList.add(relatedObjectFilter);
        output.relatedObjectFilter.relatedObjectFilter = relatedObjectFilterList;

        output.userContext.accountId = '001DU000001nx9BYAQ';

```

```

        return flowOutputs;
    }
}

```

Create a Flow with the Necessary Variables and Components: Create a flow that enables users to add a search term to find products. Add the ProductService action that you've created above by using Apex. When a flow is invoked from a record, the flow sends the record's objectApiName and recordId to the Apex class, which then generates the flow output. The flow passes the objectApiName and recordId of the record that the flow is invoked from to the Apex class to generate the flow output. See [Example of How to Create a Flow for Product Discovery](#).

Configure the Action: Configure the action (for example, Find Products action) to add values for the Apex-defined input parameters. Use the output of the created Apex class as the input of the Apex-defined parameter in the Find Products action, which users can use to find products.

Execute Qualification Procedure Action

Execute a qualification procedure, which returns the qualification status for the specified products.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Execute Qualification Procedure action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
additionalContextData	Apex-defined	Collection of Apex AdditionalContextData records that contain additional context data for nodes of the custom context definition, if applicable. You can add details for up to 10 nodes. See AdditionalContextData .
contextDefinitionName	string	Name of the custom context definition that's used to create context data for categories. If null, the default context definition is used.
contextMappingName	string	Name of the context mapping. By default, the default context mapping associated with the context definition is used.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
productIds	string	Required. Collection of IDs of products that are to be checked for qualification.
qualificationProcedureName	string	Name of the custom qualification procedure that's executed to determine the category list. If null, the default qualification procedure is executed.
userContextInputRepresentation	Apex-defined	An Apex UserContextInputRepresentation record that contains user details, such as account ID, geographical location, language preferences, and more.

Outputs

Output	Type	Description
apiStatusOutputRepresentation	Apex-defined	An Apex ApiStatusOutputRepresentation record that contains the status of the request, including the status code and message.
contextId	string	ID of the context that's created by using the specified context definition.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
qualificationResultRepresentations	Apex-defined	Collection of Apex QualificationResultRepresentation records that contain details about the qualified product.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action =
Invocable.Action.createStandardAction('executeQualificationProcedure');

ConnectApi.UserContextInputRepresentation userContext = new
ConnectApi.UserContextInputRepresentation();
userContext.accountId = '001xx000003GYiEAAW';

runtime_industries_cpq.ContextDataInput data = new runtime_industries_cpq.ContextDataInput();
String nodeNameVal = 'Quote__c';
Map<String,Object> nodeDataVal = new Map<String,Object>();
nodeDataVal.put('id', (Object) '0Q0xx0000004CDsCAM');
nodeDataVal.put('businessObjectType', (Object) 'Quote');
data.nodeName = nodeNameVal;
data.nodeData = nodeDataVal;
List<runtime_industries_cpq.ContextDataInput> contextData= new
List<runtime_industries_cpq.ContextDataInput>();
contextData.add(data);
runtime_industries_cpq.AdditionalContextData additionalContextDataOut = new
runtime_industries_cpq.AdditionalContextData();
additionalContextDataOut.additionalContextData = new
List<runtime_industries_cpq.ContextDataInput>();
additionalContextDataOut.additionalContextData.add(data);

List<String> productIds = new List<String>();
prodIds.add('01ttx0000006i2ZAAQ');
prodIds.add('01ttx0000006i35AAA');
action2.setInvocationParameter('productIds', productIds);
action.setInvocationParameter('correlationId', '9cbb9650-48c5-11ed-96d1-0afcf185843b');
action.setInvocationParameter('userContextInputRepresentation', userContext);
action.setInvocationParameter('qualificationProcedureName', 'CatQual02');
action.setInvocationParameter('contextDefinitionName', 'CategoryCD');
action.setInvocationParameter('contextMappingName', 'ProductDiscoveryMapping');
action.setInvocationParameter('additionalContextData', additionalContextDataOut);

```

```
List<Invocable.Action.Result> results = action.invoke();
System.debug('Execute Qualification Procedure Action + '+results);
```

Here's a sample response when you call this action.

```
[
  {
    "actionName": "executeQualificationProcedure",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "apiStatusOutputRepresentation": {
        "statusMessage": null,
        "statusCode": "FetchedDetailsSuccessfully",
        "messages": []
      },
      "qualificationResultRepresentations": [
        {
          "qualificationContext": {
            "reason": null,
            "isQualified": true
          },
          "productId": "01tSG000007uDL8YAM"
        },
        {
          "qualificationContext": {
            "reason": "Product is not qualified because one or more field(s) do not match
the qualification criteria. Fields:- ProductId - 01tSG000007uDLBYA2 Max_Number_of_Employees
- 50 Min_Number_of_Employees - 50 RootProductId - ",
            "isQualified": false
          },
          "productId": "01tSG000007uDLBYA2"
        }
      ],
      "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
      "contextId": "0000000b28op21g00251747224654739cade16577eac4c8fb5d94a20d952fdab"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Get Catalogs Action

Get a list of catalog records.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

Inputs

Input	Type	Description
recordLimit	integer	Number of catalog records to get. The minimum is 1, the maximum is 100, and the default is 100.
recordOffset	integer	Number of catalog records to skip in the request. The default is 0.
correlationId	string	Unique identifier for tracking requests and messages, allowing reference to a specific transaction or event chain.
orderBy	string	Sort records in ascending or descending order.

Outputs

Output	Type	Description
resultCatalogList	Apex-defined	List of filtered catalog records. See CatalogOutputRepresentation .
apiStatusOutputRepresentation	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains the status of the request, including the status code and message.
recordLimit	integer	Number of catalog records to show per page.
resultListCount	integer	Number of catalog records in the result.
correlationId	string	Unique identifier for tracking requests and messages, allowing reference to a specific transaction or event chain.
recordOffset	integer	Number of catalog records to skip in the request. The default is 0.

Example

POST

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action = Invocable.Action.createStandardAction('getCatalogs');

action.setInvocationParameter('correlationId', '9cbb9650-48c5-11ed-96d1-0afcf185843b');
action.setInvocationParameter('recordLimit', 1);
action.setInvocationParameter('recordOffset', 1);
String[] sortOrder = new String[]{'Name:ASC'};
action.setInvocationParameter('orderBy', sortOrder);

List<Invocable.Action.Result> results = action.invoke();
System.debug('Catalog List Action + '+results);

```

Here's a sample response when you call this action.

```
[
  {
    "actionName": "getCatalogs",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "resultListCount": 2,
      "apiStatusOutputRepresentation": {
        "statusMessage": null,
        "statusCode": "FetchedDetailsSuccessfully",
        "messages": []
      },
      "resultCatalogList": [
        {
          "status": null,
          "numberOfCategories": 2,
          "name": "Hardware Catalog",
          "id": "0ZSZ6000000CtXYOA0",
          "effectiveStartDate": null,
          "effectiveEndDate": null,
          "description": "Hardware Catalog Desc",
          "customFields": [],
          "catalogType": "Sales",
          "catalogCode": "HC"
        }
      ],
      "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
      "recordOffset": 0,
      "recordLimit": 1
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Get Catalog Details Action

Get details of a catalog record.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Get Catalog Details action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
catalogId	string	Required. ID of the catalog record.
correlationId	string	Unique identifier attached to requests and messages, enabling reference to a specific transaction or event chain.

Outputs

Output	Type	Description
apiStatusOutputRepresentation	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains the status of the request, including the status code and message.
catalogDetailsResult	Apex-defined	Details of the catalog record.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.

Example

Here's a sample input to call this invocable action from Apex code.

```
Invocable.Action action = Invocable.Action.createStandardAction('getCatalogDetails');

action.setInvocationParameter('correlationId', '9cbb9650-48c5-11ed-96d1-0afcf185843b');
action.setInvocationParameter('catalogId', '0ZSZ6000000CtXYOA0');

List<Invocable.Action.Result> results = action.invoke();
System.debug('Catalog Details Action + '+results);
```

Here's a sample response when you call this action.

```
[
  {
    "actionName": "getCatalogDetails",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "apiStatusOutputRepresentation": {
        "statusMessage": null,
        "statusCode": "FetchedDetailsSuccessfully",
        "messages": []
      },
      "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
      "catalogDetailsResult": {
        "status": null,
        "numberOfCategories": 2,
        "name": "Hardware Catalog",

```

```

        "id": "0ZSZ6000000CtXYOA0",
        "effectiveStartDate": null,
        "effectiveEndDate": null,
        "description": "Hardware Catalog Desc",
        "customFields": null,
        "catalogType": "Sales",
        "catalogCode": "HC"
    }
},
"sortOrder": -1,
"version": 1
}
]

```

Get Categories Action

Get the list of categories associated with a catalog record.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Get Categories action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
additionalContextData	Apex-defined	Collection of Apex runtime_industries_cpq.AdditionalContextData records that contain additional context data for nodes of the custom context definition, if applicable. You can add details for up to 10 nodes.
catalogId	string	Required. ID of the catalog record.
categoryNestLevel	integer	Level of nesting within the category hierarchy to include in the request.
contextDefinitionName	string	Name of the custom context definition that's used to create context data for categories. If null, the default context definition is used.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
contextMappingName	string	Name of the context mapping. By default, the default context mapping associated with the context definition is used.
enableQualificationProcedure	boolean	Indicates whether qualification rules are applied to categories (<code>true</code>) or not (<code>false</code>).
filterInputRepresentation	Apex-defined	Collection of Apex runtime_industries_cpq.FilterInputRepresentation records that contain the filter criteria applied to the category records.

Input	Type	Description
parentCategoryId	string	ID of the parent category record.
qualificationProcedureName	string	Name of the custom qualification procedure that's executed to determine the category list. If null, the default qualification procedure is executed.
userContextInputRepresentation	Apex-defined	An Apex UserContextInputRepresentation record that contains user details, such as account ID, geographical location, language preferences, and more.

Outputs

Output	Type	Description
apiStatusOutputRepresentation	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains the status of the request, including the status code and message.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
resultCategoryList	Apex-defined	List of filtered category records. See CategoryOutputRepresentation .
resultListCount	integer	Number of category records in the result.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action = Invocable.Action.createStandardAction('getCategories');

ConnectApi.UserContextInputRepresentation userContext = new
ConnectApi.UserContextInputRepresentation();
userContext.accountId = '001xx000003GYiEAAW';

runtime_industries_cpq.ContextDataInput data = new runtime_industries_cpq.ContextDataInput();
String nodeNameVal = 'Quote__c';
Map<String,Object> nodeDataVal = new Map<String,Object>();
nodeDataVal.put('id', (Object) '0Q0xx0000004CDsCAM');
nodeDataVal.put('businessObjectType', (Object) 'Quote');
data.nodeName = nodeNameVal;
data.nodeData = nodeDataVal;
List<runtime_industries_cpq.ContextDataInput> contextData= new
List<runtime_industries_cpq.ContextDataInput>();
contextData.add(data);
runtime_industries_cpq.AdditionalContextData additionalContextDataOut = new
runtime_industries_cpq.AdditionalContextData();
additionalContextDataOut.additionalContextData = new
List<runtime_industries_cpq.ContextDataInput>();
additionalContextDataOut.additionalContextData.add(data);

action.setInvocationParameter('catalogId', '0ZSxx0000000002GAA');
action.setInvocationParameter('correlationId', '9cbb9650-48c5-11ed-96d1-0afcf185843b');
action.setInvocationParameter('userContextInputRepresentation', userContext);

```

```

action.setInvocationParameter('enableQualificationProcedure', True);
action.setInvocationParameter('qualificationProcedureName', 'CatQual02');
action.setInvocationParameter('contextDefinitionName', 'CategoryCD');
action.setInvocationParameter('contextMappingName', 'ProductDiscoveryMapping');
action.setInvocationParameter('additionalContextData', additionalContextDataOut);
//action.setInvocationParameter('categoryDepth', 4);
//action.setInvocationParameter('parentCategoryId', '0ZGxx0000000001GAA');

List<Invocable.Action.Result> results = action.invoke();
System.debug('Search Action + '+results);

```

Here's a sample response when you call this action.

```

[
  {
    "actionName": "getCategories",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "resultCategoryList": [
        {
          "sortOrder": null,
          "qualificationContext": {
            "reason": "Category is not qualified because one or more field(s) do not match
the qualification criteria. Fields:- CategoryId - 0ZGxx0000000001GAA quotename - null
Max_Number_of_Employees - 1500 Min_Number_of_Employees - 1500",
            "isQualified": false
          },
          "parentCategoryId": null,
          "name": "Laptops",
          "isNavigational": true,
          "id": "0ZGxx0000000001GAA",
          "hasSubCategories": true,
          "description": null,
          "childCategories": [],
          "catalogId": "0ZSxx0000000002GAA"
        },
        {
          "sortOrder": null,
          "qualificationContext": {
            "reason": null,
            "isQualified": true
          },
          "parentCategoryId": null,
          "name": "Desktops",
          "isNavigational": true,
          "id": "0ZGxx0000000002GAA",
          "hasSubCategories": false,
          "description": null,
          "childCategories": [],
          "catalogId": "0ZSxx0000000002GAA"
        }
      ]
    }
  ]

```

```

        "sortOrder": null,
        "qualificationContext": {
            "reason": null,
            "isQualified": true
        },
        "parentCategoryId": null,
        "name": "Accessories",
        "isNavigational": true,
        "id": "0ZGxx0000000003GAA",
        "hasSubCategories": false,
        "description": null,
        "childCategories": [],
        "catalogId": "0ZSxx0000000002GAA"
    },
    ],
    "resultListCount": 3,
    "apiStatusOutputRepresentation": {
        "statusMessage": null,
        "statusCode": "FetchedDetailsSuccessfully",
        "messages": []
    },
    "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b"
},
"sortOrder": -1,
"version": 1
}
]

```

Get Category Details Action

Get details of a category record.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Get Category Details action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
additionalContextData	Apex-defined	Collection of Apex runtime_industries_cpq.AdditionalContextData records that contain additional context data for nodes of the custom context definition, if applicable. You can add details for up to 10 nodes.
catalogId	string	ID of the catalog record that's used to search for products within a category.
categoryId	string	Required. ID of the category or subcategory that's used to search for products.
contextDefinitionName	string	Name of the custom context definition that's used to create context data for categories. If null, the default context definition is used.

Input	Type	Description
contextMappingName	string	Name of the context mapping. By default, the default context mapping associated with the context definition is used.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
enableQualificationProcedure	boolean	Indicates whether qualification rules are applied to categories (<code>true</code>) or not (<code>false</code>).
filterInputRepresentation	Apex-defined	Collection of Apex runtime_industries_cpq.FilterInputRepresentation records that contain the filter criteria applied to the category records.
qualificationProcedureName	string	Name of the custom qualification procedure that's executed to determine the category list. If null, the default qualification procedure is executed.
userContextInputRepresentation	Apex-defined	An Apex UserContextInputRepresentation record that contains user details, such as account ID, geographical location, language preferences, and more.

Outputs

Output	Type	Description
apiStatusOutputRepresentation	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains the status of the request, including the status code and message.
categoryDetailsRepresentations	Apex-defined	Collection of Apex CategoryDetailsRepresentation records that contain details about the retrieved category.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action = Invocable.Action.createStandardAction('getCategoryDetails');

ConnectApi.UserContextInputRepresentation userContext = new
ConnectApi.UserContextInputRepresentation();
userContext.accountId = '001xx000003GYiEAAW';

runtime_industries_cpq.ContextDataInput data = new runtime_industries_cpq.ContextDataInput();
String nodeNameVal = 'Quote__c';
Map<String,Object> nodeDataVal = new Map<String,Object>();
nodeDataVal.put('id', (Object)'0Q0xx0000004CDsCAM');
nodeDataVal.put('businessObjectType', (Object)'Quote');
data.nodeName = nodeNameVal;
data.nodeData = nodeDataVal;
List<runtime_industries_cpq.ContextDataInput> contextData= new
List<runtime_industries_cpq.ContextDataInput>();

```

```

contextData.add(data);
runtime_industries_cpq.AdditionalContextData additionalContextDataOut = new
runtime_industries_cpq.AdditionalContextData();
additionalContextDataOut.additionalContextData = new
List<runtime_industries_cpq.ContextDataInput>();
additionalContextDataOut.additionalContextData.add(data);

action.setInvocationParameter('categoryId', '0ZGxx0000000001GAA');
action.setInvocationParameter('correlationId', '9cbb9650-48c5-11ed-96d1-0afcf185843b');
action.setInvocationParameter('userContext', userContext);
action.setInvocationParameter('enableQualification', True);
action.setInvocationParameter('qualificationProcedure', 'CatQual02');
action.setInvocationParameter('contextDefinition', 'CategoryCD');
action.setInvocationParameter('contextMapping', 'ProductDiscoveryMapping');
action.setInvocationParameter('additionalContextData', additionalContextDataOut);

List<Invocable.Action.Result> results = action.invoke();
System.debug('Search Action + '+results);

```

Here's a sample response when you call this action.

```

{
  "root": [
    {
      "actionName": "getCategoryDetails",
      "errors": null,
      "invocationId": null,
      "isSuccess": true,
      "outcome": null,
      "outputValues": {
        "apiStatusOutputRepresentation": {
          "statusMessage": null,
          "statusCode": "FetchedDetailsSuccessfully",
          "messages": []
        },
        "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
        "categoryDetailsRepresentations": {
          "sortOrder": null,
          "qualificationContext": {
            "reason": "Category is not qualified because one or more field(s) do not match
the qualification criteria. Fields:- CategoryId - 0ZGxx0000000001GAA quotename - null
Max_Number_of_Employees - 1500 Min_Number_of_Employees - 1500",
            "isQualified": false
          },
          "parentCategoryId": null,
          "name": "Laptops",
          "isNavigational": true,
          "id": "0ZGxx0000000001GAA",
          "hasSubCategories": true,
          "description": null,
          "childCategories": [
            {
              "sortOrder": null,
              "qualificationContext": {
                "reason": null,

```

```

        "isQualified": true
      },
      "parentCategoryId": "0ZGxx0000000001GAA",
      "name": "level1",
      "isNavigational": true,
      "id": "0ZGxx0000000004rGAA",
      "hasSubCategories": true,
      "description": null,
      "childCategories": [],
      "catalogId": null
    }
  ],
  "catalogId": "0ZSxx0000000002GAA"
}
},
"sortOrder": -1,
"version": 1
}
]
}

```

Get Multiple Product Details Action

Get product details for a list of products.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Get Multiple Product Details action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
additionalContextData	Apex-defined	Collection of Apex runtime_industries_cpq.AdditionalContextData records that contain additional context data for nodes of the custom context definition, if applicable. You can add details for up to 10 nodes.
additionalFields	Apex-defined	An Apex AdditionalFields record that contains the additional fields that are passed for the Product2 object.
catalogId	string	ID of the catalog record.
contextDefinitionName	string	Name of the custom context definition that's used to create context data for categories. If null, the default context definition is used.
contextMappingName	string	Name of the context mapping. By default, the default context mapping associated with the context definition is used.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.

Input	Type	Description
currencyCode	string	Currency code that's used to calculate and show prices.
enablePricing	boolean	Indicates whether pricing procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, the Pricing Procedure setting must be enabled.
enableQualificationProcedure	boolean	Indicates whether the qualification procedure is applied to categories (<code>true</code>) or not (<code>false</code>).
priceBookId	string	ID of the pricebook that the pricing information is retrieved from.
pricingProcedureName	string	Name of the pricing procedure to calculate product prices. If you don't enter a value, the pricing procedure selected on the Product Discovery Settings page is used.
productDataInputs	Apex-defined	Required. Collection of Apex BulkProductDetailsInputBody records that contain details about the products that are to be retrieved.
qualificationProcedureName	string	Name of the custom qualification procedure that's executed to determine the category list. If null, the default qualification procedure is executed.
userContextInputRepresentation	Apex-defined	An Apex <code>UserContextInputRepresentation</code> record that contains user details, such as account ID, geographical location, language preferences, and more.

Outputs

Output	Type	Description
apiStatusOutputRepresentation	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains the status of the request, including the status code and message.
contextId	string	ID of the context that's created using the specified context definition.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
productDetailsOutputRepresentation	Apex-defined	Collection of Apex BulkProductDetailsRepresentation records that contain details of available products.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextRepresentation</code> record containing user information.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action = Invocable.Action.createStandardAction('getMultipleProductDetails');

List<runtime_industries_cpq.BulkProductDetailsInputBody> productDataList = new
List<runtime_industries_cpq.BulkProductDetailsInputBody>();
runtime_industries_cpq.BulkProductDetailsInputBody productData = new
runtime_industries_cpq.BulkProductDetailsInputBody();
productData.productId = '01tIY000000nCxxhYAE';

productDataList.add(productData);

```

```
runtime_industries_cpq.BulkProductDetailsInputBodyList productList = new
runtime_industries_cpq.BulkProductDetailsInputBodyList();
productList.productData = productDataList;

action.setInvocationParameter('productDataInputs', productList);

List<Invocable.Action.Result> results = action.invoke();
System.debug('Result === ' + results);
```

Here's a sample response when you call this action.

```
[
  {
    "actionName": "getMultipleProductDetails",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "apiStatusOutputRepresentation": {
        "statusMessage": null,
        "statusCode": "FetchedDetailsSuccessfully",
        "messages": []
      },
      "correlationId": "9cbb9650-48c5-11ed-96d1-0afcf185843b",
      "contextId": null,
      "productDetailsOutputRepresentation": [
        {
          "unitOfMeasure": {
            "unitCode": null,
            "scale": null,
            "roundingMethod": null,
            "name": null,
            "id": null
          },
          "status": null,
          "qualificationContext": null,
          "productType": null,
          "productSpecificationType": null,
          "productSellingModelOptions": [
            {
              "productSellingModelId": "0jPxx0000000002EAA",
              "productSellingModel": {
                "status": "Active",
                "sellingModelType": "TermDefined",
                "pricingTermUnit": "Annual",
                "pricingTerm": 1,
                "name": "Term Based - Yearly",
                "id": "0jPxx0000000002EAA"
              },
              "productId": "01txx00000006i2oAAA",
              "id": "0iOxx000000000JEAQ"
            }
          ]
        }
      ]
    }
  ]
]
```



```

"productRelatedComponent": {
  "unitOfMeasure": null,
  "sequence": null,
  "quoteVisibility": null,
  "quantityScaleMethod": null,
  "quantity": null,
  "productRelationshipTypeId": null,
  "productComponentGroupId": null,
  "productClassificationId": null,
  "parentSellingModelId": null,
  "parentProductId": null,
  "minQuantity": null,
  "maxQuantity": null,
  "isQuantityEditable": null,
  "isExcluded": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "id": null,
  "doesBundlePriceIncludeChild": null,
  "childSellingModelId": null,
  "childProductId": null
},
"productQuantity": {
  "quantity": null,
  "minQuantity": null,
  "maxQuantity": null
},
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "ASTCERT001",
"productClassification": {
  "id": null
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Based - Yearly",
      "id": "0jPxx0000000002EAA",
      "frequency": "Annual"
    },
    "priceBookId": "01sxx0000005ptpAAA",
    "priceBookEntryId": "01luxx0000008yXaAAI",
    "price": 2000,
    "isSelected": true,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
]

```

```

    ],
    "nodeType": "simpleProduct",
    "name": "AI Specialist Certification",
    "isSoldOnlyWithOtherProds": false,
    "isQuantityEditable": null,
    "isDefaultComponent": null,
    "isComponentRequired": null,
    "isAssetizable": true,
    "isActive": true,
    "id": "01txx0000006i2oAAA",
    "endOfLifeDate": null,
    "displayUrl":
    "https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcQsp4GdUP_nGiCXJ-wzYkPx-RIA_UOM0zIDv3slxnACqYardvHUZe6yQkUixVEg0&usqp=CAU",

    "discontinuedDate": null,
    "description": "The Certified Artificial Intelligence Expert certification is
    typically designed for individuals who have an in-depth understanding of artificial
    intelligence (AI) concepts, algorithms, and applications and want to validate their expertise
    in the field.",
    "configureDuringSale": "NotAllowed",
    "childProducts": [],
    "catalogs": [],
    "availabilityDate": null,
    "attributes": [],
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": {
      "unitCode": null,
      "scale": null,
      "roundingMethod": null,
      "name": null,
      "id": null
    },
    "status": null,
    "qualificationContext": null,
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPxx0000000002EAA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Based - Yearly",
          "id": "0jPxx0000000002EAA"
        },
        "productId": "01txx0000006i2rAAA",
        "id": "0iOxx000000000QEAQ"
      }
    ]
  },
  ],

```

```

"productRelatedComponent": {
  "unitOfMeasure": null,
  "sequence": null,
  "quoteVisibility": null,
  "quantityScaleMethod": null,
  "quantity": null,
  "productRelationshipTypeId": null,
  "productComponentGroupId": null,
  "productClassificationId": null,
  "parentSellingModelId": null,
  "parentProductId": null,
  "minQuantity": null,
  "maxQuantity": null,
  "isQuantityEditable": null,
  "isExcluded": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "id": null,
  "doesBundlePriceIncludeChild": null,
  "childSellingModelId": null,
  "childProductId": null
},
"productQuantity": {
  "quantity": null,
  "minQuantity": null,
  "maxQuantity": null
},
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "ACERT001",
"productClassification": {
  "id": null
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Based - Yearly",
      "id": "0jPxx0000000002EAA",
      "frequency": "Annual"
    },
    "priceBookId": "01sxx0000005ptpAAA",
    "priceBookEntryId": "01luxx0000008yXdAAI",
    "price": 2000,
    "isSelected": true,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
]

```

```

    ],
    "nodeType": "simpleProduct",
    "name": "Admin Certification",
    "isSoldOnlyWithOtherProds": false,
    "isQuantityEditable": null,
    "isDefaultComponent": null,
    "isComponentRequired": null,
    "isAssetizable": true,
    "isActive": true,
    "id": "01txx0000006i2rAAA",
    "endOfLifeDate": null,
    "displayUrl": null,
    "discontinuedDate": null,
    "description": null,
    "configureDuringSale": "Allowed",
    "childProducts": [],
    "catalogs": [],
    "availabilityDate": null,
    "attributes": [],
    "attributeCategories": [],
    "additionalFields": []
  }
]
},
"sortOrder": -1,
"version": 1
}
]

```

Get Products Action

Get products from the specified catalog, category, or subcategory, including product qualification and pricing details.

If a catalog, category, or subcategory isn't specified, then this action retrieves all the products from all catalogs. This action is available in API version 62.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Get Products action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
additionalContextData	Apex-defined	An array of Apex runtime_industries_cpq.AdditionalContextData records that contain the additional nodes that are used along with the context definition nodes for data hydration. The maximum number of supported nodes is 10.
additionalFields	Apex-defined	An Apex runtime_industries_cpq.AdditionalFields record that contains an array of additional standard or custom fields to include in the response. The supported objects are <code>Product2</code> or <code>ProductAttributeDefinition</code> —If

Input	Type	Description
		the fields defined for the <code>ProductAttributeDefinition</code> object aren't available for the <code>ProductClassificationAttr</code> object, then the API request fails.
<code>catalogId</code>	string	Catalog ID that's used to find and retrieve the products.
<code>categoryId</code>	string	ID of the category or subcategory to get the products for.
<code>contextDefinition</code>	string	API name of the context definition that's used for context creation. If you don't specify a value, the context selected on the Product Discovery Settings page from Setup is used.
<code>contextMapping</code>	string	API name of the context mapping that's used for data hydration. The value of this parameter is used only if it belongs to the specified context definition.
<code>correlationId</code>	string	Unique ID that's used to reference a series of related actions.
<code>currencyCode</code>	string	Currency code that's used to calculate and show prices. Only the products with the currency code matching the specified currency code are fetched.
<code>cursor</code>	string	Unique identifier that represents the position of the product from which the next set of results are retrieved.
<code>enablePricing</code>	boolean	Indicates whether the pricing procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, you must enable the Pricing Procedure setting from Setup.
<code>enableQualification</code>	boolean	Indicates whether the qualification procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, you must enable the Qualification Procedure setting from Setup.
<code>executeConfigurationRules</code>	boolean	Indicates whether configuration rules must run (<code>true</code>) or not (<code>false</code>). Available in API version 67.0 and later.
<code>filter</code>	Apex-defined	A collection of Apex <code>runtime_industries_cpq.FilterInputRepresentation</code> records where each record contains a related object and the filter criteria that's applied on the object. The <code>filter</code> parameter supports only the <code>name</code> property. The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . If this parameter contains multiple criteria, all the criteria are applied.
<code>includeCatalogDetails</code>	boolean	Indicates whether catalog details must be included in the response (<code>true</code>) or not (<code>false</code>).
<code>limit</code>	integer	Maximum number of results to be returned in the response. Specify a value from 1 through 100. The default value is 10.
<code>orderBy</code>	string	Comma-separated string of key-value pairs that specify how the results are sorted. Each string must contain a field name and its sort order. For example, <code>["name:asc","custom_field:asc"]</code> .
<code>priceBookId</code>	string	ID of the pricebook that the pricing details are retrieved from.

Input	Type	Description
pricingProcedure	string	API name of the pricing procedure to calculate product prices. If you don't specify a value, the pricing procedure selected on the Product Discovery Settings page from Setup is used.
productClassificationId	string	ID of the product classification that's used to filter the products.
qualificationProcedure	string	API name of the qualification procedure to evaluate product eligibility. If you don't specify a value, the qualification procedure selected on the Product Discovery Settings page from Setup is used.
transactionContextId	string	Context ID of the quote or order. Available in API version 67.0 and later.
transactionId	string	ID of the quote or order. Available in API version 67.0 and later.
relatedObjectFilters	Apex-defined	A collection of Apex runtime_industries_cpq.RelatedObjectFilterInputRepresentation records, where each record contains a related object and the filter criteria that's applied on the object.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextInputRepresentation</code> record that contains the user details to evaluate product eligibility and calculate prices.

Outputs

Output	Type	Description
apiStatus	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains a status code and message.
contextId	string	ID of the context that's created by using the specified context definition.
correlationId	string	ID to reference a series of related actions.
cursor	string	Unique identifier that represents the position of the product from which the next set of results are retrieved.
results	Apex-defined	An Apex runtime_industries_cpq.ProductListRepresentation record that contains the retrieved products.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextRepresentation</code> record that includes the user details.

Example

Here's a sample input to call this invocable action from Apex code.

```
Invocable.Action action = Invocable.Action.createStandardAction('getProducts');
action.setInvocationParameter('executeConfigurationRules', true);
action.setInvocationParameter('catalogId', '0ZSVW000000AhdB4AS');
action.setInvocationParameter('transactionId', '0Q0VW0000018J6X0AU');
List<String> orderBy = new List<String>();
```

```

orderBy.add('name:asc');
action.setInvocationParameter('orderBy', orderBy);
List<Invocable.Action.Result> results = action.invoke();

for (Invocable.Action.Result res : results) {
    if (res.isSuccess()) {
        Map<String, Object> outMap = res.getOutputParameters();
        String jsonOutput = JSON.serialize(outMap);
        System.debug(jsonOutput);
    }
}

```

Here's a sample response for this action.

```

{
  "facets": [],
  "apiStatus": {
    "statusMessage": null,
    "statusCode": "FetchedDetailsSuccessfully",
    "messages": []
  },
  "results": [
    {
      "unitOfMeasure": null,
      "status": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "productType": null,
      "productSpecificationType": null,
      "productSellingModelOptions": [
        {
          "productSellingModelId": "0jPVW0000001fh32AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "TermDefined",
            "pricingTermUnit": "Annual",
            "pricingTerm": 1,
            "name": "Term Annual",
            "id": "0jPVW0000001fh32AA"
          },
          "productId": "01tVW0000003l7txYAA",
          "id": "0iOVW00000049w22AA"
        },
        {
          "productSellingModelId": "0jPVW0000001fh52AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "Evergreen",
            "pricingTermUnit": "Months",
            "pricingTerm": 1,
            "name": "Evergreen Monthly",
            "id": "0jPVW0000001fh52AA"
          }
        }
      ]
    }
  ]
}

```

```

    "productId": "01tVW00000317txYAA",
    "id": "0iOVW00000049w12AA"
  },
  {
    "productSellingModelId": "0jPVW0000001fh62AA",
    "productSellingModel": {
      "status": "Active",
      "sellingModelType": "TermDefined",
      "pricingTermUnit": "Months",
      "pricingTerm": 1,
      "name": "Term Monthly",
      "id": "0jPVW0000001fh62AA"
    },
    "productId": "01tVW00000317txYAA",
    "id": "0iOVW00000049w32AA"
  }
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API",
"productClassification": {
  "id": "11BVW0000041jiz2AQ"
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "01sVW0000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzfGYAQ",
    "price": 15000,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "Evergreen",
      "occurrence": 1,
      "name": "Evergreen Monthly",
      "id": "0jPVW0000001fh52AA",
      "frequency": "Months"
    }
  }
]

```



```

    },
    "priceBookId": "01sVW0000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzg8YAA",
    "price": 2000,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Monthly",
      "id": "0jPVW0000001fh62AA",
      "frequency": "Months"
    },
    "priceBookId": "01sVW0000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzg9YAA",
    "price": 1500,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
],
"nodeType": "simpleProduct",
"name": "Additional API",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000003l7txYAA",
"endOfLifeDate": null,
"displayUrl": "/resource/add_api",
"discontinuedDate": null,
"description": null,
"configureDuringSale": "Allowed",
"configurationRules": [
  {
    "type": "disable",
    "details": [
      {
        "message": "This is disabled"
      }
    ]
  }
]
}

```

```

    ],
    "childProducts": [],
    "categories": [
      {
        "sortOrder": null,
        "qualificationContext": {
          "reason": null,
          "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
      }
    ],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "0ltVW0000003l7tyYAA",
        "id": "0iOVW000000049w42AA"
      }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-API-FLEX",

```

```

"productClassification": {
  "id": null
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "01sVW00000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzffYAQ",
    "price": 450,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
],
"nodeType": "simpleProduct",
"name": "Additional API Flex (100M)",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000000317tyYAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_flex",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
  {
    "sortOrder": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "parentCategoryId": null,
    "name": "API",
    "isNavigational": null,
    "id": "0ZGVW0000000IUEG4A4",
    "hasSubCategories": null,

```

```

        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
    }
],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
},
{
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
        "reason": null,
        "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
        {
            "productSellingModelId": "0jPVW0000001fh32AA",
            "productSellingModel": {
                "status": "Active",
                "sellingModelType": "TermDefined",
                "pricingTermUnit": "Annual",
                "pricingTerm": 1,
                "name": "Term Annual",
                "id": "0jPVW0000001fh32AA"
            },
            "productId": "01tVW000000317tzYAA",
            "id": "0iOVW000000049w52AA"
        }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-API-GOVT",
    "productClassification": {
        "id": null
    },
    "prices": [
        {
            "pricingModel": {
                "unitOfMeasure": null,
                "pricingModelType": "TermDefined",
                "occurrence": 1,
                "name": "Term Annual",
                "id": "0jPVW0000001fh32AA",
                "frequency": "Annual"
            },
            "priceBookId": "01sVW00000024PZ1YAM",

```

```

        "priceBookEntryId": "01uVW000000jzfHYAQ",
        "price": 1450,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    }
],
"nodeType": "simpleProduct",
"name": "Additional API Gov",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000003l7tzYAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_govt",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
    {
        "sortOrder": null,
        "qualificationContext": {
            "reason": null,
            "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
    }
],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
},
{
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {

```

```

    "reason": null,
    "isQualified": true
  },
  "productType": null,
  "productSpecificationType": null,
  "productSellingModelOptions": [
    {
      "productSellingModelId": "0jPVW0000001fh32AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "TermDefined",
        "pricingTermUnit": "Annual",
        "pricingTerm": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA"
      },
      "productId": "01tVW00000317u0YAA",
      "id": "0iOVW00000049w92AA"
    }
  ],
  "productRelatedComponent": null,
  "productQuantity": null,
  "productPricingInformation": null,
  "productInformation": null,
  "productComponentGroups": [],
  "productCode": "QB-API-PREP",
  "productClassification": {
    "id": null
  },
  "prices": [
    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA",
        "frequency": "Annual"
      },
      "priceBookId": "01sVW0000024PZ1YAM",
      "priceBookEntryId": "01uVW000000jzfSYAQ",
      "price": 3240,
      "isSelected": false,
      "isDerived": false,
      "isDefault": true,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    }
  ],
  "nodeType": "simpleProduct",
  "name": "Additional API Pre-Prod",
  "isSoldOnlyWithOtherProds": false,
  "isQuantityEditable": null,

```

```

    "isDefaultComponent": null,
    "isComponentRequired": null,
    "isAssetizable": true,
    "isActive": true,
    "id": "01tVW00000317u0YAA",
    "endOfLifeDate": null,
    "displayUrl": "/resource/api_preprod",
    "discontinuedDate": null,
    "description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
    "configureDuringSale": null,
    "configurationRules": [],
    "childProducts": [],
    "categories": [
      {
        "sortOrder": null,
        "qualificationContext": {
          "reason": null,
          "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
      }
    ],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",

```

```

        "id": "0jPVW0000001fh32AA"
      },
      "productId": "01tVW00000317u1YAA",
      "id": "0iOVW00000049wA2AQ"
    }
  ],
  "productRelatedComponent": null,
  "productQuantity": null,
  "productPricingInformation": null,
  "productInformation": null,
  "productComponentGroups": [],
  "productCode": "QB-API-PROD",
  "productClassification": {
    "id": null
  },
  "prices": [
    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA",
        "frequency": "Annual"
      },
      "priceBookId": "01sVW0000024PZ1YAM",
      "priceBookEntryId": "01uVW000000jzfdYAA",
      "price": 3240,
      "isSelected": false,
      "isDerived": false,
      "isDefault": true,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    }
  ],
  "nodeType": "simpleProduct",
  "name": "Additional API Prod",
  "isSoldOnlyWithOtherProds": false,
  "isQuantityEditable": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "isAssetizable": true,
  "isActive": true,
  "id": "01tVW00000317u1YAA",
  "endOfLifeDate": null,
  "displayUrl": "/resource/api_prod",
  "discontinuedDate": null,
  "description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
  "configureDuringSale": null,
  "configurationRules": [],
  "childProducts": [],

```



```

"categories": [
  {
    "sortOrder": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "parentCategoryId": null,
    "name": "API",
    "isNavigational": null,
    "id": "0ZGVW000000IUEG4A4",
    "hasSubCategories": null,
    "description": null,
    "childCategories": null,
    "catalogId": "0ZSVW000000AhdB4AS"
  },
],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
},
{
  "unitOfMeasure": null,
  "status": null,
  "qualificationContext": {
    "reason": null,
    "isQualified": true
  },
  "productType": null,
  "productSpecificationType": null,
  "productSellingModelOptions": [
    {
      "productSellingModelId": "0jPVW0000001fh32AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "TermDefined",
        "pricingTermUnit": "Annual",
        "pricingTerm": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA"
      },
      "productId": "01tVW000000317u3YAA",
      "id": "0iOVW000000049wF2AQ"
    },
    {
      "productSellingModelId": "0jPVW00000001fh52AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "Evergreen",
        "pricingTermUnit": "Months",
        "pricingTerm": 1,
        "name": "Evergreen Monthly",
        "id": "0jPVW00000001fh52AA"
      }
    }
  ]
}

```

```

    },
    "productId": "01tVW00000317u3YAA",
    "id": "0iOVW00000049wE2AQ"
  },
  {
    "productSellingModelId": "0jPVW0000001fh62AA",
    "productSellingModel": {
      "status": "Active",
      "sellingModelType": "TermDefined",
      "pricingTermUnit": "Months",
      "pricingTerm": 1,
      "name": "Term Monthly",
      "id": "0jPVW0000001fh62AA"
    },
    "productId": "01tVW00000317u3YAA",
    "id": "0iOVW00000049wG2AQ"
  }
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-AUT-CRED",
"productClassification": {
  "id": null
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "01sVW0000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzfUYAQ",
    "price": 25,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "Evergreen",
      "occurrence": 1,
      "name": "Evergreen Monthly",
      "id": "0jPVW0000001fh52AA",

```

```

        "frequency": "Months"
    },
    "priceBookId": "01sVW0000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzgAYAQ",
    "price": 2.5,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
},
{
    "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Monthly",
        "id": "0jPVW0000001fh62AA",
        "frequency": "Months"
    },
    "priceBookId": "01sVW0000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzgBYAQ",
    "price": 2,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
}
],
"nodeType": "simpleProduct",
"name": "Additional Automation QB Credits",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW00000317u3YAA",
"endOfLifeDate": null,
"displayUrl": "/resource/add_auto_credit",
"discontinuedDate": null,
"description": "Your QuantumBit Automation subscription plan includes a quota of
Automation QB Credits that you can use with QB RPA, QB Orchestrator, or a combination of
both products. As you use processes to create automations, your total credit quota is
depleted. 1 QB Automation Credit = 2 RPA Bot Minutes, 1 QB Automation Credit = 100 RPA API
Calls, 1 QB Automation Credit = 50 Orchestrator Tasks",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
    {

```

```

        "sortOrder": null,
        "qualificationContext": {
            "reason": null,
            "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
    },
    ],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
},
{
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
        "reason": null,
        "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
        {
            "productSellingModelId": "0jPVW0000001fh32AA",
            "productSellingModel": {
                "status": "Active",
                "sellingModelType": "TermDefined",
                "pricingTermUnit": "Annual",
                "pricingTerm": 1,
                "name": "Term Annual",
                "id": "0jPVW0000001fh32AA"
            },
            "productId": "01tVW000000317uPYAQ",
            "id": "0iOVW000000049wR2AQ"
        }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-DAT-GRPH",
    "productClassification": {
        "id": null
    },
    "prices": [

```

```

    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA",
        "frequency": "Annual"
      },
      "priceBookId": "01sVW0000024PZ1YAM",
      "priceBookEntryId": "01uVW000000jzffYAA",
      "price": 25000,
      "isSelected": false,
      "isDerived": false,
      "isDefault": true,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    }
  ],
  "nodeType": "simpleProduct",
  "name": "Additional QB DataGraph (500M)",
  "isSoldOnlyWithOtherProds": false,
  "isQuantityEditable": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "isAssetizable": true,
  "isActive": true,
  "id": "01tVW00000317uPYAQ",
  "endOfLifeDate": null,
  "displayUrl": "/resource/add_data_graph",
  "discontinuedDate": null,
  "description": "With QuantumBit DataGraph, you can reuse multiple APIs in a single request. Enterprise architects can easily unify APIs into one data service – all without writing more code. Developers can consume multiple APIs from the data service in a single GraphQL request.",
  "configureDuringSale": null,
  "configurationRules": [],
  "childProducts": [],
  "categories": [
    {
      "sortOrder": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "parentCategoryId": null,
      "name": "API",
      "isNavigational": null,
      "id": "0ZGVW000000IUEG4A4",
      "hasSubCategories": null,
      "description": null,
      "childCategories": null,
      "catalogId": "0ZSVW000000AhdB4AS"
    }
  ]
}

```

```

    }
  ],
  "catalogs": [],
  "availabilityDate": null,
  "attributeCategories": [],
  "additionalFields": []
},
{
  "unitOfMeasure": null,
  "status": null,
  "qualificationContext": {
    "reason": null,
    "isQualified": true
  },
  "productType": null,
  "productSpecificationType": null,
  "productSellingModelOptions": [
    {
      "productSellingModelId": "0jPVW0000001fh32AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "TermDefined",
        "pricingTermUnit": "Annual",
        "pricingTerm": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA"
      },
      "productId": "01tVW00000317u2YAA",
      "id": "0iOVW00000049wC2AQ"
    },
    {
      "productSellingModelId": "0jPVW0000001fh52AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "Evergreen",
        "pricingTermUnit": "Months",
        "pricingTerm": 1,
        "name": "Evergreen Monthly",
        "id": "0jPVW0000001fh52AA"
      },
      "productId": "01tVW00000317u2YAA",
      "id": "0iOVW00000049wB2AQ"
    },
    {
      "productSellingModelId": "0jPVW0000001fh62AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "TermDefined",
        "pricingTermUnit": "Months",
        "pricingTerm": 1,
        "name": "Term Monthly",
        "id": "0jPVW0000001fh62AA"
      },
      "productId": "01tVW00000317u2YAA",

```

```

        "id": "0iOVW00000049wD2AQ"
    }
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API-REQT",
"productClassification": {
    "id": null
},
"prices": [
    {
        "pricingModel": {
            "unitOfMeasure": null,
            "pricingModelType": "TermDefined",
            "occurrence": 1,
            "name": "Term Annual",
            "id": "0jPVW0000001fh32AA",
            "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZlYAM",
        "priceBookEntryId": "01uVW000000jzfOYAQ",
        "price": 45,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    },
    {
        "pricingModel": {
            "unitOfMeasure": null,
            "pricingModelType": "Evergreen",
            "occurrence": 1,
            "name": "Evergreen Monthly",
            "id": "0jPVW0000001fh52AA",
            "frequency": "Months"
        },
        "priceBookId": "01sVW00000024PZlYAM",
        "priceBookEntryId": "01uVW000000jzgJYAQ",
        "price": 5,
        "isSelected": false,
        "isDerived": false,
        "isDefault": false,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    },
    {
        "pricingModel": {
            "unitOfMeasure": null,

```

```

        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Monthly",
        "id": "0jPVW0000001fh62AA",
        "frequency": "Months"
    },
    "priceBookId": "01sVW00000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzgKYAQ",
    "price": 5,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
],
"nodeType": "simpleProduct",
"name": "API Access Requests (AEH)",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000000317u2YAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_access",
"discontinuedDate": null,
"description": "QuantumBit API Experience Hub enables you to create vibrant ecosystems
and grow engagement for your API products",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
  {
    "sortOrder": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "parentCategoryId": null,
    "name": "API",
    "isNavigational": null,
    "id": "0ZGVW000000IUEG4A4",
    "hasSubCategories": null,
    "description": null,
    "childCategories": null,
    "catalogId": "0ZSVW000000AhdB4AS"
  }
],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],

```



```

    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "01tVW000000317uhYAA",
        "id": "0iOVW000000049x22AA"
      }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-SUPP-1005",
    "productClassification": {
      "id": null
    },
    "prices": [
      {
        "pricingModel": {
          "unitOfMeasure": null,
          "pricingModelType": "TermDefined",
          "occurrence": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA",
          "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZ1YAM",
        "priceBookEntryId": "01uVW0000000jzfRYAQ",
        "price": 30000,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
      }
    ]
  }
]

```

```

    }
  ],
  "nodeType": "simpleProduct",
  "name": "Gold Hardware Maintenance",
  "isSoldOnlyWithOtherProds": false,
  "isQuantityEditable": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "isAssetizable": true,
  "isActive": true,
  "id": "01tVW00000317uhYAA",
  "endOfLifeDate": null,
  "displayUrl": "/resource/gold_maint",
  "discontinuedDate": null,
  "description": "System maintenance, administration, and configuration performed by
a certified technician. Also includes 24x7 phone service and monthly on-site check-ups.
20% of hardware.",
  "configureDuringSale": null,
  "configurationRules": [],
  "childProducts": [],
  "categories": [
    {
      "sortOrder": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "parentCategoryId": null,
      "name": "Maintenance",
      "isNavigational": null,
      "id": "0ZGVW000000IUEJ4A4",
      "hasSubCategories": null,
      "description": null,
      "childCategories": null,
      "catalogId": "0ZSVW000000AhdB4AS"
    }
  ],
  "catalogs": [],
  "availabilityDate": null,
  "attributeCategories": [],
  "additionalFields": []
},
{
  "unitOfMeasure": null,
  "status": null,
  "qualificationContext": {
    "reason": null,
    "isQualified": true
  },
  "productType": "Base",
  "productSpecificationType": null,
  "productSellingModelOptions": [
    {
      "productSellingModelId": "0jPVW0000001fh32AA",

```

```

    "productSellingModel": {
      "status": "Active",
      "sellingModelType": "TermDefined",
      "pricingTermUnit": "Annual",
      "pricingTerm": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA"
    },
    "productId": "01tVW000003o1LNYAY",
    "id": "0iOVW0000005X112AE"
  },
  {
    "productSellingModelId": "0jPVW0000001fh42AA",
    "productSellingModel": {
      "status": "Active",
      "sellingModelType": "OneTime",
      "pricingTermUnit": null,
      "pricingTerm": null,
      "name": "One-Time",
      "id": "0jPVW0000001fh42AA"
    },
    "productId": "01tVW000003o1LNYAY",
    "id": "0iOVW0000005X092AE"
  }
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "LaptopDell",
"productClassification": {
  "id": null
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "01sVW00000024PZ1YAM",
    "priceBookEntryId": "01uVW0000001sJfYAI",
    "price": 600,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },

```

```

    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "OneTime",
        "occurrence": null,
        "name": "One-Time",
        "id": "0jPVW0000001fh42AA",
        "frequency": null
      },
      "priceBookId": "01sVW0000024PZ1YAM",
      "priceBookEntryId": "01uVW0000001sPxYAI",
      "price": 100,
      "isSelected": false,
      "isDerived": false,
      "isDefault": false,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    }
  ],
  "nodeType": "variationParentProduct",
  "name": "Laptop Dell",
  "isSoldOnlyWithOtherProds": false,
  "isQuantityEditable": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "isAssetizable": true,
  "isActive": true,
  "id": "01tVW000003o1LNYAY",
  "endOfLifeDate": null,
  "displayUrl": null,
  "discontinuedDate": null,
  "description": null,
  "configureDuringSale": null,
  "configurationRules": [],
  "childProducts": [],
  "categories": [
    {
      "sortOrder": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "parentCategoryId": null,
      "name": "Variants",
      "isNavigational": null,
      "id": "0ZGVW000000ItXV4A0",
      "hasSubCategories": null,
      "description": null,
      "childCategories": null,
      "catalogId": "0ZSVW000000AhdB4AS"
    }
  ],
  "catalogs": [],

```

```

        "availabilityDate": null,
        "attributeCategories": [],
        "additionalFields": []
    }
],
"contextId": "0000000r25tp21g0025177753245202837fde5e54eed45178ef77c9e453083fd",
"correlationId": "ee883b85-2c99-48fb-88e6-95cb35e8751e",
"cursor": "MTAwMDAwMDAxMw=="
}

```

Usage of an Apex-Defined Data Type in a Flow

To use an Apex-defined input parameter in a Flow, follow these guidelines.

Create an Apex Class

Create an Apex class defining the input and output parameters. In the flow, include the Apex-defined input parameters for which you want to add the details. In this example, we have created a class named `ProductServiceAction` that takes an object's API name and record ID as input, and returns the additional context data.

```

public class ProductServiceAction {
    // Define input parameters
    public class FlowInput{
        @InvocableVariable(required=false)
        public String objectApiName;

        @InvocableVariable(required=false)
        public String recordId;
    }

    // Define output parameters
    public class FlowOutput{
        @InvocableVariable
        public runtime_industries_cpq.AdditionalContextData additionalContextDataFinalOutput
        = new runtime_industries_cpq.AdditionalContextData();

        @InvocableVariable
        public runtime_industries_cpq.RelatedObjectFilterInputRepresentation
        relatedObjectFilter = new runtime_industries_cpq.RelatedObjectFilterInputRepresentation();

        @InvocableVariable
        public ConnectApi.UserContextInputRepresentation userContext = new
        ConnectApi.UserContextInputRepresentation();
    }

    // This method is invoked from a Flow
    @InvocableMethod(label='Process Input' description='Creates the Array of ContextDataInput
    for additional Context Data')
    public static List<FlowOutput> processContextData(List<FlowInput> inputs){
        String apiName;
        String recId;
        FlowOutput output = new FlowOutput();
    }
}

```

```

// Capture input from the flow
for(FlowInput input: inputs){
    apiName = input.objectApiName;
    recId = input.recordId;
}

// Populate the ContextDataInput list to store additional context data
List<runtime_industries_cpq.ContextDataInput> listContextData = new
List<runtime_industries_cpq.ContextDataInput>();
runtime_industries_cpq.ContextDataInput cd1 = new
runtime_industries_cpq.ContextDataInput();
cd1.nodeName = apiName;
cd1.nodeData = new Map<String, Object>();
cd1.nodeData.put('id', recId);
listContextData.add(cd1);

output.additionalContextDataFinalOutput.additionalContextData = listContextData;
List<FlowOutput> flowOutputs = new List<FlowOutput>();
flowOutputs.add(output);

List<runtime_industries_cpq.RelatedObjectFilter> relatedObjectFilterList = new
List<runtime_industries_cpq.RelatedObjectFilter>();

runtime_industries_cpq.RelatedObjectFilter relatedObjectFilter = new
runtime_industries_cpq.RelatedObjectFilter();

relatedObjectFilter.objectName = 'ProductSpecificationRecType';
List<runtime_industries_cpq.FilterCriteriaInputRepresentation> criteriaList = new
List<runtime_industries_cpq.FilterCriteriaInputRepresentation>();
runtime_industries_cpq.FilterCriteriaInputRepresentation criteria = new
runtime_industries_cpq.FilterCriteriaInputRepresentation();
criteria.property = 'IsCommercial';
criteria.operator = 'eq';
criteria.value = 'true';
criteriaList.add(criteria);
relatedObjectFilter.criteria = criteriaList;

relatedObjectFilterList.add(relatedObjectFilter);

output.relatedObjectFilter.relatedObjectFilter = relatedObjectFilterList;

output.userContext.accountId = '001Hs00003r17HNIAY';

return flowOutputs;
}
}

```

Create a Flow with the Necessary Variables and Components: Create a flow that enables users to add a search term to find products. Add the ProductService action that you've created above by using Apex. When a flow is invoked from a record, the flow sends the record's objectApiName and recordId to the Apex class, which then generates the flow output. The flow passes the objectApiName and recordId of the record that the flow is invoked from to the Apex class to generate the flow output. See [Example of How to Create a Flow for Product Discovery](#).

Configure the Action: Configure the action (for example, Get Products action) to add values for the Apex-defined input parameters. Use the output of the created Apex class as the input of the Apex-defined parameter in the Get Products action, which users can use to get products.

Get Product Details Action

Get details such as attributes, hierarchy, and cardinality for the specified product.

This action is available in API version 62.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Get Product Details action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
<code>additionalContextData</code>	Apex-defined	An array of Apex <code>runtime_industries_cpq.AdditionalContextData</code> records that contain the additional nodes that are used along with the context definition nodes for data hydration. The maximum number of supported nodes is 10.
<code>additionalFields</code>	Apex-defined	An Apex <code>runtime_industries_cpq.AdditionalFields</code> record that contains an array of additional standard or custom fields to include in the response. The supported objects are <code>Product2</code> or <code>ProductAttributeDefinition</code> —If the fields defined for the <code>ProductAttributeDefinition</code> object aren't available for the <code>ProductClassificationAttr</code> object, then the API request fails.
<code>catalogId</code>	string	Catalog ID that's used to find and retrieve the products.
<code>contextDefinition</code>	string	API name of the context definition for context creation. If you don't provide a value, the context selected on the Product Discovery Settings page from Setup is used.
<code>contextMapping</code>	string	API name of the context mapping for data hydration. The value of this parameter is used only if it belongs to the specified context definition.
<code>correlationId</code>	string	Currency code that's used to calculate and show prices. Only the products with the currency code matching the specified currency code are fetched.
<code>currencyCode</code>	string	Currency code that's used to calculate and show prices.
<code>enablePricing</code>	boolean	Indicates whether the pricing procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, you must enable the Pricing Procedure setting from Setup.
<code>enableQualification</code>	boolean	Indicates whether the qualification procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, you must enable the Qualification Procedure setting from Setup.
<code>priceBookId</code>	string	ID of the pricebook from which you want to retrieve the pricing details.

Input	Type	Description
pricingProcedure	string	API name of the pricing procedure to calculate product prices. If you don't specify a value, the pricing procedure selected on the Product Discovery Settings page from Setup is used.
productId	string	Required. ID of the product to get the details for.
productSellingModelId	string	ID of the product selling model.
qualificationProcedure	string	API name of the qualification procedure to evaluate product eligibility. If you don't specify a value, the qualification procedure selected on the Product Discovery Settings page from Setup is used.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextInputRepresentation</code> record that contains the user details to evaluate product eligibility and calculate prices.

Outputs

Output	Type	Description
apiStatus	Apex-defined	An Apex <code>runtime_industries_cpq.ApiStatusRepresentation</code> record that contains a status code and message.
contextId	string	ID of the context that's created by using the specified context definition.
correlationId	string	ID to reference a series of related actions.
results	Apex-defined	An Apex <code>runtime_industries_cpq.ProductDetailsRepresentation</code> record that contains the product details.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextRepresentation</code> record that contains the user details.

Usage of an Apex-Defined Data Type in a Flow

To use an Apex-defined input parameter in a flow, follow these guidelines.

Create an Apex Class

Create an Apex class defining the input and output parameters. In the flow, include the Apex-defined input parameters for which you want to add the details. In this example, we have created a class named `ProductServiceAction` that takes an object's API name and record ID as input, and returns the additional context data.

```
public class ProductServiceAction {
    // Define input parameters
    public class FlowInput{
        @InvocableVariable(required=false)
        public String objectApiName;

        @InvocableVariable(required=false)
        public String recordId;
    }
}
```



```

// Define output parameters
public class FlowOutput{
    @invocableVariable
    public runtime_industries_cpq.AdditionalContextData additionalContextDataFinalOutput
= new runtime_industries_cpq.AdditionalContextData();

}

// This method is invoked from a Flow
@InvocableMethod(label='Process Input' description='Creates the Array of ContextDataInput
for additional Context Data')
public static List<FlowOutput> processContextData(List<FlowInput> inputs){
    String apiName;
    String recId;
    FlowOutput output = new FlowOutput();

    // Capture input from the flow
    for(FlowInput input: inputs){
        apiName = input.objectApiName;
        recId = input.recordId;
    }

    // Populate the ContextDataInput list to store additional context data
    List<runtime_industries_cpq.ContextDataInput> listContextData = new
List<runtime_industries_cpq.ContextDataInput>();
    runtime_industries_cpq.ContextDataInput cd1 = new
runtime_industries_cpq.ContextDataInput();
    cd1.nodeName = apiName;
    cd1.nodeData = new Map<String, Object>();
    cd1.nodeData.put('id', recId);
    listContextData.add(cd1);

    output.additionalContextDataFinalOutput.additionalContextData = listContextData;
    List<FlowOutput> flowOutputs = new List<FlowOutput>();
    flowOutputs.add(output);

    List<runtime_industries_cpq.RelatedObjectFilter> relatedObjectFilterList = new
List<runtime_industries_cpq.RelatedObjectFilter>();

    runtime_industries_cpq.RelatedObjectFilter relatedObjectFilter = new
runtime_industries_cpq.RelatedObjectFilter();

    relatedObjectFilter.objectName = 'ProductSpecificationRecType';
    List<runtime_industries_cpq.FilterCriteriaInputRepresentation> criteriaList = new
List<runtime_industries_cpq.FilterCriteriaInputRepresentation>();
    runtime_industries_cpq.FilterCriteriaInputRepresentation criteria = new
runtime_industries_cpq.FilterCriteriaInputRepresentation();
    criteria.property = 'IsCommercial';
    criteria.operator = 'eq';
    criteria.value = 'true';
    criteriaList.add(criteria);
    relatedObjectFilter.criteria = criteriaList;

    relatedObjectFilterList.add(relatedObjectFilter);
    output.relatedObjectFilter.relatedObjectFilter = relatedObjectFilterList;

```

```

    output.userContext.accountId = '001DU000001nx9BYAQ';

    return flowOutputs;
}
}

```

Create a Flow with the Necessary Variables and Components: Create a flow that enables users to add a search term to find products. Add the ProductService action that you've created above by using Apex. When a flow is invoked from a record, the flow sends the record's objectApiName and recordId to the Apex class, which then generates the flow output. The flow passes the objectApiName and recordId of the record that the flow is invoked from to the Apex class to generate the flow output. See [Example of How to Create a Flow for Product Discovery](#).

Configure the Action: Configure the action (for example, Get Product Details action) to add values for the Apex-defined input parameters. Use the output of the created Apex class as the input of the Apex-defined parameter in the Get Product Details action, which users can use to get the product details.

Search Product with Guided Selection Action

Use guided product selection to search for products.

This action is available in API version 64.0 and later.

You can invoke this action via Apex and Flows only.

Special Access Rules

The Search Product with Guided Selection action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled.

Inputs

Input	Type	Description
additionalContextData	Apex-defined	Collection of Apex runtime_industries_cpq.AdditionalContextData records that contain the nodes used in addition to context definition nodes for data hydration. This parameter can contain up to 10 nodes.
additionalFields	Apex-defined	An Apex runtime_industries_cpq.AdditionalFields record that contains the collection of additional fields to be included in the response. This parameter supports only the fields from the Product2 and ProductAttributeDefinition objects. The fields defined for the ProductAttributeDefinition object must also be available on the ProductClassificationAttr object.
catalogId	string	ID of the catalog to find and retrieve products.
categoryId	string	ID of the category or subcategory to find and retrieve products.
contextDefinition	string	API name of the context definition that's used for context creation. If you don't specify a value, the context selected on the Product Discovery Settings page is used.

Input	Type	Description
contextMapping	string	API name of the context mapping that's used for data hydration. The value of this parameter is used only if it belongs to the specified context definition.
correlationId	string	Unique ID that's used to reference a series of related actions.
currencyCode	string	Currency code that's used to calculate and show prices. Only the products with the currency code matching the entered currency code are fetched.
executeConfigurationRules	boolean	Indicates whether configuration rules must run (<code>true</code>) or not (<code>false</code>). Available in API version 67.0 and later.
enablePricing	boolean	Indicates whether pricing procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, the Pricing Procedure setting must be enabled.
enableQualification	boolean	Indicates whether qualification procedure must run (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> . To use this parameter, the Qualification Procedure setting must be enabled.
filterInputRepresentation	Apex-defined	An Apex runtime_industries_cpq.FilterInputRepresentation record that contains the filter criteria. This parameter supports only the <code>name</code> property and the <code>eq</code> , <code>in</code> , or <code>contains</code> operators. If it contains multiple criteria, all the criteria are applied.
guidedSelectionResponseId	string	Response identifier that stores user responses specified in the guided product selection window.
includeCatalogDetails	boolean	Indicates whether catalog details must be included in the response (<code>true</code>) or not (<code>false</code>).
orderBy	string	Comma-delimited string of key-value pairs that specify how results are sorted. Each string must contain a field name and its sort order. For example, <code>["name:asc","custom_field:asc"]</code> .
priceBookId	string	ID of the pricebook that the pricing information is retrieved from.
pricingProcedure	string	API name of the pricing procedure to calculate product prices. If you don't specify a value, the pricing procedure selected on the Product Discovery Settings page is used.
productClassificationId	string	ID of the product classification that's used to filter products.
productCursor	string	Unique identifier that represents the position of the product from which the next set of results are retrieved.
qualificationProcedure	string	API name of the qualification procedure to evaluate product eligibility. If you don't specify a value, the qualification procedure selected on the Product Discovery Settings page is used.
recordLimit	integer	Maximum number of results to be returned in the response. Specify a value from 1 through 100. Default value is 10.
relatedObjectFilters	Apex-defined	Collection of Apex runtime_industries_cpq.RelatedObjectFilterInputRepresentation

Input	Type	Description
		records, each containing a related object and the filter criteria that's applied on the object.
searchTerms	Apex-defined	Collection of terms that are used to search products. See GuidedSelectionSearchTerm .
transactionContextId	string	Context ID of the quote or order. Available in API version 67.0 and later.
transactionId	string	ID of the quote or order. Available in API version 67.0 and later.
userContext	Apex-defined	An Apex ConnectApi.UserContextInputRepresentation record containing user information to evaluate product eligibility and calculate pricing.

Outputs

Output	Type	Description
apiStatusOutputRepresentation	Apex-defined	An Apex runtime_industries_cpq.ApiStatusRepresentation record that contains the status of the request, including the status code and message.
contextId	string	ID of the context that's created by using the specified context definition.
correlationId	string	Unique identifier attached to requests and messages, allowing reference to a specific transaction or event chain.
productCursor	string	Unique identifier that represents the position of the product from which the next set of results are retrieved.
productListOutputRepresentations	Apex-defined	Collection of Apex ProductListOutputRepresentation records that contain details about the product shown by the Guided Product Selection.
recordOffset	integer	Number of catalog records to skip in the request. The default is 0.
searchTerms	Apex-defined	Collection of terms that are used to search products. See GuidedSelectionSearchTerm .
userContext	Apex-defined	An Apex ConnectApi.UserContextRepresentation record containing user information.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action =
Invocable.Action.createStandardAction('searchPrdctWithGuidedSelection');

action.setInvocationParameter('correlationId', '77f9dc6a-8ecc-44a3-8d89-4050179cc846');
//action.setInvocationParameter('catalogId', '0ZSxx000000004sGAA');
action.setInvocationParameter('guidedSelectionResponseId', '0U3xx0000004CPACA2');
//action.setInvocationParameter('priceBookId', '01sxx0000005pyfAAA');
//action.setInvocationParameter('categoryId', '0ZGxx000000004rGAA');
action.setInvocationParameter('enableQualification', true);
action.setInvocationParameter('enablePricing', true);
//action.setInvocationParameter('contextDefinition', 'PDACDCTX');
//action.setInvocationParameter('contextMapping', 'ProductDiscoveryMapping');

```

```
//action.setInvocationParameter('qualificationProcedure', 'PDQualProceWithQuote');
//action.setInvocationParameter('pricingProcedure', 'IconpricingProcedure');
action.setInvocationParameter('includeCatalogDetails', true);
action.setInvocationParameter('currencyCode', 'USD');
action.setInvocationParameter('executeConfigurationRules', true);
List<String> orderByInputs = new List<String>();
orderByInputs.add('name:asc');
orderByInputs.add('id:desc');
action.setInvocationParameter('orderBy', orderByInputs);
List<runtime_industries_cpq.GuidedSelectionSearchTerm> searchTerms = new
List<runtime_industries_cpq.GuidedSelectionSearchTerm>();
runtime_industries_cpq.GuidedSelectionSearchTerm searchTerm = new
runtime_industries_cpq.GuidedSelectionSearchTerm();
searchTerm.term = 'Laptop Basic Bundle';
List<String> tags = new List<String>();
tags.add('Laptop');
tags.add('Desktop');
searchTerm.tags = tags;
searchTerms.add(searchTerm);

runtime_industries_cpq.GuidedSelectionSearchTermList searchTermList = new
runtime_industries_cpq.GuidedSelectionSearchTermList();
searchTermList.searchTerms = searchTerms;
action.setInvocationParameter('searchTerms', searchTermList);
List<Invocable.Action.Result> results = action.invoke();
System.debug('Guided Selection result = ' + results);
```

Here's a sample response when you call this action.

```
{
  "recordOffset": 5,
  "contextId": null,
  "correlationId": "854c487d-183e-40b6-ba42-f079a6e695a3",
  "apiStatusOutputRepresentation": {
    "statusMessage": null,
    "statusCode": "FetchedDetailsSuccessfully",
    "messages": []
  },
  "searchTerms": [
    {
      "term": "Additional API",
      "tags": []
    }
  ],
  "productListOutputRepresentations": [
    {
      "unitOfMeasure": null,
      "status": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "productType": null,
      "productSpecificationType": null,
      "productSellingModelOptions": [
```

```

{
  "productSellingModelId": "0jPVW0000001fh32AA",
  "productSellingModel": {
    "status": "Active",
    "sellingModelType": "TermDefined",
    "pricingTermUnit": "Annual",
    "pricingTerm": 1,
    "name": "Term Annual",
    "id": "0jPVW0000001fh32AA"
  },
  "productId": "01tVW00000317txYAA",
  "id": "0iOVW00000049w22AA"
},
{
  "productSellingModelId": "0jPVW0000001fh52AA",
  "productSellingModel": {
    "status": "Active",
    "sellingModelType": "Evergreen",
    "pricingTermUnit": "Months",
    "pricingTerm": 1,
    "name": "Evergreen Monthly",
    "id": "0jPVW0000001fh52AA"
  },
  "productId": "01tVW00000317txYAA",
  "id": "0iOVW00000049w12AA"
},
{
  "productSellingModelId": "0jPVW0000001fh62AA",
  "productSellingModel": {
    "status": "Active",
    "sellingModelType": "TermDefined",
    "pricingTermUnit": "Months",
    "pricingTerm": 1,
    "name": "Term Monthly",
    "id": "0jPVW0000001fh62AA"
  },
  "productId": "01tVW00000317txYAA",
  "id": "0iOVW00000049w32AA"
}
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API",
"productClassification": {
  "id": "11BVW0000041jiz2AQ"
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",

```

```

        "occurrence": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA",
        "frequency": "Annual"
    },
    "priceBookId": "01sVW00000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzfGYAQ",
    "price": 15000,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
},
{
    "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "Evergreen",
        "occurrence": 1,
        "name": "Evergreen Monthly",
        "id": "0jPVW0000001fh52AA",
        "frequency": "Months"
    },
    "priceBookId": "01sVW00000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzg8YAA",
    "price": 2000,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
},
{
    "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Monthly",
        "id": "0jPVW0000001fh62AA",
        "frequency": "Months"
    },
    "priceBookId": "01sVW00000024PZlYAM",
    "priceBookEntryId": "01uVW000000jzg9YAA",
    "price": 1500,
    "isSelected": false,
    "isDerived": false,
    "isDefault": false,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
}
],

```

```

    "nodeType": "simpleProduct",
    "name": "Additional API",
    "isSoldOnlyWithOtherProds": false,
    "isQuantityEditable": null,
    "isDefaultComponent": null,
    "isComponentRequired": null,
    "isAssetizable": true,
    "isActive": true,
    "id": "01tVW000003l7txYAA",
    "endOfLifeDate": null,
    "displayUrl": "/resource/add_api",
    "discontinuedDate": null,
    "description": null,
    "configureDuringSale": "Allowed",
    "configurationRules": [
      {
        "type": "disable",
        "details": [
          {
            "message": "This is disabled"
          }
        ]
      }
    ],
    "childProducts": [],
    "categories": [
      {
        "sortOrder": null,
        "qualificationContext": {
          "reason": null,
          "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
      }
    ],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    }
  },

```



```

"productType": null,
"productSpecificationType": null,
"productSellingModelOptions": [
  {
    "productSellingModelId": "0jPVW0000001fh32AA",
    "productSellingModel": {
      "status": "Active",
      "sellingModelType": "TermDefined",
      "pricingTermUnit": "Annual",
      "pricingTerm": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA"
    },
    "productId": "0ltVW0000003l7tyYAA",
    "id": "0iOVW000000049w42AA"
  },
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API-FLEX",
"productClassification": {
  "id": null
},
"prices": [
  {
    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "0lsVW00000024PZlYAM",
    "priceBookEntryId": "0luVW0000000jzfFYAQ",
    "price": 450,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  },
],
"nodeType": "simpleProduct",
"name": "Additional API Flex (100M)",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,

```

```

    "isActive": true,
    "id": "01tVW000003l7tyYAA",
    "endOfLifeDate": null,
    "displayUrl": "/resource/api_flex",
    "discontinuedDate": null,
    "description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
    "configureDuringSale": null,
    "configurationRules": [],
    "childProducts": [],
    "categories": [
      {
        "sortOrder": null,
        "qualificationContext": {
          "reason": null,
          "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
      }
    ],
    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "01tVW000003l7tzYAA",

```

```

        "id": "0iOVW00000049w52AA"
    }
],
"productRelatedComponent": null,
"productQuantity": null,
"productPricingInformation": null,
"productInformation": null,
"productComponentGroups": [],
"productCode": "QB-API-GOVT",
"productClassification": {
    "id": null
},
"prices": [
    {
        "pricingModel": {
            "unitOfMeasure": null,
            "pricingModelType": "TermDefined",
            "occurrence": 1,
            "name": "Term Annual",
            "id": "0jPVW0000001fh32AA",
            "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZlYAM",
        "priceBookEntryId": "01uVW000000jzfHYAQ",
        "price": 1450,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,
        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    }
],
"nodeType": "simpleProduct",
"name": "Additional API Govt",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000000317tzYAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_govt",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
    {
        "sortOrder": null,

```

```

    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "parentCategoryId": null,
    "name": "API",
    "isNavigational": null,
    "id": "0ZGVW000000IUEG4A4",
    "hasSubCategories": null,
    "description": null,
    "childCategories": null,
    "catalogId": "0ZSVW000000AhdB4AS"
  },
  "catalogs": [],
  "availabilityDate": null,
  "attributeCategories": [],
  "additionalFields": []
},
{
  "unitOfMeasure": null,
  "status": null,
  "qualificationContext": {
    "reason": null,
    "isQualified": true
  },
  "productType": null,
  "productSpecificationType": null,
  "productSellingModelOptions": [
    {
      "productSellingModelId": "0jPVW0000001fh32AA",
      "productSellingModel": {
        "status": "Active",
        "sellingModelType": "TermDefined",
        "pricingTermUnit": "Annual",
        "pricingTerm": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA"
      },
      "productId": "01tVW000000317u0YAA",
      "id": "0iOVW000000049w92AA"
    }
  ],
  "productRelatedComponent": null,
  "productQuantity": null,
  "productPricingInformation": null,
  "productInformation": null,
  "productComponentGroups": [],
  "productCode": "QB-API-PREP",
  "productClassification": {
    "id": null
  },
  "prices": [
    {

```

```

    "pricingModel": {
      "unitOfMeasure": null,
      "pricingModelType": "TermDefined",
      "occurrence": 1,
      "name": "Term Annual",
      "id": "0jPVW0000001fh32AA",
      "frequency": "Annual"
    },
    "priceBookId": "01sVW00000024PZ1YAM",
    "priceBookEntryId": "01uVW000000jzfSYAQ",
    "price": 3240,
    "isSelected": false,
    "isDerived": false,
    "isDefault": true,
    "effectiveTo": null,
    "effectiveFrom": null,
    "currencyIsoCode": "USD"
  }
],
"nodeType": "simpleProduct",
"name": "Additional API Pre-Prod",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000000317u0YAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_preprod",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
  {
    "sortOrder": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "parentCategoryId": null,
    "name": "API",
    "isNavigational": null,
    "id": "0ZGVW000000IUEG4A4",
    "hasSubCategories": null,
    "description": null,
    "childCategories": null,
    "catalogId": "0ZSVW000000AhdB4AS"
  }
],

```

```

    "catalogs": [],
    "availabilityDate": null,
    "attributeCategories": [],
    "additionalFields": []
  },
  {
    "unitOfMeasure": null,
    "status": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "productType": null,
    "productSpecificationType": null,
    "productSellingModelOptions": [
      {
        "productSellingModelId": "0jPVW0000001fh32AA",
        "productSellingModel": {
          "status": "Active",
          "sellingModelType": "TermDefined",
          "pricingTermUnit": "Annual",
          "pricingTerm": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA"
        },
        "productId": "0ltVW0000003l7u1YAA",
        "id": "0iOVW00000049wA2AQ"
      }
    ],
    "productRelatedComponent": null,
    "productQuantity": null,
    "productPricingInformation": null,
    "productInformation": null,
    "productComponentGroups": [],
    "productCode": "QB-API-PROD",
    "productClassification": {
      "id": null
    },
    "prices": [
      {
        "pricingModel": {
          "unitOfMeasure": null,
          "pricingModelType": "TermDefined",
          "occurrence": 1,
          "name": "Term Annual",
          "id": "0jPVW0000001fh32AA",
          "frequency": "Annual"
        },
        "priceBookId": "01sVW00000024PZ1YAM",
        "priceBookEntryId": "01uVW000000jzfdYAA",
        "price": 3240,
        "isSelected": false,
        "isDerived": false,
        "isDefault": true,

```

```

        "effectiveTo": null,
        "effectiveFrom": null,
        "currencyIsoCode": "USD"
    }
],
"nodeType": "simpleProduct",
"name": "Additional API Prod",
"isSoldOnlyWithOtherProds": false,
"isQuantityEditable": null,
"isDefaultComponent": null,
"isComponentRequired": null,
"isAssetizable": true,
"isActive": true,
"id": "01tVW000003l7u1YAA",
"endOfLifeDate": null,
"displayUrl": "/resource/api_prod",
"discontinuedDate": null,
"description": "API instances remain under management until they are deleted. Instances
of API Manager are aggregated using a Max Concurrent model. The usage for a month is the
highest number of APIs Managed in a single given hour during a month.",
"configureDuringSale": null,
"configurationRules": [],
"childProducts": [],
"categories": [
    {
        "sortOrder": null,
        "qualificationContext": {
            "reason": null,
            "isQualified": true
        },
        "parentCategoryId": null,
        "name": "API",
        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
    }
],
"catalogs": [],
"availabilityDate": null,
"attributeCategories": [],
"additionalFields": []
}
]
}

```

Get Product Recommendations Action

Retrieve a list of recommended products for a quote or order by using the Constraint Rule Engine.

This action is available in API version 67.0 and later.

Special Access Rules

The Get Product Details action is available in Enterprise, Unlimited, and Developer Editions where Product Discovery is enabled. You can invoke this action via Apex and Flows only.

Inputs

Input	Type	Description
<code>additionalContextData</code>	Apex-defined	An array of Apex runtime_industries_cpq.AdditionalContextData records that contain the additional nodes used along with the context definition nodes for data hydration. The maximum number of supported nodes is 10.
<code>additionalFields</code>	Apex-defined	An Apex runtime_industries_cpq.AdditionalFields record that contains an array of additional standard or custom fields from the <code>Product2</code> object to include in the response.
<code>catalogId</code>	string	ID of the catalog from which to retrieve recommended products.
<code>contextDefinition</code>	string	API name of the context definition used for context creation. If you don't specify a value, the context definition selected on the Product Discovery Settings page from Setup is used.
<code>contextMapping</code>	string	API name of the context mapping used for data hydration. The value of this parameter is used only if it belongs to the specified context definition. If you don't specify a value, the default context mapping of the context definition is used.
<code>currencyCode</code>	string	Currency code used for pricing calculations and product filtering.
<code>enablePricing</code>	boolean	Indicates whether the pricing procedure must run (<code>true</code>) or not (<code>false</code>). For orgs where pricing is enabled, you can override to <code>false</code> to skip Salesforce Pricing execution. For orgs where pricing is disabled, you can't override to <code>true</code> .
<code>enableQualification</code>	boolean	Indicates whether the qualification procedure must run (<code>true</code>) or not (<code>false</code>). For orgs where qualification is enabled, you can override to <code>false</code> to skip BRE qualification rules. For orgs where qualification is disabled, you can't override to <code>true</code> .
<code>filterCriteria</code>	Apex-defined	A collection of Apex runtime_industries_cpq.FilterInputRepresentation records used to filter products. The <code>filterCriteria</code> parameter supports only the <code>name</code> property. The supported operators are <code>eq</code> , <code>in</code> , or <code>contains</code> . If this parameter contains multiple criteria, all criteria are applied using the <code>and</code> operator.
<code>nextCursor</code>	string	A unique identifier that represents the position of the product from which the next set of results are retrieved.
<code>pageSize</code>	integer	Maximum number of recommended products to return in the response.
<code>priceBookId</code>	string	ID of the pricebook from which to retrieve pricing details.
<code>pricingProcedure</code>	string	API name of the pricing procedure used to calculate product prices. If you don't specify a value, the pricing procedure selected on the Product Discovery Settings page from Setup is used.

Input	Type	Description
qualificationProcedure	string	API name of the qualification procedure used to evaluate product eligibility. If you don't specify a value, the qualification procedure selected on the Product Discovery Settings page from Setup is used.
transactionContextId	string	Context ID of the transaction.
transactionId	string	ID of the transaction.
usePromotions	boolean	Indicates whether to fetch promotions for recommended products (<code>true</code>) or not (<code>false</code>). Applies only when promotions are enabled for the org.
userContext	Apex-defined	An Apex <code>ConnectApi.UserContextInputRepresentation</code> record that contains the user details used to evaluate product eligibility and calculate prices.

Outputs

Output	Type	Description
errorMessages	Apex-defined	A list of Apex <code>runtime_industries_cpq.ProductRecommendationErrorsOutputRepresentation</code> records that contain error codes and messages returned by the action.
isSuccessful	boolean	Indicates whether the action call succeeded (<code>true</code>) or not (<code>false</code>).
nextCursor	string	Unique identifier that represents the position of the next product in the dataset. Use this value as an input to retrieve the next page of results.
recommendedProducts	Apex-defined	A list of Apex <code>runtime_industries_cpq.RecommendedProductsOutputRepresentation</code> records that contain the recommended products returned by the Constraint Rule Engine.
transactionContextId	string	Context ID of the transaction.

Example

Here's a sample input to call this invocable action from Apex code.

```

Invocable.Action action = Invocable.Action.createStandardAction('getRecommendedProducts');
action.setInvocationParameter('catalogId', '0ZSVW000000AhdB4AS');
action.setInvocationParameter('transactionId', '0Q0VW00000018J6X0AU');
List<Invocable.Action.Result> results = action.invoke();

for (Invocable.Action.Result res : results) {
    if (res.isSuccess()) {
        Map<String, Object> outMap = res.getOutputParameters();
        String jsonOutput = JSON.serialize(outMap);
        System.debug(jsonOutput);
    }
}

```

Here's a sample response for the Get Product Recommendations action.

```
{
  "prodRecomErrorOutRepresentation": [],
  "isSuccessful": true,
  "productCursor": "MTAwMDAwMDAwNg==",
  "transactionContextId": "0000000r25tq18g00291777531846434b162e02f878f425680e0d95dc5f650fe",

  "recomProdOutputRepresentations": [
    {
      "status": null,
      "qualificationContext": {
        "reason": null,
        "isQualified": true
      },
      "productType": null,
      "productSpecificationType": null,
      "productSellingModelOptions": [
        {
          "productSellingModelId": "0jPVW0000001fh32AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "TermDefined",
            "pricingTermUnit": "Annual",
            "pricingTerm": 1,
            "name": "Term Annual",
            "id": "0jPVW0000001fh32AA"
          },
          "productId": "01tVW00000317txYAA",
          "id": "0iOVW00000049w22AA"
        },
        {
          "productSellingModelId": "0jPVW0000001fh52AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "Evergreen",
            "pricingTermUnit": "Months",
            "pricingTerm": 1,
            "name": "Evergreen Monthly",
            "id": "0jPVW0000001fh52AA"
          },
          "productId": "01tVW00000317txYAA",
          "id": "0iOVW00000049w12AA"
        },
        {
          "productSellingModelId": "0jPVW0000001fh62AA",
          "productSellingModel": {
            "status": "Active",
            "sellingModelType": "TermDefined",
            "pricingTermUnit": "Months",
            "pricingTerm": 1,
            "name": "Term Monthly",
            "id": "0jPVW0000001fh62AA"
          },
          "productId": "01tVW00000317txYAA",

```

```

      "id": "0iOVW00000049w32AA"
    }
  ],
  "productQuantity": null,
  "productCode": "QB-API",
  "productClassification": {
    "id": "11BVW00000041jiz2AQ"
  },
  "prices": [
    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Annual",
        "id": "0jPVW0000001fh32AA",
        "frequency": "Annual"
      },
      "priceBookId": "01sVW00000024PZlYAM",
      "priceBookEntryId": "01uVW000000jzfGYAQ",
      "price": 15000,
      "isSelected": false,
      "isDerived": false,
      "isDefault": true,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    },
    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "Evergreen",
        "occurrence": 1,
        "name": "Evergreen Monthly",
        "id": "0jPVW0000001fh52AA",
        "frequency": "Months"
      },
      "priceBookId": "01sVW00000024PZlYAM",
      "priceBookEntryId": "01uVW000000jzg8YAA",
      "price": 2000,
      "isSelected": false,
      "isDerived": false,
      "isDefault": false,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    },
    {
      "pricingModel": {
        "unitOfMeasure": null,
        "pricingModelType": "TermDefined",
        "occurrence": 1,
        "name": "Term Monthly",
        "id": "0jPVW0000001fh62AA",

```

```

        "frequency": "Months"
      },
      "priceBookId": "01sVW0000024PZlYAM",
      "priceBookEntryId": "01uVW000000jzg9YAA",
      "price": 1500,
      "isSelected": false,
      "isDerived": false,
      "isDefault": false,
      "effectiveTo": null,
      "effectiveFrom": null,
      "currencyIsoCode": "USD"
    }
  ],
  "nodeType": "simpleProduct",
  "name": "Additional API",
  "isSoldOnlyWithOtherProds": false,
  "isQuantityEditable": null,
  "isDefaultComponent": null,
  "isComponentRequired": null,
  "isAssetizable": true,
  "isActive": true,
  "id": "01tVW000003l7txYAA",
  "endOfLifeDate": null,
  "displayUrl": "/resource/add_api",
  "discontinuedDate": null,
  "description": null,
  "configureDuringSale": "Allowed",
  "configurationRules": [
    {
      "type": "recommend",
      "details": [
        {
          "message": "APIAccessRequests recommends AdditionalAPI"
        }
      ]
    },
    {
      "type": "disable",
      "details": [
        {
          "message": "This is disabled"
        }
      ]
    }
  ]
},
"categories": [
  {
    "sortOrder": null,
    "qualificationContext": {
      "reason": null,
      "isQualified": true
    },
    "parentCategoryId": null,
    "name": "API",

```

```

        "isNavigational": null,
        "id": "0ZGVW000000IUEG4A4",
        "hasSubCategories": null,
        "description": null,
        "childCategories": null,
        "catalogId": "0ZSVW000000AhdB4AS"
    }
],
"catalogs": [
    {
        "status": null,
        "numberOfCategories": 8,
        "name": "QuantumBit Software",
        "id": "0ZSVW000000AhdB4AS",
        "effectiveStartDate": null,
        "effectiveEndDate": null,
        "description": null,
        "customFields": [],
        "catalogType": null,
        "catalogCode": null
    }
],
"availabilityDate": null,
"additionalFields": []
}
]
}

```

Product Discovery Apex Reference

Use built-in Apex classes and interfaces grouped by namespace.

[runtime_industries_cpq Namespace](#)

The `runtime_industries_cpq` namespace provides classes and methods to search products or to manage products, catalogs, and categories.

runtime_industries_cpq Namespace

The `runtime_industries_cpq` namespace provides classes and methods to search products or to manage products, catalogs, and categories.

The `runtime_industries_cpq` namespace includes these classes.

Usage

You can access the `runtime_industries_cpq` classes if your org has the Product Discovery feature.

[AdditionalContextData Class](#)

Contains properties to include a list of additional context data nodes. These nodes are used along with the context definition nodes for data hydration.

[AdditionalFields Class](#)

Contains properties to include a map where the key is a string and the value is an instance of the AdditionalFieldsInput class.

[AdditionalFieldsInput Class](#)

Contains properties to include the additional standard or custom fields in the request.

[ApiStatusRepresentation Class](#)

Stores details of the API request such as execution messages, status code, and status message.

[AttributeCategoryOutputRepresentation Class](#)

Stores details of an attribute such as code, description, usage type, and so on.

[AttributePickListOutputRepresentation Class](#)

Stores details of an attribute picklist.

[AttributePickListValueOutputRepresentation Class](#)

Stores details of an attribute picklist value.

[BulkProductDetailsInputBody Class](#)

Contains the details of the request to retrieve product details by using product ID and product selling model ID.

[BulkProductDetailsInputBodyList Class](#)

Contains details of the request to retrieve a list of products.

[BulkProductDetailsRepresentation Class](#)

Get the details of multiple product definitions in a single request. This class is used for bulk product retrieval operations in Product Discovery.

[CatalogOutputRepresentation Class](#)

Contains properties to store details of a catalog definition.

[ConfigRuleResult Class](#)

Contains the results of configuration rule evaluation, including message rules, product recommendation rules, and visibility rules that are applied during product configuration.

[CategoryOutputRepresentation Class](#)

Contains properties to store details of a category.

[ContextDataInput Class](#)

Get details of a context.

[FacetValueRepresentation Class](#)

Get details of the facet values that are found in the search result.

[Filter Class](#)

Contains the criteria property to store the details of a filter criteria, which is used to filter records.

[FilterCriteriaInputRepresentation Class](#)

Contains properties to store criteria details to filter records based on supported properties.

[FilterInputRepresentation Class](#)

Contains the filter property to filters records based on supported criteria.

[GuidedSelectionRepresentation Class](#)

Contains properties to represent a product in a guided selection flow. This class is used in Product Discovery to provide structured product information during guided product selection processes.

[GuidedSelectionSearchTerm Class](#)

Represents a search term used in guided product selection. Contains the search term text and associated tags for filtering and searching products in Product Discovery.

[GuidedSelectionSearchTermList Class](#)

Contains a list of search terms used in guided product selection. This class is used to pass multiple search terms for filtering and searching products in Product Discovery.

[MessageRule Class](#)

Represents a message rule that is evaluated during product configuration. Message rules display informational, warning, or error messages to users based on configuration conditions.

[PricingModelOutputRepresentation Class](#)

Contains details of a pricing model in a product configuration.

[ProductAttributeOutputRepresentation Class](#)

Contains details about the attribute in a product configuration.

[ProductClassificationOutputRepresentation Class](#)

Get details of the product classification in a product configuration.

[ProductComponentGroupOutputRepresentation Class](#)

Get details of the product component group in a product classification.

[ProductComponentGroupRepresentation Class](#)

Represents a product component group used in bulk product operations. This class is similar to ProductComponentGroupOutputRepresentation but is used specifically for bulk product detail representations where components are represented as BulkProductDetailsRepresentation objects.

[ProductDetailsRepresentation Class](#)

Get the details of a product definition.

[ProductListRepresentation Class](#)

Get the list of retrieved products.

[ProductOutputRepresentation Class](#)

Get the details of a product definition.

[ProductPricesOutputRepresentation Class](#)

Get the price details of a product.

[ProductQuantityOutputRepresentation Class](#)

Represents the quantity constraints and current quantity for a product in the product discovery context.

[ProductRecommendationRule Class](#)

Represents a product recommendation rule that is evaluated during product configuration. Product recommendation rules suggest additional products to users based on configuration conditions.

[ProductRelatedComponentOutputRepresentation Class](#)

Represents a related component product in a bundle or product relationship, including component configuration details such as quantity constraints, required status, and relationship metadata.

[ProductSellingModelOptionOutputRepresentation Class](#)

Represents a selling model option available for a product, which defines how the product can be sold (such as subscription, one-time, or usage-based).

[ProductSellingModelOutputRepresentation Class](#)

Represents a product selling model that defines how a product is sold, including the selling model type, pricing term, and status.

[ProductSpecificationRecordTypeOutputRepresentation Class](#)

Represents the record type information for a product specification, which defines the type of record used to store product specification data.

[ProductSpecificationTypeOutputRepresentation Class](#)

Represents a product specification type that defines the structure and attributes available for configuring a product.

[ProductUnitOfMeasureOutputRepresentation Class](#)

Represents a unit of measure that's available for a product, including whether it's the base or default unit and whether it's orderable.

[ProductVariantAttributeOutputRepresentation Class](#)

Stores details of an attribute that defines a product variation, including the field and its label.

[ProductVariantAttributeSetOutputRepresentation Class](#)

Stores the set of attributes that define the variations of a product.

[ProductVariantAttributeValueOutputRepresentation Class](#)

Stores the value of a product variation attribute.

[QocQualificationOutputRepresentation Class](#)

Represents a quote, order, or contract qualification that determines whether a product can be sold based on specific business rules and conditions.

[QualificationContextOutputRepresentation Class](#)

Represents the context information used for product qualification, including account, opportunity, and other relevant context data for determining product eligibility.

[RelatedObjectFilter Class](#)

Represents a filter for related objects used in product search and discovery, allowing you to filter products based on related object criteria.

[RelatedObjectFilterInputRepresentation Class](#)

Represents input criteria for filtering products based on related object information, such as account, opportunity, or contract data.

[SearchProductsFacetRepresentation Class](#)

Represents a search facet that provides filtering and categorization options for product search results, such as categories, attributes, or other product characteristics.

[SearchProductsRepresentation Class](#)

Represents the results of a product search operation, including the list of products, search facets, pagination information, and total count of matching products.

[UnitOfMeasureOutputRepresentation Class](#)

Represents the unit of measure for a product. This class contains information about how product quantities are measured, including the unit code, name, scale, and rounding method.

[VisibilityRule Class](#)

Represents a visibility rule that is evaluated during product configuration. Visibility rules control the visibility of products, attributes, or other UI elements based on configuration conditions.

AdditionalContextData Class

Contains properties to include a list of additional context data nodes. These nodes are used along with the context definition nodes for data hydration.

Namespace

[runtime_industries_cpq](#) on page 467

[AdditionalContextData Properties](#)

Set the `AdditionalContextData` class property to specify a list of additional nodes for data hydration.

AdditionalContextData Properties

Set the `AdditionalContextData` class property to specify a list of additional nodes for data hydration.

The `AdditionalContextData` class includes this property.

[additionalContextData](#)

Include a list of additional nodes that are used along with the context definition nodes for data hydration. The maximum number of supported nodes is 10.

additionalContextData

Include a list of additional nodes that are used along with the context definition nodes for data hydration. The maximum number of supported nodes is 10.

Signature

```
public List<runtime_industries_cpq.ContextDataInput> additionalContextData {get; set;}
```

Property Value

Type: `List<runtime\_industries\_cpq.ContextDataInput on page 505>`

AdditionalFields Class

Contains properties to include a map where the key is a string and the value is an instance of the `AdditionalFieldsInput` class.

Namespace

[runtime_industries_cpq](#) on page 467

[AdditionalFields Properties](#)

Set the `AdditionalFields` class property to include a map where the key is a string and the value is an instance of the `AdditionalFieldsInput` class.

AdditionalFields Properties

Set the `AdditionalFields` class property to include a map where the key is a string and the value is an instance of the `AdditionalFieldsInput` class.

The `AdditionalFields` class includes this property.

[additionalFields](#)

Includes a map where the key is a string and the value is an instance of the AdditionalFieldsInput class.

additionalFields

Includes a map where the key is a string and the value is an instance of the AdditionalFieldsInput class.

Signature

```
public Map<String, runtime_industries_cpq.AdditionalFieldsInput> additionalFields {get; set; }
```

Property Value

Type: Map<String, [runtime_industries_cpq.AdditionalFieldsInput](#) on page 472>

AdditionalFieldsInput Class

Contains properties to include the additional standard or custom fields in the request.

Namespace

[runtime_industries_cpq](#) on page 467

[AdditionalFieldsInput Properties](#)

Set the AdditionalFieldsInput class property to include the additional standard or custom fields in the response.

AdditionalFieldsInput Properties

Set the AdditionalFieldsInput class property to include the additional standard or custom fields in the response.

The AdditionalFieldsInput class includes this property.

[fields](#)

Include the additional standard or custom fields in the response.

fields

Include the additional standard or custom fields in the response.

Signature

```
public List<String> fields {get; set; }
```

Property Value

Type: List<String>

ApiStatusRepresentation Class

Stores details of the API request such as execution messages, status code, and status message.

Namespace

[runtime_industries_cpq](#) on page 467

[ApiStatusRepresentation Properties](#)

Contains properties to include the API response details.

ApiStatusRepresentation Properties

Contains properties to include the API response details.

The `ApiStatusRepresentation` class includes these properties.

[messages](#)

Get the status messages of the API execution.

[statusCode](#)

Get the status code of the API execution.

[statusMessage](#)

Get the display label for the API status.

messages

Get the status messages of the API execution.

Signature

```
public List<ConnectApi.CpqMessageOutputRepresentation> messages {get; set;}
```

Property Value

Type: `List<ConnectApi.CpqMessageOutputRepresentation>`

statusCode

Get the status code of the API execution.

Signature

```
public String statusCode {get; set;}
```

Property Value

Type: `String`

statusMessage

Get the display label for the API status.

Signature

```
public String statusMessage {get; set;}
```

Property Value

Type: String

AttributeCategoryOutputRepresentation Class

Stores details of an attribute such as code, description, usage type, and so on.

Namespace

[runtime_industries_cpq](#) on page 467

[AttributeCategoryOutputRepresentation Properties](#)

Contains properties to include details of an attribute.

AttributeCategoryOutputRepresentation Properties

Contains properties to include details of an attribute.

The `AttributeCategoryOutputRepresentation` class includes these properties.

[code](#)

Get the code of the attribute category.

[description](#)

Get the description of the attribute category.

[id](#)

Get the ID of the attribute category.

[name](#)

Get the name of the attribute category.

[records](#)

Get the attributes of the attribute category.

[sequence](#)

Get the sequence of the attribute category.

[status](#)

Get the status of the attribute category.

[totalSize](#)

Get the total size of the attribute category.

[usageType](#)

Get the usage type of the attribute category.

code

Get the code of the attribute category.

Signature

```
public String code {get; set;}
```

Property Value

Type: String

description

Get the description of the attribute category.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

id

Get the ID of the attribute category.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Get the name of the attribute category.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

records

Get the attributes of the attribute category.

Signature

```
public List<runtime_industries_cpq.ProductAttributeOutputRepresentation> records {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductAttributeOutputRepresentation>](#) on page 528>

sequence

Get the sequence of the attribute category.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

status

Get the status of the attribute category.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

totalSize

Get the total size of the attribute category.

Signature

```
public Integer totalSize {get; set;}
```

Property Value

Type: Integer

usageType

Get the usage type of the attribute category.

Signature

```
public String usageType {get; set;}
```

Property Value

Type: String

AttributePickListOutputRepresentation Class

Stores details of an attribute picklist.

Namespace

[runtime_industries_cpq](#) on page 467

[AttributePickListOutputRepresentation Properties](#)

Contains properties to include details of an attribute picklist.

AttributePickListOutputRepresentation Properties

Contains properties to include details of an attribute picklist.

The `AttributePickListOutputRepresentation` class includes these properties.

[description](#)

Get the description of the attribute picklist.

[id](#)

Get the ID of the attribute picklist.

[name](#)

Get the name of the attribute picklist.

[status](#)

Get the status of the attribute picklist.

[values](#)

Get the values of the attribute picklist.

[dataType](#)

Get the datatype value.

description

Get the description of the attribute picklist.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

id

Get the ID of the attribute picklist.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Get the name of the attribute picklist.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

status

Get the status of the attribute picklist.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

values

Get the values of the attribute picklist.

Signature

```
public List<runtime_industries_cpq.AttributePickListValueOutputRepresentation> values  
{get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.AttributePickListValueOutputRepresentation](#) on page 479>

dataType

Get the datatype value.

Signature

```
public String dataType {get; set;}
```

Property Value

Type: String

AttributePickListValueOutputRepresentation Class

Stores details of an attribute picklist value.

Namespace

[runtime_industries_cpq](#) on page 467

[AttributePickListValueOutputRepresentation Properties](#)

Contains properties to include details of an attribute picklist value.

AttributePickListValueOutputRepresentation Properties

Contains properties to include details of an attribute picklist value.

The `AttributePickListValueOutputRepresentation` class includes these properties.

[code](#)

Get the code of the attribute picklist value.

[description](#)

Get the description of attribute picklist value.

[displayValue](#)

Get the display value of the attribute value.

[id](#)

Get the ID of the attribute picklist value.

[isBooleanValue](#)

Indicates whether this attribute value is a boolean value (true) or not (false).

[label](#)

Get the label of the attribute picklist value.

[name](#)

Get the name of the attribute picklist value.

[sequence](#)

Get the sequence of the attribute picklist value.

[status](#)

Get the status of the attribute picklist value.

[textValue](#)

Get the text value of the attribute picklist value.

code

Get the code of the attribute picklist value.

Signature

```
public String code {get; set;}
```

Property Value

Type: String

description

Get the description of attribute picklist value.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

displayValue

Get the display value of the attribute value.

Signature

```
public String displayValue {get; set;}
```

Property Value

Type: String

id

Get the ID of the attribute picklist value.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isBooleanValue

Indicates whether this attribute value is a boolean value (true) or not (false).

Signature

```
public Boolean isBooleanValue {get; set;}
```

Property Value

Type: Boolean

label

Get the label of the attribute picklist value.

Signature

```
public String label {get; set;}
```

Property Value

Type: String

name

Get the name of the attribute picklist value.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

sequence

Get the sequence of the attribute picklist value.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

status

Get the status of the attribute picklist value.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

textValue

Get the text value of the attribute picklist value.

Signature

```
public String textValue {get; set;}
```

Property Value

Type: String

BulkProductDetailsInputBody Class

Contains the details of the request to retrieve product details by using product ID and product selling model ID.

Namespace

[runtime_industries_cpq](#) on page 467

[BulkProductDetailsInputBody Properties](#)

Contains properties to retrieve details of products.

BulkProductDetailsInputBody Properties

Contains properties to retrieve details of products.

The `BulkProductDetailsInputBody` class includes these properties.

[productId](#)

Set the ID of the product to return the details for.

[productSellingModelId](#)

Set the ID of the product selling model to return the details for.

productId

Set the ID of the product to return the details for.

Signature

```
public String productId {get; set;}
```

Property Value

Type: String

productSellingModelId

Set the ID of the product selling model to return the details for.

Signature

```
public String productSellingModelId {get; set;}
```

Property Value

Type: String

BulkProductDetailsInputBodyList Class

Contains details of the request to retrieve a list of products.

Namespace

[runtime_industries_cpq](#) on page 467

[BulkProductDetailsInputBodyList Properties](#)

Contains properties to retrieve details of a list of products.

BulkProductDetailsInputBodyList Properties

Contains properties to retrieve details of a list of products.

The `BulkProductDetailsInputBodyList` class includes these properties.

[productData](#)

Set the list of maps that contain product IDs and product selling model IDs.

productData

Set the list of maps that contain product IDs and product selling model IDs.

Signature

```
public List<runtime_industries_cpq.BulkProductDetailsInputBody> productData {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.BulkProductDetailsInputBody](#) on page 482>

BulkProductDetailsRepresentation Class

Get the details of multiple product definitions in a single request. This class is used for bulk product retrieval operations in Product Discovery.

Namespace

[runtime_industries_cpq](#) on page 467

[BulkProductDetailsRepresentation Constructor](#)

Learn more about the constructors that are available with the BulkProductDetailsRepresentation class.

[BulkProductDetailsRepresentation Properties](#)

Contains properties to include details of product definitions retrieved in bulk operations.

BulkProductDetailsRepresentation Constructor

Learn more about the constructors that are available with the BulkProductDetailsRepresentation class.

The BulkProductDetailsRepresentation class includes these constructors.

[BulkProductDetailsRepresentation\(apexObj\)](#)

Constructor to create a BulkProductDetailsRepresentation instance from a ConnectApi CPQProductDetailsOutputRepresentation object.

[BulkProductDetailsRepresentation\(\)](#)

Default constructor to create an empty BulkProductDetailsRepresentation instance.

BulkProductDetailsRepresentation (apexObj)

Constructor to create a BulkProductDetailsRepresentation instance from a ConnectApi CPQProductDetailsOutputRepresentation object.

Signature

```
public BulkProductDetailsRepresentation (ConnectApi.CPQProductDetailsOutputRepresentation  
apexObj)
```

Parameters

apexObj

Type: ConnectApi.CPQProductDetailsOutputRepresentation

The ConnectApi product details representation object to convert to BulkProductDetailsRepresentation.

BulkProductDetailsRepresentation ()

Default constructor to create an empty BulkProductDetailsRepresentation instance.

Signature

```
public BulkProductDetailsRepresentation ()
```

BulkProductDetailsRepresentation Properties

Contains properties to include details of product definitions retrieved in bulk operations.

The BulkProductDetailsRepresentation class includes these properties.

[additionalFields](#)

Get the list of additionalfield.

[attributeCategories](#)

Get the list of attributecategorie.

[attributes](#)

Get the list of attribute.

[availabilityDate](#)

Get the availability date.

[catalogs](#)

Get the list of catalog.

[childProducts](#)

Get the list of childproduct.

[childVariationIds](#)

Get the list of IDs of the child variations of the product.

[configureDuringSale](#)

Get the configureduringsale value.

[description](#)

Get the description of the bulkproductdetails.

[discontinuedDate](#)

Get the discontinued date.

[displayUrl](#)

Get the displayurl value.

[endOfLifeDate](#)

Get the endoflife date.

[isActive](#)

Indicates whether the item is active.

[isAssetizable](#)

Indicates whether assetizable is true or false.

[isComponentRequired](#)

Indicates whether componentrequired is true or false.

[id](#)

Get the ID of the product.

[isDefaultComponent](#)

Indicates whether defaultcomponent is true or false.

[isQuantityEditable](#)

Indicates whether quantityeditable is true or false.

[isSoldOnlyWithOtherProds](#)

Indicates whether soldonlywithotherprods is true or false.

[name](#)

Get the name of the bulkproductdetails.

[nodeType](#)

Get the nodetype value.

[prices](#)

Get the list of price.

[productClass](#)

Get the class of the product.

[productClassification](#)

Get the productclassification value.

[productCode](#)

Get the productcode value.

[productComponentGroups](#)

Get the list of productcomponentgroup.

[productInformation](#)

Get the productinformation value.

[productPricingInformation](#)

Get the productpricinginformation value.

[productQuantity](#)

Get the productquantity value.

[productRelatedComponent](#)

Get the productrelatedcomponent value.

[productSellingModelOptions](#)

Get the list of productsellingmodeloption.

[productSpecificationType](#)

Get the productspecificationtype value.

[productType](#)

Get the producttype value.

[productUnitOfMeasures](#)

Get the list of units of measure for the product.

[qualificationContext](#)

Get the qualificationcontext value.

[status](#)

Get the status of the bulkproductdetails.

[unitOfMeasure](#)

Get the unitofmeasure value.

[variationAttributeSet](#)

Get the variation attribute set of the product.

additionalFields

Get the list of additionalfield.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategories

Get the list of attributecategory.

Signature

```
public List<runtime_industries_cpq.AttributeCategoryOutputRepresentation> attributeCategories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.AttributeCategoryOutputRepresentation](#) on page 474>

attributes

Get the list of attribute.

Signature

```
public List<runtime_industries_cpq.ProductAttributeOutputRepresentation> attributes {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductAttributeOutputRepresentation](#) on page 528>

availabilityDate

Get the availability date.

Signature

```
public Datetime availabilityDate {get; set;}
```

Property Value

Type: Datetime

catalogs

Get the list of catalog.

Signature

```
public List<runtime_industries_cpq.CatalogOutputRepresentation> catalogs {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.CatalogOutputRepresentation>](#) on page 496>

childProducts

Get the list of childproduct.

Signature

```
public List<runtime_industries_cpq.BulkProductDetailsRepresentation> childProducts  
{get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.BulkProductDetailsRepresentation>](#) on page 483>

childVariationIds

Get the list of IDs of the child variations of the product.

Signature

```
public List<String> childVariationIds {get; set;}
```

Property Value

Type: [List<String>](#)

configureDuringSale

Get the configureduringsale value.

Signature

```
public String configureDuringSale {get; set;}
```

Property Value

Type: [String](#)

description

Get the description of the bulkproductdetails.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

discontinuedDate

Get the discontinued date.

Signature

```
public Datetime discontinuedDate {get; set;}
```

Property Value

Type: Datetime

displayUrl

Get the displayurl value.

Signature

```
public String displayUrl {get; set;}
```

Property Value

Type: String

endOfLifeDate

Get the endoflife date.

Signature

```
public Datetime endOfLifeDate {get; set;}
```

Property Value

Type: Datetime

isActive

Indicates whether the item is active.

Signature

```
public Boolean isActive {get; set;}
```

Property Value

Type: Boolean

isAssetizable

Indicates whether assetizable is true or false.

Signature

```
public Boolean isAssetizable {get; set;}
```

Property Value

Type: Boolean

isComponentRequired

Indicates whether componentrequired is true or false.

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

id

Get the ID of the product.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isDefaultComponent

Indicates whether defaultcomponent is true or false.

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Indicates whether quantityeditable is true or false.

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

isSoldOnlyWithOtherProds

Indicates whether soldonlywithotherprods is true or false.

Signature

```
public Boolean isSoldOnlyWithOtherProds {get; set;}
```

Property Value

Type: Boolean

name

Get the name of the bulkproductdetails.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

nodeType

Get the nodetype value.

Signature

```
public String nodeType {get; set;}
```

Property Value

Type: String

prices

Get the list of price.

Signature

```
public List<runtime_industries_cpq.ProductPricesOutputRepresentation> prices {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductPricesOutputRepresentation](#) on page 578>

productClass

Get the class of the product.

Signature

```
public String productClass {get; set;}
```

Property Value

Type: String

productClassification

Get the productclassification value.

Signature

```
public runtime_industries_cpq.ProductClassificationOutputRepresentation  
productClassification {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductClassificationOutputRepresentation](#) on page 537

productCode

Get the productcode value.

Signature

```
public String productCode {get; set;}
```

Property Value

Type: String

productComponentGroups

Get the list of productcomponentgroup.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupRepresentation>  
productComponentGroups {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductComponentGroupRepresentation](#) on page 541>

productInformation

Get the productinformation value.

Signature

```
public String productInformation {get; set;}
```

Property Value

Type: String

productPricingInformation

Get the productpricinginformation value.

Signature

```
public String productPricingInformation {get; set;}
```

Property Value

Type: String

productQuantity

Get the productquantity value.

Signature

```
public runtime_industries_cpq.ProductQuantityOutputRepresentation productQuantity {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductQuantityOutputRepresentation](#) on page 582

productRelatedComponent

Get the productrelatedcomponent value.

Signature

```
public runtime_industries_cpq.ProductRelatedComponentOutputRepresentation  
productRelatedComponent {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductRelatedComponentOutputRepresentation](#) on page 586

productSellingModelOptions

Get the list of productsellingmodeloption.

Signature

```
public List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation>
productSellingModelOptions {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation](#) on page 592>

productSpecificationType

Get the productspecificationtype value.

Signature

```
public runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation
productSpecificationType {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation](#) on page 596

productType

Get the producttype value.

Signature

```
public String productType {get; set;}
```

Property Value

Type: String

productUnitOfMeasures

Get the list of units of measure for the product.

Signature

```
public List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation>
productUnitOfMeasures {get; set;}
```


Property Value

Type: [List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation](#) on page 597>

qualificationContext

Get the qualificationcontext value.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: [runtime_industries_cpq.QualificationContextOutputRepresentation](#) on page 606

status

Get the status of the bulkproductdetails.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

unitOfMeasure

Get the unitofmeasure value.

Signature

```
public runtime_industries_cpq.UnitOfMeasureOutputRepresentation unitOfMeasure {get;  
set;}
```

Property Value

Type: [runtime_industries_cpq.UnitOfMeasureOutputRepresentation](#) on page 622

variationAttributeSet

Get the variation attribute set of the product.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation  
variationAttributeSet {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation](#) on page 601

CatalogOutputRepresentation Class

Contains properties to store details of a catalog definition.

Namespace

[runtime_industries_cpq](#) on page 467

[CatalogOutputRepresentation Properties](#)

Contains properties to include details of a catalog definition.

CatalogOutputRepresentation Properties

Contains properties to include details of a catalog definition.

The `CatalogOutputRepresentation` class includes these properties.

[catalogCode](#)

Get the unique ID associated with the catalog.

[catalogType](#)

Get the category of an entry in the catalog, which is customizable. For example, catalog types, such as sellable products, services, parts, technical services, or technical resources.

[customFields](#)

Get details of the custom fields associated with a catalog.

[description](#)

Get the description of the catalog.

[effectiveEndDate](#)

Get the date and time from when the catalog isn't available to the end users.

[effectiveStartDate](#)

Get the date and time from when the catalog is available to the end users.

[id](#)

Get the ID of the catalog.

[name](#)

Get the name of the catalog.

[numberOfCategories](#)

Get the number of categories in the catalog.

[status](#)

Get the status of the catalog.

catalogCode

Get the unique ID associated with the catalog.

Signature

```
public String catalogCode {get; set;}
```

Property Value

Type: String

catalogType

Get the category of an entry in the catalog, which is customizable. For example, catalog types, such as sellable products, services, parts, technical services, or technical resources.

Signature

```
public String catalogType {get; set;}
```

Property Value

Type: String

customFields

Get details of the custom fields associated with a catalog.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> customFields {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

description

Get the description of the catalog.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

effectiveEndDate

Get the date and time from when the catalog isn't available to the end users.

Signature

```
public String effectiveEndDate {get; set;}
```

Property Value

Type: String

effectiveStartDate

Get the date and time from when the catalog is available to the end users.

Signature

```
public String effectiveStartDate {get; set;}
```

Property Value

Type: String

id

Get the ID of the catalog.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Get the name of the catalog.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

numberOfCategories

Get the number of categories in the catalog.

Signature

```
public Integer numberOfCategories {get; set;}
```

Property Value

Type: Integer

status

Get the status of the catalog.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

ConfigRuleResult Class

Contains the results of configuration rule evaluation, including message rules, product recommendation rules, and visibility rules that are applied during product configuration.

Namespace

[runtime_industries_cpq](#) on page 467

[ConfigRuleResult Constructor](#)

Learn more about the constructor that's available with the ConfigRuleResult class.

[ConfigRuleResult Properties](#)

Contains properties to store configuration rule evaluation results.

ConfigRuleResult Constructor

Learn more about the constructor that's available with the ConfigRuleResult class.

The `ConfigRuleResult` class includes this constructor.

[ConfigRuleResult\(transactionContextId, messageRules, productRecommendationRules, visibilityRules, errors\)](#)

Constructor to create a ConfigRuleResult instance with configuration rule evaluation results.

```
ConfigRuleResult(transactionContextId, messageRules, productRecommendationRules,  
visibilityRules, errors)
```

Constructor to create a ConfigRuleResult instance with configuration rule evaluation results.

Signature

```
public ConfigRuleResult(String transactionContextId,  
List<runtime_industries_cpq.MessageRule> messageRules,  
List<runtime_industries_cpq.ProductRecommendationRule> productRecommendationRules,  
List<runtime_industries_cpq.VisibilityRule> visibilityRules, List<String> errors)
```

Parameters

transactionContextId

Type: String

The ID of the transaction context for this configuration rule evaluation.

messageRules

Type: List<runtime_industries_cpq.MessageRule>

List of message rules that were evaluated during configuration.

productRecommendationRules

Type: List<runtime_industries_cpq.ProductRecommendationRule>

List of product recommendation rules that were evaluated during configuration.

visibilityRules

Type: List<runtime_industries_cpq.VisibilityRule>

List of visibility rules that were evaluated during configuration.

errors

Type: List<String>

List of error messages from the configuration rule evaluation, if any.

ConfigRuleResult Properties

Contains properties to store configuration rule evaluation results.

The `ConfigRuleResult` class includes these properties.

[errors](#)

Get the list of error messages.

[messageRules](#)

Get the list of messengerule.

[productRecommendationRules](#)

Get the list of productrecommendationrule.

[transactionContextId](#)

Get the ID of the transactioncontext.

[visibilityRules](#)

Get the list of visibilityrule.

errors

Get the list of error messages.

Signature

```
public List<String> errors {get; set;}
```

Property Value

Type: List<String>

messageRules

Get the list of messengerule.

Signature

```
public List<runtime_industries_cpq.MessageRule> messageRules {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.MessageRule](#) on page 525>

productRecommendationRules

Get the list of productrecommendationrule.

Signature

```
public List<runtime_industries_cpq.ProductRecommendationRule> productRecommendationRules  
{get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductRecommendationRule](#) on page 583>

transactionContextId

Get the ID of the transactioncontext.

Signature

```
public String transactionContextId {get; set;}
```

Property Value

Type: String

visibilityRules

Get the list of visibilityrule.

Signature

```
public List<runtime_industries_cpq.VisibilityRule> visibilityRules {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.VisibilityRule](#) on page 624>

CategoryOutputRepresentation Class

Contains properties to store details of a category.

Namespace

[runtime_industries_cpq](#) on page 467

[CategoryOutputRepresentation Properties](#)

Learn more about the properties available with the `CategoryOutputRepresentation` class.

CategoryOutputRepresentation Properties

Learn more about the properties available with the `CategoryOutputRepresentation` class.

The `CategoryOutputRepresentation` class includes these properties.

[catalogId](#)

Get the ID of the catalog that the category is associated with.

[description](#)

Get the description of a catalog.

[hasSubCategories](#)

Indicates whether the subcategories are available (true) or not (false).

[id](#)

Get the ID of the category.

[isNavigational](#)

Indicates whether the category node is navigational (true) or not (false).

[name](#)

Get the name of the category. If data translation is set up and specified in the org, the translated name is available.

[parentCategoryId](#)

Get the ID of the parent category.

[qualificationContext](#)

Get the context details of a user, which are used for qualification rules.

[sortOrder](#)

Get the display order of the product category relative to the siblings with the same parent category.

[childCategories](#)

Get the list of childcategories.

catalogId

Get the ID of the catalog that the category is associated with.

Signature

```
public String catalogId {get; set;}
```

Property Value

Type: String

description

Get the description of a catalog.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

hasSubCategories

Indicates whether the subcategories are available (true) or not (false).

Signature

```
public Boolean hasSubCategories {get; set;}
```

Property Value

Type: Boolean

id

Get the ID of the category.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isNavigational

Indicates whether the category node is navigational (true) or not (false).

Signature

```
public Boolean isNavigational {get; set;}
```

Property Value

Type: Boolean

name

Get the name of the category. If data translation is set up and specified in the org, the translated name is available.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

parentCategoryId

Get the ID of the parent category.

Signature

```
public String parentCategoryId {get; set;}
```

Property Value

Type: String

qualificationContext

Get the context details of a user, which are used for qualification rules.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: [runtime_industries_cpq.QualificationContextOutputRepresentation](#) on page 606

sortOrder

Get the display order of the product category relative to the siblings with the same parent category.

Signature

```
public Integer sortOrder {get; set;}
```

Property Value

Type: Integer

childCategories

Get the list of childcategories.

Signature

```
public List<runtime_industries_cpq.CategoryOutputRepresentation> childCategories {get; set; }
```

Property Value

Type: [List<runtime_industries_cpq.CategoryOutputRepresentation>](#) on page 501>

ContextDataInput Class

Get details of a context.

Namespace

[runtime_industries_cpq](#) on page 467

[ContextDataInput Properties](#)

Learn more about the properties available with the ContextDataInput class.

ContextDataInput Properties

Learn more about the properties available with the ContextDataInput class.

The `ContextDataInput` class includes these properties.

[nodeData](#)

Get details of the node.

[nodeName](#)

Get the name of the node.

nodeData

Get details of the node.

Signature

```
public Map<String,ANY> nodeData {get; set; }
```

Property Value

Type: `Map<String,ANY>`

nodeName

Get the name of the node.

Signature

```
public String nodeName {get; set; }
```

Property Value

Type: String

FacetValueRepresentation Class

Get details of the facet values that are found in the search result.

Namespace

[runtime_industries_cpq](#) on page 467

[FacetValueRepresentation Properties](#)

Learn more about the properties available with the FacetValueRepresentation class.

FacetValueRepresentation Properties

Learn more about the properties available with the FacetValueRepresentation class.

The `FacetValueRepresentation` class includes these properties.

[displayName](#)

Get the display name of the facet value.

[nameOrId](#)

Get the name or ID of the facet. Reserved for internal use.

displayName

Get the display name of the facet value.

Signature

```
public String displayName {get; set;}
```

Property Value

Type: String

nameOrId

Get the name or ID of the facet. Reserved for internal use.

Signature

```
public String nameOrId {get; set;}
```

Property Value

Type: String

Filter Class

Contains the criteria property to store the details of a filter criteria, which is used to filter records.

Namespace

[runtime_industries_cpq](#) on page 467

[Filter Properties](#)

Learn more about the properties available with the Filter class.

Filter Properties

Learn more about the properties available with the Filter class.

The `Filter` class includes these properties.

[criteria](#)

Get the filter criteria to filter the records.

criteria

Get the filter criteria to filter the records.

Signature

```
public List<runtime_industries_cpq.FilterCriteriaInputRepresentation> criteria {get;
set; }
```

Property Value

Type: List<[runtime_industries_cpq.FilterCriteriaInputRepresentation](#) on page 507>

FilterCriteriaInputRepresentation Class

Contains properties to store criteria details to filter records based on supported properties.

Namespace

[runtime_industries_cpq](#) on page 467

[FilterCriteriaInputRepresentation Properties](#)

Learn more about the properties available with the FilterCriteriaInputRepresentation class.

FilterCriteriaInputRepresentation Properties

Learn more about the properties available with the FilterCriteriaInputRepresentation class.

The `FilterCriteriaInputRepresentation` class includes these properties.

[attributeType](#)

Get details of the search attribute type of the facet for a faceted search.

[operator](#)

Get the operator that's used for the filter criteria.

[property](#)

Get the property name to use in the filter, which must be the same as the object field. The supported property is name.

[value](#)

Get the value for the filter criteria.

attributeType

Get details of the search attribute type of the facet for a faceted search.

Signature

```
public String attributeType {get; set;}
```

Property Value

Type: String

Usage

Valid values are:

- ProductStandard
- ProductCustom
- ProductDynamicAttribute
- ProductAttributeStandard
- ProductAttributeCustom

operator

Get the operator that's used for the filter criteria.

Signature

```
public String operator {get; set;}
```

Property Value

Type: String

Usage

The supported operators are:

- eq
- in

- `contains`
- `gt`—Specifies a greater than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lt`—Specifies a less than criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `gte`—Specifies a greater than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.
- `lte`—Specifies a less than or equal to criteria. Available from API version 63.0 and later for Number, Date, and Datetime data types only.

property

Get the property name to use in the filter, which must be the same as the object field. The supported property is name.

Signature

```
public String property {get; set;}
```

Property Value

Type: String

value

Get the value for the filter criteria.

Signature

```
public String value {get; set;}
```

Property Value

Type: String

FilterInputRepresentation Class

Contains the filter property to filters records based on supported criteria.

Namespace

[runtime_industries_cpq](#) on page 467

[FilterInputRepresentation Properties](#)

Learn more about the available properties with the FilterInputRepresentation class.

FilterInputRepresentation Properties

Learn more about the available properties with the FilterInputRepresentation class.

The `FilterInputRepresentation` class includes these properties.

[filter](#)

Filters records based on supported criteria. The supported property is name.

filter

Filters records based on supported criteria. The supported property is name.

Signature

```
public runtime_industries_cpq.Filter filter {get; set;}
```

Property Value

Type: [runtime_industries_cpq.Filter](#) on page 507

Usage

The supported operators are:

- `eq`
- `in`
- `contains`—This value isn't applicable if the **Use Indexed Data For Product Listing and Search** toggle from the Product Discovery Settings page from Setup is enabled.

If multiple criteria are specified, then the resultant criteria are combined by using the `and` operator.

GuidedSelectionRepresentation Class

Contains properties to represent a product in a guided selection flow. This class is used in Product Discovery to provide structured product information during guided product selection processes.

Namespace

[runtime_industries_cpq](#) on page 467

[GuidedSelectionRepresentation Properties](#)

Contains properties to include details of a product in a guided selection flow.

GuidedSelectionRepresentation Properties

Contains properties to include details of a product in a guided selection flow.

The `GuidedSelectionRepresentation` class includes these properties.

[additionalFields](#)

Get the list of additionalfield.

[attributeCategories](#)

Get the list of attributecategorie.

[availabilityDate](#)

Get the availability date.

[catalogs](#)

Get the list of catalog.

[categories](#)

Get the list of categorie.

[childProducts](#)

Get the list of childproduct.

[childVariationIds](#)

Get the list of IDs of the child variations of the product.

[configureDuringSale](#)

Get the configureduringsale value.

[description](#)

Get the description of the guidedselection.

[discontinuedDate](#)

Get the discontinued date.

[displayUrl](#)

Get the displayurl value.

[endOfLifeDate](#)

Get the endoflife date.

[id](#)

Get the ID of the guidedselection.

[isActive](#)

Indicates whether the item is active.

[isAssetizable](#)

Indicates whether assetizable is true or false.

[isComponentRequired](#)

Indicates whether componentrequired is true or false.

[isDefaultComponent](#)

Indicates whether defaultcomponent is true or false.

[isQuantityEditable](#)

Indicates whether quantityeditable is true or false.

[isSoldOnlyWithOtherProds](#)

Indicates whether soldonlywithotherprods is true or false.

[name](#)

Get the name of the guidedselection.

[nodeType](#)

Get the nodetype value.

[prices](#)

Get the list of price.

[productClass](#)

Get the class of the product.

[productClassification](#)

Get the productclassification value.

[productCode](#)

Get the productcode value.

[productComponentGroups](#)

Get the list of productcomponentgroup.

[productInformation](#)

Get the productinformation value.

[productPricingInformation](#)

Get the productpricinginformation value.

[productQuantity](#)

Get the productquantity value.

[productRelatedComponent](#)

Get the productrelatedcomponent value.

[productSellingModelOptions](#)

Get the list of productsellingmodeloption.

[productSpecificationType](#)

Get the productspecificationtype value.

[productType](#)

Get the producttype value.

[productUnitOfMeasures](#)

Get the list of units of measure for the product.

[qualificationContext](#)

Get the qualificationcontext value.

[status](#)

Get the status of the guidedselection.

[unitOfMeasure](#)

Get the unitofmeasure value.

[variationAttributeSet](#)

Get the variation attribute set of the product.

[variationsCount](#)

Get the number of variations of the product.

additionalFields

Get the list of additionalfield.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get;
set; }
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategories

Get the list of attributecategorie.

Signature

```
public List<runtime_industries_cpq.AttributeCategoryOutputRepresentation>  
attributeCategories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.AttributeCategoryOutputRepresentation](#) on page 474>

availabilityDate

Get the availability date.

Signature

```
public Datetime availabilityDate {get; set;}
```

Property Value

Type: Datetime

catalogs

Get the list of catalog.

Signature

```
public List<runtime_industries_cpq.CatalogOutputRepresentation> catalogs {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.CatalogOutputRepresentation](#) on page 496>

categories

Get the list of categorie.

Signature

```
public List<runtime_industries_cpq.CategoryOutputRepresentation> categories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.CategoryOutputRepresentation](#) on page 501>

childProducts

Get the list of childproduct.

Signature

```
public List<runtime_industries_cpq.ProductListRepresentation> childProducts {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductListRepresentation](#) on page 557>

childVariationIds

Get the list of IDs of the child variations of the product.

Signature

```
public List<String> childVariationIds {get; set;}
```

Property Value

Type: List<String>

configureDuringSale

Get the configureduringsale value.

Signature

```
public String configureDuringSale {get; set;}
```

Property Value

Type: String

description

Get the description of the guidedselection.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

discontinuedDate

Get the discontinued date.

Signature

```
public Datetime discontinuedDate {get; set;}
```

Property Value

Type: Datetime

displayUrl

Get the displayurl value.

Signature

```
public String displayUrl {get; set;}
```

Property Value

Type: String

endOfLifeDate

Get the endoflife date.

Signature

```
public Datetime endOfLifeDate {get; set;}
```

Property Value

Type: Datetime

id

Get the ID of the guidedselection.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isActive

Indicates whether the item is active.

Signature

```
public Boolean isActive {get; set;}
```

Property Value

Type: Boolean

isAssetizable

Indicates whether assetizable is true or false.

Signature

```
public Boolean isAssetizable {get; set;}
```

Property Value

Type: Boolean

isComponentRequired

Indicates whether componentrequired is true or false.

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

isDefaultComponent

Indicates whether defaultcomponent is true or false.

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Indicates whether quantityeditable is true or false.

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

isSoldOnlyWithOtherProds

Indicates whether soldonlywithotherprods is true or false.

Signature

```
public Boolean isSoldOnlyWithOtherProds {get; set;}
```

Property Value

Type: Boolean

name

Get the name of the guidedselection.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

nodeType

Get the nodetype value.

Signature

```
public String nodeType {get; set;}
```

Property Value

Type: String

prices

Get the list of price.

Signature

```
public List<runtime_industries_cpq.ProductPricesOutputRepresentation> prices {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductPricesOutputRepresentation](#) on page 578>

productClass

Get the class of the product.

Signature

```
public String productClass {get; set;}
```

Property Value

Type: String

productClassification

Get the productclassification value.

Signature

```
public runtime_industries_cpq.ProductClassificationOutputRepresentation  
productClassification {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductClassificationOutputRepresentation](#) on page 537

productCode

Get the productcode value.

Signature

```
public String productCode {get; set;}
```

Property Value

Type: String

productComponentGroups

Get the list of productcomponentgroup.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>  
productComponentGroups {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductComponentGroupOutputRepresentation](#) on page 538>

productInformation

Get the productinformation value.

Signature

```
public String productInformation {get; set;}
```

Property Value

Type: String

productPricingInformation

Get the productpricinginformation value.

Signature

```
public String productPricingInformation {get; set;}
```

Property Value

Type: String

productQuantity

Get the productquantity value.

Signature

```
public runtime_industries_cpq.ProductQuantityOutputRepresentation productQuantity {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductQuantityOutputRepresentation](#) on page 582

productRelatedComponent

Get the productrelatedcomponent value.

Signature

```
public ConnectApi.CPQProductRelatedComponentOutputRepresentation productRelatedComponent {get; set;}
```

Property Value

Type: ConnectApi.CPQProductRelatedComponentOutputRepresentation

productSellingModelOptions

Get the list of productsellingmodeloption.

Signature

```
public List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation>  
productSellingModelOptions {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation](#) on page 592>

productSpecificationType

Get the productspecificationtype value.

Signature

```
public runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation  
productSpecificationType {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation](#) on page 596

productType

Get the producttype value.

Signature

```
public String productType {get; set;}
```

Property Value

Type: String

productUnitOfMeasures

Get the list of units of measure for the product.

Signature

```
public List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation>  
productUnitOfMeasures {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation](#) on page 597>

qualificationContext

Get the qualificationcontext value.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: [runtime_industries_cpq.QualificationContextOutputRepresentation](#) on page 606

status

Get the status of the guidedselection.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

unitOfMeasure

Get the unitofmeasure value.

Signature

```
public runtime_industries_cpq.UnitOfMeasureOutputRepresentation unitOfMeasure {get;  
set;}
```

Property Value

Type: [runtime_industries_cpq.UnitOfMeasureOutputRepresentation](#) on page 622

variationAttributeSet

Get the variation attribute set of the product.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation  
variationAttributeSet {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation](#) on page 601

variationsCount

Get the number of variations of the product.

Signature

```
public Integer variationsCount {get; set;}
```

Property Value

Type: Integer

GuidedSelectionSearchTerm Class

Represents a search term used in guided product selection. Contains the search term text and associated tags for filtering and searching products in Product Discovery.

Namespace

[runtime__industries__cpq](#) on page 467

[GuidedSelectionSearchTerm Constructor](#)

Learn more about the constructors that are available with the GuidedSelectionSearchTerm class.

[GuidedSelectionSearchTerm Properties](#)

Contains properties to include search term details for guided product selection.

GuidedSelectionSearchTerm Constructor

Learn more about the constructors that are available with the GuidedSelectionSearchTerm class.

The `GuidedSelectionSearchTerm` class includes these constructors.

[GuidedSelectionSearchTerm\(apexObj\)](#)

Constructor to create a `GuidedSelectionSearchTerm` instance from a `ConnectApi.CPQGuidedSelectionSearchTermOutputRepresentation` object.

[GuidedSelectionSearchTerm\(\)](#)

Default constructor to create an empty `GuidedSelectionSearchTerm` instance.

GuidedSelectionSearchTerm (apexObj)

Constructor to create a `GuidedSelectionSearchTerm` instance from a `ConnectApi.CPQGuidedSelectionSearchTermOutputRepresentation` object.

Signature

```
public  
GuidedSelectionSearchTerm (ConnectApi.CPQGuidedSelectionSearchTermOutputRepresentation  
apexObj)
```

Parameters

apexObj

Type: `ConnectApi.CPQGuidedSelectionSearchTermOutputRepresentation`

The ConnectApi guided selection search term representation object to convert to GuidedSelectionSearchTerm.

GuidedSelectionSearchTerm()

Default constructor to create an empty GuidedSelectionSearchTerm instance.

Signature

```
public GuidedSelectionSearchTerm()
```

GuidedSelectionSearchTerm Properties

Contains properties to include search term details for guided product selection.

The GuidedSelectionSearchTerm class includes these properties.

tags

Get the list of tags.

term

Get the term value.

tags

Get the list of tags.

Signature

```
public List<String> tags {get; set;}
```

Property Value

Type: List<String>

term

Get the term value.

Signature

```
public String term {get; set;}
```

Property Value

Type: String

GuidedSelectionSearchTermList Class

Contains a list of search terms used in guided product selection. This class is used to pass multiple search terms for filtering and searching products in Product Discovery.

Namespace

[runtime_industries_cpq](#) on page 467

[GuidedSelectionSearchTermList Constructor](#)

Learn more about the constructor that's available with the `GuidedSelectionSearchTermList` class.

[GuidedSelectionSearchTermList Properties](#)

Contains properties to include a list of search terms for guided product selection.

GuidedSelectionSearchTermList Constructor

Learn more about the constructor that's available with the `GuidedSelectionSearchTermList` class.

The `GuidedSelectionSearchTermList` class includes this constructor.

[GuidedSelectionSearchTermList\(\)](#)

Default constructor to create an empty `GuidedSelectionSearchTermList` instance.

`GuidedSelectionSearchTermList()`

Default constructor to create an empty `GuidedSelectionSearchTermList` instance.

Signature

```
public GuidedSelectionSearchTermList()
```

GuidedSelectionSearchTermList Properties

Contains properties to include a list of search terms for guided product selection.

The `GuidedSelectionSearchTermList` class includes these properties.

[searchTerms](#)

Get the list of searchterm.

`searchTerms`

Get the list of searchterm.

Signature

```
public List<runtime_industries_cpq.GuidedSelectionSearchTerm> searchTerms {get; set;}
```

Property Value

Type: `List<runtime\_industries\_cpq.GuidedSelectionSearchTerm on page 522>`

MessageRule Class

Represents a message rule that is evaluated during product configuration. Message rules display informational, warning, or error messages to users based on configuration conditions.

Namespace

[runtime_industries_cpq](#) on page 467

[MessageRule Constructor](#)

Learn more about the constructor that's available with the MessageRule class.

[MessageRule Properties](#)

Contains properties to store message rule details from configuration rule evaluation.

MessageRule Constructor

Learn more about the constructor that's available with the MessageRule class.

The `MessageRule` class includes this constructor.

[MessageRule\(stiId, severity, messages\)](#)

Constructor to create a MessageRule instance with the specified STI ID, severity, and messages.

MessageRule(stiId, severity, messages)

Constructor to create a MessageRule instance with the specified STI ID, severity, and messages.

Signature

```
public MessageRule(String stiId, String severity, List<String> messages)
```

Parameters

stiId

Type: String

The ID of the Sales Transaction Item (STI) associated with this message rule.

severity

Type: String

The severity level of the message (for example, Error, Warning, or Info).

messages

Type: List<String>

List of message strings to display to the user.

MessageRule Properties

Contains properties to store message rule details from configuration rule evaluation.

The `MessageRule` class includes these properties.

[messages](#)

Get the list of messages.

[severity](#)

Get the severity value.

[stId](#)

Get the ID of the sti.

messages

Get the list of messages.

Signature

```
public List<String> messages {get; set;}
```

Property Value

Type: List<String>

severity

Get the severity value.

Signature

```
public String severity {get; set;}
```

Property Value

Type: String

stiId

Get the ID of the sti.

Signature

```
public String stiId {get; set;}
```

Property Value

Type: String

PricingModelOutputRepresentation Class

Contains details of a pricing model in a product configuration.

Namespace

[runtime_industries_cpq](#) on page 467

[PricingModelOutputRepresentation Properties](#)

Learn more about the properties available with the PricingModelOutputRepresentation class.

PricingModelOutputRepresentation Properties

Learn more about the properties available with the PricingModelOutputRepresentation class.

The `PricingModelOutputRepresentation` class includes these properties.

[frequency](#)

Contains frequency details of the pricing model.

[id](#)

Contains the ID of the pricing model.

[name](#)

Contains the name of the pricing model.

[occurrence](#)

Contains details about the occurrence of the pricing model.

[pricingModelType](#)

Contains the type of the pricing model.

[unitOfMeasure](#)

Contains details about the unit of measure for the pricing model.

frequency

Contains frequency details of the pricing model.

Signature

```
public String frequency {get; set;}
```

Property Value

Type: String

id

Contains the ID of the pricing model.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Contains the name of the pricing model.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

occurrence

Contains details about the occurrence of the pricing model.

Signature

```
public Integer occurrence {get; set;}
```

Property Value

Type: Integer

pricingModelType

Contains the type of the pricing model.

Signature

```
public String pricingModelType {get; set;}
```

Property Value

Type: String

unitOfMeasure

Contains details about the unit of measure for the pricing model.

Signature

```
public String unitOfMeasure {get; set;}
```

Property Value

Type: String

ProductAttributeOutputRepresentation Class

Contains details about the attribute in a product configuration.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductAttributeOutputRepresentation Properties](#)

Learn more about the properties available with the `ProductAttributeOutputRepresentation` class.

ProductAttributeOutputRepresentation Properties

Learn more about the properties available with the `ProductAttributeOutputRepresentation` class.

The `ProductAttributeOutputRepresentation` class includes these properties.

[additionalFields](#)

Get the key-value pairs of additional standard or custom fields and their values for the product attribute.

[attributeCategoryId](#)

Get the ID of the attribute category.

[attributeNameOverride](#)

Get the name override value of the attribute.

[attributePickList](#)

Get the picklist values of the attribute.

[code](#)

Get the code of the attribute.

[dataType](#)

Get the data type of the attribute.

[defaultHelpText](#)

Get the default help text value of the attribute.

[defaultValue](#)

Get the default value of the attribute.

[description](#)

Get the description of the attribute.

[developerName](#)

Get the developer name of the product attribute.

[displayTypeOverride](#)

Get the override value of the display type of the attribute.

[hidden](#)

Indicates whether the attribute is hidden (true) or not (false).

[id](#)

Get the ID of the attribute.

[isCloneable](#)

Indicates whether the attribute is cloneable (true) or not (false).

[isConfigurable](#)

Indicates whether the attribute is configurable (true) or not (false).

isEncrypted

Indicates whether the attribute is encrypted (true) or not (false).

isPriceImpacting

Indicates whether this is a price impacting attribute (true) or not (false).

isReadOnly

Indicates whether the attribute is read-only (true) or not (false).

isRequired

Indicates whether the attribute is required (true) or not (false).

label

Get the label of the attribute.

maximumValue

Get the maximum value for the product attribute.

minimumValue

Get the minimum value for the product attribute.

name

Get the name of the attribute.

sequence

Get the sequence values of the attribute.

status

Get the status of the attribute.

stepValue

Get the step value for the attribute.

unitOfMeasure

Get details about the unit of measure associated with an attribute.

userValue

Get the user value of the attribute.

valueDescription

Get the value description of the attribute.

additionalFields

Get the key-value pairs of additional standard or custom fields and their values for the product attribute.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get;
set; }
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategoryId

Get the ID of the attribute category.

Signature

```
public String attributeCategoryId {get; set;}
```

Property Value

Type: String

attributeNameOverride

Get the name override value of the attribute.

Signature

```
public String attributeNameOverride {get; set;}
```

Property Value

Type: String

attributePickList

Get the picklist values of the attribute.

Signature

```
public runtime_industries_cpq.AttributePickListOutputRepresentation attributePickList  
{get; set;}
```

Property Value

Type: [runtime_industries_cpq.AttributePickListOutputRepresentation](#) on page 477

code

Get the code of the attribute.

Signature

```
public String code {get; set;}
```

Property Value

Type: String

dataType

Get the data type of the attribute.

Signature

```
public String dataType {get; set;}
```

Property Value

Type: String

defaultHelpText

Get the default help text value of the attribute.

Signature

```
public String defaultHelpText {get; set;}
```

Property Value

Type: String

defaultValue

Get the default value of the attribute.

Signature

```
public String defaultValue {get; set;}
```

Property Value

Type: String

description

Get the description of the attribute.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

developerName

Get the developer name of the product attribute.

Signature

```
public String developerName {get; set;}
```

Property Value

Type: String

displayTypeOverride

Get the override value of the display type of the attribute.

Signature

```
public String displayTypeOverride {get; set;}
```

Property Value

Type: String

hidden

Indicates whether the attribute is hidden (true) or not (false).

Signature

```
public Boolean hidden {get; set;}
```

Property Value

Type: Boolean

id

Get the ID of the attribute.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isCloneable

Indicates whether the attribute is cloneable (true) or not (false).

Signature

```
public Boolean isCloneable {get; set;}
```

Property Value

Type: Boolean

isConfigurable

Indicates whether the attribute is configurable (true) or not (false).

Signature

```
public Boolean isConfigurable {get; set;}
```

Property Value

Type: Boolean

isEncrypted

Indicates whether the attribute is encrypted (true) or not (false).

Signature

```
public Boolean isEncrypted {get; set;}
```

Property Value

Type: Boolean

isPriceImpacting

Indicates whether this is a price impacting attribute (true) or not (false).

Signature

```
public Boolean isPriceImpacting {get; set;}
```

Property Value

Type: Boolean

isReadOnly

Indicates whether the attribute is read-only (true) or not (false).

Signature

```
public Boolean isReadOnly {get; set;}
```

Property Value

Type: Boolean

isRequired

Indicates whether the attribute is required (true) or not (false).

Signature

```
public Boolean isRequired {get; set;}
```

Property Value

Type: Boolean

label

Get the label of the attribute.

Signature

```
public String label {get; set;}
```

Property Value

Type: String

maximumValue

Get the maximum value for the product attribute.

Signature

```
public String maximumValue {get; set;}
```

Property Value

Type: String

minimumValue

Get the minimum value for the product attribute.

Signature

```
public String minimumValue {get; set;}
```

Property Value

Type: String

name

Get the name of the attribute.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

sequence

Get the sequence values of the attribute.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

status

Get the status of the attribute.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

stepValue

Get the step value for the attribute.

Signature

```
public String stepValue {get; set;}
```

Property Value

Type: String

unitOfMeasure

Get details about the unit of measure associated with an attribute.

Signature

```
public ConnectApi.UnitOfMeasureOutputRepresentation unitOfMeasure {get; set;}
```

Property Value

Type: ConnectApi.UnitOfMeasureOutputRepresentation

userValue

Get the user value of the attribute.

Signature

```
public String userValue {get; set;}
```

Property Value

Type: String

valueDescription

Get the value description of the attribute.

Signature

```
public String valueDescription {get; set;}
```

Property Value

Type: String

ProductClassificationOutputRepresentation Class

Get details of the product classification in a product configuration.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductClassificationOutputRepresentation Properties](#)

Learn more about the properties available with the ProductClassificationOutputRepresentation class.

ProductClassificationOutputRepresentation Properties

Learn more about the properties available with the ProductClassificationOutputRepresentation class.

The ProductClassificationOutputRepresentation class includes these properties.

[id](#)

Get the ID of the product classification.

id

Get the ID of the product classification.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

ProductComponentGroupOutputRepresentation Class

Get details of the product component group in a product classification.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductComponentGroupOutputRepresentation Properties](#)

Learn more about the properties available with the ProductComponentGroupOutputRepresentation class.

ProductComponentGroupOutputRepresentation Properties

Learn more about the properties available with the ProductComponentGroupOutputRepresentation class.

The `ProductComponentGroupOutputRepresentation` class includes these properties.

[childGroups](#)

Get the child groups associated with a product component group.

[classifications](#)

Get the list of classifications for the product component group.

[code](#)

Get the code of the product component group.

[components](#)

Get the details of components within the product component group.

[description](#)

Get the description of the product component group.

[id](#)

Get the ID of the product component group.

[name](#)

Get the name of the product component group.

[parentGroupId](#)

Get the ID of the parent group.

[parentProductId](#)

Get the parent Product2 ID of the product component group.

[sequence](#)

Get the sequence of the product component group.

childGroups

Get the child groups associated with a product component group.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation> childGroups  
{get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>](#) on page 538>

classifications

Get the list of classifications for the product component group.

Signature

```
public List<runtime_industries_cpq.ProductClassificationOutputRepresentation>  
classifications {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductClassificationOutputRepresentation>](#) on page 537>

code

Get the code of the product component group.

Signature

```
public String code {get; set;}
```

Property Value

Type: String

components

Get the details of components within the product component group.

Signature

```
public List<runtime_industries_cpq.ProductDetailsRepresentation> components {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductDetailsRepresentation>](#) on page 545>

description

Get the description of the product component group.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

id

Get the ID of the product component group.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Get the name of the product component group.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

parentGroupId

Get the ID of the parent group.

Signature

```
public String parentGroupId {get; set;}
```

Property Value

Type: String

parentProductId

Get the parent Product2 ID of the product component group.

Signature

```
public String parentProductId {get; set;}
```

Property Value

Type: String

sequence

Get the sequence of the product component group.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

ProductComponentGroupRepresentation Class

Represents a product component group used in bulk product operations. This class is similar to `ProductComponentGroupOutputRepresentation` but is used specifically for bulk product detail representations where components are represented as `BulkProductDetailsRepresentation` objects.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductComponentGroupRepresentation Constructor](#)

Learn more about the constructor that's available with the `ProductComponentGroupRepresentation` class.

[ProductComponentGroupRepresentation Properties](#)

Contains properties to include details of a product component group used in bulk operations.

ProductComponentGroupRepresentation Constructor

Learn more about the constructor that's available with the `ProductComponentGroupRepresentation` class.

The `ProductComponentGroupRepresentation` class includes this constructor.

[ProductComponentGroupRepresentation\(apexObj\)](#)

Constructor to create a `ProductComponentGroupRepresentation` instance from a `ConnectApi` `CPQProductComponentGroupOutputRepresentation` object.

ProductComponentGroupRepresentation (apexObj)

Constructor to create a `ProductComponentGroupRepresentation` instance from a `ConnectApi` `CPQProductComponentGroupOutputRepresentation` object.

Signature

```
public  
ProductComponentGroupRepresentation (ConnectApi.CPQProductComponentGroupOutputRepresentation  
apexObj)
```

Parameters

apexObj

Type: ConnectApi.CPQProductComponentGroupOutputRepresentation

The ConnectApi product component group representation object to convert to ProductComponentGroupRepresentation.

ProductComponentGroupRepresentation Properties

Contains properties to include details of a product component group used in bulk operations.

The `ProductComponentGroupRepresentation` class includes these properties.

[childGroups](#)

Get the list of childgroup.

[classifications](#)

Get the list of product classifications.

[code](#)

Get the code of the productcomponentgroup.

[components](#)

Get the list of component.

[description](#)

Get the description of the productcomponentgroup.

[id](#)

Get the ID of the productcomponentgroup.

[name](#)

Get the name of the productcomponentgroup.

[parentGroupId](#)

Get the ID of the parentgroup.

[parentProductId](#)

Get the ID of the parentproduct.

[sequence](#)

Get the sequence value.

childGroups

Get the list of childgroup.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupRepresentation> childGroups  
{get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductComponentGroupRepresentation](#) on page 541>

classifications

Get the list of product classifications.

Signature

```
public List<runtime_industries_cpq.ProductClassificationOutputRepresentation>  
classifications {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductClassificationOutputRepresentation](#) on page 537>

code

Get the code of the productcomponentgroup.

Signature

```
public String code {get; set;}
```

Property Value

Type: String

components

Get the list of component.

Signature

```
public List<runtime_industries_cpq.BulkProductDetailsRepresentation> components {get;  
set; }
```

Property Value

Type: List<[runtime_industries_cpq.BulkProductDetailsRepresentation](#) on page 483>

description

Get the description of the productcomponentgroup.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

id

Get the ID of the productcomponentgroup.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Get the name of the productcomponentgroup.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

parentGroupId

Get the ID of the parentgroup.

Signature

```
public String parentGroupId {get; set;}
```

Property Value

Type: String

parentProductId

Get the ID of the parentproduct.

Signature

```
public String parentProductId {get; set;}
```

Property Value

Type: String

sequence

Get the sequence value.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

ProductDetailsRepresentation Class

Get the details of a product definition.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductDetailsRepresentation Constructor](#)

Learn more about the constructor that's available with the ProductDetailsRepresentation class.

[ProductDetailsRepresentation Properties](#)

Learn more about the properties available with the ProductDetailsRepresentation class.

ProductDetailsRepresentation Constructor

Learn more about the constructor that's available with the ProductDetailsRepresentation class.

The `ProductDetailsRepresentation` class includes this constructor.

[ProductDetailsRepresentation\(\)](#)

Constructor to get the product details for a product definition.

ProductDetailsRepresentation()

Constructor to get the product details for a product definition.

Signature

```
public ProductDetailsRepresentation()
```

ProductDetailsRepresentation Properties

Learn more about the properties available with the ProductDetailsRepresentation class.

The `ProductDetailsRepresentation` includes these properties.

[additionalFields](#)

Get the key-value pair of additional standard or custom fields with their values.

[attributeCategories](#)

Get the list of categorized attributes related to the product.

[attributes](#)

Get the list of uncategorized attributes related to the product.

[availabilityDate](#)

Get the date when the part is used in the product or is made available for sale.

[catalogs](#)

Get the list of the associated catalogs returned with the Product List API (POST) response. The Product By ID API (GET) returns an empty catalog list in the response. Returns the name and id values only.

[childProducts](#)

Get the hierarchy of the child products.

[childVariationIds](#)

Get the list of IDs of the child variations of the product.

[configureDuringSale](#)

Determines whether to allow or prevent configuration when a bundle is sold.

[description](#)

Get the description of the product.

[discontinuedDate](#)

Get the date from when the part can't be used in the product or sold.

[displayUrl](#)

Get the display image URL of the product.

[endOfLifeDate](#)

Get the date after which a product isn't supported, ordered, or maintained.

[id](#)

Get the ID of the product.

[isActive](#)

Indicates whether the product is active (true) or not (false).

[isAssetizable](#)

Indicates whether the product instance remains a customer asset after it's purchased (true) or not (false).

[isComponentRequired](#)

Indicates whether the product component is required (true) or not (false).

[isDefaultComponent](#)

Indicates whether the product component is the default component (true) or not (false).

[isQuantityEditable](#)

Indicates whether the product quantity is editable (true) or not (false).

[isSoldOnlyWithOtherProds](#)

Indicates whether the product can't be sold separately (true) or not (false).

[name](#)

Get the name of the product.

[nodeType](#)

Get the type of the node, such as a product or bundled product.

[prices](#)

Get the price details associated with the products.

[productClass](#)

Get the class of the product.

[productClassification](#)

Get the details of the product classification that the product is based on.

[productCode](#)

Get the universal product code that's used to track the part that's used in the product.

[productComponentGroups](#)

Get the logical grouping of the component products in a bundle and the group cardinality for ordering the product components.

[productInformation](#)

Get the details of a product.

[productPricingInformation](#)

Get the pricing details of a product.

[productQuantity](#)

Get the quantity of a product.

[productRelatedComponent](#)

Get the details of the related components of a product.

[productSellingModelOptions](#)

Get the details of the product selling model options.

[productSpecificationType](#)

Get the details of the product specification type.

[productType](#)

Get the product type.

[productUnitOfMeasures](#)

Get the list of units of measure for the product.

[qualificationContext](#)

Get the context details of a user, which are used for qualification rules.

[status](#)

Get or set the status of the product, such as Active or Inactive.

[unitOfMeasure](#)

Get details about the unit of measure for a specific set of records.

[variationAttributeSet](#)

Get the variation attribute set of the product.

additionalFields

Get the key-value pair of additional standard or custom fields with their values.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategories

Get the list of categorized attributes related to the product.

Signature

```
public List<runtime_industries_cpq.AttributeCategoryOutputRepresentation> attributeCategories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.AttributeCategoryOutputRepresentation](#) on page 474>

attributes

Get the list of uncategorized attributes related to the product.

Signature

```
public List<runtime_industries_cpq.ProductAttributeOutputRepresentation> attributes {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductAttributeOutputRepresentation](#) on page 528>

availabilityDate

Get the date when the part is used in the product or is made available for sale.

Signature

```
public Datetime availabilityDate {get; set;}
```

Property Value

Type: Datetime

catalogs

Get the list of the associated catalogs returned with the Product List API (POST) response. The Product By ID API (GET) returns an empty catalog list in the response. Returns the name and id values only.

Signature

```
public List<runtime_industries_cpq.CatalogOutputRepresentation> catalogs {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.CatalogOutputRepresentation>](#) on page 496>

childProducts

Get the hierarchy of the child products.

Signature

```
public List<runtime_industries_cpq.ProductDetailsRepresentation> childProducts {get; set; }
```

Property Value

Type: [List<runtime_industries_cpq.ProductDetailsRepresentation>](#) on page 545>

childVariationIds

Get the list of IDs of the child variations of the product.

Signature

```
public List<String> childVariationIds {get; set;}
```

Property Value

Type: [List<String>](#)

configureDuringSale

Determines whether to allow or prevent configuration when a bundle is sold.

Signature

```
public String configureDuringSale {get; set;}
```

Property Value

Type: [String](#)

description

Get the description of the product.

If data translation is set up and specified in the org, the translated description is available.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

discontinuedDate

Get the date from when the part can't be used in the product or sold.

Signature

```
public Datetime discontinuedDate {get; set;}
```

Property Value

Type: Datetime

displayUrl

Get the display image URL of the product.

Signature

```
public String displayUrl {get; set;}
```

Property Value

Type: String

endOfLifeDate

Get the date after which a product isn't supported, ordered, or maintained.

Signature

```
public Datetime endOfLifeDate {get; set;}
```

Property Value

Type: Datetime

id

Get the ID of the product.

Signature

```
public String id {get; set;}
```


Property Value

Type: String

isActive

Indicates whether the product is active (true) or not (false).

Signature

```
public Boolean isActive {get; set;}
```

Property Value

Type: Boolean

isAssetizable

Indicates whether the product instance remains a customer asset after it's purchased (true) or not (false).

Signature

```
public Boolean isAssetizable {get; set;}
```

Property Value

Type: Boolean

isComponentRequired

Indicates whether the product component is required (true) or not (false).

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

isDefaultComponent

Indicates whether the product component is the default component (true) or not (false).

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Indicates whether the product quantity is editable (true) or not (false).

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

isSoldOnlyWithOtherProds

Indicates whether the product can't be sold separately (true) or not (false).

Signature

```
public Boolean isSoldOnlyWithOtherProds {get; set;}
```

Property Value

Type: Boolean

name

Get the name of the product.

If data translation is set up and specified in the org, the translated name is available.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

nodeType

Get the type of the node, such as a product or bundled product.

Signature

```
public String nodeType {get; set;}
```

Property Value

Type: String

prices

Get the price details associated with the products.

Signature

```
public List<runtime_industries_cpq.ProductPricesOutputRepresentation> prices {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductPricesOutputRepresentation>](#) on page 578>

productClass

Get the class of the product.

Signature

```
public String productClass {get; set;}
```

Property Value

Type: String

productClassification

Get the details of the product classification that the product is based on.

Signature

```
public runtime_industries_cpq.ProductClassificationOutputRepresentation  
productClassification {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductClassificationOutputRepresentation](#) on page 537

productCode

Get the universal product code that's used to track the part that's used in the product.

Signature

```
public String productCode {get; set;}
```

Property Value

Type: String

productComponentGroups

Get the logical grouping of the component products in a bundle and the group cardinality for ordering the product components.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>  
productComponentGroups {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>](#) on page 538>

productInformation

Get the details of a product.

Signature

```
public String productInformation {get; set;}
```

Property Value

Type: String

productPricingInformation

Get the pricing details of a product.

Signature

```
public String productPricingInformation {get; set;}
```

Property Value

Type: String

productQuantity

Get the quantity of a product.

Signature

```
public runtime_industries_cpq.ProductQuantityOutputRepresentation productQuantity {get;  
set; }
```

Property Value

Type: [runtime_industries_cpq.ProductQuantityOutputRepresentation](#) on page 582

productRelatedComponent

Get the details of the related components of a product.

Signature

```
public ConnectApi.CPQProductRelatedComponentOutputRepresentation productRelatedComponent
{get; set;}
```

Property Value

Type: ConnectApi.CPQProductRelatedComponentOutputRepresentation

productSellingModelOptions

Get the details of the product selling model options.

Signature

```
public List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation>
productSellingModelOptions {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation](#) on page 592>

productSpecificationType

Get the details of the product specification type.

Signature

```
public runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation
productSpecificationType {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation](#) on page 596

productType

Get the product type.

Signature

```
public String productType {get; set;}
```

Property Value

Type: String

productUnitOfMeasures

Get the list of units of measure for the product.

Signature

```
public List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation>  
productUnitOfMeasures {get; set;}
```

Property Value

Type: [List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation>](#) on page 597>

qualificationContext

Get the context details of a user, which are used for qualification rules.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: [runtime_industries_cpq.QualificationContextOutputRepresentation](#) on page 606

status

Get or set the status of the product, such as Active or Inactive.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

unitOfMeasure

Get details about the unit of measure for a specific set of records.

Signature

```
public ConnectApi.UnitOfMeasureOutputRepresentation unitOfMeasure {get; set;}
```

Property Value

Type: ConnectApi.UnitOfMeasureOutputRepresentation

variationAttributeSet

Get the variation attribute set of the product.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation  
variationAttributeSet {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation](#) on page 601

ProductListRepresentation Class

Get the list of retrieved products.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductListRepresentation Properties](#)

Learn more about the properties available with the ProductListRepresentation class.

ProductListRepresentation Properties

Learn more about the properties available with the ProductListRepresentation class.

The following are properties for `ProductListRepresentation`.

[additionalFields](#)

Get the key-value pair of additional standard or custom fields with their values.

[attributeCategories](#)

Get the list of categorized attributes related to the product.

[availabilityDate](#)

Get the date when the part is used in the product or is made available for sale.

[catalogs](#)

Get the list of associated catalogs. Returns the name and id values only.

[categories](#)

Get the list of associated categories. Returns the name and id values only.

[childProducts](#)

Get the hierarchy of the child products.

[childVariationIds](#)

Get the list of IDs of the child variations of the product.

[configureDuringSale](#)

Determines whether to allow or prevent configuration when a bundle is sold.

[description](#)

Get the description of the product. If data translation is set up and specified in the org, the translated description is available.

[discontinuedDate](#)

Get the date from when the part can't be used in the product or sold.

[displayUrl](#)

Get the display image URL of the product.

[endOfLifeDate](#)

Get the date after which a product isn't supported, ordered, or maintained.

[id](#)

Get the ID of the product.

[isActive](#)

Indicates whether the product is active (true) or not (false).

[isAssetizable](#)

Indicates whether the product instance remains a customer asset after it's purchased (true) or not (false).

[isComponentRequired](#)

Indicates whether the product component is required (true) or not (false).

[isDefaultComponent](#)

Indicates whether the product component is the default component (true) or not (false).

[isQuantityEditable](#)

Indicates whether the product quantity is editable (true) or not (false).

[isSoldOnlyWithOtherProds](#)

Indicates whether the product can't be sold separately (true) or not (false).

[name](#)

Get the name of the product. If data translation is set up and specified in the org, the translated name is available.

[nodeType](#)

Get the type of the node, such as a product or bundled product.

[prices](#)

Get the price details associated with the products.

[productClass](#)

Get the class of the product.

[productClassification](#)

Get the details of the product classification that the product is based on.

[productCode](#)

Get the universal product code that's used to track the part that's used in the product.

[productComponentGroups](#)

Get the logical grouping of the component products in a bundle and group cardinality for ordering the product components.

[productInformation](#)

Get the details of a product.

[productPricingInformation](#)

Get the pricing details of a product.

[productQuantity](#)

Get the quantity of a product.

[productRelatedComponent](#)

Get the details of the related components of a product.

[productSellingModelOptions](#)

Get the details of the product selling model options.

[productSpecificationType](#)

Get the details of the product specification type.

[productType](#)

Get the product type.

[productUnitOfMeasures](#)

Get the list of units of measure for the product.

[qualificationContext](#)

Get the context details of a user, which are used for qualification rules.

[status](#)

Get or set the status of the product, such as Active or Inactive.

[unitOfMeasure](#)

Get details about the unit of measure for a specific set of records.

[variationAttributeSet](#)

Get the variation attribute set of the product.

[variationsCount](#)

Get the number of variations of the product.

additionalFields

Get the key-value pair of additional standard or custom fields with their values.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get; set; }
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategories

Get the list of categorized attributes related to the product.

Signature

```
public List<runtime_industries_cpq.AttributeCategoryOutputRepresentation> attributeCategories {get; set; }
```

Property Value

Type: List<[runtime_industries_cpq.AttributeCategoryOutputRepresentation](#) on page 474>

availabilityDate

Get the date when the part is used in the product or is made available for sale.

Signature

```
public Datetime availabilityDate {get; set;}
```

Property Value

Type: Datetime

catalogs

Get the list of associated catalogs. Returns the name and id values only.

Signature

```
public List<runtime_industries_cpq.CatalogOutputRepresentation> catalogs {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.CatalogOutputRepresentation](#) on page 496>

categories

Get the list of associated categories. Returns the name and id values only.

Signature

```
public List<runtime_industries_cpq.CategoryOutputRepresentation> categories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.CategoryOutputRepresentation](#) on page 501>

childProducts

Get the hierarchy of the child products.

Signature

```
public List<runtime_industries_cpq.ProductListRepresentation> childProducts {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductListRepresentation](#) on page 557>

childVariationIds

Get the list of IDs of the child variations of the product.

Signature

```
public List<String> childVariationIds {get; set;}
```

Property Value

Type: List<String>

configureDuringSale

Determines whether to allow or prevent configuration when a bundle is sold.

Signature

```
public String configureDuringSale {get; set;}
```

Property Value

Type: String

description

Get the description of the product. If data translation is set up and specified in the org, the translated description is available.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

discontinuedDate

Get the date from when the part can't be used in the product or sold.

Signature

```
public Datetime discontinuedDate {get; set;}
```

Property Value

Type: Datetime

displayUrl

Get the display image URL of the product.

Signature

```
public String displayUrl {get; set;}
```

Property Value

Type: String

endOfLifeDate

Get the date after which a product isn't supported, ordered, or maintained.

Signature

```
public Datetime endOfLifeDate {get; set;}
```

Property Value

Type: Datetime

id

Get the ID of the product.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isActive

Indicates whether the product is active (true) or not (false).

Signature

```
public Boolean isActive {get; set;}
```

Property Value

Type: Boolean

isAssetizable

Indicates whether the product instance remains a customer asset after it's purchased (true) or not (false).

Signature

```
public Boolean isAssetizable {get; set;}
```

Property Value

Type: Boolean

isComponentRequired

Indicates whether the product component is required (true) or not (false).

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

isDefaultComponent

Indicates whether the product component is the default component (true) or not (false).

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Indicates whether the product quantity is editable (true) or not (false).

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

isSoldOnlyWithOtherProds

Indicates whether the product can't be sold separately (true) or not (false).

Signature

```
public Boolean isSoldOnlyWithOtherProds {get; set;}
```

Property Value

Type: Boolean

name

Get the name of the product. If data translation is set up and specified in the org, the translated name is available.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

nodeType

Get the type of the node, such as a product or bundled product.

Signature

```
public String nodeType {get; set;}
```

Property Value

Type: String

prices

Get the price details associated with the products.

Signature

```
public List<runtime_industries_cpq.ProductPricesOutputRepresentation> prices {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductPricesOutputRepresentation](#) on page 578>

productClass

Get the class of the product.

Signature

```
public String productClass {get; set;}
```

Property Value

Type: String

productClassification

Get the details of the product classification that the product is based on.

Signature

```
public runtime_industries_cpq.ProductClassificationOutputRepresentation  
productClassification {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductClassificationOutputRepresentation](#) on page 537

productCode

Get the universal product code that's used to track the part that's used in the product.

Signature

```
public String productCode {get; set;}
```

Property Value

Type: String

productComponentGroups

Get the logical grouping of the component products in a bundle and group cardinality for ordering the product components.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>  
productComponentGroups {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductComponentGroupOutputRepresentation](#) on page 538>

productInformation

Get the details of a product.

Signature

```
public String productInformation {get; set;}
```

Property Value

Type: String

productPricingInformation

Get the pricing details of a product.

Signature

```
public String productPricingInformation {get; set;}
```

Property Value

Type: String

productQuantity

Get the quantity of a product.

Signature

```
public runtime_industries_cpq.ProductQuantityOutputRepresentation productQuantity {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductQuantityOutputRepresentation](#) on page 582

productRelatedComponent

Get the details of the related components of a product.

Signature

```
public ConnectApi.CPQProductRelatedComponentOutputRepresentation productRelatedComponent {get; set;}
```

Property Value

Type: ConnectApi.CPQProductRelatedComponentOutputRepresentation

productSellingModelOptions

Get the details of the product selling model options.

Signature

```
public List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation> productSellingModelOptions {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation](#) on page 592>

productSpecificationType

Get the details of the product specification type.

Signature

```
public runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation  
productSpecificationType {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation](#) on page 596

productType

Get the product type.

Signature

```
public String productType {get; set;}
```

Property Value

Type: String

productUnitOfMeasures

Get the list of units of measure for the product.

Signature

```
public List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation>  
productUnitOfMeasures {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation](#) on page 597>

qualificationContext

Get the context details of a user, which are used for qualification rules.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: [runtime_industries_cpq.QualificationContextOutputRepresentation](#) on page 606

status

Get or set the status of the product, such as Active or Inactive.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

unitOfMeasure

Get details about the unit of measure for a specific set of records.

Signature

```
public ConnectApi.UnitOfMeasureOutputRepresentation unitOfMeasure {get; set;}
```

Property Value

Type: ConnectApi.UnitOfMeasureOutputRepresentation

variationAttributeSet

Get the variation attribute set of the product.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation  
variationAttributeSet {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation](#) on page 601

variationsCount

Get the number of variations of the product.

Signature

```
public Integer variationsCount {get; set;}
```

Property Value

Type: Integer

ProductOutputRepresentation Class

Get the details of a product definition.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductOutputRepresentation Properties](#)

Learn more about the properties available with the `ProductOutputRepresentation` class.

ProductOutputRepresentation Properties

Learn more about the properties available with the `ProductOutputRepresentation` class.

The `ProductOutputRepresentation` class includes these properties.

[additionalFields](#)

Get the key-value pair of additional standard or custom fields with their values.

[attributeCategories](#)

Get the list of categorized attributes related to the product.

[availabilityDate](#)

Get the date when the part is used in the product or is made available for sale.

[catalogs](#)

Get the list of associated catalogs. Returns the name and id values only.

[childVariationIds](#)

Get the list of IDs of the child variations of the product.

[configureDuringSale](#)

Determines whether to allow or prevent configuration when a bundle is sold.

[description](#)

Get the description of the product. If data translation is set up and specified in the org, the translated description is available.

[discontinuedDate](#)

Get the date from when the part can't be used in the product or sold.

[displayUrl](#)

Get the display image URL of the product.

[endOfLifeDate](#)

Get the date after which a product isn't supported, ordered, or maintained.

[id](#)

Get the ID of the product.

[isActive](#)

Indicates whether the product is active (true) or not (false).

[isAssetizable](#)

Indicates whether the product instance remains a customer asset after it's purchased (true) or not (false).

[isComponentRequired](#)

Indicates whether the product component is required (true) or not (false).

[isDefaultComponent](#)

Indicates whether the product component is the default component (true) or not (false).

[isQuantityEditable](#)

Indicates whether the product quantity is editable (true) or not (false).

[`isSoldOnlyWithOtherProds`](#)

Indicates whether the product can't be sold separately (true) or not (false).

[`name`](#)

Get the name of the product. If data translation is set up and specified in the org, the translated name is available.

[`nodeType`](#)

Get the type of the node, such as a product or bundled product.

[`productClass`](#)

Get the class of the product.

[`productClassification`](#)

Get the details of the product classification that the product is based on.

[`productCode`](#)

Get the universal product code that's used to track the part that's used in the product.

[`productComponentGroups`](#)

Get the logical grouping of the component products in a bundle and group cardinality for ordering the product components.

[`productInformation`](#)

Get the details of a product.

[`productPricingInformation`](#)

Get the pricing details of a product.

[`productQuantity`](#)

Get the quantity of a product.

[`productRelatedComponent`](#)

Get the details of the related components of a product.

[`productSellingModelOptions`](#)

Get the details of the product selling model options.

[`productSpecificationType`](#)

Get the details of the product specification type.

[`productType`](#)

Get the product type.

[`qualificationContext`](#)

Get the context details of a user, which are used for qualification rules.

[`status`](#)

Get or set the status of the product, such as Active or Inactive.

[`variationAttributeSet`](#)

Get the variation attribute set of the product.

`additionalFields`

Get the key-value pair of additional standard or custom fields with their values.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategories

Get the list of categorized attributes related to the product.

Signature

```
public List<runtime_industries_cpq.AttributeCategoryOutputRepresentation> attributeCategories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.AttributeCategoryOutputRepresentation](#) on page 474>

availabilityDate

Get the date when the part is used in the product or is made available for sale.

Signature

```
public Datetime availabilityDate {get; set;}
```

Property Value

Type: Datetime

catalogs

Get the list of associated catalogs. Returns the name and id values only.

Signature

```
public List<runtime_industries_cpq.CatalogOutputRepresentation> catalogs {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.CatalogOutputRepresentation](#) on page 496>

childVariationIds

Get the list of IDs of the child variations of the product.

Signature

```
public List<String> childVariationIds {get; set;}
```

Property Value

Type: List<String>

configureDuringSale

Determines whether to allow or prevent configuration when a bundle is sold.

Signature

```
public String configureDuringSale {get; set;}
```

Property Value

Type: String

description

Get the description of the product. If data translation is set up and specified in the org, the translated description is available.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

discontinuedDate

Get the date from when the part can't be used in the product or sold.

Signature

```
public Datetime discontinuedDate {get; set;}
```

Property Value

Type: Datetime

displayUrl

Get the display image URL of the product.

Signature

```
public String displayUrl {get; set;}
```

Property Value

Type: String

endOfLifeDate

Get the date after which a product isn't supported, ordered, or maintained.

Signature

```
public Datetime endOfLifeDate {get; set;}
```

Property Value

Type: Datetime

id

Get the ID of the product.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isActive

Indicates whether the product is active (true) or not (false).

Signature

```
public Boolean isActive {get; set;}
```

Property Value

Type: Boolean

isAssetizable

Indicates whether the product instance remains a customer asset after it's purchased (true) or not (false).

Signature

```
public Boolean isAssetizable {get; set;}
```

Property Value

Type: Boolean

isComponentRequired

Indicates whether the product component is required (true) or not (false).

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

isDefaultComponent

Indicates whether the product component is the default component (true) or not (false).

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Indicates whether the product quantity is editable (true) or not (false).

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

isSoldOnlyWithOtherProds

Indicates whether the product can't be sold separately (true) or not (false).

Signature

```
public Boolean isSoldOnlyWithOtherProds {get; set;}
```

Property Value

Type: Boolean

name

Get the name of the product. If data translation is set up and specified in the org, the translated name is available.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

nodeType

Get the type of the node, such as a product or bundled product.

Signature

```
public String nodeType {get; set;}
```

Property Value

Type: String

productClass

Get the class of the product.

Signature

```
public String productClass {get; set;}
```

Property Value

Type: String

productClassification

Get the details of the product classification that the product is based on.

Signature

```
public runtime_industries_cpq.ProductClassificationOutputRepresentation  
productClassification {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductClassificationOutputRepresentation](#) on page 537

productCode

Get the universal product code that's used to track the part that's used in the product.

Signature

```
public String productCode {get; set;}
```

Property Value

Type: String

productComponentGroups

Get the logical grouping of the component products in a bundle and group cardinality for ordering the product components.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>  
productComponentGroups {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductComponentGroupOutputRepresentation](#) on page 538>

productInformation

Get the details of a product.

Signature

```
public String productInformation {get; set;}
```

Property Value

Type: String

productPricingInformation

Get the pricing details of a product.

Signature

```
public String productPricingInformation {get; set;}
```

Property Value

Type: String

productQuantity

Get the quantity of a product.

Signature

```
public runtime_industries_cpq.ProductQuantityOutputRepresentation productQuantity {get;  
set; }
```

Property Value

Type: [runtime_industries_cpq.ProductQuantityOutputRepresentation](#) on page 582

productRelatedComponent

Get the details of the related components of a product.

Signature

```
public ConnectApi.CPQProductRelatedComponentOutputRepresentation productRelatedComponent
{get; set;}
```

Property Value

Type: ConnectApi.CPQProductRelatedComponentOutputRepresentation

productSellingModelOptions

Get the details of the product selling model options.

Signature

```
public List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation>
productSellingModelOptions {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation](#) on page 592>

productSpecificationType

Get the details of the product specification type.

Signature

```
public runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation
productSpecificationType {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation](#) on page 596

productType

Get the product type.

Signature

```
public String productType {get; set;}
```

Property Value

Type: String

qualificationContext

Get the context details of a user, which are used for qualification rules.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: [runtime_industries_cpq.QualificationContextOutputRepresentation](#) on page 606

status

Get or set the status of the product, such as Active or Inactive.

Signature

```
public String status {get; set;}
```

Property Value

Type: String

variationAttributeSet

Get the variation attribute set of the product.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation  
variationAttributeSet {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation](#) on page 601

ProductPricesOutputRepresentation Class

Get the price details of a product.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductPricesOutputRepresentation Properties](#)

Learn more about the properties available with the `ProductPricesOutputRepresentation` class.

ProductPricesOutputRepresentation Properties

Learn more about the properties available with the `ProductPricesOutputRepresentation` class.

The following are properties for `ProductPricesOutputRepresentation`.

[currencyIsoCode](#)

Get or set the ISO currency code for the price.

[effectiveFrom](#)

Get or set the date and time when this price becomes effective.

[effectiveTo](#)

Get or set the date and time when this price expires.

[isDefault](#)

Indicates whether this is the default price for the product.

[isDerived](#)

Indicates whether this price is derived from another price.

[isSelected](#)

Indicates whether this price is currently selected.

[price](#)

Get or set the price value for the product.

[priceBookEntryId](#)

Get or set the ID of the price book entry.

[priceBookId](#)

Get or set the ID of the price book containing this price.

[pricingModel](#)

Get or set the pricing model associated with this price.

currencyIsoCode

Get or set the ISO currency code for the price.

Signature

```
public String currencyIsoCode {get; set;}
```

Property Value

Type: String

effectiveFrom

Get or set the date and time when this price becomes effective.

Signature

```
public String effectiveFrom {get; set;}
```

Property Value

Type: String

effectiveTo

Get or set the date and time when this price expires.

Signature

```
public String effectiveTo {get; set;}
```

Property Value

Type: String

isDefault

Indicates whether this is the default price for the product.

Signature

```
public Boolean isDefault {get; set;}
```

Property Value

Type: Boolean

isDerived

Indicates whether this price is derived from another price.

Signature

```
public Boolean isDerived {get; set;}
```

Property Value

Type: Boolean

isSelected

Indicates whether this price is currently selected.

Signature

```
public Boolean isSelected {get; set;}
```

Property Value

Type: Boolean

price

Get or set the price value for the product.

Signature

```
public Double price {get; set;}
```

Property Value

Type: Double

priceBookEntryId

Get or set the ID of the price book entry.

Signature

```
public String priceBookEntryId {get; set;}
```

Property Value

Type: String

priceBookId

Get or set the ID of the price book containing this price.

Signature

```
public String priceBookId {get; set;}
```

Property Value

Type: String

pricingModel

Get or set the pricing model associated with this price.

Signature

```
public runtime_industries_cpq.PricingModelOutputRepresentation pricingModel {get; set;}
```

Property Value

Type: [runtime_industries_cpq.PricingModelOutputRepresentation](#) on page 526

ProductQuantityOutputRepresentation Class

Represents the quantity constraints and current quantity for a product in the product discovery context.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductQuantityOutputRepresentation Properties](#)

ProductQuantityOutputRepresentation Properties

The following are properties for `ProductQuantityOutputRepresentation`.

[maxQuantity](#)

Get or set the maximum quantity allowed for the product.

[minQuantity](#)

Get or set the minimum quantity allowed for the product.

[quantity](#)

Get or set the current quantity of the product.

maxQuantity

Get or set the maximum quantity allowed for the product.

Signature

```
public Double maxQuantity {get; set;}
```

Property Value

Type: Double

minQuantity

Get or set the minimum quantity allowed for the product.

Signature

```
public Double minQuantity {get; set;}
```

Property Value

Type: Double

quantity

Get or set the current quantity of the product.

Signature

```
public Double quantity {get; set;}
```

Property Value

Type: Double

ProductRecommendationRule Class

Represents a product recommendation rule that is evaluated during product configuration. Product recommendation rules suggest additional products to users based on configuration conditions.

Namespace

[runtime__industries__cpq](#) on page 467

[ProductRecommendationRule Constructor](#)

Learn more about the constructor that's available with the ProductRecommendationRule class.

[ProductRecommendationRule Properties](#)

Contains properties to store product recommendation rule details from configuration rule evaluation.

ProductRecommendationRule Constructor

Learn more about the constructor that's available with the ProductRecommendationRule class.

The `ProductRecommendationRule` class includes this constructor.

[ProductRecommendationRule\(referenceId, productIds, message, recordType, target, scope\)](#)

Constructor to create a ProductRecommendationRule instance with the specified recommendation details.

```
ProductRecommendationRule(referenceId, productIds, message, recordType, target,  
scope)
```

Constructor to create a ProductRecommendationRule instance with the specified recommendation details.

Signature

```
public ProductRecommendationRule(String referenceId, List<String> productIds, String  
message, String recordType, String target, String scope)
```

Parameters

referenceId

Type: String

The reference ID of the product recommendation rule.

productIds

Type: List<String>

List of product IDs that are recommended.

message

Type: String

The message to display with the product recommendation.

recordType

Type: String

The record type associated with the recommendation.

target

Type: String

The target of the recommendation rule.

scope

Type: String

The scope of the recommendation rule.

ProductRecommendationRule Properties

Contains properties to store product recommendation rule details from configuration rule evaluation.

The `ProductRecommendationRule` class includes these properties.

[message](#)

Get the message value.

[productIds](#)

Get the list of productid.

[recordType](#)

Get the recordtype value.

[referenceId](#)

Get the ID of the reference.

[scope](#)

Get the scope value.

[target](#)

Get the target value.

message

Get the message value.

Signature

```
public String message {get; set;}
```

Property Value

Type: String

productId

Get the list of productid.

Signature

```
public List<String> productId {get; set;}
```

Property Value

Type: List<String>

recordType

Get the recordtype value.

Signature

```
public String recordType {get; set;}
```

Property Value

Type: String

referenceId

Get the ID of the reference.

Signature

```
public String referenceId {get; set;}
```

Property Value

Type: String

scope

Get the scope value.

Signature

```
public String scope {get; set;}
```

Property Value

Type: String

target

Get the target value.

Signature

```
public String target {get; set;}
```

Property Value

Type: String

ProductRelatedComponentOutputRepresentation Class

Represents a related component product in a bundle or product relationship, including component configuration details such as quantity constraints, required status, and relationship metadata.

Namespace

[runtime__industries__cpq](#) on page 467

[ProductRelatedComponentOutputRepresentation Properties](#)

ProductRelatedComponentOutputRepresentation Properties

The following are properties for `ProductRelatedComponentOutputRepresentation`.

[childProductId](#)

Get or set the identifier of the child product in the relationship.

[childSellingModelId](#)

Get or set the identifier of the child product's selling model in the relationship.

[doesBundlePriceIncludeChild](#)

Get or set whether the bundle price includes the price of this child component.

[id](#)

Get or set the unique identifier of the product related component relationship.

[isComponentRequired](#)

Get or set whether this component is required in the bundle or product relationship.

[isDefaultComponent](#)

Get or set whether this component is selected by default in the bundle or product relationship.

[isQuantityEditable](#)

Get or set whether the quantity of this component can be edited.

[maxQuantity](#)

Get or set the maximum quantity allowed for this component.

[minQuantity](#)

Get or set the minimum quantity required for this component.

[parentProductId](#)

Get or set the identifier of the parent product in the relationship.

[parentSellingModelId](#)

Get or set the identifier of the parent product's selling model in the relationship.

[productClassificationId](#)

Get or set the identifier of the product classification for this component.

[productComponentGroupId](#)

Get or set the identifier of the product component group that this component belongs to.

[productRelationshipTypeId](#)

Get or set the identifier of the product relationship type that defines this relationship.

[quantity](#)

Get or set the current quantity of this component.

[quantityScaleMethod](#)

Get or set the method used to scale the quantity of this component, such as "PerUnit" or "PerBundle".

[sequence](#)

Get or set the display sequence order of this component within the bundle or product relationship.

[unitOfMeasure](#)

Get or set the unit of measure for the quantity of this component.

[isExcluded](#)

Indicates whether excluded is true or false.

[quoteVisibility](#)

Get the quotevisibility value.

childProductId

Get or set the identifier of the child product in the relationship.

Signature

```
public String childProductId {get; set;}
```

Property Value

Type: String

childSellingModelId

Get or set the identifier of the child product's selling model in the relationship.

Signature

```
public String childSellingModelId {get; set;}
```

Property Value

Type: String

doesBundlePriceIncludeChild

Get or set whether the bundle price includes the price of this child component.

Signature

```
public Boolean doesBundlePriceIncludeChild {get; set;}
```

Property Value

Type: Boolean

id

Get or set the unique identifier of the product related component relationship.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isComponentRequired

Get or set whether this component is required in the bundle or product relationship.

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

isDefaultComponent

Get or set whether this component is selected by default in the bundle or product relationship.

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Get or set whether the quantity of this component can be edited.

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

maxQuantity

Get or set the maximum quantity allowed for this component.

Signature

```
public Double maxQuantity {get; set;}
```

Property Value

Type: Double

minQuantity

Get or set the minimum quantity required for this component.

Signature

```
public Double minQuantity {get; set;}
```

Property Value

Type: Double

parentProductId

Get or set the identifier of the parent product in the relationship.

Signature

```
public String parentProductId {get; set;}
```

Property Value

Type: String

parentSellingModelId

Get or set the identifier of the parent product's selling model in the relationship.

Signature

```
public String parentSellingModelId {get; set;}
```

Property Value

Type: String

productClassificationId

Get or set the identifier of the product classification for this component.

Signature

```
public String productClassificationId {get; set;}
```

Property Value

Type: String

productComponentGroupId

Get or set the identifier of the product component group that this component belongs to.

Signature

```
public String productComponentGroupId {get; set;}
```

Property Value

Type: String

productRelationshipTypeId

Get or set the identifier of the product relationship type that defines this relationship.

Signature

```
public String productRelationshipTypeId {get; set;}
```

Property Value

Type: String

quantity

Get or set the current quantity of this component.

Signature

```
public Double quantity {get; set;}
```

Property Value

Type: Double

quantityScaleMethod

Get or set the method used to scale the quantity of this component, such as "PerUnit" or "PerBundle".

Signature

```
public String quantityScaleMethod {get; set;}
```

Property Value

Type: String

sequence

Get or set the display sequence order of this component within the bundle or product relationship.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

unitOfMeasure

Get or set the unit of measure for the quantity of this component.

Signature

```
public ConnectApi.UnitOfMeasureOutputRepresentation unitOfMeasure {get; set;}
```

Property Value

Type: ConnectApi.UnitOfMeasureOutputRepresentation

isExcluded

Indicates whether excluded is true or false.

Signature

```
public Boolean isExcluded {get; set;}
```

Property Value

Type: Boolean

quoteVisibility

Get the quotevisibility value.

Signature

```
public String quoteVisibility {get; set;}
```

Property Value

Type: String

ProductSellingModelOptionOutputRepresentation Class

Represents a selling model option available for a product, which defines how the product can be sold (such as subscription, one-time, or usage-based).

Namespace

[runtime_industries_cpq](#) on page 467

[ProductSellingModelOptionOutputRepresentation Properties](#)

Learn more about the properties available with the ProductSellingModelOptionOutputRepresentation class.

ProductSellingModelOptionOutputRepresentation Properties

Learn more about the properties available with the ProductSellingModelOptionOutputRepresentation class.

The `ProductSellingModelOptionOutputRepresentation` class includes these properties.

[id](#)

Get or set the unique identifier of the product selling model option.

[productId](#)

Get or set the identifier of the product that this selling model option applies to.

[productSellingModel](#)

Get or set the product selling model details for this option.

[productSellingModelId](#)

Get or set the identifier of the product selling model for this option.

id

Get or set the unique identifier of the product selling model option.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

productId

Get or set the identifier of the product that this selling model option applies to.

Signature

```
public String productId {get; set;}
```

Property Value

Type: String

productSellingModel

Get or set the product selling model details for this option.

Signature

```
public runtime_industries_cpq.ProductSellingModelOutputRepresentation productSellingModel  
{get; set;}
```

Property Value

Type: runtime_industries_cpq.ProductSellingModelOutputRepresentation

productSellingModelId

Get or set the identifier of the product selling model for this option.

Signature

```
public String productSellingModelId {get; set;}
```

Property Value

Type: String

ProductSellingModelOutputRepresentation Class

Represents a product selling model that defines how a product is sold, including the selling model type, pricing term, and status.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductSellingModelOutputRepresentation Properties](#)

Learn more about the properties available with the ProductSellingModelOutputRepresentation class.

ProductSellingModelOutputRepresentation Properties

Learn more about the properties available with the ProductSellingModelOutputRepresentation class.

The `ProductSellingModelOutputRepresentation` class includes these properties.

id

Get or set the unique identifier of the product selling model.

name

Get or set the name of the product selling model.

pricingTerm

Get or set the pricing term value, which represents the duration or quantity for the pricing term unit.

pricingTermUnit

Get or set the unit for the pricing term, such as "Month", "Year", or "Day".

sellingModelType

Get or set the type of selling model, such as "Subscription", "OneTime", or "Usage".

status

Get or set the status of the product selling model, such as "Active" or "Inactive".

id

Get or set the unique identifier of the product selling model.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

name

Get or set the name of the product selling model.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

pricingTerm

Get or set the pricing term value, which represents the duration or quantity for the pricing term unit.

Signature

```
public Integer pricingTerm {get; set;}
```

Property Value

Type: Integer

pricingTermUnit

Get or set the unit for the pricing term, such as "Month", "Year", or "Day".

Signature

```
public String pricingTermUnit {get; set;}
```

Property Value

Type: String

sellingModelType

Get or set the type of selling model, such as "Subscription", "OneTime", or "Usage".

Signature

```
public String sellingModelType {get; set;}
```

Property Value

Type: String

status

Get or set the status of the product selling model, such as "Active" or "Inactive".

Signature

```
public String status {get; set;}
```

Property Value

Type: String

ProductSpecificationRecordTypeOutputRepresentation Class

Represents the record type information for a product specification, which defines the type of record used to store product specification data.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductSpecificationRecordTypeOutputRepresentation Properties](#)

Learn more about the properties available with the ProductSpecificationRecordTypeOutputRepresentation class.

ProductSpecificationRecordTypeOutputRepresentation Properties

Learn more about the properties available with the ProductSpecificationRecordTypeOutputRepresentation class.

The `ProductSpecificationRecordTypeOutputRepresentation` class includes these properties.

[isCommercial](#)

Get or set whether this product specification record type is commercial.

isCommercial

Get or set whether this product specification record type is commercial.

Signature

```
public Boolean isCommercial {get; set;}
```

Property Value

Type: Boolean

ProductSpecificationTypeOutputRepresentation Class

Represents a product specification type that defines the structure and attributes available for configuring a product.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductSpecificationTypeOutputRepresentation Properties](#)

Learn more about the properties available with the `ProductSpecificationTypeOutputRepresentation` class.

ProductSpecificationTypeOutputRepresentation Properties

Learn more about the properties available with the `ProductSpecificationTypeOutputRepresentation` class.

The `ProductSpecificationTypeOutputRepresentation` class includes these properties.

[name](#)

Get or set the name of the product specification type.

[productSpecificationRecordType](#)

Get or set the product specification record type associated with this specification type.

name

Get or set the name of the product specification type.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

productSpecificationRecordType

Get or set the product specification record type associated with this specification type.

Signature

```
public runtime_industries_cpq.ProductSpecificationRecordTypeOutputRepresentation
productSpecificationRecordType {get; set;}
```

Property Value

Type: runtime_industries_cpq.ProductSpecificationRecordTypeOutputRepresentation

ProductUnitOfMeasureOutputRepresentation Class

Represents a unit of measure that's available for a product, including whether it's the base or default unit and whether it's orderable.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductUnitOfMeasureOutputRepresentation Constructor](#)

Learn more about the constructor that's available with the ProductUnitOfMeasureOutputRepresentation class.

[ProductUnitOfMeasureOutputRepresentation Properties](#)

Contains properties to include unit of measure details for products.

ProductUnitOfMeasureOutputRepresentation Constructor

Learn more about the constructor that's available with the ProductUnitOfMeasureOutputRepresentation class.

The `ProductUnitOfMeasureOutputRepresentation` class includes this constructor.

[ProductUnitOfMeasureOutputRepresentation\(apexObj\)](#)

Constructor to create a ProductUnitOfMeasureOutputRepresentation instance from a ConnectApi.CPQProductUnitOfMeasureOutputRepresentation object.

ProductUnitOfMeasureOutputRepresentation (apexObj)

Constructor to create a ProductUnitOfMeasureOutputRepresentation instance from a ConnectApi.CPQProductUnitOfMeasureOutputRepresentation object.

Signature

```
public
ProductUnitOfMeasureOutputRepresentation (ConnectApi.CPQProductUnitOfMeasureOutputRepresentation
apexObj)
```

Parameters

apexObj

Type: ConnectApi.CPQProductUnitOfMeasureOutputRepresentation

The ConnectApi.CPQProductUnitOfMeasureOutputRepresentation object to convert to ProductUnitOfMeasureOutputRepresentation.

ProductUnitOfMeasureOutputRepresentation Properties

Contains properties to include unit of measure details for products.

The `ProductUnitOfMeasureOutputRepresentation` class includes these properties.

`id`

Get the ID of the product unit of measure.

`isBaseUnit`

Get whether the unit of measure is the base unit of measure for the product.

`isDefaultUnit`

Get whether the unit of measure is the default unit of measure for the product.

`isOrderable`

Get whether the product can be ordered in this unit of measure.

`sequence`

Get the sequence of the unit of measure.

`unitOfMeasureInfo`

Get the details of the unit of measure.

`id`

Get the ID of the product unit of measure.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

`isBaseUnit`

Get whether the unit of measure is the base unit of measure for the product.

Signature

```
public Boolean isBaseUnit {get; set;}
```

Property Value

Type: Boolean

isDefaultUnit

Get whether the unit of measure is the default unit of measure for the product.

Signature

```
public Boolean isDefaultUnit {get; set;}
```

Property Value

Type: Boolean

isOrderable

Get whether the product can be ordered in this unit of measure.

Signature

```
public Boolean isOrderable {get; set;}
```

Property Value

Type: Boolean

sequence

Get the sequence of the unit of measure.

Signature

```
public Integer sequence {get; set;}
```

Property Value

Type: Integer

unitOfMeasureInfo

Get the details of the unit of measure.

Signature

```
public runtime_industries_cpq.UnitOfMeasureOutputRepresentation unitOfMeasureInfo {get; set;}
```

Property Value

Type: [runtime_industries_cpq.UnitOfMeasureOutputRepresentation](#) on page 622

ProductVariantAttributeOutputRepresentation Class

Stores details of an attribute that defines a product variation, including the field and its label.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductVariantAttributeOutputRepresentation Constructors](#)

[ProductVariantAttributeOutputRepresentation Properties](#)

Contains properties of the ProductVariantAttributeOutputRepresentation class.

ProductVariantAttributeOutputRepresentation Constructors

The following are constructors for ProductVariantAttributeOutputRepresentation.

[ProductVariantAttributeOutputRepresentation\(\)](#)

Constructor to create a ProductVariantAttributeOutputRepresentation instance.

ProductVariantAttributeOutputRepresentation()

Constructor to create a ProductVariantAttributeOutputRepresentation instance.

Signature

```
public ProductVariantAttributeOutputRepresentation()
```

ProductVariantAttributeOutputRepresentation Properties

Contains properties of the ProductVariantAttributeOutputRepresentation class.

The ProductVariantAttributeOutputRepresentation class includes these properties.

[attributeSetItemId](#)

Get the ID of the variation attribute set item.

[fieldApiName](#)

Get the API name of the field that defines the variation attribute.

[fieldId](#)

Get the ID of the field that defines the variation attribute.

[fieldLabel](#)

Get the label of the field that defines the variation attribute.

attributeSetItemId

Get the ID of the variation attribute set item.

Signature

```
public String attributeSetItemId {get; set;}
```

Property Value

Type: String

fieldApiName

Get the API name of the field that defines the variation attribute.

Signature

```
public String fieldApiName {get; set;}
```

Property Value

Type: String

fieldId

Get the ID of the field that defines the variation attribute.

Signature

```
public String fieldId {get; set;}
```

Property Value

Type: String

fieldLabel

Get the label of the field that defines the variation attribute.

Signature

```
public String fieldLabel {get; set;}
```

Property Value

Type: String

ProductVariantAttributeSetOutputRepresentation Class

Stores the set of attributes that define the variations of a product.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductVariantAttributeSetOutputRepresentation Constructors](#)

[ProductVariantAttributeSetOutputRepresentation Properties](#)

Contains properties of the ProductVariantAttributeSetOutputRepresentation class.

ProductVariantAttributeSetOutputRepresentation Constructors

The following are constructors for `ProductVariantAttributeSetOutputRepresentation`.

[ProductVariantAttributeSetOutputRepresentation\(\)](#)

Constructor to create a `ProductVariantAttributeSetOutputRepresentation` instance.

`ProductVariantAttributeSetOutputRepresentation()`

Constructor to create a `ProductVariantAttributeSetOutputRepresentation` instance.

Signature

```
public ProductVariantAttributeSetOutputRepresentation()
```

ProductVariantAttributeSetOutputRepresentation Properties

Contains properties of the `ProductVariantAttributeSetOutputRepresentation` class.

The `ProductVariantAttributeSetOutputRepresentation` class includes these properties.

[attributes](#)

Get the map of variation attribute values, where the key is the attribute name and the value is the attribute value.

[description](#)

Get the description of the variation attribute set.

[developerName](#)

Get the developer name of the variation attribute set.

[id](#)

Get the ID of the variation attribute set.

[label](#)

Get the label of the variation attribute set.

attributes

Get the map of variation attribute values, where the key is the attribute name and the value is the attribute value.

Signature

```
public
Map<String, runtime_industries_cpq.ProductVariantAttributeValueOutputRepresentation>
attributes {get; set;}
```

Property Value

Type: `Map<String, runtime\_industries\_cpq.ProductVariantAttributeValueOutputRepresentation on page 603>`

description

Get the description of the variation attribute set.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

developerName

Get the developer name of the variation attribute set.

Signature

```
public String developerName {get; set;}
```

Property Value

Type: String

id

Get the ID of the variation attribute set.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

label

Get the label of the variation attribute set.

Signature

```
public String label {get; set;}
```

Property Value

Type: String

ProductVariantAttributeValueOutputRepresentation Class

Stores the value of a product variation attribute.

Namespace

[runtime_industries_cpq](#) on page 467

[ProductVariantAttributeValueOutputRepresentation Constructors](#)

[ProductVariantAttributeValueOutputRepresentation Properties](#)

Contains properties of the `ProductVariantAttributeValueOutputRepresentation` class.

ProductVariantAttributeValueOutputRepresentation Constructors

The following are constructors for `ProductVariantAttributeValueOutputRepresentation`.

[ProductVariantAttributeValueOutputRepresentation\(\)](#)

Constructor to create a `ProductVariantAttributeValueOutputRepresentation` instance.

ProductVariantAttributeValueOutputRepresentation()

Constructor to create a `ProductVariantAttributeValueOutputRepresentation` instance.

Signature

```
public ProductVariantAttributeValueOutputRepresentation()
```

ProductVariantAttributeValueOutputRepresentation Properties

Contains properties of the `ProductVariantAttributeValueOutputRepresentation` class.

The `ProductVariantAttributeValueOutputRepresentation` class includes these properties.

[attribute](#)

Get the variation attribute.

[value](#)

Get the value of the variation attribute.

attribute

Get the variation attribute.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeOutputRepresentation attribute  
{get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeOutputRepresentation](#) on page 599

value

Get the value of the variation attribute.

Signature

```
public Object value {get; set;}
```

Property Value

Type: Object

QocQualificationOutputRepresentation Class

Represents a quote, order, or contract qualification that determines whether a product can be sold based on specific business rules and conditions.

Namespace

[runtime__industries__cpq](#) on page 467

[QocQualificationOutputRepresentation Constructors](#)

[QocQualificationOutputRepresentation Properties](#)

Learn more about the properties available with the QocQualificationOutputRepresentation class.

QocQualificationOutputRepresentation Constructors

The following are constructors for `QocQualificationOutputRepresentation`.

[QocQualificationOutputRepresentation\(\)](#)

Constructs an empty QocQualificationOutputRepresentation instance.

`QocQualificationOutputRepresentation()`

Constructs an empty QocQualificationOutputRepresentation instance.

Signature

```
public QocQualificationOutputRepresentation()
```

QocQualificationOutputRepresentation Properties

Learn more about the properties available with the QocQualificationOutputRepresentation class.

The `QocQualificationOutputRepresentation` class includes these properties.

[productId](#)

Get or set the identifier of the product being qualified.

[qualificationContext](#)

Get or set the qualification context that contains the qualification result and reason.

productId

Get or set the identifier of the product being qualified.

Signature

```
public String productId {get; set;}
```

Property Value

Type: String

qualificationContext

Get or set the qualification context that contains the qualification result and reason.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: runtime_industries_cpq.QualificationContextOutputRepresentation

QualificationContextOutputRepresentation Class

Represents the context information used for product qualification, including account, opportunity, and other relevant context data for determining product eligibility.

Namespace

[runtime_industries_cpq](#) on page 467

[QualificationContextOutputRepresentation Properties](#)

Learn more about the properties available with the QualificationContextOutputRepresentation class.

QualificationContextOutputRepresentation Properties

Learn more about the properties available with the QualificationContextOutputRepresentation class.

The `QualificationContextOutputRepresentation` class includes these properties.

[isQualified](#)

Get or set whether the product is qualified based on the qualification rules.

[reason](#)

Get or set the reason for the qualification result, explaining why the product is qualified or not qualified.

isQualified

Get or set whether the product is qualified based on the qualification rules.

Signature

```
public Boolean isQualified {get; set;}
```

Property Value

Type: Boolean

reason

Get or set the reason for the qualification result, explaining why the product is qualified or not qualified.

Signature

```
public String reason {get; set;}
```

Property Value

Type: String

RelatedObjectFilter Class

Represents a filter for related objects used in product search and discovery, allowing you to filter products based on related object criteria.

Namespace

[runtime_industries_cpq](#) on page 467

[RelatedObjectFilter Properties](#)

Learn more about the properties available with the RelatedObjectFilter class.

RelatedObjectFilter Properties

Learn more about the properties available with the RelatedObjectFilter class.

The `RelatedObjectFilter` class includes these properties.

[criteria](#)

Get or set the list of filter criteria to apply to the related object.

[objectName](#)

Get or set the name of the related object to filter by, such as "Account" or "Opportunity".

criteria

Get or set the list of filter criteria to apply to the related object.

Signature

```
public List<runtime_industries_cpq.FilterCriteriaInputRepresentation> criteria {get; set; }
```

Property Value

Type: List<runtime_industries_cpq.FilterCriteriaInputRepresentation>

objectName

Get or set the name of the related object to filter by, such as "Account" or "Opportunity".

Signature

```
public String objectName {get; set; }
```

Property Value

Type: String

RelatedObjectFilterInputRepresentation Class

Represents input criteria for filtering products based on related object information, such as account, opportunity, or contract data.

Namespace

[runtime_industries_cpq](#) on page 467

[RelatedObjectFilterInputRepresentation Properties](#)

Learn more about the properties available with the RelatedObjectFilterInputRepresentation

RelatedObjectFilterInputRepresentation Properties

Learn more about the properties available with the RelatedObjectFilterInputRepresentation

The `RelatedObjectFilterInputRepresentation` class includes these properties.

[relatedObjectFilter](#)

Get or set the list of related object filters to apply when searching for products.

relatedObjectFilter

Get or set the list of related object filters to apply when searching for products.

Signature

```
public List<runtime_industries_cpq.RelatedObjectFilter> relatedObjectFilter {get; set; }
```

Property Value

Type: List<runtime_industries_cpq.RelatedObjectFilter>

SearchProductsFacetRepresentation Class

Represents a search facet that provides filtering and categorization options for product search results, such as categories, attributes, or other product characteristics.

Namespace

[runtime_industries_cpq](#) on page 467

[SearchProductsFacetRepresentation Properties](#)

Learn more about the properties available with the SearchProductsFacetRepresentation class.

SearchProductsFacetRepresentation Properties

Learn more about the properties available with the SearchProductsFacetRepresentation class.

The `SearchProductsFacetRepresentation` class includes these properties.

[attributeType](#)

Get or set the type of attribute this facet represents, such as "Picklist" or "Text".

[displayName](#)

Get or set the display name of the search facet.

[displayRank](#)

Get or set the display rank that determines the order in which this facet appears in search results.

[nameOrId](#)

Get or set the name or identifier of the attribute or category that this facet represents.

[values](#)

Get or set the list of facet values available for filtering, each representing a distinct option within this facet.

attributeType

Get or set the type of attribute this facet represents, such as "Picklist" or "Text".

Signature

```
public String attributeType {get; set;}
```

Property Value

Type: String

displayName

Get or set the display name of the search facet.

Signature

```
public String displayName {get; set;}
```

Property Value

Type: String

displayRank

Get or set the display rank that determines the order in which this facet appears in search results.

Signature

```
public Integer displayRank {get; set;}
```

Property Value

Type: Integer

nameOrId

Get or set the name or identifier of the attribute or category that this facet represents.

Signature

```
public String nameOrId {get; set;}
```

Property Value

Type: String

values

Get or set the list of facet values available for filtering, each representing a distinct option within this facet.

Signature

```
public List<runtime_industries_cpq.FacetValueRepresentation> values {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.FacetValueRepresentation>

SearchProductsRepresentation Class

Represents the results of a product search operation, including the list of products, search facets, pagination information, and total count of matching products.

Namespace

[runtime_industries_cpq](#) on page 467

[SearchProductsRepresentation Properties](#)

Learn more about the properties available with the SearchProductsRepresentation class.

SearchProductsRepresentation Properties

Learn more about the properties available with the SearchProductsRepresentation class.

The `SearchProductsRepresentation` class includes these properties.

[additionalFields](#)

Get or set additional custom fields for the product in the search results.

[attributeCategories](#)

Get or set the list of attribute categories that contain product attributes for configuration.

[availabilityDate](#)

Get or set the date when the product becomes available for sale.

[catalogs](#)

Get or set the list of catalogs that this product belongs to.

[childVariationIds](#)

Get the list of IDs of the child variations of the product.

[configureDuringSale](#)

Get or set whether the product can be configured during the sales process.

[description](#)

Get or set the description of the product in the search results. If data translation is set up and specified in the org, the translated description is available.

[discontinuedDate](#)

Get or set the date when the product was discontinued.

[displayUrl](#)

Get or set the URL to display additional information about the product.

[endOfLifeDate](#)

Get or set the end of life date for the product.

[id](#)

Get or set the ID of the product in the search results.

[isActive](#)

Get or set whether the product is active (true) or not (false) in the search results.

[isAssetizable](#)

Get or set whether the product can be converted to an asset after sale.

[isComponentRequired](#)

Get or set whether this component is required in a bundle or product relationship.

[isDefaultComponent](#)

Get or set whether this component is selected by default in a bundle or product relationship.

[isQuantityEditable](#)

Get or set whether the quantity of this product can be edited.

[isSoldOnlyWithOtherProds](#)

Get or set whether this product can only be sold with other products.

[name](#)

Get or set the name of the product in the search results. If data translation is set up and specified in the org, the translated name is available.

[nodeType](#)

Get or set the node type of the product, such as "Product" or "Bundle".

[prices](#)

Get or set the list of prices available for this product.

[productCategories](#)

Get the list of categories that the product belongs to.

[productClass](#)

Get the class of the product.

[productClassification](#)

Get or set the product classification information for this product.

[productCode](#)

Get or set the universal product code that's used to track the part that's used in the product.

[productComponentGroups](#)

Get or set the list of product component groups that organize related components.

[productInformation](#)

Get or set additional product information details.

[productPricingInformation](#)

Get or set the pricing information for this product, including price lists and pricing models.

[productQuantity](#)

Get or set the quantity constraints and current quantity for this product.

[productRelatedComponent](#)

Get or set the related component information for this product in bundle or product relationships.

[productSellingModelOptions](#)

Get or set the list of selling model options available for this product.

[productSpecificationType](#)

Get or set the product specification type that defines the structure and attributes for configuring this product.

[productType](#)

Get or set the type of product, such as "Product", "Service", or "Bundle".

[productUnitOfMeasures](#)

Get the list of units of measure for the product.

[qualificationContext](#)

Get or set the qualification context that contains the qualification result and reason for this product.

[status](#)

Get or set the status of the product, such as "Active" or "Inactive".

[unitOfMeasure](#)

Get or set the unit of measure for the quantity of this product.

variationAttributeSet

Get the variation attribute set of the product.

variationsCount

Get the number of variations of the product.

additionalFields

Get or set additional custom fields for the product in the search results.

Signature

```
public List<runtime_industries_cpq.AdditionalFieldsWrapper> additionalFields {get; set; }
```

Property Value

Type: List<runtime_industries_cpq.AdditionalFieldsWrapper>

attributeCategories

Get or set the list of attribute categories that contain product attributes for configuration.

Signature

```
public List<runtime_industries_cpq.AttributeCategoryOutputRepresentation> attributeCategories {get; set; }
```

Property Value

Type: List<runtime_industries_cpq.AttributeCategoryOutputRepresentation>

availabilityDate

Get or set the date when the product becomes available for sale.

Signature

```
public Datetime availabilityDate {get; set; }
```

Property Value

Type: Datetime

catalogs

Get or set the list of catalogs that this product belongs to.

Signature

```
public List<runtime_industries_cpq.CatalogOutputRepresentation> catalogs {get; set; }
```

Property Value

Type: List<runtime_industries_cpq.CatalogOutputRepresentation>

childVariationIds

Get the list of IDs of the child variations of the product.

Signature

```
public List<String> childVariationIds {get; set;}
```

Property Value

Type: List<String>

configureDuringSale

Get or set whether the product can be configured during the sales process.

Signature

```
public String configureDuringSale {get; set;}
```

Property Value

Type: String

description

Get or set the description of the product in the search results. If data translation is set up and specified in the org, the translated description is available.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

discontinuedDate

Get or set the date when the product was discontinued.

Signature

```
public Datetime discontinuedDate {get; set;}
```

Property Value

Type: Datetime

displayUrl

Get or set the URL to display additional information about the product.

Signature

```
public String displayUrl {get; set;}
```

Property Value

Type: String

endOfLifeDate

Get or set the end of life date for the product.

Signature

```
public Datetime endOfLifeDate {get; set;}
```

Property Value

Type: Datetime

id

Get or set the ID of the product in the search results.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

isActive

Get or set whether the product is active (true) or not (false) in the search results.

Signature

```
public Boolean isActive {get; set;}
```

Property Value

Type: Boolean

isAssetizable

Get or set whether the product can be converted to an asset after sale.

Signature

```
public Boolean isAssetizable {get; set;}
```

Property Value

Type: Boolean

isComponentRequired

Get or set whether this component is required in a bundle or product relationship.

Signature

```
public Boolean isComponentRequired {get; set;}
```

Property Value

Type: Boolean

isDefaultComponent

Get or set whether this component is selected by default in a bundle or product relationship.

Signature

```
public Boolean isDefaultComponent {get; set;}
```

Property Value

Type: Boolean

isQuantityEditable

Get or set whether the quantity of this product can be edited.

Signature

```
public Boolean isQuantityEditable {get; set;}
```

Property Value

Type: Boolean

isSoldOnlyWithOtherProds

Get or set whether this product can only be sold with other products.

Signature

```
public Boolean isSoldOnlyWithOtherProds {get; set;}
```

Property Value

Type: Boolean

name

Get or set the name of the product in the search results. If data translation is set up and specified in the org, the translated name is available.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

nodeType

Get or set the node type of the product, such as "Product" or "Bundle".

Signature

```
public String nodeType {get; set;}
```

Property Value

Type: String

prices

Get or set the list of prices available for this product.

Signature

```
public List<runtime_industries_cpq.ProductPricesOutputRepresentation> prices {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.ProductPricesOutputRepresentation>

productCategories

Get the list of categories that the product belongs to.

Signature

```
public List<runtime_industries_cpq.CategoryOutputRepresentation> productCategories {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.CategoryOutputRepresentation](#) on page 501>

productClass

Get the class of the product.

Signature

```
public String productClass {get; set;}
```

Property Value

Type: String

productClassification

Get or set the product classification information for this product.

Signature

```
public runtime_industries_cpq.ProductClassificationOutputRepresentation  
productClassification {get; set;}
```

Property Value

Type: runtime_industries_cpq.ProductClassificationOutputRepresentation

productCode

Get or set the universal product code that's used to track the part that's used in the product.

Signature

```
public String productCode {get; set;}
```

Property Value

Type: String

productComponentGroups

Get or set the list of product component groups that organize related components.

Signature

```
public List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>  
productComponentGroups {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.ProductComponentGroupOutputRepresentation>

productInformation

Get or set additional product information details.

Signature

```
public String productInformation {get; set;}
```

Property Value

Type: String

productPricingInformation

Get or set the pricing information for this product, including price lists and pricing models.

Signature

```
public String productPricingInformation {get; set;}
```

Property Value

Type: String

productQuantity

Get or set the quantity constraints and current quantity for this product.

Signature

```
public runtime_industries_cpq.ProductQuantityOutputRepresentation productQuantity {get; set;}
```

Property Value

Type: runtime_industries_cpq.ProductQuantityOutputRepresentation

productRelatedComponent

Get or set the related component information for this product in bundle or product relationships.

Signature

```
public ConnectApi.CPQProductRelatedComponentOutputRepresentation productRelatedComponent {get; set;}
```

Property Value

Type: ConnectApi.CPQProductRelatedComponentOutputRepresentation

productSellingModelOptions

Get or set the list of selling model options available for this product.

Signature

```
public List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation>
productSellingModelOptions {get; set;}
```

Property Value

Type: List<runtime_industries_cpq.ProductSellingModelOptionOutputRepresentation>

productSpecificationType

Get or set the product specification type that defines the structure and attributes for configuring this product.

Signature

```
public runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation
productSpecificationType {get; set;}
```

Property Value

Type: runtime_industries_cpq.ProductSpecificationTypeOutputRepresentation

productType

Get or set the type of product, such as "Product", "Service", or "Bundle".

Signature

```
public String productType {get; set;}
```

Property Value

Type: String

productUnitOfMeasures

Get the list of units of measure for the product.

Signature

```
public List<runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation>
productUnitOfMeasures {get; set;}
```

Property Value

Type: List<[runtime_industries_cpq.ProductUnitOfMeasureOutputRepresentation](#) on page 597>

qualificationContext

Get or set the qualification context that contains the qualification result and reason for this product.

Signature

```
public runtime_industries_cpq.QualificationContextOutputRepresentation  
qualificationContext {get; set;}
```

Property Value

Type: runtime_industries_cpq.QualificationContextOutputRepresentation

status

Get or set the status of the product, such as "Active" or "Inactive".

Signature

```
public String status {get; set;}
```

Property Value

Type: String

unitOfMeasure

Get or set the unit of measure for the quantity of this product.

Signature

```
public ConnectApi.UnitOfMeasureOutputRepresentation unitOfMeasure {get; set;}
```

Property Value

Type: ConnectApi.UnitOfMeasureOutputRepresentation

variationAttributeSet

Get the variation attribute set of the product.

Signature

```
public runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation  
variationAttributeSet {get; set;}
```

Property Value

Type: [runtime_industries_cpq.ProductVariantAttributeSetOutputRepresentation](#) on page 601

variationsCount

Get the number of variations of the product.

Signature

```
public Integer variationsCount {get; set;}
```

Property Value

Type: Integer

UnitOfMeasureOutputRepresentation Class

Represents the unit of measure for a product. This class contains information about how product quantities are measured, including the unit code, name, scale, and rounding method.

Namespace

[runtime_industries_cpq](#) on page 467

[UnitOfMeasureOutputRepresentation Constructor](#)

Learn more about the constructor that's available with the UnitOfMeasureOutputRepresentation class.

[UnitOfMeasureOutputRepresentation Properties](#)

Contains properties to include unit of measure details for products.

UnitOfMeasureOutputRepresentation Constructor

Learn more about the constructor that's available with the UnitOfMeasureOutputRepresentation class.

The `UnitOfMeasureOutputRepresentation` class includes this constructor.

[UnitOfMeasureOutputRepresentation\(apexObj\)](#)

Constructor to create a UnitOfMeasureOutputRepresentation instance from a ConnectApi UnitOfMeasureOutputRepresentation object.

UnitOfMeasureOutputRepresentation (apexObj)

Constructor to create a UnitOfMeasureOutputRepresentation instance from a ConnectApi UnitOfMeasureOutputRepresentation object.

Signature

```
public UnitOfMeasureOutputRepresentation (ConnectApi.UnitOfMeasureOutputRepresentation  
apexObj)
```


Parameters

apexObj

Type: ConnectApi.UnitOfMeasureOutputRepresentation

The ConnectApi unit of measure representation object to convert to UnitOfMeasureOutputRepresentation.

UnitOfMeasureOutputRepresentation Properties

Contains properties to include unit of measure details for products.

The `UnitOfMeasureOutputRepresentation` class includes these properties.

`id`

Get the ID of the unitofmeasure.

`name`

Get the name of the unitofmeasure.

`roundingMethod`

Get the roundingmethod value.

`scale`

Get the scale value.

`unitCode`

Get the unitcode value.

`id`

Get the ID of the unitofmeasure.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

`name`

Get the name of the unitofmeasure.

Signature

```
public String name {get; set;}
```

Property Value

Type: String

roundingMethod

Get the roundingMethod value.

Signature

```
public String roundingMethod {get; set;}
```

Property Value

Type: String

scale

Get the scale value.

Signature

```
public Integer scale {get; set;}
```

Property Value

Type: Integer

unitCode

Get the unitcode value.

Signature

```
public String unitCode {get; set;}
```

Property Value

Type: String

VisibilityRule Class

Represents a visibility rule that is evaluated during product configuration. Visibility rules control the visibility of products, attributes, or other UI elements based on configuration conditions.

Namespace

[runtime_industries_cpq](#) on page 467

[VisibilityRule Constructor](#)

Learn more about the constructor that's available with the VisibilityRule class.

[VisibilityRule Properties](#)

Contains properties to store visibility rule details from configuration rule evaluation.

VisibilityRule Constructor

Learn more about the constructor that's available with the `VisibilityRule` class.

The `VisibilityRule` class includes this constructor.

```
VisibilityRule(stiId, prcId, attributeId, attributePicklistValueId, target, scope, type, productIds, message)
```

Constructor to create a `VisibilityRule` instance with the specified visibility rule details.

```
VisibilityRule(stiId, prcId, attributeId, attributePicklistValueId, target, scope,  
type, productIds, message)
```

Constructor to create a `VisibilityRule` instance with the specified visibility rule details.

Signature

```
public VisibilityRule(String stiId, String prcId, String attributeId, String  
attributePicklistValueId, String target, String scope, String type, List<String>  
productIds, String message)
```

Parameters

stiId

Type: String

The ID of the Sales Transaction Item (STI) associated with this visibility rule.

prcId

Type: String

The ID of the Product Relationship Configuration (PRC) associated with this visibility rule.

attributeId

Type: String

The ID of the attribute associated with this visibility rule.

attributePicklistValueId

Type: String

The ID of the attribute picklist value associated with this visibility rule.

target

Type: String

The target of the visibility rule (for example, product, attribute, or component).

scope

Type: String

The scope of the visibility rule.

type

Type: String

The type of visibility rule (for example, Show or Hide).

productIds

Type: List<String>

List of product IDs affected by this visibility rule.

message

Type: String

The message to display when the visibility rule is applied.

VisibilityRule Properties

Contains properties to store visibility rule details from configuration rule evaluation.

The `VisibilityRule` class includes these properties.

[attributeId](#)

Get the ID of the attribute.

[attributePicklistValueId](#)

Get the ID of the attributepicklistvalue.

[message](#)

Get the message value.

[prcId](#)

Get the ID of the prc.

[productId](#)

Get the ID of the product.

[scope](#)

Get the scope value.

[stId](#)

Get the ID of the sti.

[target](#)

Get the target value.

[type](#)

Get the type value.

attributeId

Get the ID of the attribute.

Signature

```
public String attributeId {get; set;}
```

Property Value

Type: String

attributePicklistValueId

Get the ID of the attributepicklistvalue.

Signature

```
public String attributePicklistValueId {get; set;}
```

Property Value

Type: String

message

Get the message value.

Signature

```
public String message {get; set;}
```

Property Value

Type: String

prcId

Get the ID of the prc.

Signature

```
public String prcId {get; set;}
```

Property Value

Type: String

productId

Get the ID of the product.

Signature

```
public List<String> productId {get; set;}
```

Property Value

Type: List<String>

scope

Get the scope value.

Signature

```
public String scope {get; set;}
```

Property Value

Type: String

stiId

Get the ID of the sti.

Signature

```
public String stiId {get; set;}
```

Property Value

Type: String

target

Get the target value.

Signature

```
public String target {get; set;}
```

Property Value

Type: String

type

Get the type value.

Signature

```
public String type {get; set;}
```

Property Value

Type: String

Product Discovery Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Product Discovery](#)

Represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

[ProductDiscoverySettings](#)

Represents the settings for Product Discovery.

Flow for Product Discovery

Represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Product Discovery exposes additional `actionType` values for the `FlowActionCall` metadata type.

Field Name	Field Type	Description
<code>actionType</code>	<code>InvokableActionType</code> (enumeration of type string)	Required. The action type. Additional valid values for Product Discovery are <code>findProducts</code> —Search for the products from a catalog, category, or subcategory by using the specified search term, <code>GetProducts</code> —Get products from the specified catalog, category, or subcategory, including product qualification and pricing details, <code>GetProductDetails</code> —Get details such as attributes, hierarchy, and cardinality for the specified product, <code>executeQualificationProcedure</code> —Execute a qualification procedure, which returns the qualification status for the specified products, <code>getCatalogDetails</code> —Get details of a catalog record, <code>getCatalogs</code> —Get a list of catalog records, <code>getCategories</code> —Get the list of categories associated with a catalog record, <code>getCategoryDetails</code> —Get details of a category record, <code>getMultipleProductDetails</code> —Get product details for a list of products, <code>searchPrdctWithGuidedSelection</code> —Use guided product selection to search for products, or <code>getRecommendedProducts</code> —Retrieve a list of recommended products for a quote or order by using the Constraint Rule Engine.

ProductDiscoverySettings

Represents the settings for Product Discovery.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

`ProductDiscoverySettings` values are stored in the `ProductDiscoverySettings.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there is only one settings file for each settings component.

Version

`ProductDiscoverySettings` components are available in API version 62.0 and later.

Fields

Field Name	Field Type	Description
<code>enableGuidedSelling</code>	boolean	Indicates whether guided product selection is enabled (<code>true</code>) or not (<code>false</code>). Using guided product selection, you can manage dynamic forms that assess user requirements and show relevant products. The default value is <code>false</code> . Available in API version 63.0 and later.
<code>enableProdDiscConstraintRules</code>	boolean	Indicates whether to enable the Constraint Rules Engine within Product Discovery (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . If set to <code>true</code> , this setting activates constraint-based configuration rules so that the Constraint Rules Engine evaluates product selections during configuration. This step determines valid combinations based on defined constraints. Available in API version 67.0 and later.
<code>discoverProductsFlowNameOrgValue</code>	string	Name of the custom flow for browsing and adding products. If this field isn't specified, the Discover Products flow is used for browsing and adding products. Available in API version 63.0 and later.
<code>prodDiscBrowseContextDefOrgValue</code>	string	Context definition that gets updated based on the user-selected options and provides summary data.
<code>prodDiscDefaultCatalogOrgValue</code>	string	Default catalog that determines the products to be displayed on the product list page. Available in API version 64.0 and later.
<code>prodDiscPricingEnabledOrgValue</code>	string	Indicates whether pricing is enabled (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
<code>prodDiscProcedureOrgValue</code>	string	Pricing procedure that calculates the list price.
<code>prodDiscQualEnabledOrgValue</code>	string	Indicates whether product qualification is enabled (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
<code>prodDiscQualificationOrgValue</code>	string	Qualification procedure that determines product eligibility.

Declarative Metadata Sample Definition

The following is an example of a `ProductDiscoverySettings` component.

```
<ProductDiscoverySettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableGuidedSelling>true</enableGuidedSelling>
```



```

<discoverProductsFlowNameOrgValue>revenue_products__DiscoverProducts</discoverProductsFlowNameOrgValue>

    <prodDiscPricingEnabledOrgValue>true</prodDiscPricingEnabledOrgValue>
    <prodDiscQualEnabledOrgValue>true</prodDiscQualEnabledOrgValue>
    <prodDiscProcedureOrgValue>PricingProcedure</prodDiscProcedureOrgValue>
    <prodDiscQualificationOrgValue>QualificationProcedure</prodDiscQualificationOrgValue>

<prodDiscBrowseContextDefOrgValue>BrowseContextDefinition</prodDiscBrowseContextDefOrgValue>
</ProductDiscoverySettings>

```

The following is an example `package.xml` that references the previous definition.

```

<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
    <types>
        <members>ProductDiscovery</members>
        <name>Settings</name>
    </types>
    <version>68.0</version>
</Package>

```

Wildcard Support in the Manifest File

The wildcard character * (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

CHAPTER 5 Salesforce Pricing

In this chapter ...

- [Salesforce Pricing Standard Objects](#)
- [Salesforce Pricing Fields on Standard Objects](#)
- [Salesforce Pricing Business APIs](#)
- [Salesforce Pricing Apex Reference](#)
- [Salesforce Pricing Standard Invocable Actions](#)
- [Salesforce Pricing Metadata API Types](#)
- [Salesforce Pricing Tooling API Objects](#)

Create customized price adjustment methods and pricing procedures. Determine the discounts to apply to your products and services by using price adjustment methods. Get visibility into the pricing calculation process by using pricing procedures.

SEE ALSO:

[Salesforce Help: Permissions for Salesforce Pricing](#)

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions of Revenue Management where Salesforce Pricing is enabled

Salesforce Pricing Standard Objects

The Salesforce Pricing data model provides objects and fields to manage pricing processes, such as product management and calculation and application of discounts.

[AttributeAdjustmentCondition](#)

Represents the condition applied to an attribute that determines the price of a product or service being sold. This object is available in API version 60.0 and later.

[AttributeBasedAdjRule](#)

Represents the attribute conditions in a rule associated with the attribute based adjustment made for a product or service being sold. This object is available in API version 60.0 and later.

[AttributeBasedAdjustment](#)

Represents the association between the product selling model and the price adjustment for product or service being sold based on its attributes. This object stores information about the attributes that define the price of the product or service, the discounts applied, along with its value for a given date range. This object is available in API version 60.0 and later.

[AttributeDefinition](#)

Represents a product, asset, or object attribute, for example, a hardware specification or software detail. This object is available in API version 60.0 and later.

[BundleBasedAdjustment](#)

Represents the association between the product selling model and the price adjustment for a product or service being sold as a bundle. This object stores information of the product or service's price, the discounts applied, along with its value for a given date range. This object is available in API version 60.0 and later.

[CostBook](#)

Represents the cost book that contains multiple cost book entries. This object is available in API version 61.0 and later.

[ContractItemPrice](#)

Represents the price of a product on the contract. This object is available in API version 61.0 and later.

[CostBookEntry](#)

Represents the total cost of a product or service that's determined based on various factors that affect a product's price. For example, when a product is manufactured, the weight of the raw material can be a cost factor based on the amount of material required and its shipping cost. This object is available in API version 61.0 and later.

[PriceAdjustmentSchedule](#)

Represents a series of tiered discounts based on the number of items purchased. This object is available in API version 60.0 and later.

[PriceAdjustmentTier](#)

Represents a discount tier in a price adjustment schedule. This object is available in API version 60.0 and later.

[PriceBook2](#)

Represents a price book that contains the list of products that your org sells. This object is available in API version 60.0 and later.

[PriceBookEntry](#)

Represents a product entry (an association between a Pricebook2 and Product2) in a price book. This object is available in API version 60.0 and later.

[PriceBookEntryDerivedPrice](#)

Represents the price of a product that's derived from another source such as a product or an asset. This object is available in API version 61.0 and later.

[PriceRevisionPolicy](#)

Represents the guidelines and methods used to modify product or service prices, often incorporating formulas based on price revision entries and various adjustments. For example, a policy might dictate that prices are revised based on a formula that considers the regional Consumer Price Index (CPI) with a specific adjustment percentage, effective from a defined date, and categorized as either a flat adjustment or one directly based on the price revision entry data. This object is available in API version 65.0 and later.

[PricingAdjBatchJob](#)

Represents the collective update of multiple records on their prices and other adjustments. This object is available in API version 62.0 and later.

[PricingAdjBatchJobLog](#)

Represents the report that contains a list of failed adjustment requests along with an error message that describes the reason for failure. This object is available in API version 62.0 and later.

[PricingAPIExecution](#)

Represents the pricing resolution for an pricing element determined using strategy name and formula. This object is available in API version 63.0 and later.

[PricingProcedureResolution](#)

Represents a selection for a pricing procedure to execute a pricing process from a list of pricing procedures available. This object is available in API version 60.0 and later.

[PricingProcessExecution](#)

Represents a record generated during the execution of a discovery or pricing procedure. Multiple procedures may be performed within a single API call, with each recorded in a Pricing API Execution record. This object is available in API version 63.0 and later.

[ProductPriceHistoryLog](#)

Stores historical pricing data based on the product's price range. This object is available in API version 62.0 and later.

[ProductPriceRange](#)

Represents the price range of a product determined by using a product selling model that's stored in the relevant price book. This object is available in API version 62.0 and later.

[ProductSellingModel](#)

Defines one method by which a product can be sold; for example, as a one-time sale, an evergreen subscription, or a termed subscription. If the product is sold on subscription, this object defines the subscription's term. A product can have multiple product selling models. This object is available in API version 60.0 and later.

[ProductSellingModelDataTranslation](#)

Represents the translated values of the data stored within the ProductSellingModel record's fields. This object is available in API version 61.0 and later.

[ProductSellingModelOption](#)

A junction object between Product Selling Model and Product2. This object is available in API version 60.0 and later.

[ProcedurePlanCriterion](#)

The procedure plan option associated with the procedure plan criterion record. This object is available in API version 67.0 and later.

[ProrationPolicy](#)

Represents the proration policy associated with a Product Selling Model Option that determines how a product's price is calculated based on subscription duration or billing periods. This object is available in API version 67.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

AttributeAdjustmentCondition

Represents the condition applied to an attribute that determines the price of a product or service being sold. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

AttributeBasedAdjRuleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Specifies the attribute adjustment rule record for which the condition is to be applied.

This field is a relationship field.

Relationship Name: AttributeBasedAdjRule

Relationship Type: Lookup

Refers To: AttributeBasedAdjRule

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Specifies the attribute definition record for which the condition is to be applied.

This field is a relationship field.

Relationship Name: AttributeDefinition

Relationship Type: Lookup

Refers To: AttributeDefinition

BooleanValue

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the boolean value of the operator.

Possible values are `False` or `True`.

DateTimeValue

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date time value of the attribute.

DateValue

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date value of the attribute.

DoubleValue

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The double value of the attribute.

IntegerValue

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The integer value of the attribute.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Name of the attribute adjustment condition.

Operator

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Operator used by the attribute.

Possible values are `doesnotexistin`—Does Not Exist In, `equals`—Equals, `existsin`—Exists In, `greaterorequal`—Greater Or Equal, `greaterthan`—Greater Than, `lessorequal`—Less Or Equal, `lessthan`—Less Than, `matches`—Matches, or `notequals`—Not Equals.

The default value is `equals`.

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the product associated with the attribute adjustment condition.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

StringValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The string value of the attribute.

UsageType

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: The type of record where the attribute adjustment condition is used.

Possible values are:

- Pricing
- Rating

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttributeAdjustmentConditionFeed on page 2509: Feed tracking is available for the object.

AttributeAdjustmentConditionHistory on page 2515: History is available for tracked fields of the object.

AttributeBasedAdjRule

Represents the attribute conditions in a rule associated with the attribute based adjustment made for a product or service being sold. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AttributeCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of attributes.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute based adjustment rule was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Name of the attribute based adjustment rule.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the owner of the attribute based adjustment rule.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

UsageType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of record where the attribute-based adjustment rule is used.

Possible values are:

- Pricing
- Rating

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AttributeBasedAdjRuleFeed on page 2509: Feed tracking is available for the object.

AttributeBasedAdjRuleHistory on page 2515: History is available for tracked fields of the object.

AttributeBasedAdjRuleShare on page 2517: Sharing is available for the object.

AttributeBasedAdjustment

Represents the association between the product selling model and the price adjustment for product or service being sold based on its attributes. This object stores information about the attributes that define the price of the product or service, the discounts applied, along with its value for a given date range. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AdjustmentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of pricing adjustment being made.

Possible values are Amount, Override, or Percentage.

AdjustmentValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The value of the adjustment being made based on the adjustment type.

AttributeBasedAdjRuleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The attribute based adjustment rule associated with this attribute based adjustment record.

This field is a relationship field.

Relationship Name: AttributeBasedAdjRule

Relationship Type: Lookup

Refers To: AttributeBasedAdjRule

AttributeCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of attributes.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: ISO code of the currency. Must be one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as USD, GBP, or JPY. Must be unique within your organization.

Possible values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar.

The default value is USD.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the price list entry comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time till when the price list entry remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute based adjustment was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Name of the attribute based adjustment.

PriceAdjustmentScheduleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The price adjustment schedule associated with the attribute based adjustment record.

This field is a relationship field.

Relationship Name: PriceAdjustmentSchedule

Relationship Type: Lookup

Refers To: PriceAdjustmentSchedule

PricingTerm

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of pricing term units in the pricing term. Used with PricingTermUnit to define the length of the pricing term. For example, if PricingTermUnit is Months and this field is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null.

PricingTermUnit

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The unit of time used to define the pricing term. Used with PricingTerm to define the length of the pricing term. For example, if this field is Months and PricingTerm is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null.

Possible values are Annual—Years, Months, Quarterly, or Semi-Annual.

ProductId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product associated with the product attribute set.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the ProductSellingModel record associated with this attribute based adjustment record.

This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

SellingModelType

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates whether the product is sold as a one-time sale, an evergreen subscription, or a subscription with a defined term.

Possible values are `Evergreen`, `OneTime`—One Time, or `TermDefined`—Term-Defined.

The default value is `OneTime`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AttributeBasedAdjustmentFeed](#) on page 2509: Feed tracking is available for the object.

[AttributeBasedAdjustmentHistory](#) on page 2515: History is available for tracked fields of the object.

AttributeDefinition

Represents a product, asset, or object attribute, for example, a hardware specification or software detail. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: Code for the attribute definition. This field is unique within your organization.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. Possible values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar. The default value is USD.

DataType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The data type of the attribute definition. Possible values are Checkbox, Currency, Date, Datetime, Multipicklist, Number, Percent, Picklist, or Text.

DefaultHelpText

Type: textarea

Properties: Create, Nillable, Update

Description: The default help text for this attribute.

DefaultValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default value for this attribute.

Description

Type: textarea

Properties: Create, Nillable, Update

Description: Description of this attribute.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort

Description: The unique name of the attribute definition record. This name must begin with a letter and use only alphanumeric characters and underscores. It can't include spaces, end with an underscore, or have two consecutive underscores.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates that the attribute definition is active. Active attributes definitions can be selected for products. The default value is false.

IsRequired

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the attribute definition is required for a product. The default value is `false`.

Label

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The label for the attribute.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute definition was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the attribute definition was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the attribute.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The owner of the attribute definition. This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

PicklistId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the attribute picklist with the valid values for this attribute. This field is a relationship field.

Relationship Name: Picklist

Relationship Type: Lookup

Refers To: AttributePicklist

SourceSystemIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The identifier of the attribute definition in an external system.

ValueDescription

Type: textarea

Properties: Create, Nillable, Update

Description: The default value description for this attribute.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AttributeDefinitionFeed](#) on page 2509: Feed tracking is available for the object.

[AttributeDefinitionHistory](#) on page 2515: History is available for tracked fields of the object.

[AttributeDefinitionShare](#) on page 2517: Sharing is available for the object.

BundleBasedAdjustment

Represents the association between the product selling model and the price adjustment for a product or service being sold as a bundle. This object stores information of the product or service's price, the discounts applied, along with its value for a given date range. This object is available in API version 60.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),  
retrieve(), search(), undelete(), update(), upsert()
```

Fields

AdjustmentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of pricing adjustment being made.

Possible values are `Amount`, `Override`, or `Percentage`.

AdjustmentValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The type of pricing adjustment being made.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: ISO code of the currency. Must be one of the valid alphabetic, three-letter currency ISO codes defined by the ISO 4217 standard, such as USD, GBP, or JPY. Must be unique within your organization.

Possible values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar.

The default value is USD.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the bundle based adjustment comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time till when the bundle based adjustment remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the bundle based adjustment was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the bundle based adjustment was last viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the bundle based adjustment record.

ParentProductId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Represents the immediate parent in the product bundle that the price is configured for.

This field is a relationship field.

Relationship Name: ParentProduct

Relationship Type: Lookup

Refers To: Product2

ParentProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The immediate parent node of a product selling model when nodes are represented in a hierarchial structure.

This field is a relationship field.

Relationship Name: ParentProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

PriceAdjustmentScheduleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The price adjustment schedule associated with the bundle based adjustment record.

This field is a relationship field.

Relationship Name: PriceAdjustmentSchedule

Relationship Type: Lookup

Refers To: PriceAdjustmentSchedule

PricingTerm

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of pricing term units in the pricing term. Used with PricingTermUnit to define the length of the pricing term. For example, if PricingTermUnit is Months and this field is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null.

PricingTermUnit

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The unit of time used to define the pricing term. Used with PricingTerm to define the length of the pricing term. For example, if this field is Months and PricingTerm is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null.

Possible values are Annual—Years, Months, Quarterly, or Semi-Annual.

ProductId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the product associated with the product bundle set.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the ProductSellingModel record associated with this bundle based adjustment record.

This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

RootBundleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Represents the structural root product in a product's bundle that the price is configured for.

This field is a relationship field.

Relationship Name: RootBundle

Relationship Type: Lookup

Refers To: Product2

RootProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The root product selling model. The primary or base product selling method.

This field is a relationship field.

Relationship Name: RootProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

SellingModelType

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates whether the product is sold as a one-time sale, an evergreen subscription, or a subscription with a defined term.

Possible values are `Evergreen`, `OneTime`—One Time, or `TermDefined`—Term-Defined.

The default value is `OneTime`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[BundleBasedAdjustmentFeed](#) on page 2509: Feed tracking is available for the object.

[BundleBasedAdjustmentHistory](#) on page 2515: History is available for tracked fields of the object.

CostBook

Represents the cost book that contains multiple cost book entries. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Date and time when the cost book comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Date and time till when the cost book is no longer in effect.

IsDefault

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the cost book is default (`true`) or not (`false`).

The default value is `true`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Name of the cost book.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CostBookFeed on page 2509: Feed tracking is available for the object.

CostBookHistory on page 2515: History is available for tracked fields of the object.

CostBookShare on page 2517: Sharing is available for the object.

ContractItemPrice

Represents the price of a product on the contract. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

ContractId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The contract record associated with this contract item price record.

This field is a relationship field.

Relationship Name: Contract

Relationship Type: Master-detail

Refers To: Contract (the master object)

CurrencyIsoCode

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Contains the ISO code for any currency allowed by the organization. Available only if the multicurrency feature is enabled.

Valid value is `USD`—U.S. Dollar

The default value is `USD`.

DiscountType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit of the discount.

Valid values are `AdjustmentAmount` or `AdjustmentPercentage`.

DiscountValue

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The value of the discount.

EndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time till when the contract item price is no longer in effect.

ItemId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the line item record associated with this contract item price record.

This field is a polymorphic relationship field.

Relationship Name: Item

Relationship Type: Lookup

Refers To: Product2, ProductCategory

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the contract item price record.

Price

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit price of the product that's being sold as part of the contract.

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the product selling model record associated with this contract item price record.

This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

SellingModelType

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether the line item is sold as a one-time sale, an evergreen subscription, or a subscription with a defined term.

Valid values are `Evergreen`, `OneTime`, or `TermDefined`.

The default value is `OneTime`.

StartDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the contract item price comes into effect.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContractItemPriceFeed on page 2509: Feed tracking is available for the object.

ContractItemPriceHistory on page 2515: History is available for tracked fields of the object.

CostBookEntry

Represents the total cost of a product or service that's determined based on various factors that affect a product's price. For example, when a product is manufactured, the weight of the raw material can be a cost factor based on the amount of material required and its shipping cost. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Cost

Type: currency

Properties: Create, Filter, Sort, Update

Description: Total cost of the product.

CostBookId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the Cost Book record with which this record is associated.

This field is a relationship field.

Relationship Name: CostBook

Relationship Type: Master-detail

Refers To: CostBook (the master object)

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: ISO code for any currency allowed by the organization. Available only for organizations with the multicurrency feature enabled. Valid values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar.

The default value is USD.

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Description of this cost book entry record.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Date and time when the cost book entry comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Date and time till when the cost book entry is no longer in effect.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Name of the cost book entry.

ProductId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. ID of the Product2 record with which this record is associated. This field must be specified when creating Product2 records. This field can't be changed in an update.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CostBookEntryFeed on page 2509: Feed tracking is available for the object.

CostBookEntryHistory on page 2515: History is available for tracked fields of the object.

PriceAdjustmentSchedule

Represents a series of tiered discounts based on the number of items purchased. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AdjustmentMethod

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The method for applying tiered pricing. Possible values are `Range`—All items receive the discount of the highest tier the quantity falls in. or `Slab`—Items receive the discount defined for the tier they fall in. Possible values are `Range` or `Slab`. The default value is `Range`.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. Possible values are `BHD`—Bahraini Dinar, `JPY`—Japanese Yen, or `USD`—U.S. Dollar. The default value is `USD`.

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Text description of the price adjustment schedule.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the price adjustment schedule comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the price adjustment schedule remains effective.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the price adjustment schedule is active (true) or not (false). You can change this field's value as often as necessary. Label is **Active**. Default value is `False`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates whether the price adjustment schedule has been archived (true) or not (false). This field is read-only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the price adjustment schedule. This field is read-only. Label is Price Adjustment Schedule Name.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The Salesforce ID of the sales representative who owns the price adjustment schedule. This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Pricebook2Id

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The price book associated with this price adjustment schedule record. This field is a relationship field.

Relationship Name: Pricebook2

Relationship Type: Lookup

Refers To: Pricebook2

ScheduleType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of price adjustment schedule. Possible values are `Attribute`, `Bundle`, `Custom`, `Term`, or `Volume`. The default value is `Volume`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PriceAdjustmentScheduleShare](#) on page 2517: Sharing is available for the object.

PriceAdjustmentTier

Represents a discount tier in a price adjustment schedule. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

AdjustmentType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of price adjustment.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. Possible values are `BHD`—Bahraini Dinar, `JPY`—Japanese Yen, or `USD`—U.S. Dollar The default value is `USD`.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the price adjustment tier comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the price adjustment tier remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates when the user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

LowerBound

Type: double

Properties: Create, Filter, Sort, Update

Description: The minimum quantity the discount can be applied to. It must be a positive integer and less than or equal to the upper bound of the tier.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the price adjustment tier.

PriceAdjustmentScheduleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the price adjustment schedule that the discount is applied to. This field is a relationship field.

Relationship Name: PriceAdjustmentSchedule

Relationship Type: Lookup

Refers To: PriceAdjustmentSchedule

PricingTerm

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of pricing term units in the pricing term. Used with PricingTermUnit to define the length of the pricing term. For example, if PricingTermUnit is Months and this field is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null.

PricingTermUnit

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The unit of time used to define the pricing term. Used with PricingTerm to define the length of the pricing term. For example, if this field is Months and PricingTerm is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null. Possible values are `Annual—Years` or `Months`

Product2Id

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the product associated with the price adjustment tier. This field is a relationship field.

Relationship Name: Product2

Relationship Type: Lookup

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the ProductSellingModel record associated with this price adjustment tier record. This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

SellingModelType

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Indicates whether the product is sold as a one-time sale, an evergreen subscription, or a subscription with a defined term. Possible values are `Evergreen`, `OneTime—One Time`, or `TermDefined—Term-Defined`. The default value is `OneTime`.

TierType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The unit of the discount. Possible values are `AdjustmentAmount—An amount discounted from an item's list price` or `AdjustmentPercentage—A percentage discounted from an item's list price`. Possible values are `AdjustmentAmount—Amount`, `AdjustmentPercentage—Percentage`, or `OverrideAmount—Override`

TierValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The value of the discount.

UpperBound

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The maximum quantity the discount can be applied to. Must be a positive integer. Not inclusive. Set this value one digit higher than the quantity you want the tier to include. For example, if a tier's upper bound is 99, set the value of UpperBound to 100. For the last tier, the value is optional.

Usage

To use PriceAdjustmentTiers, associate them with a PriceAdjustmentSchedule.

Tiers can't overlap, and no gaps are allowed between tiers.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PriceAdjustmentTierFeed](#) on page 2509: Feed tracking is available for the object.

[PriceAdjustmentTierHistory](#) on page 2515: History is available for tracked fields of the object.

PriceBook2

Represents a price book that contains the list of products that your org sells. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization. Possible values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar. The default value is USD.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Text description of the price book.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the price book is active (true) or not (false). Inactive price books are hidden in many areas in the user interface. You can change this field's value as often as necessary. Label is **Active**. The default value is `false`.

IsArchived

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the price book has been archived (true) or not (false). This field is read only. The default value is `false`.

IsStandard

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the price book is the standard price book for the org (true) or not (false). Every org has one standard price book—all other price books are custom price books. The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. Name of this object. This field is read-only for the standard price book.

ValidFrom

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when a price book is initially valid. If this field is null, the price book is valid immediately when active.

ValidTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when a price book is valid to. If this field is null, the price book is valid until it's deactivated.

Usage

A price book is a list of products that your org sells.

- Each org has one standard price book that defines the standard or generic list price for each product or service that it sells.
- An org can have multiple custom price books to use for specialized purposes, such as for discounts, different channels or markets, or select accounts or opportunities. While your client application can create, delete, and update custom price books, your client application can only update the standard price book.
- For some orgs, the standard price book is the only price needed. If you set up other price books, you can reference the standard price book when setting up list prices in custom price books.

Use this object to query standard and custom price books that have been configured for your org. A common use of this object is to allow your client application to obtain valid Pricebook2 object IDs for use when configuring PricebookEntry records via the API.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PriceBook2ChangeEvent](#) on page 2507: Change events are available for the object.

[PriceBook2History](#) on page 2515: History is available for tracked fields of the object.

PriceBookEntry

Represents a product entry (an association between a Pricebook2 and Product2) in a price book. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization. Possible values are `BHD`—Bahraini Dinar, `JPY`—Japanese Yen, or `USD`—U.S. Dollar The default value is `USD`.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this price book entry is active (true) or not (false). Although you can never delete PricebookEntry records, your client application can set this flag to false. Inactive PricebookEntry records are hidden in many areas in the user interface. You can change this flag on a PricebookEntry record as often as necessary. The default value is `false`.

IsArchived

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the PricebookEntry has been archived (true) or not (false). This field is set to true when the Product2 record it's associated with is archived, or when the Pricebook2 record is archived. This field is read only. The default value is `false`.

Name

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Name of this price book entry record. This read-only field references the value in the Name field of the Product2 record.

Pricebook2Id

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. ID of the Pricebook2 record with which this record is associated. This field must be specified when creating Pricebook2 records. It can't be changed in an update. This field is a relationship field.

Relationship Name: Pricebook2

Relationship Type: Lookup

Refers To: Pricebook2

Product2Id

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. ID of the Product2 record with which this record is associated. This field must be specified when creating Product2 records. It can't be changed in an update. This field is a relationship field.

Relationship Name: Product2

Relationship Type: Lookup

Refers To: Product2

ProductCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Product code for this record. This read-only field references the value in the ProductCode field of the associated Product2 record.

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the related product selling model. This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

UnitPrice

Type: currency

Properties: Create, Filter, Sort, Update

Description: Required. Unit price for this price book entry. You can specify a value only if UseStandardPrice is set to false.

UseStandardPrice

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this price book entry uses the standard price defined in the standard Pricebook2 record (true) or not (false). If set to true, then the UnitPrice field is read-only, and the value is the same as the UnitPrice value in the corresponding PricebookEntry in the standard price book (that is, the PricebookEntry record whose Pricebook2Id refers to the standard price book and whose Product2Id and CurrencyIsoCode are the same as this record). For PricebookEntry records associated with the standard Pricebook2 record, this field must be set to true. The default value is `false`.

Usage

Use this object to define the association between your organization's products (Product2) and your organization's standard price book or to custom price books (Pricebook2). Create one PricebookEntry record for each standard or custom price and currency combination for a product in a Pricebook2.

When creating these records, you must specify the IDs of the associated Pricebook2 record and Product2 record. Once these records are created, your client application can't update these IDs.

This object is defined only for those organizations that have products enabled as a feature. If the organization doesn't have the products feature enabled, then the PricebookEntry object doesn't appear in the describeGlobal call, and you can't access it.

If you delete a PriceBookEntry that is referenced by a line item, the line item is unaffected, but the PriceBookEntry is archived and unavailable from the API. Deleted PriceBookEntry records can't be recovered.

You must load the standard price for a product before you're permitted to load its custom prices.

Create PriceBookEntry records by using this sObject API.

```
https://yourInstance.salesforce.com/services/data/v68.0/objects/PricebookEntry
```

This example shows a sample request that specifies the details of a price book entry.

```
{
  "ProductSellingModelId": "0jPxx0000000005EAA",
  "Product2Id": "01tLT00000A0YT1YAN",
  "IsActive": true,
  "Pricebook2Id": "01s1W000000SYXNQ4",
  "UnitPrice": "100.00"
}
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PriceBookEntryChangeEvent](#) on page 2507: Change events are available for the object.

[PriceBookEntryHistory](#) on page 2515: History is available for tracked fields of the object.

PriceBookEntryDerivedPrice

Represents the price of a product that's derived from another source such as a product or an asset. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ContributingProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: Source product from which the derived price is calculated. The source product is associated with the derived price product.

This field is a relationship field.

Relationship Name: ContributingProduct

Relationship Type: Lookup

Refers To: Product2

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: ISO code for any currency allowed by the organization. Available only if the multicurrency feature is enabled.

Valid values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar.

The default value is `USD`.

DerivedPricingScope

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Scope of the product based on which the derived price is calculated.

Valid values are `Both`, `NonTransactional`, or `Transactional`.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Date and time when the derived pricing comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Date and time when the derived pricing is no longer in effect.

Formula

Type: string

Properties: Create, Filter, Sort, Update

Description: Coded format of the formula used to calculate the derived price of a product from another product or asset.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (`LastReferencedDate`) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Name of the derived price record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

PricebookEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Price book entry associated with the source product.

This field is a relationship field.

Relationship Name: PricebookEntry

Relationship Type: Lookup

Refers To: PricebookEntry

PricebookId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: Price book associated with the source product.

This field is a relationship field.

Relationship Name: Pricebook

Relationship Type: Lookup

Refers To: Pricebook2

PricingSource

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Pricing type used to calculate the derived price of the product.

Valid values are `Header` or `Product`.

ProductId

Type: reference

Properties: Filter, Group, Sort

Description: Product associated with the derived pricing.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Filter, Group, Sort

Description: Product selling model associated with this record.

This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PriceBookEntryDerivedPriceFeed on page 2509: Feed tracking is available for the object.

PriceBookEntryDerivedPriceHistory on page 2515: History is available for tracked fields of the object.

PriceBookEntryDerivedPriceShare on page 2517: Sharing is available for the object.

PriceRevisionPolicy

Represents the guidelines and methods used to modify product or service prices, often incorporating formulas based on price revision entries and various adjustments. For example, a policy might dictate that prices are revised based on a formula that considers the regional Consumer Price Index (CPI) with a specific adjustment percentage, effective from a defined date, and categorized as either a flat adjustment or one directly based on the price revision entry data. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

EffectiveFrom

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date and time when the price revision policy comes into effect.

EffectiveTo

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date and time when the price revision policy is no longer in effect.

Formula

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The coded format of the formula used to calculate the revised price of a product from a quote and order, or contract.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the price revision policy.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PolicyType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of price revision policy.

Valid values are `Flat`—You can't define a price index-based formula for revision or `PriceIndex`—Price Index.

Region

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The region where the price revision policy is valid.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PriceRevisionPolicyFeed on page 2509: Feed tracking is available for the object.

PriceRevisionPolicyHistory on page 2515: History is available for tracked fields of the object.

PriceRevisionPolicyShare on page 2517: Sharing is available for the object.

PricingAdjBatchJob

Represents the collective update of multiple records on their prices and other adjustments. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the updated value can be considered for a pricing adjustment batch job.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time until when the updated value is effective and can be considered for a pricing adjustment batch job.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates whether the pricing adjustment batch job has been archived (`true`) or not (`false`). This field is read-only.

LastTriggeredDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the pricing adjustment batch job was last triggered.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (`LastReferencedDate`) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the pricing adjustment batch job.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The Salesforce ID of the sales representative who owns the pricing procedure resolution.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProcessedRecordsCount

Type: long

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The total number of records that were successfully updated.

RecordCount

Type: long

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The total number of records that have been processed.

RecordList

Type: textarea

Properties: Create

Description: The list of record IDs eligible for a pricing adjustment batch job.

ShouldSkipBulkRetry

Type: boolean

Properties: Create, Filter, Group, Nillable, Sort

Description: For internal use only.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The processing status of the pricing adjustment batch job.

Valid values are Completed, Failed, InProgress, New, PartiallyCompleted, or Rerun.

TargetObject

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The target object of the pricing adjustment batch job.

Valid values are AttributeBasedAdjustment, BundleBasedAdjustment, PriceAdjustmentTier, or PricebookEntry.

UpdateType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of update being made by the pricing adjustment batch job.

Valid values are Amount, Override, or Percentage.

UpdateValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The numerical value of the update.

Usage

To execute a pricing adjustment batch job through an API request, make a POST request to the `/services/data/v68.0/objects/PricingAdjBatchJob` resource. Here's a sample request payload.

```
{
  "TargetObject": "PriceAdjustmentTier",
  "UpdateType": "Amount",
  "UpdateValue": "10",
  "RecordList": "84YDU00000010ig2AA,84YDU00000010ig2AB,84YDU00000010ig2AC",
  "EffectiveFrom": "2024-08-01T10:07:09.000+0000",
  "EffectiveTo": "2024-08-05T10:07:09.000+0000"
}
```

You can specify a comma-separated list of record IDs that are eligible for a pricing adjustment batch job.

To rerun a pricing adjustment batch job, make a PATCH request to the `/services/data/v68.0/objects/PricingAdjBatchJob/pricingAdjBatchJobID` resource. Here's a sample request payload.

```
{
  "Status": "Rerun"
}
```

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PricingAdjBatchJobFeed on page 2509: Feed tracking is available for the object.

PricingAdjBatchJobHistory on page 2515: History is available for tracked fields of the object.

PricingAdjBatchJobShare on page 2517: Sharing is available for the object.

PricingAdjBatchJobLog

Represents the report that contains a list of failed adjustment requests along with an error message that describes the reason for failure. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AdjustedValue

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The adjusted value of a record. The stored value is used even if another pricing adjustment batch job is triggered again.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the failed versioned record is generated. This is only applicable for Price Adjustment records.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time until when the failed versioned record is available. This is applicable only for Price Adjustment records.

ErrorCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The error code for the failure during the record update process.

ErrorMessage

Type: textarea

Properties: Create, Update

Description: The error message that's generated for the failure during the record update process.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates whether the pricing adjustment batch job has been archived (`true`) or not (`false`). This field is read-only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (`LastReferencedDate`) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The name of the pricing adjustment batch job.

PricingAdjBatchJobId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The pricing adjustment batch job associated with the pricing adjustment batch job log.

This field is a relationship field.

Relationship Name: PricingAdjBatchJob

Relationship Type: Master-detail

Refers To: PricingAdjBatchJob (the master object)

TargetRecord

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The ID of the record for which a pricing adjustment error was generated.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PricingAdjBatchJobLogFeed: Feed tracking is available for the object.

PricingAdjBatchJobLogHistory on page 2515: History is available for tracked fields of the object.

PricingAPIExecution

Represents the pricing resolution for an pricing element determined using strategy name and formula. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ApiEndpoint

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unique API endpoint that is called.

ApiType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the API type of the pricing API execution.

Possible values are NGP.

The default value is NGP.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization.

Possible values are:

- BHD—Bahraini Dinar
- JPY—Japanese Yen
- USD—U.S. Dollar

The default value is USD.

ExecutionKey

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique execution ID generated each time a pricing API runs.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The Salesforce ID of the sales representative who owns the pricing procedure resolution.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ReferenceKey

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Optional. The reference ID that a consuming workstream must pass in the API to search for specific logs in the Pricing Operations Console.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the API response.

Possible values are `Failure`, `Partial_Success`—Partial Success, or `Success`.

The default value is `Success`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PricingAPIExecutionFeed on page 2509: Feed tracking is available for the object.

PricingAPIExecutionHistory on page 2515: History is available for tracked fields of the object.

PricingAPIExecutionShare on page 2517: Sharing is available for the object.

PricingProcedureResolution

Represents a selection for a pricing procedure to execute a pricing process from a list of pricing procedures available. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization.

Possible values are BHD—Bahraini Dinar, JPY—Japanese Yen, or USD—U.S. Dollar.

The default value is USD.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the pricing procedure resolution comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time till when the pricing procedure resolution remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates whether the pricing procedure resolution has been archived (true) or not (false). This field is read-only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (LastReferencedDate) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The name of the pricing procedure resolution.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The Salesforce ID of the sales representative who owns the pricing procedure resolution.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

PricingProcedureId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The pricing procedure record associated with this pricing procedure resolution.

This field is a relationship field.

Relationship Name: PricingProcedure

Relationship Type: Lookup

Refers To: ExpressionSet

ProcedureType

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The pricing data store associated with this pricing recipe field mappings.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PricingProcedureResolutionFeed on page 2509: Feed tracking is available for the object.

PricingProcedureResolutionHistory on page 2515: History is available for tracked fields of the object.

PricingProcedureResolutionShare on page 2517: Sharing is available for the object.

PricingProcessExecution

Represents a record generated during the execution of a discovery or pricing procedure. Multiple procedures may be performed within a single API call, with each recorded in a Pricing API Execution record. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only if the multicurrency feature is enabled. Contains the ISO code for any currency allowed by the organization.

Possible values are:

- BHD—Bahraini Dinar
- JPY—Japanese Yen
- USD—U.S. Dollar

The default value is `USD`.

ExecutionKey

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The unique execution ID generated each time a pricing API runs.

ExecutionType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of execution defined internally within the pricing API.

Possible values are `Api_Execution`—Api Execution, `Discovery`, `Discovery_Line`—Discovery Line, `Pricing`, or `Pricing_Line`—Pricing Line.

The default value is `Pricing`.

ExecutionTypeKey

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique execution type ID generated internally for procedure executions, such as pricing or discovery procedures.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (`LastReferencedDate`) and not viewed.

Message

Type: textarea

Properties: Create, Nillable, Update

Description: The message generated upon running a pricing process.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The Salesforce ID of the sales representative who owns the pricing procedure resolution.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the status of the execution type.

Possible values are `Failure`, `Partial_Success`—Partial Success, or `Success`.

The default value is `Success`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PricingProcessExecutionFeed on page 2509: Feed tracking is available for the object.

PricingProcessExecutionHistory on page 2515: History is available for tracked fields of the object.

PricingProcessExecutionShare on page 2517: Sharing is available for the object.

ProductPriceHistoryLog

Stores historical pricing data based on the product's price range. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: ISO code for any currency allowed by the organization. Available only for organizations with the multicurrency feature enabled.

Valid values are `BHD`—Bahraini Dinar, `JPY`—Japanese Yen, or `USD`—U.S. Dollar.

The default value is `USD`.

Date

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: The date when the product price history log record is created.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates whether the product price history log has been archived (`true`) or not (`false`). This field is read-only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (`LastReferencedDate`) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The name of the product price history log.

ProductPriceRanged

Type: reference

Properties: Create, Filter, Group, Sort

Description:

The product price range associated with this product price history log record.

This field is a relationship field.

Relationship Name: ProductPriceRange

Relationship Type: Master-detail

Refers To: ProductPriceRange (the master object)

TrackedPrice

Type: currency

Properties: Create, Filter, Sort, Update

Description: The price for a product recorded for a particular date.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductPriceHistoryLogFeed on page 2509: Feed tracking is available for the object.

ProductPriceHistoryLogHistory on page 2515: History is available for tracked fields of the object.

ProductPriceRange

Represents the price range of a product determined by using a product selling model that's stored in the relevant price book. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: ISO code for any currency allowed by the organization. Available only for organizations with the multicurrency feature enabled.

Valid values are `BHD`—Bahraini Dinar, `JPY`—Japanese Yen, or `USD`—U.S. Dollar.

The default value is `USD`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates whether the product price range has been archived (`true`) or not (`false`). This field is read-only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (`LastReferencedDate`) and not viewed.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The name of the product price range.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The Salesforce ID of the sales representative who owns the product price range.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The product for which the price range is being determined.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The product selling model used to determine the price range of the product.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

RecordedPrice

Type: currency

Properties: Filter, Nillable, Sort

Description: The selected price of the product over a range of prices.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductPriceRangeFeed on page 2509: Feed tracking is available for the object.

ProductPriceRangeHistory on page 2515: History is available for tracked fields of the object.

ProductPriceRangeShare on page 2517: Sharing is available for the object.

ProductSellingModel

Defines one method by which a product can be sold; for example, as a one-time sale, an evergreen subscription, or a termed subscription. If the product is sold on subscription, this object defines the subscription's term. A product can have multiple product selling models. This object is available in API version 60.0 and later.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),  
retrieve(), search(), undelete(), update(), upsert()
```

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates when the user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Indicates when the user last viewed this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name given to the product selling model.

PricingTerm

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of pricing term units in the pricing term. Used with PricingTermUnit to define the length of the pricing term. For example, if PricingTermUnit is Months and this field is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null.

PricingTermUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit of time used to define the pricing term. Used with PricingTerm to define the length of the pricing term. For example, if this field is Months and PricingTerm is 1, the subscription is priced monthly. If the selling model is one-time, this field must be null. Possible values are Months, Quarterly, Semi-Annual, or Annual

SellingModelType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Indicates whether the product is sold as a one-time sale, an evergreen subscription, or a subscription with a defined term. Possible values are Evergreen, OneTime, or TermDefined. The default value is OneTime.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the product selling model. Possible values are Active, Draft, or Inactive. The default value is Draft.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ProductSellingModelFeed](#) on page 2509: Feed tracking is available for the object.

[ProductSellingModelHistory](#) on page 2515: History is available for tracked fields of the object.

ProductSellingModelDataTranslation

Represents the translated values of the data stored within the ProductSellingModel record's fields. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Unlimited, or Developer edition.

- Translation Workbench and data translation must be enabled in your org.
- To view this object, you must have the “View Setup and Configuration” permission.

Fields

IsOutOfDate

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the translation is out-of-date (`true`) or current (`false`). A translation is out-of-date if the parent Product2 record is updated after the last translation was filed.

Language

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The language for these translated values.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The translated value for the ProductSellingModel record name. This field is required to translate the text in other fields.

ParentId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the ProductSellingModel record associated with the data that’s being translated.

This field is a relationship field.

Relationship Name: Parent

Relationship Type: Lookup

Refers To: ProductSellingModel

Usage

Use this object to translate the data stored in a ProductSellingModel record into the different languages supported by Salesforce. If data translation is enabled for custom fields on the ProductSellingModel object, additional ProductSellingModelDataTranslation fields exist for translating the data contained within those fields.

You can’t use a custom external id field in an upsert call for a ProductSellingModelDataTranslation object.

ProductSellingModelOption

A junction object between Product Selling Model and Product2. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Description

Type: textarea

Properties: Create, Nillable, Update

Description: The description of the product selling model option.

DisplayName

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product selling model option to display to customers.

Increment

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of pricing term units that can be used to increase a subscription term.

IsDefault

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates the default product selling model for a product. Setting a default is optional. A product can only have one default product selling model. The default value is `false`. This field requires Industries EPC.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view but not viewed it.

Maximum

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of pricing term units for a subscription term.

Minimum

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum number of pricing term units for a subscription term.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the product selling model option.

Product2Id

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the Product2 record associated with this ProductSellingModelOption record. This field is a relationship field.

Relationship Name: Product2

Relationship Type: Lookup

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the ProductSellingModel record associated with this ProductSellingModelOption record. This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

ProrationPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the ProrationPolicy record associated with this ProductSellingModelOption record. This field is a relationship field.

Relationship Name: ProrationPolicy

Relationship Type: Lookup

Refers To: ProrationPolicy

ProcedurePlanCriterion

The procedure plan option associated with the procedure plan criterion record. This object is available in API version 67.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

ActualValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The user-defined value that is compared to the value of the SObject field value.

DataType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The data type of the field from the selected object.

FieldPath

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The path of the field used in a procedure in relation to the object that the field belongs to.

ObjectField

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The object field value used to resolve the procedure plan option.

Operator

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the operator used by the procedure plan criterion.

Possible values are:

- Equals

- GreaterThan
- GreaterThanOrEquals
- In
- IsNotNull
- IsNull
- LessThan
- LessThanOrEquals
- NotEquals
- NotIn

ProcedurePlanOptionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: This field is a relationship field.

Relationship Name: ProcedurePlanOption

Relationship Type: Master-detail

Refers To: ProcedurePlanOption (the master object)

Sequence

Type: int

Properties: Create, Filter, Group, Sort

Description: The sequence in which the conditions defined in the procedure plan criteria are processed.

ProrationPolicy

Represents the proration policy associated with a Product Selling Model Option that determines how a product's price is calculated based on subscription duration or billing periods. This object is available in API version 67.0 and later.

Supported Calls

```
create(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(), retrieve(), search()
```

Fields

ArePartialPeriodsAllowed

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort

Description: Indicates whether partial periods should be allowed for standard time periods. The default value is false.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the proration policy was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the proration policy was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort

Description: The name of the proration policy.

ProrationPolicyType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The type of proration policy to be used. Possible values are `StandardTimePeriods`—Standard Time Periods

RemainderStrategy

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The type of remainder strategy to be used.

Salesforce Pricing Fields on Standard Objects

Salesforce Pricing adds standard fields to some standard Salesforce objects of other features to represent information specific to pricing. These fields are available only in orgs where Salesforce Pricing is enabled.

[IndexRate](#)

Standard fields extend the `IndexRate` object for use in Salesforce Pricing to represent information for a given rate. This object is available in API version 65.0 and later.

IndexRate

Standard fields extend the `IndexRate` object for use in Salesforce Pricing to represent information for a given rate. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Region

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Specified the region associated with the given rate.

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the usage type associated with the given rate.

Possible values are `Pricing`

Salesforce Pricing Business APIs

Perform pricing request, create context instance, sync pricing data, and manage pricing recipes and pricing waterfall details by using Salesforce Pricing Business APIs.

This table lists the available Salesforce Pricing resources.

Resource	Description
/connect/core-pricing/price-contexts/<i>contextid</i> (POST)	Perform a pricing request by using the instance ID of a context.
/connect/core-pricing/pricing (POST)	Create and hydrate context instance in a single request. Provide a comprehensive response that contains final pricing details per line items and related errors, if any.
/connect/core-pricing/sync/<i>pricingSyncOrigin</i> (GET)	Sync pricing data to ensure that the lookup tables contain the latest pricing data.
/connect/core-pricing/recipe (GET)	Get the mapping details of pricing recipes to the associated pricing recipe table.

Resource	Description
/connect/core-pricing/revenue/pricing-recipe/valid-elements (GET)	Get the list of valid pricing element type API names for a given Pricing Usage Sub Type.
/connect/core-pricing/revenue/pricing-recipe/clone (POST)	Clone a pricing recipe with all its associated pricing recipe table mappings.
/connect/core-pricing/recipe/mapping (POST)	Create a mapping between the pricing recipe and the Decision Tables. Post recipes with lookup tables or procedures.
/connect/core-pricing/versioned-revise-details (POST)	Create revisions of a pricing request with versions for adjustment entities.
/connect/core-pricing/waterfall/lineItemId/executionId (GET)	Get the persisted price waterfall that stores the process logs. Price waterfall provides insights into every step of the pricing process.
/connect/core-pricing/waterfall (POST)	Create a log of price waterfall. Price waterfall provides insights into every step of the pricing process.
/connect/core-pricing/pbeDerivedPricingSourceProduct (POST)	Get the source product for the Price Book Entry (PBE) derived pricing.
/connect/core-pricing/apiexecutionlogs/executionId (GET)	Get the log details of a pricing API execution record by using the execution ID.
/connect/core-pricing/pricing-process-execution/executionId (GET)	Get the execution details of a pricing process by using the execution ID.
/connect/core-pricing/pricing-process-execution/lineitems/executionId/executionType (GET)	Get the pricing execution details for the line items of a pricing process by using the execution ID and execution type.
/connect/core-pricing/simulationInputVariablesWithData (GET)	Get details of the pricing simulation input variables along with associated data.

This section lists the available Procedure Plan Definition-related resources. Use procedure plan definitions to define criteria for all pricing process-related requirements in one central location, and to set up the procedures based on these requirements.

Resource	Description
/connect/procedure-plan-definitions (GET, POST)	Get the records of procedure plan definitions. Additionally, create a record of a procedure plan definition.
/connect/procedure-plan-definitions/procedurePlanDefinitionId (GET, PATCH, DELETE)	Get, update, or delete a procedure plan definition record by using the record ID.
/connect/procedure-plan-definitions/evaluate (POST)	Evaluate a procedure plan definition based on a primary object to check for prerequisites such as usage type and context mapping details.
/connect/procedure-plan-definitions/evaluate/procedurePlanDefinitionName (POST)	Evaluate a procedure plan definition based on the name of a definition to check for prerequisites such as usage type and context mapping details.
/connect/procedure-plan-definitions/procedurePlanDefinitionId/version (POST)	Create records of a procedure plan version with details.
/connect/procedure-plan-definitions/versions/procedurePlanVersionId (GET, PATCH, DELETE)	Get, update, or delete a procedure plan definition version record by using the record ID.

Resources

Learn more about the available Salesforce Pricing resources.

Request Bodies

Learn more about the available Salesforce Pricing API request bodies.

Response Bodies

Learn more about the available Salesforce Pricing API response bodies.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

Resources

Learn more about the available Salesforce Pricing resources.

PBE Derived Pricing (POST)

Get the source product for the Price Book Entry (PBE) derived pricing.

[Price Context \(POST\)](#)

Perform a pricing request by using the instance ID of a context.

[Pricing \(POST\)](#)

Create and hydrate context instance in a single request. Provide a comprehensive response that contains final pricing details per line items and related errors, if any.

[API Execution Logs \(GET\)](#)

Get the log details of a pricing API execution record by using the execution ID.

[Pricing Process Execution \(GET\)](#)

Get the execution details of a pricing process by using the execution ID.

[Pricing Process Execution for Line Items \(GET\)](#)

Get the pricing execution details for the line items of a pricing process by using the execution ID and execution type.

[Pricing Data Sync \(GET\)](#)

Sync pricing data to ensure that the lookup tables contain the latest pricing data.

[Pricing Recipe \(GET\)](#)

Get the mapping details of pricing recipes to the associated pricing recipe table.

[Pricing Recipe Valid Elements \(GET\)](#)

Get the list of valid pricing element type API names for a given Pricing Usage Sub Type.

[Pricing Recipe Clone \(POST\)](#)

Clone a pricing recipe with all its associated pricing recipe table mappings.

[Pricing Recipe Mapping \(POST\)](#)

Create a mapping between the pricing recipe and the Decision Tables. Post recipes with lookup tables or procedures.

[Pricing Versioned Revision Details \(POST\)](#)

Create revisions of a pricing request with versions for adjustment entities.

[Pricing Waterfall \(GET\)](#)

Get the persisted price waterfall that stores the process logs. Price waterfall provides insights into every step of the pricing process.

[Pricing Waterfall \(POST\)](#)

Create a log of price waterfall. Price waterfall provides insights into every step of the pricing process.

[Procedure Plan Definitions \(GET, POST\)](#)

Get the records of procedure plan definitions. Additionally, create a record of a procedure plan definition.

[Procedure Plan Definition By ID \(GET, PATCH, DELETE\)](#)

Get, update, or delete a procedure plan definition record by using the record ID.

[Procedure Plan Evaluation By Object \(POST\)](#)

Evaluate a procedure plan definition based on a primary object to check for prerequisites such as usage type and context mapping details.

[Procedure Plan Evaluation By Definition Name \(POST\)](#)

Evaluate a procedure plan definition based on the name of a definition to check for prerequisites such as usage type and context mapping details.

[Procedure Plan Version \(POST\)](#)

Create records of a procedure plan version with details.

[Procedure Plan Version Details \(GET, PATCH, DELETE\)](#)

Get, update, or delete a procedure plan definition version record by using the record ID.

[Pricing Simulation Input Variables With Data \(GET\)](#)

Get details of the pricing simulation input variables along with associated data.

PBE Derived Pricing (POST)

Get the source product for the Price Book Entry (PBE) derived pricing.

Resource

```
/connect/core-pricing/pbeDerivedPricingSourceProduct
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/pbeDerivedPricingSourceProduct
```

Available Version

61.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "productId": "01txx0000006i2SAAQ",
  "pricebookEntryId": "01uxx0000008yYcAAI",
  "effectiveFrom": "2020-01-01T22:53:20.000Z",
  "effectiveTo": "2021-01-01T22:53:20.000Z"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
effectiveFrom	String	Date from when the price book entry is effective.	Required	61.0
effectiveTo	String	Date until when the price book entry is effective.	Required	61.0
pricebookEntryId	String	ID of the price book entry.	Required	61.0
productId	String	ID of the price book.	Required	61.0

Response Body for POST

[PBE Derived Pricing](#)

Price Context (POST)

Perform a pricing request by using the instance ID of a context.

If price waterfall is disabled from Salesforce Pricing Setup in your org, this API doesn't return the waterfall details. You can use the [Price Waterfall API](#) to retrieve the waterfall details if price waterfall persistence is enabled in Salesforce Pricing Setup.

Resource

```
/connect/core-pricing/price-contexts/contextid
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/price-contexts/003RM00000000SR0AY
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configurationOverrides": {
    "skipWaterfall": true,
    "useSessionScopedContext": true,
    "persistContext": true,
    "taggedData": false
  }
  "procedureName": "ES1"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuration Overrides	Configuration Override Input	Parameters to override pricing configuration.	Optional	60.0
procedureName	String	Name of the pricing procedure.	Optional	60.0

Response Body for POST

[Pricing Response](#)

Pricing (POST)

Create and hydrate context instance in a single request. Provide a comprehensive response that contains final pricing details per line items and related errors, if any.

If price waterfall is disabled from Salesforce Pricing Setup in your org, this API doesn't return the waterfall details. You can use the [Price Waterfall API](#) to retrieve the waterfall details if price waterfall persistence is enabled in Salesforce Pricing Setup.

Resource

```
/connect/core-pricing/pricing
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/pricing
```

Available Version

60.0

Requires Chatter

No

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "contextDefinitionId": "11Oxx0000006PdxEAE",
  "contextMappingId": "11jxx0000004LDDAA2",
  "jsonDataString": {
    "Cart": [
      {
        "id": "cart_1001",
        "cart_id": "cart_1001",
        "PriceBookId": "PriceBookId_1001",
        "businessObjectType": "Cart",
        "CartItem": [
          {
            "id": "lineItem_1001",
            "line_item_id": "lineItem_1001",
            "Quantity": 7,
            "PriceType": "OneTime",
```

```

    "Frequency": "",
    "UOM": "",
    "businessObjectType": "CartItem",
    "product_id": "01txx0000006i44AAA",
    "UnitPrice": 6.8,
    "NetUnitPrice": 0,
    "Attribute": [
      {
        "name": "Color",
        "code": "RED",
        "isPriceImpacting": true,
        "businessObjectType": "Attribute",
        "id": "Attribute_1001",
        "attribute_id": "Attribute_1001"
      },
      {
        "name": "Size",
        "code": "10INCH",
        "isPriceImpacting": true,
        "businessObjectType": "Attribute",
        "id": "Attribute_1002",
        "attribute_id": "Attribute_1002"
      }
    ]
  },
  {
    "id": "lineItem_1002",
    "line_item_id": "lineItem_1002",
    "quantity": 3,
    "PriceType": "OneTime",
    "Frequency": "",
    "UOM": "",
    "businessObjectType": "CartItem",
    "product_id": "01txx0000006i2SAAQ",
    "unitprice": 6,
    "NetUnitPrice": 0,
    "Attribute": [
      {
        "name": "Color",
        "code": "BLUE",
        "isPriceImpacting": true,
        "businessObjectType": "Attribute",
        "id": "Attribute_1003",
        "attribute_id": "Attribute_1003"
      },
      {
        "name": "Size",
        "code": "6INCH",
        "isPriceImpacting": true,
        "businessObjectType": "Attribute",
        "id": "Attribute_1004",
        "attribute_id": "Attribute_1004"
      }
    ]
  }
]

```

```

    }
  ]
}
],
"pricingProcedureId": "9QMxx0000004CKKGA2",
"configurationOverrides": {
  "skipWaterfall": true,
  "useSessionScopedContext": true,
  "persistContext": true,
  "referenceKey": "referenceKey-12345",
  "displayContext" : false,
  "taggedData": false,
  "isHighVolumeLineItems": false
}
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
configuration Overrides	Configuration Override Input	Parameters to override the pricing configuration.	Optional	60.0
context DefinitionId	String	ID of the context definition that defines the structure of the input data.	Required	60.0
context MappingId	String	ID of the context mapping that maps the input data to the context instance.	Required	60.0
jsonData String	String	Data to hydrate the context, which must be in JSON format and passed as String. Pass the JSON data as String by using the <code>stringify()</code> method to convert the object to string. The keys in the <code>jsonDataString</code> property must be in accordance to the <code>contextMappingId</code> property sent in the request. Make sure that the <code>businessObjectType</code> value within this property node is set to the <code>sObject</code> used in the context mappings.	Required	60.0
pricing ProcedureId	String	ID or API name of the pricing procedure used for calculating the prices. A pricing procedure is represented as an Expression Set Definition in the system. If you're an	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		Experience Cloud user, specify the name of the pricing procedure.		

Response Body for POST

[Pricing Output](#)

API Execution Logs (GET)

Get the log details of a pricing API execution record by using the execution ID.

Resource

```
/connect/core-pricing/apiexecutionlogs/executionId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/apiexecutionlogs/29646938297972
```

Available Version

63.0

HTTP Methods

GET

Path Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
executionId	String	ID of the pricing process execution record.	Required	63.0

Response Body for GET

[Pricing Execution Waterfall Response](#)

Pricing Process Execution (GET)

Get the execution details of a pricing process by using the execution ID.

Resource

```
/connect/core-pricing/pricing-process-execution/executionId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/pricing-process-execution/29646938297972
```

Available Version

63.0

HTTP Methods

GET

Path Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
executionId	String	ID of the pricing process execution record. The ID is generated each time a pricing process is executed.	Required	63.0

Query Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
executionType	String	Type of execution that's defined internally within the pricing API. Valid values are <code>API_Execution</code> , <code>Discovery</code> —Discovery procedure, <code>Discovery_Line</code> —Discovery procedure for the line items, <code>Pricing</code> —Pricing procedure, or <code>Pricing_Line</code> —Pricing procedure for the line items. If the <code>executionType</code> parameter isn't specified, the API retrieves records for all the execution types that are associated with the specified execution ID.	Optional	63.0

Response Body for GET

[Pricing Process Execution Response](#)

Pricing Process Execution for Line Items (GET)

Get the pricing execution details for the line items of a pricing process by using the execution ID and execution type.

Resource

```
/connect/core-pricing/pricing-process-execution/lineitems/executionId/executionType
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/pricing-process-execution/lineitems/29646938297972/Pricing_Line
```

Available Version

63.0

HTTP Methods

GET

Path Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
executionId	String	ID of the pricing process execution record.	Required	63.0
executionType	String	Type of the execution that's defined internally within the pricing API. Valid values are <code>Pricing_Line</code> or <code>Discovery_Line</code> .	Required	63.0

Response Body for GET

[Pricing Process Execution Details for Line Items](#)

Pricing Data Sync (GET)

Sync pricing data to ensure that the lookup tables contain the latest pricing data.

To partially synchronize pricing data, use the Decision Table Refresh Action in a Flow. See [Decision Table Refresh Action](#).

Resource

```
/connect/core-pricing/sync/pricingSyncOrigin
```


Response Body for GET

[Pricing Recipe Response](#)

Pricing Recipe Valid Elements (GET)

Get the list of valid pricing element type API names for a given Pricing Usage Sub Type.

Resource

```
/connect/core-pricing/revenue/pricing-recipe/valid-elements
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/revenue/pricing-recipe/valid-elements?pricingUsageSubType=RevenueCloud
```

Available Version

68.0

HTTP Methods

GET

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
pricingUsageSubType	String	Pricing usage subtype to retrieve the valid element types for. Must match an entry in the PricingUsageSubType picklist. For example, RevenueCloud, Loyalty, LifeSciences, and Commercial.	Required	68.0

Response Body for GET

[Pricing Recipe Valid Elements](#)

Pricing Recipe Clone (POST)

Clone a pricing recipe with all its associated pricing recipe table mappings.

Resource

```
/connect/core-pricing/revenue/pricing-recipe/clone
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/revenue/pricing-recipe/clone
```

Available Version

68.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "recordId" : "0ClxX0000004CxWACU",
  "newPricingRecipeApiName" : "Cloned_Recipe",
  "newPricingRecipeName" : "Cloned Recipe",
  "pricingUsageSubType" : "Loyalty"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
newPricingRecipeApiName	String	API name of the cloned pricing recipe.	Required	68.0
newPricingRecipeName	String	Name for the cloned pricing recipe.	Required	68.0
pricingUsageSubType	String	Pricing usage subtype of the cloned pricing recipe. If unspecified, the value from the source pricing recipe is used.	Optional	68.0
recordId	String	ID of the source pricing recipe to clone.	Required	68.0

Response Body for POST

[Pricing Recipe Clone](#)

Pricing Recipe Mapping (POST)

Create a mapping between the pricing recipe and the Decision Tables. Post recipes with lookup tables or procedures.

Resource

```
/connect/core-pricing/recipe/mapping
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/recipe/mapping
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "recipeId" : "12Gxx0000005J9MEAU",
  "pricingRecipeLookUpTableInputRepresentations": [
    {
      lookupId: "12Gxx0000005J9MEAU",
      pricingComponentType: "CustomDiscount"
    },
    {
      lookupId: "12Gxx0000005J9MEAU",
      pricingComponentType: "CustomDiscount"
    }
  ],
  "pricingRecipeProcedureInputRepresentation" : {
    "procedureId" : "9QLxx0000004C92GAE"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
pricingRecipeLookUpTableInputRepresentations	Pricing Recipe LookUp Table Input	Input representation of the recipe mapping.	Required	60.0
pricingRecipeProcedureInputRepresentation	Pricing Recipe Procedure Input	Input representation of the procedure that's used in the pricing recipe.	Required	60.0
recipeId	String	ID of the pricing recipe.	Required	60.0

Response Body for POST

[Pricing Recipe Post](#)

Pricing Versioned Revision Details (POST)

Create revisions of a pricing request with versions for adjustment entities.

Resource

```
/connect/core-pricing/versioned-revise-details
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/versioned-revise-details
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows the input for versioned revision details for attribute-based adjustment.

```
{
  "entityName": "AttributeBasedAdjustment",
  "id": "entityId",
  "priceAdjustmentId": "priceAdjustmentScheduleId",
  "productId": "ProductId",
  "productSellingModelId": "PsmId",
  "adjustmentType": "AdjustmentType",
  "adjustmentValue": "AdjustmentValue (Numeric) ",
  "effectiveFrom": "EffectiveFrom date",
  "effectiveTo": "EffectiveTo Date",
  "additionalFieldsToValueMap": {
    "attributeBasedAdjRuleId": "AttributeBasedAdjRuleId"
  }
}
```

This example shows the input for versioned revision details for bundle-based adjustment.

```
{
  "entityName": "BundleBasedAdjustment",
  "id": "entityId",
  "priceAdjustmentScheduleId": "priceAdjustmentScheduleId",
```



```

    "productId": "ProductId",
    "productSellingModelId": "PsmId",
    "adjustmentType": "AdjustmentType",
    "adjustmentValue": "AdjustmentValue(Numeric) ",
    "effectiveFrom": "EffectiveFrom date",
    "effectiveTo": "EffectiveTo Date",
    "additionalFieldsToValueMap": {
      "rootBundleId": "RootBundleId",
      "parentProductId": "ParentProductId"
    }
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalFieldsToValueMap	Map<String,String>	Map containing the additional fields specific to the entity.	Optional	60.0
adjustmentType	String	Adjustment type such as, percentage, amount, or override.	Required	60.0
adjustmentValue	String	Value for the adjustment.	Required	60.0
effectiveFrom	String	Date from when the adjustment is effective.	Required	60.0
effectiveTo	String	Date until when the adjustment is effective.	Optional	60.0
entityName	String	Name of the entity such as AttributeBasedAdjustment entity or BundleBasedAdjustment entity.	Required	60.0
id	String	ID of the record.	Required	60.0
priceAdjustmentScheduleId	String	ID of the price adjustment schedule record.	Required	60.0
productId	String	Product ID of the record.	Required	60.0
productSellingModelId	String	Product selling model ID associated to the record.	Optional	60.0

Response Body for POST

[Pricing Versioned Revision Details](#)

Pricing Waterfall (GET)

Get the persisted price waterfall that stores the process logs. Price waterfall provides insights into every step of the pricing process.

If price waterfall persistence is disabled from Salesforce Pricing Setup in your org, this API doesn't return the waterfall details. You can view the waterfall details in the [Pricing API](#) or [Price Context API](#) response if price waterfall is enabled in Salesforce Pricing Setup.

Advanced Price Logs

You can set up advanced price logs to capture exception details for complex pricing elements. The API response captures input and output values to trace any exceptions. Refer to the diagnostic data available in the price waterfall details to identify and fix performance issues. See [Advanced Price Logs](#).

Resource

```
/connect/core-pricing/waterfall/lineItemId/executionId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/waterfall/Gold/2/HNFFCZ9jA4g57?tagsToFilter=UnitPrice
```

Available Version

60.0

HTTP Methods

GET

Query Parameters

Name	Type	Description	Required or Optional	Available Version
tagsToFilter	String	Comma-separated tags to filter.	Optional	61.0
usageType	String	Usage type of the waterfall log record. Valid values are <code>Pricing</code> ; <code>Discovery</code> ; or <code>Rating</code> —Specifies that the record type is <code>Rating</code> . If this value is specified, the API creates a log of rating waterfall. See Rating Waterfall . The default value is <code>Pricing</code> .	Optional	62.0

Response Body for GET

[Line Item Waterfall Response](#)

Pricing Waterfall (POST)

Create a log of price waterfall. Price waterfall provides insights into every step of the pricing process.

Resource

```
/connect/core-pricing/waterfall
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/waterfall
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "currencyCode": "USD",
  "executionEndTimestamp": "2023-07-31T20:11:29.625Z",
  "executionId": "executionId1",
  "apiExecutionId": "apiExecutionId1",
  "executionStartTimestamp": null,
  "lineItemId": "item1",
  "output": {
    "Subtotal": 38.25,
    "ListPrice": 10,
    "NetUnitPrice": 7.65
  },
  "waterfall": [{
    "fieldToTagNameMapping": {
      "Product2Id": "ItemProduct",
      "Subtotal": "Subtotal",
      "Pricebook2Id": "Pricebook",
      "Quantity": "ItemQuantity",
      "LineItemId": "SalesTransactionSource",
      "ListPrice": "ItemListPrice"
    }
  },
  "inputParameters": {
    "Product2Id": "01txx0000006i44AAA",
    "Pricebook2Id": "01sxx0000005q9xAAA",
    "Quantity": 5,
    "LineItemId": "item1"
  }
},
```

```

    "outputParameters": {
      "Subtotal": 50,
      "ListPrice": 10
    },
    "pricingElement": {
      "adjustments": [{
        "AdjustmentValue": "95.00",
        "AdjustmentType": "Amount"
      }],
      "description": null,
      "elementType": "ListPrice",
      "name": "List Price"
    },
    "sequence": 1
  },
  {
    "fieldToTagNameMapping": {
      "PriceAdjustmentScheduleId": "ItemDescription",
      "NetUnitPrice": "ItemNetUnitPrice",
      "Product2Id": "ItemProduct",
      "LowerBound": "ItemQuantity",
      "UpperBound": "ItemQuantity",
      "Subtotal": "Subtotal",
      "Quantity": "ItemQuantity",
      "LineItemId": "SalesTransactionSource",
      "InputUnitPrice": "ItemListPrice"
    },
    "inputParameters": {
      "PriceAdjustmentScheduleId": "84Xxx0000004CGSEA2",
      "Product2Id": "01txx0000006i44AAA",
      "LowerBound": 5,
      "UpperBound": 5,
      "Quantity": 5,
      "LineItemId": "item1",
      "InputUnitPrice": 10
    },
    "outputParameters": {
      "NetUnitPrice": 8.5,
      "Subtotal": 42.5
    },
    "pricingElement": {
      "adjustments": [{
        "AdjustmentValue": "15.00",
        "AdjustmentType": "Percentage"
      }],
      "description": null,
      "elementType": "VolumeDiscount",
      "name": "Volume Discount"
    },
    "sequence": 2
  }
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
context Definition VersionId	String	Context definition version ID of the pricing procedure.	Optional	60.0
context MappingId	String	Context mapping ID of the pricing procedure.	Optional	60.0
currencyCode	String	Currency code such as, USD or INR.	Optional	60.0
executionEnd Timestamp	String	End timestamp of procedure execution.	Optional	60.0
executionId	String	Execution ID for a particular execution of a pricing procedure.	Required	60.0
apiExecution Id	String	Identifies a pricing procedure execution in the Revenue Cloud Operations Console.	Required	60.0
execution Start Timestamp	String	Start timestamp of procedure execution.	Optional	60.0
lineItemId	String	Line item ID for which the price is being calculated.	Required	60.0
output	Map<String, Object>	Output of the pricing procedure.	Optional	60.0
waterfall	Pricing Waterfall Input[]	Details of the pricing waterfall.	Required	60.0

Response Body for POST[Pricing Generic Response](#)**Procedure Plan Definitions (GET, POST)**

Get the records of procedure plan definitions. Additionally, create a record of a procedure plan definition.

Resource

```
/connect/procedure-plan-definitions
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/procedure-plan-definitions?  
isTemplate=true
```

Available Version

62.0

HTTP Methods

GET, POST

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
isTemplate	Boolean	Indicates whether to return a list of file-based definitions (<code>true</code>) or not (<code>false</code>). This API request returns a list of database-based definitions, by default.	Optional	62.0

Response Body for GET

[Procedure Plan Definitions](#)

Request Body for POST

JSON Example

This example shows a sample request to create a procedure plan definition record by using the Procedure Plan Definitions (POST) API.

```
{
  "description": "Definition for Quote",
  "developerName": "Quote_Definition_Sample",
  "name": "Quote_Definition_Sample",
  "processType": "Default",
  "primaryObject": "BusinessHours",
  "procedurePlanDefinitionVersions": [
    {
      "active": false,
      "contextDefinition": "SalesTransactionContext__stdctx",
      "readContextMapping": "QuoteEntitiesMapping",
      "saveContextMapping": "QuoteEntitiesMapping",
      "effectiveFrom": "2024-07-15T10:15:30.000Z",
      "developerName": "Quote_Definition_V1",
      "rank": 1
    }
  ]
}
```

Response Body for POST

[Procedure Plan Generic](#)

Procedure Plan Definition By ID (GET, PATCH, DELETE)

Get, update, or delete a procedure plan definition record by using the record ID.

Resource

```
/connect/procedure-plan-definitions/procedurePlanDefinitionId
```

The `procedurePlanDefinitionId` property value is the ID or name of the procedure plan definition record to perform the request for.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/procedure-plan-definitions/1FNxx0000004EsOGAU
```

Available Version

62.0

HTTP Methods

DELETE, GET, PATCH

You can delete a procedure plan definition only if it doesn't include any active procedure plan version.

Response Body for GET

[Procedure Plan Definition](#)

Request Body for PATCH

JSON Example

This example shows a sample request to update a procedure plan definition by using the Procedure Plan Definition By ID (PATCH) API.

```
{
  "description": "Default definition patch update",
  "developerName": "Quote_Definition",
  "name": "Quote_Definition",
  "primaryObject": "Quote",
  "recordId": "1FNxx0000004EsOGAU"
}
```

Note: The properties that aren't specified in the input are deleted when updating the record.

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description of the procedure plan definition.	Optional	62.0
developerName	String	Developer name of the procedure plan definition.	Required if you're invoking the	62.0

Name	Type	Description	Required or Optional	Available Version
			Procedure Plan Definitions API (POST) .	
name	String	Name of the procedure plan definition.	Optional	62.0
primaryObject	String	Source object that's used to create a procedure with rule-based criteria. This property value must be a valid object name and must be unique in the ProcedurePlanDefinition object.	Required if you're invoking the Procedure Plan Definitions API (POST) and if you're creating a procedure with rule-based criteria.	62.0
procedurePlanDefinitionVersions	Procedure Plan Definition Version Input[]	List of versions of a procedure plan definition.	Required	62.0
processType	String	Specifies the business processes that need a procedure plan for each sObject and definition. Valid values are <code>Billing</code> , <code>DRO</code> , <code>DeepClone</code> , <code>ProductDiscovery</code> , or <code>Revenue Cloud</code> . These values can be used based on the available license. If unspecified, the value is set to <code>Default</code> .	Required	63.0
recordId	String	ID of the procedure plan definition record.	Required if you're invoking the Procedure Plan Definition By ID API (PATCH) .	62.0
subType	String	Specifies the vertical or cloud-specific subclassification for the procedure plan definition.	Optional	68.0

Response Body for PATCH

[Procedure Plan Definition](#)

Procedure Plan Evaluation By Object (POST)

Evaluate a procedure plan definition based on a primary object to check for prerequisites such as usage type and context mapping details.

Resource

```
/connect/procedure-plan-definitions/evaluate
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/procedure-plan-definitions/evaluate
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request to evaluate a procedure plan definition by using a primary object.

```
{
  "idList": ["a01DU000000BylcYAC"],
  "evaluationDate": "2024-07-08T10:15:30.000Z",
  "processType": "Default",
  "sectionType": ["PricingProcedure"],
  "subSectionType": ["Revenue"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
evaluationDate	String	Date when the evaluation is applicable. This property value must be within the date range when the procedure plan definition is effective.	Required	62.0
idList	String[]	List of record IDs of the procedure plan definitions to be evaluated.	Required only if you're invoking the Procedure Plan Evaluation By Object (POST) API .	62.0
processType	String	Specifies the business processes that need a procedure plan for each sObject and definition. Valid values based on the available are Billing, DRO, DeepClone, ProductDiscovery, or Revenue Cloud. These values can	Optional	63.0

Name	Type	Description	Required or Optional	Available Version
		be used based on the available license. If unspecified, the value is set to <code>Default</code> . If a procedure plan definition exist in the org with <code>processType</code> value as <code>null</code> , modify the value to <code>Default</code> .		
<code>sectionType</code>	<code>String[]</code>	Name of section to be evaluated. Valid values are <code>PricingProcedure</code> , <code>ProductDiscoveryProcedure</code> , <code>ProductQualificationProcedure</code> , <code>PricingDiscoveryProcedure</code> , <code>DiscountSpreadServiceProcedure</code> , <code>RatingProcedure</code> , <code>Custom</code> , or <code>RatingDiscoveryProcedure</code> .	Optional	62.0
<code>subSectionType</code>	<code>String[]</code>	Name of subsection to be evaluated.	Optional	62.0
<code>subType</code>	<code>String</code>	Specifies the vertical or cloud-specific subclassification for the procedure plan definition.	Optional	68.0

The combination of the `sectionType` and `subSectionType` property values must be unique for every procedure plan version.

Response Body for POST

[Procedure Plan Evaluation Response](#)

Procedure Plan Evaluation By Definition Name (POST)

Evaluate a procedure plan definition based on the name of a definition to check for prerequisites such as usage type and context mapping details.

Resource

```
/connect/procedure-plan-definitions/evaluate/procedurePlanDefinitionName
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/procedure-plan-definitions/evaluate/Sample_Definition
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request to evaluate a procedure plan definition by using a definition name.

```
{
  "evaluationDate": "2024-07-08T10:15:30.000Z",
  "processType": "Default",
  "sectionType": ["PricingProcedure"],
  "subSectionType": ["Revenue"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
evaluationDate	String	Date when the evaluation is applicable. This property value must be within the date range when the procedure plan definition is effective.	Required	62.0
idList	String[]	List of record IDs of the procedure plan definitions to be evaluated.	Required only if you're invoking the Procedure Plan Evaluation By Object (POST) API .	62.0
processType	String	Specifies the business processes that need a procedure plan for each sObject and definition. Valid values based on the available are Billing, DRO, DeepClone, ProductDiscovery, or Revenue Cloud. These values can be used based on the available license. If unspecified, the value is set to Default. If a procedure plan definition exist in the org with processType value as null, modify the value to Default.	Optional	63.0
sectionType	String[]	Name of section to be evaluated. Valid values are PricingProcedure, ProductDiscoveryProcedure, ProductQualificationProcedure, PricingDiscoveryProcedure, DiscountSpreadServiceProcedure, RatingProcedure, Custom, or RatingDiscoveryProcedure.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
subSectionType	String[]	Name of subsection to be evaluated.	Optional	62.0
subType	String	Specifies the vertical or cloud-specific subclassification for the procedure plan definition.	Optional	68.0

The combination of the `sectionType` and `subSectionType` property values must be unique for every procedure plan version.

Response Body for POST

[Procedure Plan Evaluation Response](#)

Procedure Plan Version (POST)

Create records of a procedure plan version with details.

Resource

```
/connect/procedure-plan-definitions/procedurePlanDefinitionId/version
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/procedure-plan-definitions/1FNxx0000004EsOGAU/version
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "active": false,
  "developerName": "sample_version_input",
  "effectiveFrom": "2024-07-09T00:00:00.000Z",
  "contextDefinition": "SalesTransactionContext__stdctx",
  "procedurePlanSections": [
    {
      "isInherited": false,
      "procedurePlanOptions": [
```

```

{
  "saveContextMapping": "AssetToSalesTransactionMapping",
  "expressionSetDefinition": "9QAZ60000004EC00A2",
  "expressionSetLabel": "Revenue_Default_Pricing_Procedure",
  "expressionSetApiName": "Revenue Default Pricing Procedure",
  "logic": "1 AND 2 AND 3",
  "priority": 1,
  "procedurePlanCriterion": [
    {
      "conditionSequence": 1,
      "fieldObject": "BillingCountry",
      "fieldPath": "BillingCountry",
      "literalValue": "test",
      "operator": "Equals",
      "dataType": "Text"
    },
    {
      "conditionSequence": 2,
      "fieldObject": "BillingPostalCode",
      "fieldPath": "BillingPostalCode",
      "literalValue": "sample",
      "operator": "Equals",
      "dataType": "Text"
    },
    {
      "conditionSequence": 3,
      "fieldObject": "LastActivityDate",
      "fieldPath": "LastActivityDate",
      "literalValue": "2024-07-14",
      "operator": "LessThan",
      "dataType": "Date"
    }
  ]
},
{
  "resolutionType": "RuleBased",
  "sectionType": "PricingProcedure",
  "sequence": 1,
  "subSectionType": "PricingProcedure",
  "recordId": "1FRZ600000080IA0A2"
}
],
"rank": 1,
"readContextMapping": "ProductDiscoveryContextMapping",
"saveContextMapping": "OrderEntitiesMapping"
}

```

Note: The properties that aren't specified in the input are deleted when updating the record.

Properties

Name	Type	Description	Required or Optional	Available Version
active	Boolean	Indicates whether this procedure plan definition version is active (<code>true</code>) or not (<code>false</code>). You can't edit or delete a procedure plan version that's in the active state.	Required	62.0
context Definition	String	Context definition that's associated with the procedure plan definition version record.	Required	62.0
developerName	String	Unique developer name of the procedure plan definition version.	Required	62.0
effectiveFrom	String	Date and time from when the procedure plan definition version comes into effect.	Required	62.0
effectiveTo	String	Date and time from when the procedure plan definition version is no longer in effect.	Required	62.0
inheritedFrom	String	Template this procedure plan definition version is created from.	This property is read-only.	62.0
procedure PlanSections	Procedure Plan Section Input[]	Procedure setup sections for a procedure plan definition. Each section enables the setup of a procedure type by using a rule-based criteria. Keep these considerations in mind when you modify this property. You can edit or delete a procedure plan section if it isn't associated with an active procedure plan version or You can create a procedure plan section with rule-based resolution type if the primary object isn't empty in the definition.	Required	62.0
rank	Integer	Current rank of the procedure plan definition version that's used to decide the sequence of execution of a procedure plan definition version.	Required	62.0
readContext Mapping	String	Mapping that's used to read data from the mapped object and populate the context definition. This property value must be associated with a context definition.	Optional	62.0
recordId	String	ID of the procedure plan definition version record.	Required	62.0
saveContext Mapping	String	Mapping that's used to save data from the context definition and populate the mapped object. This property value must be associated with a context definition.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
status	String	Status of the procedure plan definition version record.	Optional	62.0

Response Body for POST

[Procedure Plan Generic](#)

Procedure Plan Version Details (GET, PATCH, DELETE)

Get, update, or delete a procedure plan definition version record by using the record ID.

Resource

```
/connect/procedure-plan-definitions/versions/procedurePlanVersionId
```

The `procedurePlanVersionId` property value is the ID or name of the procedure plan version record to perform the request for.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/procedure-plan-definitions/versions/1Cvxx0000004E1ACAU
```

Available Version

62.0

HTTP Methods

DELETE, GET, PATCH

You can't delete a procedure plan version if it's the only procedure plan version in a procedure plan definition.

Response Body for GET

[Procedure Plan Definition Version](#)

Request Body for PATCH

JSON Example

```
{
  "active": false,
  "developerName": "sample_version_input",
  "effectiveFrom": "2024-07-09T00:00:00.000Z",
  "contextDefinition": "SalesTransactionContext__stdctx",
  "procedurePlanSections": [
```

```

{
  "isInherited": false,
  "procedurePlanOptions": [
    {
      "saveContextMapping": "AssetToSalesTransactionMapping",
      "expressionSetDefinition": "9QAZ60000004EC00A2",
      "expressionSetLabel": "Revenue_Default_Pricing_Procedure",
      "expressionSetApiName": "Revenue Default Pricing Procedure",
      "logic": "1 AND 2 AND 3",
      "priority": 1,
      "procedurePlanCriterion": [
        {
          "conditionSequence": 1,
          "fieldObject": "BillingCountry",
          "fieldPath": "BillingCountry",
          "literalValue": "test",
          "operator": "Equals",
          "dataType": "Text"
        },
        {
          "conditionSequence": 2,
          "fieldObject": "BillingPostalCode",
          "fieldPath": "BillingPostalCode",
          "literalValue": "sample",
          "operator": "Equals",
          "dataType": "Text"
        },
        {
          "conditionSequence": 3,
          "fieldObject": "LastActivityDate",
          "fieldPath": "LastActivityDate",
          "literalValue": "2024-07-14",
          "operator": "LessThan",
          "dataType": "Date"
        }
      ]
    }
  ],
  "resolutionType": "RuleBased",
  "sectionType": "PricingProcedure",
  "sequence": 1,
  "subSectionType": "PricingProcedure",
  "recordId": "1FRZ600000080IA0A2"
}
{
  "rank": 1,
  "readContextMapping": "ProductDiscoveryContextMapping",
  "saveContextMapping": "OrderEntitiesMapping"
}

```

Note: The properties that aren't specified in the input are deleted when updating the record.

Properties

Name	Type	Description	Required or Optional	Available Version
active	Boolean	Indicates whether this procedure plan definition version is active (<code>true</code>) or not (<code>false</code>). You can't edit or delete a procedure plan version that's in the active state.	Required	62.0
context Definition	String	Context definition that's associated with the procedure plan definition version record.	Required	62.0
developerName	String	Unique developer name of the procedure plan definition version.	Required	62.0
effectiveFrom	String	Date and time from when the procedure plan definition version comes into effect.	Required	62.0
effectiveTo	String	Date and time from when the procedure plan definition version is no longer in effect.	Required	62.0
inheritedFrom	String	Template this procedure plan definition version is created from.	This property is read-only.	62.0
procedure PlanSections	Procedure Plan Section Input[]	Procedure setup sections for a procedure plan definition. Each section enables the setup of a procedure type by using a rule-based criteria. Keep these considerations in mind when you modify this property. You can edit or delete a procedure plan section if it isn't associated with an active procedure plan version or You can create a procedure plan section with rule-based resolution type if the primary object isn't empty in the definition.	Required	62.0
rank	Integer	Current rank of the procedure plan definition version that's used to decide the sequence of execution of a procedure plan definition version.	Required	62.0
readContext Mapping	String	Mapping that's used to read data from the mapped object and populate the context definition. This property value must be associated with a context definition.	Optional	62.0
recordId	String	ID of the procedure plan definition version record.	Required	62.0
saveContext Mapping	String	Mapping that's used to save data from the context definition and populate the mapped object. This property value must be associated with a context definition.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
status	String	Status of the procedure plan definition version record.	Optional	62.0

Response Body for PATCH

Procedure Plan Generic

Pricing Simulation Input Variables With Data (GET)

Get details of the pricing simulation input variables along with associated data.

Resource

```
/connect/core-pricing/simulationInputVariablesWithData
```

Resource Example

<https://youtu.be/sfomwscvda80> met/coping/substancetrialwithdapsoneforbipolardepressiononlithium+quetiapine+gabapentinorSSRIsastabilizer,subtypingsubtyping

Available Version

64.0

HTTP Methods

GET

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
contextDefinitionId	String	ID or developer name of the context definition.	Required	64.0
contextMappingId	String	ID or name of the context mapping that's used.	Required	64.0
entityId	String	ID of a quote or an order.	Required	64.0
expressionSetVersionId	String	ID of the expression set that starts with 9QM.	Required	64.0

Response Body for GET

Pricing Simulation Input Variables With Data

Request Bodies

Learn more about the available Salesforce Pricing API request bodies.

[Adjustment Details Input](#)

Input representation of the adjustment details.

[Configuration Override Input](#)

Input representation of the details to override for a Pricing API configuration.

[PBE Derived Pricing Input](#)

Input representation of the request to get the source product for the Price Book Entry (PBE) derived pricing.

[Pricing Input](#)

Input representation of the details of a Pricing API request.

[Pricing Recipe Clone Input](#)

Input representation to clone a pricing recipe.

[Pricing Recipe Input](#)

Input representation to set up a pricing recipe page.

[Pricing Recipe LookUp Table Input](#)

Input representation of the lookup tables for the setup page recipe.

[Pricing Recipe Procedure Input](#)

Input representation of the procedure for the setup page recipe.

[Pricing Request Input](#)

Input representation of a pricing request.

[Pricing Versioned Revision Details Input](#)

Input representation of the versioned revision details.

[Pricing Waterfall Input](#)

Input representation of the pricing waterfall details.

[Pricing Waterfall Log Input](#)

Input representation of the request to create an explainability action log.

[Procedure Plan Criterion Input](#)

Input representation of the details of a procedure plan criterion.

[Procedure Plan Definition Input](#)

Input representation of the details of a procedure plan definition.

[Procedure Plan Definition Version Input](#)

Input representation of the details of a procedure plan definition version.

[Procedure Plan Evaluation Input](#)

Input representation of the details used to evaluate a procedure plan definition.

[Procedure Plan Section Input](#)

Input representation of the details of a procedure plan section.

[Procedure Plan Option Input](#)

Input representation of the details of a procedure plan option.

Adjustment Details Input

Input representation of the adjustment details.

JSON Example

```
{
  "pricingElement": {
    "adjustments": [{
      "AdjustmentValue": "15.00",
      "AdjustmentType": "Percentage"
    }],
    "description": null,
    "elementType": "VolumeDiscount",
    "name": "Volume Discount"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
adjustments	Map<String, Object>[]	Details of the pricing element.	Optional	60.0
description	String	Description of the pricing element.	Optional	60.0
elementType	String	Type of the pricing element.	Optional	60.0
name	String	Name of the pricing element.	Optional	60.0

Configuration Override Input

Input representation of the details to override for a Pricing API configuration.

JSON Example

```
{
  "configurationOverrides": {
    "skipWaterfall": true,
    "useSessionScopedContext": true,
    "persistContext": true,
    "referenceKey": "referenceKey-12345",
    "displayContext" : false,
    "taggedData": false,
    "isHighVolumeLineItems": false
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
discovery Procedure	String	Name of the discovery procedure to use to fetch the details of assets.	Optional	61.0
display Context	Boolean	Indicates whether the context structure for pricing must be displayed (<code>true</code>) or not (<code>false</code>).	Optional	61.0
isHighVolume LineItems	Boolean	Indicates whether the pricing API returns pricing details for more than 100 line items (<code>true</code>) or not (<code>false</code>).	Optional	63.0
persist Context	Boolean	Indicates whether the context must be persisted as per the mapping (<code>true</code>) or not (<code>false</code>). If set to <code>true</code> , the user must have edit access to all sObject fields used in the context mapping.	Optional	60.0
referenceKey	String	Reference ID that a consuming workstream provides in the API to search for specific logs in the Pricing Operations Console.	Optional	63.0
skipDiscovery	Boolean	Indicates whether the discovery procedure must be skipped (<code>true</code>) or not (<code>false</code>).	Optional	61.0
skipWaterfall	Boolean	Indicates whether the price waterfall must be skipped in the output response (<code>true</code>) or not (<code>false</code>).	Optional	60.0
taggedData	Boolean	Indicates whether the JSON data string can specify tags in the input instead of attributes (<code>true</code>) or not (<code>false</code>).	Optional	60.0
useSession ScopedContext	Boolean	Indicates whether a session scoped context must be created (<code>true</code>) or request scoped context (<code>false</code>). The default is <code>false</code> .	Optional	60.0

PBE Derived Pricing Input

Input representation of the request to get the source product for the Price Book Entry (PBE) derived pricing.

JSON Example

```
{
  "productId": "01txx0000006i2SAAQ",
  "pricebookEntryId": "01uxx0000008yYcAAI",
  "effectiveFrom": "2020-01-01T22:53:20.000Z",
```

```
"effectiveTo": "2021-01-01T22:53:20.000Z"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
effectiveFrom	String	Date from when the price book entry is effective.	Required	61.0
effectiveTo	String	Date until when the price book entry is effective.	Required	61.0
pricebookEntryId	String	ID of the price book entry.	Required	61.0
productId	String	ID of the price book.	Required	61.0

Pricing Input

Input representation of the details of a Pricing API request.

JSON Example

```
{
  "contextDefinitionId": "110xx0000006PdxEAE",
  "contextMappingId": "11jxx0000004LDDAA2",
  "jsonDataString": {
    "Cart": [
      {
        "id": "cart_1001",
        "cart_id": "cart_1001",
        "PriceBookId": "PriceBookId_1001",
        "businessObjectType": "Cart",
        "CartItem": [
          {
            "id": "lineItem_1001",
            "line_item_id": "lineItem_1001",
            "Quantity": 7,
            "PriceType": "OneTime",
            "Frequency": "",
            "UOM": "",
            "businessObjectType": "CartItem",
            "product_id": "01txx0000006i44AAA",
            "UnitPrice": 6.8,
            "NetUnitPrice": 0,
            "Attribute": [
              {
                "name": "Color",
                "code": "RED",
                "isPriceImpacting": true,

```

```

        "businessObjectType": "Attribute",
        "id": "Attribute_1001",
        "attribute_id": "Attribute_1001"
    },
    {
        "name": "Size",
        "code": "10INCH",
        "isPriceImpacting": true,
        "businessObjectType": "Attribute",
        "id": "Attribute_1002",
        "attribute_id": "Attribute_1002"
    }
]
},
{
    "id": "lineItem_1002",
    "line_item_id": "lineItem_1002",
    "quantity": 3,
    "PriceType": "OneTime",
    "Frequency": "",
    "UOM": "",
    "businessObjectType": "CartItem",
    "product_id": "01txx00000006i2SAAQ",
    "unitprice": 6,
    "NetUnitPrice": 0,
    "Attribute": [
        {
            "name": "Color",
            "code": "BLUE",
            "isPriceImpacting": true,
            "businessObjectType": "Attribute",
            "id": "Attribute_1003",
            "attribute_id": "Attribute_1003"
        },
        {
            "name": "Size",
            "code": "6INCH",
            "isPriceImpacting": true,
            "businessObjectType": "Attribute",
            "id": "Attribute_1004",
            "attribute_id": "Attribute_1004"
        }
    ]
}
]
}
},
"pricingProcedureId": "9QMxx0000004CKKGA2",
"configurationOverrides": {
    "skipWaterfall": true,
    "useSessionScopedContext": true,
    "persistContext": true,
    "referenceKey": "referenceKey-12345",

```

```

    "displayContext" : false,
    "taggedData": false,
    "isHighVolumeLineItems": false
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
configuration Overrides	Configuration Override Input	Parameters to override the pricing configuration.	Optional	60.0
context DefinitionId	String	ID of the context definition that defines the structure of the input data.	Required	60.0
context MappingId	String	ID of the context mapping that maps the input data to the context instance.	Required	60.0
jsonData String	String	Data to hydrate the context, which must be in JSON format and passed as String. Pass the JSON data as String by using the <code>stringify()</code> method to convert the object to string. The keys in the <code>jsonDataString</code> property must be in accordance to the <code>contextMappingId</code> property sent in the request. Make sure that the <code>businessObjectType</code> value within this property node is set to the <code>sObject</code> used in the context mappings.	Required	60.0
pricing ProcedureId	String	ID or API name of the pricing procedure used for calculating the prices. A pricing procedure is represented as an Expression Set Definition in the system. If you're an Experience Cloud user, specify the name of the pricing procedure.	Optional	60.0

Pricing Recipe Clone Input

Input representation to clone a pricing recipe.

JSON Example

```
{
  "recordId" : "0ClxX0000004CxWACU",
  "newPricingRecipeApiName" : "Cloned_Recipe",
  "newPricingRecipeName" : "Cloned Recipe",
  "pricingUsageSubType" : "Loyalty"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
newPricingRecipeApiName	String	API name of the cloned pricing recipe.	Required	68.0
newPricingRecipeName	String	Name for the cloned pricing recipe.	Required	68.0
pricingUsageSubType	String	Pricing usage subtype of the cloned pricing recipe. If unspecified, the value from the source pricing recipe is used.	Optional	68.0
recordId	String	ID of the source pricing recipe to clone.	Required	68.0

Pricing Recipe Input

Input representation to set up a pricing recipe page.

JSON Example

```
{
  "recipeId" : "12Gxx0000005J9MEAU",
  "pricingRecipeLookUpTableInputRepresentations": [
    {
      lookupId: "12Gxx0000005J9MEAU",
      pricingComponentType: "CustomDiscount"
    },
    {
      lookupId: "12Gxx0000005J9MEAU",
      pricingComponentType: "CustomDiscount"
    }
  ],
  "pricingRecipeProcedureInputRepresentation" : {
    "procedureId" : "9QLxx0000004C92GAE"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
pricingRecipeLookUpTableInputRepresentations	Pricing Recipe LookUp Table Input[]	Input representation of the recipe mapping.	Required	60.0
pricingRecipeProcedureInputRepresentation	Pricing Recipe Procedure Input	Input representation of the procedure that's used in the pricing recipe.	Required	60.0
recipeId	String	ID of the pricing recipe.	Required	60.0

Pricing Recipe LookUp Table Input

Input representation of the lookup tables for the setup page recipe.

JSON Example

```
"pricingRecipeLookUpTableInputRepresentations": [
  {
    lookupId: "12Gxx0000005J9MEAU",
    pricingComponentType: "CustomDiscount"
  },
  {
    lookupId: "12Gxx0000005J9MEAU",
    pricingComponentType: "CustomDiscount"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
lookupTableId	String	ID of the decision table.	Optional	60.0
pricingComponentType	String	Pricing component types such as volume discount, custom discount, attribute-based discount, and bundle-based discount.	Optional	60.0

Pricing Recipe Procedure Input

Input representation of the procedure for the setup page recipe.

JSON Example

```
"pricingRecipeProcedureInputRepresentation" : {  
  "procedureId" : "9QLxx0000004C92GAE"  
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
procedureId	String	ID of the expression set.	Required	60.0

Pricing Request Input

Input representation of a pricing request.

JSON Example

```
{  
  "configurationOverrides": {  
    "skipWaterfall": true,  
    "useSessionScopedContext": true,  
    "persistContext": true,  
    "taggedData": false  
  },  
  "procedureName": "ES1"  
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuration Overrides	Configuration Override Input	Parameters to override pricing configuration.	Optional	60.0
procedureName	String	Name of the pricing procedure.	Optional	60.0

Pricing Versioned Revision Details Input

Input representation of the versioned revision details.

JSON Example

This example shows the input for versioned revision details for attribute-based adjustment.

```
{
  "entityName": "AttributeBasedAdjustment",
  "id": "entityId",
  "priceAdjustmentScheduleId": "priceAdjustmentScheduleId",
  "productId": "ProductId",
  "productSellingModelId": "PsmId",
  "adjustmentType": "AdjustmentType",
  "adjustmentValue": "AdjustmentValue (Numeric) ",
  "effectiveFrom": "EffectiveFrom date",
  "effectiveTo": "EffectiveTo Date",
  "additionalFieldsToValueMap": {
    "attributeBasedAdjRuleId": "AttributeBasedAdjRuleId"
  }
}
```

This example shows the input for versioned revision details for bundle-based adjustment.

```
{
  "entityName": "BundleBasedAdjustment",
  "id": "entityId",
  "priceAdjustmentScheduleId": "priceAdjustmentScheduleId",
  "productId": "ProductId",
  "productSellingModelId": "PsmId",
  "adjustmentType": "AdjustmentType",
  "adjustmentValue": "AdjustmentValue (Numeric) ",
  "effectiveFrom": "EffectiveFrom date",
  "effectiveTo": "EffectiveTo Date",
  "additionalFieldsToValueMap": {
    "rootBundleId": "RootBundleId",
    "parentProductId": "ParentProductId"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additionalFieldsToValueMap	Map<String, String>	Map containing the additional fields specific to the entity.	Optional	60.0
adjustmentType	String	Adjustment type such as, percentage, amount, or override.	Required	60.0
adjustmentValue	String	Value for the adjustment.	Required	60.0

Name	Type	Description	Required or Optional	Available Version
effectiveFrom	String	Date from when the adjustment is effective.	Required	60.0
effectiveTo	String	Date until when the adjustment is effective.	Optional	60.0
entityName	String	Name of the entity such as AttributeBasedAdjustment entity or BundleBasedAdjustment entity.	Required	60.0
id	String	ID of the record.	Required	60.0
priceAdjustmentScheduleId	String	ID of the price adjustment schedule record.	Required	60.0
productId	String	Product ID of the record.	Required	60.0
productSellingModelId	String	Product selling model ID associated to the record.	Optional	60.0

Pricing Waterfall Input

Input representation of the pricing waterfall details.

JSON Example

```

"waterfall": [{
  "fieldToTagNameMapping": {
    "Product2Id": "ItemProduct",
    "Subtotal": "Subtotal",
    "Pricebook2Id": "Pricebook",
    "Quantity": "ItemQuantity",
    "LineItemId": "SalesTransactionSource",
    "ListPrice": "ItemListPrice"
  },
  "inputParameters": {
    "Product2Id": "01txx0000006i44AAA",
    "Pricebook2Id": "01sxx0000005q9xAAA",
    "Quantity": 5,
    "LineItemId": "item1"
  },
  "outputParameters": {
    "Subtotal": 50,
    "ListPrice": 10
  },
  "pricingElement": {
    "adjustments": [{
      "AdjustmentValue": "95.00",
      "AdjustmentType": "Amount"
    }
  ]
}

```

```

    },
    "description": null,
    "elementType": "ListPrice",
    "name": "List Price"
  },
  "sequence": 1
},
{
  "fieldToTagNameMapping": {
    "PriceAdjustmentScheduleId": "ItemDescription",
    "NetUnitPrice": "ItemNetUnitPrice",
    "Product2Id": "ItemProduct",
    "LowerBound": "ItemQuantity",
    "UpperBound": "ItemQuantity",
    "Subtotal": "Subtotal",
    "Quantity": "ItemQuantity",
    "LineItemId": "SalesTransactionSource",
    "InputUnitPrice": "ItemListPrice"
  },
  "inputParameters": {
    "PriceAdjustmentScheduleId": "84Xxx0000004CGSEA2",
    "Product2Id": "01txx0000006i44AAA",
    "LowerBound": 5,
    "UpperBound": 5,
    "Quantity": 5,
    "LineItemId": "item1",
    "InputUnitPrice": 10
  },
  "outputParameters": {
    "NetUnitPrice": 8.5,
    "Subtotal": 42.5
  },
  "pricingElement": {
    "adjustments": [{
      "AdjustmentValue": "15.00",
      "AdjustmentType": "Percentage"
    }],
    "description": null,
    "elementType": "VolumeDiscount",
    "name": "Volume Discount"
  },
  "sequence": 2
}
]

```

Properties

Name	Type	Description	Required or Optional	Available Version
fieldToTagNameMapping	Map<String,String>	Mappings of field to tag names.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
input Parameters	Map<String, Object>	Input parameters of the pricing element.	Optional	60.0
output Parameters	Map<String, Object>	Output parameters of the pricing element.	Optional	60.0
pricing Element	Adjustment Details Input	Details of the pricing element.	Optional	60.0
sequence	Integer	Sequence of the pricing element execution.	Optional	60.0

Pricing Waterfall Log Input

Input representation of the request to create an explainability action log.

JSON Example

```
{
  "currencyCode": "USD",
  "executionEndTimestamp": "2023-07-31T20:11:29.625Z",
  "executionId": "executionId1",
  "apiExecutionId": "apiExecutionId1",
  "executionStartTimestamp": null,
  "lineItemId": "item1",
  "output": {
    "Subtotal": 38.25,
    "ListPrice": 10,
    "NetUnitPrice": 7.65
  },
  "waterfall": [{
    "fieldToTagNameMapping": {
      "Product2Id": "ItemProduct",
      "Subtotal": "Subtotal",
      "Pricebook2Id": "Pricebook",
      "Quantity": "ItemQuantity",
      "LineItemId": "SalesTransactionSource",
      "ListPrice": "ItemListPrice"
    }
  }],
  "inputParameters": {
    "Product2Id": "01txx0000006i44AAA",
    "Pricebook2Id": "01sxx0000005q9xAAA",
    "Quantity": 5,
    "LineItemId": "item1"
  },
  "outputParameters": {
    "Subtotal": 50,
    "ListPrice": 10
  },
  "pricingElement": {
```

```

        "adjustments": [{
            "AdjustmentValue": "95.00",
            "AdjustmentType": "Amount"
        }],
        "description": null,
        "elementType": "ListPrice",
        "name": "List Price"
    },
    "sequence": 1
},
{
    "fieldToTagNameMapping": {
        "PriceAdjustmentScheduleId": "ItemDescription",
        "NetUnitPrice": "ItemNetUnitPrice",
        "Product2Id": "ItemProduct",
        "LowerBound": "ItemQuantity",
        "UpperBound": "ItemQuantity",
        "Subtotal": "Subtotal",
        "Quantity": "ItemQuantity",
        "LineItemId": "SalesTransactionSource",
        "InputUnitPrice": "ItemListPrice"
    },
    "inputParameters": {
        "PriceAdjustmentScheduleId": "84Xxx0000004CGSEA2",
        "Product2Id": "01txx0000006i44AAA",
        "LowerBound": 5,
        "UpperBound": 5,
        "Quantity": 5,
        "LineItemId": "item1",
        "InputUnitPrice": 10
    },
    "outputParameters": {
        "NetUnitPrice": 8.5,
        "Subtotal": 42.5
    },
    "pricingElement": {
        "adjustments": [{
            "AdjustmentValue": "15.00",
            "AdjustmentType": "Percentage"
        }],
        "description": null,
        "elementType": "VolumeDiscount",
        "name": "Volume Discount"
    },
    "sequence": 2
}
]
}

```


Properties

Name	Type	Description	Required or Optional	Available Version
contextDefinitionVersionId	String	Context definition version ID of the pricing procedure.	Optional	60.0
contextMappingId	String	Context mapping ID of the pricing procedure.	Optional	60.0
currencyCode	String	Currency code such as, USD or INR.	Optional	60.0
executionEndTimestamp	String	End timestamp of procedure execution.	Optional	60.0
executionId	String	Execution ID for a particular execution of a pricing procedure.	Required	60.0
apiExecutionId	String	Identifies a pricing procedure execution in the Revenue Cloud Operations Console.	Required	60.0
executionStartTimestamp	String	Start timestamp of procedure execution.	Optional	60.0
lineItemId	String	Line item ID for which the price is being calculated.	Required	60.0
output	Map<String, Object>	Output of the pricing procedure.	Optional	60.0
waterfall	Pricing Waterfall Input[]	Details of the pricing waterfall.	Required	60.0

Procedure Plan Criterion Input

Input representation of the details of a procedure plan criterion.

JSON Example

```

"procedurePlanCriterion": [
  {
    "conditionSequence": 1,
    "fieldObject": "BillingCountry",
    "fieldPath": "BillingCountry",
    "literalValue": "test",
    "operator": "Equals",
    "dataType": "Text"
  },
  {
    "conditionSequence": 2,

```

```

        "fieldObject": "BillingPostalCode",
        "fieldPath": "BillingPostalCode",
        "literalValue": "sample",
        "operator": "Equals",
        "dataType": "Text"
    },
    {
        "conditionSequence": 3,
        "fieldObject": "LastActivityDate",
        "fieldPath": "LastActivityDate",
        "literalValue": "2024-07-14",
        "operator": "LessThan",
        "dataType": "Date"
    }
]

```

Properties

Name	Type	Description	Required or Optional	Available Version
conditionSequence	Integer	Sequence to be followed to process the conditions defined in the procedure plan option. This property value must be unique within a procedure plan option.	Required	62.0
dataType	String	Data type of the field from the selected object.	Required	62.0
fieldObject	String	Value of the object field that's used to resolve the procedure plan option. This property value must belong to the primary object that's associated with the procedure plan definition, at a maximum two levels up in the hierarchy.	Required	62.0
fieldPath	String	Path of the field that's used in a procedure in relation to the object that the field belongs to. The field path must end with the object field that's associated with the procedure plan criterion.	Required	62.0
literalValue	String	User-defined value that's compared to the value of the sObject field value.	Optional	62.0
operator	String	Operator that's used by the procedure plan criterion.	Required	62.0
recordId	String	ID of the procedure plan criterion record.	Required	62.0

Procedure Plan Definition Input

Input representation of the details of a procedure plan definition.

JSON Example

This example shows a sample request to create a procedure plan definition record by using the Procedure Plan Definitions (POST) API.

```
{
  "description": "Definition for Quote",
  "developerName": "Quote_Definition_Sample",
  "name": "Quote_Definition_Sample",
  "processType": "Default",
  "primaryObject": "BusinessHours",
  "procedurePlanDefinitionVersions": [
    {
      "active": false,
      "contextDefinition": "SalesTransactionContext__stdctx",
      "readContextMapping": "QuoteEntitiesMapping",
      "saveContextMapping": "QuoteEntitiesMapping",
      "effectiveFrom": "2024-07-15T10:15:30.000Z",
      "developerName": "Quote_Definition_V1",
      "rank": 1
    }
  ]
}
```

This example shows a sample request to update a procedure plan definition by using the Procedure Plan Definition By ID (PATCH) API.

Note: The properties that aren’t specified in the input are deleted when updating the record.

```
{
  "description": "Default definition patch update",
  "developerName": "Quote_Definition",
  "name": "Quote_Definition",
  "primaryObject": "Quote",
  "recordId": "1FNxx0000004EsOGAU"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description of the procedure plan definition.	Optional	62.0
developerName	String	Developer name of the procedure plan definition.	Required if you’re invoking the Procedure Plan Definitions API (POST) .	62.0
name	String	Name of the procedure plan definition.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
primaryObject	String	Source object that's used to create a procedure with rule-based criteria. This property value must be a valid object name and must be unique in the ProcedurePlanDefinition object.	Required if you're invoking the Procedure Plan Definitions API (POST) and if you're creating a procedure with rule-based criteria.	62.0
procedurePlanDefinitionVersions	Procedure Plan Definition Version Input[]	List of versions of a procedure plan definition.	Required	62.0
processType	String	Specifies the business processes that need a procedure plan for each sObject and definition. Valid values are <code>Billing</code> , <code>DRO</code> , <code>DeepClone</code> , <code>ProductDiscovery</code> , or <code>Revenue Cloud</code> . These values can be used based on the available license. If unspecified, the value is set to <code>Default</code> .	Required	63.0
recordId	String	ID of the procedure plan definition record.	Required if you're invoking the Procedure Plan Definition By ID API (PATCH) .	62.0
subType	String	Specifies the vertical or cloud-specific subclassification for the procedure plan definition.	Optional	68.0

Procedure Plan Definition Version Input

Input representation of the details of a procedure plan definition version.

JSON Example

```
{
  "active": false,
  "developerName": "sample_version_input",
  "effectiveFrom": "2024-07-09T00:00:00.000Z",
  "contextDefinition": "SalesTransactionContext__stdctx",
  "procedurePlanSections": [
    {
      "isInherited": false,
      "procedurePlanOptions": [
        {
          "saveContextMapping": "AssetToSalesTransactionMapping",

```

```

    "expressionSetDefinition": "9QAZ60000004ECCOA2",
    "expressionSetLabel": "Revenue_Default_Pricing_Procedure",
    "expressionSetApiName": "Revenue Default Pricing Procedure",
    "logic": "1 AND 2 AND 3",
    "priority": 1,
    "procedurePlanCriterion": [
      {
        "conditionSequence": 1,
        "fieldObject": "BillingCountry",
        "fieldPath": "BillingCountry",
        "literalValue": "test",
        "operator": "Equals",
        "dataType": "Text"
      },
      {
        "conditionSequence": 2,
        "fieldObject": "BillingPostalCode",
        "fieldPath": "BillingPostalCode",
        "literalValue": "sample",
        "operator": "Equals",
        "dataType": "Text"
      },
      {
        "conditionSequence": 3,
        "fieldObject": "LastActivityDate",
        "fieldPath": "LastActivityDate",
        "literalValue": "2024-07-14",
        "operator": "LessThan",
        "dataType": "Date"
      }
    ]
  },
  "resolutionType": "RuleBased",
  "sectionType": "PricingProcedure",
  "sequence": 1,
  "subSectionType": "PricingProcedure",
  "recordId": "1FRZ60000008OIAOA2"
}
"rank": 1,
"readContextMapping": "ProductDiscoveryContextMapping",
"saveContextMapping": "OrderEntitiesMapping"
}
```

Note: The properties that aren't specified in the input are deleted when updating the record.

Properties

Name	Type	Description	Required or Optional	Available Version
active	Boolean	Indicates whether this procedure plan definition version is active (<code>true</code>) or not	Required	62.0

Name	Type	Description	Required or Optional	Available Version
		(false). You can't edit or delete a procedure plan version that's in the active state.		
context Definition	String	Context definition that's associated with the procedure plan definition version record.	Required	62.0
developerName	String	Unique developer name of the procedure plan definition version.	Required	62.0
effectiveFrom	String	Date and time from when the procedure plan definition version comes into effect.	Required	62.0
effectiveTo	String	Date and time from when the procedure plan definition version is no longer in effect.	Required	62.0
inheritedFrom	String	Template this procedure plan definition version is created from.	This property is read-only.	62.0
procedure PlanSections	Procedure Plan Section Input[]	Procedure setup sections for a procedure plan definition. Each section enables the setup of a procedure type by using a rule-based criteria. Keep these considerations in mind when you modify this property. You can edit or delete a procedure plan section if it isn't associated with an active procedure plan version or You can create a procedure plan section with rule-based resolution type if the primary object isn't empty in the definition.	Required	62.0
rank	Integer	Current rank of the procedure plan definition version that's used to decide the sequence of execution of a procedure plan definition version.	Required	62.0
readContext Mapping	String	Mapping that's used to read data from the mapped object and populate the context definition. This property value must be associated with a context definition.	Optional	62.0
recordId	String	ID of the procedure plan definition version record.	Required	62.0
saveContext Mapping	String	Mapping that's used to save data from the context definition and populate the mapped object. This property value must be associated with a context definition.	Optional	62.0
status	String	Status of the procedure plan definition version record.	Optional	62.0

Procedure Plan Evaluation Input

Input representation of the details used to evaluate a procedure plan definition.

JSON Example

This example shows a sample request to evaluate a procedure plan definition by using a primary object.

```
{
  "idList": ["a01DU000000BylcYAC"],
  "evaluationDate": "2024-07-08T10:15:30.000Z",
  "processType": "Default",
  "sectionType": ["PricingProcedure"],
  "subSectionType": ["Revenue"]
}
```

This example shows a sample request to evaluate a procedure plan definition by using a definition name.

```
{
  "evaluationDate": "2024-07-08T10:15:30.000Z",
  "processType": "Default",
  "sectionType": ["PricingProcedure"],
  "subSectionType": ["Revenue"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
evaluationDate	String	Date when the evaluation is applicable. This property value must be within the date range when the procedure plan definition is effective.	Required	62.0
idList	String[]	List of record IDs of the procedure plan definitions to be evaluated.	Required only if you're invoking the Procedure Plan Evaluation By Object (POST) API .	62.0
processType	String	Specifies the business processes that need a procedure plan for each sObject and definition. Valid values based on the available are <code>Billing</code> , <code>DRO</code> , <code>DeepClone</code> , <code>ProductDiscovery</code> , or <code>Revenue Cloud</code> . These values can be used based on the available license. If unspecified, the value is set to <code>Default</code> . If a procedure plan definition exist in the org with <code>processType</code> value as <code>null</code> , modify the value to <code>Default</code> .	Optional	63.0

Name	Type	Description	Required or Optional	Available Version
sectionType	String[]	Name of section to be evaluated. Valid values are PricingProcedure, ProductDiscoveryProcedure, ProductQualificationProcedure, PricingDiscoveryProcedure, DiscountSpreadServiceProcedure, RatingProcedure, Custom, Or RatingDiscoveryProcedure.	Optional	62.0
subSectionType	String[]	Name of subsection to be evaluated.	Optional	62.0
subType	String	Specifies the vertical or cloud-specific subclassification for the procedure plan definition.	Optional	68.0

The combination of the `sectionType` and `subSectionType` property values must be unique for every procedure plan version.

Procedure Plan Section Input

Input representation of the details of a procedure plan section.

JSON Example

```
"procedurePlanSections": [
  {
    "isInherited": false,
    "procedurePlanOptions": [
      {
        "saveContextMapping": "AssetToSalesTransactionMapping",
        "expressionSetDefinition": "9QAZ60000004ECOOA2",
        "expressionSetLabel": "Revenue_Default_Pricing_Procedure",
        "expressionSetApiName": "Revenue Default Pricing Procedure",
        "logic": "1 AND 2 AND 3",
        "priority": 1,
        "procedurePlanCriterion": [
          {
            "conditionSequence": 1,
            "fieldObject": "BillingCountry",
            "fieldPath": "BillingCountry",
            "literalValue": "test",
            "operator": "Equals",
            "dataType": "Text"
          },
          {
            "conditionSequence": 2,
            "fieldObject": "BillingPostalCode",
            "fieldPath": "BillingPostalCode",
            "literalValue": "sample",
```



```
        "operator": "Equals",
        "dataType": "Text"
      },
      {
        "conditionSequence": 3,
        "fieldObject": "LastActivityDate",
        "fieldPath": "LastActivityDate",
        "literalValue": "2024-07-14",
        "operator": "LessThan",
        "dataType": "Date"
      }
    ]
  },
  "resolutionType": "RuleBased",
  "sectionType": "PricingProcedure",
  "sequence": 1,
  "subSectionType": "PricingProcedure",
  "recordId": "1FRZ60000008OIAOA2"
}
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
isInherited	Boolean	Indicates whether the procedure plan section is inherited from a template (<code>true</code>) or not (<code>false</code>).	This property is read-only.	62.0
procedurePlan Options	Procedure Plan Option Input[]	List of procedure plan options that defines a group of criteria. You can edit or delete a procedure plan option only if it isn't associated with an active procedure plan version.	Required	62.0
recordId	String	ID of the procedure plan section record.	Required	62.0
resolution Type	String	Type of resolution used to filter the procedure. You can't edit this property value if the procedure plan section includes a procedure plan option record.	Required	62.0
sectionType	String	Type of section. Valid values are <code>PricingProcedure</code> , <code>ProductDiscoveryProcedure</code> , <code>ProductQualificationProcedure</code> , <code>PricingDiscoveryProcedure</code> , <code>DiscountSpreadServiceProcedure</code> , <code>RatingProcedure</code> , <code>Custom</code> , or <code>RatingDiscoveryProcedure</code> .	Required	62.0

Name	Type	Description	Required or Optional	Available Version
sequence	Integer	Sequence to be followed for the processing of the procedures. This property value must be greater than 0 and must be unique for a procedure plan section associated with a procedure plan version.	Required	62.0
subSection Type	String	Procedure subsection added to the procedure plan definition.	Required	62.0

Procedure Plan Option Input

Input representation of the details of a procedure plan option.

JSON Example

```
"procedurePlanOptions": [
  {
    "saveContextMapping": "AssetToSalesTransactionMapping",
    "expressionSetDefinition": "9QAZ60000004EC00A2",
    "expressionSetLabel": "Revenue_Default_Pricing_Procedure",
    "expressionSetApiName": "Revenue Default Pricing Procedure",
    "logic": "1 AND 2 AND 3",
    "priority": 1,
    "procedurePlanCriterion": [
      {
        "conditionSequence": 1,
        "fieldObject": "BillingCountry",
        "fieldPath": "BillingCountry",
        "literalValue": "test",
        "operator": "Equals",
        "dataType": "Text"
      },
      {
        "conditionSequence": 2,
        "fieldObject": "BillingPostalCode",
        "fieldPath": "BillingPostalCode",
        "literalValue": "sample",
        "operator": "Equals",
        "dataType": "Text"
      },
      {
        "conditionSequence": 3,
        "fieldObject": "LastActivityDate",
        "fieldPath": "LastActivityDate",
        "literalValue": "2024-07-14",
        "operator": "LessThan",
        "dataType": "Date"
      }
    ]
  }
]
```

```
}
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
expressionSet ApiName	String	API name of the expression set.	Optional	62.0
expressionSet Definition	String	Expression set definition that's associated with this procedure plan option record.	Required	62.0
expressionSet Label	String	Label of the expression set that's associated with this procedure plan option record.	Optional	62.0
logic	String	Computation logic for the conditions applied to a procedure plan option. This property value must be blank if the resolution type is default.	Optional	62.0
priority	Integer	Priority for the specified criteria. This property value must be greater than 0 and must be unique within a procedure plan section.	Required	62.0
procedurePlan Criterion	Procedure Plan Criterion Input[]	Details of the rule-based criteria for the procedure. You can edit or delete a procedure plan criterion only if it isn't associated with an active procedure plan version.	Optional	62.0
readContext Mapping	String	Mapping that's used to read from the mapped object and populate the context definition. This property value must be associated with a context definition.	Optional	62.0
recordId	String	ID of the procedure plan option record.	Required	62.0
saveContext Mapping	String	Mapping that's used to save data from the context definition and populate the mapped object. This property value must be associated with a context definition.	Optional	62.0

Response Bodies

Learn more about the available Salesforce Pricing API response bodies.

[Adjustment Details](#)

Output representation of a pricing adjustment request.

[API Execution Log Response](#)

Output representation of the execution log of a pricing waterfall request.

[Line Item Waterfall Response](#)

Output representation of the line item waterfall response.

[PBE Derived Pricing](#)

Output representation of the response that includes the source product for the Price Book Entry (PBE) derived pricing.

[Pricing Error Response](#)

Output representation of the pricing error response.

[Pricing Execution Waterfall Response](#)

Output representation of the execution process that's associated with a pricing waterfall.

[Pricing Generic Response](#)

Output representation of a pricing data sync request.

[Pricing Output](#)

Output representation of a Salesforce pricing request.

[Pricing Recipe LookUp Table Response](#)

Output representation of a pricing recipe lookup table.

[Pricing Recipe](#)

Output representation of the pricing recipe information table.

[Pricing Recipe Post](#)

Output representation of the pricing recipe after the API request.

[Pricing Recipe Response](#)

Output representation of the pricing recipe.

[Pricing Recipe Clone](#)

Output representation of the payload for the pricing recipe clone operation.

[Pricing Recipe Clone Error](#)

Output representation of the error response for the Pricing Recipe Clone API.

[Pricing Recipe Valid Elements](#)

Output representation containing the list of valid pricing element type API names for a given Pricing Usage Sub Type.

[Pricing Response](#)

Output representation of the pricing request.

[Pricing Result](#)

Output representation of the pricing result.

[Pricing Result Error](#)

Output representation of the pricing result error.

[Pricing Versioned Revision Details](#)

Output representation of the versioned revision details.

[Pricing Waterfall Response](#)

Output representation of a pricing waterfall request.

[Procedure Plan Criterion](#)

Output representation of the details of a procedure plan criterion.

[Procedure Plan Definition](#)

Output representation of the details of a single procedure plan definition.

[Procedure Plan Definition Version](#)

Output representation of the version details of a procedure plan definition.

[Procedure Plan Definitions](#)

Output representation of the details of procedure plan definitions.

[Procedure Plan Generic](#)

Output representation of the details of the created procedure plan definition record.

[Procedure Plan Generic Error](#)

Output representation of the error details related to the procedure plan definitions.

[Procedure Plan Option](#)

Output representation of the details of a procedure plan option.

[Procedure Plan Section](#)

Output representation of the details of a procedure plan section.

[Procedure Plan Section Evaluation Runtime](#)

Output representation of the results from the procedure plan evaluation.

[Procedure Plan Evaluation](#)

Output representation of the evaluation details of a procedure plan definition.

[Procedure Plan Evaluation Response](#)

Output representation of the evaluation details of a procedure plan definition.

[Procedure Plan Evaluation Result](#)

Output representation of the evaluation result of a procedure plan definition.

[Pricing Process Execution Details for Line Items](#)

Output representation of the pricing process execution details for the line items along with the error details and response generation status.

[Line Item Details Response](#)

Output representation of the pricing process execution details for the line items.

[Pricing Process Execution Response](#)

Output representation of the details of a pricing process execution.

[Pricing Process Execution List](#)

Output representation of the execution details for different types of the pricing processes.

[Pricing Simulation Input Variables With Data](#)

Output representation of the pricing simulation variables with data.

Adjustment Details

Output representation of a pricing adjustment request.

JSON Example

```
"pricingElement": {
```

```
{
  "adjustments": [{
    "adjustmentType": null,
    "adjustmentValue": null
  }],
  "name": "List Price",
  "elementType": "ListPrice"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
adjustments	Map<String, Object>[]	Details of the pricing element.	Small, 60.0	60.0
description	String	Description of the pricing element.	Small, 60.0	60.0
elementType	String	Type of the pricing element.	Small, 60.0	60.0
name	String	Name of the pricing element.	Small, 60.0	60.0

API Execution Log Response

Output representation of the execution log of a pricing waterfall request.

JSON Example

```
{
  "message": {The Pricing API execution was successful.},
  "pricingElement": {
    "adjustments": [
      {
        "adjustmentType": null,
        "adjustmentValue": null
      }
    ],
    "name": "List Price",
    "elementType": "ListPrice"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
message	String []	Message of the API execution.	Small, 63.0	63.0
pricingElement	Adjustment Details	Details of the price adjustment of a pricing element.	Small, 63.0	63.0

Line Item Waterfall Response

Output representation of the line item waterfall response.

JSON Example

```
{
  "currencyCode": "USD",
  "error": null,
  "executionEndTimestamp": "2023-07-31T20:11:29.625Z",
  "executionId": "gdLVwn2xluats2xWMAjV",
  "executionStartTimestamp": null,
  "lineItemId": "item1",
  "success": true,
  "usageType": "Pricing",
  "output": {
    "quantity": "10",
    "netUnitPrice": "10",
    "subtotal": "100"
  },
  "waterfall": []
}
```

This sample response includes diagnostic data if you've enabled Advanced Logging settings under Salesforce Pricing from Setup.

```
{
  "apiExecutionId": "395526033950891",
  "contextDefinitionVersionId": "110SG000000Eiu12AC",
  "contextMappingId": "11jSG00001YqfHVVYAZ",
  "currencyCode": "USD",
  "executionEndTimestamp": "2026-02-17T10:43:46.197Z",
  "executionId": "395527509949481",
  "executionStartTimestamp": "2026-02-17T10:43:44.063Z",
  "id": "0QLSG0000010Xv84AG",
  "lineItemId": "0QLSG0000010Xv84AG",
  "output": {
    "NetUnitPrice": 20,
    "TotalSubscriptionPrice": 40,
    "Subtotal": 40,
    "diagnosticData": {
      "lineItemId": "0QLSG0000010Xv84AG",
      "exceptionDetails": {},
      "inputParams": {
        "ContributingNetUnitPrice": [
          100
        ],
        "ContributingSubTotal": [
          100
        ],
        "DerivedFormula": [
          "PERCENTAGE(ListPrice,10)",
          "PERCENTAGE(ListPrice,10)"
        ],
        "PRODUCT_REFERENCE_IDS": null,
        "Subtotal": 40,
        "Quantity": 2,
        "TransactionalListPrice": 0,
        "ContractId": null,
        "CurrencyIsoCode": "USD",

```

```

    "ContributingSource": [
      "Product",
      "Product"
    ],
    "isDerivedProcessed": true,
    "IsDerived": true,
    "NetUnitPrice": 20,
    "ContributingId": [
      "02iSG000001fenKYAQ",
      "0QLSG000001OXv74AG"
    ],
    "HeaderTotal": 100,
    "ContributingScope": [
      "NonTransactional",
      "Transactional"
    ],
    "Non-TransactionalListPrice": [
      100
    ],
    "ContributingProduct": [
      "01tSG00000CC6NhYAL",
      "01tSG00000CC6NhYAL"
    ],
    "LineItemId": "0QLSG000001OXv84AG",
    "hasError": false,
    "lineItemDetailId": "0QLSG000001OXv84AG",
    "lineItemDetailIndex": 1
  },
  "contributorCount": 2,
  "contributingLines": [
    {
      "ContributingNetUnitPrice": 100,
      "DerivedFormula": "PERCENTAGE(ListPrice,10)",
      "ContributingSubTotal": 100,
      "ContributingId": "0QLSG000001OXv84AG",
      "ContributingScope": "NonTransactional",
      "HeaderTotal": 100,
      "isSkipped": false,
      "Non-TransactionalListPrice": 100,
      "ContributingProduct": "01tSG00000CC6NhYAL",
      "TransactionalListPrice": 0,
      "hasError": false,
      "ContributingSource": "Product"
    },
    {
      "ContributingNetUnitPrice": null,
      "DerivedFormula": "PERCENTAGE(ListPrice,10)",
      "ContributingSubTotal": null,
      "ContributingId": "0QLSG000001OXv84AG",
      "ContributingScope": "Transactional",
      "HeaderTotal": 100,
      "isSkipped": false,
      "Non-TransactionalListPrice": null,
      "ContributingProduct": "01tSG00000CC6NhYAL",

```



```

        "TransactionalListPrice": 0,
        "hasError": false,
        "ContributingSource": "Product"
    }
]
},
"isParallelExecution": true,
"SubscriptionNetUnitPrice": 20,
"section-1-output": 40,
"section-0-output": 40
},
"success": true,
"usageType": "Pricing",
"waterfall": [
    {
        "fieldToTagNameMapping": {
            "ContributingNetUnitPrice": "ContributorUnitPrice",
            "ContributingSubTotal": "ContributorTotalPrice",
            "DerivedFormula": "ContributorFormulaInput",
            "Subtotal": "ItemNetTotalPrice",
            "Quantity": "LineItemQuantity",
            "TransactionalListPrice": "ListPrice",
            "ContractId": "ItemContract",
            "CurrencyIsoCode": "CurrencyIsoCode",
            "PriceWaterfall": "price_water_fall",
            "ContributingSource": "ContributorSource",
            "IsDerived": "DerivedPricingAttribute",
            "NetUnitPrice": "NetUnitPrice",
            "ContributingId": "Contributor",
            "ContributingScope": "ContributorScope",
            "HeaderTotal": "TotalAmount",
            "Non-TransactionalListPrice": "ContributorListPrice",
            "ContributingProduct": "ContributorProduct",
            "LineItemId": "LineItem"
        },
        "hideWaterfall": false,
        "inputParameters": {
            "ContributingNetUnitPrice": [
                100
            ],
            "ContributingSubTotal": [
                100
            ],
            "DerivedFormula": [
                "PERCENTAGE(ListPrice,10)",
                "PERCENTAGE(ListPrice,10)"
            ],
            "Quantity": 2,
            "TransactionalListPrice": 0,
            "ContractId": null,
            "CurrencyIsoCode": "USD",
            "ContributingSource": [
                "Product",
                "Product"
            ]
        }
    }
]

```

```

],
"IsDerived": true,
"ContributingId": [
  "02iSG000001fenKYAQ",
  "0QLSG0000010Xv74AG"
],
"HeaderTotal": 100,
"ContributingScope": [
  "NonTransactional",
  "Transactional"
],
"Non-TransactionalListPrice": [
  100
],
"diagnosticData": {
  "lineItemId": "0QLSG0000010Xv84AG",
  "exceptionDetails": {},
  "inputParams": {
    "ContributingNetUnitPrice": [
      100
    ],
    "ContributingSubTotal": [
      100
    ],
    "DerivedFormula": [
      "PERCENTAGE(ListPrice,10)",
      "PERCENTAGE(ListPrice,10)"
    ],
    "PRODUCT_REFERENCE_IDS": null,
    "Subtotal": 40,
    "Quantity": 2,
    "TransactionalListPrice": 0,
    "ContractId": null,
    "CurrencyIsoCode": "USD",
    "ContributingSource": [
      "Product",
      "Product"
    ],
    "isDerivedProcessed": true,
    "IsDerived": true,
    "NetUnitPrice": 20,
    "ContributingId": [
      "02iSG000001fenKYAQ",
      "0QLSG0000010Xv74AG"
    ],
    "HeaderTotal": 100,
    "ContributingScope": [
      "NonTransactional",
      "Transactional"
    ],
    "Non-TransactionalListPrice": [
      100
    ],
    "ContributingProduct": [

```

```

        "01tSG00000CC6NhYAL",
        "01tSG00000CC6NhYAL"
    ],
    "LineItemId": "0QLSG000001OXv84AG",
    "hasError": false,
    "lineItemDetailId": "0QLSG000001OXv84AG",
    "lineItemDetailIndex": 1
},
"contributorCount": 2,
"contributingLines": [
    {
        "ContributingNetUnitPrice": 100,
        "DerivedFormula": "PERCENTAGE(ListPrice,10)",
        "ContributingSubTotal": 100,
        "ContributingId": "0QLSG000001OXv84AG",
        "ContributingScope": "NonTransactional",
        "HeaderTotal": 100,
        "isSkipped": false,
        "Non-TransactionalListPrice": 100,
        "ContributingProduct": "01tSG00000CC6NhYAL",
        "TransactionalListPrice": 0,
        "hasError": false,
        "ContributingSource": "Product"
    },
    {
        "ContributingNetUnitPrice": null,
        "DerivedFormula": "PERCENTAGE(ListPrice,10)",
        "ContributingSubTotal": null,
        "ContributingId": "0QLSG000001OXv84AG",
        "ContributingScope": "Transactional",
        "HeaderTotal": 100,
        "isSkipped": false,
        "Non-TransactionalListPrice": null,
        "ContributingProduct": "01tSG00000CC6NhYAL",
        "TransactionalListPrice": 0,
        "hasError": false,
        "ContributingSource": "Product"
    }
]
},
"ContributingProduct": [
    "01tSG00000CC6NhYAL",
    "01tSG00000CC6NhYAL"
],
"LineItemId": "0QLSG000001OXv84AG"
},
"outputParameters": {
    "Subtotal": 40,
    "diagnosticData": {
        "lineItemId": "0QLSG000001OXv84AG",
        "exceptionDetails": {},
        "inputParams": {
            "ContributingNetUnitPrice": [
                100
            ]
        }
    }
}

```

```

    ],
    "ContributingSubTotal": [
      100
    ],
    "DerivedFormula": [
      "PERCENTAGE(ListPrice,10)",
      "PERCENTAGE(ListPrice,10)"
    ],
    "PRODUCT_REFERENCE_IDS": null,
    "Subtotal": 40,
    "Quantity": 2,
    "TransactionalListPrice": 0,
    "ContractId": null,
    "CurrencyIsoCode": "USD",
    "ContributingSource": [
      "Product",
      "Product"
    ],
    "isDerivedProcessed": true,
    "IsDerived": true,
    "NetUnitPrice": 20,
    "ContributingId": [
      "02iSG000001fenKYAQ",
      "0QLSG000001OXv74AG"
    ],
    "HeaderTotal": 100,
    "ContributingScope": [
      "NonTransactional",
      "Transactional"
    ],
    "Non-TransactionalListPrice": [
      100
    ],
    "ContributingProduct": [
      "01tSG00000CC6NhYAL",
      "01tSG00000CC6NhYAL"
    ],
    "LineItemId": "0QLSG000001OXv84AG",
    "hasError": false,
    "lineItemDetailId": "0QLSG000001OXv84AG",
    "lineItemDetailIndex": 1
  },
  "contributorCount": 2,
  "contributingLines": [
    {
      "ContributingNetUnitPrice": 100,
      "DerivedFormula": "PERCENTAGE(ListPrice,10)",
      "ContributingSubTotal": 100,
      "ContributingId": "0QLSG000001OXv84AG",
      "ContributingScope": "NonTransactional",
      "HeaderTotal": 100,
      "isSkipped": false,
      "Non-TransactionalListPrice": 100,
      "ContributingProduct": "01tSG00000CC6NhYAL",

```

```

        "TransactionalListPrice": 0,
        "hasError": false,
        "ContributingSource": "Product"
    },
    {
        "ContributingNetUnitPrice": null,
        "DerivedFormula": "PERCENTAGE(ListPrice,10)",
        "ContributingSubTotal": null,
        "ContributingId": "0QLSG000001OXv84AG",
        "ContributingScope": "Transactional",
        "HeaderTotal": 100,
        "isSkipped": false,
        "Non-TransactionalListPrice": null,
        "ContributingProduct": "01tSG00000CC6NhYAL",
        "TransactionalListPrice": 0,
        "hasError": false,
        "ContributingSource": "Product"
    }
]
},
"NetUnitPrice": 20
},
"pricingElement": {
    "adjustments": [
        {
            "NetUnitPrice": 10,
            "ContributingId": "02iSG000001fenKYAQ",
            "ContributingScope": "NonTransactional",
            "ContributingProduct": "01tSG00000CC6NhYAL",
            "ContributingSource": "Product"
        },
        {
            "NetUnitPrice": 10,
            "ContributingId": "0QLSG000001OXv74AG",
            "ContributingScope": "Transactional",
            "ContributingProduct": "01tSG00000CC6NhYAL",
            "ContributingSource": "Product"
        }
    ],
    "elementType": "DerivedPricing",
    "name": "Derived Price"
},
"profileAccess": [],
"sequence": 3,
"tasksInfo": [
    {
        "executionEndTimestamp": "2026-02-17T10:43:46.077280883Z",
        "executionStartTimestamp": "2026-02-17T10:43:46.037719198Z",
        "taskName": "DerivedPrice-DerivedCalculate"
    },
    {
        "executionEndTimestamp": "2026-02-17T10:43:45.657762503Z",
        "executionStartTimestamp": "2026-02-17T10:43:45.657283237Z",
        "taskName": "DerivedPrice-UpdateCalculationPayload"
    }
]

```

```

    }
  ]
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
contextDefinitionVersionId	String	Context definition version ID of the pricing procedure.	Small, 60.0	60.0
contextMappingId	String	Context mapping ID of the record.	Small, 60.0	60.0
currencyCode	String	Currency code. For example, USD or INR.	Small, 60.0	60.0
error	Pricing Error Response	Details of any errors.	Small, 60.0	60.0
executionEndTimestamp	String	End timestamp of procedure execution.	Small, 60.0	60.0
executionId	String	Execution ID of a particular execution of a pricing procedure.	Small, 60.0	60.0
executionStartTimestamp	String	Start timestamp of procedure execution.	Small, 60.0	60.0
lineItemId	String	Line item ID for which the price is being calculated.	Small, 60.0	60.0
output	Map<String, Object>	Output of the pricing procedure.	Small, 60.0	60.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
usageType	String	Usage type of the waterfall log record.	Small, 62.0	62.0
waterfall	Pricing Waterfall Response[]	Details of the price waterfall.	Small, 60.0	60.0

PBE Derived Pricing

Output representation of the response that includes the source product for the Price Book Entry (PBE) derived pricing.

JSON Example

```

{
  "productId": "01txx0000006i2SAAQ",
  "pricebookEntryId": "01uxx0000008yYcAAI",

```

```
"effectiveFrom": "2020-01-01T22:53:20.000Z",
"effectiveTo": "2021-01-01T22:53:20.000Z"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response[]	Displays the error while processing the request.	Small, 61.0	61.0
isSuccess	Boolean	Indicates whether the request is successful (true) or not (false).	Small, 61.0	61.0
source ProeductId	String	ID of the source product.	Small, 61.0	61.0

Pricing Error Response

Output representation of the pricing error response.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Indicates the error code.	Small, 60.0	60.0
message	String	Specifies the message stating the reason for the error, if any.	Small, 60.0	60.0

Pricing Execution Waterfall Response

Output representation of the execution process that's associated with a pricing waterfall.

JSON Example

```
{
  "apiEndpoint": "/connect/core-pricing/pricing",
  "apiExecutionId": "263369316770986",
  "apiExecutionLogRepresentationList": [
    {
      "message": [
        "The Pricing API couldn't be run. Try again, and if the issue persists, ask your admin for help."
      ]
    }
  ],
  "currencyCode": "USD",
  "executionId": "263369316895959",
  "id": "263369316895960",
  "lineItemId": null,
  "referenceKey": "referenceKey-ABCD",
  "success": false,
}
```

```

    "usageType": "Api_Execution"
  }

```

Property Name	Type	Description	Filter Group and Version	Available Version
apiEndpoint	String	API endpoint that ran during the pricing request.	Small, 63.0	Small, 63.0
apiExecutionId	String	Unique execution ID that's generated each time a pricing API is executed.	Small, 63.0	Small, 63.0
apiExecutionLogRepresentationList	API Execution Log Response[]	List of API execution logs.	Small, 63.0	63.0
currencyCode	String	Currency code that's stored in each API log record for the pricing execution.	Small, 67.0	Small, 67.0
error	Pricing Error Response	Error details of the pricing execution process.	Small, 63.0	Small, 63.0
executionId	String	Unique ID that's generated each time a pricing process is executed.	Small, 63.0	Small, 63.0
id	String	Unique record ID of the waterfall response.	Small, 65.0	Small, 65.0
lineItemId	String	Unique ID of the line item that's associated with this pricing execution.	Small, 59.0	Small, 59.0
referenceKey	String	The reference ID that a consuming workstream provides in the API to search for the specific logs in the Pricing Operations Console.	Small, 63.0	Small, 63.0
success	Boolean	Indicates whether the API execution is successful (<code>true</code>) or not (<code>false</code>).	Small, 63.0	Small, 63.0
usageType	String	Usage type of the API execution.	Small, 63.0	Small, 63.0

Pricing Generic Response

Output representation of a pricing data sync request.

JSON Example

```

{
  "success": true
}

```


Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response	Details from the pricing error response.	Small, 60.0	60.0
success	Boolean	Indicates whether the request is successful (true) or not (false).	Small, 60.0	60.0

Pricing Output

Output representation of a Salesforce pricing request.

JSON Example

```
{
  "apiExecutionId": "612228038743152",
  "pricingExecutionId": "612229738898095",
  "pricingResult": {
    "subtotal": [
      {
        "dataPath": [
          "cart_1001",
          "lineItem_1002"
        ],
        "value": 300.0,
        "errors": [],
        "isSuccess": true
      },
      {
        "dataPath": [
          "cart_1001",
          "lineItem_1001"
        ],
        "value": 400.0,
        "errors": [],
        "isSuccess": true
      }
    ],
    "netunitprice": [
      {
        "dataPath": [
          "cart_1001",
          "lineItem_1002"
        ],
        "value": xx,
        "errors": [],
        "isSuccess": true
      },
      {
        "dataPath": [
          "cart_1001",
          "lineItem_1001"
        ]
      }
    ]
  }
}
```

```

},
"value": xx,
"errors": [],
"isSuccess": true
}
],
},
"pricingResultErrors": [],
"status": "Completed",
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
apiExecutionId	String	Unique ID that's generated each time a pricing API is executed.	Small, 63.0	63.0
error	Pricing Error Response	Displays the error encountered when the request is processed. For example, a pricing procedure isn't found.	Small, 60.0	60.0
pricingExecutionId	String	Unique ID that's generated each time a pricing process is executed.	Small, 63.0	63.0
pricingResult	Pricing Result	Represents the outcomes associated with the output tags defined in the contextual definition for which the pricing engine establishes values. The initial attribute name is substituted for the output tag's designation. For instance, if the original attribute name specified in the Context Definition is "Subtotal," but during contextual setup, the output tag is denoted as "Total Price," the API output exhibits the initial attribute name "Subtotal" in the response.	Small, 60.0	60.0
pricingResultErrors	Pricing Result Error[]	Errors from the pricing request, if any.	Small, 60.0	60.0
status	String	Status of the pricing request. Valid values are <code>Completed</code> — Pricing is completed for all the line items, <code>Partially Completed</code> — Pricing is completed for some line items, or <code>Failed</code> — Pricing isn't completed for the line items.	Small, 60.0	60.0

Pricing Recipe LookUp Table Response

Output representation of a pricing recipe lookup table.

JSON Example

```
    "decisionTables": [
      {
        "id": "01Dxx00000000T3EAI",
        "isInternal": true,
        "pricingComponentType": "ListPrice"
      },
      {
        "id": "01Dxx00000000T4EAI",
        "isInternal": true,
        "pricingComponentType": "VolumeDiscount"
      },
      {
        "id": "01Dxx00000000H1EAI",
        "isInternal": false,
        "pricingComponentType": "CustomDiscount"
      }
    ]
  }
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the pricing recipe table mapping.	Small, 60.0	60.0
isInternal	Boolean	Indicates if the decision table is available (true) or not (false).	Small, 60.0	60.0
pricing ComponentType	String	Price component types such as, custom discount, volume discount, attribute-based discount, bundle-based discount, and list price.	Small, 60.0	60.0

Pricing Recipe

Output representation of the pricing recipe information table.

JSON Example

```
  "recipes": [
    {
      "active": false,
      "createdBy": "autoproc@00dxx0000006gmjea2",
      "createdOn": "2023-07-15T13:12:38.000Z",
      "decisionTables": [
        {
          "id": "01Dxx00000000T3EAI",
          "isInternal": true,
          "pricingComponentType": "ListPrice"
        },
        {
          "id": "01Dxx00000000T4EAI",
          "isInternal": true,
          "pricingComponentType": "VolumeDiscount"
        },
        {
          "id": "01Dxx00000000H1EAI",
          "isInternal": false,
          "pricingComponentType": "CustomDiscount"
        }
      ]
    }
  ]
}
```

```

{
  "id": "01Dxx00000000T4EAI",
  "isInternal": true,
  "pricingComponentType": "VolumeDiscount"
},
{
  "id": "01Dxx00000000H1EAI",
  "isInternal": false,
  "pricingComponentType": "CustomDiscount"
}
],
"developerName": "NGPDefaultRecipe",
"id": "12Gxx00000005Ka4EAE",
"name": "NGPDefaultRecipe",
"procedureCreatedBy": "",
"procedureCreatedOn": "2023-09-19T11:39:18.983Z",
"procedureId": "",
"procedureName": ""
}
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
active	Boolean	Indicates whether the recipe is active (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
createdBy	String	Details on who created the recipe.	Small, 60.0	60.0
createdOn	String	Date when the recipe was created.	Small, 60.0	60.0
decision Tables	Pricing Recipe LookUp Table Response []	Decision tables linked to the recipe.	Small, 60.0	60.0
developerName	String	API name of the recipe.	Small, 60.0	60.0
id	String	ID of the recipe.	Small, 60.0	60.0
name	String	Name of the recipe.	Small, 60.0	60.0
procedure CreatedBy	String	Details on who created the procedure.	Small, 60.0	60.0
procedure CreatedOn	String	Date when the procedure was created.	Small, 60.0	60.0
procedureId	String	ID of the procedure.	Small, 60.0	60.0
procedureName	String	Name of the procedure.	Small, 60.0	60.0

Pricing Recipe Post

Output representation of the pricing recipe after the API request.

JSON Example

```
{
  isSuccess : true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response	Details from the pricing error response.	Small, 60.0	60.0
isSuccess	Boolean	Indicates whether the response was calculated successfully (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Pricing Recipe Response

Output representation of the pricing recipe.

JSON Example

```
{
  "recipes": [
    {
      "active": false,
      "createdBy": "autoproc@00dxx0000006gmjea2",
      "createdOn": "2023-07-15T13:12:38.000Z",
      "decisionTables": [
        {
          "id": "01Dxx00000000T3EAI",
          "isInternal": true,
          "pricingComponentType": "ListPrice"
        },
        {
          "id": "01Dxx00000000T4EAI",
          "isInternal": true,
          "pricingComponentType": "VolumeDiscount"
        },
        {
          "id": "01Dxx00000000H1EAI",
          "isInternal": false,
          "pricingComponentType": "CustomDiscount"
        }
      ],
      "developerName": "NGPDefaultRecipe",
      "id": "12Gxx0000005Ka4EAE",
      "name": "NGPDefaultRecipe",
      "procedureCreatedBy": "",
      "procedureCreatedOn": "2023-09-19T11:39:18.983Z",
      "procedureId": ""
    }
  ]
}
```

```

    "procedureName": ""
  }],
  "success": true
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
recipes	Pricing Recipe Output Representation []	Representation of the pricing recipe.	Small, 60.0	60.0
success	Boolean	Indicates if the request is successful (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Pricing Recipe Clone

Output representation of the payload for the pricing recipe clone operation.

JSON Example

```

{
  "isSuccess" : true,
  "newPricingRecipeId" : "0C1xX0000004D1AACU",
  "newPricingRecipeName" : "Cloned Recipe"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Recipe Clone Error	Details of the error encountered during the clone operation, if any.	Big, 68.0	68.0
isSuccess	Boolean	Indicates whether the clone operation was successful (<code>true</code>) or not (<code>false</code>).	Big, 68.0	68.0
newPricingRecipeId	String	ID of the cloned pricing recipe.	Big, 68.0	68.0
newPricingRecipeName	String	Name of the cloned pricing recipe.	Big, 68.0	68.0

Pricing Recipe Clone Error

Output representation of the error response for the Pricing Recipe Clone API.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Indicates the error code.	Big, 68.0	68.0

Property Name	Type	Description	Filter Group and Version	Available Version
message	String	Specifies the message stating the reason for the error, if any.	Big, 68.0	68.0

Pricing Recipe Valid Elements

Output representation containing the list of valid pricing element type API names for a given Pricing Usage Sub Type.

Property Name	Type	Description	Filter Group and Version	Available Version
errorMessage	String	Error message when the <code>isSuccess</code> property is false. This property value is blank when the <code>isSuccess</code> property is true.	Big, 68.0	68.0
isSuccess	Boolean	Indicates whether the request was successful (<code>true</code>) or not (<code>false</code>).	Big, 68.0	68.0
validPricingElements	String	List of valid pricing element type API names for the given sub usage type. This property value includes an empty list when the <code>isSuccess</code> property is false.	Big, 68.0	68.0

Pricing Response

Output representation of the pricing request.

JSON Example

```
{
  "success": true,
  "executionId": "zu81o5hBCrFzyd5LWZk"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response	Errors while processing the request, if any.	Small, 60.0	60.0
executionId	String	Auto-generated alphanumeric string for correlation to extract async waterfall and context persistence status.	Small, 60.0	60.0
success	Boolean	Indicates if the request is successful (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Pricing Result

Output representation of the pricing result.

JSON Example

```
"pricingResult": {
  "subtotal": [
    {
      "dataPath": [
        "cart_1001",
        "lineItem_1002"
      ],
      "value": 300.0,
      "errors": [],
      "isSuccess": true
    },
    {
      "dataPath": [
        "cart_1001",
        "lineItem_1001"
      ],
      "value":400.0,
      "errors": [],
      "isSuccess": true
    }
  ],
  "netunitprice": [
    {
      "dataPath": [
        "cart_1001",
        "lineItem_1002"
      ],
      "value": xx,
      "errors": [],
      "isSuccess": true
    },
    {
      "dataPath": [
        "cart_1001",
        "lineItem_1001"
      ],
      "value": xx,
      "errors": [],
      "isSuccess": true
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
dataPath	String	Includes the entire data route for the specific element starting from the root node. The	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
		request must include the ID to construct the accurate data route. For example, if a <code>jsonDataString</code> property comprises a Cart [Id = Cart1] and its associated Cart Item [Id = CartItem1], then the data route for CartItem appears as [Cart1, CartItem1].		
errors	Pricing Error Response[]	Displays processing errors related to the element as recognized by the data path.	Small, 60.0	60.0
isSuccess	Boolean	Displays if processing of the element for the specified data path is successful or not.	Small, 60.0	60.0
value	Object	Displays the value of the element into consideration. Element is uniquely identify by the data path.	Small, 60.0	60.0

Pricing Result Error

Output representation of the pricing result error.

JSON Example

```

"pricingResultErrors": {
  "Aggregateprice": [
    {
      "dataPath": [
        "cart_1001",
      ],

      "errors": [
        {
          "errorCode": "Dummy"
          "message":
            }
        ]
      }
    ]
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
dataPath	String[]	Includes the entire data route for the specific element starting from the root node. The request must include the ID to construct the accurate data route. For example, if a <code>jsonDataString</code> property comprises	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
		a Cart [Id = Cart1] and its associated Cart Item [Id = CartItem1], then the data route for CartItem appears as [Cart1, CartItem1].		
errors	Pricing Error Response	Displays processing errors related to the element as recognized by the data path.	Small, 60.0	60.0

Pricing Versioned Revision Details

Output representation of the versioned revision details.

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response	Details from the pricing error response.	Small, 60.0	60.0
success	Boolean	Indicates whether the request is successful (true) or not (false).	Small, 60.0	60.0

Pricing Waterfall Response

Output representation of a pricing waterfall request.

JSON Example

```
{
  "inputParameters": {
    "productId": "01txx0000006i2SAAQ",
    "pricebookId": "01sxx0000005ptpAAA",
    "pricingModelType": "OneTime"
  },
  "fieldToTagNameMapping": {
    "Product2Id": "ItemProduct",
    "Subtotal": "Subtotal",
    "Pricebook2Id": "Pricebook",
    "Quantity": "ItemQuantity",
    "LineItemId": "SalesTransactionSource",
    "ListPrice": "ItemListPrice"
  },
  "sequence": 0,
  "outputParameters": {
    "listPrice": "10"
  },
  "pricingElement": {
    "adjustments": [
      {
        "adjustmentType": null,
```

```

        "adjustmentValue": null
    }
  ],
  "name": "List Price"
}
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
fieldTo TagName Mapping	Map<String, String>	Mappings of field to tag names.	Small, 60.0	60.0
input Parameters	Map<String, Object>	Parameters of pricing element input.	Small, 60.0	60.0
output Parameters	Map<String, Object>	Parameters of pricing element output.	Small, 60.0	60.0
pricing Element	Adjustment Details	Details of the price adjustment of a pricing element.	Small, 60.0	60.0
sequence	Integer	Sequence of pricing element execution.	Small, 60.0	60.0

Procedure Plan Criterion

Output representation of the details of a procedure plan criterion.

JSON Example

```

"procedurePlanCriterion": [
  {
    "conditionSequence": 1,
    "dataType": "Text",
    "fieldObject": "BillingCountry",
    "fieldPath": "BillingCountry",
    "isSuccess": true,
    "literalValue": "test",
    "operator": "Equals",
    "recordId": "1FiZ60000004C9cKAE"
  },
  {
    "conditionSequence": 2,
    "dataType": "Text",
    "fieldObject": "BillingPostalCode",
    "fieldPath": "BillingPostalCode",
    "isSuccess": true,
    "literalValue": "pramit",
    "operator": "Equals",
    "recordId": "1FiZ60000004C9dKAE"
  },
  {

```

```
        "conditionSequence": 3,
        "dataType": "Date",
        "fieldObject": "LastActivityDate",
        "fieldPath": "LastActivityDate",
        "isSuccess": true,
        "literalValue": "2024-07-14",
        "operator": "LessThan",
        "recordId": "1FiZ60000004C9eKAE"
      }
    ]
  }
```

Property Name	Type	Description	Filter Group and Version	Available Version
conditionSequence	Integer	Sequence to be followed to process the conditions defined in the procedure plan option.	Small, 62.0	62.0
dataType	String	Data type of the field from the selected object.	Small, 62.0	62.0
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
fieldObject	String	Value of the object field that's used to resolve the procedure plan option.	Small, 62.0	62.0
fieldPath	String	Path of the field that's used in a procedure in relation to the object that the field belongs to.	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
literalValue	String	User-defined value that's compared to the value of the sObject field value.	Small, 62.0	62.0
operator	String	Operator that's used by the procedure plan criterion.	Small, 62.0	62.0
recordId	String	ID of the procedure plan criterion record.	Small, 62.0	62.0

Procedure Plan Definition

Output representation of the details of a single procedure plan definition.

JSON Example

This example shows a sample response for the Procedure Plan Definition By ID (GET) request.

```
{
  "description": "Default Definition",
  "developerName": "Quote_Definition",
  "name": "Quote_Definition",
}
```

```
    "primaryObject": "Quote",
    "procedurePlanDefinitionVersions": [
      {
        "active": false,
        "contextDefinition": "11Oxx0000006PZ7EAM",
        "effectiveFrom": "2024-02-03T10:15:30.000Z",
        "effectiveTo": "2024-02-03T10:15:30.000Z",
        "readContextMapping": "MedicalHistoryMapping",
        "recordId": "1Cvxx0000004E1ACAU",
        "saveContextMapping": "MedicalHistoryMapping",
        "success": true,
        "processType": "Default"
      }
    ],
    "recordId": "1FNxx0000004GkWGUAU",
    "processType": "Default",
    "success": true
  }
}
```

This example shows a sample response for the Procedure Plan Definition By ID (PATCH) request.

```
{
  "procedurePlanDefinitionVersions": [],
  "recordId": "1FNDU00000000EX4AY",
  "processType": "Default",
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
description	String	Description for the procedure plan definition.	Small, 62.0	62.0
developerName	String	Developer name of the procedure plan definition.	Small, 62.0	62.0
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
name	String	Name of the procedure plan definition.	Small, 62.0	62.0
primaryObject	String	Object that's associated with the procedure plan definition.	Small, 62.0	62.0
procedurePlan Definition Versions	Procedure Plan Definition Version[]	Details of the versions of a procedure plan definition.	Small, 62.0	62.0
processType	String	Business processes that's specified that requires a procedure plan for each sObject and definition.	Small, 63.0	63.0
recordId	String	ID of the procedure plan definition record.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Procedure Plan Definition Version

Output representation of the version details of a procedure plan definition.

JSON Example

```
"procedurePlanDefinitionVersions": [
  {
    "active": false,
    "developerName": "sample_test",
    "effectiveFrom": "2024-07-09T00:00:00.000Z",
    "contextDefinition": "SalesTransactionContext__stdctx",
    "procedurePlanSections": [],
    "rank": 1,
    "readContextMapping": "ProductDiscoveryContextMapping",
    "recordId": "1CvZ60000008OIaKAM",
    "success": true,
    "processType": "Default"
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
active	Boolean	Indicates whether the procedure plan definition version is active (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
context Definition	String	Context definition that's associated with the procedure plan definition version.	Small, 62.0	62.0
developerName	String	Developer name of the procedure plan definition version.	Small, 62.0	62.0
effectiveFrom	String	Date and time from when the procedure plan definition version is effective.	Small, 62.0	62.0
effectiveTo	String	Date and time until when the procedure plan definition version is effective.	Small, 62.0	62.0
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
inheritedFrom	String	Name of the template the procedure plan definition is extended from.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
procedurePlanSections	Procedure Plan Section[]	List of sections of the procedure plan definition that you can organize in any order. Each section must include a procedure or a set of procedures to be executed for a specific criteria.	Small, 62.0	62.0
processType	String	Business processes that's specified that requires a procedure plan for each sObject and definition.	Small, 64.0	64.0
rank	Integer	Rank or the order of sequence to follow for the processing of the procedure plan definition version.	Small, 62.0	62.0
readContextMapping	String	Mapping that's used to read data from the mapped object and populate the context definition.	Small, 62.0	62.0
recordId	String	ID of the procedure plan definition version record.	Small, 62.0	62.0
saveContextMapping	String	Mapping that's used to save data from the context definition and populate the mapped object.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Procedure Plan Definitions

Output representation of the details of procedure plan definitions.

JSON Example

```
{
  "isSuccess": true,
  "procedurePlanDefinitions": [
    {
      "description": "test description",
      "developerName": "sample_test",
      "name": "sample_test",
      "primaryObject": "Account",
      "procedurePlanDefinitionVersions": [
        {
          "active": false,
          "developerName": "sample_test",
          "effectiveFrom": "2024-07-09T00:00:00.000Z",
          "contextDefinition": "SalesTransactionContext__stdctx",
          "procedurePlanSections": [],
          "rank": 1,

```

```
        "readContextMapping": "ProductDiscoveryContextMapping",
        "recordId": "1CvZ60000008OIaKAM",
        "success": true
      }
    ],
    "recordId": "1FNZ60000004CAHOA2",
    "success": true
  },
  {
    "developerName": "PriceAdjustmentSchedule",
    "name": "PriceAdjustmentSchedule",
    "primaryObject": "PriceAdjustmentSchedule",
    "procedurePlanDefinitionVersions": [
      {
        "active": false,
        "developerName": "PriceAdjustmentSchedule",
        "effectiveFrom": "2024-07-10T00:00:00.000Z",
        "contextDefinition": "SalesTransactionContext__stdctx",
        "procedurePlanSections": [],
        "rank": 1,
        "recordId": "1CvZ6000000CaRbKAK",
        "success": true
      }
    ],
    "recordId": "1FNZ6000000CaSAOA0",
    "success": true
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
procedure PlanDefinitions	Procedure Plan Definition[]	Details of a single procedure plan definition.	Small, 62.0	62.0

Procedure Plan Generic

Output representation of the details of the created procedure plan definition record.

JSON Example

This example shows a sample response of the details of a procedure plan definition record, created by using the Procedure Plan Definitions (POST) API.

```
{
  "isSuccess":true,
```



```
{
  "recordId": "1FNDU000000000EX4AY"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
recordId	String	ID of the created procedure plan definition record.	Small, 62.0	62.0

Procedure Plan Generic Error

Output representation of the error details related to the procedure plan definitions.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code indicating the type of error.	Small, 62.0	62.0
message	String	Message stating the reason for the error, if any.	Small, 62.0	62.0

Procedure Plan Option

Output representation of the details of a procedure plan option.

JSON Example

```
{
  "procedurePlanOptions": [
    {
      "expressionSetApiName": "Revenue_Mgmt_Default_Pricing_Procedure",
      "expressionSetDefinition": "9QAZ60000004ECOA2",
      "expressionSetLabel": "Revenue Management Default Pricing Procedure",
      "isSuccess": true,
      "logic": "1 AND 2 AND 3",
      "primaryObject": "Account",
      "priority": 1,
      "procedurePlanCriterion": [
        {
          "conditionSequence": 1,
          "dataType": "Text",
          "fieldObject": "BillingCountry",
          "fieldPath": "BillingCountry",
          "isSuccess": true,
          "literalValue": "test",

```

```
      "operator": "Equals",
      "recordId": "1FiZ60000004C9cKAE"
    },
    {
      "conditionSequence": 2,
      "dataType": "Text",
      "fieldObject": "BillingPostalCode",
      "fieldPath": "BillingPostalCode",
      "isSuccess": true,
      "literalValue": "pramit",
      "operator": "Equals",
      "recordId": "1FiZ60000004C9dKAE"
    },
    {
      "conditionSequence": 3,
      "dataType": "Date",
      "fieldObject": "LastActivityDate",
      "fieldPath": "LastActivityDate",
      "isSuccess": true,
      "literalValue": "2024-07-14",
      "operator": "LessThan",
      "recordId": "1FiZ60000004C9eKAE"
    }
  ],
  "recordId": "1FYZ6000000000foAA",
  "saveContextMapping": "AssetToSalesTransactionMapping"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
expressionSetApiName	String	API name of the expression set.	Small, 62.0	62.0
expressionSetDefinition	String	Expression set definition that's associated with this procedure plan option record.	Small, 62.0	62.0
expressionSetLabel	String	Label of the expression set that's associated with this procedure plan option record.	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
logic	String	Computation logic for the conditions applied to a procedure plan option.	Small, 62.0	62.0
primaryObject	String	Source object that's used to create a procedure with rule-based criteria.	Small, 62.0	62.0
priority	Integer	Priority for the specified criteria.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
procedurePlanCriterion	Procedure Plan Criterion[]	Details of the rule-based criteria for the procedure.	Small, 62.0	62.0
readContextMapping	String	Mapping that's used to read from the mapped object and populate the context definition.	Small, 62.0	62.0
recordId	String	ID of the procedure plan option record.	Small, 62.0	62.0
saveContextMapping	String	Mapping that's used to save data from the context definition and populate the mapped object.	Small, 62.0	62.0

Procedure Plan Section

Output representation of the details of a procedure plan section.

JSON Example

```

"procedurePlanSections": [
{
  "isInherited": false,
  "isSuccess": true,
  "procedurePlanOptions": [
    {
      "expressionSetApiName": "Revenue_Mgmt_Default_Pricing_Procedure",
      "expressionSetDefinition": "9QAZ60000004ECOA2",
      "expressionSetLabel": "Revenue Management Default Pricing Procedure",

      "isSuccess": true,
      "logic": "1 AND 2 AND 3",
      "primaryObject": "Account",
      "priority": 1,
      "procedurePlanCriterion": [
        {
          "conditionSequence": 1,
          "dataType": "Text",
          "fieldObject": "BillingCountry",
          "fieldPath": "BillingCountry",
          "isSuccess": true,
          "literalValue": "test",
          "operator": "Equals",
          "recordId": "1FiZ60000004C9cKAE"
        },
        {
          "conditionSequence": 2,
          "dataType": "Text",
          "fieldObject": "BillingPostalCode",
          "fieldPath": "BillingPostalCode",
          "isSuccess": true,

```

```

        "literalValue": "pramit",
        "operator": "Equals",
        "recordId": "1FiZ60000004C9dKAE"
      },
      {
        "conditionSequence": 3,
        "dataType": "Date",
        "fieldObject": "LastActivityDate",
        "fieldPath": "LastActivityDate",
        "isSuccess": true,
        "literalValue": "2024-07-14",
        "operator": "LessThan",
        "recordId": "1FiZ60000004C9eKAE"
      }
    ],
    "recordId": "1FYZ6000000000foAA",
    "saveContextMapping": "AssetToSalesTransactionMapping"
  }
],
"recordId": "1FRZ600000080IAOA2",
"resolutionType": "RuleBased",
"sectionType": "PricingProcedure",
"sequence": 1,
"subSectionType": "PricingProcedure"
}
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Procedure Plan Generic Error[]	Details of the error encountered during the processing of the API request.	Small, 62.0	62.0
isInherited	Boolean	Indicates whether the procedure plan section is inherited from a template (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
procedurePlanOptions	Procedure Plan Option[]	List of procedure plan options.	Small, 62.0	62.0
recordId	String	ID of the procedure plan option record.	Small, 62.0	62.0
resolutionType	String	Type of resolution that's used to filter the procedure.	Small, 62.0	62.0
sectionType	String	Type of section. Valid values are PricingProcedure, ProductDiscoveryProcedure, ProductQualificationProcedure, PricingDiscoveryProcedure, DiscountSpreadServiceProcedure,	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
		RatingProcedure, Custom, Or RatingDiscoveryProcedure.		
sequence	Integer	Sequence that's followed for the processing of the procedures.	Small, 62.0	62.0
subSection Type	String	Subsection that's added to the procedure plan definition.	Small, 62.0	62.0

Procedure Plan Section Evaluation Runtime

Output representation of the results from the procedure plan evaluation.

JSON Example

```
"procedurePlanSections": [
  {
    "expressionSetApiName": "pricingProcedure_usageType_3",
    "expressionSetDefinitionId": "9QAZ60000004Ef6OAE",
    "expressionSetLabel": "pricingProcedure_usageType_3",
    "sectionType": "PricingProcedure",
    "sequence": 1,
    "subSectionType": "Section1",
    "usageType": "DefaultPricing"
  },
  {
    "expressionSetApiName": "productQualification_usageType_3",
    "expressionSetDefinitionId": "9QAZ60000004EfFOAU",
    "expressionSetLabel": "productQualification_usageType_3",
    "sectionType": "ProductQualificationProcedure",
    "sequence": 3,
    "subSectionType": "Section2",
    "usageType": "ProductQualification"
  },
  {
    "expressionSetApiName": "rating_usageType_2",
    "expressionSetDefinitionId": "9QAZ60000004EfHOAU",
    "expressionSetLabel": "rating_usageType_2",
    "sectionType": "RatingProcedure",
    "sequence": 2,
    "subSectionType": "Section3",
    "usageType": "DefaultRating"
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
expressionSetApiName	String	API name of the expression set.	Small, 62.0	62.0
expressionSetDefinitionId	String	ID of the expression set definition.	Small, 62.0	62.0
expressionSetLabel	String	Label of the expression set.	Small, 62.0	62.0
readContextMapping	String	Mapping that's used to read data from the mapped object and populate the context definition.	Small, 62.0	62.0
saveContextMapping	String	Mapping that's used to save data from the context definition and populate the mapped object.	Small, 62.0	62.0
sectionType	String	Name of the evaluated section. Valid values are PricingProcedure, ProductDiscoveryProcedure, ProductQualificationProcedure, PricingDiscoveryProcedure, DiscountSpreadServiceProcedure, RatingProcedure, Custom, or RatingDiscoveryProcedure.	Small, 62.0	62.0
sequence	Integer	Sequence that's followed for the processing of the procedures.	Small, 62.0	62.0
subSectionType	String	Name of the evaluated subsection.	Small, 62.0	62.0
usageType	String	Usage type of the procedure.	Small, 62.0	62.0

Procedure Plan Evaluation

Output representation of the evaluation details of a procedure plan definition.

JSON Example

```
"procedurePlanEvaluations": [
{
  "errorMessage": "",
  "id": "a01DU000000BylcYAC",
  "isSuccess": true,
  "primaryObject": "SignallingCustomEvaluation__c",
  "result": {
    "contextDefinition": "110DU00000008Sw2AI",
    "procedurePlanSections": []
  }
}
```

```

}
}
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
errorMessage	String	Message indicating the error details, if any.	Small, 62.0	62.0
id	String	ID of the object used for evaluation.	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
primaryObject	String	Name of the object used for evaluation.	Small, 62.0	62.0
result	Procedure Plan Evaluation Result[]	Results from the procedure plan evaluation.	Small, 62.0	62.0

Procedure Plan Evaluation Response

Output representation of the evaluation details of a procedure plan definition.

JSON Example

```

{
  "isSuccess":true,
  "procedurePlanEvaluations":[
    {
      "errorMessage":"",
      "id":"a01DU000000BylcYAC",
      "isSuccess":true,
      "primaryObject":"SignallingCustomEvaluation__c",
      "result":{
        "contextDefinition":"110DU00000008Sw2AI",
        "procedurePlanSections":[]
      }
    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errorMessage	String	Message indicating the error details, if any.	Small, 62.0	62.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
procedure PlanDefinition Name	String	Name of the procedure plan definition.	Small, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
procedurePlan Evaluations	Procedure Plan Evaluation []	Evaluation details of the procedure plan.	Small, 62.0	62.0

Procedure Plan Evaluation Result

Output representation of the evaluation result of a procedure plan definition.

JSON Example

```
"result":{
  "contextDefinition":"11ODU00000008Sw2AI",
  "procedurePlanSections":[]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
context Definition	String	Context definition that's associated with the procedure plan evaluation.	Small, 62.0	62.0
procedure PlanSections	Procedure Plan Section Evaluation Runtime []	Results from the procedure plan evaluation.	Small, 62.0	62.0

Pricing Process Execution Details for Line Items

Output representation of the pricing process execution details for the line items along with the error details and response generation status.

JSON Example

```
{
  "error": {},
  "isSuccess": true,
  "lineItemDetailsList": [
    {
      "lineItemId": "LineItem1",
      "status": "Success"
    },
    {
      "lineItemId": "LineItem2",
      "status": "Success"
    },
    {
      "lineItemId": "LineItem3",
      "status": "Failure"
    }
  ]
}
```



```

    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response	Error encountered during the processing of the API request.	Small, 63.0	63.0
isSuccess	Boolean	Indicates whether the response was generated successfully (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0
lineItemDetailsList	Line Item Details Response []	List of the line items for which the pricing process is executed.	Small, 63.0	63.0

Line Item Details Response

Output representation of the pricing process execution details for the line items.

JSON Example

```

{
  "lineItemDetailsList": [
    {
      "lineItemId": "LineItem1",
      "status": "Success"
    },
    {
      "lineItemId": "LineItem2",
      "status": "Success"
    },
    {
      "lineItemId": "LineItem3",
      "status": "Failure"
    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
lineItemId	String	ID of the line item that the pricing process is executed for.	Small, 63.0	63.0
status	String	Specifies whether the pricing process execution for the line item is successful or has failed. Valid values are <code>Success</code> or <code>Failure</code> .	Small, 63.0	63.0

Pricing Process Execution Response

Output representation of the details of a pricing process execution.

JSON Example

```
{
  "error": {},
  "isSuccess": true,
  "pricingProcessExecutionList": [
    {
      "executionId": "12345",
      "executionType": "Pricing_Line",
      "executionTypeId": "111_LineItem1",
      "message": "The Pricing API execution was successful.",
      "status": "Success"
    },
    {
      "executionId": "12345",
      "executionType": "Api_Execution",
      "executionTypeId": "333",
      "status": "Partial_Success"
    },
    {
      "executionId": "12345",
      "executionType": "Discovery",
      "executionTypeId": "222",
      "status": "Success"
    },
    {
      "executionId": "12345",
      "executionType": "Pricing",
      "executionTypeId": "111",
      "status": "Failure"
    },
    {
      "executionId": "12345",
      "executionType": "Discovery_Line",
      "executionTypeId": "222_LineItem1",
      "status": "Partial_Success"
    },
    {
      "executionId": "12345",
      "executionType": "Pricing_Line",
      "executionTypeId": "111_LineItem2",
      "status": "Failure"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Pricing Error Response	Error encountered during the processing of the API request.	Small, 63.0	63.0
isSuccess	Boolean	Indicates whether the response was generated successfully (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0
pricingProcessExecutionList	Pricing Process Execution List []	List of the execution details of the pricing process.	Small, 63.0	63.0

Pricing Process Execution List

Output representation of the execution details for different types of the pricing processes.

JSON Example

```
{
  "pricingProcessExecutionList": [
    {
      "executionId": "12345",
      "executionType": "Pricing_Line",
      "executionTypeId": "111_LineItem1",
      "message": "The Pricing API execution was successful.",
      "status": "Success"
    },
    {
      "executionId": "12345",
      "executionType": "Api_Execution",
      "executionTypeId": "333",
      "status": "Success"
    },
    {
      "executionId": "12345",
      "executionType": "Discovery",
      "executionTypeId": "222",
      "status": "Success"
    },
    {
      "executionId": "12345",
      "executionType": "Pricing",
      "executionTypeId": "111",
      "status": "Failure"
    },
    {
      "executionId": "12345",
      "executionType": "Discovery_Line",
      "executionTypeId": "222_LineItem1",
      "status": "Success"
    }
  ],
}
```

```
{
  {
    "executionId": "12345",
    "executionType": "Pricing_Line",
    "executionTypeId": "111_LineItem2",
    "status": "Failure"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
executionId	String	Unique ID that's generated each time a pricing process is executed.	Small, 63.0	63.0
executionType	String	Type of the execution that's defined internally within the pricing API.	Small, 63.0	63.0
executionTypeId	String	Unique execution type ID that's generated internally for process executions, such as pricing or discovery procedures.	Small, 63.0	63.0
message	String	Message that's generated when a pricing process is executed.	Small, 63.0	63.0
status	String	Execution process status for a line item. Valid values are <code>Failure</code> , <code>Partial_Success</code> —Applies to <code>Pricing</code> and <code>Discovery</code> procedures when execution for some line items fails, or <code>Success</code> .	Small, 63.0	63.0

Pricing Simulation Input Variables With Data

Output representation of the pricing simulation variables with data.

JSON Example

```
{
  "error": "",
  "simulationInputJsonWithData": "{ \"SalesTransaction\": [{ \"PriceBooks\": \\\"01sxx0000005ptpAAA\\\", \\\"SalesTransactionItem\": [{ \\\"LineItemQuantity\": 4, \\\"ProductSellingModel\": null, \\\"Product\": \\\"01txx0000006i2SAAQ\\\", \\\"LineItem\": \\\"0QLxx0000004C92GAE\\\" }, { \\\"LineItemQuantity\": 3, \\\"ProductSellingModel\": null, \\\"Product\": \\\"01txx0000006i2TAAQ\\\", \\\"LineItem\": \\\"0QLxx0000004C93GAE\\\" } ] } ] }\",
  \"success\": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
<code>error</code>	String	Returns the cause of error, if any. For a successful request, this API returns an empty string.	Small, 64.0	64.0
<code>simulationInput JsonWithData</code>	String	Resultant simulation input variables with quote or order data such as ID, which was specified in the query parameters.	Small, 64.0	64.0
<code>success</code>	Boolean	Indicates whether the request was successful (<code>true</code>) or not (<code>false</code>).	Small, 64.0	64.0

Salesforce Pricing Apex Reference

Use built-in Apex classes and interfaces grouped by namespace.

[RevSignaling Namespace](#)

The RevSignaling Namespace includes properties and methods to extend the standard procedure plan implementation through custom logic. Using this extension support, you can tailor implementations to your unique requirements.

SEE ALSO:

[Apex Developer Guide: Getting Started with Apex](#)

RevSignaling Namespace

The RevSignaling Namespace includes properties and methods to extend the standard procedure plan implementation through custom logic. Using this extension support, you can tailor implementations to your unique requirements.

Usage

To use this namespace, enable the **Procedure Plan Orchestration for Pricing** toggle from the Revenue Settings page from Setup.

The `RevSignaling` namespace includes these classes.

[ProcedurePlan Class](#)

Represents the instance of the current pricing procedure plan that you're working on.

[SignalingApexProcessor Interface](#)

Defines the context-driven orchestration logic based on procedure plan instance and contextual instance.

[TransactionRequest Class](#)

Represents the transaction request to the signaling Apex processor.

[TransactionResponse Class](#)

Represents the transaction response from the signaling Apex processor.

[TransactionStatus Enum](#)

Specifies the status of the transaction request.

ProcedurePlan Class

Represents the instance of the current pricing procedure plan that you're working on.

Namespace

[RevSignaling](#) on page 795

[ProcedurePlan Properties](#)

Learn more about the properties that are available with the ProcedurePlan class.

ProcedurePlan Properties

Learn more about the properties that are available with the ProcedurePlan class.

The `ProcedurePlan` class includes these properties.

[prevStepOutput](#)

Output of the previous step that's executed and passed to the next step.

prevStepOutput

Output of the previous step that's executed and passed to the next step.

Signature

```
public Map<String,ANY> prevStepOutput {get; set;}
```

```
RevSignaling.ProcedurePlan, prevStepOutput
```

Property Value

Type: Map<String,Object>

SignalingApexProcessor Interface

Defines the context-driven orchestration logic based on procedure plan instance and contextual instance.

Namespace

[RevSignaling](#) on page 795

Usage

Here's a sample implementation of the SignalingApexProcessor interface.

```
public class SignalingApexProcessorImpl implements RevSignaling.SignalingApexProcessor {

    public RevSignaling.TransactionResponse execute(RevSignaling.TransactionRequest request)
    {
        System.debug('Executing SampleValidClass...');
        System.debug('Procedure Plan: ' + request.procedurePlanInstance);
        System.debug('Context Instance: ' + request.ctxInstanceId);

        // Add your logic here

        // Return the response
        RevSignaling.TransactionResponse response = new RevSignaling.TransactionResponse();

        response.status = RevSignaling.TransactionStatus.SUCCESS;
        response.message = 'Apex method was successfully executed!';
        return response;
    }
}
```

Refer to [Customize Your Pricing Procedures With Apex Hooks](#) for additional samples that cover unique pricing scenarios by implementing this interface.

SignalingApexProcessor Methods

The SignalingApexProcessor method executes the specified transaction request, which returns the corresponding response.

SignalingApexProcessor Example Implementation

Refer to the example implementation of the SignalingApexProcessor interface to define a context-driven orchestration logic.

SignalingApexProcessor Methods

The SignalingApexProcessor method executes the specified transaction request, which returns the corresponding response.

The `SignalingApexProcessor` class includes these methods.

`execute(var1)`

Executes the parameter that's specified in the instance of a transaction request.

`execute (var1)`

Executes the parameter that's specified in the instance of a transaction request.

Signature

```
public RevSignaling.TransactionResponse execute(RevSignaling.TransactionRequest var1)

RevSignaling.SignalingApexProcessor, execute, [RevSignaling.TransactionRequest],
RevSignaling.TransactionResponse
```

Parameters

var1

Type: [RevSignaling.TransactionRequest](#) on page 798

Instance of the TransactionRequest class containing the execution parameter.

Return Value

Type: [RevSignaling.TransactionResponse](#) on page 800

Response from the orchestration.

SignalingApexProcessor Example Implementation

Refer to the example implementation of the SignalingApexProcessor interface to define a context-driven orchestration logic.

This is an example implementation of the `RevSignaling.SignalingApexProcessor` interface.

```
public class SignalingApexProcessorImpl implements RevSignaling.SignalingApexProcessor {

    public RevSignaling.TransactionResponse execute(RevSignaling.TransactionRequest request)
    {
        System.debug('Executing SampleValidClass...');
        System.debug('Procedure Plan: ' + request.procedurePlanInstance);
        System.debug('Context Instance: ' + request.ctxInstanceId);

        // Add your logic here

        // Return the response
        RevSignaling.TransactionResponse response = new RevSignaling.TransactionResponse();

        response.status = RevSignaling.TransactionStatus.SUCCESS;
        response.message = 'Apex method was successfully executed!';
        return response;
    }
}
```

TransactionRequest Class

Represents the transaction request to the signaling Apex processor.

Namespace

[RevSignaling](#) on page 795

[TransactionRequest Constructors](#)

Learn more about the available constructors with the TransactionRequest class.

[TransactionRequest Properties](#)

Learn more about the properties that are available with the TransactionRequest class.

TransactionRequest Constructors

Learn more about the available constructors with the TransactionRequest class.

The `TransactionRequest` class includes these constructors.

[TransactionRequest\(procedurePlanInstance, ctxInstanceId\)](#)

Creates an instance of the TransactionRequest class to specify the procedure plan and context instance ID.

TransactionRequest(procedurePlanInstance, ctxInstanceId)

Creates an instance of the TransactionRequest class to specify the procedure plan and context instance ID.

Signature

```
public TransactionRequest (RevSignaling.ProcedurePlan procedurePlan, String ctxInstanceId)
```

```
RevSignaling.TransactionRequest, newInstance, [RevSignaling.ProcedurePlan, String],  
RevSignaling.TransactionRequest
```

Parameters

procedurePlan

Type: [RevSignaling.ProcedurePlan](#) on page 796

Instance of the procedure plan.

ctxInstanceId

Type: String

ID of the context.

TransactionRequest Properties

Learn more about the properties that are available with the TransactionRequest class.

The `TransactionRequest` class includes these properties.

[ctxInstanceId](#)

Set the context ID.

[procedurePlanInstance](#)

Set the instance of the procedure plan.

ctxInstanceId

Set the context ID.

Signature

```
public String ctxInstanceId {get; set;}
```

```
RevSignaling.TransactionRequest, ctxInstanceId
```

Property Value

Type: String

procedurePlanInstance

Set the instance of the procedure plan.

Signature

```
public RevSignaling.ProcedurePlan procedurePlanInstance {get; set;}
```

```
RevSignaling.TransactionRequest, procedurePlanInstance
```

Property Value

Type: [RevSignaling.ProcedurePlan](#) on page 796

TransactionResponse Class

Represents the transaction response from the signaling Apex processor.

Namespace

[RevSignaling](#) on page 795

[TransactionResponse Properties](#)

Learn more about the properties that are available with the TransactionResponse class.

TransactionResponse Properties

Learn more about the properties that are available with the TransactionResponse class.

The `TransactionResponse` class includes these properties.

[message](#)

Get the message from the transaction response.

[status](#)

Get the status of the request from the transaction response.

message

Get the message from the transaction response.

Signature

```
public String message {get; set;}
```

```
RevSignaling.TransactionResponse, message
```

Property Value

Type: String

status

Get the status of the request from the transaction response.

Signature

```
public RevSignaling.TransactionStatus status {get; set;}
```

```
RevSignaling.TransactionResponse, status
```

Property Value

Type: [RevSignaling.TransactionStatus](#) on page 801

TransactionStatus Enum

Specifies the status of the transaction request.

Enum Values

The `RevSignaling.TransactionStatus` enum includes these values.

Value	Description
FAILED	The transaction request has failed.
SUCCESS	The transaction request was successful.

Example FAILED:

```
RevSignaling.TransactionStatus, FAILED
```

Example SUCCESS:

```
RevSignaling.TransactionStatus, SUCCESS
```

Salesforce Pricing Standard Invocable Actions

Learn more about the standard invocable actions available with Salesforce Pricing.

[Run Salesforce Headless Pricing Action](#)

Invoke the Pricing Connect API by providing the pricing data and details of a context, pricing procedure, and price waterfall.

[Run Salesforce Pricing Action](#)

Invoke the Pricing Connect API by providing the context, pricing procedure, and price waterfall details.

SEE ALSO:

[Actions Developer Guide: Overview](#)

[REST API Developer Guide: Invocable Actions Standard](#)

Run Salesforce Headless Pricing Action

Invoke the Pricing Connect API by providing the pricing data and details of a context, pricing procedure, and price waterfall.

This action is available in API version 60.0 and later.

Special Access Rules

The Run Salesforce Headless Pricing action is available in Enterprise, Unlimited, and Developer Editions where Salesforce Pricing is enabled.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/runSalesforceHeadlessPricing`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>contextDefinitionId</code>	string	Required. ID of the context definition record that's used to build the pricing data.
<code>contextMappingId</code>	string	Required. ID of the context-mapping record that identifies which Salesforce object and mappings to use to build the pricing data.
<code>discoveryProcedure</code>	string	Name of the discovery procedure that's used to execute the discovery process.
<code>displayContext</code>	boolean	Indicates whether to display the context structure for pricing (<code>true</code>) or not (<code>false</code>).
<code>effectiveDate</code>	string	Date when the pricing rules, as specified in the pricing procedure, are applied. The <code>effectiveDate</code> parameter determines which pricing procedure to execute when multiple active versions of pricing procedures are available with different date ranges.
<code>isHighVolumeLineItems</code>	boolean	Indicates whether the pricing API returns pricing details for more than 100 line items (<code>true</code>) or not (<code>false</code>).
<code>isSkipWaterfall</code>	boolean	Indicates whether to generate the price waterfall data (<code>true</code>) or not (<code>false</code>).
<code>persistContext</code>	boolean	Indicates whether to store the context (<code>true</code>) or not (<code>false</code>). If set to <code>true</code> , the user must have edit access to all sObject fields used in the context mapping.

Input	Type	Description
pricingData	string	Required. JSON data that's used to build the pricing data. The JSON must be escaped. If you're using this data within a Flow, then the JSON data must not be escaped. Also, make sure that the <code>businessObjectType</code> value within the <code>pricingData</code> property node is set to the <code>sObject</code> used in the context mappings.
pricingProcedureId	string	Required. ID or API name of the pricing procedure used for calculating the prices. A pricing procedure is represented as an Expression Set Definition in the system. If you're an Experience Cloud user, specify the name of the pricing procedure.
skipDiscovery	boolean	Indicates whether to skip executing the discovery procedure (<code>true</code>) or not (<code>false</code>).
taggedData	boolean	Indicates whether the associated context node contains a key (<code>true</code>) or not (<code>false</code>).
useSessionScopedContext	boolean	Indicates whether to store the context in a session (<code>true</code>) or a request (<code>false</code>).

Outputs

Output	Type	Description
contextDetails	string	Context structure for pricing that's generated when the <code>displayContext</code> parameter is set to <code>true</code> .
executionId	string	ID of the executed pricing data.
pricingProcessErrors	string	Errors that are generated due to context tags in a pricing process.
pricingProcessStatus	string	Status of the pricing process, which is executed as an API call.
pricingResult	string	Outcome of the executed pricing process that's based on the output tags defined in the associated context definition.

Example

POST

This sample request is for the Run Salesforce Headless Pricing action.

```
{
  "inputs": [
    {
      "contextMappingId": "11jSB000002Bn13YAC",
      "contextDefinitionId": "110SB0000000WSv2AM",
      "pricingProcedureId": "9QLSB00000011T74AI",
      "discoveryProcedure": "ES1",
      "displayContext": true,
      "effectiveDate": "2023-11-16T12:20:00.000Z",
      "isHighVolumeLineItems": true,
      "skipDiscovery": true,
      "taggedData": false,
      "pricingData":
        "Escaped JSON data that's used to build the pricing data. The JSON must be escaped. If you're using this data within a Flow, then the JSON data must not be escaped. Also, make sure that the businessObjectType value within the pricingData property node is set to the sObject used in the context mappings."
    }
  ]
}
```

```

        "isSkipWaterfall": false,
        "persistContext": true,
        "useSessionScopedContext": false
    }
]
}

```

This sample response is for the Run Salesforce Headless Pricing action.

```

{
  "actionName": "runSalesforceHeadlessPricing",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "contextDetails": {
      "SalesTransaction": [
        {
          "PriceBooks": "01sxx0000005q3VAAQ",
          "Subtotal": 587.2095,
          "PriceAdjustmentSchedule": "84Xxx0000004CMxEAM",
          "EffectiveDate": "2024-02-12T00:00:00.000Z",
          "SalesTransactionItem": [
            {
              "LineItemQuantity": 5,
              "ProductSellingModel": "0jPxx000000009hEAA",
              "DerivedPricingAttribute": false,
              "Product": "01txx0000006iLwAAI",
              "LineItem": "LineItem1",
              "NetUnitPrice": 117.4419,
              "SalesTrxnAdjustmentGroup": [
                {
                  "AdjustmentType": "Percentage",
                  "AdjustmentValue": 10
                }
              ]
            }
          ]
        }
      ]
    }
  },
  "executionId": "1708488641379821",
  "pricingProcessStatus": "Completed",
  "pricingResult": {
    "StartDate": [
      {
        "value": 1700137200000,
        "dataPath": [
          "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5",
          "CTX_d3b9ffd5-2be7-4366-92d8-c2bcf03b69ed"
        ],
        "errors": [],
        "isSuccess": true
      }
    ]
  },
}

```

```

"NetUnitPrice": [
  {
    "value": 115,
    "dataPath": [
      "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5",
      "CTX_d3b9ffd5-2be7-4366-92d8-c2bcf03b69ed"
    ],
    "errors": [],
    "isSuccess": true
  }
],
"ProductSellingModel": [
  {
    "value": "0jPDE000000042K2AQ",
    "dataPath": [
      "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5",
      "CTX_d3b9ffd5-2be7-4366-92d8-c2bcf03b69ed"
    ],
    "errors": [],
    "isSuccess": true
  }
],
"Pricebook": [
  {
    "value": "01sDE00000000LoeYAE",
    "dataPath": [
      "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5"
    ],
    "errors": [],
    "isSuccess": true
  }
],
"NetTotalPrice": [
  {
    "value": 1150,
    "dataPath": [
      "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5",
      "CTX_d3b9ffd5-2be7-4366-92d8-c2bcf03b69ed"
    ],
    "errors": [],
    "isSuccess": true
  }
],
"Subtotal": [
  {
    "value": 1150,
    "dataPath": [
      "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5"
    ],
    "errors": [],
    "isSuccess": true
  }
],
"Quantity": [

```

```

    {
      "value": 10,
      "dataPath": [
        "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5",
        "CTX_d3b9ffd5-2be7-4366-92d8-c2bcf03b69ed"
      ],
      "errors": [],
      "isSuccess": true
    }
  ],
  "Product": [
    {
      "value": "01tDE000000FU99YAG",
      "dataPath": [
        "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5",
        "CTX_d3b9ffd5-2be7-4366-92d8-c2bcf03b69ed"
      ],
      "errors": [],
      "isSuccess": true
    }
  ],
  "CurrencyIsoCode": [
    {
      "value": "USD",
      "dataPath": [
        "CTX_ece1667e-7a09-40ab-9718-23bdc179a0a5"
      ],
      "errors": [],
      "isSuccess": true
    }
  ]
},
"version": 1
}

```

Run Salesforce Pricing Action

Invoke the Pricing Connect API by providing the context, pricing procedure, and price waterfall details.

This action is available in API version 60.0 and later. You can use this action with Flows only. To use this action with an API tool such as Postman, see [Run Salesforce Headless Pricing Action](#).

Special Access Rules

The Run Salesforce Pricing action is available in Developer, Enterprise, and Unlimited Editions where Salesforce Pricing is enabled.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/runSalesforcePricing

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
contextInstanceId	string	Required. ID of the context data that's used to build the pricing procedure. Get the context instance ID by invoking the Context Service API. See Context Service (POST) .
discoveryProcedure	string	Name of the discovery procedure that's used to execute the discovery process of the pricing data.
effectiveDate	string	Date when the pricing rules, as specified in the pricing procedure, are applied. The <code>effectiveDate</code> parameter determines which pricing procedure to execute when multiple active versions of pricing procedures are available with different date ranges.
isDeveloperName	boolean	Indicates whether the input value in a procedure must use the API name of the pricing (<code>true</code>) or the field name (<code>false</code>).
isSkipWaterfall	boolean	Indicates whether the price waterfall data must be generated (<code>true</code>) or not (<code>false</code>).
pricingProcedureName	string	Required. Name of the pricing procedure record that's used to execute the pricing process.
skipDiscovery	boolean	Indicates whether to skip executing the discovery procedure (<code>true</code>) or not (<code>false</code>).

Outputs

Output	Type	Description
executionId	string	ID of the executed pricing data.

Example

POST

This sample request is for the Run Salesforce Pricing action.

```
{
  "inputs": [
    {
      "contextInstanceId": "32f2c894-ba5e-41c0-91e4-2ab5826f579b",
      "pricingProcedureName": "PricingAction",
      "isSkipWaterfall": false,
      "skipDiscovery": false,
      "isDeveloperName": true,
      "effectiveDate": "2023-11-16T12:20:00.000Z",
      "discoveryProcedure": "ES1"
    }
  ]
}
```

This sample response is for the Run Salesforce Pricing action.

```
{
  "actionName": "runSalesforcePricing",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "executionId": "2QTurzG2NRQ5bgrjvvqyh"
  },
  "version": 1
}
```

Salesforce Pricing Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Salesforce Pricing](#)

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

[IndustriesPricingSettings](#)

Represents the settings for Salesforce Pricing.

[PricingActionParameters](#)

Represents the pricing action that's associated with a context definition and pricing procedure.

[PricingRecipe](#)

Represents the data models or sets of objects of a particular cloud that the pricing data store consumes during design time and run time.

[ProcedureOutputResolution](#)

Represents the pricing resolution for a pricing element determined by using strategy name and formula.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

Flow for Salesforce Pricing

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Salesforce Pricing exposes additional actionType values for the FlowActionCall Metadata type.

Field Name	Field Type	Description
<code>actionType</code>	InvokableActionType (enumeration of type string)	Required. The action type. Additional valid values only for Salesforce Pricing include <code>runSalesforcePricing</code> —Invoke the Pricing Connect API by providing the context, pricing procedure, and price waterfall details or <code>runSalesforceHeadlessPricing</code> —Invoke the Pricing Connect API by providing the pricing data and details of a context, pricing procedure, and price waterfall.

IndustriesPricingSettings

Represents the settings for Salesforce Pricing.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

`IndustriesPricingSettings` values are stored in the `IndustriesPricingSettings.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there’s only one settings file for each settings component.

Version

`IndustriesPricingSettings` components are available in API version 60.0 and later.

Special Access Rules

This metadata type is available with Salesforce Pricing.

Fields

Field Name	Field Type	Description
<code>enableDebugPriceLogs</code>	boolean	Indicates whether to use price logs to diagnose and resolve pricing issues (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 63.0 and later.
<code>enableHighAvailability</code>	boolean	Reserved for internal use.
<code>enableHighestPriceCompliance</code>	boolean	Indicates whether to track the maximum price of a product over a period of 30 days (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 64.0 and later.

Field Name	Field Type	Description
enableLowestPriceCompliance	boolean	Indicates whether to track the minimum price of a product over a period of 30 days (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 62.0 and later.
enablePricingProcParallelization	boolean	Indicates whether to run pricing elements in parallel within a pricing procedure to optimize the performance of the pricing execution process (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 64.0 and later.
enablePricingWaterfall	boolean	Indicates whether to enable Price Waterfall (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Price Waterfall provides insights that include price breakups and reasons for every step of the pricing process.
enablePricingWaterfallPersistence	boolean	Indicates whether to enable Price Waterfall Persistence (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Price Waterfall Persistence stores the process logs that provide insights into the internal pricing processes.
enableSalesforcePricing	boolean	Indicates whether to enable Salesforce Pricing (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .

Declarative Metadata Sample Definition

This example shows a sample IndustriesPricingSettings component.

```
<IndustriesPricingSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableDebugPriceLogs>true</enableDebugPriceLogs>
  <enableHighAvailability>true</enableHighAvailability>
  <enableHighestPriceCompliance>true</enableHighestPriceCompliance>
  <enableLowestPriceCompliance>true</enableLowestPriceCompliance>
  <enablePricingProcParallelization>true</enablePricingProcParallelization>
  <enablePricingWaterfall>true</enablePricingWaterfall>
  <enablePricingWaterfallPersistence>true</enablePricingWaterfallPersistence>
  <enableSalesforcePricing>true</enableSalesforcePricing>
</IndustriesPricingSettings>
```

This example shows a sample `package.xml` that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>IndustriesPricing</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character `*` (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

PricingActionParameters

Represents the pricing action that's associated with a context definition and pricing procedure.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Parent Type

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

File Suffix and Directory Location

PricingActionParameters components have the suffix `.pricingActionParameters` and are stored in the `pricingActionParameters` folder.

Version

PricingActionParameters components are available in API version 60.0 and later.

Special Access Rules

This metadata type is available with Salesforce Pricing.

Fields

Field Name	Field Type	Description
<code>contextDefinition</code>	string	Required. Context definition record that's associated with the pricing action.
<code>contextMapping</code>	string	Required. Context mapping record that's associated with the pricing action.
<code>developerName</code>	string	Required. Unique name of the pricing action parameter record. The name must begin with a letter and use only alphanumeric characters and underscores. The name must not include spaces, end with an underscore, or have two consecutive underscores.
<code>effectiveFrom</code>	dateTime	Required. Date and time from when the pricing action becomes effective.
<code>effectiveTo</code>	dateTime	Date and time till when the pricing action is in effect.
<code>masterLabel</code>	string	Required. Master label of the pricing action parameter.
<code>objectName</code>	string	Name of the object that's associated with the pricing action. Valid values are <code>Case</code> , <code>Contract</code> , <code>Opportunity</code> , <code>Order</code> , <code>Quote</code> , <code>SalesAgreement</code> , or <code>WorkOrder</code> .
<code>pricingProcedure</code>	string	Pricing procedure record that's associated with this pricing action.

Declarative Metadata Sample Definition

The following is an example of a PricingActionParameters component.

```
<PricingActionParameters xmlns="http://soap.sforce.com/2006/04/metadata">
  <developerName>CMEDefaultActionParameters</developerName>
  <objectName>ORDER</objectName>
  <pricingProcedure>PP</pricingProcedure>
  <effectiveFrom>2024-04-08T07:32:00.000Z</effectiveFrom>
  <effectiveTo>2024-04-11T07:32:00.000Z</effectiveTo>
  <contextDefinition>SalesTransactionContext__stdctx</contextDefinition>
  <contextMapping>SalesAgreementEntitiesMapping</contextMapping>
  <masterLabel>PAP_test</masterLabel>
</PricingActionParameters>
```

The following is an example package.xml that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>*</members>
    <name>PricingActionParameters</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

PricingRecipe

Represents the data models or sets of objects of a particular cloud that the pricing data store consumes during design time and run time.

Parent Type

This type extends the [Metadata](#) metadata type and inherits its fullName field.

File Suffix and Directory Location

PricingRecipe components have the suffix .pricingRecipe and are stored in the pricingRecipe folder.

Version

PricingRecipe components are available in API version 60.0 and later.

Special Access Rules

This metadata type is available with Salesforce Pricing.

Fields

Field Name	Field Type	Description
defaultPricingProcedure	Expression Definition	Expression set definition that's associated with this pricing recipe setting.
defaultPricingProcedureDeveloperName	string	For internal use only.
defaultPricingProcedureId	string	ID of the pricing procedure of the pricing recipe.
developerName	string	Required. API name of the pricing recipe.
isActive	boolean	Indicates whether the pricing recipe is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
isInternal	boolean	Indicates whether the price recipe record is created internally by the Salesforce platform (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
masterLabel	string	Required. Name for pricing recipe that's defined when the pricing recipe is created.
pricingRecipeTableMapping	PricingTableMapping	Mapping of the pricing components of a lookup table with the chosen pricing recipe.

PricingRecipeTableMapping

Represents the mapping of the lookup table with the chosen pricing recipe.

Field Name	Field Type	Description
isInternal	boolean	Indicates whether the price recipe field mapping record is created internally by the platform (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
lookupTable	DecisionTable or DecisionMatrixDefinition	Lookup table that's associated with either a decision matrix or decision table.
lookupTableDeveloperName	string	For internal use only.
pricingComponentType	string	Pricing component field data that the decision table is built on. Valid values are <code>AttributeDiscount</code> ; <code>BundleDiscount</code> ; <code>DerivedPricing</code> ; <code>ListPrice</code> ; <code>PriceAdjustmentMatrix</code> ; <code>PromotionsDiscount</code> ; <code>VolumeDiscount</code> ; <code>VolumeTierDiscount</code> ; <code>DiscountDistributionService</code> . This value is available in API version 60.0 and later; or <code>MinimumPrice</code> . Available in API version 62.0 and later.
pricingProcedureOutputMapList	PricingProcedureOutputMapList	List of the mappings of the outputs of the pricing procedures to the associated lookup tables. Available in API version 60.0 and later.
pricingRecipe	string	Required. Pricing data store that's associated with this pricing recipe field mapping.

PricingProcedureOutputMap

Represents the mapping of the outputs of the pricing procedures to the associated lookup tables. Each record specifies the output mapping of the associated lookup table based on the pricing component type specified in the PricingRecipeTableMapping object.

Field Name	Field Type	Description
fieldName	string	For internal use only.
isPricingRecipeActive	boolean	Indicates whether the associated pricing recipe is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
outputFieldName	string	Field name that contains the output type that's generated from the pricing element.
outputFieldNameString	string	Derived field that references a specific column in a decision table or decision matrix.
outputType	string	Output type that's generated from a pricing element. Valid values are <code>AdjustmentType</code> , <code>AdjustmentValue</code> , <code>CustomOutput</code> , <code>HashOutput</code> , or <code>UnitPrice</code> .
pricingElementType	PricingElementType (enumeration of type string)	Type of pricing element, which is a derived field from <code>PricingRecipeTableMapping.PricingComponentType</code> . Valid values are <code>AssetDiscovery</code> , <code>AttributeDiscount</code> , <code>BundleDiscount</code> , <code>DerivedPricing</code> , <code>DiscountDistributionService</code> , <code>ListPrice</code> , <code>MinimumPrice</code> , <code>PriceAdjustmentMatrix</code> , <code>PriceRevision</code> , <code>PromotionsDiscount</code> , <code>RuleFetch</code> , <code>VolumeDiscount</code> , or <code>VolumeTierDiscount</code> .

Declarative Metadata Sample Definition

The following is an example of a PricingRecipe component.

```
<PricingRecipe xmlns="http://soap.sforce.com/2006/04/metadata">
  <defaultPricingProcedureId> </defaultPricingProcedureId>
  <developerName>CMEDefaultRecipe</developerName>
  <isActive>false</isActive>
  <isInternal>false</isInternal>
  <masterLabel>CMEDefaultRecipe</masterLabel>
  <pricingRecipeTableMapping>
    <isInternal>false</isInternal>

  <lookupTableDeveloperName>Bundle_Based_Adjustment_Decision_Table</lookupTableDeveloperName>

  <pricingComponentType>CUSTOMDISCOUNT</pricingComponentType>
  <fileBasedDecisionTableName>Bundle Based Adjustment
Entries</fileBasedDecisionTableName>
  <pricingProcedureOutputMapList>
    <fieldName>AdjustmentValue</fieldName>
    <isPricingRecipeActive>false</isPricingRecipeActive>
    <outputFieldName>01Pxx000000000f</outputFieldName>
```



```

        <outputFieldNameString>false</outputFieldNameString>
        <outputType>AdjustmentValue</outputType>
    <pricingElementType>BundleDiscount</pricingElementType>
    </pricingProcedureOutputMapList>
    <pricingProcedureOutputMapList>
        <fieldName>AdjustmentType</fieldName>
        <isPricingRecipeActive>false</isPricingRecipeActive>
        <outputFieldName>01Pxx000000000m</outputFieldName>
        <outputFieldNameString>false</outputFieldNameString>
        <outputType>AdjustmentType</outputType>
    <pricingElementType>BundleDiscount</pricingElementType>
    </pricingProcedureOutputMapList>
    <pricingRecipe>CMEDefaultRecipe</pricingRecipe>
</pricingRecipeTableMapping>
</PricingRecipe>

```

The following is an example `package.xml` that references the previous definition.

```

<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
    <types>
        <members>*</members>
        <name>PricingRecipe</name>
    </types>
    <version>68.0</version>
</Package>

```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character `*` (asterisk) in the `package.xml` manifest file. For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

ProcedureOutputResolution

Represents the pricing resolution for a pricing element determined by using strategy name and formula.

Parent Type

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

File Suffix and Directory Location

ProcedureOutputResolution components have the suffix `.procedureOutputResolution` and are stored in the `procedureOutputResolution` folder.

Version

ProcedureOutputResolution components are available in API version 63.0 and later.

Special Access Rules

This metadata type is available with Salesforce Pricing.

Fields

Field Name	Field Type	Description
developerName	string	Required. API name of the procedure output resolution.
formula	string	Required. Stores the encoded formula as text.
isActive	boolean	Required. Indicates whether the strategy is active (<code>true</code>) or not (<code>false</code>).
isInternal	boolean	Reserved for internal use.
masterLabel	string	Required. A user-friendly name for the procedure output resolution, which is defined when the ProcedureOutputResolution record is created.
pricingElement	string	Required. Pricing element on which the procedure output resolution is defined.

Declarative Metadata Sample Definition

Here's an example of a ProcedureOutputResolution component.

```
<?xml version="1.0" encoding="UTF-8"?>
<ProcedureOutputResolution xmlns="http://soap.sforce.com/2006/04/metadata">
  <developerName>ProcedureOutputResolution</developerName>
  <isActive>false</isActive>
  <isInternal>false</isInternal>
  <masterLabel>Procedure Output Resolution</masterLabel>
  <pricingElement>ListPrice</pricingElement>
  <formula>MAX(ListPrice)</formula>
</ProcedureOutputResolution>
```

Here's an example package.xml that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>*</members>
    <name>ProcedureOutputResolution</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the package.xml manifest file. For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

Salesforce Pricing Tooling API Objects

Tooling API exposes metadata used in developer tooling that you can access through REST or SOAP. Tooling API's SOQL capabilities for many metadata types allow you to retrieve smaller pieces of metadata.

[PricingActionParameters](#)

Represents a pricing action associated to a context definition and a pricing procedure. This object is available in API version 60.0 and later.

[PricingProcedureOutputMap](#)

Represents the mapping of the outputs of the pricing procedures to the associated lookup tables. Each record specifies the output mapping of the associated lookup table based on the pricing component type specified in the Pricing Recipe Table Mapping object. This object is available in API version 60.0 and later.

[PricingRecipe](#)

Represents one out of various data models or sets of entities of a particular cloud that'll be consumed by the pricing data store during design and run time. This object is available in API version 60.0 and later.

[PricingRecipeTableMapping](#)

Represents the mapping of pricing components of a lookup table with the chosen pricing recipe. This object is available in API version 60.0 and later.

[ProcedureOutputResolution](#)

Represents the pricing resolution for an pricing element determined using strategy name and formula. This object is available in API version 63.0 and later.

[ProcedurePlanCriterion](#)

Represents a criterion within a procedure plan option record. This object is available in API version 62.0 and later.

[ProcedurePlanDefinition](#)

Represents the setup of a unified procedure from a list of multiple procedures that can be sequenced in any order based on business needs. Each procedure plan definition contains sections and subsections where procedures can be configured by using a lookup table or rule-based criteria. This object is available in API version 62.0 and later.

[ProcedurePlanDefinitionVersion](#)

Represents the versions for a procedure plan definition. Multiple versions under a procedure plan definition must be active at a time, which can be resolved at run time using the rank field. This object is available in API version 62.0 and later.

[ProcedurePlanOption](#)

Represents the selection criteria of how a procedure can be configured for a selected procedure plan section record. This object is available in API version 62.0 and later.

[ProcedurePlanSection](#)

Represents various procedure setup sections for a procedure plan definition. Each section enables the setup of a procedure of a type that can be further determined by using a rule-based criteria or it can be set based on a selected lookup table. This object is available in API version 62.0 and later.

[ProcedurePlanVariable](#)

Represents the setup for any adhoc user-defined variable that can be linked to a procedure plan definition record. This object is available in API version 62.0 and later.

SEE ALSO:

[Tooling API Developer Guide: Introducing Tooling API](#)

PricingActionParameters

Represents a pricing action associated to a context definition and a pricing procedure. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

ContextDefinition

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The context definition record associated with the pricing action.

ContextMapping

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The context mapping record that's associated with the pricing action.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the pricing action parameter record.

This name must begin with a letter and use only alphanumeric characters and underscores. It can't include spaces, end with an underscore, or have two consecutive underscores.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the pricing action comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time till when the pricing action is in effect.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The language of the pricing action parameter.

Possible values are:

- da—Danish
- de—German
- en_US—English
- es—Spanish
- es_MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl_NL—Dutch
- no—Norwegian
- pt_BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai
- zh_CN—Chinese (Simplified)
- zh_TW—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The master label of the pricing action parameter.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix__componentName notation.

The namespace prefix can have one of the following values.

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There's an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.

- In organizations that are Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There's no namespace prefix for all other objects.

ObjectName

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the object associated to the pricing action.

Possible values are:

- Case
- Contract
- Opportunity
- Order
- Quote
- SalesAgreement
- WorkOrder

PricingProcedure

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The pricing procedure record associated with this pricing action.

PricingProcedureOutputMap

Represents the mapping of the outputs of the pricing procedures to the associated lookup tables. Each record specifies the output mapping of the associated lookup table based on the pricing component type specified in the Pricing Recipe Table Mapping object. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

IsPricingRecipeActive

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates if the pricing recipe is active (true) or not (false).

The default value is `false`.

LookupField

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Definition of the fields that are used for this lookup.

OutputFieldNameId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The field name containing the output type generated from the pricing element.

This field is a polymorphic relationship field.

Relationship Name: OutputFieldName

Relationship Type: Lookup

Refers To: CalculationMatrixColumn, DecisionTableParameter

OutputFieldNameString

Type: string

Properties: Filter, Group, Nillable, Sort

Description: This is a derived field that references a specific column in a decision table or decision matrix.

OutputType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The output type generated from a pricing element.

Possible values are:

- AdjustmentType—Adjustment Type
- AdjustmentValue—Adjustment Value
- CustomOutput—Custom Output
- HashOutput—Hash Output
- PriceIndex—Price Index
- UnitPrice—Unit Price
- UpperBound—Unit Price
- LowerBound—Unit Price
- TierValue—Unit Price
- TierType—Unit Price

PricingComponentType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The pricing component field data on which the decision table is built.

Possible values are:

- `AttributeDiscount`—Attribute Based Discount
- `BundleDiscount`—Bundle Based Discount
- `DerivedPricing`
- `DiscountDistributionService`—Discount Distribution Service
- `ListPrice`—List Price
- `PriceAdjustmentMatrix`
- `PromotionsDiscount`
- `VolumeDiscount`—Volume Based Discount
- `VolumeTierDiscount`—Tier Discount
- `RuleFetch`
- `AssetDiscovery`

PricingRecipeTableMappingId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The mapping of pricing components of a lookup table with the chosen pricing recipe.

This field is a relationship field.

Relationship Name: PricingRecipeTableMapping

Relationship Type: Lookup

Refers To: PricingRecipeTableMapping

PricingRecipe

Represents one out of various data models or sets of entities of a particular cloud that'll be consumed by the pricing data store during design and run time. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

DefaultPricingProcedureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The expression set definition or Salesforce flow definition associated with this pricing recipe settings.

This field is a relationship field.

Relationship Name: DefaultPricingProcedure

Relationship Type: Lookup

Refers To: ExpressionSetDefinition

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The developer name of the pricing recipe.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the pricing recipe is active (true) or not (false).

The default value is `false`.

IsInternal

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates if the price recipe record is created internally by the platform (true) or not (false).

The default value is `false`.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The languages in which pricing recipe is supported.

Possible values are:

- `da`—Danish
- `de`—German
- `en_US`—English
- `es`—Spanish
- `es_MX`—Spanish (Mexico)
- `fi`—Finnish
- `fr`—French
- `it`—Italian
- `ja`—Japanese
- `ko`—Korean

- nl_NL—Dutch
- no—Norwegian
- pt_BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai
- zh_CN—Chinese (Simplified)
- zh_TW—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: A user-friendly name for pricing recipe, which is defined when the pricing recipe is created.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix__componentName notation.

The namespace prefix can have one of the following values.

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There's an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There's no namespace prefix for all other objects.

PricingRecipeTableMapping

Represents the mapping of pricing components of a lookup table with the chosen pricing recipe. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

FileBasedDecisionTableName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Name of the file-based decision table.

IsInternal

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates if the price recipe field mapping record is created internally by the platform (true) or not (false).

The default value is `false`.

LookupTableId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The lookup table associated with the mapped fields.

This field is a polymorphic relationship field.

Relationship Name: LookupTable

Relationship Type: Lookup

Refers To: DecisionMatrixDefinition, DecisionTable

PricingComponentType

Type: Pricing Element Type enumerated list

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The pricing component field data on which the decision table is built.

Possible values are:

- `AttributeDiscount`—Attribute Based Discount
- `BundleDiscount`—Bundle Based Discount
- `DerivedPricing`
- `ListPrice`—List Price
- `PriceAdjustmentMatrix`
- `PromotionsDiscount`
- `VolumeDiscount`—Volume Based Discount
- `VolumeTierDiscount`—Tier Discount
- `DiscountDistributionService`. This value is available in API version 60.0 and later.
- `MinimumPrice`. This value is available in API version 62.0 and later.
- `RuleFetch`. This value is available in API version 64.0 and later.
- `AssetDiscovery`. This value is available in API version 64.0 and later.

PricingRecipeld

Type: reference

Properties: Create, Filter, Group, Sort

Description: The pricing data store associated with this pricing recipe field mappings.

This field is a relationship field.

Relationship Name: PricingRecipe

Relationship Type: Lookup

Refers To: PricingRecipe

ProcedureOutputResolution

Represents the pricing resolution for an pricing element determined using strategy name and formula. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

BusinessVertical

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The business vertical associated with the procedure output resolution record.

Possible values are:

- RLM

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The name of the procedure output resolution.

Formula

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The formula function used to determine the minimum or maximum price of a product. The supported operations are MIN and MAX.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the procedure output resolution is active (true) or not (false). Only active procedure output resolutions can be applied to a procedure.

The default value is `false`.

IsInternal

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort

Description: Indicates if the procedure output resolution record is created internally by the platform (true) or not (false).

The default value is `false`.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The languages in which pricing recipe is supported.

Possible values are:

- `da`—Danish
- `de`—German
- `en_US`—English
- `es`—Spanish
- `es_MX`—Spanish (Mexico)
- `fi`—Finnish
- `fr`—French
- `it`—Italian
- `ja`—Japanese
- `ko`—Korean
- `nl_NL`—Dutch
- `no`—Norwegian
- `pt_BR`—Portuguese (Brazil)
- `ru`—Russian
- `sv`—Swedish
- `th`—Thai
- `zh_CN`—Chinese (Simplified)
- `zh_TW`—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: A user-friendly name for procedure output resolution, which is defined when the procedure output resolution record is created.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix__componentName notation.

The namespace prefix can have one of the following values.

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There's an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There's no namespace prefix for all other objects.

PricingElement

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the pricing element on which the procedure output resolution is defined.

Possible values are:

- ListPrice—List Price
- MinimumPrice—Price Tracking
- PriceAdjustmentMatrix—Price Adjustment Matrix

ProcedurePlanCriterion

Represents a criterion within a procedure plan option record. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Fields

ActualValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The user-defined value that's compared to the value of the sObject field value.

DataType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The data type of the field from the selected object.

FieldPath

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The path of the field used in a procedure in relation to the object that the field belongs to.

ObjectField

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The Salesforce object field value used to resolve the procedure plan option.

Operator

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The operator used by the procedure plan criterion.

Valid values are:

- Equals
- GreaterThan
- GreaterThanOrEquals
- In
- IsNotNull
- IsNull
- LessThan
- LessThanOrEquals
- NotEquals
- NotIn

ProcedurePlanOptionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The procedure plan option associated with the procedure plan criterion record.

This field is a relationship field.

Relationship Name: ProcedurePlanOption

Relationship Type: Master-detail

Refers To: ProcedurePlanOption (the master object)

Sequence

Type: int

Properties: Create, Filter, Group, Sort

Description: The sequence in which the conditions defined in the procedure plan criteria are processed.

ProcedurePlanDefinition

Represents the setup of a unified procedure from a list of multiple procedures that can be sequenced in any order based on business needs. Each procedure plan definition contains sections and subsections where procedures can be configured by using a lookup table or rule-based criteria. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Fields

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the procedure plan definition.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the procedure plan definition record.

This name must begin with a letter and use only alphanumeric characters and underscores. It can't include spaces, end with an underscore, or have two consecutive underscores.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The language of the procedure plan definition.

Valid values are:

- da—Danish
- de—German
- en_US—English
- es—Spanish
- es_MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl_NL—Dutch
- no—Norwegian
- pt_BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish
- th—Thai
- zh_CN—Chinese (Simplified)
- zh_TW—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The master label of the procedure plan definition.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix that is associated with this object. Each Developer Edition org that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the namespacePrefix__componentName notation.

The namespace prefix can have one of the following values.

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There's an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are Developer Edition organizations, NamespacePrefix is only set for objects that are part of an installed managed package. There's no namespace prefix for all other objects.

PrimaryObject

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort

Description: The object associated to the procedure plan definition. The fields in the object are used as variables in the procedure plan criterion.

ProcessType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Identify the business processes that need a procedure plan for each SObject and definition.

Possible values are:

- Billing
- DRO
- DeepClone—Deep Clone
- Default
- ProductDiscovery—Product Discovery
- RLM

The default value is `Default`.

ProcedurePlanDefinitionVersion

Represents the versions for a procedure plan definition. Multiple versions under a procedure plan definition must be active at a time, which can be resolved at run time using the rank field. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Fields

ContextDefinition

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The context definition associated with the procedure plan definition record.

Valid values are:

- 11ODU00000007Zx2AI
- 11ODU000000084F2AQ
- CollectionPlanEvent__stdctx
- CommerceCartContextDefinition__stdctx
- SalesTransactionContext__stdctx
- TestContextService__stdctx
- TestDynamicAttribute__stdctx
- TestExtendedDefinition__stdctx

DefaultReadContextMapping

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default read context mapping used to read from the mapped object and populate the context definition.

DefaultSaveContextMapping

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The save context mapping used to save from the context definition and populate the mapped object.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the procedure plan definition version record.

This name must begin with a letter and use only alphanumeric characters and underscores. It can't include spaces, end with an underscore, or have two consecutive underscores.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the procedure plan definition comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the procedure plan definition is no longer in effect.

InheritedFrom

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort

Description: The template from which this procedure plan definition is created.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if this procedure plan definition version is active (`true`) or not (`false`).

The default value is `false`.

ProcedurePlanDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The procedure plan definition associated with this procedure plan definition version record.

This field is a relationship field.

Relationship Name: ProcedurePlanDefinition

Relationship Type: Master-detail

Refers To: ProcedurePlanDefinition (the master object)

Rank

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The current rank of the procedure plan definition version that's used to determine which procedure plan definition version is executed .

ProcedurePlanOption

Represents the selection criteria of how a procedure can be configured for a selected procedure plan section record. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Fields

ApexClassId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The Apex class associated with the procedure plan option record.

This field is a relationship field.

Relationship Name: ApexClass

Refers To: ApexClass

ApexClassName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The name of the Apex class associated with the procedure plan option record.

CriteriaLogic

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The computation logic for the various conditions applied to an option.

CtxDefinitionOutputFieldId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The context definition field that's associated with the decision table.

This field is a relationship field.

Relationship Name: CtxDefinitionOutputField

Refers To: DecisionTableParameter

CtxMappingOutputFieldId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The context mapping field that's associated with the decision table.

This field is a relationship field.

Relationship Name: CtxMappingOutputField

Refers To: DecisionTableParameter

DecisionTableId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The decision table associated with the pricing procedure.

This field is a relationship field.

Relationship Name: DecisionTable

Refers To: DecisionTable

ExpressionSetApiName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The API name of the expression set.

ExpressionSetDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The expression set definition associated with the procedure plan option record.

This field is a relationship field.

Relationship Name: ExpressionSetDefinition

Refers To: ExpressionSetDefinition

ExpressionSetLabel

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The label of the expression set definition.

ExpressionSetOutputFieldId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The expression set output field that's associated with the decision table.

This field is a relationship field.

Relationship Name: ExpressionSetOutputField

Refers To: DecisionTableParameter

PrimaryObject

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The procedure plan definition associated with the procedure plan option record.

Priority

Type: int

Properties: Create, Filter, Group, Sort

Description: The order in which the options are executed.

ProcedurePlanSectionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The procedure plan section associated with the procedure plan option record.

This field is a relationship field.

Relationship Name: ProcedurePlanSection

Relationship Type: Master-detail

Refers To: ProcedurePlanSection (the master object)

ReadContextMapping

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The read context mapping used to read from the mapped object and populate the context definition.

SaveContextMapping

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The save context mapping used to save from the context definition and populate the mapped object.

ProcedurePlanSection

Represents various procedure setup sections for a procedure plan definition. Each section enables the setup of a procedure of a type that can be further determined by using a rule-based criteria or it can be set based on a selected lookup table. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Fields

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the procedure plan section.

IsInherited

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort

Description: Indicates if the section is inherited from a template (`true`) ot not (`false`).

The default value is `false`.

Phase

Type: string

Properties: Create, Filter, Nillable, Sort, Update

Description: The phase associated with the procedure plan section record.

ProcedurePlanVersionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The procedure plan version associated with this procedure plan section record.

This field is a relationship field.

Relationship Name: ProcedurePlanVersion

Relationship Type: Master-detail

Refers To: ProcedurePlanDefinitionVersion (the master object)

ResolutionType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of resolution used to filter the procedure.

Valid values are `Default` or `RuleBased`

SectionType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: The type of procedure section.

Valid values are Custom, PricingDiscoveryProcedure, PricingProcedure, or ProductDiscoveryProcedure

Sequence

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The sequence in which the procedures are processed.

SubSectionType

Type: string

Properties: Create, Filter, Group, Sort

Description: The procedure subsection added to the procedure plan definition.

ProcedurePlanVariable

Represents the setup for any adhoc user-defined variable that can be linked to a procedure plan definition record. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

`DELETE`, `GET`, `HEAD`, `PATCH`, `POST`, `Query`

Fields

DataType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The data type of the input procedure plan variable.

DefaultValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default value for the user-defined procedure plan variable.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique name of the procedure plan variable record.

This name must begin with a letter and use only alphanumeric characters and underscores. It can't include spaces, end with an underscore, or have two consecutive underscores.

Label

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The label of the procedure plan variable.

ProcedurePlanVersionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The procedure plan version associated with the procedure plan variable record.

This field is a relationship field.

Relationship Name: ProcedurePlanVersion

Relationship Type: Master-detail

Refers To: ProcedurePlanDefinitionVersion (the master object)

CHAPTER 6 Rate Management

In this chapter ...

- [Rate Management Standard Objects](#)
- [Rate Management Metadata API Types](#)
- [Rate Management Business APIs](#)
- [Rate Management Standard Invocable Actions](#)

Quote and price products based on predefined rates for future use of the product or service.

SEE ALSO:

[Salesforce Help: Rate Management Permission Set Licenses](#)

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions of Revenue Management where Rate Management is enabled

Rate Management Standard Objects

The Rate Management data model provides objects and fields to manage rates and discounts for a product's resource consumption.

[BindingObjectCustomExt](#)

Represents the external or custom target object that's bound to the entitlements granted with the sellable product. This object is available in API version 64.0 and later.

[BindingObjectRateAdjustment](#)

Represents the rate adjustments of the usage resource associated with the binding object that's used to charge over consumption. This object is available in API version 64.0 and later.

[BindingObjectRateCardEntry](#)

Represents the rate card entry details of the usage resource associated with the binding object that's used to charge over consumption. This object is available in API version 64.0 and later.

[PriceBookRateCard](#)

Represents a junction between price book and rate card objects. This object is available in API version 62.0 and later.

[RateAdjustmentByAttribute](#)

Represents the adjustments that determine the rate of a resource based on its rate-impacting attributes. These attributes are linked to the usage product record. Rates are then influenced by conditions specified in the Attribute Based Adjustment Condition object. Finally, the charge rate is determined by using the Attribute Based Adjustment Rule object. This object is available in API version 62.0 and later.

[RateAdjustmentByTier](#)

Represents the adjustments for the rate of a resource that's determined based on the specified tiers. This object stores information about the type of adjustment used, the value of the adjustment type, and any applicable boundaries. This object is available in API version 62.0 and later.

[RateCard](#)

Represents the rules used to rate the consumption of a group of resources within a product. Usage of a resource is billed at a specified rate if the user consumes more than their allowance for a time period. This object is available in API version 62.0 and later.

[RateCardEntry](#)

Represents a rule that determines the charge rate for using a product's resource. Each entry is linked to one rate card exclusively, and its activation or deactivation can be controlled by assigning effective dates. This object is available in API version 62.0 and later.

[RatingFrequencyPolicy](#)

Represents the policy that defines the frequency at which rating is triggered for the ratable summary records. This object is available in API version 62.0 and later.

[RatingRequest](#)

Represents the common run-time parameters, such as context definition and rating procedure for a set of records in the rateable summary table. This object is available in API version 62.0 and later.

[RatingRequestBatchJob](#)

Represents a junction between the rating request and batch job objects. This object is available in API version 62.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

BindingObjectCustomExt

Represents the external or custom target object that's bound to the entitlements granted with the sellable product. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- This object is available in Revenue Management when Rate Management is enabled.
- Users with any Rate Management permission set (Admin, Manager, Design-time, Runtime) can view records. Only Admins can create, edit, and delete records.

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the binding custom object record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the product usage grant.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

BindingObjectRateAdjustment

Represents the rate adjustments of the usage resource associated with the binding object that's used to charge over consumption. This object is available in API version 64.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

- This object is available in Revenue Management when Rate Management is enabled.
- Users with any Rate Management permission set (Admin, Manager, Design-time, Runtime) can view records.

Fields

AdjustmentType

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: The type of rate adjustment related to the associated rate card entry.

Valid values are `Amount`, `Override`, or `Percentage`.

AdjustmentValue

Type: double

Properties: Filter, Sort

Description: The value of the rate adjustment based on the adjustment type.

BindingObjectRateCardEntryId

Type: reference

Properties: Filter, Group, Sort

Description: The binding object rate card entry associated with the binding object rate adjustment.

This field is a relationship field.

Relationship Name: `BindingObjectRateCardEntry`

Relationship Type: Master-detail

Refers To: `BindingObjectRateCardEntry` (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

LowerBound

Type: double

Properties: Filter, Sort

Description: The minimum quantity of the rate adjustment value that can be applied to the binding object rate adjustment record. This must be a positive number that's less than or equal to the upper bound of the tier.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The autogenerated identifier for the binding object rate adjustment record.

UpperBound

Type: double

Properties: Filter, Nillable, Sort

Description: The maximum quantity of the rate adjustment value that can be applied to the binding object rate adjustment record. This must be a positive number. Set this value one digit higher than the quantity you want the tier to include.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BindingObjectRateAdjustmentFeed: Feed tracking is available for the object.

BindingObjectRateAdjustmentHistory: History is available for tracked fields of the object.

BindingObjectRateAdjustmentShare: Sharing is available for the object.

BindingObjectRateCardEntry

Represents the rate card entry details of the usage resource associated with the binding object that's used to charge over consumption. This object is available in API version 64.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

- This object is available in Revenue Management when Rate Management is enabled.
- Users with any Rate Management permission set (Admin, Manager, Design-time, Runtime) can view records.

Fields

BindingObjectId

Type: reference

Properties: Filter, Group, Sort

Description: The object associated with the entitlements that are granted with the sellable product.

This field is a polymorphic relationship field.

Relationship Name: BindingObject

Refers To: Account, BindingObjectCustomExt, Contract

BindingObjectRateOrder

Type: double

Properties: Filter, Nillable, Sort

Description: The order that determines the applicable binding object rate when multiple rates are defined for an Anchor target within an effective period. Available in API version 65.0 and later.

BindingObjectUsageResourceKey

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: Specifies the autogenerated composite key combining the BindingObjectId and UsageResourceId fields. The format used is BindingObjectId_UsageResourceId and must be within 18 characters. The key is generated on saving the BindingObjectRateCardEntry record. For example,001xx000003Gc4FAAS_1BRxx0000004C95GAE. Available in API version 66.0 and later.

EffectiveFrom

Type: dateTime

Properties: Filter, Sort

Description: The date and time when the associated rate card entry comes into effect.

EffectiveTo

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time until which the associated rate card entry remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The autogenerated identifier for the binding object rate card entry record. For example, BORCE-00004 or BORCE-4567.

NegotiatedRate

Type: double

Properties: Filter, Nillable, Sort

Description: The rate negotiated for the associated binding object.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RateCardEntryId

Type: reference

Properties: Filter, Group, Sort

Description: The rate card entry associated with the binding object.

This field is a relationship field.

Relationship Name: RateCardEntry

Refers To: RateCardEntry

RateCardId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The rate card associated to the binding object.

This field is a relationship field.

Relationship Name: RateCard

Refers To: RateCard

RateCardType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of the rate card associated with the binding object rate card entry.

Valid values are `Attribute`, `Base`, or `Tier`.

RateUnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The standard unit of measure associated with the rate defined for the binding object.

This field is a relationship field.

Relationship Name: RateUnitOfMeasure

Refers To: UnitOfMeasure

SourceAssetId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The asset that's used to create the binding object rate card entry.

This field is a relationship field.

Relationship Name: SourceAsset

Refers To: Asset

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource associated with the binding object rate card entry.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BindingObjectRateAdjustmentFeed: Feed tracking is available for the object.

BindingObjectRateAdjustmentHistory: History is available for tracked fields of the object.

BindingObjectRateAdjustmentShare: Sharing is available for the object.

PriceBookRateCard

Represents a junction between price book and rate card objects. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Auto-generated identifier for the price book rate card record.

PriceBookId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Price book ID that's associated with the rate cards IDs. For Quote, Order, and Contracts, the price book IDs identify the associated rate cards.

This field is a relationship field.

Relationship Name: PriceBook

Relationship Type: Master-detail

Refers To: Pricebook2 (the master object)

RateCardId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Rate card ID that's associated with the price book.

This field is a relationship field.

Relationship Name: RateCard

Relationship Type: Master-detail

Refers To: RateCard (the detail object)

RateCardType

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Type of rate card associated with the price book.

Valid values are `Attribute`, `Base`, or `Tier`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PriceBookRateCardFeed: Feed tracking is available for the object.

PriceBookRateCardHistory: History is available for tracked fields of the object.

RateAdjustmentByAttribute

Represents the adjustments that determine the rate of a resource based on its rate-impacting attributes. These attributes are linked to the usage product record. Rates are then influenced by conditions specified in the Attribute Based Adjustment Condition object. Finally, the charge rate is determined by using the Attribute Based Adjustment Rule object. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AdjustmentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Type of rate adjustment.

Valid values are Amount, Override, or Percentage.

AdjustmentValue

Type: double

Properties: Create, Filter, Sort, Update

Description: Value of the rate adjustment based on the selected adjustment type.

AttributeBasedAdjRuleId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: ID of the attribute based adjustment rule associated with this rate adjustment by attribute record.

This field is a relationship field.

Relationship Name: AttributeBasedAdjRule

Refers To: AttributeBasedAdjRule

EffectiveFrom

Type: dateTime

Properties: Filter, Sort

Description: Date and time when the associated rate card entry comes into effect.

EffectiveTo

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time until when the associated rate card entry remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Auto-generated identifier for the rate adjustment by attribute record.

ProductId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the product whose resource is being used as the associated rate card entry.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the product selling model for the associated rate card entry.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

RateCardEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the rate card entry associated with this rate adjustment by attribute record.

This field is a relationship field.

Relationship Name: RateCardEntry

Relationship Type: Master-detail

Refers To: RateCardEntry (the master object)

RateCardEntryStatus

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Status of the rate card entry associated with this rate adjustment by attribute.

Valid values are `Active`, `Draft`, or `Inactive`. The default value is `Draft`. Available in API version 63.0 and later.

RateCardId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the rate card of the associated rate card entry.

This field is a relationship field.

Relationship Name: RateCard

Refers To: RateCard

RateUnitOfMeasureId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the standard unit of measure record of the associated rate card entry.

This field is a relationship field.

Relationship Name: RateUnitOfMeasure

Refers To: UnitOfMeasure

RateUnitOfMeasureName

Type: string

Properties: Filter, Group, Sort

Description: Name of the standard unit of measure record of the associated rate card entry.

UsageResourceId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the resource selected for the associated rate card entry.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RateAdjustmentByAttributeFeed: Feed tracking is available for the object.

RateAdjustmentByAttributeHistory: History is available for tracked fields of the object.

RateAdjustmentByTier

Represents the adjustments for the rate of a resource that's determined based on the specified tiers. This object stores information about the type of adjustment used, the value of the adjustment type, and any applicable boundaries. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AdjustmentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Type of rate adjustment.

Valid values are Amount, Override, or Percentage.

AdjustmentValue

Type: double

Properties: Create, Filter, Sort, Update

Description: Value of the rate adjustment based on the selected adjustment type.

EffectiveFrom

Type: dateTime

Properties: Filter, Sort

Description: Date and time when the associated rate card entry comes into effect.

EffectiveTo

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time until when the associated rate card entry remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

LowerBound

Type: double

Properties: Create, Filter, Sort, Update

Description: Minimum quantity of the rate adjustment value that can be applied to the record. This value must be a positive integer and must be less than the upper bound of the tier.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Auto-generated identifier for the rate adjustment by tier record.

ProductId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the product whose resource is being used as the associated rate card entry.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the product selling model for the associated rate card entry record.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

RateCardEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the rate card entry associated with this rate adjustment by tier record.

This field is a relationship field.

Relationship Name: RateCardEntry

Relationship Type: Master-detail

Refers To: RateCardEntry (the master object)

RateCardEntryStatus

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Status of the rate card entry associated with this rate adjustment by tier.

Valid values are `Active`, `Draft`, or `Inactive`. The default value is `Draft`. Available in API version 63.0 and later.

RateCardId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the rate card of the associated rate card entry.

This field is a relationship field.

Relationship Name: RateCard

Refers To: RateCard

RateUnitOfMeasureId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the standard unit of measure record of the associated rate card entry.

This field is a relationship field.

Relationship Name: RateUnitOfMeasure

Refers To: UnitOfMeasure

RateUnitOfMeasureName

Type: string

Properties: Filter, Group, Sort

Description: Name of the standard unit of measure record of the associated rate card entry.

UpperBound

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: Maximum quantity of the rate adjustment value that can be applied to the record. This value must be a positive double and must be greater than the lower bound of the tier.

UsageResourceId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the resource selected for the associated rate card entry.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RateAdjustmentByTierFeed: Feed tracking is available for the object.

RateAdjustmentByTierHistory: History is available for tracked fields of the object.

RateCard

Represents the rules used to rate the consumption of a group of resources within a product. Usage of a resource is billed at a specified rate if the user consumes more than their allowance for a time period. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Description about the rate card.

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Date and time when the rate card becomes effective.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Date and time until when the rate card remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Name of the rate card.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Type of rate card.

Valid values are `Attribute`, `Base`, or `Tier`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RateCardFeed: Feed tracking is available for the object.

RateCardHistory: History is available for tracked fields of the object.

RateCardShare: Sharing is available for the object.

RateCardEntry

Represents a rule that determines the charge rate for using a product's resource. Each entry is linked to one rate card exclusively, and its activation or deactivation can be controlled by assigning effective dates. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

DefaultUnitOfMeasureClassId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the default unit of measure classification record associated with this rate card entry.

This field is a relationship field.

Relationship Name: DefaultUnitOfMeasureClass

Refers To: UnitOfMeasureClass

DefaultUnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the default unit of measure record associated with this rate card entry.

This field is a relationship field.

Relationship Name: DefaultUnitOfMeasure

Refers To: UnitOfMeasure

EffectiveFrom

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Date and time when the rate card entry comes into effect.

EffectiveTo

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Date and time until when the rate card entry remains effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Auto-generated identifier for the rate card entry record.

ProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: ID of the product whose resource is being used as a rate card entry.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: ID of the product selling model associated with this rate card entry.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

Rate

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: Value of the rate card entry.

RateCardId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the rate card associated with this rate card entry.

This field is a relationship field.

Relationship Name: RateCard

Relationship Type: Master-detail

Refers To: RateCard (the master object)

RateCardType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Type of rate card associated with this rate card entry.

Valid values are `Attribute`, `Base`, or `Tier`. Available in API version 63.0 and later.

RateNegotiation

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Type of rate negotiation applicable to the rate card entry.

Valid values are `Negotiable` or `NonNegotiable`.

The default value is `Negotiable`. Available in API version 63.0 and later.

RateUnitOfMeasureClassId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the unit of measure classification record associated with this rate card entry.

This field is a relationship field.

Relationship Name: RateUnitOfMeasureClass

Refers To: UnitOfMeasureClass

RateUnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: ID of the standard unit of measure record associated with this rate card entry.

This field is a relationship field.

Relationship Name: RateUnitOfMeasure

Refers To: UnitOfMeasure

RateUnitOfMeasureName

Type: string

Properties: Filter, Group, Sort

Description: Name of the standard unit of measure record of the associated rate card entry.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Status of the rate card entry.

Active, Draft, or Inactive.

The default value is `Draft`. Available in API version 63.0 and later.

UsageProductId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the product associated with the resource for which the rate is specified.

This field is a relationship field.

Relationship Name: UsageProduct

Refers To: Product2

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: ID of the resource associated with this rate card entry.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RateCardEntryFeed: Feed tracking is available for the object.

RateCardEntryHistory: History is available for tracked fields of the object.

RatingFrequencyPolicy

Represents the policy that defines the frequency at which rating is triggered for the ratable summary records. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Name of the rating frequency policy. This is a mandatory field.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: ID of the product for which the rating policy is defined.

This field is a relationship field. This field is deprecated and will be retired in a future version.

Relationship Name: Product

Refers To: Product2

RatingDelayDuration

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Duration of delay—in hours—post the billing period after which the rating is to be triggered.

RatingDelayDurationUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the unit for the specified rating delay duration. Available in API version 65.0 and later.

Valid values are `Days` or `Hours`.

RatingPeriod

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Period for which the usage of a product and usage resource combination is to be rated.

Valid values are `Daily` or `Monthly`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RatingFrequencyPolicyFeed: Feed tracking is available for the object.

RatingFrequencyPolicyHistory: History is available for tracked fields of the object.

RatingFrequencyPolicyOwnerSharingRule: Sharing rules are available for the object.

RatingFrequencyPolicyShare: Sharing is available for the object.

RatingRequest

Represents the common run-time parameters, such as context definition and rating procedure for a set of records in the rateable summary table. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ContextDefinition

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Context definition that's used for context instance creation, which encapsulates all aggregated records that are stamped for the rating request.

ContextMapping

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Context mapping that's used for context instance creation, which encapsulates all aggregated records that are stamped for the rating request. If no ID is provided, default context mapping is used.

DoesExcludeWaterfall

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the waterfall isn't generated for the rating request (`true`) or is generated (`false`). The default value is `false`. Available in API version 64.0 and later.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Auto-generated identifier for the rating request record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RatingProcedureName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Procedure name that's used to rate the aggregated records that are stamped for rating request.

Status

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Status of the rating request.

Valid values are `Failed`, `Pending`, `RatingComplete`, `RatingInProgress`, or `ReadyForRating`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RatingRequestFeed: Feed tracking is available for the object.

RatingRequestHistory: History is available for tracked fields of the object.

RatingRequestShare: Sharing is available for the object.

RatingRequestBatchJob

Represents a junction between the rating request and batch job objects. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

BatchJobId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: ID of the batch job that triggered the rating request on the aggregated records.

This field is a relationship field.

Relationship Name: BatchJob

Refers To: BatchJob

ErrorCode

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Error code that defines the batch job failure.

Valid values are `BadRequest` or `InternalError`.

ErrorMessage

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Error message that describes the cause of the batch job failure.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last referred to this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Name of the rating request batch job record.

RatingRequestId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the rating request record associated with the batch job.

This field is a relationship field.

Relationship Name: RatingRequest

Relationship Type: Master-detail

Refers To: RatingRequest (the master object)

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RatingRequestBatchJobFeed: Feed tracking is available for the object.

RatingRequestBatchJobHistory: History is available for tracked fields of the object.

Rate Management Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[IndustriesRatingSettings](#)

Represents the settings for Rate Management.

[Flow for Rate Management](#)

Represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

IndustriesRatingSettings

Represents the settings for Rate Management.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the "Settings" name. See [Settings](#) for more details.

File Suffix and Directory Location

The `IndustriesRatingSettings` values are stored in the `IndustriesRating.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there's only one settings file for each settings component.

Version

`IndustriesRatingSettings` components are available in API version 62.0 and later.

Special Access Rules

This metadata type is available with Rate Management.

Fields

Field Name	Field Type	Description
enableRating	boolean	Indicates whether to enable Rate Management (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
enableRatingWaterfall	boolean	Indicates whether to enable Rating Waterfall (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Rating Waterfall provides insights into the rating data, which you can synchronize with your rating lookup tables.
enableRatingWaterfallPersistence	boolean	Indicates whether to enable Rating Waterfall Persistence (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Rating Waterfall Persistence stores rating data, which you can use to enhance the internal processes and increase efficiency.

Declarative Metadata Sample Definition

The following is an example of an `IndustriesRatingSettings` component.

```
<IndustriesRatingSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableRating>true</enableRating>
  <enableRatingWaterfall>true</enableRatingWaterfall>
  <enableRatingWaterfallPersistence>true</enableRatingWaterfallPersistence>
</IndustriesRatingSettings>
```

The following is an example `package.xml` that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>IndustriesRating</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character `*` (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

Flow for Rate Management

Represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Rate Management exposes additional `actionType` values for the `FlowActionCall` metadata type.

Field Name	Field Type	Description
<code>actionType</code>	<code>InvokableActionType</code> (enumeration of type string)	Required. The action type. Additional valid values for Rate Management include <code>invokeRatingService</code> —Invoke the rating service to rate the usage records.

Rate Management Business APIs

Use the Rate Management Business APIs to get rate plan and persisted rating waterfall details.

[Resources](#)

Learn more about the available Rate Management API resources.

[Response Bodies](#)

Learn more about the available response bodies of Rate Management APIs.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

Resources

Learn more about the available Rate Management API resources.

[Rate Plan \(GET\)](#)

Get a rate plan for a specified set of context input. Use this API to retrieve rate cards, rate card entries, and related adjustments based on the filter criteria for the context input.

[Rating Waterfall \(GET\)](#)

Get the persisted rating waterfall that stores the process logs. Rating waterfall provides insights into the internal rating process.

Rate Plan (GET)

Get a rate plan for a specified set of context input. Use this API to retrieve rate cards, rate card entries, and related adjustments based on the filter criteria for the context input.

Keep these considerations in mind when you use this API.

- This API request supports one pricebook and one sellable product.
- The ID of the product is required to invoke this API.
- Invoke this API even if a hydrated context is available to fetch the rate card, rate card entry, and adjustment details.

Special Access Rules

The org must have the Rate Management: Run Time User permission set to use this API. Additionally, the org must also have a default usage rating discovery procedure defined in the Revenue Settings from Setup.

Resource

```
/connect/core-rating/rate-plan
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-rating/rate-plan?contextId=858a3ad3e5a0e5c319652a6ab92f6fdb2b4fa8be72b390506d014596c6da62c9&procedureApiName=SampleProcedure
```

Available Version

62.0

HTTP Methods

GET

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
contextId	String	ID of the context to specify as an input to the procedure.	Required	62.0
procedure ApiName	String	API name of the procedure to be executed.	Required	62.0

Response Body for GET

[Rate Plan Response](#)

Rating Waterfall (GET)

Get the persisted rating waterfall that stores the process logs. Rating waterfall provides insights into the internal rating process.

Resource

```
/connect/core-pricing/waterfall/lineItemId/executionId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/core-pricing/waterfall/old/2#NEWER-974657?tagsToFilter=UnitPrice&usageType=Rating
```

Available Version

62.0

HTTP Methods

GET

Query Parameters

Name	Type	Description	Required or Optional	Available Version
tagsToFilter	String	Comma-separated tags to filter.	Optional	62.0
usageType	String	Usage type of the waterfall log record. Valid values are <code>Rating</code> ; or <code>Pricing</code> —Specifies that the record type is <code>Pricing</code> . If this value is specified, the API creates a log of pricing waterfall. See Pricing Waterfall . The default value is <code>Pricing</code> .	Optional	62.0

Response Body for GET

[Line Item Waterfall Response](#)

Response Bodies

Learn more about the available response bodies of Rate Management APIs.

[Adjustment Details](#)

Output representation of a rate adjustment request.

[Line Item Waterfall Response](#)

Output representation of the line item waterfall response.

[Rate Plan Response](#)

Output representation of the details of a rate plan.

[Rating Error Response](#)

Output representation of the error details related to the API request.

[Rating Waterfall Response](#)

Output representation of a rating waterfall request.

Adjustment Details

Output representation of a rate adjustment request.

JSON Example

```
"pricingElement": {
  "adjustments": [{
    "adjustmentType": null,
    "adjustmentValue": null
  }],
  "name": "List Price",
  "elementType": "ListPrice"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
adjustments	Map<String, Object>[]	Details of the rate element.	Small, 60.0	60.0
description	String	Description of the rate element.	Small, 60.0	60.0
elementType	String	Type of the rate element.	Small, 60.0	60.0
name	String	Name of the rate element.	Small, 60.0	60.0

Line Item Waterfall Response

Output representation of the line item waterfall response.

JSON Example

```
{
  "currencyCode": "USD",
  "error": null,
  "executionEndTimestamp": "2023-07-31T20:11:29.625Z",
  "executionId": "gdLVwn2xluats2xWMAjV",
  "executionStartTimestamp": null,
  "lineItemId": "item1",
  "success": true,
  "usageType": "Rating",
  "output": {
    "quantity": "10",
    "netUnitPrice": "10",
    "subtotal": "100"
  },
  "waterfall": []
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
context Definition VersionId	String	Context definition version ID of the rating procedure.	Small, 62.0	62.0
context MappingId	String	Context mapping ID of the record.	Small, 62.0	62.0
currencyCode	String	Currency code. For example, USD or INR.	Small, 62.0	62.0
error	Rating Error Response	Details of any errors.	Small, 62.0	62.0
executionEnd Timestamp	String	End timestamp of procedure execution.	Small, 62.0	62.0
executionId	String	Execution ID of a particular execution of a rating procedure.	Small, 62.0	62.0
execution Start Timestamp	String	Start timestamp of procedure execution.	Small, 62.0	62.0
lineItemId	String	Line item ID for which the price is being calculated.	Small, 62.0	62.0
output	Map<String, Object>	Output of the rating procedure.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
usageType	String	Usage type of the waterfall log record.	Small, 62.0	62.0
waterfall	Rating Waterfall Response[]	Details of the rating waterfall.	Small, 62.0	62.0

Rate Plan Response

Output representation of the details of a rate plan.

JSON Example

```
{
  "success": true,
  "executionId" : "a521d592-71c3-4db3-8048-r64504df1605",
  "error": {}
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Rating Error Response[]	Error response for the API request, if any.	Small, 62.0	62.0
executionId	String	ID of the procedure execution record.	Small, 62.0	62.0
success	Boolean	Indicates whether the request is successful (true) or not (false)	Small, 62.0	62.0

Rating Error Response

Output representation of the error details related to the API request.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code indicating the type of error.	Small, 62.0	62.0
message	String	Message stating the reason for error, if any.	Small, 62.0	62.0

Rating Waterfall Response

Output representation of a rating waterfall request.

JSON Example

```
{
  "inputParameters": {
    "productId": "01txx0000006i2SAAQ",
    "pricebookId": "01sxx0000005ptpAAA",
    "pricingModelType": "OneTime"
  },
  "fieldToTagNameMapping": {
    "Product2Id": "ItemProduct",
    "Subtotal": "Subtotal",
    "Pricebook2Id": "Pricebook",
    "Quantity": "ItemQuantity",
    "LineItemId": "SalesTransactionSource",
    "ListPrice": "ItemListPrice"
  },
  "sequence": 0,
  "outputParameters": {
    "listPrice": "10"
  },
  "pricingElement": {
    "adjustments": [
      {
        "adjustmentType": null,
        "adjustmentValue": null
      }
    ]
  }
}
```

```

    }
  ],
  "name": "List Price"
}
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
fieldToTagNameMapping	Map<String,String>	Mappings of field to tag names.	Small, 62.0	62.0
inputParameters	Map<String, Object>	Parameters of rating element input.	Small, 62.0	62.0
outputParameters	Map<String, Object>	Parameters of rating element output.	Small, 62.0	62.0
pricingElement	Adjustment Details	Details of the rate adjustment of a rating element.	Small, 62.0	62.0
sequence	Integer	Sequence of rating element execution.	Small, 62.0	62.0

Rate Management Standard Invocable Actions

Learn more about the standard invocable actions available with Rate Management.

[Invoke Rating Service Action](#)

Invoke the rating service to rate the usage records.

SEE ALSO:

[Actions Developer Guide: Overview](#)

[REST API Developer Guide: Invocable Actions Standard](#)

[Metadata API Developer Guide: Understanding Metadata API](#)

Invoke Rating Service Action

Invoke the rating service to rate the usage records.

The Invoke Rating Service action acts as a connector between batch management and the rating service. This action is available in API version 62.0 and later.

Special Access Rules

The Invoke Rating Service action is available in Enterprise, Unlimited, and Developer Editions where Rate Management is enabled.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/invokeRatingService

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
attributeRateCardID	string	ID of the rate card that's used to define adjustments based on the attributes that impact the rate.
baseRateCardID	string	ID of the rate card that includes the base rate for the resource to be rated, based on its consumption.
contextDefinitionId	string	Required. ID of the context definition that's used to create the context instance.
contextMappingID	string	ID of the context mapping that maps a standard object, context definition object, or any other input data source to the node that's defined in the context definition.
isSkipWaterfall	boolean	Indicates whether to skip the generation of price waterfall data (<i>true</i>) or not (<i>false</i>).
procedureName	string	Name of the rating procedure that's used to calculate the rates.
recordID	reference	Required. ID of the usage ratable summary record to be rated.
tierRateCardID	string	ID of the rate card that's used to define adjustments for different tiers of a resource.

Outputs

None

Example

POST

This example shows a sample request for the Invoke Rating Service action.

```
{
  "inputs": [
    {
      "recordIDs": "56jSB000002Bn12CXC",
      "contextMappingId": "11jSB000002Bn13YAC",
      "contextDefinitionId": "11OSB0000000WSv2AM",
      "procedureName": "Invoke Rate",
      "isSkipWaterfall": false,
      "baseRateCardID": "11jSB000002Bn13YAC",
      "tierRateCardID": "fgjjSB0sdf987dsf",
      "attributeRateCardID": "asdfgh563034lk"
    }
  ]
}
```

```
]
}
```

This example shows a sample response for the Invoke Rating Service action.

```
[
  {
    "actionName": "invokeRatingService",
    "errors": null,
    "isSuccess": true,
    "outputValues": {}
  }
]
```


CHAPTER 7 Product Configurator

In this chapter ...

- Product Configurator Standard Objects
- Product Configurator Business APIs
- Product Configurator Standard Invocable Actions
- Product Configurator Metadata API Types
- Constraint Modeling Language

Customize the components and attributes of a product to align with specific business requirements.

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise, Unlimited, and Developer** Editions of Revenue Management where Product Configurator is enabled

Product Configurator Standard Objects

The Product Configurator data model provides objects and fields to manage the product configurator flow.

These objects are documented in the [Salesforce Object Reference](#).

- [ExpressionSetConstraintObj](#)

[ProductConfigurationFlow](#)

Specifies the many-to-many relationship between Product Classification, Product, and Flow Definition objects. The flow definition is used to configure standalone and bundled products of a specific product classification along with the product attributes, quantities, and product selling models. This object is available in API version 60.0 and later.

[ProductConfigFlowAssignment](#)

A junction object that represents the many-to-many relationship between Product Configuration Flow, Product, and Product Classification. This object is available in API version 60.0 and later.

[ProductConfigurationRule](#)

Represents the validation, inclusion, and exclusion rules for products in the context of the selling process. The selling process can be quoting, configuration, or ordering. This object is available in API version 61.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

ProductConfigurationFlow

Specifies the many-to-many relationship between Product Classification, Product, and Flow Definition objects. The flow definition is used to configure standalone and bundled products of a specific product classification along with the product attributes, quantities, and product selling models. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

FlowIdentifier

Type: String

Properties: Create, Filter, Group, Sort, Update

Description: Stores the flow API name.

IsDefault

Type: Boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates the default configurator flow.

The default value is `false`.

IsRequestDetailEditable

Type: Boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether request attributes and products can be edited (`true`) or not (`false`). When enabled, users can modify the attributes and products in associated cases, incidents, or service requests after the request is created.

The default value is `false`.

Status

Type: Picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates the status of the product configuration flow. Possible values include Draft, Active, and Inactive

Possible values are `Active`, `Draft`, or `Inactive`

The default value is `Draft`.

ProductConfigFlowAssignment

A junction object that represents the many-to-many relationship between Product Configuration Flow, Product, and Product Classification. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

AssignmentType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the Product Configuration Flow is assigned to the primary product or classification, or to dynamic components added within a bundle.

Valid values are `DynamicAdditionFlow` or `PrimaryConfiguratorFlow`.

The default value is `PrimaryConfiguratorFlow`. Available in API version 65.0 and later.

ProductClassificationId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product classification associated with the Product Configuration Flow.

This field is a relationship field.

Relationship Name: ProductClassification

Relationship Type: Lookup

Refers To: ProductClassification

ProductConfigurationFlowId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The Product Configuration Flow associated with the Product Classification or Product.

This field is a relationship field.

Relationship Name: ProductConfigurationFlow

Relationship Type: Lookup

Refers To: ProductConfigurationFlow

ProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product associated with the Product Configuration Flow.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

ProductConfigurationRule

Represents the validation, inclusion, and exclusion rules for products in the context of the selling process. The selling process can be quoting, configuration, or ordering. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ApiName

Type: string

Properties: Filter, Group, Nillable, Sort

Description:

ConfigurationRuleDefinition

Type: textarea

Properties: Create, Nillable, Update

Description: The configuration rule criteria and actions.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the configuration rule.

EffectiveFromDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time from which the configuration rules comes into effect.

EffectiveToDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time to which the configuration rules ceases to be in effect.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the configuration rule record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the configuration rule record was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the configuration rule.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the configuraion rule owner.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ProcessScope

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The scope of the configuration rule.

Possible values are `Bundle` or `Product`

The default value is `Product`.

RuleSubType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The segregation of products into subsets such that the configuration rules only apply to the products that fall under the ambit of the selected rule subtype.

Possible values are `BundleProduct`, `BundleProductClassification`, `Product`, or `ProductClassification`

The default value is `Product`.

RuleType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Indicates the industry vertical or the feature of the industry vertical that's using the configuration rule.

Possible values are `Configurator` or `Promotions`

The default value is `Configurator`.

Sequence

Type: int

Properties: Filter, Group, Nillable, Sort

Description: Indicates the order for executing the configuration rule. Rules with lower numbers run first when multiple rules are triggered at once.

Status

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The lifecycle status of the configuration rule.

Possible values are `Active`, `Draft`, or `Inactive`

The default value is `Draft`.

Product Configurator Business APIs

Use the Product Configurator Business APIs to customize a product or a service according to your business-specific requirements.

Perform product configuration-related operations by using the Product Configurator Business APIs. Integrate these APIs with any front-end application to access the configurator capabilities.

These APIs are stateless and don't recall prior user actions between calls unless state is explicitly persisted and reloaded.

For example, if a user deselects a child product and later reselects it, the engine treats the request as adding a new item that doesn't currently exist in the model. It can't infer that this request is a re-selection of a previously removed item. As a result, the original line item isn't restored and a new line item is created.

This table lists the available Product Configurator resources.

Resource	Description
/connect/cpq/configurator/actions/configure (POST)	Retrieve and update a product's configuration from a configurator. Execute configuration rules and notify users of any violations for changes to product bundle, attributes, or product quantity within a bundle. Additionally, get pricing details for the configured bundle.
/connect/cpq/configurator/actions/load-instance (POST)	Create a session for the product configuration instance using the transaction ID. Get the session ID that includes the results of actions, such as configuration rules, qualification rules, and pricing management.
/connect/cpq/configurator/actions/set-instance (POST)	Set a product configuration instance. This API is used in scenarios where the configuration instance is available in a different database than Salesforce and the product

Resource	Description
	catalog management data is in Salesforce.
/connect/cpq/configurator/actions/get-instance (POST)	Fetch the JSON representation of a product configuration. Use the response to display the details of the product configuration instance on the Salesforce user interface, or save the product configuration instance to an external system.
/connect/cpq/configurator/actions/save-instance (POST)	Save a configuration instance after a successful product configuration.
/connect/cpq/configurator/actions/set-product-quantity (POST)	Set the quantity of a product through the runtime system.
/connect/cpq/configurator/actions/add-nodes (POST)	Add a node to the context through the runtime system without using the Salesforce user interface.
/connect/cpq/configurator/actions/update-nodes (POST)	Update nodes in a product configuration.
/connect/cpq/configurator/actions/delete-nodes (POST)	Delete nodes from a product configuration.
/revenue/product-configurator/rules/actions/execute (POST)	Run rules for a specific quote or order based on a context ID or transaction ID.

[Resources](#)

Learn more about the available Product Configurator API resources.

[Request Bodies](#)

Learn more about the available Product Configurator API request bodies.

[Response Bodies](#)

Learn more about the available Product Configurator API response bodies.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

[Salesforce Help: Product Configurator Permissions](#)

Resources

Learn more about the available Product Configurator API resources.

[Configuration \(POST\)](#)

Retrieve and update a product's configuration from a configurator. Execute configuration rules and notify users of any violations for changes to product bundle, attributes, or product quantity within a bundle. Additionally, get pricing details for the configured bundle.

[Saved Configuration \(GET, POST\)](#)

Save and reuse a record's configurations, and get a list of the saved configurations for a record.

[Saved Configuration \(DELETE, PUT\)](#)

Update or delete a record's saved configuration by using the configuration ID.

[Configuration Get Instance \(POST\)](#)

Fetch the JSON representation of a product configuration. Use the response to display the details of the product configuration instance on the Salesforce user interface, or save the product configuration instance to an external system.

[Configuration Load Instance \(POST\)](#)

Create a session for the product configuration instance using the transaction ID. Get the session ID that includes the results of actions, such as configuration rules, qualification rules, and pricing management.

[Configuration Save Instance \(POST\)](#)

Save a configuration instance after a successful product configuration.

[Configuration Set Instance \(POST\)](#)

Set a product configuration instance. This API is used in scenarios where the configuration instance is available in a different database than Salesforce and the product catalog management data is in Salesforce.

[Configurator Add Nodes \(POST\)](#)

Add a node to the context through the runtime system without using the Salesforce user interface.

[Configurator Delete Nodes \(POST\)](#)

Delete nodes from a product configuration.

[Configurator Update Nodes \(POST\)](#)

Update nodes in a product configuration.

[Product Set Quantity \(POST\)](#)

Set the quantity of a product through the runtime system.

[Config Rules \(POST\)](#)

Run rules for a specific quote or order based on a context ID or transaction ID.

Configuration (POST)

Retrieve and update a product's configuration from a configurator. Execute configuration rules and notify users of any violations for changes to product bundle, attributes, or product quantity within a bundle. Additionally, get pricing details for the configured bundle.

Resource

```
/connect/cpq/configurator/actions/configure
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/configure
```

If you're calling this API from an external website, include the site name in the resource.

```
https://yourInstance.salesforce.com/<siteName>/services/data/v68.0/connect/cpq/configurator/actions/configure
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample to initiate a context based on a transaction ID.

```
{
  "transactionLineId": "0QLDE000000IBXw4AO",
  "transactionId": "0Q0xx0000000001GAA",
  "correlationId": "c95246d4-102c-4ecd-a263-f74ac525d1e5",
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample to add, update, or delete a node in an existing context.

```
{
  "transactionLineId": "0QLDE000000IBXw4AO",
  "transactionId": "0Q0DE000000ISHJs81",
  "correlationId": "c95246d4-102c-4ecd-a263-f74ac525d1e5",
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "contextResponseType": "Full",
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

```

    },
    "transactionContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
    "addedNodes": [
      {
        "path": ["0Q0DE000000ISHJs81", "sti2_id"],
        "addedObject": {
          "id": "ref_sti2_id",
          "SalesTransactionSource": "sti2_id",
          "PricebookEntry": "0luxx0000000001AAA",
          "ProductSellingModel": "0jPxx0000000001AAA",
          "businessObjectType": "QuoteLineItem",
          "Quantity": 10,
          "UnitPrice": 2.0,
          "Product": "0ltxx0000000001AAA"
        }
      },
      {
        "path": ["0Q0DE000000ISHJs81", "ref_sti2_id", "ref_stir1_id"],
        "addedObject": {
          "id": "ref_stir1_id",
          "businessObjectType": "QuoteLineRelationship",
          "MainItem": "0QLDE000000IBXw4AO",
          "AssociatedItem": "ref_sti2_id",
          "ProductRelatedComponent": "0dSxx0000000001AAA",
          "ProductRelationshipType": "0yoxx0000000001AAA",
          "AssociatedItemPricing": "IncludedInBundlePrice"
        }
      }
    ],
    "updatedNodes": [
      {
        "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"],
        "updatedAttributes": {
          "Quantity": 5
        }
      }
    ],
    "deletedNodes": [
      {
        "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"]
      }
    ]
  }
}

```

This example adds a node to an existing context and includes the contextFieldsList property.

```

{
  "configuratorInput": {
    "transactionId": "0Q0xx0000004DEmCAM",
    "transactionLineId": "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c",
    "transactionContextId": "",
    "addedNodes": [
      {
        "path": [

```

```

        "0Q0xx0000004DEmCAM",
        "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c"
    ],
    "addedObject": {
        "Product": "01txx0000006ip1AAA",
        "ProductCode": "PB001",
        "ProductName": "Printer Bundle",
        "ProductBasedOn": null,
        "id": "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c",
        "PricebookEntry": "01uxx0000008zXxAAI",
        "ProductSellingModel": "0jPxx00000000ODEAY",
        "SellingModelType": "OneTime",
        "SubscriptionTerm": null,
        "PricingTermUnit": null,
        "UnitPrice": 205,
        "Quantity": 1,
        "businessObjectType": "QuoteLineItem",
        "SalesTransactionItemSource": "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c",
        "SalesTransactionItemParent": "0Q0xx0000004DEmCAM",
        "SalesTransactionItemGroup": null,
        "ItemRampIdentifier": null,
        "ItemSegmentIdentifier": null,
        "EffectiveFrom": null,
        "EffectiveTo": null,
        "StartDate": null,
        "EndDate": null,
        "ItemSegmentType": null
    }
}
],
"updatedNodes": [],
"deletedNodes": [],
"correlationId": "859100d0_0a78_4203_9cdc_bead3cb243a9",
"contextFieldsList": [
    "SalesTransaction.Account",
    "SalesTransaction.QuoteAccount",
    "SalesTransaction.Pricebook",
    "SalesTransaction.CurrencyIsoCode",
    "SalesTransaction.SalesTransactionSource",
    "SalesTransaction.OriginalActionType",
    "SalesTransaction.Contract",
    "SalesTransaction.STContractHasCotermination__std",
    "SalesTransaction.STContractEndDate__std",
    "SalesTransaction.EffectiveDate",
    "SalesTransaction.Status",
    "SalesTransaction.Subtotal",
    "SalesTransaction.TransactionType",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemSource",
    "SalesTransaction.SalesTransactionItem.Product",
    "SalesTransaction.SalesTransactionItem.ProductName",
    "SalesTransaction.SalesTransactionItem.ProductCode",
    "SalesTransaction.SalesTransactionItem.ProductSellingModel",
    "SalesTransaction.SalesTransactionItem.PricebookEntry",
    "SalesTransaction.SalesTransactionItem.SellingModelType",

```

```

    "SalesTransaction.SalesTransactionItem.SubscriptionTerm",
    "SalesTransaction.SalesTransactionItem.PricingTermUnit",
    "SalesTransaction.SalesTransactionItem.ProductBasedOn",
    "SalesTransaction.SalesTransactionItem.CustomProductName",
    "SalesTransaction.SalesTransactionItem.StartQuantity",
    "SalesTransaction.SalesTransactionItem.EndQuantity",
    "SalesTransaction.SalesTransactionItem.Quantity",
    "SalesTransaction.SalesTransactionItem.StartDate",
    "SalesTransaction.SalesTransactionItem.EndDate",
    "SalesTransaction.SalesTransactionItem.UnitPrice",
    "SalesTransaction.SalesTransactionItem.NetUnitPrice",
    "SalesTransaction.SalesTransactionItem.NetTotalPrice",
    "SalesTransaction.SalesTransactionItem.PartnerUnitPrice",
    "SalesTransaction.SalesTransactionItem.Discount",
    "SalesTransaction.SalesTransactionItem.ListPrice",
    "SalesTransaction.SalesTransactionItem.PriceWaterFall",
    "SalesTransaction.SalesTransactionItem.TotalLineAmount",
    "SalesTransaction.SalesTransactionItem.Subtotal",
    "SalesTransaction.SalesTransactionItem.ItemRampIdentifier",
    "SalesTransaction.SalesTransactionItem.ItemSegmentIdentifier",
    "SalesTransaction.SalesTransactionItem.ItemSegmentName",
    "SalesTransaction.SalesTransactionItem.ItemSegmentType",
    "SalesTransaction.SalesTransactionItem.SalesTransactionAction",
    "SalesTransaction.SalesTransactionItem.Deleted",
    "SalesTransaction.SalesTransactionItem.DerivedPricingAttribute",
    "SalesTransaction.SalesTransactionItem.SalesTransactionSourceAsset",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemParent",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemGroup",
    "SalesTransaction.SalesTransactionItem.ItemPath",
    "SalesTransaction.SalesTransactionItem.LineItemPath",
    "SalesTransaction.SalesTransactionItem.ItemUnitOfMeasureName",
    "SalesTransaction.SalesTransactionItem.ItemUnitOfMeasureScale",
    "SalesTransaction.SalesTransactionItem.ItemUnitOfMeasureRoundingMethod",
    "SalesTransaction.SalesTransactionItem.BillingFrequency",
    "SalesTransaction.SalesTransactionItem.UsageModelType",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeKey",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeValue",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeName",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributePicklistValue",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.SalesTransactionItemAttrParent",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.IsPriceImpacting",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeUnitOfMeasure",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeUnitOfMeasureName",

```

```

        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.MainItem",
        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.AssociatedItem",
        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItem",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.ProductRelatedComponent",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.ProductRelatedComponentPRT__std",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.AssociatedQuantScaleMethod",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.AssociatedItemPricing",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.ProductRelationshipType",

        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItemProduct",
        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItemProductCode",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItemProductSellingModel",

        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.MainItemProduct",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.MainItemProductSellingModel",

        "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.IsPriceInclusive",

    "SalesTransaction.SalesTransactionAction.Type",
    "SalesTransaction.SalesTransactionAction.SourceAsset",
    "SalesTransaction.SalesTransactionAction.Subtype__std",
    "SalesTransaction.SalesTransactionGroup.SalesTransactionGroupParent",
    "SalesTransaction.SalesTransactionGroup.GroupIsRamped__std",
    "SalesTransaction.SalesTransactionGroup.GroupSortOrder",
    "SalesTransaction.SalesTransactionGroup.GroupSource",
    "SalesTransaction.SalesTransactionGroup.SummarySubtotal",
    "SalesTransaction.SalesTransactionGroup.GroupName",
    "SalesTransaction.SalesTransactionGroup.GroupStartDate__std",
    "SalesTransaction.SalesTransactionGroup.GroupEndDate__std",
    "SalesTransaction.SalesTransactionGroup.ParentSalesTransactionItemGroup__std",
    "SalesTransaction.SalesTransactionGroup.GroupType",
    "SalesTransaction.SalesTransactionGroup.SummaryTotalAmount__std"
],
"configuratorOptions": {
    "explainabilityEnabled": false,
    "executePricing": false,
    "qualifyAllProductsInTransaction": false,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": false,
    "executeConfigurationRules": true,
    "returnProductCatalogData": true,
    "addDefaultConfiguration": true
}

```

```

    },
    "contextResponseType": "Product"
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
addedNodes	Configurator Added Node Input[]	List of added context nodes that's passed to the product configurator	Optional	60.0
configuratorOptions	Configurator Options Input[]	Options to pass to the configurator	Optional	60.0
contextFieldsList	String[]	List of fields to return in the configurator response	Optional	68.0
contextResponseType	String	Specifies the type of transaction context response. Valid values are <code>Delta</code> —Returns only the sales transaction items that are added or updated in the call. Deleted items are returned separately in a <code>DeletedSTIIds</code> collection on the response. The response is always flat regardless of response type; reconstruct hierarchy from <code>SalesTransactionItemParent</code> on child items and <code>MainItem/AssociatedItem</code> on relationships; <code>Full</code> —Returns all sales transaction items in a transaction; <code>None</code> —Returns empty transaction context response; or <code>Product</code> —Returns the sales transaction items related to the product that's being configured.	Required for large sales transactions with more than 1000 line items and less than 15K line items.	65.0
correlationId	String	ID that's specified for traceability of logs	Optional	60.0
deletedNodes	Configurator Deleted Node Input[]	List of deleted context nodes that's passed to the product configurator	Optional	60.0
qualificationContext	User Context Input[]	Details such as account ID, contact ID, and context ID that are used for executing qualification rules	Optional	60.0
transactionContextId	String	ID of the transaction context. The context expires after 10 minutes by default (managed by Context Service). To extend it, set <code>ContextTtlInMinutes</code> on the Context Definition record. The org-level ceiling is controlled by	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		ContextMaxTtlInMinutes (default: 45 minutes). Design for short-lived sessions: rebuild context on expiry rather than extending TTL indefinitely, because the durable state lives on the persisted transaction record.		
transactionId	String	ID of the sales transaction that's being configured such as a quote or an order	Required	60.0
transactionLineId	String	ID of the top-level line item that's being configured	Optional	60.0
updatedNodes	Configurator Updated Node Input[]	List of updated context nodes that's passed to the product configurator	Optional	60.0

Response Body for POST

[Configuration Details](#)

Saved Configuration (GET, POST)

Save and reuse a record's configurations, and get a list of the saved configurations for a record.

Resource

```
/connect/cpq/configurator/saved-configuration
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/saved-configuration
```

Available Version

63.0

HTTP Methods

GET, POST

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
referenceRecordId	String	ID of the record whose saved configurations must be retrieved.	Required	63.0

Response Body for GET

Configuration List

Request Body for POST

JSON Example

[illegible]

Properties

Name	Type	Description	Required or Optional	Available Version
data	String	JSON object that contains the details of the sales transaction, formatted as a string.	Optional	63.0
description	String	Description of the saved configuration.	Optional	63.0
name	String	Name of the saved configuration.	Optional	63.0
referenceRecordId	String	ID of the record for which the configuration must be saved.	Required	63.0

Response Body for POST

Configuration Record Save

SEE ALSO:

Salesforce Help: Considerations to Save and Reuse Configurations

Response Body for PUT

[Configuration Update](#)

SEE ALSO:

[Salesforce Help: Considerations to Save and Reuse Configurations](#)

Configuration Get Instance (POST)

Fetch the JSON representation of a product configuration. Use the response to display the details of the product configuration instance on the Salesforce user interface, or save the product configuration instance to an external system.

Resource

```
/connect/cpq/configurator/actions/get-instance
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/get-instance
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextId	String	Transaction context ID of the product configuration instance that's to be fetched.	Required	60.0

Response Body for POST

[Configuration Get Instance](#)

Configuration Load Instance (POST)

Create a session for the product configuration instance using the transaction ID. Get the session ID that includes the results of actions, such as configuration rules, qualification rules, and pricing management.

Resource

```
/connect/cpq/configurator/actions/load-instance
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/load-instance
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configuratorOptions":
  {
    "addDefaultConfiguration": true,
    "executeConfigurationRules": true,
    "executePricing": true,
    "qualifyAllProductsInTransaction": true,
    "validateAmendRenewCancel": true,
    "validateProductCatalog": true
  },
  "qualificationContext": {
    "accountId": "001DU000001nHUGYA2"
  },
  "transactionId": "0Q0DU0000000XoN0AU"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configurator Options	Configurator Options Input	List of the configurator options to execute.	Optional	60.0
context MappingId	String	ID of the context mapping record.	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
transactionId	String	Transaction ID of the header entity that's used to create a session. For example, a Quote or an Order.	Required	60.0

Response Body for POST

[Configuration Load Instance](#)

Configuration Save Instance (POST)

Save a configuration instance after a successful product configuration.

Use the Configuration Save Instance API to save the changes to the source after a successful configuration. For example, save changes to the quote line item of a product, which is the source used to load the configuration.

Resource

```
/connect/cpq/configurator/actions/save-instance
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/save-instance
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextId	String	Transaction context ID of the product configuration instance that's to be saved.	Required	60.0

Response Body for POST

[Configuration Save Instance](#)

Configuration Set Instance (POST)

Set a product configuration instance. This API is used in scenarios where the configuration instance is available in a different database than Salesforce and the product catalog management data is in Salesforce.

Resource

```
/connect/cpq/configurator/actions/set-instance
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/set-instance
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configuratorOptions": {
    "addDefaultConfiguration": true,
    "executeConfigurationRules": true,
    "executePricing": false,
    "qualifyAllProductsInTransaction": false,
    "validateAmendRenewCancel": false,
    "validateProductCatalog": false
  },
  "contextMappingId": "11jEk000017YdyUIAS",
  "qualificationContext": {
    "accountId": "001DU000001nHUGYA2"
  },
  "transaction":
```

```

    "0x1", "0x2", "0x3", "0x4", "0x5", "0x6", "0x7", "0x8", "0x9", "0xA", "0xB", "0xC", "0xD", "0xE", "0xF", "0x10", "0x11", "0x12", "0x13", "0x14", "0x15", "0x16", "0x17", "0x18", "0x19", "0x1A", "0x1B", "0x1C", "0x1D", "0x1E", "0x1F", "0x20", "0x21", "0x22", "0x23", "0x24", "0x25", "0x26", "0x27", "0x28", "0x29", "0x2A", "0x2B", "0x2C", "0x2D", "0x2E", "0x2F", "0x30", "0x31", "0x32", "0x33", "0x34", "0x35", "0x36", "0x37", "0x38", "0x39", "0x3A", "0x3B", "0x3C", "0x3D", "0x3E", "0x3F", "0x40", "0x41", "0x42", "0x43", "0x44", "0x45", "0x46", "0x47", "0x48", "0x49", "0x4A", "0x4B", "0x4C", "0x4D", "0x4E", "0x4F", "0x50", "0x51", "0x52", "0x53", "0x54", "0x55", "0x56", "0x57", "0x58", "0x59", "0x5A", "0x5B", "0x5C", "0x5D", "0x5E", "0x5F", "0x60", "0x61", "0x62", "0x63", "0x64", "0x65", "0x66", "0x67", "0x68", "0x69", "0x6A", "0x6B", "0x6C", "0x6D", "0x6E", "0x6F", "0x70", "0x71", "0x72", "0x73", "0x74", "0x75", "0x76", "0x77", "0x78", "0x79", "0x7A", "0x7B", "0x7C", "0x7D", "0x7E", "0x7F", "0x80", "0x81", "0x82", "0x83", "0x84", "0x85", "0x86", "0x87", "0x88", "0x89", "0x8A", "0x8B", "0x8C", "0x8D", "0x8E", "0x8F", "0x90", "0x91", "0x92", "0x93", "0x94", "0x95", "0x96", "0x97", "0x98", "0x99", "0x9A", "0x9B", "0x9C", "0x9D", "0x9E", "0x9F", "0xA0", "0xA1", "0xA2", "0xA3", "0xA4", "0xA5", "0xA6", "0xA7", "0xA8", "0xA9", "0xAA", "0xAB", "0xAC", "0xAD", "0xAE", "0xAF", "0xB0", "0xB1", "0xB2", "0xB3", "0xB4", "0xB5", "0xB6", "0xB7", "0xB8", "0xB9", "0xBA", "0xBB", "0xBC", "0xBD", "0xBE", "0xBF", "0xC0", "0xC1", "0xC2", "0xC3", "0xC4", "0xC5", "0xC6", "0xC7", "0xC8", "0xC9", "0xCA", "0xCB", "0xCC", "0xCD", "0xCE", "0xCF", "0xD0", "0xD1", "0xD2", "0xD3", "0xD4", "0xD5", "0xD6", "0xD7", "0xD8", "0xD9", "0xDA", "0xDB", "0xDC", "0xDD", "0xDE", "0xDF", "0xE0", "0xE1", "0xE2", "0xE3", "0xE4", "0xE5", "0xE6", "0xE7", "0xE8", "0xE9", "0xEA", "0xEB", "0xEC", "0xED", "0xEE", "0xEF", "0xF0", "0xF1", "0xF2", "0xF3", "0xF4", "0xF5", "0xF6", "0xF7", "0xF8", "0xF9", "0xFA", "0xFB", "0xFC", "0xFD", "0xFE", "0xFF", "0x100", "0x101", "0x102", "0x103", "0x104", "0x105", "0x106", "0x107", "0x108", "0x109", "0x10A", "0x10B", "0x10C", "0x10D", "0x10E", "0x10F", "0x110", "0x111", "0x112", "0x113", "0x114", "0x115", "0x116", "0x117", "0x118", "0x119", "0x11A", "0x11B", "0x11C", "0x11D", "0x11E", "0x11F", "0x120", "0x121", "0x122", "0x123", "0x124", "0x125", "0x126", "0x127", "0x128", "0x129", "0x12A", "0x12B", "0x12C", "0x12D", "0x12E", "0x12F", "0x130", "0x131", "0x132", "0x133", "0x134", "0x135", "0x136", "0x137", "0x138", "0x139", "0x13A", "0x13B", "0x13C", "0x13D", "0x13E", "0x13F", "0x140", "0x141", "0x142", "0x143", "0x144", "0x145", "0x146", "0x147", "0x148", "0x149", "0x14A", "0x14B", "0x14C", "0x14D", "0x14E", "0x14F", "0x150", "0x151", "0x152", "0x153", "0x154", "0x155", "0x156", "0x157", "0x158", "0x159", "0x15A", "0x15B", "0x15C", "0x15D", "0x15E", "0x15F", "0x160", "0x161", "0x162", "0x163", "0x164", "0x165", "0x166", "0x167", "0x168", "0x169", "0x16A", "0x16B", "0x16C", "0x16D", "0x16E", "0x16F", "0x170", "0x171", "0x172", "0x173", "0x174", "0x175", "0x176", "0x177", "0x178", "0x179", "0x17A", "0x17B", "0x17C", "0x17D", "0x17E", "0x17F", "0x180", "0x181", "0x182", "0x183", "0x184", "0x185", "0x186", "0x187", "0x188", "0x189", "0x18A", "0x18B", "0x18C", "0x18D", "0x18E", "0x18F", "0x190", "0x191", "0x192", "0x193", "0x194", "0x195", "0x196", "0x197", "0x198", "0x199", "0x19A", "0x19B", "0x19C", "0x19D", "0x19E", "0x19F", "0x1A0", "0x1A1", "0x1A2", "0x1A3", "0x1A4", "0x1A5", "0x1A6", "0x1A7", "0x1A8", "0x1A9", "0x1AA", "0x1AB", "0x1AC", "0x1AD", "0x1AE", "0x1AF", "0x1B0", "0x1B1", "0x1B2", "0x1B3", "0x1B4", "0x1B5", "0x1B6", "0x1B7", "0x1B8", "0x1B9", "0x1BA", "0x1BB", "0x1BC", "0x1BD", "0x1BE", "0x1BF", "0x1C0", "0x1C1", "0x1C2", "0x1C3", "0x1C4", "0x1C5", "0x1C6", "0x1C7", "0x1C8", "0x1C9", "0x1CA", "0x1CB", "0x1CC", "0x1CD", "0x1CE", "0x1CF", "0x1D0", "0x1D1", "0x1D2", "0x1D3", "0x1D4", "0x1D5", "0x1D6", "0x1D7", "0x1D8", "0x1D9", "0x1DA", "0x1DB", "0x1DC", "0x1DD", "0x1DE", "0x1DF", "0x1E0", "0x1E1", "0x1E2", "0x1E3", "0x1E4", "0x1E5", "0x1E6", "0x1E7", "0x1E8", "0x1E9", "0x1EA", "0x1EB", "0x1EC", "0x1ED", "0x1EE", "0x1EF", "0x1F0", "0x1F1", "0x1F2", "0x1F3", "0x1F4", "0x1F5", "0x1F6", "0x1F7", "0x1F8", "0x1F9", "0x1FA", "0x1FB", "0x1FC", "0x1FD", "0x1FE", "0x1FF", "0x200", "0x201", "0x202", "0x203", "0x204", "0x205", "0x206", "0x207", "0x208", "0x209", "0x20A", "0x20B", "0x20C", "0x20D", "0x20E", "0x20F", "0x210", "0x211", "0x212", "0x213", "0x214", "0x215", "0x216", "0x217", "0x218", "0x219", "0x21A", "0x21B", "0x21C", "0x21D", "0x21E", "0x21F", "0x220", "0x221", "0x222", "0x223", "0x224", "0x225", "0x226", "0x227", "0x228", "0x229", "0x22A", "0x22B", "0x22C", "0x22D", "0x22E", "0x22F", "0x230", "0x231", "0x232", "0x233", "0x234", "0x235", "0x236", "0x237", "0x238", "0x239", "0x23A", "0x23B", "0x23C", "0x23D", "0x23E", "0x23F", "0x240", "0x241", "0x242", "0x243", "0x244", "0x245", "0x246", "0x247", "0x248", "0x249", "0x24A", "0x24B", "0x24C", "0x24D", "0x24E", "0x24F", "0x250", "0x251", "0x252", "0x253", "0x254", "0x255", "0x256", "0x257", "0x258", "0x259", "0x25A", "0x25B", "0x25C", "0x25D", "0x25E", "0x25F", "0x260", "0x261", "0x262", "0x263", "0x264", "0x265", "0x266", "0x267", "0x268", "0x269", "0x26A", "0x26B", "0x26C", "0x26D", "0x26E", "0x26F", "0x270", "0x271", "0x272", "0x273", "0x274", "0x275", "0x276", "0x277", "0x278", "0x279", "0x27A", "0x27B", "0x27C", "0x27D", "0x27E", "0x27F", "0x280", "0x281", "0x282", "0x283", "0x284", "0x285", "0x286", "0x287", "0x288",
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	ConfiguratorOptions Input	List of the configurator options to execute.	Optional	60.0
contextMappingId	String	ID of the context mapping record.	Required	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
transaction	String	Transaction JSON payload representing an object in an external system that's used to create a session.	Required	60.0

Response Body for POST

Configuration Set Instance

Configurator Add Nodes (POST)

Add a node to the context through the runtime system without using the Salesforce user interface.

Resource

```
/connect/cpq/configurator/actions/add-nodes
```

Resource Example

`https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/add-nodes`

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "addedNodes": [
    {
      "path": [
        "0Q0xx0000004EvcCAE",
        "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589"
      ],
      "addedObject": {
        "id": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemSource": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemParent": "0Q0xx0000004EvcCAE",
        "PricebookEntry": "01luxx00000090VuAAI",
        "ProductSellingModel": "0jPxx00000001KHEAY",
        "UnitPrice": 15.26,
        "Quantity": 1,
        "Product": "01txx0000006lfHAAQ",
        "businessObjectType": "QuoteLineItem"
      }
    },
    {
      "path": [
        "0Q0xx0000004EvcCAE",
        "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "ref_d85b036d_d305_4bb6_aba8_aldff645a664"
      ],
      "addedObject": {
        "id": "ref_d85b036d_d305_4bb6_aba8_aldff645a664",
        "MainItem": "0QLxx0000004QdRGAU",
        "AssociatedItem": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "ProductRelatedComponent": "0dSxx00000001p6EAA",
        "ProductRelationshipType": null,
        "AssociatedItemPricing": "NotIncludedInBundlePrice",
        "AssociatedQuantScaleMethod": "Proportional",
        "businessObjectType": "QuoteLineRelationship"
      }
    }
  ]
}
```



```
]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
addedNodes	Configurator Added Node Input[]	List of the nodes to be added.	Required	60.0
configuratorOptions	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0

Response Body for POST

[Configurator Add Nodes](#)

Configurator Delete Nodes (POST)

Delete nodes from a product configuration.

Resource

```
/connect/cpq/configurator/actions/delete-nodes
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/delete-nodes
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
```

```

    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "deletedNodes": [
    {
      "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"]
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
configurator Options	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0
deletedNodes	Configurator Deleted Node Input[]	List of the nodes to be deleted.	Required	60.0
qualification Context	User Context Input	Context details that are used for the qualification rules.	Optional	60.0

Response Body for POST

[Configurator Delete Nodes](#)

Configurator Update Nodes (POST)

Update nodes in a product configuration.

Resource

```
/connect/cpq/configurator/actions/update-nodes
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/update-nodes
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "updatedNodes": [
    {
      "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"],
      "updatedAttributes": {
        "Quantity": 5
      }
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
updatedNodes	Configurator Updated Node Input[]	List of the nodes to be updated.	Required	60.0

Response Body for POST

[Configurator Update Nodes](#)

Product Set Quantity (POST)

Set the quantity of a product through the runtime system.

Resource

```
/connect/cpq/configurator/actions/set-product-quantity
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/cpq/configurator/actions/set-product-quantity
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "quantity": 20,
  "transactionLinePath": "Quote.QuoteLineItem.Quantity"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
quantity	Integer	Value of the product quantity.	Required	60.0
transactionLinePath	String[]	Path to the line item where the update to the quantity is applied. For example, Quote.QuoteLineItem.Quantity.	Required	60.0

Response Body for POST

[Product Quantity Set Configurator](#)

Config Rules (POST)

Run rules for a specific quote or order based on a context ID or transaction ID.

Resource

```
/revenue/product-configurator/rules/actions/execute
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v67.0/revenue/product-configurator/rules/actions/execute
```

Available Version

67.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "transactionContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "transactionId": "0Q0DU0000005tJh0AI",
  "ruleOptions": {
    "isUpdateContextRequired": false
  }
}
```

```

    }
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
ruleOptions	Config Rule Options Input[]	Details of the options to run specific steps in rules.	Optional	67.0
transactionContextId	String	ID of the sales transaction context instance.	Required if the <code>transactionId</code> property isn't specified.	67.0
transactionId	String	ID of the quote or order.	Required if the <code>transactionContextId</code> property isn't specified.	67.0

Response Body for POST

[Configuration Rule Response](#)

Request Bodies

Learn more about the available Product Configurator API request bodies.

[Configuration Get Instance Input](#)

Input representation of the request to get a product configuration instance.

[Configuration Load Instance Input](#)

Input representation of the request to load a product configuration instance.

[Configuration Save Input](#)

Input representation of the details to save a configuration.

[Configuration Update Input](#)

Input representation of the details to update a configuration.

[Configuration Save Instance Input](#)

Input representation of the request to save a product configuration instance.

[Configuration Set Instance Input](#)

Input representation of the request to set a product configuration instance.

[Configurator Add Nodes Input](#)

Input representation of the request to add nodes within a root node.

[Configurator Added Node Input](#)

Input representation of the nodes to be added to a product configuration.

[Configurator Delete Nodes Input](#)

Input representation of the request to delete nodes from a product configuration.

[Configurator Deleted Node Input](#)

Input representation of the nodes to be deleted from a product configuration.

[Configurator Input](#)

Input representation of the request to modify the product configuration.

[Configurator Options Input](#)

Input representation of the request to get the product configuration options that's passed to the configurator.

[Configuration Rule Input](#)

Input representation of the details of a configuration rule.

[Configurator Update Nodes Input](#)

Input representation of the request to update the nodes in a product configuration.

[Configurator Updated Node Input](#)

Input representation of the nodes to be updated in a product configuration.

[Product Quantity Set Configurator Input](#)

Input representation of the request to set the quantity of a product.

[User Context Input](#)

Input representation of the request to get the context details of a user, which are used for qualification rules.

Configuration Get Instance Input

Input representation of the request to get a product configuration instance.

JSON Example

```
{
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextId	String	Transaction context ID of the product configuration instance that's to be fetched.	Required	60.0

Configuration Load Instance Input

Input representation of the request to load a product configuration instance.

JSON Example

```
{
  "configuratorOptions":
  {
    "addDefaultConfiguration": true,
    "executeConfigurationRules": true,
    "executePricing": true,
    "qualifyAllProductsInTransaction": true,
    "validateAmendRenewCancel": true,
    "validateProductCatalog": true
  },
  "qualificationContext": {
    "accountId": "001DU000001nHUGYA2"
  },
  "transactionId": "0Q0DU0000000XoN0AU"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	Configurator Options Input	List of the configurator options to execute.	Optional	60.0
contextMappingId	String	ID of the context mapping record.	Optional	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
transactionId	String	Transaction ID of the header entity that's used to create a session. For example, a Quote or an Order.	Required	60.0

Configuration Save Input

Input representation of the details to save a configuration.

JSON Example

```
{
  "data":
  {
    "name": "Built-in",
    "description": "This configuration is saved for reuse."
  }
}
```



```
\\"name\\": \\"Favorite Configuration\\",
\\"referenceRecordId\\": \\"01txx0000006iCFAAY\\"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
data	String	JSON object that contains the details of the sales transaction, formatted as a string.	Optional	63.0
description	String	Description of the saved configuration.	Optional	63.0
name	String	Name of the saved configuration.	Optional	63.0
referenceRecordId	String	ID of the record for which the configuration must be saved.	Required	63.0

Configuration Update Input

Input representation of the details to update a configuration.

JSON Example

[illegible]

Properties

Name	Type	Description	Required or Optional	Available Version
data	String	JSON object that contains the details of the sales transaction, formatted as a string.	Required	63.0
description	String	Description of the configuration.	Required	63.0
name	String	Name of the configuration.	Required	63.0

Name	Type	Description	Required or Optional	Available Version
context MappingId	String	ID of the context mapping record.	Required	60.0
qualification Context	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
transaction	String	Transaction JSON payload representing an object in an external system that's used to create a session.	Required	60.0

Configurator Add Nodes Input

Input representation of the request to add nodes within a root node.

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "addedNodes": [
    {
      "path": [
        "0Q0xx0000004EvcCAE",
        "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589"
      ],
      "addedObject": {
        "id": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemSource": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemParent": "0Q0xx0000004EvcCAE",
        "PricebookEntry": "01uxx00000090VuAAI",
        "ProductSellingModel": "0jPxx00000001KHEAY",
        "UnitPrice": 15.26,
        "Quantity": 1,
        "Product": "01txx00000061fHAAQ",
        "businessObjectType": "QuoteLineItem"
      }
    }
  ],
}
```

```
    "path": [
      "0Q0xx0000004EvcCAE",
      "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
      "ref_d85b036d_d305_4bb6_aba8_aldff645a664"
    ],
    "addedObject": {
      "id": "ref_d85b036d_d305_4bb6_aba8_aldff645a664",
      "MainItem": "0QLxx0000004QdRGAU",
      "AssociatedItem": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
      "ProductRelatedComponent": "0dSxx00000001p6EAA",
      "ProductRelationshipType": null,
      "AssociatedItemPricing": "NotIncludedInBundlePrice",
      "AssociatedQuantScaleMethod": "Proportional",
      "businessObjectType": "QuoteLineRelationship"
    }
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
addedNodes	Configurator Added Node Input[]	List of the nodes to be added.	Required	60.0
configurator Options	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that’s being considered.	Required	60.0
qualification Context	User Context Input	Context details that are used for the qualification rules.	Optional	60.0

Configurator Added Node Input

Input representation of the nodes to be added to a product configuration.

JSON Example

```
{
  "addedNodes": [
    {
      "path": [
        "0Q0xx0000004EvcCAE",
        "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589"
      ],
      "addedObject": {
        "id": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemSource": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
```

```

    "SalesTransactionItemParent": "0Q0xx0000004EvcCAE",
    "PricebookEntry": "01luxx00000090VuAAI",
    "ProductSellingModel": "0jPxx00000001KHEAY",
    "UnitPrice": 15.26,
    "Quantity": 1,
    "Product": "01txx00000061fHAAQ",
    "businessObjectType": "QuoteLineItem"
  }
},
{
  "path": [
    "0Q0xx0000004EvcCAE",
    "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
    "ref_d85b036d_d305_4bb6_aba8_a1dff645a664"
  ],
  "addedObject": {
    "id": "ref_d85b036d_d305_4bb6_aba8_a1dff645a664",
    "MainItem": "0QLxx0000004QdRGAU",
    "AssociatedItem": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
    "ProductRelatedComponent": "0dSxx00000001p6EAA",
    "ProductRelationshipType": null,
    "AssociatedItemPricing": "NotIncludedInBundlePrice",
    "AssociatedQuantScaleMethod": "Proportional",
    "businessObjectType": "QuoteLineRelationship"
  }
}
]
}

```

This example shows a sample request for orders.

```

{
  "addedNodes": [
    {
      "path": [
        "0Q0xx0000004EvcCAE",
        "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589"
      ],
      "addedObject": {
        "id": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemSource": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "SalesTransactionItemParent": "0Q0xx0000004EvcCAE",
        "PricebookEntry": "01luxx00000090VuAAI",
        "ProductSellingModel": "0jPxx00000001KHEAY",
        "UnitPrice": 15.26,
        "Quantity": 1,
        "Product": "01txx00000061fHAAQ",
        "businessObjectType": "OrderItem"
      }
    },
    {
      "path": [
        "0Q0xx0000004EvcCAE",
        "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
        "ref_d85b036d_d305_4bb6_aba8_a1dff645a664"
      ]
    }
  ]
}

```

```

    ],
    "addedObject": {
      "id": "ref_d85b036d_d305_4bb6_aba8_aldff645a664",
      "MainItem": "0QLxx0000004QdRGAU",
      "AssociatedItem": "ref_d3a3f8d2_e031_4517_ae28_69ce16cb6589",
      "ProductRelatedComponent": "0dSxx00000001p6EAA",
      "ProductRelationshipType": null,
      "AssociatedItemPricing": "NotIncludedInBundlePrice",
      "AssociatedQuantScaleMethod": "Proportional",
      "businessObjectType": "OrderItemRelationship"
    }
  }
]
}

```

This example shows a single-call request that adds a parent bundle, a child product, a relationship, and an attribute in one payload. Use this pattern to minimize API round-trips when building cart flows. When a constraint model is active, include `AttributeName` and set it to the attribute's developer name.

```

{
  "addedNodes": [
    {
      "path": [
        "801xx0000000001AAA",
        "ref_PrimLine"
      ],
      "addedObject": {
        "id": "ref_PrimLine",
        "SalesTransactionItemSource": "ref_PrimLine",
        "SalesTransactionItemParent": "801xx0000000001AAA",
        "PricebookEntry": "01luxx00000090VuAAI",
        "ProductSellingModel": "0jPxx00000001KHEAY",
        "UnitPrice": 100.0,
        "Quantity": 1,
        "Product": "01txx0000006lfHAAQ",
        "businessObjectType": "OrderItem"
      }
    },
    {
      "path": [
        "801xx0000000001AAA",
        "ref_ChildItem"
      ],
      "addedObject": {
        "id": "ref_ChildItem",
        "SalesTransactionItemSource": "ref_ChildItem",
        "SalesTransactionItemParent": "801xx0000000001AAA",
        "PricebookEntry": "01luxx00000090VuAAJ",
        "ProductSellingModel": "0jPxx00000001KHEAZ",
        "UnitPrice": 0.0,
        "Quantity": 1,
        "Product": "01txx0000006lfHAAR",
        "businessObjectType": "OrderItem"
      }
    }
  ],
}

```

```
{
  "path": [
    "801xx0000000001AAA",
    "ref_ChildItem",
    "ref_Rel"
  ],
  "addedObject": {
    "id": "ref_Rel",
    "MainItem": "ref_PrimLine",
    "AssociatedItem": "ref_ChildItem",
    "ProductRelatedComponent": "0dSxx00000001p6EAA",
    "ProductRelationshipType": null,
    "AssociatedItemPricing": "IncludedInBundlePrice",
    "businessObjectType": "OrderItemRelationship"
  }
},
{
  "path": [
    "801xx0000000001AAA",
    "ref_ChildItem",
    "ref_LengthAttr"
  ],
  "addedObject": {
    "id": "ref_LengthAttr",
    "businessObjectType": "OrderItemAttribute",
    "AttributeName": "Length",
    "SalesTransactionItemAttrParent": "ref_ChildItem",
    "ParentReference": "ref_ChildItem",
    "AttributeKey": "0tjxx0000000001AAA",
    "AttributeValue": "5",
    "AttributePicklistValue": null
  }
}
]
```

Note: Ordering constraint: within a single `addedNodes` array, an attribute node's `SalesTransactionItemAttrParent` must reference a parent that either already exists on the transaction or appears earlier in the same array. Attribute nodes (`businessObjectType`: "OrderItemAttribute" or "QuoteLineItemAttribute") are never placed inline on the parent's `addedObject`; each attribute requires its own entry in the `addedNodes` array.

Note: When `businessObjectType` is `OrderItemAttribute` or `QuoteLineItemAttribute` and a constraint model is active, `addedObject` must include `AttributeName`. Set `AttributeName` to the product attribute's developer name so the constraint engine can match the CML variable. `AttributeKey` doesn't replace `AttributeName`. For matching behavior and default fallback, see [Constraint Modeling Language \(CML\) Best Practices](#) on page 1130.

Properties

Name	Type	Description	Required or Optional	Available Version
addedObject	Map<String, Object>	Details of the object that's being added. This property supports fields of objects from the	Required	60.0

Name	Type	Description	Required or Optional	Available Version
		Sales Transaction context definition, including custom objects and fields in your extended context definition. When <code>businessObjectType</code> is <code>OrderItemAttribute</code> or <code>QuoteLineItemAttribute</code> and a constraint model is active, include <code>AttributeName</code> and set it to the product attribute's developer name. <code>AttributeKey</code> doesn't replace <code>AttributeName</code> .		
<code>path</code>	<code>String[]</code>	Path to the node that's being added. The path includes the unique ID of the context node in the data structure. This ID must match the ID of the sales transaction item source such as a quote line or an order line item. Keep these considerations in mind when setting the <code>path</code> value. If the <code>businessObjectType</code> property value is <code>QuoteLineItem</code> or <code>OrderItem</code> , the path must contain 2 IDs. The first ID is the transaction ID (quote or order), and the second ID is the line item ID; If the <code>businessObjectType</code> property value is <code>QuoteLineItem</code> or <code>OrderItem</code> , the <code>addedObject</code> must contain <code>SalesTransactionItemSource</code> and <code>SalesTransactionItemParent</code> ; If the <code>businessObjectType</code> property value is <code>QuoteLineRelationship</code> or <code>OrderItemRelationship</code> , the path must contain 3 IDs. The first ID is the transaction ID. The second ID is the associated line item ID. The third ID is the relationship node ID; or If the <code>businessObjectType</code> property value is <code>QuoteLineItemAttribute</code> or <code>OrderItemAttribute</code> , the path must contain 3 IDs. The first ID is the transaction ID. The second ID is the parent line item ID. The third ID is the attribute node ID. The <code>addedObject</code> must contain <code>SalesTransactionItemAttrParent</code> set to the parent line item ID.	Required	60.0

Configurator Delete Nodes Input

Input representation of the request to delete nodes from a product configuration.

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "deletedNodes": [
    {
      "path": ["0Q0DE0000000ISHJs81", "0QLDE0000000IBXw4AO"]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0
deletedNodes	Configurator Deleted Node Input[]	List of the nodes to be deleted.	Required	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0

Configurator Deleted Node Input

Input representation of the nodes to be deleted from a product configuration.

JSON Example

```
"deletedNodes": [
  {
    "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"]
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
path	String[]	Path to the node that's being deleted.	Required	60.0

Configurator Input

Input representation of the request to modify the product configuration.

JSON Example

This example shows a sample to initiate a context based on a transaction ID.

```
{
  "transactionLineId": "0QLDE000000IBXw4AO",
  "transactionId": "0Q0xx0000000001GAA",
  "correlationId": "c95246d4-102c-4ecd-a263-f74ac525d1e5",
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  }
}
```

This example shows a sample to add, update, or delete a node in an existing context.

```
{
  "transactionLineId": "0QLDE000000IBXw4AO",
  "transactionId": "0Q0DE000000ISHJs81",
  "correlationId": "c95246d4-102c-4ecd-a263-f74ac525d1e5",
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"]
}
```

```

"contextResponseType": "Full",
"qualificationContext": {
  "accountId": "001xx0000000001AAA",
  "contactId": "003xx000000000D7AAI"
},
"transactionContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
"addedNodes": [
  {
    "path": ["0Q0DE000000ISHJs81", "sti2_id"],
    "addedObject": {
      "id": "ref_sti2_id",
      "SalesTransactionSource": "sti2_id",
      "PricebookEntry": "01luxx0000000001AAA",
      "ProductSellingModel": "0jPxx0000000001AAA",
      "businessObjectType": "QuoteLineItem",
      "Quantity": 10,
      "UnitPrice": 2.0,
      "Product": "01txx0000000001AAA"
    }
  },
  {
    "path": ["0Q0DE000000ISHJs81", "ref_sti2_id", "ref_stir1_id"],
    "addedObject": {
      "id": "ref_stir1_id",
      "businessObjectType": "QuoteLineRelationship",
      "MainItem": "0QLDE000000IBXw4AO",
      "AssociatedItem": "ref_sti2_id",
      "ProductRelatedComponent": "0dSxx0000000001AAA",
      "ProductRelationshipType": "0yoxx0000000001AAA",
      "AssociatedItemPricing": "IncludedInBundlePrice"
    }
  }
],
"updatedNodes": [
  {
    "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"],
    "updatedAttributes": {
      "Quantity": 5
    }
  }
],
"deletedNodes": [
  {
    "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"]
  }
]
}

```

This example adds a node to an existing context and includes the contextFieldsList property.

```

{
  "configuratorInput": {
    "transactionId": "0Q0xx0000004DEmCAM",
    "transactionLineId": "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c",

```

```

"transactionContextId": "",
"addedNodes": [
  {
    "path": [
      "0Q0xx0000004DEmCAM",
      "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c"
    ],
    "addedObject": {
      "Product": "01txx0000006ip1AAA",
      "ProductCode": "PB001",
      "ProductName": "Printer Bundle",
      "ProductBasedOn": null,
      "id": "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c",
      "PricebookEntry": "01uxx0000008zXxAAl",
      "ProductSellingModel": "0jPxx000000000DEAY",
      "SellingModelType": "OneTime",
      "SubscriptionTerm": null,
      "PricingTermUnit": null,
      "UnitPrice": 205,
      "Quantity": 1,
      "businessObjectType": "QuoteLineItem",
      "SalesTransactionItemSource": "ref_a7cdf3fb_d912_4c21_b683_9aadd591ac3c",
      "SalesTransactionItemParent": "0Q0xx0000004DEmCAM",
      "SalesTransactionItemGroup": null,
      "ItemRampIdentifier": null,
      "ItemSegmentIdentifier": null,
      "EffectiveFrom": null,
      "EffectiveTo": null,
      "StartDate": null,
      "EndDate": null,
      "ItemSegmentType": null
    }
  }
],
"updatedNodes": [],
"deletedNodes": [],
"correlationId": "859100d0_0a78_4203_9cdc_bead3cb243a9",
"contextFieldsList": [
  "SalesTransaction.Account",
  "SalesTransaction.QuoteAccount",
  "SalesTransaction.Pricebook",
  "SalesTransaction.CurrencyIsoCode",
  "SalesTransaction.SalesTransactionSource",
  "SalesTransaction.OriginalActionType",
  "SalesTransaction.Contract",
  "SalesTransaction.STContractHasCotermination__std",
  "SalesTransaction.STContractEndDate__std",
  "SalesTransaction.EffectiveDate",
  "SalesTransaction.Status",
  "SalesTransaction.Subtotal",
  "SalesTransaction.TransactionType",
  "SalesTransaction.SalesTransactionItem.SalesTransactionItemSource",
  "SalesTransaction.SalesTransactionItem.Product",
  "SalesTransaction.SalesTransactionItem.ProductName",

```

```

    "SalesTransaction.SalesTransactionItem.ProductCode",
    "SalesTransaction.SalesTransactionItem.ProductSellingModel",
    "SalesTransaction.SalesTransactionItem.PricebookEntry",
    "SalesTransaction.SalesTransactionItem.SellingModelType",
    "SalesTransaction.SalesTransactionItem.SubscriptionTerm",
    "SalesTransaction.SalesTransactionItem.PricingTermUnit",
    "SalesTransaction.SalesTransactionItem.ProductBasedOn",
    "SalesTransaction.SalesTransactionItem.CustomProductName",
    "SalesTransaction.SalesTransactionItem.StartQuantity",
    "SalesTransaction.SalesTransactionItem.EndQuantity",
    "SalesTransaction.SalesTransactionItem.Quantity",
    "SalesTransaction.SalesTransactionItem.StartDate",
    "SalesTransaction.SalesTransactionItem.EndDate",
    "SalesTransaction.SalesTransactionItem.UnitPrice",
    "SalesTransaction.SalesTransactionItem.NetUnitPrice",
    "SalesTransaction.SalesTransactionItem.NetTotalPrice",
    "SalesTransaction.SalesTransactionItem.PartnerUnitPrice",
    "SalesTransaction.SalesTransactionItem.Discount",
    "SalesTransaction.SalesTransactionItem.ListPrice",
    "SalesTransaction.SalesTransactionItem.PriceWaterFall",
    "SalesTransaction.SalesTransactionItem.TotalLineAmount",
    "SalesTransaction.SalesTransactionItem.Subtotal",
    "SalesTransaction.SalesTransactionItem.ItemRampIdentifier",
    "SalesTransaction.SalesTransactionItem.ItemSegmentIdentifier",
    "SalesTransaction.SalesTransactionItem.ItemSegmentName",
    "SalesTransaction.SalesTransactionItem.ItemSegmentType",
    "SalesTransaction.SalesTransactionItem.SalesTransactionAction",
    "SalesTransaction.SalesTransactionItem.Deleted",
    "SalesTransaction.SalesTransactionItem.DerivedPricingAttribute",
    "SalesTransaction.SalesTransactionItem.SalesTransactionSourceAsset",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemParent",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemGroup",
    "SalesTransaction.SalesTransactionItem.ItemPath",
    "SalesTransaction.SalesTransactionItem.LineItemPath",
    "SalesTransaction.SalesTransactionItem.ItemUnitOfMeasureName",
    "SalesTransaction.SalesTransactionItem.ItemUnitOfMeasureScale",
    "SalesTransaction.SalesTransactionItem.ItemUnitOfMeasureRoundingMethod",
    "SalesTransaction.SalesTransactionItem.BillingFrequency",
    "SalesTransaction.SalesTransactionItem.UsageModelType",
    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeKey",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeValue",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeName",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributePicklistValue",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.SalesTransactionItemAttrParent",

    "SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.IsPriceImpacting",

```

```

"SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeUnitOfMeasure",

"SalesTransaction.SalesTransactionItem.SalesTransactionItemAttribute.AttributeUnitOfMeasureName",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.MainItem",
    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.AssociatedItem",
    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItem",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.ProductRelatedComponent",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.ProductRelatedComponentPRT__std",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.AssociatedQuantScaleMethod",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.AssociatedItemPricing",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.ProductRelationshipType",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItemProduct",
    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItemProductCode",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.RootItemProductSellingModel",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.MainItemProduct",

"SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.MainItemProductSellingModel",

    "SalesTransaction.SalesTransactionItem.SalesTrxnItemRelationship.IsPriceInclusive",

    "SalesTransaction.SalesTransactionAction.Type",
    "SalesTransaction.SalesTransactionAction.SourceAsset",
    "SalesTransaction.SalesTransactionAction.Subtype__std",
    "SalesTransaction.SalesTransactionGroup.SalesTransactionGroupParent",
    "SalesTransaction.SalesTransactionGroup.GroupIsRamped__std",
    "SalesTransaction.SalesTransactionGroup.GroupSortOrder",
    "SalesTransaction.SalesTransactionGroup.GroupSource",
    "SalesTransaction.SalesTransactionGroup.SummarySubtotal",
    "SalesTransaction.SalesTransactionGroup.GroupName",
    "SalesTransaction.SalesTransactionGroup.GroupStartDate__std",
    "SalesTransaction.SalesTransactionGroup.GroupEndDate__std",
    "SalesTransaction.SalesTransactionGroup.ParentSalesTransactionItemGroup__std",
    "SalesTransaction.SalesTransactionGroup.GroupType",
    "SalesTransaction.SalesTransactionGroup.SummaryTotalAmount__std"
],
"configuratorOptions": {
    "explainabilityEnabled": false,
    "executePricing": false,
    "qualifyAllProductsInTransaction": false,
    "validateProductCatalog": true,

```

```

    "validateAmendRenewCancel": false,
    "executeConfigurationRules": true,
    "returnProductCatalogData": true,
    "addDefaultConfiguration": true
  },
  "contextResponseType": "Product"
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
addedNodes	Configurator Added Node Input[]	List of added context nodes that's passed to the product configurator	Optional	60.0
configurator Options	Configurator Options Input[]	Options to pass to the configurator	Optional	60.0
context FieldsList	String[]	List of fields to return in the configurator response	Optional	68.0
context ResponseType	String	Specifies the type of transaction context response. Valid values are <code>Delta</code> —Returns only the sales transaction items that are added or updated in the call. Deleted items are returned separately in a <code>DeletedSTIIds</code> collection on the response. The response is always flat regardless of response type; reconstruct hierarchy from <code>SalesTransactionItemParent</code> on child items and <code>MainItem/AssociatedItem</code> on relationships; <code>Full</code> —Returns all sales transaction items in a transaction; <code>None</code> —Returns empty transaction context response; or <code>Product</code> —Returns the sales transaction items related to the product that's being configured.	Required for large sales transactions with more than 1000 line items and less than 15K line items.	65.0
correlationId	String	ID that's specified for traceability of logs	Optional	60.0
deletedNodes	Configurator Deleted Node Input[]	List of deleted context nodes that's passed to the product configurator	Optional	60.0
qualification Context	User Context Input[]	Details such as account ID, contact ID, and context ID that are used for executing qualification rules	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
transaction ContextId	String	ID of the transaction context. The context expires after 10 minutes by default (managed by Context Service). To extend it, set <code>ContextTtlInMinutes</code> on the Context Definition record. The org-level ceiling is controlled by <code>ContextMaxTtlInMinutes</code> (default: 45 minutes). Design for short-lived sessions: rebuild context on expiry rather than extending TTL indefinitely, because the durable state lives on the persisted transaction record.	Optional	60.0
transactionId	String	ID of the sales transaction that's being configured such as a quote or an order	Required	60.0
transaction LineId	String	ID of the top-level line item that's being configured	Optional	60.0
updatedNodes	Configurator Updated Node Input[]	List of updated context nodes that's passed to the product configurator	Optional	60.0

SEE ALSO:

[Salesforce Help: Context Service](#)[Developer Documentation: Context Service](#)

Configurator Options Input

Input representation of the request to get the product configuration options that's passed to the configurator.

JSON Example

```

"configuratorOptions":
{
  "addDefaultConfiguration": true,
  "executeConfigurationRules": true,
  "executePricing": true,
  "qualifyAllProductsInTransaction": true,
  "validateAmendRenewCancel": true,
  "validateProductCatalog": true
}

```


Properties

Name	Type	Description	Required or Optional	Available Version
addDefault Configuration	Boolean	Indicates whether to add the default configurations (<code>true</code>) or not (<code>false</code>).	Optional	60.0
execute Configuration Rules	Boolean	Indicates whether to execute the configuration rules (<code>true</code>) or not (<code>false</code>).	Optional	60.0
execute Pricing	Boolean	Indicates whether to execute pricing (<code>true</code>) or not (<code>false</code>).	Optional	60.0
explainability Enabled	Boolean	Indicates whether additional metadata about how the solver achieved the execution request solution must be collected and made available to the caller (<code>true</code>) or not (<code>false</code>). If you set this property to <code>true</code> , you can get explainability action logs by using the Action Logs API . See Troubleshoot Product Configurations to set up configuration logs.	Optional	66.0
pricing Procedure	String	Name of the pricing procedure to use during the API calls to Salesforce Pricing Management.	Optional	60.0
qualifyAll ProductsIn Transaction	Boolean	Indicates whether to run the qualification rules on all the products in the context (<code>true</code>) or not (<code>false</code>).	Optional	60.0
returnProduct CatalogData	Boolean	Indicates whether to return the product catalog data (<code>true</code>) or not (<code>false</code>). Exclude this property or specify the property value as <code>false</code> if you're using the API without the Product Configurator UI.	Optional	60.0
validateAmend RenewCancel	Boolean	Indicates whether to run the amend, renew, cancel-related validations (<code>true</code>) or not (<code>false</code>).	Optional	60.0
validate Product Catalog	Boolean	Indicates whether to run the validations against the product catalog (<code>true</code>) or not (<code>false</code>).	Optional	60.0

Configuration Rule Input

Input representation of the details of a configuration rule.

JSON Example

```
{
  "transactionContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "transactionId": "0Q0DU0000005tJh0AI",
  "ruleOptions": {
    "isUpdateContextRequired": false
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
ruleOptions	Config Rule Options Input[]	Details of the options to run specific steps in rules.	Optional	67.0
transactionContextId	String	ID of the sales transaction context instance.	Required if the transactionId property isn't specified.	67.0
transactionId	String	ID of the quote or order.	Required if the transactionContextId property isn't specified.	67.0

[Configuration Rule Options Input](#)

Input representation of the details of the configuration rule options.

Configuration Rule Options Input

Input representation of the details of the configuration rule options.

JSON Example

```
{
  "ruleOptions": {
    "isUpdateContextRequired": false
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
isUpdateContextRequired	Boolean	Indicates whether context update is required with the capability to automatically	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
		add or delete a product and its components (<code>true</code>) or not (<code>false</code>). If Place Sales Transaction API is invoked with configuration enabled, set this property to <code>false</code> to avoid any redundant execution of context logic.		

Configurator Update Nodes Input

Input representation of the request to update the nodes in a product configuration.

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "updatedNodes": [
    {
      "path": ["0Q0DE000000ISHJs81", "0QLDE000000IBXw4AO"],
      "updatedAttributes": {
        "Quantity": 5
      }
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0

Name	Type	Description	Required or Optional	Available Version
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
updatedNodes	Configurator Updated Node Input[]	List of the nodes to be updated.	Required	60.0

Configurator Updated Node Input

Input representation of the nodes to be updated in a product configuration.

JSON Example

This example updates a field on an already-added sales transaction item. The path uses the persistent Salesforce record ID, not a `ref_*` reference. Only include the changed fields in `updatedAttributes`.

```
{
  "updatedNodes": [
    {
      "path": ["801xx0000000001AAA", "802xx0000000001AAA"],
      "updatedAttributes": {
        "businessObjectType": "OrderItem",
        "Quantity": 5
      }
    }
  ]
}
```

This example updates an attribute value on an already-added sales transaction item attribute. The path uses the persistent attribute record ID. Only include the changed fields in `updatedAttributes`. When a constraint model is active, include `AttributeName` and set it to the attribute's developer name.

```
{
  "updatedNodes": [
    {
      "path": ["801xx0000000001AAA", "802xx0000000001AAA", "0AZxx0000000001AAA"],
      "updatedAttributes": {
        "businessObjectType": "OrderItemAttribute",
        "AttributeName": "Length",
        "AttributeValue": "10",
        "AttributePicklistValue": null
      }
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
path	String[]	Path to the node that's being updated.	Required	60.0
updated Attributes	Map<String, Object>	Details of the object that's being updated. This property supports fields of objects from the Sales Transaction context definition, including custom objects and fields in your extended context definition. When you update an <code>OrderItemAttribute</code> or <code>QuoteLineItemAttribute</code> node and a constraint model is active, include <code>AttributeName</code> and set it to the product attribute's developer name. For matching behavior and default fallback, see Constraint Modeling Language (CML) Best Practices on page 1130.	Required	60.0

Product Quantity Set Configurator Input

Input representation of the request to set the quantity of a product.

JSON Example

```
{
  "configuratorOptions": {
    "executePricing": true,
    "returnProductCatalogData": true,
    "qualifyAllProductsInTransaction": true,
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "qualificationContext": {
    "accountId": "001xx0000000001AAA",
    "contactId": "003xx000000000D7AAI"
  },
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "quantity": 20,
  "transactionLinePath": "Quote.QuoteLineItem.Quantity"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuratorOptions	Configurator Options Input	List of the configuration options to execute.	Optional	60.0
contextId	String	ID of the context object that's being considered.	Required	60.0
qualificationContext	User Context Input	Context details that are used for the qualification rules.	Optional	60.0
quantity	Integer	Value of the product quantity.	Required	60.0
transactionLinePath	String[]	Path to the line item where the update to the quantity is applied. For example, Quote.QuoteLineItem.Quantity.	Required	60.0

User Context Input

Input representation of the request to get the context details of a user, which are used for qualification rules.

JSON Example

```
"qualificationContext": {  
  "accountId": "001DU000001nHUGYA2",  
  "contactId": "003xx00000000D7AAI"  
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account in a user context.	Optional	60.0
contactId	String	ID of the contact in a user context.	Optional	60.0
contextId	String	ID of the context that represents the created session.	Optional	60.0

Response Bodies

Learn more about the available Product Configurator API response bodies.

[Configuration Details](#)

Output representation of the product configuration details.

[Configuration Get Instance](#)

Output representation of the request to retrieve the configuration instance.

[Configuration Load Instance](#)

Output representation of the details of the context or session that are returned with a load configuration request.

[Configuration Save Details](#)

Output representation of the details of a saved configuration.

[Configuration Record Save](#)

Output representation of the details of a saved configuration.

[Configuration List](#)

Output representation of the details of the saved configuration.

[Configuration Save Instance](#)

Output representation of the response that's returned with a save configuration request.

[Configuration Set Instance](#)

Output representation of the details of the context or session that are returned with a set configuration request.

[Configurator Add Nodes](#)

Output representation of the configuration request details to add nodes.

[Configurator Additional Fields](#)

Output representation of the additional fields of a product configuration.

[Configurator Attribute](#)

Output representation of the attribute in a product configuration.

[Configurator Attribute Category](#)

Output representation of the attribute category in a product configuration.

[Configurator Attribute Picklist](#)

Output representation of the attribute picklist in a product configuration.

[Configurator Attribute Picklist Value](#)

Output representation of the values of an attribute picklist in a product configuration.

[Configurator Delete Nodes](#)

Output representation of the details of the configuration request to delete nodes.

[Configurator Message](#)

Output representation of the messages of a product configurator.

[Configurator Price](#)

Output representation of the pricing details in a product configuration.

[Configurator Pricing Model](#)

Output representation of the details of a pricing model in a product configuration.

[Configurator Product Catalog](#)

Output representation of the product catalog.

[Configurator Product Classification](#)

Output representation of the product classification in a product configuration.

[Configurator Product Component Group](#)

Output representation of the product component group in a product classification.

[Configurator Product Recommendations](#)

Output representation of the details of the product recommendations.

[Configurator Product Related Component](#)

Output representation of the product related component in a product configuration.

[Configurator Product Selling Model](#)

Output representation of the product selling model in a product configuration.

[Configurator Product Selling Model Option](#)

Output representation of the product selling model option in a product configuration.

[Configurator Qualification Context](#)

Output representation of the qualification context in a product configuration.

[Configurator UI Treatment](#)

Output representation of the details of the UI treatments of a product configurator. The details include the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.

[Configurator Unit Of Measure](#)

Output representation of the details of the unit of measure record.

[Configurator Update Nodes](#)

Output representation of the configuration request details to update nodes.

[Configuration Update](#)

Output representation of the details of the updated configuration.

[Error Response](#)

Output representation of the details of the error.

[Product Quantity Set Configurator](#)

Output representation of the request details to set product quantity.

[Configuration Rule Response](#)

Output representation of the details of the configuration rule response.

Configuration Details

Output representation of the product configuration details.

JSON Example

```
{
  "catalogProducts": {
    "additionalFields": [],
    "attributeCategories": [
      {
        "attributes": [
          {
            "attributeCategoryId": "0v3xx0000000001AAA",
            "attributeNameOverride": "Load Capacity",
            "code": "CAP",
            "dataType": "NUMBER",
            "defaultValue": "1500",
            "description": "Server racks are designed to support a specific load capacity,"
```



```

commonly measured in kilograms (kg) or pounds (lbs). Typical load capacities range from
500 kg (1102 lbs) to 1500 kg (3307 lbs) depending on the model.",
  "id": "0tjxx00000001DpAAI",
  "isCloneable": false,
  "isConfigurable": true,
  "isHidden": false,
  "isPriceImpacting": false,
  "isReadOnly": false,
  "isRequired": false,
  "label": "Load Capacity",
  "name": "Load Capacity"
},
{
  "attributeCategoryId": "0v3xx0000000001AAA",
  "attributeNameOverride": "Expansion Slots",
  "code": "SLOTCAP",
  "dataType": "NUMBER",
  "defaultValue": "12",
  "id": "0tjxx00000001H3AAI",
  "isCloneable": false,
  "isConfigurable": true,
  "isHidden": false,
  "isPriceImpacting": false,
  "isReadOnly": false,
  "isRequired": true,
  "label": "Expansion Slots",
  "name": "Expansion Slots"
},
{
  "attributeCategoryId": "0v3xx0000000001AAA",
  "attributeNameOverride": "Memory",
  "attributePicklist": {
    "id": "0v5xx0000000001AAA",
    "values": [
      {
        "code": "MEM",
        "displayValue": "25",
        "id": "0v6xx0000000001AAA",
        "isBooleanValue": false,
        "name": "25Mem",
        "sequence": 0,
        "textValue": "25"
      },
      {
        "code": "50MEM",
        "displayValue": "50",
        "id": "0v6xx000000001eAAA",
        "isBooleanValue": false,
        "name": "50Mem",
        "sequence": 1,
        "textValue": "50"
      },
      {
        "code": "100MEM",

```

```

        "displayValue": "100",
        "id": "0v6xx000000003FAAQ",
        "isBooleanValue": false,
        "name": "100Mem",
        "sequence": 2,
        "textValue": "100"
    }
]
},
"dataType": "MULTIPICKLIST",
"defaultValue": "25",
"id": "0tjxx00000001IfAAI",
"isCloneable": false,
"isConfigurable": true,
"isHidden": false,
"isPriceImpacting": false,
"isReadOnly": false,
"isRequired": true,
"label": "Memory",
"name": "Memory"
}
],
"code": "SPEC",
"name": "Server Rack Specifications"
}
],
"description": "Introducing the Cisco Server Rack, a sleek and robust solution designed to streamline your data center infrastructure. With its scalable design and advanced cable management features, it ensures optimal performance, efficiency, and easy maintenance for your critical network equipment.",
"displayUrl":
"https://www.cisco.com/content/dam/en/us/products/servers-unified-computing/ucs-c240-m4-rack-server/product-large.jpg",
"id": "0ltxx0000006jkuAAA",
"isActive": true,
"isAssetizable": true,
"isConfigurable": true,
"isSoldOnlyWithOtherProds": false,
"name": "Cisco Server Rack NX44",
"nodeType": "bundleProduct",
"prices": [],
"productClassification": {
    "id": "1lBxx000002CC02EAG"
},
"productCode": "RACK",
"productComponentGroups": [
{
    "classifications": [],
    "code": "SERVICE",
    "components": [
{
            "additionalFields": [],
            "attributeCategories": [],
            "description": "Introducing the Cisco Rack Server NX44 Service, a comprehensive

```

protection plan designed to safeguard your valuable data infrastructure. With extended coverage and rapid response times, this warranty ensures peace of mind and uninterrupted performance for your critical business operations.",

```

    "id": "01txx0000006jmWAAQ",
    "isActive": true,
    "isAssetizable": true,
    "isComponentRequired": false,
    "isConfigurable": false,
    "isDefaultComponent": false,
    "isQuantityEditable": false,
    "isSoldOnlyWithOtherProds": false,
    "name": "Cisco Rack Server Service - 1 Year",
    "nodeType": "simpleProduct",
    "prices": [],
    "productClassification": {},
    "productCode": "SERVICE",
    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01txx0000006jmWAAQ",
      "childSellingModelId": "0jPxx000000004rEAA",
      "doesBundlePriceIncludeChild": true,
      "id": "0dSxx000000001dEAA",
      "isComponentRequired": false,
      "isDefaultComponent": false,
      "isQuantityEditable": false,
      "parentProductId": "01txx0000006jkuAAA",
      "parentSellingModelId": "0jPxx000000004rEAA",
      "productComponentGroupId": "0y7xx000000001dAAA",
      "productRelationshipTypeId": "0yoxx00000001IfAAI",
      "quantity": 1,
      "quantityScaleMethod": "Proportional"
    },
    "productSellingModelOptions": [
      {
        "id": "0iOxx000000009hEAA",
        "productId": "01txx0000006jmWAAQ",
        "productSellingModel": {
          "id": "0jPxx000000004rEAA",
          "name": "Termed Annually",
          "pricingTerm": 1,
          "pricingTermUnit": "Annual",
          "sellingModelType": "TermDefined",
          "status": "Active"
        },
        "productSellingModelId": "0jPxx000000004rEAA"
      },
      {
        "id": "0iOxx00000000PpEAI",
        "productId": "01txx0000006jmWAAQ",
        "productSellingModel": {
          "id": "0jPxx0000000085EAA",
          "name": "Evergreen Annually",
          "pricingTerm": 1,
          "pricingTermUnit": "Annual",

```

```

        "sellingModelType": "Evergreen",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx0000000085EAA"
}
]
}
],
"description": "The services available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
"id": "0y7xx000000001dAAA",
"maxBundleComponents": 1,
"minBundleComponents": 0,
"name": "Services",
"parentProductId": "01txx0000006jkuAAA",
"sequence": 1
},
{
    "classifications": [],
    "code": "WARRANTY",
    "components": [
        {
            "additionalFields": [],
            "attributeCategories": [],
            "description": "Introducing the Cisco Rack Server NX44 Warranty, a comprehensive
            protection plan designed to safeguard your valuable data infrastructure. With extended
            coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
            performance for your critical business operations.",
            "id": "01txx0000006jjIAAQ",
            "isActive": true,
            "isAssetizable": true,
            "isComponentRequired": false,
            "isConfigurable": false,
            "isDefaultComponent": true,
            "isQuantityEditable": true,
            "isSoldOnlyWithOtherProds": false,
            "name": "Cisco Rack Server Warranty - 1 Year",
            "nodeType": "simpleProduct",
            "prices": [],
            "productClassification": {},
            "productCode": "WARRANTY",
            "productComponentGroups": [],
            "productRelatedComponent": {
                "childProductId": "01txx0000006jjIAAQ",
                "childSellingModelId": "0jPxx000000001dEAA",
                "doesBundlePriceIncludeChild": false,
                "id": "0dSxx0000000001EAA",
                "isComponentRequired": false,
                "isDefaultComponent": true,
                "isQuantityEditable": true,
                "maxQuantity": 1,
                "parentProductId": "01txx0000006jkuAAA",
                "parentSellingModelId": "0jPxx000000001dEAA",
            }
        }
    ]
}

```

```

    "productComponentGroupId": "0y7xx0000000001AAA",
    "productRelationshipTypeId": "0yoxx000000001IfAAI",
    "quantity": 1,
    "quantityScaleMethod": "Proportional",
    "sequence": 0
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000001dEAA",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000001dEAA",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000001dEAA"
    },
    {
      "id": "0iOxx00000000HlEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000003FEAQ",
        "name": "Termed Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000003FEAQ"
    },
    {
      "id": "0iOxx00000000JNEAY",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
      "id": "0iOxx00000000KzEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx0000000085EAA",
        "name": "Evergreen Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "Evergreen",
        "status": "Active"
      }
    }
  ]
}

```

```

        },
        "productSellingModelId": "0jPxx0000000085EAA"
    },
    {
        "id": "0iOxx00000000MbEAI",
        "productId": "01txx0000006jjIAAQ",
        "productSellingModel": {
            "id": "0jPxx000000006TEAQ",
            "name": "Evergreen Monthly",
            "pricingTerm": 1,
            "pricingTermUnit": "Months",
            "sellingModelType": "Evergreen",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000006TEAQ"
    }
]
},
"description": "The warranties available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
"id": "0y7xx0000000001AAA",
"maxBundleComponents": 1,
"minBundleComponents": 0,
"name": "Warranties",
"parentProductId": "01txx0000006jkuAAA",
"sequence": 0
}
],
"productSellingModelOptions": [
    {
        "id": "0iOxx0000000003FEAQ",
        "productId": "01txx0000006jkuAAA",
        "productSellingModel": {
            "id": "0jPxx000000001dEAA",
            "name": "One Time",
            "sellingModelType": "OneTime",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000001dEAA"
    },
    {
        "id": "0iOxx000000004rEAA",
        "productId": "01txx0000006jkuAAA",
        "productSellingModel": {
            "id": "0jPxx000000003FEAQ",
            "name": "Termed Monthly",
            "pricingTerm": 1,
            "pricingTermUnit": "Months",
            "sellingModelType": "TermDefined",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000003FEAQ"
    }
]

```

```

    },
    {
      "id": "0iOxx000000006TEAQ",
      "productId": "01txx0000006jkuAAA",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    }
  ],
  "productType": "Bundle"
},
"uiTreatments": [
  {
    "details": {
      "attributeId": "0tjxx0000000007AAA",
      "prcId": "0dSxx0000000007EAA",
      "stiId": "0QLxx00000004CU0GAM",
      "attributePicklistValueId": "0v6xx0000000005AAA"
    },
    "uiTreatmentScope": "Bundle",
    "uiTreatmentTarget": "Attribute_Picklist_Value",
    "uiTreatmentType": "Hide"
  },
  {
    "details": {
      "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
    },
    "uiTreatmentScope": "Product",
    "uiTreatmentTarget": "Component",
    "uiTreatmentType": "Disable"
  }
],
"errors": [],
"success": true,
"productRecommendations": [
  {
    "referenceId": "CORE_BUNDLE_001",
    "productIds": [
      "01t000000001234",
      "01t000000005678"
    ]
  }
],
"transactionContext": {
  "SalesTransaction": [
    {
      "Status": "Draft",
      "Account": "001xx000003GeIxAk",

```

```

"BillingCity": "San Francisco",
"Subtotal": 152500,
"LastPricedDate": "2023-08-22T05:55:39Z",
"businessObjectType": "Quote",
"TotalAmount": 152500,
"ShippingStreet": "415 Mission St",
"SalesTransactionItem": [
  {
    "ProrationPolicy": null,
    "Discount": null,
    "ProductSellingModel": "0jPxx000000001dEAA",
    "Product": "0ltxx0000006jkuAAA",
    "businessObjectType": "QuoteLineItem",
    "BasisTransactionItem": null,
    "PartnerUnitPrice": null,
    "StartingUnitPriceSource": "System",
    "ListPrice": 150000,
    "ItemTotalAdjustmentAmount": 0,
    "SalesTransactionItemSource": "0QLxx0000004CQmGAM",
    "SubscriptionTerm": null,
    "StartDate": null,
    "NetTotalPrice": 150000,
    "TotalLineAmount": 150000,
    "PeriodBoundaryStartMonth": null,
    "ListPriceTotal": 150000,
    "PartnerDiscountPercent": null,
    "id": "0QLxx0000004CQmGAM",
    "PriceWaterFall": {
      "currencyCode": "USD",
      "executionEndTimestamp": "2023-09-18T20:11:15.016Z",
      "executionId": "ruepwmHn2ZFvnQo5bjot",
      "executionStartTimestamp": "2023-09-18T20:11:14.906Z",
      "lineItemId": "0QLxx0000004CQmGAM",
      "output": {
        "NetUnitPrice": 150000,
        "Subtotal": 0
      },
    },
    "success": true,
    "waterfall": [
      {
        "fieldToTagNameMapping": {
          "NetUnitPrice": "ItemUnitPrice",
          "AdjustmentValue": "ItemAdjustmentValue",
          "Subtotal": "ItemTotalAdjustmentAmount",
          "Quantity": "ItemQuantity",
          "LineItemId": "SalesTransactionItemSource",
          "InputUnitPrice": "ItemUnitPrice"
        },
        "inputParameters": {
          "Quantity": 1,
          "LineItemId": "0QLxx0000004CQmGAM",
          "InputUnitPrice": 150000,
          "AdjustmentType": "Amount"
        }
      },
    ],
  },
]

```



```

        "outputParameters": {
            "NetUnitPrice": 150000,
            "Subtotal": 0
        },
        "pricingElement": {
            "adjustments": [
                {
                    "AdjustmentType": "Amount"
                }
            ],
            "elementType": "MANUALDISCOUNT",
            "name": "ManualDiscount"
        },
        "sequence": 1
    }
],
},
"BillingFrequency": null,
"SalesTransactionItemParent": "0Q0xx0000004CAeCAM",
"StartingPriceTotal": 150000,
"Quantity": 1,
"PeriodBoundary": null,
"SalesTransactionItemAttribute": [
    {
        "AttributeKey": "0tjxx00000001H3AAI",
        "AttributeValue": "30.0",
        "AttributePicklistValue": null,
        "IsPriceImpacting": true,
        "businessObjectType": "QuoteLineItemAttribute",
        "AttributeName": "Expansion Slots",
        "AttributeDefinitionCode": "SLOTCAP",
        "id": "0zuxx000000001AAA",
        "SalesTransactionItemAttrParent": "0QLxx0000004CQmGAM"
    }
],
"EndDate": null,
"DiscountAmount": null,
"PricebookEntry": "0luxx0000009154AAA",
"PricingTermCount": 1,
"NetUnitPrice": 150000,
"UnitPrice": 150000,
"StartingUnitPrice": 150000,
"SalesTrxnItemRelationship": [
    {
        "ProductRelationshipType": "0yoxx00000001IfAAI",
        "MainItemRole": "Bundle",
        "AssociatedItem": "0QLxx0000004CQnGAM",
        "ProductRelatedComponent": "0dSxx000000001EAA",
        "MainItem": "0QLxx0000004CQmGAM",
        "AssociatedQuantScaleMethod": "Proportional",
        "businessObjectType": "QuoteLineRelationship",
        "AssociatedItemRole": "BundleComponent",
        "SalesTrnItemRelationshipParent": "0Q0xx0000004CAeCAM",
        "id": "0yQxx000000001dEAA",
    }
]

```

```

        "AssociatedItemPricing": "NotIncludedInBundlePrice"
    }
},
"TotalPrice": 150000,
"PeriodBoundaryDay": null
},
{
    "ProrationPolicy": null,
    "Discount": null,
    "ProductSellingModel": "0jPxx000000001dEAA",
    "Product": "0ltxx0000006jjIAAQ",
    "businessObjectType": "QuoteLineItem",
    "BasisTransactionItem": null,
    "PartnerUnitPrice": null,
    "StartingUnitPriceSource": "System",
    "ListPrice": 2000,
    "ItemTotalAdjustmentAmount": 0,
    "SalesTransactionItemSource": "0QLxx0000004CQnGAM",
    "SubscriptionTerm": null,
    "StartDate": null,
    "NetTotalPrice": 2000,
    "TotalLineAmount": 2000,
    "PeriodBoundaryStartMonth": null,
    "ListPriceTotal": 2000,
    "PartnerDiscountPercent": null,
    "id": "0QLxx0000004CQnGAM",
    "PriceWaterFall": {
        "currencyCode": "USD",
        "executionEndTimestamp": "023-09-18T20:11:15.016Z",
        "executionId": "ruepwmHn2ZFvnQo5bjot",
        "executionStartTimestamp": "2023-09-18T20:11:14.906Z",
        "lineItemId": "0QLxx0000004CQnGAM",
        "output": {
            "NetUnitPrice": 2000,
            "Subtotal": 0
        }
    },
    "success": true,
    "waterfall": [
        {
            "fieldToTagNameMapping": {
                "NetUnitPrice": "ItemUnitPrice",
                "AdjustmentValue": "ItemAdjustmentValue",
                "Subtotal": "ItemTotalAdjustmentAmount",
                "Quantity": "ItemQuantity",
                "LineItemId": "SalesTransactionItemSource",
                "InputUnitPrice": "ItemUnitPrice"
            },
            "inputParameters": {
                "Quantity": 1,
                "LineItemId": "0QLxx0000004CQnGAM",
                "InputUnitPrice": 2000,
                "AdjustmentType": "Amount"
            },
            "outputParameters": {

```

```

        "NetUnitPrice": 2000,
        "Subtotal": 0
    },
    "pricingElement": {
        "adjustments": [
            {}
        ],
        "elementType": "MANUALDISCOUNT",
        "name": "ManualDiscount"
    },
    "sequence": 1
}
]
},
"BillingFrequency": null,
"SalesTransactionItemParent": "0Q0xx0000004CAeCAM",
"StartingPriceTotal": 2000,
"Quantity": 1,
"PeriodBoundary": null,
"EndDate": null,
"DiscountAmount": null,
"PricebookEntry": "01uxx000000913SAAQ",
"PricingTermCount": 1,
"NetUnitPrice": 2000,
"UnitPrice": 2000,
"StartingUnitPrice": 2000,
"TotalPrice": 2000,
"PeriodBoundaryDay": null
}
],
"BillingCountry": "US",
"BillingStreet": "415 Mission St",
"Pricebook": "01sxx0000005uDZAA",
"ShippingPostalCode": "94105",
"SalesTransactionSource": "0Q0xx0000004CAeCAM",
"ShippingCountry": "US",
"ShippingCity": "San Francisco",
"ShippingState": "CA",
"BillingPostalCode": "94105",
"id": "0Q0xx0000004CAeCAM",
"BillToContact": null,
"Contract": null,
"BillingState": "CA"
}
]
},
"transactionContextId": "cda87acd-45ed-4913-903e-9dd33cec85a6",
"transactionContextMappingId": "11jxx0000004LwOAAU"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
catalogProducts	Configurator Product Catalog[]	Structure that contains the product catalog data.	Small, 61.0	61.0
errors	ConnectApiErrorResponse	List of errors that contains a message and an error code.	Small, 60.0	60.0
messages	Map<String, Configurator Message >>	Messages from the validation, Business Rules Engine (BRE), or Salesforce Pricing calls.	Small, 60.0	60.0
productRecommendations	Configurator Product Recommendations	List of product recommendations.	Small, 65.0	65.0
success	Boolean	Indicates whether the request is successful (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
transactionContext	Map<String, Object>	Serialized JSON representation of the transaction context.	Small, 60.0	60.0
transactionContextId	String	ID of the transaction context.	Small, 60.0	60.0
transactionContextMappingId	String	ID of the context mapping.	Small, 60.0	60.0
transactionQualification	Map<String, Configurator Qualification Context >	Map of the product IDs to the qualification context.	Small, 60.0	60.0
uiTreatments	Configurator UI Treatment[]	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0

Configuration Get Instance

Output representation of the request to retrieve the configuration instance.

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (<code>true</code>) not (<code>false</code>).	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
transaction	Map<String, Object>	Transaction JSON payload representing an object in an external system that's used to create a session.	Small, 60.0	60.0

Configuration Load Instance

Output representation of the details of the context or session that are returned with a load configuration request.

JSON Example

```
{
  "configuratorMessages": {},
  "configuratorUITreatments": [
    {
      "details": {
        "attributeId": "0tjxx0000000007AAA",
        "prcId": "0dSxx0000000007EAA",
        "stiId": "0QLxx0000004CU0GAM",
        "attributePicklistValueId": "0v6xx0000000005AAA"
      },
      "uiTreatmentScope": "Bundle",
      "uiTreatmentTarget": "Attribute_Picklist_Value",
      "uiTreatmentType": "Hide"
    },
    {
      "details": {
        "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
      },
      "uiTreatmentScope": "Product",
      "uiTreatmentTarget": "Component",
      "uiTreatmentType": "Disable"
    }
  ],
  "contextId": "831f07b01cf0cbd2d046adf5350420f85f0611b4b1e22e183921a063857a1377",
  "errors": [],
  "productQualifications": {
    "01tDU000000EOTCYA4": {
      "isQualified": true
    }
  },
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
configurator Messages	Map<String, < Configurator Message >>	Map of the product IDs to the list of configurator messages. Configurator messages are results from any validations,	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
		Business Rules Engines (BRE) calls, or Salesforce Pricing calls.		
configuratorUITreatments	ConfiguratorUITreatment[]	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0
contextId	String	ID of the transaction context.	Small, 60.0	60.0
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
productQualifications	Map<String, ConfiguratorQualificationContext>	Map of the product IDs to the execution results from qualification rules.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (true) not (false).	Small, 60.0	60.0

Configuration Save Details

Output representation of the details of a saved configuration.

JSON Example

[illegible]

Property Name	Type	Description	Filter Group and Version	Available Version
data	String	JSON object that contains the details of the sales transaction, formatted as a string.	Small, 63.0	63.0
description	String	Description of the saved configuration.	Small, 63.0	63.0
id	String	ID of the saved configuration.	Small, 63.0	63.0
name	String	Name of the saved configuration.	Small, 63.0	63.0
referenceRecordId	String	ID of the record that the saved configuration belongs to.	Small, 63.0	63.0

Configuration Record Save

Output representation of the details of a saved configuration.

JSON Example

This example shows a sample when the save operation is successful.

```
{
  "errors": [],
  "id": "1Nyxx0000004CNYCA2"
}
```

This example shows a sample when the save operation has errors.

```
{
  "errors": [{
    "code": "INTERNAL_SERVER_ERROR",
    "message": "INVALID_REFERENCEOBJECTID"
  }]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors that contains a message and an error code.	Small, 63.0	63.0
id	String	ID of the configuration that's saved. This property isn't shown if the operation has errors.	Small, 63.0	63.0

Configuration List

Output representation of the details of the saved configuration.

JSON Example

```
{
  "errors": [],
  "savedConfigurations": [
    {
      "data":
        Built-in
        by Apple, Acer, Amd, Apple, Asus, Dell, Hewlett-Packard, Intel, Lenovo, Microsoft, Samsung, Sony, Toshiba, and others.

      "description": \"This configuration is saved for reuse.\",
      "name": \"Favorite Configuration\",
      "referenceRecordId": \"01txx0000006icFAAY\"
    }
  ],
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors that contains a message and an error code.	Small, 63.0	63.0
saved Configurations	Configuration Save Details	Configuration details associated with the referenceRecordID request parameter.	Small, 63.0	63.0
success	Boolean	Indicates whether the operation is successful (true) or not (false).	Small, 63.0	63.0

Configuration Save Instance

Output representation of the response that's returned with a save configuration request.

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (true) not (false).	Small, 60.0	60.0

Configuration Set Instance

Output representation of the details of the context or session that are returned with a set configuration request.

JSON Example

```
{
  "configuratorMessages": {},
  "configuratorUITreatments": [
    {
      "details": {
        "attributeId": "0tjxx0000000007AAA",
        "prcId": "0dSxx0000000007EAA",
        "stiId": "0QLxx00000004CU0GAM",
        "attributePicklistValueId": "0v6xx0000000005AAA"
      },
      "uiTreatmentScope": "Bundle",
      "uiTreatmentTarget": "Attribute_Picklist_Value",
      "uiTreatmentType": "Hide"
    },
    {
      "details": {
        "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
      },
      "uiTreatmentScope": "Product",
      "uiTreatmentTarget": "Component",
      "uiTreatmentType": "Disable"
    }
  ],
  "contextId": "831f07b01cf0cbd2d046adf5350420f85f0611b4b1e22e183921a063857a1377",
  "errors": [],
  "productQualifications": {
    "01tDU000000EOTCYA4": {
      "isQualified": true
    }
  },
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
configuratorMessages	Map<String, < Configurator Message >>	Map of the product IDs to the list of configurator messages. Configurator messages are results from any validations, Business Rules Engines (BRE) calls, or Salesforce Pricing calls.	Small, 60.0	60.0
configuratorUITreatments	Configurator UI Treatment []	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0
contextId	String	ID of the transaction context.	Small, 60.0	60.0
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
product Qualifications	Map<String, Configurator Qualification Context >	Map of the product IDs to the execution results from qualification rules.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (<code>true</code>) not (<code>false</code>).	Small, 60.0	60.0

Configurator Add Nodes

Output representation of the configuration request details to add nodes.

JSON Example

```
{
  "configuratorMessages": {},
  "configuratorUITreatments": [
    {
      "details": {
        "attributeId": "0tjxx0000000007AAA",
        "prcId": "0dSxx0000000007EAA",
        "stiId": "0QLxx0000004CU0GAM",
        "attributePicklistValueId": "0v6xx0000000005AAA"
      },
      "uiTreatmentScope": "Bundle",
      "uiTreatmentTarget": "Attribute_Picklist_Value",
      "uiTreatmentType": "Hide"
    },
    {
      "details": {
        "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
      },
      "uiTreatmentScope": "Product",
      "uiTreatmentTarget": "Component",
      "uiTreatmentType": "Disable"
    }
  ],
  "errors": [],
  "productQualifications": {
    "01tDU000000EOTCYA4": {
      "isQualified": true
    }
  },
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
configurator Messages	Map<String, Configurator Message >	Map of the product IDs to the list of configurator messages. Configurator messages are results from any validations, Business Rules Engines (BRE) calls, or Salesforce Pricing calls.	Small, 60.0	60.0
configurator UITreatments	Configurator UI Treatment []	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
product Qualifications	Map<String, Configurator Qualification Context >	Map of the product IDs to the qualification rule execution results.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (<code>true</code>) not (<code>false</code>).	Small, 60.0	60.0

Configurator Additional Fields

Output representation of the additional fields of a product configuration.

Property Name	Type	Description	Filter Group and Version	Available Version
fieldApiName	String	API name of the field.	Small, 60.0	60.0
fieldName	String	Name of the field.	Small, 60.0	60.0
value	String	Value of the field.	Small, 60.0	60.0

Configurator Attribute

Output representation of the attribute in a product configuration.

JSON Example

```
"attributeCategories": [
  {
    "attributes": [
      {
        "attributeCategoryId": "0v3xx0000000001AAA",
```

```

      "attributeNameOverride": "Load Capacity",
      "code": "CAP",
      "dataType": "NUMBER",
      "defaultValue": "1500",
      "description": "Server racks are designed to support a specific load capacity,
commonly measured in kilograms (kg) or pounds (lbs). Typical load capacities range from
500 kg (1102 lbs) to 1500 kg (3307 lbs) depending on the model.",
      "id": "0tjxx00000001DpAAI",
      "isCloneable": false,
      "isConfigurable": true,
      "isHidden": false,
      "isPriceImpacting": false,
      "isReadOnly": false,
      "isRequired": false,
      "label": "Load Capacity",
      "name": "Load Capacity"
    },
    {
      "attributeCategoryId": "0v3xx0000000001AAA",
      "attributeNameOverride": "Expansion Slots",
      "code": "SLOTCAP",
      "dataType": "NUMBER",
      "defaultValue": "12",
      "id": "0tjxx00000001H3AAI",
      "isCloneable": false,
      "isConfigurable": true,
      "isHidden": false,
      "isPriceImpacting": false,
      "isReadOnly": false,
      "isRequired": true,
      "label": "Expansion Slots",
      "name": "Expansion Slots"
    },
    {
      "attributeCategoryId": "0v3xx0000000001AAA",
      "attributeNameOverride": "Memory",
      "attributePicklist": {
        "id": "0v5xx0000000001AAA",
        "values": [
          {
            "code": "MEM",
            "displayValue": "25",
            "id": "0v6xx0000000001AAA",
            "isBooleanValue": false,
            "name": "25Mem",
            "sequence": 0,
            "textValue": "25"
          },
          {
            "code": "50MEM",
            "displayValue": "50",
            "id": "0v6xx000000001eAAA",
            "isBooleanValue": false,
            "name": "50Mem",

```

```

        "sequence": 1,
        "textValue": "50"
      },
      {
        "code": "100MEM",
        "displayValue": "100",
        "id": "0v6xx000000003FAAQ",
        "isBooleanValue": false,
        "name": "100Mem",
        "sequence": 2,
        "textValue": "100"
      }
    ]
  },
  "dataType": "MULTIPICKLIST",
  "defaultValue": "25",
  "id": "0tjxx00000001IfAAI",
  "isCloneable": false,
  "isConfigurable": true,
  "isHidden": false,
  "isPriceImpacting": false,
  "isReadOnly": false,
  "isRequired": true,
  "label": "Memory",
  "name": "Memory"
}
],
"code": "SPEC",
"name": "Server Rack Specifications"
}
],
"description": "Introducing the Cisco Server Rack, a sleek and robust solution designed
to streamline your data center infrastructure. With its scalable design and advanced cable
management features, it ensures optimal performance, efficiency, and easy maintenance for
your critical network equipment.",
"displayUrl":
"https://www.cisco.com/content/dam/en/us/products/servers-unified-computing/ucs-c240-m4-rack-server/product-large.jpg",

  "id": "01txx00000006jkuAAA",
  "isActive": true,
  "isAssetizable": true,
  "isConfigurable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "Cisco Server Rack NX44",
  "nodeType": "bundleProduct",
  "prices": [],
  "productClassification": {
    "id": "11Bxx000002CC02EAG"
  },
  "productCode": "RACK",
  "productComponentGroups": [
    {
      "classifications": [],
      "code": "SERVICE",

```

```

    "components": [
      {
        "additionalFields": [],
        "attributeCategories": [],
        "description": "Introducing the Cisco Rack Server NX44 Service, a comprehensive
        protection plan designed to safeguard your valuable data infrastructure. With extended
        coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
        performance for your critical business operations.",
        "id": "01txx0000006jmWAAQ",
        "isActive": true,
        "isAssetizable": true,
        "isComponentRequired": false,
        "isConfigurable": false,
        "isDefaultComponent": false,
        "isQuantityEditable": false,
        "isSoldOnlyWithOtherProds": false,
        "name": "Cisco Rack Server Service - 1 Year",
        "nodeType": "simpleProduct",
        "prices": [],
        "productClassification": {},
        "productCode": "SERVICE",
        "productComponentGroups": [],
        "productRelatedComponent": {
          "childProductId": "01txx0000006jmWAAQ",
          "childSellingModelId": "0jPxx000000004rEAA",
          "doesBundlePriceIncludeChild": true,
          "id": "0dSxx000000001dEAA",
          "isComponentRequired": false,
          "isDefaultComponent": false,
          "isQuantityEditable": false,
          "parentProductId": "01txx0000006jkuAAA",
          "parentSellingModelId": "0jPxx000000004rEAA",
          "productComponentGroupId": "0y7xx000000001dAAA",
          "productRelationshipTypeId": "0yoxx00000001IfAAI",
          "quantity": 1,
          "quantityScaleMethod": "Proportional"
        },
        "productSellingModelOptions": [
          {
            "id": "0iOxx000000009hEAA",
            "productId": "01txx0000006jmWAAQ",
            "productSellingModel": {
              "id": "0jPxx000000004rEAA",
              "name": "Termed Annually",
              "pricingTerm": 1,
              "pricingTermUnit": "Annual",
              "sellingModelType": "TermDefined",
              "status": "Active"
            },
            "productSellingModelId": "0jPxx000000004rEAA"
          },
          {
            "id": "0iOxx00000000PpEAI",
            "productId": "01txx0000006jmWAAQ",

```

```

        "productSellingModel": {
          "id": "0jPxx0000000085EAA",
          "name": "Evergreen Annually",
          "pricingTerm": 1,
          "pricingTermUnit": "Annual",
          "sellingModelType": "Evergreen",
          "status": "Active"
        },
        "productSellingModelId": "0jPxx0000000085EAA"
      ]
    }
  ],
  "description": "The services available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
  "id": "0y7xx000000001dAAA",
  "maxBundleComponents": 1,
  "minBundleComponents": 0,
  "name": "Services",
  "parentProductId": "01txx0000006jkuAAA",
  "sequence": 1
},
{
  "classifications": [],
  "code": "WARRANTY",
  "components": [
    {
      "additionalFields": [],
      "attributeCategories": [],
      "description": "Introducing the Cisco Rack Server NX44 Warranty, a comprehensive
protection plan designed to safeguard your valuable data infrastructure. With extended
coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
performance for your critical business operations.",
      "id": "01txx0000006jjIAAQ",
      "isActive": true,
      "isAssetizable": true,
      "isComponentRequired": false,
      "isConfigurable": false,
      "isDefaultComponent": true,
      "isQuantityEditable": true,
      "isSoldOnlyWithOtherProds": false,
      "name": "Cisco Rack Server Warranty - 1 Year",
      "nodeType": "simpleProduct",
      "prices": [],
      "productClassification": {},
      "productCode": "WARRANTY",
      "productComponentGroups": [],
      "productRelatedComponent": {
        "childProductId": "01txx0000006jjIAAQ",
        "childSellingModelId": "0jPxx000000001dEAA",
        "doesBundlePriceIncludeChild": false,
        "id": "0dSxx0000000001EAA",
        "isComponentRequired": false,

```

```

    "isDefaultComponent": true,
    "isQuantityEditable": true,
    "maxQuantity": 1,
    "parentProductId": "01txx0000006jkuAAA",
    "parentSellingModelId": "0jPxx000000001dEAA",
    "productComponentGroupId": "0y7xx0000000001AAA",
    "productRelationshipTypeId": "0yoxx000000001IfAAI",
    "quantity": 1,
    "quantityScaleMethod": "Proportional",
    "sequence": 0
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000001dEAA",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000001dEAA",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000001dEAA"
    },
    {
      "id": "0iOxx00000000HlEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000003FEAQ",
        "name": "Termed Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000003FEAQ"
    },
    {
      "id": "0iOxx00000000JNEAY",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
      "id": "0iOxx00000000KzEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx0000000085EAA",

```



```

        "name": "Evergreen Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "Evergreen",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx0000000085EAA"
},
{
    "id": "0iOxx00000000MbEAI",
    "productId": "01txx0000006jjIAAQ",
    "productSellingModel": {
        "id": "0jPxx000000006TEAQ",
        "name": "Evergreen Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "Evergreen",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx000000006TEAQ"
}
]
}
],
"description": "The warranties available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
"id": "0y7xx0000000001AAA",
"maxBundleComponents": 1,
"minBundleComponents": 0,
"name": "Warranties",
"parentProductId": "01txx0000006jkuAAA",
"sequence": 0
}
],
"productSellingModelOptions": [
{
    "id": "0iOxx0000000003FEAQ",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
        "id": "0jPxx000000001dEAA",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx000000001dEAA"
},
{
    "id": "0iOxx0000000004rEAA",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
        "id": "0jPxx000000003FEAQ",
        "name": "Termed Monthly",
        "pricingTerm": 1,

```

```

        "pricingTermUnit": "Months",
        "sellingModelType": "TermDefined",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx000000003FEAQ"
},
{
    "id": "0iOxx000000006TEAQ",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx000000004rEAA"
}
],
"productType": "Bundle"
},
"errors": [],
"success": true,
"transactionContext": {
    "SalesTransaction": [
        {
            "Status": "Draft",
            "Account": "001xx000003GeIxAAK",
            "BillingCity": "San Francisco",
            "Subtotal": 152500,
            "LastPricedDate": "2023-08-22T05:55:39Z",
            "businessObjectType": "Quote",
            "TotalAmount": 152500,
            "ShippingStreet": "415 Mission St",
            "SalesTransactionItem": [
                {
                    "ProrationPolicy": null,
                    "Discount": null,
                    "ProductSellingModel": "0jPxx000000001dEAA",
                    "Product": "01txx0000006jkuAAA",
                    "businessObjectType": "QuoteLineItem",
                    "BasisTransactionItem": null,
                    "PartnerUnitPrice": null,
                    "StartingUnitPriceSource": "System",
                    "ListPrice": 150000,
                    "ItemTotalAdjustmentAmount": 0,
                    "SalesTransactionItemSource": "0QLxx0000004CQmGAM",
                    "SubscriptionTerm": null,
                    "StartDate": null,
                    "NetTotalPrice": 150000,
                    "TotalLineAmount": 150000,
                    "PeriodBoundaryStartMonth": null,
                    "ListPriceTotal": 150000,

```

```

"PartnerDiscountPercent": null,
"id": "0QLxx0000004CQmGAM",
"PriceWaterFall": "{
  "currencyCode": "USD",
  "executionEndTimestamp": "2023-09-18T20:11:15.016Z",
  "executionId": "ruepwmHn2ZFvnQo5bjot",
  "executionStartTimestamp": "2023-09-18T20:11:14.906Z",
  "lineItemId": "0QLxx0000004CQmGAM",
  "output": {
    "NetUnitPrice": 150000.0,
    "Subtotal": 0.0
  },
  "success": true,
  "waterfall": [
    {
      "fieldToTagNameMapping": {
        "NetUnitPrice": "ItemUnitPrice",
        "AdjustmentValue": "ItemAdjustmentValue",
        "Subtotal": "ItemTotalAdjustmentAmount",
        "Quantity": "ItemQuantity",
        "LineItemId": "SalesTransactionItemSource",
        "InputUnitPrice": "ItemUnitPrice"
      },
      "inputParameters": {
        "Quantity": 1.0,
        "LineItemId": "0QLxx0000004CQmGAM",
        "InputUnitPrice": 150000.0,
        "AdjustmentType": "Amount"
      },
      "outputParameters": {
        "NetUnitPrice": 150000.0,
        "Subtotal": 0.0
      },
      "pricingElement": {
        "adjustments": [
          {
            "AdjustmentType": "Amount"
          }
        ]
      },
      "elementType": "MANUALDISCOUNT",
      "name": "ManualDiscount"
    },
    {
      "sequence": 1
    }
  ],
  "BillingFrequency": null,
  "SalesTransactionItemParent": "0Q0xx0000004CAeCAM",
  "StartingPriceTotal": 150000,
  "Quantity": 1,
  "PeriodBoundary": null,
  "SalesTransactionItemAttribute": [
    {
      "AttributeKey": "0tjxx00000001H3AAI",

```

```

        "AttributeValue": "30.0",
        "AttributePicklistValue": null,
        "IsPriceImpacting": true,
        "businessObjectType": "QuoteLineItemAttribute",
        "AttributeName": "Expansion Slots",
        "AttributeDefinitionCode": "SLOTCAP",
        "id": "0zuxx0000000001AAA",
        "SalesTransactionItemAttrParent": "0QLxx0000004CQmGAM"
    }
],
"EndDate": null,
"DiscountAmount": null,
"PricebookEntry": "01uxx0000009154AAA",
"PricingTermCount": 1,
"NetUnitPrice": 150000,
"UnitPrice": 150000,
"StartingUnitPrice": 150000,
"SalesTrxnItemRelationship": [
    {
        "ProductRelationshipType": "0yoxx00000001IfAAI",
        "MainItemRole": "Bundle",
        "AssociatedItem": "0QLxx0000004CQnGAM",
        "ProductRelatedComponent": "0dSxx0000000001EAA",
        "MainItem": "0QLxx0000004CQmGAM",
        "AssociatedQuantScaleMethod": "Proportional",
        "businessObjectType": "QuoteLineRelationship",
        "AssociatedItemRole": "BundleComponent",
        "SalesTrnItemRelationshipParent": "0Q0xx0000004CAeCAM",
        "id": "0yQxx000000001dEAA",
        "AssociatedItemPricing": "NotIncludedInBundlePrice"
    }
],
"TotalPrice": 150000,
"PeriodBoundaryDay": null
},
{
    "ProrationPolicy": null,
    "Discount": null,
    "ProductSellingModel": "0jPxx0000000001dEAA",
    "Product": "01txx0000006jjIAAQ",
    "businessObjectType": "QuoteLineItem",
    "BasisTransactionItem": null,
    "PartnerUnitPrice": null,
    "StartingUnitPriceSource": "System",
    "ListPrice": 2000,
    "ItemTotalAdjustmentAmount": 0,
    "SalesTransactionItemSource": "0QLxx0000004CQnGAM",
    "SubscriptionTerm": null,
    "StartDate": null,
    "NetTotalPrice": 2000,
    "TotalLineAmount": 2000,
    "PeriodBoundaryStartMonth": null,
    "ListPriceTotal": 2000,
    "PartnerDiscountPercent": null,

```

```

"id": "0QLxx0000004CQnGAM",
"PriceWaterFall": {
  "currencyCode": "USD",
  "executionEndTimestamp": "2023-09-18T20:11:15.016Z",
  "executionId": "ruepwmHn2ZFvnQo5bjot",
  "executionStartTimestamp": "2023-09-18T20:11:14.906Z",
  "lineItemId": "0QLxx0000004CQnGAM",
  "output": {
    "NetUnitPrice": 2000.0,
    "Subtotal": 0.0
  },
  "success": true,
  "waterfall": [
    {
      "fieldToTagNameMapping": {
        "NetUnitPrice": "ItemUnitPrice",
        "AdjustmentValue": "ItemAdjustmentValue",
        "Subtotal": "ItemTotalAdjustmentAmount",
        "Quantity": "ItemQuantity",
        "LineItemId": "SalesTransactionItemSource",
        "InputUnitPrice": "ItemUnitPrice"
      },
      "inputParameters": {
        "Quantity": 1.0,
        "LineItemId": "0QLxx0000004CQnGAM",
        "InputUnitPrice": 2000.0,
        "AdjustmentType": "Amount"
      },
      "outputParameters": {
        "NetUnitPrice": 2000.0,
        "Subtotal": 0.0
      }
    },
    {
      "pricingElement": {
        "adjustments": [
          {}
        ]
      },
      "elementType": "MANUALDISCOUNT",
      "name": "ManualDiscount"
    },
    {
      "sequence": 1
    }
  ],
  "BillingFrequency": null,
  "SalesTransactionItemParent": "0Q0xx0000004CAeCAM",
  "StartingPriceTotal": 2000,
  "Quantity": 1,
  "PeriodBoundary": null,
  "EndDate": null,
  "DiscountAmount": null,
  "PricebookEntry": "01uxx000000913SAAQ",
  "PricingTermCount": 1,
  "NetUnitPrice": 2000,
  "UnitPrice": 2000,

```

```

        "StartingUnitPrice": 2000,
        "TotalPrice": 2000,
        "PeriodBoundaryDay": null
    }
],
"BillingCountry": "US",
"BillingStreet": "415 Mission St",
"Pricebook": "01sxx0000005uDZAAAY",
"ShippingPostalCode": "94105",
"SalesTransactionSource": "0Q0xx0000004CAeCAM",
"ShippingCountry": "US",
"ShippingCity": "San Francisco",
"ShippingState": "CA",
"BillingPostalCode": "94105",
"id": "0Q0xx0000004CAeCAM",
"BillToContact": null,
"Contract": null,
"BillingState": "CA"
}
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
attribute CategoryId	String	ID of the attribute category.	Small, 60.0	60.0
attribute NameOverride	String	Name override value of the attribute.	Small, 60.0	60.0
attribute Picklist	Configurator Attribute Picklist[]	Picklist values of the attribute.	Small, 60.0	60.0
code	String	Code of the attribute.	Small, 60.0	60.0
dataType	String	Data type of the attribute.	Small, 60.0	60.0
default HelpText	String	Default help text value of the attribute.	Small, 60.0	60.0
defaultValue	String	Default value of the attribute.	Small, 60.0	60.0
description	String	Description of the attribute.	Small, 60.0	60.0
displayType	String	Display type of the attribute.	Small, 60.0	60.0
id	String	ID of the attribute.	Small, 60.0	60.0
isCloneable	Boolean	Indicates if the attribute is cloneable (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
is Configurable	Boolean	Indicates if the attribute is configurable (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isEncrypted	Boolean	Indicates if the attribute is encrypted (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
isHidden	Boolean	Indicates if the attribute is hidden (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isPrice Impacting	Boolean	Indicates if this is a price impacting attribute (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isReadOnly	Boolean	Indicates if the attribute is read-only (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isRequired	Boolean	Indicates if the attribute is required (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
label	String	Label of the attribute.	Small, 60.0	60.0
maximumValue	String	Maximum value for the product attribute.	Small, 60.0	60.0
minimumValue	String	Minimum value for the product attribute.	Small, 60.0	60.0
name	String	Name of the attribute.	Small, 60.0	60.0
sequence	Integer	Sequence values of the attribute.	Small, 60.0	60.0
status	String	Status of the attribute.	Small, 60.0	60.0
stepValue	String	Step value for the attribute.	Small, 60.0	60.0
unitOfMeasure	Configurator Unit Of Measure[]	Details about the unit of measure associated with an attribute.	Small, 63.0	63.0
userValue	String	User value of the attribute.	Small, 60.0	60.0
valueDecoder	String	Value decoder for the attribute.	Small, 60.0	60.0
value Description	String	Value description of the attribute.	Small, 60.0	60.0

Configurator Attribute Category

Output representation of the attribute category in a product configuration.

JSON Example

```
"attributeCategories": [
  {
    "attributes": [
      {
        "attributeCategoryId": "0v3xx0000000001AAA",
        "attributeNameOverride": "Load Capacity",
        "code": "CAP",
        "dataType": "NUMBER",
        "defaultValue": "1500",
```

```

      "description": "Server racks are designed to support a specific load capacity,
commonly measured in kilograms (kg) or pounds (lbs). Typical load capacities range from
500 kg (1102 lbs) to 1500 kg (3307 lbs) depending on the model.",
      "id": "0tjxx00000001DpAAI",
      "isCloneable": false,
      "isConfigurable": true,
      "isHidden": false,
      "isPriceImpacting": false,
      "isReadOnly": false,
      "isRequired": false,
      "label": "Load Capacity",
      "name": "Load Capacity"
    },
    {
      "attributeCategoryId": "0v3xx0000000001AAA",
      "attributeNameOverride": "Expansion Slots",
      "code": "SLOTCAP",
      "dataType": "NUMBER",
      "defaultValue": "12",
      "id": "0tjxx00000001H3AAI",
      "isCloneable": false,
      "isConfigurable": true,
      "isHidden": false,
      "isPriceImpacting": false,
      "isReadOnly": false,
      "isRequired": true,
      "label": "Expansion Slots",
      "name": "Expansion Slots"
    },
    {
      "attributeCategoryId": "0v3xx0000000001AAA",
      "attributeNameOverride": "Memory",
      "attributePicklist": {
        "id": "0v5xx0000000001AAA",
        "values": [
          {
            "code": "MEM",
            "displayValue": "25",
            "id": "0v6xx0000000001AAA",
            "isBooleanValue": false,
            "name": "25Mem",
            "sequence": 0,
            "textValue": "25"
          },
          {
            "code": "50MEM",
            "displayValue": "50",
            "id": "0v6xx000000001eAAA",
            "isBooleanValue": false,
            "name": "50Mem",
            "sequence": 1,
            "textValue": "50"
          }
        ]
      }
    }
  ]
}

```



```

        "code": "100MEM",
        "displayValue": "100",
        "id": "0v6xx000000003FAAQ",
        "isBooleanValue": false,
        "name": "100Mem",
        "sequence": 2,
        "textValue": "100"
      }
    ],
    "data": {
      "code": "SPEC",
      "name": "Server Rack Specifications"
    }
  ],
  "description": "Introducing the Cisco Server Rack, a sleek and robust solution designed to streamline your data center infrastructure. With its scalable design and advanced cable management features, it ensures optimal performance, efficiency, and easy maintenance for your critical network equipment.",
  "displayUrl": "https://www.cisco.com/content/dam/en/us/products/servers-unified-computing/ucs-c240-m4-rack-server/product-large.jpg",
  "id": "01txx00000006jkuAAA",
  "isActive": true,
  "isAssetizable": true,
  "isConfigurable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "Cisco Server Rack NX44",
  "nodeType": "bundleProduct",
  "prices": [],
  "productClassification": {
    "id": "11Bxx000002CC02EAG"
  },
  "productCode": "RACK",
  "productComponentGroups": [
    {
      "classifications": [],
      "code": "SERVICE",
      "components": [
        {
          "additionalFields": [],
          "attributeCategories": [],

```

```

    "description": "Introducing the Cisco Rack Server NX44 Service, a comprehensive
    protection plan designed to safeguard your valuable data infrastructure. With extended
    coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
    performance for your critical business operations.",
    "id": "01txx0000006jmWAAQ",
    "isActive": true,
    "isAssetizable": true,
    "isComponentRequired": false,
    "isConfigurable": false,
    "isDefaultComponent": false,
    "isQuantityEditable": false,
    "isSoldOnlyWithOtherProds": false,
    "name": "Cisco Rack Server Service - 1 Year",
    "nodeType": "simpleProduct",
    "prices": [],
    "productClassification": {},
    "productCode": "SERVICE",
    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01txx0000006jmWAAQ",
      "childSellingModelId": "0jPxx000000004rEAA",
      "doesBundlePriceIncludeChild": true,
      "id": "0dSxx000000001dEAA",
      "isComponentRequired": false,
      "isDefaultComponent": false,
      "isQuantityEditable": false,
      "parentProductId": "01txx0000006jkuAAA",
      "parentSellingModelId": "0jPxx000000004rEAA",
      "productComponentGroupId": "0y7xx000000001dAAA",
      "productRelationshipTypeId": "0yoxx00000001IfAAI",
      "quantity": 1,
      "quantityScaleMethod": "Proportional"
    },
    "productSellingModelOptions": [
      {
        "id": "0iOxx000000009hEAA",
        "productId": "01txx0000006jmWAAQ",
        "productSellingModel": {
          "id": "0jPxx000000004rEAA",
          "name": "Termed Annually",
          "pricingTerm": 1,
          "pricingTermUnit": "Annual",
          "sellingModelType": "TermDefined",
          "status": "Active"
        },
        "productSellingModelId": "0jPxx000000004rEAA"
      },
      {
        "id": "0iOxx00000000PpEAI",
        "productId": "01txx0000006jmWAAQ",
        "productSellingModel": {
          "id": "0jPxx0000000085EAA",
          "name": "Evergreen Annually",
          "pricingTerm": 1,

```

```

        "pricingTermUnit": "Annual",
        "sellingModelType": "Evergreen",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx0000000085EAA"
}
]
}
],
"description": "The services available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
"id": "0y7xx000000001dAAA",
"maxBundleComponents": 1,
"minBundleComponents": 0,
"name": "Services",
"parentProductId": "01txx0000006jkuAAA",
"sequence": 1
},
{
    "classifications": [],
    "code": "WARRANTY",
    "components": [
        {
            "additionalFields": [],
            "attributeCategories": [],
            "description": "Introducing the Cisco Rack Server NX44 Warranty, a comprehensive
            protection plan designed to safeguard your valuable data infrastructure. With extended
            coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
            performance for your critical business operations.",
            "id": "01txx0000006jjIAAQ",
            "isActive": true,
            "isAssetizable": true,
            "isComponentRequired": false,
            "isConfigurable": false,
            "isDefaultComponent": true,
            "isQuantityEditable": true,
            "isSoldOnlyWithOtherProds": false,
            "name": "Cisco Rack Server Warranty - 1 Year",
            "nodeType": "simpleProduct",
            "prices": [],
            "productClassification": {},
            "productCode": "WARRANTY",
            "productComponentGroups": [],
            "productRelatedComponent": {
                "childProductId": "01txx0000006jjIAAQ",
                "childSellingModelId": "0jPxx000000001dEAA",
                "doesBundlePriceIncludeChild": false,
                "id": "0dSxx000000001EAA",
                "isComponentRequired": false,
                "isDefaultComponent": true,
                "isQuantityEditable": true,
                "maxQuantity": 1,
                "parentProductId": "01txx0000006jkuAAA",

```

```

    "parentSellingModelId": "0jPxx000000001dEAA",
    "productComponentGroupId": "0y7xx000000001AAA",
    "productRelationshipTypeId": "0yoxx00000001IfAAI",
    "quantity": 1,
    "quantityScaleMethod": "Proportional",
    "sequence": 0
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000001dEAA",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000001dEAA",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000001dEAA"
    },
    {
      "id": "0iOxx00000000HlEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000003FEAQ",
        "name": "Termed Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000003FEAQ"
    },
    {
      "id": "0iOxx00000000JNEAY",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
      "id": "0iOxx00000000KzEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx0000000085EAA",
        "name": "Evergreen Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "Evergreen",

```

```

        "status": "Active"
      },
      "productSellingModelId": "0jPxx0000000085EAA"
    },
    {
      "id": "0iOxx00000000MbEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000006TEAQ",
        "name": "Evergreen Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "Evergreen",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000006TEAQ"
    }
  ]
},
{
  "description": "The warranties available for the Cisco Server Rack NX44 product provide comprehensive coverage and support for optimal performance and reliability, ensuring peace of mind for your data center infrastructure.",
  "id": "0y7xx0000000001AAA",
  "maxBundleComponents": 1,
  "minBundleComponents": 0,
  "name": "Warranties",
  "parentProductId": "01txx0000006jkuAAA",
  "sequence": 0
}
],
"productSellingModelOptions": [
  {
    "id": "0iOxx0000000003FEAQ",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
      "id": "0jPxx000000001dEAA",
      "name": "One Time",
      "sellingModelType": "OneTime",
      "status": "Active"
    },
    "productSellingModelId": "0jPxx000000001dEAA"
  },
  {
    "id": "0iOxx0000000004rEAA",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
      "id": "0jPxx000000003FEAQ",
      "name": "Termed Monthly",
      "pricingTerm": 1,
      "pricingTermUnit": "Months",
      "sellingModelType": "TermDefined",
      "status": "Active"
    }
  },

```

```

        "productSellingModelId": "0jPxx000000003FEAQ"
    },
    {
        "id": "0iOxx000000006TEAQ",
        "productId": "0ltxx0000006jkuAAA",
        "productSellingModel": {
            "id": "0jPxx000000004rEAA",
            "name": "Termed Annually",
            "pricingTerm": 1,
            "pricingTermUnit": "Annual",
            "sellingModelType": "TermDefined",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000004rEAA"
    }
],
"productType": "Bundle"
},
"errors": [],
"success": true,
"transactionContext": {
    "SalesTransaction": [
        {
            "Status": "Draft",
            "Account": "00lxx000003GeIXAAK",
            "BillingCity": "San Francisco",
            "Subtotal": 152500,
            "LastPricedDate": "2023-08-22T05:55:39Z",
            "businessObjectType": "Quote",
            "TotalAmount": 152500,
            "ShippingStreet": "415 Mission St",
            "SalesTransactionItem": [
                {
                    "ProrationPolicy": null,
                    "Discount": null,
                    "ProductSellingModel": "0jPxx000000001dEAA",
                    "Product": "0ltxx0000006jkuAAA",
                    "businessObjectType": "QuoteLineItem",
                    "BasisTransactionItem": null,
                    "PartnerUnitPrice": null,
                    "StartingUnitPriceSource": "System",
                    "ListPrice": 150000,
                    "ItemTotalAdjustmentAmount": 0,
                    "SalesTransactionItemSource": "0QLxx0000004CQmGAM",
                    "SubscriptionTerm": null,
                    "StartDate": null,
                    "NetTotalPrice": 150000,
                    "TotalLineAmount": 150000,
                    "PeriodBoundaryStartMonth": null,
                    "ListPriceTotal": 150000,
                    "PartnerDiscountPercent": null,
                    "id": "0QLxx0000004CQmGAM",
                    "PriceWaterFall": "{
                        "currencyCode": "USD",

```

```

    "executionEndTimestamp": "2023-09-18T20:11:15.016Z",
    "executionId": "ruepwmHn2ZFvnQo5bjot",
    "executionStartTimestamp": "2023-09-18T20:11:14.906Z",
    "lineItemId": "0QLxx0000004CQmGAM",
    "output": {
      "NetUnitPrice": 150000.0,
      "Subtotal": 0.0
    },
    "success": true,
    "waterfall": [
      {
        "fieldToTagNameMapping": {
          "NetUnitPrice": "ItemUnitPrice",
          "AdjustmentValue": "ItemAdjustmentValue",
          "Subtotal": "ItemTotalAdjustmentAmount",
          "Quantity": "ItemQuantity",
          "LineItemId": "SalesTransactionItemSource",
          "InputUnitPrice": "ItemUnitPrice"
        },
        "inputParameters": {
          "Quantity": 1.0,
          "LineItemId": "0QLxx0000004CQmGAM",
          "InputUnitPrice": 150000.0,
          "AdjustmentType": "Amount"
        },
        "outputParameters": {
          "NetUnitPrice": 150000.0,
          "Subtotal": 0.0
        }
      },
      {
        "pricingElement": {
          "adjustments": [
            {
              "AdjustmentType": "Amount"
            }
          ]
        },
        "elementType": "MANUALDISCOUNT",
        "name": "ManualDiscount"
      },
      {
        "sequence": 1
      }
    ],
    "BillingFrequency": null,
    "SalesTransactionItemParent": "0Q0xx0000004CAeCAM",
    "StartingPriceTotal": 150000,
    "Quantity": 1,
    "PeriodBoundary": null,
    "SalesTransactionItemAttribute": [
      {
        "AttributeKey": "0tjxx00000001H3AAI",
        "AttributeValue": "30.0",
        "AttributePicklistValue": null,
        "IsPriceImpacting": true,
        "businessObjectType": "QuoteLineItemAttribute",

```

```

        "AttributeName": "Expansion Slots",
        "AttributeDefinitionCode": "SLOTCAP",
        "id": "0zuxx000000001AAA",
        "SalesTransactionItemAttrParent": "0QLxx0000004CQmGAM"
    }
],
"EndDate": null,
"DiscountAmount": null,
"PricebookEntry": "01uxx0000009154AAA",
"PricingTermCount": 1,
"NetUnitPrice": 150000,
"UnitPrice": 150000,
"StartingUnitPrice": 150000,
"SalesTrxnItemRelationship": [
    {
        "ProductRelationshipType": "0yoxx00000001IfAAI",
        "MainItemRole": "Bundle",
        "AssociatedItem": "0QLxx0000004CQnGAM",
        "ProductRelatedComponent": "0dSxx0000000001EAA",
        "MainItem": "0QLxx0000004CQmGAM",
        "AssociatedQuantScaleMethod": "Proportional",
        "businessObjectType": "QuoteLineRelationship",
        "AssociatedItemRole": "BundleComponent",
        "SalesTrnItemRelationshipParent": "0Q0xx0000004CAeCAM",
        "id": "0yQxx000000001dEAA",
        "AssociatedItemPricing": "NotIncludedInBundlePrice"
    }
],
"TotalPrice": 150000,
"PeriodBoundaryDay": null
},
{
    "ProrationPolicy": null,
    "Discount": null,
    "ProductSellingModel": "0jPxx000000001dEAA",
    "Product": "01txx0000006jjIAAQ",
    "businessObjectType": "QuoteLineItem",
    "BasisTransactionItem": null,
    "PartnerUnitPrice": null,
    "StartingUnitPriceSource": "System",
    "ListPrice": 2000,
    "ItemTotalAdjustmentAmount": 0,
    "SalesTransactionItemSource": "0QLxx0000004CQnGAM",
    "SubscriptionTerm": null,
    "StartDate": null,
    "NetTotalPrice": 2000,
    "TotalLineAmount": 2000,
    "PeriodBoundaryStartMonth": null,
    "ListPriceTotal": 2000,
    "PartnerDiscountPercent": null,
    "id": "0QLxx0000004CQnGAM",
    "PriceWaterFall": "{
        \"currencyCode\":\"USD\",
        \"executionEndTimestamp\":\"023-09-18T20:11:15.016Z\",
    "

```



```

        "executionId":"ruepwmHn2ZFvnQo5bjot",
        "executionStartTimestamp":"2023-09-18T20:11:14.906Z",
        "lineItemId":"0QLxx0000004CQnGAM",
        "output":{
            "NetUnitPrice":2000.0,
            "Subtotal":0.0
        },
        "success":true,
        "waterfall":[
            {
                "fieldToTagNameMapping":{
                    "NetUnitPrice":"ItemUnitPrice",
                    "AdjustmentValue":"ItemAdjustmentValue",
                    "Subtotal":"ItemTotalAdjustmentAmount",
                    "Quantity":"ItemQuantity",
                    "LineItemId":"SalesTransactionItemSource",
                    "InputUnitPrice":"ItemUnitPrice"
                },
                "inputParameters":{
                    "Quantity":1.0,
                    "LineItemId":"0QLxx0000004CQnGAM",
                    "InputUnitPrice":2000.0,
                    "AdjustmentType":"Amount"
                },
                "outputParameters":{
                    "NetUnitPrice":2000.0,
                    "Subtotal":0.0
                },
            },
            "pricingElement":{
                "adjustments":[
                    {}
                ],
                "elementType":"MANUALDISCOUNT",
                "name":"ManualDiscount"
            },
            "sequence":1
        ]
    },
    "BillingFrequency": null,
    "SalesTransactionItemParent": "0Q0xx0000004CAeCAM",
    "StartingPriceTotal": 2000,
    "Quantity": 1,
    "PeriodBoundary": null,
    "EndDate": null,
    "DiscountAmount": null,
    "PricebookEntry": "01uxx000000913SAAQ",
    "PricingTermCount": 1,
    "NetUnitPrice": 2000,
    "UnitPrice": 2000,
    "StartingUnitPrice": 2000,
    "TotalPrice": 2000,
    "PeriodBoundaryDay": null
}

```

```

    ],
    "BillingCountry": "US",
    "BillingStreet": "415 Mission St",
    "Pricebook": "01sxx0000005uDZAAAY",
    "ShippingPostalCode": "94105",
    "SalesTransactionSource": "0Q0xx0000004CAeCAM",
    "ShippingCountry": "US",
    "ShippingCity": "San Francisco",
    "ShippingState": "CA",
    "BillingPostalCode": "94105",
    "id": "0Q0xx0000004CAeCAM",
    "BillToContact": null,
    "Contract": null,
    "BillingState": "CA"
  }
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
attributes	Configurator Attribute[]	Attributes of the attribute category.	Small, 60.0	60.0
code	String	Code of the attribute category.	Small, 60.0	60.0
description	String	Description of the attribute category.	Small, 60.0	60.0
id	String	ID of the attribute category.	Small, 60.0	60.0
name	String	Name of the attribute category.	Small, 60.0	60.0
status	String	Status of the attribute category.	Small, 60.0	60.0
totalSize	Integer	Total size of the attribute category.	Small, 60.0	60.0
usageType	String	Usage type of the attribute category.	Small, 60.0	60.0

Configurator Attribute Picklist

Output representation of the attribute picklist in a product configuration.

Property Name	Type	Description	Filter Group and Version	Available Version
description	String	Description of the attribute picklist.	Small, 60.0	60.0
id	String	ID of the attribute picklist.	Small, 60.0	60.0
name	String	Name of the attribute picklist.	Small, 60.0	60.0
status	String	Status of the attribute picklist.	Small, 60.0	60.0
values	Configurator Attribute Picklist Value[]	Values of the attribute picklist.	Small, 60.0	60.0

Configurator Attribute Picklist Value

Output representation of the values of an attribute picklist in a product configuration.

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Code of the attribute value.	Small, 60.0	60.0
description	String	Description of the attribute value.	Small, 60.0	60.0
displayValue	String	Display value of the attribute value.	Small, 60.0	60.0
id	String	ID of the attribute value.	Small, 60.0	60.0
isBoolean Value	Boolean	Indicates if this attribute value is a boolean value (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
label	String	Label of the attribute value.	Small, 60.0	60.0
name	String	Name of the attribute value.	Small, 60.0	60.0
sequence	Integer	Sequence of the attribute value.	Small, 60.0	60.0
status	String	Status of the attribute value.	Small, 60.0	60.0
textValue	String	Text value of the attribute value.	Small, 60.0	60.0

Configurator Delete Nodes

Output representation of the details of the configuration request to delete nodes.

JSON Example

```
{
  "configuratorMessages": {},
  "configuratorUITreatments": [
    {
      "details": {
        "attributeId": "0tjxx0000000007AAA",
        "prcId": "0dSxx0000000007EAA",
        "stiId": "0QLxx00000004CU0GAM",
        "attributePicklistValueId": "0v6xx0000000005AAA"
      },
      "uiTreatmentScope": "Bundle",
      "uiTreatmentTarget": "Attribute_Picklist_Value",
      "uiTreatmentType": "Hide"
    },
    {
      "details": {
        "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
      },
      "uiTreatmentScope": "Product",
      "uiTreatmentTarget": "Component",
      "uiTreatmentType": "Disable"
    }
  ]
}
```

```

    }
  ],
  "errors": [],
  "productQualifications": {
    "01tDU000000EOTCYA4": {
      "isQualified": true
    }
  },
  "success": true
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
configurator Messages	Map<String, Configurator Message >	Map of the product IDs to the list of configurator messages. Configurator messages are results from any validations, Business Rules Engine (BRE) calls, or Salesforce Pricing calls.	Small, 60.0	60.0
configurator UITreatments	Configurator UI Treatment []	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
product Qualifications	Map<String, Configurator Qualification Context >	Map of the product IDs to the qualification rule execution results.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (<code>true</code>) not (<code>false</code>).	Small, 60.0	60.0

Configurator Message

Output representation of the messages of a product configurator.

JSON Example

```

{
  "messages": {
    "0Q0xx0000004CDsCAM": [
      {
        "message": "This is a quote with warranty",
        "messageType": "Info",
        "category": "ConfigurationRules",
        "primaryRecordId": "0Q0xx0000004CDsCAM"
      }
    ]
  }
}

```

```

{
  "message": "It is a group 1C9xx0000004CCGCA2",
  "messageType": "Warning",
  "category": "ConfigurationRules",
  "primaryRecordId": "0Q0xx0000004CDsCAM",
  "groupByValue": "1C9xx0000004CCGCA2"
},
{
  "message": "We're in group virtual bundle",
  "messageType": "Warning",
  "category": "ConfigurationRules",
  "primaryRecordId": "0Q0xx0000004CDsCAM",
  "groupByValue": "1C9xx0000004CCGCA2"
},
{
  "message": "It is a group 1C9xx0000004CCOCA2",
  "messageType": "Warning",
  "category": "ConfigurationRules",
  "primaryRecordId": "0Q0xx0000004CDsCAM",
  "groupByValue": "1C9xx0000004CCOCA2"
},
{
  "message": "We're in group virtual bundle",
  "messageType": "Warning",
  "category": "ConfigurationRules",
  "primaryRecordId": "0Q0xx0000004CDsCAM",
  "groupByValue": "1C9xx0000004CCOCA2"
}
],
"stiId-Laptop1": [
  {
    "message": "Only laptop",
    "messageType": "Info",
    "category": "ConfigurationRules",
    "primaryRecordId": "0Q0xx0000004CDsCAM",
    "relatedRecordId": "stiId-Laptop1"
  }
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
category	String	Category or type of the error message. Valid values are ArcResolutionService, ArcValidationService, BundleValidation, ConfigurationRules, or Pricing.	Small, 60.0	60.0
groupByValue	String	Specifies the value from Constraint Modeling Language rule action details.	Small, 67.0	67.0
message	String	Message that contains the error details.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
messageType	String	Type of error message. Valid values are <code>Error</code> , <code>Info</code> , or <code>Warning</code> .	Small, 60.0	60.0
primaryRecordId	String	Primary record ID that contains the error.	Small, 60.0	60.0
relatedRecordId	String	Related record ID for the error, if any.	Small, 60.0	60.0

Configurator Price

Output representation of the pricing details in a product configuration.

Property Name	Type	Description	Filter Group and Version	Available Version
currencyIsoCode	String	Currency ISO code of the price book entry.	Small, 60.0	60.0
effectiveFrom	String	Date from when the price book entry is effective.	Small, 60.0	60.0
effectiveTo	String	Date until when the price book entry is effective.	Small, 60.0	60.0
isDefault	Boolean	Indicates if this price book entry is the default pricing model (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isSelected	Boolean	Indicates if this price book entry is selected (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
pricebookEntryId	String	ID of the price book entry.	Small, 60.0	60.0
pricebookId	String	Pricebook2 ID of the price book entry.	Small, 60.0	60.0
pricingModel	Configurator Pricing Model[]	Pricing model details of the price book entry.	Small, 60.0	60.0
unitPrice	Double	Unit price of the price book entry.	Small, 60.0	60.0

Configurator Pricing Model

Output representation of the details of a pricing model in a product configuration.

Property Name	Type	Description	Filter Group and Version	Available Version
frequency	String	Frequency of the pricing model.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the pricing model.	Small, 60.0	60.0
name	String	Name of the pricing model.	Small, 60.0	60.0
occurrence	Integer	Occurrence of the pricing model.	Small, 60.0	60.0
pricing ModelType	String	Type of the pricing model.	Small, 60.0	60.0
unitOfMeasure	String	Unit of measure for the pricing model.	Small, 60.0	60.0

Configurator Product Catalog

Output representation of the product catalog.

JSON Example

```

"catalogProducts": {
  "additionalFields": [],
  "attributeCategories": [
    {
      "attributes": [
        {
          "attributeCategoryId": "0v3xx0000000001AAA",
          "attributeNameOverride": "Load Capacity",
          "code": "CAP",
          "dataType": "NUMBER",
          "defaultValue": "1500",
          "description": "Server racks are designed to support a specific load capacity, commonly measured in kilograms (kg) or pounds (lbs). Typical load capacities range from 500 kg (1102 lbs) to 1500 kg (3307 lbs) depending on the model.",
          "id": "0tjxx000000001DpAAI",
          "isCloneable": false,
          "isConfigurable": true,
          "isHidden": false,
          "isPriceImpacting": false,
          "isReadOnly": false,
          "isRequired": false,
          "label": "Load Capacity",
          "name": "Load Capacity"
        },
        {
          "attributeCategoryId": "0v3xx0000000001AAA",
          "attributeNameOverride": "Expansion Slots",
          "code": "SLOTCAP",
          "dataType": "NUMBER",
          "defaultValue": "12",
          "id": "0tjxx000000001H3AAI",
          "isCloneable": false,

```

```

    "isConfigurable": true,
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "Expansion Slots",
    "name": "Expansion Slots"
  },
  {
    "attributeCategoryId": "0v3xx0000000001AAA",
    "attributeNameOverride": "Memory",
    "attributePicklist": {
      "id": "0v5xx0000000001AAA",
      "values": [
        {
          "code": "MEM",
          "displayValue": "25",
          "id": "0v6xx0000000001AAA",
          "isBooleanValue": false,
          "name": "25Mem",
          "sequence": 0,
          "textValue": "25"
        },
        {
          "code": "50MEM",
          "displayValue": "50",
          "id": "0v6xx0000000001eAAA",
          "isBooleanValue": false,
          "name": "50Mem",
          "sequence": 1,
          "textValue": "50"
        },
        {
          "code": "100MEM",
          "displayValue": "100",
          "id": "0v6xx0000000003FAAQ",
          "isBooleanValue": false,
          "name": "100Mem",
          "sequence": 2,
          "textValue": "100"
        }
      ]
    },
    "dataType": "MULTIPICKLIST",
    "defaultValue": "25",
    "id": "0tjxx000000001IfAAI",
    "isCloneable": false,
    "isConfigurable": true,
    "isHidden": false,
    "isPriceImpacting": false,
    "isReadOnly": false,
    "isRequired": true,
    "label": "Memory",
    "name": "Memory"
  }

```



```

    }
  ],
  "code": "SPEC",
  "name": "Server Rack Specifications"
}
],
  "description": "Introducing the Cisco Server Rack, a sleek and robust solution designed
to streamline your data center infrastructure. With its scalable design and advanced cable
management features, it ensures optimal performance, efficiency, and easy maintenance for
your critical network equipment.",
  "displayUrl":
"https://www.cisco.com/content/dam/en/us/products/servers-unified-computing/ucs-c240-m4-rack-server/product-large.jpg",

  "id": "01txx0000006jkuAAA",
  "isActive": true,
  "isAssetizable": true,
  "isConfigurable": true,
  "isSoldOnlyWithOtherProds": false,
  "name": "Cisco Server Rack NX44",
  "nodeType": "bundleProduct",
  "prices": [],
  "productClassification": {
    "id": "11Bxx000002CC02EAG"
  },
},
"productCode": "RACK",
"productComponentGroups": [
  {
    "classifications": [],
    "code": "SERVICE",
    "components": [
      {
        "additionalFields": [],
        "attributeCategories": [],
        "description": "Introducing the Cisco Rack Server NX44 Service, a comprehensive
protection plan designed to safeguard your valuable data infrastructure. With extended
coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
performance for your critical business operations.",
        "id": "01txx0000006jmWAAQ",
        "isActive": true,
        "isAssetizable": true,
        "isComponentRequired": false,
        "isConfigurable": false,
        "isDefaultComponent": false,
        "isQuantityEditable": false,
        "isSoldOnlyWithOtherProds": false,
        "name": "Cisco Rack Server Service - 1 Year",
        "nodeType": "simpleProduct",
        "prices": [],
        "productClassification": {},
        "productCode": "SERVICE",
        "productComponentGroups": [],
        "productRelatedComponent": {
          "childProductId": "01txx0000006jmWAAQ",
          "childSellingModelId": "0jPxx000000004rEAA",

```

```

    "doesBundlePriceIncludeChild": true,
    "id": "0dSxx000000001dEAA",
    "isComponentRequired": false,
    "isDefaultComponent": false,
    "isQuantityEditable": false,
    "parentProductId": "01txx0000006jkuAAA",
    "parentSellingModelId": "0jPxx000000004rEAA",
    "productComponentGroupId": "0y7xx000000001dAAA",
    "productRelationshipTypeId": "0yoxx00000001IfAAI",
    "quantity": 1,
    "quantityScaleMethod": "Proportional"
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000009hEAA",
      "productId": "01txx0000006jmWAAQ",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
      "id": "0iOxx00000000PpEAI",
      "productId": "01txx0000006jmWAAQ",
      "productSellingModel": {
        "id": "0jPxx0000000085EAA",
        "name": "Evergreen Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "Evergreen",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx0000000085EAA"
    }
  ]
},
{
  "description": "The services available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
  "id": "0y7xx000000001dAAA",
  "maxBundleComponents": 1,
  "minBundleComponents": 0,
  "name": "Services",
  "parentProductId": "01txx0000006jkuAAA",
  "sequence": 1
},
{
  "classifications": [],

```

```

"code": "WARRANTY",
"components": [
  {
    "additionalFields": [],
    "attributeCategories": [],
    "description": "Introducing the Cisco Rack Server NX44 Warranty, a comprehensive
    protection plan designed to safeguard your valuable data infrastructure. With extended
    coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
    performance for your critical business operations.",
    "id": "01txx0000006jjIAAQ",
    "isActive": true,
    "isAssetizable": true,
    "isComponentRequired": false,
    "isConfigurable": false,
    "isDefaultComponent": true,
    "isQuantityEditable": true,
    "isSoldOnlyWithOtherProds": false,
    "name": "Cisco Rack Server Warranty - 1 Year",
    "nodeType": "simpleProduct",
    "prices": [],
    "productClassification": {},
    "productCode": "WARRANTY",
    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01txx0000006jjIAAQ",
      "childSellingModelId": "0jPxx000000001dEAA",
      "doesBundlePriceIncludeChild": false,
      "id": "0dSxx0000000001EAA",
      "isComponentRequired": false,
      "isDefaultComponent": true,
      "isQuantityEditable": true,
      "maxQuantity": 1,
      "parentProductId": "01txx0000006jkuAAA",
      "parentSellingModelId": "0jPxx000000001dEAA",
      "productComponentGroupId": "0y7xx0000000001AAA",
      "productRelationshipTypeId": "0yoxx00000001IfAAI",
      "quantity": 1,
      "quantityScaleMethod": "Proportional",
      "sequence": 0
    },
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000001dEAA",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000001dEAA",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000001dEAA"
    },
    {
      "id": "0iOxx00000000H1EAI",

```

```

        "productId": "01txx0000006jjIAAQ",
        "productSellingModel": {
            "id": "0jPxx000000003FEAQ",
            "name": "Termed Monthly",
            "pricingTerm": 1,
            "pricingTermUnit": "Months",
            "sellingModelType": "TermDefined",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000003FEAQ"
    },
    {
        "id": "0iOxx00000000JNEAY",
        "productId": "01txx0000006jjIAAQ",
        "productSellingModel": {
            "id": "0jPxx000000004rEAA",
            "name": "Termed Annually",
            "pricingTerm": 1,
            "pricingTermUnit": "Annual",
            "sellingModelType": "TermDefined",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
        "id": "0iOxx00000000KzEAI",
        "productId": "01txx0000006jjIAAQ",
        "productSellingModel": {
            "id": "0jPxx0000000085EAA",
            "name": "Evergreen Annually",
            "pricingTerm": 1,
            "pricingTermUnit": "Annual",
            "sellingModelType": "Evergreen",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx0000000085EAA"
    },
    {
        "id": "0iOxx00000000MbEAI",
        "productId": "01txx0000006jjIAAQ",
        "productSellingModel": {
            "id": "0jPxx000000006TEAQ",
            "name": "Evergreen Monthly",
            "pricingTerm": 1,
            "pricingTermUnit": "Months",
            "sellingModelType": "Evergreen",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx000000006TEAQ"
    }
]
},
],
"description": "The warranties available for the Cisco Server Rack NX44 product

```

```

provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
  "id": "0y7xx0000000001AAA",
  "maxBundleComponents": 1,
  "minBundleComponents": 0,
  "name": "Warranties",
  "parentProductId": "01txx0000006jkuAAA",
  "sequence": 0
}
],
"productSellingModelOptions": [
  {
    "id": "0iOxx000000003FEAQ",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
      "id": "0jPxx000000001dEAA",
      "name": "One Time",
      "sellingModelType": "OneTime",
      "status": "Active"
    },
    "productSellingModelId": "0jPxx000000001dEAA"
  },
  {
    "id": "0iOxx000000004rEAA",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
      "id": "0jPxx000000003FEAQ",
      "name": "Termed Monthly",
      "pricingTerm": 1,
      "pricingTermUnit": "Months",
      "sellingModelType": "TermDefined",
      "status": "Active"
    },
    "productSellingModelId": "0jPxx000000003FEAQ"
  },
  {
    "id": "0iOxx000000006TEAQ",
    "productId": "01txx0000006jkuAAA",
    "productSellingModel": {
      "id": "0jPxx000000004rEAA",
      "name": "Termed Annually",
      "pricingTerm": 1,
      "pricingTermUnit": "Annual",
      "sellingModelType": "TermDefined",
      "status": "Active"
    },
    "productSellingModelId": "0jPxx000000004rEAA"
  }
],
"productType": "Bundle"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
additionalFields	Configurator Additional Fields[]	Additional fields for this product.	Small, 60.0	60.0
attributeCategories	Configurator Attribute Category[]	List of attribute categories. The categories that aren't categorized are specified in the uncategorized entry in this list.	Small, 60.0	60.0
availabilityDate	String	Availability date of this product.	Small, 60.0	60.0
description	String	Description of this product.	Small, 60.0	60.0
discontinuedDate	String	Date when this product is discontinued.	Small, 60.0	60.0
displayUrl	String	Display URL of this product.	Small, 60.0	60.0
endOfLifeDate	String	End of life date for this product.	Small, 60.0	60.0
id	String	ID of the product.	Small, 60.0	60.0
isActive	Boolean	Indicates whether this product is active (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isAssetizable	Boolean	Indicates whether this product is assetizable (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isComponentRequired	Boolean	Indicates whether the component is required (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isConfigurable	Boolean	Indicates whether the component is configurable (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isDefaultComponent	Boolean	Indicates whether the component is a default component (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isQuantityEditable	Boolean	Indicates whether the quantity of the component is editable (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isSoldOnlyWithOtherProds	Boolean	Indicates whether this product is sold only with other products (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
name	String	Name of the product.	Small, 60.0	60.0
nodeType	String	Node type of the product.	Small, 60.0	60.0
prices	Configurator Price[]	List of prices from the product catalog.	Small, 60.0	60.0
productClassification	Configurator Product Classification[]	Classification details of the product.	Small, 60.0	60.0
productCode	String	Code of the product.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
productComponentGroups	Configurator Product Component Group[]	List of product component groups for this product.	Small, 60.0	60.0
productRelatedComponent	Configurator Product Related Component[]	Details of the product related component of this product.	Small, 60.0	60.0
productSellingModelOptions	Configurator Product Selling Model Option[]	List of product selling model options for this product.	Small, 60.0	60.0
productType	String	Type of product.	Small, 60.0	60.0
qualificationContext	Configurator Qualification Context[]	Details of the qualification context of the product.	Small, 60.0	60.0
status	String	Status of the product.	Small, 60.0	60.0
unitOfMeasure	Configurator Unit Of Measure[]	Details about the unit of measure associated with a product.	Small, 63.0	63.0

Configurator Product Classification

Output representation of the product classification in a product configuration.

JSON Example

```
"productClassification": {
  "id": "11Bxx000002CC02EAG"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the product classification.	Small, 60.0	60.0

Configurator Product Component Group

Output representation of the product component group in a product classification.

JSON Example

```
"productComponentGroups": [
  {
    "classifications": [],
```

```

"code": "SERVICE",
"components": [
  {
    "additionalFields": [],
    "attributeCategories": [],
    "description": "Introducing the Cisco Rack Server NX44 Service, a comprehensive
    protection plan designed to safeguard your valuable data infrastructure. With extended
    coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
    performance for your critical business operations.",
    "id": "01txx0000006jmWAAQ",
    "isActive": true,
    "isAssetizable": true,
    "isComponentRequired": false,
    "isConfigurable": false,
    "isDefaultComponent": false,
    "isQuantityEditable": false,
    "isSoldOnlyWithOtherProds": false,
    "name": "Cisco Rack Server Service - 1 Year",
    "nodeType": "simpleProduct",
    "prices": [],
    "productClassification": {},
    "productCode": "SERVICE",
    "productComponentGroups": [],
    "productRelatedComponent": {
      "childProductId": "01txx0000006jmWAAQ",
      "childSellingModelId": "0jPxx000000004rEAA",
      "doesBundlePriceIncludeChild": true,
      "id": "0dSxx000000001dEAA",
      "isComponentRequired": false,
      "isDefaultComponent": false,
      "isQuantityEditable": false,
      "parentProductId": "01txx0000006jkuAAA",
      "parentSellingModelId": "0jPxx000000004rEAA",
      "productComponentGroupId": "0y7xx000000001dAAA",
      "productRelationshipTypeId": "0yoxx00000001IfAAI",
      "quantity": 1,
      "quantityScaleMethod": "Proportional"
    },
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000009hEAA",
      "productId": "01txx0000006jmWAAQ",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
      "id": "0iOxx00000000PpEAI",

```



```

        "productId": "01txx0000006jmwAAQ",
        "productSellingModel": {
            "id": "0jPxx0000000085EAA",
            "name": "Evergreen Annually",
            "pricingTerm": 1,
            "pricingTermUnit": "Annual",
            "sellingModelType": "Evergreen",
            "status": "Active"
        },
        "productSellingModelId": "0jPxx0000000085EAA"
    }
}
],
{
    "description": "The services available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
    "id": "0y7xx000000001dAAA",
    "maxBundleComponents": 1,
    "minBundleComponents": 0,
    "name": "Services",
    "parentProductId": "01txx0000006jkuAAA",
    "sequence": 1
},
{
    "classifications": [],
    "code": "WARRANTY",
    "components": [
        {
            "additionalFields": [],
            "attributeCategories": [],
            "description": "Introducing the Cisco Rack Server NX44 Warranty, a comprehensive
protection plan designed to safeguard your valuable data infrastructure. With extended
coverage and rapid response times, this warranty ensures peace of mind and uninterrupted
performance for your critical business operations.",
            "id": "01txx0000006jjIAAQ",
            "isActive": true,
            "isAssetizable": true,
            "isComponentRequired": false,
            "isConfigurable": false,
            "isDefaultComponent": true,
            "isQuantityEditable": true,
            "isSoldOnlyWithOtherProds": false,
            "name": "Cisco Rack Server Warranty - 1 Year",
            "nodeType": "simpleProduct",
            "prices": [],
            "productClassification": {},
            "productCode": "WARRANTY",
            "productComponentGroups": [],
            "productRelatedComponent": {
                "childProductId": "01txx0000006jjIAAQ",
                "childSellingModelId": "0jPxx000000001dEAA",
                "doesBundlePriceIncludeChild": false,
                "id": "0dSxx0000000001EAA",

```

```

    "isComponentRequired": false,
    "isDefaultComponent": true,
    "isQuantityEditable": true,
    "maxQuantity": 1,
    "parentProductId": "01txx0000006jkuAAA",
    "parentSellingModelId": "0jPxx000000001dEAA",
    "productComponentGroupId": "0y7xx0000000001AAA",
    "productRelationshipTypeId": "0yoxx000000001IfAAI",
    "quantity": 1,
    "quantityScaleMethod": "Proportional",
    "sequence": 0
  },
  "productSellingModelOptions": [
    {
      "id": "0iOxx000000001dEAA",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000001dEAA",
        "name": "One Time",
        "sellingModelType": "OneTime",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000001dEAA"
    },
    {
      "id": "0iOxx00000000HlEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000003FEAQ",
        "name": "Termed Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000003FEAQ"
    },
    {
      "id": "0iOxx00000000JNEAY",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {
        "id": "0jPxx000000004rEAA",
        "name": "Termed Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "TermDefined",
        "status": "Active"
      },
      "productSellingModelId": "0jPxx000000004rEAA"
    },
    {
      "id": "0iOxx00000000KzEAI",
      "productId": "01txx0000006jjIAAQ",
      "productSellingModel": {

```

```

        "id": "0jPxx0000000085EAA",
        "name": "Evergreen Annually",
        "pricingTerm": 1,
        "pricingTermUnit": "Annual",
        "sellingModelType": "Evergreen",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx0000000085EAA"
},
{
    "id": "0iOxx00000000MbEAI",
    "productId": "01txx0000006jjIAAQ",
    "productSellingModel": {
        "id": "0jPxx000000006TEAQ",
        "name": "Evergreen Monthly",
        "pricingTerm": 1,
        "pricingTermUnit": "Months",
        "sellingModelType": "Evergreen",
        "status": "Active"
    },
    "productSellingModelId": "0jPxx000000006TEAQ"
}
]
}
],
"description": "The warranties available for the Cisco Server Rack NX44 product
provide comprehensive coverage and support for optimal performance and reliability, ensuring
peace of mind for your data center infrastructure.",
"id": "0y7xx0000000001AAA",
"maxBundleComponents": 1,
"minBundleComponents": 0,
"name": "Warranties",
"parentProductId": "01txx0000006jkuAAA",
"sequence": 0
}
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
classifications	Configurator Product Classification[]	List of classifications for this product component group.	Small, 60.0	60.0
code	String	Code of the product component group.	Small, 60.0	60.0
components	Configurator Product Catalog[]	Components within the product component group.	Small, 60.0	60.0
description	String	Description of the product component group.	Small, 60.0	60.0
id	String	ID of the product component group.	Small, 60.0	60.0
maxBundleComponents	Integer	Maximum number of bundle components within the product component group.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
minBundleComponents	Integer	Minimum number of bundle components within the product component group.	Small, 60.0	60.0
name	String	Name of the product component group.	Small, 60.0	60.0
parentProductId	String	Parent Product2 ID of the product component group.	Small, 60.0	60.0
sequence	Integer	Sequence of the product component group.	Small, 60.0	60.0

Configurator Product Recommendations

Output representation of the details of the product recommendations.

JSON Example

```
{
  "productRecommendations": [
    {
      "referenceId": "CORE_BUNDLE_001",
      "productIds": [
        "01t000000001234",
        "01t000000005678"
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
productIds	String[]	List of recommended product IDs.	Small, 65.0	65.0
referenceId	String	Reference ID for the recommendation.	Small, 65.0	65.0

Configurator Product Related Component

Output representation of the product related component in a product configuration.

JSON Example

```
"productRelatedComponent": {
  "childProductId": "01txx0000006jmWAAQ",
  "childSellingModelId": "0jPxx000000004rEAA",
  "doesBundlePriceIncludeChild": true,
  "id": "0dSxx000000001dEAA",
  "isComponentRequired": false,
```

```

    "isDefaultComponent": false,
    "isQuantityEditable": false,
    "parentProductId": "01txx0000006jkuAAA",
    "parentSellingModelId": "0jPxx000000004rEAA",
    "productComponentGroupId": "0y7xx000000001dAAA",
    "productRelationshipTypeId": "0yoxx00000001IfAAI",
    "quantity": 1,
    "quantityScaleMethod": "Proportional",
    "quoteVisibility": "Quote Document Only"
  }

```

Property Name	Type	Description	Filter Group and Version	Available Version
child ProductId	String	ID of the child product in the bundle.	Small, 60.0	60.0
childSelling ModelId	String	ID of the child product selling model record.	Small, 60.0	60.0
doesBundle Price IncludeChild	Boolean	Indicates whether the price of the bundle includes the child product (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
id	String	ID of the product related component.	Small, 60.0	60.0
isComponent Required	Boolean	Indicates whether the component is required in the bundle (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isDefault Component	Boolean	Indicates whether to select the component in the bundle group by default (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
isQuantity Editable	Boolean	Indicates whether to allow changes to the quantity of the component in the bundle (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
maxQuantity	Double	Maximum quantity of the product in the opportunity, quote, or order line item.	Small, 60.0	60.0
minQuantity	Double	Minimum quantity of the product in the opportunity, quote, or order line item.	Small, 60.0	60.0
parent ProductId	String	ID of the parent product.	Small, 60.0	60.0
parentSelling ModelId	String	ID of the parent product selling model record.	Small, 60.0	60.0
product Classification Id	String	ID of the product classification record.	Small, 60.0	60.0

Property Name	Type	Description	Filter Group and Version	Available Version
product Component GroupId	String	ID of the product component group.	Small, 60.0	60.0
product Relationship TypeId	String	ID of the product relationship type record.	Small, 60.0	60.0
quantity	Double	Quantity of the child products.	Small, 60.0	60.0
quantityScale Method	String	Method to scale the quantity of the child product in relation to the quantity of the parent. Valid values are <code>Constant</code> or <code>Proportional</code> .	Small, 60.0	60.0
quote Visibility	String	Specifies whether a quote line item must be shown on the transaction line editor or quote document. Valid values are <code>Always</code> , <code>Transaction Line Editor Only</code> —Specifies whether to show a quote line item on quote editor only, <code>Quote Document Only</code> —Specifies whether to show a quote line item on quote proposal only, or <code>Never</code> . The API returns this property only if the CoreCPQ permission set is available.	Small, 64.0	64.0
sequence	Integer	Order in which the child products are displayed.	Small, 60.0	60.0

Configurator Product Selling Model

Output representation of the product selling model in a product configuration.

JSON Example

```

"productSellingModel": {
  "id": "0jPxx0000000085EAA",
  "name": "Evergreen Annually",
  "pricingTerm": 1,
  "pricingTermUnit": "Annual",
  "sellingModelType": "Evergreen",
  "status": "Active"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the product selling model.	Small, 60.0	60.0
name	String	Name of the product selling model.	Small, 60.0	60.0
pricingTerm	Integer	Pricing term of the product selling model.	Small, 60.0	60.0
pricingTermUnit	String	Pricing term unit of the product selling model.	Small, 60.0	60.0
sellingModelType	String	Selling model type of the product selling model.	Small, 60.0	60.0
status	String	Status of the product selling model.	Small, 60.0	60.0

Configurator Product Selling Model Option

Output representation of the product selling model option in a product configuration.

JSON Example

```

"productSellingModelOptions": [
  {
    "id": "0iOxx000000009hEAA",
    "productId": "01txx0000006jmWAAQ",
    "productSellingModel": {
      "id": "0jPxx000000004rEAA",
      "name": "Termed Annually",
      "pricingTerm": 1,
      "pricingTermUnit": "Annual",
      "sellingModelType": "TermDefined",
      "status": "Active"
    },
    "productSellingModelId": "0jPxx000000004rEAA"
  },
  {
    "id": "0iOxx00000000PpEAI",
    "productId": "01txx0000006jmWAAQ",
    "productSellingModel": {
      "id": "0jPxx0000000085EAA",
      "name": "Evergreen Annually",
      "pricingTerm": 1,
      "pricingTermUnit": "Annual",
      "sellingModelType": "Evergreen",
      "status": "Active"
    },
    "productSellingModelId": "0jPxx0000000085EAA"
  }
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the product selling model option.	Small, 60.0	60.0
productId	String	ID of the product that's associated with the product selling model option.	Small, 60.0	60.0
productSellingModel	Configurator Product Selling Model[]	Product selling model that's associated with the product selling model option.	Small, 60.0	60.0
productSellingModelId	String	ID of the product selling model that's associated with the product selling model option.	Small, 60.0	60.0

Configurator Qualification Context

Output representation of the qualification context in a product configuration.

Property Name	Type	Description	Filter Group and Version	Available Version
isQualified	Boolean	Indicates whether the product is qualified (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0
reason	String	Reason for the qualification of this product.	Small, 60.0	60.0

Configurator UI Treatment

Output representation of the details of the UI treatments of a product configurator. The details include the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.

JSON Example

```
[
  {
    "details": {
      "attributeId": "0tjxx0000000007AAA",
      "prcId": "0dSxx0000000007EAA",
      "stiId": "0QLxx0000004CU0GAM",
      "attributePicklistValueId": "0v6xx0000000005AAA"
    },
    "uiTreatmentScope": "Bundle",
    "uiTreatmentTarget": "Attribute_Picklist_Value",
    "uiTreatmentType": "Hide"
  },
  {
    "details": {
      "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
    },
    "uiTreatmentScope": "Product",
```



```

    "uiTreatmentTarget": "Component",
    "uiTreatmentType": "Disable"
  }
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
details	Map<String, Object>	Key-value pair that specifies the items to apply the rules on, which includes these details. ID of the sales transaction item, ID of the product-related component, ID of the attribute, or ID of the attribute picklist value.	Small, 62.0	62.0
uiTreatment Scope	String	Type of the UI treatment to be performed. Valid values are Product —UI treatment is applicable to a certain product only or Bundle —UI treatment is applicable to the whole bundle.	Small, 62.0	62.0
uiTreatment Target	String	Target of the UI treatment. Valid values are Component —Represents a product option or bundle component, Quantity —Represents a quantity field, Attribute —Represents a certain attribute of the product, or Attribute_Picklist_Value —Represents one of the picklist values of a product attribute.	Small, 62.0	62.0
uiTreatment Type	String	Type of UI treatment to be performed. Valid values are Hide —Hide the associated target or Disable —Disable the associated target.	Small, 62.0	62.0

Configurator Unit Of Measure

Output representation of the details of the unit of measure record.

JSON Example

```

{
  "unitOfMeasure": {
    "id": "0hEXR00000000BJ2AY",
    "name": "Litres",
    "roundingMethod": "Down",
    "scale": 2,
    "unitCode": "Ltrs"
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the unit of measure record.	Small, 63.0	63.0
name	String	Name of the unit of measure record.	Small, 63.0	63.0
rounding Method	String	Rounding method associated with the unit of measure record.	Small, 63.0	63.0
scale	Integer	Scale associated with the unit of measure record.	Small, 63.0	63.0
unitCode	String	Unit code associated with the unit of measure record.	Small, 63.0	63.0

Configurator Update Nodes

Output representation of the configuration request details to update nodes.

JSON Example

```
{
  "configuratorMessages": {},
  "configuratorUITreatments": [
    {
      "details": {
        "attributeId": "0tjxx0000000007AAA",
        "prcId": "0dSxx0000000007EAA",
        "stiId": "0QLxx00000004CU0GAM",
        "attributePicklistValueId": "0v6xx0000000005AAA"
      },
      "uiTreatmentScope": "Bundle",
      "uiTreatmentTarget": "Attribute_Picklist_Value",
      "uiTreatmentType": "Hide"
    },
    {
      "details": {
        "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
      },
      "uiTreatmentScope": "Product",
      "uiTreatmentTarget": "Component",
      "uiTreatmentType": "Disable"
    }
  ],
  "errors": [],
  "productQualifications": {
    "01tDU000000EOTCYA4": {
      "isQualified": true
    }
  },
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
configurator Messages	Map<String, Configurator Message >	Map of the product IDs to the list of configurator messages. Configurator messages are results from any validations, Business Rules Engines (BRE) calls, or Salesforce Pricing calls.	Small, 60.0	60.0
configurator UITreatments	Configurator UI Treatment []	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
product Qualifications	Map<String, Configurator Qualification Context >	Map of the product IDs to the qualification rule execution results.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (<code>true</code>) not (<code>false</code>).	Small, 60.0	60.0

Configuration Update

Output representation of the details of the updated configuration.

JSON Example

This example shows a sample when the update operation is successful.

```
{
  "errors": [],
  "success": true
}
```

This example shows a sample when the update operation has errors.

```
{
  "errors": [
    {
      "code": "INTERNAL_SERVER_ERROR",
      "message": "INVALID_REFERENCEOBJECTID"
    }
  ],
  "success": false
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors that contains a message and an error code.	Small, 63.0	63.0
success	Boolean	Indicates whether the update operation is successful (<code>true</code>) or not (<code>false</code>)	Small, 63.0	63.0

Error Response

Output representation of the details of the error.

JSON Example

```
{
  "errors": [
    {
      "code": "BAD_REQUEST",
      "message": "MISSING_REFERENCEOBJECTID"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
code	String	Code of the error.	Small, 63.0	63.0
message	String	Description of the error.	Small, 63.0	63.0

Product Quantity Set Configurator

Output representation of the request details to set product quantity.

JSON Example

```
{
  "configuratorMessages": {},
  "configuratorUITreatments": [
    {
      "details": {
        "attributeId": "0tjxx0000000007AAA",
        "prcId": "0dSxx0000000007EAA",
        "stiId": "0QLxx0000004CU0GAM",
        "attributePicklistValueId": "0v6xx0000000005AAA"
      },
      "uiTreatmentScope": "Bundle",
      "uiTreatmentTarget": "Attribute_Picklist_Value",
      "uiTreatmentType": "Hide"
    },
  ],
}
```

```
{
  "details": {
    "stiId": "ref_f0f2da7b_c431_482d_bf4b_599052f3a2e1"
  },
  "uiTreatmentScope": "Product",
  "uiTreatmentTarget": "Component",
  "uiTreatmentType": "Disable"
},
"errors": [],
"productQualifications": {
  "01tDU000000EOTCYA4": {
    "isQualified": true
  }
},
"success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
configurator Messages	Map<String, Configurator Message >	Map of the product IDs to the list of configurator messages. Configurator messages are results from any validations, Business Rules Engines (BRE) calls, or Salesforce Pricing calls.	Small, 60.0	60.0
configurator UITreatments	Configurator UI Treatment []	Details of the UI treatments that specify the product configuration rule actions to override the disable or hide behavior in the UI for product options, product attributes, and attribute picklist values.	Small, 62.0	62.0
errors	Error Response	List of errors, which contains an error code and a message.	Small, 60.0	60.0
product Qualifications	Map<String, Configurator Qualification Context >	Map of the product IDs to the qualification rule execution results.	Small, 60.0	60.0
success	Boolean	Indicates whether the call was successful (<code>true</code>) not (<code>false</code>).	Small, 60.0	60.0

Configuration Rule Response

Output representation of the details of the configuration rule response.

JSON Example

```
{
  "errors": [],
```

```

"messageRules": [
  {
    "message": "You have a 128GB LRDIMM QLI",
    "messageType": "error",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "You have a 16GB RDIMM QLI",
    "messageType": "warning",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "You have a 32GB RDIMM QLI",
    "messageType": "info",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "128GB LRDIMM disables 16GB RDIMM",
    "messageType": "info",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "Additional API disables Additional API Gov",
    "messageType": "info",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "Disable All other API Products",
    "messageType": "info",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "32GB RDIMM disables 128GB LRDIMM",
    "messageType": "info",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "API Access Requests AEH disables Additional API Prod",
    "messageType": "info",
    "primaryRecordId": "0Q0VW000000z8yN0AQ"
  }
],
"productRecommendationRules": [
  {
    "message": "32GB RDIMM recommends 16GB RDIMM",
    "productIds": [
      "01tVW00000317uaYAA"
    ],
    "recordType": "Type",
    "referenceId": "0Q0VW000000z8yN0AQ"
  },
  {
    "message": "32GB RDIMM recommends 64GB RDIMM",
    "productIds": [

```

```

        "01tVW00000317v6YAA"
    ],
    "recordType": "Type",
    "referenceId": "0Q0VW000000z8yN0AQ"
}
],
"success": true,
"transactionContextId": "0000000r25tq18g00291775730228818e689c3c5756e409fb3f886f68937ab13",

"visibilityRules": [
    {
        "message": "128GB LRDIMM disables 16GB RDIMM",
        "productIds": [
            "01tVW00000317uaYAA"
        ],
        "scope": "virtual",
        "target": "product",
        "type": "disable"
    },
    {
        "message": "Additional API disables Additional API Gov",
        "productIds": [
            "01tVW00000317tzYAA"
        ],
        "scope": "virtual",
        "target": "product",
        "type": "disable"
    },
    {
        "message": "Disable All other API Products",
        "productIds": [
            "01tVW00000317u0YAA",
            "01tVW00000317u1YAA"
        ],
        "scope": "virtual",
        "target": "product",
        "type": "disable"
    },
    {
        "message": "32GB RDIMM disables 128GB LRDIMM",
        "productIds": [
            "01tVW00000317v5YAA"
        ],
        "scope": "virtual",
        "target": "product",
        "type": "disable"
    },
    {
        "message": "API Access Requests AEH disables Additional API Prod",
        "productIds": [
            "01tVW00000317u1YAA"
        ],
        "scope": "virtual",
        "target": "product",

```

```

      "type": "disable"
    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Config Rule Errors[]	List of error messages from the configuration rule evaluation, if any.	Small, 67.0	67.0
messageRules	Message Rules[]	List of message rules that were evaluated during configuration.	Small, 67.0	67.0
product Recommendation Rules	Product Recommendation Rules[]	List of product recommendation rules that were evaluated during configuration.	Small, 67.0	67.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 67.0	67.0
transaction ContextId	String	ID of the transaction context for this configuration rule evaluation.	Small, 67.0	67.0
visibility Rules	Visibility Rules[]	List of visibility rules that were evaluated during configuration.	Small, 67.0	67.0

[Configuration Rule Errors](#)

Output representation of the error details, if applicable, when you run config rules.

[Message Rules](#)

Output representation of the details of the message rules.

[Product Recommendation Rules](#)

Output representation of the details of the product recommendation rules.

[Visibility Rules](#)

Output representation of the details of the visibility rules.

Configuration Rule Errors

Output representation of the error details, if applicable, when you run config rules.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code indicating the type of error.	Small, 67.0	67.0
message	String	Message stating the reason for error, if any.	Small, 67.0	67.0

Message Rules

Output representation of the details of the message rules.

JSON Example

```
{
  "message": "Constraints is running for laptop",
  "messageType": "Info",
  "primaryRecordId": "0QLxx0000004CU0GAM",
  "relatedRecordId": "0QLxx0000004CU1GAM"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
message	String	List of message strings to display to the user.	Small, 67.0	67.0
messageType	String	Severity level of the message. Valid values are INFO, WARNING, or ERROR.	Small, 67.0	67.0
primaryRecordId	String	ID of the primary sales transaction item record.	Small, 67.0	67.0
relatedRecordId	String	ID of the related record.	Small, 67.0	67.0

Product Recommendation Rules

Output representation of the details of the product recommendation rules.

JSON Example

```
{
  "productRecommendationRules": [
    {
      "message": "32GB RDIMM recommends 16GB RDIMM",
      "productIds": [
        "01tVW00000317uaYAA"
      ],
      "recordType": "Type",
      "referenceId": "0Q0VW000000z8yN0AQ"
    },
    {
      "message": "32GB RDIMM recommends 64GB RDIMM",
      "productIds": [
        "01tVW00000317v6YAA"
      ],
      "recordType": "Type",
      "referenceId": "0Q0VW000000z8yN0AQ"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
message	String	Message to display with the product recommendation.	Small, 67.0	67.0
productIds	String[]	List of recommended Product IDs.	Small, 67.0	67.0
recordType	String	Record type associated with the recommendation.	Small, 67.0	67.0
referenceId	String	Reference ID of the product recommendation rule.	Small, 67.0	67.0

Visibility Rules

Output representation of the details of the visibility rules.

JSON Example

```
{
  "visibilityRules": [
    {
      "message": "128GB LRDIMM disables 16GB RDIMM",
      "productIds": [
        "01tVW00000317uaYAA"
      ],
      "scope": "virtual",
      "target": "product",
      "type": "disable"
    },
    {
      "message": "Additional API disables Additional API Gov",
      "productIds": [
        "01tVW00000317tzYAA"
      ],
      "scope": "virtual",
      "target": "product",
      "type": "disable"
    },
    {
      "message": "Disable All other API Products",
      "productIds": [
        "01tVW00000317u0YAA",
        "01tVW00000317u1YAA"
      ],
      "scope": "virtual",
      "target": "product",
      "type": "disable"
    },
    {
      "message": "32GB RDIMM disables 128GB LRDIMM",
      "productIds": [
```

```

        "01tVW00000317v5YAA"
    ],
    "scope": "virtual",
    "target": "product",
    "type": "disable"
  },
  {
    "message": "API Access Requests AEH disables Additional API Prod",
    "productIds": [
      "01tVW00000317u1YAA"
    ],
    "scope": "virtual",
    "target": "product",
    "type": "disable"
  }
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
attributeId	String	ID of the attribute associated with this visibility rule.	Small, 67.0	67.0
attributePicklistValueId	String	ID of the attribute picklist value associated with this visibility rule.	Small, 67.0	67.0
message	String	Message to display when the visibility rule is applied.	Small, 67.0	67.0
prcId	String	ID of the Product Relationship Configuration (PRC) associated with this visibility rule.	Small, 67.0	67.0
productIds	String[]	List of product IDs affected by this visibility rule.	Small, 67.0	67.0
scope	String	Scope of the visibility rule. Valid values are PRODUCT, BUNDLE, or VIRTUAL.	Small, 67.0	67.0
stiId	String	ID of the sales transaction item associated with this visibility rule.	Small, 67.0	67.0
target	String	Target of the visibility rule. Valid values are COMPONENT, QUANTITY, ATTRIBUTE, ATTRIBUTE_PICKLIST_VALUE, or PRODUCT.	Small, 67.0	67.0
type	String	Type of visibility rule. Valid values are HIDE or DISABLE.	Small, 67.0	67.0

Product Configurator Standard Invocable Actions

Learn more about the standard invocable actions available with Product Configurator.

[Run Config Rules Action](#)

Run rules for a specific quote or order based on a context ID or transaction ID, and process other steps that are part of the configuration directly within a Flow. This action decouples rule execution from configurations to enable independent execution of rules and for easier retrieval of responses.

SEE ALSO:

[Actions Developer Guide: Overview](#)

[REST API Developer Guide: Invocable Actions Standard](#)

Run Config Rules Action

Run rules for a specific quote or order based on a context ID or transaction ID, and process other steps that are part of the configuration directly within a Flow. This action decouples rule execution from configurations to enable independent execution of rules and for easier retrieval of responses.

This action is available in API version 65.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/runConfigRules` If you're calling this invocable action from an external website, include the site name in the URI.

`<siteName>/services/data/v68.0/actions/standard/runConfigRules`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
transactionContextId	string	Unique identifier for the transaction context.
transactionId	string	Required. Unique identifier for the transaction.

Outputs

Output	Type	Description
configRuleResult	Apex-defined	An <code>runtime_industries_cpq.ConfigRuleResult</code> record that contains the configuration rule execution results including validation messages, product recommendations, visibility rules, and errors from rule processing.

Output	Type	Description
transactionContextId	string	Unique identifier for the transaction context.

Example

POST

This example shows a sample request to run rules for the specified quote based on the transaction context ID and transaction ID.

```
{
  "inputs": [
    {
      "transactionContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
      "transactionId": "0Q0DU0000005tJh0AI"
    }
  ]
}
```

This example shows a sample successful response.

```
[
  {
    "actionName": "runConfigRules",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "transactionContextId":
"0000000p18dq18g0029175793402786243c3d5ea94c241f09c11388ac1b865f9",
      "configRuleResult": {
        "visibilityRules": [
          {
            "stiId": "0QLxx0000004CU0GAM",
            "prcId": "PRC1",
            "attributeId": "Color",
            "attributePicklistValueId": "Red",
            "target": "Attribute",
            "scope": "Product",
            "type": "Hide"
          },
          {
            "stiId": "0QLxx0000004CU0GAM",
            "prcId": "PRC2",
            "attributeId": "Size",
            "attributePicklistValueId": "Large",
            "target": "Attribute",
            "scope": "Bundle",
            "type": "Disable"
          }
        ]
      },
      "transactionContextId":
"0000000p18dq18g0029175793402786243c3d5ea94c241f09c11388ac1b865f9",
    }
  ]
}
```

```

    "productRecommendationRules": [
      {
        "referenceId": "CORE_BUNDLE_001",
        "productIds": [
          "01t000000001234",
          "01t000000005678"
        ]
      }
    ],
    "messageRules": [
      {
        "stiId": "0QLxx0000004CU0GAM",
        "severity": "INFO",
        "messages": [
          "Product configuration validated successfully"
        ]
      },
      {
        "stiId": "0QLxx0000004CU0GAM",
        "severity": "INFO",
        "messages": [
          "All required attributes are configured"
        ]
      },
      {
        "stiId": "0QLxx0000004CU0GAM",
        "severity": "INFO",
        "messages": [
          "Bundle compatibility check passed"
        ]
      }
    ],
    "errors": []
  }
},
"sortOrder": -1,
"version": 1
}
]

```

Here's a sample input to call this invocable action by using `transactionContextId` property from Apex code.

```

// Create the invocable action with namespace
Invocable.Action action = Invocable.Action.createStandardAction('runConfigRules');

// Set input parameters using setInvocationParameter
String contextId = '008d27d7-e004-4906-a949-ee7d7c323c77';
System.debug('Setting transactionContextId parameter with value: ' + contextId);

// Use the exact parameter name format from the debug output
action.setInvocationParameter('transactionContextId', contextId);

// Debug the action parameters
System.debug('Action parameters: ' + action);

```

```
// Execute the action
System.debug('Invoking action...');
List<Invocable.Action.Result> results = action.invoke();

System.debug('Number of results: ' + results.size());
```

Product Configurator Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Product Configurator](#)

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

[ProductConfiguratorSettings](#)

Represents the settings for Product Configurator.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

Flow for Product Configurator

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Product Configurator exposes additional `actionType` values for the `FlowActionCall` Metadata type.

Field Name	Field Type	Description
<code>actionType</code>	<code>InvocableActionType</code> (enumeration of type string)	Required. The action type. Additional valid values only for Product Configurator include <code>runConfigRules</code> —Run rules for a specific quote or order based on a context ID or transaction ID, and process other steps that are part of the configuration directly within a Flow. This action decouples rule execution from configurations to enable independent execution of rules and for easier retrieval of responses.

ProductConfiguratorSettings

Represents the settings for Product Configurator.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

ProductConfiguratorSettings values are stored in the ProductConfiguratorSettings.settings file in the settings folder. The .settings files are different from other named components, because there is only one settings file for each settings component.

Version

ProductConfiguratorSettings components are available in API version 60.0 and later.

Fields

Field Name	Field Type	Description
enableProductConfigurator	boolean	Indicates whether to enable Product Configurator at run time to customize product components and attributes during the sales process (true) or not (false). The default value is false.

Declarative Metadata Sample Definition

Here's an example of a ProductConfiguratorSettings component.

```
<?xml version="1.0" encoding="UTF-8"?>
<ProductConfiguratorSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableProductConfigurator>true</enableProductConfigurator>
</ProductConfiguratorSettings>
```

Here's an example package.xml that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>ProductConfigurator</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character * (asterisk) in the package.xml manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

Constraint Modeling Language

Constraint Modeling Language (CML) is a domain-specific language that defines models for complex systems. For product configuration, constraint models describe real-world entities and their relationships to each other.

Constraint models enforce business logic declaratively, without the need for extensive code in a general-purpose programming language. In Product Configurator, a product designers or admin create a constraint model in CML, then Constraint Rules Engine compiles the CML code. The constraint model enforces requirements in a product configuration to comply with the specified constraints.

To build a constraint model in CML, use this basic workflow.

- Create global properties and settings that are header-level declarations in CML that define the foundational, fixed values for the entire constraint model. They're crucial for setting up the core configuration environment and ensuring reusability across the model.
- Create variables to define the properties or characteristics of a type. Variables can hold different kinds of data, such as strings, numbers, or lists, and can be calculated from other variables and values. In Revenue Management, variables represent product fields, product attributes, and sometimes context tags. See [Create a Context Definition](#) in Salesforce Help.
- Define types, which represent entities or objects in the model. Types are the building blocks of CML. They're similar to classes in object-oriented programming. In Revenue Management, types represent standalone products, bundles, product components, and product classes.
- Define relationships that describe how different types are associated with each other. In Revenue Management, relationships represent the product structure in a bundle. For example, the root product has a relationship with its components.
- Apply constraints to define logical restrictions, and enforce rules and conditions on types, variables, and relationships.

In Product Configurator, use the Visual Builder and CML Editor in Constraint Builder to create constraint models with CML.

- [Use Constraint Builder With Constraint Rules Engine](#)
- [Define Constraints and Rules with the Visual Builder](#)
- [Use Code to Define Constraints and Rules in the CML Editor](#)

See the linked topics for information on working with CML, including detailed code examples.

[Modeling a Generator Set](#)

The Constraint Model for a Generator Set examples use CML to define a technical power configuration, illustrating concepts such as calculated variables, enforcement of external standards, and component selection based on requirements.

[Core Concepts](#)

Constraint Modeling Language (CML) includes components that cover high-level global configurations to specific data types and constraints.

[Core Concept Examples](#)

These examples illustrate core Constraint Modeling Language (CML) concepts including type, relationships, constraints, and so on.

[Annotation Examples](#)

Constraint Modeling Language (CML) annotations are labels that you add to parts of a model, such as types, variables, relationships, and constraints. Annotations control how these elements are shown and how they behave in the configurator. Annotations help fine-tune the configurator and the constraint engine without changing the actual structure of the model.

[Constraint Modeling Language \(CML\) Best Practices](#)

To prevent performance degradation or unexpected behaviors when the constraint engine executes CML code, follow these practices when writing code.

Business-Centric Constraint Modeling Language (CML) Guidelines

Constraint Modeling Language (CML) must accurately calculate the total sum or aggregate of specific attributes like quantity or userCount across child components, especially in complex configurations requiring group-level aggregation

Debugging Constraint Modeling Language (CML)

To debug constraint models and troubleshoot performance issues, enable debug logging in Apex and set the debug log level to FINE.

Model Structure

The tables on the following pages show the structure for the constraint model in Core Concept Examples.

Modeling a Generator Set

The Constraint Model for a Generator Set examples use CML to define a technical power configuration, illustrating concepts such as calculated variables, enforcement of external standards, and component selection based on requirements.

The [examples](#) on page 1073 correspond to the [CML core concepts](#) on page 1016 linked here. See the Generator Set examples for code samples that use the core concepts.

- Global Properties and Settings—`VOLTAGE_REGEX` is a global constant that defines a fixed regular expression pattern used for validation or parsing throughout the model.
- Types—`GeneratorSet` is the root type that represents the main entity. `GeneralModel` represents a related component type.
- Variables—The `GeneratorSet` type defines variables like `requiredKW` (the user's power requirement), `voltage`, and calculated variables like `surgeLoadKW` and `voltage3` (derived from parsing the `voltage` string).
- Relationships—The `GeneralModels` relation connects the `GeneratorSet` type to its possible configurations (`GeneralModel`).
- Constraints—Constraints enforce critical business rules and safety standards, such as ensuring the selected generator model's power meets the required threshold, or restricting configuration options (such as `voltage`) based on the specified compliance standards ([Listing-UL 2200](#)).

Core Concepts

Constraint Modeling Language (CML) includes components that cover high-level global configurations to specific data types and constraints.

See these topics for information on each core concept and the ways they work together.



Note: CML supports single-line code comments with `//` and block comments with `/* */`.

Global Properties and Settings

Header-level declarations define the global properties and settings for a model, including constants, properties, and external values that set up the foundation of the CML code.

Variables

Variables are the properties or characteristics defined within a type. Variables can hold different types of data and can be calculated from other values.

Types

In Constraint Modeling Language (CML), you define types to represent entities or objects in the model. Types are the foundational building blocks of CML. A type encapsulates the property, relationships, constraint, and rules for the entity.

Relationships

Relationships in Constraint Modeling Language (CML) define how different product types are associated with each other, forming the structural hierarchy of a product bundle. Relationships are also referred to as ports.

Constraints

Constraints enforce rules and conditions on types, variables, and relationships. Use constraints to define logical restrictions and ensure consistency within the model.

Global Properties and Settings

Header-level declarations define the global properties and settings for a model, including constants, properties, and external values that set up the foundation of the CML code.

Use these declarations to create reusable components and configuration settings that you can reference throughout the model.

Global Constants

Use global constants to define values that remain fixed throughout the model. These constants can be numeric values, strings, lists, or other supported data types. Use constants to create standardized settings or options that you can reference multiple times. See [Example 1: Use Regex Global Variable](#) on page 1016.

In the example, `MAX_COUNT` is a global constant that is hard-coded to 100: `define MAX_COUNT 100.`

Regex (regular expressions) can be used to define global constants. The generalized abstract syntax structure for regex expressions is `define <CONSTANT_NAME> "<REGEX_PATTERN_STRING>$"`.

Regex Pattern Components

This table lists regex components and their details.

Regex Component	Description	Generalization
^ and \$	Anchors that ensure the pattern matches the entire string, from the beginning (^) to the end (\$).	Ensures strict adherence to the required format.
()	Capturing Groups used to isolate portions of the matched string. You can reference the captured parts later by using \$1,\$2, and so on, in functions such as regexreplace. See String Variable Functions and Operators on page 1020.	Allows extraction of specific data fields from a string.
+	Character Class and Quantifier that matches one or more (+) digits or characters.	Defines the permitted characters and minimum occurrences for the data fields.
/	Literal Character matching the forward slash separator present in the input data.	Matches fixed delimiters in the input string.

In the example, `VOLTAGE_REGEX` is a global constant that defines a fixed regular expression pattern used for validation or parsing throughout the model `define VOLTAGE_REGEX "^[0-9]+/[0-9]+$"`.

For more on the usage of global properties, see [External Variables](#).

Variables

Variables are the properties or characteristics defined within a type. Variables can hold different types of data and can be calculated from other values.

[Variable Domains and Domain Restrictions](#)

A variable can have a fixed domain that defines a set of permitted values. You can specify the domain as a list of discrete values, a continuous range, or a combination.

[Variable Data Types](#)

Variables support multiple data types including boolean, date, decimal, and so on. Variables without a domain definition may remain unbound, leading to errors.

[Mathematical Functions \(Numerical Derivation\)](#)

Mathematical functions and operators are used to calculate derived values based on arithmetic relationships between variables.

[String Variable Functions and Operators](#)

Constraint Modeling Language (CML) provides string manipulation and conversion functions, and string comparison and validation operators.

[Variable Annotations](#)

You can annotate variables with properties such as `configurable`, `defaultValue`, `domainComputation`, and `relatedAttributes`.

[External Variables](#)

External variables are global Constraint Modeling Language (CML) variables defined within a virtual CML type.

Variable Domains and Domain Restrictions

A variable can have a fixed domain that defines a set of permitted values. You can specify the domain as a list of discrete values, a continuous range, or a combination.

Variable Domains and Domain Restrictions

A variable can have a fixed domain that defines a set of permitted values. You can specify the domain as:

- A list of discrete values
- A continuous range
- A combination of ranges and discrete values

For more information, see `domainComputation` in [Variable Annotations](#) on page 1022.

Example

This example defines a `SwitchgearBay` type with three variables, each having a fixed domain.

- `BayType` can be one of the specified string values.
- `Bay_Number` can be any integer from 1 through 9 (inclusive).
- `Total_Power_Required_kW` can be any integer from 1 through 100000 (inclusive).



Note: For string (picklist) variables, if you don't specify a `defaultValue` annotation and don't define a default in the Product Attribute Definition in Product Catalog Management (PCM), the configurator uses the first value in the domain as the initial value.

In the example, `BayType` defaults to `"load"`. To set a different default, use the `defaultValue` annotation on the variable. To avoid inconsistent behavior at run time, use the same default value in CML as the default value you define in PCM.

```
type SwitchgearBay {
  string BayType = ["load", "lv", "mv"];
  int Bay_Number = [1..9];
  int Total_Power_Required_kW = [1..100000];
}
```

Variable Data Types

Variables support multiple data types including boolean, date, decimal, and so on. Variables without a domain definition may remain unbound, leading to errors.

Data Type	Description	Defaulting Example
boolean	Only true, false, or null can be assigned as a value.	@(defaultValue="true") boolean isActive;
date	A value that indicates a particular day, the same as local date in Java.	date shipDate = ["2023-01-01".."2023-12-31"]; If there's no <code>defaultValue</code> specified, the variable defaults to the first value in the domain. See the Constraints using Format Specifiers (%s, %d) and Dates example on page 1073.
double(n)	A 64-bit number that includes a decimal point, the same as double in Java.	double (2) percentage = [0.00..100.00]; If there's no <code>defaultValue</code> specified, the variable defaults to the first value in the domain.
decimal(n)	A fixed-point numeric value with n decimal places. Note: The decimal variable data type isn't supported for the quantity field in quote line items. Use the integer data type for the quantity field.	decimal (2) TaxRate = 0.08;
int	Integer. A 32-bit number that doesn't include a decimal point, the same as int in Java.	@(defaultValue = "5") int defaultQty = [1..10]; If there's no <code>defaultValue</code> specified, the variable defaults to the first value in the domain.
string	Any set of characters surrounded by double quotes (")	@(defaultValue = "Red") string color = ["Red", "Green", "Blue"]; If there's no <code>defaultValue</code> specified, the attribute defaults to the first value in the domain.

Data Type	Description	Defaulting Example
string[]	Used in multi-select picklists for the user to select more than one item from multiple options. For example, if a user selects "Red", "Green", and "Blue" values in a color picker, this variable holds those selected values.	@ (defaultValue = '["Red", "Green"]') string[] selectedColors; If there's no defaultValue specified, the attribute picklist defaults to the first value in the domain.

Mathematical Functions (Numerical Derivation)

Mathematical functions and operators are used to calculate derived values based on arithmetic relationships between variables.

Function/Operator	Purpose	CML Keyword/Operator [Source]
Arithmetic Operators	Perform standard arithmetic: addition (+), subtraction (-), multiplication (*), division (/), modulo (% or mod), and power (^).	+, -, *, /, %, ^
ceil()	Returns the smallest integer greater than or equal to the argument (rounds up).	ceil

Usage Example

```
surgeLoadKW == requiredKW * 1.25;
ceil(totalItems / itemsPerCrate)
```

See [Arithmetic Calculations and Functions](#) on page 1073 and examples [here](#) on page 1141.

String Variable Functions and Operators

Constraint Modeling Language (CML) provides string manipulation and conversion functions, and string comparison and validation operators.

The functions can be used to modify strings, extract information, or convert strings to numeric types. The operators can be used to validate string values against sets or regular expressions.

Function	Purpose	Syntax, Examples, and Additional Details
strlen()	Returns the length of the string as an integer.	strlen(inputString) strlen("Hello") returns 5.
substr()	Returns a substring from the input string.	substr(inputString, startIndex) or substr(inputString, startIndex, endIndex). The index starts with 0. The character at startIndex is included, and the character at endIndex is excluded.

Function	Purpose	Syntax, Examples, and Additional Details
<code>strconcat()</code>	Concatenates multiple strings using a specified separator.	<code>strconcat(separator, stringArgsToConcatenate)</code> <code>strconcat("-", "a", "b")</code> results in "a-b".
<code>join()</code>	An aggregate function that concatenates string values across related components, typically using a separator. The separator is a comma by default.	<code>names = join(name)</code>
<code>trim()</code>	Returns the string after removing any leading or trailing spaces.	<code>trim(strToTrim)</code>
<code>strsplit()</code>	Splits a string into an array of strings around a given separator.	<code>strsplit(stringToSplit, separator)</code>
<code>strcontain()</code>	Returns a boolean value (true or false) to specify whether the input string contains the specified search string.	<code>strcontain(inputString, searchString)</code>
<code>strshare()</code>	Splits two strings using a delimiter (comma by default) and returns true if the resulting lists have any elements in common.	<code>strshare(string1, string2, delimiter)</code>
<code>strformat()</code>	Returns a formatted string based on parameters and format specifiers.	<code>strformat("%d person", quantity)</code> . Specifiers include <code>%d</code> for integer, <code>%s</code> for string, <code>%.2f</code> for decimal or float, and <code>%b</code> for boolean.
<code>strtoint()</code>	Converts a string to an integer.	<code>strtoint(inputString, defaultValue)</code> . If the string can't be parsed as an integer (for example, it contains text or a decimal point), the provided <code>defaultValue</code> is returned.
<code>strtofloat()</code>	Converts a string to a decimal (floating point) value.	<code>strtofloat(inputString, defaultValue)</code> . If the conversion fails, the provided <code>defaultValue</code> is returned. The resulting decimal attribute must be declared with the intended precision. For example, <code>decimal(3)</code> .
<code>regexpreplace()</code>	Take an input string and a defined Regular Expression (regex). Replace the entire input string with a specific captured group from the regex match.	<code>regexpreplace(InputString, RegexPattern, ReplacementGroup)</code> . This function is commonly used to derive numeric data from complex, formatted strings before they are converted into integers or decimals.

Function	Purpose	Syntax, Examples, and Additional Details
<code>get(index, array)</code>	Used to retrieve an element at a specified index (starting at 0) from an array or list generated by a function like <code>strsplit</code> .	<pre>string splitStr1 = get(0, strsplit("hello constraint engine", " ")); // returns hello.</pre> Using <code>Get</code> with Table Constraint—If your table constraint output for three columns is stored in a <code>string[]</code> variable named <code>picklistValues</code>, you would access the first row's attributes like this (assuming the columns are stored in a predictable sequence): <pre>// Retrieve the first element (Row 0, Column 0) string value0_0 = get(0, picklistValues); // Retrieve the second element (Row 0, Column 1).</pre>

String Comparison and Validation Operators

The `in` operator checks if the value of a string attribute is present within a defined set or array of strings.

Example

```
color in ["red", "blue"]
```

Variable Annotations

You can annotate variables with properties such as `configurable`, `defaultValue`, `domainComputation`, and `relatedAttributes`.

In this example, the `gc_runningKw` variable is annotated to indicate that it's not configurable and has a default value of 0.00.

 **Note:** This example requires an enclosing type.

```
@(configurable = false, defaultValue = 0.00)
decimal(2) gc_runningKw;
```

Property	Values	Description
<code>allowOverride</code>	<code>true</code> , <code>false</code>	Allows the engine to recalculate a value even if a value was already received from core. This annotation helps save on performance by allowing early calculation.
<code>configurable</code>	<code>true</code> , <code>false</code>	Indicates whether the variable is configurable (<code>true</code>) or not (<code>false</code>). If the <code>configurable</code> annotation isn't explicitly specified, the engine sets it implicitly as <code>true</code> for the variable. If the <code>configurable</code> annotation is explicitly specified as <code>true</code> , the variable is indicated as configurable. The

Property	Values	Description
		engine can set the value to the variable according to the defined logic, and users can modify it. If the configurable annotation is explicitly specified as <code>false</code> , the engine cannot set a value to the variable, and users can't update it. The variable value in this case is set through the PCM default. See examples here on page 1083.
defaultValue	literal	Indicates the default value for the variable. The configurator uses the default value defined in PCM (in Product Attribute Definition). If no PCM default is available, the configurator uses the first value in the variable domain as the initial value. If no default value is defined in PCM and a defaultValue is specified in CML, the configurator uses the value defined in CML as the initial value of the variable. See examples here on page 1083.
domainComputation	true, false	domainComputation is a CML annotation that specifies how the domain of a model element is determined, either by using a fixed domain or by computing the domain dynamically during configuration. If domainComputation is not explicitly specified, the engine sets it implicitly as false for the variable. If the domainComputation is specified as true, the variable domain is dynamically determined based on the configuration and constraint logic. If the domainComputation is specified as false, the variable domain is fixed. See examples here on page 1083.
nullAssignable	true, false	Sets an initial value for the calculated variable if the expression value can't be calculated.
Peelable	true, false	Indicates whether the constraint engine can override the variable's value (whether set by default or user selection) to resolve a conflict (<code>true</code>) or not (<code>false</code>). If set to <code>true</code> , the engine treats the value as a "soft selection." When a configuration conflict occurs, the engine attempts to "peel" (unbind) this variable and retry the solution. If a valid configuration is found, the engine

Property	Values	Description
		automatically changes the value to satisfy constraints, rather than displaying an error message to the user. If not explicitly set, or set to false, the engine treats the value as a "hard selection." If the value causes a conflict with a constraint, the engine will not attempt to change it automatically. Instead, it will stop and display a conflict error message to the user, requiring manual intervention to resolve the issue. See examples here on page 1083.
productGroup	integer	Used to represent the group cardinality for relationships under a type, either for specified relationships, or for all relationships (using `*`). We recommend using <code>maxInstanceQty</code> and <code>minInstanceQty</code> type annotations instead of productGroup. See Type Annotations on page 1029.
relatedAttributes	string value	<code>relatedAttributes</code> annotation is required to reset the domain to the original domain for domain computation. If <code>relatedAttributes</code> annotation is not specified, the engine updates the variable domain according to <code>domainComputation</code> and constraint logic. If the <code>relatedAttributes</code> annotation is specified with one or multiple values (separated by comma), the variable domain is reset to the original domain. See examples here on page 1083.
sequence	integer	Indicates the sequence in which variables are configured. If a sequence value is not explicitly defined, the configurator implicitly determines the order based on the variable declaration order in the CML model. If a sequence value is explicitly defined, the configurator uses the sequence number to control the order in which variables are configured. Variables with lower sequence values are assigned first. See examples here on page 1083.
setDefault	true, false	Sets the variable status to default.
source	string value	Data source defined in the model.

Property	Values	Description
sourceAttribute	Variable name in string	Sets the domain of the current variable to be the domain of the source variable.
strategy	descending, ascending, string	Defines the strategy to configure the variable. If the strategy is ascending, the engine tries values from low to high or If the strategy is descending, the engine tries values from high to low. See example here on page 1083.
tagName	string value	To create an external variable linked to a Sales Transaction header, use the tagName annotation with the contextPath annotation to reference context tags on SalesTransactionItem within a type. See contextPath in External Variable Annotations on page 1025.

External Variables

External variables are global Constraint Modeling Language (CML) variables defined within a virtual CML type.

See virtual in [Type Annotations](#) on page 1029. The values for external variables are usually set by the environment that launches the constraint solver engine. Use external variables to import runtime data from the context header (such as Quote or Sales Transaction) into the configuration model, with the contextPath annotation to denote header fields, or with tagName annotation to denote lineltem fields. See External Variable Annotations section.

If the external variable isn't mapped to any external data source, it must have a default value. Otherwise, it may remain unbound and cause errors.

Here's a basic declaration syntax.

```
extern int MAX_VALUE = 9999;
extern decimal(2) threshold = 1.5;
```

Example: Using External Variables with Context Path Annotation

In this example, the constraint engine needs access to the quote header (Sales Transaction) field, which defines the shipping location to enforce region-specific compliance requirements. The contextPath annotation is used to map the field (SalesTransaction.ShippingCountry) to an external CML variable (ShippingCountry).



Note: The CML variable name can be different from the context path value.

```
// External variable declaration with context path annotation
@(contextPath = "SalesTransaction.ShippingCountry")
extern string ShippingCountry; // ShippingCountry Value is pulled from the Quote/Order
header
```

See the full example in [Using ContextPath and tagName annotations](#) on page 1073.

External Variable Annotations

Here are the details of external variable annotations.

Annotation	Possible Value	Description
contextPath	"SalesTransaction.<ST_FIELD>", where the sales transaction field is pulled directly from the context definition.	References sales transaction values directly from their context definition, such as account name, sales transaction total, or address. The contextPath annotation can only be used for header fields. To create a variable linked to a SalesTransactionItem, use the tagName annotation to reference context tags on SalesTransactionItem within a type. See tagName in Variable Annotations on page 1022.

Types

In Constraint Modeling Language (CML), you define types to represent entities or objects in the model. Types are the foundational building blocks of CML. A type encapsulates the property, relationships, constraint, and rules for the entity.

A type is similar to a class in object-oriented programming. You can define relationships that represent associations between different types. See [Relationships](#) on page 1037.



Note: To define a constraint for a child product in a bundle, you must include the entire bundle in the constraint model. For example, if you define a constraint for a laptop, and the laptop is a child product in the Laptop Pro Bundle, you must include the Laptop Pro Bundle in the constraint model for the constraint on the laptop to run.



Note: Product variants aren't supported in constraint models.

Generic Structure of a Type

This table explains the generic structure of types with examples.

Element	Purpose	Example
Declaration	Defines the entity name, optionally preceded by annotations and optionally followed by inheritance, if applicable.	<code>type Product {}</code> Or optionally: <code>@annotation_name("annotation parameters") type Product: BaseProduct {}.</code>
Variables (Attributes)	Defines the properties or characteristics of the entity, including data type and domain.	<code>int requiredKW = [101..10000]; string color = ["Red", "Blue"];</code>
Relations	Defines one-to-many associations with other types, specifying cardinality (the quantity range) and optionally, the configuration order.	<code>relation items: LineItem[1..10] {}.</code>

Element	Purpose	Example
Constraints and Rules	Enforces business logic and restrictions that must be satisfied by the entity's variables and relationships.	<code>constraint(condition); require(condition, items [type]);</code>

Example: Basic Type Declaration with Variables

This example shows the declaration of the main `GeneratorSet` type. It defines several core attributes (variables) that characterize the product.

```
type GeneratorSet{
// Declaration only (inherits LineItem properties)
// Attributes with explicit domains
int requiredKW = [101..10000];
string Voltage = ["220/380", "240/416", "255/440", "277/480", "347/600", "2400/4160",
"7200/12470", "7621/13200", "7976/13800"];
string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Data Center Continuous
(DCC)", "Emergency Standby Power (ESP)"];
}
```

Type Hierarchies

Constraint Modeling Language (CML) supports inheritance and overriding, which allow you to create hierarchies between types. By establishing these hierarchies, constraint models become more modular and efficient.

Type Annotations

You can annotate types to add information. Type annotations are metadata applied to a type declaration to provide instructions to the constraint engine regarding how instances of that type should be handled, instantiated, or used in the configuration structure.

Group Type

In Constraint Modeling Language (CML), a Group Type is used to logically containerize related components within a bundle configuration, primarily when product component groups are imported from Product Catalog Management (PCM).

Define Constraints for Quote Groups, Ramps, and Ramp Segments

Apply rules to quote groups, ramps, and ramp segments by using the `SalesTransactionItemGroup` context tag. Assign a groupby value to messages defined in Constraint Rules Engine to include the messages in custom grouping strategies.

Type Hierarchies

Constraint Modeling Language (CML) supports inheritance and overriding, which allow you to create hierarchies between types. By establishing these hierarchies, constraint models become more modular and efficient.

How Hierarchies Function

- **Inheritance:** This mechanism enables a specialized child type to automatically share common variables (attributes) and relationships defined in its parent type. By inheriting from a base type, child types don't need to redefine shared properties, which ensures consistency across the model.
- **Overriding:** While child types inherit the structure of the parent, they can override or specialize those properties. For example, a parent type might define a variable with a broad range of possible values, while a child type overrides that variable with a fixed value specific to that individual product.

Practical Examples of Hierarchy

- Simple Product Extension: A `BaseProduct` might define an `id` and `name`. A `PhysicalProduct` can then inherit from `BaseProduct` to gain those fields while adding its own unique characteristics, such as `weight` or `color`.
- Multi-Level Nesting: Hierarchies can extend through multiple layers. For instance, a `Room` type can be the parent to a `Bedroom` type, and a `MasterBedroom` can further inherit from the `Bedroom` type, carrying all properties down the chain.
- Abstract Base Models: In complex configurations such as a `GeneratorSet`, a parent type such as `GeneralModel` defines the necessary attributes (such as `powerKW` and `dB`), while specific child types such as `GeneralModel1900` or `GeneralModel11200` inherit those attributes and override them with their specific ratings.

Core Benefits

By establishing these hierarchies, constraint models become more modular and efficient. You can create header-level declarations and base types to serve as a foundation for the entire model, allowing you to reference reusable components multiple times rather than writing redundant code for every product variation. This structural organization allows the constraint engine to effectively enforce business logic and validate configurations across all related types.

Example 1: Simple Product Extension

In this pattern, a specialized type inherits from a broader base type. In the provided generator set model, the `GeneratorSet` type inherits from `LineItem`, gaining any properties defined at the line-item level while adding its own specific configuration fields like `requiredKW` and `Voltage`.

```
// The ultimate base type in the system
type LineItem;
// Child type extending LineItem with generator-specific attributes
type GeneratorSet : LineItem {
  int requiredKW = [101..10000];
  string Voltage = ["220/380", "240/416", "255/440"];
  string DutyRating;
}
```

Example 2: Multi-Level Nesting

CML supports hierarchies with multiple layers of depth. In this example, properties flow from the top-level `LineItem` down to the `GeneratorSet`, and finally to a highly specialized `EmergencyGenerator`. Each level inherits all attributes from the levels above it.

```
type LineItem;
// Level 2: Adds basic generator capacity attributes
type GeneratorSet : LineItem {
  int requiredKW = [101..10000];
  decimal(2) surgeLoadKW = requiredKW * 1.25; // Calculation shared down the chain
}
// Level 3: Specialized version inheriting everything from GeneratorSet and LineItem
type EmergencyGenerator : GeneratorSet {
  // Automatically inherits requiredKW and surgeLoadKW
  string DutyRating = "Emergency Standby Power (ESP)"; // Specific fixed rating
}
```

Example 3: Abstract Base Models (Polymorphism & Overriding)

This pattern uses an abstract type as a structural blueprint. Specific components (the "General Models") inherit from this blueprint and override its generic attributes with fixed, real-world ratings.

```
// Base model acting as a blueprint for all engine options
type GeneralModel{
  int powerKW = [100..2000]; // Broad domain
  int dB = [60..100];
}
// Specific product type that overrides parent domains with fixed values
type GeneralModel900 : GeneralModel {
  int powerKW = 900; // Overrides broad range with exact value
  int dB = 78;
}
// Another specialized model with different fixed properties
type GeneralModel1500 : GeneralModel {
  int powerKW = 1500;
  int dB = 83;
}
```

Type Annotations

You can annotate types to add information. Type annotations are metadata applied to a type declaration to provide instructions to the constraint engine regarding how instances of that type should be handled, instantiated, or used in the configuration structure.

Annotation	Possible Values	Description
virtual	true, false	If <code>true</code> , specifies whether the indicated type refers to the transaction header (such as <code>Quote</code> or <code>Order</code>) or to a logical container (sub group of the <code>Quote</code> or <code>Order</code>). If the value is <code>false</code> , then it's the default behavior for types and doesn't need to be explicitly specified.
groupBy	Variable name	Used with <code>virtual = true</code> , the <code>groupBy</code> annotation organizes child products—the individual instances populating a relationship—into virtual containers based on a shared attribute value. See Relationships on page 1037 and the Grouping Generators by Voltage example on page 1073.
maxInstanceQty	Integer	Specifies the maximum cardinality for a component in a group. See Group Type on page 1031.
minInstanceQty	Integer	Specifies the minimum cardinality for a component in a group. See Group Type on page 1031.

Annotation	Possible Values	Description
source	String	Specifies the data source defined in the model.
split	true, false, none	Specifies whether the type should be split or not. If <code>split=true</code> , there can be multiple instances of the type, and the quantity of each instance is always 1; If <code>split=false</code> , there is only one instance in the relationship. If the user adds more instances, the engine adds more quantity to the existing instance; or If <code>split=none</code> (the default), there are multiple instances of the same type in the relationship, with different quantities. The <code>split=true</code> annotation isn't supported for child products within a dynamic bundle. See examples here on page 1083.
sharingcount	Integer	Specifies the maximum number of times a single instance of a specific type can be shared or reused across different relationships within the configuration model. This annotation is used in conjunction with the <code>@(split=true)</code> annotation. When a type is marked for splitting, the constraint engine can process multiple instances in parallel to improve performance. The <code>sharingCount</code> tells the engine exactly how many times it can "split" or reuse that instance to satisfy the configuration requirements without generating entirely new, unique instances. It's a critical tool for managing large-scale configurations (for example, models with over 1,000 components). By setting a sharing limit, you reduce the number of variables the engine must instantiate, which helps prevent performance degradation and system timeouts. The <code>sharingCount</code> annotation works with the <code>@(sharing=true)</code> annotation applied to Relations. The relation annotation enables the general capability to share components across instances, while the <code>sharingCount</code> on the child type sets the numerical limit for that behavior. See Relationship Annotations on page 1044 and

Annotation	Possible Values	Description
		the Sharing Accessories in a Generator Set example on page 1073.

Creating a Virtual Container (@virtual = true)

In this example, the `@virtual = true` annotation is applied to a logical container type, `System`, which is primarily used to define relationships. These relationships aggregate data across line items in the quote that forms a sub-group called `system`. See [Relationships](#) on page 1037.

```
@(virtual = true)
type System {
  // This relation gathers all GeneratorSet line items on the sales transaction
  @(sourceContextNode = "SalesTransaction.SalesTransactionItem")
  relation generators : GeneratorSet[0..10];
  // This variable aggregates the surge load (calculated inside GeneratorSet) from all
  collected generators
  int totalQuotedLoad = generators.sum(surgeLoadKW);
}

type GeneratorSet {
  // The attribute calculated here is aggregated in the virtual 'System' type above
  @(configurable = false)
  int requiredKW = [101..10000];
  string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Data Center Continuous
    (DCC)", "Emergency Standby Power (ESP)"];
  decimal(2) surgeLoadKW = requiredKW * 1.25;
}
```

Group Type

In Constraint Modeling Language (CML), a Group Type is used to logically containerize related components within a bundle configuration, primarily when product component groups are imported from Product Catalog Management (PCM).

The Group Type uses specific annotations to control the total quantity of components selected from that group, regardless of the individual component type.

Bundles and Group Types (also known as Product Component Groups or PCGs) represent different levels of a product hierarchy and serve distinct functional roles in configuration logic.

Conceptual Hierarchy

- Bundles are high-level parent products that contain multiple child products sold together as a package. In CML, they are defined as "root types" that encapsulate the properties, relationships, and constraints for the entire entity.
- Group Types are structural containers within a bundle. They act as intermediate folders that organize related components imported from Product Catalog Management (PCM). Instances of these Group Types are declared as variables inside the root Bundle type.

Role in Cardinality and Selection

- Bundles establish the primary relationship between a root product and its broad categories of components.
- Group Types are specifically designed to enforce cardinality rules for a collection of products. They use the `@(minInstanceQty)` and `@(maxInstanceQty)` annotations to control exactly how many instances can be selected from a specific set of options.

(for example, "select at least 1 but no more than 2 accessories"). While the selected component can have a high quantity, the Group Type restricts the number of unique instances chosen from that group.

Syntactic Implementation

- **Accessing Components:** For standard bundles, you reference components directly via their relation name. For components within a Group Type, you must use dot notation starting with the group variable name defined in the root type (for example, `accessoryGroup.mouse.Wireless == true`).
- **Constraint Limitations:** You cannot write a constraint directly on a Group Type's attribute to apply it to all components within that group; constraints must reference the specific child components.
- **Identification:** Group Types are automatically identified by a Group suffix and the presence of instance cardinality annotations during the import from PCM.



Note: The following examples are partial. See the complete code in the final CML code sample.

Example 1: Defining Generator Set Group Types

We can define two group types for a Generator Set configuration: `CoreModelGroup` (mandatory selection of a primary generator model) and `EnclosureGroup` (optional selection of a specific enclosure type).

For the `CoreModelGroup`, setting `minInstanceQty` to 1 and `maxInstanceQty` to 1 means that at least 1 is required, and a maximum of 1 is permitted.

```
@(minInstanceQty=1, maxInstanceQty=1)
type CoreModelGroup {
  // Relation holds the actual Generator Model products
  relation generalModel : GeneralModel[0..9999];
}
type GeneralModel : LineItem {
  int powerKW;
}
```

For the `EnclosureGroup`, setting `minInstanceQty` to 0 and `maxInstanceQty` to 1 means that selecting an enclosure is optional, but if selected, the user can add at most one instance of an enclosure component (such as `WeatherproofEnclosure`).

```
@(minInstanceQty=0, maxInstanceQty=1)
type EnclosureGroup {
  relation enclosure : Enclosure;
  relation cabinetHeater : ControlCabinetHeater;
}
type Enclosure : LineItem;
type ControlCabinetHeater : LineItem;
```

Example 2: Referencing Group Types in the Root Bundle

Once defined, instances of these group types are used as variables within the root type, which represents the entire bundle. In this example, the `coreModelGroup` and `enclosureGroup` are instances of the respective group types, defined within the root type `GeneratorSetBundle`.

```
type GeneratorSetBundle {
  CoreModelGroup coreModelGroup;
  EnclosureGroup enclosureGroup;
}
```

Example 3: Writing Constraints on Group Components

To write constraints or rules that reference components inside a group, use dot notation starting with the group variable name defined in the root type.

This example shows how a constraint might be defined within the `GeneratorSetBundle` type to enforce business logic on components within the groups.

```
// If the selected generator model has a powerKW greater than 1500,
// then a Control Cabinet Heater must be included in the Enclosure Group.
constraint(coreModelGroup.generalModel.powerKW > 1500 ->
enclosureGroup.cabinetHeater[ControlCabinetHeater] == 1);
// Require an Enclosure component if the set requires seismic certification.
require(seismicCertification == "IBC Seismic Certification",
enclosureGroup.enclosure[Enclosure],
"Enclosure required for seismic certification");
```

Final CML Code Sample with Group Types

This structure defines the complete model, showing the component hierarchy and the relationship constraints.

Parent Type	Relation Name	Child Type	Cardinality	Key Attribute Usage
GeneratorSetBundle	coreModelGroup (Group Instance)	CoreModelGroup	Group Cardinality: 1	The group type defined by @minInstanceQty=1, maxInstanceQty=1. This enforces that exactly one component choice must be made from the internal generalModel relation.
GeneratorSetBundle	enclosureGroup (Group Instance)	EnclosureGroup	Group Cardinality: [0..1]	The group type defined by @minInstanceQty=0, maxInstanceQty=1. This enforces that selecting components from this group is optional (min 0) and at most one total component instance can be selected (max 1).

```
/**
 * The Root Bundle: GeneratorSetBundle
 * This type holds instances of the defined Group Types and the definition of seismic
 * certification */
type GeneratorSetBundle {
string seismicCertification = ["IBC Seismic Certification", "OSHPD Seismic Certification"];
CoreModelGroup coreModelGroup;
```

```

EnclosureGroup enclosureGroup;
// Constraint 1: If the selected GeneralModel has a powerKW greater than 1500,
// then a Control Cabinet Heater must be included in the Enclosure Group.
constraint(coreModelGroup.generalModel.powerKW > 1500 ->
enclosureGroup.cabinetHeater[ControlCabinetHeater] == 1);
// Constraint 2: Require an Enclosure component if the set requires seismic certification.
require(seismicCertification == "IBC Seismic Certification",
enclosureGroup.enclosure[Enclosure],
"Enclosure required for seismic certification");
// Action Rule Example: Disable a specific enclosure type if the core model is low power
(e.g., 900kW).
rule(coreModelGroup.generalModel.powerKW == 900, "disable", "relation",
"enclosureGroup.enclosure", "type", "ReinforcedEnclosure");
}
/**
 * Group Type 1: Core Model Group (Mandatory, Single Select)
 * Min/Max Instance Quantity controls the selection rules for components within this group.
 */
@(minInstanceQty=1, maxInstanceQty=1)
type CoreModelGroup {
// Relation holds the actual Generator Model products
relation generalModel : GeneralModel[0..9999];
}
/**
 * Group Type 2: Enclosure and Accessories Group (Optional)
 * minInstanceQty=0 means selection is optional. maxInstanceQty=1 limits the selection to
a single enclosure or accessory component instance.
 */
@(minInstanceQty=0, maxInstanceQty=1)
type EnclosureGroup {
relation enclosure : Enclosure;
relation cabinetHeater : ControlCabinetHeater;
}
/**
 * Component Types (Children)
 */
type GeneralModel {
int powerKW;
}
type Enclosure {
@(defaultValue = "false")
boolean Weatherproof;
}
type ReinforcedEnclosure : Enclosure; // Subtype of Enclosure
type ControlCabinetHeater;

```

Key Considerations

When reviewing Group Types in the context of the Generator Set model, keep these architectural points in mind.

- Group Cardinality Enforcement: The annotations `@ (minInstanceQty)` (minimum instance quantity) and `@ (maxInstanceQty)` (maximum instance quantity) are defined on the Group Type itself (`ElectricalSafetyGroup`). These annotations control the overall cardinality for all the components contained within that group, regardless of the individual relation cardinality defined (for example `[0..1]`, `[1..2]`).

- Root Reference: The `GeneratorSetBundle` includes the groups as variables (`coreModelGroup` and `enclosureGroup`).
- Constraint Syntax for Group Components: Constraints access attributes or components inside the groups using dot notation starting with the group variable name (for example, `coreModelGroup.generalModel.powerKW`).
- Limitation on Group Attributes: You cannot write a constraint directly on a group's attribute and expect it to apply to all components within that group (for example, `constraint(enclosureGroup.color == "Black")` is not a valid constraint).

Define Constraints for Quote Groups, Ramps, and Ramp Segments

Apply rules to quote groups, ramps, and ramp segments by using the `SalesTransactionItemGroup` context tag. Assign a `groupBy` value to messages defined in Constraint Rules Engine to include the messages in custom grouping strategies.

Define a Constraint for a Quote Group

To define a constraint for a quote group, use the `require` rule to assign the `SalesTransactionItemGroup` attribute that's contained on a type to the value of the `QuoteGroup` container.

Define a Constraint for a Ramp Group

To define a constraint that applies to a ramp group, use the `IsLineGroupRamped__std` attribute in the `require` rule to specify that the group is a ramp group.

Define a Constraint for a Ramp Segment

To define a rule that applies to a ramp segment for defined conditions, use the `ItemSegmentType` attribute.

Define a Constraint for a Quote Group

To define a constraint for a quote group, use the `require` rule to assign the `SalesTransactionItemGroup` attribute that's contained on a type to the value of the `QuoteGroup` container.

In this example for a `GeneratorSet` and its `Enclosure`, all the relations defined in the `groupBy` container include the `SalesTransactionItemGroup` attribute. Constraint Rules Engine creates a virtual container for each unique value of the `SalesTransactionItemGroup` attribute defined in the `groupBy` container. The engine creates one virtual container with its own self-contained rule execution for each group that contains one or more of the products defined in the `QuoteGroup` container.



Note: Groups don't support rules such as `Hide`, `Disable`, or `Recommend`, that perform an action when specified conditions are true.



Example:

```
type LineItem {
  @(tagName = "SalesTransactionItemGroup")
  string SalesTransactionItemGroup;
}

type GeneratorSet : LineItem;
type Enclosure : LineItem;

// Transaction scoped container
@(virtual = true)
type Quote {
  relation quotegroup : QuoteGroup;
  @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation generators
  : GeneratorSet;
  @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation enclosures
  : Enclosure;
```

```

}

// Group scoped container
@(virtual = true, groupBy = SalesTransactionItemGroup)
type QuoteGroup {
    string SalesTransactionItemGroup; // Needed for the require rule to save

    @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation generators
    : GeneratorSet;
    @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation enclosures
    : Enclosure;

    require(generators[GeneratorSet], enclosures[Enclosure] {SalesTransactionItemGroup
    = SalesTransactionItemGroup});
}

```

Define a Constraint for a Ramp Group

To define a constraint that applies to a ramp group, use the `IsLineGroupRamped__std` attribute in the `require` rule to specify that the group is a ramp group.

In this example, the `Enclosure` is added to the group only if the `GeneratorSet` is in a ramp group. In the last lines of the example, the `IsLineGroupRamped__std` attribute in the `require` rule specifies that the `GeneratorSet` is in a ramp group.



Note: Groups don't support rules such as `Hide`, `Disable`, or `Recommend`, that perform an action when specified conditions are true.



Note: To add a type to an unramped group only and exclude the type from ramp groups, set the `IsLineGroupRamped__std` attribute to `NOT (!)` in the `require` rule. For example,

```
require(!(generators[GeneratorSet].IsLineGroupRamped__std),.
```



Example:

```

type LineItem {
    @(tagName = "SalesTransactionItemGroup")
    string SalesTransactionItemGroup;
    @(tagName = "IsLineGroupRamped__std")
    boolean IsLineGroupRamped__std;
}

type GeneratorSet : LineItem;
type Enclosure : LineItem;

// Transaction scoped container
@(virtual = true) type Quote {
    relation quoteGroup : QuoteGroup;
}

// Group scoped container
@(virtual = true, groupBy = SalesTransactionItemGroup)
type QuoteGroup {
    string SalesTransactionItemGroup; // Needed for the require rule to save

    @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation generators

```

```

: GeneratorSet;
  @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation enclosures
: Enclosure;

  require(generators[GeneratorSet].IsLineGroupRamped__std, enclosures[Enclosure]
{SalesTransactionItemGroup = SalesTransactionItemGroup});
}

```

Define a Constraint for a Ramp Segment

To define a rule that applies to a ramp segment for defined conditions, use the `ItemSegmentType` attribute.

In this example, `Enclosure` is included in the group with `GeneratorSet` only if `ItemSegmentType` for `GeneratorSet` isn't `Trial`. To set a value for `ItemSegmentType`, the type must be in a ramp group and be ramped.



Note: Groups don't support rules such as `Hide`, `Disable`, or `Recommend`, that perform an action when specified conditions are true.



Example:

```

type LineItem {
  @(tagName = "SalesTransactionItemGroup")
  string SalesTransactionItemGroup;
  @(tagName = "ItemSegmentType")
  string ItemSegmentType;
}

type GeneratorSet : LineItem;
type Enclosure : LineItem;

// Transaction scoped container
@(virtual = true) type Quote {
  relation quoteGroup : QuoteGroup;
}

// Group scoped container
@(virtual = true, groupBy = SalesTransactionItemGroup)
type QuoteGroup {
  string SalesTransactionItemGroup; // Needed for the require rule to save

  @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation generators :
  GeneratorSet;
  @(sourceContextNode = "SalesTransaction.SalesTransactionItem") relation enclosures :
  Enclosure;

  require(generators[GeneratorSet].ItemSegmentType != "Trial", enclosures[Enclosure]
{SalesTransactionItemGroup = SalesTransactionItemGroup});
}

```

Relationships

Relationships in Constraint Modeling Language (CML) define how different product types are associated with each other, forming the structural hierarchy of a product bundle. Relationships are also referred to as ports.

Here's a comprehensive overview of relationships, their syntax, purpose, and key features, particularly using examples relevant to the Generator Set model.

-  **Note:** When you import product relationships from PCM into a constraint model, don't include product component groups. Importing with product component groups increases complexity and can cause performance degradation.

Definition and Syntax of Relationships

Relationships define the one-to-many connections between a parent type (such as a bundle) and its component types (children).

- **Keyword:** The keyword used is `relation`.
- **Syntax:** A basic relationship declaration includes the relation name, the target type, and cardinality bounds.

```
relation <relation name> : <Target Type>[min..max] { /* Optional content */ }
```

- **Purpose:** Relationships represent the product structure in a bundle. For example, the root product (GeneratorSet) has relationships with its components (MainAlternators, TemperatureSensors).

-  **Note:** To avoid testing unnecessary value combinations and improve performance, specify the smallest required cardinality (quantity range).

Set Maximum Relationship Size

The `maxRelationSize` property is the maximum cardinality for a single relationship in the constraint model. It controls how many instances of a child component can exist under one parent through the relationship. The maximum value for `maxRelationSize` is 1073741824. The default value is 9999.

Use `maxRelationSize` to set a limit based on the number of instances you need for your business purposes. For example, if the most a customer can order of a child component is 200,000, set `maxRelationSize` to 200,000. An overly high cardinality limit increases the risk of unbound variables that cause the constraint engine to backtrack through the entire range to resolve a conflict. Use `maxRelationSize` with the `property`.

```
property maxRelationSize = 100000;

type Quote {

    relation items : LineItem[0..99999999]; // cardinality uses this max

}
```

The `maxRelationSize` property doesn't limit these values:

- The number of relationship declarations in a type
- The number of types in the constraint model
- The total component count across all relationships

Omit Unnecessary Relationships

When using the [visual builder](#) or the [CML editor](#) to create a CML code for a bundle, the system by default imports all the relationships for the selected bundle from the structure defined in Product Catalog Management (PCM). In large and complex CML code, some of these relationships may not be relevant to any constraint and can be potentially omitted.

To enable import of a subset of bundle components, add this property at the top of the constraint model CML file.

```
property allowMissingRelations = "true";
```

If your PCM bundle contains many relations but your CML code defines only one, the engine validates the model, but often returns a configuration failure. at run time. By setting `allowMissingRelations = "true"`, you don't have to define every relation found in the PCM (such as GeneralModels in the Relationship Ordering example) if they don't require specific configuration logic in your CML file.

Here's an example with the `allowMissingRelations` property.

```
// 1. Enable skipping of unneeded relations from the Product Catalog (PCM)
property allowMissingRelations = "true";

type ConciseGeneratorBundle {
  // Define only the specific accessory needed for this logic
  relation enclosures : Enclosure;

  // A simple variable to trigger the logic
  int requiredKW = [100..5000];

  // Logic: High power requirements force a specific enclosure type
  // This omits other accessories like filters, batteries, and heaters [2, 3].
  constraint(requiredKW > 2000 -> enclosures[ReinforcedEnclosure] == 1,
    "Power levels above 2000kW require a Reinforced Enclosure.");
}

// 2. Define the accessory and its specific subtype
type Enclosure ;
type ReinforcedEnclosure : Enclosure;
```

For more information, see [Constraints](#) on page 1046.

To ensure stability at run time without the `allowMissingRelations` property, you must manually define every relation and type present in the PCM bundle, even if you don't intend to write logic for them. This creates large CML files with a high number of variables and components, which lead to performance degradation, and even timeout issues.



Note: We don't recommend using the pattern in this example.

```
// EXPENSIVE FIX: Mirroring everything
type GeneratorSet {
  relation engineModels : EngineModel; // Unused in CML logic
  relation alternators : Alternator;    // Unused in CML logic
  relation fuelFilters : FuelFilter;     // Unused in CML logic
  relation starterMotors : StarterMotor; // Unused in CML logic
  relation enclosures : Enclosure;       // The only one we need
  // ... potentially 15+ more relations ...

  constraint(requiredKW > 2000 -> enclosures[ReinforcedEnclosure] == 1);
}
type Enclosure ;
type ReinforcedEnclosure : Enclosure;
```

Skip Type Generation for Types with Many Mapped Products

When you create a constraint model for a product whose type is mapped to a large number of products, either directly or through product classifications, the constraint engine loads all mapped product data into the model during model fetch, regardless of whether those products are used in your CML. In catalogs with hundreds or thousands of mapped products, the loading process can significantly increase model fetch and execution time, causing timeouts. To load only the types that you explicitly declare in your constraint model and skip generating types from unmapped product data, add the `skipTypeGeneration` property at the top of the constraint model CML file.

```
property skipTypeGeneration = "true";
```

When you set `skipTypeGeneration = "true"`, the constraint engine skips type generation for all products not declared in the CML file, to optimize model storage. This property applies to types only and doesn't affect relationship loading or other model elements.

Use `skipTypeGeneration = "true"` when all of the following are true.

- A type in your constraint model is mapped to hundreds or thousands of products, either directly or through a product classification.
- Your CML defines constraints for only a subset of those mapped products.
- You experience slow load times or execution timeouts.



Note: Before you enable `skipTypeGeneration`, confirm that you explicitly declare every type that your CML references in the constraint model. When you skip type generation, the constraint engine can only resolve types that it finds in your declarations. A referenced type that isn't declared causes an error when you try to save the model. As a best practice, use `skipTypeGeneration` only when your constraint model includes classification types.

Example: skipTypeGeneration with a Large Classification Catalog

In this example, a `GeneratorSet` product is mapped to many products through a classification. The CML enforces duty-rating and engine constraints, but only needs two component types. Setting `skipTypeGeneration = "true"` at the top of the constraint model prevents the constraint engine from loading mapped products that the model doesn't use.

```
// Skip loading all classification types from PCM.
// Only the types explicitly declared in this file are loaded.
property skipTypeGeneration = "true";
type GeneratorSet : LineItem {
    string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby
    Power (ESP)"];
    int requiredKW = [100..10000];
    relation engine : Engine[1..1];
    constraint(DutyRating == "Emergency Standby Power (ESP)" -> requiredKW >= 500,
        "Emergency Standby Power requires at least 500 kW.");
    constraint(DutyRating == "Prime Power (PRP)" -> engine[PrimePowerEngine] == 1,
        "Prime Power duty rating requires a Prime Power Engine.");
}
// Declare only the types this constraint model requires.
// Classification types not declared here are not loaded into the model.
type Engine;
type PrimePowerEngine : Engine;
type ContinuousPowerEngine : Engine;
```

Order Keyword

The `order()` keyword is used within a `relation` declaration to define the specific sequence in which the constraint engine evaluates and attempts to instantiate the child subtypes available in that relationship. This controls the prioritization of component selection.

Example: Relationship Ordering

```
// --- Component Subtypes (Specific Generator Models) ---
// Define a base type for generator models with a power attribute
type GeneralModel {
  int powerKW = [0..3000]; // Explicit domain
}
// Specific subtypes that inherit from GeneralModel
type GeneralModel2500 : GeneralModel {
  int powerKW = 2500;
}
type GeneralModel1750 : GeneralModel {
  int powerKW = 1750;
}
type GeneralModel900 : GeneralModel {
  int powerKW = 900;
}
// --- Parent Type (GeneratorSet) ---
type GeneratorSet {
  // Required power defined by the parent (non-configurable)
  @(configurable = false)
  int requiredKW = [100..3000];
  // Relation Declaration using order()
  // Cardinality requires exactly one model to be selected.
  // order() sets the selection priority (2500 KW model is checked before 1750 KW model).
  relation GeneralModels : GeneralModel order(GeneralModel2500, GeneralModel1750,
  GeneralModel900);
}
```

Relationship Variable Functions

CML variable functions are fundamental tools used to perform both aggregation (summarizing data from related components) and complex mathematical calculations on attribute values (variables) within a configuration model. These functions are crucial for enforcing dimensional validity and calculating derived attributes.

Relationship Annotations

You can annotate relationships by using annotations, such as `configurable`, `allowNewInstance`, `closeRelation`, `sourceContextNode`, and so on.

Relationship Variable Functions

CML variable functions are fundamental tools used to perform both aggregation (summarizing data from related components) and complex mathematical calculations on attribute values (variables) within a configuration model. These functions are crucial for enforcing dimensional validity and calculating derived attributes.

You can use functions such as `count()`, `min()`, `max()`, `sum()` and `total()` to calculate values from all variables with the same name in the descendants of the current type. Aggregate functions are used primarily as relationship attributes within a relation to calculate values across multiple instances of a component type (descendants).

Function	Purpose	CML Keyword [Source]
<code>count()</code>	Counts the number of component instances within a relationship that match a specific logical condition.	<code>count</code>
<code>max()</code> / <code>min()</code>	Returns the maximum or minimum value of an attribute found across all instances in a relationship.	<code>max</code> , <code>min</code>
<code>sum()</code>	Calculates the sum of a specific numeric variable across all instances in a relationship. Note: executes multiplication of a variable value by a product quantity.	<code>sum</code>
<code>total()</code>	Calculates the sum of a specific numeric variable across all instances in a relationship. Note: Unlike the <code>sum()</code> function, does not execute multiplication of a variable value by line item quantity.	<code>total</code>

Example: Using Aggregate Functions

```

type LineItem;
type GeneratorSet : LineItem {
  relation modelclassification : ModelClassification {
    sumPowerKW = sum(powerKW);
    maxPowerKW = max(powerKW);
    highPowerModelsAmount = count(powerKW > 500);
  }
  relation warranties : Warranty {
    totalCoverageDays = total(coverageDays);
  }
  constraint(modelclassification.sumPowerKW > 2500 && modelclassification.sumPowerKW < 3500);
  message(true, "The maximum `powerKW` from selected GeneralModels is: {}",
    modelclassification.maxPowerKW);
  constraint(warranties[Warranty] == modelclassification.highPowerModelsAmount);
  message(true, "Effective Warranty coverage days: {}", warranties.totalCoverageDays);
}
type ModelClassification : LineItem {
  int powerKW = [900, 1750, 2500];
}
type GeneralModel1750 : ModelClassification {
  int powerKW = 1750;
}
type GeneralModel2500 : ModelClassification {
  int powerKW = 2500;
}
type GeneralModel900 : ModelClassification {
  int powerKW = 900;
}
type Warranty {
  int coverageDays;
}

```

```

}
type Warranty_PRP : Warranty {
int coverageDays = 50;
}
type Warranty_DCC : Warranty {
int coverageDays = 100;
}
type Warranty_ESP : Warranty {
int coverageDays = 200;
}

```

sum()

In the example, the `sum()` function aggregates the `powerKW` variable values of the selected products in the `modelClassification` relationship. The model includes a constraint that enforces the selection rule based on the calculated total: the sum of `powerKW` for the selected products must be between 2500 and 3500.

```
constraint(modelclassification.sumPowerKW > 2500 && modelclassification.sumPowerKW < 3500);
```

As a result, the engine selects two products from the `modelClassification` relation (`GeneralModel1750` and `GeneralModel1900`), since their calculated sum of `powerKW` values (2650) satisfies the constraint.

max()

In the example, the `max()` function returns the maximum `powerKW` variable value among the selected products in the `modelClassification` relationship. The model defines a message that displays the maximum `powerKW` value in the Product Configurator.

```
message(true, "The maximum `powerKW` from selected GeneralModels is: {}",
modelclassification.maxPowerKW);
```

As a result, because the previously described `sum()` function and constraint selected two products (`GeneralModel1750` and `GeneralModel1900`), the maximum returned value is 1750.

count()

In the example, the `count()` function calculates the amount of selected `modelClassification` relationship products that contain the `powerKW` variable value greater than 500. The model includes a constraint that enforces the selection of `warranties` product for each `GeneralModel` counted by the function.

```
constraint(warranties[Warranty] == modelclassification.highPowerModelsAmount);
```

As a result, based on the previous `sum()` description, the engine selects two products (`GeneralModel1750` and `GeneralModel1900`). Since both products meet the `count()` condition (`powerKW > 500`), the engine adds one of the `warranties` product with quantity 2.

total()

In the example, the `total()` function aggregates the values of the `coverageDays` variable for the selected products of the `warranties` relationship. The model defines a message that displays the calculated total in the Product Configuration.

```
message(true, "Effective Warranty coverage days: {}", warranties.totalCoverageDays);
```

As a result, based on previously described `count()` example, the system selects one of the `warranties` product (e.g., `warranty_DCC`) with a quantity of 2 and calculates the total value of its `coverageDays` variable (100).

A key difference between `total()` and `sum()` functions is that for `total()` the engine ignores the `warranties` product quantity. The system does not multiply the quantity of the selected warranty by the `coverageDays` variable value when computing the overall total.

See also [Arithmetic Calculations and Functions](#) on page 1073 and examples [here](#) on page 1141.

Relationship Annotations

You can annotate relationships by using annotations, such as `configurable`, `allowNewInstance`, `closeRelation`, `sourceContextNode`, and `so on`.

You can annotate relationships, as in this example, with `configurable=true`.

```
// 1. Define the target type
type Component;
// 2. Define the parent type to hold the relation
type System {
// 3. Add the relation with cardinality and proper nesting
@(configurable = true)
relation components : Component[0..10];
}
```

Here are the details of relationship annotations.

Annotation	Values	Description
<code>allowNewInstance</code>	true, false	Enables require rule constraints to work on relationships that are otherwise closed. Must be set to true to enable require rule constraints on closed relationships.
<code>closeRelation</code>	true, false	If the value is true, prevents the addition of new line items to the relationship. false is the default value and allows the addition of new line items to the relationship. See examples here on page 1083.
<code>compNumberVar</code>	true, false	Avoids creating a component number variable if it is set to false.
<code>disableCardinalityConstraint</code>	true, false	Disable cardinality constraint in the relationship to optimize the performance.
<code>domainComputation</code>	true, false	<code>domainComputation</code> is a Constraint Modeling Language (CML) annotation that specifies how the domain of a model element is determined, either by using a fixed domain or by computing the domain dynamically during configuration. If <code>domainComputation</code> is not explicitly specified, the engine sets it implicitly as <code>true</code> for the relationship. If the

Annotation	Values	Description
		<code>domainComputation</code> is specified as <code>true</code>, the relationship domain is dynamically determined based on the configuration and constraint logic. If the <code>domainComputation</code> is specified as <code>false</code>, the relationship domain is fixed. See examples here on page 1083.
<code>generic</code>	<code>true, false</code>	Indicates if generic instance is allowed in the relationship or not. Generic instance is used to prompt the user that they need to select a product in the relationship.
<code>noneLeafCardVar</code>	<code>true, false</code>	Avoids creating cardinality variables for none leaf type (a node with no children) in the relationship to optimize the performance.
<code>propagateUp</code>	<code>true, false</code>	Aggregates values from child elements to parent elements. If <code>propagateUp</code> is not specified, the engine sets it implicitly as <code>false</code> for the relationship. If the <code>propagateUp</code> annotation is specified as <code>true</code>, the engine aggregates values from children to parent elements (upward propagation). The engine cannot modify this value from the parent level (e.g. via constraint), so the children relation domain will not be affected. If the <code>propagateUp</code> is specified as <code>false</code>, both upward and downward propagations are applicable. The engine aggregates values from children to parent elements (upward propagation). Meanwhile the engine can modify this value (e.g. via constraint) from the parent level. The value is propagated downward and might affect the relation domain (downward propagation). See examples here on page 1083.
<code>readOnly</code>	<code>true, false</code>	Sets a relationship and all child relationships to read-only, to prevent the engine or user from modifying.
<code>relatedAttributes</code>	string value	<code>relatedAttributes</code> is a CML annotation that resets the domain to the original one for <code>domainComputation</code>. If <code>domainComputation</code> is not explicitly specified, the engine sets it implicitly as <code>true</code> for the relationship. If the <code>domainComputation</code> is specified as

Annotation	Values	Description
		<code>true</code> , the relationship domain is dynamically determined based on the configuration and constraint logic. If the <code>domainComputation</code> is specified as <code>false</code> , the relationship domain is fixed. See examples here on page 1083.
<code>relatedRelationships</code>	string value	Related relationships whose cardinality variables must be unbound for domain computation.
<code>sequence</code>	integer	Indicates the sequence in which the relationship is configured and executed.
<code>sharing</code>	<code>true</code> , <code>false</code>	Indicates if the relationship is shared or not. If the relationship is shared, the engine connects the instance from another relationship to this relationship instead of instantiating the instance in the relationship itself.
<code>singleton</code>	<code>true</code> , <code>false</code>	Indicates if all types in the relationship must be singleton or none.
<code>source</code>	string	Data source defined in the model.
<code>sourceAttribute</code>	Variable name in string	Sets the domain of the current relationship to the domain of the source attribute.
<code>sourceContextNode</code>	string	For cases that use a virtual container, specifies the path in the context service for the instances in the relationship.

Constraints

Constraints enforce rules and conditions on types, variables, and relationships. Use constraints to define logical restrictions and ensure consistency within the model.

For more information about the supported constraints, see:

- [Logical Constraints](#) on page 1049
- [Table Constraints](#) on page 1054
- [Using Proxy Variables with Constraints on Types and Relationships](#) on page 1056
- [Group Type](#) on page 1031
- [Message Rule](#) on page 1064
- [Preference Rule](#) on page 1065
- [Require Rule](#) on page 1065
- [Require Rule vs Constraint](#) on page 1066
- [SetDefault Rule](#) on page 1066

- [Exclude Rule](#) on page 1067
- [Action Rule](#) on page 1068
- [Hide/Disable Rule](#) on page 1068
- [Recommendation Rule](#) on page 1071
- [Set Product Selling Model in a Constraint](#) on page 1072

Supported Logic Operators

These logic operators are supported in CML.

Arithmetic Operators

- Multiplication (*)
- Division (/)
- Remainder (%)
- Addition (+)
- Subtraction (-)

Relational Operators

- Greater than (>)
- Greater than or equal to (>=)
- Less than (<)
- Less than or equal to (<=)

Equality Operators

- Equal (==)
- Not equal (!=)

Logic Operators

- Not (!)
- And (&&)
- XOR/Exclusive or (^)
- Or (||)
- Bi-conditional (<->)
- Conditional (?:)
- Implication (->)

Operator Precedence

In resolving equations, operator precedence determines the order in which operations are performed. Operators in CML have precedence in this order:

- Arithmetic operators have the first precedence.

- Relational operators have the second precedence.
- Equality operators have the third precedence.
- Logic operators have a lower precedence than equality operators, in decreasing order as listed, with Implication having the lowest precedence.

Constraint Annotation

Here are the details of `abort`, a constraint annotation.

Annotation	Possible Values	Description
<code>abort</code>	<code>true</code> , <code>false</code>	Specifies that, if this constraint fails, abort search and return <code>false</code> for configuration.

Logical Constraints

A logical constraint defines a statement that must hold true logically. The constraint can be any logical expression by using a logical operator.

Table Constraints

The table constraint in Constraint Modeling Language (CML) is used to define a set of valid combinations of values for two or more attributes. These combinations are specified in rows within the constraint definition.

Proxy Variables with Constraints on Types and Relationships

Use proxy variables to reference the variables of related types, including parent, root, and sibling types.

Message Rule

The message rule displays a message to users based on specified conditions.

Preference Rule

The preference rule encourages the constraint solver to satisfy the condition, but doesn't enforce it if the condition can't be met.

Require Rule

The require rule requires certain components to be included in a relationship when specified conditions are met.

Require Rule vs Constraint

In Constraint Modeling Language (CML), `constraint()` and `require()` can both enforce behavior, but they operate differently: `constraint` focuses on logical consistency, `require` focuses on physical presence of products.

Setdefault Rule

The setdefault rule allows component selection with attribute values and quantity, similar to the require rule.

Exclude Rule

The exclude rule automatically removes a specific type in a relationship if a certain condition is true.

Action Rule

The CML Action Rule is defined using the `rule()` keyword. Its primary purpose is to execute a designated action, specified as a string literal, when a condition is met.

Hide or Disable Rule

The Hide or Disable Rule uses the `rule()` keyword to conditionally remove an element from the selection menu (hide) or preserve it in the menu while preventing user selection (disable).

Recommendation Rule

The `recommend` keyword is used within a Constraint Modeling Language (CML) rule to display suggestions for related products in the Product Configurator. The rule defines the condition under which a specific product type or relation should be suggested to the user.

Set Product Selling Model in a Constraint

Use the `productSellingModel` tagname to write a constraint that sets the Product Selling Model (PSM) for a type. You can define a PSM as one time, time-deferred (subscription with end date), or evergreen (recurring subscription with no preset end date). The PSM is updated for new line items at runtime, based on the constraint.

Logical Constraints

A logical constraint defines a statement that must hold true logically. The constraint can be any logical expression by using a logical operator.

For example, the statement `c0 ? c1 : c2` means that if `c0` is true, then `c1` needs to be true, otherwise `c2` needs to be true.

Constraint Syntax Patterns

Here are the details of the constraint syntax patterns.

- `constraint(logic expression);`: The simplest form, enforcing a logic statement.
- `constraint(logic expression, string literal | string variable);`: Includes an optional failure explanation that is displayed if the constraint is violated.
- `constraint(logic expression, string literal | string variable, arg, ..., arg);`: Includes a failure explanation with additional arguments to be interpolated into the string of the failure explanation.

If a constraint is violated, it takes an optional string variable or string literal as the failure explanation. The failure explanation could be in a string format with additional arguments. CML supports two string formats. One is the standard string format and another is a string with `{}` placeholder, to be replaced with the actual argument value.

Key Components of the Constraint Syntax

Here are the details of the key components of the constraint syntax.

Component	Description	Code Sample
Logic Expression	This can be a basic mathematical expression (using operators like <code>+</code> , <code>-</code> , <code>*</code> , <code>/</code>) or a relational expression (using <code>==</code> , <code>!=</code> , <code>></code> , <code><</code> , and so on). It can also include logical operators such as AND (<code>&&</code>), OR (<code> </code>), NOT (<code>!</code>), the implication operator (<code>-></code>), or the bi-directional operator (<code><-></code>).	Basic <pre>constraint(generator.sum(quantity) > 20);</pre>
Failure Explanation	This optional string literal or variable provides a human-readable reason for the violation. CML supports two formatting styles for these strings Java string format (for example, using <code>% d</code> or <code>%s</code>) or Placeholder format using <code>{ }</code> .	With Explanation <pre>constraint(x + y <= 100, "Total must not exceed 100");</pre>

Component	Description	Code Sample
Arguments (arg)	Arguments are used to replace the placeholders in the failure explanation string with actual values at runtime.	With Explanation and Arguments.

Example Arguments (arg):

```
constraint(requiredKW <= 2500, "The required capacity of {} kW exceeds the maximum supported limit of 2500 kW.",requiredKW);
```

See the complete example in [Constraints using Format Specifiers \(%s, %d\) and Dates](#) on page 1073.

Constraint Example

In this example, the first constraint specifies that, if the `DutyRating` value isn't `Prime Power (PRP)`, then the quantity of `Warranty_PRP` (`Warranties` subtype) must be 0. Similarly in the second constraint, if `DutyRating` value isn't `Data Center Continuous (DCC)` then the quantity of `Warranty_DCC` must be 0. Lastly, in the third constraint, if `DutyRating` value isn't `Emergency Standby Power (ESP)`, then the quantity of `Warranty_ESP` must be 0.

```
type Warranty;
type Warranty_PRP : Warranty;
type Warranty_DCC : Warranty;
type Warranty_ESP : Warranty;
type GeneratorSet {
  string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Data Center Continuous (DCC)", "Emergency Standby Power (ESP)"];
  relation Warranties : Warranty[3];
  constraint(DutyRating != "Prime Power (PRP)" -> Warranties[Warranty_PRP] == 0);
  constraint(DutyRating != "Data Center Continuous (DCC)" -> Warranties[Warranty_DCC] == 0);
  constraint(DutyRating != "Emergency Standby Power (ESP)" -> Warranties[Warranty_ESP] == 0);
}
```

Example: Constraints Using String and Logical Operators

This example demonstrates how a `GeneratorSet` uses string functions to extract a numeric voltage value, and then uses logical operators (`->`, `&&`, `|`) to enforce safety and certification requirements.

Explanation of Operators Used in the Example

Here are the details of the operators used in the example.

Operator/Function	Category	Usage in Example
<code>strtoint()</code>	String Function	Converts the extracted voltage string to the integer <code>Voltage3</code> .
<code>regexpreplace()</code>	String Function	Replaces the full <code>Voltage</code> string with only the second matched group (the high voltage number) using the defined <code>VOLTAGE_REGEX</code> .

Operator/Function	Category	Usage in Example
<code>strcontain()</code>	String Function	Checks if the <code>DutyRating</code> string contains the substring "Power".
<code>-></code>	Logical Implication	Defines a conditional rule: If the condition on the left is true, the condition on the right must be true.
<code>&&</code>	Logical AND	Requires both conditions (high requiredKW AND duty rating contains "Power") to be true.
<code> </code>	Logical OR	Requires <code>standardsAndCompliance</code> to be "Listing-UL 2200" or "Certification-CSA".
<code>!=</code>	Comparison/Relational	Used to check if the string value is "Not Equal" to a specific string literal.

```
// --- Constants (Required for String Manipulation) ---
define VOLTAGE_REGEX "^(+)/(+)$"

// --- Base Type and Configuration Attributes ---
type Warranty;
type Warranty_ESP : Warranty;

type GeneratorSet {
    // String input attribute for user selection
    string Voltage = ["277/480", "2400/4160", "7976/13800"];

    // String input attribute for operational mode
    string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby Power (ESP)"];

    // String input attribute for compliance
    string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];
    // Required KW (Int attribute)
    int requiredKW = [101..10000];
// warranties for generator set
relation Warranties : Warranty[3];

    // 1. STRING OPERATORS/FUNCTIONS: Deriving Numeric Data
    // We use strtoint() combined with regexpreplace() to extract the second number (the high voltage)
    // from the Voltage string (e.g., extracting 480 from "277/480").
    int Voltage3 = strtoint(regexpreplace(Voltage, VOLTAGE_REGEX, "$2"), 0);
    // Prime Power or Continuous Power using strcontain
    boolean NonstandbyPower = !strcontain(DutyRating, "ESP");

    // 2. LOGICAL OPERATOR (Implication ->): Certification Validation
    // Constraint: If the standard is UL 2200 (precondition), THEN Voltage3 must be <= 600 (postcondition).
```

```

    constraint(
        standardsAndCompliance == "Listing-UL 2200" -> Voltage3 <= 600,
        "The UL 2200 standard covers stationary engine generator assemblies rated at 600
volts or less."
    );

    // 3. LOGICAL OPERATORS (AND &&, OR ||) and STRING FUNCTION (strcontain)
    // Constraint: If the required power is high AND the unit is used for Prime Power OR
Continuous Power,
    // THEN a specific standard must be selected.
    constraint(
        (requiredKW >= 5000 && NonstandbyPower)
        ->
        (standardsAndCompliance == "Listing-UL 2200" || standardsAndCompliance ==
"Certification-CSA"), "High power and continuous use requires a major compliance
standard.");

    // 4. LOGICAL OPERATOR (Implication ->) and String Comparison (!=)
    // Constraint: If the Duty Rating is NOT Emergency Standby Power, THEN a specific
warranty (Warranties[Warranty_ESP]) must be excluded/zero.
    constraint(
        DutyRating != "Emergency Standby Power (ESP)" -> Warranties[Warranty_ESP] == 0,
        "The DutyRating when not equal to Emergency Standby Power, implies that the Warranty
must be 0."
    );
}

```

How User Input Order Affects Constraint Engine Behavior

The constraint engine is architecturally designed to never override or modify a user-selected value when evaluating constraints, except in the specific case of an `exclude` rule. If a constraint violation occurs due to user input, the engine generates an error message rather than attempting to fix the value itself.

Example: Constraint Evaluation Based on Input Order (Generator Set)

The order in which a user configures attributes for a product (such as a `GeneratorSet`) determines whether the constraint engine performs an automatic update or enforces a validation error.

Consider a constraint within the `GeneratorSet` type that links the operational requirement (`DutyRating`) to the required certification (`standardsAndCompliance`).

```

type GeneratorSet {
    // Attribute 1 (Precondition): User selects operational mode
    string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)"];
    // Attribute 2 (Dependent): Certification standard
    string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];
    // Constraint: If the unit is configured for Prime Power, it must have UL 2200 Listing.
    constraint(
        DutyRating == "Prime Power (PRP)" -> standardsAndCompliance == "Listing-UL 2200",
        "Prime Power Duty Rating requires UL 2200 Listing"
    );
}

```

The outcomes depend on the user's input sequence.

Scenario	User Input Sequence	Constraint Engine Result
Scenario 1: Successful Update (Precondition first)	The user first sets <code>DutyRating</code> to "Prime Power (PRP)".	The constraint engine recognizes the precondition is met and updates the dependent attribute, setting <code>standardsAndCompliance</code> to "Listing-UL 2200". The constraint is validated.
Scenario 2: Constraint Violation (Conflicting Value first)	The user first sets <code>standardsAndCompliance</code> to "Certification-CSA", and then sets <code>DutyRating</code> to "Prime Power (PRP)".	The existing user-selected value ("Certification-CSA") violates the constraint. The constraint engine will not override the user's prior selection to change it to "Listing-UL 2200". Instead, the engine displays an error.

To resolve the error in Scenario 2, the user must manually adjust one of their selections: either change the `DutyRating` (precondition) or manually update the `standardsAndCompliance` (dependent value) to "Listing-UL 2200".

Left-Hand Side and Right-Hand Side Behavior in Constraint Resolution

Operator precedence and constraint engine resolution process determines whether the left-hand side (LHS) or right-hand side (RHS) of a constraint changes or is constrained to maintain logical validity. Variable origin, which means whether variables are user-selected, calculated, or restricted by system limitations, can also affect the outcome for the LHS or RHS in an expression.

These examples show how different user inputs lead to different outcomes for the LHS and RHS in the same expression.

Example 1. Implication Operator (->): Directional Enforcement

```
type Order {
  int quantity = [1..1000];
  boolean requiresApproval;
  constraint bulkOrderApproval (
    quantity >= 100 -> requiresApproval == true
  );
}
```

The implication constraint `A -> B` (if A, then B) is the primary method for defining a mandatory outcome. The engine evaluates the LHS (A) first. If the `quantity` is 150 (LHS TRUE), then the engine forces `requiresApproval` (RHS) to be `TRUE`.

Scenario	Outcome
Scenario A: LHS is True, RHS Changes	The user sets a quantity greater than or equal to 100 on the LHS, which makes the condition true. The engine sets or changes the value of <code>requiresApproval</code> , the RHS, to true.
Scenario B: RHS is False, LHS is Constrained to be False	The user manually sets <code>requiresApproval</code> , the RHS variable, to false. Since the implication <code>true -> false</code> is forbidden, the LHS condition must be false to satisfy the constraint. The engine constrains <code>quantity</code> on the LHS to be less than 100 to make the LHS false.

Example 2. Bi-conditional (<->): Symmetrical Equivalence

```
type BulkOrderSystem {
  int quantity = [1..1000];
  boolean requiresApproval;
  boolean isBulkOrder;

  constraint bulkOrderStatus (
    isBulkOrder <-> (quantity >= 100 && requiresApproval),
    "Bulk order status requires 100+ quantity AND management approval."
  );
}
```

The bi-conditional constraint $A \leftrightarrow B$ (A if and only if B) requires that the LHS and RHS must share the same Boolean truth value. Either side can act as the driver, forcing the other side to change. In the example above:

- A is the boolean variable `isBulkOrder`.
- B is the complex condition `(quantity >= 100 && requiresApproval)`.

Scenario	Outcome
Scenario A: LHS Drives RHS	If the user manually sets the attribute <code>isBulkOrder</code> to true (making the LHS true), the engine immediately forces the RHS (<code>quantity >= 100 && requiresApproval</code>) to also be true, ensuring that both quantity is at least 100 and <code>requiresApproval</code> is set to true.
Scenario B: RHS Drives LHS	If the user selects a configuration where the quantity is high (for example, 500) and then sets <code>requiresApproval</code> to false (making the RHS condition false), the engine immediately forces the LHS attribute <code>isBulkOrder</code> to false to maintain equivalence.

Exception: The exclude Rule

The only scenario where the constraint engine intentionally overrides user input is when processing the `exclude` rule. If a user selects a component or sets an attribute value that violates an `exclude` rule, the engine will automatically override that user input to satisfy the exclusion constraint. In all other constraint types (like implication constraints shown previously), the engine relies on the user to fix the error. For more information, see [Exclude Rule](#) on page 1067.

Table Constraints

The table constraint in Constraint Modeling Language (CML) is used to define a set of valid combinations of values for two or more attributes. These combinations are specified in rows within the constraint definition.

The table constraint has this syntax:

```
table(variable, ..., variable, {value, .. value}, ..., {value, ..., value});
```

Each row inside `{}` defines a valid combination of values.

Example: Table Constraint

In this example:

- Variables: The attributes `Voltage` and `DutyRating` are listed as the columns for the table.

- **Table Rows:** Each row defined within the curly braces ({} specifies a valid combination. For instance, {"7976/13800", "Continuous Power (COP)"} is a valid pairing.
- **Enforcement:** If a user attempts to select a high voltage ("7976/13800") while choosing a Prime Power rating ("Prime Power (PRP)"), the table constraint is violated, and the engine displays the error message: "Selected Voltage is not compatible with the required Duty Rating."

```
// --- Component Types ---
type GeneratorSet {
// 1. Attributes whose values must align according to the table
string Voltage = ["220/380", "277/480", "7976/13800"];
string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby Power (ESP)"];
// 2. Table Constraint
// Defines valid combinations where Voltage and DutyRating are mutually dependent.
constraint validOperationalModes(
table(
Voltage,
DutyRating,
{"220/380", "Prime Power (PRP)"},
{"220/380", "Continuous Power (COP)"},
{"220/380", "Emergency Standby Power (ESP)"},
{"277/480", "Prime Power (PRP)"},
{"277/480", "Emergency Standby Power (ESP)"},
{"7976/13800", "Continuous Power (COP)"}
),
"Selected Voltage is not compatible with the required Duty Rating."
);
}
```

Import Data from a Salesforce Object to Populate a Table Constraint

Import data from a standard or custom Salesforce object to use in a table constraint in a constraint model. The imported data populates the columns and rows in the table constraint in CML, and saves you the step of manually entering the data.

To import data from a Salesforce object, first assign Read, Create, Edit, and Delete permissions for the object to the Constraint Rules Engine Licenseless permission set. See [Import Data from Salesforce Objects to Use in Constraint Models](#) in Salesforce Help.

In CML, use the `SalesforceTable` keyword and the syntax shown here to import data from a Salesforce object. This example uses the `GeneratorSet` type to constrain the calculated running capacity (`gc_runningKw`) based on a user's selection of the nominal output (`Nominal_Power_Output`), referencing an external Salesforce custom object named `PowerCst__c`.

Example: Imported Table Constraint

```
type GeneratorSet {
// 1. Attribute storing the user-selected power output (String)
string Nominal_Power_Output = ["100 kW", "300 kW", "500 kW", "700 kW"];
// 2. Attribute storing the resulting Running kW (Decimal, calculated)
@configurable = false, defaultValue = "0")
decimal(2) gc_runningKw;
// Constraint ensures the pairing of Nominal_Power_Output and gc_runningKw is found in the
// imported Salesforce table.
constraint(
table(
Nominal_Power_Output, gc_runningKw,
```

```
SalesforceTable("PowerCst__c", "Nominal__c,Running__c")
)
);
}
```

Explanation of the Imported Table

The table constraint ensures that the selected values for `Nominal_Power_Output` and `gc_runningKw` must form one of the valid combinations defined in the external source.

- `Table(Nominal_Power_Output, gc_runningKw,...)`: These are the CML attributes whose values must correlate. They define the columns of the required combination table.
- `Salesforce Table("PowerCst__c", "Nominal__c,Running__c")`: This function keyword directs the constraint engine to import data from the Salesforce custom object `PowerCst__c`.
- **Field Mapping**: The fields specified (`"Nominal__c,Running__c"`) define the columns in the Salesforce object that correspond to the CML attributes listed in the table function. `Nominal__c` maps to `Nominal_Power_Output`, and `Running__c` maps to `gc_runningKw`.

Proxy Variables with Constraints on Types and Relationships

Use proxy variables to reference the variables of related types, including parent, root, and sibling types.

The supported proxy variables include:

- Cardinality
- Parent
- `this.quantity`

Cardinality

Cardinality is a fundamental concept in Constraint Modeling Language (CML), controlling the quantity of product instances allowed in a defined relationship. It's crucial for ensuring product structure validity and optimizing performance.

The `cardinality` proxy variable refers to the cardinality of a relationship, that is, the quantity of instances of the same type in a relationship. The first parameter is the type name. The second, optional parameter is the port name. This variable differs from the `this.quantity` proxy variable, which refers to the quantity of the current instance.

Use this format:

```
cardinality(<type name>, <relation name>) or cardinality(<type name>)
```

Each parameter value can be a string or a string variable. If you don't specify the relation name, the engine searches all ports to find the type.

The cardinality bounds are defined within the relation declaration with square brackets, formatted as `[minimum..maximum]`.

Cardinality Examples

These examples illustrate how cardinality is defined and managed in the Generator Set model, focusing on standard definition, conditional enforcement, and reading the quantity.

Example 1: Using Cardinality Full Syntax

```
type Heater ;
type GeneratorSet {
//Define the relation and specify the smallest cardinality required for performance
relation Heaters : Heater[0..10];
//Declare a variable to hold the count
int totalHeaterCount = [0..10];
// This counts instances of type "Heater" specifically within the "Heaters" relation.
int InstancesofHeater = cardinality(Heater, Heaters);
constraint(totalHeaterCount == InstancesofHeater);
// Optional message to display the count to the user
message(totalHeaterCount > 0, "Current configuration includes {} heaters.", totalHeaterCount,
"Info");
}
```

See [Message Rule](#) on page 1064.

Example 2: Using Cardinality Partial Syntax

```
type Heater ;
type OutputTerminal ;
// Main Generator Set type
type GeneratorSet {
// Define multiple relations that might contain specific types, each with a specified
cardinality
relation Heaters : Heater[2];
relation OutputTerminals : OutputTerminal[0..99];
// Define derived attributes with an explicit domain
int totalHeatersFound = [0..100];
int totalTerminalsFound = [0..100];
// Partial cardinality SYNTAX
// The engine searches all relations to find the specified type
// Counts all instances of "Heater" across the entire GeneratorSet
int AllHeaterInstances = cardinality(Heater);
constraint(totalHeatersFound == AllHeaterInstances);
// Counts all instances of "OutputTerminal" across all relations
int AllOutputTerminals = cardinality(OutputTerminal);
constraint(totalTerminalsFound == AllOutputTerminals);
// Optional message for user visibility
message(totalHeatersFound > 0, "System found {} heaters in this configuration.",
totalHeatersFound, "Info");
}
```

Example 3: Defining Cardinality in Relations

This example shows how the Generator Set uses different cardinality ranges to define fixed requirements, optional components, and minimum quantities for necessary components.

```
type GeneratorSet {
// 1. Fixed Cardinality: Exactly one General Model (component) is required.
// means min=1 and max=1.
relation GeneralModels : GeneralModel [1..1];
// 2. Bounded Optional Cardinality: Between 0 and 5 Temperature Sensors are allowed.
```

```
// [0..5] means the component is optional but limited.
relation TemperatureSensors : TemperatureSensor[0..5];
// 3. Minimum Required Cardinality: At least 1 Test record is required, up to 99.
// [1..99] enforces inclusion.
relation Testing : Test[1..99];
}
type GeneralModel;
type TemperatureSensor;
type Test ;
```

Key Concepts:

- Syntax: Cardinality is specified immediately after the component type in the relation declaration.
- Best Practice: Specifying the smallest required range, such as [1..1] or [0..5], ensures the constraint engine tests fewer combinations, which prevents performance degradation.

Example 4: Enforcing Conditional Cardinality via require()

Cardinality can be dynamically enforced based on attributes of the parent product using the `require()` constraint keyword. For more information, see [Require Rule](#) on page 1065.

```
type GeneratorSet {
int requiredKW = [101..10000];
string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];
// Relation for mandatory installation accessories
relation Accessories : Accessory[1..99];
relation Testing : Test[1..99];
// Conditional Requirement based on power level:
// If the required power is over 5000 kW, exactly 5 specific Accessory instances are
// required.
require(
requiredKW > 5000,
Accessories [Accessory] == 5,
"High capacity generators require exactly 5 specialized accessory kits."
);
// Conditional Requirement based on compliance standard:
// If UL 2200 is selected, exactly 2 Test records must be included.
require(
standardsAndCompliance == "Listing-UL 2200",
Testing [Test] == 2,
"UL 2200 listing mandates exactly two certification tests."
);
}
type Accessory;
type Test;
```

This pattern (`require(condition, relation[type] == N, ...)`) allows the CML model to enforce a precise fixed number of child components when a quantity threshold or attribute condition is met on the parent.

Cardinality vs. Count

The `cardinality()` keyword is a proxy variable used to refer to the size of a relationship. The `count()` keyword is an aggregate function that counts matching components or attribute conditions within a relation. Both can be used to read quantities for validation or aggregation rules.

Example for Similarity

Both `cardinality()` and `count()` can be used to determine the total quantity of items in a relationship. In this scenario, they return the same value because the `count()` condition covers all possible active instances.

```
type Accessory{
  boolean isPresent = true;
}
type Bundle {
  relation items : Accessory[0..10];
  int totalByCount = [0..10];
  // Similarity: Both can read the headcount of the relation
  // Use the proxy variable to set an attribute
  int totalByCardinality = cardinality(Accessory, items);
  // Use count() aggregate function within a constraint
  constraint(totalByCount == items.count(isPresent == true));
}
```

Example for Difference

Cardinality is a proxy variable representing the headcount or size of the relation, whereas count is a function used to evaluate specific attribute conditions or filters within those instances.

```
type Accessory {
  int weight = [1..100];
  boolean isEssential;
}
type Bundle {
  relation items : Accessory[1..20];
  // 1. Declare variables with explicit domains
  int totalHeadcount = cardinality(Accessory, items);
  int heavyItemsCount = [0..20];
  int essentialItemsCount = [0..20];
  // DIFFERENCE 1: Cardinality (Proxy Variable)
  // Cardinality refers to the relationship size (how many instances are present).
  // It does not look at the values of the attributes within the instances.
  // DIFFERENCE 2: Count (Aggregate Function)
  // Count MUST use a logical expression to evaluate conditions within the relation.
  // It filters the instances based on attribute logic before returning a total.
  // Example: Counting only accessories that weigh more than 50kg
  constraint(heavyItemsCount == items.count(weight > 50));
  // Example: Counting only accessories marked as 'essential'
  constraint(essentialItemsCount == items.count(isEssential == true));
  // Business Logic using both:
  message(
    heavyItemsCount > (totalHeadcount / 2),
    "Warning: More than half of your accessories ({} ) are heavy items.",
    heavyItemsCount
  );
}
```

For more information, see [Message Rule](#) on page 1064.

Instance Quantity

Instance Quantity is the quantity of a child product per instance of the parent product. It differs from the end quantity, which is the total quantity of the child product across all parent instances. For example, if a customer orders 3 generator sets and each set requires 2 alternators, the instance quantity is 2, the quantity per bundle. The end quantity of alternators is 6.

The constraint engine calculates instance quantity when the constraint model CML meets all of these conditions.

- Instance Quantity Access (`orgHasInstanceQtyAccess`) is turned on. To turn on Instance Quantity Access, go to Revenue Settings and turn on the Instance Quantity Access setting.
- The child product's `ProductRelatedComponent` record has `QuantityScalingMethod__c` set to Proportional.
- The child product's end quantity divides evenly by the parent product's quantity.

The constraint engine divides the child's end quantity by the parent's quantity to derive the instance quantity.

```
Instance Quantity = Child End Quantity / Parent End Quantity
```

Example: Using `this.quantity` to Calculate Instance Quantity

In the Generator Set configuration, `instanceQty` is assigned the value of `this.quantity`. Quantities for `MainAlternator` and `TemperatureSensor` are returned as instance quantities of `GeneratorSet`.

The require rule validates against `instanceQty` values, confirming the per-set configuration is correct regardless of how many sets the customer orders.

```
type LineItem;
type GeneratorSet : LineItem {
  int instanceQty = this.quantity;
  int requiredKW = [101..10000];
  relation alternators: MainAlternator;
  relation sensors: TemperatureSensor;
  // Enforce per-unit component counts using instance quantities
  require(alternators.instanceQty == 2,
    alternators[MainAlternator] == 2,
    "Each generator set requires exactly 2 main alternators");
  require(sensors.instanceQty >= 1 && sensors.instanceQty <= 5,
    sensors[TemperatureSensor],
    "Each generator set requires 1 to 5 temperature sensors");
  message(true,
    "Generator set qty: {}, alternators per set: {}, sensors per set: {}",
    instanceQty, alternators.instanceQty, sensors.instanceQty);
}
type MainAlternator : LineItem {
  int instanceQty = this.quantity; // Per-generator-set quantity when QSM is Proportional
}
type TemperatureSensor : LineItem {
  int instanceQty = this.quantity; // Per-generator-set quantity when QSM is Proportional
}
```

Parent

The `parent()` proxy variable is used to turn on components at any level of the product hierarchy (child, grandchild, and so on) to access the attributes (variables) defined by their ancestor types. This mechanism facilitates the flow of configuration data and calculated values from the top of the bundle down to its components.

The `parent()` keyword functions as a proxy variable used to reference attributes residing in the immediate parent or any ancestor type in the configuration model.

Variable Name	Syntax	Purpose
<code>parent()</code>	<code>parent(<ancestor variable name>, <level>)</code>	Retrieves the value of an attribute from a parent or ancestor type.

Key Characteristics

- **Targeting Ancestors:** The first parameter is the name of the attribute in the ancestor type that you want to reference.
- **Level Parameter:** The second parameter (`<level>`) is optional and specifies how many levels up the hierarchy the engine searches. If omitted, it typically references the immediate parent. The level index for the `parent()` function effectively starts from 0 (implicit) for the immediate parent.
- **Level 0 (Default):** When you use `parent(attributeName)`, the engine references the attribute in the immediate parent.
- **Level n:** When you specify `parent(attributeName, 1)`, the engine reaches one level beyond the immediate parent, to the grandparent.
- **Data Flow:** `parent()` makes sure that the data flows unidirectionally, where the child reads attributes calculated or defined by the parent, which helps to prevent complex circular dependencies.
- **Single Inheritance:** CML follows a single inheritance model, where a type can only extend one other type at a time.
- **Same Variable Name:** In CML, using the same variable name between a parent bundle and its child accessories is a standard architectural pattern for cascading values down a product hierarchy. This allows a child component to automatically inherit or synchronize its properties with the parent type, ensuring configuration consistency.

Example: Standards and Compliance Synchronization

In this example, the `standardsAndCompliance` selection made at the bundle level is passed down to every accessory within that bundle.

```
type AccessoryBundle {
  // 1. Define the attribute at the Bundle level
  string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];
  // Relation to accessories
  relation accessories : Accessory[1..10];
}
type Accessory {
  // 2. Reuse the same variable name
  // The parent() function targets the attribute in the immediate parent
  string standardsAndCompliance = parent(standardsAndCompliance);
  // Business Logic: If the inherited standard is UL 2200, price is affected
  decimal(2) testingFee = [0.00..500.00];
  constraint(standardsAndCompliance == "Listing-UL 2200" -> testingFee == 250.00);
}
```

The `parent()` proxy variable is essential for cascading configuration data and constraints down the product hierarchy, so that child components reference attributes defined by their ancestors.

Example: Parent Attribute Reference

This example uses attributes found on the `GeneratorSet` type (the parent) and demonstrates how related components (like `TemperatureSensor`) access those values using the `parent()` proxy variable. Here’s the hierarchy context.

Parent Type	Relation Name	Child Type	Cardinality	Key Attribute Usage
Root <code>GeneratorSet</code>	<code>TemperatureSensors</code>	<code>TemperatureSensor</code>	<code>[0..5]</code>	Defines primary inputs (<code>requiredKW</code>) and a derived attribute (<code>ULComplianceEnforced</code>) based on the <code>standardsAndCompliance</code> selection.
Child <code>TemperatureSensor</code> (Instance within <code>GeneratorSet</code> relation)	Not Applicable	Not Applicable	Not Applicable	Uses the <code>parent()</code> proxy variable to reference the <code>requiredKW</code> attribute from its ancestor (<code>GeneratorSet</code>). A constraint ensures the component's capacity (<code>maxOperatingKW</code>) meets the requirement inherited from the parent.
Grandchild <code>StatorTemperatureSensor</code> (Subtype of <code>TemperatureSensor</code>)	Not Applicable	Not Applicable	Not Applicable	Inherits functionality from <code>TemperatureSensor</code> . Uses <code>parent()</code> to retrieve the calculated <code>ULComplianceEnforced</code> boolean from the <code>GeneratorSet</code> . Enforces a conditional installation rule using the Implication Operator (<code>-></code>).

```
// --- Parent Type (GeneratorSet) ---
type GeneratorSet {
  // Attributes defined by the parent
  int requiredKW = [101..10000]; // Required power rating
  string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"]; // Compliance choice
  // Derived status: True if UL 2200 is selected (precondition for compliance checks)
  boolean ULComplianceEnforced = standardsAndCompliance == "Listing-UL 2200";
  // Relation to child components
  relation TemperatureSensors : TemperatureSensor[0..5];
}

// --- Child Component Type (TemperatureSensor) ---
type TemperatureSensor {
```



```
// Temperature sensors may have a model that defines max operating KW
int maxOperatingKW = [1000..10000];
// Retrieve the required KW value from the immediate parent (GeneratorSet)
int parentRequiredKW = parent(requiredKW);
// Constraint ensures the sensor can handle the power defined by the parent
constraint(maxOperatingKW >= parentRequiredKW, "Sensor capacity must meet the required KW
  set by the generator set.");
}
// --- Specific Sensor Type (Grandchild) ---
type StatorTemperatureSensor : TemperatureSensor {
  // Retrieve the boolean compliance flag from the immediate parent (GeneratorSet)
  boolean enforceULCompliance = parent(ULComplianceEnforced);
  // Constraint ensures that if UL Compliance is enforced by the parent,
  // this sensor must meet a specific installation requirement (e.g., must be shielded)
  string installationMethod = ["Standard", "Shielded"];
  constraint(enforceULCompliance -> installationMethod == "Shielded",
    "UL Compliance requires a shielded temperature sensor installation."
  );
}
// Note: To reference a value further up the hierarchy, the optional level parameter can
// be used:
// int grandParentValue = parent(requiredKW, 1); // Accesses attribute 1 level up
```

Explanation of Parent Reference

- Direct Reference (Immediate Parent): In the `TemperatureSensor` type, `int parentRequiredKW = parent(requiredKW);` accesses the `requiredKW` attribute defined in the immediately superior type, which is `GeneratorSet`.
- Unidirectional Data Flow: The `parent()` proxy variable is critical for enabling unidirectional data flow, where calculated or defined values in the parent are read by children to enforce constraints. The engine makes sure that parent aggregation and calculation are complete before the `parent()` function executes in the child component.

this.quantity

`this.quantity` is a proxy variable used specifically to access the quantity of the current instance (the specific product line item) within a configuration.

Key Characteristics and Usage

- Scope: It refers only to the quantity of the specific instance in which it's used. It's used at the component level to determine the quantity of that item selected by the user or set by the constraint engine.
- Calculation Rule: The `this.quantity` proxy variable can be used only within a calculation rule.
- Distinction from `cardinality()`: `this.quantity` differs from the `cardinality()` proxy variable, which refers to the total number of instances of a specific type within a relationship and includes the quantity of other instances of the same type.
- Read-Only/Validation: When accessing quantity in CML, attributes like `this.quantity`, or external equivalents like `lineItemQuantity` or `ItemEndQuantity`, are treated as read only and should be used only in calculation or evaluation rules. It isn't recommended to use it to drive component creation, which should be done via `cardinality`.

Example: Using this.quantity for Calculation

In the Generator Set configuration, a component like the `NaturalGasReformer` uses `this.quantity` to define a local attribute representing how many units were selected, which is used for internal calculations (like total capacity or total weight contribution).

```
type LineItem;
type NaturalGasReformer : LineItem {
// 1. Definition: The LineItemQuantity attribute captures the quantity of this specific
instance.
// The CML syntax dictates defining an attribute (LineItemQuantity) that equals
this.quantity.
int LineItemQuantity = this.quantity;
// Placeholder: Attribute representing unit capacity per reformer unit
int unitCapacityKW = 100;
// 2. Calculation: Used in a calculation rule to determine total capacity based on the
quantity selected for this line item instance.
int totalReformerCapacity = LineItemQuantity * unitCapacityKW;
}
```

Message Rule

The message rule displays a message to users based on specified conditions.

Message rules have this syntax:

```
message(logical expression, string literal | string variable, argument, ..., argument,
severity);
message(logical expression, string literal | string variable, severity);
message(logical expression, string literal | string variable);
```

A message rule can take optional arguments to generate the message and indicate the severity of the message as the last argument. Message severity can be `Info`, `Warning`, or `Error`. Without an explicit message severity argument, the message will be treated as `Info`.

Understand the behaviour of each message severity type at runtime.

- The `Info` message type doesn't require the user to take any action in order to continue with the current task. Info messages display a gray banner.
- The `Warning` message type allows the user to continue working on the current task, but blocks them from taking the next step until they take action to address the issue described in the message. Warning messages display a yellow banner.
- The `Error` message type blocks the user from continuing with the current task until they fix the error described in the message. Error messages display a red banner. Note: An Error message doesn't block a user working in the Transaction Line Editor (Transaction Line Table, or TLT). In that component, the user can still make changes and save the quote, even when the quote contains conditions that trigger an Error message.

Message format can be a Java string, or a string with `{}` as a placeholder. The constraint solver replaces each `{}` with arguments specified after the string, in the order they are written.

Example

In this example, if `requiredKW` is greater than 2500, a message is displayed that the specified required kW is larger than the supported options and must be changed.

```
type GeneratorSet {
int requiredKW = [101..10000];
```

```
message(requiredKW > 2500, "The required kW is above what the current options can support.
Please adjust to 2500 kW or select a new generator set that meets your requirements.");
}
```

Preference Rule

The preference rule encourages the constraint solver to satisfy the condition, but doesn't enforce it if the condition can't be met.

The system tries to satisfy the condition in a preference rule, but if for some reason it can't, the system delivers a failure message to the user with `Info` severity.



Note: If a preference rule auto-adds a product that has one or more Product Selling Model Options (PSMOs), set one PSMO on the product to Default. The system uses the default PSMO to determine which pricebook entry to use for the auto-added product. For more information, see [Manage Product Selling Model](#) in Revenue Cloud in Salesforce Help.

The preference rule has this syntax.

```
preference(logic expression, string literal | string variable, argument, ..., argument);
preference(logic expression, string literal | string variable);
preference(logic expression);
```

A preference rule can include an optional explanation message for failure. The message is of `Info` severity, meaning it does not block the user from continuing with the action.

In this example, the preference rule encourages the user to mention the `dbMax` value as 90 and the `requiredKW` value as 500.

```
type GeneratorSet {
    int requiredKW = [101..10000];
    int dbMax = [0..140];
    preference(dbMax == 90, "90 preferred for dbMax");
    preference(requiredKW == 500, "50 preferred for requiredKW");
}
```

Require Rule

The require rule requires certain components to be included in a relationship when specified conditions are met.

Required components can have attributes and quantity specified. The require rule can include an optional explanation message, for the rule failure explanation.

In certain scenarios, you can independently add a type at the header level. This means you can include a specific type even if it isn't explicitly defined as part of any of the relationships you've configured. This capability offers flexibility in managing and including necessary types that might not always fall under a specific relationship structure.



Note: If a require rule auto-adds a product that has one or more Product Selling Model Options (PSMOs), set one PSMO on the product to Default. The system uses the default PSMO to determine which pricebook entry to use for the auto-added product. For more information, see [Manage Product Selling Model](#) in Revenue Cloud in Salesforce Help.

The require rule has this syntax:

```
require(logic expression, relationship[type]{var=value,...,var=value}==integer value,
"Explanation message");
```

In this example, the require rule specifies that if the number of engineers is more than 0, installation is required. The installation will be automatically added upon adding an engineer.

```
type GeneratorSet {
    relation engineers : engineer[0..99];
    relation installation : install[0..5];
    require(engineers[engineer] > 0, installation[install], "Installation is required if
engineers are present");
}
type engineer{}
type install{}
```

Require Rule vs Constraint

In Constraint Modeling Language (CML), `constraint()` and `require()` can both enforce behavior, but they operate differently: `constraint` focuses on logical consistency, `require` focuses on physical presence of products.

Here's a comparison between `constraint()` and `require()`.

Feature	<code>constraint()</code>	<code>require()</code>
Primary goal	Validates if a condition is met (LHS) and operates on the result (RHS).	Forces a product to be present.
Engine action	Resolves the constraint or displays an error if there are no options to resolve.	Adds the required product to the quote.

Setdefault Rule

The setdefault rule allows component selection with attribute values and quantity, similar to the require rule.

Unlike the require rule, the setdefault rule applies a default configuration status and uses a triggering mechanism to control when the solver attempts to satisfy the rule. The setdefault rule can include an optional explanation message.

The setdefault has this syntax, similar to the require rule.

```
setdefault(condition, expression, message);
```

The setdefault rule evaluates the condition.

- If the condition was never true or is false on initial evaluation, the solver doesn't attempt to satisfy the expression and doesn't show a message, regardless of whether any part of the condition is changed
- If the condition was previously true and changes to false, the solver reverts any configuration state changes, such as product selections or quantity adjustments, that were applied when the condition was true. The configuration returns to the state it would be in without the setdefault rule.
- If the condition is true, the solver performs one of these actions.
 - If any part of the condition is changed or the parent component is new, the solver attempts to satisfy the expression. If the solver can't satisfy the expression, an explanation message is shown (if included).
 - If no part of the condition is changed, the solver evaluates the expression without attempting to satisfy it. If the expression evaluates to false, an explanation message is shown (if included).

The key difference between the `setdefault` rule and the `require` rule is that the `setdefault` rule attempts to satisfy the expression only when a condition is changed. If no condition is changed, the `setdefault` rule performs a passive evaluation. The `require` rule always attempts to satisfy the expression when the condition is true.

In this scenario, we use the `requiredKW` attribute (the user's power requirement) as the condition and the `Accessories` relation as the target for the recommended cardinality.

```
type Accessory;
type GeneratorSet {
  int requiredKW = [101..10000];
  relation Accessories : Accessory[1..99];
  /**
   * @Title High Power Accessory Recommendation
   * The setdefault constraint specifies that 2 accessory units are
   * recommended when the required power capacity is greater than 2000 kW.
   */
  setdefault(
    requiredKW > 2000,
    Accessories[Accessory] == 2,
    "2 specialized accessory kits are recommended for power levels above 2000 kW"
  );
}
```

Exclude Rule

The `exclude` rule automatically removes a specific type in a relationship if a certain condition is true.

The `exclude` rule has this syntax.

```
exclude(logic expression, relationship[type], "Explanation message");
```

The type must be leaf type, a node without children.

In the `exclude` rule, if a user sets attribute values in Product Catalog Management (PCM) that violate the rule requirements, the constraint engine overrides the user input in order to validate the constraint. This behavior is different than other constraints, in which the constraint engine doesn't override user input, but displays an error if user input violates the constraint. See [How User Input Order Affects Constraint Engine Behavior](#) section in [Logical Constraints](#) on page 1049.

In this example, the `exclude` rule automatically removes the `Heater_120` heater from the type `GeneratorSet` if the `Voltage3` is greater than or equal to 4160.

```
type GeneratorSet {
  int Voltage3 = [120..13800];
  relation Heaters : Heater_120 [1..3];
  exclude(Voltage3 >= 4160, Heaters[Heater_120]);
}
type Heater_120 {}
```

Exclude a Child Product Based on Another Child Product's Attribute

When a bundle contains multiple child products, you can exclude one child product based on an attribute value set on a sibling child product. To evaluate a child product's attributes from the parent scope, use the `count()` aggregate function on the parent's relation. The `count()` function inspects instances within a relation and counts those that match a given condition. When the count is greater than zero, at least one child instance satisfies the condition, and the `exclude` rule acts on that result.

Use this pattern.

```
exclude(<relation>.count(<ChildType>.<attribute> == <value>) > 0,
<otherRelation>[<OtherChildType>], "Explanation message");
```

In this example, the `GeneratorSet` bundle contains both `Heater` and `StandardCooler` child products. If any `Heater` in the configuration has an `outputClass` of `High-Output`, the `StandardCooler` is automatically excluded because high-output heaters require an industrial-grade cooler.

```
type Heater {
  string outputClass = ["Standard-Output", "High-Output"];
}
type StandardCooler {}
type GeneratorSet {
  relation Heaters : Heater[0..10];
  relation Coolers : StandardCooler[0..5];
  exclude(Heaters.count(Heater.outputClass == "High-Output") > 0, Coolers[StandardCooler],
    "High-output heaters require an industrial cooler, not a standard cooler.");
}
```

Action Rule

The CML Action Rule is defined using the `rule()` keyword. Its primary purpose is to execute a designated action, specified as a string literal, when a condition is met.

This action is typically handled by external systems, such as the Product Configurator API or custom code, to manage business processes, workflows, or complex constraints that fall outside the constraint engine's primary scope.

Action rules have this syntax.

```
rule(condition, action, arg, ..., arg)
rule(<condition>, <action>, "attribute", <attribute>);
rule(<condition>, <action>, "attribute", <attribute>, "value", [<attribute values>]);
rule(<condition>, <action>, "relation", <relation>, "type", <type>);
```

`condition` is any logic expression such as a constraint in CML.

`action` is a string literal that specifies an action that can be interpreted by the Product Configurator API. The Product Configurator API supports these actions.

- Hide: hide attribute, attribute value, product option
- Disable: disable attribute, attribute value, product option
- args are a list of arguments needed to execute the action. An argument is a pair including a string literal and an identifier, a literal, or a domain, enclosed in brackets `[]` to specify multiple values. The string literal specifies what kind of argument follows. The identifier attribute can be defined in the type. The engine retrieves the argument value and passes it to the caller to execute the action.

Hide or Disable Rule

The Hide or Disable Rule uses the `rule()` keyword to conditionally remove an element from the selection menu (hide) or preserve it in the menu while preventing user selection (disable).

This functionality can be applied.

- On a bundle, hide a component to remove it from the selection menu, or disable a component to preserve it in the menu but prevent users from selecting options for it.

- On an individual product, hide an attribute to remove it from the selection menu, or disable an attribute to preserve it in the menu but prevent users from selecting options for it.
- On an attribute, hide or disable an attribute value to preserve it in the menu but prevent users from selecting options for it. For attribute values, the hide and disable rules have the same behavior.

 **Note:** In Visual Builder in Salesforce, for attribute values, only the hide rule is enabled. When you apply the hide rule to an attribute value in Visual Builder, the value appears in the menu but selections are disabled.

The hide and disable rules use this syntax, where `action` is replaced by either `hide` or `disable`.

```
rule(logic expression, action, actionScope, actionTarget)
rule(logic expression, action, actionScope, actionTarget, actionClassification,
actionValueTarget)
```

Example: Hiding and Disabling Features

In the example in this section, rules rely on specific variables to define the scope and target of the action.

Variable in Rule	Purpose	Example from Generator Set	Description
<code>logic expression</code> (Declaration)	Condition upon which the rule occurs.	<code>requiredKW <= 500</code>	The logical test that triggers the action.
<code>action</code>	Designates whether the rule is hide or disable.	<code>"hide", "disable"</code>	Determines if the element is removed from view or made unselectable.
<code>actionScope</code>	Designates whether the rule acts on an attribute or relation scope.	<code>"attribute", "relation"</code>	Specifies if the target is a variable property or a component relationship.
<code>actionTarget</code>	Designates the specific variable or relation that the rule acts on.	<code>"Voltage", "StarterMotors"</code>	The Constraint Modeling Language (CML) name of the attribute or relation.
<code>actionClassification</code>	Designates whether the rule acts on a type or a value.	<code>"type", "value"</code>	Used when targeting components within a relation (type) or specific options within an attribute domain (value).
<code>actionValueTarget</code>	Designates the specific type or value that the rule acts on.	<code>"7976/13800", "StarterMotor_Advanced"</code>	The specific string value or type name to hide or disable.

```
// --- Component Definitions (For relations referenced below) ---
type LineItem;
type EngineModel : LineItem;
type StarterMotor : LineItem;
type OutputTerminal : LineItem;
type OutputTerminals2HoleLugNEMA : OutputTerminal; // Specific terminal type
type GeneratorSet : LineItem {
// Attributes subject to hide/disable rules
int requiredKW = [101..10000];
```

```

string Voltage = ["220/380", "240/416", "4160/7200", "7976/13800"]; // Voltage is the
attribute being hidden/disabled
string specialApplication = ["None - Standard", "Motor Starting"]; // specialApplication
attribute contains a value to hide
// Relations subject to hide/disable rules
relation StarterMotors : StarterMotor; // Relation target (component) to hide/disable
relation OutputTerminals : OutputTerminal[0..99]; // Relation being acted upon
// 1. Disable a Component (Type) in a Relation
// If requiredKW is too low (<= 500 kW), the advanced starter motor component is disabled
(visible but unselectable).
rule(
requiredKW <= 500,
"disable",
"relation",
"StarterMotors",
"type",
"StarterMotor_Advanced"      );
// 2. Hide an Attribute
// If the Generator is configured for a special purpose (Motor Starting), hide the Voltage
attribute entirely.
rule(
specialApplication == "Motor Starting",
"hide",
"attribute",
"Voltage"
);
// 3. Hide a Specific Attribute Value
// If the power requirement is low (< 2000 kW), hide the high voltage option (7976/13800)
from the Voltage attribute domain.
rule(
requiredKW < 2000,
"hide",
"attribute",
"Voltage",
"value",
"7976/13800"
);
// 4. Hide Multiple Attribute Values
// If the power requirement is very low (< 2000 kW), hide both high voltage options
(7976/13800 and 4160/7200) from the Voltage attribute domain.
rule(
requiredKW < 2000,
"hide",
"attribute",
"Voltage",
"value",
["7976/13800", "4160/7200"]
);
// 5. Disable a Component Type (Alternate Syntax using the component name)
// Disable the OutputTerminals2HoleLugNEMA component if the required KW is high.
rule(
requiredKW >= 5000,
"disable",
"relation",

```



```

"OutputTerminals",
"type",
"OutputTerminals2HoleLugNEMA"
);
}
type StarterMotor_Advanced : StarterMotor; // Subtype used in the rule

```

Recommendation Rule

The `recommend` keyword is used within a Constraint Modeling Language (CML) rule to display suggestions for related products in the Product Configurator. The rule defines the condition under which a specific product type or relation should be suggested to the user.

You can recommend a type, a relation, or both in the same rule. The recommendation rule can be added inside a standalone product, a product bundle, or a virtual container.

Unlike action rules that are interpreted directly by the Product Configurator API, when the condition is met, the engine forces a UI change (hiding or disabling a product option, attribute, or value). Recommendations are not automatically applied to the UI by the configuration engine alone. To suggest types or relations (products/bundles), typically for up-selling or cross-selling based on their current selections at runtime, use the [Run Config Rules Action](#) within a Salesforce Flow. See [Run Config Rules Action](#) in the Revenue Cloud Developer Guide.

- Use an action rule when a selection makes another option invalid or irrelevant. For example, if a user selects a basic warranty, you should "hide" or "disable" the premium support options to prevent a conflicting or impossible setup.
- Use a recommendation rule when you want to nudge the user toward a beneficial add-on. For example, if a user buys a high-end generator, you "recommend" a maintenance service contract. This does not block the user if they choose not to add it.

Here are 3 examples demonstrating how to implement product recommendation rules.

Example 1: Recommending a Type (Based on Attribute Selection)

This rule is placed within the `GeneratorSet` type. If a user selects an extremely high voltage, the configuration engine recommends a specialized engineer component required for installation or commissioning.

```

type GeneratorSet {
// Attribute input
string Voltage = ["277/480", "7976/13800"];
// Relation to the component type being recommended
relation engineers : engineer[0..99];
// Recommend Engineer Specialist (type) for High Voltage
rule(
Voltage == "7976/13800", "recommend", "type", "EngineerSpecialist"
);
}
// Recommended type
type EngineerSpecialist ;
type engineer;

```

Example 2: Recommending a Relation (Based on Component Quantity)

This rule recommends adding items to an existing relation (`Accessories`) if the user selects a high-end component (such as the most robust enclosure, `Enclosure_SA3`).

```

type GeneratorSet {
// Relations defined in the GeneratorSet
relation Enclosures : Enclosure;

```

```

relation Accessories : Accessory[1..99]; // The relation being recommended
// Recommend Accessories when maximum sound dB is chosen
rule(
  Enclosures[Enclosure_SA3] == 1,
  "recommend",
  "relation",
  "Accessories");
}
type Enclosure ;
type Enclosure_SA3 : Enclosure;
type Accessory ;

```

Example 3: Recommending a Type (From a Virtual/System Container)

This rule is applied at the Quote or System level (using a `virtual` type) and recommends a system integration product if multiple generators are being configured, reflecting the requirement that large projects often need central control components.

```

@(virtual = true)
type Quote {
  // Relation referencing all GeneratorSet instances on the quote
  @(sourceContextNode = "SalesTransaction.SalesTransactionItem")
  relation lineItems : GeneratorSet[0..10];
  // Recommend Switchgear for multi-unit orders
  rule(
    lineItems[GeneratorSet] > 1,
    "recommend",
    "type",
    "Switchgear"
  );
}
type GeneratorSet;
type Switchgear;

```

Set Product Selling Model in a Constraint

Use the `productSellingModel` tagname to write a constraint that sets the Product Selling Model (PSM) for a type. You can define a PSM as one time, time-deferred (subscription with end date), or evergreen (recurring subscription with no preset end date). The PSM is updated for new line items at runtime, based on the constraint.

You can't use a Constraint Modeling Language (CML) constraint to update the PSM for an existing quote line. For more information on product selling models, see [Manage Product Selling Model](#) in Revenue Cloud in Salesforce Help.

Constraint Example

Using the `GeneratorSet` model, a constraint can be defined that sets the PSM based on a specific operational attribute chosen by the user, such as the `DutyRating`. This assumes that different duty ratings correspond to different billing models (for example, permanent installation versus temporary rental).

This example sets the PSM to a specific ID (for example, `PSM_EVERGREEN_ID`) if the user selects the "Continuous Power (COP)" duty rating.

```

//Global variable PSM ID
define PSM_EVERGREEN_ID "a00Tx000000Qz1g"
type GeneratorSet {

```

```
// Use the productSellingModel tag from the context definition
@(tagName = "ProductSellingModel")
string productSellingModel;
string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby
Power (ESP)"];
// Set PSM based on Duty Rating
constraint(
DutyRating == 'Continuous Power (COP)' ->    productSellingModel == PSM_EVERGREEN_ID
);
}
```

Core Concept Examples

These examples illustrate core Constraint Modeling Language (CML) concepts including type, relationships, constraints, and so on.

For an explanation of the constraint model structure in these examples, see [Model Structure](#) on page 1146.

Example 1: Use Regex Global Variable

```
// Global Constant: Regex used to parse voltage strings
define VOLTAGE_REGEX "^[11-19]+/[11-19]+$"

type LineItem;
type GeneratorSet : LineItem {
    // Core attributes
    @(configurable = false)
    int requiredKW = [101..10000]; // Required power capacity
    string Voltage = ["220/380", "240/416", "277/480", "7976/13800"];
    string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];

    // Calculated attributes
    // Surge load is 1.25 times the required KW
    decimal(2) surgeLoadKW = requiredKW * 1.25;
    // Voltage3 extracts the secondary voltage (e.g., 380 or 416) for checks
    int Voltage3 = strtoint(regexpreplace(Voltage, VOLTAGE_REGEX, "$2"), 0);

    // Relation to model components
    relation GeneralModels : GeneralModel[11];

    // Constraint 1: Ensure model capacity meets the required KW
    constraint(GeneralModels[GeneralModel].powerKW >= requiredKW,
        "Selected Generator Model is insufficient for the required power.");

    // Constraint 2: UL 2200 standard restricts voltage to 600V or less (Implication rule)
    constraint(standardsAndCompliance == "Listing-UL 2200" -> Voltage3 <= 600,
        "The UL 2200 standard covers stationary engine generator assemblies rated at 600
volts or less.");
}

// Component type definition (GeneralModel is a product component)
type GeneralModel : LineItem {
    int powerKW = [900, 1200, 1500, 1750, 2500];
}
```

```
int dB = [20..23];
}
```

Key Technical Details

- The `GeneratorSet` type is related to the `GeneralModel` type through a single relation.

Parent Type	Relation Name	Child Type	Cardinality	Key Attribute Usage
<code>GeneratorSet</code>	<code>GeneralModels</code>	<code>GeneralModel</code>	Not Applicable	Constrained by <code>requiredKW</code> on the parent type.

- Parent Type (`GeneratorSet`):** Defined as a `LineItem` component, the `GeneratorSet` holds configuration parameters such as the user's power requirement (`requiredKW`), the specified voltage (`Voltage`), and compliance standards (`standardsAndCompliance`). It also includes calculated attributes like `surgeLoadKW` and `Voltage3`.
- Child Type (`GeneralModel`):** Defined as a `LineItem` component, the `GeneralModel` specifies the technical attributes of the selected generator configuration, including its power output (`powerKW`) and noise rating (`dB`).
- Cardinality:** The relation `GeneralModels : GeneralModel` specifies the quantity bounds for the component, indicating that exactly 11 instances of the `GeneralModel` type must be included in this configuration.

Example 2: Use Groupby Annotation to Create Virtual Group

Using `Groupby` annotation for types, this model creates a virtual `VoltageGroup` for every unique voltage (for example, "220/380", "480/277") found in the transaction.

```
// 1. The physical product type
type GeneratorSet {
    @(configurable = false)
    int requiredKW = [101..10000];

    string Voltage = ["220/380", "240/416", "255/440", "277/480"];

    // Calculation with explicit domain for best practice
    decimal(2) surgeLoadKW = [126.25..12500.00];
    constraint(surgeLoadKW == requiredKW * 1.25);
}

// 2. The virtual container grouped by the "Voltage" attribute
@(split=true, virtual=true, groupBy=Voltage)
type VoltageGroup {
    string Voltage; // The attribute used for grouping
    decimal(2) groupTotalSurgeKW = [0.00..99999.99];

    // Map instances to this group from the transaction line items
    @(sourceContextNode="SalesTransaction.SalesTransactionItem")
    relation generators : GeneratorSet[0..50];

    // Aggregation: Sum only the surge load of generators in THIS voltage group
    constraint(groupTotalSurgeKW == generators.sum(surgeLoadKW));
}
```

```

    // Business Rule: Limit total surge load per voltage branch
    message(groupTotalSurgeKW > 10000, "Warning: Surge load for Voltage {} exceeds branch
capacity!", Voltage);
}

// 3. The top-level system managing the groups
@(virtual = true)
type GeneratorSystem {
    relation generators : GeneratorSet[0..100];
    relation voltageGroups : VoltageGroup[1..10];

    decimal(2) systemTotalKW = voltageGroups.sum(groupTotalSurgeKW);
}

```

Key Technical Details

- **groupBy=Voltage:** The engine scans all `GeneratorSet` instances and creates one virtual `VoltageGroup` for each unique voltage value detected (for example, one group for all "220/380" units, another for all "277/480" units).
- **sourceContextNode:** This tells the virtual group to pull its "children" (the generators) from the specific path in the Salesforce context where quote line items are stored.
- **Bottom-Up Aggregation:** Each `VoltageGroup` independently calculates its `groupTotalSurgeKW` based strictly on the generators assigned to it by the `groupBy` logic.
- **Explicit Domains:** Following best practices, the `surgeLoadKW` and `groupTotalSurgeKW` use explicit domains (for example, [0.00..99999.99]) to prevent "NullPointer" or initialization errors during solving.

Example 3: Use Sharingcount Annotation to Reuse Accessory Instances

In this example, we apply `sharingcount` annotation to the `Accessory` type to allow the engine to reuse accessory instances across the configuration up to a specified limit.

```

// 1. Define the component type with split and sharingCount
// split=true enables parallel solving by splitting quantity into multiple instances
// sharingCount=5 allows a single Accessory instance to be reused 5 times in the model
@(split = true, sharingCount = 5)
type Accessory {
    string category;
    decimal(2) weight;
}

type GeneratorSet {
    @(configurable = false)
    int requiredKW = [101..10000];

    // 2. Define the relationship with the sharing annotation
    // @(sharing = true) allows the engine to satisfy this relation by
    // "pointing" to existing instances instead of creating new ones
    @(sharing = true)
    relation Accessories : Accessory[1..99];
}

```

Key Technical Details

- **Parallel Solving:** By setting `split = true`, the engine can process the 99 possible accessories in parallel rather than sequentially, which is critical for large-scale generator configurations.
- **Resource Management:** The `sharingCount = 5` tells the solver that it doesn't need to instantiate 99 unique `Accessory` objects; it can reuse the same object definition up to five times across different parts of the configuration graph.
- **Relationship Requirement:** For `sharingCount` to take effect, the `Relation` (the port) must also be annotated with `@(sharing = true)` to grant the engine permission to reuse instances.

Example 4: Use `contextPath` and `tagName` Annotations

```
// 1. GLOBAL EXTERN DECLARATIONS
// Unifying contextPath (header field) and tagName (context identifier)
@(contextPath = "SalesTransaction.ShippingCountry", tagName = "Region_Identifier")
extern string ShippingCountry = "International";

@(contextPath = "SalesTransaction.ProjectUrgency", tagName = "Priority_Level")
extern string ProjectUrgency = "Standard";

// 2. PHYSICAL PRODUCT TYPE
type GeneratorSet {
    // Core technical attributes
    @(configurable = false)
    int requiredKW = [101..10000];

    string DutyRating = ["Prime Power (PRP)", "Emergency Standby Power (ESP)"];

    // Technical calculation with explicit domain (Best Practice)
    decimal(2) surgeLoadKW = [126.25..12500.00];
    constraint(surgeLoadKW == requiredKW * 1.25);

    // 3. LOGIC INTEGRATING EXTERNAL DATA
    // Using contextPath/tagName data to drive technical warnings
    message(ShippingCountry == "US",
        "Regional Notice: Generator must comply with US-specific UL 2200 standards.");

    message(ProjectUrgency == "Critical" && requiredKW > 5000,
        "High Priority Alert: Large scale power requirement in a Critical project
        requires site inspection.",
        requiredKW, "Warning");
}
```

Key Technical Details

- **External Variable (`extern`):** These are declared outside of any type to hold values supplied by the environment (Salesforce).
- **`contextPath` Annotation:** This maps the variable directly to a header-level field in the Sales Transaction.
- **`tagName` Annotation:** This links the variable to a specific Context Tag identifier within the Salesforce Context Definition.



Note: Rules depending on these external variables (such as the `ShippingCountry` message) only re-evaluate when a Line Item change occurs (For example, updating `requiredKW`), not solely when the header field changes.

Example 5: Use Format Specifiers (%s, %d) and Dates in Constraints

In this example, we define a generator configuration that validates the required power (`requiredKW`) against the duty rating and voltage, providing specific feedback when a mismatch occurs.

```
type GeneratorSet {
    // 1. Core Technical Attributes with explicit domains
    @(configurable = true)
    int requiredKW = [101..10000];

    string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)",
                        "Data Center Continuous (DCC)", "Emergency Standby Power (ESP)"];

    string Voltage = ["220/380", "277/480", "347/600", "2400/4160"];

    string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];

    // Date Attribute Definition
    // Date variables represent a specific day.
    // You can define a fixed domain for a date as a range between two dates.
    date requestedDeliveryDate = ["2024-01-01".."2025-12-31"];

    // Message Rule with Multiple Arguments using placeholders
    message(requiredKW > 5000 && DutyRating == "Emergency Standby Power (ESP)",
            "High Capacity Alert: The %s rating for %d kW requires an additional cooling
            system.",
            DutyRating, requiredKW, "Warning");

    // Constraint with Multiple Arguments using placeholders
    constraint(Voltage == "2400/4160" && standardsAndCompliance == "Listing-UL 2200",
            "Configuration Error: Voltage %s cannot be used with %s standards due to
            safety limits.",
            Voltage, standardsAndCompliance);

    // Dates can be used in logical expressions with comparison operators like < or >=.
    message(requestedDeliveryDate < "2024-09-01" && requiredKW > 7000,
            "Schedule Warning: Delivery for %d kW units on %s may require expedited
            manufacturing.",
            requiredKW, requestedDeliveryDate, "Info");
}
```

Key Technical Details

- **Multiple Arguments:** You can pass several variables after the string literal. The engine maps them to the placeholders in the exact order they appear.
- **Format Specifiers**
- `%s` is used for string variables (for example, `DutyRating` or `Voltage`).
- `%d` is used for integer variables (for example, `requiredKW`).
- **Placeholder Usage:** Alternatively, you can use the `{}` syntax, which the constraint engine automatically replaces with the actual argument values during runtime evaluation.

- Comparison Logic with Dates: You can treat dates as comparable values in `constraint` or `message` rules to enforce scheduling logic (for example, ensuring a delivery date is not too early for a complex build).

Example 6: Use Arithmetic Calculations and Functions

This example demonstrates using aggregate functions (a virtual type for transaction-level aggregation) and mathematical functions within the `GeneratorSet` type for precise quantity calculation.

```
// --- Component Definition ---
type GeneratorSet {
    int requiredKW = [101..10000];
    int quantity = [1..10];
    // BEST PRACTICE: Define derived attributes with an explicit domain
    decimal(2) surgeLoadKW = [0.00..12500.00];
    // BEST PRACTICE: Put calculations inside of constraints
    constraint(surgeLoadKW == requiredKW * 1.25);
}

// --- Accessory Definition ---
type Accessory {
    int weight_kg = [1..100];
}

// --- Virtual System Type (Aggregation Context) ---
@(virtual = true)
type System {
    @(sourceContextNode = "SalesTransaction.SalesTransactionItem")
    relation generators : GeneratorSet[0..10];
    relation shipmentbatch : ShipmentBatch [0..10];
    // BEST PRACTICE: Attributes must have explicit domains
    decimal(2) totalQuotedLoad = [0.00..125000.00];
    int highPowerCount = [0..10];
    // Aggregate calculations in separate constraints
    constraint(totalQuotedLoad == generators.sum(surgeLoadKW));
    // VARIATION: Condition-based count
    // count() requires a logical expression
    constraint(highPowerCount == generators.count(requiredKW > 5000));
    // Ensuring Shipment batch crates are similar to the number of generators
    message(
        shipmentbatch.requiredCrates != generators[GeneratorSet],
        "The Shipment items ({} ) must match the number of Generators ({} )",
        shipmentbatch.requiredCrates, generators[GeneratorSet],
        "Error"
    );
}

type ShipmentBatch {
    int totalItems = [1..100];
    int itemsPerCrate = 10;
    // BEST PRACTICE: Define derived attributes for the relation in the parent type
    int totalWeight = [0..1000];
    int accessoryCount = [0..10];
    // Aggregates within the relation block
    relation accessories : Accessory[0..10] {
        accessoryWeight = sum(weight_kg);
        accessoryCount = count(weight_kg > 0);
    }
}
```



```
// Mapping relation attributes to parent variables via constraints
constraint(totalWeight == accessories.accessoryWeight);
constraint(accessoryCount == accessories.accessoryCount);
int requiredCrates = [0..100];
// Mathematical Function Example: CEIL
constraint calculateCeil(requiredCrates == ceil(totalItems / itemsPerCrate));
}
```

Key Considerations for Calculations and Aggregations

When implementing these functions in CML, follow these architectural best practices for robustness and performance.

- Explicit domains are required: All the derived attributes that result from a calculation or aggregation must have an explicit variable domain definition. This practice ensures accurate aggregation and helps prevent runtime errors.
- Separate calculation from declaration: Define the aggregation or calculation in a separate constraint rather than using an inline derived attribute declaration (for example, `int total = items.sumPrice;`). This separation helps avoid issues where domains may not initialize correctly.
- Correct Pattern: Define the relation aggregate (`totalQty = sum(quantity);`) and then enforce the result via a constraint (`constraint(totalItemCount == items.totalQty);`).

Example 7: Use Asset-Based Constraints Across Transaction and Installed Base

This example shows how to enforce quantity rules that span both in-flight items on the current sales transaction and products the customer already owns (the installed base). The `sourceContextNode="Asset"` annotation on a relation pulls existing asset records into the model as read-only data, so that a `require()` rule can combine those asset quantities with in-transaction quantities to drive configuration logic.

```
// 1. Top-level virtual type that organizes generator sets by fuel type
@(virtual=true)
type ServiceOrder {
    relation groups : GeneratorGroup;
}

// 2. Virtual group type: the engine creates one GeneratorGroup instance
// for each unique FuelType value found in the sales transaction
@(virtual=true, groupby=FuelType)
type GeneratorGroup {

    // In-flight generator sets on the current sales transaction
    @(sourceContextNode="SalesTransaction.SalesTransactionItem")
    relation generators : GeneratorSet;
    constraint(generators[GeneratorSet] < 10, "Generator qty should be less than 10");
    constraint(generators[GeneratorSet].Discount > 10 && generators[GeneratorSet].Discount
    < 20,
        "Discount should be between 10 and 20");

    // In-flight heaters on the current sales transaction
    @(sourceContextNode="SalesTransaction.SalesTransactionItem")
    relation heaters : Heater;

    // Existing heaters retrieved from the customer's installed base (Assets)
    // closerelation=true prevents the engine from adding new records to this relation
}
```

```

@ (sourceContextNode="Asset", closerelation=true)
relation heaterAssets : Heater;

// Asset-based require rule: when combined in-flight and installed heater
// quantity exceeds 10, exactly 100 generator sets are required
require (heaters[Heater] + heaterAssets[Heater] > 10, generators[GeneratorSet] == 100);
}

// 3. Physical product types
type GeneratorSet {
    string FuelType = ["Natural Gas", "Diesel", "Propane"];
    decimal Discount = [0..100];
}

type Heater {
    boolean AutoIgnition;
}

```

Key Technical Details

- `sourceContextNode="SalesTransaction.SalesTransactionItem"`: Binds the relation to line items on the current quote or order. The engine reads and writes these instances during configuration.
- `sourceContextNode="Asset"`: Binds the relation to asset records that represent products the customer already owns from prior transactions. These records exist outside the current transaction and are treated as read-only context data.
- `closerelation=true`: Required on asset-sourced relations to prevent the engine from attempting to add new instances to the installed base. Without this annotation, the engine may try to create asset records to satisfy cardinality or require rules.
- Asset-based `require()`: The rule `require (heaters[Heater] + heaterAssets[Heater] > 10, generators[GeneratorSet] == 100)` combines cardinality from two separate relations — one sourced from the transaction and one from the installed base — in a single logical expression. This lets the model enforce quantity thresholds that account for what the customer is buying now and what they already have.
- Virtual grouping: The `groupby=FuelType` annotation on `GeneratorGroup` ensures that the asset-based constraint is evaluated independently per fuel type, so heaters and generator sets of different fuel types do not count toward each other's totals.

Example 8: Use Asset Scope to Drive Auto-Add Logic

These examples show how to use the installed base (existing customer assets) as a condition in a `require()` rule to automatically add products to the current quote. The positive asset check triggers an auto-add when the customer already owns a product. The negative asset check enforces a prerequisite product when the customer does not yet own it.

Positive asset check: if the customer already owns at least one `GeneratorSet` in their installed base, the engine automatically adds a `MaintenanceKit` to the current quote.

```

@ (virtual=true)
type ServiceOrder {
    // In-flight generator sets on the current sales transaction
    @ (sourceContextNode="SalesTransaction.SalesTransactionItem")
    relation generators : GeneratorSet;

    // Existing generator sets from the customer's installed base (read-only)
    @ (sourceContextNode="Asset", closerelation=true)
    relation generatorAssets : GeneratorSet;
}

```

```
// In-flight maintenance kits on the current sales transaction
@(sourceContextNode="SalesTransaction.SalesTransactionItem")
relation maintenanceKits : MaintenanceKit;

// Positive asset check: customer already owns a GeneratorSet,
// so automatically require a MaintenanceKit on the quote
require(generatorAssets[GeneratorSet] >= 1, maintenanceKits[MaintenanceKit]);
}

type GeneratorSet;
type MaintenanceKit;
```

Negative asset check: if the customer does not yet own a `GeneratorSet` in their installed base but is adding more than one `MaintenanceKit` to the quote, the engine requires a `GeneratorSet` to also be added to the quote.

```
@(virtual=true)
type ServiceOrder {
  // In-flight generator sets on the current sales transaction
  @(sourceContextNode="SalesTransaction.SalesTransactionItem")
  relation generators : GeneratorSet;

  // Existing generator sets from the customer's installed base (read-only)
  @(sourceContextNode="Asset", closeRelation=true)
  relation generatorAssets : GeneratorSet;

  // In-flight maintenance kits on the current sales transaction
  @(sourceContextNode="SalesTransaction.SalesTransactionItem")
  relation maintenanceKits : MaintenanceKit;

  // Negative asset check: customer does not own a GeneratorSet yet,
  // but is adding more than one MaintenanceKit, so require a GeneratorSet on the quote
  require(generatorAssets[GeneratorSet] < 1 && maintenanceKits[MaintenanceKit] > 1,
generators[GeneratorSet]);
}

type GeneratorSet;
type MaintenanceKit;
```

Key Technical Details

- Positive asset check (`generatorAssets[GeneratorSet] >= 1`): Evaluates to true when the installed base contains at least one matching asset. Use this pattern to trigger upsell or companion-product logic for existing customers.
- Negative asset check (`generatorAssets[GeneratorSet] < 1`): Evaluates to true when the customer has no matching asset. Use this pattern to enforce a prerequisite product for net-new buyers.
- Auto-add result: When the `require()` condition is met, the engine adds the specified product to the relation automatically. Passing only the relation and type without a quantity (`maintenanceKits[MaintenanceKit]`) requires exactly one instance. Append `== N` to require a specific quantity.
- `closeRelation=true` is required on the asset relation to prevent the engine from attempting to write back to the installed base when evaluating the condition.

Example 9: Model Bundle Composition with Type Hierarchies and Mixed Rules

This example demonstrates how to model a multi-relation bundle that uses type inheritance to organize components and enforces compatibility rules using both `require()` and `exclude()` in the same model. `GeneratorBundle` holds three relations of different types and uses `require()` to enforce cross-relation dependencies based on quantity and presence. `ExhaustBundle`, a subtype of `Accessory`, uses `exclude()` to prevent incompatible child component combinations. The type hierarchy (`Heater : Accessory`, `ExhaustFilter : Filter`, `GeneratorSet : PowerUnit`) shows how subtypes participate in relations typed to their parent while carrying their own attributes and rules.

```
@(virtual=true)
type ServiceOrder {
    relation groups : GeneratorGroup;
}
@(virtual=true, groupBy=FuelType)
type GeneratorGroup {
    @(sourceContextNode="SalesTransaction.SalesTransactionItem")
    relation generators : GeneratorSet;
    constraint(generators[GeneratorSet] < 10, "Generator qty should be less than 10");
    constraint(generators[GeneratorSet].Discount > 10 && generators[GeneratorSet].Discount
< 20, "Discount should be between 10 and 20");
    @(sourceContextNode="SalesTransaction.SalesTransactionItem")
    relation heaters : Heater;
    @(sourceContextNode="Asset", closeRelation=true)
    relation heaterAssets : Heater;
    require(heaters[Heater] + heaterAssets[Heater] > 10, generators[GeneratorSet] == 100);
}
type GeneratorBundle {
    relation accessories : Accessory;
    relation controlSystems : ControlSystem;
    relation generators : GeneratorSet;
    require(controlSystems[ControlSystem] > 1, accessories[Heater]);
    require(accessories[Accessory], generators[GeneratorSet]);
}
type Accessory;
type ExhaustBundle : Accessory {
    relation turbines : Turbine;
    relation filters : ExhaustFilter;
    exclude(turbines.Turbine == "Gas", filters[ExhaustFilter]);
}
type Heater : Accessory {
    boolean AutoIgnition;
}
type MaintenanceKit : Accessory;
type Turbine {
    string Turbine = ["Gas", "Steam", "Hydro"];
}
type ExhaustFilter : Filter;
type Filter {
    string FilterGrade = ["Standard", "HEPA"];
}
type GeneratorSet : PowerUnit {
    string FuelType = ["Natural Gas", "Diesel", "Propane"];
    string EngineSpec = ["500kW Continuous", "750kW Continuous", "1000kW Peak"];
    string CoolingSystem = ["Air Cooled", "Water Cooled", "Hybrid Cooled"];
```

```

    string OutputVoltage = ["208V", "480V", "4160V", "13.8kV"];
    string Enclosure = ["Open Frame", "Sound Attenuated", "Weather Protected", "Hazardous
Location"];
    string TransferSwitch = ["Manual Transfer Switch", "Automatic Transfer Switch (ATS)",
"Bypass Isolation ATS"];
    decimal Discount = [0..100];
}

type PowerUnit;
type ControlSystem;

```

Key Technical Details

- Supertype as relation target: The `accessories : Accessory` relation accepts any subtype instance, including `Heater`, `ExhaustBundle`, or `MaintenanceKit`, because all three extend `Accessory`. The engine resolves which subtype is present at runtime. To target a specific subtype in a rule, reference it by name in the cardinality expression, for example `accessories[Heater]`.
- Cross-relation `require()`: `require(controlSystems[ControlSystem] > 1, accessories[Heater])` evaluates a condition on one relation (`controlSystems`) and enforces a requirement on a different relation (`accessories`). The condition and the result do not have to involve the same relation or type.
- Supertype cardinality in `require()`: `require(accessories[Accessory], generators[GeneratorSet])` uses the supertype `Accessory` in the condition to check whether any accessory of any subtype is present. This is broader than checking for a specific subtype and fires regardless of which `Accessory` subtype the user selects.
- `require()` and `exclude()` in the same model: `GeneratorBundle` uses `require()` to mandate components; `ExhaustBundle` uses `exclude()` to block incompatible combinations. Both rules coexist in the same model without conflict because they apply to different types and relations.
- Multi-level hierarchy: `ExhaustFilter : Filter` and `Heater : Accessory` each inherit from their respective parent types. The `filters : ExhaustFilter` relation in `ExhaustBundle` targets the concrete subtype directly rather than the parent `Filter`, which constrains the relation to only that subtype's instances.

Annotation Examples

Constraint Modeling Language (CML) annotations are labels that you add to parts of a model, such as types, variables, relationships, and constraints. Annotations control how these elements are shown and how they behave in the configurator. Annotations help fine-tune the configurator and the constraint engine without changing the actual structure of the model.

The examples explain what each annotation does, where it can be used in the model, what kinds of values it supports, and how it behaves when the configurator runs and evaluates constraints. CML code samples show how the annotation works in practice.

[closeRelation Annotation](#)

`closeRelation` is a CML annotation that controls addition of new line items to the relationship by the engine.

[configurable Annotation](#)

`configurable` is a CML annotation that controls whether a model element can be configured.

[defaultValue Annotation](#)

The `defaultValue` annotation is used on a variable to define the value it should start with when configuration begins.

[domainComputation Annotation](#)

`domainComputation` is a CML annotation that specifies how the domain of a model element is determined, either by using a fixed domain or by computing the domain dynamically during configuration.

[guardrails Annotation](#)

`guardrails` is a CML annotation that prevent the constraint engine from changing specified attributes or relations when it resolves the constraint.

[peelable Annotation](#)

The `peelable` annotation is used to create soft selection values and allow the engine to modify these selections to satisfy a constraint.

[productField Annotation](#)

`productField` is a CML annotation that defines the `Product2` field on a variable. `productField` loads the value from Product Catalog Management (PCM) during constraint model activation.

[propagateUp Annotation](#)

`propagateUp` is a Constraint Modeling Language (CML) annotation that controls aggregation propagation between children and parent elements.

[relatedAttributes Annotation](#)

`relatedAttributes` is a Constraint Modeling Language (CML) annotation that resets the domain to the original one for `domainComputation`.

[sequence Annotation](#)

The `sequence` annotation defines the execution and configuration order of elements in a Constraint Modeling Language (CML) model.

[split Annotation](#)

`split` is a Constraint Modeling Language (CML) annotation that specifies whether the instances of the type should be split or not.

closeRelation Annotation

`closeRelation` is a CML annotation that controls addition of new line items to the relationship by the engine.

Annotation	<code>closeRelation</code>
Applicable to	Relationship
Value Type/Values	true, false
Description	If <code>closeRelation</code> is not specified, the engine sets it implicitly as false for the relationship. If <code>closeRelation</code> is specified as true, the engine prevents the addition of new line items to the relationship. If <code>closeRelation</code> is specified as false, the engine allows the addition of new line items to the relationship.

Example 1

In this example, the `closeRelation` annotation isn't specified for the relationship (`mainalternatorclassification`). The model contains the constraint.

```
type LineItem;
type GeneratorSet : LineItem {
```

```

    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
    relation mainalternatorclassification : MainAlternatorClassification;
    constraint(dutyRating == "Continuous Power (COP)" ->
mainalternatorclassification[Alternator_240] >= 1);
}
type MainAlternatorClassification : LineItem;
type Alternator_220 : MainAlternatorClassification;
type Alternator_440 : MainAlternatorClassification;
type Alternator_240 : MainAlternatorClassification;

```

Example 2

In this example, the `closeRelation` annotation is defined as `false` for the relationship (`mainalternatorclassification`). The model contains the constraint.

```

type LineItem;
type GeneratorSet : LineItem {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
    @(closeRelation = false)
    relation mainalternatorclassification : MainAlternatorClassification;
    constraint(dutyRating == "Continuous Power (COP)" ->
mainalternatorclassification[Alternator_240] >= 1);
}
type MainAlternatorClassification : LineItem;
type Alternator_220 : MainAlternatorClassification;
type Alternator_440 : MainAlternatorClassification;
type Alternator_240 : MainAlternatorClassification;

```

Example Description and Configurator Result

In example 1, the `mainalternatorclassification` relation is not specified with the `closeRelation` annotation, but the system considers it as `false` by default. In example 2, the relation is explicitly defined with `false`. As a result, if the user updates the `dutyRating` variable to "Continuous Power (COP)", the system adds the `Alternator_240` product according to annotation and constraint logic and allows addition of other products from the `mainalternatorclassification` relation (`Alternator_220`, `Alternator_440`). The system does not allow to unselect the `Alternator_240` product specified in the constraint while the "Continuous Power (COP)" is selected. If the user updates the `dutyRating` variable to another value (For example, Emergency Standby Power (ESP)), the engine removes the `Alternator_240` product, but the user can add/select/unselect all products from the relationship manually.

Example 3

In this example, the `closeRelation` annotation is specified as `true` for the relationship (`mainalternatorclassification`). The model contains the constraint

```

type LineItem;
type GeneratorSet : LineItem {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous

```

```

    Power (COP)", "Data Center Continuous (DCC)"];
    @(closeRelation = true)
    relation mainalternatorclassification : MainAlternatorClassification;
    constraint(dutyRating == "Continuous Power (COP)" ->
mainalternatorclassification[Alternator_240] >= 1);
}
type MainAlternatorClassification : LineItem;
type Alternator_220 : MainAlternatorClassification;
type Alternator_440 : MainAlternatorClassification;
type Alternator_240 : MainAlternatorClassification;

```

In example 3, the `mainalternatorclassification` relation is specified with the `closeRelation` annotation as `true`. As a result, if a user updates the `dutyRating` variable to "Continuous Power (COP)", the engine resets it back to "Emergency Standby Power (ESP)" to prevent adding the `Alternator_240` product according to the annotation. The user can add all `mainalternatorclassification` products manually (including the `Alternator_240` product specified in the constraint).

Table 8: closeRelation Configuration Settings

Associated Example	Product Group Structure	Applicable to	"closeRelation" annotation	User Action	Engine Action	UI Behavior
N/A	Individual product	Relationship	not specified	Change variable value specified in constraint condition	Add the product according to the constraint. Allow addition of other products to the relationship	Display product specified in constraint as pre-selected: if a User unselects it, the product returns back to selected state. User can select other products from the relationship.
N/A	Individual product	Relationship	TRUE	Change variable value specified in constraint condition	Reset the variable value back to the default value to avoid addition the relation product specified in the constraint	Products from the relation are not added or selected (including the product specified in constraint). User can manually select any products from the relationship
N/A	Individual product	Relationship	FALSE	Change variable value specified in constraint condition	Add the product according to the constraint. Allow addition of other	Display product specified in constraint as pre-selected: if a User unselects it,

Associated Example	Product Group Structure	Applicable to	"closeRelation" annotation	User Action	Engine Action	UI Behavior
					products to the relationship	the product returns back to selected state. User can select other products from the relationship.
Example 1	Product Classification	Relationship	not specified	Change variable value specified in constraint condition	Add the product according to the constraint. Allow addition of other products to the relationship from browse products pop up	Display product specified in constraint as pre-selected: if a User unselects it, the product returns back to selected state. User can add other products from the relationship in browse products pop up.
Example 2	Product Classification	Relationship	FALSE	Change variable value specified in constraint condition	Add the product according to the constraint. Allow addition of other products to the relationship from browse products pop up	Display product specified in constraint as pre-selected: if a User unselects it, the product returns back to selected state. User can add other products from the relationship in browse products pop up.
Example 3	Product Classification	Relationship	TRUE	Change variable value specified in constraint condition	Reset the variable value back to the default value to avoid addition the relation product specified in the constraint	Products from the relation are not added or selected (including the product specified in constraint). User can manually browse and add any

Associated Example	Product Group Structure	Applicable to	"closeRelation" annotation	User Action	Engine Action	UI Behavior
						products from the relationship

configurable Annotation

`configurable` is a CML annotation that controls whether a model element can be configured.

`configurable` annotation specification: Variable

Annotation	<code>configurable</code>
Applicable to	Variable
Value Type/Values	true, false
Description	If the <code>configurable</code> annotation is not explicitly specified, the engine sets it implicitly as true for the variable. If the <code>configurable</code> annotation is explicitly specified as true, the variable is indicated as configurable. The engine sets the value to the variable. If the <code>configurable</code> annotation is explicitly specified as false, the engine doesn't set a value to the variable.

Example 1

In this example, the `configurable` annotation is not specified for the variable (Cable Entry) of the VoltageConnection child products. The `defaultValue` is not defined.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[1..999999];
}
type VoltageConnection {
    string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

In this example, the `configurable` annotation is not explicitly specified for the variable `cableEntry`, but the system considers it as `configurable = true` by default. As a result, the system sets the "Top Entry" (the first value in the ["Top Entry", "Bottom Entry", "Side Entry"] CML domain) as the initial value for the configurable Cable Entry variable.

Example 2

In this example, the `configurable` annotation is specified as `true` for the variable (Cable Entry) of the VoltageConnection child products. The `defaultValue` is not specified.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[1..999999];
}
```

```
type VoltageConnection {
  @(configurable = true)
  string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

In this example, the `configurable` annotation is `true` for the variable. As a result, the system specifies the variable as configurable and sets the "Top Entry" (the first value in the ["Top Entry", "Bottom Entry", "Side Entry"] CML domain) as the initial value for the Cable Entry.

Example 3

In this example, the `configurable` annotation is specified as `false` for the variable (Cable Entry) of the VoltageConnection child products. The `defaultValue` is not specified

```
type GeneratorSet {
  relation voltageConnections : VoltageConnection[1..999999];
}
type VoltageConnection {
  @(configurable = false)
  string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

In this example, the `configurable` annotation is `false` for the variable. As a result, the engine doesn't configure the variable with an initial value, and it is displayed empty on the Product Configuration UI.

Example 4

In this example, the `configurable` is `false` and `defaultValue` annotation is `true` for the variable (Cable Entry) of the VoltageConnection child products.

```
type GeneratorSet {
  relation voltageConnections : VoltageConnection[1..999999];
}
type VoltageConnection {
  @(configurable = true, defaultValue = "Side Entry")
  string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

In this example, the system indicates the variable as `configurable` and sets the "Side Entry" as the initial value for the Cable Entry defined in the `defaultValue` annotation.

Example 5

In this example, the `configurable` and `defaultValue` annotations are specified for the variable (Cable Entry) of the `VoltageConnection` child products.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[1..999999];
}
type VoltageConnection {
    @(configurable = false, defaultValue = "Side Entry")
    string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

In this example, the system sets the "Side Entry" as the initial value for the Cable Entry according to the `defaultValue` annotation.

Table 9: configurable Configuration Settings

Associated Example	Product Group Structure	Applicable to	"CONFIGURABLE" annotation	User Action	Engine Action	UI Behavior
Example 1	Individual product	Variable	not specified	Configure the product containing variable	Set the first value from the variable domain as initial value. If the User changes the variable value manually, reset it back to the first value from the variable domain. If the default value is defined in PCM, reset it back to the first value from the variable domain.	Display defined by engine variable value as the default value
Example 2. Example 4.	Individual product	Variable	TRUE	Configure the product containing variable	Set the first value from the variable domain as initial value. If the User changes the variable value manually, reset it back to the first value from the variable domain. If the default value is defined	Display defined by engine variable value as the default value

Associated Example	Product Group Structure	Applicable to	"CONFIGURABLE" annotation	User Action	Engine Action	UI Behavior
					in PCM, reset it back to the first value from the variable domain. If the <code>defaultValue</code> annotation is specified for the variable, set it as initial value.	
Example 3. Example 5.	Individual product	Variable	FALSE	Configure the product containing variable	Set emptiness for the variable as initial value (If the default value is specified in PCM for the variable, set it as initial value instead of emptiness). If the <code>defaultValue</code> annotation is specified for the variable, set it as initial value (despite of the PCM default value).	Display defined by engine or PCM variable value as the default value

defaultValue Annotation

The `defaultValue` annotation is used on a variable to define the value it should start with when configuration begins.

Annotation	<code>defaultValue</code>
Applicable to	Variable
Value Type/Values	Literal
Description	The configurator uses the default value defined in PCM (Product Attribute Definition). If no PCM default is available, the configurator uses the first value in the variable domain as the initial value. If no default value is defined in PCM and a <code>defaultValue</code> is specified in CML, the configurator uses the value defined in CML as the initial value of the variable. When you create or update an attribute by calling Product Configurator API while a constraint model is active, include <code>AttributeName</code> in the payload and set it to the

Annotation

defaultValue

attribute's developer name. The constraint engine matches that value to the CML variable name. If the payload omits `AttributeName`, the engine applies the default described in this topic instead of the submitted value. See [Constraint Modeling Language \(CML\) Best Practices](#) on page 1130.

Example 1

In this example, neither PCM nor CML defines a default value for the `Cable Entry` variable.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[1..999999];
}
type VoltageConnection {
    string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

The configurator sets `"Top Entry"` as the initial value for `Cable Entry`, because it is the first value in the variable domain `["Top Entry", "Bottom Entry", "Side Entry"]`.

Example 2

In this example, PCM (Product Attribute Definition) defines `"Bottom Entry"` as the default value for `Cable Entry`, and no `defaultValue` annotation is defined for this variable in CML.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[1..999999];
}
// This annotation is added automatically if PCM has a default before the product is added
// to CML. If the product already exists in CML, the annotation is added or updated only
// after running Sync.
@(defaultValue = "Bottom Entry")
type VoltageConnection {
    string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

The configurator sets the `"Bottom Entry"` as the initial value for the `Cable Entry` of the `VoltageConnection` child products.

As a best practice, define the default value in PCM and use the `Sync` function in CML to keep the model aligned whenever PCM settings are updated.

Example 3

In this example, a `defaultValue` annotation with `"Side Entry"` is defined in CML, and no default value is defined in PCM for the `Cable Entry` variable.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[1..999999];
}

type VoltageConnection {
    @(defaultValue = "Side Entry")
    string cableEntry = ["Top Entry", "Bottom Entry", "Side Entry"];
}
```

Example Description and Configurator Result

The configurator sets the `"Side Entry"` annotation value as the initial value for `Cable Entry`.



Note: We recommend that you define default values in PCM (Product Attribute Definition) whenever possible, as this approach promotes consistency across products and simplifies maintenance.

The `defaultValue` annotation in CML should be used only when a default value is not suitable to be defined in PCM due to specific modeling requirements.

When a default value is defined in PCM but the CML model has not been synced, the configurator still applies the PCM default. However, the value displayed in the CML model may become inconsistent with PCM.

To avoid such inconsistencies, it is recommended to run the Sync action in CML after updating default values in PCM, so that the CML model remains aligned with the latest PCM settings.

defaultValue Configuration Settings

Table 10: defaultValue Configuration Settings

Associated Example	Configurable Specified	Configurable Value	defaultValue Specified	Initial Value Behavior	Example UI Result
Example 1	No	default = TRUE	No	Uses the first value in the domain	Automatically set to "Top Entry"
Example 2	Yes	TRUE	No	Uses the first value in the domain	Automatically set to "Bottom Entry"
Example 3	Yes	FALSE	No	No initial value is set	Field remains empty
N/A	Yes	TRUE	Yes	Uses the value defined in defaultValue	Automatically set to "Side Entry"
N/A	Yes	FALSE	Yes	Still uses the value defined in defaultValue	Automatically set to "Side Entry"

domainComputation Annotation

`domainComputation` is a CML annotation that specifies how the domain of a model element is determined, either by using a fixed domain or by computing the domain dynamically during configuration.

`domainComputation` annotation specification: Variable and Relationship

Annotation	<code>domainComputation</code>
Applicable to	Variable and Relationship
Value Type/Values	true, false
Description	If <code>domainComputation</code> annotation is not explicitly specified, the engine sets it implicitly as false for the variable, and true for a relationship. If the <code>domainComputation</code> annotation is specified as true, the variable or relationship domain is dynamically determined based on the configuration and constraint logic. If the <code>domainComputation</code> annotation is specified as false, the variable domain is fixed.

Example 1

In this example, the `domainComputation` annotation is not specified for the variable (voltage) of the `GeneratorSet` type. The model contains the constraints.

```
type GeneratorSet {
  @(defaultValue = "Emergency Standby Power (ESP)")
  string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
  string voltage = ["220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160",
"7200/12470", "7621/13200", "7976/13800"]
  constraint(dutyRating == "Continuous Power (COP)" -> voltage != "220/380");
  constraint(dutyRating == "Data Center Continuous (DCC)" -> voltage == "255/440");
}
```

Example 2

In this example, the `domainComputation` annotation is explicitly specified as false for the variable (voltage) of the `GeneratorSet` type. The model contains the constraints.

```
type GeneratorSet {
  @(defaultValue = "Emergency Standby Power (ESP)")
  string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
  @(domainComputation = false)
  string voltage = ["220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160",
"7200/12470", "7621/13200", "7976/13800"];
  constraint(dutyRating == "Continuous Power (COP)" -> voltage != "220/380");
  constraint(dutyRating == "Data Center Continuous (DCC)" -> voltage == "255/440");
}
```


Example Description and Configurator Result

In example 1, the `domainComputation` annotation is not explicitly specified for the `voltage` variable, but the system considers it as `false` by default. In example 2, the `domainComputation` annotation is explicitly defined as `false`. As a result, the system remains the variable domain unchanged (`"220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160", "7200/12470", "7621/13200", "7976/13800"`) and executes the constraints:

If the `dutyRating` is selected with the `"Continuous Power (COP)"` value, the `voltage` is pre-populated with the next possible value from the variable domain (`"240/416"`) to satisfy the constraint.

If the `dutyRating` is selected with the `"Data Center Continuous (DCC)"` value, the `voltage` is pre-populated with the `"255/440"` value to satisfy the constraint.

Example 3

In this example, the `domainComputation` annotation is explicitly specified as `true` for the variable (`voltage`) of the `GeneratorSet` type. The model contains the constraints.

```
type GeneratorSet {
  @(defaultValue = "Emergency Standby Power (ESP)")
  string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
  @(domainComputation = true)
  string voltage = ["220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160",
"7200/12470", "7621/13200", "7976/13800"];
  constraint(dutyRating == "Continuous Power (COP)" -> voltage != "220/380");
  constraint(dutyRating == "Data Center Continuous (DCC)" -> voltage == "255/440");
}
```

Example Description and Configurator Result

In example 3, the `domainComputation` annotation is explicitly specified as `true` for the `voltage` variable. As a result, the system updates the variable domain based on the constraint logic.

If the `dutyRating` is selected with the `"Continuous Power (COP)"` value, the `voltage` is pre-populated with the next possible value from the variable domain (`"240/416"`) to satisfy the constraint. The variable domain is updated to exclude the `"220/380"` value.

If the `dutyRating` is selected with the `"Data Center Continuous (DCC)"` value, the `voltage` is pre-populated with the `"255/440"` value to satisfy the constraint. The variable domain is updated to contain only the `"255/440"` value.

Example 4

In this example, the `domainComputation` annotation is not specified for the relationship (`temperatureSensors`). The model contains the constraints.

```
type GeneratorSet {
  @(defaultValue = "Emergency Standby Power (ESP)")
  string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
  relation temperatureSensors : TemperatureSensor[0..1];
  constraint(dutyRating == "Continuous Power (COP)" ->
temperatureSensors[BearingTemperatureSensor] == 0);
  constraint(dutyRating == "Data Center Continuous (DCC)" ->
temperatureSensors[StatorTemperatureSensor] == 0);
}
```

```

}
type TemperatureSensor;
type BearingTemperatureSensor : TemperatureSensor;
type StatorTemperatureSensor : TemperatureSensor;

```

Example 5

In this example, the `domainComputation` annotation is explicitly specified as `true` for the relationship (`temperatureSensors`). The model contains the constraints.

```

type GeneratorSet {
  @(defaultValue = "Emergency Standby Power (ESP)")
  string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
  @(domainComputation = true)
  relation temperatureSensors : TemperatureSensor[0..1];
  constraint(dutyRating == "Continuous Power (COP)" ->
temperatureSensors[BearingTemperatureSensor] == 0);
  constraint(dutyRating == "Data Center Continuous (DCC)" ->
temperatureSensors[StatorTemperatureSensor] == 0);
}
type TemperatureSensor;
type BearingTemperatureSensor : TemperatureSensor;
type StatorTemperatureSensor : TemperatureSensor;

```

Example Description and Configurator Result

In example 4, the `domainComputation` annotation is not explicitly specified for the `temperatureSensors` relationship, but the system considers it as `true` by default. In example 5, the `domainComputation` annotation is explicitly specified as `true` for the relationship. As a result, the system updates the relationship domain based on the constraint logic.

- If the `dutyRating` is selected with the "Continuous Power (COP)" value, the system re-computes the relationship domain and excludes the `BearingTemperatureSensor` product to satisfy the constraint. The `StatorTemperatureSensor` product remains and can be selected in scope of the `GeneratorSet` bundle product;
- If the `dutyRating` is selected with the "Data Center Continuous (DCC)" value: the system re-computes the relationship domain and excludes the `StatorTemperatureSensor` product to satisfy the constraint. The `BearingTemperatureSensor` product remains and can be selected in scope of the `GeneratorSet` bundle product.

Example 6

In this example, the `domainComputation` annotation is explicitly specified as `false` for the relationship (`temperatureSensors`). The model contains the constraints.

```

type GeneratorSet {
  @(defaultValue = "Emergency Standby Power (ESP)")
  string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];
  @(domainComputation = false)
  relation temperatureSensors : TemperatureSensor[0..1];
  constraint(dutyRating == "Continuous Power (COP)" ->
temperatureSensors[BearingTemperatureSensor] == 0);
  constraint(dutyRating == "Data Center Continuous (DCC)" ->

```

```
temperatureSensors[StatorTemperatureSensor] == 0);
}
type TemperatureSensor;
type BearingTemperatureSensor : TemperatureSensor;
type StatorTemperatureSensor : TemperatureSensor;
```

Example Description and Configurator Result

In example 6, the `domainComputation` annotation is explicitly specified as `false` for the relationship. As a result, the system remains the relationship domain unchanged and executes the constraints:

If the `dutyRating` is selected with the "Continuous Power (COP) " value, the system displays both `BearingTemperatureSensor` and `StatorTemperatureSensor` products in scope of the `GeneratorSet` bundle product. The `BearingTemperatureSensor` product cannot be selected based on the constraint.

If the `dutyRating` is selected with the "Data Center Continuous (DCC) " value, the system displays both `BearingTemperatureSensor` and `StatorTemperatureSensor` products in scope of the `GeneratorSet` bundle product. The `StatorTemperatureSensor` product cannot be selected based on the constraint.

domainComputation Configuration Settings

Table 11: defaultValue Configuration Settings

Applicable to	"domainComputation" annotation	User Action	Actual UI Behavior	Actual Engine Behavior	Constraint Model
string voltage	not specified	Case 1: Duty Rating = any except specified in constraints (e.g. "Prime Power (PRP)", "Emergency Standby Power (ESP)"): • Initial value for the voltage = the value specified in the @defaultValue annotation ("220/380") • The user can select a different voltage value (e.g. "240/416", "255/440" etc.). The system remains User selected voltage • The user can save the configuration with both values: initial voltage or user-selected voltage. Case 2: Duty Rating = "Continuous Power (COP)" • Initial value for the voltage = next	Always show the full voltage domain regardless of the Duty Rating selection.	Remain the full voltage domain. Case 1: Duty Rating = any except specified in constraints (e.g. "Prime Power (PRP)", "Emergency Standby Power (ESP)"): • If the configuration is saved with initial (default) voltage value ("220/380"): the voltage is set to the initial value • If the configuration is saved with User selected voltage value (e.g. "255/440"): the voltage is set to the user selected value Case 2: Duty Rating = "Continuous Power (COP)" • If the configuration is	

Applicable to	"domainComputation" annotation	User Action	Actual UI Behavior	Actual Engine Behavior	Constraint Model
		possible value from the domain to satisfy the constraint ("240/416") • Warning: If the user selects a different voltage (e.g. "220/380", "255/440", "2400/4160" etc.), the system reverts it to the initial value ("240/416") • The user can save the configuration with the initial voltage value (the configuration cannot be saved with other voltage due to reverting). Case 3: Duty Rating = "Data Center Continuous (DCC)" • Initial value for the voltage = specified value in constraint that comes first in the domain ("220/380") • The user can select a different valid voltage specified in constraint ("255/440"). The system remains User selected voltage • If the user selects a voltage that not valid in the constraint (e.g. "240/416", "2400/4160" etc.), the system will revert it to one of the values defined in constraint ("220/380" or "255/440") • The user can save the configuration with the specified in constraint voltage value (the		saved with initial/reverted to initial voltage value ("240/416"): "240/416" Case 3: Duty Rating = "Data Center Continuous (DCC)" • If the configuration is saved with initial ("220/380")/other constraint specified ("255/440") reverted to constraint specified voltage values ("220/380", "255/440"): "240/416"	

Applicable to	"domainComputation" annotation	User Action	Actual UI Behavior	Actual Engine Behavior	Constraint Model
		configuration cannot be saved with other voltage due to reverting).			
string voltage	TRUE	Case 1: Duty Rating = any except specified in constraints (e.g. "Prime Power (PRP)", "Emergency Standby Power (ESP)"): • Display the full voltage domain • Initial value for the voltage = the value specified in the @defaultValue annotation ("220/380") • The user can select a different voltage value (e.g. "240/416", "255/440" etc.). The system remains User selected voltage • The user can save the configuration with both values: initial voltage or User selected voltage. Case 2: Duty Rating = "Continuous Power (COP)" • Display updated voltage domain according to the constraint (the "220/380" is not shown) • Initial value for the voltage = next possible value from the domain to satisfy the constraint ("240/416") • Warning: If the user selects a different voltage (e.g. "255/440", "2400/4160" etc.), the system reverts it to	Show updated voltage domain based on Duty Rating selection and constraint logic.	Update voltage domain based on Duty Rating selection and constraint logic. Case 1: Duty Rating = any except specified in constraints (e.g. "Prime Power (PRP)", "Emergency Standby Power (ESP)"): • Remain the full voltage domain • If the configuration is saved with initial (default) voltage value ("220/380"): the Voltage Domain • If the configuration is saved with User selected voltage value (e.g. "255/440"): the Voltage Domain Case 2: Duty Rating = "Continuous Power (COP)" • Update voltage domain according to the constraint (exclude the "220/380" value) • If the configuration is saved with initial/reverted voltage value ("240/416"): the Voltage Domain Case 3: Duty Rating = "Data Center Continuous (DCC)" •	

Applicable to	"domainComputation" annotation	User Action	Actual UI Behavior	Actual Engine Behavior	Constraint Model
		the initial value ("240/416") • The user can save the configuration with the initial ("240/416") voltage value (the configuration cannot be saved with other voltage due to reverting). Case 3: Duty Rating = "Data Center Continuous (DCC)" • Display updated voltage domain according to the constraint (only "220/380" and "255/440" are shown, other values are excluded) • Initial value for the voltage = specified value in constraint that comes first in the domain ("220/380") • Warning: If the user selects a different voltage specified in constraint ("255/440"), the system reverts it to the initial value ("220/380") • The user can save the configuration with the initial voltage value (the configuration cannot be saved with the "255/440" voltage due to reverting).		If the configuration is saved with initial ("220/380")/reverted to "220/380" constraint specified voltage value: "220/380" and "255/440" are shown.	
string voltage	FALSE	Case 1: Duty Rating = any except specified in constraints (e.g. "Prime Power (PRP)", "Emergency Standby Power (ESP)"); • Initial value for the voltage	Same as not specified. Always show the full voltage domain regardless of the Duty Rating selection.	Same as not specified. Remain the full voltage domain. Case 1: Duty Rating = any except specified in	

Applicable to	"domainComputation" annotation	User Action	Actual UI Behavior	Actual Engine Behavior	Constraint Model
		= the value specified in the @defaultValue annotation ("220/380") • The user can select a different voltage value (e.g. "240/416", "255/440" etc.). The system remains User selected voltage • The user can save the configuration with both values: initial voltage or User selected voltage. Case 2: Duty Rating = "Continuous Power (COP)" • Initial value for the voltage = next possible value from the domain to satisfy the constraint ("240/416") • Warning: If the user selects a different voltage (e.g. "220/380", "255/440", "2400/4160" etc.), the system reverts it to the initial value ("240/416") • The user can save the configuration with the initial voltage value (the configuration cannot be saved with other voltage due to reverting). Case 3: Duty Rating = "Data Center Continuous (DCC)" • Initialvalue for the voltage = specified value in constraint that comes first in the domain ("220/380") • The user can select a different voltage specified in		constraints (e.g. "Prime Power (PRP)", "Emergency Standby Power (ESP)"): • If the configuration is saved with initial (default) voltage value ("220/380"): the Voltage is set • If the configuration is saved with User selected voltage value (e.g. "255/440"): the Voltage is set Case 2: Duty Rating = "Continuous Power (COP)" • If the configuration is saved with initial/reverted to initial voltage value ("240/416"): the Voltage is set Case 3: Duty Rating = "Data Center Continuous (DCC)" • If the configuration is saved with initial ("220/380")/other constraint specified ("255/440")reverted to constraint specified voltage values ("220/380", "255/440"): the Voltage is set	

Applicable to	"domainComputation" annotation	User Action	Actual UI Behavior	Actual Engine Behavior	Constraint Model Behavior
		constraint ("255/440"). The system remains User selected voltage • If the user selects a voltage that not specified in the constraint (e.g. "240/416", "2400/4160" etc.), the system will revert it to one of the values defined in constraint ("220/380" or "255/440") • The user can save the configuration with the specified in constraint voltage value (the configuration cannot be saved with other voltage due to reverting).			

Example string voltage:

```
type GeneratorSet {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
    Power (COP)", "Data Center Continuous (DCC)"];

    @(defaultValue = "220/380")
    string voltage = ["220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160",
    "7200/12470", "7621/13200", "7976/13800"];

    constraint(dutyRating == "Continuous Power (COP)" -> voltage != "220/380");

    constraint(dutyRating == "Data Center Continuous (DCC)" -> voltage == "255/440" ||
    voltage == "220/380");
}
```

Example string voltage:

```
type GeneratorSet {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
    Power (COP)", "Data Center Continuous (DCC)"];

    @(defaultValue = "220/380", domainComputation = true)
    string voltage = ["220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160",
```



```
"7200/12470", "7621/13200", "7976/13800"];

    constraint(dutyRating == "Continuous Power (COP)" -> voltage != "220/380");

    constraint(dutyRating == "Data Center Continuous (DCC)" -> voltage == "255/440" ||
voltage == "220/380");
}
```

Example string voltage:

```
type GeneratorSet {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];

    @(defaultValue = "220/380", domainComputation = false)
    string voltage = ["220/380", "240/416", "347/600", "255/440", "277/480", "2400/4160",
"7200/12470", "7621/13200", "7976/13800"];

    constraint(dutyRating == "Continuous Power (COP)" -> voltage != "220/380");

    constraint(dutyRating == "Data Center Continuous (DCC)" -> voltage == "255/440" ||
voltage == "220/380");
}
```

guardrails Annotation

guardrails is a CML annotation that prevent the constraint engine from changing specified attributes or relations when it resolves the constraint.

Annotation	guardrails
Applicable to	Constraint
Value Type/Values	String. A comma-separated list of the attribute or relation names to protect.
Description	Prevents the constraint engine from altering the listed attributes or relations to satisfy the constraint. Defines protections at the constraint level instead of on individual attributes and relations, which avoids conflicts with other constraints that share the same elements. When you guard an attribute, the engine can't change its domain values or When you guard a relation, the engine can't change its cardinality.

Example 1: Guard an Attribute

In this generator set model, the UL 2200 compliance constraint requires a secondary voltage of 600V or less. The `voltage` attribute is guarded, so the engine can't change its domain values to satisfy the constraint.

```
type GeneratorSet : LineItem {
    @(configurable = false)
    int requiredKW = [101..10000];
```

```

string Voltage = ["220/380", "240/416", "277/480", "7976/13800"];
string standardsAndCompliance = ["Certification-CSA", "Listing-UL 2200"];

int Voltage3 = strtoint(regexpreplace(Voltage, VOLTAGE_REGEX, "$2"), 0);

// Guard Voltage so the engine resolves the rule by adjusting the
// compliance standard, not the domain values of Voltage.
@(guardrails = "Voltage")
constraint(standardsAndCompliance == "Listing-UL 2200" -> Voltage3 <= 600,
    "The UL 2200 standard covers stationary engine generator assemblies rated at 600
volts or less.");
}

```

Example Description and Configurator Result

In example 1, the `guardrails` annotation set to "Voltage". As a result, if the user selects the "Listing-UL 2200" standard, the engine can't change the domain values of the `Voltage` attribute to resolve the conflict. Instead, the engine either satisfies the constraint by changing an unguarded element, such as `standardsAndCompliance`, or displays a conflict error message. Without the `guardrails` annotation, the engine restricts the domain values of `Voltage` to satisfy the constraint.

peelable Annotation

The `peelable` annotation is used to create soft selection values and allow the engine to modify these selections to satisfy a constraint.

Annotation	peelable
Applicable to	Variable
Value Type/Values	true, false
Description	Indicates whether the constraint engine can override the variable's value (whether set by default or user selection) to resolve a conflict. If <code>peelable</code> annotation is set to <code>true</code> , the engine treats the value as a "soft selection." When a configuration conflict occurs, the engine attempts to "peel" (unbind) this variable and retry the solution. If a valid configuration is found, the engine automatically changes the value to satisfy constraints rather than displaying an error message; or If <code>peelable</code> annotation is set to <code>false</code> , the engine treats the value as a "hard selection." If the value causes a conflict with a constraint, the engine will not attempt to change it automatically. Instead, it will stop and display a conflict error message to the user, requiring manual intervention to resolve the issue.

Example 1: peelable = true (Soft Selection)

In this scenario, the `ServiceLevel` defaults to "Standard". Because it is marked `peelable = true`, the Constraint Engine treats this value as a "soft pick." It is authorized to override this value automatically if a conflict arises with another selection.

```

type CloudSubscription {

```

```
// User adds 5TB of storage
int storageTB = [1..3];

/*
 * peelable=true: The engine acts as a "negotiator."
 * If a constraint needs to change this value, the engine is allowed
 * to "peel" (remove) the user's selection and apply the required value.
 */
@(defaultValue = "Standard", peelable = true)
string ServiceLevel = ["Standard", "Premium"];

// Constraint: 5TB or more requires Premium Service
constraint(storageTB >= 5 -> ServiceLevel == "Premium", "High storage requires Premium
service");
}
```

Example 2: peelable = false (Hard Selection)

In this scenario, `peelable` is omitted (defaulting to `false`) or explicitly set to `false`. The engine treats the value `"Standard"` as a "hard constraint" or a firm user commitment. It is not authorized to change it automatically.

```
type CloudSubscription {

// User adds 5TB of storage
int storageTB = [1..3];

/*
 * peelable=false (Default): The engine acts as a "validator."
 * It respects the current value as a hard fact.
 * It cannot change "Standard" to "Premium" on its own.
 */
@(defaultValue = "Standard", peelable = false)
string ServiceLevel = ["Standard", "Premium"];

// Constraint: 5TB or more requires Premium Service
constraint(storageTB >= 5 -> ServiceLevel == "Premium", "High storage requires Premium
service");
}
```

Example Description and Configurator Result

In example 1, the `ServiceLevel` attribute is specified with the `peelable` annotation set to `true`. In example 2, the annotation is not specified, so the system considers it as `false` by default. As a result, if the user updates the `storageTB` variable to 5, the system automatically changes the `ServiceLevel` to `"Premium"` in example 1 according to constraint logic, effectively "peeling" the default `"Standard"` value to resolve the conflict. The system allows this override without displaying an error message to the user. In example 2, the system does not allow the engine to override the default `"Standard"` value automatically. Consequently, the system displays a conflict error message, and the user must manually update the `ServiceLevel` to `"Premium"` to satisfy the constraint.

Example 3: System-Driven Soft Selection (configurable = false, peelable = true)

In this example, the `Voltage` is set to a high voltage ("2400/4160") by default. The annotation `configurable = false` prevents the user from manually changing this value in the UI. However, `peelable = true` is added to allow the constraint engine to override this default if a specific compliance standard is selected.

```
type GeneratorSet {

    string standardsAndCompliance = ["None", "Listing-UL 2200"];

    /*
     * configurable=false: The user cannot change this directly.
     * peelable=true: The engine is authorized to change the default
     * to resolve conflicts with the standardsAndCompliance selection.
     */
    @(defaultValue = "2400/4160", configurable = false, peelable = true)
    string Voltage = ["220/380", "277/480", "2400/4160"];

    // Constraint: UL 2200 listing requires a specific low voltage (277/480)
    constraint(standardsAndCompliance == "Listing-UL 2200" -> Voltage == "277/480");
}
```

Example Description and Configurator Result

In example 3, the `Voltage` is specified with `configurable` set to `false`, preventing user interaction, but `peelable` is set to `true`. Initially, the system sets the voltage to "2400/4160". If the user updates the `standardsAndCompliance` variable to "Listing-UL 2200", the system detects a conflict with the default voltage. Because the variable is `peelable`, the system automatically "peels" the default "2400/4160" value and changes it to "277/480" to satisfy the constraint. The transition happens silently without a conflict error, even though the user cannot manually edit the field.

Example 4: System-Driven Hard Constraint (configurable = false, peelable = false)

In this example, the `EmissionsTier` is set to "Tier 3" by default. It is marked `configurable = false` (system-controlled) and `peelable` is omitted (defaults to false), treating the default value as a hard constraint.

```
type GeneratorSet {

    string Location = ["US", "International"];

    /*
     * configurable=false: The user cannot change this.
     * peelable=false (Default): The engine treats "Tier 3" as a hard fact.
     */
    @(defaultValue = "Tier 3", configurable = false)
    string EmissionsTier = ["Tier 3", "Tier 4 Final"];

    // Constraint: US Location requires Tier 4 Final
    constraint(Location == "US" -> EmissionsTier == "Tier 4 Final", "US requires Tier 4
    Final emissions");
}
```

Example Description and Configurator Result

In example 4, the `EmissionsTier` is specified with `configurable` set to `false`, and `peelable` is not specified (defaulting to `false`). As a result, the system considers the default value "Tier 3" as a hard constraint that cannot be overridden. If the user updates the `Location` variable to "US", the constraint engine attempts to enforce "Tier 4 Final" but finds it cannot overwrite the fixed "Tier 3" value. Consequently, the system displays a conflict error message stating "US requires Tier 4 Final emissions," and the configuration enters an invalid state because the user cannot manually change the `EmissionsTier` to resolve it.

Example 5: Auto-Correcting User Input (`configurable = true`, `peelable = true`)

In this example, the `EnclosureType` is user-selectable (`configurable = true`) and defaults to "Standard". It is marked with `peelable = true`. This allows the engine to override even an explicit user selection if a subsequent choice makes the enclosure invalid.

```
type GeneratorAccessories {
    /*
     * configurable=true: User explicitly selects 'Standard'.
     * peelable=true: Grants permission to override the User's selection
     * to resolve conflicts with the Environment.
     */
    @(defaultValue = "Standard", configurable = true, peelable = true)
    string EnclosureType = ["Standard", "Heated", "Reinforced"];

    string Environment = ["Indoor", "Arctic"];

    // Constraint: Arctic requires Heated Enclosure
    constraint(Environment == "Arctic" -> EnclosureType == "Heated");
}
```

Example Description and Configurator Result

In example 5, the `EnclosureType` is specified with `configurable` set to `true` and `peelable` set to `true`. Initially, the system allows the user to confirm the selection of "Standard". If the user subsequently updates the `Environment` variable to "Arctic", the system detects that "Standard" is invalid. Typically, the engine protects user selections and would throw an error. However, because `EnclosureType` is peelable, the system treats the user's choice as a "soft pick." It automatically "peels" the "Standard" selection and changes it to "Heated" to satisfy the logic. The user sees their previous selection update automatically to match the new environment requirement, preventing a "dead end" configuration state.

Example 6: Upstream Correction (`sequence`, `peelable = true`)

In this example, the `Voltage` is configured early in the process (Sequence 1) with a default value of "Low". It is marked with `peelable = true` to allow downstream selections to override this initial setting.

```
type GeneratorSet {
    /*
     * sequence=1: Evaluated first. Defaults to 'Low'.
     * peelable=true: Allows 'Application' (seq=2) to force a change to this value.
     */
    @(defaultValue = "Low", sequence = 1, peelable = true)
    string Voltage = ["Low", "Medium", "High"];

    /*
     * sequence=2: Evaluated after Voltage is set.
     */
}
```

```

    * The user picks 'DataCenter', which requires High Voltage.
    */
    @(sequence = 2)
    string Application = ["Residential", "DataCenter"];

    // Constraint: DataCenter application forces High Voltage
    constraint(Application == "DataCenter" -> Voltage == "High");
}

```

Example Description and Configurator Result

In example 6, the `Voltage` attribute is specified with `sequence` set to 1 and `peelable` set to `true`. As a result, the system initially sets the value to "Low" before evaluating the `Application` attribute. If the user updates the `Application` variable to "DataCenter" (which runs at sequence 2), the system detects a conflict between the established "Low" voltage and the constraint requirement for "High" voltage. Because `Voltage` is peelable, the system automatically "peels" the default "Low" value and changes it to "High" to satisfy the constraint. The transition happens silently without a conflict error, effectively allowing a later user choice to correct an earlier default assumption.

Example 7: Guided Fallback (`strategy`, `peelable = true`)

In this example, the `ServiceTier` defaults to "Bronze" (the lowest value). It is marked with `peelable = true` and `strategy = "descending"`. If a constraint forces a change from the default, the strategy directs the engine to try the highest possible valid values first.

```

type ServicePlan {
    /*
    * defaultValue="Bronze": Start cheap.
    * peelable=true: Allow upgrade if needed.
    * strategy="descending": If peeled, try 'Platinum' next (Max value),
    * instead of creeping up to 'Silver'.
    */
    @(defaultValue = "Bronze", strategy = "descending", peelable = true)
    string ServiceTier = ["Bronze", "Silver", "Gold", "Platinum"];

    int UserCount = [1..1000];

    // Constraint: > 100 users requires Premium tiers (Gold or Platinum)
    constraint(UserCount > 100 -> ServiceTier in ["Gold", "Platinum"]);
}

```

Example Description and Configurator Result

In example 7, the `ServiceTier` is specified with `strategy` set to "descending" and `peelable` set to `true`. Initially, the system sets the value to "Bronze". If the user updates the `UserCount` variable to 150, the constraint requires `ServiceTier` to be either "Gold" or "Platinum". Because the variable is peelable, the system removes the "Bronze" selection. Instead of testing the next closest value ("Silver"), the "descending" strategy instructs the engine to attempt resolution starting from the top of the domain. Consequently, the system automatically selects "Platinum" (the highest valid option) rather than "Gold". The user sees the plan upgrade immediately to the highest tier without an error message.

productField Annotation

productField is a CML annotation that defines the Product2 field on a variable. productField loads the value from Product Catalog Management (PCM) during constraint model activation.

Annotation	productfield
Applicable to	Variable
Value Type/Values	Literal (case sensitive)
Description	Used to load the value from the corresponding Product2 field defined in Product Catalog Management(PCM). Defined under either a type or supertype. If defined under a supertype, the types, which inherit from the supertype, load the Product2 field value for the corresponding product. Supports a maximum of 50 Product2 fields. Loads product field values for a maximum of 20,000 products. Read-only. Doesn't support a null value.

Example 1

In this example, RatedPowerOutput__c is a custom field defined on the Product2 object. The constraint rules engine loads the value of RatedPowerOutput__c for the GeneratorSet product during constraint model activation.

```
type GeneratorSet {
    @(productField = "RatedPowerOutput__c")
    int ratedPowerOutput;
}
```

Example 2

In this example, the product field variable productName is defined under a supertype EquipmentItem. Any type that inherits the supertype loads the value of Name for the corresponding product during constraint model activation.

```
type EquipmentItem {
    @(productField = "Name")
    string productName;
}

type GeneratorSet : EquipmentItem;
type GeneralModel : EquipmentItem;
```

Example 3

In this example, the product field variable productCode is defined under the parent type GeneratorSet. GeneralModel is a child of GeneratorSet, and it can access the productCode variable from its parent by using the parent() function.

```
type GeneratorSet {
    @(productField = "ProductCode")
    string productCode;

    relation generalModels : GeneralModel[1..999999];
}
```

```

}

type GeneralModel {
    string parentProductCode = parent(productCode);
}

```

propagateUp Annotation

`propagateUp` is a Constraint Modeling Language (CML) annotation that controls aggregation propagation between children and parent elements.

Annotation	<code>propagateUp</code>
Applicable to	Relationship
Value Type/Values	true, false
Description	If <code>propagateUp</code> is not specified, the engine sets it implicitly as false for the relationship. If the <code>propagateUp</code> annotation is specified as true, the engine aggregates values from children to parent elements (upward propagation). The engine cannot modify this value from the parent level (e.g. via constraint), so the children relation domain will not be affected; or If the <code>propagateUp</code> is specified as false, both upward and downward propagations are applicable. The engine aggregates values from children to parent elements (upward propagation). Meanwhile the engine can modify this value (e.g. via constraint) from the parent level. The value is propagated downward and might affect the relation domain (downward propagation).

Example 1

In this example, the `propagateUp` annotation is not specified for the relationship (`warranties`). The model contains technical variable (`coverageDays`) and constraint.

```

type GeneratorSet {
    relation warranties : Warranty {
        totalDays = sum(coverageDays);
    }
    constraint(warranties.totalDays <= 299);
}

type Warranty {
    int coverageDays = 100;
}

type Warranty_PRP : Warranty;

type Warranty_DCC : Warranty;

type Warranty_ESP : Warranty;

```


Example 2

In this example, the `propagateUp` annotation is defined as `false` for the relationship (`warranties`). The model contains technical variable (`coverageDays`) and constraint.

```
type GeneratorSet {

    @(propagateUp = false)
    relation warranties : Warranty {
        totalDays = sum(coverageDays);
    }
    constraint(warranties.totalDays <= 299);
}

type Warranty {
    int coverageDays = 100;
}

type Warranty_PRP : Warranty;

type Warranty_DCC : Warranty;

type Warranty_ESP : Warranty;
```

Example Description and Configurator Result

In example 1, the `warranties` relation is not specified with the `propagateUp` annotation, and the system considers it as `false` by default. In example 2, the relation is explicitly defined with a `false` annotation value. Each product of the `warranties` relation is assigned with the technical `coverageDays` variable equalled to 100. The `totalDays` calculates the `coverageDays` sum of selected `warranties` products. As a result, the system validates the constraint and relation domain in the following way:

- The user selects one `warranties` product (e.g. `Warranty_PRP`). The system calculates the `totalDays` aggregated value for the relation (equal to 100). The system validates the constraint on the parent based on the calculated aggregation variable. The constraint is satisfied ($100 \leq 299$). The system also verifies the possibility to add extra products to the relation. The capacity of the constraint allows to add one more product to the relation, so the system will not reduce the relation domain.
- The user selects the second `warranties` product (e.g. `Warranty_DCC`). The system calculates the `totalDays` aggregated value for the relation (equal to 200). The system validates the constraint on the parent based on the calculated aggregation variable. The constraint is satisfied ($200 \leq 299$). The system verifies the possibility to add extra products to the relation. The capacity of the constraint ($300 \leq 299$) does not allow to add one more product to the relation, so the system will reduce the relation domain.
- The user unselects one of the selected `warranties` products (e.g. `Warranty_PRP`). The system calculates the `totalDays` aggregated value for the relation (equal to 100). The system validates the constraint on the parent based on the calculated aggregation variable. The constraint is satisfied ($100 \leq 299$). The system verifies the possibility to add extra products to the relation. The capacity of the constraint allows to add one more product to the relation, so the system will not reduce the relation domain (both `Warranty_DCC` and `Warranty_ESP` products are available for selection).

Example 3

In this example, the `propagateUp` annotation is specified for the relationship (`warranties`) as `true`. The model contains technical variable (`coverageDays`) and constraint.

```
type GeneratorSet {
```

```

    @(propagateUp = true)
    relation warranties : Warranty {
        totalDays = sum(coverageDays);
    }
    constraint(warranties.totalDays <= 299);
}

type Warranty {
    int coverageDays = 100;
}

type Warranty_PRP : Warranty;

type Warranty_DCC : Warranty;

type Warranty_ESP : Warranty;

```

Example Description and Configurator Result

In example 3, the relation is specified with `propagateUp` annotation as `true` value. Each product of the `warranties` relation is assigned with the technical `coverageDays` variable equalled to 100. The `totalDays` calculates the `coverageDays` sum of selected `warranties` products. As a result, the system validates the constraint and relation domain in the following way:

The user selects one `warranties` product (e.g. `Warranty_PRP`). The system calculates the `totalDays` aggregated value for the relation (equal to 100). The system validates the constraint on the parent based on the calculated aggregation variable. The constraint is satisfied ($100 \leq 299$);

The user selects the second `warranties` product (e.g. `Warranty_DCC`). The system calculates the `totalDays` aggregated value for the relation (equal to 200). The system validates the constraint on the parent based on the calculated aggregation variable. The constraint is satisfied ($200 \leq 299$);

The user selects the third `warranties` product (e.g. `Warranty_ESP`). The system calculates the `totalDays` aggregated value for the relation (equal to 300). The system validates the constraint on the parent based on the calculated aggregation variable. The constraint is not satisfied ($300 \leq 299$). The system rejects the selection of one of the `warranties` products to satisfy the constraint.

As a best practice, use the `propagateUp = true` for models with few relationships and rare constraint violations, since it minimizes propagation work and avoids extra domain updates. Meanwhile, set the `propagateUp = false` for large product structures or frequent violations, since bidirectional propagation prevents invalid states early and reduces expensive backtracking.

propagateUp Configuration Settings

Table 12: propagateUp Configuration Settings

Associated Example	Product Group Structure	Applicable to	"propagateUp" annotation	User Action	Engine Action	UI Behavior
Example 1	Individual product	Relationship	not specified	Selects or deselects the products	Calculates the aggregation variable value on the relation, validation of the constraint, limitation of the relation domain	Displays the selected products. When constraint capacity is used up, in addition to the selected products the

Associated Example	Product Group Structure	Applicable to	"propagateUp" annotation	User Action	Engine Action	UI Behavior
					when the constraint capacity is used up	limited list of the available to be added products will be displayed(if any)
Example 2	Individual product	Relationship	FALSE	Selects or deselects the products	Calculates the aggregation variable value on the relation, validation of the constraint, limitation of the relation domain when the constraint capacity is used up	Displays the selected products. When constraint capacity is used up, in addition to the selected products the limited list of the available to be added products will be displayed(if any)
Example 3	Individual product	Relationship	TRUE	Selects or deselects the products	Calculates the aggregation variable value on the relation, validation of the constraint, rejection of the user selection when the constraint validation is failed	Displays the selected products. No limitations for the list of available products
N/A	Product Classification	Relationship	not specified	Selects or deselects the products	Calculates the aggregation variable value on the relation, validation of the constraint. The engine might replace one of the previously selected products with a newly selected	Displays the selected products. No limitations for the list of available products in the browse popup for the classification
N/A	Product Classification	Relationship	FALSE	Selects or deselects the products	Calculates the aggregation	Displays the selected products. No

Associated Example	Product Group Structure	Applicable to	"propagateUp" annotation	User Action	Engine Action	UI Behavior
					variable value on the relation, validation of the constraint. The engine might replace one of the previously selected products with a newly selected	limitations for the list of available products in the browse popup for the classification
N/A	Product Classification	Relationship	TRUE	Selects or deselects the products	Calculates the aggregation variable value on the relation, validation of the constraint, rejection of the user selection when the constraint validation is failed	Displays the selected products. No limitations for the list of available products in the browse popup for the classification

relatedAttributes Annotation

`relatedAttributes` is a Constraint Modeling Language (CML) annotation that resets the domain to the original one for `domainComputation`.

`relatedAttributes` annotation specification: Variable

Annotation	<code>relatedAttributes</code>
Applicable to	Variable and Relationship
Value Type/Values	String
Description	For Variables. If <code>relatedAttributes</code> annotation is not specified, the engine updates the variable domain according to <code>domainComputation</code> and constraint logic. If the <code>relatedAttributes</code> annotation is specified with one or multiple values (separated by comma), the variable domain is reset to the original domain. For relationships. If <code>domainComputation</code> is not explicitly specified, the engine sets it implicitly as <code>true</code> for the relationship. If the <code>domainComputation</code> is specified as <code>true</code> , the relationship domain is dynamically determined based on the configuration and constraint logic. If the <code>domainComputation</code> is specified as <code>false</code> , the relationship domain is fixed.

Example 1

In this example, the `relatedAttributes` annotation is not specified for the variables (`controlLanguage`, `controlPlacement`, `commissioningScope`) of the `Control` type. The `domainComputation` annotation is defined for the variables. The model contains the constraints.

```
type GeneratorSet {
    relation controls : Control;
}

type Control {
    @(domainComputation = true, defaultValue = "English")
    string controlLanguage = ["English", "Danish", "French"];

    @(domainComputation = true, defaultValue = "Left")
    string controlPlacement = ["Left", "Right", "Top"];

    @(domainComputation = true, defaultValue = "None")
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];

    constraint(controlPlacement == "Right" -> commissioningScope != "Remote Support");

    constraint(controlLanguage == "Danish" -> commissioningScope != "On-site Commissioning");
```

Example Description and Configurator Result

In example 1, the variables of the `Control` type are not specified with the `relatedAttributes` annotation, but defined with the `domainComputation` annotation. As a result, the system updates the variable domain based on the constraint logic.

If the `controlPlacement` is selected with the "Right" value, the `commissioningScope` variable domain is updated to exclude the "Remote Support" value;

If the `controlLanguage` is selected with the "Danish" value, the `commissioningScope` variable domain is updated to exclude the "On-site Commissioning" value.

Example 2

In this example, the `relatedAttributes` annotation is specified for the variable with one value. The `domainComputation` annotation is defined for the variables. The model contains the constraints.

```
type GeneratorSet {
    relation controls : Control;
}

type Control {
    @(domainComputation = true, defaultValue = "English")
    string controlLanguage = ["English", "Danish", "French"];

    @(domainComputation = true, defaultValue = "Left")
    string controlPlacement = ["Left", "Right", "Top"];

    @(domainComputation = true, defaultValue = "None", relatedAttributes =
"controlPlacement")
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];
```

```

    constraint(controlPlacement == "Right" -> commissioningScope != "Remote Support");

    constraint(controlLanguage == "Danish" -> commissioningScope != "On-site Commissioning");
}

```

Example 3

In this example, the `relatedAttributes` annotation is specified for the variable with one value. The `domainComputation` annotation is defined for the variables. The model contains the constraints.

```

type GeneratorSet {
    relation controls : Control;
}

type Control {
    @(domainComputation = true, defaultValue = "English")
    string controlLanguage = ["English", "Danish", "French"];

    @(domainComputation = true, defaultValue = "Left")
    string controlPlacement = ["Left", "Right", "Top"];

    @(domainComputation = true, defaultValue = "None", relatedAttributes = "controlLanguage")
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];

    constraint(controlPlacement == "Right" -> commissioningScope != "Remote Support");

    constraint(controlLanguage == "Danish" -> commissioningScope != "On-site Commissioning");
}

```

Example Description and Configurator Result

In Example 2, the `relatedAttributes` annotation is defined with the "controlPlacement" value for the `commissioningScope` variable. As a result, the system controls the domain for the `commissioningScope` differently depending on `controlPlacement` or `controlLanguage` variable selection.

If the `controlPlacement` is selected with the "Right" value, the `commissioningScope` variable domain remains unchanged, because the `controlPlacement` is listed in the `relatedAttributes` annotation.

If the `controlLanguage` is selected with the "Danish" value, the `commissioningScope` variable domain is updated to exclude the "On-site Commissioning" value according to the constraint, because the `controlLanguage` is not listed in the `relatedAttributes` annotation.

In example 3, the `relatedAttributes` annotation is defined with the "controlLanguage" value for the `commissioningScope` variable. As a result, the system controls the domain for the `commissioningScope` differently depending on `controlPlacement` or `controlLanguage` variable selection.

If the `controlPlacement` is selected with the "Right" value, the `commissioningScope` variable domain is updated to exclude the "Remote Support" value according to the constraint, because the `controlPlacement` is not listed in the `relatedAttributes` annotation.

If the `controlLanguage` is selected with the "Danish" value, the `commissioningScope` variable domain remains unchanged, because the `controlLanguage` is listed in the `relatedAttributes` annotation.

Example 4

In this example, the `relatedAttributes` annotation is specified for the variable with several values (separated by comma). The `domainComputation` annotation is defined for the variables. The model contains the constraints.

```
type GeneratorSet {
    relation controls : Control;
}

type Control {
    @(domainComputation = true, defaultValue = "English")
    string controlLanguage = ["English", "Danish", "French"];

    @(domainComputation = true, defaultValue = "Left")
    string controlPlacement = ["Left", "Right", "Top"];

    @(domainComputation = true, defaultValue = "None", relatedAttributes = "controlPlacement,
controlLanguage")
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];

    constraint(controlPlacement == "Right" -> commissioningScope != "Remote Support");

    constraint(controlLanguage == "Danish" -> commissioningScope != "On-site Commissioning");
}
```

Example Description and Configurator Result

In example 4, the `relatedAttributes` annotation is defined with the "controlPlacement" and "controlLanguage" values for the `commissioningScope` variable. As a result, the system remains the `commissioningScope` variable domain unchanged.

If the `controlPlacement` is selected with the "Right" value, the `commissioningScope` variable domain remains unchanged, because the `controlPlacement` is listed in the `relatedAttributes` annotation.

If the `controlLanguage` is selected with the "Danish" value, the `commissioningScope` variable domain remains unchanged, because the `controlLanguage` is listed in the `relatedAttributes` annotation.

Example 5

In this example, the `relatedAttributes` annotation is not specified for the relationship (`temperatureSensors`). The `domainComputation` annotation is defined for the relationship. The model contains the constraints.

```
type GeneratorSet {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
Power (COP)", "Data Center Continuous (DCC)"];

    @(domainComputation = true)
    relation temperatureSensors : TemperatureSensor[0..1];

    constraint(dutyRating == "Continuous Power (COP)" ->
temperatureSensors[BearingTemperatureSensor] == 0);

    constraint(dutyRating == "Data Center Continuous (DCC)" ->
temperatureSensors[StatorTemperatureSensor] == 0);
}
```

```

type TemperatureSensor;

type BearingTemperatureSensor : TemperatureSensor;

type StatorTemperatureSensor : TemperatureSensor;

```

Example Description and Configurator Result

In example 5, the `temperatureSensors` relation is not specified with the `relatedAttributes` annotation, but defined with the `domainComputation` as `true`. As a result, the system updates the relationship domain based on the constraint logic.

If the `dutyRating` is selected with the "Continuous Power (COP)" value, the system re-computes the relationship domain and excludes the `BearingTemperatureSensor` product to satisfy the constraint. The `StatorTemperatureSensor` product remains and can be selected in scope of the `GeneratorSet` bundle product.

If the `dutyRating` is selected with the "Data Center Continuous (DCC)" value, the system re-computes the relationship domain and excludes the `StatorTemperatureSensor` product to satisfy the constraint. The `BearingTemperatureSensor` product remains and can be selected in scope of the `GeneratorSet` bundle product.

Example 6

In this example, the `relatedAttributes` annotation is specified for the relationship (`temperatureSensors`). The `domainComputation` annotation is defined for the relationship. The model contains the constraints.

```

type GeneratorSet {
    @(defaultValue = "Emergency Standby Power (ESP)")
    string dutyRating = ["Emergency Standby Power (ESP)", "Prime Power (PRP)", "Continuous
    Power (COP)", "Data Center Continuous (DCC)"];

    @(domainComputation = true, relatedAttributes = 'dutyRating')
    relation temperatureSensors : TemperatureSensor[0..1];

    constraint(dutyRating == "Continuous Power (COP)" ->
    temperatureSensors[BearingTemperatureSensor] == 0);

    constraint(dutyRating == "Data Center Continuous (DCC)" ->
    temperatureSensors[StatorTemperatureSensor] == 0);
}

type TemperatureSensor;

type BearingTemperatureSensor : TemperatureSensor;

type StatorTemperatureSensor : TemperatureSensor;

```

Example Description and Configurator Result

In example 6, the `temperatureSensors` relation is specified with the `relatedAttributes` annotation containing the `dutyRating` value, the `domainComputation` annotation is defined as `true`. As a result, the system remains the relationship domain unchanged and executes the constraints.

If the `dutyRating` is selected with the "Continuous Power (COP)" value, the system displays both `BearingTemperatureSensor` and `StatorTemperatureSensor` products in scope of the `GeneratorSet` bundle product. The `BearingTemperatureSensor` product cannot be selected based on the constraint.

If the `dutyRating` is selected with the "Data Center Continuous (DCC)" value, the system displays both `BearingTemperatureSensor` and `StatorTemperatureSensor` products in scope of the `GeneratorSet` bundle product. The `StatorTemperatureSensor` product cannot be selected based on the constraint.

relatedAttributes Configuration Settings

Table 13: relatedAttributes Configuration Settings

Associated Example	Product Group Structure	Applicable to	'relatedAttributes' annotation	'domainComputation' annotation	User Action	Engine Action	UI Behavior
Example 1	Individual product	Variable	not specified	TRUE	Change variable value specified in constraint condition	Update the variable (specified with <code>domainComputation</code>) domain based on <code>domainComputation</code> and constraint logic	Display updated variable domain
Example 2. Example 3.	Individual product	Variable	specified (with one variable)	TRUE	Change variable value specified in constraint condition and <code>relatedAttributes</code>	Reset variable (specified in <code>relatedAttributes</code>) domain to the original domain	Display original variable domain
Example 4	Individual product	Variable	specified (with several variables)	TRUE	Change variable values specified in constraint conditions and <code>relatedAttributes</code>	Reset variable (specified in <code>relatedAttributes</code>) domain to the original domain	Display original variable domain
Example 5	Individual product	Relationship	not specified	TRUE	Change variable value specified in constraint condition	Update the relationship (specified with <code>domainComputation</code>) domain based on <code>domainComputation</code> and constraint logic	Display updated relationship domain
Example 6	Individual product	Relationship	specified	TRUE	Change variable value	Reset relationship	Display original relationship

Associated Example	Product Group Structure	Applicable to	"relatedAttributes" annotation	"domainComputation" annotation	User Action	Engine Action	UI Behavior
					specified in constraint condition and relatedAttributes	domain to the original domain	domain (products). If the product is allowed according to constraint: the product can be selected. If the product is not allowed according to constraint: selected product returns back to unselected state.
N/A	Product Classification	Relationship	not specified	TRUE	- Change variable value specified in constraint condition > Add products on browse popup from product classification - Add products on browse popup from product classification > Change variable value specified in constraint condition.	Update the relationship (specified with domainComputation) domain based on domainComputation and constraint logic	Display updated relationship domain. If the variable is changed again by the User, the value is reverted to the initial value
N/A	Product Classification	Relationship	specified	TRUE	Change variable value specified in constraint condition > Add products on browse	If the variable of constraint condition is changed first: update the relationship (specified with	If the variable of constraint condition is changed first: display updated relationship

Associated Example	Product Group Structure	Applicable to	'relatedAttributes' annotation	'domainComputation' annotation	User Action	Engine Action	UI Behavior
					popup from product classification •Add products on browse popup from product classification > Change variable value specified in constraint condition.	domainComputation domain based on constraint logic • if products are added first from browse popup: remain the relationship domain unchanged.	domain. If the variable is changed again by the user, the value is reverted to the initial value • if products are added first from browse popup: display added products as selected. If constraint variable is changed again by the user, the value is reverted to the initial value.

sequence Annotation

The `sequence` annotation defines the execution and configuration order of elements in a Constraint Modeling Language (CML) model.

`sequence` annotation specification: Variable and Relationship

Annotation	<code>sequence</code>
Applicable to	Variable and Relationship
Value Type/Values	integer Example: 1, 2, 10
Description	If a sequence value is not explicitly defined, the configurator implicitly determines the order based on the variable or relationship declaration order in the CML model. If a sequence value is explicitly defined, the configurator uses the sequence number to control the order in which variables or relationships are configured. Variables or Relationships with lower sequence values are assigned first.

Example 1

In this example, the `sequence` annotation is not explicitly specified. The `defaultValue` is defined for 3 variables (`controlPlacement`, `commissioningScope`, and `controlLanguage`) of the `Control` products. The model contains a constraint.

```
type GeneratorSet {
    relation controls : Control[1..999999];
}

type Control {
    @(defaultValue = "Left")
    string controlPlacement = ["Left", "Right", "Top"];

    @(defaultValue = "None")
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];

    @(defaultValue = "English")
    string controlLanguage = ["English", "Danish", "French"];

    constraint(controlPlacement == "Left" && controlLanguage == "English" -> commissioningScope
        == "Remote Support");
}
```

Example Description and Configurator Result

The model defines 3 variables with `defaultValue` annotation.

```
controlPlacement = "Left"
commissioningScope = "None"
controlLanguage = "English"
```

Even when `sequence` is not explicitly specified for the variables, the engine assigns it implicitly based on the variable declaration order in the CML type. For this example, the sequence for the variables is:

```
controlPlacement: sequence = 1 (highest priority)
commissioningScope: sequence = 2
controlLanguage: sequence = 3 (lowest priority)
```

The constraint specifies that a type with `controlPlacement == "Left"` and `controlLanguage == "English"` will have a `commissioningScope == "Remote Support"`.

```
constraint(controlPlacement == "Left" && controlLanguage == "English" -> commissioningScope
    == "Remote Support");
```

For any constraint, the engine enforces logical equivalence between the left-hand side (before `->`) and the right-hand side (after `->`): if the left side evaluates to true, the right side must also be true (and vice versa).

In this example, the engine resolves the true `->` false constraint (to be false `->` false): it modifies the `controlLanguage` with the highest sequence.

As a result, the Product Configurator will have next values for the variables:

```
controlPlacement = "Left"
commissioningScope = "None"
controlLanguage = "Danish"
```

Example 2

In this example, the `sequence` annotation is explicitly specified and the `defaultValue` is defined for 3 variables (`controlPlacement`, `controlLanguage`, `commissioningScope`) of the `Control` products. The model contains a constraint.

```
type GeneratorSet {
    relation controls : Control[1..999999];
}

type Control{

    @(defaultValue = "Left", sequence = 1)
    string controlPlacement = ["Left", "Right", "Top"];

    @(defaultValue = "English", sequence = 3)
    string controlLanguage = ["English", "Danish", "French"];

    @(defaultValue = "None", sequence = 2)
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];

    constraint(controlPlacement == "Left" && controlLanguage == "English" -> commissioningScope
        == "Remote Support");
}
```

Example Description and Configurator Result

This example is similar to Example 1, but the `sequence` annotation is specified explicitly for the variables to control solver priority:

```
controlPlacement: sequence = 1 (highest priority)
controlLanguage: sequence = 3 (lowest priority)
commissioningScope: sequence = 2
```

The constraint specifies that a type with `controlPlacement == "Left"` and `controlLanguage == "English"` will have a `commissioningScope == "Remote Support"`.

```
constraint(controlPlacement == "Left" && controlLanguage == "English" -> commissioningScope
    == "Remote Support");
```

- Following the same logical equivalence for constraints described in Example 1 and considering the default values specified in the Example 2, the left side of the constraint is true (`controlPlacement = "Left"` and `controlLanguage = "English"`), while the right side is false (`commissioningScope = "None"`).
- Because the `commissioningScope` has higher priority than the `controlLanguage`, the engine avoids changing the `commissioningScope` and instead resolves the constraint by making the left side false.
- The `controlPlacement` has the highest priority sequence than the `controlLanguage`, so the engine modifies the `controlLanguage` as the most efficient way to satisfy the constraint.

Available values for the `controlLanguage`: `["English", "Danish", "French"]`. To make the left side of the constraint false, the engine selects the first non-matching value (specified in CML domain): `"Danish"`.

As a result, the Product Configurator will have next values for the variables.

```
controlPlacement = "Left"
controlLanguage = "Danish"
commissioningScope = "None"
```

Example 3

In this example, the `sequence` annotation is explicitly specified and the `defaultValue` is defined for 3 variables (`controlPlacement`, `controlLanguage`, and `commissioningScope`) of the `Control` products. The model contains a constraint.

```
type GeneratorSet {
    relation controls : Control[1..999999];
}

type Control{

    @(defaultValue = "Left", sequence = 1)
    string controlPlacement = ["Left", "Right", "Top"];

    @(defaultValue = "English", sequence = 2)
    string controlLanguage = ["English", "Danish", "French"];

    @(defaultValue = "None", sequence = 3)
    string commissioningScope = ["None", "Remote Support", "On-site Commissioning"];

    constraint(controlPlacement == "Left" && controlLanguage == "English" -> commissioningScope
        == "Remote Support");
}
```

Example Description and Configurator Result

This example is similar to Example 2, but the lowest priority sequence is specified for the `commissioningScope`. This is a trigger for the engine to modify the `commissioningScope` first to resolve the true -> false constraint to be true -> true).

As a result, the Product Configurator will have next values for the variables:

```
controlPlacement = "Left"
controlLanguage = "English"
commissioningScope = "Remote Support"
```

Example 4

In this example, the `sequence` annotation is not explicitly specified for 3 relations (`voltageConnections`, `controls`, and `alternators`). The model contains a constraint.

```
type GeneratorSet {
    relation voltageConnections : VoltageConnection[0..999999];
    relation controls : Control[1..999999];
    relation alternators : Alternator[1..999999];

    int alternatorsQty = controls[Control] + voltageConnections[VoltageConnection];
    constraint(alternators[Alternator] > 0 -> alternators[Alternator] == alternatorsQty,
        "alternators[Alternator] = controls[Control] + voltageConnections[VoltageConnection]");
}

type Alternator;

type VoltageConnection;
```

```
type Control;
```

Example Description and Configurator Result

Even when sequence is not explicitly specified for the relations, the engine sets it implicitly based on the relation declaration order in the CML type. For this example, the sequence for the relations is:

```
relation voltageConnections: sequence = 1 (highest priority)
relation controls: sequence = 2
relation alternators: sequence = 3 (lowest priority)
```



Note: Use mindful sequencing in CML for variables and relations to avoid backtracking issues. Define them in the order you expect the engine to modify them during constraint resolution.

In this example, the CML model works without conflicts because the relations are implicitly defined with the correct sequence. The `voltageConnections` and `controls` relations are evaluated first, then the `alternatorsQty` is calculated from their quantities. Finally, the `alternators` relation is adjusted based on that result. Because the `alternators` is processed last, the engine avoids backtracking and errors.

Example 5

In this example, the `sequence` annotation is explicitly specified for 3 relations (`voltageConnections`, `controls`, and `alternators`). The model contains a constraint.

```
type GeneratorSet {
  @(sequence=3)
    relation alternators : Alternator[1..999999];
  @(sequence=1)
    relation voltageConnections : VoltageConnection[0..999999];
  @(sequence=2)
    relation controls : Control[1..999999];

    int alternatorsQty = controls[Control] + voltageConnections[VoltageConnection];
    constraint(alternators[Alternator] > 0 -> alternators[Alternator] == alternatorsQty,
"alternators[Alternator] = controls[Control] + voltageConnections[VoltageConnection]");
}
type Alternator;

type VoltageConnection;

type Control;
```

Example Description and Configurator Result

This example is similar to Example 4, but the `sequence` is explicitly specified for the relations to control the processing priority and ensure the engine evaluates and modifies them in the correct order during configuration.

sequence Configuration Settings

Table 14: sequence Configuration Settings

Associated Example	Product Group Structure	Applicable to	"sequence" annotation	User Action	Engine Action	UI Behavior
Example 1	N/A	Variable	not specified	Configure the product containing variables	Assign the sequence for the variables based on the variable declaration order in the type. Enforce logical equivalence between left-hand side and right-hand side for the constraint by modifying the variable with the highest sequence	Display appropriate variable values based on sequence and constraint logic
Example 2. Example 3.	N/A	Variable	specified	Configure the product containing variables	Assign the sequence for the variables based on defined sequence annotation. Enforce logical equivalence between left-hand side and right-hand side for the constraint by modifying the variable with the highest sequence	Display appropriate variable values based on sequence and constraint logic
Example 4	Individual product	Relationship	not specified	Configure the bundle product containing relationship products	Assign the sequence for the relationships based on the relation declaration order in the type. Execute the constraint (according to	Display adjusted relationships based on the relationship sequence and constraint logic

Associated Example	Product Group Structure	Applicable to	"sequence" annotation	User Action	Engine Action	UI Behavior
					assigned sequence)	
Example 5	Individual Product	Relationship	specified	Configure the bundle product containing relationship products	Assign the sequence for the relationships based on defined sequence annotation. Execute the constraint (according to specified sequence)	Display adjusted relationships based on the relationship sequence and constraint logic
N/A	Product Classification	Relationship	not specified	Configure the bundle product containing relationship products	Assign the sequence for the relationships based on the relation declaration order in the type. Execute the constraint (according to assigned sequence)	Display adjusted relationships based on the relationship sequence and constraint logic
N/A	Product Classification	Relationship	specified	Configure the bundle product containing relationship products	Assign the sequence for the relationships based on defined sequence annotation. Execute the constraint (according to specified sequence)	Display adjusted relationships based on the relationship sequence and constraint logic

split Annotation

`split` is a Constraint Modeling Language (CML) annotation that specifies whether the instances of the type should be split or not.

Annotation	<code>split</code>
Applicable to	Type

Annotation	<code>split</code>
Value Type/Values	<code>true</code> , <code>false</code>
Description	If <code>split</code> isn't specified, there are multiple instances of the same type in the relationship with different quantities. If the <code>split</code> is specified as <code>true</code> , there can be multiple instances of the type, and the quantity of each instance is always 1. If the <code>split</code> is specified as <code>false</code> , there is only one instance in the relationship. If the user adds more instances, the engine adds more quantity to the existing instance.

Example 1

In this example, the `split` annotation isn't specified for the type (`Model`).

```
type FESBAGeneratorSet {
    relation models : Model;
}
type Model;
```

Example Description and Configurator Result

In this example, the system allows the multiple instances of the `Model` type with different quantities defined by the user.

Example 2

In this example, the `split` annotation is specified as `true` for the type (`Model`).

```
type FESBAGeneratorSet {
    relation models : Model;
}
@(split = true)
type Model;
```

Example Description and Configurator Result

In this example, the annotation `split = true` specifies that the multiple `Model` instances are split into individual items with fixed quantity 1.

Example 3

In this example, the `split` annotation is specified as `false` for the type (`Model`).

```
type FESBAGeneratorSet {
    relation models : Model;
}
@(split = false)
type Model;
```

Use `@(split=false)` when the line item record must persist across configuration changes and record continuity matters for your business process. The `@(split=false)` annotation prevents the configurator from deleting and recreating existing line item records

when the quantity or selection changes. When you apply `@(split=false)`, the configurator updates the quantity on the existing record instead of replacing it with a new one. This preserves the record ID and any data associated with it.

Example Description and Configurator Result

In this example, the system allows one instance of the Model type with different quantity defined by the user.



Note: If there are multiple products of type Model (for example, `FESBA 900kW` and `FESBA 1500kW`), the user can add both models to the configuration and adjust the quantity for each one. However, the user can't add additional separate instances of the same product (for example, to configure unique instances with different variable values).

split Configuration Settings

Table 15: split Configuration Settings

Product Group Structure	"split" annotation	Engine Action	user Action	UI Behavior
Product Classification	TRUE	Add multiple products	N/A	N/A
Product Classification	TRUE	N/A	Selecting or adding the product multiple times manually	Multiple instances created (qty = 1 each). User can add more instances, but can't change quantity per instance.
Product Classification	FALSE	Add multiple products	N/A	One instance created with qty > 1. User can change the quantity of this instance, but can't add more instances.
Product Classification	FALSE	N/A	Selecting or adding the product multiple times manually	One instance created with qty = 1. User can change the quantity of this instance, but can't add more instances.
Product Classification	(empty)	Add multiple products	N/A	One instance created with qty > 1. User can change quantity and can add more instances.
Product Classification	(empty)	N/A	Selecting or adding the product multiple times manually	One instance created with qty = 1. User can change quantity and can add more instances.
Individual Product	TRUE	Add multiple products	N/A	Multiple line items created, but Configurator displays only one instance. Users cannot

Product Group Structure	"split" annotation	Engine Action	user Action	UI Behavior
				modify quantity for that instance.
Individual Product	TRUE	N/A	Selecting or adding the product manually	One instance created with qty = 1. Users cannot change quantity.
Individual Product	FALSE	Add multiple products		One instance created with qty > 1. Users can't modify quantity for that instance.
Individual Product	FALSE	N/A	Selecting or adding the product manually	One instance created with qty = 1. Users can modify quantity for that instance.
Individual Product	(empty)	Add multiple products		One instance created with qty > 1. Users can't modify quantity for that instance.
Individual Product	(empty)	N/A	Selecting or adding the product manually	One instance created with qty = 1. Users can modify quantity for that instance.

Constraint Modeling Language (CML) Best Practices

To prevent performance degradation or unexpected behaviors when the constraint engine executes CML code, follow these practices when writing code.

For tips on troubleshooting, see [Debugging Constraint Modeling Language \(CML\)](#) on page 1144.

Relationship Cardinality: Specify the Smallest Range Required

In a relationship, cardinality is the quantity of instances of the same type. Specify the smallest required cardinality for a variable, to avoid testing unneeded combinations of values. If you specify a higher cardinality than required, or don't specify cardinality, the constraint engine tests more combinations, which impacts performance.

This example doesn't specify cardinality. The constraint engine tries to set a quantity with 1, 2, 3, all the way up to 9,999:

```
relation engine : Engine;
```

This example specifies minimum and maximum cardinality as 0 and 1, so the constraint engine sets the quantity to 1. The engine tests fewer combinations to find a solution.

```
relation engine : Engine[0..1];
```

Decimals and Doubles: Consider the Impact of Scale on Performance

In a decimal or double, scale is the number of digits that follow the decimal point. Using decimals and doubles in expressions can cause performance problems due to the number of permutations.

In this example, myNumber is a double with a scale of 2. The value can be 0.00, 0.01, 0.02, all the way up to 2.99, which can impact constraint engine performance:

```
double(2) myNumber = [0..3];
```

In this example, myNumber is an integer. The value can only be 0, 1, 2 or 3, which has less impact on constraint engine performance:

```
int myNumber = [0..3];
```

Variable Domains: Keep Domains as Small as Possible

A variable domain is the set of all possible values that the variable can take. In this example, the variable color has a domain with three values:

```
string color = ["Red", "Yellow", "Green"];
```

The larger the domain, the more possible values for the variable, which means more combinations for the engine to test. A large domain can impact performance and lead to slower searches, errors, or unexpected behaviors.

Calculating Values: Put Calculations Inside of Constraints

To calculate a value, put the calculation inside of a constraint, instead of in an inline expression.

For example, to calculate area, use this constraint:

```
constraint(area == length * width)
```

Avoid this example, which calculates the area with an inline expression, and can impact performance:

```
area = length * width.
```

Relationships: Combine Relationships to Reduce Performance Impact

Creating multiple relationships on a type can impact performance. When possible, combine relationships to improve performance.

When possible, avoid this example, which includes separate relationships for Mouse and Keyboard, two accessories in a product bundle:

```
relation mouse : Mouse;  
relation keyboard : Keyboard;
```

Follow this example, which uses one relationship for Accessories, which can include Mouse, Keyboard, and other accessories.

```
relation accessories : Accessories;
```

Sequence: Use the Sequence Variable Annotation to Specify the Order of Execution

If a constraint model includes multiple attributes and relationships that should follow a certain order of execution, use the sequence variable annotation to specify the order. The constraint engine follows sequence designations in satisfying constraint requirements and resolving constraint violations.

In this example, for the Desktop type, the sequence annotation directs the constraint engine to set the default values for attributes in this order:

- Display: sequence=1
- Windows_Processor: sequence=2
- Display_Size: sequence=3

```
type Desktop {
  @(defaultValue = "1080p Built-in Display", sequence=1)
  string Display = ["1080p Built-in Display", "4k Built-in Display", "2k Built-in Display"];

  @(defaultValue = "15 Inch", sequence=3)
  string Display_Size = ["15 Inch", "24 Inch", "13 Inch", "27 Inch"];

  @(defaultValue = "i5-CPU 4.4GHz", sequence=2)
  string Windows_Processor = ["i5-CPU 4.4GHz", "i7-CPU 4.7GHz", "Intel Core i9 5.2 GHz"];

  constraint(Display == "1080p Built-in Display" && Display_Size == "15 Inch" ->
    Windows_Processor == "i7-CPU 4.7GHz");
}
```

For Desktop, Display is set to 1080p, Windows_Processor to i5-CPU, and Display_Size to 15 Inch.

The constraint specifies that a type with Display of 1080p and Display_Size of 15 Inch must have a Windows_Processor of i7-CPU.

```
constraint(Display == "1080p Built-in Display" && Display_Size == "15 Inch" ->
  Windows_Processor == "i7-CPU 4.7GHz");
```

The Windows_Processor default value of i5-CPU for Desktop violates the constraint. In order to satisfy the constraint and resolve the violation, the constraint engine uses a different Display_Size for Desktop, such as 24 Inch.

If the user manually updates Display_Size for Desktop to 15 Inch in the Product Configurator, the constraint engine updates Windows_Processor to i7-CPU to satisfy the constraint.

Sequence and Configurable

Using the `configurable` property with the `sequence` variable affects how the solver handles attributes. When `configurable` is set to `true`, the user can set attribute values, and the solver doesn't override user input unless no other solution exists. When `configurable` is set to `false`, the solver sets attribute values.

In this example for type A, `attribute1` is set to `configurable = true`. The user can set the value, and the solver doesn't override the user input unless no other solution exists. When the left-hand side of the rule is true, the constraint doesn't change `attribute1` to "Enum3".

```
type A : System {
  @(defaultValue = "Enum1", domainComputation = "true", configurable = true, sequence = 48)
  string attribute1 = ["Enum1", "Enum2", "Enum3"];

  @(configurable = false, defaultValue = "0", sequence = 30)
  decimal(2) attribute2 = f(x, y, z);
  constraint((attribute2 > 3 && attribute2 <= 5) -> attribute1 == "Enum3", "message");
}
```

In this example for type B, `attribute1` is set to `configurable = false`. The solver propagates values to satisfy constraints. When the left-hand side of the rule is true, the constraint automatically sets `attribute1` to "Enum3".

```
type B : System {
  @(defaultValue = "Enum1", domainComputation = "true", configurable = false, sequence
= 48)
  string attribute1 = ["Enum1", "Enum2", "Enum3"];

  @(configurable = false, defaultValue = "0", sequence = 30)
  decimal(2) attribute2 = f(x, y, z);
  constraint((attribute2 > 3 && attribute2 <= 5) -> attribute1 == "Enum3", "message");
```

Use mindful sequencing in CML to avoid backtracking by the solver when looking for a solution, as in this example.

```
type LaptopProBundle {

  //relation mouse : Mouse[1..20];
  //The relation mouse has the highest sequence
  relation warranty : Warranty[0..10];
  relation software : Software;
  relation printerBundle : PrinterBundle;
  relation laptop : Laptop[1..10];
  relation mouse : Mouse[1..20];
  //Put highest sequence last to avoid backtracking

  int mouseQty = laptop[Laptop] + warranty[Warranty];

  constraint(mouse[Mouse] > 0 -> mouse[Mouse] == mouseQty,
    "mouse[Mouse] = laptop[Laptop] + warranty[Warranty]");
```

Automatically Add a Product: Define as a Separate Constraint

If you need to automatically add a product, and also set attributes on the product, define these procedures as separate constraints, as in this example.

```
constraint(laptop[Laptop] > 0, warranty[Warranty] > 0);
constraint(warranty[Warranty] > 0, warranty[Warranty].type == "Premium");
```

Avoid this example, which automatically adds a product and sets attributes on the product, in the same constraint.

```
constraint(laptop[Laptop] > 0, warranty[Warranty] > 0 && warranty[Warranty].type ==
"Premium");
```

Configurator API: Include the Attribute Developer Name When Creating or Updating Attributes

When a constraint model is active, Product Configurator API requests that create or update a product attribute must include `AttributeName` in the payload. Set `AttributeName` to the attribute's developer name. The constraint engine matches that value to the attribute name defined in the CML model, which is the CML variable name.

When you import a product attribute from Product Catalog Management (PCM) into CML, the variable name is the attribute's developer name. For the engine to apply the value in the request, `AttributeName` must match that CML variable name. `AttributeKey` doesn't replace `AttributeName`.

When the payload includes a matching `AttributeName`, the engine uses the submitted attribute value. When the payload omits `AttributeName`, the engine can't match the input to a CML variable and applies the default attribute value defined in CML.

This `addedNodes` payload creates an order item attribute without `AttributeName`. The engine applies the CML default for that attribute instead of `"true"`.

```
{
  "path": [
    "801WI00001Q5fN0YAJ",
    "ref_Assoc1Line",
    "ref_Assoc1LineAttrAssoc"
  ],
  "addedObject": {
    "id": "ref_Assoc1LineAttrAssoc",
    "SalesTransactionItemAttrParent": "ref_Assoc1Line",
    "ParentReference": "ref_Assoc1Line",
    "AttributeKey": "0tjWI0000000I6cYAE",
    "AttributeValue": "true",
    "businessObjectType": "OrderItemAttribute"
  }
}
```

This payload includes `AttributeName` set to `Associate`, which matches the CML variable. The engine applies `"true"`.

```
{
  "path": [
    "801WI00001Q5fN0YAJ",
    "ref_Assoc1RV",
    "ref_Assoc1RVAssocAttr"
  ],
  "addedObject": {
    "id": "ref_Assoc1RVAssocAttr",
    "AttributeName": "Associate",
    "SalesTransactionItemAttrParent": "ref_Assoc1RV",
    "ParentReference": "ref_Assoc1RV",
    "AttributeKey": "0tjWI0000000I6cYAE",
    "AttributeValue": "true",
    "businessObjectType": "OrderItemAttribute"
  }
}
```

For a picklist attribute, include `AttributeName` with the same developer-name match, plus `AttributeValue` and `AttributePicklistValue`.

```
{
  "path": [
    "801WI00001Q5fN0YAJ",
    "ref_Assoc1RV",
    "ref_Assoc1RVLengthAttr"
  ],
  "addedObject": {
    "id": "ref_Assoc1RVLengthAttr",
    "AttributeName": "RV_Trailer",
    "SalesTransactionItemAttrParent": "ref_Assoc1RV",
    "ParentReference": "ref_Assoc1RV",
    "AttributeKey": "0tjWI0000000I6bYAE",
  }
}
```



```

    "AttributeValue": "Upto 33 Ft and longer",
    "AttributePicklistValue": "0v6WIO000000DuxYAE",
    "businessObjectType": "OrderItemAttribute"
  }
}

```

Include `AttributeName` the same way in `updatedNodes` when you update an existing attribute. On a quote, use `businessObjectType QuoteLineItemAttribute` and the same `AttributeName` requirement.

For how the engine chooses a default when no matching payload value is present, see [defaultValue Annotation](#) on page 1091.

Access Quantity in CML: Cardinality and Attribute Constraints

There are two ways to access quantity in CML:

A cardinality constraint creates or validates the presence of components. The constraint engine adds or removes instances to satisfy the conditions of the constraint.

An attribute constraint, such as `lineItemQuantity` or `ItemEndQuantity`, only reads or validates. The constraint engine validates the expression, but doesn't configure to satisfy the conditions of the constraint.

For best performance, follow these guidelines:

- Use a cardinality constraint whenever possible. Use `lineItemQuantity` or `ItemEndQuantity` only when a cardinality constraint can't meet the business need.
- Treat `lineItemQuantity` and `ItemEndQuantity` as read-only. Use only in calculation or evaluation rules.
- Keep scope in mind. When a product can have multiple instances, read `lineItemQuantity` or `ItemEndQuantity` per instance. Avoid reading the attribute at a parent or aggregate scope where it can be unbound or ambiguous.
- Don't use `lineItemQuantity` or `ItemEndQuantity` to create components. Drive component creation by cardinality, not by attribute references.

Use constraint patterns similar to these examples. Do this.

```
constraint (mouse[Mouse] == warranty[Warranty])
```

Avoid this.

```
constraint (mouse[Mouse].lineItemQuantity == warranty[Warranty].lineItemQuantity)
```

Do this.

```
constraint (mouse[Mouse] == 3)
```

Avoid this.

```
constraint (mouse[Mouse].lineItemQuantity == 3)
```

Pricing Fields Not Supported in CML

Pricing fields, such as `ListPrice`, `NetUnitPrice`, and others, are not supported in CML and should not be used in constraint models. CML is designed to enforce configuration logic for products, not to perform pricing calculations. Attempting to reference or manipulate pricing fields in CML code leads to errors and unexpected behaviors in the constraint engine. Use dedicated pricing or calculation mechanisms outside of the CML constraint model for such functionality.

Configure Child or Grandchild Products Based on Parent Product

Use the `parent` keyword to configure child and grandchild products dynamically based on the parent product. Control visibility or availability for the child or grandchild using the keyword.

 **Note:** The `parent` keyword isn't supported with Group Type.

In this example, grandchild products are excluded based on which parent product they belong to.

```
type LineItem;

/*
 * Parent 1: Industrial Bundle
 * Sets the context 'ApplicationType' to "Industrial"
 */
type IndustrialGeneratorBundle : LineItem {
    relation enclosurePackage : EnclosurePackage[1..999];

    relation enclosurePackage1 : EnclosurePackage[1..999];

    relation enclosurePackage2 : EnclosurePackage;

    string ApplicationType = "Industrial";
}

/*
 * Parent 2: Residential Bundle
 * Sets the context 'ApplicationType' to "Residential"
 */
type ResidentialGeneratorBundle : LineItem {
    relation enclosurePackage3 : EnclosurePackage[1..999];

    relation enclosurePackage4 : EnclosurePackage;

    string ApplicationType = "Residential";
}

/*
 * Shared Component: Enclosure Package
 * Uses parent() to read the ApplicationType and excludes items accordingly.
 */
type EnclosurePackage : LineItem {
    relation soundInsulation : SoundInsulation[0..999];
    relation weatherProofing : WeatherProofing[0..999];
    relation heater : Heater[0..999];
    relation lighting : InternalLighting[0..999];

    // Retrieve the context tag from the parent bundle
    string parentApp = parent(ApplicationType);

    message(true, parentApp);

    // Logic 1: Exclude Lighting and Heater for BOTH bundles
    exclude(parentApp == "Industrial" || parentApp == "Residential",
lightning[InternalLighting]);
```

```

    exclude(parentApp == "Industrial" || parentApp == "Residential", heater[Heater]);

    // Logic 2: Residential (Basic) excludes Sound Insulation
    exclude(parentApp == "Residential", soundInsulation[SoundInsulation]);

    // Logic 3: Industrial (Pro) excludes Weather Proofing
    exclude(parentApp == "Industrial", weatherProofing[WeatherProofing]);
}

// --- Sub-components ---

type SoundInsulation : LineItem {
    @(defaultValue = "Foam")
    string Material = ["Foam", "Fiberglass"];
}

type WeatherProofing : LineItem {
    @(defaultValue = "Standard")
    string Grade = ["Standard", "Marine"];
}

type Heater : LineItem;

type InternalLighting : LineItem;

```

PCG Group Relations: Follow Order in Constraints

Order the Product Component Group (PCG) group relations in the way they appear in the constraints. Specify the groups used in the LHS of the constraints first, followed by those in the RHS.

In this example, the order of PCG groups is incorrect as `Test1Group` is part of the LHS and should be declared first.

```

type TestParent : LineItem {
    Test2Group test2group;

    Test1Group test1group;

    constraint(test1group.testchild1[TestChild1] > 0 -> test2group.testchild2[TestChild2]
    == test1group.testchild1[TestChild1]);
}

```

This example shows the correct order of PCG groups, where `Test1Group` is declared first because it is part of the LHS.

```

type Test20260204Parent : LineItem {

    Test1Group test1group;
    Test2Group test2group;

    constraint(test1group.testchild1[TestChild1] > 0 -> test2group.testchild2[TestChild2]
    == test1group.testchild1[TestChild1]);
}

```

Relations Without PCG: Follow Order in Constraints

Order of relations matter for constraint evaluation. Specify the relations used in the LHS of the constraints first, followed by those in the RHS.

Relation Aggregates: Stabilize Preferences Using Staged Variables

To improve solver stability and prevent backtracking, avoid referencing relation aggregates directly within preferences when the preferences also influence the same relation. Instead, stage these aggregates through local variables and state anchors.

In this example, the preferences and the calculated quantity depend directly on live relation aggregates.

```
relation ml : ModelTraining {
    totalNumSubscriptions = total(NumSubscriptions);
    subCount = count(Sublicense == true);
}
preference(ml[ModelTraining] > 0 && ml.subCount == 0 -> ml[ModelTraining] == parentQty);
preference(ml[ModelTraining] > 0 && ml.subCount > 0 -> ml[ModelTraining] ==
calculatedQuantity);
constraint(calculatedQuantity == ((ml.totalNumSubscriptions + 99) / 100) * 100);
```

When the solver evaluates preferences that depend directly on a relation's own aggregates, it creates a tight feedback loop:

Relation Quantity Relation Aggregates Preference Guards/Targets Relation Quantity (loop repeats)

The feedback loop can cause the solver to oscillate or backtrack repeatedly before finding a stable solution.

This example shows the stabilized pattern. It introduces staged variables that act as anchors to separate the relation aggregates from the preference logic.

```
relation ml : ModelTraining {
    totalNumSubscriptions = total(NumSubscriptions);
    subCount = count(Sublicense == true);
}

// Stage 1: Convert relation conditions into stable booleans
boolean hasSub;
constraint(hasSub <-> (ml.subCount > 0));

// Stage 2: Copy relation aggregates into local variables
int localTotalNumSubscriptions;
constraint(localTotalNumSubscriptions == ml.totalNumSubscriptions);

// Stage 3: Perform calculations by using the local variables
int calculatedQuantity;
constraint(calculatedQuantity == ((localTotalNumSubscriptions + 99) / 100) * 100);

// Stage 4: Use the staged variables in the preferences
preference(ml[ModelTraining] > 0 && hasSub == false -> ml[ModelTraining] == parentQty);
preference(ml[ModelTraining] > 0 && hasSub == true -> ml[ModelTraining] ==
calculatedQuantity);
```

With this pattern, instead of solving everything simultaneously, the solver logic processes a pipeline:

Relation Aggregates Anchored State/Local Variables Derived Calculations Preferences

This process reduces oscillation and makes the solving path more deterministic.

Dependent Logic: Use Configurable Variable Annotation to Prevent Premature Default Assignment

To ensure preference rules correctly set target attributes based on calculated values, use the `@(configurable=false)` annotation on the target attribute. This prevents a race condition where the engine assigns a default value during initialization before your calculation and preference rules execute.

When an inline expression is used, CML evaluates the model top-down. If the target attribute is declared before the inline calculation, the engine immediately assigns a default value to the attribute. As a result, any subsequent `preference()` rules are ignored because the engine treats the existing default value as an established selection and avoids overwriting it with the calculated value. Annotating the target attribute with `@(configurable=false)` forces the engine to leave the variable as `null` until the calculation and preference rules are executed.

In this example, the engine processes `ShippingMethod` first and immediately assigns the default value "Standard" to it. Later, when the calculation for `totalWeight` returns a value high enough to require the "Freight" shipping method, the engine ignores this preference rule because the `ShippingMethod` variable is already bound to "Standard".

```
type Order : LineItem {
  int quantity = [1..100];
  int weightPerUnit = [10..50];

  // Problem: Engine assigns "Standard" immediately during initialization
  @(defaultValue = "Standard")
  string ShippingMethod = ["Standard", "Freight"];

  // Calculated Attribute via Inline Expression

  // The calculation happens after the default is already set
  int totalWeight = quantity * weightPerUnit;

  // This rule is ignored because ShippingMethod is already bound to "Standard"
  preference(totalWeight > 1000 -> ShippingMethod == "Freight");
}
```

In this example, using the `@(configurable=false)` annotation ensures the `ShippingMethod` attribute remains as `null` until the calculation completes and the rules execute.



Note: Provide a second preference rule for the fallback condition (else) to ensure a value is always set.

```
type Order : LineItem {
  int quantity = [1..100];
  int weightPerUnit = [10..50];

  // Solution: Prevent premature default assignment
  @(configurable=false)
  string ShippingMethod = ["Standard", "Freight"];

  // Calculated Attribute via Inline Expression
  int totalWeight = quantity * weightPerUnit;

  // Rule 1: Handle the specific condition (high weight)
  preference(totalWeight > 1000 -> ShippingMethod == "Freight");

  // Rule 2: Handle the fallback (low weight)
```

```

    preference(totalWeight <= 1000 -> ShippingMethod == "Standard");
}

```

Consolidate Multiple Default Configurations

Apply dynamic, overridable default quantities to a single component based on multiple possible states of a driving attribute. This process avoids rule conflicts where only the last rule evaluates.

When multiple `setdefault` rules target the same assignment in the RHS, evaluations can conflict. For example, a conflict can result when the rule targets the same relation and type, such as `accessories[Accessory] == ...`. The condition side can use different expressions, but if the rules resolve to the same target on the assignment side, behavior can become order-dependent and lead to inconsistent outcomes.

For example, if you want to set a default for the quantity of `Accessories` based on the selected `DutyRating` of a Generator Set, writing three separate `setdefault` rules causes inconsistent behavior depending on the quantity changes of the accessories.

To prevent the conflict, consolidate the conditional logic into a single derived variable using nested ternary expressions, such as `? : .`. Then, apply a single `setdefault` rule using that newly derived variable to drive the relation's quantity.

This example shows the recommended process, consolidating the logic into a single variable and rule.

```

type GeneratorSet : LineItem {
    string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby
    Power (ESP)"];

    relation accessories : Accessory[1..99] {
        default Accessory(1);
    }

    // 1. Consolidate the conditional logic into a single integer variable
    int defaultAccessoryQty = (DutyRating == "Prime Power (PRP)") ? 2 : ((DutyRating ==
    "Continuous Power (COP)") ? 4 : 6);

    // 2. Create a dynamic informational message
    string infoMsg = DutyRating + " accessory default overridden";

    // 3. Apply a single setdefault rule using the derived variable
    setdefault(
        DutyRating in ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby
    Power (ESP)"],
        accessories[Accessory] == defaultAccessoryQty,
        infoMsg
    );
}

```

Avoid the process shown in this example, which includes multiple conflicting `setdefault` rules.

```

type GeneratorSet : LineItem {
    string DutyRating = ["Prime Power (PRP)", "Continuous Power (COP)", "Emergency Standby
    Power (ESP)"];

    relation accessories : Accessory[1..99] {
        default Accessory(1);
    }

    // X AVOID: Multiple setdefault rules targeting the same relation.

```

```
// Only the last rule will reliably evaluate.
setdefault(DutyRating == "Prime Power (PRP)", accessories[Accessory] == 2, "PRP error");

setdefault(DutyRating == "Continuous Power (COP)", accessories[Accessory] == 4, "COP
error");
setdefault(DutyRating == "Emergency Standby Power (ESP)", accessories[Accessory] ==
6, "ESP error");
}
```

Business-Centric Constraint Modeling Language (CML) Guidelines

Constraint Modeling Language (CML) must accurately calculate the total sum or aggregate of specific attributes like quantity or userCount across child components, especially in complex configurations requiring group-level aggregation

The main modeling obstacles when performing aggregation in CML involve:

- Initialization Errors: Preventing runtime errors, such as `NullPointerException`, which can occur if derived aggregate attributes lack explicit domains.
- Circular Dependencies: Avoiding calculation loops where the parent and children mutually rely on aggregated totals, often involving the `total()` function. If these loops are not broken, the aggregated variable becomes "not bound", which causes the solution to fail.

User Workflow

As a sales representative, when I am configuring a bundle product in the Configurator window, I modify the quantities or specific attributes of the individual child components. I expect the constraint engine to immediately and accurately calculate the overall aggregated totals for the parent product, such as the `totalItemCount` or `sumOfUsers`.

[Business-Centric CML Examples](#)

These Constraint Modeling Language (CML) structures implement quantity aggregation and resolve calculation dependencies.

Business-Centric CML Examples

These Constraint Modeling Language (CML) structures implement quantity aggregation and resolve calculation dependencies.

Example 1: Derived Aggregates (Total Quantity or Sum)

This CML example shows how to model bundle rollups by separating aggregation from validation, ensuring correct calculation order, solver stability, and business-rule consistency

```
type LineItem;
type GeneratorSet : LineItem {
  int totalItemPowerKW = modelclassification.totalPowerKW;
  // Aggregate `powerKW`
  relation modelclassification : ModelClassification[0..10] {
    totalPowerKW = sum(powerKW);
  }
  message(true, "GeneratorSet totalItemPowerKW = {} kW (calculated roll-up). Sum of selected
ModelClassification powerKW values = {} kW.", totalItemPowerKW,
modelclassification.totalPowerKW);
}
```

```

type ModelClassification : LineItem {
    int powerKW = [900, 1750, 2500];
}
type GeneralModel1750 : ModelClassification {
    int powerKW = 1750;
}
type GeneralModel2500 : ModelClassification {
    int powerKW = 2500;
}
type GeneralModel900 : ModelClassification {
    int powerKW = 900;
}

```

Example Description and Configurator Result

In example 1, the `GeneratorSet` type contains the `totalItemPowerKW` variable that is assigned with the `totalPowerKW`. The model specifies a relationship based on the product classification (`modelClassification`). This relationship includes aggregation using the `sum()` function that calculates the `totalPowerKW` from the products selected in the `modelClassification` during bundle configuration. The model contains a message for displaying the `totalItemPowerKW` with the `modelClassification.totalPowerKW` on the Product Configuration.

```

message(true, "GeneratorSet totalItemPowerKW = {} kW (calculated roll-up). Sum of selected
    ModelClassification powerKW values = {} kW.", totalItemPowerKW,
    modelClassification.totalPowerKW);

```

As a result, the engine calculates the `totalPowerKW` of user selected products in the `modelClassification` and assigns this value to the `totalItemPowerKW`. The system displays both values in the information message on the Product Configuration.

Example 2: Resolving Circular Dependencies

This pattern breaks unsolvable loops by enforcing unidirectional data flow (Parent dictates Child quantity based on Child aggregates).

```

type LineItem;
type GeneratorSet : LineItem {
    // RELATION: THE "READ" PHASE
    // Data flows UP from children to the parent via the port attribute
    relation voltageclassification : VoltageClassification[1..10] {
        sumOfChildPower = total(power);
    }
    // Explicit domain ensures the solver initializes correctly for calculations
    decimal(2) totalDistributionValue = [0.00..1000.00];
    // CONSTRAINT 1: THE "CALCULATION" PHASE
    // @(sequence = 1) ensures the engine reads child data and calculates first
    @(sequence = 1)
    constraint calcTotalDistribution(totalDistributionValue ==
    voltageclassification.sumOfChildPower / 100);
    // CONSTRAINT 2: THE "WRITE/ENFORCE" PHASE
    // @(sequence = 2) ensures this happens last to push values DOWN to children
    @(sequence = 2)
    constraint setChildQuantity(voltageclassification[VoltageClassification] ==
    totalDistributionValue * 2);
}
type VoltageClassification : LineItem {

```



```

    int power = [1..100];
}
type VoltageConnection_220_380 : VoltageClassification;
type VoltageConnection_240_416 : VoltageClassification;
type VoltageConnection_255_440 : VoltageClassification;

```

Example Description and Configurator Result

In example 2, the relationship includes aggregation using the `total()` function that calculates the `sumOfChildPower` from the selected products in the `voltageclassification`. The `GeneratorSet` type contains the `totalDistributionValue` with the explicit domain `([0.00..1000.00])`. The model contains two constraints with corresponding `@sequence` annotation to enforce the logical order for calculation of the `calcTotalDistribution` (using child products data) and defining the quantity for the `voltageclassification` child items.

Example 3: Grouped Aggregation (Sum of Users Across Regions)

This advanced pattern uses the `@(groupBy=attribute)` annotation to create virtual components (`RegionGroup`) for aggregation, referencing the source data relation in the parent type (`SubscriptionOrder.licenses`) using the `sourceContextNode` annotation.

```

// 1. Base Product Type (e.g., Regional License)
type RegionalLicense {
    int regionId = [0..100]; // Attribute for grouping
    int userCount = [0..100];
}
// 2. Virtual Group Type (Performs grouping and user sum)
@(split=true, virtual=true, groupBy=regionId)
type RegionGroup {
    int regionId;
    int groupTotalUsers; // Sum of userCount for this region
    // Relation to licenses matching this region group
    @(sourceContextNode="SubscriptionOrder.licenses")
    relation licenses: RegionalLicense[0..100];
    // Constraint: Calculate the aggregate user count within this group
    constraint(groupTotalUsers == licenses.sum(userCount));
}
// 3. Parent Order Management (Aggregates all region totals)
@(virtual=true)
type SubscriptionOrder {
    // Overall total users is calculated by referencing the group totals
    int totalUsers = regionGroups.groupTotalUsers;
    relation licenses: RegionalLicense[0..500];
    relation regionGroups: RegionGroup[1..10];
}

```

Example Description and Configurator Result

In example 3, the `licenses` relationship that is brought as an external source by `@(sourceContextNode="SubscriptionOrder.licenses")`, includes an aggregation using the `sum()` function that calculates the `groupTotalUsers` from the selected products in the `RegionalLicense`. The `RegionGroup` type contains the `groupTotalUsers` variable that serves the aggregation. The `SubscriptionOrder` type contains the aggregate metric

`totalUsers` which is calculated by summing all `groupTotalUsers`. The model contains one core constraint on `RegionGroup` to enforce that `groupTotalUsers` equals the sum of all `userCount` from its member licenses.

Debugging Constraint Modeling Language (CML)

To debug constraint models and troubleshoot performance issues, enable debug logging in Apex and set the debug log level to FINE.

For more information on debug logging in Salesforce, see these topics in Salesforce Help:

- [Set Up Debug Logging](#)
- [Debug Log](#)
- [Debug Log Levels](#)

Use the Apex log to get information about configurator engine performance when running a constraint model, including performance degradation or unexpected behavior. To improve performance, modify the constraint model based on information in the log.

For tips on writing trouble-free CML, see [Constraint Modeling Language \(CML\) Best Practices](#) on page 1130.

About the Apex Debugging Log File

The Apex debugging log file contains three sections: `RLM_CONFIGURATOR_BEGIN`, `RLM_CONFIGURATOR_STATS`, and `RLM_CONFIGURATOR_END`.

Use the Apex Debugging Log File

To find possible reasons for the performance problems and identify solutions, look at the `RLM_CONFIGURATOR_STATS` section of the log file.

About the Apex Debugging Log File

The Apex debugging log file contains three sections: `RLM_CONFIGURATOR_BEGIN`, `RLM_CONFIGURATOR_STATS`, and `RLM_CONFIGURATOR_END`.

RLM_CONFIGURATOR_BEGIN

JSON representation of the request payload to `ExecuteConstraintsRESTService`.

```
"contextProperties" : { },
"rootLineItems" : [ {
  "attributes" : { },
  "properties" : { },
  "ruleActions" : null,
  "attributeDomains" : { },
  "portDomainsToHide" : { },
  "lineItems" : [ { } ]
} ],
"orgId" : "00Dxx00000006H2F"
}
```

RLM_CONFIGURATOR_STATS

Key statistics of the request execution by the constraint engine, as in this example.

```
"rootId" : "0QLxx0000004DluGAE", //Root ID that is being configured
"Product" : "SFDC License", //Root product name
```

```

"Total Execution Time" : "2ms", //Total solver time
"Constraints Execution Stats" : "Distinct: 18 Total: 70", //Number of distinct and total
  constraint satisfaction attempts
"Solving goal AndGoal([ConfigureComponentGoal(RootProduct RootProduct_0)]) took " : "2ms",
  //Total solver time for the goal
"Configurator Stats" : "Total Time 2ms", //Total time
"Number of Component" : "6", //Number of components instantiated
"Number of Variables" : "42", //Number of variables instantiated
"Number of Constraints" : "13", //Number of constraints instantiated
"Number of Backtracks" : "0", //Number of backtracks solver did for the last choice point
"Constraints Violation Stats" : "Distinct: 0 Total: 0", //Distinct and total number of
  constraint violations followed by a list of top 10
"ChoicePoint Backtracking Stats" : "Distinct: 0 Total: 0" // Distinct and total number
  of backtracked choice points followed by a list of top 10
}

```

RLM_CONFIGURATOR_END

JSON representation of the response payload from ExecuteConstraintsRESTService.

```

"id" : "0QLxx0000004D1uGAE",
"rootId" : null,
"parentId" : null,
"cfgStatus" : "User",
"name" : "RootProduct",
"relation" : null,
"source" : "SalesTransaction.SalesTransactionItem",
"qty" : 1,
"actionCode" : null,
"modelName" : "Support_instance_variable_in_CML",
"productId" : "0ltxx0000006iP2AAI",
"productRelatedComponentId" : null,
"attributes" : {}, "properties" : {},
"ruleActions" : [ {} ], "attributeDomains" : {}, "portDomainsToHide" : {},
"lineItems" : [ {} ]
}

```

Use the Apex Debugging Log File

To find possible reasons for the performance problems and identify solutions, look at the RLM_CONFIGURATOR_STATS section of the log file.

See the values for Total Execution Time, Constraints Violation Stats, and ChoicePoint Backtracking Stats.

For example, consider how the constraint engine performs with this sample constraint model. In the constraint model, the value of the `volts` variable is greater than 110/10000 ($\text{volts} = \text{power}/\text{amps} * 9999$). The constraint engine must backtrack the `power` variable to find a value that satisfies the constraint, starting with 0.01, 0.02, and so on until it reaches a valid value.

```

relation laptops : Laptop[1..9999];
@ (sequence = 1)
decimal(2) power = [0..500];
@ (sequence = 1)
int amps = [1..5];

```

```
decimal(2)  volts = (power / amps) * laptops[Laptop];
constraint(volts > 110);
```

In the log file for this constraint model, see the execution statistics for Total Execution Time, Constraints Violation Stats, and ChoicePoint Backtracking Stats:

```
"rootId" : "ref_a67c6632_fa1f_40b4_8093_226a9ab8a4d0",
"Product" : "Laptop",
"Total Execution Time" : "676ms",
"Constraints Execution Stats" : "Distinct: 2 Total: 132006",
"Solving goal AndGoal([ConfigureComponentGoal(Laptop Laptop_0)]) took " : "677ms",
"Configurator Stats" : "Total Time 677ms",
"Number of Component" : "1",
"Number of Variables" : "4",
"Number of Constraints" : "1",
"Number of Backtracks" : "49500",
"Constraints Violation Stats" : "Distinct: 1 Total: 41250",
"IntComparison(GT,[DecimalVar(volts)])" : "41250",
"ChoicePoint Backtracking Stats" : "Distinct: 2 Total: 98999",
"VariableChoicePoint(DecimalVar(power))" : "49500",
"VariableChoicePoint(IntVar(amps))" : "49499"
```

Optimally, execution time for a constraint model is less than 100 milliseconds, with fewer than 1,000 backtracks and no violations. Values for the constraint model example are significantly higher, indicating that the constraint engine is performing inefficiently. To improve performance in this example, reduce the domain of the power variable without reducing the solution space. For example, define the domain as [110..500] instead of [0..500]. This change reduces the number of backtracks the constraint engine performs to find a solution.

Model Structure

The tables on the following pages show the structure for the constraint model in Core Concept Examples.

See [Core Concept Examples](#) on page 1073.

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
0	Bundle	Generator Set	GeneratorSet					
				Required KW	requiredKW	CONFIGURABLE	int	
				Surge Load KW	surgeLoadKW	EXPRESSION	decimal	requiredKW * 1.25
				Reserve Capacity KW	reserveCapacityKW	EXPRESSION	decimal	surgeLoadKW - requiredKW
				Voltage	voltage	CONFIGURABLE	Picklist Voltage	
				Duty Rating	dutyRating	CONFIGURABLE	Picklist DutyRating	

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
							["Prime Power", "Continuous Power", "Data Center Continuous", "Emergency Standby Power"]	
				Standards and Compliance	and Compliance		Picklist and Compliance ["Certification-CSA", "Listing-UL 2200"]	
				max dB level	dBMax	CONFIGURABLE	int	
				Nominal Power Output	nominalPowerOutput		Picklist Power Output Picklist ["100 kW", "300 kW", "500 kW", "700 kW"]	
1	General							
2	General - Model		GeneralModel					
				Power KW	powerKW	STATIC	Picklist powerKW [900, 1750, 2500]	powerKW >= Needs required KW
				dB	dB	STATIC	Picklist dB [78, 90, 94]	
		General Model 900	GeneralModel900					
		General Model 1750	GeneralModel1750					
		General Model 2500	GeneralModel2500					

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
2	General - Voltage Connection		VoltageConnection					
				Voltage	voltage	STATIC	Picklist voltage ["220/380", "240/416", "255/440"]	voltage == Needs.voltage
				Cable Entry	cableEntry	CONFIGURABLE	Picklist cableEntry ["Top Entry", "Bottom Entry", "Side Entry"]	
		220/380,3 Phase,Wye,4 Wire	VoltageComb_20_38					
		240/416,3 Phase,Wye,4 Wire	VoltageComb_20_46					
		255/440,3 Phase,Wye,4 Wire	VoltageComb_25_40					
1	Alternator							
2	Alternator - Main Alternator		MainAlternator					
					voltage	STATIC	Picklist Voltage	Needs.voltage == voltage
					PRP	STATIC	boolean	Needs.voltage == voltage onNeedBy = true Powd">PRP==true
					COP	STATIC	boolean	Needs.voltage == voltage onNeedBy = true Powd">COP==true
					DCC	STATIC	boolean	Needs.voltage == voltage onNeedBy = true Powd">DCC==true
					ESP	STATIC	boolean	Needs.voltage == voltage onNeedBy = true Powd">ESP==true

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
		Alternator - amb	FESBA_B595_2					
		Alternator - Vd10580C-St-Pm	FESBA_B715_2					
		Alternator - amb	FESBA_B691_2					
2	Alternator - Heater							
2	Alternator - Temperature Sensors		TemperatureSensor					
				Max Operating KW	maxOperatingKW	STATIC		
				Parent Required KW	parentRequiredKW	EXPRESSION		
		Temp Sens-Stator, 2 RTD/Ph	StatorTemperatureSensor					
		Bearing,1 RTD NDE	BearingTemperatureSensor					
2	Alternator - Output Terminals		OutputTerminal					
		Output Terminals-2Hole Lug, NEMA	OutputTerminalNEMA					
1	Engine							
2	Engine - Engine Model		EngineModel					
		Engine - QSK60-G6	FESBA_2940					
2	Engine - Starter Motor		StarterMotor					

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
		Electric Starter Motor - 24V DC	FESBA_A334-2					
2	Engine - Fuel Filter		FuelFilter					
		Fuel Filters-Engine, Standard	FESBA_3090					
		Fuel Filters-Engine, Duplex	FESBA_C278-2					
1	Control							
2	Control - Control Main		Control					
				Control Placement	controlPlacement	CONFIGURABLE	Picklist	["Left", "Right", "Top"]
				Commissioning Scope	commissioningScope	CONFIGURABLE	Picklist	["None", "Remote Support", "On-site Commissioning"]
				Control Language	controlLanguage	CONFIGURABLE	Picklist	["English", "Danish", "French"]
		PowerCommand 3.3	FESBA_H704_2					
		PowerCommand 3.3 with MLD	FESBA_KX21_2					
2	Control - Control Cabinet Heater		Control Cabinet Heater					
		120/240VAC compatible	FESBA_A460_2					

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
1	Services							
2	Services - Warranty		Warranty					
		Warranty PRP	Warranty_PRP					
		Warranty DCC	Warranty_DCC					
		Warranty ESP	Warranty_ESP					
2	Services - Maintenance		Maintenance					
				Maintenance Duration	maintenanceDuration	CONFIGURABLE	int [12..60]	
				Coverage Level	coverageLevel	CONFIGURABLE	Picklist ["Standard", "Premium"]	
		Standard Maintenance Kit	StandardMaintenanceKit					
2	Services - Testing		Test					
		Test - Standard Factory	StandardFactoryTest					
		Test Record-Certified	TestRecord					
		Test-Independent Laboratory	IndependentLaboratoryTest					
		Test - Witness	WitnessTest					
		Test-Extended, Standby Load, 2	WitnessService					
1	Accessories							
2	Accessories - Main		Accessory					
				Category	category	CONFIGURABLE	Picklist	

Level	Product Group	Product	Product Type Name	Product Attribute	API Name OR CML Variable	Configurable or Static	Type	Comments
				Weight	weight			
2	Accessories - Enclosure		Enclosure					
				dB Reduction	dBReduction	STATIC	Picklist dBReduction [0, 1, 3, 6, 9]	
		Enclosure None	Enclosure_None					
		Enclosure Weather	Enclosure_Weather					
		Enclosure SA1	Enclosure_SA1					
		Enclosure SA2	Enclosure_SA2					
		Enclosure SA3	Enclosure_SA3					
1	Install & Misc							
2	Install & Misc - Installation		install					

CHAPTER 8 Transaction Management

In this chapter ...

- [Transaction Management Standard Objects](#)
- [Transaction Management Fields on Standard Objects](#)
- [Transaction Management Tooling API Objects](#)
- [Transaction Management Platform Event](#)
- [Transaction Management Business APIs](#)
- [Transaction Management Apex Reference](#)
- [Transaction Management Standard Invocable Actions](#)
- [Transaction Management Metadata API Types](#)

Configure, price, and sell products with Transaction Management in Revenue Management. Transaction Management supports subscription lifecycles and ensures end-to-end integrity of your quotes and orders.

SEE ALSO:

[Salesforce Help: Permissions for Quote and Order Capture](#)

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions of Revenue Cloud where Transaction Management is enabled

Transaction Management Standard Objects

The Transaction Management data model provides objects and fields to manage transactions.

These objects are documented in the [Salesforce Object Reference](#).

- [Asset](#)
- [AssetAction](#)
- [AssetActionSource](#)
- [AssetContractRelationship](#)
- [AssetDowntimePeriod](#)
- [AssetOwnerSharingRule](#)
- [AssetRateAdjustment](#)
- [AssetRateCardEntry](#)
- [AssetRelationship](#)
- [AssetShare](#)
- [AssetStatePeriod](#)
- [AssetStatePeriodAttribute](#)
- [AssetTag](#)
- [AssetTokenEvent](#)
- [AssetWarranty](#)
- [OrderDeliveryMethod](#)
- [QuoteAction](#)
- [QuoteItemTaxItem](#)

[AssetActionSrcPriceAdjustment](#)

Each row represents a junction between an asset and the calculated price adjustment that's applied to an asset. This object is available in API version 66.0 and later.

[BindingObjUsageRsrcPlcy](#)

Represents the policies that are used for the usage resource that's associated with an asset or a binding object. This object is available in API version 65.0 and later.

[ContractItemPrice](#)

Represents an object that's used to capture a price for a product on a contract. This object is available in API version 61.0 and later.

[ContractItemPriceAdjTier](#)

Represents the tiers of a price adjustment to a product on a contract. This object is available in API version 63.0 and later.

[ContractItemPriceHistory](#)

Represents the history of changes to the values in the fields of a ContractItemPrice object. This object is available in API version 61.0 and later.

[OrderItemAttribute](#)

Represents a virtual object that stores an attribute specified for an order item. This object is available in API version 60.0 and later.

[OrderItemDetail](#)

Represents the breakdown details of an order product. Revenue Management generates these records to capture pricing and quantity changes, such as negative quantity reductions, early renewals, derived pricing or repricing during an amendment, and bundle or product attribute reconfigurations. This object is available in API version 60.0 and later.

[OrderItemRateAdjustment](#)

Represents the negotiated rate adjustment for an order product. This object is available in API version 62.0 and later.

[OrderItemRateCardEntry](#)

Represents the catalog and negotiated rates of a usage metric associated with an order item that's used to charge overage consumption. This object is available in API version 62.0 and later.

[OrderItemUsageRsrcGrant](#)

Represents the negotiated grants for the usage resource that's associated with the usage product added in the order item. This object is available in API version 65.0 and later.

[OrderItemUsageRsrcPlcy](#)

Represents the policies that are used for the usage resource that's associated with the usage product added in the order item. This object is available in API version 65.0 and later.

[SalesTransactionType](#)

Represents the type of the sales transaction. This object is available in API version 61.0 and later.

[QuoteLineDetail](#)

Represents the breakdown details of a quote line item. Revenue Management generates these records to capture pricing and quantity changes, such as negative quantity reductions, early renewals, derived pricing or repricing during an amendment, and bundle or product attribute reconfigurations. This object is available in API version 60.0 and later.

[QuoteLineGroup](#)

Stores the group information for line items in a quote. It also stores the aggregated line field information (subtotal). It contains a parent-child relationship to quote. This object is available in API version 61.0 and later.

[QuoteLineItemAttribute](#)

Represents a virtual object that stores an attribute specified for a quote line item. This object is available in API version 59.0 and later.

[QuoteLineItemUsageRsrcGrant](#)

Represents the negotiated grants for the usage resource that's associated with the usage product added in the quote line item. This object is available in API version 65.0 and later.

[QuoteLineItemUsageRsrcPlcy](#)

Represents the policies that are used for the usage resource that's associated with the usage product added in the quote line item. This object is available in API version 65.0 and later.

[QuoteLineRateAdjustment](#)

Represents the negotiated rate adjustment for a quote line item. This object is available in API version 62.0 and later.

[QuoteLineRateCardEntry](#)

Represents the catalog and negotiated rates of a usage resource associated with a quote line item that's used to charge overage consumption. This object is available in API version 62.0 and later.

[QuoteToOpportunitySyncEvent](#)

Represents an asynchronous quote to opportunity synchronization event. It tracks whether the sync succeeded or failed and notifies associated subscribers upon completion. This object is available in API version XX.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

AssetActionSrcPriceAdjustment

Each row represents a junction between an asset and the calculated price adjustment that's applied to an asset. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

AdjustmentValue

Type: double

Properties: Create, Filter, Nillable, Sort

Description: The value of the price adjustment that was applied to the asset.

AppliedPriceAdjustmentDate

Type: dateTime

Properties: Create, Filter, Sort

Description: The date and time on which the price adjustment was applied to the asset.

AssetActionSourceId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the asset action source related to the asset for which the price adjustment was applied.

This field is a relationship field.

Relationship Name: AssetActionSource

Relationship Type: Master-detail

Refers To: AssetActionSource (the master object)

AssetId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the asset that this price adjustment applies to.

This field is a relationship field.

Relationship Name: Asset

Refers To: Asset

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the asset price adjustment record.

PriceAdjustmentCauseId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the record that caused the price adjustment.

This field is a polymorphic relationship field.

Relationship Name: PriceAdjustmentCause

Refers To: Promotion

PriceAdjustmentSource

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the source of price adjustment.

Possible values are `Discretionary—Reserved for future use`, `Promotion`, `Rule—Reserved for future use`, or `System—Reserved for future use`.

PrioritySequence

Type: int

Properties: Create, Filter, Group, Nillable, Sort

Description: The priority sequence of the applied price adjustment.

BindingObjUsageRsrcPlcy

Represents the policies that are used for the usage resource that's associated with an asset or a binding object. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

BindingObjectId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The object that's bounded with the quote line policy or order policy.

This field is a polymorphic relationship field.

Relationship Name: BindingObject

Refers To: Account, Asset, BindingObjectCustomExt, Contract

DrawdownOrder

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the order that's used to debit consumption of entitlements related to the usage resource from the usage entitlement bucket.

Valid values are `ExpiringFirst`, `GrantedFirst`, or `GrantedLast`.

EffectiveEndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time until when the policy remains effective.

EffectiveStartDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the policy becomes effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The auto-generated identifier for the quote line item usage resource policy record. For example, BOURP-000004.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the binding object usage resource policy.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RatingFrequencyPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The rating frequency policy associated with the usage resource.

This field is a relationship field.

Relationship Name: RatingFrequencyPolicy

Refers To: RatingFrequencyPolicy

UsageAggregationPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage aggregation policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageAggregationPolicy

Refers To: UsageResourceBillingPolicy

UsageCommitmentPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage commitment policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageCommitmentPolicy

Refers To: UsageCommitmentPolicy

UsageOveragePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage overage policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageOveragePolicy

Refers To: UsageOveragePolicy

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the usage product.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Binding Object Usage Resource Policy Behavior During Asset Operations

When you create or update an order and an asset is created or modified, Usage Management creates a Binding Object Usage Resource Policy (BOURP) record per Usage Resource based on the Product Usage Resource Policy (PURP) from the asset that's processed first. After the BOURP record is created, the policy references remain unchanged regardless of subsequent operations.

The Effective Start Date and Effective End Date fields extend to accommodate new or renewed assets associated with the same Binding Object and Usage Resource. However, the policy fields can't be updated after initial BOURP creation.

Here's how each operation affects BOURP creation, date ranges, and policy updates.

Operation	BOURP Create	Start Date Update	End Date Update	Policy Update	Delete/Expire
New Sale (first asset for Binding Object)	Yes	—	—	—	—
New Sale (subsequent asset, same Binding Object, and Usage Resource)	No	Extends to an earlier date, if applicable	Extends to a later date, if applicable	No	—
Renew (existing BOURP)	No	No	Extends to a later date, if applicable	No	—
Renew (new Usage Resource on asset)	Yes	—	—	—	—
Amend (new Usage Resource on asset)	Yes	—	—	—	—
Amend (existing Usage Resource)	No	No	No	No	—
Cancel	No	No	No	No	No

 **Important:** Policy fields on a BOURP record are never updated after the initial record is created. If an asset operation introduces a different Product Usage Resource Policy for the same Binding Object and Usage Resource combination, the BOURP retains the policy from the first asset that was processed. The system doesn't split BOURP records or create multiple BOURPs per Usage Resource and Binding Object combination.

 **Note:** If you must change the policy for a Usage Resource, you must manually update the existing BOURP record or implement custom automation to handle policy changes during specific operations.

ContractItemPrice

Represents an object that's used to capture a price for a product on a contract. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

AdjustmentMethod

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Method used to apply discount.

Valid values are:

- **Range**—Apply the discount to all items after you reach the discount tier. For example, suppose that you give a 10% discount for 50 or more items. If a customer orders 50 products, and the type is `range`, apply the 10% discount to all 50 items.
- **Slab**—Apply discounts in tiers. For example, suppose that you order 30 products, and the type is `slab`, you can apply a 10% discount to units 1–9, a 20% discount to units 10–19, and a 30% discount to units 20–30.

ContractId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the contract.

This field is a relationship field.

Relationship Name: Contract

Relationship Type: Master-detail

Refers To: Contract (the master object)

DiscountType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of discount applied, a percentage of the price or an amount.

Valid values are `AdjustmentAmount` or `AdjustmentPercentage`.

DiscountValue

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The value of the discount applied, based on the discount type.

EndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: End date and time of the relationship between the contract and contract item price.

ItemId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: ID of the product or product category related to a price in a contract.

This field is a polymorphic relationship field.

Relationship Name: Item

Relationship Type: Lookup

Refers To: Product2, ProductCategory

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp when the current user last accessed this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp when the current user last viewed this record or list view. If this value is null, the user accessed this record or list view (`LastReferencedDate`) but didn't view it.

ListPrice

Type: currency

Properties: Filter, Nillable

Description: The list price of the product. This value is read-only and inherited from the price book related to the contract when the contract item price is created. Use the list price to compare the advertised price to prices that customers receive during contract negotiations. This field is available in API version 66.0 and later.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Auto-generated number assigned to the contract item price. (Read only)

Price

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: Unit price for the product sold as part of the contract.

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Product selling model for the product associated with the price.

This field is a relationship field.

Relationship Name: ProductSellingModel

Relationship Type: Lookup

Refers To: ProductSellingModel

SellingModelType

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Selling mode type to specify whether the product sold is a one-time sale, an evergreen subscription, or a subscription with a defined term.

Valid values are `Evergreen`, `OneTime`, or `TermDefined`.

The value derived from the product selling model.

StartDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Start date and time of the relationship between the contract and contract item price.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContractItemPriceHistory on page 1165: History is available for tracked fields of the object.

ContractItemPriceAdjTier

Represents the tiers of a price adjustment to a product on a contract. This object is available in API version 63.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available with Revenue Management.

Fields

ContractItemPriceId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The contract item price ID associated with the contract item price adjustment tier.

This field is a relationship field.

Relationship Name: ContractItemPrice

Relationship Type: Master-detail

Refers To: ContractItemPrice (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Timestamp when the current user last viewed this record or list view. If this value is null, the user accessed this record or list view (`LastReferencedDate`) but didn't view it.

LowerBound

Type: double

Properties: Create, Filter, Sort, Update

Description: The minimum quantity for the adjustment to be applicable.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the record.

TierType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of adjustment tier.

Valid values are `AdjustmentAmount`, `AdjustmentPercentage`, or `OverrideAmount`.

TierValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The price adjustment value.

UpperBound

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The maximum quantity for the adjustment to be applicable.

Associated Objects

This object has associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ContractItemPriceAdjTierFeed: Feed tracking is available for the object.

ContractItemPriceAdjTierHistory: History is available for tracked fields of the object.

ContractItemPriceHistory

Represents the history of changes to the values in the fields of a `ContractItemPrice` object. This object is available in API version 61.0 and later.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

ContractItemPriceld

Type: reference

Properties: Filter, Group, Sort

Description: ID of the ContractItemPrice record.

This field is a relationship field.

Relationship Name: ContractItemPrice

Relationship Type: Lookup

Refers To: ContractItemPrice

DataType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Data type of the field that was changed.

Valid values are:

- Address
- AnyType
- AutoNumber
- Base64
- BitVector
- Boolean
- Content
- Currency
- DataCategoryGroupReference
- DateOnly
- DateTime
- Division
- Double
- DynamicEnum
- Email
- EncryptedBase64

- EncryptedText
- EntityId
- EnumOrId
- ExternalId
- Fax
- File
- HtmlMultiLineText
- HtmlStringPlusClob
- InetAddress
- Json
- Location
- MultiEnum
- MultiLineText
- Namespace
- Percent
- PersonName
- Phone
- Raw
- RecordType
- SfdcEncryptedText
- SimpleNamespace
- StringPlusClob
- Switchable_PersonName
- Text
- TimeOnly
- Url
- YearQuarter

Field

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Name of the field that was changed.

Possible values are:

- AdjustmentMethod
- Contract
- DiscountType
- DiscountValue
- EndDate
- Item

- Name
- Price
- ProductSellingModel
- StartDate
- created
- customPersonMerged
- feedEvent
- individualMerged
- locked—Record locked.
- ownerAccepted—Owner (Accepted)
- ownerAssignment—Owner (Assignment)
- unlocked—Record unlocked.

NewValue

Type: anyType

Properties: Nillable, Sort

Description: New value of the field that was changed.

OldValue

Type: anyType

Properties: Nillable, Sort

Description: Latest value of the field before it was changed.

OrderItemAttribute

Represents a virtual object that stores an attribute specified for an order item. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the attribute definition for this order item attribute.

This field is a relationship field.

Relationship Name: AttributeDefinition

Relationship Type: Lookup

Refers To: AttributeDefinition

AttributeName

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: The name given to order item attribute.

AttributePicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the attribute picklist value if the attribute is a picklist type.

This field is a relationship field.

Relationship Name: AttributePicklistValue

Relationship Type: Lookup

Refers To: AttributePicklistValue

AttributeValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Stores the value of the order item attribute. For example 5-TB storage.

You can use this field to filter records only if the `DataType` value in the related `AttributeDefinitionId` record is `Text`. If the `DataType` value is `Picklist`, use the value in the `AttributePicklistValueId` field for filtering. You can't use this field to filter records if the `DataType` value is `Checkbox`, `Currency`, `Date`, `Datetime`, `Multipicklist`, `Number`, or `Percent`.

ExternalId

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: An auto-generated ID of the attribute record saved in an external system (for example an HBase database).

IsPriceImpacting

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: The pricing impacting the status of the attribute.

The default value is `false`.

OrderItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The parent order item associated with the order item attribute.

This field is a relationship field.

Relationship Name: OrderItem

Relationship Type: Lookup

Refers To: OrderItem

OrderItemDetail

Represents the breakdown details of an order product. Revenue Management generates these records to capture pricing and quantity changes, such as negative quantity reductions, early renewals, derived pricing or repricing during an amendment, and bundle or product attribute reconfigurations. This object is available in API version 60.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

BillingReference

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Reference to the original order item for which this amend or cancel record is created.

EffectiveFrom

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the transaction becomes effective.

EffectiveTo

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the transaction ends.

LineNumber

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The line number of the detail record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the record.

NetUnitPrice

Type: currency

Properties: Filter, Sort

Description: The unit price of the item that's calculated after applying any discounts and before tax calculation.

OrderItemId

Type: reference

Properties: Filter, Group, Sort

Description: The ID of the related order item.

This field is a relationship field.

Relationship Name: OrderItem

Relationship Type: Lookup

Refers To: OrderItem

PriceWaterfallIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The price waterfall identifier generated by Salesforce Pricing that's associated with the pricing of the detail record.

Quantity

Type: double

Properties: Filter, Sort

Description: The quantity specified for the item in the detail record.

ReferenceDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The reference date of the item. For example, the start date of the subscription that's associated with the detail record.

ReferenceNumber

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The reference number of the item. For example, the order number that's associated with the detail record.

TotalLineAmount

Type: currency

Properties: Filter, Sort

Description: The net total price of the order product, before price adjustments, inclusive of quantity and subscription term.

TotalPrice

Type: currency

Properties: Filter, Sort

Description: The total price of the item in the detail record that's calculated using the quantity, net unit price, and after applying the pricing terms.

UnitPrice

Type: currency

Properties: Filter, Sort

Description: The unit price of the item before any discounts or tax calculation.

OrderItemRateAdjustment

Represents the negotiated rate adjustment for an order product. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

AdjustmentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the type of rate adjustment.

Possible values are Amount, Override, or Percentage

AdjustmentValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The value of the adjustment.

LowerBound

Type: double

Properties: Create, Filter, Sort, Update

Description: The minimum quantity for the adjustment to be applicable.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the order item rate adjustment.

OrderItemRateCardEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The parent order item rate card entry associated with the order item rate adjustment.

This field is a relationship field.

Relationship Name: OrderItemRateCardEntry

Relationship Type: Master-detail

Refers To: OrderItemRateCardEntry (the master object)

UpperBound

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The quantity below which the adjustment must be applicable. For example, if you want the adjustment to be applicable when the quantity is 99 or less, set this value to 100.

OrderItemRateCardEntry

Represents the catalog and negotiated rates of a usage metric associated with an order item that's used to charge overage consumption. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

IsChosenRate

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this rate is the chosen rate for the associated binding target and usage resource (`true`) or not (`false`). The default value is `false`. Available in API version 64.0 and later.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: An auto-generated number assigned to the order item rate card entry record.

NegotiatedRate

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The base negotiated rate used to charge overage consumption.

OrderItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The parent order item associated with the order item rate card entry.

This field is a relationship field.

Relationship Name: OrderItem

Relationship Type: Master-detail

Refers To: OrderItem (the master object)

RateCardEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The rate card entry containing catalog rates that's associated with the order item rate card entry.

This field is a relationship field.

Relationship Name: RateCardEntry

Refers To: RateCardEntry

RateCardId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The rate card associated with the order item rate card entry.

This field is a relationship field.

Relationship Name: RateCard

Refers To: RateCard

RateUnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The standard unit of measure containing the unit for the negotiated rate that's associated with the order item rate card entry.

This field is a relationship field.

Relationship Name: RateUnitOfMeasure

Refers To: UnitOfMeasure

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource associated with the order item rate card entry.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

OrderItemUsageRsrcGrant

Represents the negotiated grants for the usage resource that's associated with the usage product added in the order item. This object is available in API version 65.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

GrantQuantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The granted or negotiated quantity of a usage resource associated with the usage product.

GrantType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the type of model that defines how the usage resource is consumed.

Valid values are `Commit` or `Grant`.

The default value is `Grant`.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The auto-generated identifier for the order item usage resource grant record. For example, OIURG-00004 or OIURG-4567.

OrderItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The order item associated with the usage product.

This field is a relationship field.

Relationship Name: OrderItem

Relationship Type: Master-detail

Refers To: OrderItem (the master object)

ProductUsageGrantId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product usage grant associated with the order item.

This field is a relationship field.

Relationship Name: ProductUsageGrant

Refers To: ProductUsageGrant

TokenResourceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage resource of category Token associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: TokenResource

Refers To: UsageResource

UsageGrantRefreshPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage grant refresh policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: UsageGrantRefreshPolicy

Refers To: UsageGrantRenewalPolicy

UsageGrantRolloverPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage grant rollover policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: UsageGrantRolloverPolicy

Refers To: UsageGrantRolloverPolicy

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the usage product that's added in the order item.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

ValidityPeriodTerm

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The duration for which the usage resource grant is valid, when used with the validity period units.

ValidityPeriodUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The length of a validity period for the usage resource grant, when used with the validity period term.

Valid values are Month, None, or Year.

OrderItemUsageRsrcPlcy

Represents the policies that are used for the usage resource that's associated with the usage product added in the order item. This object is available in API version 65.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

DrawdownOrder

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the order that's used to debit consumption of entitlements related to the usage resource from the usage entitlement bucket.

Valid values are ExpiringFirst, GrantedFirst, or GrantedLast.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: An auto-generated number assigned to the order item for usage product grant record. For example, OIURG-4567

OrderItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The order item associated with the usage product.

This field is a relationship field.

Relationship Name: OrderItem

Relationship Type: Master-detail

Refers To: OrderItem (the master object)

ProductUsageResourcePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product usage resource policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: ProductUsageResourcePolicy

Refers To: ProductUsageResourcePolicy

RatingFrequencyPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The rating frequency policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: RatingFrequencyPolicy

Refers To: RatingFrequencyPolicy

UsageAggregationPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage aggregation policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: UsageAggregationPolicy

Refers To: UsageResourceBillingPolicy

UsageCommitmentPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage commitment policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: UsageCommitmentPolicy

Refers To: UsageCommitmentPolicy

UsageOveragePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage overage policy associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: UsageOveragePolicy

Refers To: UsageOveragePolicy

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the usage product that's added in the order item.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

SalesTransactionType

Represents the type of the sales transaction. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, the user might have only accessed this record or list view but not viewed it directly.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the sales transaction type.

QuoteLineDetail

Represents the breakdown details of a quote line item. Revenue Management generates these records to capture pricing and quantity changes, such as negative quantity reductions, early renewals, derived pricing or repricing during an amendment, and bundle or product attribute reconfigurations. This object is available in API version 60.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Fields

BillingReference

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Reference to the original order item for which this amend or cancel record is created.

EffectiveFrom

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the transaction becomes effective.

EffectiveTo

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the transaction ends.

LineNumber

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The line number of the detail record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the record.

NetUnitPrice

Type: currency

Properties: Filter, Sort

Description: The unit price of the item that's calculated after applying any discounts and before tax calculation.

PriceWaterfallIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The price waterfall identifier generated by Salesforce Pricing that's associated with the pricing of the detail record.

Quantity

Type: double

Properties: Filter, Sort

Description: The quantity specified for the item in the detail record.

QuoteLineItemId

Type: reference

Properties: Filter, Group, Sort

Description: The ID of the related quote line.

This field is a relationship field.

Relationship Name: QuoteLineItem

Relationship Type: Lookup

Refers To: QuoteLineItem

ReferenceDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The reference date of the item. For example, the start date of the subscription that's associated with the detail record.

ReferenceNumber

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The reference number of the item. For example, the order number that's associated with the detail record.

TotalLineAmount

Type: currency

Properties: Filter, Sort

Description: The net total price of the order product, before price adjustments, inclusive of quantity and the subscription term.

TotalPrice

Type: currency

Properties: Filter, Sort

Description: The total price of the item in the detail record that's calculated using the quantity, net unit price, and after applying the pricing terms.

UnitPrice

Type: currency

Properties: Filter, Sort

Description: The unit price of the item before any discounts or tax calculation.

QuoteLineGroup

Stores the group information for line items in a quote. It also stores the aggregated line field information (subtotal). It contains a parent-child relationship to quote. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the group.

Discount

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional discount percentage, specified by the sales representative at the group level.

DiscountAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional discount amount, specified by the sales representative at the group level.

EndDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The end date of the group ramp segment.

IsRamped

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the group is a group ramp segment, which is a period in a group ramp deal with specific prices and volume. The default value is `false`.

Margin

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin percentage, specified by the sales representative at the group level.

MarginAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin amount, specified by the sales representative at the group level. This amount can also be considered as the summary margin amount calculated by subtracting the total cost from the summary subtotal.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the group.

ParentQuoteLineGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the parent group for a nested quote line group. This field is a relationship field.

Relationship Name: ParentQuoteLineGroup

Refers To: QuoteLineGroup

QuoteId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the related quote. This field is a relationship field.

Relationship Name: Quote

Relationship Type: Master-detail

Refers To: Quote (the master object)

SegmentType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The duration type of the segment. Possible values are `Custom` or `Yearly`.

SortOrder

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

StartDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The start date of the group ramp segment.

SummarySubtotal

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The aggregated subtotal amount of nested group lines.

SummaryTotalAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The aggregated total amount of nested group lines before any discounts are applied.

TotalAdjustment

Type: percent

Properties: Filter, Nillable, Sort

Description: The total discount percentage applied at the group level. This percentage is calculated by using the formula: $(\text{Summary Total Amount} - \text{Summary Subtotal}) / \text{Summary Total Amount}$.

TotalAdjustmentAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total discount amount at the group level. This amount is calculated by subtracting the summary subtotal from the summary total amount.

TotalCost

Type: currency

Properties: Filter, Nillable, Sort

Description: The aggregated total cost of nested group lines.

TotalMargin

Type: percent

Properties: Filter, Nillable, Sort

Description: The summary margin percentage at the line item level. This percentage is calculated by using the formula: (Summary Subtotal - Total Cost) / Summary Subtotal.

TotalMarginAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The summary margin amount calculated at the group level.

Type

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of quote line group. Possible values are `AssetDowngrade`, `AssetSwap`, `AssetUpgrade`, `CPQQuoteGroup`—CPQ Line Grouping, or `RampScheduleGroup`. The default value is `CPQQuoteGroup`.

QuoteLineItemAttribute

Represents a virtual object that stores an attribute specified for a quote line item. This object is available in API version 59.0 and later.



Note: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Revenue Management

Fields

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the attribute definition for this quote line item attribute.

This field is a relationship field.

Relationship Name: AttributeDefinition

Refers To: AttributeDefinition

AttributeName

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: The name of the quote line item attribute.

AttributePicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the attribute picklist value if the attribute is a picklist type.

This field is a relationship field.

Relationship Name: AttributePicklistValue

Refers To: AttributePicklistValue

AttributeValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of the quote line item attribute. For example 5-TB storage.

You can use this field to filter records only if the `DataType` value in the related `AttributeDefinitionId` record is `Text`. If the `DataType` value is `Picklist`, use the value in the `AttributePicklistValueId` field for filtering. You can't use this field to filter records if the `DataType` value is `Checkbox`, `Currency`, `Date`, `Datetime`, `Multipicklist`, `Number`, or `Percent`.

ExternalId

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: An auto-generated ID of the attribute record saved in an external system, such as an HBase database.

IsPriceImpacting

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: The pricing impacting the status of the attribute.

The default value is `false`.

QuoteLineItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The associated parent quote line item.

This field is a relationship field.

Relationship Name: QuoteLineItem

Relationship Type: Master-detail

Refers To: QuoteLineItem (the master object)

Usage

This object doesn't support custom fields, validation rules, or triggers. In SOQL queries, you can filter records by using `Id` and `AttributeDefinition`. You can't use `AttributeValue` in the `WHERE` clause.

QuotLineItemUseRsrcGrant

Represents the negotiated grants for the usage resource that's associated with the usage product added in the quote line item. This object is available in API version 65.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

GrantQuantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The granted or negotiated quantity of a usage resource associated with the usage product.

GrantType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the type of model that defines how the usage resource is consumed.

Valid values are `Commit` or `Grant`.

The default value is `Grant`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The auto-generated identifier for the quote line item usage resource grant record. For example, QLIURG-00004 or QLIURG-4567.

ProductUsageGrantId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product usage grant associated with the quote line item.

This field is a relationship field.

Relationship Name: ProductUsageGrant

Refers To: ProductUsageGrant

QuoteLineItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The quote line item associated with the usage product.

This field is a relationship field.

Relationship Name: QuoteLineItem

Relationship Type: Master-detail

Refers To: QuoteLineItem (the master object)

TokenResourceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage resource of category Token associated with the usage resource related to the usage product added in the order item.

This field is a relationship field.

Relationship Name: TokenResource

Refers To: UsageResource

UsageGrantRefreshPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage grant refresh policy associated with the usage resource related to the usage product added in the quote line item.

This field is a relationship field.

Relationship Name: UsageGrantRefreshPolicy

Refers To: UsageGrantRenewalPolicy

UsageGrantRolloverPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage grant rollover policy associated with the usage resource related to the usage product added in the quote line item.

This field is a relationship field.

Relationship Name: UsageGrantRolloverPolicy

Refers To: UsageGrantRolloverPolicy

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the usage product that's added as the quote line item.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

ValidityPeriodTerm

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The duration for which the usage resource grant is valid, when used with the validity period units.

ValidityPeriodUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The length of a validity period for the usage resource grant, when used with the validity period term.

Valid values are Month, None, or Year.

QuotLineItemUsageRsrcPlcy

Represents the policies that are used for the usage resource that's associated with the usage product added in the quote line item. This object is available in API version 65.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

DrawdownOrder

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the order that's used to debit consumption of entitlements related to the usage resource from the usage entitlement bucket.

Valid values are ExpiringFirst, GrantedFirst, or GrantedLast.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The auto-generated identifier for the quote line item usage resource policy record. For example, QLIURP-00004 or QLIURP-4567.

ProductUsageResourcePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product usage resource policy associated with the quote line item.

This field is a relationship field.

Relationship Name: ProductUsageResourcePolicy

Refers To: ProductUsageResourcePolicy

QuoteLineItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The quote line item associated with the usage product.

This field is a relationship field.

Relationship Name: QuoteLineItem

Relationship Type: Master-detail

Refers To: QuoteLineItem (the master object)

RatingFrequencyPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The rating frequency policy associated with the usage resource related to the usage product added in the quote line item.

This field is a relationship field.

Relationship Name: RatingFrequencyPolicy

Refers To: RatingFrequencyPolicy

UsageAggregationPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage aggregation policy associated with the usage resource related to the usage product added in the quote line item.

This field is a relationship field.

Relationship Name: UsageAggregationPolicy

Refers To: UsageResourceBillingPolicy

UsageCommitmentPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage commitment policy associated with the usage resource related to the usage product added in the quote line item.

This field is a relationship field.

Relationship Name: UsageCommitmentPolicy

Refers To: UsageCommitmentPolicy

UsageOveragePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage overage policy associated with the quote line item.

This field is a relationship field.

Relationship Name: UsageOveragePolicy

Refers To: UsageOveragePolicy

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the usage product that's added in the quote line item.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

QuoteLineRateAdjustment

Represents the negotiated rate adjustment for a quote line item. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

AdjustmentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the type of rate adjustment.

Possible values are Amount, Override, or Percentage

AdjustmentValue

Type: double

Properties: Create, Filter, Sort, Update

Description: The value of the adjustment.

LowerBound

Type: double

Properties: Create, Filter, Sort, Update

Description: The minimum quantity for the adjustment to be applicable.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the quote line rate adjustment record.

QuoteLineRateCardEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The parent quote line rate card entry associated with the quote line rate adjustment.

This field is a relationship field.

Relationship Name: QuoteLineRateCardEntry

Relationship Type: Master-detail

Refers To: QuoteLineRateCardEntry (the master object)

UpperBound

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The quantity below which the adjustment must be applicable. For example, if you want the adjustment to be applicable when the quantity is 99 or less, set this value to 100.

QuoteLineRateCardEntry

Represents the catalog and negotiated rates of a usage resource associated with a quote line item that's used to charge overage consumption. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

IsChosenRate

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether this rate is the chosen rate for the associated binding target and usage resource (`true`) or not (`false`). The default value is `false`. Available in API version 64.0 and later.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: An auto-generated number assigned to the quote line rate card entry record.

NegotiatedRate

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The base negotiated rate used to charge overage consumption.

QuoteLineItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The parent quote line item associated with the quote line rate card entry.

This field is a relationship field.

Relationship Name: QuoteLineItem

Relationship Type: Master-detail

Refers To: QuoteLineItem (the master object)

RateCardEntryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The rate card entry containing catalog rates that's associated with the quote line rate card entry.

This field is a relationship field.

Relationship Name: RateCardEntry

Refers To: RateCardEntry

RateCardId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The rate card associated with the quote line rate card entry.

This field is a relationship field.

Relationship Name: RateCard

Refers To: RateCard

RateUnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The standard unit of measure containing the unit for the negotiated rate that's associated with the quote line rate card entry.

This field is a relationship field.

Relationship Name: RateUnitOfMeasure

Refers To: UnitOfMeasure

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource associated with the quote line rate card entry.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

QuoteToOpportunitySyncEvent

Represents an asynchronous quote to opportunity synchronization event. It tracks whether the sync succeeded or failed and notifies associated subscribers upon completion. This object is available in API version XX.0 and later.

Supported Calls

`create()`, `describeSObjects()`

Fields

CorrelationIdentifier

Type: string

Properties: Create, Nillable

Description: The caller-specified ID that matches this event to the originating request.

ErrorCode

Type: string

Properties: Create, Nillable

Description: The error code returned when the sync fails. Null when Has Errors is False.

ErrorMessage

Type: textarea

Properties: Create, Nillable

Description: The error message that explains why the sync failed. Null when Has Errors is False.

HasErrors

Type: boolean

Properties: Create, Defaulted on create

Description: Indicates whether the sync failed. True if the sync completed with errors or False if the sync succeeded.

The default value is `false`.

OpportunityRecordId

Type: reference

Properties: Create, Nillable

Description: The ID of the Opportunity record being synced. Null if the sync fails before an Opportunity is associated.

This field is a relationship field.

Relationship Name: OpportunityRecord

Refers To: Opportunity

QuoteRecordId

Type: reference

Properties: Create

Description: The ID of the Quote record synced to its related Opportunity.

This field is a relationship field.

Relationship Name: QuoteRecord

Refers To: Quote

RequestIdentifier

Type: string

Properties: Create, Nillable

Description: The unique identifier for the request that triggered this sync event.

RevenueTransactionErrLogId

Type: reference

Properties: Create, Nillable

Description: The ID of the Revenue Transaction Error Log record created when the sync fails. Null when Has Errors is False.

This field is a relationship field.

Relationship Name: RevenueTransactionErrLog

Refers To: RevenueTransactionErrorLog

Transaction Management Fields on Standard Objects

Transaction Management adds standard and custom fields to some standard Salesforce objects. These fields are available only in orgs where Transaction Management is enabled.

[Transaction Management Fields on Object State Definition](#)

Standard and custom fields extend the standard Object State Definition object for use in Transaction Management to represent the object state model for a particular status field for an entity. This object is available in API version 60.0 and later.

[Transaction Management Fields on Object State Transition](#)

Standard and custom fields extend the standard Object State Transition object for use in Transaction Management to define the valid transition between two statuses. This object is available in API version 60.0 and later.

[Transaction Management Fields on Object State Value](#)

Standard and custom fields extend the standard Object State Transition object for use in Transaction Management. This object is available in API version 60.0 and later.

[Transaction Management Fields on Order](#)

Standard and custom fields extend the standard Order object for use in Transaction Management.

[Transaction Management Fields on Order Item](#)

Standard and custom fields extend the standard Order Item object for use in Transaction Management.

[Transaction Management Fields on Order Item Group](#)

Standard and custom fields extend the standard Order Item Group object for use in Transaction Management.

[Transaction Management Fields on Order Action](#)

Standard and custom fields extend the standard Order Action object for use in Transaction Management. This object is available in API version 55.0 and later.

[Transaction Management Fields on Order Item Relationship](#)

Standard and custom fields extend the standard Order Item Relationship object for use in Transaction Management. This object is available in API version 58.0 and later.

[Transaction Management Fields on Quote](#)

Standard and custom fields extend the standard Quote object for use in Transaction Management to represent information about quotes. This object is available in API version 60.0 and later.

[Transaction Management Fields on Quote Line Group](#)

Standard and custom fields extend the standard Quote Line Group object for use in Transaction Management.

[Transaction Management Fields on Quote Line Item](#)

Standard and custom fields extend the standard Quote Line Item object for use in Transaction Management to represent information about line items in a quote. This object is available in API version 60.0 and later.

[Transaction Management Fields on Quote Document](#)

Standard and custom fields extend the standard Quote Document object for use in Transaction Management to represent information about quote documents. This object is available in API version 61.0 and later.

Transaction Management Fields on Object State Definition

Standard and custom fields extend the standard Object State Definition object for use in Transaction Management to represent the object state model for a particular status field for an entity. This object is available in API version 60.0 and later.

AppUsageType

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: This field indicates under which AppUsageType the transition applies to. For example, ObjectStateDefinition associated with "Revenue Lifecycle Management" AppUsageType will apply to quotes, assets, or orders associated with "Revenue Lifecycle Management".

Transaction Management Fields on Object State Transition

Standard and custom fields extend the standard Object State Transition object for use in Transaction Management to define the valid transition between two statuses. This object is available in API version 60.0 and later.

CustomPermissionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the associated custom permission.

This field is a relationship field.

Relationship Name: CustomPermission

Relationship Type: Lookup

Refers To: CustomPermission

Transaction Management Fields on Object State Value

Standard and custom fields extend the standard Object State Transition object for use in Transaction Management. This object is available in API version 60.0 and later.

CustomPermissionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the associated custom permission.

This field is a relationship field.

Relationship Name: CustomPermission

Relationship Type: Lookup

Refers To: CustomPermission

Transaction Management Fields on Order

Standard and custom fields extend the standard Order object for use in Transaction Management.

Special Access Rules

To view these fields, you must have the Revenue Cloud Advanced license. See [Order](#) for fields on the platform object.

Fields

AdjustmentDistributionLogic

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies how the overall discount amount distributes among all the order line items that have prices associated with them.

The amount distributed is either the value specified in the `AppliedDiscountAmount` field or the difference between the values in the calculated `TotalAmount` and the user-specified `TotalAmountOverride` fields.

Valid values are:

- `Equal`—Distributes the discount amount equally among all the order items.
- `Proportionate`—Distributes the discount amount in proportion to the `ListPriceTotal` values of the order items.

Available in API version 65.0 and later.

AppliedDiscount

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The discount amount that's distributed among all the order items that have prices associated with them. This amount is distributed based on the logic specified in the `AdjustmentDistributionLogic` field. Available in API version 65.0 and later.

AppliedDiscountAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The percent discount applied to each order item. Available in API version 65.0 and later.

CalculationStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the price and tax calculations for the order.

Valid values are:

- `CompletedWithPricing`—Indicates that pricing is complete and tax will now be calculated.
- `CompletedWithTax`—Indicates that pricing and tax calculation are complete.
- `CompletedWithoutPricing`—Indicates that pricing and tax calculation were skipped. For a sales rep, this value appears as `Unknown` on the order page.
- `ConfigurationFailed`—Indicates that configuration failed. Available in API version 62.0
- `ConfigurationInProgress`—Indicates that the configuration is in progress. Available in API version 62.0
- `GroupRampConfigurationFailed`—Indicates that the checks for group ramps have failed. Available in API version 65.0 and later.
- `OrderRequestFailed`—Indicates that the requested order changes weren't saved. Available in API version 62.0
- `OrderRequestPartiallySaved`—Indicates that the requested order changes were partially saved. Available in API version 62.0
- `PriceCalculationFailed`—Indicates that pricing failed.
- `ReconciliationFailed`—Indicates that the arrangement of order data failed. Available in API version 62.0
- `ReconciliationInProgress`—Indicates that the arrangement of data is in progress. For a sales rep, this value appears as `Saving` on the order page. Available in API version 62.0
- `SaveFailedOrIncomplete`—Indicates that the recent changes to the order weren't saved. For a sales rep, this value appears as `Some Records Weren't Saved` on the order page.
- `TaxCalculationFailed`—Indicates that pricing is complete but tax calculation failed.
- `TaxCalculationWaiting`—Indicates that pricing is complete and a request sent to the tax engine, but tax calculation isn't complete.

This read-only field is available in API version 61.0 and later.

DiscountPercent

Type: percent

Properties: Filter, Nillable, Sort

Description: The percentage of discount applied to the order. The discount percent calculation is $((\text{TotalRoundedLineAmount} - \text{TotalAmount}) / \text{TotalRoundedLineAmount}) * 100$. Available in API version 60.0 and later.

FulfillmentPlanId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unique ID of the fulfillment plan associated with the order.

This field is a relationship field.

This field is available only in orgs where Dynamic Revenue Orchestrator is enabled. Available in API version 60.0 and later.

Relationship Name: FulfillmentPlan

Relationship Type: Lookup

Refers To: FulfillmentPlan

LastPricedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the order price was last calculated. Available in API version 60.0 and later.

OrchestrationSbmsStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of order submission for orchestration.

This field is available only in orgs where Dynamic Revenue Orchestrator is enabled.

Valid values are `Completed`, `Rejected`, or `Submitted`

This read-only field is available in API version 61.0 and later.

OriginalActionType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the action that created the order.

Valid values are:

- `Amend`—Indicates that the order was created to amend assets.
- `Cancel`—Indicates that the order was created to cancel assets.
- `Renew`—Indicates that the order was created to renew assets.
- `Transfer`—Indicates that the order was created to transfer assets.

Available in API version 61.0 and later.

SalesTransactionTypeId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The foreign key to the Sales Transaction Type object. Available in API version 61.0 and later.

This field is a relationship field.

Relationship Name: SalesTransactionType

Relationship Type: Lookup

Refers To: SalesTransactionType

TotalAmountOverride

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The value that the `TotalAmount` field must be set to by applying overall discounts.

Transaction Management calculates the overall discount amount by finding the difference between the value in the calculated `TotalAmount` field and the value in this field. It then uses the logic specified in the `AdjustmentDistributionLogic` field to distribute the discount amount among all the order items that have prices associated with them.

Available in API version 65.0 and later.

TotalRoundedLineAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of all line items in an order without pricing adjustments, such as discounts or tax calculations. Available in API version 60.0 and later.

TransactionType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the type of order being processed.

The valid value is:

- `AdvancedConfigurator`—Indicates that the order must be processed by using the configuration rules and constraints set up in Constraint Rules Engine.

Available in API version 61.0 and later.

ValidationResult

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the order was configured and priced.

Orders can be activated only after they're configured and priced.

Valid values are:

- `MissingContributor`—Indicates that the order contains a derived product but not its pricing source.
- `TransactionIncomplete`—Indicates that the order wasn't configured and priced.

Available in API version 61.0 and later.

Transaction Management Fields on Order Item

Standard and custom fields extend the standard Order Item object for use in Transaction Management.

Special Access Rules

These fields require the Revenue Cloud Advanced license. See [Order Item](#) for fields on the Salesforce platform object.

Fields

`ApplUnitPriceUpliftPct`

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit price uplift percent that's applied to the order item, used for ramp pricing.

This field is available in API version 68.0 and later.

`CustomProductName`

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The custom name of a product that's used to override the product name. The maximum supported length is 80 characters.

Available in API version 61.0 and later.

`Discount`

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The manual discount percentage for the order item. Available in API version 60.0 and later.

`DiscountAmount`

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The manual discount amount for the order item. Available in API version 60.0 and later.

`EffectiveGrantDate`

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date when the resources associated with the order item are granted.

EndDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The end date and time of the order item, which is calculated by using the values in the `EndDate`, `EndTime`, and `ServiceEndTimeZone` fields.

If the `EndTime` field doesn't have a value, 23:59:59 is used for the calculation. If the `ServiceEndTimeZone` field doesn't have a value, GMT is used for the calculation.

Available in API version 65.0 and later.

EndQuantity

Type: double

Properties: Filter, Nillable, Sort

Description: The revised quantity of the item after adjusting changes. The field is read-only. It's calculated by adding the `Start Quantity` and the `Quantity` fields. Available in API version 60.0 and later.

EndTime

Type: time

Properties: Create, Filter, Nillable, Sort, Update

Description: The end time of the order item. Available in API version 65.0 and later.

Margin

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin percentage, specified by the sales representative at the line item level. Available in API version 65.0 and later.

MarginAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin amount specified by the sales representative at the line item level. Available in API version 65.0 and later.

NetTotalPrice

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The total price after applying all price adjustments. Available in API version 60.0 and later.

OrderItemGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The order item group associated with the order item.

This field is a relationship field.

Relationship Name: OrderItemGroup

Refers To: OrderItemGroup

PartnerDiscountPercent

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The discount percentage given to the partner for the order item. Available in API version 60.0 and later.

PartnerUnitPrice

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit price after applying the discount given to the partner for the order item. Available in API version 60.0 and later.

PriceWaterfallIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The price waterfall identifier generated by Salesforce Pricing that's associated with the pricing of this order item record. Available in API version 60.0 and later.

RampUpliftType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The pricing uplift calculation type for ramp segments.

Valid values are:

- Compound
- Standard

This field is available in API version 68.0 and later.

SegmentType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The duration type of the segment. You can use this field from Revenue Management only when the **Ramp Deals for Groups in Quotes and Orders** setting is turned on.

Valid values are:

- `Custom`—Available in API version 65.0 and later.
- `Prorated`—Available in API version 67.0 and later.
- `Trial`—Available in API version 67.0 and later.
- `Yearly`—Available in API version 65.0 and later.

The default value is `Yearly`.

ServiceDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The start date and time of the order item, which is calculated by using the values in the `ServiceDate`, `ServiceTime`, and `ServiceEndTimeZone` fields.

If the `ServiceTime` field doesn't have a value, 00:00:00 is used for the calculation. If the `ServiceEndTimeZone` field doesn't have a value, GMT is used for the calculation.

Available in API version 65.0 and later.

ServiceEndTimeZone

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The time zone for the order item's start and end dates, times, and datetimes. Available in API version 65.0 and later.

ServiceTime

Type: time

Properties: Create, Filter, Nillable, Sort, Update

Description: The start time of the order item. Available in API version 65.0 and later.

StartQuantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The quantity available on the order item start date. Available in API version 60.0 and later.

Status

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The status of the order item. Available in API version 60.0 and later.

SubscriptionTerm

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of terms in the subscription for the item.

The unit of the subscription term is stored in the PricingTermUnit field of this order item's related product selling model record (OrderItem.ProductSellingModel.PricingTermUnit). Available in API version 61.0 and later.

SupplementalChangeType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the order item change type in the supplemental order.

Possible values are:

- Add
- Amend
- Cancel
- No Change

This field is available in API version 64.0 and later.

TotalAdjustment

Type: percent

Properties: Filter, Nillable, Sort

Description: The total discount percentage applied at the line item level. This percentage is calculated by using the formula: (Total Line Amount - Net Total Price) / Total Line Amount. Available in API version 65.0 and later.

TotalCost

Type: currency

Properties: Filter, Nillable, Sort

Description: The total cost of all products sold in the order is calculated by multiplying the quantity by the unit cost. Available in API version 65.0 and later.

TotalMargin

Type: percent

Properties: Filter, Nillable, Sort

Description: The effective margin percentage at the line item level. This percentage is calculated by using the formula: (Net Total Price - Total Cost) / Net Total Price. Available in API version 65.0 and later.

TotalMarginAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The effective margin amount at the line item level. This amount is calculated by subtracting total cost from net total price. Available in API version 65.0 and later.

UnitCost

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit cost of a product sold as part of the order. Available in API version 65.0 and later.

ValidationResult

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the order item was configured and priced.

An order can be activated only after all its order items are configured and priced.

Valid value is `warning`—Indicates that the order item isn't configured and priced. Available in API version 60.0 and later.

Transaction Management Fields on Order Item Group

Standard and custom fields extend the standard Order Item Group object for use in Transaction Management.

Special Access Rules

These fields require the Revenue Cloud Advanced license. See [Order Item Group](#) for fields on the platform object.

Fields

Discount

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional discount percentage, specified by the sales representative at the group level. Available in API version 65.0 and later.

DiscountAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional discount amount specified by the sales representative at the group level. Available in API version 65.0 and later.

EndDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The end date of the group. If the `IsRamped` field is set to `true`, Transaction Management sets this date as the end date of all the line items in the group that have the Term-Defined product selling model. Available in API version 65.0 and later.

IsRamped

Type: boolean

Properties: Create, Defaulted on Create, Filter, Group, Sort, Update

Description: Indicates whether the group is a group ramp segment, which is a period in a group ramp schedule with specific products, quantities, and discounts. You can use this field from Revenue Management only when the **Ramp Deals for Groups in Quotes and Orders** setting is turned on. The default value is `false`. Available in API version 65.0 and later.

Margin

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin percentage, specified by the sales representative at the group level. Available in API version 65.0 and later.

MarginAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin amount specified by the sales representative at the group level. This amount can also be considered as the summary margin amount calculated by subtracting the total cost from the summary subtotal. Available in API version 65.0 and later.

ParentOrderItemGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the parent group for a nested quote line group. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: ParentOrderItemGroup

Refers To: OrderItemGroup

RampUpliftType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The pricing uplift calculation type for ramp segments.

Valid values are:

- Compound
- Standard

This field is available in API version 68.0 and later.

SegmentType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The duration type of the segment. You can use this field from Revenue Management only when the **Ramp Deals for Groups in Quotes and Orders** setting is turned on.

Valid values are:

- **Custom**—Available in API version 65.0 and later.
- **Prorated**—Available in API version 67.0 and later.
- **Trial**—Available in API version 67.0 and later.
- **Yearly**—Available in API version 65.0 and later.

StartDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The start date of the group. If the `IsRamped` field is set to `true`, Transaction Management sets this date as the start date of all the line items in the group. Available in API version 65.0 and later.

SummaryTotalAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The aggregated total amount of nested group lines before any discounts are applied. Available in API version 65.0 and later.

TotalAdjustment

Type: percent

Properties: Filter, Nillable, Sort

Description: The total discount percentage applied at the group level. This percentage is calculated by using the formula: (Summary Total Amount - Summary Subtotal) / Summary Total Amount. Available in API version 65.0 and later.

TotalAdjustmentAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total discount amount at the group level. This amount is calculated by subtracting the summary subtotal from the summary total amount. Available in API version 65.0 and later.

TotalCost

Type: currency

Properties: Filter, Nillable, Sort

Description: The aggregated total cost of nested group lines. Available in API version 65.0 and later.

TotalMargin

Type: percent

Properties: Filter, Nillable, Sort

Description: The summary margin percentage at the line item level. This percentage is calculated by using the formula: (Summary Subtotal Total Cost) / Summary Subtotal. Available in API version 65.0 and later.

TotalMarginAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The summary margin amount calculated at the group level. Available in API version 65.0 and later.

Transaction Management Fields on Order Action

Standard and custom fields extend the standard Order Action object for use in Transaction Management. This object is available in API version 55.0 and later.

Special Access Rules

To view these fields, you must have the Revenue Cloud Advanced license. See [Order Action](#) for fields on the Salesforce platform object.

Fields

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The business action that created the order product.

Valid values are:

- Add
- Amend
- Cancel
- No Change—A child product was added to the bundle, but the top-level product in the bundle was otherwise unchanged.
- Renew

Transaction Management Fields on Order Item Relationship

Standard and custom fields extend the standard Order Item Relationship object for use in Transaction Management. This object is available in API version 58.0 and later.

Special Access Rules

To view these fields, you must have the Revenue Cloud Advanced license. See [Order Item Relationship](#) for fields on the platform object.

Fields

ProductRelatedComponentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The ID of the product that is included in a product bundle, a set, or a product and an add-on.

This field is a relationship field.

Relationship Name: ProductRelatedComponent

Relationship Type: Lookup

Refers To: ProductRelatedComponent

Transaction Management Fields on Quote

Standard and custom fields extend the standard Quote object for use in Transaction Management to represent information about quotes. This object is available in API version 60.0 and later.

Special Access Rules

To view these fields, you must have the Revenue Cloud Advanced license. See [Quote](#) for fields on the platform object.

Fields

AdjustmentDistributionLogic

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies how the overall discount amount is distributed among all the quote line items that have prices associated with them.

The amount distributed is either the value specified in the `AppliedDiscountAmount` field or the difference between the values in the calculated `TotalPrice` and the user-specified `TotalPriceOverride` fields.

Valid values are:

- `Equal`—Distributes the discount amount equally among all the quote line items.
- `Proportionate`—Distributes the discount amount in proportion to the `ListPriceTotal` values of the quote line items.

Available in API version 65.0 and later.

AppliedDiscount

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The percent discount applied to each quote line item. Available in API version 65.0 and later.

AppliedDiscountAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The discount amount that's distributed among all the quote line items that have prices associated with them. This amount is distributed based on the logic specified in the `AdjustmentDistributionLogic` field. Available in API version 65.0 and later.

LastPricedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the quote is last priced.

OriginalActionType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the action that created the quote.

Valid values are:

- `Amend`—Indicates that the quote was created to amend assets.
- `Cancel`—Indicates that the quote was created to cancel assets.
- `Renew`—Indicates that the quote was created to renew assets.
- `Transfer`—Indicates that the quote was created to transfer assets.

Available in API version 61.0 and later.

PartnerAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: ID of the related partner account.

This field is a relationship field.

Relationship Name: PartnerAccount

Relationship Type: Lookup

Refers To: Account

TotalPriceOverride

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The value that the `TotalPrice` field must be set to by applying overall discounts.

Transaction Management calculates the overall discount amount by finding the difference between the value in the calculated `TotalPrice` field and the value in this field. It then uses the logic specified in the `AdjustmentDistributionLogic` field to distribute the discount amount among all the quote line items that have prices associated with them.

Available in API version 65.0 and later.

TotalPriceWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of `TotalPrice` and `TotalTaxAmount`.

This field is available only when you turn on Add Estimated Tax to Quotes and Orders settings and enable Revenue Cloud in your org.

Available in API version 64.0 and later.

TotalTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of all taxes.

This field is available only when you turn on Add Estimated Tax to Quotes and Orders settings and enable Revenue Cloud in your org.

Available in API version 64.0 and later.

This field is a calculated field.

TransactionType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the type of quote being processed.

Valid value is:

- `AdvancedConfigurator`—Indicates that the transaction must be processed by using the configuration rules and constraints set up in Constraint Rules Engine.

Available in API version 62.0 and later.

ValidationResult

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the quote was configured and priced.

This field serves as a staleness indicator. When this value is blank, pricing is up-to-date. When this value is set, it signals that the quote needs attention before its pricing can be trusted.

Valid values are:

- `Blank/null`—Specifies that the quote pricing is current and valid.
- `MissingContributor`—Specifies that the quote contains a derived product but not its pricing source. This occurs when the quote contains derived products without its necessary pricing sources.
- `TransactionIncomplete`—Specifies that the quote wasn't configured and priced. This typically occurs when a line item or action is modified outside the standard pricing flow, such as saving changes through a method other than the Place Quote or Place Sales Transaction API.

Available in API version 61.0 and later.

Transaction Management Fields on Quote Line Group

Standard and custom fields extend the standard Quote Line Group object for use in Transaction Management.

Special Access Rules

These fields require the Revenue Cloud Advanced license. See [Quote Line Group](#) for fields on the platform object.

Fields

Discount

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional discount percentage, specified by the sales representative at the group level. Available in API version 65.0 and later.

DiscountAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional discount amount specified by the sales representative at the group level. Available in API version 65.0 and later.

EndDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The end date of the group. If the `IsRamped` field is set to `true`, Transaction Management sets this date as the end date of all the line items in the group that have the Term-Defined product selling model. Available in API version 65.0 and later.

IsRamped

Type: boolean

Properties: Create, Defaulted on Create, Filter, Group, Sort, Update

Description: Indicates whether the group is a group ramp segment, which is a period in a group ramp schedule with specific products, quantities, and discounts. You can use this field from Revenue Management only when the **Ramp Deals for Groups in Quotes and Orders** setting is turned on. The default value is `false`. Available in API version 65.0 and later.

Margin

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin percentage, specified by the sales representative at the group level. Available in API version 65.0 and later.

MarginAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin amount specified by the sales representative at the group level. This amount can also be considered as the summary margin amount calculated by subtracting the total cost from the summary subtotal. Available in API version 65.0 and later.

ParentQuoteLineGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the parent group for a nested quote line group. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: ParentQuoteLineGroup

Refers To: QuoteLineGroup

RampUpliftType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The pricing uplift calculation type for ramp segments.

Valid values are:

- Compound
- Standard

This field is available in API version 68.0 and later.

SegmentType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The duration type of the segment. You can use this field from Revenue Management only when the **Ramp Deals for Groups in Quotes and Orders** setting is turned on.

Valid values are:

- Custom—Available in API version 65.0 and later.
- Prorated—Available in API version 67.0 and later.
- Trial—Available in API version 67.0 and later.
- Yearly—Available in API version 65.0 and later.

StartDate**Type:** date**Properties:** Create, Filter, Group, Nillable, Sort, Update**SummaryTotalAmount****Type:** currency**Properties:** Create, Filter, Nillable, Sort, Update**Description:** The aggregated total amount of nested group lines before any discounts are applied. Available in API version 65.0 and later.**TotalAdjustment****Type:** percent**Properties:** Filter, Nillable, Sort**Description:** The total discount percentage applied at the group level. This percentage is calculated by using the formula: (Summary Total Amount - Summary Subtotal) / Summary Total Amount. Available in API version 65.0 and later.**TotalAdjustmentAmount****Type:** currency**Properties:** Filter, Nillable, Sort**Description:** The total discount amount at the group level. This amount is calculated by subtracting the summary subtotal from the summary total amount. Available in API version 65.0 and later.**TotalCost****Type:** currency**Properties:** Filter, Nillable, Sort**Description:** The aggregated total cost of nested group lines. Available in API version 65.0 and later.**TotalMargin****Type:** percent**Properties:** Filter, Nillable, Sort**Description:** The summary margin percentage at the line item level. This percentage is calculated by using the formula: (Summary Subtotal Total Cost) / Summary Subtotal. Available in API version 65.0 and later.**TotalMarginAmount****Type:** currency**Properties:** Filter, Nillable, Sort**Description:** The summary margin amount calculated at the group level. Available in API version 65.0 and later.

Transaction Management Fields on Quote Line Item

Standard and custom fields extend the standard Quote Line Item object for use in Transaction Management to represent information about line items in a quote. This object is available in API version 60.0 and later.

Special Access Rules

These fields require the Revenue Cloud Advanced license. See [Quote Line Item](#) for fields on the Salesforce platform object.

Fields

ApplUnitPriceUpliftPct

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit price uplift percent that's applied to the quote line item, used for ramp pricing.

This field is available in API version 68.0 and later.

DiscountAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: Specifies the fixed amount discount to apply to the quote line item.

EffectiveGrantDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date on which the resources associated with the quote line item are granted.

EndDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The end date and time of the quote line item, which is calculated by using the values in the `EndDate`, `EndTime`, and `StartEndTimeZone` fields.

If the `EndTime` field doesn't have a value, 23:59:59 is used for the calculation. If the `StartEndTimeZone` field doesn't have a value, GMT is used for the calculation.

Available in API version 65.0 and later.

EndQuantity

Type: double

Properties: Filter, Nillable, Sort

Description: The quantity available on the quote line item end date. The field is read-only. It's calculated by adding the Start Quantity and the existing Quantity fields.

EndTime

Type: time

Properties: Create, Filter, Nillable, Sort, Update

Description: The end time of the quote line item. Available in API version 65.0 and later.

Margin

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin percentage, specified by the sales representative at the line item level. Available in API version 65.0 and later.

MarginAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The optional margin amount specified by the sales representative at the line item level. Available in API version 65.0 and later.

PartnerDiscountPercent

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The discount percentage given to the partner for the quote line.

PartnerUnitPrice

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit price after discount given to the partner for the quote line.

PriceWaterfallIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The price waterfall identifier generated by Salesforce Pricing that's associated with the pricing of the detail record.

RampUpliftType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The pricing uplift calculation type for ramp segments.

Valid values are:

- Compound
- Standard

This field is available in API version 68.0 and later.

StartDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The start date and time of the quote line item, which is calculated by using the values in the `StartDate`, `StartTime`, and `StartEndTimeZone` fields.

If the `StartTime` field doesn't have a value, 00:00:00 is used for the calculation. If the `StartEndTimeZone` field doesn't have a value, GMT is used for the calculation.

Available in API version 65.0 and later.

StartEndTimeZone

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The time zone for the quote line item's start and end dates, times, and datetimes. Available in API version 65.0 and later.

StartTime

Type: time

Properties: Create, Filter, Nillable, Sort, Update

Description: The start time of the quote line item. Available in API version 65.0 and later.

StartQuantity

Type: double

Properties: Create, Filter, Nillable, Sort

Description: The quantity available on the quote line item start date.

TotalAdjustment

Type: percent

Properties: Filter, Nillable, Sort

Description: The total discount percentage applied at the line item level. This percentage is calculated by using the formula: (Total Line Amount - Net Total Price) / Total Line Amount. Available in API version 65.0 and later.

TotalCost

Type: currency

Properties: Filter, Nillable, Sort

Description: The total cost of all products sold in the order is calculated by multiplying the quantity by the unit cost. Available in API version 65.0 and later.

TotalMargin

Type: percent

Properties: Filter, Nillable, Sort

Description: The effective margin percentage at the line item level. This percentage is calculated by using the formula: (Net Total Price - Total Cost) / Net Total Price. Available in API version 65.0 and later.

TotalMarginAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The effective margin amount at the line item level. This amount is calculated by subtracting total cost from net total price. Available in API version 65.0 and later.

UnitCost

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit cost of a product sold as part of the order. Available in API version 65.0 and later.

ValidationResult

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the quote line item is configured and priced.

A quote can be activated only after all its quote line items are configured and priced.

Valid value is `warning`—Indicates that the quote line item isn't configured and priced. Available in API version 60.0 and later.

Transaction Management Fields on Quote Document

Standard and custom fields extend the standard Quote Document object for use in Transaction Management to represent information about quote documents. This object is available in API version 61.0 and later.

Special Access Rules

To view these fields, you must have the Revenue Cloud Advanced license. See [Quote Document](#) for fields on the Salesforce platform object.

Fields

Document Template

Type: String

Properties: Create, Filter, Group, Nillable, Sort

Description: The template ID used for generating the quote document.

Status

Type: Picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The status of the quote document.

Possible values are:

- Completed
- Failed
- Generating
- In Progress
- None
- Queued

The default value is None.

Transaction Management Tooling API Objects

Tooling API exposes metadata used in developer tooling that you can access through REST or SOAP. Tooling API's SOQL capabilities for many metadata types allow you to retrieve smaller pieces of metadata.

[TransactionProcessingType](#)

Represents the settings to configure the processing constraints for a request.. This object is available in API version 63.0 and later.

TransactionProcessingType

Represents the settings to configure the processing constraints for a request.. This object is available in API version 63.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Refer to the Usage section to learn more about creating Transaction Processing Type records based on your requirements. See the [setup details](#) to specify the default rule engine on the Revenue Settings page.

Supported SOAP API Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`

Supported REST API Methods

GET, HEAD, POST, Query

Fields

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the transaction processing configuration to help Salesforce admins with configuration in their orgs.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is **Record Type Name**.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Nillable, Update

Description: The language of the TransactionProcessingType object.

Valid values are:

- da—Danish
- de—German
- en_US—English
- es—Spanish
- es_MX—Spanish (Mexico)
- fi—Finnish
- fr—French
- it—Italian
- ja—Japanese
- ko—Korean
- nl_NL—Dutch
- no—Norwegian
- pt_BR—Portuguese (Brazil)
- ru—Russian
- sv—Swedish

- `th`—Thai
- `zh_CN`—Chinese (Simplified)
- `zh_TW`—Chinese (Traditional)

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The label for the TransactionProcessingType object.

PricingPreference

Type: string

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether to execute the price calculation step for each sales transaction record. Valid values are:

- `Force`—Reprices all lines.
- `System`—Performs a delta pricing request on the unprocessed lines when [Delta Pricing](#) is enabled in the org.
- `Skip`—Skips the pricing request on all lines.

Available in API version 65.0 and later.

RatingPreference

Type: string

Description: Specifies whether catalog rates are fetched and saved during quote creation. Valid value is `Fetch`. Use this value to retrieve and save catalog rates for usage resources associated with each sales transaction record. If this value isn't specified, catalog rates aren't saved by default when a quote line item is added to a quote. Available in API version 66.0 and later if Rate Management is enabled.

RuleEngine

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The rule engine to be used for processing rules.

Valid values are `AdvancedConfigurator` or `StandardConfigurator`

SaveType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies how the transaction results are processed when saved for Salesforce administrators to adjust the user experience as desired. Valid values are `Standard` or `Large`—Reserved for future use.

TaxPreference

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether to execute or skip the tax calculation step for each sales transaction record.

Valid value is `Skip`. If this value isn't specified, then tax calculation request is performed by default. Available in API version 65.0 and later.

Usage

Create transaction type records by calling this resource through a POST method.

```
/services/data/v68.0/tooling/objects/TransactionProcessingType
```

```
{
  "SaveType": "Standard",
  "Description": "Setup for Transaction Processing Type",
  "DeveloperName": "SkipPricingAndTaxStep",
  "MasterLabel": "SkipPricingAndTaxStep",
  "RuleEngine": "StandardConfigurator",
  "PricingPreference": "Skip",
  "TaxPreference": "Skip"
}
```

```
{
  "SaveType": "Standard",
  "Description": "Setup for Transaction Processing Type",
  "DeveloperName": "SkipPricingAndTaxStep",
  "MasterLabel": "SkipPricingAndTaxStep",
  "RuleEngine": "StandardConfigurator",
  "PricingPreference": "Skip",
  "TaxPreference": "Skip",
  "RatingPreference": "Fetch"
}
```

Transaction Management Platform Event

Use the `QuoteSaveEvent` event to notify subscribers after saving of a quote is processed.

These events are documented in the [Platform Events Developer Guide](#).

- [CreateAssetOrderEvent](#)
- [CreateAssetOrderDtlEvent](#)
- [PlaceOrderCompletedEvent](#)
- [QuoteToOrderCompletedEvent](#)

[QuoteSaveEvent](#)

Notifies subscribers that the process started by the Place Quote or Place Sales Transaction API request is complete. If the process is successful, use this event to learn about the updated quote. If the request isn't successful, use this event to learn about the errors and how to fix them. This object is available in API version 60.0 and later.

EDITIONS

Available in: Lightning Experience

Available in all Salesforce orgs where the admin settings for products related to the use case are enabled. The Salesforce org must have a Revenue Management or Subscription Management license.

QuoteSaveEvent

Notifies subscribers that the process started by the Place Quote or Place Sales Transaction API request is complete. If the process is successful, use this event to learn about the updated quote. If the request isn't successful, use this event to learn about the errors and how to fix them. This object is available in API version 60.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Streaming API (CometD)	Yes

Streaming API Subscription Channel

`/event/QuoteSaveEvent`

Special Access Rules

This object is available in orgs with Subscription Management or Revenue Management.

Fields

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

HasErrors

Type: boolean

Properties: Defaulted on create

Description: The default value is `false`. Possible values are `false` or `true`.

Quoteld

Type: reference

Properties: Nillable

Description: The ID of the quote associated with this event. This field is a relationship field.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that is populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdIdentifier

Type: string

Properties: Nillable

Description: ID of the request that triggered the event.

Transaction Management Business APIs

Use the Transaction Management Business APIs to fetch instant pricing data on a quote or an order, to create a quote, or to create an order.

This table lists the available Transaction Management resources.

Resource	Description
/connect/revenue-management/assets/actions/amend (POST)	Initiate and execute the amendment of a quote or an order.
/connect/revenue-management/assets/actions/cancel (POST)	Initiate and execute the cancellation of an asset.
/connect/revenue-management/assets/actions/renew (POST)	Initiate and execute the renewal of an asset.
/industries/cpq/quotes/actions/get-instant-price (POST)	Fetch instant pricing data on the quote or order line data grid and associated summary component. This API offers capabilities to either create a context or update the existing

Resource	Description
	one based on the provided context ID.
/commerce/sales-orders/actions/place (POST)	Place orders with integrated pricing, configuration, and validation, and manage them throughout their entire lifecycle. Additionally, update an order or insert order items.
/commerce/quotes/actions/place (POST)	Create a quote to discover and price products and services. Additionally, insert, update, or delete a quote line item.
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-create (POST)	Create a ramp deal for a customer on a product. Sales reps can use ramp deals to provide yearly deals to a customer, resulting in long-term revenue and customer relationship. A customer can create, update, or view multiple segments of periods for their subscription term with different attributes for each segment.
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-update (POST)	Modify a ramp deal in scenarios where a segment has updates such as quantity, discount, or date change.
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-view (GET)	View a ramp deal related to a quote line item or an order item.
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-delete (POST)	Delete a ramp deal to convert a ramped product to include a single quote line item or order item.
/connect/rev/sales-transaction/actions/place (POST)	Create a sales transaction, such as an order or a quote, with integrated pricing and configuration. Also, update an order or a quote, and insert and delete order or quote line items to calculate the estimated tax.
/connect/rev/sales-transaction/actions/clone (POST)	Create a clone of a sales transaction, such as a quote or an order. You can also clone a

Resource	Description
	quote line item or an order item record with its related records and configurations.
/connect/rev/sales-transaction/actions/place-supplemental-transaction (POST)	Create a supplemental order or change orders after they are submitted for processing, such as during the fulfillment process.
/connect/revenue/transaction-management/sales-transactions/actions/read (POST)	Retrieve sales transaction data efficiently from an initialized or a hydrated context.
/global-promotions-management/promotions (GET, POST, PUT)	Get rewards based on a product selling model template.
/revenue/transaction-management/sales-transactions/actions/get-eligible-promotions (POST)	Get eligible promotions for line items within a quote or an order.
/revenue/transaction-management/assets/actions/swap (POST)	Exchange one product for another of equivalent or different value. The change is tracked as a swap request with linked asset actions and a net-zero order total where applicable. The API creates an amendment quote and order with order actions and quote action subtypes.
/revenue/transaction-management/assets/actions/upgrade (POST)	Move a lower-tier product to a higher-tier product. The change is tracked as an upgrade request with linked asset actions and quote or order line linkage for reporting and auditing. This API creates an amendment quote and order with order actions and quote action subtypes.
/revenue/transaction-management/assets/actions/downgrade (POST)	Move to a lower-tier or lower-value product. The change is tracked as a downgrade request with linked asset actions and quote or order line linkage for reporting and auditing. This API creates an amendment quote and order

Resource	Description
	with downgrade-specific order actions and quote action subtypes.

[Resources](#)

Learn more about the available Quote and Order Capture resources.

[Request Bodies](#)

Learn more about the available API request bodies.

[Response Bodies](#)

Learn more about the available response bodies.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

Resources

Learn more about the available Quote and Order Capture resources.

[Asset Amendment \(POST\)](#)

Initiate and execute the amendment of a quote or an order.

[Asset Cancellation \(POST\)](#)

Initiate and execute the cancellation of an asset.

[Asset Renewal \(POST\)](#)

Initiate and execute the renewal of an asset.

[Clone Sales Transaction \(POST\)](#)

Create a clone of a sales transaction, such as a quote or an order. You can also clone a quote line item or an order item record with its related records and configurations.

[Create Promotions \(GET, POST, PUT\)](#)

Get rewards based on a product selling model template.

[Get Eligible Promotions \(POST\)](#)

Get eligible promotions for line items within a quote or an order.

[Initiate Downgrade \(POST\)](#)

Move to a lower-tier or lower-value product. The change is tracked as a downgrade request with linked asset actions and quote or order line linkage for reporting and auditing. This API creates an amendment quote and order with downgrade-specific order actions and quote action subtypes.

[Initiate Swap \(POST\)](#)

Exchange one product for another of equivalent or different value. The change is tracked as a swap request with linked asset actions and a net-zero order total where applicable. The API creates an amendment quote and order with order actions and quote action subtypes.

[Initiate Upgrade \(POST\)](#)

Move a lower-tier product to a higher-tier product. The change is tracked as an upgrade request with linked asset actions and quote or order line linkage for reporting and auditing. This API creates an amendment quote and order with order actions and quote action subtypes.

[Instant Pricing \(POST\)](#)

Fetch instant pricing data on the quote or order line data grid and associated summary component. This API offers capabilities to either create a context or update the existing one based on the provided context ID.

[Place Order \(POST\)](#)

Place orders with integrated pricing, configuration, and validation, and manage them throughout their entire lifecycle. Additionally, update an order or insert order items.

[Place Quote \(POST\)](#)

Create a quote to discover and price products and services. Additionally, insert, update, or delete a quote line item.

[Place Sales Transaction \(POST\)](#)

Create a sales transaction, such as an order or a quote, with integrated pricing and configuration. Also, update an order or a quote, and insert and delete order or quote line items to calculate the estimated tax.

[Place Supplemental Transaction \(POST\)](#)

Create a supplemental order or change orders after they are submitted for processing, such as during the fulfillment process.

[Read Sales Transaction \(POST\)](#)

Retrieve sales transaction data efficiently from an initialized or a hydrated context.

[Retrieve Sales Transaction API Errors \(GET\)](#)

Retrieve any asynchronous error details associated with a sales transaction request.

[Create Ramp Deal \(POST\)](#)

Create a ramp deal for a customer on a product. Sales reps can use ramp deals to provide yearly deals to a customer, resulting in long-term revenue and customer relationship. A customer can create, update, or view multiple segments of periods for their subscription term with different attributes for each segment.

[Delete Ramp Deal \(POST\)](#)

Delete a ramp deal to convert a ramped product to include a single quote line item or order item.

[Update Ramp Deal \(POST\)](#)

Modify a ramp deal in scenarios where a segment has updates such as quantity, discount, or date change.

[View Ramp Deal \(GET\)](#)

View a ramp deal related to a quote line item or an order item.

Asset Amendment (POST)

Initiate and execute the amendment of a quote or an order.

Considerations

For usage products, creating an order directly by setting `outputRecordType` to `Order` is currently not supported. The direct-to-order flow can create Order Products without required related Rate Card Entry records, which can cause order activation to fail.

When you amend usage assets, use a two-step flow.

- Create an amendment quote by calling `initiateAmendment` with `outputRecordType` set to `Quote`.
- Create an order from that amendment quote.

Special Access Rules

To use this API, you need the InitiateAmend API permission set.

Resource

```
/connect/revenue-management/assets/actions/amend
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/revenue-management/assets/actions/amend
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "assetIds": [
    "02iSG0000003NMhYAM",
    "02iSG0000006DvSYAU"
  ],
  "amendmentStartDate": "2023-10-04T00:00:00",
  "contractId": "800SG00000CFpepYAD",
  "opportunityId": "006SG000004W5tVYAS",
  "outputRecordId": "801SG00000DX1jWYAT",
  "outputRecordType": "Quote",
  "quantityChange": 5
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assetIds	String[]	IDs of the assets that you want to add to the amendment record.	Required	62.0
amendmentStartDate	String	Start date of the amendment.	Required	62.0
contractId	String	ID of the Contract record that you want to sync with the amendment quote.	Optional	62.0
opportunityId	String	ID of the Opportunity record that you want to sync with the amendment quote.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
outputRecordId	String	ID of the quote or order record that you want to add the assets to.	Optional	62.0
outputRecordType	String	Type of amendment record that you want to create. For usage products, set this value to <code>Quote</code> . The usage-related records (<code>QuoteLineItemUseResourceGrant</code> , <code>QuoteLineItemUsageResourcePolicy</code> , and <code>QuoteLineRateCardEntry</code>) are copied in the quote action flow, not in the amend order flow.	Required	62.0
quantityChange	Double	Quantity to add to or reduce from the asset's existing quantity.	Required	62.0

Response Body for POST

[Amendment](#)

Asset Cancellation (POST)

Initiate and execute the cancellation of an asset.

Special Access Rules

To use this API, you need the `InitiateCancellation` API permission set.

Resource

```
/connect/revenue-management/assets/actions/cancel
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/revenue-management/assets/actions/cancel
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "assetIds": [
    "02iSG0000003NMhYAM",
    "02iSG0000006DvSYAU"
  ],
  "cancellationDate": "2023-10-04T00:00:00",
  "contractId": "800SG00000CFpepYAD",
  "opportunityId": "006SG000004W5tVYAS",
  "outputRecordId": "801SG00000DX1jWYAT",
  "outputRecordType": "Quote"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assetIds	String[]	IDs of the assets that you want to cancel. All assets in a request must belong to the same price book.	Required	62.0
cancellationDate	String	Effective date of the cancellation.	Required	62.0
contractId	String	ID of the Contract record that you want to sync with the cancellation quote.	Optional	62.0
opportunityId	String	ID of the Opportunity record that you want to sync with the cancellation quote.	Optional	62.0
outputRecordId	String	ID of the quote or order that you want to cancel.	Optional	62.0
outputRecordType	String	Type of cancellation record that you want to create.	Required	62.0

Response Body for POST

[Cancellation](#)

Asset Renewal (POST)

Initiate and execute the renewal of an asset.

Special Access Rules

To use this API, you need the InitiateRenewal API permission set.

Resource

/connect/revenue-management/assets/actions/renew

Resource Example

https://*yourInstance*.salesforce.com/services/data/v**68.0**/connect/revenue-management/assets/actions/renew

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "assetIds": [
    "02iSG0000003NMhYAM",
    "02iSG0000006DvSYAU"
  ],
  "contractId": "800SG00000CFpepYAD",
  "opportunityId": "006SG000004W5tVYAS",
  "outputRecordId": "801SG00000DX1jWYAT",
  "outputRecordType": "Quote",
  "renewalEndDate": "2024-10-03T23:59:59",
  "renewalStartDate": "2023-10-04T00:00:00"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assetIds	String[]	IDs of the assets that you want to renew.	Required	62.0
contractId	String	ID of the Contract record that you want to sync with the renewal of the Quote or Order record.	Optional	62.0
opportunityId	String	ID of the Opportunity record that you want to sync with the renewal quote.	Optional	62.0
outputRecordId	String	ID of the Quote or Order record that you want to renew.	Optional	62.0
outputRecordType	String	Type of renewal record that you want to create.	Required	62.0

Name	Type	Description	Required or Optional	Available Version
renewal EndDate	String	End date of the renewal process for the assets.	Optional	62.0
renewal StartDate	String	Start date of the renewal process for the assets. Required for early asset renewals and renewing expired assets, using today's date or a future date.	Optional	62.0

Response Body for POST

[Renewal](#)

Clone Sales Transaction (POST)

Create a clone of a sales transaction, such as a quote or an order. You can also clone a quote line item or an order item record with its related records and configurations.

This API supports the cloning of records for these objects.

- Quote
- QuoteLineItem
- OrderItem
- QuoteLineGroup
- Order
- OrderItemGroup

You can clone all items in a quote line group or order item group when the record to clone is a quote line group or an order item group record.

Resource

```
/connect/rev/sales-transaction/actions/clone
```

Resource Example

```
https://<varname>yourInstance</varname>.salesforce.com/services/data/v64.0/connect/rev/sales-transaction/actions/clone
```

Available Version

64.0

HTTP Methods

POST

Request Body for POST

JSON Example

This is a sample request to clone a record within a sales transaction.

```
{
  "recordIds": ["0QLxx0000004CBYGA2"],
  "salesTransactionId": "0Q0xx0000004CE0CAM"
}
```

This is a sample request to clone all line items in a ramped group within a sales transaction.

```
{
  "recordIds": ["0QLxx0000004CBYGA2"],
  "salesTransactionId": "0Q0xx0000004CE0CAM",
  "options": {
    "lineScope": "AllLines"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
recordIds	String[]	ID of the record to be cloned. You can specify a single record ID only.	Required	64.0
salesTransactionId	String	ID of the sales transaction related to the record IDs to clone.	Required	64.0
options	Clone Options Input	Specifies options to clone a ramp segment within a sales transaction. You can clone only the last ramp segment.	Optional	65.0

Response Body for POST

[Clone Sales Transaction](#)

Create Promotions (GET, POST, PUT)

Get rewards based on a product selling model template.

Resource

```
/global-promotions-management/promotions
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/global-promotions-management/promotions
```


Available Version

66.0

HTTP Methods

GET, POST, PUT

Request and Response Body

This example shows a sample request to create a promotion.

```
{
  "promotionDetails": {
    "additionalFieldValues": {
      "attributes": {}
    },
    "displayName": "10% off on Cisco Router",
    "isAutomatic": true,
    "isEmailActivated": false,
    "name": "10% off on Cisco Router",
    "promotionEligibility": {
      "eligibleCustomerEvents": {},
      "eligibleEnrollmentPeriod": {
        "isEnrollmentRequired": false
      },
      "eligibleProducts": [
        {
          "id": "01txx0000006igmAAA",
          "name": "Cisco Router",
          "productType": "SimpleProduct"
        }
      ]
    },
    "promotionLimits": {},
    "ruleLibrary": {
      "id": "9Qsxx0000004H76CAE",
      "name": "RLMSales"
    },
    "startDateTime": "2025-11-01T08:43:00.000Z"
  },
  "rules": [
    {
      "eventConfiguration": [],
      "journalSubType": null,
      "journalSubTypeName": null,
      "journalType": "Customer Purchase",
      "priority": 10,
      "rewardConfiguration": [
        {
          "scope": "SimpleProduct",
          "scopeDetails": [
            {
              "name": "Cisco Router",
```

```

        "id": "01txx0000006igmAAA"
      }
    ],
    "doNotDefineRewards": false,
    "rewardDetailsList": [
      {
        "productSellingModel": {
          "name": "Monthly",
          "id": "0jPxx0000000001EAA"
        },
        "discountType": "PercentageOff",
        "discountValue": 10,
        "termBasedRewards": {
          "psmTenure": {
            "tenure": "SpecificTerm",
            "operator": "Equals",
            "value": 12
          },
          "rewardDuration": {
            "tenure": "SpecificTerm",
            "value": 3
          }
        }
      }
    ],
    "childProducts": [],
    "type": "PSMDiscount",
    "isPrimaryReward": false
  }
],
"ruleName": "rule",
"templateName": "GetRewardsBasedOnSellingModel"
}
]
}

```

See [Promotions Creation API](#) reference to get additional details of the request and response properties.

Get Eligible Promotions (POST)

Get eligible promotions for line items within a quote or an order.

This API accepts line item IDs and sales transaction ID as the input and then initializes the context by filtering on the specific line items.

Resource

```
/revenue/transaction-management/sales-transactions/actions/get-eligible-promotions
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/transaction-management/sales-transactions/actions/get-eligible-promotions
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "salesTransactionId": "0Q0xx0000004EOECA2",
  "lineItemIds": [
    "0QLxx0000004E7eGAE",
    "0QLxx0000004GCeGAM",
    "0QLxx0000004E7gGAE"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
lineItemIds	String[]	List of line item IDs to evaluate for promotions. The object type is auto-determined from the sales transaction ID.	Required	66.0
salesTransactionId	String	The sales transaction ID, such as an order ID or a quote ID, for the promotion evaluation.	Required	66.0

Response Body for POST

[Get Eligible Promotions](#)

Initiate Downgrade (POST)

Move to a lower-tier or lower-value product. The change is tracked as a downgrade request with linked asset actions and quote or order line linkage for reporting and auditing. This API creates an amendment quote and order with downgrade-specific order actions and quote action subtypes.

After assetization, the original asset receives an asset action with business category as Downgrade (or equivalent). This step indicates that the downgrade-from product and the new asset is created with an asset action (downgraded to), with relationships between the two. This step also enables sales reps to process downgrades and makes sure that downgrades are auditable and reportable separately from cancellations and new sales.

Resource

```
/revenue/transaction-management/assets/actions/downgrade
```

Resource Example

[https://**yourInstance**.salesforce.com/services/data/v68.0/revenue/transaction-management/assets/actions/downgrade](https://yourInstance.salesforce.com/services/data/v68.0/revenue/transaction-management/assets/actions/downgrade)

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "swapStartDate": "2025-12-01T00:00:00Z",
  "outputRecordType": "Quote",
  "swapGroups": {
    "groups": [
      {
        "referenceId": "DOWNGRADE-001",
        "outGroup": {
          "swapAssets": [
            {
              "assetId": "02ixx0000004HOAAA2",
              "quantity": 1
            }
          ]
        },
        "inGroup": {
          "graphId": "downgradeRequest",
          "records": [
            {
              "referenceId": "refQuoteLine0",
              "record": {
                "attributes": {
                  "type": "QuoteLineItem",
                  "method": "POST"
                },
                "Product2Id": "01txx0000006iVlAAI",
                "PricebookEntryId": "01luxx0000008ym4AAA",
                "UnitPrice": 1049,
                "Quantity": "1",
                "StartDate": "2022-09-22"
              }
            }
          ]
        }
      }
    ]
  }
}
```

```

    }
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
contractId	String	ID of the contract record to downgrade.	Optional	66.0
opportunityId	String	ID of the opportunity record to downgrade.	Optional	66.0
outputRecordType	String	Record type of the output for the downgrade.	Required	66.0
swapGroups	Swap Group []	Groups that contain the asset details for the downgrade.	Required	66.0
swapStartDate	String	Amendment start date for the downgrade action.	Required	66.0

Response Body for POST

[Initiate Downgrade Response](#)

SEE ALSO:

[Salesforce Help: Swap, Upgrade, or Downgrade Assets](#)

Initiate Swap (POST)

Exchange one product for another of equivalent or different value. The change is tracked as a swap request with linked asset actions and a net-zero order total where applicable. The API creates an amendment quote and order with order actions and quote action subtypes.

When the order is assetized, the source asset gets an asset action with business category as `Swap` (reduced quantity). The new asset is created with an asset action that identifies it as swapped in, with relationships that link the swapped-from and swapped-to assets. The swaps are auditable and reportable separately from cancellations and new sales. This API also supports use cases such as trading unused licenses for credits or moving spend between products while preserving contract intent.

Resource

```
/revenue/transaction-management/assets/actions/swap
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/transaction-management/assets/actions/swap
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "swapStartDate": "2025-12-01T00:00:00Z",
  "outputRecordType": "Quote",
  "swapGroups": {
    "groups": [
      {
        "referenceId": "SWAP-001",
        "outGroup": {
          "swapAssets": [
            {
              "assetId": "02ixx0000004HOAAA2",
              "quantity": 1
            }
          ]
        },
        "inGroup": {
          "graphId": "swapRequest",
          "records": [
            {
              "referenceId": "refQuoteLine0",
              "record": {
                "attributes": {
                  "type": "QuoteLineItem",
                  "method": "POST"
                },
                "Product2Id": "01txx0000006iVlAAI",
                "PricebookEntryId": "01luxx0000008ym4AAA",
                "UnitPrice": 1049,
                "Quantity": "1",
                "StartDate": "2022-09-22"
              }
            }
          ]
        }
      }
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contractId	String	ID of the contract record to swap.	Optional	66.0
opportunityId	String	ID of the opportunity record to swap.	Optional	66.0

Name	Type	Description	Required or Optional	Available Version
outputRecordType	String	Record type of the output for the swap.	Required	66.0
swapGroups	Swap Group []	Groups that contain the asset details for the swap.	Required	66.0
swapStartDate	String	Amendment start date for the swap action.	Required	66.0

Response Body for POST

[Initiate Swap Response](#)

SEE ALSO:

[Salesforce Help: Swap, Upgrade, or Downgrade Assets](#)

Initiate Upgrade (POST)

Move a lower-tier product to a higher-tier product. The change is tracked as an upgrade request with linked asset actions and quote or order line linkage for reporting and auditing. This API creates an amendment quote and order with order actions and quote action subtypes.

The original asset receives an asset action with an `Upgrade` (or equivalent) business category. This step indicates that the upgrade-from product and the new asset is created with an asset action (upgraded to), with relationships between the two. This step also enables sales reps to process upgrades and makes sure that upgrades are distinguishable in reporting and analytics from cancellations plus new sales.

Resource

```
/revenue/transaction-management/assets/actions/upgrade
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/transaction-management/assets/actions/upgrade
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "swapStartDate": "2025-12-01T00:00:00Z",
  "outputRecordType": "Quote",
  "swapGroups": {
    "groups": [
      {
        "referenceId": "UPGRADE-001",
        "outGroup": {
          "swapAssets": [
            {
              "assetId": "02ixx0000004HOAAA2",
              "quantity": 1
            }
          ]
        },
        "inGroup": {
          "graphId": "upgradeRequest",
          "records": [
            {
              "referenceId": "refQuoteLine0",
              "record": {
                "attributes": {
                  "type": "QuoteLineItem",
                  "method": "POST"
                },
                "Product2Id": "01txx0000006iVlAAI",
                "PricebookEntryId": "01uxx0000008ym4AAA",
                "UnitPrice": 1049,
                "Quantity": "1",
                "StartDate": "2026-03-22"
              }
            }
          ]
        }
      }
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contractId	String	ID of the contract record to upgrade.	Optional	66.0
opportunityId	String	ID of the opportunity record to upgrade.	Optional	66.0
outputRecordType	String	Record type of the output for the upgrade.	Required	66.0
swapGroups	Swap Group []	Groups that contain the asset details for the upgrade.	Required	66.0

Name	Type	Description	Required or Optional	Available Version
swapStartDate	String	Amendment start date for the upgrade action.	Required	66.0

Response Body for POST

[Initiate Upgrade Response](#)

SEE ALSO:

[Salesforce Help: Swap, Upgrade, or Downgrade Assets](#)

Instant Pricing (POST)

Fetch instant pricing data on the quote or order line data grid and associated summary component. This API offers capabilities to either create a context or update the existing one based on the provided context ID.

You can also group quote line items or order items based on location, work types, or departments, if groups are enabled for your org. Groups provide a visualization of the products to view large quotes.

Resource

```
/industries/cpq/quotes/actions/get-instant-price
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/industries/cpq/quotes/actions/get-instant-price
```

Available Version

60.0

Requires Chatter

No

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "correlationId": "7847127122596",
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "records": [
```

```

{
  "referenceId": "0Q0xx0000004DOSCA2",
  "record": {
    "attributes": {
      "type": "Quote",
      "method": "POST"
    },
    "Name": "Test Quote Proration Pricing",
    "OpportunityId": "006xx000001a4ISAA",
    "Pricebook2Id": "01sxx0000005ptpAAA"
  }
},
{
  "referenceId": "refQuoteLine",
  "record": {
    "attributes": {
      "type": "QuoteLineItem",
      "method": "POST"
    },
    "QuoteId": "0Q0xx0000004DOSCA2",
    "PricebookEntryId": "01uxx0000008zHmAAI",
    "Product2Id": "01txx0000006jmWAAQ",
    "Quantity": 2,
    "UnitPrice": 25,
    "StartDate": "2022-09-28",
    "EndDate": "2028-09-27",
    "PeriodBoundary": "ANNIVERSARY",
    "BillingFrequency": "ANNUAL"
  }
}
]
}

```

This example shows a sample request to specify grouping of lines based on criteria.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004DOSCA2",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "0QLxx0000004F3gGAE",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        }
      }
    }
  ]
}

```

```

        "Quantity": 5
      }, {
        "referenceId": "0QLxx0000004F3hGAE",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "PUT"
          },
          "Quantity": 2
        }
      }, {
        "referenceId": "GroupId1",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST",
            "action": "GroupBy",
            "criteria": {
              "Quantity": 5
            }
          },
          "Name": "record"
        }
      }, {
        "referenceId": "GroupId2",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST",
            "action": "GroupBy",
            "criteria": {
              "Quantity": 2
            }
          },
          "Name": "record1",
        }
      }
    ]
  }
}

```

This example shows a sample request for the initial grouping of the quote with the quote lines assigned to the first group.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    }
  ]
}

```

```

    }
  },
  {
    "referenceId": "GroupId1",
    "record": {
      "attributes": {
        "type": "QuoteLineGroup",
        "method": "POST",
        "action": "GroupAll"
      },
      "Name": "sample"
    }
  }
]
}

```

This example shows a sample request to ungroup a quote but retain the quote lines.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "0QLxx0000004CByGA2",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        },
        "Quantity": 2,
        "QuoteLineGroupId": null
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "DELETE",
          "action": "Ungroup"
        }
      }
    }
  ]
}

```

This example shows a sample request to create a new group.

```
{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "POST"
        },
        "Name": "sample"
      }
    }
  ]
}
```

This example shows a sample request to delete a group.

```
{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "DELETE",
          "action": "DeleteGroup"
        },
        "Name": "sample"
      }
    }
  ]
}
```

```
  ]
}
```

This example shows a sample request to move a group.

```
{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "0QLxx0000004CByGA2",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        },
        "Quantity": 2
        "QuoteLineGroupId": "@GroupId2"
      }
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextId	String	ID generated by the context service. If you don't specify a context ID, a new context is created.	Optional	59.0
correlationId	String	Client-generated ID for tracking multiple related API requests.	Optional	59.0
records	Object with Reference Input[]	List of pricing data to be fetched.	Required	59.0

Response Body for POST

[Instant Pricing](#)

Place Order (POST)

Place orders with integrated pricing, configuration, and validation, and manage them throughout their entire lifecycle. Additionally, update an order or insert order items.

You can also group order items based on location, work types, or departments, if groups are enabled for your org. Groups provide a visualization of the products to view large quotes.

This API supports a maximum of 300 transaction line items.



Note: This API has been deprecated as of API version 63.0. In API version 63.0 and later, use the new [Place Sales Transaction](#) API.

Special Access Rules

You need the PlaceOrder API permission set to use this API.

Resource

```
/commerce/sales-orders/actions/place
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/sales-orders/actions/place
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "pricingPref": "System",
  "configurationInput": "RunAndAllowErrors",
  "configurationOptions": {
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "graph": {
    "graphId": "graphId",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
```

```

        "type": "Order",
        "method": "POST",
        "Id": "POST"
    }
}
},
{
    "referenceId": "refOrderItem",
    "record": {
        "attributes": {
            "type": "OrderItem",
            "method": "POST"
        },
        "OrderId": "@{refOrder.id}",
        "OrderActionId": "@{refOrderAction.id}",
        "ListPrice": "144.99",
        "Quantity": 3,
        "PricebookEntryId": "01uxx0000008yXPAAY",
        "Product2Id": "01txx0000006i2UAAQ",
        "UnitPrice": "199.49"
    }
}
]
}
}

```

This example shows a sample request to define grouping of order items.

```

{
    "pricingPref": "system",
    "graph": {
        "graphId": "placeOrder",
        "records": [
            {
                "referenceId": "refOrder",
                "record": {
                    "attributes": {
                        "type": "Order",
                        "method": "PATCH",
                        "id": "801xx000003GZ9bAAG"
                    }
                }
            },
            {
                "referenceId": "refOlg1",
                "record": {
                    "attributes": {
                        "type": "OrderItemGroup",
                        "method": "POST"
                    },
                    "Name": "New Group",
                    "OrderId": "@{refOrder.id}"
                }
            }
        ]
    }
}

```



```

    }
  }
}

```

This example shows a sample request to ungroup order items.

```

{
  "pricingPref": "system",
  "graph": {
    "graphId": "placeOrder",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "refOrder"
          }
        }
      },
      {
        "referenceId": "refOlg1",
        "record": {
          "attributes": {
            "type": "OrderItemGroup",
            "method": "DELETE",
            "id": "refOlg1",
            "action": "Ungroup"
          }
        }
      }
    ]
  }
}

```

This example shows a sample request to create a new group.

```

{
  "pricingPref": "system",
  "graph": {
    "graphId": "placeOrder",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "refOrder"
          }
        }
      },
      {
        "referenceId": "refOlg",
        "record": {

```

```

        "attributes": {
            "type": "OrderItemGroup",
            "method": "POST"
        },
        "Name": "New Group",
        "OrderId": "@{refOrder.id}"
    }
}
]
}
}

```

This example shows a sample request to delete a group.

```

{
    "contextId": "",
    "correlationId": "",
    "records": [
        {
            "referenceId": "refOrder",
            "record": {
                "attributes": {
                    "type": "Order",
                    "method": "PATCH",
                    "id": "refOrder"
                }
            }
        },
        {
            "referenceId": "refOlg",
            "record": {
                "attributes": {
                    "type": "OrderItemGroup",
                    "method": "DELETE",
                    "id": "refOlg",
                    "action": "DeleteGroup"
                }
            }
        }
    ]
}

```

This example shows a sample request to group order items based on criteria.

```

{
    "pricingPref": "system",
    "graph": {
        "graphId": "placeOrder",
        "records": [
            {
                "referenceId": "refOrder",
                "record": {
                    "attributes": {
                        "type": "Order",
                        "method": "PATCH",

```

```

        "id": "refOrder"
      }
    },
    {
      "referenceId": "g0",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "BillingFrequency2": null
          }
        },
        "Name": "Billing Frequency: ",
        "OrderId": "@{refOrder.id}"
      }
    },
    {
      "referenceId": "g1",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "BillingFrequency2": "Monthly"
          }
        },
        "Name": "Billing Frequency: Monthly",
        "OrderId": "@{refOrder.id}"
      }
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
catalog RatesPref	String	Rate card entries defined in the catalog that must be fetched for order items with usage-based pricing during the order creation process. Valid values are <code>Fetch</code> —Retrieves the rate card entries defined in the catalog for order items during the order creation process or <code>Skip</code> —Skips the retrieval of rate card entries for order items during the order creation process. The default value is <code>Skip</code> . This property is	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
		available when the Usage-Based Selling feature is enabled.		
configuration Input	String	Configuration input for the place order process. Valid values are <code>RunAndAllowErrors</code> —Specifies to run the configuration and to proceed order ingestion upon encountering any configuration errors, <code>RunAndBlockErrors</code> —Specifies to run configuration and to block order ingestion upon encountering any configuration errors, or <code>Skip</code> —Specifies to skip configuration. The default value is <code>RunAndBlockErrors</code> .	Optional	60.0
configuration Options	Configuration Options Input[]	Configuration options during the ingestion process.	Optional	60.0
graph	Object Graph Input	The sObject graph of the order payload to be ingested. You can perform create, update, or delete operations on objects from the Sales Transaction context definition by using this property. Additionally, perform create, update, or delete operations on custom objects and fields in your extended context definition.	Required	60.0
pricingPref	String	Pricing preference during the create order process. Valid values are <code>Force</code> —Specifies to force pricing during the order ingestion process, <code>Skip</code> —Specifies to skip pricing during the order ingestion process, or <code>System</code> —Specifies the system to determine whether a pricing calculation is required. The default value is <code>System</code> .	Optional	60.0

Response Body for POST

[Place Order](#)

Place Quote (POST)

Create a quote to discover and price products and services. Additionally, insert, update, or delete a quote line item.

You can also group quote line items based on location, work types, or departments, if groups are enabled for your org. Groups provide a visualization of the products to view large quotes.

This API supports a maximum of 300 transaction line items.

 **Note:** This API has been deprecated as of API version 63.0. In API version 63.0 and later, use the new [Place Sales Transaction](#) API.

Special Access Rules

You need the Create on Quotes user permission to create quotes.

Resource

```
/commerce/quotes/actions/place
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/quotes/actions/place
```

Available Version

60.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request to create a quote.

```
{
  "pricingPref": "System",
  "configurationInput": "RunAndAllowErrors",
  "configurationOptions": {
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "graph": {
    "graphId": "createQuote",
    "records": [{
      "referenceId": "refQuote",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "POST"
        },
        "opportunityId": "---",
        "quoteProp1": "value1",
        "quoteProp2": "value2"
      }
    }
  ],
  {
```

```

    "referenceId": "refQuoteLineItem1",
    "record": {
      "attributes": {
        "type": "QuoteLineItem",
        "method": "POST"
      },
      "QuoteLineItemProp1": "value1",
      "QuoteLineItemProp2": "value2"
    }
  },
  {
    "referenceId": "refQuoteLineItemAttribute",
    "record": {
      "attributes": {
        "type": "QuoteLineItemAttribute",
        "method": "POST"
      },
      "QuoteLineItemId": "@{refQuoteLineItem1.id}",
      "AttributeDefinitionId": "0tjxx0000000001AAA"
    }
  }
]
}

```

This example shows a sample request to insert, update, or delete a quote line item.

```

{
  "pricingPref": "System",
  "configurationInput": "skip",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004E2mCAE"
          },
          "Name": "Quote_Acme"
        }
      },
      {
        "referenceId": "refQuoteLineItemToCreate1",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "POST"
          },
          "QuoteId": "0Q0xx0000004E2mCAE",
          "PricebookEntryId": "01uxx0000008yXPAAY",
          "Product2Id": "01txx0000006i2UAAQ",
          "Quantity": 2.0,

```

```

        "UnitPrice": 800.0,
        "PeriodBoundary": "Anniversary",
        "BillingFrequency": "Monthly",
        "StartDate": "2024-03-11"
    }
},
{
    "referenceId": "refQuoteLineItemToPatch2",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "PATCH",
            "id": "0Q0xx0000004E2mCAE"
        },
        "Quantity": 2.0,
        "UnitPrice": 600.0
    }
},
{
    "referenceId": "refQuoteLineItemToDelete3",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "DELETE",
            "id": "0Q0xx0000004E2mYLK"
        }
    }
}
]
}
}

```

This example shows a sample request to define grouping of quote line items.

```

{
    "pricingPref": "Force",
    "configurationInput": "skip",
    "graph": {
        "graphId": "groupLines",
        "records": [
            {
                "referenceId": "refQuote",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0xx0000004C99CAE"
                    },
                    "Name": "From Place Quote API"
                }
            },
            {
                "referenceId": "refQlgl",
                "record": {
                    "attributes": {

```

```

        "type": "QuoteLineGroup",
        "method": "POST",
        "action": "GroupBy",
        "criteria": {
            "Quantity": 1
        }
    },
    "Name": "From Place Quote API Group",
    "QuoteId": "@{refQuote.id}"
}
},
{
    "referenceId": "refQuoteItem1",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "PATCH",
            "id": "0QLxx0000004DJcGAM"
        },
        "QuoteLineGroupId": "@{refQlgl.id}",
        "Quantity": 1
    }
}
}
]
}
}

```

This example shows a sample request for the initial grouping of the quote with the quote lines assigned to the first group.

```

{
    "pricingPref": "Force",
    "graph": {
        "graphId": "test",
        "records": [
            {
                "referenceId": "refQuote",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0xx0000004CAmCAM"
                    }
                }
            },
            {
                "referenceId": "refQlgl",
                "record": {
                    "attributes": {
                        "type": "QuoteLineGroup",
                        "method": "POST",
                        "action": "GroupAll"
                    },
                    "Name": "From PQ API Group",
                    "QuoteId": "@{refQuote.id}"
                }
            }
        ]
    }
}

```



```

    }
  ]
}
}

```

This example shows a sample request to ungroup a quote but retain the quote lines.

```

{
  "pricingPref": "Force",
  "configurationInput": "skip",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "From Place Quote API"
        }
      },
      {
        "referenceId": "refQlgl",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "DELETE",
            "id": "{GroupId}",
            "action": "Ungroup"
          }
        }
      }
    ]
  }
}

```

This example shows a sample request to create a new group.

```

{
  "pricingPref": "Force",
  "configurationInput": "skip",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },

```

```

        "Name": "From Place Quote API"
      }
    },
    {
      "referenceId": "refQlg1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "POST"
        },
        "Name": "From PQ API Group",
        "QuoteId": "@{refQuote.id}"
      }
    }
  ]
}

```

This example shows a sample request to delete a group.

```

{
  "pricingPref": "Force",
  "configurationInput": "skip",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "From Place Quote API"
        }
      },
      {
        "referenceId": "refQlg1",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "DELETE",
            "id": "{GroupId}",
            "action": "DeleteGroup"
          }
        }
      }
    ]
  }
}

```

This example shows a sample request to move a group.

```
{
  "pricingPref": "Force",
  "configurationInput": "skip",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "From PlaceQuote Api"
        }
      },
      {
        "referenceId": "0QLxx0000004CBYGA2",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "PATCH",
            "id": "0QLxx0000004CBYGA2"
          },
          "Quantity": 2,
          "QuoteLineGroupId": "@{GroupId2}"
        }
      }
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
catalog RatesPref	String	Rate card entries defined in the catalog that must be fetched for quote line items with usage-based pricing during the quote creation process. Valid values are <code>Fetch</code> —Retrieves the rate card entries defined in the catalog for quote line items during the quote creation process or <code>Skip</code> —Skips the retrieval of rate card entries for quote line items during the quote creation process. The default value is <code>Skip</code> . This property is available when the Usage-Based Selling feature is enabled.	Optional	62.0
configuration Input	String	Configuration input for the place quote process. Valid values are	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
		RunAndAllowErrors, RunAndBlockErrors, or Skip. The default value is RunAndBlockErrors.		
configuration Options	Configuration Options Input	Configuration options during the ingestion process.	Optional	60.0
graph	Object Graph Input	The sObject graph representing the quote structure. You can perform create, update, or delete operations on objects from the Sales Transaction context definition by using this property. Additionally, perform create, update, or delete operations on custom objects and fields in your extended context definition.	Required	60.0
pricingPref	String	Pricing preference during the quote process. Valid values are Force, Skip, or System. The default value is System.	Optional	60.0

Response Body for POST

[Place Quote](#)

Place Sales Transaction (POST)

Create a sales transaction, such as an order or a quote, with integrated pricing and configuration. Also, update an order or a quote, and insert and delete order or quote line items to calculate the estimated tax.

You can also group order or quote line items based on location, work types, or departments, if groups are enabled for your org. Groups provide a visualization of the products to view large quotes.

Keep these considerations in mind when you use this API.

- You can add up to 1000 quote line items for a quote, and 1000 order products for an order. For complex flows that involve a large volume of records, make sure that the number of line items that are sent to this API are within this limit.
- A quote can have up to 3000 quote line item attributes, and an order can have up to 3000 order line item attributes.
- This API doesn't support creation of amendment, renewal, or cancellation quote or order. Use the amendment, renewal, or cancellation APIs or invocable actions.
- Create or update quote lines with an associated group ID if you plan to use the sales transaction line editor after the API request.
- Bundle quantity handling depends on the AssociatedQuantScaleMethod field in the payload. If AssociatedQuantScaleMethod field value is Proportional, child quantity is $\text{parent} \times \text{child}$. For example, $10 \times 2 = 20$. Without this value, the API can enforce quantity or cardinality restrictions and return validation errors. Include it explicitly for predictable results. See [OrderItemRelationship](#) for details of AssociatedQuantScaleMethod field.
- For custom objects at level 2 or deeper in the sales transaction hierarchy, configure context mapping so that parentReference maps to the custom object's immediate parent field. For custom object child_one under QuoteLineItem object, map parentReference to quote_line_item_c in QuoteEntitiesMapping object. Without this mapping, this API fails as delta processing can't reconcile all input records.

- This API saves and commits the quote header first, then processes configuration, pricing, and persistence for components, such as line items and groups. If a later step fails, the header isn't rolled back.
- To add an optional child product under a bundle, include a `QuoteLineRelationship` record with its `ProductRelationshipTypeId` set to a Bundle to Bundle product relationship type.

Resource

```
/connect/rev/sales-transaction/actions/place
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/rev/sales-transaction/actions/place
```

Available Version

63.0

HTTP Methods

POST

Request Body for POST

JSON Example

This is a sample request to create a sales transaction for a quote. This example also skips tax calculation by specifying a value for the optional `taxPref` property.

```
{
  "pricingPref": "System",
  "catalogRatesPref": "Skip",
  "configurationPref": {
    "configurationMethod": "Skip",
    "configurationOptions": {
      "validateProductCatalog": true,
      "validateAmendRenewCancel": true,
      "executeConfigurationRules": true,
      "addDefaultConfiguration": true
    }
  },
  "taxPref": "Skip",
  "contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
  },
  "graph": {
    "graphId": "createQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "method": "POST",
```

```

        "type": "Quote"
    },
    "Name": "Quote_Acme",
    "Pricebook2Id": "01sDU000000JvhyYAC"
}
},
{
    "referenceId": "refQuoteLine0",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "POST"
        },
        "QuoteId": "@{refQuote.id}",
        "Product2Id": "01tDU000000F7b8YAC",
        "PricebookEntryId": "01uDU000000fxt2YAA",
        "UnitPrice": 100,
        "Quantity": "1",
        "StartDate": "2024-10-29",
        "EndDate": "2025-03-01",
        "PeriodBoundary": "Anniversary"
    }
},
{
    "referenceId": "refQuoteLine1",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "POST"
        },
        "QuoteId": "@{refQuote.id}",
        "Product2Id": "01tLT000000AA2M9YAL",
        "PricebookEntryId": "01uLT0000007PTafYAG",
        "Quantity": "1"
    }
},
{
    "referenceId": "refQuoteLineItemAttribute1",
    "record": {
        "attributes": {
            "type": "QuoteLineItemAttribute",
            "method": "POST"
        },
        "QuoteLineItemId": "@{refQuoteLine0.id}",
        "AttributeDefinitionId": "0tjRT0000000XbtYAE",
        "AttributeValue": "True"
    }
},
{
    "referenceId": "refQuoteLineRelationship1",
    "record": {
        "attributes": {
            "type": "QuoteLineRelationship",
            "method": "POST"
        }
    }
}

```

```

    },
    "ProductRelationshipTypeId": "0yoLT000000wHq6YAE",
    "ProductRelatedComponentId": "0dSLT00000076IP2AY",
    "MainQuoteLineId": "@{refQuoteLine0.id}",
    "AssociatedQuoteLineId": "@{refQuoteLine1.id}",
    "AssociatedQuoteLinePricing": "NotIncludedInBundlePrice"
  }
}
]
}
}

```

This sample request assigns a TransactionProcessingType record to a quote without any additional preferences. In this example, the TransactionType value for a record is set to a TransactionProcessingType record. See [TransactionProcessingType](#) on page 1223 tooling object for more details.

```

{
  "pricingPref": "Force",
  "contextDetails": {
    "contextId": "f1c9e3e1c335f7959a88de09d3a867cc2b95e08709b99de8e2edeb8f5039e8ed",
    "scope": "Session"
  },
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "POST"
          },
          "OpportunityId": "006xx000001a2oWAAQ",
          "PriceBook2Id": "01sxx0000005ptpAAA",
          "TransactionType": "SkipPricingAndRunTax",
          "Name": "Quote_No_Tax_System"
        }
      },
      {
        "referenceId": "refQLI1",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "POST"
          },
          "QuoteId": "@{refQuote.id}",
          "UnitPrice": 49.99,
          "Product2Id": "01txx0000006i2aAAA",
          "PricebookEntryId": "01luxx0000008yX0AAI",
          "Quantity": 10
        }
      }
    ]
  }
}

```

This is a sample request to insert, update, or delete a quote line item.

```
{
  {
    "pricingPref": "System",
    "catalogRatesPref": "Skip",
    "configurationPref": {
      "configurationMethod": "Skip",
      "configurationOptions": {
        "validateProductCatalog": true,
        "validateAmendRenewCancel": true,
        "executeConfigurationRules": true,
        "addDefaultConfiguration": true
      }
    },
    "contextDetails": {
      "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
    },
    "graph": {
      "graphId": "updateQuote",
      "records": [
        {
          "referenceId": "refQuote",
          "record": {
            "attributes": {
              "method": "PATCH",
              "type": "Quote",
              "id": "801xx000003GZ9bAAG"
            }
          }
        },
        {
          "referenceId": "refQuoteLine0",
          "record": {
            "attributes": {
              "type": "QuoteLineItem",
              "method": "PATCH",
              "id": "402xx000003KY5vJGH"
            },
            "Quantity": "5"
          }
        }
      ]
    }
  }
}
```

This is a sample request to define grouping of quote line items.

```
{
  "pricingPref": "Force",
  "catalogRatesPref": "Skip",
  "configurationPref": {
    "configurationMethod": "Skip",
    "configurationOptions": {
      "validateProductCatalog": true,
```



```

        "validateAmendRenewCancel": true,
        "executeConfigurationRules": true,
        "addDefaultConfiguration": true
    }
},
"contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
},
"graph": {
    "graphId": "groupQuoteLines",
    "records": [
        {
            "referenceId": "refQuote",
            "record": {
                "attributes": {
                    "method": "PATCH",
                    "type": "Quote",
                    "id": "801xx000003GZ9bAAG"
                }
            }
        },
        {
            "referenceId": "refQuoteLine0",
            "record": {
                "attributes": {
                    "type": "QuoteLineItem",
                    "method": "PATCH",
                    "id": "402xx000003KY5vJGH"
                },
                "QuoteLineGroupId": "@{refQuote.id}"
            }
        }
    ]
}
}

```

This is a sample request for the initial grouping of the quote with all the quote lines assigned to the first group.

```

{
    "pricingPref": "Force",
    "catalogRatesPref": "Skip",
    "graph": {
        "graphId": "groupQuote",
        "records": [
            {
                "referenceId": "refQuote",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0xx0000004CAmCAM"
                    }
                }
            },
            {

```

```

    "referenceId": "refQlg1",
    "record": {
      "attributes": {
        "type": "QuoteLineGroup",
        "method": "POST",
        "action": "GroupAll"
      },
      "Name": "From PST API Group",
      "QuoteId": "@{refQuote.id}"
    }
  }
]
}

```

This is a sample request to ungroup a quote but retain the quote lines.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {
    "graphId": "ungroupQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "Grouped Quote with PST API"
        }
      },
      {
        "referenceId": "refQlg1",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "DELETE",
            "id": "402xx000003KY5vJGH",
            "action": "Ungroup"
          }
        }
      }
    ]
  }
}

```

This is a sample request to create a new group.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {

```

```

    "graphId": "createGroup",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "Grouped Quote with PST API"
        }
      },
      {
        "referenceId": "refQlgl",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST"
          },
          "Name": "From PQ API Group",
          "QuoteId": "@{refQuote.id}"
        }
      }
    ]
  }
}

```

This example shows a sample request to delete a group.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {
    "graphId": "deleteGroup",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "Grouped Quote with PST API"
        }
      },
      {
        "referenceId": "refQlgl",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "DELETE",
            "id": "402xx000003KY5vJGH",
            "action": "DeleteGroup"
          }
        }
      }
    ]
  }
}

```

```

    }
  }
]
}
}

```

This is a sample request to group order items based on criteria.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {
    "graphId": "groupOrderItems",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          }
        }
      },
      {
        "referenceId": "refOlg1",
        "record": {
          "attributes": {
            "type": "OrderItemGroup",
            "method": "POST",
            "action": "GroupBy",
            "criteria": {
              "BillingFrequency2": null
            }
          },
          "Name": "Billing Frequency: ",
          "OrderId": "@{refOrder.id}"
        }
      },
      {
        "referenceId": "g1",
        "record": {
          "attributes": {
            "type": "OrderItemGroup",
            "method": "POST",
            "action": "GroupBy",
            "criteria": {
              "BillingFrequency2": "Monthly"
            }
          },
          "Name": "Billing Frequency: Monthly",
          "OrderId": "@{refOrder.id}"
        }
      }
    ]
  }
}

```

```
    ]
  }
}
```

This is a sample request to save changes to a ramp deal by using context ID. The context ID is returned by the Ramp Deal APIs. See [Create Ramp Deal \(POST\)](#).

```
{
  "pricingPref": "Force",
  "contextDetails": {
    "contextId": "f1c9e3e1c335f7959a88de09d3a867cc2b95e08709b99de8e2edeb8f5039e8ed",
    "scope": "Session"
  },
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004DQ4CAM"
          }
        }
      }
    ]
  }
}
```

To see examples that specify actions to create ramp deals for groups, see [Group Ramp Action Input](#) on page 1336.

To see examples that apply to usage-based products, see [Usage-Based Product Input](#) on page 1347.

Properties

Name	Type	Description	Required or Optional	Available Version
catalogRates Pref	String	Rate card entries defined in the catalog that must be fetched for sales items with usage-based pricing during the creation of the sales transaction. Valid values are <code>Fetch</code> —Retrieves the rate card entries defined in the catalog for sales items during the creation of the sales transaction; or <code>Skip</code> —Skips the retrieval of rate card entries for sales items during the creation of the sales transaction. The default value is <code>Skip</code> . This property is available when the Usage-Based Selling feature is enabled.	Optional	63.0
configuration Pref	Configurator Preference Input	Configuration preference during the quote process. These preferences ensure that quotes are defined as per the requirement.	Optional	63.0

Name	Type	Description	Required or Optional	Available Version
contextDetails	Context Input	Context details that are created for a sales transaction.	Required if the <code>graph</code> property isn't specified.	63.0
graph	Object Graph Input	The sObject graph of the sales transaction to be ingested. You can perform create, update, or delete operations on objects from the Sales Transaction context definition by using this property. Additionally, perform create, update, or delete operations on custom objects and fields in your extended context definition. To create custom objects that are at the grandchildren level from a line item, you must create the hierarchy of objects until the grandchild object in the same request.	Required if the <code>contextDetails</code> property isn't specified.	63.0
groupRampAction	String	Specifies the action that you want to perform on group ramp segments. You can also convert a non-ramped group into a ramped group. To add or delete ramped line items from multiple group ramp segments, specify the applicable values in the <code>graph</code> property. See Group Ramp Action Input on page 1336 to refer to examples.	Optional	65.0
pricingPref	String	Pricing preference during the creation of a sales transaction. The default value is <code>System</code> .	Optional	63.0
taxPref	String	Specifies whether to execute or skip the tax calculation step for each sales transaction record. Valid value is <code>Skip</code> . If you don't specify this value, then tax calculation request is performed by default.	Optional	65.0

Valid `groupRampAction` values:

- `AddProducts`—Adds rampable products to group ramp segments.
- `DeleteProducts`—Deletes ramped products.
- `EditGroup`—Converts a non-ramped group into a group ramp segment, or edit group ramp segment attributes such as name and description, except the start and end dates.
- `EditRampSchedule`—Edits details of the group ramp segments, including start and end dates.
- `DeleteSegment`—Deletes the first or last segment in a group ramp schedule.
- `ConvertToNonRampedGroup`—Converts the first or last group ramp segment into a non-ramped group.

Valid `pricingPref` values:

- `Force`—Enforces pricing during the creation of sales transactions.
- `Skip`—Skips pricing during the creation of sales transactions.
- `System`—Determines whether a pricing calculation is required.

Response Body for POST

[Place Sales Transaction](#)

Place Supplemental Transaction (POST)

Create a supplemental order or change orders after they are submitted for processing, such as during the fulfillment process.

Keep these considerations in mind when you use this API.

- The original order must not be assetized.
- If Billing is enabled and configured for the order, verify that the original order hasn't been billed.
- If Dynamic Revenue Orchestration (DRO) is enabled and configured for the order, ensure the original order hasn't reached the point of no return milestone. If point of no return milestone hasn't been reached, the fulfillment plan is frozen.

Resource

```
/connect/rev/sales-transaction/actions/place-supplemental-transaction
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/rev/sales-transaction/actions/place-supplemental-transaction
```

Available Version

64.0

HTTP Methods

POST

Request Body for POST

JSON Example

This sample creates a supplemental order, which is a clone of the original order. The supplemental order is related to the original order.

```
{
  "relatedSalesTransactionId": "801S70000001VKgIAM"
}
```

This sample overrides a field value of an order line item to supplement the order item with ID value as 802SG000003vZ15YAE.

```
{
  "relatedSalesTransactionId": "801S70000001VKgIAM",
  "pricingPref": "System",
}
```

```

"supplementalGraph": {
  "graphId": "1",
  "records": [
    {
      "referenceId": "refOrder",
      "record": {
        "attributes": {
          "type": "Order",
          "method": "PATCH",
          "id": "801S70000001VKgIAM"
        },
        "EffectiveDate": "2025-03-01",
        "QuoteId": "0Q0xx0000004DQ4CAM"
      },
    },
    {
      "referenceId": "refOrderItem",
      "record": {
        "attributes": {
          "type": "OrderItem",
          "method": "PATCH",
          "id": "802SG000003vZ15YAE"
        },
        "QuoteLineItemId": "0Q0xx0000004E2mYLK"
      },
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
pricingPref	String	Pricing preference for this supplemental transaction or order ingestion process. If pricingPref value is defined as either Force or System, the supplemental order can have a different pricing from the original order.	Optional	64.0
relatedSales TransactionId	String	Related or the original sales transaction upon which a supplemental transaction is created.	Required	64.0
supplemental Graph	Object Graph Input	The sObject graph that represents a payload with the additional changes to be ingested. The attribute's HTTP method must be PATCH. The attribute ID must be the ID of the original order or order item that you want to supplement.	Optional	64.0

Valid values are:

- **Force**—Enforces pricing during the creation of sales transactions.
- **Skip**—Skips pricing during the creation of sales transactions.
- **System**—Determines whether a pricing calculation is required.

Response Body for POST

[Supplemental Transaction](#)

Read Sales Transaction (POST)

Retrieve sales transaction data efficiently from an initialized or a hydrated context.

Resource

```
/connect/revenue/transaction-management/sales-transactions/actions/read
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/revenue/transaction-management/sales-transactions/actions/read
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Examples

```
{
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "batchIndices": [
    0,
    1
  ],
  "subjectFieldMap": {
    "Quote": [],
    "QuoteLineItem": [
      "Quantity",
      "Product2Id"
    ]
  },
  "filters": [
    {
      "subjectName": "Quote",
      "fieldName": "Status",

```

```
      "operator": "Equals",
      "operands": [
        {
          "value": "Draft",
          "type": "STRING"
        }
      ]
    }
  ]
}

{
  "contextId": "0RSxx0000004C92GAE",
  "queryTags": [
    "QuoteLineItem"
  ],
  "filters": [
    {
      "nodeName": "SalesTransactionItem",
      "attributeName": "DmlStatus",
      "operator": "In",
      "operands": [
        {
          "value": "Inserted",
          "type": "STRING"
        },
        {
          "value": "Updated",
          "type": "STRING"
        }
      ]
    }
  ]
}

{
  "contextId": "0RSxx0000004C92GAE",
  "shouldReturnMetadataOnly": true
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
batchIndices	List<Integer>	List of batch indices to fetch. The indices are zero-based. If you include this property, the API returns only the specified batches. This property supports fetching multiple batches in parallel.	Optional	68.0
contextId	String	ID of the context to retrieve the data records.	Required	65.0

Name	Type	Description	Required or Optional	Available Version
filters	List< Sales Transaction Filter Condition >	Filter conditions to query the context data.	Optional	67.0
queryTags	List<String>	List of objects that must be retrieved from the context.	Optional	65.0
shouldReturnMetadataOnly	Boolean	Indicates whether to return only batch metadata without fetching batch data (<code>true</code>) or not (<code>false</code>).	Optional	68.0
objectFieldMap	Map<String, List<String>>	Mapping of an sObject name to a list. The list includes the sObject field names on the object or can be an empty list. An empty list specifies that all fields on the object must be queried.	Optional	67.0

Response Body for POST

[Read Sales Transaction](#)

Retrieve Sales Transaction API Errors (GET)

Retrieve any asynchronous error details associated with a sales transaction request.

This API returns detailed error status and a retryable payload from [Place Sales Transaction API](#) that runs asynchronously. Also, view any blocking errors that prevent a subrequest from persisting. This request doesn't return any non-blocking warnings, such as configuration or tax warnings.

You can view the list of `rollbackedReferenceIds`, which shows synthetic or reference IDs that roll back when the batch fails.

Resource

```
connect/revenue/transaction-management/sales-transactions/actions/place/trackerId/errors
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/revenue/transaction-management/sales-transactions/actions/place/16RM0000004187/errors
```

Available Version

66.0

HTTP Methods

GET

Request Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
includeRetryable Payload	Boolean	Indicates whether to return a subset of the original Place Sales Transaction API payload errors (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Optional	66.0

Response Body for GET

[Sales Transaction Async Error](#)

Create Ramp Deal (POST)

Create a ramp deal for a customer on a product. Sales reps can use ramp deals to provide yearly deals to a customer, resulting in long-term revenue and customer relationship. A customer can create, update, or view multiple segments of periods for their subscription term with different attributes for each segment.

This API request creates segments based on the specified input properties such as term, segment type, and trial details. The API response includes the context ID and the updated context object for the sales transaction. You must call the Place Sales Transaction API by specifying this context ID to apply the ramp deal updates. See [Place Sales Transaction API](#).



Note: This API is applicable when you're working with line ramps. To work with ramp deals for groups, you must use the Place Sales Transaction API and specify the `groupRampActions` property.

Resource

```
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-create
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/revenue-management/sales-transaction-contexts/001a000004C81210/actions/ramp-deal-create
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
resourceId	String	ID of the quote line item, order item, or context.	Required	62.0

Request Body for POST

JSON Example

```
{
  "transactionId": "0Q0xx0000004C92CAE",
  "transactionLineId": "0QLxx0000004C9VGAU",
  "subscriptionTerm": 14,
  "subscriptionTermUnit": "MONTHS",
  "trialTerm": 45,
  "trialTermUnit": "DAYS",
  "segmentType": "YEARLY",
  "executionSettings": {
    "executePricing": true,
    "executeConfigRules": false
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
execution Settings	Execution Settings Input[]	Settings to run the pricing or configuration rules.	Optional	62.0
segmentType	String	Type of segment that the user wants to create. Valid values are <code>FREE_TRIAL</code> , <code>CUSTOM</code> , or <code>YEARLY</code> .	Required	62.0
subscription Term	Integer	Subscription length of the term-defined product.	Required	62.0
subscription TermUnit	String	Unit of time for the subscription length. Valid value is <code>MONTHS</code> .	Required	62.0
transactionId	String	ID of the sales transaction that's configured, such as quote or order.	Required	62.0
transaction LineId	String	Quote line item ID or order item ID that the price ramp is created for.	Required	62.0
trialTerm	Integer	Length of the trial period, if any.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
trialTermUnit	String	Unit of time for the trial period. Valid value is DAYS.	Optional. Required if trialTerm property is specified.	62.0

Response Body for POST

[Ramp Deal Service](#)

Delete Ramp Deal (POST)

Delete a ramp deal to convert a ramped product to include a single quote line item or order item.

This API request deletes the segments related to the product. The API response includes the updated context with the context ID. You must call the Place Sales Transaction (POST) API by specifying this context ID to apply the ramp deal updates. See [Place Sales Transaction \(POST\) API](#).

This API is applicable when you're working with line ramps. To work with ramp deals for groups, you must use the Place Sales Transaction API and specify the groupRampActions property.

Resource

```
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-delete
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/revenue-management/sales-transaction-contexts/000000004C8141000000004C8141/actions/ramp-deal-delete
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
resourceId	String	ID of the context.	Required	62.0

Request Body for POST

JSON Example

```
{
  "rampDealIds": [
    "0Q0xx0000004CDxCAM",
    "0QLxx0000004CSOGA2"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
rampDealIds	String[]	Ramp identifier on the quote line item or order item.	Required	62.0

Response Body for POST

[Ramp Deal Service](#)

Update Ramp Deal (POST)

Modify a ramp deal in scenarios where a segment has updates such as quantity, discount, or date change.

Update a ramp deal in these scenarios.

- A segment has quantity or discount changes.
- A trial segment or custom segment has a date change. A custom segment is an added or deleted segment. In this scenario, you can update a ramp deal during the initial sale before assetization.

This API request returns the updated context with the context ID. You must call the Place Sales Transaction (POST) API by specifying this context ID to apply the ramp deal updates. See [Place Sales Transaction \(POST\) API](#).

This API is applicable when you're working with line ramps. To work with ramp deals for groups, you must use the Place Sales Transaction API and specify the `groupRampActions` property.

Resource

```
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-update
```

Resource Example

```
https://yourInstanceNamesalesforce.com/services/data/v62.0/connect/revenue-management/sales-transaction-contexts/4235598068350261392971102730110711102942355980683502613929711027301107111029/actions/ramp-deal-update
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
resourceId	String	ID of the context data that’s used to build the pricing procedure. Get the context instance ID by invoking the Context Service API. See Context Service (POST) .	Required	62.0

Request Body for POST

JSON Example

```
{
  "executionSettings": {
    "executePricing": true,
    "executeConfigRules": false
  },
  "addedNodes": [
    {
      "contextNodePath": [
        "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9", // Context ID

        "0Q0xx0000004CPACA2", //Quote or Order ID
        "RandomUUID" // random UUID for Quote Line Item or Order Item ID
      ],
      "contextNode": {
        "Discount": 10,
        "Quantity": 5,
        "ItemSegmentName": "Year 5",
        "StartDate": "2024-09-07T00:00:00.000Z",
        "EndDate": "2024-09-07T00:00:00.000Z"
      }
    }
  ],
  "updatedNodes": [
    {
      "contextNodePath": [
        "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9", // Context ID

        "0Q0xx0000004CPACA2", //Quote or Order ID
        "0QLxx0000004CfIGAU" // Quote Line ID or Order Line ID to update
      ],
      "contextNode": {
        "Discount": 10,
        "Quantity": 5
      }
    }
  ]
}
```



```
    ],
    "deletedNodes": [
      {
        "contextNodePath": [
          "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9",
          "0Q0xx0000004CPACA2",
          "0QLxx0000004CfIGAU" // Quote Line Item ID to delete
        ]
      }
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
addedNodes	Context Node Input[]	Details of the nodes to be added.	Required	62.0
deletedNodes	Context Node Input[]	Details of the nodes to be deleted.	Required	62.0
execution Settings	Execution Settings Input[]	Settings to run the pricing or configuration rules.	Optional	62.0
updatedNodes	Context Node Input[]	Details of the nodes to be updated.	Required	62.0

Response Body for POST

[Ramp Deal Service](#)

View Ramp Deal (GET)

View a ramp deal related to a quote line item or an order item.

This API request retrieves the segments if the ramp deal already exists. This API is applicable when you're working with line ramps. To work with ramp deals for groups, you must use the Place Sales Transaction API and specify the `groupRampActions` property.

Resource

```
/connect/revenue-management/sales-transaction-contexts/resourceId/actions/ramp-deal-view
```

Resource Example

```
https://your Salesforce org URL/connect/revenue-management/sales-transaction-contexts/0Q0xx0000004CPACA2/actions/ramp-deal-view?transactionId=0Q0xx0000004CPACA2
```

Available Version

62.0

HTTP Methods

GET

Path Parameter for GET

Name	Type	Description	Required or Optional	Available Version
resourceId	String	ID of the quote line item, order item, or context.	Required	62.0

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
transactionId	String	ID of the quote or order required to hydrate the context and retrieve the quote lines.	Required	62.0
transactionLineId	String	ID of the quote or order line required to retrieve the segmented details.	Required	62.0

Response Body for GET

[Ramp Deal Service](#)

Request Bodies

Learn more about the available API request bodies.

[Amendment Input](#)

Input representation of the details of the request to create an amendment record.

[Cancellation Input](#)

Input representation of the details of the request to cancel a quote or an order.

[Create Ramp Deal Input](#)

Input representation of the request to create a ramp deal.

[Clone Options Input](#)

Input representation of the options to clone a sales transaction.

[Clone Sales Transaction Input](#)

Input representation of the request to clone records within a sales transaction.

[Configuration Options Input](#)

Input representation for the configuration options.

[Configurator Preference Input](#)

Input representation of the configuration preference for the place sales transaction request.

[Context Input](#)

Input representation of the context that's associated with a sales transaction for a quote or an order.

[Context Node Input](#)

Input representation of the details of the context nodes for ramp segments.

[Delete Ramp Deal Input](#)

Input representation of the request to delete a ramp deal.

[Eligible Promotions Input](#)

Input representation of the request to get eligible promotions for line items. This representation includes the details to accept line item IDs and a sales transaction ID.

[Execution Settings Input](#)

Input representation of the execution settings for a ramp deal.

[Initiate Downgrade Input](#)

Input representation of the details of the request to initiate a downgrade action.

[Initiate Swap Input](#)

Input representation of the details of the request to initiate a swap action.

[Initiate Upgrade Input](#)

Input representation of the details of the request to initiate an upgrade action. The response includes the ID of the sales transaction that the upgrade action creates.

[Instant Pricing Input](#)

Input representation to fetch the instant pricing details.

[Object Graph Input](#)

Input representation of an sObject with a graph ID.

[Object Input Map](#)

Input representation of an sObject record in a key-value map format.

[Object with Reference Input](#)

Input representation of a list of records to be inserted or updated. To update a record, specify the record ID.

[Place Order Input](#)

Input representation of the request to create or update an order.

[Place Quote Input](#)

Input representation of the request to create or update a quote.

[Read Sales Transaction Input](#)

Input representation of the filter criteria details to read a sales transaction.

[Renewal Input](#)

Input representation of the details of the request to initiate the renewal of an asset.

[Sales Transaction Filter Condition Input](#)

Input representation of filter conditions used to query sales transaction context data.

[Sales Transaction Input](#)

Input representation of the details of the request to place a sales transaction, such as a quote or an order.

[Sales Transaction Operand Input](#)

Input representation of a filter operand for reading sales transaction context data.

[Supplemental Transaction Input](#)

Input representation of the details of the request to create a supplemental order.

Swap Group Input

Input representation of the details of the swap groupings for swap operations.

Update Ramp Deal Input

Input representation of the request to update a ramp deal.

Usage-Based Product Input

Understand the sample request structure to specify and manage usage-based products within a sales transaction.

Amendment Input

Input representation of the details of the request to create an amendment record.

JSON Example

```
{
  "assetIds": [
    "02iSG0000003NMhYAM",
    "02iSG0000006DvSYAU"
  ],
  "amendmentStartDate": "2023-10-04T00:00:00",
  "contractId": "800SG00000CFpepYAD",
  "opportunityId": "006SG000004W5tVYAS",
  "outputRecordId": "801SG00000DX1jWYAT",
  "outputRecordType": "Quote",
  "quantityChange": 5
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assetIds	String[]	IDs of the assets that you want to add to the amendment record.	Required	62.0
amendmentStartDate	String	Start date of the amendment.	Required	62.0
contractId	String	ID of the Contract record that you want to sync with the amendment quote.	Optional	62.0
opportunityId	String	ID of the Opportunity record that you want to sync with the amendment quote.	Optional	62.0
outputRecordId	String	ID of the quote or order record that you want to add the assets to.	Optional	62.0
outputRecordType	String	Type of amendment record that you want to create. For usage products, set this value to Quote. The usage-related records (QuoteLineItemUseResourceGrant, QuoteLineItemUsageResourcePolicy,	Required	62.0

Name	Type	Description	Required or Optional	Available Version
		and QuoteLineRateCardEntry) are copied in the quote action flow, not in the amend order flow.		
quantity Change	Double	Quantity to add to or reduce from the asset's existing quantity.	Required	62.0

Cancellation Input

Input representation of the details of the request to cancel a quote or an order.

JSON Example

```
{
  "assetIds": [
    "02iSG0000003NMhYAM",
    "02iSG0000006DvSYAU"
  ],
  "cancellationDate": "2023-10-04T00:00:00",
  "contractId": "800SG00000CFpepYAD",
  "opportunityId": "006SG000004W5tVYAS",
  "outputRecordId": "801SG00000DX1jWYAT",
  "outputRecordType": "Quote"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assetIds	String[]	IDs of the assets that you want to cancel. All assets in a request must belong to the same price book.	Required	62.0
cancellation Date	String	Effective date of the cancellation.	Required	62.0
contractId	String	ID of the Contract record that you want to sync with the cancellation quote.	Optional	62.0
opportunityId	String	ID of the Opportunity record that you want to sync with the cancellation quote.	Optional	62.0
output RecordId	String	ID of the quote or order that you want to cancel.	Optional	62.0
output RecordType	String	Type of cancellation record that you want to create.	Required	62.0

Create Ramp Deal Input

Input representation of the request to create a ramp deal.

JSON Example

```
{
  "transactionId": "0Q0xx0000004C92CAE",
  "transactionLineId": "0QLxx0000004C9VGAU",
  "subscriptionTerm": 14,
  "subscriptionTermUnit": "MONTHS",
  "trialTerm": 45,
  "trialTermUnit": "DAYS",
  "segmentType": "YEARLY",
  "executionSettings": {
    "executePricing": true,
    "executeConfigRules": false
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
executionSettings	Execution Settings Input[]	Settings to run the pricing or configuration rules.	Optional	62.0
segmentType	String	Type of segment that the user wants to create. Valid values are <code>FREE_TRIAL</code> , <code>CUSTOM</code> , or <code>YEARLY</code> .	Required	62.0
subscriptionTerm	Integer	Subscription length of the term-defined product.	Required	62.0
subscriptionTermUnit	String	Unit of time for the subscription length. Valid value is <code>MONTHS</code> .	Required	62.0
transactionId	String	ID of the sales transaction that's configured, such as quote or order.	Required	62.0
transactionLineId	String	Quote line item ID or order item ID that the price ramp is created for.	Required	62.0
trialTerm	Integer	Length of the trial period, if any.	Optional	62.0
trialTermUnit	String	Unit of time for the trial period. Valid value is <code>DAYS</code> .	Optional. Required if <code>trialTerm</code> property is specified.	62.0

Clone Options Input

Input representation of the options to clone a sales transaction.

JSON Example

This is a sample request to clone all line items in a ramped group within a sales transaction.

```
{
  "recordIds": ["0QLxx0000004CBYGA2"],
  "salesTransactionId": "0Q0xx0000004CE0CAM",
  "options": {
    "lineScope": "AllLines"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
recordTypeId	String	ID of the record type related to the record to clone.	Optional	65.0
lineScope	String	Specifies the scope for cloning a ramp segment. You can clone only the last ramp segment. This property determines which line items must be cloned and added to the cloned segment. Valid values are AllLines—Specifies whether all line items in a ramped group must be cloned or RampedLinesOnly—Specifies whether only the ramped line items must be cloned. A segment identifier is created for the newly cloned line items, ensuring date continuity between the existing and cloned segment.	Optional	65.0

Clone Sales Transaction Input

Input representation of the request to clone records within a sales transaction.

JSON Example

This is a sample request to clone a record within a sales transaction.

```
{
  "recordIds": ["0QLxx0000004CBYGA2"],
  "salesTransactionId": "0Q0xx0000004CE0CAM"
}
```

This is a sample request to clone all line items in a ramped group within a sales transaction.

```
{
  "recordIds": ["0QLxx0000004CBYGA2"],
  "salesTransactionId": "0Q0xx0000004CE0CAM",
  "options": {
    "lineScope": "AllLines"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
recordIds	String[]	ID of the record to be cloned. You can specify a single record ID only.	Required	64.0
salesTransactionId	String	ID of the sales transaction related to the record IDs to clone.	Required	64.0
options	Clone Options Input	Specifies options to clone a ramp segment within a sales transaction. You can clone only the last ramp segment.	Optional	65.0

Configuration Options Input

Input representation for the configuration options.

JSON Example

```
{
  "configurationOptions": {
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
addDefault Configuration	Boolean	Indicates whether to automatically add default configurations to the order (<code>true</code>) or not (<code>false</code>).	Optional	60.0

Name	Type	Description	Required or Optional	Available Version
execute Configuration Rules	Boolean	Indicates whether the order must adhere to configuration rules during processing (<code>true</code>) or bypass them (<code>false</code>).	Optional	60.0
validateAmend RenewCancel	Boolean	Indicates whether to run validations related to amend, renew, or cancel processes (<code>true</code>) or not (<code>false</code>).	Optional	60.0
validate Product Catalog	Boolean	Indicates whether the order must be validated against the product catalog (<code>true</code>) or not (<code>false</code>).	Optional	60.0

Configurator Preference Input

Input representation of the configuration preference for the place sales transaction request.

JSON Example

```
{
  "configurationPref": {
    "configurationMethod": "Skip",
    "configurationOptions": {
      "validateProductCatalog": true,
      "validateAmendRenewCancel": true,
      "executeConfigurationRules": true,
      "addDefaultConfiguration": true
    }
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
configuration Method	String	Configuration method for the place sales transaction request. Valid values are <code>Force</code> —Specifies to enforce the predefined configuration process during the sales transaction process, <code>Skip</code> —Specifies to skip the configuration process during the quote creation process, or <code>System</code> —Specifies the system to determine whether the configuration process is required. The default value is <code>Skip</code> .	Optional	63.0

Name	Type	Description	Required or Optional	Available Version
configuration Options	Configuration Options Input	Configuration options during the ingestion process.	Optional	63.0

Context Input

Input representation of the context that's associated with a sales transaction for a quote or an order.

JSON Example

```
{
  "contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextId	String	ID of the context that represents the created session for the sales transaction. This property is supported only for a PATCH request. If the contextId property isn't specified, the Place Sales Transaction API generates the context ID for the sales transaction.	Optional	63.0

Context Node Input

Input representation of the details of the context nodes for ramp segments.

JSON Example

```
"updatedNodes": [
  {
    "contextNodePath": [
      "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9", // ContextId
      "0Q0xx0000004CPACA2", //Quote or OrderId
      "0QLxx0000004CfIGAU" // Quote Line ID or Order Line ID to update
    ],
    "contextNode": {
      "Discount": 10,
      "Quantity": 5
    }
  },
]
```

```
{
  "contextNodePath": [
    "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9",
    "0Q0xx0000004CPACA2",
    "2b6401d144904e10aa"
  ],
  "contextNode": {
    "Discount": 20,
    "Quantity": 15
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextNode	Map<String, Object>	Details of the context node to be added, updated, or deleted.	Required	62.0
contextNode Path	String[]	Path to the context node to be added, updated, or deleted.	Required	62.0

Delete Ramp Deal Input

Input representation of the request to delete a ramp deal.

JSON Example

```
{
  "rampDealIds": [
    "0Q0xx0000004CDxCAM",
    "0QLxx0000004CSOGA2"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
rampDealIds	String[]	Ramp identifier on the quote line item or order item.	Required	62.0

Eligible Promotions Input

Input representation of the request to get eligible promotions for line items. This representation includes the details to accept line item IDs and a sales transaction ID.

JSON Example

```
{
  "salesTransactionId": "0Q0xx0000004EOECA2",
  "lineItemIds": [
    "0QLxx0000004E7eGAE",
    "0QLxx0000004GCeGAM",
    "0QLxx0000004E7gGAE"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
lineItemIds	String[]	List of line item IDs to evaluate for promotions. The object type is auto-determined from the sales transaction ID.	Required	66.0
salesTransactionId	String	The sales transaction ID, such as an order ID or a quote ID, for the promotion evaluation.	Required	66.0

Execution Settings Input

Input representation of the execution settings for a ramp deal.

JSON Example

```
"executionSettings": {
  "executePricing": true,
  "executeConfigRules": false
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
execute ConfigRules	Boolean	Indicates whether to run configuration rules (<i>true</i>) or not (<i>false</i>). The default value is <i>true</i> .	Optional	62.0
execute Pricing	Boolean	Indicates whether to run pricing request (<i>true</i>) or not (<i>false</i>). The default value is <i>true</i> .	Optional	62.0

Initiate Downgrade Input

Input representation of the details of the request to initiate a downgrade action.

JSON Example

```
{
  "swapStartDate": "2025-12-01T00:00:00Z",
  "outputRecordType": "Quote",
  "swapGroups": {
    "groups": [
      {
        "referenceId": "DOWNGRADE-001",
        "outGroup": {
          "swapAssets": [
            {
              "assetId": "02ixx0000004HOAAA2",
              "quantity": 1
            }
          ]
        },
        "inGroup": {
          "graphId": "downgradeRequest",
          "records": [
            {
              "referenceId": "refQuoteLine0",
              "record": {
                "attributes": {
                  "type": "QuoteLineItem",
                  "method": "POST"
                },
                "Product2Id": "01txx0000006iVlAAI",
                "PricebookEntryId": "01uxx0000008ym4AAA",
                "UnitPrice": 1049,
                "Quantity": "1",
                "StartDate": "2022-09-22"
              }
            }
          ]
        }
      }
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contractId	String	ID of the contract record to downgrade.	Optional	66.0
opportunityId	String	ID of the opportunity record to downgrade.	Optional	66.0

Name	Type	Description	Required or Optional	Available Version
outputRecordType	String	Record type of the output for the downgrade.	Required	66.0
swapGroups	Swap Group[]	Groups that contain the asset details for the downgrade.	Required	66.0
swapStartDate	String	Amendment start date for the downgrade action.	Required	66.0

Initiate Swap Input

Input representation of the details of the request to initiate a swap action.

JSON Example

```
{
  "swapStartDate": "2025-12-01T00:00:00Z",
  "outputRecordType": "Quote",
  "swapGroups": {
    "groups": [
      {
        "referenceId": "SWAP-001",
        "outGroup": {
          "swapAssets": [
            {
              "assetId": "02ixx0000004HOAAA2",
              "quantity": 1
            }
          ]
        },
        "inGroup": {
          "graphId": "swapRequest",
          "records": [
            {
              "referenceId": "refQuoteLine0",
              "record": {
                "attributes": {
                  "type": "QuoteLineItem",
                  "method": "POST"
                },
                "Product2Id": "01txx0000006iVlAAI",
                "PricebookEntryId": "01uxx0000008ym4AAA",
                "UnitPrice": 1049,
                "Quantity": "1",
                "StartDate": "2022-09-22"
              }
            }
          ]
        }
      }
    ]
  }
}
```

```
    ]
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contractId	String	ID of the contract record to swap.	Optional	66.0
opportunityId	String	ID of the opportunity record to swap.	Optional	66.0
outputRecordType	String	Record type of the output for the swap.	Required	66.0
swapGroups	Swap Group []	Groups that contain the asset details for the swap.	Required	66.0
swapStartDate	String	Amendment start date for the swap action.	Required	66.0

Initiate Upgrade Input

Input representation of the details of the request to initiate an upgrade action. The response includes the ID of the sales transaction that the upgrade action creates.

JSON Example

```
{
  "swapStartDate": "2025-12-01T00:00:00Z",
  "outputRecordType": "Quote",
  "swapGroups": {
    "groups": [
      {
        "referenceId": "UPGRADE-001",
        "outGroup": {
          "swapAssets": [
            {
              "assetId": "02ixx0000004HOAAA2",
              "quantity": 1
            }
          ]
        }
      },
      {
        "inGroup": {
          "graphId": "upgradeRequest",
          "records": [
            {
              "referenceId": "refQuoteLine0",
              "record": {
                "attributes": {
                  "type": "QuoteLineItem",
                  "method": "POST"
                }
              }
            }
          ]
        }
      }
    ]
  }
}
```

```
      "Product2Id": "01txx0000006iVlAAI",
      "PricebookEntryId": "01uxx0000008ym4AAA",
      "UnitPrice": 1049,
      "Quantity": "1",
      "StartDate": "2026-03-22"
    }
  ]
}
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contractId	String	ID of the contract record to upgrade.	Optional	66.0
opportunityId	String	ID of the opportunity record to upgrade.	Optional	66.0
outputRecordType	String	Record type of the output for the upgrade.	Required	66.0
swapGroups	Swap Group []	Groups that contain the asset details for the upgrade.	Required	66.0
swapStartDate	String	Amendment start date for the upgrade action.	Required	66.0

Instant Pricing Input

Input representation to fetch the instant pricing details.

JSON Example

```
{
  "correlationId": "7847127122596",
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "records": [
    {
      "referenceId": "0Q0xx0000004DOSCA2",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "POST"
        },
        "Name": "Test Quote Proration Pricing",
        "OpportunityId": "006xx000001a4ISAAY",
        "Pricebook2Id": "01sxx0000005ptpAAA"
      }
    }
  ]
}
```



```

    },
    {
      "referenceId": "refQuoteLine",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "POST"
        },
        "QuoteId": "0Q0xx0000004DOSCA2",
        "PricebookEntryId": "01luxx0000008zHmAAI",
        "Product2Id": "01ttxx0000006jmWAAQ",
        "Quantity": 2,
        "UnitPrice": 25,
        "StartDate": "2022-09-28",
        "EndDate": "2028-09-27",
        "PeriodBoundary": "ANNIVERSARY",
        "BillingFrequency": "ANNUAL"
      }
    }
  ]
}

```

This example shows a sample request to specify grouping of lines based on criteria.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004DOSCA2",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "0QLxx0000004F3gGAE",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        },
        "Quantity": 5
      }
    },
    {
      "referenceId": "0QLxx0000004F3hGAE",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        },
        "Quantity": 2
      }
    }
  ]
}

```

```

    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "Quantity": 5
          }
        },
        "Name": "record"
      }
    }, {
      "referenceId": "GroupId2",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "Quantity": 2
          }
        },
        "Name": "record1",
      }
    }
  ]
}

```

This example shows a sample request for the initial grouping of the quote with the quote lines assigned to the first group.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "POST",
          "action": "GroupAll"
        },
        "Name": "sample"
      }
    }
  ]
}

```

```

    }
  }
]
}

```

This example shows a sample request to ungroup a quote but retain the quote lines.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "0QLxx0000004CBYGA2",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        },
        "Quantity": 2,
        "QuoteLineGroupId": null
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "DELETE",
          "action": "Ungroup"
        }
      }
    }
  ]
}

```

This example shows a sample request to create a new group.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",

```

```

        "method": "PUT"
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "POST"
        },
        "Name": "sample"
      }
    }
  ]
}

```

This example shows a sample request to delete a group.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "PUT"
        }
      }
    },
    {
      "referenceId": "GroupId1",
      "record": {
        "attributes": {
          "type": "QuoteLineGroup",
          "method": "DELETE",
          "action": "DeleteGroup"
        },
        "Name": "sample"
      }
    }
  ]
}

```

This example shows a sample request to move a group.

```

{
  "contextId": "0000000b28op21g00281751271041790cc1e5686282849a387dd3c59b310418b",
  "correlationId": "7847127122596",
  "records": [
    {
      "referenceId": "0Q0xx0000004CAgCAM",
      "record": {

```

```
      "attributes": {
        "type": "Quote",
        "method": "PUT"
      }
    },
    {
      "referenceId": "0QLxx0000004CByGA2",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PUT"
        },
        "Quantity": 2
        "QuoteLineGroupId": "@GroupId2"
      }
    },
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
contextId	String	ID generated by the context service. If you don't specify a context ID, a new context is created.	Optional	59.0
correlationId	String	Client-generated ID for tracking multiple related API requests.	Optional	59.0
records	Object with Reference Input[]	List of pricing data to be fetched.	Required	59.0

Object Graph Input

Input representation of an sObject with a graph ID.

JSON Example

```
{
  "graph": {
    "graphId": "1",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "POST"
          }
        }
      }
    ]
  }
}
```

```
}
  }
}
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
graphId	String	The ID of the graph.	Required	60.0
records	Object with Reference Input on page 1309[]	List of the records to be ingested.	Required	60.0

Object Input Map

Input representation of an sObject record in a key-value map format.

JSON Example

```
{
  "records": [
    {
      "referenceId": "refOrder",
      "record": {
        "attributes": {
          "type": "Order",
          "method": "PATCH",
          "id": "402xx000003KY5vJGH"
        },
        "Quantity": 5
      }
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
attributes	Map <String, String>	Configuration input for the record process. Valid values are type —Type of sales transaction such as Quote or Order; method —HTTP	Required	60.0

Name	Type	Description	Required or Optional	Available Version
		methods such as POST, PATCH, and DELETE; id —Unique identifier for the record. Required for PATCH and DELETE operations; criteria —Criteria to group order or quote line items. For example, group order or quote line items based on a monthly billing frequency; or action —Action to group order or quote line items. Valid values are GroupBy, Group, Ungroup, GroupAll, or DeleteGroup.		

Object with Reference Input

Input representation of a list of records to be inserted or updated. To update a record, specify the record ID.

This is a sample request to create a sales transaction for an order line item.

JSON Example

```
{
  "referenceId": "refOrderItem0",
  "record": {
    "attributes": {
      "type": "OrderItem",
      "method": "POST"
    },
    "OrderId": "@{refOrder.id}",
    "OrderActionId": "@{refOrderAction.id}",
    "PricebookEntryId": "01uRM000000igZG",
    "Quantity": 2
  }
}
```

This is a sample request to update an order line item.

JSON Example

```
{
  "referenceId": "refOrderItem0",
  "record": {
    "attributes": {
      "type": "OrderItem",
      "method": "PATCH",

```

```

    "id": "402xx000003KY5vJGH"
  },
  "OrderId": "@{refOrder.id}",
  "OrderActionId": "@{refOrderAction.id}",
  "PricebookEntryId": "01uRM000000igZG",
  "Quantity": 2,
  "UnitPrice": 800
}
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceId	String	Reference ID that maps to the response and can be used as a reference in later subrecords. This property value starts with a letter or number only and can contain letters, numbers, and underscores. It's also case-sensitive when used for referencing.	Required	60.0
records	Object Input Map on page 1308	Details of a record to be ingested.	Required	60.0

Place Order Input

Input representation of the request to create or update an order.

JSON Example

```

{
  "pricingPref": "System",
  "configurationInput": "RunAndAllowErrors",
  "configurationOptions": {
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,
    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "graph": {
    "graphId": "graphId",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "POST",
            "Id": "POST"
          }
        }
      }
    ]
  }
}

```



```

    }
  },
  {
    "referenceId": "refOrderItem",
    "record": {
      "attributes": {
        "type": "OrderItem",
        "method": "POST"
      },
      "OrderId": "@{refOrder.id}",
      "OrderActionId": "@{refOrderAction.id}",
      "ListPrice": "144.99",
      "Quantity": 3,
      "PricebookEntryId": "01uxx0000008yXPAAY",
      "Product2Id": "01txx0000006i2UAAQ",
      "UnitPrice": "199.49"
    }
  }
]
}
}

```

This example shows a sample request to define grouping of order items.

```

{
  "pricingPref": "system",
  "graph": {
    "graphId": "placeOrder",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "80lxx000003GZ9bAAG"
          }
        }
      },
      {
        "referenceId": "refOlgl",
        "record": {
          "attributes": {
            "type": "OrderItemGroup",
            "method": "POST"
          },
          "Name": "New Group",
          "OrderId": "@{refOrder.id}"
        }
      }
    ]
  }
}

```

This example shows a sample request to ungroup order items.

```
{
  "pricingPref": "system",
  "graph": {
    "graphId": "placeOrder",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "refOrder"
          }
        }
      },
      {
        "referenceId": "refOlg1",
        "record": {
          "attributes": {
            "type": "OrderItemGroup",
            "method": "DELETE",
            "id": "refOlg1",
            "action": "Ungroup"
          }
        }
      }
    ]
  }
}
```

This example shows a sample request to create a new group.

```
{
  "pricingPref": "system",
  "graph": {
    "graphId": "placeOrder",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "refOrder"
          }
        }
      },
      {
        "referenceId": "refOlg",
        "record": {
          "attributes": {
            "type": "OrderItemGroup",
            "method": "POST"
          }
        }
      }
    ]
  }
}
```

```

        },
        "Name": "New Group",
        "OrderId": "@{refOrder.id}"
    }
}
]
}
}

```

This example shows a sample request to delete a group.

```

{
  "contextId": "",
  "correlationId": "",
  "records": [
    {
      "referenceId": "refOrder",
      "record": {
        "attributes": {
          "type": "Order",
          "method": "PATCH",
          "id": "refOrder"
        }
      }
    },
    {
      "referenceId": "refOlg",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "DELETE",
          "id": "refOlg",
          "action": "DeleteGroup"
        }
      }
    }
  ]
}

```

This example shows a sample request to group order items based on criteria.

```

{
  "pricingPref": "system",
  "graph": {
    "graphId": "placeOrder",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "refOrder"
          }
        }
      }
    ]
  }
}

```

```

    },
    {
      "referenceId": "g0",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "BillingFrequency2": null
          }
        },
        "Name": "Billing Frequency: ",
        "OrderId": "@{refOrder.id}"
      }
    },
    {
      "referenceId": "g1",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "BillingFrequency2": "Monthly"
          }
        },
        "Name": "Billing Frequency: Monthly",
        "OrderId": "@{refOrder.id}"
      }
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
catalog RatesPref	String	Rate card entries defined in the catalog that must be fetched for order items with usage-based pricing during the order creation process. Valid values are <code>Fetch</code> —Retrieves the rate card entries defined in the catalog for order items during the order creation process or <code>Skip</code> —Skips the retrieval of rate card entries for order items during the order creation process. The default value is <code>Skip</code> . This property is available when the Usage-Based Selling feature is enabled.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
configuration Input	String	Configuration input for the place order process. Valid values are <code>RunAndAllowErrors</code> —Specifies to run the configuration and to proceed order ingestion upon encountering any configuration errors, <code>RunAndBlockErrors</code> —Specifies to run configuration and to block order ingestion upon encountering any configuration errors, or <code>Skip</code> —Specifies to skip configuration. The default value is <code>RunAndBlockErrors</code> .	Optional	60.0
configuration Options	Configuration Options Input[]	Configuration options during the ingestion process.	Optional	60.0
graph	Object Graph Input	The sObject graph of the order payload to be ingested. You can perform create, update, or delete operations on objects from the Sales Transaction context definition by using this property. Additionally, perform create, update, or delete operations on custom objects and fields in your extended context definition.	Required	60.0
pricingPref	String	Pricing preference during the create order process. Valid values are <code>Force</code> —Specifies to force pricing during the order ingestion process, <code>Skip</code> —Specifies to skip pricing during the order ingestion process, or <code>System</code> —Specifies the system to determine whether a pricing calculation is required. The default value is <code>System</code> .	Optional	60.0

Place Quote Input

Input representation of the request to create or update a quote.

JSON Example

This example shows a sample request to create a quote.

```
{
  "pricingPref": "System",
  "configurationInput": "RunAndAllowErrors",
  "configurationOptions": {
    "validateProductCatalog": true,
    "validateAmendRenewCancel": true,

```

```

    "executeConfigurationRules": true,
    "addDefaultConfiguration": true
  },
  "graph": {
    "graphId": "createQuote",
    "records": [{
      "referenceId": "refQuote",
      "record": {
        "attributes": {
          "type": "Quote",
          "method": "POST"
        },
        "opportunityId": "---",
        "quoteProp1": "value1",
        "quoteProp2": "value2"
      }
    },
    {
      "referenceId": "refQuoteLineItem1",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "POST"
        },
        "QuoteLineItemProp1": "value1",
        "QuoteLineItemProp2": "value2"
      }
    },
    {
      "referenceId": "refQuoteLineItemAttribute",
      "record": {
        "attributes": {
          "type": "QuoteLineItemAttribute",
          "method": "POST"
        },
        "QuoteLineItemId": "@{refQuoteLineItem1.id}",
        "AttributeDefinitionId": "0tjxx0000000001AAA"
      }
    }
  ]
}

```

This example shows a sample request to insert, update, or delete a quote line item.

```

{
  "pricingPref": "System",
  "configurationInput": "skip",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",

```

```

        "method": "PATCH",
        "id": "0Q0xx0000004E2mCAE"
    },
    "Name": "Quote_Acme"
}
},
{
    "referenceId": "refQuoteLineItemToCreate1",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "POST"
        },
        "QuoteId": "0Q0xx0000004E2mCAE",
        "PricebookEntryId": "01uxx0000008yXPAAY",
        "Product2Id": "01txx0000006i2UAAQ",
        "Quantity": 2.0,
        "UnitPrice": 800.0,
        "PeriodBoundary": "Anniversary",
        "BillingFrequency": "Monthly",
        "StartDate": "2024-03-11"
    }
},
{
    "referenceId": "refQuoteLineItemToPatch2",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "PATCH",
            "id": "0Q0xx0000004E2mCAE"
        },
        "Quantity": 2.0,
        "UnitPrice": 600.0
    }
},
{
    "referenceId": "refQuoteLineItemToDelete3",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "DELETE",
            "id": "0Q0xx0000004E2mYLK"
        }
    }
}
]
}
}

```

This example shows a sample request to define grouping of quote line items.

```

{
    "pricingPref": "Force",
    "configurationInput": "skip",
    "graph": {

```

```

    "graphId": "groupLines",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "From Place Quote API"
        }
      },
      {
        "referenceId": "refQlgl",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST",
            "action": "GroupBy",
            "criteria": {
              "Quantity": 1
            }
          },
          "Name": "From Place Quote API Group",
          "QuoteId": "@{refQuote.id}"
        }
      },
      {
        "referenceId": "refQuoteItem1",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "PATCH",
            "id": "0QLxx0000004DJcGAM"
          },
          "QuoteLineGroupId": "@{refQlgl.id}",
          "Quantity": 1
        }
      }
    ]
  }
}

```

This example shows a sample request for the initial grouping of the quote with the quote lines assigned to the first group.

```

{
  "pricingPref": "Force",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {

```



```

        "type": "Quote",
        "method": "PATCH",
        "id": "0Q0xx0000004CAmCAM"
    }
}
},
{
    "referenceId": "refQlg1",
    "record": {
        "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST",
            "action": "GroupAll"
        },
        "Name": "From PQ API Group",
        "QuoteId": "@{refQuote.id}"
    }
}
]
}
}

```

This example shows a sample request to ungroup a quote but retain the quote lines.

```

{
    "pricingPref": "Force",
    "configurationInput": "skip",
    "graph": {
        "graphId": "test",
        "records": [
            {
                "referenceId": "refQuote",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0xx0000004C99CAE"
                    },
                    "Name": "From Place Quote API"
                }
            },
            {
                "referenceId": "refQlg1",
                "record": {
                    "attributes": {
                        "type": "QuoteLineGroup",
                        "method": "DELETE",
                        "id": "{GroupId}",
                        "action": "Ungroup"
                    }
                }
            }
        ]
    }
}

```

This example shows a sample request to create a new group.

```
{
  "pricingPref": "Force",
  "configurationInput": "skip",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "From Place Quote API"
        }
      },
      {
        "referenceId": "refQlgl",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST"
          },
          "Name": "From PQ API Group",
          "QuoteId": "@{refQuote.id}"
        }
      }
    ]
  }
}
```

This example shows a sample request to delete a group.

```
{
  "pricingPref": "Force",
  "configurationInput": "skip",
  "graph": {
    "graphId": "test",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "From Place Quote API"
        }
      },
      {
        "referenceId": "refQlgl",
```

```

        "record": {
            "attributes": {
                "type": "QuoteLineGroup",
                "method": "DELETE",
                "id": "{GroupId}",
                "action": "DeleteGroup"
            }
        }
    ]
}

```

This example shows a sample request to move a group.

```

{
    "pricingPref": "Force",
    "configurationInput": "skip",
    "graph": {
        "graphId": "test",
        "records": [
            {
                "referenceId": "refQuote",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0xx0000004C99CAE"
                    },
                    "Name": "From PlaceQuote Api"
                }
            },
            {
                "referenceId": "0QLxx0000004CBYGA2",
                "record": {
                    "attributes": {
                        "type": "QuoteLineItem",
                        "method": "PATCH",
                        "id": "0QLxx0000004CBYGA2"
                    },
                    "Quantity": 2,
                    "QuoteLineGroupId": "@{GroupId2}"
                }
            }
        ]
    }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
catalog RatesPref	String	Rate card entries defined in the catalog that must be fetched for quote line items with	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
		usage-based pricing during the quote creation process. Valid values are <code>Fetch</code> —Retrieves the rate card entries defined in the catalog for quote line items during the quote creation process or <code>Skip</code> —Skips the retrieval of rate card entries for quote line items during the quote creation process. The default value is <code>Skip</code> . This property is available when the Usage-Based Selling feature is enabled.		
<code>configurationInput</code>	String	Configuration input for the place quote process. Valid values are <code>RunAndAllowErrors</code> , <code>RunAndBlockErrors</code> , or <code>Skip</code> . The default value is <code>RunAndBlockErrors</code> .	Optional	60.0
<code>configurationOptions</code>	Configuration Options Input	Configuration options during the ingestion process.	Optional	60.0
<code>graph</code>	Object Graph Input	The sObject graph representing the quote structure. You can perform create, update, or delete operations on objects from the Sales Transaction context definition by using this property. Additionally, perform create, update, or delete operations on custom objects and fields in your extended context definition.	Required	60.0
<code>pricingPref</code>	String	Pricing preference during the quote process. Valid values are <code>Force</code> , <code>Skip</code> , or <code>System</code> . The default value is <code>System</code> .	Optional	60.0

Read Sales Transaction Input

Input representation of the filter criteria details to read a sales transaction.

JSON Examples

```
{
  "contextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "batchIndices": [
    0,
    1
  ],
  "sobjectFieldMap": {
    "Quote": [],
    "QuoteLineItem": [
```

```

        "Quantity",
        "Product2Id"
    ]
},
"filters": [
    {
        "subjectName": "Quote",
        "fieldName": "Status",
        "operator": "Equals",
        "operands": [
            {
                "value": "Draft",
                "type": "STRING"
            }
        ]
    }
]
}

```

```

{
  "contextId": "0RSxx0000004C92GAE",
  "queryTags": [
    "QuoteLineItem"
  ],
  "filters": [
    {
      "nodeName": "SalesTransactionItem",
      "attributeName": "DmlStatus",
      "operator": "In",
      "operands": [
        {
          "value": "Inserted",
          "type": "STRING"
        },
        {
          "value": "Updated",
          "type": "STRING"
        }
      ]
    }
  ]
}

```

```

{
  "contextId": "0RSxx0000004C92GAE",
  "shouldReturnMetadataOnly": true
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
batchIndices	List<Integer>	List of batch indices to fetch. The indices are zero-based. If you include this property, the API returns only the specified batches. This property supports fetching multiple batches in parallel.	Optional	68.0
contextId	String	ID of the context to retrieve the data records.	Required	65.0
filters	List< Sales Transaction Filter Condition >	Filter conditions to query the context data.	Optional	67.0
queryTags	List<String>	List of objects that must be retrieved from the context.	Optional	65.0
shouldReturnOnlyMetadata	Boolean	Indicates whether to return only batch metadata without fetching batch data (<code>true</code>) or not (<code>false</code>).	Optional	68.0
subjectFieldMap	Map<String, List<String>>	Mapping of an sObject name to a list. The list includes the sObject field names on the object or can be an empty list. An empty list specifies that all fields on the object must be queried.	Optional	67.0

Renewal Input

Input representation of the details of the request to initiate the renewal of an asset.

JSON Example

```
{
  "assetIds": [
    "02iSG0000003NMhYAM",
    "02iSG0000006DvSYAU"
  ],
  "contractId": "800SG00000CFpепYAD",
  "opportunityId": "006SG000004W5tVYAS",
  "outputRecordId": "801SG00000DX1jWYAT",
  "outputRecordType": "Quote",
  "renewalEndDate": "2024-10-03T23:59:59",
  "renewalStartDate": "2023-10-04T00:00:00"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assetIds	String[]	IDs of the assets that you want to renew.	Required	62.0
contractId	String	ID of the Contract record that you want to sync with the renewal of the Quote or Order record.	Optional	62.0
opportunityId	String	ID of the Opportunity record that you want to sync with the renewal quote.	Optional	62.0
outputRecordId	String	ID of the Quote or Order record that you want to renew.	Optional	62.0
outputRecordType	String	Type of renewal record that you want to create.	Required	62.0
renewalEndDate	String	End date of the renewal process for the assets.	Optional	62.0
renewalStartDate	String	Start date of the renewal process for the assets. Required for early asset renewals and renewing expired assets, using today's date or a future date.	Optional	62.0

Sales Transaction Filter Condition Input

Input representation of filter conditions used to query sales transaction context data.

JSON Example

```
{
  "filters": [
    {
      "sObjectName": "Quote",
      "fieldName": "Status",
      "operator": "Equals",
      "operands": [
        {
          "value": "Draft",
          "type": "STRING"
        }
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
sObjectName	String	Name of the sObject that contains the field to filter on.	Required if the <code>fieldName</code> property value isn't specified. Or, specify the <code>nodeName</code> and <code>attributeName</code> property values.	67.0
fieldName	String	Name of the field on the specified sObject to filter on.	Required if the <code>sObjectName</code> property value isn't specified. Or, specify the <code>nodeName</code> and <code>attributeName</code> property values.	67.0
operator	String	Operator to use to filter the results. Valid values are <code>Equals</code> , <code>NotEquals</code> , <code>Gt</code> —Greater Than, <code>GtEq</code> —Greater Than or Equals, <code>Lt</code> —Less Than, <code>LtEq</code> —Less Than or Equals, or <code>In</code> .	Required	67.0
nodeName	String	Name of the context node to apply filtering on.	Optional	67.0
attributeName	String	Name of the node attribute to apply filtering on.	Optional	67.0
operands	Sales Transaction Operand[]	Operand values with explicit value and type metadata.	Required	67.0
underlyingFilters	Sales Transaction Filter Condition[]	Nested filter conditions used to compose a composite filter.	Optional	67.0
operatorLogic	String	Logical expression that defines how underlying filters are combined. Valid values are <code>AND</code> or <code>OR</code> .	Optional	67.0

Sales Transaction Input

Input representation of the details of the request to place a sales transaction, such as a quote or an order.

JSON Example

This is a sample request to create a sales transaction for a quote. This example also skips tax calculation by specifying a value for the optional `taxPref` property.

```
{
  "pricingPref": "System",
  "catalogRatesPref": "Skip",
  "configurationPref": {
    "configurationMethod": "Skip",
    "configurationOptions": {
      "validateProductCatalog": true,
      "validateAmendRenewCancel": true,
      "executeConfigurationRules": true,
      "addDefaultConfiguration": true
    }
  },
  "taxPref": "Skip",
  "contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
  },
  "graph": {
    "graphId": "createQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "method": "POST",
            "type": "Quote"
          },
          "Name": "Quote_Acme",
          "Pricebook2Id": "01sDU000000JvhbYAC"
        }
      },
      {
        "referenceId": "refQuoteLine0",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "POST"
          },
          "QuoteId": "@{refQuote.id}",
          "Product2Id": "01tDU000000F7b8YAC",
          "PricebookEntryId": "01uDU000000fxt2YAA",
          "UnitPrice": 100,
          "Quantity": "1",
          "StartDate": "2024-10-29",
          "EndDate": "2025-03-01",
          "PeriodBoundary": "Anniversary"
        }
      },
      {
        "referenceId": "refQuoteLine1",
        "record": {
```

```

    "attributes": {
      "type": "QuoteLineItem",
      "method": "POST"
    },
    "QuoteId": "@{refQuote.id}",
    "Product2Id": "01tLT00000AA2M9YAL",
    "PricebookEntryId": "01uLT000007PTafYAG",
    "Quantity": "1"
  },
  {
    "referenceId": "refQuoteLineItemAttribute1",
    "record": {
      "attributes": {
        "type": "QuoteLineItemAttribute",
        "method": "POST"
      },
      "QuoteLineItemId": "@{refQuoteLine0.id}",
      "AttributeDefinitionId": "0tjRT0000000XbtYAE",
      "AttributeValue": "True"
    }
  },
  {
    "referenceId": "refQuoteLineRelationship1",
    "record": {
      "attributes": {
        "type": "QuoteLineRelationship",
        "method": "POST"
      },
      "ProductRelationshipTypeId": "0yoLT000000wHq6YAE",
      "ProductRelatedComponentId": "0dsLT00000076IP2AY",
      "MainQuoteLineId": "@{refQuoteLine0.id}",
      "AssociatedQuoteLineId": "@{refQuoteLine1.id}",
      "AssociatedQuoteLinePricing": "NotIncludedInBundlePrice"
    }
  }
]
}

```

This sample request assigns a TransactionProcessingType record to a quote without any additional preferences. In this example, the TransactionType value for a record is set to a TransactionProcessingType record. See [TransactionProcessingType](#) on page 1223 tooling object for more details.

```

{
  "pricingPref": "Force",
  "contextDetails": {
    "contextId": "f1c9e3e1c335f7959a88de09d3a867cc2b95e08709b99de8e2edeb8f5039e8ed",
    "scope": "Session"
  },
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "refQuote",

```

```

    "record": {
      "attributes": {
        "type": "Quote",
        "method": "POST"
      },
      "OpportunityId": "006xx000001a2oWAAQ",
      "PriceBook2Id": "01sxx0000005ptpAAA",
      "TransactionType": "SkipPricingAndRunTax",
      "Name": "Quote_No_Tax_System"
    }
  },
  {
    "referenceId": "refQLI1",
    "record": {
      "attributes": {
        "type": "QuoteLineItem",
        "method": "POST"
      },
      "QuoteId": "@{refQuote.id}",
      "UnitPrice": 49.99,
      "Product2Id": "01txx0000006i2aAAA",
      "PricebookEntryId": "01uxx0000008yX0AAI",
      "Quantity": 10
    }
  }
]
}
}

```

This is a sample request to insert, update, or delete a quote line item.

```

{
  {
    "pricingPref": "System",
    "catalogRatesPref": "Skip",
    "configurationPref": {
      "configurationMethod": "Skip",
      "configurationOptions": {
        "validateProductCatalog": true,
        "validateAmendRenewCancel": true,
        "executeConfigurationRules": true,
        "addDefaultConfiguration": true
      }
    },
    "contextDetails": {
      "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
    },
    "graph": {
      "graphId": "updateQuote",
      "records": [
        {
          "referenceId": "refQuote",
          "record": {
            "attributes": {
              "method": "PATCH",

```

```

        "type": "Quote",
        "id": "801xx000003GZ9bAAG"
      }
    },
    {
      "referenceId": "refQuoteLine0",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "PATCH",
          "id": "402xx000003KY5vJGH"
        },
        "Quantity": "5"
      }
    }
  ]
}

```

This is a sample request to define grouping of quote line items.

```

{
  "pricingPref": "Force",
  "catalogRatesPref": "Skip",
  "configurationPref": {
    "configurationMethod": "Skip",
    "configurationOptions": {
      "validateProductCatalog": true,
      "validateAmendRenewCancel": true,
      "executeConfigurationRules": true,
      "addDefaultConfiguration": true
    }
  },
  "contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708"
  },
  "graph": {
    "graphId": "groupQuoteLines",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "method": "PATCH",
            "type": "Quote",
            "id": "801xx000003GZ9bAAG"
          }
        }
      },
      {
        "referenceId": "refQuoteLine0",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",

```

```

        "method": "PATCH",
        "id": "402xx000003KY5vJGH"
      },
      "QuoteLineGroupId": "@{refQuote.id}"
    }
  ]
}

```

This is a sample request for the initial grouping of the quote with all the quote lines assigned to the first group.

```

{
  "pricingPref": "Force",
  "catalogRatesPref": "Skip",
  "graph": {
    "graphId": "groupQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004CAmCAM"
          }
        }
      },
      {
        "referenceId": "refQlg1",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "POST",
            "action": "GroupAll"
          },
          "Name": "From PST API Group",
          "QuoteId": "@{refQuote.id}"
        }
      }
    ]
  }
}

```

This is a sample request to ungroup a quote but retain the quote lines.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {
    "graphId": "ungroupQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {

```

```

        "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
        },
        "Name": "Grouped Quote with PST API"
    },
    {
        "referenceId": "refQlg1",
        "record": {
            "attributes": {
                "type": "QuoteLineGroup",
                "method": "DELETE",
                "id": "402xx000003KY5vJGH",
                "action": "Ungroup"
            }
        }
    }
]
}

```

This is a sample request to create a new group.

```

{
    "catalogRatesPref": "Skip",
    "pricingPref": "Force",
    "graph": {
        "graphId": "createGroup",
        "records": [
            {
                "referenceId": "refQuote",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0xx0000004C99CAE"
                    },
                    "Name": "Grouped Quote with PST API"
                }
            },
            {
                "referenceId": "refQlg1",
                "record": {
                    "attributes": {
                        "type": "QuoteLineGroup",
                        "method": "POST"
                    },
                    "Name": "From PQ API Group",
                    "QuoteId": "@{refQuote.id}"
                }
            }
        ]
    }
}

```

```

    }
  }
}

```

This example shows a sample request to delete a group.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {
    "graphId": "deleteGroup",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          },
          "Name": "Grouped Quote with PST API"
        }
      },
      {
        "referenceId": "refQlgl",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "DELETE",
            "id": "402xx000003KY5vJGH",
            "action": "DeleteGroup"
          }
        }
      }
    ]
  }
}

```

This is a sample request to group order items based on criteria.

```

{
  "catalogRatesPref": "Skip",
  "pricingPref": "Force",
  "graph": {
    "graphId": "groupOrderItems",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "0Q0xx0000004C99CAE"
          }
        }
      }
    ]
  }
}

```

```

    {
      "referenceId": "ref0lg1",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "BillingFrequency2": null
          }
        },
        "Name": "Billing Frequency: ",
        "OrderId": "@{refOrder.id}"
      }
    },
    {
      "referenceId": "g1",
      "record": {
        "attributes": {
          "type": "OrderItemGroup",
          "method": "POST",
          "action": "GroupBy",
          "criteria": {
            "BillingFrequency2": "Monthly"
          }
        },
        "Name": "Billing Frequency: Monthly",
        "OrderId": "@{refOrder.id}"
      }
    }
  ]
}

```

This is a sample request to save changes to a ramp deal by using context ID. The context ID is returned by the Ramp Deal APIs. See [Create Ramp Deal \(POST\)](#).

```

{
  "pricingPref": "Force",
  "contextDetails": {
    "contextId": "f1c9e3e1c335f7959a88de09d3a867cc2b95e08709b99de8e2edeb8f5039e8ed",
    "scope": "Session"
  },
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004DQ4CAM"
          }
        }
      }
    ]
  }
}

```



```

    }
  ]
}
}

```

To see examples that specify actions to create ramp deals for groups, see [Group Ramp Action Input](#) on page 1336.

To see examples that apply to usage-based products, see [Usage-Based Product Input](#) on page 1347.

Properties

Name	Type	Description	Required or Optional	Available Version
catalogRates Pref	String	Rate card entries defined in the catalog that must be fetched for sales items with usage-based pricing during the creation of the sales transaction. Valid values are <code>Fetch</code> —Retrieves the rate card entries defined in the catalog for sales items during the creation of the sales transaction; or <code>Skip</code> —Skips the retrieval of rate card entries for sales items during the creation of the sales transaction. The default value is <code>Skip</code> . This property is available when the Usage-Based Selling feature is enabled.	Optional	63.0
configuration Pref	Configurator Preference Input	Configuration preference during the quote process. These preferences ensure that quotes are defined as per the requirement.	Optional	63.0
contextDetails	Context Input	Context details that are created for a sales transaction.	Required if the <code>graph</code> property isn't specified.	63.0
graph	Object Graph Input	The sObject graph of the sales transaction to be ingested. You can perform create, update, or delete operations on objects from the Sales Transaction context definition by using this property. Additionally, perform create, update, or delete operations on custom objects and fields in your extended context definition. To create custom objects that are at the grandchildren level from a line item, you must create the hierarchy of objects until the grandchild object in the same request.	Required if the <code>contextDetails</code> property isn't specified.	63.0
groupRampAction	String	Specifies the action that you want to perform on group ramp segments. You can also convert a non-ramped group into a ramped group. To add or delete ramped	Optional	65.0

Name	Type	Description	Required or Optional	Available Version
		line items from multiple group ramp segments, specify the applicable values in the <code>graph</code> property. See Group Ramp Action Input on page 1336 to refer to examples.		
<code>pricingPref</code>	String	Pricing preference during the creation of a sales transaction. The default value is <code>System</code> .	Optional	63.0
<code>taxPref</code>	String	Specifies whether to execute or skip the tax calculation step for each sales transaction record. Valid value is <code>Skip</code> . If you don't specify this value, then tax calculation request is performed by default.	Optional	65.0

Valid `groupRampAction` values:

- `AddProducts`—Adds rampable products to group ramp segments.
- `DeleteProducts`—Deletes ramped products.
- `EditGroup`—Converts a non-ramped group into a group ramp segment, or edit group ramp segment attributes such as name and description, except the start and end dates.
- `EditRampSchedule`—Edits details of the group ramp segments, including start and end dates.
- `DeleteSegment`—Deletes the first or last segment in a group ramp schedule.
- `ConvertToNonRampedGroup`—Converts the first or last group ramp segment into a non-ramped group.

Valid `pricingPref` values:

- `Force`—Enforces pricing during the creation of sales transactions.
- `Skip`—Skips pricing during the creation of sales transactions.
- `System`—Determines whether a pricing calculation is required.

[Group Ramp Action Input](#)

Understand the sample request to specify group ramp actions during initial sale.

Group Ramp Action Input

Understand the sample request to specify group ramp actions during initial sale.

Keep these considerations in mind when you specify ramp actions.

- Use the [Clone Sales Transaction API](#) to clone a ramp segment, and specify the clone option.
- Use the [Place Sales Transaction API](#) to specify a group ramp action by using the `groupRampAction` property. You can refer to the sections in this topic for examples.

JSON Example to Edit a Group

This is a sample request that creates the first ramp segment. This request accepts IDs of a quote and quote line group. Additionally, the request accepts attributes of quote line group such as `IsRamped`, `SegmentType`, `StartDate`, and `EndDate`. A ramp segment is created with a ramp identifier and segment identifier added to all the quote line items available in the ramp segment.

This process converts a group into a segment, which becomes the first segment in the ramp schedule. A quote can contain a single ramp schedule only. To create another segment in the ramp schedule, use the [Clone Sales Transaction API](#).

```
{
  "groupRampAction": "EditGroup",
  "pricingPref": "System",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "0Q0xx0000004CYqCAM",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004CYqCAM"
          }
        }
      },
      {
        "referenceId": "1C9xx0000004CVcCAM",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "PATCH",
            "id": "1C9xx0000004CVcCAM"
          },
          "StartDate": "2025-05-01",
          "EndDate": "2025-06-30",
          "SortOrder": 1,
          "IsRamped": true,
          "SegmentType": "Custom"
        }
      }
    ]
  }
}
```

JSON Example to Edit a Ramp Segment

This is a sample request to edit multiple ramp segments simultaneously, maintaining date continuity among ramp segments.

```
{
  "groupRampAction": "EditRampSchedule",
  "pricingPref": "System",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
```

```

    "referenceId": "0Q0xx0000004CYqCAM",
    "record": {
      "attributes": {
        "type": "Quote",
        "method": "PATCH",
        "id": "0Q0xx0000004CYqCAM"
      }
    }
  },
  {
    "referenceId": "1C9xx0000004CVcCAM",
    "record": {
      "attributes": {
        "type": "QuoteLineGroup",
        "method": "PATCH",
        "id": "1C9xx0000004CVcCAM"
      },
      "StartDate": "2025-05-01",
      "EndDate": "2025-06-30"
    }
  },
  {
    "referenceId": "1C9xx0000004CVcAAM",
    "record": {
      "attributes": {
        "type": "QuoteLineGroup",
        "method": "PATCH",
        "id": "1C9xx0000004CVcAAM"
      },
      "StartDate": "2025-07-01",
      "EndDate": "2025-08-30"
    }
  },
  {
    "referenceId": "1C9xx0000004CVcBAM",
    "record": {
      "attributes": {
        "type": "QuoteLineGroup",
        "method": "PATCH",
        "id": "1C9xx0000004CVcBAM"
      },
      "StartDate": "2025-09-01",
      "EndDate": "2025-10-30"
    }
  }
]
}

```

JSON Example to Add a Product

This is a sample request to add a product to the current and subsequent segments. A ramp identifier and segment identifier are added to the quote line items.

```
{
  "groupRampAction": "AddProducts",
  "pricingPref": "System",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "0Q0xx0000004CKKCA2",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004CKKCA2"
          }
        }
      },
      {
        "referenceId": "1C9xx0000004CCGCA2",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "PATCH",
            "id": "1C9xx0000004CCGCA2"
          }
        }
      },
      {
        "referenceId": "ref_01txx0000006iCXAAY_0",
        "record": {
          "attributes": {
            "type": "QuoteLineItem",
            "method": "POST",
            "id": "ref_01txx0000006iCXAAY_0"
          },
          "QuoteId": "@{0Q0xx0000004CKKCA2.id}",
          "Id": "ref_01txx0000006iCXAAY_0",
          "UnitPrice": 2000,
          "Product2Id": "01txx0000006iCXAAY",
          "PricebookEntryId": "01uxx0000008yciAAA",
          "Quantity": 1,
          "StartDate": "2025-05-28T00:00:00.000Z",
          "BillingFrequency": null,
          "PeriodBoundary": null,
          "QuoteLineGroupId": "1C9xx0000004CCGCA2"
        }
      },
      {
        "referenceId": "1C9xx0000004CCGCAB",
        "record": {
          "attributes": {
```

```

        "type": "QuoteLineGroup",
        "method": "PATCH",
        "id": "1C9xx0000004CCGCAB"
    }
},
{
    "referenceId": "ref_01ttx0000006iCXABY_0",
    "record": {
        "attributes": {
            "type": "QuoteLineItem",
            "method": "POST",
            "id": "ref_01ttx0000006iCXABY_0"
        },
        "QuoteId": "@{0Q0xx0000004CKKCA2.id}",
        "Id": "ref_01ttx0000006iCXABY_0",
        "UnitPrice": 2000,
        "Product2Id": "01ttx0000006iCXABY_0",
        "PricebookEntryId": "01lux0000008yciAAA",
        "Quantity": 1,
        "StartDate": "2025-05-28T00:00:00.000Z",
        "BillingFrequency": null,
        "PeriodBoundary": null,
        "QuoteLineGroupId": "1C9xx0000004CCGCAB"
    }
}
]
}

```

JSON Example to Delete a Product

This is a sample request to delete a product from the current and subsequent ramp segments.

```

{
    "pricingPref": "System",
    "groupRampAction": "DeleteProducts",
    "graph": {
        "graphId": "updateQuote",
        "records": [
            {
                "referenceId": "0Q0SG000000L5r70AC",
                "record": {
                    "attributes": {
                        "type": "Quote",
                        "method": "PATCH",
                        "id": "0Q0SG000000L5r70AC"
                    }
                }
            },
            {
                "referenceId": "0QLSG000000WuTh4AK",
                "record": {
                    "attributes": {

```

```

        "type": "QuoteLineItem",
        "method": "DELETE",
        "id": "0QLSG000000WuTh4AK"
      }
    },
    {
      "referenceId": "0QLSG000000WuTh4BK",
      "record": {
        "attributes": {
          "type": "QuoteLineItem",
          "method": "DELETE",
          "id": "0QLSG000000WuTh4AK"
        }
      }
    }
  ]
}

```

JSON Example to Delete a Segment

This is a sample request to delete the first and last segment in a ramp schedule. The API throws an error if the specified segment isn't the first and last segment, ensuring there are no gaps between quote line items in different ramp segments.

```

{
  "pricingPref": "System",
  "groupRampAction": "DeleteSegment",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "0Q0xx0000004CfICAU",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004CfICAU"
          }
        }
      },
      {
        "referenceId": "1C9xx0000004FjcCAE",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "DELETE",
            "id": "1C9xx0000004FjcCAE",
            "action": "DeleteGroup"
          }
        }
      }
    ]
  }
}

```

```

    }
  }
}

```

JSON Example to Remove a Segment From a Ramp Schedule

This is a sample request to remove the first or last ramp segment in a ramp schedule. This request removes the ramp-specific fields from a quote line group such as `IsRamped` and `SegmentType`. Additionally, this request removes the `RampIdentifier` and `SegmentIdentifier` fields from a quote line item.

```

{
  "pricingPref": "System",
  "groupRampAction": "ConvertToNonRampedGroup",
  "graph": {
    "graphId": "updateQuote",
    "records": [
      {
        "referenceId": "0Q0xx0000004CfICAU",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004CfICAU"
          }
        }
      },
      {
        "referenceId": "1C9xx0000004FjcCAE",
        "record": {
          "attributes": {
            "type": "QuoteLineGroup",
            "method": "PATCH",
            "id": "1C9xx0000004FjcCAE"
          }
        }
      }
    ]
  }
}

```

Sales Transaction Operand Input

Input representation of a filter operand for reading sales transaction context data.

JSON Example

```

{
  "operands": [
    {
      "value": "Draft",
      "type": "STRING"
    }
  ]
}

```



```
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
value	String	Operand value used by the filter condition.	Required	67.0
type	String	Data type of the operand value. Valid values are <code>STRING</code> , <code>NUMBER</code> , <code>BOOLEAN</code> , <code>DATETIME</code> , or <code>DATE</code> .	Required	67.0

Supplemental Transaction Input

Input representation of the details of the request to create a supplemental order.

JSON Example

This sample creates a supplemental order, which is a clone of the original order. The supplemental order is related to the original order.

```
{
  "relatedSalesTransactionId": "801S70000001VKgIAM"
}
```

This sample overrides a field value of an order line item to supplement the order item with ID value as 802SG000003vZ15YAE.

```
{
  "relatedSalesTransactionId": "801S70000001VKgIAM",
  "pricingPref": "System",
  "supplementalGraph": {
    "graphId": "1",
    "records": [
      {
        "referenceId": "refOrder",
        "record": {
          "attributes": {
            "type": "Order",
            "method": "PATCH",
            "id": "801S70000001VKgIAM"
          },
          "EffectiveDate": "2025-03-01",
          "QuoteId": "0Q0xx0000004DQ4CAM"
        }
      },
      {
        "referenceId": "refOrderItem",
        "record": {
          "attributes": {
            "type": "OrderItem",
            "method": "PATCH",
```

```

        "id": "802SG000003vZ15YAE"
      },
      "QuoteLineItemId": "0Q0xx0000004E2mYLK"
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
pricingPref	String	Pricing preference for this supplemental transaction or order ingestion process. If <code>pricingPref</code> value is defined as either <code>Force</code> or <code>System</code> , the supplemental order can have a different pricing from the original order.	Optional	64.0
relatedSales TransactionId	String	Related or the original sales transaction upon which a supplemental transaction is created.	Required	64.0
supplemental Graph	Object Graph Input	The sObject graph that represents a payload with the additional changes to be ingested. The attribute's HTTP method must be PATCH. The attribute ID must be the ID of the original order or order item that you want to supplement.	Optional	64.0

Valid values are:

- `Force`—Enforces pricing during the creation of sales transactions.
- `Skip`—Skips pricing during the creation of sales transactions.
- `System`—Determines whether a pricing calculation is required.

Swap Group Input

Input representation of the details of the swap groupings for swap operations.

JSON Example

```

{
  "swapGroups": {
    "groups": [
      {
        "referenceId": "SWAP-001",
        "outGroup": {

```

```

    "swapAssets": [
      {
        "assetId": "02ixx0000004HOAAA2",
        "quantity": 1
      }
    ],
    "inGroup": {
      "graphId": "swapRequest",
      "records": [
        {
          "referenceId": "refQuoteLine0",
          "record": {
            "attributes": {
              "type": "QuoteLineItem",
              "method": "POST"
            },
            "Product2Id": "01txx0000006iVLAAl",
            "PricebookEntryId": "01luxx0000008ym4AAA",
            "UnitPrice": 1049,
            "Quantity": "1",
            "StartDate": "2022-09-22"
          }
        }
      ]
    }
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
inGroup	Object	Products to include in the swap. These objects are supported. QuoteLineItem or OrderItem.	Required	66.0
outGroup	Swap Group[]	Assets to exclude from the swap. You can't use string values for properties, such as quantity and price.	Required	66.0
referenceId	String	Reference ID of the operation.	Required	66.0

Update Ramp Deal Input

Input representation of the request to update a ramp deal.

JSON Example

```
{
  "executionSettings": {
    "executePricing": true,
    "executeConfigRules": false
  },
  "addedNodes": [
    {
      "contextNodePath": [
        "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9", // Context ID

        "0Q0xx0000004CPACA2", //Quote or Order ID
        "RandomUUID" // random UUID for Quote Line Item or Order Item ID
      ],
      "contextNode": {
        "Discount": 10,
        "Quantity": 5,
        "ItemSegmentName": "Year 5",
        "StartDate": "2024-09-07T00:00:00.000Z",
        "EndDate": "2024-09-07T00:00:00.000Z"
      }
    }
  ],
  "updatedNodes": [
    {
      "contextNodePath": [
        "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9", // Context ID

        "0Q0xx0000004CPACA2", //Quote or Order ID
        "0QLxx0000004CfIGAU" // Quote Line ID or Order Line ID to update
      ],
      "contextNode": {
        "Discount": 10,
        "Quantity": 5
      }
    }
  ],
  "deletedNodes": [
    {
      "contextNodePath": [
        "4f23961a5c98806f89305e064c67b397e93f1bb8a2a7a3a80db506f1d4110ee9",
        "0Q0xx0000004CPACA2",
        "0QLxx0000004CfIGAU" // Quote Line Item ID to delete
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
addedNodes	Context Node Input[]	Details of the nodes to be added.	Required	62.0
deletedNodes	Context Node Input[]	Details of the nodes to be deleted.	Required	62.0
execution Settings	Execution Settings Input[]	Settings to run the pricing or configuration rules.	Optional	62.0
updatedNodes	Context Node Input[]	Details of the nodes to be updated.	Required	62.0

Usage-Based Product Input

Understand the sample request structure to specify and manage usage-based products within a sales transaction.

JSON Example to Create a Quote Record With Default Rates and Default Grants

The example shows a sample request to creates these records with these updates.

- **Quote**—Creates the main quote record with default rates and default grants.
- **Quote Line Item**—Adds a product to the quote.
- **Rate Card Entry**—Links default pricing from rate card. When `NegotiatedRate` property value is null, the rate card price is used.
- **Usage Grant**—Allocates all default grants.

```
{
  "pricingPref": "system",
  "configurationPref": {
    "configurationMethod": "skip",
    "configurationOptions": {
      "validateProductCatalog": false,
      "validateAmendRenewCancel": false,
      "executeConfigurationRules": false,
      "addDefaultConfiguration": false
    }
  },
  "graph": {
    "graphId": "graphId",
    "records": [
      {
        "referenceId": "refQuote",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "POST"
          },
          "Name": "Q-2024-001",
          "QuoteAccountId": "001xx000003DHP0AAO",
          "OpportunityId": "006xx000004TmiGAAS",
          "Status": "Draft",

```

```

        "Pricebook2Id": "01sxx0000001SGEAA2"
    },
    {
        "referenceId": "refQuoteLineItem",
        "record": {
            "attributes": {
                "type": "QuoteLineItem",
                "method": "POST"
            },
            "QuoteId": "@{refQuote.id}",
            "Product2Id": "01txx0000001SGEAA2",
            "StartDate": "2024-10-29",
            "PeriodBoundary": "Anniversary",
            "EndDate": "2027-03-01",
            "PricebookEntryId": "01luxx0000001SGEAA2",
            "UnitPrice": 100,
            "Quantity": 1
        }
    },
    {
        "referenceId": "refRateCardEntry",
        "record": {
            "attributes": {
                "type": "QuoteLineRateCardEntry",
                "method": "POST"
            },
            "RateCardEntryId": "1CJxx0000004CXEGA2",
            "NegotiatedRate": null,
            "QuoteLineItemId": "@{refQuoteLineItem.id}"
        }
    }
]
}

```

JSON Example to Specify Negotiated Grants

This example shows a sample response to create a `QuotLineItemUseRsrcGrant` record that links a quote line item to a product usage grant for usage-based products. This request performs these updates.

- Associates a usage grant with a quote line item.
- Allocates a quantity of usage resources.
- Applies a usage policy that defines how the resources can be consumed.
- Links to a base product usage grant that defines the grant structure.

```

{
    "pricingPref": "system",
    "configurationPref": {
        "configurationMethod": "skip",
        "configurationOptions": {
            "validateProductCatalog": false,
            "validateAmendRenewCancel": false,

```

```

        "executeConfigurationRules": false,
        "addDefaultConfiguration": false
    }
},
"graph": {
    "graphId": "graphId",
    "records": [
        {
            "referenceId": "ref1CJxx0000004CXGGA2",
            "record": {
                "attributes": {
                    "type": "QuotLineItmUseRsrcGrant",
                    "method": "POST"
                },
                "GrantQuantity": 4,
                "ProductUsageResourcePolicyId": "7Suxx0000004C92CAE",
                "QuoteLineItemId": "0QLxx0000004CnMGAU",
                "ProductUsageGrantId": "1BXxx0000004C92GAE"
            }
        }
    ]
}
}

```

This example shows a sample response to update the previously created QuotLineItmUseRsrcGrant record with additional units, which is specified by using the `GrantQuantity` property. The quote line item now has 97 units of usage resource allocation.

```

{
    "pricingPref": "system",
    "configurationPref": {
        "configurationMethod": "skip",
        "configurationOptions": {
            "validateProductCatalog": false,
            "validateAmendRenewCancel": false,
            "executeConfigurationRules": false,
            "addDefaultConfiguration": false
        }
    },
    "graph": {
        "graphId": "graphId",
        "records": [
            {
                "referenceId": "ref1X6xx000000003GCAQ",
                "record": {
                    "attributes": {
                        "method": "PATCH",
                        "type": "QuotLineItmUseRsrcGrant",
                        "id": "1X6xx000000003GCAQ"
                    },
                    "GrantQuantity": 97
                }
            }
        ]
    }
}

```

JSON Example to Specify Tiered Pricing and Usage Grants

This example shows a sample request to update an existing quote with tiered pricing and usage grants. This request sets up a multi-tier rate structure and updates a usage grant quantity along with these additional updates.

- Creates a base rate card entry with a negotiated rate of 10. Sets the base price for the quote line item.
- Creates a second rate card entry for tiered pricing without any negotiated rate. The default rate card is used. This rate card entry is the base for tier adjustments.
- Creates a tier adjustment for quantities 0 through 50 and adds \$5 adjustment to the base rate.
- Creates a tier adjustment for quantities 50 through 100 and adds an adjustment of \$10.
- Updates an existing usage resource grant record to set grant quantity to 150 units.

For example, if an order is placed for 75 units, the base rate is \$10. As tier 2 is applicable for this order, an adjustment of \$10 is applicable. The final price per unit is \$20 with a total of \$1500 for 75 units.

```
{
  "pricingPref": "system",
  "configurationPref": {
    "configurationMethod": "skip",
    "configurationOptions": {
      "validateProductCatalog": false,
      "validateAmendRenewCancel": false,
      "executeConfigurationRules": false,
      "addDefaultConfiguration": false
    }
  },
  "graph": {
    "graphId": "graphId",
    "records": [
      {
        "referenceId": "refLineItemParent",
        "record": {
          "attributes": {
            "type": "Quote",
            "method": "PATCH",
            "id": "0Q0xx0000004CXEGA2"
          }
        }
      },
      {
        "referenceId": "ref1",
        "record": {
          "attributes": {
            "type": "QuoteLineRateCardEntry",
            "method": "POST"
          },
          "RateCardEntryId": "1CJxx0000004CXEGA2",
          "NegotiatedRate": 10,
          "QuoteLineItemId": "0QLxx0000004Eh6GAE"
        }
      },
      {
        "referenceId": "refTierRateCardEntry0",
        "record": {
```



```

    "attributes": {
      "type": "QuoteLineRateCardEntry",
      "method": "POST"
    },
    "RateCardEntryId": "1CJxx0000004CXFGA2",
    "QuoteLineItemId": "0QLxx0000004Eh6GAE"
  },
  {
    "referenceId": "refTier0",
    "record": {
      "attributes": {
        "type": "QuoteLineRateAdjustment",
        "method": "POST"
      },
      "Name": "Tier 1",
      "AdjustmentType": "Amount",
      "AdjustmentValue": 5,
      "LowerBound": 0,
      "UpperBound": 50,
      "QuoteLineRateCardEntryId": "@{refTierRateCardEntry0.id}"
    }
  },
  {
    "referenceId": "refTier1",
    "record": {
      "attributes": {
        "type": "QuoteLineRateAdjustment",
        "method": "POST"
      },
      "Name": "Tier 2",
      "AdjustmentType": "Amount",
      "AdjustmentValue": 10,
      "LowerBound": 50,
      "UpperBound": 100,
      "QuoteLineRateCardEntryId": "@{refTierRateCardEntry0.id}"
    }
  },
  {
    "referenceId": "refTier2",
    "record": {
      "attributes": {
        "type": "QuoteLineRateAdjustment",
        "method": "POST"
      },
      "Name": "Tier 3",
      "AdjustmentType": "Amount",
      "AdjustmentValue": 15,
      "LowerBound": 100,
      "UpperBound": 150,
      "QuoteLineRateCardEntryId": "@{refTierRateCardEntry0.id}"
    }
  },
  {

```

```

    "referenceId": "refGt2xzdUP",
    "record": {
      "attributes": {
        "type": "QuotLineItmUseRsrcGrant",
        "method": "PATCH",
        "id": "1X6xx000000003GCAQ"
      },
      "GrantQuantity": 150
    }
  ]
}

```

Response Bodies

Learn more about the available response bodies.

[Amendment](#)

Output representation of the details of an amendment record.

[ARC Base Error](#)

Output representation of the error response related to the amendment, renewal, or cancellation of assets.

[Batch Metadata](#)

Output representation of the metadata that describes the available batches for a context.

[Batch Records](#)

Output representation of a single batch and the records that it contains.

[Cancellation](#)

Output representation of the details of a cancellation record.

[Clone Sales Transaction](#)

Output representation for the result of cloning records within a sales transaction.

[Clone Sales Transaction Error Response](#)

Output representation of the errors that occur during the clone sales transaction operation.

[Eligible Promotions Response](#)

Output representation of the details of the eligible promotions.

[Initiate Downgrade Response](#)

Output representation of the request to initiate a downgrade action.

[Initiate Swap Response](#)

Output representation of the request to initiate a swap action.

[Initiate Upgrade Response](#)

Output representation of the request to initiate an upgrade action.

[Instant Pricing](#)

Output representation containing the results of the instant pricing request.

[Object Reference](#)

Output representation of an sObject with a reference ID along with any potential error.

[Place Order Error Response](#)

Output representation of the error response for the place order request.

[Place Order Response](#)

Output representation of the request to create or update an order.

[Place Quote Error Response](#)

Output representation of the error responses of a place quote request.

[Place Quote](#)

Output representation of the request to create or update a quote.

[Sales Transaction Async Error](#)

Output representation of the details of errors encountered during the async processing of the Place Sales Transaction API request.

[Promotion Coupon](#)

Output representation of the details of a coupon that's eligible for the recommended promotion.

[Promotion Coupon Availability](#)

Output representation of the details of the coupon that's eligible for the promotion. Additionally, this representation specifies the reason for any coupon ineligibility.

[Promotion Details Response](#)

Output representation of the eligible promotion and its details. This representation includes details of any coupons, eligibility rules, and terms and conditions.

[Promotion Limit](#)

Output representation of the details of the promotion limit of an eligible promotion.

[Promotion Reward Details](#)

Output representation of the details of the rewards of an eligible promotion rule.

[Promotion Rules List](#)

Output representation of the details of the rules of an eligible promotion.

[Ramp Deal Service Error Response](#)

Output representation of the details of errors encountered during the processing of the API request.

[Ramp Deal Service](#)

Output representation of the details of a created, updated, or deleted ramp deal.

[Read Sales Transaction](#)

Output representation of the request to read a sales transaction.

[Read Sales Transaction Records](#)

Output representation of the details of a map of keys and associated values. The keys are record type names, such as a Quote or QuoteLineItem, and values are lists of records of that type.

[Renewal](#)

Output representation of the details of a renewal record.

[Sales Transaction](#)

Output representation of the request to create a sales transaction.

[Sales Transaction Context](#)

Output representation of the context details that are associated with a sales transaction.

[Sales Transaction Error Response](#)

Output representation of the error details associated with the API request.

Sales Transaction Record

Generic output representation for any sales transaction record type.

Supplemental Transaction Error Response

Output representation of the error details associated with the Place Supplemental Transaction API.

Supplemental Transaction

Output representation of the details of the created supplemental order.

Amendment

Output representation of the details of an amendment record.

JSON Example

```
{
  "amendmenRecordId": "0Q0xx0000004NsSCAU",
  "errors": [
    {
      "errorCode": "REQUIRED_FIELD_MISSING",
      "errorMessage": "Specify a value for quantityChange, and try again."
    }
  ],
  "requestId": "16Pxx0000004NIy",
  "success": true
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
amendmentRecordId	String	ID of the amendment record that’s created for a quote or an order.	Small, 62.0	62.0
errors	ARC Base Error on page 1354[]	Error responses if the creation of an amendment record fails.	Small, 62.0	62.0
requestId	String	Request ID that’s used to track an async request.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

ARC Base Error

Output representation of the error response related to the amendment, renewal, or cancellation of assets.

```
  "errors": [
    {
      "errorCode": "REQUIRED_FIELD_MISSING",
      "errorMessage": "Specify a value for quantityChange, and try again."
    }
  ]
```

$$\left. \begin{array}{l}] \\ \end{array} \right\}$$

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Big, 62.0	62.0
errorMessage	String	Error message for the resultant error.	Big, 62.0	62.0

Batch Metadata

Output representation of the metadata that describes the available batches for a context.

JSON Example

This example response shows the metadata that describes the available batches for a context.

```
{
  "parentContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
  "totalBatches": 3,
  "batchId": "b1f2c3d4-5678-90ab-cdef-1234567890ab"
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
batchId	String	ID of the batch for the context.	Small, 68.0	68.0
parentContextId	String	ID of the parent context that the batches belong to.	Small, 68.0	68.0
totalBatches	Integer	Total number of batches available for the context.	Small, 68.0	68.0

Batch Records

Output representation of a single batch and the records that it contains.

JSON Example

This example response shows a single batch and the records that it contains.

```
{
  "batchIndex": 0,
  "batchRecords": {
    "records": {
      "Quote": [
        {
```

```
    "data": {
      "Id": "0Q0d2700000AbCdEAAV",
      "Name": "Q-00001",
      "Status": "Draft",
      "GrandTotalAmount": 1500.00,
      "hasDeletedLines": true
    }
  ],
  "QuoteLineItem": [
    {
      "data": {
        "Id": "0QLd2700000XyZaBAAX",
        "Quantity": 2,
        "Product2Id": "01td2700000PqRsTAAV"
      }
    },
    {
      "data": {
        "Id": "0QLd2700000XyZaCAAX",
        "Quantity": 5,
        "Product2Id": "01td2700000PqRsUAAV"
      }
    }
  ]
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
batchIndex	Integer	Zero-based index of the batch.	Small, 68.0	68.0
batchRecords	Read Sales Transaction Records	Records that the batch contains.	Small, 68.0	68.0

Cancellation

Output representation of the details of a cancellation record.

JSON Example

```
{
  "cancellationRecordId": "0Q0xx0000004NsSCAU",
  "errors": [
    {
      "errorCode": "REQUIRED_FIELD_MISSING",
      "errorMessage": "Specify a value for quantityChange, and try again."
    }
  ]
}
```

```

    }
  ],
  "requestId": "16Pxx0000004NIy",
  "success": true
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
cancellation RecordId	String	ID of the cancellation record that's created for a quote or an order.	Small, 62.0	62.0
errors	ARC Base Error on page 1354[]	Error responses if the creation of a cancellation record fails.	Small, 62.0	62.0
requestId	String	Request ID that's used to track the async request.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Clone Sales Transaction

Output representation for the result of cloning records within a sales transaction.

JSON Example

This example shows a sample of a successful response.

```

{
  "requestId": "9356bcbf04f06e22360a09807c13e1d4e395",
  "salesTransactionId": "0Q0SG000000ACxf0AG",
  "errors": [],
  "success": true
}

```

This example shows a sample error response.

```

{
  "requestId": "9356bcbf04f06e22360a09807c13e1d4e395",
  "salesTransactionId": "0Q0SG000000ACxf0AG",
  "errors": [
    {
      "errorCode": "INVALID_API_INPUT",
      "message": "Specify only one record",
      "referenceId": "0QLxx0000004CBYGA2"
    }
  ],
  "success": false
}

```

Properties

Name	Type	Description	Available Version
requestId	String	Request ID of the process that can be used to query the async status.	64.0
salesTransactionId	String	ID of the quote line item, order item, quote line group, or order item group record.	64.0
success	Boolean	Indicates whether the synchronous part of the processing is successful (<code>true</code>) or not (<code>false</code>).	64.0
errors	Clone Sales Transaction Error Response[]	List of errors encountered during synchronous processing.	64.0

Clone Sales Transaction Error Response

Output representation of the errors that occur during the clone sales transaction operation.

JSON Example

```
{
  "errors": [
    {
      "errorCode": "INVALID_API_INPUT",
      "message": "Specify only one record",
      "referenceId": "0QLxx0000004CBYGA2"
    }
  ]
}
```

Properties

Name	Type	Description	Available Version
errorCode	String	Code associated with the error.	64.0
message	String	Message associated with the error.	64.0
referenceId	String	Reference ID associated with the error.	64.0

Eligible Promotions Response

Output representation of the details of the eligible promotions.

JSON Example

```
{
  "eligiblePromotions": [
```



```

{
  "additionalPromotionFields": {},
  "couponDetails": {
    "coupon": {
      "couponCode": "COUPON_002",
      "endDateTime": null,
      "startDateTime": "2025-10-08T19:00:00.000Z",
      "status": "Active"
    },
    "couponAvailabilityMessage": null
  },
  "currencyIsoCode": "USD",
  "description": "15% on Accessories",
  "displayName": "Comms Manual Promotion 15% on Accessories",
  "endDateTime": null,
  "isAutomatic": false,
  "priorityNumber": null,
  "promotionCode": null,
  "promotionEligibleRules": [
    {
      "ruleName": "CommsAutoPromotionRule",
      "rulePriority": 1,
      "ruleRewards": [
        {
          "rewardDetails": {
            "discountLevel": "Line",
            "discountType": "PercentageOff",
            "discountValue": "10.0",
            "discountAppliedAt": "LineItem",
            "discountCategory": "Accessories"
          },
          "rewardType": "ProvideDiscount"
        }
      ]
    }
  ],
  "promotionId": "0c8DX00000001UeYAI",
  "promotionLimits": [],
  "startDateTime": "2025-07-01T17:02:00.000Z",
  "termsAndCondition": "<p>test</p>"
},
{
  "additionalPromotionFields": {},
  "couponDetails": {
    "coupon": {
      "couponCode": "COUPON_001",
      "endDateTime": null,
      "startDateTime": null,
      "status": "Active"
    },
    "couponAvailabilityMessage": null
  },
  "currencyIsoCode": "USD",
  "description": "Promo_Printer_Child",

```

```
    "displayName": "Promo_Printer_Child",
    "endTime": null,
    "isAutomatic": false,
    "priorityNumber": null,
    "promotionCode": null,
    "promotionEligibleRules": [
      {
        "ruleName": "Rule001",
        "rulePriority": 1,
        "ruleRewards": [
          {
            "rewardDetails": {
              "discountLevel": "Line",
              "discountProduct": "Printer Paper",
              "discountType": "AmountOff",
              "discountValue": "2.0",
              "discountAppliedAt": "LineItem"
            },
            "rewardType": "ProvideDiscount"
          }
        ]
      }
    ],
    "promotionId": "0c8DX00000001h5YAA",
    "promotionLimits": [],
    "startDate": "2025-11-03T12:44:00.000Z",
    "termsAndCondition": "<p>Promo_Printer_Child</p>"
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
eligiblePromotions	Promotion Details Response	List of eligible promotions for the specified line items.	Big, 66.0	66.0

Initiate Downgrade Response

Output representation of the request to initiate a downgrade action.

JSON Example

```
{
  "salesTransactionId": "0Q09Q000005IkeEPSA0"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
salesTransactionId	String	ID of the sales transaction that's created by the downgrade action.	Small, 66.0	66.0

Initiate Swap Response

Output representation of the request to initiate a swap action.

JSON Example

```
{
  "salesTransactionId": "0Q09Q000005IkePSA0"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
salesTransactionId	String	ID of the sales transaction that's created by the swap action.	Small, 66.0	66.0

Initiate Upgrade Response

Output representation of the request to initiate an upgrade action.

JSON Example

```
{
  "salesTransactionId": "0Q09Q000005IkePSA0"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
salesTransactionId	String	ID of the sales transaction that's created by the upgrade action.	Small, 66.0	66.0

Instant Pricing

Output representation containing the results of the instant pricing request.

Sample Response

```
{
  "contextId": "0000000p18dq18g0025177552281982954d1f35410374495bc923a2319a1247c",
  "correlationId": "7847127122596",
  "records": [
    {
      "error": {},
      "record": {
        "NetUnitPrice": 900.8972677417262,
        "Discount": null,
        "EndQuantity": 5,
        "NetTotalPrice": 3603.5890709669047,
      }
    }
  ]
}
```

```

        "AggregatedQuantity": 4,
        "TotalLineAmount": 3603.5890709669047,
        "Quantity": 4,
        "attributes": {
            "type": "QuoteLineItem"
        },
        "ListPrice": 900.8972677417262
    },
    "referenceId": "0QLLT0000018DY14AM"
},
{
    "error": {},
    "record": {
        "NetUnitPrice": 720.3738964743471,
        "Discount": null,
        "EndQuantity": 5,
        "NetTotalPrice": 2881.4955858973885,
        "AggregatedQuantity": 4,
        "TotalLineAmount": 2881.4955858973885,
        "Quantity": 4,
        "attributes": {
            "type": "QuoteLineItem"
        },
        "ListPrice": 720.3738964743471
    },
    "referenceId": "0QLLT0000018DYr4AM"
},
{
    "error": {},
    "record": {
        "NetUnitPrice": 218.36199390885784,
        "Discount": null,
        "EndQuantity": 5,
        "NetTotalPrice": 873.4479756354314,
        "AggregatedQuantity": 4,
        "TotalLineAmount": 873.4479756354314,
        "Quantity": 4,
        "attributes": {
            "type": "QuoteLineItem"
        },
        "ListPrice": 218.36199390885784
    },
    "referenceId": "0QLLT0000018DYG4A2"
},
{
    "error": {},
    "record": {
        "AccountId": "001LT000011SA6bYAG",
        "TotalPrice": 406014.84549259685,
        "attributes": {
            "type": "Quote"
        },
        "Discount": 0,
        "psmSummaryFields": {

```

```

    "evergreen##months##1": {
      "aggregatedTotal": 140349.76846114534,
      "pricingTerm": 1,
      "pricingTermUnit": "Months",
      "sellingModelType": "Evergreen"
    },
    "onetime": {
      "aggregatedTotal": 128927.94222255558,
      "sellingModelType": "OneTime"
    },
    "termdefined##annual##1": {
      "aggregatedTotal": 136737.13480889596,
      "pricingTerm": 1,
      "pricingTermUnit": "Annual",
      "sellingModelType": "TermDefined"
    }
  },
  "Subtotal": 406014.84549259685
},
"referenceId": "0Q0LT000000Q1LR0A0"
}
],
"success": true
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
contextId	String	Context ID returned by the context service.	Small, 59.0	59.0
correlationId	String	Client-generated ID for tracking multiple related API calls.	Small, 59.0	59.0
records	Object Reference[]	List of records related to pricing results.	Small, 59.0	59.0
success	Boolean	Indicates whether the fetching of instant pricing is successful (<code>true</code>) or not (<code>false</code>).	Small, 59.0	59.0

Object Reference

Output representation of an sObject with a reference ID along with any potential error.

Sample Response

```

{
  "referenceid": "refQuote",
  "record": {
    "attributes": {
      "type": "Quote",
      "method": "POST"
    },
    "quantity": "2"
  }
}

```

```

    },
    "error": {
      "errorCode": "INVALID_API_INPUT",
      "message": "Reference Id format is irrelevant."
    }
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
referenceId	String	ID that identifies the specific Salesforce object that's returned in the API response.	Small, 59.0	59.0
record	Map<String, Object>	The sObject record data represented as a map of attribute names to their values.	Small, 59.0	59.0
error	Map<String, Object>	Detailed information about any error associated with the sObject in the response.	Small, 59.0	59.0

Place Order Error Response

Output representation of the error response for the place order request.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code representing the type of error encountered during the place order create request.	Small, 60.0	60.0
message	String	Message stating the reason for the error, if any.	Small, 60.0	60.0
referenceId	String	Reference ID associated with the specific error instance for tracking and reference purposes.	Small, 60.0	60.0

Place Order Response

Output representation of the request to create or update an order.

JSON Example

```

{
  "requestId": "16PRM0000004DBq",
  "orderId": "801S70000001VKgIAM",
  "success": true,
  "errors": [],
  "statusURL": "/services/data/vXX.X/subjects/AsyncOperationTracker/16PRM0000004DBq"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Place OrderError Response on page 1364[]	List of errors encountered during the synchronous processing.	Small, 60.0	60.0
orderId	String	ID of the order created after a successful request.	Small, 60.0	60.0
requestId	String	Request ID of the process to query asynchronous status of the place order API.	Small, 60.0	60.0
statusURL	String	Asynchronous status URL of the request, if available.	Small, 60.0	60.0
success	Boolean	Indicates whether the synchronous part of the processing is successful (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Place Quote Error Response

Output representation of the error responses of a place quote request.

JSON Example

```
{
  "errorCode": "INVALID_API_INPUT",
  "message": "Include record type and method in the request and try again.",
  "referenceId": "refQuoteItem2"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Error code representing the type of error encountered in the create place quote request.	Small, 60.0	60.0
message	String	Message stating the reason for the error, if any.	Small, 60.0	60.0
referenceId	String	Reference ID associated with the specific error instance for tracking and reference purposes.	Small, 60.0	60.0

Place Quote

Output representation of the request to create or update a quote.

JSON Example

This example shows a sample response of the place quote request.

```
{
  "quoteId": "0Q0xx0000004E2mCAE",
  "requestIdentifier": "95Txx0000004Cx2",
  "responseError": [],
  "statusURL": "/services/data/v60.0/subjects/RevenueAsyncOperation/95Txx0000004Cx2EAE",
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
quoteId	String	ID of the quote created after a successful request.	Small, 60.0	60.0
request Identifier	String	Unique request identifier that can be used to poll the async request.	Big, 60.0	60.0
responseError	Place Quote Error Response []	List of errors encountered during the synchronous processing.	Small, 60.0	60.0
statusURL	String	Asynchronous status URL to track the operation, if available.	Big, 60.0	60.0
success	Boolean	Indicates whether the synchronous part of the processing is successful (<code>true</code>) or not (<code>false</code>).	Small, 60.0	60.0

Sales Transaction Async Error

Output representation of the details of errors encountered during the async processing of the Place Sales Transaction API request.

JSON Example

```
{
  "errors": [
    {
      "errorCode": "FIELD_CUSTOM_VALIDATION_EXCEPTION",
      "message": "Quantity cannot exceed 10",
      "referenceId": "refQuoteLineItem2"
    }
  ],
  "jobStatus": "Completed",
  "retryablePayload": {
    "pricingPref": "System",
    "configurationPref": {
      "configurationMethod": "System",
      "configurationOptions": {
        "validateProductCatalog": true,

```



```

        "validateAmendRenewCancel": true,
        "executeConfigurationRules": true,
        "addDefaultConfiguration": true
    }
},
"graph": {
    "graphId": "1",
    "records": [
        {
            "referenceId": "refQuoteLineItem2",
            "record": {
                "attributes": {
                    "type": "QuoteLineItem",
                    "method": "POST"
                },
                "QuoteId": "000xx0000004CNYCA2",
                "PricebookEntryId": "01luxx0000009CL2",
                "Product2Id": "01txx0000006uu2",
                "Quantity": 15,
                "UnitPrice": 100
            }
        },
        {
            "referenceId": "refQuoteLineItem3",
            "record": {
                "attributes": {
                    "type": "QuoteLineItem",
                    "method": "POST"
                },
                "QuoteId": "000xx0000004CNYCA2",
                "PricebookEntryId": "01luxx0000009CL3",
                "Product2Id": "01txx0000006uu3",
                "Quantity": 20,
                "UnitPrice": 100
            }
        },
        {
            "referenceId": "refQuoteLinePriceAdjustment1",
            "record": {
                "attributes": {
                    "type": "QuoteLinePriceAdjustment",
                    "method": "POST"
                },
                "QuoteLineItemId": "@{refQuoteLineItem3.id}",
                "Name": "Some Promo",
                "Amount": -25
            }
        }
    ]
}
},
"rolledBackReferenceIds": [
    "refQuoteLineItem3",
    "refQuoteLinePriceAdjustment1"
]

```

```

    ]
  }

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Place Sales Transaction Error[]	List of async errors from Place Sales Transaction API. The details include a reference ID for the failed subrequest, an error code, and a detailed message.	Small, 66.0	66.0
jobStatus	String	Status of the async tracker ID. Error results are returned after the job is in a Completed status.	Small, 66.0	66.0
retryablePayload	Sales Transaction Input	Subset of the original Place Sales Transaction API payload errors that can be used for retry attempts. Reference IDs that are saved are replaced by their corresponding record IDs. This property is included in the response only when the <code>includeRetryablePayload</code> query parameter is set to <code>true</code> .	Small, 66.0	66.0
rolledBack ReferenceIds	String[]	List of rolled-back reference IDs for subrequests due to failure of a subrequest in the same transaction.	Small, 66.0	66.0

Promotion Coupon

Output representation of the details of a coupon that's eligible for the recommended promotion.

JSON Example

```

{
  "coupon": {
    "couponCode": "COUPON_002",
    "endTime": null,
    "startTime": "2025-10-08T19:00:00.000Z",
    "status": "Active"
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
couponCode	String	Unique code of the coupon.	Big, 66.0	66.0
endTime	String	End date and time of the coupon.	Big, 66.0	66.0
startTime	String	Start date and time of the coupon.	Big, 66.0	66.0

Property Name	Type	Description	Filter Group and Version	Available Version
status	String	Status of the coupon.	Big, 66.0	66.0

Promotion Coupon Availability

Output representation of the details of the coupon that's eligible for the promotion. Additionally, this representation specifies the reason for any coupon ineligibility.

JSON Example

```
{
  "couponDetails": {
    "coupon": {
      "couponCode": "COUPON_002",
      "endDateTime": null,
      "startDateTime": "2025-10-08T19:00:00.000Z",
      "status": "Active"
    },
    "couponAvailabilityMessage": null
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
coupon	Promotion Coupon[]	Coupon that's eligible for the customers' cart.	Big, 66.0	66.0
couponAvailabilityMessage	String	Specifies the reason for coupon ineligibility for the promotion. Valid values are MultipleActiveCoupons, NoActiveCoupons, or SingleActiveCouponLimitReached.	Big, 66.0	66.0

Promotion Details Response

Output representation of the eligible promotion and its details. This representation includes details of any coupons, eligibility rules, and terms and conditions.

JSON Example

```
{
  "eligiblePromotions": [
    {
      "additionalPromotionFields": {},
      "couponDetails": {
        "coupon": {
          "couponCode": "COUPON_002",
```

```

        "endTime": null,
        "startTime": "2025-10-08T19:00:00.000Z",
        "status": "Active"
    },
    "couponAvailabilityMessage": null
},
"currencyIsoCode": "USD",
"description": "15% on Accessories",
"displayName": "Comms Manual Promotion 15% on Accessories",
"endTime": null,
"isAutomatic": false,
"priorityNumber": null,
"promotionCode": null,
"promotionEligibleRules": [
    {
        "ruleName": "CommsAutoPromotionRule",
        "rulePriority": 1,
        "ruleRewards": [
            {
                "rewardDetails": {
                    "discountLevel": "Line",
                    "discountType": "PercentageOff",
                    "discountValue": "10.0",
                    "discountAppliedAt": "LineItem",
                    "discountCategory": "Accessories"
                },
                "rewardType": "ProvideDiscount"
            }
        ]
    }
],
"promotionId": "0c8DX00000001UeYAI",
"promotionLimits": [],
"startTime": "2025-07-01T17:02:00.000Z",
"termsAndCondition": "<p>test</p>",
},
{
    "additionalPromotionFields": {},
    "couponDetails": {
        "coupon": {
            "couponCode": "COUPON_001",
            "endTime": null,
            "startTime": null,
            "status": "Active"
        },
        "couponAvailabilityMessage": null
    },
    "currencyIsoCode": "USD",
    "description": "Promo_Printer_Child",
    "displayName": "Promo_Printer_Child",
    "endTime": null,
    "isAutomatic": false,
    "priorityNumber": null,
    "promotionCode": null,

```

```

    "promotionEligibleRules": [
      {
        "ruleName": "Rule001",
        "rulePriority": 1,
        "ruleRewards": [
          {
            "rewardDetails": {
              "discountLevel": "Line",
              "discountProduct": "Printer Paper",
              "discountType": "AmountOff",
              "discountValue": "2.0",
              "discountAppliedAt": "LineItem"
            },
            "rewardType": "ProvideDiscount"
          }
        ]
      }
    ],
    "promotionId": "0c8DX00000001h5YAA",
    "promotionLimits": [],
    "startDateTime": "2025-11-03T12:44:00.000Z",
    "termsAndCondition": "<p>Promo_Printer_Child</p>"
  }
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
additional PromotionFields	Map<String, Object>	Values of the additional promotion fields that are mapped in the context definition.	Big, 66.0	66.0
couponDetails	Promotion Coupon Availability[]	Specifies the details of the coupon eligible for the promotion or specifies the reason why there isn't an eligible coupon for the promotion.	Big, 66.0	66.0
currencyIso Code	String	Three-letter ISO 4217 code of the monetary currency associated with the promotion.	Big, 66.0	66.0
description	String	Description of the promotion.	Big, 66.0	66.0
displayName	String	Display name of the eligible promotion.	Big, 66.0	66.0
endDateTime	String	End date and time of the promotion in the ISO 8601 date format.	Big, 60.0	66.0
isAutomatic	Boolean	Indicates whether the promotion is automatically applied for eligible carts (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
priorityNumber	Integer	Priority number of the eligible promotion for promotion ordering.	Big, 66.0	66.0
promotionCode	String	Code of the eligible promotion.	Big, 66.0	66.0

Property Name	Type	Description	Filter Group and Version	Available Version
promotionEligible Rules	Promotion Rules List[]	List of promotion rules that are eligible for the customer's cart.	Big, 66.0	66.0
promotionId	String	ID of the eligible promotion.	Big, 66.0	66.0
promotion Limits	Promotion Limit[]	List of the promotion's cart level and cart item level limits.	Big, 66.0	66.0
startDateTime	String	Start date and time of the promotion in the ISO 8601 date format.	Big, 66.0	66.0
termsAnd Condition	String	Terms and conditions of the promotion.	Big, 66.0	66.0

Promotion Limit

Output representation of the details of the promotion limit of an eligible promotion.

Property Name	Type	Description	Filter Group and Version	Available Version
limitCurrent Attainment	Double	Current attainment of the promotion's limit value.	Big, 66.0	66.0
limitTarget	Double	Value beyond which the promotion can't be applied to customer carts.	Big, 66.0	66.0
limitType	String	Limit type for the promotion. Valid values are <code>CartItemCount</code> —Specifies the limit type that represents the maximum number of cart items the promotion can be applied for or <code>OrderCount</code> —Specifies the limit type that represents the maximum number of carts the promotion can be applied for.	Big, 66.0	66.0

Promotion Reward Details

Output representation of the details of the rewards of an eligible promotion rule.

JSON Example

```
{
  "ruleRewards": [
    {
      "rewardDetails": {
        "discountLevel": "Line",
        "discountProduct": "Printer Paper",
        "discountType": "AmountOff",
```

```

        "discountValue": "2.0",
        "discountAppliedAt": "LineItem"
    },
    "rewardType": "ProvideDiscount"
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
rewardDetails	Map<String, Object>	Details of the reward offered by the promotion rule.	Big, 66.0	66.0
rewardType	String	Reward type of the promotion. Valid values are AssignBadge, AssignGame, CreditFixedPoints, CreditMultiplierPoints, GiveFreeProduct, IssueVoucher, or ProvideDiscount.	Big, 66.0	66.0

Promotion Rules List

Output representation of the details of the rules of an eligible promotion.

JSON Example

```

{
  "promotionEligibleRules": [
    {
      "ruleName": "Rule001",
      "rulePriority": 1,
      "ruleRewards": [
        {
          "rewardDetails": {
            "discountLevel": "Line",
            "discountProduct": "Printer Paper",
            "discountType": "AmountOff",
            "discountValue": "2.0",
            "discountAppliedAt": "LineItem"
          },
          "rewardType": "ProvideDiscount"
        }
      ]
    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
ruleName	String	Rule name in the promotion which is eligible for rewards.	Big, 66.0	66.0
rulePriority	Integer	Rule priority in the promotion which is eligible for rewards.	Big, 66.0	66.0
ruleRewards	Promotion Reward Details[]	Rewards associated with the eligible rule.	Big, 66.0	66.0

Ramp Deal Service Error Response

Output representation of the details of errors encountered during the processing of the API request.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Error code from the API request. For example, <code>INVALID_INPUT_ERROR</code> .	Small, 62.0	62.0
message	String	Error message from the API request.	Small, 62.0	62.0

Ramp Deal Service

Output representation of the details of a created, updated, or deleted ramp deal.

JSON Example

This example shows the sample response for the create, update, or view ramp deal requests.

```
{
  "correlationId": "0QLDU0000002t0Z4AQ",
  "errors": [],
  "salesTransactionContext": {
    "SalesTransaction": [
      {
        "LegalEntity": null,
        "Account": null,
        "HeaderDistributionType": null,
        "BillingCity": null,
        "AccountBusinessType": null,
        "HeaderDiscountType": null,
        "businessObjectType": "Quote",
        "QuoteAccount": null,
        "EmployeeCount": null,
        "SalesTransactionName": "WarrantyPriceRampAR",
        "StartDate": null,
        "HeaderDiscountValue": null,
        "SalesTransactionType": null,
        "Pricebook": "01sDU000000JGf4YAG",

```



```

"Opportunity": null,
"ShippingCountry": null,
"ShippingCity": null,
"BillingPostalCode": null,
"id": "0Q0DU0000002f3d0AA",
"BillToContact": null,
"CalculationStatus": "CompletedWithTax",
"Status": "Draft",
"LastPricedDate": null,
"Subtotal": 108.47145205479453,
"OriginalActionType": null,
"TotalAmount": 99.98,
"CurrencyIsoCode": null,
"ShippingStreet": null,
"SalesTransactionItem": [
  {
    "LegalEntity": null,
    "ProductName": "Warranty",
    "businessObjectType": "QuoteLineItem",
    "Product": "0ltDU000000EsWSYA0",
    "ItemIsPrimarySegment": true,
    "ListPrice": 49.99,
    "ValidationResult": null,
    "StartDate": "2024-08-23T00:00:00.000Z",
    "ContractVolumePasId": null,
    "BillingTreatment": null,
    "PeriodBoundaryStartMonth": null,
    "SalesTransactionSourceAsset": null,
    "id": "0QLDU0000002t0Z4AQ",
    "PartnerDiscountPercent": null,
    "PriceWaterFall": "0QLDU0000002t0Z4AQ:548201414593252",
    "ItemProductRecipient": null,
    "BillingFrequency": "Annual",
    "ProductCode": "W001",
    "DerivedPricingAttribute": null,
    "TaxTreatment": "1ttDU0000001oGKYAY",
    "Subtotal": 8.491452054794523,
    "ItemRampIdentifier": "RDI5b5ce52b2db4484",
    "ItemSegmentName": "Trial",
    "PricebookEntry": "01uDU000000f4LSYAY",
    "DiscountAmount": null,
    "PricingTermCount": 0.0849315068493151,
    "NetUnitPrice": 0,
    "ItemEffectiveGrantDate": null,
    "ProductCategory": null,
    "SalesTransactionAction": null,
    "SalesTransactionActionType": null,
    "SalesTransactionItemGroup": null,
    "PeriodBoundaryDay": null,
    "LineItemDistributionType": null,
    "ProrationPolicy": "0muDU00000029ryYAA",
    "ContractDiscountType": null,
    "TransactionType": null,
    "ParentReference": null,
  }
]

```

```

    "Discount": 100,
    "ProductSellingModel": "0jPDU00000029zb2AA",
    "PricingTermUnit": "Annual",
    "PricingSource": null,
    "StockKeepingUnit": null,
    "PartnerUnitPrice": null,
    "ItemTotalAdjustmentAmount": -8.491452054794523,
    "SalesTransactionItemSource": "0QLDU0000002t0Z4AQ",
    "ContractAttributePasId": null,
    "SubscriptionTerm": 1,
    "SellingModelType": "TermDefined",
    "EndQuantity": 2,
    "NetTotalPrice": 0,
    "TotalLineAmount": 8.491452054794523,
    "ItemSegmentType": "FreeTrial",
    "ProductBasedOn": null,
    "Deleted": null,
    "BillingReference": null,
    "ArePartialPeriodsAllowed": true,
    "ItemRecordedPrice": null,
    "CustomProductName": "Warranty",
    "ItemSegmentIdentifier": "SEG4380006a1c2b416",
    "SalesTransactionItemParent": "0Q0DU0000002f3d0AA",
    "Quantity": 2,
    "PeriodBoundary": "Anniversary",
    "ContractDiscountValue": null,
    "LineItemDiscountValue": null,
    "ContractId": null,
    "EndDate": "2024-09-22T00:00:00.000Z",
    "ItemGroupSummarySubtotal": null,
    "IsContracted": null,
    "UnitPrice": 49.99,
    "StartQuantity": 0,
    "ContractPrice": null,
    "TotalPrice": 0,
    "ItemPath": null,
    "LineItemDiscountType": null
  },
  {
    "LegalEntity": null,
    "ProductName": "Warranty",
    "businessObjectType": "QuoteLineItem",
    "Product": "0ltDU000000EsWSYA0",
    "ItemIsPrimarySegment": false,
    "ListPrice": 49.99,
    "ValidationResult": null,
    "StartDate": "2024-09-23T00:00:00.000Z",
    "ContractVolumePasId": null,
    "BillingTreatment": null,
    "PeriodBoundaryStartMonth": null,
    "SalesTransactionSourceAsset": null,
    "id": "0QLDU0000003CZ94AM",
    "PartnerDiscountPercent": null,
    "PriceWaterFall": "0QLDU0000003CZ94AM:548201414593252",

```

```

"ItemProductRecipient": null,
"BillingFrequency": "Annual",
"ProductCode": "W001",
"DerivedPricingAttribute": null,
"TaxTreatment": "1ttDU0000001oGKYAY",
"Subtotal": 99.98,
"ItemRampIdentifier": "RDI5b5ce52b2db4484",
"ItemSegmentName": "Year-1",
"PricebookEntry": "01uDU000000f4LSYAY",
"DiscountAmount": null,
"PricingTermCount": 1,
"NetUnitPrice": 49.99,
"ItemEffectiveGrantDate": null,
"ProductCategory": null,
"SalesTransactionAction": null,
"SalesTransactionActionType": null,
"SalesTransactionItemGroup": null,
"PeriodBoundaryDay": null,
"LineItemDistributionType": null,
"ProrationPolicy": "0muDU00000029ryYAA",
"ContractDiscountType": null,
"TransactionType": null,
"ParentReference": null,
"Discount": null,
"ProductSellingModel": "0jPDU00000029zb2AA",
"PricingTermUnit": "Annual",
"PricingSource": null,
"StockKeepingUnit": null,
"PartnerUnitPrice": null,
"ItemTotalAdjustmentAmount": 0,
"SalesTransactionItemSource": "0QLDU0000003CZ94AM",
"ContractAttributePasId": null,
"SubscriptionTerm": 1,
"SellingModelType": "TermDefined",
"EndQuantity": 2,
"NetTotalPrice": 99.98,
"TotalLineAmount": 99.98,
"ItemSegmentType": "Yearly",
"ProductBasedOn": null,
"Deleted": null,
"BillingReference": null,
"ArePartialPeriodsAllowed": true,
"ItemRecordedPrice": null,
"CustomProductName": "Warranty",
"ItemSegmentIdentifier": "SEG73ad7378e1ed4c5",
"SalesTransactionItemParent": "0Q0DU0000002f3d0AA",
"Quantity": 2,
"PeriodBoundary": "Anniversary",
"ContractDiscountValue": null,
"LineItemDiscountValue": null,
"ContractId": null,
"EndDate": "2025-08-22T00:00:00.000Z",
"ItemGroupSummarySubtotal": null,
"IsContracted": null,

```

```

        "UnitPrice": 49.99,
        "StartQuantity": 0,
        "ContractPrice": null,
        "TotalPrice": 99.98,
        "ItemPath": null,
        "LineItemDiscountType": null
    }
],
"AppUsageAssignment": [
    {
        "businessObjectType": "AppUsageAssignment",
        "ParentReference": null,
        "Record": "0Q0DU0000002f3d0AA",
        "id": "0j8DU0000002VKiYAM",
        "AppUsageType": "RevenueLifecycleManagement"
    }
],
"BillingCountry": null,
"BillingStreet": null,
"ShippingPostalCode": null,
"SalesTransactionSource": "0Q0DU0000002f3d0AA",
"PrimaryIndustry": null,
"ShippingState": null,
"HeaderDistributionLogic": null,
"Contract": null,
"BillingState": null,
"AnnualRevenue": null,
"EffectiveDate": null
}
]
},
"success": true,
"transactionContextId": "d3fd83b007418ce4980340313b40fd45665b194973486ebac3674c2b8002336f"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Resource ID to correlate the API request with the response.	Small, 62.0	62.0
errors	Ramp Deal Service Error Response[]	List of errors encountered during the processing of the API request.	Small, 62.0	62.0
sales Transaction Context	Map<String, Object>	Context object for the sales transaction with updated segment details.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0
transaction ContextId	String	ID of the sales transaction context record instance.	Small, 62.0	62.0

Read Sales Transaction

Output representation of the request to read a sales transaction.

JSON Examples

```
{
  "response": {
    "isSuccess": true,
    "batchMetadata": {
      "parentContextId": "008d27d7-e004-4906-a949-ee7d7c323c77",
      "totalBatches": 3,
      "batchId": "b1f2c3d4-5678-90ab-cdef-1234567890ab"
    },
    "batches": [
      {
        "batchIndex": 0,
        "batchRecords": {
          "records": {
            "Quote": [
              {
                "data": {
                  "Id": "0Q0d2700000AbCdEAAV",
                  "Name": "Q-00001",
                  "Status": "Draft",
                  "GrandTotalAmount": 1500.00,
                  "hasDeletedLines": true
                }
              }
            ]
          },
          "QuoteLineItem": [
            {
              "data": {
                "Id": "0QLd2700000XyZaBAAX",
                "Quantity": 2,
                "Product2Id": "01td2700000PqRsTAAV"
              }
            },
            {
              "data": {
                "Id": "0QLd2700000XyZaCAAX",
                "Quantity": 5,
                "Product2Id": "01td2700000PqRsUAAV"
              }
            }
          ]
        }
      },
      {
        "batchIndex": 1,
        "batchRecords": {
          "records": {
            "QuoteLineItem": [
```

```

{
  "data": {
    "Id": "0QLd2700000XyZaDAAX",
    "Quantity": 1,
    "Product2Id": "01td2700000PqRsVAAV"
  }
}

```

```

{
  "isSuccess": false,
  "errors": [
    {
      "errorCode": "INVALID_API_INPUT",
      "message": "Specify either queryTags or sObjectEntitiesToFields in the request."
    }
  ]
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
batches	Batch Records[]	List of the requested batches and their records. The API returns this property when you fetch specific batches by using the <code>batchIndices</code> property.	Small, 68.0	68.0
batchMetadata	Batch Metadata	Metadata that describes the available batches for the context, such as the total number of batches. The API returns this property when you request only the batch metadata or when you fetch specific batches.	Small, 68.0	68.0
errors	Place Sales Transaction Error Response[]	List of errors encountered during the processing of the API request.	Small, 65.0	65.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 65.0	65.0
response	Read Sales Transaction Records[]	Contains a map of keys and associated values. The keys are record type names, such as a <code>Quote</code> or <code>QuoteLineItem</code> , and values are lists of records of that type.	Small, 65.0	65.0

Read Sales Transaction Records

Output representation of the details of a map of keys and associated values. The keys are record type names, such as a Quote or QuoteLineItem, and values are lists of records of that type.

JSON Example

```
{
  "response": {
    "records": {
      "Quote": [
        {
          "data": {
            "Id": "0Q05g000000AJK954",
            "Name": "Sample Quote",
            "Status": "Draft",
            "TotalPrice": 1500
          }
        }
      ],
      "QuoteLineItem": [
        {
          "data": {
            "Id": "0QL5g000000DEF456",
            "Product2Id": "01t5g000000GUE752",
            "Quantity": 2,
            "UnitPrice": 750,
            "TotalPrice": 1500
          }
        }
      ]
    }
  },
  "isSuccess": true,
  "errorResponse": []
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
records	Map<String, Sales Transaction Record >>	Map of record type names to the list of records.	Small, 65.0	65.0

Renewal

Output representation of the details of a renewal record.

JSON Example

```
{
  "renewalRecordId": "0Q0xx0000004NsSCAU",
}
```

```

"errors": [
  {
    "errorCode": "REQUIRED_FIELD_MISSING",
    "errorMessage": "Specify a value for quantityChange, and try again."
  }
],
"requestId": "16Pxx0000004NIy",
"success": true
}

```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errors	ARC Base Error on page 1354[]	Error responses if the creation of a renewal record fails.	Small, 62.0	62.0
renewal RecordId	String	ID of the renewal record that's created for the Quote or Order record.	Small, 62.0	62.0
requestId	String	Request ID that's used to track the async request.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Sales Transaction

Output representation of the request to create a sales transaction.

JSON Example

```

{
  "contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708",
    "isBuiltInTransaction": true
  },
  "errorResponse": {
    "errorCode": "INVALID_API_INPUT",
    "message": "Include record type and method in the request and try again.",
    "referenceId": "refQuoteItem2"
  },
  "isSuccess": true,
  "salesTransactionId": "0Q0xx0000004CNYCA2",
  "statusUrl": null,
  "trackerId": null
}

```


Property Name	Type	Description	Filter Group and Version	Available Version
contextDetails	Sales Transaction Context	Details of the context that's created for the sales transaction.	Small, 63.0	63.0
errorResponse	Sales Transaction Error Response[]	Details of the error if the operation fails.	Small, 63.0	63.0
isSuccess	Boolean	Indicates if the operation is successful (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0
salesTransactionId	String	ID of the sales transaction, such as a quote or an order.	Small, 63.0	63.0
statusUrl	String	URL to check the status of the operation.	Small, 63.0	63.0
trackerId	String	Unique identifier assigned to a specific operation or request that's used for tracking and referencing the operation.	Small, 63.0	63.0

The **Calculation Status** field for a quote or an order shows an intermediate status as `Saving` during the creation of a sales transaction. If the pricing calculation fails, then the **Calculation Status** field shows the `Pricing Calculation Failed` status. See [Quote standard object](#) for a list of applicable calculation status values.

Sales Transaction Context

Output representation of the context details that are associated with a sales transaction.

JSON Example

```
{
  "contextDetails": {
    "contextId": "e055bb18-d4e8-41c3-881e-0132b9561708",
    "isBuiltInTransaction": true
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
contextId	String	ID of the context that's created for a session of the sales transaction.	Small, 63.0	63.0
isBuiltInTransaction	Boolean	Indicates whether a new context ID is created for the sales transaction (<code>true</code>) or not (<code>false</code>). If the <code>contextId</code> property isn't specified, the Place Sales Transaction API generates it.	Small, 63.0	63.0

Sales Transaction Error Response

Output representation of the error details associated with the API request.

JSON Example

```
{
  "errorResponse": {
    "errorCode": "INVALID_API_INPUT",
    "message": "Include record type and method in the request and try again.",
    "referenceId": "refQuoteItem2"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Small, 63.0	63.0
message	String	Error message for the resultant error.	Small, 63.0	63.0
referenceId	String	Unique ID that's associated with the specific error for tracking and reference purposes.	Small, 63.0	63.0

Sales Transaction Record

Generic output representation for any sales transaction record type.

JSON Example

```
{
  "response": {
    "records": {
      "Quote": [
        {
          "data": {
            "Id": "0Q05g000000AJK954",
            "Name": "Sample Quote",
            "Status": "Draft",
            "TotalPrice": 1500
          }
        }
      ],
      "QuoteLineItem": [
        {
          "data": {
            "Id": "0QL5g000000DEF456",
            "Product2Id": "01t5g000000GUE752",
            "Quantity": 2,
            "UnitPrice": 750,
            "TotalPrice": 1500
          }
        }
      ]
    }
  }
}
```

```

    }
  ]
}
},
"isSuccess": true,
"errorResponse": []
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
data	Map<String, Object>	Represents the data map for any sales transaction record.	Small, 65.0	65.0

Supplemental Transaction Error Response

Output representation of the error details associated with the Place Supplemental Transaction API.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Small, 64.0	64.0
message	String	Message stating the reason for error, if any.	Small, 64.0	64.0
referenceId	String	Unique ID that's associated with the specific error for tracking and reference purposes.	Small, 64.0	64.0

Supplemental Transaction

Output representation of the details of the created supplemental order.

JSON Example

```

{
  "requestId": "16PRM0000004DBq",
  "statusURL": "/services/data/vXX.X/subjects/AsyncOperationTracker/16PRM0000004DBq",
  "orderId": "801S70000001VKgIAM",
  "success": true,
  "errors": []
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Supplemental Transaction Error Response[]	List of errors encountered during synchronous processing.	Small, 64.0	64.0
requestId	String	Request ID of the process that can be used to query the async status.	Small, 64.0	64.0

Property Name	Type	Description	Filter Group and Version	Available Version
statusURL	String	URL to check the status of the async operation, if available.	Small, 64.0	64.0
success	Boolean	Indicates whether the synchronous part of the processing is successful (<code>true</code>) or not (<code>false</code>).	Small, 64.0	64.0
supplemental TransactionId	String	ID of the created supplemental transaction.	Small, 64.0	64.0

Transaction Management Apex Reference

Use built-in Apex classes and interfaces grouped by namespace.

[CommerceOrders Namespace](#)

The `CommerceOrders` namespace provides classes and methods to place orders with integrated pricing, configuration, and validation.

[ConnectApi Namespace](#)

The `ConnectApi` namespace (also called Connect in Apex) provides an Apex class to specify details for asset transfer request from one account to another.

[CommerceTax Namespace](#)

Manage the communication between Salesforce and an external tax engine.

[PlaceQuote Namespace](#)

The `PlaceQuote` namespace provides classes and methods to create or update quotes with pricing preferences and configuration options.

[renew_assets_summary Namespace](#)

Retrieve details about renewable assets to create renewal opportunities.

[RevSalesTrxn Namespace](#)

Create a sales transaction, such as a quote or an order, with integrated pricing and configuration. Additionally, update an order or a quote, and insert and delete order or quote line items to calculate the estimated tax.

CommerceOrders Namespace

The `CommerceOrders` namespace provides classes and methods to place orders with integrated pricing, configuration, and validation.



Note: This namespace has been deprecated as of API version 63.0. In API version 63.0 and later, use the new [RevSalesTrxn](#) namespace.

The `CommerceOrders` namespace includes these classes.

[CatalogRatesPreferenceEnum Enum](#)

Specifies the rate card entries defined in the catalog that must be fetched for order items, with usage-based selling during the order creation process.

[ConfigurationInputEnum Enum](#)

Specifies the configuration input for the request to place an order.

[ConfigurationOptionsInput Class](#)

Contains methods and properties to set the configuration options for the input to the product configurator.

[GraphRequest Class](#)

Contains constructors and properties to set the graph ID and a list of records to be ingested. The list of records is specified in a key-value map format that contains the field values of an order.

[PlaceOrderExecutor Class](#)

Contains methods to place an order with details of the graph request, pricing preferences, and configuration options.

[PlaceOrderResult Class](#)

Contains properties to hold the response to the place order request.

[PricingPreferenceEnum Enum](#)

Specifies the pricing preference during the create order process.

[RecordResource Class](#)

Contains constructors and properties to create a record object from field values of an order.

[RecordWithReferenceRequest Class](#)

Contains constructors and properties to associate a record object with a reference identifier.

CatalogRatesPreferenceEnum Enum

Specifies the rate card entries defined in the catalog that must be fetched for order items, with usage-based selling during the order creation process.

Usage

This enum is available when the Usage-Based Selling feature is enabled.

Enum Values

The `commerceorders.CatalogRatesPreferenceEnum` enum includes these values.

Value	Description
<code>Fetch</code>	Retrieves the rate card entries defined in the catalog for order items during the order creation process.
<code>Skip</code>	Skips the retrieval of rate card entries for order items during the order creation process. The default value is <code>Skip</code> .

Example `Fetch`:

Example `Skip`:

ConfigurationInputEnum Enum

Specifies the configuration input for the request to place an order.

Usage

Use these enum values for the `configurationInputEnum` property in the [PlaceOrderExecutor Class](#)

Enum Values

The `commerceorders.ConfigurationInputEnum` enum has these values.

Value	Description
<code>RunAndAllowErrors</code>	Run the configuration and proceed with order ingestion upon encountering any configuration errors.
<code>RunAndBlockErrors</code>	Run the configuration and block order ingestion upon encountering any configuration errors.
<code>Skip</code>	Skip the configuration execution.

Example `RunAndAllowErrors`:

Example `RunAndBlockErrors`:

Example `Skip`:

ConfigurationOptionsInput Class

Contains methods and properties to set the configuration options for the input to the product configurator.

Namespace

[CommerceOrders](#)

Usage

This class holds the required details of the product configuration input. Set the class properties to enable default configuration, execution of configuration rules, and validation of the product catalog. Use these class properties as an input to the [PlaceOrderExecutor Class](#) method.

Example

```
CommerceOrders.ConfigurationOptionsInput configurationInput = new
CommerceOrders.ConfigurationOptionsInput();
configurationInput.validateProductCatalog = true;
configurationInput.validateAmendRenewCancel = true;
configurationInput.executeConfigurationRules = true;
configurationInput.addDefaultConfiguration = true;

CommerceOrders.GraphRequest graph = new CommerceOrders.GraphRequest('testGraph',
recordNodes);
CommerceOrders.PlaceOrderResult result = CommerceOrders.PlaceOrderExecutor.execute(graph,
pricingPreference, configurationPreference, configurationInput);
```

[ConfigurationOptionsInput Properties](#)

Set the `ConfigurationOptionsInput` class properties to add default configuration, execute configuration rules, and validate the product catalog.

[ConfigurationOptionsInput Methods](#)

Learn more about the methods available with the `ConfigurationOptionsInput` class.

ConfigurationOptionsInput Properties

Set the `ConfigurationOptionsInput` class properties to add default configuration, execute configuration rules, and validate the product catalog.

The `ConfigurationOptionsInput` class includes these properties.

[addDefaultConfiguration](#)

Sets the default product configuration, such as bundle and product attributes, for an order request.

[executeConfigurationRules](#)

Sets the requirement for an order to adhere to the configuration rules.

[validateAmendRenewCancel](#)

Sets the requirement to run validations related to amend, renew, or cancel processes.

[validateProductCatalog](#)

Sets the requirement to validate an order against the product catalog.

addDefaultConfiguration

Sets the default product configuration, such as bundle and product attributes, for an order request.

Signature

```
public Boolean addDefaultConfiguration {get; set;}
```

Property Value

Type: Boolean

Indicates whether to automatically add default configuration to the order (`true`) or not (`false`).

executeConfigurationRules

Sets the requirement for an order to adhere to the configuration rules.

Signature

```
public Boolean executeConfigurationRules {get; set;}
```

Property Value

Type: Boolean

Indicates whether the order must adhere to configuration rules during processing (`true`) or bypass them (`false`).

validateAmendRenewCancel

Sets the requirement to run validations related to amend, renew, or cancel processes.

Signature

```
public Boolean validateAmendRenewCancel {get; set;}
```

Property Value

Type: Boolean

Indicates whether to run validations related to amend, renew, or cancel processes (`true`) or not (`false`).

validateProductCatalog

Sets the requirement to validate an order against the product catalog.

Signature

```
public Boolean validateProductCatalog {get; set;}
```

Property Value

Type: Boolean

Indicates whether the order must be validated against the product catalog (`true`) or not (`false`).

ConfigurationOptionsInput Methods

Learn more about the methods available with the `ConfigurationOptionsInput` class.

The `ConfigurationOptionsInput` class includes these methods.

[`equals\(obj\)`](#)

Determines the equality of external objects in a list. This method is dynamic and is based on the `equals()` method in Java.

[`hashCode\(\)`](#)

Determines the uniqueness of the external object records in a list.

[`toString\(\)`](#)

Converts a value to a string.

equals(obj)

Determines the equality of external objects in a list. This method is dynamic and is based on the `equals()` method in Java.

Signature

```
public Boolean equals(Object obj)
```

Parameters

obj

Type: Object

Reference object that's used to compare with the class object.

Return Value

Type: Boolean

Indicates if the class object is same as the reference object (`true`) or not (`false`).

hashCode ()

Determines the uniqueness of the external object records in a list.

Signature

```
public Integer hashCode()
```

Return Value

Type: Integer

Integer hash code that represents the value of the object. Equal objects as per the `equals ()` method must return the same hash code.

toString ()

Converts a value to a string.

Signature

```
public String toString()
```

Return Value

Type: String

GraphRequest Class

Contains constructors and properties to set the graph ID and a list of records to be ingested. The list of records is specified in a key-value map format that contains the field values of an order.

Namespace

[CommerceOrders](#)

Example

Create the list of records to be ingested by using these steps.

- Create the list of records by constructing the `Map<String, Object>` map of field values of an order.

```
List<CommerceOrders.RecordWithReferenceRequest> recordNodes = new
List<CommerceOrders.RecordWithReferenceRequest>();

// Prepare for the Order
Map<String, Object> orderFieldValues = new Map<String, Object>();
orderFieldValues.put('Pricebook2Id', '01sDU00000001EIYAY');
orderFieldValues.put('AccountId', '001DU0000001nIPKYA2');
orderFieldValues.put('EffectiveDate', '2024-01-01');
```

- To create a record object from the field values, create an instance of the `RecordResource` class.

```
CommerceOrders.RecordResource orderRecord = new
CommerceOrders.RecordResource(Order.getSObjectType(), 'POST');
orderRecord.fieldValues = orderFieldValues;
```

- To associate the `Record` object with a reference identifier, create an instance of the `RecordWithReferenceRequest` class.

```
CommerceOrders.RecordWithReferenceRequest orderRecordNode = new
CommerceOrders.RecordWithReferenceRequest('refOrder', orderRecord);
recordNodes.add(orderRecordNode);

// Prepare for the App Usage Assignment
Map<String, Object> auaFieldValues = new Map<String, Object>();
auaFieldValues.put('AppUsageType', 'RevenueLifecycleManagement');
auaFieldValues.put('RecordId', '{@refOrder.id}');

CommerceOrders.RecordResource auaRecord = new
CommerceOrders.RecordResource(AppUsageAssignment.getSObjectType(), 'POST');
auaRecord.fieldValues = auaFieldValues;

CommerceOrders.RecordWithReferenceRequest auaRecordNode = new
CommerceOrders.RecordWithReferenceRequest('refAppTag', auaRecord);
recordNodes.add(auaRecordNode);

// Prepare for the Order Item
Map<String, Object> oiFieldValues = new Map<String, Object>();
oiFieldValues.put('OrderId', '{@refOrder.id}');
oiFieldValues.put('PricebookEntryId', '01uDU0000000YPkIYAW');
oiFieldValues.put('Product2Id', '01tDU0000000ESCSYA4');
oiFieldValues.put('Quantity', 2);
oiFieldValues.put('UnitPrice', 800);

CommerceOrders.RecordResource oiRecord = new
CommerceOrders.RecordResource(OrderItem.getSObjectType(), 'POST');
oiRecord.fieldValues = oiFieldValues;

CommerceOrders.RecordWithReferenceRequest oiRecordNode = new
CommerceOrders.RecordWithReferenceRequest('refOrderItem', oiRecord);
recordNodes.add(oiRecordNode);
```

- Invoke the `Place Order` Apex API.

 **Note:** The `CatalogRatesPreferenceEnum` enum is available when the Usage-Based Selling feature is enabled.

```
// Invoke the Place Order Apex API
CommerceOrders.PricingPreferenceEnum pricingPreference =
CommerceOrders.PricingPreferenceEnum.System;
CommerceOrders.CatalogRatesPreferenceEnum catalogRatesPreference =
CommerceOrders.CatalogRatesPreferenceEnum.Fetch;
CommerceOrders.ConfigurationInputEnum configurationPreference =
CommerceOrders.ConfigurationInputEnum.RunAndAllowErrors;
CommerceOrders.ConfigurationOptionsInput configurationInput = new
CommerceOrders.ConfigurationOptionsInput();
configurationInput.validateProductCatalog = true;
configurationInput.validateAmendRenewCancel = true;
configurationInput.executeConfigurationRules = true;
configurationInput.addDefaultConfiguration = true;
```

- To contain all record objects, create an instance of the `GraphRequest` class.

```
CommerceOrders.GraphRequest graph = new CommerceOrders.GraphRequest('testGraph',
recordNodes);
CommerceOrders.PlaceOrderResult result = CommerceOrders.PlaceOrderExecutor.execute(graph,
pricingPreference, catalogRatesPreference, configurationPreference, configurationInput);

// Process any error, if exists
if (!result.success) {
    List<ConnectApi.PlaceOrderErrorResponse> errors = result.responseError;
    for (ConnectApi.PlaceOrderErrorResponse error : errors) {
        System.debug(error.errorCode + ': ' + error.message);
    }
}
```

[GraphRequest Constructors](#)

Learn more about the available constructors with the `GraphRequest` class.

[GraphRequest Properties](#)

Learn more about the available properties with the `GraphRequest` class.

GraphRequest Constructors

Learn more about the available constructors with the `GraphRequest` class.

The `GraphRequest` class includes these constructors.

[GraphRequest\(graphId, records\)](#)

Creates an instance of the `GraphRequest` class to assign the graph ID and a list of records to be ingested.

GraphRequest(graphId, records)

Creates an instance of the `GraphRequest` class to assign the graph ID and a list of records to be ingested.

Signature

```
public GraphRequest(String graphId, List<commerceorders.RecordWithReferenceRequest> records)
```

Parameters

graphId

Type: String

ID of the graph.

records

Type: List<commerceorders.RecordWithReferenceRequest>

List of records to be ingested.

GraphRequest Properties

Learn more about the available properties with the `GraphRequest` class.

The `GraphRequest` class includes these properties.

[graphId](#)

Set the `graphId` property to assign the ID value of the graph.

graphId

Set the `graphId` property to assign the ID value of the graph.

Signature

```
public String graphId {get; set;}
```

Property Value

Type: String

PlaceOrderExecutor Class

Contains methods to place an order with details of the graph request, pricing preferences, and configuration options.

Namespace

[CommerceOrders](#)

Example

```
CommerceOrders.PlaceOrderResult resp =  
CommerceOrders.PlaceOrderExecutor.execute(graph, internalEnum, cEnum, cInput, catalogRatesPreference);
```

[PlaceOrderExecutor Methods](#)

Learn more about the methods available with the `PlaceOrderExecutor` class.

[PlaceOrderExecutor Example Implementation](#)

Place orders with integrated pricing, configuration, and validation, and manage them throughout their entire lifecycle. To place an order from Apex, refer to the example implementation of the `PlaceOrderExecutor` class.

PlaceOrderExecutor Methods

Learn more about the methods available with the `PlaceOrderExecutor` class.

The `PlaceOrderExecutor` class includes these methods.

[execute\(graphRequest, pricingPreferenceEnum, configurationInputEnum, configurationOptionsInput\)](#)

Use the method in the `PlaceOrderExecutor` class to execute the Place Order Apex API request by assigning the properties for graph request, pricing reference, and configuration options.

[execute\(graphRequest, pricingPreferenceEnum, catalogRatesPreference, configurationInputEnum, configurationOptionsInput\)](#)

Use the method in the `PlaceOrderExecutor` class to execute the Place Order Apex API request by assigning the properties for graph request, pricing reference, and configuration options. This method also includes the property to define fetching of rate card entries.

[execute\(graphRequest\)](#)

Use the method in the `PlaceOrderExecutor` class to execute the Place Order Apex API request by assigning the properties for graph request.

execute(graphRequest, pricingPreferenceEnum, configurationInputEnum, configurationOptionsInput)

Use the method in the `PlaceOrderExecutor` class to execute the Place Order Apex API request by assigning the properties for graph request, pricing reference, and configuration options.

Signature

```
public static commerceorders.PlaceOrderResult execute(commerceorders.GraphRequest
graphRequest, commerceorders.PricingPreferenceEnum pricingPreferenceEnum,
commerceorders.ConfigurationInputEnum configurationInputEnum,
commerceorders.ConfigurationOptionsInput configurationOptionsInput)
```

Parameters

graphRequest

Type: [commerceorders.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [commerceorders.PricingPreferenceEnum](#)

Pricing preference during the order process.

configurationInputEnum

Type: [commerceorders.ConfigurationInputEnum](#)

Configuration input for the place order process.

configurationOptionsInput

Type: [commerceorders.ConfigurationOptionsInput](#) on page 1388

Configuration options during the ingestion process.

Return Value

Type: [commerceorders.PlaceOrderResult](#)

execute(graphRequest, pricingPreferenceEnum, catalogRatesPreference, configurationInputEnum, configurationOptionsInput)

Use the method in the `PlaceOrderExecutor` class to execute the Place Order Apex API request by assigning the properties for graph request, pricing reference, and configuration options. This method also includes the property to define fetching of rate card entries.

Signature

```
public static commerceorders.PlaceOrderResult execute(commerceorders.GraphRequest
graphRequest, commerceorders.PricingPreferenceEnum pricingPreferenceEnum,
commerceorders.CatalogRatesPreferenceEnum catalogRatesPreferenceEnum,
commerceorders.ConfigurationInputEnum configurationInputEnum,
commerceorders.ConfigurationOptionsInput configurationOptionsInput)
```

Parameters

graphRequest

Type: [commerceorders.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [commerceorders.PricingPreferenceEnum](#)

Pricing preference during the order process.

catalogRatesPreference

Type: [commerceorders.CatalogRatesPreferenceEnum](#)

The rate card entries defined in the catalog that must be fetched for order items, with usage-based pricing during the order creation process. The `CatalogRatesPreferenceEnum` enum is available when the Usage-Based Selling feature is enabled.

configurationInputEnum

Type: [commerceorders.ConfigurationInputEnum](#)

Configuration input for the place order process.

configurationOptionsInput

Type: [commerceorders.ConfigurationOptionsInput](#) on page 1388

Configuration options during the ingestion process.

Return Value

Type: [commerceorders.PlaceOrderResult](#)

execute (graphRequest)

Use the method in the `PlaceOrderExecutor` class to execute the Place Order Apex API request by assigning the properties for graph request.

Signature

```
public static commerceorders.PlaceOrderResult execute (commerceorders.GraphRequest graphRequest)
```

Parameters

graphRequest

Type: [commerceorders.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

Return Value

Type: [commerceorders.PlaceOrderResult](#)

PlaceOrderExecutor Example Implementation

Place orders with integrated pricing, configuration, and validation, and manage them throughout their entire lifecycle. To place an order from Apex, refer to the example implementation of the `PlaceOrderExecutor` class.

Namespace

[commerceorders](#)

Usage

Customize this example to suit your requirements. Create the list of records to be ingested by using these steps. Replace the respective IDs with the values that are present in your org. For example, replace the value of `Pricebook2Id` field with the price book ID that's present in the org.



Example:

- Create the list of records by constructing the `Map<String, Object>` map of field values of an order.

```
List<CommerceOrders.RecordWithReferenceRequest> recordNodes = new
List<CommerceOrders.RecordWithReferenceRequest> ();

// Prepare for the Order
Map<String, Object> orderFieldValues = new Map<String, Object> ();
orderFieldValues.put('Pricebook2Id', '01sDU00000001EIYAY');
orderFieldValues.put('AccountId', '001DU000001nIPKYA2');
orderFieldValues.put('EffectiveDate', '2024-01-01');
```

- To create a record object from the field values, create an instance of the `RecordResource` class.

```
CommerceOrders.RecordResource orderRecord = new
CommerceOrders.RecordResource(Order.getSObjectType(), 'POST');
orderRecord.fieldValues = orderFieldValues;
```

- To associate the Record object with a reference identifier, create an instance of the `RecordWithReferenceRequest` class.

```
CommerceOrders.RecordWithReferenceRequest orderRecordNode = new
CommerceOrders.RecordWithReferenceRequest('refOrder', orderRecord);
recordNodes.add(orderRecordNode);

// Prepare for the App Usage Assignment
Map<String, Object> auaFieldValues = new Map<String, Object>();
auaFieldValues.put('AppUsageType', 'RevenueLifecycleManagement');
auaFieldValues.put('RecordId', '@{refOrder.id}');

CommerceOrders.RecordResource auaRecord = new
CommerceOrders.RecordResource(AppUsageAssignment.getSObjectType(), 'POST');
auaRecord.fieldValues = auaFieldValues;

CommerceOrders.RecordWithReferenceRequest auaRecordNode = new
CommerceOrders.RecordWithReferenceRequest('refAppTag', auaRecord);
recordNodes.add(auaRecordNode);

// Prepare for the Order Item
Map<String, Object> oiFieldValues = new Map<String, Object>();
oiFieldValues.put('OrderId', '@{refOrder.id}');
oiFieldValues.put('PricebookEntryId', '01uDU000000YPkIYAW');
oiFieldValues.put('Product2Id', '01tDU000000ESCSYA4');
oiFieldValues.put('Quantity', 2);
oiFieldValues.put('UnitPrice', 800);

CommerceOrders.RecordResource oiRecord = new
CommerceOrders.RecordResource(OrderItem.getSObjectType(), 'POST');
oiRecord.fieldValues = oiFieldValues;

CommerceOrders.RecordWithReferenceRequest oiRecordNode = new
CommerceOrders.RecordWithReferenceRequest('refOrderItem', oiRecord);
recordNodes.add(oiRecordNode);
```

- Invoke the Place Order Apex API.



Note: The `CatalogRatesPreferenceEnum` enum is available when the Usage-Based Selling feature is enabled.

```
// Invoke the Place Order Apex API
CommerceOrders.PricingPreferenceEnum pricingPreference =
CommerceOrders.PricingPreferenceEnum.System;
CommerceOrders.CatalogRatesPreferenceEnum catalogRatesPreference =
CommerceOrders.CatalogRatesPreferenceEnum.Fetch;
```



```
CommerceOrders.ConfigurationInputEnum configurationPreference =
CommerceOrders.ConfigurationInputEnum.RunAndAllowErrors;
CommerceOrders.ConfigurationOptionsInput configurationInput = new
CommerceOrders.ConfigurationOptionsInput();
configurationInput.validateProductCatalog = true;
configurationInput.validateAmendRenewCancel = true;
configurationInput.executeConfigurationRules = true;
configurationInput.addDefaultConfiguration = true;
```

- To contain all record objects, create an instance of the `GraphRequest` class.

```
CommerceOrders.GraphRequest graph = new CommerceOrders.GraphRequest('testGraph',
recordNodes);
CommerceOrders.PlaceOrderResult result =
CommerceOrders.PlaceOrderExecutor.execute(graph, pricingPreference,
catalogRatesPreference, configurationPreference, configurationInput);

// Process any error, if exists
if (!result.success) {
    List<ConnectApi.PlaceOrderErrorResponse> errors = result.responseError;
    for (ConnectApi.PlaceOrderErrorResponse error : errors) {
        System.debug(error.errorCode + ': ' + error.message);
    }
}
```

PlaceOrderResult Class

Contains properties to hold the response to the place order request.

Namespace

[CommerceOrders](#)

Example

```
CommerceOrders.PlaceOrderResult resp =
CommerceOrders.PlaceOrderExecutor.execute(graph, internalEnum, cEnum, cInput, catalogRatesPreference);
```

[PlaceOrderResult Properties](#)

Learn more about the available properties with the `PlaceOrderResult` class.

PlaceOrderResult Properties

Learn more about the available properties with the `PlaceOrderResult` class.

The `PlaceOrderResult` class includes these properties.

[orderId](#)

Get the ID of the order that's created after a successful request.

[requestIdentifier](#)

Get the request ID of the process to query the asynchronous status of the Place Order Apex API.

[responseError](#)

Get the list of errors encountered during the synchronous processing of the API request.

[statusURL](#)

Get the asynchronous status URL of the request, if available.

[success](#)

Get the request status of the synchronous part of the processing.

orderId

Get the ID of the order that's created after a successful request.

Signature

```
public String orderId {get; set;}
```

Property Value

Type: String

requestIdentifier

Get the request ID of the process to query the asynchronous status of the Place Order Apex API.

Signature

```
public String requestIdentifier {get; set;}
```

Property Value

Type: String

responseError

Get the list of errors encountered during the synchronous processing of the API request.

Signature

```
public List<commerceorders.PlaceOrderErrorResponse> responseError {get; set;}
```

Property Value

Type: List<ConnectApi.PlaceOrderErrorResponse>

statusURL

Get the asynchronous status URL of the request, if available.

Signature

```
public String statusURL {get; set;}
```

Property Value

Type: String

success

Get the request status of the synchronous part of the processing.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: Boolean

Indicates whether the synchronous part of the processing is successful (`true`) or not (`false`).

PricingPreferenceEnum Enum

Specifies the pricing preference during the create order process.

Usage

Used by the [PlaceOrderExecutor](#) class.

Enum Values

The `commerceorders.PricingPreferenceEnum` enum includes these values.

Value	Description
Force	Enforce pricing during the order ingestion process.
Skip	Skip pricing during the order ingestion process.
System	Determine whether a pricing calculation is required.

Example Force:

Example Skip:

Example System:

RecordResource Class

Contains constructors and properties to create a record object from field values of an order.

Namespace

[CommerceOrders](#)

Example

```
CommerceOrders.RecordResource orderRecord = new  
CommerceOrders.RecordResource(Order.getSObjectType(), 'POST');  
orderRecord.fieldValues = orderFieldValues;
```

[RecordResource Constructors](#)

Learn more about the available constructors with the `RecordResource` class.

[RecordResource Properties](#)

Learn more about the available properties with the `RecordResource` class.

RecordResource Constructors

Learn more about the available constructors with the `RecordResource` class.

The `RecordResource` class includes these constructors.

[RecordResource\(type, method, id\)](#)

Creates an instance of the `RecordResource` class to assign values to the fields of an order item by using the sObject type, API method, and order ID properties.

[RecordResource\(type, method\)](#)

Creates an instance of the `RecordResource` class to assign the values to the fields of an order item by using the sObject type and API method properties.

RecordResource(type, method, id)

Creates an instance of the `RecordResource` class to assign values to the fields of an order item by using the sObject type, API method, and order ID properties.

Signature

```
public RecordResource(Schema.SObjectType type, String method, Id id)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the sObject describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST or PATCH.

id

Type: Id

ID of the order.

RecordResource(type, method)

Creates an instance of the `RecordResource` class to assign the values to the fields of an order item by using the `sObject` type and API method properties.

Signature

```
public RecordResource(Schema.SObjectType type, String method)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the `sObject` describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST or PATCH.

RecordResource Properties

Learn more about the available properties with the `RecordResource` class.

The `RecordResource` class includes these properties.

[fieldValues](#)

Set the `fieldValues` property to assign values to the fields to update the order record.

[id](#)

Set the `id` property to assign the ID of the order record.

[method](#)

Set the `method` property to specify the API request method, such as POST or PATCH.

[type](#)

Set the `type` property to assign the object type that's returned from the field describe result using the `getReferenceTo()` method or from the `sObject` describe result using the `getSObjectType()` method.

fieldValues

Set the `fieldValues` property to assign values to the fields to update the order record.

Signature

```
public Map<String,ANY> fieldValues {get; set;}
```

Property Value

Type: List<Map<String,ANY>>

id

Set the `id` property to assign the ID of the order record.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

method

Set the `method` property to specify the API request method, such as POST or PATCH.

Signature

```
public String method {get; set;}
```

Property Value

Type: String

type

Set the `type` property to assign the object type that's returned from the field describe result using the `getReferenceTo ()` method or from the sObject describe result using the `getSObjectType ()` method.

Signature

```
public Schema.SObjectType type {get; set;}
```

Property Value

Type: [Schema.SObjectType](#)

RecordWithReferenceRequest Class

Contains constructors and properties to associate a record object with a reference identifier.

Namespace

[CommerceOrders](#)

Example

```
CommerceOrders.RecordWithReferenceRequest orderRecordNode = new  
CommerceOrders.RecordWithReferenceRequest('refOrder', orderRecord);
```

[RecordWithReferenceRequest Constructors](#)

Learn more about the available constructors with the `RecordWithReferenceRequest` class.

[RecordWithReferenceRequest Properties](#)

Learn more about the available properties with the `RecordWithReferenceRequest` class.

RecordWithReferenceRequest Constructors

Learn more about the available constructors with the `RecordWithReferenceRequest` class.

The `RecordWithReferenceRequest` class includes these constructors.

[RecordWithReferenceRequest\(referenceId, record\)](#)

Creates an instance of the `RecordWithReferenceRequest` class to associate a record object with a reference identifier by using the `referenceId` and `record` object properties.

RecordWithReferenceRequest(referenceId, record)

Creates an instance of the `RecordWithReferenceRequest` class to associate a record object with a reference identifier by using the `referenceId` and `record` object properties.

Signature

```
public RecordWithReferenceRequest(String referenceId, commerceorders.RecordResource  
record)
```

Parameters

referenceId

Type: String

Reference ID that maps to the subrequest response and can be used to reference the response in subsequent subrequests. You can reference the `referenceId` in either the body or URL of a subrequest. Use this syntax to include a reference:

@{referenceId.FieldName}. See [referenceId property of a composite subrequest](#).

record

Type: [commerceorders.RecordResource](#)

Record object that's defined using the `RecordResource` class.

RecordWithReferenceRequest Properties

Learn more about the available properties with the `RecordWithReferenceRequest` class.

The `RecordWithReferenceRequest` class includes these properties.

`record`

Set the `record` property to specify the record object that's defined by using the `RecordResource` class.

`referenceId`

Set the `referenceId` property to specify the reference ID that maps to the subrequest response. This reference ID can be used to reference the response in subsequent subrequests.

`record`

Set the `record` property to specify the record object that's defined by using the `RecordResource` class.

Signature

```
public commerceorders.RecordResource record {get; set;}
```

Property Value

Type: [commerceorders.RecordResource](#)

`referenceId`

Set the `referenceId` property to specify the reference ID that maps to the subrequest response. This reference ID can be used to reference the response in subsequent subrequests.

Signature

```
public String referenceId {get; set;}
```

Property Value

Type: String

ConnectApi Namespace

The `ConnectApi` namespace (also called Connect in Apex) provides an Apex class to specify details for asset transfer request from one account to another.

These classes are available in the `ConnectApi` namespace.

[ConnectApi Input Classes](#)

Transaction Management includes this Apex input class.

ConnectApi Input Classes

Transaction Management includes this Apex input class.

[ConnectApi.RampOptionInputRepresentation](#)

Input representation of the ramp option details during an asset renewal.

[ConnectApi.TransferRecordInputRepresentation](#)

Input representation of the details of the assets to be transferred.

ConnectApi.RampOptionInputRepresentation

Input representation of the ramp option details during an asset renewal.

This Apex class is used by the `rampOptionDetails` Apex-defined input variable. See [Initiate Renewal Action](#).

Property	Type	Description	Required or Optional	Available Version
<code>durationInMonths</code>	Double	Maximum duration of all ramp segments.	Required	67.0
<code>segmentCount</code>	Double	Number of created ramp segments based on the specified duration.	Required if you specify <code>Custom</code> value for the <code>segmentType</code> property.	67.0
<code>segmentType</code>	ConnectApi.RampSegmentType <code>Custom</code>	Type of ramp schedule. Valid values are: <code>Custom</code> —Specifies the number of segments. The total duration is divided equally across segments; or <code>Yearly</code> —Creates 12-month segments. If the total duration isn't a multiple of 12, the last segment covers the remaining months. If the duration divided by the number of months has a remainder, that segment is listed first as a prorated segment.	Required	67.0

ConnectApi.TransferRecordInputRepresentation

Input representation of the details of the assets to be transferred.

This Apex class is used by the `transferRecords` apex-defined input variable. See [Initiate Transfer Action](#) on page 1485.

Property	Type	Description	Required or Optional	Available Version
<code>assetId</code>	String	ID of the asset to transfer.	Required	65.0
<code>transferQuantity</code>	Double	Transfer quantity for the request.	Required	65.0

CommerceTax Namespace

Manage the communication between Salesforce and an external tax engine.

These types are documented in the [Apex Reference Guide](#).

- [AbstractTransactionResponse](#)
- [AddressesResponse](#)
- [AddressResponse](#)
- [AmountDetailsResponse](#)
- [CalculateTaxRequest](#)
- [CalculateTaxResponse](#)
- [CalculateTaxType](#)
- [CustomTaxAttributesResponse](#)
- [ErrorResponse](#)
- [HeaderTaxAddressesRequest](#)
- [ImpositionResponse](#)
- [JurisdictionResponse](#)
- [LineItemResponse](#)
- [LineTaxAddressesRequest](#)
- [RequestType](#)
- [ResultCode](#)
- [RuleDetailsResponse](#)
- [TaxAddressesRequest](#)
- [TaxAddressRequest](#)
- [TaxApiException](#)
- [TaxCustomerDetailsRequest](#)
- [TaxDetailsResponse](#)
- [TaxEngineAdapter](#)
- [TaxEngineContext](#)
- [TaxLineItemRequest](#)
- [TaxSellerDetailsRequest](#)
- [TaxTransactionRequest](#)
- [TaxTransactionStatus](#)
- [TaxTransactionType](#)

PlaceQuote Namespace

The `PlaceQuote` namespace provides classes and methods to create or update quotes with pricing preferences and configuration options.



Note: This namespace has been deprecated as of API version 63.0. In API version 63.0 and later, use the new [RevSalesTrxn](#) namespace.

The `PlaceQuote` namespace includes these classes.

[CatalogRatesPreferenceEnum Enum](#)

Specifies the rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the quote creation process.

[ConfigurationInputEnum Enum](#)

Specifies the configuration input for the request to place a quote.

[ConfigurationOptionsInput Class](#)

Contains methods and properties to set the configuration options for the input to the product configurator.

[GraphRequest Class](#)

Contains constructors and properties to set the graph ID and a list of records to be ingested. The list of records is specified in a key-value map format that contains the field values of an order.

[PlaceQuoteException Class](#)

Contains methods to hold the exception details for the place quote request.

[PlaceQuoteResponse Class](#)

Contains properties to hold the response to the place quote request.

[PlaceQuoteRLMApexProcessor Class](#)

Contains methods to place a quote with details of the graph request, pricing preferences, and configuration options.

[PricingPreferenceEnum Enum](#)

Specifies the pricing preference during the create quote process.

[RecordResource Class](#)

Contains constructors and properties to create a record object from the field values of a quote.

[RecordWithReferenceRequest Class](#)

Contains constructors and properties to associate a record object with a reference identifier.

CatalogRatesPreferenceEnum Enum

Specifies the rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the quote creation process.

Usage

This enum is available when the Usage-Based Selling feature is enabled.

Enum Values

The `placequote.CatalogRatesPreferenceEnum` enum includes these values.

Value	Description
Fetch	Retrieves the rate card entries defined in the catalog for quote line items during the quote creation process.
Skip	Skips the retrieval of rate card entries for quote line items during the quote creation process. The default value is <code>Skip</code> .

Example Fetch:

Example Skip:

ConfigurationInputEnum Enum

Specifies the configuration input for the request to place a quote.

Usage

Use these enum values for the `configurationInputEnum` property in the [PlaceQuoteRLMApexProcessor](#) class.

Enum Values

The `placequote.ConfigurationInputEnum` enum has these values.

Value	Description
<code>RunAndAllowErrors</code>	Run the configuration and proceed with order ingestion upon encountering any configuration errors.
<code>RunAndBlockErrors</code>	Run the configuration and block order ingestion upon encountering any configuration errors.
<code>Skip</code>	Skip the configuration execution.

Example `RunAndAllowErrors`:

Example `RunAndBlockErrors`:

Example `Skip`:

ConfigurationOptionsInput Class

Contains methods and properties to set the configuration options for the input to the product configurator.

Namespace

[PlaceQuote](#)

Usage

This class holds the required details of the product configuration input. Set the class properties to enable default configuration, execution of configuration rules, and validation of the product catalog. Use these class properties as an input to the [PlaceQuoteRLMApexProcessor](#) class method.

Example

```
PlaceQuote.GraphRequest graph = new PlaceQuote.GraphRequest('test', listOfRecords);
    PlaceQuote.PricingPreferenceEnum pricingPreference =
PlaceQuote.PricingPreferenceEnum.System;
    PlaceQuote.ConfigurationInputEnum configurationPreference =
PlaceQuote.ConfigurationInputEnum.RunAndAllowErrors;
    PlaceQuote.ConfigurationOptionsInput cInput = new PlaceQuote.ConfigurationOptionsInput();

    cInput.addDefaultConfiguration = true;
```

```

cInput.executeConfigurationRules = true;
cInput.validateAmendRenewCancel = true;
cInput.validateProductCatalog = true;
    //Place Quote Call
    PlaceQuote.PlaceQuoteResponse resp =
PlaceQuote.PlaceQuoteRLMApexProcessor.execute(pricingPreference,graph,configurationPreference,cInput);

```

[ConfigurationOptionsInput Properties](#)

Set the `ConfigurationOptionsInput` class properties to add default configuration, execute configuration rules, and validate the product catalog.

[ConfigurationOptionsInput Methods](#)

Learn more about the methods available with the `ConfigurationOptionsInput` class.

ConfigurationOptionsInput Properties

Set the `ConfigurationOptionsInput` class properties to add default configuration, execute configuration rules, and validate the product catalog.

The `ConfigurationOptionsInput` class includes these properties.

[addDefaultConfiguration](#)

Sets the default product configuration, such as bundle and product attributes, for a quote request.

[executeConfigurationRules](#)

Sets the requirement for a quote to adhere to the configuration rules.

[validateAmendRenewCancel](#)

Sets the requirement to run validations related to amend, renew, or cancel processes.

[validateProductCatalog](#)

Sets the requirement to validate a quote against the product catalog.

addDefaultConfiguration

Sets the default product configuration, such as bundle and product attributes, for a quote request.

Signature

```
public Boolean addDefaultConfiguration {get; set;}
```

Property Value

Type: Boolean

Indicates whether to automatically add default configuration to the order (`true`) or not (`false`).

executeConfigurationRules

Sets the requirement for a quote to adhere to the configuration rules.

Signature

```
public Boolean executeConfigurationRules {get; set;}
```

Property Value

Type: Boolean

Indicates whether the order must adhere to configuration rules during processing (`true`) or bypass them (`false`).

validateAmendRenewCancel

Sets the requirement to run validations related to amend, renew, or cancel processes.

Signature

```
public Boolean validateAmendRenewCancel {get; set;}
```

Property Value

Type: Boolean

Indicates whether to run validations related to amend, renew, or cancel processes (`true`) or not (`false`).

validateProductCatalog

Sets the requirement to validate a quote against the product catalog.

Signature

```
public Boolean validateProductCatalog {get; set;}
```

Property Value

Type: Boolean

Indicates whether the quote must be validated against the product catalog (`true`) or not (`false`).

ConfigurationOptionsInput Methods

Learn more about the methods available with the `ConfigurationOptionsInput` class.

The `ConfigurationOptionsInput` class includes these methods.

[`equals\(obj\)`](#)

Determines the equality of external objects in a list. This method is dynamic and is based on the `equals()` method in Java.

[`hashCode\(\)`](#)

Determines the uniqueness of the external object records in a list.

[`toString\(\)`](#)

Converts a value to a string.

equals (obj)

Determines the equality of external objects in a list. This method is dynamic and is based on the `equals ()` method in Java.

Signature

```
public Boolean equals(Object obj)
```

Parameters

obj

Type: Object

Reference object that's used to compare with the class object.

Return Value

Type: Boolean

Indicates if the class object is same as the reference object (`true`) or not (`false`).

hashCode ()

Determines the uniqueness of the external object records in a list.

Signature

```
public Integer hashCode()
```

Return Value

Type: Integer

Integer hash code that represents the value of the object. Equal objects as per the `equals ()` method must return the same hash code.

toString ()

Converts a value to a string.

Signature

```
public String toString()
```

Return Value

Type: String

GraphRequest Class

Contains constructors and properties to set the graph ID and a list of records to be ingested. The list of records is specified in a key-value map format that contains the field values of an order.

Namespace

PlaceQuote

Example

Invoke the Place Quote Apex API by using these steps.

- Set up a quote and quote line item. To associate the Record object with a reference identifier, create an instance of the `RecordWithReferenceRequest` class.

```
//Quote Setup
PlaceQuote.RecordResource quoteRecord = new
PlaceQuote.RecordResource(Quote.getSubjectType(), 'POST');
Map<String, Object> quoteFieldValues = new Map<String, Object>();
quoteFieldValues.put('Name', 'q-ap12');
quoteFieldValues.put('OpportunityId', '006xx000001aBFcAAM');
quoteFieldValues.put('Pricebook2Id', '01sxx0000005pvRAAQ');
quoteRecord.fieldValues = quoteFieldValues;

//Quote Line Item Setup
PlaceQuote.RecordResource quoteLineItemRecord1 = new
PlaceQuote.RecordResource(QuoteLineItem.getSubjectType(), 'POST');
Map<String, Object> quoteLineItemFieldValues = new Map<String, Object>();
quoteLineItemFieldValues.put('Product2Id', '01txx0000006ibwAAA');
quoteLineItemFieldValues.put('PricebookEntryId', '01luxx0000008zPqAAI');
quoteLineItemFieldValues.put('Quantity', '2.0');
quoteLineItemFieldValues.put('UnitPrice', '5.0');
quoteLineItemFieldValues.put('StartDate', '2023-03-15');
quoteLineItemFieldValues.put('QuoteId', '{@refQuote.id}');
quoteLineItemRecord1.fieldValues = quoteLineItemFieldValues;
PlaceQuote.RecordWithReferenceRequest quoteItemRecords = new
PlaceQuote.RecordWithReferenceRequest('refQuote', quoteRecord);
PlaceQuote.RecordWithReferenceRequest quoteLineItemRecords1 = new
PlaceQuote.RecordWithReferenceRequest('refQuoteItem1', quoteLineItemRecord1);
```

- To create a quote line relationship, create an instance of the `RecordResource` class.

```
PlaceQuote.RecordResource quoteLineRelationship1 = new
PlaceQuote.RecordResource(QuoteLineRelationship.getSubjectType(), 'POST');
Map<String, Object> quoteLineRelationshipValues = new Map<String, Object>();
quoteLineRelationshipValues.put('ProductRelationshipTypeId', '0yoxx00000000JNAAY');
quoteLineRelationshipValues.put('MainQuoteLineId', '{@refQuoteItem2.id}');
quoteLineRelationshipValues.put('AssociatedQuoteLineId', '{@refQuoteItem1.id}');
quoteLineRelationshipValues.put('AssociatedQuoteLinePricing', 'IncludedInBundlePrice');

quoteLineRelationship1.fieldValues = quoteLineRelationshipValues;
```

- Create the list of records to be ingested.

```
PlaceQuote.RecordWithReferenceRequest quoteLineRelationship = new
PlaceQuote.RecordWithReferenceRequest('QuoteLineRelationship', quoteLineRelationship1);
List<PlaceQuote.RecordWithReferenceRequest> listOfRecords = new
```



```
List<PlaceQuote.RecordWithReferenceRequest>();
    listOfRecords.add(quoteItemRecords);
    listOfRecords.add(quoteLineItemRecords1);
    listOfRecords.add(quoteLineItemRecords2);
    listOfRecords.add(quoteLineRelationship);
```

- To contain all record objects, create an instance of the `GraphRequest` class.



Note: The `CatalogRatesPreferenceEnum` enum is available when the Usage-Based Selling feature is enabled.

```
PlaceQuote.GraphRequest graph = new PlaceQuote.GraphRequest('test',listOfRecords);
PlaceQuote.ConfigurationOptionsInput cInput = new
PlaceQuote.ConfigurationOptionsInput();
    PlaceQuote.CatalogRatesPreferenceEnum catalogRatesPreference =
PlaceQuote.CatalogRatesPreferenceEnum.Fetch;
...PlaceQuote.ConfigurationInputEnum configurationPreference =
PlaceQuote.ConfigurationInputEnum.RunAndAllowErrors;
    PlaceQuote.PricingPreferenceEnum pricingPreference =
PlaceQuote.PricingPreferenceEnum.System;
    //System.debug(graph);

//Place Quote Call
PlaceQuote.PlaceQuoteResponse resp =
PlaceQuote.PlaceQuoteRLMApexProcessor.execute(pricingPreference, catalogRatesPreference,
graph, configurationPreference, cInput);
    System.debug(resp);
```

[GraphRequest Constructors](#)

Learn more about the available constructors with the `GraphRequest` class.

[GraphRequest Properties](#)

GraphRequest Constructors

Learn more about the available constructors with the `GraphRequest` class.

The `GraphRequest` class includes these constructors.

[GraphRequest\(graphId, records\)](#)

Creates an instance of the `GraphRequest` class to assign the graph ID and a list of records to be ingested.

GraphRequest(graphId, records)

Creates an instance of the `GraphRequest` class to assign the graph ID and a list of records to be ingested.

Signature

```
public GraphRequest(String graphId, List<placequote.RecordWithReferenceRequest> records)
```

Parameters

graphId

Type: String

ID of the graph.

records

Type: List<[placequote.RecordWithReferenceRequest](#) on page 1426>

List of records to be ingested.

GraphRequest Properties

The following are properties for `GraphRequest`.

[graphId](#)

Set the `graphId` property to assign the ID value of the graph.

graphId

Set the `graphId` property to assign the ID value of the graph.

Signature

```
public String graphId {get; set;}
```

Property Value

Type: String

PlaceQuoteException Class

Contains methods to hold the exception details for the place quote request.

Namespace

[PlaceQuote](#)

[PlaceQuoteException Methods](#)

Learn more about the methods available with the `PlaceQuoteException` class.

PlaceQuoteException Methods

Learn more about the methods available with the `PlaceQuoteException` class.

The `PlaceQuoteException` class includes these methods.

[getErrorCode\(\)](#)

Gets the error code that's associated to the place quote request.

getErrorCode ()

Gets the error code that's associated to the place quote request.

Signature

```
public String getErrorCode()
```

Return Value

Type: String

PlaceQuoteResponse Class

Contains properties to hold the response to the place quote request.

Namespace

[PlaceQuote](#)

Example

```
PlaceQuote.PlaceQuoteResponse resp =  
PlaceQuote.PlaceQuoteExecutor.execute(internalEnum, graph);
```

[PlaceQuoteResponse Properties](#)

Learn more about the available properties with the `PlaceQuoteResponse` class.

PlaceQuoteResponse Properties

Learn more about the available properties with the `PlaceQuoteResponse` class.

The `PlaceQuoteResponse` class includes these properties.

[quoteId](#)

Get the ID of the quote that's created after a successful request.

[requestIdentifier](#)

Get the request ID of the process to query the asynchronous status of the Place Quote Apex API.

[responseError](#)

Get the list of errors encountered during the synchronous processing of the API request.

[statusURL](#)

Get the asynchronous status URL of the request, if available.

[success](#)

Get the request status of the synchronous part of the processing.

quoteId

Get the ID of the quote that's created after a successful request.

Signature

```
public String quoteId {get; set;}
```

Property Value

Type: String

requestIdentifier

Get the request ID of the process to query the asynchronous status of the Place Quote Apex API.

Signature

```
public String requestIdentifier {get; set;}
```

Property Value

Type: String

responseError

Get the list of errors encountered during the synchronous processing of the API request.

Signature

```
public List<ConnectApi.PlaceQuoteErrorResponse> responseError {get; set;}
```

Property Value

Type: List<ConnectApi.PlaceQuoteErrorResponse>

statusURL

Get the asynchronous status URL of the request, if available.

Signature

```
public String statusURL {get; set;}
```

Property Value

Type: String

success

Get the request status of the synchronous part of the processing.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: Boolean

Indicates whether the synchronous part of the processing is successful (`true`) or not (`false`).

PlaceQuoteRLMApexProcessor Class

Contains methods to place a quote with details of the graph request, pricing preferences, and configuration options.

Namespace

[PlaceQuote](#)

[PlaceQuoteRLMApexProcessor Methods](#)

Learn more about the methods available with the `PlaceQuoteRLMApexProcessor` class.

[PlaceQuoteRLMApexProcessor Example Implementation](#)

To place a quote from Apex, refer to the example implementation of the `PlaceQuoteRLMApexProcessor` class.

PlaceQuoteRLMApexProcessor Methods

Learn more about the methods available with the `PlaceQuoteRLMApexProcessor` class.

The `PlaceQuoteRLMApexProcessor` class includes these methods.

[execute\(pricingPreferenceEnum, graphRequest, configurationInputEnum, configurationOptionsInput\)](#)

Use the method in the `PlaceQuoteExecutor` class to execute the Place Quote Apex API request by assigning the properties for graph request, pricing references, and configuration options.

[execute\(pricingPreferenceEnum, catalogRatesPreference, graphRequest, configurationInputEnum, configurationOptionsInput\)](#)

Use the method in the `PlaceQuoteExecutor` class to execute the Place Quote Apex API request by assigning the properties for graph request, pricing references, and configuration options. This method also includes the property to define fetching of rate card entries.

execute(pricingPreferenceEnum, graphRequest, configurationInputEnum, configurationOptionsInput)

Use the method in the `PlaceQuoteExecutor` class to execute the Place Quote Apex API request by assigning the properties for graph request, pricing references, and configuration options.

Signature

```
public static placequote.PlaceQuoteResponse execute(placequote.PricingPreferenceEnum
pricingPreferenceEnum, placequote.GraphRequest graphRequest,
placequote.ConfigurationInputEnum configurationInputEnum,
placequote.ConfigurationOptionsInput configurationOptionsInput)
```

Parameters

pricingPreferenceEnum

Type: [placequote.PricingPreferenceEnum](#)

Pricing preference during the quote process.

graphRequest

Type: [placequote.GraphRequest](#)

The sObject graph values of the quote payload to be ingested.

configurationInputEnum

Type: [placequote.ConfigurationInputEnum](#)

Configuration input for the quote process.

configurationOptionsInput

Type: [placequote.ConfigurationOptionsInput](#)

Configuration options during the ingestion process.

Return Value

Type: [placequote.PlaceQuoteResponse](#)

execute(pricingPreferenceEnum, catalogRatesPreference, graphRequest, configurationInputEnum, configurationOptionsInput)

Use the method in the `PlaceQuoteExecutor` class to execute the Place Quote Apex API request by assigning the properties for graph request, pricing references, and configuration options. This method also includes the property to define fetching of rate card entries.

Signature

```
public static placequote.PlaceQuoteResponse execute(placequote.PricingPreferenceEnum
pricingPreferenceEnum, placequote.CatalogRatesPreferenceEnum catalogRatesPreference,
placequote.GraphRequest graphRequest, placequote.ConfigurationInputEnum
configurationInputEnum, placequote.ConfigurationOptionsInput configurationOptionsInput)
```

Parameters

pricingPreferenceEnum

Type: [placequote.PricingPreferenceEnum](#)

Pricing preference during the quote process.

catalogRatesPreference

Type: [placequote.CatalogRatesPreferenceEnum](#)

The rate card entries defined in the catalog that must be fetched for quote line items, with usage-based pricing during the quote creation process. The `CatalogRatesPreferenceEnum` enum is available when the Usage-Based Selling feature is enabled.

graphRequest

Type: [placequote.GraphRequest](#)

The sObject graph values of the quote payload to be ingested.

configurationInputEnum

Type: [placequote.ConfigurationInputEnum](#)

Configuration input for the quote process.

configurationOptionsInput

Type: [placequote.ConfigurationOptionsInput](#)

Configuration options during the ingestion process.

Return Value

Type: [placequote.PlaceQuoteResponse](#)

PlaceQuoteRLMApexProcessor Example Implementation

To place a quote from Apex, refer to the example implementation of the `PlaceQuoteRLMApexProcessor` class.

Namespace

[PlaceQuote](#)

Usage

Customize this example to suit your requirements. Create the list of records to be ingested by using these steps. Replace the respective IDs with the values that are present in your org. For example, replace the value of `{Pricebook2Id}` field with the price book ID that's present in the org.



Example:

- Set up a quote and quote line item. To associate the Record object with a reference identifier, create an instance of the `RecordWithReferenceRequest` class.

```
//Quote Setup
PlaceQuote.RecordResource quoteRecord = new
PlaceQuote.RecordResource(Quote.getSObjectType(), 'POST');
Map<String, Object> quoteFieldValues = new Map<String, Object>();
quoteFieldValues.put('Name', 'q-ap12');
quoteFieldValues.put('OpportunityId', '006xx000001aBFcAAM');
quoteFieldValues.put('Pricebook2Id', '01sxx0000005pvRAAQ');
quoteRecord.fieldValues = quoteFieldValues;

//Quote Line Item Setup
PlaceQuote.RecordResource quoteLineItemRecord1 = new
PlaceQuote.RecordResource(QuoteLineItem.getSObjectType(), 'POST');
Map<String, Object> quoteLineItemFieldValues = new Map<String, Object>();
quoteLineItemFieldValues.put('Product2Id', '01txx0000006ibwAAA');
quoteLineItemFieldValues.put('PricebookEntryId', '01luxx0000008zPqAAI');
quoteLineItemFieldValues.put('Quantity', '2.0');
quoteLineItemFieldValues.put('UnitPrice', '5.0');
quoteLineItemFieldValues.put('StartDate', '2023-03-15');
quoteLineItemFieldValues.put('QuoteId', '@{refQuote.id}');
quoteLineItemRecord1.fieldValues = quoteLineItemFieldValues;
PlaceQuote.RecordWithReferenceRequest quoteItemRecords = new
PlaceQuote.RecordWithReferenceRequest('refQuote', quoteRecord);
```

```
PlaceQuote.RecordWithReferenceRequest quoteLineItemRecords1 = new
PlaceQuote.RecordWithReferenceRequest('refQuoteItem1',quoteLineItemRecord1);
```

- To create a quote line relationship, create an instance of the RecordResource class.

```
PlaceQuote.RecordResource quoteLineRelationship1 = new
PlaceQuote.RecordResource(QuoteLineRelationship.getSubjectType(),'POST');
Map<String,Object> quoteLineRelationshipValues = new Map<String,Object>();
quoteLineRelationshipValues.put('ProductRelationshipTypeId','0yoxx0000000JNAAY');

quoteLineRelationshipValues.put('MainQuoteLineId','@{refQuoteItem2.id}');
quoteLineRelationshipValues.put('AssociatedQuoteLineId','@{refQuoteItem1.id}');

quoteLineRelationshipValues.put('AssociatedQuoteLinePricing','IncludedInBundlePrice');

quoteLineRelationship1.fieldValues = quoteLineRelationshipValues;
```

- Create the list of records to be ingested.

```
PlaceQuote.RecordWithReferenceRequest quoteLineRelationship = new
PlaceQuote.RecordWithReferenceRequest('QuoteLineRelationship',quoteLineRelationship1);

List<PlaceQuote.RecordWithReferenceRequest> listOfRecords = new
List<PlaceQuote.RecordWithReferenceRequest>();
listOfRecords.add(quoteItemRecords);
listOfRecords.add(quoteLineItemRecords1);
listOfRecords.add(quoteLineItemRecords2);
listOfRecords.add(quoteLineRelationship);
```

- To contain all record objects, create an instance of the GraphRequest class.



Note: The CatalogRatesPreferenceEnum enum is available when the Usage-Based Selling feature is enabled.

```
PlaceQuote.GraphRequest graph = new PlaceQuote.GraphRequest('test',listOfRecords);

PlaceQuote.ConfigurationOptionsInput cInput = new
PlaceQuote.ConfigurationOptionsInput();
PlaceQuote.CatalogRatesPreferenceEnum catalogRatesPreference =
PlaceQuote.CatalogRatesPreferenceEnum.Fetch;
...PlaceQuote.ConfigurationInputEnum configurationPreference =
PlaceQuote.ConfigurationInputEnum.RunAndAllowErrors;
PlaceQuote.PricingPreferenceEnum pricingPreference =
PlaceQuote.PricingPreferenceEnum.System;
//System.debug(graph);

//Place Quote Call
PlaceQuote.PlaceQuoteResponse resp =
PlaceQuote.PlaceQuoteRLMapexProcessor.execute(pricingPreference,
catalogRatesPreference, graph, configurationPreference, cInput);
System.debug(resp);
```


PricingPreferenceEnum Enum

Specifies the pricing preference during the create quote process.

Usage

Used by the [PlaceQuoteRLMapexProcessor](#) class.

Enum Values

The `placequote.PricingPreferenceEnum` enum class includes these values.

Value	Description
Force	Enforce pricing during the quote ingestion process.
Skip	Skip pricing during the quote ingestion process.
System	Determine whether a pricing calculation is required.

Example Force:

Example Skip:

Example System:

RecordResource Class

Contains constructors and properties to create a record object from the field values of a quote.

Namespace

[PlaceQuote](#)

Example

```
PlaceQuote.RecordResource quoteLineRelationship1 = new  
PlaceQuote.RecordResource (QuoteLineRelationship.getSubjectType(), 'POST');
```

See [PlaceQuoteRLMapexProcessor](#) to refer to an example implementation.

[RecordResource Constructors](#)

Learn more about the available constructors with the `RecordResource` class.

[RecordResource Properties](#)

Learn more about the available properties with the `RecordResource` class.

RecordResource Constructors

Learn more about the available constructors with the `RecordResource` class.

The `RecordResource` class includes these constructors.

[RecordResource\(type, method, id\)](#)

Creates an instance of the `RecordResource` class to assign values to the fields of a quote item by using the `sObject` type, API method, and quote ID properties.

[RecordResource\(type, method\)](#)

Creates an instance of the `RecordResource` class to assign the values to the fields of a quote item by using the `sObject` type and API method properties.

RecordResource(type, method, id)

Creates an instance of the `RecordResource` class to assign values to the fields of a quote item by using the `sObject` type, API method, and quote ID properties.

Signature

```
public RecordResource (Schema.SObjectType type, String method, Id id)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the `sObject` describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST or PATCH.

id

Type: Id

ID of the quote.

RecordResource(type, method)

Creates an instance of the `RecordResource` class to assign the values to the fields of a quote item by using the `sObject` type and API method properties.

Signature

```
public RecordResource (Schema.SObjectType type, String method)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the `sObject` describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST or PATCH.

RecordResource Properties

Learn more about the available properties with the `RecordResource` class.

The `RecordResource` class includes these properties.

fieldValues

Set the `fieldValues` property to assign values to the fields to update the quote record.

id

Set the `id` property to assign the ID of the quote record.

method

Set the `method` property to specify the API request method, such as POST or PATCH.

type

Set the `type` property to assign the object type that's returned from the field describe result by using the `getReferenceTo()` method or from the sObject describe result by using the `getSObjectType()` method.

fieldValues

Set the `fieldValues` property to assign values to the fields to update the quote record.

Signature

```
public Map<String,ANY> fieldValues {get; set;}
```

Property Value

Type: List <Map<String,ANY>>

id

Set the `id` property to assign the ID of the quote record.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

method

Set the `method` property to specify the API request method, such as POST or PATCH.

Signature

```
public String method {get; set;}
```

Property Value

Type: String

type

Set the type property to assign the object type that's returned from the field describe result by using the `getReferenceTo()` method or from the sObject describe result by using the `getSObjectType()` method.

Signature

```
public Schema.SObjectType type {get; set;}
```

Property Value

Type: [Schema.SObjectType](#)

RecordWithReferenceRequest Class

Contains constructors and properties to associate a record object with a reference identifier.

Namespace

[PlaceQuote](#)

Example

```
PlaceQuote.RecordWithReferenceRequest quoteLineRelationship = new
PlaceQuote.RecordWithReferenceRequest('QuoteLineRelationship',quoteLineRelationship1);
```

See [PlaceQuoteRLMApexProcessor](#) to refer to an example implementation.

[RecordWithReferenceRequest Constructors](#)

Learn more about the available constructors with the `RecordWithReferenceRequest` class.

[RecordWithReferenceRequest Properties](#)

Learn more about the available properties with the `RecordWithReferenceRequest` class.

RecordWithReferenceRequest Constructors

Learn more about the available constructors with the `RecordWithReferenceRequest` class.

The `RecordWithReferenceRequest` class includes these constructors.

[RecordWithReferenceRequest\(referenceId, record\)](#)

Creates an instance of the `RecordWithReferenceRequest` class to associate a record object with a reference identifier by using the `referenceId` and `record` object properties.

RecordWithReferenceRequest(referenceId, record)

Creates an instance of the `RecordWithReferenceRequest` class to associate a record object with a reference identifier by using the `referenceId` and `record` object properties.

Signature

```
public RecordWithReferenceRequest(String referenceId, placequote.RecordResource record)
```

Parameters

referenceId

Type: String

Reference ID that maps to the subrequest response and can be used to reference the response in subsequent subrequests. You can reference the `referenceId` in either the body or URL of a subrequest. Use this syntax to include a reference: `@{referenceId.FieldName}`. See [referenceId property of a composite subrequest](#).

record

Type: [placequote.RecordResource](#)

Record object that's defined using the `RecordResource` class.

RecordWithReferenceRequest Properties

Learn more about the available properties with the `RecordWithReferenceRequest` class.

The `RecordWithReferenceRequest` class includes these properties.

[record](#)

Set the `record` property to specify the record object that's defined by using the `RecordResource` class.

[referenceId](#)

Set the `referenceId` property to specify the reference ID that maps to the subrequest response. This reference ID can be used to reference the response in subsequent subrequests.

record

Set the `record` property to specify the record object that's defined by using the `RecordResource` class.

Signature

```
public placequote.RecordResource record {get; set;}
```

Property Value

Type: [placequote.RecordResource](#)

referenceId

Set the `referenceId` property to specify the reference ID that maps to the subrequest response. This reference ID can be used to reference the response in subsequent subrequests.

Signature

```
public String referenceId {get; set;}
```

Property Value

Type: String

renew_assets_summary Namespace

Retrieve details about renewable assets to create renewal opportunities.

The `renew_assets_summary` namespace includes these classes.

[RenewalOpptyDetail Class](#)

Contains asset details and renewal pricing information for creating renewal opportunities.

[RenewalPriceDetail Class](#)

Contains net unit price and quantity details for an asset to set as sales price for renewal opportunities.

RenewalOpptyDetail Class

Contains asset details and renewal pricing information for creating renewal opportunities.

Namespace

[renew_assets_summary](#) on page 1428

[RenewalOpptyDetail Constructors](#)

Learn more about the constructors available with the `RenewalOpptyDetail` class.

[RenewalOpptyDetail Properties](#)

Learn more about the properties available with the `RenewalOpptyDetail` class.

RenewalOpptyDetail Constructors

Learn more about the constructors available with the `RenewalOpptyDetail` class.

The `RenewalOpptyDetail` class includes these constructors.

[RenewalOpptyDetail\(assetId, startDate, endDate, productId, account, priceBookId, priceBookEntryId, lastAssetActionSubtype, renewalPriceDetails, opportunityProductId, orderItem, rootAssetOpportunity, lastAssetAction, totalLineAmount\)](#)

Initializes the `RenewalOpptyDetail` class that contains asset details and renewal pricing information.

```
RenewalOpptyDetail(assetId, startDate, endDate, productId, account, priceBookId, priceBookEntryId, lastAssetActionSubtype, renewalPriceDetails, opportunityProductId, orderItem, rootAssetOpportunity, lastAssetAction, totalLineAmount)
```

Initializes the `RenewalOpptyDetail` class that contains asset details and renewal pricing information.

Signature

```
public RenewalOpptyDetail(String assetId, Date startDate, Date endDate, String productId,
String account, String priceBookId, String priceBookEntryId, String
lastAssetActionSubtype, List<renew_assets_summary.RenewalPriceDetail>
renewalPriceDetails, String opportunityProductId, String orderItem, String
rootAssetOpportunity, String lastAssetAction, Decimal totalLineAmount)
```

```
renew_assets_summary.RenewalOpptyDetail, newinstance, [String, Date, Date, String, String,
String, String, String, List<renew_assets_summary.RenewalPriceDetail>, String, String,
String, String, Decimal], renew_assets_summary.RenewalOpptyDetail
```

Parameters

assetId

Type: String

The ID of the asset.

startDate

Type: Date

The start date of the asset.

endDate

Type: Date

The end date of the asset.

productId

Type: String

The ID of the product associated with the asset.

account

Type: String

The ID of the account.

priceBookId

Type: String

The ID of the price book.

priceBookEntryId

Type: String

The ID of the price book entry.

lastAssetActionSubtype

Type: String

The subtype of the last action performed on the asset. Valid value is Start Date Adjustment.

renewalPriceDetails

Type: List<[renew_assets_summary.RenewalPriceDetail](#) on page 1435>

List of renewal price details for the asset.

opportunityProductId

Type: String

The ID of the associated opportunity product.

orderItem

Type: String

The ID of the associated order item.

rootAssetOpportunity

Type: String

The ID of the root asset opportunity.

lastAssetAction

Type: String

The last action performed on the asset.

- Initial Sale
- Upsell
- Downsell
- Renewal
- Cancellation

totalLineAmount

Type: Decimal

The total line amount for the asset.

RenewalOpptyDetail Properties

Learn more about the properties available with the `RenewalOpptyDetail` class.

The `RenewalOpptyDetail` class includes these properties.

[account](#)

Get or set the ID of the account.

[assetId](#)

Get or set the ID of the asset.

[endDate](#)

Get or set the end date of the asset.

[lastAssetAction](#)

Get or set the last action performed on the asset.

[lastAssetActionSubtype](#)

Get or set the subtype of the last action performed on the asset.

[opportunityProductId](#)

Get or set the ID of the associated opportunity product.

[orderItem](#)

Get or set the ID of the associated order item.

[priceBookEntryId](#)

Get or set the ID of the price book entry.

[priceBookId](#)

Get or set the ID of the price book.

[productId](#)

Get or set the ID of the product associated with the asset.

[renewalPriceDetails](#)

Get or set the list of renewal price details for the asset.

[rootAssetOpportunity](#)

Get or set the ID of the root asset opportunity.

[startDate](#)

Get or set the start date of the asset.

[totalLineAmount](#)

Get or set the total line amount for the asset.

account

Get or set the ID of the account.

Signature

```
public String account {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, account
```

Property Value

Type: String

assetId

Get or set the ID of the asset.

Signature

```
public String assetId {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, assetId
```

Property Value

Type: String

endDate

Get or set the end date of the asset.

Signature

```
public Date endDate {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, endDate
```

Property Value

Type: Date

lastAssetAction

Get or set the last action performed on the asset.

Signature

```
public String lastAssetAction {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, lastAssetAction
```

Property Value

Type: String

Valid values are:

- Initial Sale
- Upsell
- Downsell
- Renewal
- Cancellation

lastAssetActionSubtype

Get or set the subtype of the last action performed on the asset.

Signature

```
public String lastAssetActionSubtype {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, lastAssetActionSubtype
```

Property Value

Type: String

Valid value is Start Date Adjustment.

opportunityProductId

Get or set the ID of the associated opportunity product.

Signature

```
public String opportunityProductId {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, opportunityProductId
```

Property Value

Type: String

orderItem

Get or set the ID of the associated order item.

Signature

```
public String orderItem {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, orderItem
```

Property Value

Type: String

priceBookEntryId

Get or set the ID of the price book entry.

Signature

```
public String priceBookEntryId {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, priceBookEntryId
```

Property Value

Type: String

priceBookId

Get or set the ID of the price book.

Signature

```
public String priceBookId {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, priceBookId
```

Property Value

Type: String

productId

Get or set the ID of the product associated with the asset.

Signature

```
public String productId {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, productId
```

Property Value

Type: String

renewalPriceDetails

Get or set the list of renewal price details for the asset.

Signature

```
public List<renew_assets_summary.RenewalPriceDetail> renewalPriceDetails {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, renewalPriceDetails
```

Property Value

Type: List<[renew_assets_summary.RenewalPriceDetail](#) on page 1435>

rootAssetOpportunity

Get or set the ID of the root asset opportunity.

Signature

```
public String rootAssetOpportunity {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, rootAssetOpportunity
```

Property Value

Type: String

startDate

Get or set the start date of the asset.

Signature

```
public Date startDate {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, startDate
```

Property Value

Type: Date

totalLineAmount

Get or set the total line amount for the asset.

Signature

```
public Decimal totalLineAmount {get; set;}
```

```
renew_assets_summary.RenewalOpptyDetail, totalLineAmount
```

Property Value

Type: Decimal

RenewalPriceDetail Class

Contains net unit price and quantity details for an asset to set as sales price for renewal opportunities.

Namespace

[renew_assets_summary](#) on page 1428

[RenewalPriceDetail Constructors](#)

Learn more about the constructors available with the RenewalPriceDetail class.

[RenewalPriceDetail Properties](#)

Learn more about the properties available with the RenewalPriceDetail class.

RenewalPriceDetail Constructors

Learn more about the constructors available with the RenewalPriceDetail class.

The `RenewalPriceDetail` class includes these constructors.

[RenewalPriceDetail\(netUnitPrice, quantity\)](#)

Initializes the `RenewalPriceDetail` class that contains net unit price and quantity information.

RenewalPriceDetail(netUnitPrice, quantity)

Initializes the `RenewalPriceDetail` class that contains net unit price and quantity information.

Signature

```
public RenewalPriceDetail(Decimal netUnitPrice, Decimal quantity)
```

```
renew_assets_summary.RenewalPriceDetail, newinstance, [Decimal, Decimal],  
renew_assets_summary.RenewalPriceDetail
```

Parameters

netUnitPrice

Type: Decimal

The net unit price of the asset.

quantity

Type: Decimal

The quantity of the asset.

RenewalPriceDetail PropertiesLearn more about the properties available with the `RenewalPriceDetail` class.The `RenewalPriceDetail` class includes these properties.[netUnitPrice](#)

Get or set the net unit price of the asset.

[quantity](#)

Get or set the quantity of the asset.

netUnitPrice

Get or set the net unit price of the asset.

Signature

```
public Decimal netUnitPrice {get; set;}
```

```
renew_assets_summary.RenewalPriceDetail, netUnitPrice
```

Property Value

Type: Decimal

quantity

Get or set the quantity of the asset.

Signature

```
public Decimal quantity {get; set;}
```

```
renew_assets_summary.RenewalPriceDetail, quantity
```

Property Value

Type: Decimal

RevSalesTrxn Namespace

Create a sales transaction, such as a quote or an order, with integrated pricing and configuration. Additionally, update an order or a quote, and insert and delete order or quote line items to calculate the estimated tax.

The `RevSalesTrxn` namespace includes these classes.

[CatalogRatesPreferenceEnum Enum](#)

Specifies the rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the place sales transaction process.

[ConfigurationExecutionEnum Enum](#)

Specifies the configuration method for the place sales transaction request.

[ConfigurationOptionsInput Class](#)

Contains methods and properties to set the configuration options for the input to the product configurator.

[GraphRequest Class](#)

Contains constructors and properties to set the graph ID and a list of records to be ingested. The list of records is specified in a key-value map format that contains field values.

[GroupRampActionEnum Enum](#)

Specifies the action that you want to perform on group ramp segments. Additionally, you can also convert a non-ramped group into a ramped group.

[PersistPreferenceEnum Enum](#)

Specifies whether to persist pricing changes for each sales transaction record. Available in API version 65.0 and later.

[PlaceSalesTransactionException Class](#)

Contains methods to hold the exception details for the place sales transaction request.

[PlaceSalesTransactionExecutor Class](#)

Contains methods to place a sales transaction with details of the graph request, pricing preferences, and configuration options.

[PlaceSalesTransactionResponse Class](#)

Contains properties to hold the response to the place sales transaction request.

[PricingPreferenceEnum Enum](#)

Specifies the pricing preference during the creation of a sales transaction.

[RecordResource Class](#)

Contains constructors and properties to create a record object from the field values of a sales transaction.

[RecordWithReferenceRequest Class](#)

Contains constructors and properties to associate a record object with a reference identifier.

[TaxPreferenceEnum Enum](#)

Specifies whether to execute or skip the tax calculation step for each sales transaction record. Available in API version 65.0 and later.

CatalogRatesPreferenceEnum Enum

Specifies the rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the place sales transaction process.

Usage

This enum is available when [Usage Selling](#) is enabled.

Enum Values

The `RevSalesTrxn.CatalogRatesPreferenceEnum` enum includes these values.

Value	Description
Fetch	Retrieves the rate card entries defined in the catalog for quote line items during the quote creation process.
Skip	Skips the retrieval of rate card entries for quote line items during the quote creation process. The default value is <code>Skip</code> .

Example `Fetch`:

Example `Skip`:

ConfigurationExecutionEnum Enum

Specifies the configuration method for the place sales transaction request.

Usage

Use these enum values for the `configurationExecutionEnum` property in the [PlaceSalesTransactionExecutor](#) class.

Enum Values

The `RevSalesTrxn.ConfigurationExecutionEnum` enum has these values.

Value	Description
Force	Specifies to enforce the predefined configuration process during the sales transaction process.
Skip	Specifies to skip the configuration process during the quote creation process. The default value is <code>Skip</code> .
System	Specifies the system to determine whether the configuration process is required.

Example `Force`:

Example `Skip`:

Example `System`:

ConfigurationOptionsInput Class

Contains methods and properties to set the configuration options for the input to the product configurator.

Namespace

[RevSalesTrxn](#)

Usage

This class holds the required details of the product configuration input. Set the class properties to enable default configuration, execution of configuration rules, and validation of the product catalog. Use these class properties as an input to the [PlaceSalesTransactionExecutor](#) class method.

Example

```
RevSalesTrxn.GraphRequest graph = new RevSalesTrxn.GraphRequest('test',
listOfRecords);
RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SYSTEM;
RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SYSTEM;
RevSalesTrxn.ConfigurationOptionsInput cInput = new
RevSalesTrxn.ConfigurationOptionsInput();
cInput.addDefaultConfiguration = true;
cInput.executeConfigurationRules = true;
cInput.validateAmendRenewCancel = true;
cInput.validateProductCatalog = true;
//Place Sales Transaction API Call
RevSalesTrxn.PlaceSalesTransactionResponse resp =
PlaceQuote.PlaceSalesTransactionExecutor.execute(graph,pricingPrefEnum,configurationExecutionEnum,cInput,null);
```

[ConfigurationOptionsInput Properties](#)

Set the ConfigurationOptionsInput class properties to add default configuration, execute configuration rules, and validate the product catalog.

[ConfigurationOptionsInput Methods](#)

Learn more about the methods available with the ConfigurationOptionsInput class.

ConfigurationOptionsInput Properties

Set the ConfigurationOptionsInput class properties to add default configuration, execute configuration rules, and validate the product catalog.

The ConfigurationOptionsInput class includes these properties.

[addDefaultConfiguration](#)

Sets the default product configuration, such as bundle and product attributes, for a quote request.

[executeConfigurationRules](#)

Sets the requirement for a quote to adhere to the configuration rules.

[validateAmendRenewCancel](#)

Sets the requirement to run validations related to amend, renew, or cancel processes.

[validateProductCatalog](#)

Sets the requirement to validate a quote against the product catalog.

addDefaultConfiguration

Sets the default product configuration, such as bundle and product attributes, for a quote request.

Signature

```
public Boolean addDefaultConfiguration {get; set;}
```

Property Value

Type: Boolean

Indicates whether to automatically add default configuration to the order (`true`) or not (`false`).

executeConfigurationRules

Sets the requirement for a quote to adhere to the configuration rules.

Signature

```
public Boolean executeConfigurationRules {get; set;}
```

Property Value

Type: Boolean

Indicates whether the order must adhere to configuration rules during processing (`true`) or bypass them (`false`).

validateAmendRenewCancel

Sets the requirement to run validations related to amend, renew, or cancel processes.

Signature

```
public Boolean validateAmendRenewCancel {get; set;}
```

Property Value

Type: Boolean

Indicates whether to run validations related to amend, renew, or cancel processes (`true`) or not (`false`).

validateProductCatalog

Sets the requirement to validate a quote against the product catalog.

Signature

```
public Boolean validateProductCatalog {get; set;}
```

Property Value

Type: Boolean

Indicates whether the quote must be validated against the product catalog (`true`) or not (`false`).

ConfigurationOptionsInput Methods

Learn more about the methods available with the ConfigurationOptionsInput class.

The `ConfigurationOptionsInput` class includes these methods.

`equals(obj)`

Determines the equality of external objects in a list. This method is dynamic and is based on the `equals()` method in Java.

`hashCode()`

Determines the uniqueness of the external object records in a list.

`toString()`

Converts a value to a string.

`equals (obj)`

Determines the equality of external objects in a list. This method is dynamic and is based on the `equals()` method in Java.

Signature

```
public Boolean equals(Object obj)
```

Parameters

obj

Type: Object

Reference object that's used to compare with the class object.

Return Value

Type: Boolean

Indicates if the class object is same as the reference object (`true`) or not (`false`).

`hashCode ()`

Determines the uniqueness of the external object records in a list.

Signature

```
public Integer hashCode()
```

Return Value

Type: Integer

Integer hash code that represents the value of the object. Equal objects as per the `equals ()` method must return the same hash code.

toString()

Converts a value to a string.

Signature

```
public String toString()
```

Return Value

Type: String

GraphRequest Class

Contains constructors and properties to set the graph ID and a list of records to be ingested. The list of records is specified in a key-value map format that contains field values.

Namespace

[RevSalesTrxn](#)

[GraphRequest Constructors](#)

Learn more about the available constructors with the GraphRequest class.

[GraphRequest Properties](#)

Learn more about the available properties with the GraphRequest class.

GraphRequest Constructors

Learn more about the available constructors with the GraphRequest class.

The `GraphRequest` class includes these constructors.

[GraphRequest\(graphId, records\)](#)

Creates an instance of the GraphRequest class to assign the graph ID and a list of records to be ingested.

GraphRequest(graphId, records)

Creates an instance of the GraphRequest class to assign the graph ID and a list of records to be ingested.

Signature

```
public GraphRequest(String graphId, List<RevSalesTrxn.RecordWithReferenceRequest> records)
```

Parameters

graphId

Type: String

ID of the graph.

records

Type: List<[revsalestrxn.RecordWithReferenceRequest](#) on page 1465>

List of records to be ingested.

GraphRequest Properties

Learn more about the available properties with the GraphRequest class.

The `GraphRequest` class includes these properties.

[graphId](#)

Set the `graphId` property to assign the ID value of the graph.

graphId

Set the `graphId` property to assign the ID value of the graph.

Signature

```
public String graphId {get; set;}
```

Property Value

Type: String

GroupRampActionEnum Enum

Specifies the action that you want to perform on group ramp segments. Additionally, you can also convert a non-ramped group into a ramped group.

Enum Values

The `RevSalesTrxn.GroupRampActionEnum` enum includes these values.

Value	Description
AddProducts	Specifies to add rampable products to group ramp segments.
DeleteProducts	Specifies to delete ramped products.
EditGroup	Specifies to convert a non-ramped group into a group ramp segment, or edit group ramp segment attributes such as name and description, except the start and end dates.
EditRampSchedule	Specifies to edit details of the group ramp segments, including start and end dates.
DeleteSegment	Specifies to delete the first or last segment in a group ramp schedule.
ConvertToNonRampedGroup	Specifies to convert the first or last group ramp segment into a non-ramped group.

Example AddProducts:

Example `DeleteProducts`:

Example `EditGroup`:

Example `EditRampSchedule`:

Example `DeleteSegment`:

Example `ConvertToNonRampedGroup`:

To add or delete ramped line items from multiple group ramp segments, pass all the applicable values in the `graph` request. To refer to Connect API examples that specify actions to create ramp deals for groups, see [Group Ramp Action Input](#) on page 1336.

PersistPreferenceEnum Enum

Specifies whether to persist pricing changes for each sales transaction record. Available in API version 65.0 and later.

Enum Values

The `RevSalesTrxn.PersistPreferenceEnum` enum includes this value.

Value	Description
<code>Skip</code>	Skips the persistence of pricing changes for each sales transaction record. To persist pricing changes, specify <code>null</code> as the value in the method signature. If this value isn't specified, then request to persist pricing changes is performed by default.

Example `Skip`:

PlaceSalesTransactionException Class

Contains methods to hold the exception details for the place sales transaction request.

Namespace

[RevSalesTrxn](#)

[PlaceSalesTransactionException Methods](#)

Learn more about the methods available with the `PlaceSalesTransactionException` class.

PlaceSalesTransactionException Methods

Learn more about the methods available with the `PlaceSalesTransactionException` class.

The `PlaceSalesTransactionException` class includes these methods.

[getErrorCode\(\)](#)

Gets the error code that's associated to the place sales transaction request.

getErrorCode ()

Gets the error code that's associated to the place sales transaction request.

Signature

```
public String getErrorCode()
```

Return Value

Type: String

PlaceSalesTransactionExecutor Class

Contains methods to place a sales transaction with details of the graph request, pricing preferences, and configuration options.

Namespace

[RevSalesTrxn](#)

[PlaceSalesTransactionExecutor Methods](#)

Learn more about the methods available with the `PlaceSalesTransactionExecutor` class.

[PlaceSalesTransactionExecutor Example Implementation](#)

To place a sales transaction from Apex, refer to the example implementation of the `PlaceSalesTransactionExecutor` class.

PlaceSalesTransactionExecutor Methods

Learn more about the methods available with the `PlaceSalesTransactionExecutor` class.

The `PlaceSalesTransactionExecutor` class includes these methods.

[execute\(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId\)](#)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing references, and configurator options.

[execute\(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, catalogRatesPreferenceEnum\)](#)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing references, configurator options, and catalog rates.

[execute\(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, catalogRatesPreferenceEnum, taxPreferenceEnum, persistPreferenceEnum\)](#)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing and tax preferences, configurator options, and catalog rates.

[execute\(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, taxPreferenceEnum, persistPreferenceEnum, groupRampActionEnum\)](#)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing and tax preferences, configurator options, persist preference, and group ramp action.

[execute\(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, catalogRatesPreferenceEnum, taxPreferenceEnum, persistPreferenceEnum, groupRampActionEnum\)](#)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing and tax preferences, configurator options, catalog rates, persist preference, and group ramp action.

execute(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing references, and configurator options.

Signature

```
public static revsalestrxn.PlaceSalesTransactionResponse
execute(revsalestrxn.GraphRequest graphRequest, revsalestrxn.PricingPreferenceEnum
pricingPreferenceEnum, revsalestrxn.ConfigurationExecutionEnum
configurationExecutionEnum, revsalestrxn.ConfiguratorOptions configuratorOptions,
revsalestrxn.ContextId contextId)
```

Parameters

graphRequest

Type: [revsalestrxn.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [revsalestrxn.PricingPreferenceEnum](#)

Pricing preference during the sales transaction process.

configurationExecutionEnum

Type: [revsalestrxn.ConfigurationExecutionEnum](#)

Configuration method for the sales transaction request.

configuratorOptions

Type: [revsalestrxn.ConfigurationOptionsInput](#)

Configuration options during the creation of the sales transaction.

contextId

Type: String

Context ID to assign to the sales transaction.

Return Value

Type: [revsalestrxn.PlaceSalesTransactionResponse](#)

execute(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, catalogRatesPreferenceEnum)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing references, configurator options, and catalog rates.

Signature

[Usage Selling](#) must be enabled to use this signature.

```
public static revsalestrxn.PlaceSalesTransactionResponse
execute(revsalestrxn.GraphRequest graphRequest, revsalestrxn.PricingPreferenceEnum
pricingPreferenceEnum, revsalestrxn.ConfigurationExecutionEnum
configurationExecutionEnum, revsalestrxn.ConfiguratorOptions configuratorOptions,
revsalestrxn.ContextId contextId, revsalestrxn.CatalogRatesPreferenceEnum
catalogRatesPreferenceEnum)
```

Parameters

graphRequest

Type: [revsalestrxn.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [revsalestrxn.PricingPreferenceEnum](#)

Pricing preference during the sales transaction process.

configurationExecutionEnum

Type: [revsalestrxn.ConfigurationExecutionEnum](#)

Configuration method for the sales transaction request.

configuratorOptions

Type: [revsalestrxn.ConfigurationOptionsInput](#)

Configuration options during the creation of the sales transaction.

contextId

Type: String

Context ID to assign to the sales transaction.

catalogRatesPreferenceEnum

Type: [revsalestrxn.CatalogRatesPreferenceEnum](#)

Rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the place sales transaction process.

Return Value

Type: [revsalestrxn.PlaceSalesTransactionResponse](#)

execute(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, catalogRatesPreferenceEnum, taxPreferenceEnum, persistPreferenceEnum)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing and tax preferences, configurator options, and catalog rates.

Signature

[Usage Selling](#) must be enabled to use this signature.

```
public static revsalestrxn.PlaceSalesTransactionResponse
execute(revsalestrxn.GraphRequest graphRequest, revsalestrxn.PricingPreferenceEnum
pricingPreferenceEnum, revsalestrxn.ConfigurationExecutionEnum
configurationExecutionEnum, revsalestrxn.ConfiguratorOptions configuratorOptions,
revsalestrxn.ContextId contextId, revsalestrxn.CatalogRatesPreferenceEnum
catalogRatesPreferenceEnum, revsalestrxn.TaxPreferenceEnum taxPreferenceEnum,
revsalestrxn.PersistPreferenceEnum persistPreferenceEnum)
```

Parameters

graphRequest

Type: [revsalestrxn.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [revsalestrxn.PricingPreferenceEnum](#)

Pricing preference during the sales transaction process.

configurationExecutionEnum

Type: [revsalestrxn.ConfigurationExecutionEnum](#)

Configuration method for the sales transaction request.

configuratorOptions

Type: [revsalestrxn.ConfigurationOptionsInput](#)

Configuration options during the creation of the sales transaction.

contextId

Type: String

Context ID to assign to the sales transaction.

catalogRatesPreferenceEnum

Type: [revsalestrxn.CatalogRatesPreferenceEnum](#)

Rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the place sales transaction process.

taxPreferenceEnum

Type: [revsalestrxn.taxPreferenceEnum](#)

Tax preference during the sales transaction process. Available in API version 65.0 and later.

persistPreferenceEnum

Type: [revsalestrxn.persistPreferenceEnum](#)

Persist preference during the sales transaction process. Available in API version 65.0 and later.

Return Value

Type: [revsalestrxn.PlaceSalesTransactionResponse](#)

execute(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, taxPreferenceEnum, persistPreferenceEnum, groupRampActionEnum)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing and tax preferences, configurator options, persist preference, and group ramp action.

Signature

```
public static revsalestrxn.PlaceSalesTransactionResponse
execute(revsalestrxn.GraphRequest graphRequest, revsalestrxn.PricingPreferenceEnum
pricingPreferenceEnum, revsalestrxn.ConfigurationExecutionEnum
configurationExecutionEnum, revsalestrxn.ConfiguratorOptions configuratorOptions,
revsalestrxn.ContextId contextId, revsalestrxn.TaxPreferenceEnum taxPreferenceEnum,
revsalestrxn.PersistPreferenceEnum persistPreferenceEnum,
revsalestrxn.GroupRampActionEnum groupRampActionEnum)
```

Parameters

graphRequest

Type: [revsalestrxn.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [revsalestrxn.PricingPreferenceEnum](#)

Pricing preference during the sales transaction process.

configurationExecutionEnum

Type: [revsalestrxn.ConfigurationExecutionEnum](#)

Configuration method for the sales transaction request.

configuratorOptions

Type: [revsalestrxn.ConfigurationOptionsInput](#)

Configuration options during the creation of the sales transaction.

contextId

Type: String

Context ID to assign to the sales transaction.

taxPreferenceEnum

Type: [revsalestrxn.taxPreferenceEnum](#)

Tax preference during the sales transaction process. Available in API version 65.0 and later.

persistPreferenceEnum

Type: [revsalestrxn.persistPreferenceEnum](#)

Persist preference during the sales transaction process. Available in API version 65.0 and later.

groupRampActionEnum

Type: [revsalestrxn.GroupRampActionEnum](#)

Specifies the action that you want to perform on group ramp segments.

Return Value

Type: [revsalestrxn.PlaceSalesTransactionResponse](#)

execute(graphRequest, pricingPreferenceEnum, configurationExecutionEnum, configuratorOptions, contextId, catalogRatesPreferenceEnum, taxPreferenceEnum, persistPreferenceEnum, groupRampActionEnum)

Use the method in the `PlaceSalesTransactionExecutor` class to execute the Place Sales Transaction Apex API request by assigning the properties for graph request, pricing and tax preferences, configurator options, catalog rates, persist preference, and group ramp action.

Signature

[Usage Selling](#) must be enabled to use this signature.

```
public static revsalestrxn.PlaceSalesTransactionResponse
execute(revsalestrxn.GraphRequest graphRequest, revsalestrxn.PricingPreferenceEnum
pricingPreferenceEnum, revsalestrxn.ConfigurationExecutionEnum
configurationExecutionEnum, revsalestrxn.ConfiguratorOptions configuratorOptions,
revsalestrxn.ContextId contextId, revsalestrxn.CatalogRatesPreferenceEnum
catalogRatesPreferenceEnum, revsalestrxn.TaxPreferenceEnum taxPreferenceEnum,
revsalestrxn.PersistPreferenceEnum persistPreferenceEnum,
revsalestrxn.GroupRampActionEnum groupRampActionEnum)
```

Parameters

graphRequest

Type: [revsalestrxn.GraphRequest](#)

The sObject graph values of the order payload to be ingested.

pricingPreferenceEnum

Type: [revsalestrxn.PricingPreferenceEnum](#)

Pricing preference during the sales transaction process.

configurationExecutionEnum

Type: [revsalestrxn.ConfigurationExecutionEnum](#)

Configuration method for the sales transaction request.

configuratorOptions

Type: [revsalestrxn.ConfigurationOptionsInput](#)

Configuration options during the creation of the sales transaction.

contextId

Type: String

Context ID to assign to the sales transaction.

catalogRatesPreferenceEnum

Type: [revsalestrxn.CatalogRatesPreferenceEnum](#)

Rate card entries defined in the catalog that must be fetched for quote line items, with usage-based selling during the place sales transaction process.

taxPreferenceEnum

Type: [revsalestrxn.taxPreferenceEnum](#)

Tax preference during the sales transaction process. Available in API version 65.0 and later.

persistPreferenceEnum

Type: [revsalestrxn.persistPreferenceEnum](#)

Persist preference during the sales transaction process. Available in API version 65.0 and later.

groupRampActionEnum

Type: [revsalestrxn.GroupRampActionEnum](#)

Specifies the action that you want to perform on group ramp segments.

Return Value

Type: [revsalestrxn.PlaceSalesTransactionResponse](#)

PlaceSalesTransactionExecutor Example Implementation

To place a sales transaction from Apex, refer to the example implementation of the `PlaceSalesTransactionExecutor` class.

Namespace

[RevSalesTrxn](#)

Usage

Customize this example to suit your requirements. Create the list of records to be ingested by using these steps. Replace the respective IDs with the values that are present in your org. For example, replace the value of `Pricebook2Id` field with the price book ID that's present in the org.



Example: This example shows a sample request to create a sales transaction, update a quote with a quote line item, delete a quote line item, or skip or persist pricing changes. It includes these steps.

- Set up a quote and quote line item.
- To create a quote line relationship, create an instance of the `RecordResource` class. To create an object with its fields, specify the object that you want to create by using POST method. Create a map of the fields and its values by using `put(key, value)` operation. Assign this field map to the record object.

- To update an object's specific fields, specify the object you want to update by using the PATCH method along with the ID of the object. Create a map of the fields and its values by using put(key, value) operation. Only certain fields on an object can be updated. Add the fields that you want to update to the map. Assign this field map to the record object.
- To associate the Record object with a reference identifier, create an instance of the RecordWithReferenceRequest class.
- To contain all record objects, create an instance of the GraphRequest class.

```

public class PlaceSalesTransactionTest {
    public static void callPSTAPI_Post() {
        RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SYSTEM;
        RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SYSTEM;

        //Quote setup
        RevSalesTrxn.RecordResource quoteRecord = new
RevSalesTrxn.RecordResource(Quote.getSubjectType(), 'POST');
        Map<String, Object> quoteFieldValues = new Map<String, Object>();
        quoteFieldValues.put('Name', 'q-ap12');
        quoteFieldValues.put('OpportunityId', '006xx000001a3e8AAA');
        quoteFieldValues.put('Pricebook2Id', '01sDU000000JRX8YAO');
        quoteRecord.fieldValues = quoteFieldValues;

        //Quote line item setup

        //1st quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord1 = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(), 'POST');
        Map<String, Object> quoteLineItemFieldValues = new Map<String, Object>();
        quoteLineItemFieldValues.put('Product2Id', '01txx0000006i7JAAQ');
        quoteLineItemFieldValues.put('PricebookEntryId', '01luxx0000008yc6AAA');
        quoteLineItemFieldValues.put('Quantity', '2.0');
        quoteLineItemFieldValues.put('UnitPrice', '1000');
        quoteLineItemFieldValues.put('StartDate', '2025-03-15');
        quoteLineItemFieldValues.put('QuoteId', '@{refQuote.id}');
        quoteLineItemRecord1.fieldValues = quoteLineItemFieldValues;
        RevSalesTrxn.RecordWithReferenceRequest quoteItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuote', quoteRecord);
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords1 = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem1', quoteLineItemRecord1);

        //2nd quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord2 = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(), 'POST');
        Map<String, Object> quoteLineItemFieldValues2 = new Map<String, Object>();
        quoteLineItemFieldValues2.put('Product2Id', '01txx0000006i7RAAQ');
        quoteLineItemFieldValues2.put('PricebookEntryId', '01luxx0000008ybvAAA');
        quoteLineItemFieldValues2.put('Quantity', '2.0');
        quoteLineItemFieldValues2.put('UnitPrice', '7.0');
        quoteLineItemFieldValues2.put('StartDate', '2025-03-15');
        quoteLineItemFieldValues2.put('QuoteId', '@{refQuote.id}');
        quoteLineItemRecord2.fieldValues = quoteLineItemFieldValues2;
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords2 = new

```

```

RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem2',quoteLineItemRecord2);

    List<RevSalesTrxn.RecordWithReferenceRequest> listOfRecords = new
List<RevSalesTrxn.RecordWithReferenceRequest>();
    listOfRecords.add(quoteItemRecords);
    listOfRecords.add(quoteLineItemRecords1);
    listOfRecords.add(quoteLineItemRecords2);

    RevSalesTrxn.GraphRequest graph = new
RevSalesTrxn.GraphRequest('test',listOfRecords);
    System.debug(graph);

    //Place sales transaction API call - There are different executor signatures
detailed in the documentation
    RevSalesTrxn.PlaceSalesTransactionResponse resp =
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null, null,
null, null);
    //If you do not have Usage Based Selling Feature, you can use the signatures
without catalog rates enum
    //RevSalesTrxn.PlaceSalesTransactionResponse resp =
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null);
    System.debug(resp);
}

public static void callPSTAPI_Post_Skip_Tax_Skip_Persist() {
    RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SYSTEM;
    RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SYSTEM;
    RevSalesTrxn.TaxPreferenceEnum taxPrefEnum = RevSalesTrxn.TaxPreferenceEnum.SKIP;

    RevSalesTrxn.PersistPreferenceEnum persistPrefEnum =
RevSalesTrxn.PersistPreferenceEnum.SKIP;

    //Quote setup
    RevSalesTrxn.RecordResource quoteRecord = new
RevSalesTrxn.RecordResource(Quote.getSubjectType(),'POST');
    Map<String,Object> quoteFieldValues = new Map<String,Object>();
    quoteFieldValues.put('Name','q-apl2');
    quoteFieldValues.put('OpportunityId','006xx000001a3e8AAA');
    quoteFieldValues.put('Pricebook2Id','01sDU000000JRX8YAO');
    quoteRecord.fieldValues = quoteFieldValues;

    //Quote line item setup

    //1st quote line item
    RevSalesTrxn.RecordResource quoteLineItemRecord1 = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(),'POST');
    Map<String,Object> quoteLineItemFieldValues = new Map<String,Object>();
    quoteLineItemFieldValues.put('Product2Id','01txx0000006i7JAAQ');
    quoteLineItemFieldValues.put('PricebookEntryId','01luxx0000008yc6AAA');

```

```

        quoteLineItemFieldValues.put('Quantity', '2.0');
        quoteLineItemFieldValues.put('UnitPrice', '1000');
        quoteLineItemFieldValues.put('StartDate', '2025-03-15');
        quoteLineItemFieldValues.put('QuoteId', '@{refQuote.id}');
        quoteLineItemRecord1.fieldValues = quoteLineItemFieldValues;
        RevSalesTrxn.RecordWithReferenceRequest quoteItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuote', quoteRecord);
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords1 = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem1', quoteLineItemRecord1);

        //2nd quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord2 = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(), 'POST');
        Map<String, Object> quoteLineItemFieldValues2 = new Map<String, Object>();
        quoteLineItemFieldValues2.put('Product2Id', '01txx0000006i7RAAQ');
        quoteLineItemFieldValues2.put('PricebookEntryId', '01luxx0000008ybvAAA');
        quoteLineItemFieldValues2.put('Quantity', '2.0');
        quoteLineItemFieldValues2.put('UnitPrice', '7.0');
        quoteLineItemFieldValues2.put('StartDate', '2025-03-15');
        quoteLineItemFieldValues2.put('QuoteId', '@{refQuote.id}');
        quoteLineItemRecord2.fieldValues = quoteLineItemFieldValues2;
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords2 = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem2', quoteLineItemRecord2);

        List<RevSalesTrxn.RecordWithReferenceRequest> listOfRecords = new
List<RevSalesTrxn.RecordWithReferenceRequest>();
        listOfRecords.add(quoteItemRecords);
        listOfRecords.add(quoteLineItemRecords1);
        listOfRecords.add(quoteLineItemRecords2);

        RevSalesTrxn.GraphRequest graph = new
RevSalesTrxn.GraphRequest('test', listOfRecords);
        System.debug(graph);

        //Place sales transaction API call
        RevSalesTrxn.PlaceSalesTransactionResponse resp =
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null, null,
taxPrefEnum, persistPrefEnum);
        System.debug(resp);
    }

    public static void callPSTAPI_Patch() {

        // Apex test to update a quote with a quote line item
        RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SYSTEM;
        RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SYSTEM;

        //Quote setup
        RevSalesTrxn.RecordResource quoteRecord = new
RevSalesTrxn.RecordResource(Quote.getSubjectType(), 'PATCH', '0Q0xx0000004CysCAM');

```



```

        RevSalesTrxn.RecordWithReferenceRequest quoteItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuote', quoteRecord);

        //Quote line item setup
        //New quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(), 'POST');
        Map<String, Object> quoteLineItemFieldValues = new Map<String, Object>();
        quoteLineItemFieldValues.put('Product2Id', '01txx0000006i7KAAQ');
        quoteLineItemFieldValues.put('PricebookEntryId', '01uxx0000008ycFAAQ');
        quoteLineItemFieldValues.put('Quantity', '2.0');
        quoteLineItemFieldValues.put('UnitPrice', '7.0');
        quoteLineItemFieldValues.put('StartDate', '2025-03-15');
        quoteLineItemFieldValues.put('QuoteId', '@{refQuote.id}');
        quoteLineItemRecord.fieldValues = quoteLineItemFieldValues;
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem', quoteLineItemRecord);
        List<RevSalesTrxn.RecordWithReferenceRequest> listOfRecords = new
List<RevSalesTrxn.RecordWithReferenceRequest>();
        listOfRecords.add(quoteItemRecords);
        listOfRecords.add(quoteLineItemRecords);
        RevSalesTrxn.GraphRequest graph = new RevSalesTrxn.GraphRequest('test',
listOfRecords);

        //Place sales transaction API call
        RevSalesTrxn.PlaceSalesTransactionResponse resp =
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null, null,
null, null);
        System.debug(resp);
    }

    public static void callPSTAPI_Patch_Skip_Config_Skip_Pricing() {

        // Apex test to update a quote with a quote line item
        RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SKIP;
        RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SKIP;

        //Quote setup
        RevSalesTrxn.RecordResource quoteRecord = new
RevSalesTrxn.RecordResource(Quote.getSubjectType(), 'PATCH', '0Q0xx0000004CYsCAM');
        RevSalesTrxn.RecordWithReferenceRequest quoteItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuote', quoteRecord);

        //Quote line item setup
        //New quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(), 'POST');
        Map<String, Object> quoteLineItemFieldValues = new Map<String, Object>();
        quoteLineItemFieldValues.put('Product2Id', '01txx0000006i7KAAQ');
        quoteLineItemFieldValues.put('PricebookEntryId', '01uxx0000008ycFAAQ');
        quoteLineItemFieldValues.put('Quantity', '2.0');

```

```

        quoteLineItemFieldValues.put('UnitPrice','7.0');
        quoteLineItemFieldValues.put('StartDate','2025-03-15');
        quoteLineItemFieldValues.put('QuoteId','@{refQuote.id}');
        quoteLineItemRecord.fieldValues = quoteLineItemFieldValues;
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem',quoteLineItemRecord);
        List<RevSalesTrxn.RecordWithReferenceRequest> listOfRecords = new
List<RevSalesTrxn.RecordWithReferenceRequest>();
        listOfRecords.add(quoteItemRecords);
        listOfRecords.add(quoteLineItemRecords);
        RevSalesTrxn.GraphRequest graph = new RevSalesTrxn.GraphRequest('test',
listOfRecords);

        //Place sales transaction API call
        RevSalesTrxn.PlaceSalesTransactionResponse resp =
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null, null,
null, null);
        System.debug(resp);
    }

    public static void callPSTAPI_Patch_With_ContextId() {

        // Apex test to update a quote with a quote line item
        RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SYSTEM;
        RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SYSTEM;

        //Quote setup
        String contextId = 'MY_CONTEXT_ID';
        RevSalesTrxn.RecordResource quoteRecord = new
RevSalesTrxn.RecordResource(Quote.getSubjectType(),'PATCH','0Q0xx0000004CYsCAM');
        RevSalesTrxn.RecordWithReferenceRequest quoteItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuote',quoteRecord);

        //Quote line item setup
        //New quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(),'POST');
        Map<String,Object> quoteLineItemFieldValues = new Map<String,Object>();
        quoteLineItemFieldValues.put('Product2Id','01txx0000006i7KAAQ');
        quoteLineItemFieldValues.put('PricebookEntryId','01luxx0000008ycFAAQ');
        quoteLineItemFieldValues.put('Quantity','2.0');
        quoteLineItemFieldValues.put('UnitPrice','7.0');
        quoteLineItemFieldValues.put('StartDate','2025-03-15');
        quoteLineItemFieldValues.put('QuoteId','@{refQuote.id}');
        quoteLineItemRecord.fieldValues = quoteLineItemFieldValues;
        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem',quoteLineItemRecord);
        List<RevSalesTrxn.RecordWithReferenceRequest> listOfRecords = new
List<RevSalesTrxn.RecordWithReferenceRequest>();
        listOfRecords.add(quoteItemRecords);
        listOfRecords.add(quoteLineItemRecords);
    }

```

```

        RevSalesTrxn.GraphRequest graph = new RevSalesTrxn.GraphRequest('test',
listOfRecords);

        //Place sales transaction API call
        RevSalesTrxn.PlaceSalesTransactionResponse resp =
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), contextId,
null, null, null);
        System.debug(resp);
    }

    public static void callPSTAPI_Delete() {

        // Apex test to update a quote with a quote line item
        RevSalesTrxn.PricingPreferenceEnum pricingPrefEnum =
RevSalesTrxn.PricingPreferenceEnum.SYSTEM;
        RevSalesTrxn.ConfigurationExecutionEnum configurationExecutionEnum =
RevSalesTrxn.ConfigurationExecutionEnum.SYSTEM;

        //Quote setup
        RevSalesTrxn.RecordResource quoteRecord = new
RevSalesTrxn.RecordResource(Quote.getSubjectType(), 'PATCH', '0Q0xx0000004CYsCAM');
        RevSalesTrxn.RecordWithReferenceRequest quoteItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuote', quoteRecord);

        //Quote line item setup
        //Delete a quote line item
        RevSalesTrxn.RecordResource quoteLineItemRecord = new
RevSalesTrxn.RecordResource(QuoteLineItem.getSubjectType(), 'DELETE', '0QLxx0000004CYsCAM');

        RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords = new
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem', quoteLineItemRecord);
        List<RevSalesTrxn.RecordWithReferenceRequest> listOfRecords = new
List<RevSalesTrxn.RecordWithReferenceRequest>();
        listOfRecords.add(quoteItemRecords);
        listOfRecords.add(quoteLineItemRecords);
        RevSalesTrxn.GraphRequest graph = new
RevSalesTrxn.GraphRequest('test', listOfRecords);

        //Place sales transaction API call
        RevSalesTrxn.PlaceSalesTransactionResponse resp =
        RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null, null,
null, null);
        System.debug(resp);
    }
}

```

PlaceSalesTransactionResponse Class

Contains properties to hold the response to the place sales transaction request.

Namespace

[RevSalesTrxn](#)

Example

```
RevSalesTrxn.PlaceSalesTransactionResponse resp =  
RevSalesTrxn.PlaceSalesTransactionExecutor.execute(graph, pricingPrefEnum,  
configurationExecutionEnum, new RevSalesTrxn.ConfigurationOptionsInput(), null);
```

[PlaceSalesTransactionResponse Properties](#)

Learn more about the available properties with the PlaceSalesTransactionResponse class.

PlaceSalesTransactionResponse Properties

Learn more about the available properties with the PlaceSalesTransactionResponse class.

The PlaceSalesTransactionResponse class includes these properties.

[contextDetails](#)

Get the details of the context that's created for the sales transaction.

[errorResponse](#)

Get the list of errors encountered during the synchronous processing of the API request.

[isSuccess](#)

Get the request status of the synchronous part of the processing.

[salesTransactionId](#)

Get the ID of the sales transaction, such as a quote or an order.

[statusUrl](#)

Get the asynchronous status URL of the request, if available.

[trackerId](#)

Get the unique identifier assigned to a specific operation or request that's used for tracking and referencing the operation.

contextDetails

Get the details of the context that's created for the sales transaction.

Signature

```
public ConnectApi.ContextDetails contextDetails {get; set;}
```

Property Value

Type: ConnectApi.ContextDetails

errorResponse

Get the list of errors encountered during the synchronous processing of the API request.

Signature

```
public List<ConnectApi.PlaceSalesTransactionErrorResponse> errorResponse {get; set;}
```

Property Value

Type: List<ConnectApi.PlaceSalesTransactionErrorResponse>

isSuccess

Get the request status of the synchronous part of the processing.

Signature

```
public Boolean isSuccess {get; set;}
```

Property Value

Type: Boolean

Indicates whether the synchronous part of the processing is successful (`true`) or not (`false`).

salesTransactionId

Get the ID of the sales transaction, such as a quote or an order.

Signature

```
public String salesTransactionId {get; set;}
```

Property Value

Type: String

statusUrl

Get the asynchronous status URL of the request, if available.

Signature

```
public String statusUrl {get; set;}
```

Property Value

Type: String

trackerId

Get the unique identifier assigned to a specific operation or request that's used for tracking and referencing the operation.

Signature

```
public String trackerId {get; set;}
```

Property Value

Type: String

PricingPreferenceEnum Enum

Specifies the pricing preference during the creation of a sales transaction.

Usage

Used by the [PlaceSalesTransactionExecutor](#) class.

Enum Values

The `RevSalesTrxn.PricingPreferenceEnum` enum includes these values.

Value	Description
Force	Specifies to enforce pricing during the creation of sales transactions.
Skip	Specifies to skip pricing during the creation of sales transactions.
System	Specifies the system to determine whether a pricing calculation is required. The default value is <code>System</code> .

Example Force:

Example Skip:

Example System:

RecordResource Class

Contains constructors and properties to create a record object from the field values of a sales transaction.

Namespace

[RevSalesTrxn](#)

Example

```
RevSalesTrxn.RecordResource quoteRecord = new  
RevSalesTrxn.RecordResource(Quote.getSubjectType(), 'POST');
```

[RecordResource Constructors](#)

Learn more about the available constructors with the `RecordResource` class.

[RecordResource Properties](#)

Learn more about the available properties with the RecordResource class.

RecordResource Constructors

Learn more about the available constructors with the RecordResource class.

The `RecordResource` class has these constructors.

[RecordResource\(type, method, groupAction, criteria\)](#)

Creates an instance of the RecordResource class to assign values to the fields of a sales transaction by using the sObject type, API method, and sales transaction ID properties. Additionally, you can group order or quote line items based on a criteria by using the groupAction and criteria properties.

[RecordResource\(type, method, id\)](#)

Creates an instance of the RecordResource class to assign values to the fields of a sales transaction by using the sObject type, API method, and sales transaction ID properties.

[RecordResource\(type, method\)](#)

Creates an instance of the RecordResource class to assign the values to the fields of a sales transaction by using the sObject type and API method properties.

RecordResource(type, method, groupAction, criteria)

Creates an instance of the RecordResource class to assign values to the fields of a sales transaction by using the sObject type, API method, and sales transaction ID properties. Additionally, you can group order or quote line items based on a criteria by using the groupAction and criteria properties.

Signature

```
public RecordResource(Schema.SObjectType type, String method, String groupAction,
Map<String,ANY> criteria)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the sObject describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST, PATCH, or DELETE.

groupAction

Type: String

Action to group order or quote line items. Valid values are:

- `GroupBy`
- `Group`

- Ungroup
- GroupAll
- DeleteGroup

criteria

Type: Map<String,ANY>

Criteria to group order or quote line items. For example, group order or quote line items based on a monthly billing frequency.

RecordResource(type, method, id)

Creates an instance of the RecordResource class to assign values to the fields of a sales transaction by using the sObject type, API method, and sales transaction ID properties.

Signature

```
public RecordResource(Schema.SObjectType type, String method, Id id)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the sObject describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST, PATCH, or DELETE.

id

Type: Id

ID of the sales transaction, such as a quote or an order.

RecordResource(type, method)

Creates an instance of the RecordResource class to assign the values to the fields of a sales transaction by using the sObject type and API method properties.

Signature

```
public RecordResource(Schema.SObjectType type, String method)
```

Parameters

type

Type: [Schema.SObjectType](#)

Object that's returned from the field describe result using the `getReferenceTo()` method or from the sObject describe result using the `getSObjectType()` method.

method

Type: String

Method for the API request, such as POST, PATCH, or DELETE.

RecordResource Properties

Learn more about the available properties with the RecordResource class.

The `RecordResource` class includes these properties.

[criteria](#)

Set the criteria property to group order or quote line items. For example, group order or quote line items based on a monthly billing frequency.

[fieldValues](#)

Set the fieldValues property to assign values to the fields to update the sales transaction.

[groupAction](#)

Set the groupAction property to group order or quote line items.

[id](#)

Set the id property to assign the ID of the sales transaction record.

[method](#)

Set the method property to specify the API request method, such as POST, PATCH, or DELETE.

[type](#)

Set the type property to assign the object type that's returned from the field describe result by using the `getReferenceTo()` method or from the `sObject` describe result by using the `getSObjectType()` method.

criteria

Set the criteria property to group order or quote line items. For example, group order or quote line items based on a monthly billing frequency.

Signature

```
public Map<String,ANY> criteria {get; set;}
```

Property Value

Type: Map<String,ANY>

fieldValues

Set the fieldValues property to assign values to the fields to update the sales transaction.

Signature

```
public Map<String,ANY> fieldValues {get; set;}
```

Property Value

Type: ListMap<String,ANY>

groupAction

Set the groupAction property to group order or quote line items.

You can group order or quote line items based on location, work types, or departments, if groups are enabled for your org. Groups provide a visualization of the products to view large quotes.

Signature

```
public String groupAction {get; set;}
```

Property Value

Type: String

Valid values are:

- GroupBy
- Group
- Ungroup
- GroupAll
- DeleteGroup

id

Set the id property to assign the ID of the sales transaction record.

Signature

```
public String id {get; set;}
```

Property Value

Type: String

method

Set the method property to specify the API request method, such as POST, PATCH, or DELETE.

Signature

```
public String method {get; set;}
```

Property Value

Type: String

type

Set the type property to assign the object type that's returned from the field describe result by using the getReferenceTo() method or from the sObject describe result by using the getSObjectType() method.

Signature

```
public Schema.ObjectType type {get; set;}
```

Property Value

Type: [Schema.ObjectType](#)

RecordWithReferenceRequest Class

Contains constructors and properties to associate a record object with a reference identifier.

Namespace

[RevSalesTrxn](#)

Example

```
RevSalesTrxn.RecordWithReferenceRequest quoteLineItemRecords = new  
RevSalesTrxn.RecordWithReferenceRequest('refQuoteItem', quoteLineItemRecord);
```

[RecordWithReferenceRequest Constructors](#)

Learn more about the available constructors with the RecordWithReferenceRequest class.

[RecordWithReferenceRequest Properties](#)

Learn more about the available properties with the RecordWithReferenceRequest class.

RecordWithReferenceRequest Constructors

Learn more about the available constructors with the RecordWithReferenceRequest class.

The `RecordWithReferenceRequest` class includes these constructors.

[RecordWithReferenceRequest\(referenceId, record\)](#)

Creates an instance of the RecordWithReferenceRequest class to associate a record object with a reference identifier by using the referenceId and record object properties.

RecordWithReferenceRequest(referenceId, record)

Creates an instance of the RecordWithReferenceRequest class to associate a record object with a reference identifier by using the referenceId and record object properties.

Signature

```
public RecordWithReferenceRequest(String referenceId, RevSalesTrxn.RecordResource  
record)
```

Parameters

referenceId

Type: String

Reference ID that maps to the subrequest response and can be used to reference the response in subsequent subrequests. You can reference the `referenceId` in either the body or URL of a subrequest. Use this syntax to include a reference: `@{referenceId.FieldName}`. See [referenceId property of a composite subrequest](#).

record

Type: [RevSalesTrxn.RecordResource](#)

Record object that's defined using the `RecordResource` class.

RecordWithReferenceRequest Properties

Learn more about the available properties with the `RecordWithReferenceRequest` class.

The `RecordWithReferenceRequest` class has these properties.

[record](#)

Set the `record` property to specify the record object that's defined by using the `RecordResource` class.

[referenceId](#)

Set the `referenceId` property to specify the reference ID that maps to the subrequest response. This reference ID can be used to reference the response in subsequent subrequests.

record

Set the `record` property to specify the record object that's defined by using the `RecordResource` class.

Signature

```
public RevSalesTrxn.RecordResource record {get; set;}
```

Property Value

Type: [RevSalesTrxn.RecordResource](#)

referenceId

Set the `referenceId` property to specify the reference ID that maps to the subrequest response. This reference ID can be used to reference the response in subsequent subrequests.

Signature

```
public String referenceId {get; set;}
```

Property Value

Type: String

TaxPreferenceEnum Enum

Specifies whether to execute or skip the tax calculation step for each sales transaction record. Available in API version 65.0 and later.

Enum Values

The `RevSalesTrxn.TaxPreferenceEnum` enum includes this value.

Value	Description
Skip	Specifies to skip tax calculation request for each sales transaction record. If this value isn't specified, then tax calculation request is performed by default.

Example Skip:

Transaction Management Standard Invocable Actions

Learn more about the standard invocable actions available with Transaction Management.

[Create Contract Action](#)

Create a contract from a specific quote record.

[Create or Update Asset From Order Action](#)

Create an asset for each order item in the specified order. New assets are created for a new order. Modify existing assets for change order requests, such as a renewal or a cancellation.

[Create or Update Asset From Order Item Action](#)

Create assets from individual order items within an order. Track assets after the individual line items of an order reach a certain stage in their lifecycle, such as submitted, fulfilled, or provisioned. If the order item is part of a renewal, an amendment, or a cancellation, existing assets are changed.

[Create Order From Quote Action](#)

Create a draft order from a quote record.

[Create Orders From Quote Action](#)

Create multiple orders from a single quote instead of a single order, ensuring easier order management and fulfillment operations.

[Deep Clone Sales Transaction](#)

Clone a quote or an order, including full object graph with related objects, selected lines, or selected groups.

[Get Renewable Assets Summary Action](#)

Retrieve details about renewable assets in a given order. You can use this information to create renewal opportunities.

[Initiate Amendment Action](#)

Initiate and execute the amendment of an asset.

[Initiate Cancellation Action](#)

Initiate and execute the cancellation of an asset.

[Initiate Renewal Action](#)

Initiate and execute the renewal of an asset.

[Initiate Rollback on Last Action](#)

Initiate the reversal of the last action on an asset to rectify any transactional errors or to meet changing business requirements.

[Initiate Transfer Action](#)

Transfer an asset or multiple assets from one account to another.

[Sync Quote to Opportunity Action](#)

Sync quote line items to the matching opportunity line items so that forecasts stay up to date.

SEE ALSO:

[Actions Developer Guide: Overview](#)

[REST API Developer Guide: Invocable Actions Standard](#)

Create Contract Action

Create a contract from a specific quote record.

This action is available in API version 60.0 and later.

Special Access Rules

The Create Contract action is available in Developer, Enterprise, and Unlimited Editions of Revenue Management.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/createContract`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>contractPriceOption</code>	string	Optional. Determines how the contract price is set for quote line items based on the selected value. Valid values are <code>CONTRACT_HEADER_ONLY</code> —Creates a contract with only the header information, without using net prices or discounts, <code>NET_UNIT_PRICE_ONLY</code> —Creates a contract specifically for quote line items with a net unit price, saving all net unit prices of the quote as contract prices, or <code>DISCOUNT_ONLY</code> —Creates contract prices specifically for quote line items with discounts, saving all discounts of the quote as contract prices. The default value is <code>CONTRACT_HEADER_ONLY</code> .
<code>sourceId</code>	string	Required. ID of the quote or order that you want to create a contract from.

Outputs

Output	Type	Description
<code>contractId</code>	string	ID of the contract created for the specified order or quote.

Example

POST

This sample request is for the Create Contract action.

```
{
  "inputs": [
    {
      "sourceId": "0Q0RO0000003LyU",
      "contractPriceOption": "NET_UNIT_PRICE_ONLY"
    }
  ]
}
```

This sample response is for the Create Contract action.

```
[
  {
    "actionName": "createContract",
    "errors": null,
    "isSuccess": true,
    "outputValues": {
      "contractId": "800XXX123456789"
    }
  }
]
```

SEE ALSO:

[Salesforce Help: Use a Custom Flow to Create Contracts](#)

Create or Update Asset From Order Action

Create an asset for each order item in the specified order. New assets are created for a new order. Modify existing assets for change order requests, such as a renewal or a cancellation.

When the custom product name for an order line item has a value, the asset name is set to custom product name.

This action is available in API version 60.0 and later.

Special Access Rules

You need the Assetize Order permission set to use this invocable action.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/createOrUpdateAssetFromOrder

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer **token**

Inputs

Input	Type	Description
orderId	string	Required. ID of the order.

Outputs

Output	Type	Description
requestId	string	ID of the request to create an asset.

Example

POST

This sample request is for the Create or Update Asset From Order action.

```
{
  "inputs": [
    {
      "orderId": "801DE000000oJfAYAU"
    }
  ]
}
```

This sample response is for the Create or Update Asset From Order action.

```
[
  {
    "actionName": "createOrUpdateAssetFromOrder",
    "errors": null,
    "isSuccess": true,
    "outputValues": {
      "requestId": "3b89392d-6987-40d9-9190-d18fdb5cb849"
    }
  }
]
```

Create or Update Asset From Order Item Action

Create assets from individual order items within an order. Track assets after the individual line items of an order reach a certain stage in their lifecycle, such as submitted, fulfilled, or provisioned. If the order item is part of a renewal, an amendment, or a cancellation, existing assets are changed.

This action is available in API version 60.0 and later.

Special Access Rules

You need the Assetize Order permission set to use this invocable action.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/createOrUpdateAssetFromOrderItem

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
orderId	string	Required. ID of the order.

Outputs

Output	Type	Description
requestId	string	ID of the request to create an asset.

Example

POST

This sample request is for the Create or Update Asset From Order Item action.

```
{
  "inputs": [
    {
      "orderItemIds": ["802SG000002HixxYAC"]
    }
  ]
}
```

This sample response is for the Create or Update Asset From Order Item action.

```
{
  "actionName": "createOrUpdateAssetFromOrderItem",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "requestId": "b2a2b4b9-845b-4078-980a-759308389604"
  },
  "version": 1
}
```

Create Order From Quote Action

Create a draft order from a quote record.

This action is available in API version 60.0 and later.

 **Note:** This API has been deprecated as of API version 65.0. In API version 65.0 and later, use the [Create Orders From Quote Action](#).

Special Access Rules

The Create Order From Quote action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/createOrderFromQuote

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
quoteRecordId	id	Required. ID of the quote record.

Outputs

Output	Type	Description
orderId	string	ID of the created draft order.
orderNumber	string	Unique order number of the created draft order.
requestId	string	ID of the request.

Example

POST

This sample request is for the Create Order From Quote action.

```
{
  "inputs": [
    {
      "quoteRecordId": "0Q0D200000000DhKAI"
    }
  ]
}
```

This sample response is for the Create Order From Quote action.

```
[
  {
    "actionName": "createOrderFromQuote",
    "errors": null,
  }
]
```

```
[
  {
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "orderNumber": "00000122",
      "orderId": "801oB000000DCrNQAW"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Create Orders From Quote Action

Create multiple orders from a single quote instead of a single order, ensuring easier order management and fulfillment operations.

- You can create an order by selecting a subset of quote line items.
- You can split a quote into multiple orders based on quote line group.
- You can split a quote into multiple orders based on a quote line item field, such as Product2.

See [Considerations for Creating Multiple Orders from a Quote](#). This action is available in API version 65.0 and later.

Special Access Rules

Ensure the **Advanced Order Creation From Quote** toggle from Revenue Settings from Setup is enabled to access this action.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/createOrdersFromQuote

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
orderCreationMethod	string	If specified, represents the method used to create orders. Valid values are <code>CreateSingleOrder</code> —Creates a single order from a quote. This method creates the order header and order line items synchronously; <code>CreateOrderByGroup</code> —Create multiple orders based on a quote line group; or <code>CreateOrderByField</code> —Create multiple orders based on a specified quote line item field. If you're creating multiple orders from a quote, the order header records are created synchronously and order line items are created asynchronously. If unspecified, the default value is <code>CreateSingleOrder</code> .
orderCreationParameters	Apex-defined	An Apex <code>ConnectApi.OrderCreationParametersInputRepresentation</code>

Input	Type	Description
		record that contains the additional parameters required by the specified order creation method.
quoteId	id	Required. The ID of the source quote tied to the orders created.
quoteLineItemIds	id	List of quote line item IDs to create the orders from. If specified, the orders are created for the list of provided quote line items. If unspecified, orders are created for all quote line items.

Outputs

Output	Type	Description
orderIds	id	List of the created order IDs.
requestId	string	The request ID used to query the async status.
statusUrl	string	The status URL that's used to track the async status.

Examples

Create a Partial Order From a Quote

This example shows a sample request to create a partial order from a quote.

```
{
  "inputs": [
    {
      "quoteId": "0Q0DU0000005tJc0AI",
      "quoteLineItemIds": [
        "0QLDU000000ay2G4AQ",
        "0QLDU000000ay2n4AA"
      ],
      "orderCreationMethod": "CreateSingleOrder"
    }
  ]
}
```

This example shows a sample successful response.

```
{
  "actionName": "createOrdersFromQuote",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": {
    "requestId": null,
    "statusUrl": null,
    "orderIds": [
      "801DU000000EYySYAW"
    ]
  }
}
```

```

    ]
  },
  "sortOrder": -1,
  "version": 1
}

```

Create Orders From a Quote Based on a Quote Line Group

This example shows a sample request to create orders from a quote based on a quote line group.

```

{
  "inputs": [
    {
      "quoteId": "0Q0DU0000005tJk0AI",
      "orderCreationMethod": "CreateOrderByGroup"
    }
  ]
}

```

This example shows a sample successful response.

```

{
  "actionName": "createOrdersFromQuote",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": {
    "requestId": "16PRM0000004DBq",
    "orderIds": [
      "801S70000001VKgIAM"
    ],
    "success": true,
    "errors": [],
    "statusURL": "/services/data/v68.0/subjects/AsyncOperationTracker/16PRM0000004DBq"
  },
  "sortOrder": -1,
  "version": 1
}

```

Create Orders From a Quote Based on a Quote Line Item Field

This example shows a sample request to create orders from a quote based on a quote line item field

```

{
  "inputs": [
    {
      "quoteId": "0Q0DU0000005tJW0AY",
      "orderCreationMethod": "CreateOrderByField",
      "orderCreationParameters": {
        "splitFieldName": "Product2Id"
      }
    }
  ]
}

```

This example shows a sample successful response.

```
{
  "actionName": "createOrdersFromQuote",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": {
    "requestId": "16PRM0000004DBq",
    "orderIds": [
      "801S70000001VKgIAM",
      "801S70000001WKgIBN"
    ],
    "success": true,
    "errors": [],
    "statusURL": "/services/data/v68.0/subjects/AsyncOperationTracker/16PRM0000004DBq"
  },
  "sortOrder": -1,
  "version": 1
}
```

Deep Clone Sales Transaction

Clone a quote or an order, including full object graph with related objects, selected lines, or selected groups.

This action is available in API version 67.0 and later.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/deepCloneSalesTransaction

Formats: JSON, XML

HTTP Methods: POST

Authentication:Authorization: Bearer *token*

Inputs

Input	Type	Description
options	Apex-defined	Specifies options to clone a ramp segment within a sales transaction. You can clone only the last ramp segment. Valid values are <code>recordTypeId</code> —ID of the record type related to the record to clone. Optional; or <code>lineScope</code> —Specifies the scope for cloning a ramp segment. This property determines which line items must be cloned and added to the cloned segment. You can specify these options: <code>AllLines</code> —Specifies whether all line items in a ramped group must be cloned, or <code>RampedLinesOnly</code> —Specifies whether only the ramped line items must be cloned. A segment identifier is created for the newly cloned line items, ensuring date continuity between the existing and cloned segment.
recordIds	List<String>	Required. ID of the record to be cloned. You can specify a single record ID only.

Input	Type	Description
salesTransactionId	String	Required. ID of the sales transaction related to the record IDs to clone.

Outputs

Output	Type	Description
newRecordId	String	ID of the cloned sales transaction.

Example

POST

Here's a sample request for the Deep Clone Sales Transaction action.

```
{
  "inputs": [
    {
      "recordIds": ["0QLxx0000004CByGA2"],
      "salesTransactionId": "0Q0xx0000004CE0CAM",
      "options": {
        "lineScope": "AllLines"
      }
    }
  ]
}
```

Here's a sample response for the Deep Clone Sales Transaction action.

```
{
  "actionName": "deepCloneSalesTransaction",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "newRecordId": "0Q0SG000000ACxf0AG"
  }
}
```

Get Renewable Assets Summary Action

Retrieve details about renewable assets in a given order. You can use this information to create renewal opportunities.

This action gets pricing data from the OrderEntitiesMapping context mapping within the SalesTransactionContext context definition. Before you use this action, edit the context mapping to map the objects and fields used in your pricing procedure to the nodes and attributes in the context definition.

This action doesn't support providing a summary with procedure plans. As a result, renewal line items may return a price of zero.



Note: We recommend adding the same fields and mappings for the Quote and Order objects, and for the Quote Line Item and Order Product objects.

This action is available in API version 64.0 and later.

Supported REST HTTP Methods

URI: /services/data/v~~68.0~~**69.0**/actions/standard/getRenewableAssetsSummary

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
orderId	id	Required. ID of the order related to the assets to check for renewal opportunities.

Outputs

Output	Type	Description
renewableAssetsSummary	Apex-defined	Summary of the assets associated with the order, including details about renewal opportunities such as renewal pricing information. See renew_assets_summary Apex Namespace .

Example

POST

Here's a sample request for the Get Renewable Assets Summary action.

```
{
  "inputs": [
    {
      "orderId": "801xx000003GZ39AAG"
    }
  ]
}
```

Here's a sample response for the Get Renewable Assets Summary action.

```
[
  {
    "actionName": "getRenewableAssetsSummary",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "renewableAssetsSummary": [
        {
          "startDate": "2025-07-22",
          "rootAssetOpportunity": null,
          "renewalPriceDetails": [
```



```

        {
            "quantity": 1,
            "netUnitPrice": 0
        }
    ],
    "productId": "01txx0000006i3DAAQ",
    "priceBookId": "01sxx0000005ptpAAA",
    "priceBookEntryId": "01uxx0000008yXCAAY",
    "orderItem": "802xx000001nb1LAAQ",
    "opportunityProductId": null,
    "lastAssetActionSubtype": null,
    "lastAssetAction": "Initial Sale",
    "endDate": "2025-08-21",
    "assetId": "02ixx0000004HKwAAM",
    "account": "001xx000003GZ1XAAW"
    }
]
},
"sortOrder": -1,
"version": 1
}
]
```

Initiate Amendment Action

Initiate and execute the amendment of an asset.

Specify the IDs of assets to amend, the amendment start date, and any quantity changes. You can choose whether the action creates an amendment quote or order.

Considerations

For usage products, creating an order directly by setting `amendOutputType` to `Order` is currently not supported. The direct-to-order flow can create Order Products without required related Rate Card Entry records, which can cause order activation to fail.

When you amend usage assets, use a two-step flow.

1. Create an amendment quote by calling `initiateAmendment` with `amendOutputType` set to `Quote`.
2. Create an order from that amendment quote.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/initiateAmendment`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
amendAssetIds	string	Required. The IDs of the assets that you want to amend.
amendContractId	string	The ID of the contract record to be synced with the amendment.
amendStartDate	datetime	Required. Effective start date of the amendment.
amendOpportunityId	string	The ID of the Opportunity record to be synced with the amendment quote.
amendOutputType	string	Required. Type of amendment record to create such as a quote or an order. For usage products, set this value to <code>Quote</code> . The usage-related records (<code>QuoteLineItemUseResourceGrant</code> , <code>QuoteLineItemUsageResourcePolicy</code> , and <code>QuoteLineRateCardEntry</code>) are copied in the quote action flow, not in the amend order flow.
quantityChange	double	Required. Quantity to add to or reduce from the asset's existing quantity.
skipPricing	boolean	Indicates whether the pricing procedure must be skipped (<code>true</code>) or performed (<code>false</code>). Available in API version 64.0 and later.

Outputs

Output	Type	Description
amendRecordId	string	The ID of the amendment record that's created.
requestIdentifier	string	Request ID that's used to track the async request.

Example

POST

This sample request is for the Initiate Amendment action.

```
{
  "inputs": [
    {
      "amendAssetIds": ["02iI8000000HPzXIAW"],
      "amendStartDate": "2023-10-21T00:00:00.000Z",
      "quantityChange": 5,
      "amendOutputType": "Quote",
      "amendContractId": "800DU00000001Z1YAI",
      "amendOpportunityId": "006DU0000025AanYAE",
      "skipPricing": false
    }
  ]
}
```

This sample response is for the Initiate Amendment action.

```
[
  {
    "actionName": "initiateAmendment",
    "errors": null,
    "isSuccess": true,
    "outputValues": {
      "record_id": "0Q0xx0000004NsSCAU",
      "requestIdentifier": "16Pxx0000004NIy"
    },
    "version": 1
  }
]
```

Initiate Cancellation Action

Initiate and execute the cancellation of an asset.

Specify the IDs of the assets that you want to add to cancel by specifying a start date. You can also specify the type of cancellation record that you want to create, such as a quote or an order.

This action is available in API version 60.0 and later.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/initiateCancellation

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
cancelAssetIds	string	Required. The IDs of the assets that you want to cancel. All assets in a request must belong to the same price book.
cancelContractId	string	The ID of the contract record to sync with the cancellation.
cancelOpportunityId	string	The ID of the Opportunity record to sync with the cancellation quote.
cancelOutputType	string	Required. Type of cancellation record to create such as a quote or an order.
cancelStartDate	datetime	Required. Effective date of the cancellation.
skipPricing	boolean	Indicates whether the pricing procedure must be skipped (<code>true</code>) or performed (<code>false</code>). Available in API version 64.0 and later.

Outputs

Output	Type	Description
cancelRecordId	string	The ID of the cancellation record that's created.
requestIdentifier	string	Request ID that's used to track the async request.

Example

POST

This sample request is for the Initiate Cancellation action.

```
{
  "inputs": [
    {
      "cancelAssetIds": [
        "02iI8000000Lc5fIAC"
      ],
      "cancelStartDate": "2023-11-09T00:00:00",
      "cancelOutputType": "Quote",
      "cancelContractId": "800DU00000001Z1YAI",
      "cancelOpportunityId": "006DU0000025AanYAE",
      "skipPricing": false
    }
  ]
}
```

This sample response is for the Initiate Cancellation action.

```
[
  {
    "actionName": "initiateCancellation",
    "errors": null,
    "isSuccess": true,
    "outputValues": {
      "record_id": "0Q0xx0000004P32CAE",
      "requestIdentifier": "16Pxx0000004OTY"
    },
    "version": 1
  }
]
```

Initiate Renewal Action

Initiate and execute the renewal of an asset.

Specify the IDs of the assets that you want to add to renew by specifying a start date. You can also specify the type of renewal record that you want to create, such as a quote or an order.

This action is available in API version 60.0 and later.

Supported REST HTTP Methods

URI: /services/data/v^{68.0}/actions/standard/initiateRenewal

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
rampOptionsDetails	Apex-defined	An Apex RampOptionInputRepresentation record that contains the details of ramp options. The details include segment type, duration, and segment count. Specify this property if you want to include assets in a group ramp with a ramp schedule. See RampOptionInputRepresentation on page 1407 to refer to the associated properties for ramp options. Available in API version 67.0 and later.
renewAssetIds	string	Required. The IDs of the assets that you want to renew.
renewContractId	string	ID of the contract record to sync with the renewal quote.
renewEndDate	datetime	Effective end date of the renewal. Available in API version 62.0 and later.
renewOpportunityId	string	ID of the Opportunity record to sync with the renewal quote.
renewOutputType	string	Required. Type of renewal record to create such as a quote or an order.
renewStartDate	datetime	Optional. Effective start date of the renewal. Required for early asset renewals and renewing expired assets, by using today's date or a future date. Available in API version 62.0 and later.
skipPricing	boolean	Indicates whether the pricing procedure must be skipped (<code>true</code>) or performed (<code>false</code>). Available in API version 64.0 and later.

Outputs

Output	Type	Description
renewRecordId	string	The ID of the amendment record that's created.
requestIdentifier	string	Request ID that's used to track the async request.

Example

POST

This sample request is for the Initiate Renewal action.

```
{
  "inputs": [
    {
```

```

    "rampOptionsDetails": {
      "segmentType": "Custom",
      "duration": 40,
      "numberOfSegments": 10
    },
    "renewAssetIds": [
      "02ixx0000004LMwAAM"
    ],
    "renewOutputType": "Quote",
    "renewContractId": "800DU00000001Z1YAI",
    "renewOpportunityId": "006DU00000025AanYAE",
    "renewStartDate": "2023-10-21T00:00:00.000Z",
    "renewEndDate": "2024-10-21T00:00:00.000Z",
    "skipPricing": false
  }
]
}

```

This sample response is for the Initiate Renewal action.

```

[
  {
    "actionName": "initiateRenewal",
    "errors": null,
    "isSuccess": true,
    "outputValues": {
      "renewRecordId": "0Q0xx0000004P32CAE",
      "requestIdentifier": "16Pxx0000004OTY"
    },
    "version": 1
  }
]

```

Initiate Rollback on Last Action

Initiate the reversal of the last action on an asset to rectify any transactional errors or to meet changing business requirements.

Use this action to revert the last amendment or renewal on a particular asset, restoring the asset to its previous state. This action creates a quote or an order based on the specified output type. Use the created reversal quote to verify the reversal and convert the quote into an order.

Keep these considerations in mind when you use this action.

- You can roll back only future dated transactions.
- Rollback action isn't supported for legacy assets.
- The rollback operation is supported for amendment and renewal only.

This action is available in API version 65.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/initiateRollBackLastAction`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
assetIds	string	Required. List of asset IDs to include in the last action rollback.
outputType	string	Required. The type of record to create for reversal. Valid values are <code>Quote</code> —Creates a reversal quote or <code>Order</code> —Creates a reversal order.

Outputs

Output	Type	Description
recordId	id	The ID of the created quote or order.

Example

POST

This example shows a sample request that initiates the rollback action on an asset and converts it into a quote.

```
{
  "inputs": [
    {
      "assetIds": [
        "02iDU0000006UisYAE"
      ],
      "outputType": "Quote"
    }
  ]
}
```

This example shows a sample successful response.

```
{
  "actionName": "initiateRollBackLastAction",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "recordId": "0Q0xx0000004NsSCAU"
  },
  "version": 1
}
```

Initiate Transfer Action

Transfer an asset or multiple assets from one account to another.

Keep these considerations in mind when you use this invocable action.

- This action generates 2 quotes or 2 orders.
- One transaction is considered the source, which is used to calculate the reduction amount of the transfer. The other transaction is the target, which is used to calculate the new amount on the target account.
- The quantity on the source is negative, which reduces the existing asset's quantity. The quantity on the target is positive, which creates a new asset on the target account.
- You can change the quantity on the source or the target, but the quantities must be equal and opposite. For example, the source quote line can have a quantity value as `-5`, and the target quote line can have a quantity value `5`. If you change the source value to `-10`, you must update the target value to `10`. You must update quotes or orders manually.
- The transfer is complete after the orders are assetized.

This action is available in API version 65.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/initiateTransfer`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>outputRecordType</code>	string	Required. Specifies either a quote or order record type that's being transferred.
<code>shouldSkipPricing</code>	boolean	Indicates whether to skip pricing at the time of asset transfer (<code>true</code>) or not (<code>false</code>).
<code>targetAccountId</code>	string	Required. The ID of the target account where the asset is transferred.
<code>targetContractId</code>	string	The ID of the target contract that's associated with the asset that's being transferred.
<code>transferDate</code>	datetime	Required. The date of the asset transfer.
<code>transferRecords</code>	Apex-defined	Required. A collection of Apex <code>connectapi__TransferRecordInputRepresentation</code> records that contain details about the assets to be transferred. See ConnectApi.TransferRecordInputRepresentation .

Outputs

Output	Type	Description
<code>assetTransferSourceId</code>	id	The ID of the quote or order that's related to the source account used to start the transfer.
<code>assetTransferTargetId</code>	id	The ID of the quote or order that's related to the target account used to start the transfer.

Output	Type	Description
requestIdentifier	id	The request ID can be used to track the async request.

Example

POST

Here's a sample input to call this invocable action.

```
{
  "inputs": [
    {
      "transferRecords": [
        {
          "assetId": "02ixx0000004HZbAAM",
          "transferQuantity": 1
        }
      ],
      "transferDate": "2025-10-21T00:00:00.000Z",
      "targetAccountId": "001xx000003GbEXAAS",
      "targetContractId": "800DU00000001Z1YAI",
      "outputRecordType": "Quote"
    }
  ]
}
```

Here's a sample input to call this invocable action from Apex code.

```
ConnectApi.TransferRecordInputRepresentation transferRecord = new
ConnectApi.TransferRecordInputRepresentation();
transferRecord.assetId = '02ixx0000004HHjAAM';
transferRecord.transferQuantity = 1;
List<ConnectApi.TransferRecordInputRepresentation> transferRecords = new
List<ConnectApi.TransferRecordInputRepresentation>();
transferRecords.add(transferRecord);

Invocable.Action action = Invocable.Action.createStandardAction('initiateTransfer');
action.setInvocationParameter('transferRecords', transferRecords);
action.setInvocationParameter('targetAccountId', '001xx000003GYiHAAW');
action.setInvocationParameter('transferDate', '2025-03-01T00:00:00.000Z');
action.setInvocationParameter('outputRecordType', 'Quote');
List<Invocable.Action.Result> results = action.invoke();
System.assertEquals(true, results[0].isSuccess());
Assert.IsNotNull(results[0].getOutputParameters().get('assetTransferSourceId'));
```

Here's a sample response when you call this action.

```
[
  {
    "actionName": "initiateTransfer",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
  }
]
```

```
[{"outputValues": {"assetTransferSourceId": "0Q0DU0000006SYF0A2", "assetTransferTargetId": "0Q0DU0000006SYE0A2"}, "sortOrder": -1, "version": 1}]
```

Sync Quote to Opportunity Action

Sync quote line items to the matching opportunity line items so that forecasts stay up to date.

This action is available in API version 68.0 and later.

Special Access Rules

The sync Quote to Opportunity action is available in Developer, Enterprise, and Unlimited Editions of Revenue Management.

To use this action in a flow or other automation, in Revenue Settings, turn on **Asynchronous Opportunity Sync**.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/syncQuoteOpportunity`

Formats: JSON

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
quoteId	string	Required. The ID of the quote record to sync with an opportunity. Specify only one quote ID.

Outputs

Output	Type	Description
aotId	string	The asynchronous operation tracker ID for monitoring the sync process.
errorCode	string	The error code when <code>isSuccess</code> is false. The value is null when the process is successful.
errorMessage	string	The error description when <code>isSuccess</code> is false. The error description is an empty string when the process is successful.
isSuccess	boolean	Indicates whether the sync completed successfully (<code>true</code>), or whether the validation failed or the asynchronous job couldn't be enqueued (<code>false</code>).

Example

POST

This sample request is for the Sync Quote to Opportunity action.

```
{
  "inputs": [
    {
      "quoteId": "0Q0RO0000003LyU"
    }
  ]
}
```

This sample response is for the Sync Quote to Opportunity action.

```
[
  {
    "actionName": "syncQuoteOpportunity",
    "errors": null,
    "isSuccess": true,
    "outputValues": {
      "aotId": "16PLT00000281tR2AQ",
      "errorCode": null,
      "errorMessage": "",
      "isSuccess": true
    }
  }
]
```

Transaction Management Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Transaction Management](#)

The flow for Transaction Management represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

Flow for Transaction Management

The flow for Transaction Management represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Transaction Management exposes additional actionType values for the FlowActionCall metadata type.

Field Name	Field Type	Description
<code>actionType</code>	InvokableActionType (enumeration of type string)	Required. The action type. Additional valid values for Transaction Management are <code>createContract</code> —Create a contract from a specific quote record; <code>createOrderFromQuote</code> —Create a draft order from a quote record; <code>createServiceDocument</code> —Create service documents from work orders, work order line items, or service appointments; <code>deepCloneSalesTransaction</code> —Clone a quote or an order, including full object graph with related objects, selected lines, or selected groups. Added in API version 67.0 and later; <code>getRenewableAssetsSummary</code> —Retrieve details about renewable assets in a given order. You can use this information to create renewal opportunities. Added in API version 64.0 and later; <code>createOrUpdateAssetFromOrder</code> —Create an asset for each order item in the specified order. New assets are created for a new order. Modify existing assets for change order requests, such as a renewal or a cancellation; <code>createOrUpdateAssetFromOrderItem</code> —Create assets from individual order items within an order. Track assets after the individual line items of an order reach a certain stage in their lifecycle, such as submitted, fulfilled, or provisioned. If the order item is part of a renewal, an amendment, or a cancellation, existing assets are changed; <code>initiateAmendment</code> —Initiate and execute the amendment of an asset; <code>initiateRenewal</code> —Initiate and execute the renewal of an asset; <code>initiateCancellation</code> —Initiate and execute the cancellation of an asset; <code>initiateRollBackLastAction</code> —Initiate the reversal of the last action on an asset to rectify any transactional errors or to meet changing business requirements; <code>createOrdersFromQuote</code> —Create multiple orders from a single quote instead of a single order, ensuring easier order management and fulfillment operations; <code>initiateTransfer</code> —Transfer an asset or multiple assets from one account to another; or <code>syncQuoteOpportunity</code> —Sync quote line items to the matching opportunity line items so that forecasts stay up to date.

CHAPTER 9 Advanced Approvals

In this chapter ...

- [Advanced Approvals Fields on Standard Objects](#)
- [Advanced Approvals Standard Invocable Actions](#)
- [Advanced Approvals Business APIs](#)
- [Advanced Approvals Metadata API Types](#)

Advanced Approvals feature provides invocable actions to streamline complex business processes. These actions automate and manage intricate parallel or sequential approval chains with detailed audit trails.

SEE ALSO:

[Salesforce Help: Advanced Approvals](#)

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions of Revenue Management where Advanced Approvals is enabled

Advanced Approvals Fields on Standard Objects

Advanced Approvals adds standard and custom fields to some standard Salesforce objects. These fields are available only in Revenue Management orgs where Advanced Approvals is enabled.

[ApprovalSubmission](#)

Represents the instance of an approval request that's submitted for a record of the related object. This object is available in API version 62.0 and later.

[Advanced Approvals Fields on Approval Work Item](#)

Standard and custom fields extend the standard Approval Work Item object for use in Advanced Approvals.

ApprovalSubmission

Represents the instance of an approval request that's submitted for a record of the related object. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

This object is available in Enterprise, Unlimited, and Developer Editions of Revenue Management.

Fields

Comments

Type: textarea

Properties: Nillable

Description: The comments about the request that's submitted for approval.

DoesSendApprovalEmail

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether approval request emails are sent to approvers and delegates (`true`) or not (`false`).

The default value is `false`.

FlowOrchestrationInstanceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the flow orchestration instance record that's associated with the approval.

This field is a relationship field.

Relationship Name: FlowOrchestrationInstance

Refers To: FlowOrchestrationInstance

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The auto-generated name for the approval submission.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: The ID of the user or the group that owns the approval submission record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RelatedRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Required. The ID of the related record that's submitted for approval.

This field is a polymorphic relationship field.

Relationship Name: RelatedRecord

Refers To: Account, AdAvailabilityViewConfig, Address, AnalyticsUserAttrFuncTkn, ApprovalSubmission, ApprovalSubmissionDetail, ApprovalWorkItem, Asset, AssetAction, AssetActionSource, AssetContractRelationship, AssetRateAdjustment, AssetRateCardEntry, AssetRelationship, AssetStatePeriod, AssociatedLocation, AsyncOperationTracker, AttrPicklistExcludedValue, AttributeAdjustmentCondition, AttributeBasedAdjRule, AttributeBasedAdjustment, AttributeCategory, AttributeCategoryAttribute, AttributeDefinition, AttributePicklist, AttributePicklistValue, AuthorizationForm, AuthorizationFormConsent, AuthorizationFormDataUse, AuthorizationFormText, BatchJob, BatchJobPart, BatchJobPartFailedRecord, BundleBasedAdjustment, BusinessBrand, Case, CaseComment, ChannelProgram, ChannelProgramLevel, ChannelProgramMember, CollaborationGroup, CommSubscription, CommSubscriptionChannelType, CommSubscriptionConsent, CommSubscriptionTiming, Contact, ContactPointAddress, ContactPointConsent, ContactPointEmail, ContactPointPhone, ContactPointTypeConsent, ContactRequest, ContextDefinitionSync, Contract, ContractItemPrice, ContractItemPriceAdjTier, CostBook, CostBookEntry, Customer, DTRecordsetReplica, DataUseLegalBasis, DataUsePurpose, DecisionTblFileImportData, DelegatedAccount, DocGenerationQueryResult, DocTemplateSectionCondition, DocumentEnvelope, DocumentGenerationProcess, DocumentRecipient, DocumentTemplate, DocumentTemplateContentDoc, DocumentTemplateSection, DocumentTemplateToken, DuplicateRecordItem, DuplicateRecordSet, EmailMessage, EngagementChannelType, ExpressionSetConstraintObj, ExternalEventMapping, FlowOrchestrationInstance, FulfillmentOrder, FulfillmentOrderItemAdjustment, FulfillmentOrderItemTax, FulfillmentOrderLineItem, GeneratedDocument, GeneratedDocumentSection, Idea, Image, Individual, IntegrationProviderDcsnRqmt, IntegrationProviderExecution, Lead, Location, LocationTrustMeasure, ManagedContentVariant, ObjectStateDefinition, ObjectStateTransition, ObjectStateValue, Obligation, Opportunity, OpportunityRelatedDeleteLog, Order, OrderAction, OrderAdjustmentGroup, OrderDeliveryGroup, OrderDeliveryMethod, OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, OrderItemRateAdjustment, OrderItemRateCardEntry, OrderItemRecipient, OrderItemRelationship, OrderItemTaxLineItem,

OrgMetricScanResult, OrgMetricScanSummary, Organization, PartnerFundAllocation, PartnerFundClaim, PartnerFundRequest, PartnerMarketingBudget, PartyConsent, PriceBookEntryDerivedPrice, PriceBookRateCard, PricingAdjBatchJob, PricingAdjBatchJobLog, PricingApiExecution, PricingProcessExecution, ProcessException, Product2, ProductAttributeDefinition, ProductCatalog, ProductCategory, ProductCategoryDisqual, ProductCategoryProduct, ProductCategoryQualification, ProductClassification, ProductClassificationAttr, ProductComponentGroup, ProductComponentGrpOverride, ProductConfigFlowAssignment, ProductConfigurationFlow, ProductConfigurationRule, ProductDisqualification, ProductPriceHistoryLog, ProductPriceRange, ProductQualification, ProductRampSegment, ProductRelComponentOverride, ProductUsageGrant, ProfileSkill, ProfileSkillEndorsement, ProfileSkillUser, PromptAction, PromptError, QuickText, QuickTextUsage, Quote, QuoteLineDetail, QuoteLineItem, QuoteLineItemRecipient, QuoteLineRateAdjustment, QuoteLineRateCardEntry, RateAdjustmentByAttribute, RateAdjustmentByTier, RateCard, RateCardEntry, RatingFrequencyPolicy, SalesTransactionType, Seller, Shipment, ShipmentItem, Site, SocialPersona, SocialPost, Solution, StreamingChannel, TableauHostMapping, Topic, UnitOfMeasure, UnitOfMeasureClass, UsageGrantRenewalPolicy, UsageGrantRolloverPolicy, UsageResource, UsageResourceBillingPolicy, User, UserEsignVendorIdentifier, UserLicense, UserLocalWebServerIdentity, UserProvisioningRequest, WorkBadge, WorkBadgeDefinition, WorkOrder, WorkOrderLineItem, WorkThanks

RelatedRecordObjectName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Required. The type of record that was submitted for approval.

Status

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The status of the approval.

Valid values are: `Approved`, `Canceled`, `Errored`, `InProgress`, `Recalled`, `Rejected`, or `Suspended`.

SubmittedById

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Required. The ID of the user who submitted the record for approval.

This field is a relationship field.

Relationship Name: SubmittedBy

Refers To: User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ApprovalSubmissionOwnerSharingRule](#) on page 2516: Sharing rules are available for the object.

[ApprovalSubmissionShare](#) on page 2517: Sharing is available for the object.

Advanced Approvals Fields on Approval Work Item

Standard and custom fields extend the standard Approval Work Item object for use in Advanced Approvals.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

This object is available in Enterprise, Performance, Unlimited, and Developer Editions for users with access to the Approval Submission object.

Fields

ApprovalChainName

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The name of the related approval chain. This field is populated when there are multiple approval chains that are run in parallel. This field is only available with Advanced Approvals enabled.

CurrencyIsoCode

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only for organizations with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.

Valid values are:

- AED—UAE Dirham
- AUD—Australian Dollar
- BRL—Brazilian Real
- CAD—Canadian Dollar
- EUR—Euro
- GBP—British Pound
- INR—Indian Rupee
- JPY—Japanese Yen
- SEK—Swedish Krona
- USD—U.S. Dollar

The default value is `USD`.

IsAutoReviewed

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the approval work item is eligible for smart approval (true) or not (false).

The default value is `false`.

IsEligibleForSmartApproval

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the approval work item is eligible for smart approval (`true`) or not (`false`).

The default value is `false`.

SmartApprovalBasisWorkItemId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The previous approval work item used as a reference for the auto-approval evaluation.

This field is a relationship field.

Relationship Name: SmartApprovalBasisWorkItem

Refers To: ApprovalWorkItem

Advanced Approvals Standard Invocable Actions

Learn more about the standard invocable actions available with Advanced Approvals.

[Cancel Approval Submission Action](#)

Cancels an approval submission and all child approval work items that haven't been completed. You can also add comments about why the approval admin made the cancellation.

[Get Previous Related Record Details Action](#)

Get the related record details submitted for approval before the current approval submission. The details are required for approval steps that use custom logic for auto-approvals.

[Override Approval Work Item Action](#)

Update an approval work item status with the approval admin decision and any comments that the approval admin added.

[Reassign Approval Work Item Action](#)

Reassign an approval work item that hasn't been completed. You can also add comments about why the approval admin reassigned the approval work item.

[Recall Approval Submission Action](#)

Recall an approval submission that isn't completed. You can also add comments that the submitter or approval admin made the recall.

[Review Approval Work Item Action](#)

Update an approval work item status with the assignee or reviewer's decision and any comments that the assignee or reviewer added.

SEE ALSO:

- [Actions Developer Guide: Overview](#)
- [REST API Developer Guide: Invocable Actions Standard](#)

Cancel Approval Submission Action

Cancels an approval submission and all child approval work items that haven't been completed. You can also add comments about why the approval admin made the cancellation.

This action also validates if a user has required permissions to cancel an approval submission. Keep these considerations in mind when you use this invocable action.

- The user must have the Approval Admin user permission.
- The status of the approval submission must be in `In progress` or `Suspended` status.

This action is available in API version 62.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/cancelApprovalSubmission`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>approvalSubmissionId</code>	string	Required. ID of the Approval Submission to be canceled.
<code>comments</code>	string	Comments entered by the approval admin about why they canceled the Approval Submission.

Outputs

None.

Example

POST

Here's a sample request for the Cancel Approval Submission action.

```
{
  "inputs": [
```

```
{
  "approvalSubmissionId": "9iPxx00000001lhEBA",
  "comments": "Cancellation comments."
}
```

Here's a sample response for the Cancel Approval Submission action.

```
{
  "actionName": "cancelApprovalSubmission",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": null,
  "sortOrder": -1,
  "version": 1
}
```

Get Previous Related Record Details Action

Get the related record details submitted for approval before the current approval submission. The details are required for approval steps that use custom logic for auto-approvals.

This Apex action is available in API version 66.0 and later.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/getPreviousRelaRecDetails

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
flowOrchestrationInstanceId	string	Required. The ID of the flow orchestration instance associated with the approval submission.
stepApiNamesList	string	Required. The comma-delimited list of step API names to retrieve previous related record details for.

Outputs

Output	Type	Description
previousRelatedRecordDetails	sObject.	The collection of previous related record details for approval steps that use custom logic for auto-approvals.

Usage

To use this Apex action in approval workflows, see [Define Rules and Conditions for Auto-Approval Resubmissions](#).

Example

POST

Here's a sample request for the Get Previous Related Record Details action.

```
{
  "flowOrchestrationInstanceId": "0jEDU0000001zeN",
  "stepApiNameList": [
    "ManagerApprovalStep",
    "FinancialApprovalStep"
  ]
}
```

Override Approval Work Item Action

Update an approval work item status with the approval admin decision and any comments that the approval admin added.

This action also validates if a user has required permissions to override an approval work item and update its status. Keep these considerations in mind when you use this invocable action.

- The user must have the Approval Admin user permission.
- This action enables approval admins to interject the approval decision for any assignee.
- The status of the approval work item must be in `Assigned` status.

This action is available in API version 62.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/overrideApprovalWorkItem`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
approvalDecision	string	Required. Action that the overriding approval admin made for the unreviewed approval work item. Valid values are <code>approve</code> or <code>reject</code> .
approvalWorkItemId	string	Required. ID of the unreviewed approval work item to be reviewed by an approval admin.
channelType	picklist	Type of channel where the request to review the approval work item originated. Valid values are <code>InvocableAction</code> , <code>Slack</code> , or <code>ApprovalRecord</code> . The default value is <code>InvocableAction</code> . Available in API version 65.0 and later.
comments	string	Comments entered by the approval admin about their decision to approve or reject an unreviewed approval work item.

Outputs

None.

Example

POST

Here's a sample request for the Override Approval Work Item action.

```
{
  "inputs": [
    {
      "approvalWorkItemId": "9jRxx000000011hEAA",
      "approvalDecision": "Reject",
      "channelType": "InvocableAction",
      "comments": "Needs to be reviewed."
    }
  ]
}
```

Here's a sample response for the Override Approval Work Item action.

```
{
  "actionName": "overrideApprovalWorkItem",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": null,
  "sortOrder": -1,
  "version": 1
}
```

Reassign Approval Work Item Action

Reassign an approval work item that hasn't been completed. You can also add comments about why the approval admin reassigned the approval work item.

This action also validates if a user has required permissions to reassign an approval work item and update the assignee. Keep these considerations in mind when you use this invocable action.

- The user must have the Approval Admin user permission.
- The status of the approval work item must be in `Assigned` status.

This action is available in API version 62.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/reassignApprovalWorkItem`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>approvalWorkItemId</code>	string	Required. ID of the approval work item to be reassigned.
<code>assigneeId</code>	string	Required. ID of the user, group, or queue to reassign the approval work item to.
<code>comments</code>	string	Comments entered by the approval admin about why they reassigned the approval work item.

Outputs

None.

Example

POST

Here's a sample request for the Reassign Approval Work Item action.

```
{
  "inputs": [
    {
      "approvalWorkItemId": "9jRDU00000015C22AI",
      "assigneeId": "005DU000000I3zHYAS",
      "comments": "Needs to be reviewed."
    }
  ]
}
```

Here's a sample response for the Reassign Approval Work Item action.

```
{
  "actionName": "reassignApprovalWorkItem",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": null,
  "sortOrder": -1,
  "version": 1
}
```

Recall Approval Submission Action

Recall an approval submission that isn't completed. You can also add comments that the submitter or approval admin made the recall.

This action also validates if a user has required permissions to recall an approval submission. Keep these considerations in mind when you use this invocable action.

- The user must have the Approval Admin user permission.
- The user must also be a submitter of this approval submission.
- The status of the approval submission must be in `In progress` or `Suspended` status.

This action is available in API version 62.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/recallApprovalSubmission`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>approvalSubmissionId</code>	string	Required. ID of the approval submission to be recalled.
<code>comments</code>	string	Comments entered by the approval admin or approval submitter about why they recalled the approval submission.

Outputs

None.

Example

POST

Here's a sample request for the Recall Approval Submission action.

```
{
  "inputs": [
    {
      "approvalSubmissionId": "9iPxx00000001lhEBA",
      "comments": "Recall comments."
    }
  ]
}
```

Here's a sample response for the Recall Approval Submission action.

```
{
  "actionName": "recallApprovalSubmission",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": null,
  "sortOrder": -1,
  "version": 1
}
```

Review Approval Work Item Action

Update an approval work item status with the assignee or reviewer's decision and any comments that the assignee or reviewer added.

Keep these considerations in mind when you use this invocable action.

- The user must be an assignee of the approval work item or be a member of a group or queue if the approval work item is assigned to the group or queue. Additionally, a user has access to Approval Submissions if they're a delegate of the assignee or has a role higher than the assignee.
- The status of the approval work item must be in `Assigned` status.
- The user can also use this action if inherited access to group or queue membership, nested group membership, roles hierarchy, or delegates is available. See [Public Group Considerations](#).

This action is available in API version 62.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/reviewApprovalWorkItem`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
approvalDecision	string	Required. Action that the assigned approver made for the approval work item. Valid values are approve or reject.
approvalWorkItemId	string	Required. ID of the approval work item to be reviewed by the assigned approver.
channelType	picklist	Type of channel where the request to review the approval work item originated. Valid values are <code>InvocableAction</code> , <code>Slack</code> , or <code>ApprovalRecord</code> . The default value is <code>InvocableAction</code> . Available in API version 65.0 and later.
comments	string	Approval comments for the decision.

Outputs

None.

Example

POST

Here's a sample request for the Review Approval Work Item action.

```
{
  "inputs": [
    {
      "approvalWorkItemId": "9jRxx00000001lhEAA",
      "approvalDecision": "Approve",
      "channelType": "InvocableAction",
      "comments": "Looks good."
    }
  ]
}
```

Here's a sample response for the Review Approval Work Item action.

```
{
  "actionName": "reviewApprovalWorkItem",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outcome": null,
  "outputValues": null,
  "sortOrder": -1,
  "version": 1
}
```

Advanced Approvals Business APIs

Use the Advanced Approvals Business APIs to preview approval levels and related details before you submit a record for approval.

This table lists the available Advanced Approvals resources.

Resource	Description
/connect/advanced-approvals/approval-submission/preview (POST)	Preview the approval levels of a record and associated level details, approval chains, approvers, and conditions before you submit the record for an approval.

[Resources](#)

Learn more about the available Advanced Approvals resources.

[Request Bodies](#)

Learn more about the available request bodies.

[Response Bodies](#)

Learn more about the available response bodies.

Resources

Learn more about the available Advanced Approvals resources.

[Preview Approval \(POST\)](#)

Preview the approval levels of a record and associated level details, approval chains, approvers, and conditions before you submit the record for an approval.

Preview Approval (POST)

Preview the approval levels of a record and associated level details, approval chains, approvers, and conditions before you submit the record for an approval.

For example, a sales rep working on a quote can preview the approval levels for a quote before submitting the quote for approval.

Resource

```
/connect/advanced-approvals/approval-submission/preview
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/advanced-approvals/approval-submission/preview
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "flowApiName": "QuoteApprovals",
  "objectApiName": "Quote",
  "recordId": "0Q0DU00000005HZC0A2",
  "inputParameters": {
    "approverComments": "Submitted for approval",
    "requestType": "Standard"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
flowApiName	String	API name of the auto-launched flow.	Required	65.0
objectApiName	String	API name of the object to preview the approvals for.	Required	65.0
recordId	String	ID of the record to preview the approvals for.	Required	65.0
inputParameters	Map<String, Object>	List of input parameters to preview.	Optional	67.0

Response Body for POST

[Preview Approval](#)

Request Bodies

Learn more about the available request bodies.

[Preview Approval Input](#)

Input representation of the details of the request to preview an approval.

Preview Approval Input

Input representation of the details of the request to preview an approval.

JSON Example

```
{
  "flowApiName": "QuoteApprovals",
  "objectApiName": "Quote",
  "recordId": "0Q0DU0000005HZC0A2",
  "inputParameters": {
    "approverComments": "Submitted for approval",
    "requestType": "Standard"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
flowApiName	String	API name of the auto-launched flow.	Required	65.0
objectApiName	String	API name of the object to preview the approvals for.	Required	65.0
recordId	String	ID of the record to preview the approvals for.	Required	65.0
inputParameters	Map<String, Object>	List of input parameters to preview.	Optional	67.0

Response Bodies

Learn more about the available response bodies.

[Preview Approval](#)

Output representation of the details of a preview approval request.

[Preview Approval Chain Item](#)

Output representation of the details of an approval chain item for a specific group.

[Preview Approval Error](#)

Output representation of the error details associated with the Preview Approval API.

[Preview Approval Item](#)

Output representation of the details of a specific approval item with an approval chain.

Preview Approval

Output representation of the details of a preview approval request.

JSON Example

```
{
  "approvalChainItems": [
    {
      "approvalChainName": "FINANCE",
      "approvalItems": [
        {
          "stepApiName": "CPIFC",
          "approvalConditionName": "Payment Term Greater Than 90 Days",
          "assignedTo": "005XX000001ABCQYA4",
          "assigneeType": "User",
          "assigneeDetails": {
            "id": "005XX000001ABCQYA4",
            "name": "Sam Smith",
            "type": "User",
            "apiName": "",
            "email": "sam.smith@example.com"
          },
          "objectId": "0Q0bsOgSBEhlexWC3Q",
          "objectApiName": "Quote",
          "status": "Approved",
          "stage": {
            "apiName": "stage101",
            "label": "Stage 101"
          },
          "dependencies": [],
          "parents": [],
          "level": 1,
          "additionalFields": {
            "reviewedBy": "005CVxhW4MBIUbPYUX",
            "isEligibleForSmartApproval": true,
            "smartApprovalBasisWI": "0000000000000000",
            "isAutoReviewed": false
          }
        },
        {
          "stepApiName": "CPIFC2",
          "approvalConditionName": "Payment Term Greater Than 90 Days",
          "assignedTo": "00GXX000001XYZA2A4",
          "assigneeType": "Group",
          "assigneeDetails": {
            "id": "00GXX000001XYZA2A4",
            "name": "Admin Group",
            "type": "Group",
            "apiName": "Admin_Group",
            "email": "admin.group@example.com"
          },
          "objectId": "0Q0bsOgSBEhlexWC3Q",
          "objectApiName": "Quote",
          "status": "In Progress",
          "stage": {
            "apiName": "stage101",
            "label": "Stage 101"
          }
        }
      ]
    }
  ]
}
```

```

    "dependencies": [
      "CPIFC"
    ],
    "parents": [
      "CPIFC"
    ],
    "level": 2,
    "additionalFields": {
      "reviewedBy": "00GvUUtUVGmTDUHU34",
      "isEligibleForSmartApproval": true,
      "smartApprovalBasisWI": "0000000000000000",
      "isAutoReviewed": false
    }
  }
]
},
"flowOrchestrationDefinitionVersionId": "0jEDU0000001nZm",
"status": "Success"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
approvalChain Items	Preview Approval Chain Item[]	Details of the approval items of an approval chain.	Small, 65.0	65.0
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If unspecified, a Universally Unique Identifier (UUID) is generated.	Small, 65.0	65.0
error	Preview Approval Error[]	Details of the error encountered during the processing of the API request.	Small, 65.0	65.0
flowOrchestration DefinitionVersion Id	String	ID of the flow orchestration definition version.	Small, 65.0	65.0
status	String	Status of the API request.	Small, 65.0	65.0

Preview Approval Chain Item

Output representation of the details of an approval chain item for a specific group.

JSON Example

```

{
  "approvalChainItems": [
    {
      "approvalChainName": "FINANCE",

```

```

"approvalItems": [
  {
    "stepApiName": "CPIFC",
    "approvalConditionName": "Payment Term Greater Than 90 Days",
    "assignedTo": "005XX000001ABCQYA4",
    "assigneeType": "User",
    "assigneeDetails": {
      "id": "005XX000001ABCQYA4",
      "name": "Sam Smith",
      "type": "User",
      "apiName": "",
      "email": "sam.smith@example.com"
    },
    "objectId": "0Q0bsOgSBEhlexWC3Q",
    "objectApiName": "Quote",
    "status": "Approved",
    "stage": {
      "apiName": "stage101",
      "label": "Stage 101"
    },
    "dependencies": [],
    "parents": [],
    "level": 1,
    "additionalFields": {
      "reviewedBy": "005CVxhW4MBIUbPYUX",
      "isEligibleForSmartApproval": true,
      "smartApprovalBasisWI": "0000000000000000",
      "isAutoReviewed": false
    }
  },
  {
    "stepApiName": "CPIFC2",
    "approvalConditionName": "Payment Term Greater Than 90 Days",
    "assignedTo": "00GXX000001XYZA2A4",
    "assigneeType": "Group",
    "assigneeDetails": {
      "id": "00GXX000001XYZA2A4",
      "name": "Admin Group",
      "type": "Group",
      "apiName": "Admin_Group",
      "email": "admin.group@example.com"
    },
    "objectId": "0Q0bsOgSBEhlexWC3Q",
    "objectApiName": "Quote",
    "status": "In Progress",
    "stage": {
      "apiName": "stage101",
      "label": "Stage 101"
    },
    "dependencies": [
      "CPIFC"
    ],
    "parents": [
      "CPIFC"
    ]
  }
]

```



```

    ],
    "level": 2,
    "additionalFields": {
      "reviewedBy": "00GvUUtUVGmTDUHU34",
      "isEligibleForSmartApproval": true,
      "smartApprovalBasisWI": "0000000000000000",
      "isAutoReviewed": false
    }
  ]
}
],
"flowOrchestrationDefinitionVersionId": "OjEDU0000001nZm",
"status": "Success"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
approvalChain Name	String	Name of the approval chain.	Small, 65.0	65.0
approvalItems	Preview Approval Item[]	Details of the approval items.	Small, 65.0	65.0

Preview Approval Error

Output representation of the error details associated with the Preview Approval API.

JSON Example

This example shows a sample error scenario.

```

{
  "approvalChainItems": [],
  "error": {
    "correlationId": "0Q0DU0000005HZC0A2",
    "errorCode": "[xmlrpc=-1, statusCode=INVALID_API_INPUT, exceptionCode=null, scope=PublicApi, http=400]",
    "errorMessage": "Looks like the flow associated with this approval workflow for the current record isn't active. Activate the flow and try again.",
    "source": "PreviewApprovalDataProcessingException"
  },
  "status": "Failure"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
correlationId	String	Unique token to track and associate related events or transactions across different components of the application. If	Small, 65.0	65.0

Property Name	Type	Description	Filter Group and Version	Available Version
		unspecified, a Universally Unique Identifier (UUID) is generated.		
errorCode	String	Code for the resultant error.	Small, 65.0	65.0
errorMessage	String	Error message for the resultant error.	Small, 65.0	65.0
source	String	Details about the source of the error.	Small, 65.0	65.0

Preview Approval Item

Output representation of the details of a specific approval item with an approval chain.

JSON Example

```
{
  "approvalChainItems": [
    {
      "approvalChainName": "FINANCE",
      "approvalItems": [
        {
          "stepApiName": "CPIFC",
          "approvalConditionName": "Payment Term Greater Than 90 Days",
          "assignedTo": "005XX000001ABCQYA4",
          "assigneeType": "User",
          "assigneeDetails": {
            "id": "005XX000001ABCQYA4",
            "name": "Sam Smith",
            "type": "User",
            "apiName": "",
            "email": "sam.smith@example.com"
          },
          "objectId": "0Q0bsOgSBEhlexWC3Q",
          "objectApiName": "Quote",
          "status": "Approved",
          "stage": {
            "apiName": "stage101",
            "label": "Stage 101"
          },
          "dependencies": [],
          "parents": [],
          "level": 1,
          "additionalFields": {
            "reviewedBy": "005CVxhW4MBIUbPYUX",
            "isEligibleForSmartApproval": true,
            "smartApprovalBasisWI": "0000000000000000",
            "isAutoReviewed": false
          }
        },
        {

```

```

    "stepApiName": "CPIFC2",
    "approvalConditionName": "Payment Term Greater Than 90 Days",
    "assignedTo": "00GXX000001XYZA2A4",
    "assigneeType": "Group",
    "assigneeDetails": {
      "id": "00GXX000001XYZA2A4",
      "name": "Admin Group",
      "type": "Group",
      "apiName": "Admin_Group",
      "email": "admin.group@example.com"
    },
    "objectId": "0Q0bsOgSBEhlexWC3Q",
    "objectApiName": "Quote",
    "status": "In Progress",
    "stage": {
      "apiName": "stage101",
      "label": "Stage 101"
    },
    "dependencies": [
      "CPIFC"
    ],
    "parents": [
      "CPIFC"
    ],
    "level": 2,
    "additionalFields": {
      "reviewedBy": "00GvUUtUVGmTDUHU34",
      "isEligibleForSmartApproval": true,
      "smartApprovalBasisWI": "0000000000000000",
      "isAutoReviewed": false
    }
  }
]
},
"flowOrchestrationDefinitionVersionId": "0jEDU0000001nZm",
"status": "Success"
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
additional Fields	Map<String,String>	Details of any additional fields in the approval workflow.	Small, 65.0	65.0
approval ConditionName	String	Details of the configured conditions in the approval workflow.	Small, 65.0	65.0
assignedTo	String	Name of the assignee that the approval request is assigned to.	Small, 65.0	65.0
assigneeType	String	Type of assignee.	Small, 65.0	65.0
assigneeDetails	Map<String, Object>	Includes the details of an assignee, such as ID, name, type, API name, and email.	Small, 65.0	65.0

Property Name	Type	Description	Filter Group and Version	Available Version
dependencies	String[]	Specifies dependencies among approval steps, which are entry conditions based on the status of a previous step within the same stage.	Small, 65.0	65.0
level	Integer	Hierarchy level of the approval item.	Small, 65.0	65.0
objectApiName	String	API name of the object to preview the approval for.	Small, 65.0	65.0
objectId	String	ID of the object to preview the approval for.	Small, 65.0	65.0
parents	String[]	Details of the parent step.	Small, 65.0	65.0
stage	Map<String, String>	Includes the API name and label.	Small, 65.0	65.0
status	String	Status of the approval request.	Small, 65.0	65.0
stepApiName	String	API name of the step.	Small, 65.0	65.0

Advanced Approvals Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Advanced Approvals](#)

The flow for Advanced Approvals represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

Flow for Advanced Approvals

The flow for Advanced Approvals represents the metadata associated with a flow. With Flow, you can create an application that takes users through a series of pages to query and update the records in the database. You can also run logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Advanced Approvals exposes additional actionType values for the FlowActionCall metadata type.

Field Name	Field Type	Description
<code>actionType</code>	InvokableActionType (enumeration of type string)	Required. The action type. Additional valid values for Advanced Approvals are <code>cancelApprovalSubmission</code> —Cancels an approval submission and all child approval work items that haven't been completed. You can also add comments about why the approval admin made the cancellation. Added in API version 62.0 and later; <code>overrideApprovalWorkItem</code> —Update an approval work item status with the approval admin decision and any comments that the approval admin added. Added in API version 62.0 and later; <code>reassignApprovalWorkItem</code> —Reassign an approval work item that hasn't been completed. You can also add comments about why the approval admin reassigned the approval work item. Added in API version 62.0 and later; <code>recallApprovalSubmission</code> —Recall an approval submission that isn't completed. You can also add comments that the submitter or approval admin made the recall. Added in API version 62.0 and later; <code>reviewApprovalWorkItem</code> —Update an approval work item status with the assignee or reviewer's decision and any comments that the assignee or reviewer added. Added in API version 62.0 and later; or <code>getPreviousRelaRecDetails</code> —Get the related record details submitted for approval before the current approval submission. The details are required for approval steps that use custom logic for auto-approvals. Added in API version 66.0 and later.

CHAPTER 10 Dynamic Revenue Orchestrator

In this chapter ...

- [Dynamic Revenue Orchestrator Standard Objects](#)
- [Dynamic Revenue Orchestrator Standard Invocable Actions](#)
- [Dynamic Revenue Orchestrator Metadata API Types](#)
- [Dynamic Revenue Orchestrator Tooling API Objects](#)
- [Callouts in Dynamic Revenue Orchestrator](#)
- [Dynamic Revenue Orchestrator Platform Events](#)

Get visibility into a product's fulfillment journey. Also, get a complete view of the entire fulfillment design that includes processes such as order decomposition, fulfillment plans, and jeopardy management.

EDITIONS

Available in: **Enterprise, Unlimited, and Developer** Editions

Dynamic Revenue Orchestrator Standard Objects

The Dynamic Revenue Orchestrator data model provides objects and fields to manage details of a product's fulfillment.

[AssetFulfillmentDecomp](#)

Represents the relationship between an ordered asset and its corresponding fulfillment asset. This object is available in API version 62.0 and later.

[FulfillmentAsset](#)

Represents an instance of a technical product used to provide a customer asset. This object is available in API version 61.0 and later.

[FulfillmentAssetAttribute](#)

Represents an attribute of a fulfillment asset. This object is available in API version 61.0 and later.

[FulfillmentAssetRelationship](#)

Represents a relationship between two fulfillment assets. This object is available in API version 61.0 and later.

[FulfillmentAssetStatePeriod](#)

Represents the period during which the fulfillment asset configuration is applicable. This object is available in API version 67.0 and later.

[FulfmtAssetStatePeriodAttr](#)

Represents the key-value pair of a fulfillment asset attribute applicable during a specific asset state period. This object is available in API version 67.0 and later.

[FulfillmentFalloutRule](#)

Represents the fulfillment fallout handling rule. This object is available in API version 61.0 and later.

[FulfillmentLineAttribute](#)

Represents an attribute of a fulfillment order line. This object is available in API version 61.0 and later.

[FulfillmentLineRel](#)

Represents a relationship between two fulfillment order lines. This object is available in API version 61.0 and later.

[FulfillmentLineSourceRel](#)

Represents the relationship between a fulfillment order line and its decomposition source. This object is available in API version 61.0 and later.

[FulfillmentPlan](#)

Represents a set of steps to be created to fulfill the order. This object is available in API version 61.0 and later.

[FulfillmentStep](#)

Represents a task that's required to perform a certain action as part of order fulfillment. This task can be manual or automated. This object is available in API version 61.0 and later.

[FulfillmentStepDefinition](#)

Represents a definition of a step that must be executed during fulfillment orchestration. This object is available in API version 61.0 and later.

[FulfillmentStepDefinitionGroup](#)

Represents a set of fulfillment step definitions. This object is available in API version 61.0 and later.

[FulfillmentStepDependency](#)

Represents a dependency between tasks by defining the order between a task and one that depends on it. This object is available in API version 61.0 and later.

[FulfillmentStepDependencyDef](#)

Represents a dependency that must be created between two fulfillment step records. This object is available in API version 62.0 and later.

[FulfillmentStepJeopardyRule](#)

Represents the duration and tolerance for the step in the fulfillment process to allow the overall tracking of rules and risks. This object is available in API version 61.0 and later.

[FulfillmentStepSource](#)

Represents a link between a fulfillment step and the corresponding order lines. This object is available in API version 61.0 and later.

[FulfillmentTaskAssignmentRule](#)

Represents a set of actions that assign a task to a user or queue. This object is available in API version 63.0 and later.

[FulfillmentWorkspace](#)

Represents a visual designer for fulfillment plans that can have multiple step groups and their dependencies. This object is available in API version 61.0 and later.

[FulfillmentWorkspaceltem](#)

Represents information about the attributes that are used in the definition for a fulfillment step group. This object is available in API version 61.0 and later.

[ProductDecompEnrichmentRule](#)

Represents mappings between fields and attributes. Enrichment rules are part of a decomposition rule, and are used to propagate data to fulfillment order lines. This object is available in API version 61.0 and later.

[ProdtDecompEnrchVarMap](#)

Represents the mapping of a field context tag or an attribute to a variable within an expression set. This object is available in API version 64.0 and later.

[ProductFulfillmentDecompRule](#)

Represents a rule that determines how an order is broken into sub-orders with specific technical details that help in order fulfillment. It can be applied to a commercial or a technical product. This object is available in API version 61.0 and later.

[ProductFulfillmentScenario](#)

Represents a link between a product and the corresponding group of fulfillment steps that's necessary to fulfill that product. This object is available in API version 61.0 and later.

[SalesTrxnDeleteEvent](#)

Represents the platform event that triggers the deletion of sales transaction fulfillment request records when the corresponding reference records are deleted. This object is available in API version 64.0 and later.

[SalesTransactionFulfillReq](#)

Represents the statuses of all the sub-orders that belong to the selected commercial or technical product. This object is available in API version 62.0 and later.

[ValTfrm](#)

Represents mappings between fields and attributes. Enrichment rules are part of a decomposition rule, and are used to propagate data to fulfillment order lines. This object is available in API version 61.0 and later.

[ValTfrmGrp](#)

Represents a rule that determines how an order is broken into sub-orders with specific technical details that help in order fulfillment. The rule can be applied to a commercial or a technical product. This object is available in API version 61.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

AssetFulfillmentDecomp

Represents the relationship between an ordered asset and its corresponding fulfillment asset. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

FulfillmentSourceAssetId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The identifier of the relationship between an asset and a fulfillment asset.

This field is a polymorphic relationship field.

Relationship Name: FulfillmentSourceAsset

Refers To: Asset, FulfillmentAsset

FulfillmentTargetAssetId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The identifier of the target asset that's being fulfilled.

This field is a relationship field.

Relationship Name: FulfillmentTargetAsset

Refers To: FulfillmentAsset

IsUsedForFulfmtAssetActivation

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if internal jobs are allowed to activate the related fulfillment asset. The default value is true.

This field is available in API version 6.0 and later.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the asset that's being fulfilled.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the request record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RelationshipType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of relationship between an asset and a fulfillment asset.

Valid values are `SourceBundleRoot` or `SourceLineItem`.

SegmentIdentifier

Type: string

Properties: Create, Group, Nillable, Sort,

Description: The ID of the ramp segment associated with the asset state period.

This field is available in API version 63.0 and later in orgs that have Revenue Management when the Ramp Deals setting is enabled.

Status

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The status of the fulfillment asset.

Valid values are `Active` or `Inactive`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AssetFulfillmentDecompHistory on page 2515: History is available for tracked fields of the object starting API version 65.0.

[AssetFulfillmentDecompShare](#) on page 2517: Sharing is available for the object.

FulfillmentAsset

Represents an instance of a technical product used to provide a customer asset. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The identifier of the account.

This field is a relationship field.

Relationship Name: Account

Relationship Type: Lookup

Refers To: Account

IsTimeAware

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if the fulfillment asset's configuration data is tracked in a time-aware or time-agnostic manner. Available in API version 67.0 and later.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

For internal use only.:

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

For internal use only.:

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment asset.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: For internal use only.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The identifier of the corresponding product.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

Quantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: For internal use only.

ScopeIdentifierText

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort

Description: The scope in which this fulfillment asset record is created. This field is available in API version 65.0 and later.

StateEndTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Represents the end time of the current fulfillment asset state period. Available in API version 67.0 and later.

StateStartTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Represents the start time of the current fulfillment asset state period. Available in API version 67.0 and later.

Status

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The status of the fulfillment asset.

Valid values are `Active` or `InActive`.

UnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The unit of measure for the asset quantity such as, unit, gallon, ton, or case. This field is available in API version 63.0 and later.

This field is a relationship field.

Relationship Name: UnitOfMeasure

Refers To: UnitOfMeasure

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentAssetHistory on page 2515: History is available for tracked fields of the object starting API version 65.0.

FulfillmentAssetShare on page 2517: Sharing is available for the object.

FulfillmentAssetAttribute

Represents an attribute of a fulfillment asset. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeObjects()`, `query()`, `update()`, `upsert()`

Fields

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The attribute definition in the catalog.

This field is a relationship field.

Relationship Name: AttributeDefinition

Relationship Type: Lookup

Refers To: AttributeDefinition

AttributeName

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: The name of the attribute.

AttributePicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: AttributePicklistValue

Relationship Type: Lookup

Refers To: AttributePicklistValue

AttributeValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of the attribute.

ExternalId

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

FulfillmentAssetId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The identifier of the fulfillment asset.

This field is a relationship field.

Relationship Name: FulfillmentAsset

Relationship Type: Master-detail

Refers To: FulfillmentAsset (the master object)

FulfillmentAssetRelationship

Represents a relationship between two fulfillment assets. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

AssociatedFulfillAssetRole

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The role of the associated fulfillment asset.

Valid values are `BundleComponent` or `ClassificationComponent`—Product Classification Component.

AssociatedFulfillmentAssetId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The name of the associated fulfillment asset.

This field is a relationship field.

Relationship Name: AssociatedFulfillmentAsset

Refers To: FulfillmentAsset

EndTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The time until when this asset relationship is valid.

MainFulfillmentAssetId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The name of the primary fulfillment asset.

This field is a relationship field.

Relationship Name: MainFulfillmentAsset

Relationship Type: Master-detail

Refers To: FulfillmentAsset (the master object)

MainFulfillmentAssetRole

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The role of the primary fulfillment asset.

Valid value is `Bundle Parent`.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment asset relationship.

ProductRelationshipTypeId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The type of relationship between two assets.

This field is a relationship field.

Relationship Name: ProductRelationshipType

Refers To: ProductRelationshipType

StartTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The time from when this asset relationship is valid.

FulfillmentAssetStatePeriod

Represents the period during which the fulfillment asset configuration is applicable. This object is available in API version 67.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description:

Possible values are:

- EUR—Euro
- INR—Indian Rupee
- USD—U.S. Dollar

The default value is USD.

EndTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Represents the end time of the state period. If null, the configuration is effective from Start Time. If Start Time is also null, the configuration is effective at all times.

FulfillmentAssetId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Represents the fulfillment asset to which this fulfillment asset state period applies.

This field is a relationship field.

Relationship Name: FulfillmentAsset

Relationship Type: Master-detail

Refers To: FulfillmentAsset (the master object)

IsSuperseded

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if the state period is superseded and the record is replaced by a newer version due to updates by the fulfillment process.

The default value is `false`.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the fulfillment asset state period.

Quantity

Type: double

Properties: Create, Filter, Sort, Update

Description: Represents the fulfillment product quantity applicable for the state period.

StartTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Represents the start time of the state period. If null, the configuration is effective until End Time. If End Time is also null, the configuration is effective at all times.

FulfmtAssetStatePeriodAttr

Represents the key-value pair of a fulfillment asset attribute applicable during a specific asset state period. This object is available in API version 67.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Represents the definition of the fulfillment asset state period attribute.

This field is a relationship field.

Relationship Name: AttributeDefinition

Refers To: AttributeDefinition

AttributeName

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: Represents the name of the fulfillment asset state period attribute.

AttributePicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Represents the reference identifier of the selected picklist value.

This field is a relationship field.

Relationship Name: AttributePicklistValue

Refers To: AttributePicklistValue

AttributeValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Represents the value of the fulfillment asset state period attribute.

ExternalId

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Represents the external ID of the fulfillment asset state period attribute.

FulfillmentAssetStatePeriodId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Represents the fulfillment asset period applicable to the object.

This field is a relationship field.

Relationship Name: FulfillmentAssetStatePeriod

Relationship Type: Master-detail

Refers To: FulfillmentAssetStatePeriod (the master object)

FulfillmentFalloutRule

Represents the fulfillment fallout handling rule. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

ErrorCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The failure error code of the fulfillment step that's associated with the rule.

FalloutQueueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The fallout queue that's associated with the fallout task. This field is available in API version 62.0 and later.

This field is a relationship field.

Relationship Name: FalloutQueue

Refers To: Group

FlowDefinitionName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the flow definition that's associated with the `AutoTask` type of fulfillment step.

IntegrationDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The integration definition that's associated with the `Callout` type of fulfillment step.

This field is a relationship field.

Relationship Name: IntegrationDefinition

Relationship Type: Lookup

Refers To: IntegrationProviderDef

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the flow definition that's associated with the `AutoTask` type of fulfillment step.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the fulfillment record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

RetriesAllowed

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of times a retry policy is run before the fulfillment step is considered failed.

RetryIntervals

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The interval after which the selected retry policy is run when the fulfillment step fails. This field is available in API version 62.0 and later.

RetryPolicy

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the retry policy used when the fulfillment step fails.

Valid value is:

- Immediate
- Monotonous

- Staggered

StepType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the type of fulfillment step associated with the fallout rule.

Valid values are `AutoTask`, `Callout`, `ManualTask`, `Milestone`, or `Pause`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentFalloutRuleHistory on page 2515: History is available for tracked fields of the object.

FulfillmentFalloutRuleShare on page 2517: Sharing is available for the object.

FulfillmentLineAttribute

Represents an attribute of a fulfillment order line. This object is available in API version 61.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `update()`, `upsert()`

Fields

AttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: A unique identifier for the attribute definition in the catalog.

This field is a relationship field.

Relationship Name: AttributeDefinition

Refers To: AttributeDefinition

AttributeName

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: The name of the attribute.

AttributePicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: AttributePicklistValue

Refers To: AttributePicklistValue

AttributeValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of the attribute.

ExternalId

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID that uniquely identifies the relationship in an external data source.

FulfillmentOrderLineItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: A unique identifier for the fulfillment order line item.

This field is a relationship field.

Relationship Name: FulfillmentOrderLineItem

Relationship Type: Master-detail

Refers To: FulfillmentOrderLineItem (the master object)

FulfillmentLineRel

Represents a relationship between two fulfillment order lines. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

AssociatedFoltemInventory

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Inventory level for the associated fulfillment order item.

Valid values are:

- Included in Main Inventory
- Not Included in Main Inventory

This field is available in API version 63.0 and later.

AssociatedFulfillOrderItemId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The identifier of the associated fulfillment order line item.

This field is a relationship field.

Relationship Name: AssociatedFulfillOrderItem

Refers To: FulfillmentOrderLineItem

AssociatedLineRole

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The role of the associated fulfillment order line item.

Valid values are `BundleComponent` or `ClassificationComponent`—Product Classification Component.

AssociatedQuanScaleMethod

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Method used to scale the quantity of the associated order item summary relative to the main fulfillment order item.

Valid values are:

- Constant
- Proportional

The default value is `Proportional`.

This field is available in API version 63.0 and later.

FulfillmentOrderId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the parent fulfillment order.

This field is a relationship field.

Relationship Name: FulfillmentOrder

Refers To: FulfillmentOrder

MainFulfillOrderItemRole

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The role of the primary fulfillment order line item.

Valid value is Bundle.

MainFulfillmentOrderItemId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the associated fulfillment order line item.

This field is a relationship field.

Relationship Name: MainFulfillmentOrderItem

Relationship Type: Master-detail

Refers To: FulfillmentOrderLineItem (the master object)

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the fulfillment order line relationship.

ProductRelationshipTypeId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The type of relationship between two assets.

This field is a relationship field.

Relationship Name: ProductRelationshipType

Refers To: ProductRelationshipType

FulfillmentLineSourceRel

Represents the relationship between a fulfillment order line and its decomposition source. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Action

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the action to be performed on the asset fulfillment decomposition record. This field is available in API version 66.0 and later.

Possible values are:

- Add
- Cancel
- NoChange—No Change

FulfillmentOrderLineId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the fulfillment order line.

This field is a relationship field.

Relationship Name: FulfillmentOrderLine

Refers To: FulfillmentOrderLineItem

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The relation between the two order line sources.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the relationship record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

SourceItemIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The ID of the decomposition source that's related to the fulfillment order line. This field is available in API version 64.0 and later.

SourceLineItemId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The ID of the source line item.

This field is a polymorphic relationship field.

Relationship Name: SourceLineItem

Refers To: FulfillmentOrderLineItem, OrderItem

SourceType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of source for the line item.

Valid values are `SourceBundleRoot` or `SourceLineItem`.

SupplementalAction

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The supplemental action that's applied to the line item based on the run-time changes made to the original fulfillment request. This field is available in API version 62.0 and later.

Valid values are:

- Add
- Amend
- Cancel
- NoChange

UniqueIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort

Description: For internal use only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentLineSourceRelShare on page 2517: Sharing is available for the object.

FulfillmentPlan

Represents a set of steps to be created to fulfill the order. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

ExecutionUserId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

Relationship Name: ExecutionUser

Refers To: User

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the fulfillment plan.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Priority

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The priority of the fulfillment plan execution. This field is available in API version 63.0 and later.

Valid values are `Default`, `High`, or `Bulk`.

SourceIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update, idLookup (Available in API version 64.0 and later)

Description: For internal use only.

SourceType

Type: string

Properties: Create, Filter, Group, Nillable, Sort

Description: The type of source for the fulfillment plan. This field is available in API version 62.0 and later.

State

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the fulfillment plan.

Valid values are `Completed`, `InProgress`, or `NotStarted`.

UsageType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The business that uses Fulfillment Orchestration.

Valid values are `IntegrationOrchestrator`, `Generic`, or `StageManagement`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentPlanChangeEvent on page 2507: Change events are available for the object.

FulfillmentPlanHistory on page 2515: History is available for tracked fields of the object starting API version 65.0.

FulfillmentPlanShare on page 2517: Sharing is available for the object.

FulfillmentStep

Represents a task that's required to perform a certain action as part of order fulfillment. This task can be manual or automated. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

ActualCompletionDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the fulfillment step state changed to `Completed` or `Skipped`.

ActualStartDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the fulfillment step state changed to `Ready`.

AssignedToId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The user or queue associated with the fulfillment step.

This field is a polymorphic relationship field.

Relationship Name: AssignedTo

Relationship Type: Lookup

Refers To: Queue, User

CustomConfigParameter

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Represents the custom configuration context set by the designer in the Fulfillment Step Definition record. This context is passed to fulfillment steps during execution to enable flow reusability.

CompensatedStepId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The alternative step that's executed when a particular step in the fulfillment plan is amended or canceled.

This field is a relationship field. This field is available in API version 62.0 and later.

Relationship Name: CompensatedStep

Refers To: FulfillmentStep

DelayOf

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of the delay. This field is available in API version 63.0 and later.

DelayUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit for the delay of the fulfillment step. This field is available in API version 63.0 and later.

Valid values are `Days`, `Hours`, or `Minutes`.

ExecuteOn

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies when to execute the fulfillment step. This field is available in API version 63.0 and later.

Valid values are `PreviousStepExecutionDate` or `SourceLineStartDate`.

ExecuteOnRuleId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the expression set. The fulfillment step is executed only when its corresponding expression set returns the value `true`.

This field is a polymorphic relationship field.

Relationship Name: ExecuteOnRule

Relationship Type: Lookup

Refers To: ExpressionSet

ExecutionMessage

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

FalloutQueueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The fallout queue that's associated with the fallout task. This field is available in API version 62.0 and later.

This field is a relationship field.

Relationship Name: FalloutQueue

Refers To: Group

FlowDefinitionName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the flow definition that's associated with the `AutoTask` type of fulfillment step. This field is available in API version 62.0 and later.

FlowInterviewId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The flow interview associated with the fulfillment step.

This field is a relationship field.

Relationship Name: FlowInterview

Relationship Type: Lookup

Refers To: FlowInterview

ForcePlanFreezeDuringExecution

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether to freeze the plan while the step is in progress. If enabled, specifies how to complete the step before resuming the plan. This field is available in API version 63.0 and later.

Valid values are `Never` or `YesButWaitForStepCompletion`.

The default value is `Never`.

FulfillmentPlanId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The fulfillment plan associated with the fulfillment step.

This field is a relationship field.

Relationship Name: FulfillmentPlan

Relationship Type: Lookup

Refers To: FulfillmentPlan

FulfillmentStepDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The fulfillment step definition associated with the fulfillment step.

This field is a relationship field.

Relationship Name: FulfillmentStepDefinition

Relationship Type: Lookup

Refers To: FulfillmentStepDefinition

IntegrationDefinitionNameId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: IntegrationDefinitionName

Relationship Type: Lookup

Refers To: IntegrationProviderDef

IsSkipBranch

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the remaining steps in the fulfillment step group are skipped from execution when the Execute On Rule condition is set (`true`) or not (`false`). This field is available in API version 62.0 and later.

The default value is `false`.

JeopardyStatus

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The jeopardy status of the fulfillment step.

This field is a calculated field.

JeopardyThreshold

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of days, hours, minutes, or seconds, counting back from the expected duration, before a fulfillment step is in jeopardy.

JeopardyThresholdUnit

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The time unit of the jeopardy threshold.

Valid values are `Days`, `Hours`, `Minutes`, or `Seconds`.

The default value is `Minutes`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment step.

NextEarliestRunTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The next available time for the process execution. This field is available in API version 62.0 and later.

OmniscriptName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

PlannedCompletionDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time Dynamic Revenue Orchestrator estimates that the fulfillment step will complete.

PlannedStartDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the Dynamic Revenue Orchestrator calculates the fulfillment step state change to Ready.

PointOfNoReturn

Type: multipicklist

Properties: Create, Filter, Nillable

Description: The type of source change applied to the line item. This field is available in API version 62.0 and later.

Valid value is:

- Changes Denied

RequestedCompletionDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The planned completion date and time of the fulfillment step. For internal use only.

RequestedStartDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The planned start date and time of the fulfillment step. For internal use only.

ResumeOnRuleId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The rule set or expression set for the fulfillment step. The step is completed only when the corresponding expression set returns the `isExecuteStep` output as `true`.

This field is a polymorphic relationship field.

Relationship Name: ResumeOnRule

Relationship Type: Lookup

Refers To: ExpressionSet

RetryAttempts

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of attempts allowed for retry as set up in the Fallout Qualification Rule table.

RunAsUserId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Overrides user context for an automated step. The default user context is AutomatedProc user.

This field is a relationship field.

Relationship Name: RunAsUser

Relationship Type: Lookup

Refers To: User

ScopeIdentifierText

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The scope under which the Fulfillment Step was created. This field is available in API version 68.0 and later.

State

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The state of the fulfillment step. For example, `In Progress` or `Completed`.

Valid values are:

- `Completed`

- Failed
- FataallyFailed
- InProgress
- Pending
- Ready
- Scheduled
- Skipped

StepType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The fulfillment step type associated with the fulfillment step.

Valid values are:

- AutoTask
- Callout
- ManualTask
- Milestone
- Pause
- StagedAssetize—Available in API version 63.0 and later.

TaskAllocationType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The method of assigning the manual step. This field is available in API version 63.0 and later.

Valid values are ContextBased, LeastLoaded, or RoundRobin.

TaskId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the task assigned to a user or queue. This field is available in API version 63.0 and later.

This field is a relationship field.

Relationship Name: Task

Refers To: Task

UsageType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The details about the business that uses Fulfillment Orchestration. Some examples of UsageBy include Financial Services Cloud and CPQ.

Valid values are `Fulfillment`, `InsuranceRuleAction`, `IntegrationOrchestrator`, or `OrderFulfillment`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentStepChangeEvent on page 2507: Change events are available for the object.

FulfillmentStepHistory on page 2515: History is available for tracked fields of the object.

FulfillmentStepShare on page 2517: Sharing is available for the object.

FulfillmentStepDefinition

Represents a definition of a step that must be executed during fulfillment orchestration. This object is available in API version 61.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AmendGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The fulfillment step group that's added to the fulfillment plan when the step is amended. This field is available in API version 62.0 and later.

This field is a relationship field.

Relationship Name: AmendGroup

Refers To: FulfillmentStepDefinitionGroup

AssignedToId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The user or queue associated with the fulfillment step definition.

This field is a polymorphic relationship field.

Relationship Name: AssignedTo

Relationship Type: Lookup

Refers To: Queue, User

CancelledGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The fulfillment step group that's added to the fulfillment plan when the step is canceled. This field is available in API version 62.0 and later.

This field is a relationship field.

Relationship Name: CancelledGroup

Refers To: FulfillmentStepDefinitionGroup

CustomBaseExecutionDate

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The context tag containing a custom date that's used to calculate the execution time for a future-dated step. This field is available in API version 65.0 and later.

CustomConfigParameter

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Represents the custom configuration context given by the designer. This context is passed to fulfillment steps during execution to support flow reusability.

CustomFulfillmentScope

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The custom scope to use during order fulfillment. This field is available in API version 65.0 and later.

DelayOf

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of the delay. This field is available in API version 63.0 and later.

DelayUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit for the delay of the fulfillment step. This field is available in API version 63.0 and later.

Valid values are `Days`, `Hours`, or `Minutes`.

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Description of the fulfillment step definition, shown to admins in the orchestration plan. This field is available in API version 68.0 and later.

ExecuteOn

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies when to execute the fulfillment step. This field is available in API version 63.0 and later.

Valid values are `PreviousStepsStartDate` or `SourceLineStartDate`.

ExecuteOnConditionData

Type: textarea

Properties: Create, Nillable, Update

Description: The condition for executing the fulfillment step. The condition is defined as a rule or a set of rules in JSON format. This field is available in API version 66.0 and later.

ExecuteOnRuleId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The expression set for the fulfillment step. The step is executed only when the corresponding expression set is `true`. This field is a polymorphic relationship field.

Relationship Name: ExecuteOnRule

Relationship Type: Lookup

Refers To: ExpressionSet

FlowDefinitionName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the associated flow.

ForcePlanFreezeDuringExecution

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether to freeze the plan while the step is in progress. If enabled, specifies how to complete the step before resuming the plan. This field is available in API version 63.0 and later.

Valid values are `Never` or `YesButForcefullyCompleteStep`.

The default value is `Never`.

IntegrationDefinitionNameId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the integration definition that's used to set up communication with an external endpoint.

This field is a relationship field.

Relationship Name: IntegrationDefinitionName

Relationship Type: Lookup

Refers To: IntegrationProviderDef

IsSkipBranch

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the remaining steps in the fulfillment step group are skipped from execution when the Execute On Rule condition is set. This field is available in API version 62.0 and later.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment step definition.

OmniscriptName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

PointOfNoReturn

Type: multipicklist

Properties: Create, Filter, Nillable, Update

Description: The type of source change applied to the line item. This field is available in API version 62.0 and later.

Valid value is:

- Changes Denied

ResumeOnConditionData

Type: textarea

Properties: Create, Nillable, Update

Description: The condition for resuming the paused fulfillment step. The condition is defined as a rule or a set of rules in JSON format. This field is available in API version 66.0 and later.

ResumeOnRuleId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The expression set for the fulfillment step definition. The step is completed when the expression set is `true`.

This field is a polymorphic relationship field.

Relationship Name: ResumeOnRule

Relationship Type: Lookup

Refers To: ExpressionSet

RunAsUserId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The user context to run a fulfillment step when the fulfillment operator wants to override the default autoproc user.

This field is a relationship field.

Relationship Name: RunAsUser

Relationship Type: Lookup

Refers To: User

Scope

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The scope of the fulfillment step definition. For example, `Bundle` or `Order`.

Valid values are `Bundle`, `CrossPlan`, `LineItem`, or `Plan`.

The default value is `Plan`.

StepDefinitionGroupId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: StepDefinitionGroup

Relationship Type: Master-detail

Refers To: FulfillmentStepDefinitionGroup (the master object)

StepType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: For internal use only.

Valid values are:

- `AutoTask`
- `Callout`
- `ManualTask`
- `Milestone`
- `Pause`
- `StagedAssetize`

TaskAllocationType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The method of assigning the manual step. This field is available in API version 62.0 and later.

Valid value is:

- `RoundRobin`
- `LeastLoaded`
- `ContextBased`

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The business vertical that uses fulfillment orchestration. For example, Financial Services Cloud.

Valid values are `IntegrationOrchestrator` or `OrderFulfillment`.

FulfillmentStepDefinitionGroup

Represents a set of fulfillment step definitions. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: `string`

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment step definition group.

OwnerId

Type: `reference`

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

UsageType

Type: `picklist`

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The business that uses Fulfillment Orchestration.

Possible values are `IntegrationOrchestrator`, `Generic`, or `InsuranceRuleAction`

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentStepDefinitionGroupHistory on **page 2515**: History is available for tracked fields of the object.

FulfillmentStepDefinitionGroupShare on **page 2517**: Sharing is available for the object.

FulfillmentStepDependency

Represents a dependency between tasks by defining the order between a task and one that depends on it. This object is available in API version 61.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

DependencyDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the fulfillment step dependency definition.

This field is a relationship field.

Relationship Name: `DependencyDefinition`

Refers To: `FulfillmentStepDependencyDef`

DependentStepId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The name of a fulfillment step that depends on this step.

This field is a relationship field.

Relationship Name: `DependentStep`

Relationship Type: Master-detail

Refers To: `FulfillmentStep`

DependsOnStepId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the fulfillment step that this step depends on. That is, the name of the step that must be executed before this one can run.

This field is a relationship field.

Relationship Name: DependsOnStep

Refers To: FulfillmentStep

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: An automatically generated name for the fulfillment step dependency.

FulfillmentStepDependencyDef

Represents a dependency that must be created between two fulfillment step records. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

CustomScope

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the custom scope when the dependency scope is set to custom. This field is available in API version 68.0 and later.

DependencyScope

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The scope of the fulfillment step dependency definition. For example, Order or Order Item.

Valid values are:

- Bundle

- `LineItem`
- `Plan`
- `CrossPlan`
- `Custom`

The default value is `Plan`.

DependsOnStepDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The fulfillment step definition that must be executed before this step.

This field is a relationship field.

Relationship Name: DependsOnStepDefinition

Refers To: FulfillmentStepDefinition

FulfillmentStepDefinitionId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The identifier of the fulfillment step definition.

This field is a relationship field.

Relationship Name: FulfillmentStepDefinition

Relationship Type: Master-detail

Refers To: FulfillmentStepDefinition (the master object)

IsCompensateInReverse

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the order to insert the compensated group steps is reversed when a fulfillment step is canceled (`true`) or not (`false`).

The default value is `false`. This field is available in API version 63.0 and later.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment step dependency definition.

PropagateStateToDependentStep

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The state that's propagated to the dependent fulfillment step when the source fulfillment step is amended or canceled in the fulfillment plan.

Valid values are `Amended`, `Both`, `Canceled`, or `None`. This field is available in API version 63.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentStepDependencyDefChangeEvent on page 2507: Change events are available for the object.

FulfillmentStepDependencyDefFeed on page 2509: Feed tracking is available for the object.

FulfillmentStepDependencyDefHistory on page 2515: History is available for tracked fields of the object.

FulfillmentStepDependencyDefOwnerSharingRule on page 2516: Sharing rules are available for the object.

FulfillmentStepDependencyDefShare on page 2517: Sharing is available for the object.

FulfillmentStepJeopardyRule

Represents the duration and tolerance for the step in the fulfillment process to allow the overall tracking of rules and risks. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

EstimatedDuration

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The estimated time to complete the fulfillment step.

EstimatedDurationUnit

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The unit of measurement that applies to the estimated time to complete the fulfillment step.

Valid values are `Days`, `Hours`, `Minutes`, or `Seconds`.

The default value is `Minutes`.

FlowDefinition

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The flow definition that's associated with the `AutoTask` type of the fulfillment step.

IntegrationDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The integration definition that's associated with the `Callout` type of the fulfillment step.

This field is a relationship field.

Relationship Name: IntegrationDefinition

Relationship Type: Lookup

Refers To: IntegrationProviderDef

JeopardyThreshold

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The value indicating the threshold after which the fulfillment step is in jeopardy.

JeopardyThresholdUnit

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The unit of measurement that applies to the jeopardy threshold value.

Valid values are `Days`, `Hours`, `Minutes`, or `Seconds`.

The default value is `Minutes`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: For internal use only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: For internal use only.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: For internal use only.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: For internal use only.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

StepType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of fulfillment step that's affected by the jeopardy rule.

Valid values are `AutoTask`, `Callout`, `ManualTask`, `Milestone`, or `Pause`.

FulfillmentStepSource

Represents a link between a fulfillment step and the corresponding order lines. This object is available in API version 61.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: An automatically generated name for the fulfillment step source.

SourceIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The identifier of the source order line item (order item or fulfillment order line).

SourceLineItemId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a polymorphic relationship field.

Relationship Name: SourceLineItem

Refers To: FulfillmentOrderLineItem, OrderItem

StepId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The identifier of the fulfillment step.

This field is a relationship field.

Relationship Name: Step

Relationship Type: Master-detail

Refers To: FulfillmentStep (the master object)

VersionGroupIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the version group that's assigned to the fulfillment step source item. This field is available in API version 64.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[FulfillmentStepSourceChangeEvent](#) on page 2507: Change events are available for the object.

FulfillmentTaskAssignmentRule

Represents a set of actions that assign a task to a user or queue. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ConditionData

Type: textarea

Properties: Create, Nillable, Update

Description: The condition for executing the fulfillment task assignment rule. The condition is defined as a rule or a set of rules in JSON format. This field is available in API version 66.0 and later.

ConditionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Condition ID that's used to determine the task assignment.

This field is a polymorphic relationship field.

Relationship Name: Condition

Refers To: ExpressionSet

DestinationId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Destination ID of the task assignment such as, Queue or User.

This field is a polymorphic relationship field.

Relationship Name: Destination

Refers To: Group, User

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the object that specifies the condition used to determine the task assignment.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the task assignment rule record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Priority

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The priority of the rule for execution.

SourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Source ID of the task assignment such as Queue.

This field is a relationship field.

Relationship Name: Source

Refers To: Group

TaskAllocationType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The method of assigning the manual step.

Valid values are `ContextBased`, `LeastLoaded`, or `RoundRobin`.

UsageType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Name of the usage type.

Possible values are:

- `Fulfillment`
- `Generic`
- `InsuranceRuleAction`—Insurance Rule Action

- `IntegrationOrchestrator`—Integration Orchestrator

The default value is `Fulfillment`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentTaskAssignmentRuleFeed: Feed tracking is available for the object.

FulfillmentTaskAssignmentRuleHistory: History is available for tracked fields of the object.

FulfillmentTaskAssignmentRuleShare: Sharing is available for the object.

FulfillmentWorkspace

Represents a visual designer for fulfillment plans that can have multiple step groups and their dependencies. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Description

Type: `textarea`

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the fulfillment workspace.

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: `string`

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the fulfillment workspace.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who owns this record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

FulfillmentWorkspaceHistory on page 2515: History is available for tracked fields of the object starting API version 65.0.

FulfillmentWorkspaceShare on page 2517: Sharing is available for the object.

FulfillmentWorkspaceItem

Represents information about the attributes that are used in the definition for a fulfillment step group. This object is available in API version 61.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

FulfillmentStepDefinitionGroupId

Type: reference

Properties: Create, Filter, Group, Sort

Description: For internal use only.

This field is a relationship field.

Relationship Name: FulfillmentStepDefinitionGroup

Relationship Type: Master-detail

Refers To: FulfillmentStepDefinitionGroup (the detail object)

FulfillmentWorkspaceId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the parent fulfillment workspace that's related to this record.

This field is a relationship field.

Relationship Name: FulfillmentWorkspace

Relationship Type: Master-detail

Refers To: FulfillmentWorkspace (the master object)

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the fulfillment workspace item.

ShowOrder

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The display sequence value of the fulfillment workspace item.

ProductDecompEnrichmentRule

Represents mappings between fields and attributes. Enrichment rules are part of a decomposition rule, and are used to propagate data to fulfillment order lines. This object is available in API version 61.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

CalculationDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: An expression set or a decision matrix that calculates the destination value.

This field is a polymorphic relationship field.

Relationship Name: CalculationDefinition

Refers To: DecisionMatrixDefinition, ExpressionSet

CalculationMethod

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of enrichment rule.

Valid values are `Ad-verbatim—As Is`, `Static-Lookup—List Lookup`, or `Expression-Set`—Available in API version 64.0 and later.

DecompositionRuleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The identifier of the decomposition rule.

This field is a relationship field.

Relationship Name: DecompositionRule

Relationship Type: Parent-child

Refers To: ProductFulfillmentDecompRule (the master object)

DestinationApiName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The API name of the destination field or attribute code of an attribute.

DestinationAttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: DestinationAttributeDefinition

Refers To: AttributeDefinition

DestinationAttributeIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The destination entity attribute that is mapped from the source entity attribute. This field can store a Salesforce AttributeDefinition ID or an external identifier. This field is available in API version 65.0 and later.

DestinationContextTag

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the destination context definition.

DestinationType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The destination type for mapping.

Valid values are `Attribute` or `Field`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record

ListMappingGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: ListMappingGroup

Refers To: ValTfrmGrp

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the decomposition rule.

RuleEnforcement

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the rule applies to all fulfillment requests or only to specific ones.

Valid values are `AllFulfillmentRequests` or `InitialFulfillmentRequest`. This field is available in API version 63.0 and later.

SourceApiName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The API name of the source field or attribute code of an attribute.

SourceAttributeDefinitionId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: For internal use only.

This field is a relationship field.

Relationship Name: SourceAttributeDefinition

Refers To: AttributeDefinition

SourceAttributeIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The source entity attribute that is mapped to the destination entity attribute. This field can store a Salesforce AttributeDefinition ID or an external identifier. This field is available in API version 65.0 and later.

SourceContextTag

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The source type for the context definition.

SourceType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The source type for mapping.

Valid values are `Attribute` or `Field`.

ProdtDecompEnrchVarMap

Represents the mapping of a field context tag or an attribute to a variable within an expression set. This object is available in API version 64.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`,

Fields

AttributeDefinitionId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The attribute definition the expression set variable is mapped to when creating the enrichment rule.

This field is a relationship field.

Relationship Name: AttributeDefinition

Refers To: AttributeDefinition

ExpressionSetVarName

Type: string

Properties: Filter, Group, Sort

Description: The name of the variable that's mapped to the expression set defined in the enrichment rule.

FieldContextTagName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The name of the field context tag to which the expression set variable is mapped when creating the enrichment rule.

ProductAttributeIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The product attribute from an internal or external catalog, used by DRO to copy data during the enrichment process. This field is available in API version 65.0 and later.

ProductDecompEnrichmentRuleId

Type: reference

Properties: Filter, Group, Sort

Description: The rule that contains the mappings between the fields and attributes for the decomposing product.

This field is a relationship field.

Relationship Name: ProductDecompEnrichmentRule

Relationship Type: Master-detail

Refers To: ProductDecompEnrichmentRule (the master object)

VariableType

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Specifies whether the expression set variable is an input or output variable.

Valid values are `Input` or `Output`.

The default value is `Input`.

ProductFulfillmentDecompRule

Represents a rule that determines how an order is broken into sub-orders with specific technical details that help in order fulfillment. It can be applied to a commercial or a technical product. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ConditionData

Type: textarea

Properties: Create, Nillable, Update

Description: The condition for executing the product fulfillment decomposition. The condition is defined as a rule or a set of rules in JSON format. This field is available in API version 66.0 and later.

DestinationProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The destination product for the decomposition rule.

This field is a relationship field.

Relationship Name: DestinationProduct

Relationship Type: Lookup

Refers To: Product2

DestinationIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The destination entity in the product fulfillment decomposition rule. This field can store a Salesforce product ID or an external identifier. This field is available in API version 65.0 and later.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the decomposition rule.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who created the record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Priority

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The priority of the decomposition rule. Decomposition rules are executed in order of priority.

SourceProductClassificationId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The classification of the source product that's used for decomposition. This field is available in API version 62.0 and later.

This field is a relationship field.

Relationship Name: SourceProductClassification

Refers To: ProductClassification

SourceClassIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The source classification entity in the product fulfillment decomposition rule. This field can store a Salesforce product ID or an external identifier. This field is available in API version 65.0 and later.

SourceIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The source entity in the product fulfillment decomposition rule. This field can store a Salesforce product ID or an external identifier. This field is available in API version 65.0 and later.

SourceProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Source product for the decomposition rule.

This field is a relationship field.

Relationship Name: SourceProduct

Relationship Type: Lookup

Refers To: Product2

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductFulfillmentDecompRuleShare on page 2517: Sharing is available for the object.

ProductFulfillmentScenario

Represents a link between a product and the corresponding group of fulfillment steps that's necessary to fulfill that product. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Action

Type: multipicklist

Properties: Create, Filter, Nillable, Update

Description: For internal use only.

Valid values are Add, Amend, Cancel, NoChange, or Renew.

ConditionData

Type: textarea

Properties: Create, Nillable, Update

Description: The condition for executing the product fulfillment scenario. The condition is defined as a rule or a set of rules in JSON format. This field is available in API version 66.0 and later.

FulfillmentStepDefnGroupId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The fulfillment step definition group associated with the product fulfillment scenario.

This field is a relationship field.

Relationship Name: FulfillmentStepDefnGroup

Relationship Type: Lookup

Refers To: FulfillmentStepDefinitionGroup

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: For internal use only.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: For internal use only.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the product fulfillment scenario.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: For internal use only.

This field is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

ProductClassificationId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product classification associated with the product fulfillment scenario.

This field is a relationship field.

Relationship Name: ProductClassification

Relationship Type: Lookup

Refers To: ProductClassification

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update, Nillable (Available in API version 64.0 and later)

Description: The product associated with the product fulfillment scenario.

This field is a relationship field.

Relationship Name: Product

Relationship Type: Lookup

Refers To: Product2

SourceClassIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The source classification entity in the product fulfillment scenario. This field can store a Salesforce Product Class ID or an external identifier. This field is available in API version 65.0 and later.

SourceIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The source entity in the product fulfillment scenario. This field can store a Salesforce product ID or an external identifier. This field is available in API version 65.0 and later.

UsageType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Name of the usage type. This field is available in API version 66.0 and later.

Possible values are:

- Fulfillment
- Generic
- InsuranceRuleAction—Insurance Rule Action
- IntegrationOrchestrator—Integration Orchestrator
- StageManagement—Stage Management

The default value is Fulfillment.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductFulfillmentScenarioShare on [page 2517](#): Sharing is available for the object.

SalesTrxnDeleteEvent

Represents the platform event that triggers the deletion of sales transaction fulfillment request records when the corresponding reference records are deleted. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `describeSObjects()`

Fields

ReferenceObjectIdentifier

Type: string

Properties: Create, Nillable

Description: Object identifier for the sales transaction fulfillment request to be deleted.

SalesTransactionFulfillReq

Represents the statuses of all the sub-orders that belong to the selected commercial or technical product. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Fields

AssetizationStatus

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Specifies the status of the assetization.

Valid values are:

- Completed
- Failed
- InProgress
- NotStarted
- Rejected
- NotApplicable- Available in API version 64.0 and later.

DecompositionStatus

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Specifies the status of the decomposition.

Valid values are:

- Completed
- Failed
- InProgress
- NotStarted
- Rejected
- NotApplicable- Available in API version 64.0 and later.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the sales transaction fulfillment request.

OrchestrationGroupKey

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The identifier of the group of sales transactions that require synchronization before processing. This field is available in API version 63.0 and later.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: The ID of the user who created the request record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PlanCompositionStatus

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: For internal use only.

Valid values are:

- Completed
- Failed
- InProgress
- NotStarted
- Rejected
- NotApplicable - Available in API version 64.0 and later.

PlanExecutionStatus

Type: picklist

Properties: Filter, Group, Nillable, Sort

Description: Specifies the status of the plan execution.

Valid values are:

- InProgress
- Frozen
- Freezing

PlanId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The identifier of the plan.

This field is a relationship field.

Relationship Name: Plan

Refers To: FulfillmentPlan

PreviousRequestId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The identifier of the previous fulfillment request.

This field is a relationship field.

Relationship Name: PreviousRequest

Refers To: SalesTransactionFulfillReq

ReferenceObjectIdentifier

Type: reference

Properties: Filter, Group, idLookup, Nillable, Sort

Description: The ID of the sales transaction record. This field is available in API version 64.0 and later.

SalesTransactionType

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Specifies the type of sales transaction that's processed by the fulfillment request.

Valid values are `StandardOrder` or `GenericAdapter`—Available in API version 64.0 and later.

Status

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Specifies the overall status of the fulfillment.

Valid values are:

- Created
- Freezing
- Frozen
- Fulfilled
- Fulfilling
- Rejected
- Superseded

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

SalesTransactionFulfillReqShare on page 2517: Sharing is available for the object.

ValTfrm

Represents mappings between fields and attributes. Enrichment rules are part of a decomposition rule, and are used to propagate data to fulfillment order lines. This object is available in API version 61.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

InputDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date of value entry.

InputDatetime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The time of value entry.

InputNumber

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The value of input number.

InputPicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The identifier of the input list of values.

This field is a relationship field.

Relationship Name: InputPicklistValue

Refers To: AttributePicklistValue

InputString

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of input text.

IsInputBoolean

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if a value was entered (`true`) or not (`false`).

The default value is `false`.

IsOutputBoolean

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates if there was an output value (`true`) or not (`false`).

The default value is `false`.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The name of the related transformation group.

OutputDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date of matched output.

OutputDatetime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The time of matched output.

OutputNumber

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The value of output number.

OutputPicklistValueId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The identifier of the output list of values.

This field is a relationship field.

Relationship Name: OutputPicklistValue

Refers To: AttributePicklistValue

OutputString

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value of output text.

ValueTransformGroupId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The identifier of the related transformation group.

This field is a relationship field.

Relationship Name: ValueTransformGroup

Relationship Type: Master-detail

Refers To: ValTfrmGrp (the master object)

ValTfrmGrp

Represents a rule that determines how an order is broken into sub-orders with specific technical details that help in order fulfillment. The rule can be applied to a commercial or a technical product. This object is available in API version 61.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

DestinationPrimitiveType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The data type of the output value.

Valid values are:

- Boolean
- Currency

- Date
- Datetime
- Number
- Percent—Picklist Value
- Text

IsDestinationEnumerated

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the output is a list of values (`true`) or not (`false`).

The default value is `false`.

IsSourceEnumerated

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the input is from a list of values (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date when a user viewed this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the list mapping.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the user who owns this record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

SourcePrimitiveType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The data type of the input value.

Valid values are:

- Boolean
- Currency
- Date
- Datetime
- Number
- Percent—Picklist Value
- Text

UsageType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The data mapping feature that uses this value transformation group.

Valid value is `DFOListMapping`

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ValTfrmGrpShare](#) on page 2517: Sharing is available for the object.

Dynamic Revenue Orchestrator Standard Invocable Actions

Use standard invocable actions to submit an order or a sales transaction to Dynamic Revenue Orchestrator (DRO) for fulfillment.

[Decompose Sales Transaction Action](#)

Decompose a sales transaction, such as a quote, order, or order summary.

[Freeze Sales Transaction Action](#)

Freeze a sales transaction to disable the modification of a line item.

[Get Point Of No Return Action](#)

Get details about the point of no return milestone for each line item in a sales transaction.

[Orchestrate Sales Transaction Action](#)

Initiate the orchestration process for a sales transaction. This action executes only the plan composition and orchestration phases, without performing decomposition.

[Orchestrate Transaction Action](#)

Orchestrate a transaction for any domain-specific object, such as a collection plan for Revenue billing, that requires the composition and execution of a fulfillment plan.

[Submit Order Action](#)

Submit an order to Dynamic Revenue Orchestrator (DRO) for fulfillment.

[Submit Sales Transaction Action](#)

Initiate the fulfillment process of any sales transaction, such as a quote, an order, or an order summary.

[Unfreeze Sales Transaction Action](#)

Unfreeze a sales transaction to enable the modification of a line item.

SEE ALSO:

[Actions Developer Guide: Overview](#)

[REST API Developer Guide: Invocable Actions Standard](#)

Decompose Sales Transaction Action

Decompose a sales transaction, such as a quote, order, or order summary.

Specify the ID of the sales transaction to decompose. The decomposition process includes these steps.

- Intake process
- Sales transaction decomposition

The intake process occurs synchronously or asynchronously, as specified with the `intakeRequestType` input parameter. You can also specify the decomposition priority using the `fulfillmentPriority` parameter.

This action executes only the decomposition process and stops before orchestration. You can execute custom logic in between the decomposition and orchestration processes.

This action is available in API version 68.0 and later.

Special Access Rules

The Decompose Sales Transaction action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: `/services/data/v66.0/actions/standard/decomposeSalesTransaction`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
allowOverrideOfPointOfNoReturn	boolean	Indicates whether to override the point of no return setting for the fulfillment step (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
fulfillmentAdapter	string	Required. Type of fulfillment adapter. Valid values are <code>StandardOrder</code> or <code>GenericAdapter</code> .
fulfillmentPriority	string	Priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .
hydratedContextId	string	ID of the hydrated context.
intakeRequestType	string	Type of request to process the intake. Valid values are <code>Synchronous</code> or <code>Asynchronous</code> .
priorityLimitAction	string	Type of action to perform when the priority limit is reached. Valid values are <code>Reject</code> or <code>Downgrade</code> . This parameter is applicable only when you specify the <code>fulfillmentPriority</code> parameter.
salesTransactionId	id	Required. ID of the sales transaction to submit.

Outputs

Output	Type	Description
errorCode	string	Code that corresponds to the type of error encountered.
requestedFulfillmentPriority	string	Priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .
requestId	string	Request ID of the invocation.
resolvedFulfillmentPriority	string	Resolved priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .
submitStatus	string	Submission status of the sales transaction for decomposition. Valid values are <code>Success</code> , <code>Error</code> , <code>Submitted</code> , or <code>Rejected</code> .
usedContextId	string	ID of the used context that updates the decomposition process.

Example

POST

This sample request is for the Decompose Sales Transaction action.

```
{
  "inputs": [
    {
      "fulfillmentAdapter": "StandardOrder",
      "intakeRequestType": "Synchronous",
```

```

    "salesTransactionId": "801xx000003GYexAAG"
  }
]
}

```

This sample response is for the Decompose Sales Transaction action.

```

[
  {
    "actionName": "decomposeSalesTransaction",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "requestId": "ee3ded2e-fe43-401b-a54d-9124d48a0b72",
      "requestedFulfillmentPriority": "Default",
      "submitStatus": "SUCCESS",
      "usedContextId": "0000000s21to18g0009176412796953180a8259def914e1abbd863dde076b71f",

      "resolvedFulfillmentPriority": "Default"
    },
    "sortOrder": -1,
    "version": 1
  }
]

```

Freeze Sales Transaction Action

Freeze a sales transaction to disable the modification of a line item.

A line item can reach a milestone in the fulfillment process, which is known as a point of no return, where the line item can't accept modifications. Get details about the point of no return for each line item of a sales transaction.

This action is available in API version 64.0 and later.

Special Access Rules

The Freeze Sales Transaction action is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/freezeSalesTransaction`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
salesTransactionId	id	Required. ID of the sales transaction that's submitted to the Dynamic Revenue Orchestrator.

Outputs

Output	Type	Description
errorCode	string	Code indicating the type of error.
orchestrationPlanId	id	ID of the created orchestration plan.
planState	string	Status of the created orchestration plan. Valid values are <code>FAILURE</code> , <code>NOTSTARTED</code> , <code>PENDING</code> , <code>COMPLETED</code> , <code>FROZEN</code> , or <code>INPROGRESS</code> .
pointOfNoReturn DetailForLineItems List	string	Collection of sales transaction line items, where each item includes a boolean value indicating whether it has reached the point of no return.
requestId	string	ID of the request to get the point of no return details.
salesTransactionId	string	ID of the sales transaction that's submitted to the Dynamic Revenue Orchestrator.

Example

POST

This sample request is for the Freeze Sales Transaction action.

```
{
  "inputs": [
    {
      "salesTransactionId": "801SG00000jQ01ZYAW"
    }
  ]
}
```

This sample response is for the Freeze Sales Transaction action.

```
[
  {
    "actionName": "freezeSalesTransaction",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "salesTransactionId": "801SG00000jQ01ZYAW",
      "orchestrationPlanId": "13VSG00000229Z72AI",
      "requestId": "452789a6-f2ab-4079-8aca-a11dbfef6a45",
    }
  }
]
```

```
    "pointOfNoReturnDetailForLineItemsList": "802SG000007D0B4YAK\\": {\namendAllowed:
false,\nanyChangesAllowed: true,\ncancelAllowed: false\n}, \n802SG000007D0B3YAK\\":
{\namendAllowed: false,\nanyChangesAllowed: true,\ncancelAllowed: false\n}",
    "planState": "Frozen"
  },
  "sortOrder": -1,
  "version": 1
}
```

Get Point Of No Return Action

Get details about the point of no return milestone for each line item in a sales transaction.

A line item can reach a milestone in the fulfillment process, which is known as a point of no return, where the line item can't accept modifications. Get details about the point of no return for each line item of a sales transaction.

This action is available in API version 64.0 and later.

Special Access Rules

The Get Point Of No Return action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/getPointOfNoReturnDetails

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
salesTransactionId	id	Required. ID of the sales transaction to get the point of no return details for.

Outputs

Output	Type	Description
errorCode	string	Code indicating the type of error.
lineItemsPointOfNoReturnInfo	string	Line items with the point of no return details.
planId	id	ID of the composed fulfillment plan.
planState	string	State of the fulfillment plan.

Output	Type	Description
requestId	string	Request ID of the invocation.
salesTransactionId	string	ID of the submitted sales transaction.

Example

POST

This sample request is for the Get Point Of No Return action.

```
{
  "inputs": [
    {
      "salesTransactionId": "801SG00000jQO1ZYAW"
    }
  ]
}
```

This sample response is for the Get Point Of No Return action.

```
[
  {
    "actionName": "getPointOfNoReturnDetails",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "planId": "13VSG00000229Z72AI",
      "requestId": "35c9388b-d30d-4d68-aae5-c109c8bff7ef",
      "lineItemsPointOfNoReturnInfo": "802SG000007D0B4YAK\": {\namendAllowed:
false,\nanyChangesAllowed: true,\ncancelAllowed: false\n}, \n802SG000007D0B3YAK\":
{\namendAllowed: false,\nanyChangesAllowed: true,\ncancelAllowed: false\n}",
      "salesTransactionId": "801SG00000jQO1ZYAW",
      "planState": "InProgress"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Orchestrate Sales Transaction Action

Initiate the orchestration process for a sales transaction. This action executes only the plan composition and orchestration phases, without performing decomposition.

Specify the ID of the sales transaction to orchestrate. The decomposition process includes these steps.

- Intake process
- Fulfillment orchestration

The intake process occurs synchronously or asynchronously, as specified with the `intakeRequestType` input parameter. You can also specify the orchestration priority using the `fulfillmentPriority` parameter.

Use this action when the sales transaction is decomposed either by a previous decomposition action or by custom logic before orchestrating the fulfillment plan.

This action is available in API version 68.0 and later.

Special Access Rules

The Orchestrate Sales Transaction action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/orchestrateSalesTransaction`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>allowOverrideOfPointOfNoReturn</code>	boolean	Indicates whether to override the point-of-no-return setting for the fulfillment step (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
<code>fulfillmentAdapter</code>	string	Required. Type of fulfillment adapter. Valid values are <code>StandardOrder</code> or <code>GenericAdapter</code> .
<code>fulfillmentPriority</code>	string	Priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .
<code>hydratedContextId</code>	string	ID of the hydrated context.
<code>intakeRequestType</code>	string	Type of request to process the intake. Valid values are <code>Synchronous</code> or <code>Asynchronous</code> .
<code>priorityLimitAction</code>	string	Type of action to perform when the priority limit is reached. Valid values are <code>Reject</code> or <code>Downgrade</code> . This parameter is applicable only when you specify the <code>fulfillmentPriority</code> parameter.
<code>salesTransactionId</code>	id	Required. ID of the sales transaction to submit.

Outputs

Output	Type	Description
<code>errorCode</code>	string	Code indicating the type of error.
<code>fulfillmentPlanId</code>	id	ID of the composed fulfillment plan.
<code>requestedFulfillmentPriority</code>	string	Priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .

Output	Type	Description
requestId	string	Request ID of the invocation.
resolvedFulfillmentPriority	string	Resolved priority to fulfill the sales transaction. Valid values are High, Bulk, or Default.
submitStatus	string	Submission status of the sales transaction for orchestration. Valid values are SUCCESS, ERROR, SUBMITTED, or REJECTED.
usedContextId	string	ID of the context that updates the orchestration process.

Example

POST

This sample request is for the Orchestrate Sales Transaction action.

```
{
  "inputs": [
    {
      "fulfillmentAdapter": "StandardOrder",
      "intakeRequestType": "Synchronous",
      "salesTransactionId": "801xx000003GYgZAAW"
    }
  ]
}
```

This sample response is for the Orchestrate Sales Transaction action.

```
[
  {
    "actionName": "orchestrateSalesTransaction",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "usedContextId": "0000000s21to18g00091764134566956e2100424de0d4af8869669df515e24cb",

      "requestId": "ac2a9d18-c702-43ee-bc08-1c03061b549c",
      "fulfillmentPlanId": "13Vxx0000004CFUEA2",
      "submitStatus": "SUCCESS",
      "resolvedFulfillmentPriority": "Default",
      "requestedFulfillmentPriority": "Default"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Orchestrate Transaction Action

Orchestrate a transaction for any domain-specific object, such as a collection plan for Revenue billing, that requires the composition and execution of a fulfillment plan.

Specify the ID of the transaction to orchestrate and the orchestration type. The orchestration process includes:

- Composition of the orchestration plan
- Execution of the fulfillment plan

This action is available in API version 66.0 and later.

Special Access Rules

The Orchestrate Transaction action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/orchestrateTransaction`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>transactionId</code>	string	Required. ID of the business object or domain object to be orchestrated, such as a Collection Plan ID.
<code>orchestrationType</code>	string	Required. Type of orchestration that's used to orchestrate the transaction. Valid values are <code>Generic</code> , <code>Fulfillment</code> , or <code>Billing</code> .

Outputs

Output	Type	Description
<code>requestId</code>	string	Request ID of the invocation.
<code>errorCode</code>	string	Code that corresponds to the type of encountered error.
<code>fulfillmentPlanId</code>	string	ID of the composed fulfillment plan.
<code>submitStatus</code>	string	Submission status of the transaction that's orchestrated. Valid values are <code>Success</code> or <code>Error</code> .

Example

POST

This sample request is for the Orchestrate Transaction action.

```
{
  "inputs": [
    {
      "transactionId": "801xx000003GYexAAG",
      "orchestrationType": "Fulfillment"
    }
  ]
}
```

This sample response is for the Orchestrate Transaction action.

```
[
  {
    "actionName": "orchestrateTransaction",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "requestId": "a1b2c3d4-e5f6-7890-abcd-ef1234567890",
      "fulfillmentPlanId":
"0000000s21t0l8g0009176412796953180a8259def914e1abbd863dde076b71f",
      "submitStatus": "SUCCESS"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Submit Order Action

Submit an order to Dynamic Revenue Orchestrator (DRO) for fulfillment.

By using the Submit Order action, you can perform:

- Order decomposition
- Fulfillment orchestration that's driven through message queues
- Dynamic plan composition that's based on the incoming order

This action is available in API version 61.0 and later.

Special Access Rules

The Submit Order action is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/submitOrder

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
orderId	string	Required. ID of the order to submit to DRO.
callType	string	Optional. Mode that the order intake must be processed in. Valid values are <code>Synchronous</code> or <code>Asynchronous</code> . The default value is <code>Asynchronous</code> .
contextId	string	Optional. ID of the hydrated context. See Context Service .

Outputs

Output	Type	Description
errorCode	string	Error code for the failed request, if any.
fulfillmentPlanId	string	ID of the orchestrated fulfillment plan that's generated. Returned only if the <code>callType</code> value is <code>Synchronous</code> .
requestId	string	Unique ID of the invocation request that helps identify a single request.
submitStatus	string	Submit status of the invocation request. Valid values are <code>SUCCESS</code> , <code>ERROR</code> , <code>SUBMITTED</code> , or <code>REJECTED</code> .
usedContextId	string	Hydrated context ID that's used in this request, which can be different from the <code>contextId</code> input.

Example

POST

This example shows a sample request.

```
{
  "inputs": [
    {
      "orderId": "801RM0000007yGaYAI",
      "callType": "Synchronous"
    }
  ]
}
```

This example shows a sample response when the call type is synchronous.

```
[
  {
    "actionName": "submitOrder"
```

```

    "errors":NULL
    "invocationId":NULL
    "isSuccess":true
    "outputValues":{
    "requestId":"a161cfda-868c-41d2-b589-7c7d7ff2d4c1"
    "submitStatus":"SUCCESS"
    "usedContextId":"e275e930923106ee7e39cbfa232e38252bd4d63f4ea2dd956b7301e243554134"
    "fulfillmentPlanId":"13VZM00000000062AA"
    }
  ]

```

This example shows a sample response when the call type is asynchronous or isn't specified.

```

[
{
  "actionName": "submitOrder",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "submitStatus": "SUBMITTED"
    "requestId": "a161cfda-868c-41d2-b589-7c7d7ff2d4c1"
  }
}
]

```

This example shows a sample response when a validation error occurs.

```

[
{
  "actionName": "submitOrder",
  "errors": [
    {
      "statusCode": "UNKNOWN_EXCEPTION",
      "message": "Missing required input parameter: orderId",
      "fields": []
    }
  ],
  "invocationId": null,
  "isSuccess": false,
  "outputValues": {
    "requestId": "4c7d8ebb-6b0b-4852-a8a0-b67e0d36a73e",
    "errorCode": "DRO_INTERNAL_ERROR"
  },
}
]

```

Explainability Action Logs

: To troubleshoot or debug errors, retrieve a list of explainability action logs. See [Action Logs](#).

GET Logs for Order Intake

This resource example includes sample query parameters to retrieve the action logs for an order intake.

<https://yourdomain.com/services/data/v4.0/metric/decisionpoint/action-logs?applicationType=Submit,applicationType=Press,applicationType=Pay,file=01x000327G>

This example shows the sample response. The `actionLog` property contains the action logs.

```
{
  "actionLogs": [
    {
      "actionContextCode": "801NA000000XKPUYA4",
      "actionLog": {
        "OrderIntakeStatus": "",
        "OrderIntakeStatusMessage": "",
        "OrderId": "801NA000000XKPUYA4",
        "SubmitMode": "Synchronous",
        "UniqueRequestId": "d00c2aa7-56b0-411a-9b51-83d9fe2e4440",
        "ContextId": "a0ca3c2296c82ad071a5efa83e8974793910f44ebddb21d37f007ce4889b65d7",
        "DesActionSpecDevName": "DroSubmitAction",
        "ContextDefinition": "SalesTransactionContext__stdctx"
      },
      "additionalFilter": "undef",
      "applicationLogDate": "Thu Mar 28 12:36:26 GMT 2024",
      "applicationSubtype": "DroSubmit",
      "applicationType": "7",
      "explainabilitySpecName": "DroSubmitAction",
      "isChunked": false,
      "name": "DroSubmitAction",
      "primaryFilter": "801NA000000XKPUYA4",
      "processType": "DroSubmit",
      "secondaryFilter": "undef",
      "uniqueIdentifier": "02c4bae9-d8b0-42f6-b031-e983d4247c76"
    }
  ],
  "queryMore": ""
}
```

GET Logs for Decomposition Scope

This resource example includes sample query parameters to retrieve the decomposition-related action logs.

<https://yourname.salesforce.com/services/data/v48.0/metadata/transactionlog?actionLogApplicationSubtype=DroApplicationType=ProcessType=PrimaryFilter=801NA000000XKPUYA4>

This example shows the sample response. The `actionLog` property contains the action logs.

```
{
  "actionLogs": [
    {
      "actionContextCode": "801NA000000XKPeYAO",
      "actionLog": {
        "CandidateDecompositionRules": [
          {
            "decompRuleId": "13UNA0000004C932AE",
            "SourceProductId": "01tNA0000007NP5YAM",
            "AssociatedOlis": [
              "802NA0000021WjOYAU"
            ],
            "DestinationProductId": "01tNA0000007NOvYAM",
            "DestinationProductScope": "Order",
            "ConfiguredContextRuleId": "null"
          }
        ]
      }
    }
  ]
}
```

```

},
{
  "decompRuleId": "13UNA0000004ITY2A2",
  "SourceProductId": "01tNA0000007NP5YAM",
  "AssociatedOlis": [
    "802NA0000021WjOYAU"
  ],
  "DestinationProductId": "01tNA0000007NOqYAM",
  "DestinationProductScope": "Order",
  "ConfiguredContextRuleId": "null"
},
{
  "decompRuleId": "13UNA0000004C942AE",
  "SourceProductId": "01tNA0000007NPAY2",
  "AssociatedOlis": [
    "802NA0000021WjKYAU"
  ],
  "DestinationProductId": "01tNA0000007NOWYAM",
  "DestinationProductScope": "Order",
  "ConfiguredContextRuleId": "null"
},
{
  "decompRuleId": "13UNA0000004ITd2AM",
  "SourceProductId": "01tNA0000007NPAY2",
  "AssociatedOlis": [
    "802NA0000021WjKYAU"
  ],
  "DestinationProductId": "01tNA0000007NP0YAM",
  "DestinationProductScope": "Order",
  "ConfiguredContextRuleId": "null"
},
{
  "decompRuleId": "13UNA0000004C952AE",
  "SourceProductId": "01tNA0000007NPBY2",
  "AssociatedOlis": [
    "802NA0000021WjLYAU"
  ],
  "DestinationProductId": "01tNA0000007NOxYAM",
  "DestinationProductScope": "Order",
  "ConfiguredContextRuleId": "9QwNA0000000CTu0AM"
},
{
  "decompRuleId": "13UNA0000004C982AE",
  "SourceProductId": "01tNA0000007NPCY2",
  "AssociatedOlis": [
    "802NA0000021WjNYAU"
  ],
  "DestinationProductId": "01tNA0000007NOqYAM",
  "DestinationProductScope": "Order",
  "ConfiguredContextRuleId": "null"
},
{
  "decompRuleId": "13UNA0000004C992AE",
  "SourceProductId": "01tNA0000007NPCY2",

```



```

    "AssociatedOlis": [
      "802NA0000021WjNYAU"
    ],
    "DestinationProductId": "01tNA0000007NOrYAM",
    "DestinationProductScope": "Order",
    "ConfiguredContextRuleId": "9QwNA0000000Ct0AM"
  }
],
"SelectedDecompositionRules": [
  {
    "OliId": "802NA0000021WjKYAU",
    "DecompositionRuleIds": [
      "13UNA0000004C942AE",
      "13UNA0000004ITd2AM"
    ]
  },
  {
    "OliId": "802NA0000021WjOYAU",
    "DecompositionRuleIds": [
      "13UNA0000004C932AE",
      "13UNA0000004ITY2A2"
    ]
  },
  {
    "OliId": "802NA0000021WjNYAU",
    "DecompositionRuleIds": [
      "13UNA0000004C982AE"
    ]
  }
],
"OliScopeDetails": [
  {
    "OliId": "802NA0000021WjLYAU",
    "ParentOliId": "802NA0000021WjOYAU",
    "BundleRootOli": "802NA0000021WjOYAU"
  },
  {
    "OliId": "802NA0000021WjMYAU",
    "ParentOliId": "802NA0000021WjOYAU",
    "BundleRootOli": "802NA0000021WjOYAU"
  },
  {
    "OliId": "802NA0000021WjKYAU",
    "ParentOliId": "802NA0000021WjOYAU",
    "BundleRootOli": "802NA0000021WjOYAU"
  },
  {
    "OliId": "802NA0000021WjNYAU",
    "ParentOliId": "802NA0000021WjOYAU",
    "BundleRootOli": "802NA0000021WjOYAU"
  }
],
"FoliComputationDetails": [
  {

```

```

    "FoliId": "0a4NA000003HYbWYAW",
    "ComputedAction": "AMEND",
    "ComputedQuantity": "3.0"
  },
  {
    "FoliId": "0a4NA000003HYbXYAW",
    "ComputedAction": "AMEND",
    "ComputedQuantity": "6.0"
  },
  {
    "FoliId": "0a4NA000003HYbYYAW",
    "ComputedAction": "AMEND",
    "ComputedQuantity": "3.0"
  },
  {
    "FoliId": "0a4NA000003HYbZYAW",
    "ComputedAction": "AMEND",
    "ComputedQuantity": "3.0"
  }
],
"FlsrDetails": [
  {
    "FlsrId": "16ANA000005idR82AI",
    "FlsrGuid": "WQoYClNAszG9axKxWxoe",
    "SourceId": "802NA0000021WjOYAU",
    "FoliId": "0a4NA000003HYbWYAW"
  },
  {
    "FlsrId": "16ANA000005idR92AI",
    "FlsrGuid": "80xWFpBK8sDmTFRV3Dn0",
    "SourceId": "802NA0000021WjOYAU",
    "FoliId": "0a4NA000003HYbXYAW"
  },
  {
    "FlsrId": "16ANA000005idRA2AY",
    "FlsrGuid": "nAql9VD3KiziZTFRfYXq",
    "SourceId": "802NA0000021WjNYAU",
    "FoliId": "0a4NA000003HYbXYAW"
  },
  {
    "FlsrId": "16ANA000005idRB2AY",
    "FlsrGuid": "wgCJT6NJ3ESolFXP5ajQ",
    "SourceId": "802NA0000021WjKYAU",
    "FoliId": "0a4NA000003HYbYYAW"
  },
  {
    "FlsrId": "16ANA000005idRC2AY",
    "FlsrGuid": "bvVhA34WvTBOYbG4q2Fj",
    "SourceId": "802NA0000021WjKYAU",
    "FoliId": "0a4NA000003HYbZYAW"
  }
],
"OrderId": "801NA000000XKPeYAO",
"SubmitMode": "Synchronous",

```

```

    "UniqueRequestId": "b9ac5971-0d71-45c6-a18e-f472976eaeae",
    "ContextId": "1422049ffa3cc42d8c060b9a7732be360bd62a346652cda9ab6e5fd54cd03eca",
    "DesActionSpecDevName": "DroDecompScopeAction",
    "ContextDefinition": "SalesTransactionContext__stdctx"
  },
  "additionalFilter": "undef",
  "applicationLogDate": "Fri Mar 29 10:02:26 GMT 2024",
  "applicationSubtype": "DroDcmp",
  "applicationType": "7",
  "explainabilitySpecName": "DroDecompScopeAction",
  "isChunked": false,
  "name": "DroDecompScopeAction",
  "primaryFilter": "801NA000000XKPeYAO",
  "processType": "DcmpScp",
  "secondaryFilter": "undef",
  "uniqueIdentifier": "c1e11bc0-53e5-4f62-9ae8-1096e79a62b6"
}
],
"queryMore": ""
}

```

GET Logs for Decomposition Enrichment

This resource example includes sample query parameters to retrieve the logs for decomposition enrichment tasks. For example, conversion of order items to fulfillment order line items.

<https://api.sage.com/rev/v1/801NA00000000XKPUYA4/act/log?contextCode=801NA00000000XKPUYA4&primaryFilter=801NA00000000XKPeYAO&secondaryFilter=801NA00000000XKPeYAO>

The `secondaryFilter` property is optional. If this property is specified, the API returns the enrichment rule details for a decomposition rule. If this property is unspecified, the API returns all enrichment rule details for the order.

This example shows the sample response. The `actionLog` property contains the action logs.

```

{
  "actionLogs": [
    {
      "actionContextCode": "801NA00000000XKPUYA4",
      "actionLog": {
        "FlsrUid": "1FxfIhMq530IpE9Hzs5w",
        "EnrichmentRulesExecutionDetails": [
          {
            "EnrichmentRuleId": "13TNA000000000eG2AQ",
            "DecompRuleId": "13UNA00000004C942AE",
            "FlsrUid": "1FxfIhMq530IpE9Hzs5w",
            "SourceType": "Attribute",
            "SourceAttributeId": "0tjNA00000004CygYAE",
            "TargetType": "Attribute",
            "TargetAttributeId": "0tjNA00000004CyDYAU",
            "CalculationMethod": "Ad-verbatim",
            "ExecutionStatus": "SUCCESS"
          },
          {
            "EnrichmentRuleId": "13TNA000000000eH2AQ",
            "DecompRuleId": "13UNA00000004C942AE",
            "FlsrUid": "1FxfIhMq530IpE9Hzs5w",

```

```

    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004CylYAE",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CyIYAU",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "SUCCESS"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eI2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIPE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004CyqYAE",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CyhYAE",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "SUCCESS"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eJ2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIPE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004CzPYAU",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CymYAE",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "SUCCESS"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eK2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIPE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004CzUYAU",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CyrYAE",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "SUCCESS"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eL2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIPE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004CzZYAU",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CywYAE",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "SUCCESS"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eM2AQ",
    "DecompRuleId": "13UNA0000004C942AE",

```

```

    "FlsrUid": "1FxfIhMq53OIpE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004D0dYAE",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004Cz1YAE",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "ERROR_DATA_TYPE_MISMATCH"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eN2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIpE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004D0iYAE",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CzQYAU",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "ERROR_DATA_TYPE_MISMATCH"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eO2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIpE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004D18YAE",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CzVYAU",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "ERROR_DATA_TYPE_MISMATCH"
  },
  {
    "EnrichmentRuleId": "13TNA00000000eP2AQ",
    "DecompRuleId": "13UNA0000004C942AE",
    "FlsrUid": "1FxfIhMq53OIpE9Hzs5w",
    "SourceType": "Attribute",
    "SourceAttributeId": "0tjNA0000004D1QYAU",
    "TargetType": "Attribute",
    "TargetAttributeId": "0tjNA0000004CzaYAE",
    "CalculationMethod": "Ad-verbatim",
    "ExecutionStatus": "ERROR_DATA_TYPE_MISMATCH"
  }
],
"OrderId": "801NA0000000XKPUYA4",
"SubmitMode": "Synchronous",
"UniqueRequestId": "d00c2aa7-56b0-411a-9b51-83d9fe2e4440",
"ContexId": "a0ca3c2296c82ad071a5efa83e8974793910f44ebddb21d37f007ce4889b65d7",
"DesActionSpecDevName": "DroDecompEnrichmentAction",
"ContextDefinition": "SalesTransactionContext__stdctx"
},
"additionalFilter": "undef",
"applicationLogDate": "Thu Mar 28 12:36:25 GMT 2024",
"applicationSubtype": "DroDcmp",
"applicationType": "7",
"explainabilitySpecName": "DroDecompEnrichmentAction",

```

```

    "isChunked": false,
    "name": "DroDecompEnrichmentAction",
    "primaryFilter": "801NA000000XKPUYA4",
    "processType": "DcmpEnrich",
    "secondaryFilter": "1FxfIhMq530IpE9Hzs5w",
    "uniqueIdentifier": "0bd42942-12b2-4c2e-9f10-b77ee85fd20b"
  }
],
"queryMore": ""
}

```

GET Logs for Plan Composition

This resource example includes sample query parameters to retrieve the logs for plan composition.

<https://api.sage.com/services/na/60met/decisionplanning/logs?applicationType=DroApplicationType=ProcessType=PrimaryFilter=801NA000000XKPUYA4>

This example shows the sample response. The `actionLog` property contains the action logs.

```

{
  "actionLogs": [
    {
      "actionContextCode": "801NA000000XKPeYAO",
      "actionLog": {
        "PlanCompositionStatus": "",
        "PlanCompositionStatusMessage": "",
        "CandidateProductFulfillmentScenarios": [
          {
            "ProductFulfillmentScenarioId": "1axNA0000004C93YAE",
            "ProductId": "01tNA0000007NP5YAM",
            "FulfillmentStepDefinitionGroupId": "13oNA0000004CARYA2",
            "LineItemIds": [
              "802NA0000021WjOYAU"
            ],
            "ContextRulesetId": "9QwNA0000000CXq0AM"
          }
        ],
        "SelectedProductFulfillmentScenarios": [
          null
        ],
        "SelectedProductFulfillmentScenariosByOli": [
          {
            "OliId": "0a4NA0000003HYbFYAW",
            "ProductFulfillmentScenarios": [
              null
            ]
          },
          {
            "OliId": "0a4NA0000003HYbXYAW",
            "ProductFulfillmentScenarios": [
              null
            ]
          },
          {
            "OliId": "0a4NA0000003HYbIYAW",

```

```

        "ProductFulfillmentScenarios": [
            null
        ],
        {
            "OliId": "802NA0000021WjOYAU",
            "ProductFulfillmentScenarios": [
                null
            ]
        }
    ],
    "PlanId": "13VNA000000Q9W2AW",
    "FulfillmentStepCreationStatus": "FulfillmentStepsCreated",
    "FulfillmentStepDependencyCreationStatus": "FulfilmentStepDepCreated",
    "OrderId": "801NA000000XKPeYAO",
    "SubmitMode": "Synchronous",
    "UniqueRequestId": "b9ac5971-0d71-45c6-a18e-f472976eaeae",
    "ContextId": "1422049ffa3cc42d8c060b9a7732be360bd62a346652cda9ab6e5fd54cd03eca",
    "DesActionSpecDevName": "DroPlanCompStepsAction",
    "ContextDefinition": "SalesTransactionContext__stdctx"
},
"additionalFilter": "undef",
"applicationLogDate": "Fri Mar 29 10:02:27 GMT 2024",
"applicationSubtype": "DroPcmp",
"applicationType": "7",
"explainabilitySpecName": "DroPlanCompStepsAction",
"isChunked": false,
"name": "DroPlanCompStepsAction",
"primaryFilter": "801NA000000XKPeYAO",
"processType": "PcmpSteps",
"secondaryFilter": "undef",
"uniqueIdentifier": "bb532c9b-a88f-4add-8cd8-bd385359blad"
}
],
"queryMore": ""
}

```

Capture Logs for an Order

This resource example includes sample query parameters to retrieve the logs for an order.

<https://yourInstance.salesforce.com/services/data/v68.0/connect/decision-explainer/action-logs?actionContextCode=801D0000000GJVA0&applicationType=7>

This example shows the sample response. The `actionLog` property contains the action logs.

```

{
  "actionLogs": [
    {
      "actionContextCode": "801xx000003GZSxAAO",
      "actionLog":
      [REDACTED]

      "additionalFilter": "undef",
      "applicationLogDate": "Tue May 07 13:05:28 GMT 2024",
      "applicationSubtype": "DroDcmp",
      "applicationType": "7",

```

```
"explainabilitySpecName": "DroDecompEnrichmentAction",
"isChunked": false,
"name": "DroDecompEnrichmentAction",
"primaryFilter": "801xx000003GZSxAAO",
"processType": "DcmpEnrich",
"secondaryFilter": "qrh0Z3xv6buewl1BW0wdn",
"uniqueIdentifier": "768f7d03-6770-4939-980f-a6f42ad07cde"
},
{
  "actionContextCode": "801xx000003GZSxAAO",
  "actionLog":
```

```
"additionalFilter": "undef",
"applicationLogDate": "Tue May 07 13:05:28 GMT 2024",
"applicationSubtype": "DroDcmp",
"applicationType": "7",
"explainabilitySpecName": "DroDecompEnrichmentAction",
"isChunked": false,
"name": "DroDecompEnrichmentAction",
"primaryFilter": "801xx000003GZSxAAO",
"processType": "DcmpEnrich",
"secondaryFilter": "hjoy5L3YcntZsnNuEd5n",
"uniqueIdentifier": "7ce652e3-81a0-4b2d-a072-88b012c83864"
},
{
  "actionContextCode": "801xx000003GZSxAAO",
  "actionLog":
```

```
"additionalFilter": "undef",
"applicationLogDate": "Tue May 07 13:05:32 GMT 2024",
"applicationSubtype": "DroDcmp",
"applicationType": "7",
"explainabilitySpecName": "DroDecompScopeAction",
"isChunked": false,
"name": "DroDecompScopeAction",
"primaryFilter": "801xx000003GZSxAAO",
"processType": "DcmpScp",
"secondaryFilter": "undef",
"uniqueIdentifier": "9f633a63-67d0-4f90-b4dc-c368defe8b44"
},
{
  "actionContextCode": "801xx000003GZSxAAO",
  "actionLog":
```

```
"additionalFilter": "undef",
"applicationLogDate": "Tue May 07 13:05:33 GMT 2024",
"applicationSubtype": "DroPcmp",
"applicationType": "7",
"explainabilitySpecName": "DroPlanCompStepsAction",
"isChunked": false,
"name": "DroPlanCompStepsAction",
```



```

    "primaryFilter": "801xx000003GZSxAAO",
    "processType": "PcmpSteps",
    "secondaryFilter": "undef",
    "uniqueIdentifier": "47a956a6-ae52-4e4a-843b-08b404beb52a"
  },
  {
    "actionContextCode": "801xx000003GZSxAAO",
    "actionLog":
      "DroSubmitAction: Submit Sales Transaction 1278caec4-680c-4df8-a1b2-608e05e44baa",
      "additionalFilter": "undef",
      "applicationLogDate": "Tue May 07 13:06:30 GMT 2024",
      "applicationSubtype": "DroSubmit",
      "applicationType": "7",
      "explainabilitySpecName": "DroSubmitAction",
      "isChunked": false,
      "name": "DroSubmitAction",
      "primaryFilter": "801xx000003GZSxAAO",
      "processType": "DroSubmit",
      "secondaryFilter": "undef",
      "uniqueIdentifier": "278caec4-680c-4df8-a1b2-608e05e44baa"
    }
  ],
  "queryMore": ""
}

```

Submit Sales Transaction Action

Initiate the fulfillment process of any sales transaction, such as a quote, an order, or an order summary.

Specify the ID of the sales transaction to be fulfilled. The fulfillment process includes these steps.

- Intake process
- Fulfillment orchestration

The intake process happens synchronously or asynchronously, which is specified by using the `intakeRequestType` input parameter. You can also specify the priority for the execution of the fulfillment process, which is specified by using the `fulfillmentPriority` parameter.

This action is available in API version 63.0 and later.

Special Access Rules

The Submit Sales Transaction action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/submitSalesTransaction`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>allowOverrideOfPointOfNoReturn</code>	boolean	Indicates whether to override the point of no return setting for the fulfillment step (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 64.0 and later.
<code>fulfillmentAdapter</code>	string	Type of fulfillment adapter. Valid values are <code>StandardOrder</code> ; or <code>GenericAdapter</code> —Available in API version 64.0 and later.
<code>fulfillmentPriority</code>	string	Priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .
<code>hydratedContextId</code>	string	ID of the hydrated context.
<code>intakeRequestType</code>	string	Type of request to process the intake. Valid values are <code>Synchronous</code> or <code>Asynchronous</code> .
<code>priorityLimitAction</code>	string	Type of action to perform when the priority limit is reached. Valid values are <code>Reject</code> or <code>Downgrade</code> . This parameter is applicable only when you specify the <code>fulfillmentPriority</code> parameter.
<code>salesTransactionId</code>	id	Required. ID of the sales transaction to submit.

Outputs

Output	Type	Description
<code>errorCode</code>	string	Code indicating the type of error.
<code>fulfillmentPlanId</code>	id	ID of the composed fulfillment plan.
<code>requestedFulfillmentPriority</code>	string	Priority to fulfill the sales transaction. Valid values are <code>High</code> , <code>Bulk</code> , or <code>Default</code> .
<code>requestId</code>	string	Request ID of the invocation.
<code>resolvedFulfillmentPriority</code>	string	Resolved priority to fulfill the sales transaction.
<code>submitStatus</code>	string	Submit status of the invocation.
<code>usedContextId</code>	string	ID of the used context that updates the decomposition process.

Example

POST

This sample request is for the Submit Sales Transaction action.

```
{
  "inputs": [
    {
      "allowOverrideOfPointOfNoReturn": false,
      "salesTransactionId": "801DV000000CbIPYA0",
      "intakeRequestType": "Synchronous",

```

```

        "fulfillmentAdapter": "StandardOrder",
        "fulfillmentPriority": "Default",
        "priorityLimitAction": "Reject"
    }
}

```

This sample response is for the Submit Sales Transaction action.

```

[
  {
    "actionName": "submitSalesTransaction",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "submitStatus": "SUCCESS",
      "resolvedFulfillmentPriority": "Default",
      "requestedFulfillmentPriority": "Default",
      "usedContextId": "0abc8db32b30d09c5051e4561f0b39d938a3bd8db4ccb13e04d41019e427211d",

      "requestId": "927f72b7-85e0-4b5d-b92e-c265f41898f0",
      "fulfillmentPlanId": "13VDV00000008M92AI"
    },
    "sortOrder": -1,
    "version": 1
  }
]

```

Unfreeze Sales Transaction Action

Unfreeze a sales transaction to enable the modification of a line item.

A line item can reach a milestone in the fulfillment process, which is known as a point of no return, where the line item can't accept modifications. Get details about the point of no return for each line item of a sales transaction.

This action is available in API version 64.0 and later.

Special Access Rules

The Unfreeze Sales Transaction action is available in Enterprise, Unlimited, and Developer Editions of Revenue Management. See the [required permissions](#) to access and call this invocable action.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/unfreezeSalesTransaction

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer **token**

Inputs

Input	Type	Description
salesTransactionId	id	Required. ID of the sales transaction that's submitted to the Dynamic Revenue Orchestrator.

Outputs

Output	Type	Description
errorCode	string	Code indicating the type of error.
orchestrationPlanId	id	ID of the created orchestration plan.
planState	string	Status of the created orchestration plan. Valid values are FAILURE, NOTSTARTED, PENDING, COMPLETED, FROZEN, or INPROGRESS.
requestId	string	ID of the request to get the point of no return details.
salesTransactionId	string	ID of the sales transaction that's submitted to the Dynamic Revenue Orchestrator.

Example

POST

This sample request is for the Unfreeze Sales Transaction action.

```
{
  "inputs": [
    {
      "salesTransactionId": "801SG00000jQO1ZYAW"
    }
  ]
}
```

This sample response is for the Unfreeze Sales Transaction action.

```
[
  {
    "actionName": "unfreezeSalesTransaction",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "orchestrationPlanId": "13VSG00000229Z72AI",
      "salesTransactionId": "801SG00000jQO1ZYAW",
      "planState": "InProgress",
      "requestId": "e9f2d961-b218-4911-8fee-8de31937850d"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

```
}
]
```

Dynamic Revenue Orchestrator Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Dynamic Revenue Orchestrator](#)

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

[DynamicFulfillmentOrchestratorSettings](#)

Represents the settings for Dynamic Revenue Orchestrator.

[OrchestrationPlanCtxMapping](#)

Represents the context mapping that Dynamic Revenue Orchestrator (DRO) uses to generate and orchestrate a plan for an object, such as a non-sales transaction for billing or another generic business process.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

Flow for Dynamic Revenue Orchestrator

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Dynamic Revenue Orchestrator exposes additional `actionType` values for the `FlowActionCall` Metadata type.

Field Name	Field Type	Description
<code>actionType</code>	<code>InvokableActionType</code> (enumeration of type string)	Required. The action type. Additional valid values only for Dynamic Revenue Orchestrator include <code>decomposeSalesTransaction</code> —Decompose a sales transaction, such as a quote, order, or order summary, <code>freezeSalesTransaction</code> —Freeze a sales transaction to disable the modification of a line item, <code>getPointOfNoReturn</code> —Get details about the point of no return milestone for each line item in a sales transaction, <code>orchestrateSalesTransaction</code> —Initiate the orchestration process for a sales transaction, <code>orchestrateTransaction</code> —Orchestrate a transaction for any domain-specific object, such as a collection plan for Revenue billing, that requires the composition and execution of a fulfillment plan, <code>submitOrder</code> —Submit an order to Dynamic Revenue Orchestrator (DRO) for fulfillment, <code>submitSalesTransaction</code> —Initiate the

Field Name	Field Type	Description
		fulfillment process of any sales transaction, such as a quote, an order, or an order summary, or <code>unfreezeSalesTransaction</code> —Unfreeze a sales transaction to enable the modification of a line item.

DynamicFulfillmentOrchestratorSettings

Represents the settings for Dynamic Revenue Orchestrator.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

`DynamicFulfillmentOrchestratorSettings` values are stored in the `DynamicFulfillmentOrchestratorSettings.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there is only one settings file for each settings component.

Version

`DynamicFulfillmentOrchestratorSettings` components are available in API version 61.0 and later.

Fields

Field Name	Field Type	Description
<code>enabledDFOFallout</code>	boolean	Indicates whether to enable fallout management to handle fallouts and retry policies (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . See Turn On Feature to Manage Fallout .
<code>enabledDFOJeopardy</code>	boolean	Indicates whether to enable management of Service Level Agreements (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . See Turn On Feature to Manage Service Level Agreements .
<code>enabledDFOPref</code>	boolean	Indicates whether to enable features of Dynamic Revenue Orchestrator (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . See Turn On Dynamic Revenue Orchestrator .
<code>enabledDROFutureDatedTasks</code>	boolean	Indicates whether to enable the Future Dated Steps feature (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . See Enable Future Dated Steps . Available in API version 63.0 and later.
<code>enabledDROInflightRequest</code>	boolean	Indicates whether to allow changes to fulfillment requests that are in progress (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 64.0 and later.

Field Name	Field Type	Description
enabledDROTaskSource	boolean	Indicates whether to link a Salesforce manual task to a fulfillment step source (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . See Enable the Linking of Task to Step Source . Available in API version 63.0 and later.

Declarative Metadata Sample Definition

The following is an example of a `DynamicFulfillmentOrchestratorSettings` component.

```
<DynamicFulfillmentOrchestratorSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enabledDFOPref>true</enabledDFOPref>
  <enabledDFOFallout>true</enabledDFOFallout>
  <enabledDFOJeopardy>true</enabledDFOJeopardy>
  <enableDROFutureDatedTasks>true</enableDROFutureDatedTasks>
  <enableDROInflightRequest>true</enableDROInflightRequest>
  <enableDROTaskSource>true</enableDROTaskSource>
</DynamicFulfillmentOrchestratorSettings>
```

The following is an example `package.xml` that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>DynamicFulfillmentOrchestrator</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character `*` (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

OrchestrationPlanCtxMapping

Represents the context mapping that Dynamic Revenue Orchestrator (DRO) uses to generate and orchestrate a plan for an object, such as a non-sales transaction for billing or another generic business process.

Parent Type

[Metadata](#) `fullName`

File Suffix and Directory Location

OrchestrationPlanCtxMapping components have the suffix `.orchestrationPlanCtxMapping` and are stored in the `orchestrationPlanCtxMappings` folder.

Version

OrchestrationPlanCtxMapping components are available in API version 67.0 and later.

Fields

Field Name	Field Type	Description
contextDefinition	string	Required. ContextDefinition that the orchestration use case is based on.
contextItemNode	string	Name of the item-level node in the context definition. The item node represents the line items or child records of the root node, such as the items in an order.
contextMapping	string	Required. Name of the context mapping that maps the source object fields to the nodes in the context definition.
contextRootNode	string	Required. Name of the root node in the context definition. The root node represents the parent record that the orchestration plan is generated for, such as an order.
label	string	Required. UI label for the orchestration plan context mapping.
objectName	string	Required. API name of the object that the orchestration plan is generated for. The combination of <code>objectName</code> and <code>orchestrationType</code> must be unique.
orchestrationType	PlanUsageType (enumeration of type string)	Required. Type of orchestration plan that this context mapping applies to. Valid values are <code>Billing</code> , <code>Fulfillment</code> , <code>Generic</code> , <code>IntegrationOrchestrator</code> , <code>InsuranceRuleAction</code> , <code>OrderFulfillment</code> , or <code>StageManagement</code> .

Declarative Metadata Sample Definition

This sample shows the definition of an `OrchestrationPlanCtxMapping` component for a fulfillment plan that orchestrates an order.

```
<?xml version="1.0" encoding="UTF-8"?>
<OrchestrationPlanCtxMapping xmlns="http://soap.sforce.com/2006/04/metadata">
  <label>Order Fulfillment Context Mapping</label>
  <orchestrationType>Fulfillment</orchestrationType>
  <contextDefinition>SalesTransactionContext__stdctx</contextDefinition>
  <objectName>Order</objectName>
  <contextMapping>OrderEntitiesMapping</contextMapping>
  <contextRootNode>SalesTransaction</contextRootNode>
  <contextItemNode>SalesTransactionItem</contextItemNode>
</OrchestrationPlanCtxMapping>
```

This sample `package.xml` references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>*</members>
```



```

        <name>OrchestrationPlanCtxMapping</name>
    </types>
    <version>68.0</version>
</Package>

```

Wildcard Support in the Manifest File

This metadata type supports the wildcard character * (asterisk) in the `package.xml` manifest file. For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

Dynamic Revenue Orchestrator Tooling API Objects

Tooling API exposes metadata used in developer tooling that you can access through REST or SOAP. Tooling API's SOQL capabilities for many metadata types allow you to retrieve smaller pieces of metadata.

[CustomFulfillmentScopeCnfg](#)

Represents a user-defined scope to define and customize scope-specific validation and orchestration for flexible fulfillment. This object is available in API version 64.0 and later.

[OrchestrationPlanCtxMapping](#)

Represents an orchestration plan context mapping entry in the org. This entry is used to connect the business data in an object to the orchestration logic within Dynamic Revenue Orchestrator (DRO) by using the orchestration type. This object is available in API version 66.0.0 and later.

SEE ALSO:

[Tooling API Developer Guide: Introducing Tooling API](#)

CustomFulfillmentScopeCnfg

Represents a user-defined scope to define and customize scope-specific validation and orchestration for flexible fulfillment. This object is available in API version 64.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported SOAP API Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Supported REST API Methods

DELETE, GET, HEAD, PATCH, POST, Query

Fields

AssetContextTag

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Context tag that's used to derive custom scope value from assets. This field is available in API version 65.0 and later.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. Name of the custom fulfillment scope.

DoesParticipatingAssetImpact

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether the technical assets related to sales transactions impact the fulfillment line item actions (`true`) or not (`false`). If set to `true`, Dynamic Revenue Orchestrator reuses the existing technical assets with the same custom value.

The default value is `false`.

FallbackScope

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Scope that's used when custom scope can't be determined.

Valid value is `LineItem`. If an empty value is returned, then ID of the line item is used.

The default value is `LineItem`.

IsAssetized

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the fulfillment line items grouped by the custom scope are assetized `true` or not (`false`). If set to `false`, then the scope can't be associated with assetizable products.

The default value is `false`.

ItemContextTag

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. Context tag that's used to derive custom scope from item context nodes. The supported value is of string type only.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The language of the CustomFulfillmentScopeCnfg tooling API object.

ManageableState

Type: ManageableState enumerated list

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates the manageable state of the specified component that is contained in a package:

- beta
- deleted
- deprecated
- deprecatedEditable
- installed
- installedEditable
- released
- unmanaged

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Label of the custom fulfillment scope.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the ***namespacePrefix__componentName*** notation. The namespace prefix can have one of the following values:

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are not Developer Edition organizations, **NamespacePrefix** is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.

OrchestrationPlanCtxMapping

Represents an orchestration plan context mapping entry in the org. This entry is used to connect the business data in an object to the orchestration logic within Dynamic Revenue Orchestrator (DRO) by using the orchestration type. This object is available in API version 66.0.0 and later.

Supported Calls

`create()`, `delete()`, `describeObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Fields

ContextDefinition

Type: reference

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Name of the context definition to be used for the object.

ContextItemNode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Required. Name of the node that represents an item in the context definition.

ContextMapping

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. Name of the context definition mapping to apply. This mapping must be related to the specified context definition.

ContextRootNode

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. Name of the node that represents the root in the context definition.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two

consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. Label is **Record Type Name**.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The language of the OrchestrationPlanCtxMapping tooling API object.

ManageableState

Type: ManageableState enumerated list

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates the manageable state of the specified component that is contained in a package:

- beta
- deleted
- deprecated
- deprecatedEditable
- installed
- installedEditable
- released
- unmanaged

MasterLabel

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Label for the orchestration plan context mapping.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The namespace prefix associated with this object. Each Developer Edition organization that creates a managed package has a unique namespace prefix. Limit: 15 characters. You can refer to a component in a managed package by using the ***namespacePrefix__componentName*** notation. The namespace prefix can have one of the following values:

- In Developer Edition organizations, the namespace prefix is set to the namespace prefix of the organization for all objects that support it. There is an exception if an object is in an installed managed package. In that case, the object has the namespace prefix of the installed managed package. This field's value is the namespace prefix of the Developer Edition organization of the package developer.
- In organizations that are not Developer Edition organizations, **NamespacePrefix** is only set for objects that are part of an installed managed package. There is no namespace prefix for all other objects.

ObjectName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: API name of the object for orchestration.

OrchestrationType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Name of the type of the orchestration plan.

Valid value is `Generic`.

Callouts in Dynamic Revenue Orchestrator

Use callout step types to make HTTP calls to an external system. Callout step types use the Data Consumption Framework and Process Type Integration for interface management and communication with external systems.

Use callout step types to implement these features.

- Endpoint configuration
- Authentication parameters
- Default sync and async implementation
- Extensions or Apex Interfaces
- Error handling and fallout management
- Request and response logging
- Timeouts

Dynamic Revenue Orchestrator supports these types of callouts.

Type	Description
Standard Fulfillment Provider	Use this callout provider to use a fixed payload structure to request an order. You can also define Omnistudio Integration Procedures for request transformation and response handling.
Apex Type Provider	Use this callout provider to implement custom integration scenarios via the <code>industriesintegrationfwk.ProcessIntegrationProvider</code> Apex interface.
External Services Defined Provider	Use this callout provider to implement custom integration scenarios via external services through the OpenAPI specification. You can also define Omnistudio Integration Procedures for request transformation and response handling. To use this callout, the Omnistudio Admin and Omnistudio Runtime permissions are required.

Callouts support these integration patterns.

Type	Description
Sync	The callout step is completed when the external system returns a response.
Async	The callout step is set to <code>In Progress</code> when the external system returns the acknowledgment response with 202 HTTP code. The system waits until the external system sends a callback response to complete the callout step. See Asynchronous Interaction Pattern on page 1634.

[Configure Callout Settings](#)

Before you set up a callout provider, configure the callout settings. The settings include the creation of a named credential and an external credential, the creation of an integration definition, and the configuration of a fulfillment step definition.

[Standard Fulfillment Provider](#)

The Standard Fulfillment Provider or `CalloutIntegrationProvider` is a provider for the order fulfillment usage type. A Fulfillment Designer can configure this provider.

[Apex Type Provider](#)

Implement custom integration logic via Apex by using the Apex Type Provider. This provider requires an Apex Integration Developer to implement a custom Apex adapter interface.

[External Services Defined Provider](#)

Generate interface contract and Apex types by using external services and Open API compatible schema.

[Asynchronous Interaction Pattern](#)

To specify an asynchronous request, you must add the callback URI to the integration definition for Standard Fulfillment Provider or Apex Type Provider as an optional attribute.

[Input and Output Transformation Processors](#)

Use input and output processors to process a standard fulfillment request before sending it to an external system.

SEE ALSO:

[Salesforce Help: Data Consumption Framework](#)

Configure Callout Settings

Before you set up a callout provider, configure the callout settings. The settings include the creation of a named credential and an external credential, the creation of an integration definition, and the configuration of a fulfillment step definition.

Meet these prerequisites before you configure the callout settings.

- Configure named and external credentials to define access to an external system. Specify a named credential as the callout endpoint and an external credential to configure the authentication protocol.
See [Create Named Credentials and External Credentials](#).
- Create integration definitions to connect Salesforce with an external system. Integration definitions use APIs to perform operations in both Salesforce and the external system. You can create Apex Defined, External Services Defined, or Standard integration definitions.
See [Create an Integration Definition](#).
- Define a fulfillment step with `Callout` as the step type. Additionally, set the integration definition name and integration user.
See [Callout Fulfillment Step](#).

EDITIONS

Available in: **Developer**, **Enterprise**, and **Unlimited** Editions

USER PERMISSIONS

To create authenticated callouts:

- External Credentials Principal Access Permission

Standard Fulfillment Provider

The Standard Fulfillment Provider or `CalloutIntegrationProvider` is a provider for the order fulfillment usage type. A Fulfillment Designer can configure this provider.

The Standard Fulfillment Provider includes these features.

- Predefined payload with sales transaction items and fulfillment items data, including attribute values
- Fixed integration parameters such as timeouts, credentials, encoding styles, and path. See [Integration Definition for Standard Fulfillment Provider](#) on page 1627 for details about the integration parameters.
- Modified requests and responses via Omnistudio Integration Procedures
- Asynchronous interaction pattern. See [Asynchronous Interaction Pattern](#) on page 1634.
- Request and response logging
- Error handling and retry policies. See [Fallout Design and Management](#).
- Request transformation and response handling via integration procedures

To configure the callout settings for Standard Fulfillment Provider, see [Configuration Steps](#).

Request Payload

This example shows a sample request payload structure with data for sales transaction items and fulfillment transaction items. This data is derived using context definition mappings that are defined through settings. See [Context Definitions in Order Orchestration](#).

```
{
  "AccountId": "001xx000003GbsxAAC",
  "OrderId": "801xx000003GbsyAAC",
  "StepId": "802xx000001ndnyAAA",
  "PlanSourceId": "802xx000001ndnyAAA",
  "StepSourceId": "13Wxx0000004Cdh",
  "CorrelationId": "callout:13Wxx0000004Cdh:",
}
```



```

"SalesTransactionItems": [
  {
    "ArePartialPeriodsAllowed": "false",
    "ParentReference": "801xx000003GbsyAAC",
    "IsAssetizable": "true",
    "ProductName": "iPhone18",
    "ProductCode": "iPhone18",
    "SalesTransactionItemParent": "801xx000003GbsyAAC",
    "Attributes": [
      {
        "AttributeKey": "0tjxx00000000ePAAQ",
        "ParentReference": "802xx000001ndnxAAA",
        "AttributeValue": "true",
        "AttributeName": "IsDeliveryNotificationNeeded",
        "AttributeDefinitionCode": "FDT5",
        "SalesTransactionItemAttrParent": "802xx000001ndnxAAA"
      },
      {
        "AttributeKey": "0tjxx00000000eNAAQ",
        "ParentReference": "802xx000001ndnxAAA",
        "AttributeValue": "10",
        "AttributeName": "FDTCharge",
        "AttributeDefinitionCode": "FDT3",
        "SalesTransactionItemAttrParent": "802xx000001ndnxAAA"
      }
    ],
    "Product": "01txx0000006igoAAA",
    "Quantity": "1.0",
    "ListPrice": "1.0",
    "ItemTotalAdjustmentAmount": "0.0",
    "SalesTransactionItemSource": "802xx000001ndnxAAA",
    "PricebookEntry": "0luxx0000008zT8AAI",
    "StartDate": "2024-10-15T00:00:00.000Z",
    "UnitPrice": "1.0",
    "RoundedLineAmount": "1.0",
    "EndQuantity": "1.0",
    "TotalTaxAmount": "0.0",
    "IsItemLocked": "false",
    "TotalPrice": "1.0",
    "ProductBasedOn": "11Bxx000002C9M2EAK",
    "SalesTransactionActionType": "Add",
    "SalesTransactionAction": "80Axx0000004DGOGA2"
  },
  {
    "ArePartialPeriodsAllowed": "false",
    "ParentReference": "801xx000003GbsyAAC",
    "IsAssetizable": "true",
    "ProductName": "iPhone19",
    "ProductCode": "iPhone19",
    "SalesTransactionItemParent": "801xx000003GbsyAAC",
    "Attributes": [
      {
        "AttributeKey": "0tjxx00000000eQAAQ",
        "ParentReference": "802xx000001ndnyAAA",

```

```

        "AttributeValue": "false",
        "AttributeName": "IsDelivered",
        "AttributeDefinitionCode": "FDT6",
        "SalesTransactionItemAttrParent": "802xx000001ndnyAAA"
    }
],
"Product": "01ttx0000006igpAAA",
"Quantity": "1.0",
"ListPrice": "1.0",
"ItemTotalAdjustmentAmount": "0.0",
"SalesTransactionItemSource": "802xx000001ndnyAAA",
"PricebookEntry": "01lux0000008zTAAAY",
"StartDate": "2024-10-20T00:00:00.000Z",
"UnitPrice": "1.0",
"RoundedLineAmount": "1.0",
"EndQuantity": "1.0",
"TotalTaxAmount": "0.0",
"IsItemLocked": "false",
"TotalPrice": "1.0",
"ProductBasedOn": "11Bxx000002C9M2EAK",
"SalesTransactionActionType": "Add",
"SalesTransactionAction": "80Axx0000004DGOGA2",
"SalesTrxnItemDescription": "TrackingRef:TRK-HUBSWQT18-4238"
}
],
"FulfillmentTransactionItems": [
{
    "ParentReference": "0a3xx00000000JOAAY",
    "OriginalQuantity": "2.0",
    "FulfillmentItemSource": "0a4xx00000000JOAAY",
    "Attributes": [
        {
            "FulfillmentOrderLineId": "0a4xx00000000JOAAY",
            "LineAttributeDefinitionCode": "FDT6",
            "ParentReference": "0a4xx00000000JOAAY",
            "LineAttributeName": "IsDelivered",
            "LineAttributeValue": "false",
            "LineAttributeKey": "0tjxx00000000eQAAQ"
        },
        {
            "FulfillmentOrderLineId": "0a4xx00000000JOAAY",
            "LineAttributeDefinitionCode": "FDT2",
            "ParentReference": "0a4xx00000000JOAAY",
            "LineAttributeName": "FDTCOLOR",
            "LineAttributeKey": "0tjxx00000000eMAAQ"
        },
        {
            "FulfillmentOrderLineId": "0a4xx00000000JOAAY",
            "LineAttributeDefinitionCode": "FDT1",
            "ParentReference": "0a4xx00000000JOAAY",
            "LineAttributeName": "FDTSIZE",
            "LineAttributeKey": "0tjxx00000000eLAAQ"
        }
    ]
}
],

```

```

    "FulfillmentItemAction": "ADD",
    "FulfillmentItemProductCode": "iPhone-Pack",
    "FulfillmentOrderItemQuantity": "2.0",
    "FulfillmentItemProductName": "iPhone-Pack",
    "FulfillmentOrderId": "0a3xx00000000JNAAY",
    "FulfillmentItemTypeCode": "Product",
    "FulfillmentItemType": "Order Product",
    "FulfillmentOrderNumber": "FO-0002",
    "FulfillmentItemStartDate": "2024-10-20T00:00:00.000Z",
    "FulfillmentItemProductId": "01txx0000006igqAAA"
  },
  {
    "ParentReference": "0a3xx00000000JNAAY",
    "OriginalQuantity": "2.0",
    "FulfillmentItemSource": "0a4xx00000000JNAAY",
    "Attributes": [
      {
        "FulfillmentOrderLineId": "0a4xx00000000JNAAY",
        "LineAttributeDefinitionCode": "FDT2",
        "ParentReference": "0a4xx00000000JNAAY",
        "LineAttributeName": "FDTColor",
        "LineAttributeKey": "0tjxx00000000eMAAQ"
      },
      {
        "FulfillmentOrderLineId": "0a4xx00000000JNAAY",
        "LineAttributeDefinitionCode": "FDT5",
        "ParentReference": "0a4xx00000000JNAAY",
        "LineAttributeName": "IsDeliveryNotificationNeeded",
        "LineAttributeValue": "false",
        "LineAttributeKey": "0tjxx00000000ePAAQ"
      },
      {
        "FulfillmentOrderLineId": "0a4xx00000000JNAAY",
        "LineAttributeDefinitionCode": "FDT3",
        "ParentReference": "0a4xx00000000JNAAY",
        "LineAttributeName": "FDTCharge",
        "LineAttributeKey": "0tjxx00000000eNAAQ"
      }
    ],
    "FulfillmentItemAction": "ADD",
    "FulfillmentItemProductCode": "iPhone-Tech",
    "FulfillmentOrderItemQuantity": "2.0",
    "FulfillmentItemProductName": "iPhone-Tech",
    "FulfillmentOrderId": "0a3xx00000000JNAAY",
    "FulfillmentItemTypeCode": "Product",
    "FulfillmentItemType": "Order Product",
    "FulfillmentOrderNumber": "FO-0001",
    "FulfillmentItemStartDate": "2024-10-10T00:00:00.000Z",
    "FulfillmentItemProductId": "01txx0000006igrAAA"
  }
]
}

```

The step source ID of the fulfillment step, which is either a related order or fulfillment item, determines the payload composition with these considerations.

- If the step source ID is an order item, then all order items of the order are included in the payload under the `SalesTransactionItems` node.
- If the step source ID is a fulfillment item, then all fulfillment items of the fulfillment order are included in the payload under the `FulfillmentTransactionItems` node.
- If a product attribute doesn't have a defined code, then the attribute is excluded from the payload.

Considerations

Keep these considerations in mind for the request payload.

- The maximum request payload size limit is 12 MB.
- The default timeout period is five seconds, and the maximum timeout period is 120 seconds.
- The encoding style for fulfillment order line items, sales transaction items, and attributes can be configured through the [Integration Definition for Standard Fulfillment Provider](#) on page 1627.

Error Handling

To verify if the callout request was successful, check the `status` value in the payload. If the status is undefined, then these HTTP codes indicate a successful response.

- 200
- 201
- 202
- 203
- 204
- 205
- 206
- 302
- 304

If the request isn't successful, then the fulfillment step state is marked as `Fatally Failed`.

Integration Definition Configurations

You can configure these additional features for the integration definition.

- Select the **Save the request and response as attachments to the record** checkbox for the integration definition to save request and response payloads as attachments to the Integration Provider Execution record. Content publish limits apply when saving request and response payloads as attachments. Use [Shield Platform Encryption](#) for secure storage of sensitive information.
- [Define Input and Output Processors for the Integration Definition](#) for the pre-processing of the standard fulfillment request before you send the request to an external system. See [Omnistudio Integration Procedures](#).

See [Create an Integration Definition](#).

[Integration Definition for Standard Fulfillment Provider](#)

Use supported attribute values of an integration definition for a Standard Fulfillment Provider to implement features as per your requirement.

Integration Definition for Standard Fulfillment Provider

Use supported attribute values of an integration definition for a Standard Fulfillment Provider to implement features as per your requirement.

The Standard Fulfillment Provider supports these attribute values.

Standard Provider

*Standard Provider ⓘ

CalloutIntegrationProvider ▼

Attribute Name

Named Credentials

*Attribute Value

BillingSystemNC

Attribute Name

path

*Attribute Value

/delay/1

Attribute Name

Timeout (ms)

Attribute Value

10,000

Attribute Name

Callback URI

Attribute Value

Attribute Name

Input Processor

Attribute Value

Attribute Name

Output Processor

Attribute Value

Attribute Name

Item Encoding Style

*Attribute Value

Flat

Attribute Name

Attribute Encoding Style

*Attribute Value

Structure

Attribute Name

Send Empty Attributes

Attribute Value

☐

Attribute Name

Send Payload

Attribute Value

☒

Save the request and response as attachments to the record. ⓘ

☐ No

☒ Yes

Attribute Name	Description
Named Credentials	API name of the associated named credentials.
Path	Additional string that's added to the URL specified in the named credential endpoint.
Timeout (ms)	Number of milliseconds to set as a timeout parameter for the HTTP connection.
Callback URI	Attribute used by a third party as the callback to process steps in case of a async callout. Additionally, this attribute also indicates these scenarios. The configured callout is an async callout; If callback URI is defined, then it's included as the <code>ResponseUri</code> parameter value in the default payload for Standard Fulfillment

Attribute Name	Description
	Provider. For example, a <code>ResponseUri</code> parameter value as <code>/services/apexrest/async/callout</code> ; The executor expects 202 response code from the remote destination; or The 202 response code keeps the Fulfillment Step state as Running whereas 200 response code completes it.
Input Processor	<code>Type_Subtype</code> or <code>Id</code> of <code>OmniProcess</code> to process the input payload.
Output Processor	<code>Type_Subtype</code> or <code>Id</code> of <code>OmniProcess</code> to process the output payload.
Item Encoding Style	Required. Encoding style for fulfillment transaction items and sales transaction items. Valid values are <code>Flat</code> —Includes a list of fulfillment transaction items and sales transaction items without any hierarchy details in the payload; or <code>Structure</code> —Includes a list of all child line items if the step's source line item has a hierarchy of line items associated with it.If item encoding style is configured as <code>Structure</code> on a fulfillment order line item or a sales transaction item, then the payload contains the details of the line item that the fulfillment order line item or sales transaction item is decomposed from.If the fulfillment order line item or sales transaction item is decomposed from the root of a bundle order line item or sales transaction item, then the payload contains the entire order line item or sales transaction item bundle structure. The default value is <code>Flat</code> .
Attribute Encoding Style	Required. Generates the payload for attributes based on the specified encoding style. Valid values are <code>Flat</code> —Includes specific details in key-value pair format that doesn't include granular details of attributes or <code>Structure</code> —This payload structure includes granular details of attributes. The default value is <code>Structure</code> .
Send Empty Attributes	If this checkbox is selected, the request payload includes empty attribute values wherever applicable.
Send Payload	If this checkbox is selected, a default request payload is generated to optimize processing performance. If this checkbox isn't selected, a value for the input processor is required.

Apex Type Provider

Implement custom integration logic via Apex by using the Apex Type Provider. This provider requires an Apex Integration Developer to implement a custom Apex adapter interface.

Use a custom Apex adapter to:

- Include and use integration parameters in adapter implementations such as timeouts, credentials, and path.
- Generate and transform requests and responses via Omnistudio Integration Procedures or Extract, Transform, Load (ETL) libraries.
- Enable asynchronous interaction pattern.

- Enable request and response logging by implementing a specific Apex interface.
- Handle errors, and integrate with fallout rules.

To configure the callout settings for Apex Type Provider, see [Configuration Steps](#).

Integration Adapter Implementation

Implement the `industriesintegrationfwk.ProcessIntegrationProvider` Apex interface. Use the `industriesintegrationfwk.ApexProviderAttr` class to define and access the attribute values in the integration provider definition.

```
global with sharing class DROSampleOrderAdapter implements
industriesintegrationfwk.ProcessIntegrationProvider {

    // Named credential attribute
    private static final String MOCK_CALLOUT_NAMED_CREDENTIAL =
'callout:DROOrderInterfaceNamedCred';
    private final static Integer TIMEOUT = 10000; // Request timeout in milliseconds, or
can be defined on Integration Definition as an Attribute

    private static final industriesintegrationfwk.ApexProviderAttr NAMED_CRED_ATTR = new
industriesintegrationfwk.ApexProviderAttr('Named Credential',
'Named_Credential', 'DROOrderInterfaceNamedCred', true, 'String');
    private static final industriesintegrationfwk.ApexProviderAttr ENDPOINT_ATTR = new
industriesintegrationfwk.ApexProviderAttr('Endpoint URI',
'Endpoint_URI', '/v1/orderitems/', true, 'String');

    /**
     * @param requestGuid          Request Globally Unique Identifier (GUID) provided
by the client
     * @param inputRecordId        Input Record ID – value is taken from Fulfillment
Step > Fulfillment Step Source > Source Line Item
     * @param payload              Payload to be passed to the Provider Class (empty
in DRO)
     * @param attributes           Map of configuration attributes
     * @return IntegrationCalloutResponse Response sent to the client
     */
    global static industriesintegrationfwk.IntegrationCalloutResponse executeCallout(String
requestGuid, String inputRecordId, String payload, Map<String, Object> attributes) {
        // create request
        String msgBody = '{"message\":\"Hello\",'
            + '\n\"requestGuid\":\"' + requestGuid + '\",\n'
            + '\n\"inputRecordId\":\"' + inputRecordId + '\",\n'
            + '\n\"payload\":\"' + payload + '\"}'
            ;

        String endpointUri = (String) attributes.get('Endpoint_URI');

        // Make a call
        HttpResponse response = makeCallout(endpointUri, msgBody);
        // process response and pass details to the DRO Callout Step processor by using
IntegrationCalloutResponse(isSuccess, ResponseCode, ErrorMessage)
```

```

        industriesintegrationfwk.IntegrationCalloutResponse integrationCalloutResponse =
handleResponse(response);

        return integrationCalloutResponse;
    }

    // define configurable attributes
    global static List<industriesintegrationfwk.ApexProviderAttr> getProviderAttributes()
    {
        List<industriesintegrationfwk.ApexProviderAttr> defaults = new
List<industriesintegrationfwk.ApexProviderAttr>();
        defaults.add(NAMED_CRED_ATTR);
        defaults.add(ENDPOINT_ATTR);
        // add any attributes such as endpoint, timeout, interface, and params
        // ...
        return defaults;
    }

    // Call Mock Service API.
    private static HttpResponse makeCallout(String endpointUri, String msgBody) {

        // Construct the request object
        String endPoint = MOCK_CALLOUT_NAMED_CREDENTIAL + endpointUri;
        HttpRequest request = new HttpRequest();
        request.setMethod('POST');
        request.setHeader('Content-Type', 'application/json');
        request.setHeader('Accept', 'application/json');
        request.setEndpoint(endPoint);
        request.setTimeout(TIMEOUT);
        request.setBody(msgBody);

        // Send request
        HttpResponse response = new Http().send(request);
        return response;
    }
}

```

Error Handling

This sample shows how to pass errors from response to orchestration via the `IntegrationResponse` interface in the Apex provider implementation. See [ProcessIntegrationProvider Interface](#).

```

public static industriesintegrationfwk.IntegrationCalloutResponse handleResponse(HttpResponse
response) {

    industriesintegrationfwk.IntegrationCalloutResponse integrationCalloutResponse;

    Map<String, Object> responseGroup = getResponseGroupAfterCallout(response);

    if(response.getStatusCode() == 200)
    {
        // SUCCESS
        integrationCalloutResponse = new

```



```

industriesintegrationfwk.IntegrationCalloutResponse(true);
    integrationCalloutResponse.setResponseCode(response.getStatusCode());

    integrationCalloutResponse.setReturnValue(responseGroup);

} else {
    //FAILURE - pass error to DRO Fallout Handling to apply Retry Policies
    integrationCalloutResponse = new
industriesintegrationfwk.IntegrationCalloutResponse(false);
    integrationCalloutResponse.setResponseCode(response.getStatusCode());
    integrationCalloutResponse.setReturnValue(responseGroup);
    integrationCalloutResponse.setErrorMessage('Unable to process request.');
```

```

}
```

```

return integrationCalloutResponse;
```

```

}
```

```

// Process Response payLoad
```

```
private static Map<String, Object> getResponseGroupAfterCallout(HttpResponse response)
```

```
{
```

```
    Map<String, Object> responseGroup = new Map<String, Object>();
```

```
    if (response.getStatusCode() == 200) {
```

```
        responseGroup.put('isSuccess', true);
```

```
    } else {
```

```
        responseGroup.put('isSuccess', false);
```

```
    }
```

```
    responseGroup.put('response', getResponseMap(response.getBody()));
```

```
    return responseGroup;
```

```
}
```

```

// Convert response string into Map
```

```
private static Map<String, Object> getResponseMap(String responseBody) {
```

```
    try {
```

```
        Map<String, Object> responseBodyMap = (Map<String, Object>)
```

```
JSON.deserializeUntyped(responseBody);
```

```
        return responseBodyMap;
```

```
    } catch (Exception e) {
```

```
        Map<String, Object> responseMap = new Map<String, Object>();
```

```
        responseMap.put('response', responseBody);
```


```
        return responseMap;
```

```
    }
```

```
}
```

The fulfillment step state changes to **Fatally Failed**, and the error message is saved in the **Execution Message** field.

Fulfillment Step Send Phone																	
Fulfillment Plan 000000001	Step Type Callout	State Fatally Failed	Jeopardy Status Green														
Related Details																	
Fields Information <table border="1"> <tbody> <tr> <td>State Fatally Failed</td> <td>Fulfillment Step Name Send Phone</td> </tr> <tr> <td>Fulfillment Plan 000000001</td> <td>Step Type Callout</td> </tr> <tr> <td>Fulfillment Step Definition Send Phone</td> <td>Execute On Rule</td> </tr> <tr> <td>Flow Interview</td> <td>Assigned To</td> </tr> <tr> <td>Resume On Rule</td> <td>Run As User Integration Persona</td> </tr> <tr> <td>Integration Definition Name DFOApexVlocMockWithDelay</td> <td>Execution Message Retry attempts limit exceeded default limit of 2. Unable to handle response code 408</td> </tr> <tr> <td>Retry Attempts 2</td> <td></td> </tr> </tbody> </table>				State Fatally Failed	Fulfillment Step Name Send Phone	Fulfillment Plan 000000001	Step Type Callout	Fulfillment Step Definition Send Phone	Execute On Rule	Flow Interview	Assigned To	Resume On Rule	Run As User Integration Persona	Integration Definition Name DFOApexVlocMockWithDelay	Execution Message Retry attempts limit exceeded default limit of 2. Unable to handle response code 408	Retry Attempts 2	
State Fatally Failed	Fulfillment Step Name Send Phone																
Fulfillment Plan 000000001	Step Type Callout																
Fulfillment Step Definition Send Phone	Execute On Rule																
Flow Interview	Assigned To																
Resume On Rule	Run As User Integration Persona																
Integration Definition Name DFOApexVlocMockWithDelay	Execution Message Retry attempts limit exceeded default limit of 2. Unable to handle response code 408																
Retry Attempts 2																	

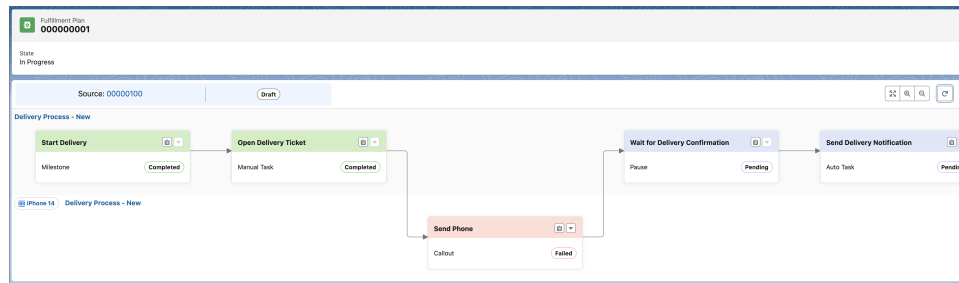

Apex Advanced Interface Implementation

To use advanced features such as logging, the Apex provider must implement the Apex Provider Advanced interface. You must use the `HttpBaseProvider` client for HTTP requests.

This example shows a sample of the `ProcessIntegrationProviderAdvanced` Apex interface implementation.

```

global with sharing class DFOApexVlocMockWithDelay
implements industriesintegrationfwk.ProcessIntegrationProviderAdvanced {
    ...
    global static industriesintegrationfwk.IntegrationCalloutResponse executeCallout(String
requestGuid, String inputRecordId, String payload, Map<String, Object> attributes,
industriesintegrationfwk.HttpBaseProvider httpProvider) {
    ...
    String endPoint = MOCK_CALLOUT_NAMED_CREDENTIAL + '/delay/5';
    HttpRequest request = new HttpRequest();
    request.setMethod('POST');
    request.setHeader('Content-Type', 'application/json');
    request.setHeader('Accept', 'application/json');
    request.setEndpoint(endPoint);
    request.setTimeout(TIMEOUT);
    request.setBody(msgBody);

    // Send request
    //HttpResponse response = httpProvider.httpCallout(request);
    HttpResponse response = new Http().send(request);
  }
}
  
```

Integration Definition Configuration


Select the **Save the request and response as attachments to the record** checkbox for the integration definition to save request and response payloads as attachments to the Integration Provider Execution record. Content publish limits apply when saving request and response payloads as attachments. Use [Shield Platform Encryption](#) for secure storage of sensitive information.

See [Create an Integration Definition](#).

Log Records

Integration Provider execution records are created on every request and associated with the fulfillment step. The referenced object identifier is set to order item or fulfillment order line item ID. See [IntegrationProviderExecution](#).

To view the Integration Provider execution records, configure the Fulfillment Step record page to include the Integration Provider Executions related list by using Lightning App Builder. See [Lightning App Builder](#).

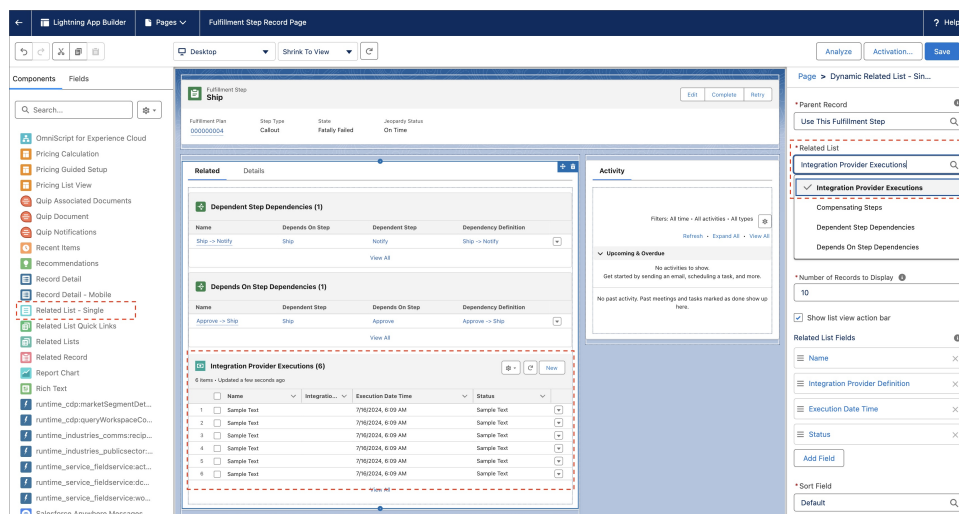

External Services Defined Provider

Generate interface contract and Apex types by using external services and Open API compatible schema.

To configure the callout settings for External Services Defined Provider, see [Configuration Steps](#).

As an integration specialist user or admin user, perform these steps.

- Set up an external service and actions.
- In the external service definition, include integration parameters such as error codes, credentials, and path.

External Service

Use external services for outbound integrations from Salesforce by using low-code, process-based integrations to enhance your Apex integrations. See [External Services](#).

Integration Definition Configurations

You can configure these additional features for the integration definition.

- Select the **Save the request and response as attachments to the record** checkbox for the integration definition to save request and response payloads as attachments to the Integration Provider Execution record. Content publish limits apply when saving request and response payloads as attachments. Use [Shield Platform Encryption](#) for secure storage of sensitive information.
- [Define Input and Output Processors for the Integration Definition](#) for the pre-processing of the standard fulfillment request before you send the request to an external system. See [Omnistudio Integration Procedures](#).

See [Create an Integration Definition](#).

Step Definition

Set the created integration definition on the Step Definition record with `Callout` as the step type.

Asynchronous Interaction Pattern

To specify an asynchronous request, you must add the callback URI to the integration definition for Standard Fulfillment Provider or Apex Type Provider as an optional attribute.

Standard Fulfillment Provider

- Provide the callback URI in the integration definition to accept the callback.
- Use these steps to set up the async callout.
 - • Use the `ResponseUri` key to retrieve the Callback URI value from the payload.
 - Use the `StepId` key to retrieve the Fulfillment Step value from the payload. If order item ID is returned instead of Fulfillment Step ID, use `CorrelationId` key to extract the value of the step ID. For example, `callout:13Wxx0000004CAf:`.
 - Pass the `StepId` value to the callback URI endpoint. Return 202 response code to ensure the Fulfillment Step is in `Running` state. Otherwise, the 200 response code completes the step.

Here's a sample payload.

```
{
  "ResponseUri": "/services/apexrest/async/callout",
  "StepId": "802xx000001nb1MAAQ",
  "CorrelationId": "callout:13Wxx0000004CAf:",
  ...//Other values
}
```

- Extract the step ID from the request. Find the Fulfillment Step ID in the org by using the extracted step ID and update the Fulfillment Step state to `Completed`.

Apex Type Provider

- Provide the callback URI in the integration definition to accept the callback.
- Set up the async callout by using Apex Type Provider.
 - • Create an Apex class that implements the `ProcessIntegrationProvider` interface.

Here's a sample that shows the addition of a callback URI to the provider attribute for Apex Type Provider.

```
global with sharing class DFOAsyncApexSample implements
  industriesintegrationfwk.ProcessIntegrationProvider {
```

```

    private static final industriesintegrationfwk.ApexProviderAttr NAMED_CRED_ATTR
    =
        new industriesintegrationfwk.ApexProviderAttr('Named Credential',
            'Named_Credential', 'DFOCalloutMockCreds', true, 'String');

    private static final industriesintegrationfwk.ApexProviderAttr CALLBACK_URL_ATTR
    =
        new industriesintegrationfwk.ApexProviderAttr('Callback URL',
            'Callback_URL', 'DFOCallbackUrl', true, 'String');

    global static List<industriesintegrationfwk.ApexProviderAttr>
    getProviderAttributes() {
        List<industriesintegrationfwk.ApexProviderAttr> defaults = new
        List<industriesintegrationfwk.ApexProviderAttr>();
        defaults.add(NAMED_CRED_ATTR);
        defaults.add(CALLBACK_URL_ATTR);

        return defaults;
    }

```

- Specify the Fulfillment Step ID as the value of the requestGuid parameter of the executeCallout method. You can also extract the Step ID from the CorrelationId key value. For example, "callout:13Wxx0000004Caf:". Here's a sample payload that assigns the provider attribute values.

```

public interface ProcessIntegrationProvider {
    IntegrationCalloutResponse executeCallout(String requestGuid,
        String inputRecordId, String payload, Map<String, Object> attributes);

    List<ProviderAttr> getProviderAttributes();
}

```

- Set response code to 202 to indicate that the callout is asynchronously executed and in Processing state. Here's a sample payload that sets the response code.

```

global with sharing class DFOAsyncApexSample implements
industriesintegrationfwk.ProcessIntegrationProvider {
    ...
    IntegrationCalloutResponse executeCallout(String requestGuid,
        String inputRecordId, String payload, Map<String, Object> attributes){
        // execute http request
        ...
        // set accepted if no failures
        IntegrationCalloutResponse acceptedResponse =
            new IntegrationCalloutResponse(true);
        acceptedResponse.setResponseCode(202);

        return new IntegrationCalloutResponse();
    }
}

```

- The callback URI is visible in the integration definition.

Integration Definitions > DFOAsyncApexAdapterMockInterface ✓

Apex Class

* Apex Class DFOApexMockService

Attribute Name * Attribute Value

Named Credential DFOCalloutMockCreds

Attribute Name * Attribute Value

Callback URL https://Callback_UH_Sample/stepcomplete

- Extract the step ID from the request. Find the Fulfillment Step ID in the org by using the extracted step ID and update the Fulfillment Step state to **Completed**.

```
FulfillmentStep step = new FulfillmentStep(id = 'stepId', State = 'Completed');
upsert step;
```

Input and Output Transformation Processors

Use input and output processors to process a standard fulfillment request before sending it to an external system.

Prerequisites

- Omnistudio license is required.
- Omnistudio Admin permission set license is assigned to Integration Configuration User (Fulfillment Designer).
- The input and output procedure attributes of an integration definition, which are available from Setup, are assigned with the Omnistudio Integration Procedure request and response. You can use `Type_Subtype` or `Id` of `OmniProcess` as the values for attributes.

When a callout step is executed, these steps are followed.

- The defined integration procedures are identified for request and response handling from an integration definition.
- The input processor generates the request by using `Fulfillment Step Source > SourceIdentifier` as the `InputRecordId` input parameter value. For example, the ID of an order item.
- The output processor handles the response by passing a map to the Integration Procedure service. The results from the Integration Procedure are used to identify any errors and details are passed to Dynamic Revenue Orchestrator.

Dynamic Revenue Orchestrator Platform Events

Salesforce publishes standard platform events in response to an action that occurred in the org or to report errors.

[FulfillmentSourceChangeEvent](#)

Notifies updates to the sources orchestrated by Dynamic Revenue Orchestrator like order product or fulfillment order product. This object is available in API version 66.0 and later.

[SalesTrxnDecompositionEvent](#)

Notifies when the decomposition process status changes. This object is available in API version 66.0 and later.

FulfillmentSourceChangeEvent

Notifies updates to the sources orchestrated by Dynamic Revenue Orchestrator like order product or fulfillment order product. This object is available in API version 66.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	No
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Streaming API Subscription Channel

`/event/SalesTrxnDecompositionEvent.`

Special Access Rules

This object is available in orgs with Revenue Management.

Event Delivery Allocation Enforced

Yes

Fields

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

RecordIdentifier

Type: string

Properties: Create, Nillable

Description: The identifier of the source record that has been updated.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that is populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

SalesTrxnDecompositionEvent

Notifies when the decomposition process status changes. This object is available in API version 66.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	No
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Streaming API Subscription Channel

`/event/SalesTrxnDecompositionEvent.`

Special Access Rules

This object is available in orgs with Revenue Management.

Event Delivery Allocation Enforced

Yes

Fields

ErrorCode

Type: string

Properties: Create, Nillable

Description: The error code returned for a decomposition process failure.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that is populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

SalesTransactionIdentifier

Type: string

Properties: Create, Nillable

Description: The sales transaction being decomposed.

Status

Type: string

Properties: Create, Nillable

Description: The status of the decomposition process.

CHAPTER 11 Usage Management

In this chapter ...

- [Usage Management Standard Objects](#)
- [Usage Management Fields on Standard Objects](#)
- [Usage Management Standard Invocable Actions](#)
- [Usage Management Business APIs](#)
- [Usage Management Metadata API Types](#)

Provide transparent, accurate, and efficient management of usage data and estimated usage amount to enhance revenue management capabilities.

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions

Usage Management Standard Objects

The Usage Management data model provides objects and fields to set up and manage consumption of usage-based products.

[ProductUsageGrant](#)

Represents the details of a grant associated with a resource, product, or service, such as the purchased quantity, renewal and rollover policy, and validity of the grant. This object is available in API version 62.0 and later.

[ProductUsageResource](#)

Represents the mapping of a product and its usage resources. This object is available in API version 64.0 and later.

[ProductUsageResourcePolicy](#)

Represents the policies applicable to the usage resource when it's associated with a sellable product. These policies are derived from the parent usage resource and can be overridden when setting up usage modeling. This object is available in API version 65 and later.

[TransactionUsageEntitlement](#)

Represents the details of each usage entitlement that's granted with the purchased sellable product, such as quantity and date when the entitlements were granted. This object is available in API version 63.0 and later.

[TransactionJournal](#)

Represents consumption details of a usage resource that are recorded for creating usage summaries. This object is available for usage management in API version 63.0 and later.

[UnitOfMeasure](#)

Defines the units and systems of units used to account for quantities of a usage resource. This object is available for usage management in API version 62.0 and later.

[UnitOfMeasureClass](#)

Represents a standard unit of measure dimension. This object is available in API version 63.0 and later.

[UsageBillingPeriodItem](#)

Represents the calculated overages for the usage entitlement and the amount that's charged for these overages. This object is available in API version 63.0 and later.

[UsageCmtAssetRelatedObj](#)

Represents the relation between an asset for the commitment-based usage product and an asset, account, contract, or custom object. This object is available in API version 64.0 and later.

[UsageCommitmentPolicy](#)

Represents the set of rules that determines how commitments are applied to a usage resource. This object is available in API version 65 and later.

[UsageEntitlementAccount](#)

Represents the entitlement account details related to the asset that holds the wallet with the granted units. This object is available in API version 63.0 and later.

[UsageEntitlementBucket](#)

Represents a usage entitlement that's granted with the sellable product. This object is available in API version 63.0 and later.

[UsageEntitlementEntry](#)

Represents the usage entitlement details, such as the usage consumption, rollovers, and details of expired units for each tenure. This object is available in API version 63.0 and later.

[UsageGrantRenewalPolicy](#)

Represents a policy about the rollover of a usage grant. This object is available in API version 62.0 and later.

[UsageGrantRolloverPolicy](#)

Represents a policy about the rollover of a usage grant. This object is available in API version 62.0 and later.

[UsageOveragePolicy](#)

Represents the set of rules that determine the management of usage resource's units consumed beyond the granted limit. This object is available in API version 65 and later.

[UsagePrdGrantBindingPolicy](#)

Represents the association of a usage resource's grants with a sellable product. This object is available in API version 63.0 and later.

[UsageRatableSummary](#)

Represents the aggregation of the usage summaries that are used to calculate the rate at which the overages are charged. This object is available in API version 63.0 and later.

[UsageRatableSumCmtAssetRt](#)

Represents the rate that's calculated and applicable for the usage resource associated with the commitment assets related to an anchor. This object is available in API version 65.0 and later.

[UsageResource](#)

Represents an entitlement granted to a user or party by a provider, such as data storage, computing power, bandwidth, or any other product or service. Additionally, this object is used to represent resources consumed over time. This object is available in API version 62.0 and later.

[UsageResourcePolicy](#)

Represents the policies applicable to the usage resource whether it's associated with a sellable product or not. This object is available in API version 65 and later.

[UsageResourceBillingPolicy](#)

Represents information about how the usage is accumulated before rating a usage resource. This object is available in API version 62.0 and later.

[UsageSummary](#)

Represents the aggregation of the entries in the transaction journal for a usage entitlement for a specified period. This object is available in API version 63.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

ProductUsageGrant

Represents the details of a grant associated with a resource, product, or service, such as the purchased quantity, renewal and rollover policy, and validity of the grant. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To create, update, and delete product usage grant records, you must have the Usage Management Design Time permission set license.

Fields

DrawdownOrder

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The order that's used to debit entitlement consumption from the usage entitlement bucket.

Valid values are `ExpiringFirst`, `GrantedFirst`, or `GrantedLast`.

This field is deprecated and will be retired in a future version.

EffectiveEndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time until when the grant remains effective.

EffectiveStartDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the grant becomes effective.

Label

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The identifying label for the product usage grant.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the product usage grant.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProductOfferId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The sellable product that grants the usage resource.

This field is a relationship field. This field is deprecated and will be retired in a future version.

Relationship Name: ProductOffer

Refers To: Product2

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product selling model associated with the product usage grant. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

ProductUsageGrantNum

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The number of each resource grant map that starts with one and is consecutive.

ProductUsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The product usage resource associated with the product usage grant. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: ProductUsageResource

Refers To: ProductUsageResource

Quantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The quantity of the granted resource.

RenewalPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The grant renewal policy associated with the product usage grant.

This field is a relationship field.

Relationship Name: RenewalPolicy

Refers To: UsageGrantRenewalPolicy

RolloverPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The grant rollover policy associated with the product usage grant.

This field is a relationship field.

Relationship Name: RolloverPolicy

Refers To: UsageGrantRolloverPolicy

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the product usage grant.

Valid values are `Active`, `Draft`, or `Inactive`.

Type

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of model that defines how the usage resource is consumed.

Valid values are `Commit` or `Grant`.

The default value is `Grant`. Available in API version 64.0 and later.

UnitOfMeasureClassId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure class associated with the product usage grant.

This field is a relationship field.

Relationship Name: UnitOfMeasureClass

Refers To: UnitOfMeasureClass

UnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unit for measure associated with the product usage grant. This value when specified, overrides the default unit of measure defined in the associated unit of measure class.

This field is a relationship field.

Relationship Name: UnitOfMeasure

Refers To: UnitOfMeasure

UsageDefinitionProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The sellable product associated with the usage resource that's used to retrieve tax policy, calculate rating during overages, and other invoicing actions.

This field is a relationship field.

Relationship Name: UsageDefinitionProduct

Refers To: Product2

UsageModelType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The ID of the unit of measure associated with the product. The type of usage model for a product or service. `Anchor` is the main subscription product or service. `Pack` is the add-on product or service that grants additional usage resources for consumption. `Commit` is the product or service with a specific committed quantity of consumption.

Valid values are `Anchor`, `Pack`, `Token Commitment`, `Quantity Commitment`, or `Monetary Commitment`.

This field is available in API version 65.0 and later.

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the product usage grant.

This field is a relationship field. This field is deprecated and will be retired in a future version.

Relationship Name: UsageResource

Refers To: UsageResource

ValidityPeriodTerm

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The period until when the resource grant is valid.

ValidityPeriodUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The length of a validity period for the resource grant, when used with the `ValidityPeriodTerm` field.

Valid values are `Month`, `None`, or `Year`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductUsageGrantHistory: History is available for tracked fields of the object.

ProductUsageGrantOwnerSharingRule: Sharing rules are available for the object.

ProductUsageGrantShare: Sharing is available for the object.

ProductUsageResource

Represents the mapping of a product and its usage resources. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields

EffectiveEndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the relationship between the product and the usage resource stops being active, and any usage tracking or billing related to this relationship ends.

EffectiveStartDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the relationship between the product and the usage resource becomes active or effective, and any usage tracking or billing related to this relationship begins.

IsOptional

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the product usage resource is optional when the associated product is one of the commitment usage model types (`true`) or not (`false`). The default value is `false`. This field is available in API version 65.0 and later.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the product usage grant.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The sellable product that grants the usage resource.

This field is a relationship field.

Relationship Name: ProductOffer

Refers To: Product2

ProductUsageResourceNum

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The number of each resource grant map that starts with one and is consecutive.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the product usage resource record.

Valid values are `Active`, `Draft`, or `Inactive`.

TokenResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource of category `Token` that's associated with the selected usage resource. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: TokenResource

Refers To: UsageResource

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource associated with the product usage grant.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductUsageResourceChangeEvent: Change events are available for the object.

ProductUsageResourceFeed: Feed tracking is available for the object.

ProductUsageResourceHistory: History is available for tracked fields of the object.

ProductUsageResourceOwnerSharingRule: Sharing rules are available for the object.

ProductUsageResourceShare: Sharing is available for the object.

ProductUsageResourcePolicy

Represents the policies applicable to the usage resource when it's associated with a sellable product. These policies are derived from the parent usage resource and can be overridden when setting up usage modeling. This object is available in API version 65 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record.

ProductSellingModelId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product selling model associated with this policy.

This field is a relationship field.

Relationship Name: ProductSellingModel

Refers To: ProductSellingModel

ProductUsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The product usage resource associated with this policy.

This field is a relationship field.

Relationship Name: ProductUsageResource

Relationship Type: Master-detail

Refers To: ProductUsageResource (the master object)

RatingFrequencyPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The rating frequency policy associated with the usage resource.

This field is a relationship field.

Relationship Name: RatingFrequencyPolicy

Refers To: RatingFrequencyPolicy

UsageAggregationPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage aggregation policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageAggregationPolicy

Refers To: UsageResourceBillingPolicy

UsageCommitmentPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage commitment policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageCommitmentPolicy

Refers To: UsageCommitmentPolicy

UsageOveragePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage overage policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageOveragePolicy

Refers To: UsageOveragePolicy

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ProductUsageResourcePolicyFeed: Feed tracking is available for the object.

ProductUsageResourcePolicyHistory: History is available for tracked fields of the object.

TransactionUsageEntitlement

Represents the details of each usage entitlement that's granted with the purchased sellable product, such as quantity and date when the entitlements were granted. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To create, update, and delete transaction usage entitlement records, you must have the Usage Management Run Time permission set license.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The account that's associated with the usage entitlement.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

ActionType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of action that resulted in the transaction usage entitlement.

Valid values are Amend, Cancellation, New, Ramp, or Renewal.

AssetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The asset associated with the sellable product.

This field is a relationship field.

Relationship Name: Asset

Refers To: Asset

EffectiveEndDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the active transaction usage entitlement ends.

EffectiveStartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the transaction usage entitlement becomes active.

EntitlementQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The entitlement quantity for the usage resource.

EntitlementProcessingStatus

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates whether the transaction usage entitlement has been processed by entitlement service to be used in Billing. Available in API version 65.0 and later.

Possible values are:

- PENDING—Pending
- PROCESSED—Processed

The default value is PENDING.

EntitlementUomClassId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The unit of measure class for the usage entitlement.

This field is a relationship field.

Relationship Name: EntitlementUomClass

Refers To: UnitOfMeasureClass

EntitlementUomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure to calculate the usage entitlement.

This field is a relationship field.

Relationship Name: EntitlementUom

Refers To: UnitOfMeasure

ExternalOrderItem

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The custom or external order item that's associated with the entitlement.

GrantBindingTargetId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The target associated with the entitlements that are granted with the sellable product.

This field is a relationship field.

Relationship Name: GrantBindingTarget

Refers To: Account, Asset, BindingObjectCustomExt, Contract

GrantType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the type of model that defines how the usage resource is consumed. Available in API version 65.0 and later.

Possible values are:

- Commit
- Grant

The default value is Grant.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Auto number, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the transaction usage entitlement record.

NetQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The total quantity that combines the amended quantity with the initial transaction quantity in the order item.

OriginalEndDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The end date of the transaction usage entitlement when the related order was assetized, amended, renewed, or canceled.

OrderItemId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The order item that's associated with the entitlement.

This field is a polymorphic relationship field.

Relationship Name: OrderItem

Refers To: OrderItem, WorkOrderLineItem

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the transaction usage entitlement.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PricebookEntryId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The price book entry that's associated with the sellable product.

This field is a relationship field.

Relationship Name: PricebookEntry

Refers To: PricebookEntry

ProductId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The sellable product for which the entitlement is granted.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

TokenResourceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage resource of category Token associated with the usage resource related to the usage product added in the quote line item. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: TokenResource

Refers To: UsageResource

TransactionQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The transaction quantity in the order for the usage entitlement.

UsageGrantRefreshPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage grant refresh policy that's associated with the transaction usage entitlement.

This field is a relationship field.

Relationship Name: UsageGrantRefreshPolicy

Refers To: UsageGrantRenewalPolicy

UsageGrantRolloverPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage grant rollover policy that's associated with the transaction usage entitlement.

This field is a relationship field.

Relationship Name: UsageGrantRolloverPolicy

Refers To: UsageGrantRolloverPolicy

UsageModelType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of usage model for a product or service. `Anchor` is the main subscription product or service. `Pack` is the add-on product or service that grants additional usage resources for consumption. `Commit` is the product or service with a specific committed quantity of consumption.

Valid values are `Anchor`, `Monetary Commitment`, `Pack`, `Quantity Commitment`, or `Token Commitment`. Available in API version 64.0 and later.

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource record that's associated with the transaction usage entitlement.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

ValidityPeriodTerm

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The duration for which the usage resource grant is valid, when used with the validity period units.

ValidityPeriodUnit

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The length of a validity period for the usage resource grant, when used with the validity period term.

Valid values are `Month`, `None`, or `Year`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

TransactionUsageEntitlementFeed: Feed tracking is available for the object.

TransactionUsageEntitlementHistory: History is available for tracked fields of the object.

TransactionUsageEntitlementOwnerSharingRule: Sharing rules are available for the object.

TransactionUsageEntitlementShare: Sharing is available for the object.

TransactionJournal

Represents consumption details of a usage resource that are recorded for creating usage summaries. This object is available for usage management in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You must have the Usage Management Run Time permission set license.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The account associated with the consumption.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

ActivityDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Required. The date of the transaction.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The three-letter ISO 4217 currency code of the monetary currency in which the transaction took place.

Possible values are:

- AED—UAE Dirham
- EUR—Euro
- GBP—British Pound
- INR—Indian Rupee
- JPY—Japanese Yen
- USD—U.S. Dollar

The default value is USD.

EndDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The end date associated with the transaction.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date on which a user referenced this record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The most recent date on which a user viewed this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The autogenerated number of the transaction journal.

Quantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The number of units consumed.

QuantityUnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unit of measure for the associated usage resource.

This field is a relationship field.

Relationship Name: QuantityUnitOfMeasure

Refers To: UnitOfMeasure

ReferenceRecordId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The asset associated with the transaction journal.

This field is a polymorphic relationship field.

Relationship Name: ReferenceRecord

Refers To: Asset

StartDate

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The start date associated with the transaction.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the transaction.

Possible values are:

- Cancelled
- Error
- Pending
- Processed

UniqueIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unique identifier of the transaction journal.

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage resource that's associated with the transaction journal.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

UsageSummaryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage summary that's associated with the transaction journal. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: UsageSummary

Refers To: UsageSummary

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of usage.

Valid value is `UsageManagement`.

UnitOfMeasure

Defines the units and systems of units used to account for quantities of a usage resource. This object is available for usage management in API version 62.0 and later.

Examples of units of measure include Liter (for volume), Kilogram (for weight), and single units (such as Can, sachet, and packet).

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ConversionFactor

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The factor or rate that's used to convert this unit of measurement to the base unit.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Autogenerated identifier for the unit of measure record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the unit of measure record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Sequence

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The sequence number assigned to the unit of measure.

Status

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The status of the unit of measure.

Valid values are: *Active*, *Draft*, or *Inactive*

Type

Type: picklist

Properties: Create, Filter, Group, Sort, Update

Description: The type of the unit of measure. For example, weight, distance, period.

UnitCode

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The code for the unit of measure.

UnitOfMeasureClassId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unit of measure class associated with the unit of measure.

This field is a relationship field.

Relationship Name: UnitOfMeasureClass

Refers To: UnitOfMeasureClass

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[UnitOfMeasureChangeEvent](#): Change events are available for the object.

[UnitOfMeasureShare](#): Sharing is available for the object.

UnitOfMeasureClass

Represents a standard unit of measure dimension. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

BaseUnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The base unit of measure that's used to calculate and display quantities.

This field is a relationship field.

Relationship Name: BaseUnitOfMeasure

Refers To: UnitOfMeasure

Code

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The unique user-defined string for the unit of measure class.

DefaultUnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default unit of measure that's used to calculate and display quantities. This measure can be different from the base unit of measure and overridden by individual resources.

This field is a relationship field.

Relationship Name: DefaultUnitOfMeasure

Refers To: UnitOfMeasure

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the unit of measure class.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Autogenerated identifier for the unit of measure class record.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the unit of measure class.

Valid values are `Active`, `Draft`, or `Inactive`.

Type

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of the unit of measure class.

Valid values are `Currency`, `Token`, or `Usage`.

The default value is `Usage`. Available in API version 64.0 and later.

This is a required field.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UnitOfMeasureClassHistory: History is available for tracked fields of the object.

UsageBillingPeriodItem

Represents the calculated overages for the usage entitlement and the amount that's charged for these overages. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To create, update, and delete transaction usage entitlement records, you must have the Usage Management Run Time permission set license.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The account that's associated with the billing period item.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

AssetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The asset that's associated with the usage billing period item.

This field is a relationship field.

Relationship Name: Asset

Refers To: Asset

EndDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The end date and time of the billing period.

ErrorCode

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The error code when the billing request fails.

Valid value is INTERNAL_ERROR

ErrorDescription

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The error description that corresponds to the error code.

GrantBindingTargetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The record that's associated with the usage entitlement account.

This field is a relationship field.

Relationship Name: GrantBindingTarget

Refers To: Account, Asset, BindingObjectCustomExt, Contract

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

OverageAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: The amount calculated for the overage.

OverageAmountDerived

Type: double

Properties: Filter, Nillable, Sort

Description: The numeric value specified in the `OverageAmount` field to process Data processing Engine (DPE) jobs.

This field is a calculated field.

OverageQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity of the usage entitlement that was overused for the specified billing period.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the usage billing period item.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

StartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The start date and time of the billing period.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the usage billing period item.

Valid values are:

- Invoiced
- InvoicingFailed
- LiableSummaryComplete
- New
- ReadyForInvoicing
- Inactive—Available in API version 65.0 and later.
- InProgress—Available in API version 66.0 and later.

TotalUsedQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The total quantity of usage entitlement that was used for the billing period. This includes granted and overused entitlements.

UoMId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure for the overage quantity of usage entitlement.

This field is a relationship field.

Relationship Name: UoM

Refers To: UnitOfMeasure

UsageBillingPeriodItemNum

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage billing period item record.

UsageEntitlementAccountId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage entitlement account associated with the source usage entitlement bucket.

This field is a relationship field.

Relationship Name: UsageEntitlementAccount

Refers To: UsageEntitlementAccount

UsageEntitlementBucketId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage entitlement bucket that's associated with the billing period item.

This field is a relationship field.

Relationship Name: UsageEntitlementBucket

Refers To: UsageEntitlementBucket

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource associated with the usage entitlement bucket.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageBillingPeriodItemFeed: Feed tracking is available for the object.

UsageBillingPeriodItemHistory: History is available for tracked fields of the object.

UsageBillingPeriodItemOwnerSharingRule: Sharing rules are available for the object.

UsageBillingPeriodItemShare: Sharing is available for the object.

UsageCmtAssetRelatedObj

Represents the relation between an asset for the commitment-based usage product and an asset, account, contract, or custom object. This object is available in API version 64.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AssetId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The asset associated with the commitment-based usage product.

This field is a relationship field.

Relationship Name: Asset

Relationship Type: Master-detail

Refers To: Asset (the master object)

EffectiveEndDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time until when the commitment for the related asset remains effective.

EffectiveStartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the commitment for the related asset becomes effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage commitment asset related object record.

RelatedObjectId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The asset, account, or contract associated with the asset.

This field is a polymorphic relationship field.

Relationship Name: RelatedObject

Refers To: Account, Asset, Contract

Only Asset is supported in API version 64.0.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageCmtAssetRelatedObjFeed: Feed tracking is available for the object.

UsageCmtAssetRelatedObjHistory: History is available for tracked fields of the object.

UsageCommitmentPolicy

Represents the set of rules that determines how commitments are applied to a usage resource. This object is available in API version 65 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields

CommitmentRate

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: The rate that's applicable to the usage resource's units consumed post the commitment is utilized, but the commitment period is still active.

Valid values are `Bounded Object Rate` or `Lowest Commitment Rate`.

The default value is `Lowest Commitment Rate`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the usage commitment policy.

UsageEntitlementAccount

Represents the entitlement account details related to the asset that holds the wallet with the granted units. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The account that's associated with the usage entitlement.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

BillDayOfMonth

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The day of the month that the bill is generated on and that ends the billing period.

BillingPeriodEndDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the billing period of the usage entitlements ends.

BillingPeriodStartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the billing period of the usage entitlements starts.

BillingPeriodTerm

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: The frequency at which the bill is generated.

BillingPeriodUnit

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The unit to measure the billing frequency.

Valid value is MONTH

EffectiveEndDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the usage entitlement account ends.

EffectiveStartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the usage entitlement account starts.

GrantBindingTargetId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The target that's associated with the usage entitlement account.

This field is a relationship field.

Relationship Name: GrantBindingTarget

Refers To: Account, Asset, BindingObjectCustomExt, Contract

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Auto number, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage entitlement account record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the usage entitlement account.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PricebookEntryId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The price book entry that's associated with the sellable product.

This field is a relationship field.

Relationship Name: PricebookEntry

Refers To: PricebookEntry

ProductId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The sellable product for which the entitlements are granted.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageEntitlementAccountFeed: Feed tracking is available for the object.

UsageEntitlementAccountHistory: History is available for tracked fields of the object.

UsageEntitlementAccountOwnerSharingRule: Sharing rules are available for the object.

UsageEntitlementAccountShare: Sharing is available for the object.

UsageEntitlementBucket

Represents a usage entitlement that's granted with the sellable product. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

BucketBalance

Type: double

Properties: Create, Filter, Sort, Update

Description: The balance of the usage entitlement bucket after each transaction.

BucketBalanceUomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit that's used to measure the usage entitlement bucket balance.

This field is a relationship field.

Relationship Name: BucketBalanceUom

Refers To: UnitOfMeasure

CompletedRollovers

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of rollovers that were completed for the entitlements.

ConsumedEntitlement

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The entitlements that have been consumed from this bucket.

EffectiveEndDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the usage entitlement bucket period ends.

EffectiveStartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the usage entitlement bucket becomes effective.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage entitlement bucket record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the usage entitlement bucket.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ParentId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The parent record that's associated with the usage entitlement bucket.

This field is a polymorphic relationship field.

Relationship Name: Parent

Refers To: UsageEntitlementAccount, UsageEntitlementBucket

ProvisionalBucketBalance

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The provisional entitlement balance available in the usage bucket. Available in API version 66.0 and later.

TotalAsOfBalance

Type: double

Properties: Filter, Nillable, Sort

Description: The balance of the entitlements granted with the usage resource for a Usage entitlement account.

TotalConsumedEntitlement

Type: double

Properties: Filter, Nillable, Sort

Description: The entitlements that have been consumed from this bucket.

TotalProvisionalBalance

Type: double

Properties: Filter, Nillable, Sort

Description: The total provisional entitlement balance in the usage entitlement account as of the specified date. Available in API version 66.0 and later.

TransactionUsageEntitlementId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The transaction usage entitlement associated with this usage entitlement bucket.

This field is a relationship field.

Relationship Name: TransactionUsageEntitlement

Refers To: TransactionUsageEntitlement

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage resource that's associated with the usage entitlement bucket.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageEntitlementBucketFeed: Feed tracking is available for the object.

UsageEntitlementBucketHistory: History is available for tracked fields of the object.

UsageEntitlementBucketOwnerSharingRule: Sharing rules are available for the object.

UsageEntitlementBucketShare: Sharing is available for the object.

UsageEntitlementEntry

Represents the usage entitlement details, such as the usage consumption, rollovers, and details of expired units for each tenure. This object is available in API version 63.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

ClosingBalance

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity of the entitlement after adjusting the transaction quantity for the current entitlement validity period.

EffectiveEndDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the usage entitlement entry ends.

EffectiveStartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the usage entitlement entry starts.

EntitlementBucketId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage entitlement bucket that's associated with the entitlement entry.

This field is a relationship field.

Relationship Name: EntitlementBucket

Relationship Type: Master-detail

Refers To: UsageEntitlementBucket (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage entitlement entry record.

OpeningBalance

Type: double

Properties: Create, Filter, Sort, Update

Description: The starting quantity of the entitlement for the current entitlement validity period.

ParentEntitlementBucketId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The parent usage entitlement bucket record that's associated with the entitlement entry.

This field is a relationship field.

Relationship Name: ParentEntitlementBucket

Refers To: UsageEntitlementBucket

TransactionDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date when the transaction usage entitlement entry was updated.

TransactionQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity of the entitlement used during the current entitlement validity period.

TransactionReason

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The reason for the usage entitlement entry.

Valid values are:

- Amend
- Cancel
- Consumption
- Original
- Refresh
- Renew
- Rollover

TransactionType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of transaction.

Valid values are Credit, Debit, or Expired.

TransactionUsageEntitlementId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The transaction usage entitlement that's associated with this usage entitlement entry.

This field is a relationship field.

Relationship Name: TransactionUsageEntitlement

Refers To: TransactionUsageEntitlement

TransactionalBucketId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage entitlement bucket that's used to debit the consumption of entitlements.

This field is a relationship field.

Relationship Name: TransactionalBucket

Refers To: UsageEntitlementBucket

UomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure that's associated with the usage entitlement.

This field is a relationship field.

Relationship Name: Uom

Refers To: UnitOfMeasure

UsageSummaryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage summary that's associated with the usage entitlement. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: UsageSummary

Refers To: UsageSummary

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageEntitlementEntryFeed: Feed tracking is available for the object.

UsageEntitlementEntryHistory: History is available for tracked fields of the object.

UsageGrantRenewalPolicy

Represents a policy about the rollover of a usage grant. This object is available in API version 62.0 and later.

A usage grant renewal policy is used if you want to never renew a usage grant or renew on a specific frequency.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),  
retrieve(), search(), undelete(), update(), upsert()
```

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: A unique user-defined string for the usage grant renewal policy.

IsRenewalAllowed

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the policy renewal is allowed (`true`) or not (`false`). If `true`, then the policy can be renewed.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the renewal policy record.

RenewalFrequency

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The frequency of the policy renewals, when used with the `RenewalFrequencyUnit` field.

RenewalFrequencyUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The renewal duration for a policy.

Valid values are `Month`, `Quarter`, or `Year`.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the renewal policy.

Valid values are `Active`, `Draft`, or `Inactive`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageGrantRenewalPolicyFeed: Feed tracking is available for the object.

UsageGrantRenewalPolicyHistory: History is available for tracked fields of the object.

UsageGrantRolloverPolicy

Represents a policy about the rollover of a usage grant. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: A unique user-defined string for the usage grant rollover policy.

IsRolloverAllowed

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the policy allows the rollover of the usage grant.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

MaximumRolloverCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of times that the usage grant can roll over.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the rollover policy record.

ShouldAllowRolloverExpiry

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the rollover for the associated usage grant is allowed to expire.

The default value is `false`.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the status of the rollover policy.

Possible values are `Active`, `Draft`, or `Inactive`

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageGrantRolloverPolicyFeed: Feed tracking is available for the object.

UsageGrantRolloverPolicyHistory: History is available for tracked fields of the object.

UsageOveragePolicy

Represents the set of rules that determine the management of usage resource's units consumed beyond the granted limit. This object is available in API version 65 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the usage overage policy.

OverageChargeable

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies whether the overconsumption beyond the granted quantity is to be charged.

Valid values are No or Yes.

UsagePrdGrantBindingPolicy

Represents the association of a usage resource's grants with a sellable product. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

GrantBindingTargetType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of binding instance to which the grant is added.

Valid values are Custom, Product, Contract, or Account.

GrantBindingType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The type of binding that indicates where the grant is added.

Valid values are `Self` or `Target`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Autogenerated identifier for the usage product grant binding policy.

Product2Id

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The sellable product associated with the usage product grant binding policy.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsagePrdGrantBindingPolicyFeed: Feed tracking is available for the object.

UsagePrdGrantBindingPolicyHistory: History is available for tracked fields of the object.

UsageRatableSummary

Represents the aggregation of the usage summaries that are used to calculate the rate at which the overages are charged. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The account that's associated with the ratable summary.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

AssetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The asset that's associated with the ratable summary.

This field is a relationship field.

Relationship Name: Asset

Refers To: Asset

EndTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The end date and time of the ratable period.

ErrorCode

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The code that represents the error encountered when the ratable summary is rated.

Valid value is `INTERNAL__ERROR`

ErrorDescription

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The error description that corresponds to the error code.

GrantBindingTargetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The record that's associated with the usage ratable summary. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: GrantBindingTarget

Refers To: Account, Asset, BindingObjectCustomExt, Contract

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage ratable summary record.

NetUnitRate

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The rate that's used to calculate the amount for each unit of usage entitlement overage.

NetUnitRateUomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure for the net unit rate applied to the overage.

This field is a relationship field.

Relationship Name: NetUnitRateUom

Refers To: UnitOfMeasure

OverageQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity of the usage entitlements that were overused.

OverageQuantityUomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure that's used for overage quantity.

This field is a relationship field.

Relationship Name: OverageQuantityUom

Refers To: UnitOfMeasure

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the usage ratable summary.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RatingDecisionDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when the decision about rating consumption is done.

RatingExecutionIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the rating service execution that's used to retrieve waterfall logs.

RatingRequestId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID that invokes the rating service that's used to rate the usage ratable summary.

This field is a relationship field.

Relationship Name: RatingRequest

Refers To: RatingRequest

SourceUsageResourceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage resource that's rated in tokens when usage ratable summary is created. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: SourceUsageResource

Refers To: UsageResource

StartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The start date and time of the ratable period.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the ratable summary.

Valid values are:

- New
- RatingComplete
- RatingFailed
- SummaryCreated
- Inactive—Available in API version 65.0 and later.
- InProgress—Available in API version 66.0 and later.

TierQuantity

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity that impacts the net unit rate of a usage entitlement.

TierQuantityUomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure for the tier quantity.

This field is a relationship field.

Relationship Name: TierQuantityUom

Refers To: UnitOfMeasure

TotalAmount

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The total amount after calculating the overage based on the net unit rate.

UsageEntitlementAccountId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage entitlement account that's associated with the source of the ratable summary.

This field is a relationship field.

Relationship Name: UsageEntitlementAccount

Refers To: UsageEntitlementAccount

UsageEntitlementBucketId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage entitlement bucket that's associated with the source of the ratable summary.

This field is a relationship field.

Relationship Name: UsageEntitlementBucket

Refers To: UsageEntitlementBucket

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource associated with the usage entitlement bucket.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageRatableSummaryHistory: History is available for tracked fields of the object.

UsageRatableSummaryOwnerSharingRule: Sharing rules are available for the object.

UsageRatableSummaryShare: Sharing is available for the object.

UsageRatableSumCmtAssetRt

Represents the rate that's calculated and applicable for the usage resource associated with the commitment assets related to an anchor. This object is available in API version 65.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Fields

CommitmentAssetId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The asset ID associated with the Usage Ratable Summary.

This field is a relationship field.

Relationship Name: CommitmentAsset

Refers To: Asset

ErrorCode

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the unique code generated when an error occurs.

Valid value is `INTERNAL__ERROR`.

ErrorDescription

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Specifies the description of the error that occurred.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed this record.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Name of the Usage Commitment Summary record.

NetUnitRate

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The calculated per-unit rate for usage after applying commitment-specific discounts during the rating process.

UsageRatableSummaryId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The usage ratable summary associated with the usage commitment summary record.

This field is a relationship field.

Relationship Name: UsageRatableSummary

Relationship Type: Master-detail

Refers To: UsageRatableSummary (the master object)

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageRatableSumCmtAssetRtHistory: History is available for tracked fields of the object.

UsageResource

Represents an entitlement granted to a user or party by a provider, such as data storage, computing power, bandwidth, or any other product or service. Additionally, this object is used to represent resources consumed over time. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Category

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The category of the usage resource that's used to organize and understand the product grant maps.

Valid values are `Currency`—Available in API version 65.0 and later, `Usage`, or `Token`—Available in API version 64.0 and later.

Code

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The unique user-defined string for the usage resource.

DefaultUnitOfMeasureId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default unit of measure for the given resource. The default value can be overridden with an alternate default unit of measure for a given resource.

This field is a relationship field.

Relationship Name: DefaultUnitOfMeasure

Refers To: UnitOfMeasure

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the usage resource.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the usage resource record.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the usage resource record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the usage resource.

Valid values are `Active`, `Draft`, or `Inactive`.

TokenResourceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage resource of Category `Token` that's used to charge this usage resource. For example, you can select a usage resource `Credits` (Token category) to rate the usage resource `Data` (Usage category). This field is available in API version 65.0 and later.

Relationship Name: TokenResource

Refers To: UsageResource

UnitOfMeasureClassId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unit of measure class that's used with the resource to define the units in which this resource is measured.

This field is a relationship field.

Relationship Name: UnitOfMeasureClass

Refers To: UnitOfMeasureClass

UsageDefinitionProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The product associated with the usage resource to retrieve tax policy, calculate rating during overages, and other invoicing actions.

This field is a relationship field.

Relationship Name: UsageDefinitionProduct

Refers To: Product2

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageResourceFeed: Feed tracking is available for the object.

UsageResourceHistory: History is available for tracked fields of the object.

UsageResourceOwnerSharingRule: Sharing rules are available for the object.

UsageResourceShare: Sharing is available for the object.

UsageResourcePolicy

Represents the policies applicable to the usage resource whether it's associated with a sellable product or not. This object is available in API version 65 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

```
create(), delete(), describeLayout(), describeSObjects(), getDeleted(), getUpdated(), query(),  
retrieve(), search(), undelete(), update(), upsert()
```

Special Access Rules

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record, a record related to this record, or a list view.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Date and time when the current user last viewed or modified this record.

RatingFrequencyPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The rating frequency policy associated with the usage resource.

This field is a relationship field.

Relationship Name: RatingFrequencyPolicy

Refers To: RatingFrequencyPolicy

UsageAggregationPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage aggregation policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageAggregationPolicy

Refers To: UsageResourceBillingPolicy

UsageCommitmentPolicyId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage commitment policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageCommitmentPolicy

Refers To: UsageCommitmentPolicy

UsageOveragePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage overage policy associated with the usage resource.

This field is a relationship field.

Relationship Name: UsageOveragePolicy

Refers To: UsageOveragePolicy

UsageResourceId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The usage resource associated with the usage resource policy.

This field is a relationship field.

Relationship Name: UsageResource

Relationship Type: Master-detail

Refers To: UsageResource (the master object)

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageResourcePolicyFeed: Feed tracking is available for the object.

UsageResourcePolicyHistory: History is available for tracked fields of the object.

UsageResourceBillingPolicy

Represents information about how the usage is accumulated before rating a usage resource. This object is available in API version 62.0 and later.

A usage resource billing policy object is used to configure the properties of usage resources related to how aggregation is performed on the usage records before rating. Usage resource billing policies are defined at the usage resource level and can be reused across multiple usage resources.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Code

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: A unique user-defined string for the usage resource billing policy.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The name of the usage resource billing policy record.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the policy.

Valid values are `Active`, `Draft`, or `Inactive`.

UsageAccumulationMethod

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update, Defaulted On Create

Description: The method used to accumulate the usage.

Valid values are `Peak` or `Sum`.

UsageAccumulationPeriod

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The duration for which the usage is accumulated.

Valid values are `Daily` or `Monthly`.

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageResourceBillingPolicyFeed: Feed tracking is available for the object.

UsageResourceBillingPolicyHistory: History is available for tracked fields of the object.

UsageSummary

Represents the aggregation of the entries in the transaction journal for a usage entitlement for a specified period. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The account that's associated with the sellable product that was purchased.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

AssetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The asset that's associated with the entitlement that was summarized.

This field is a relationship field.

Relationship Name: Asset

Refers To: Asset

ConsumptionUnits

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity that was used by the usage entitlement bucket.

DebitedUnits

Type: double

Properties: Create, Filter, Sort, Update

Description: The units that are debited from the associated usage entitlement bucket.

EndDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The end date and time of the usage summary.

GrantBindingTargetId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The record that's associated with the usage summary. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: GrantBindingTarget

Refers To: Account, Asset, BindingObjectCustomExt, Contract

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp for when the current user last viewed a record related to this record.

LiableSummaryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The usage billing period item that's associated with this usage summary.

This field is a relationship field.

Relationship Name: LiableSummary

Refers To: UsageBillingPeriodItem

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Autogenerated identifier for the usage summary record.

OverageUnits

Type: double

Properties: Create, Filter, Sort, Update

Description: The quantity that was overused by the usage entitlement bucket.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the usage summary.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ParentUsageSummaryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The parent usage summary that's associated with this usage summary. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: ParentUsageSummary

Refers To: UsageSummary

RatableSummaryId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ratable summary that's associated with this usage summary.

This field is a relationship field.

Relationship Name: RatableSummary

Refers To: UsageRatableSummary

StartDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The start date and time of the usage summary.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the usage summary.

Valid values are:

- DrawdownComplete
- LiabileSummaryComplete
- New
- RatableSummaryComplete
- Rated
- UsageSummaryComplete
- UsageSummaryInProgress
- Inactive—Available in API version 65.0 and later.

UomId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The unit of measure for the usage resource. This value overrides the default unit of measure defined in the associated unit of measure class.

This field is a relationship field.

Relationship Name: Uom

Refers To: UnitOfMeasure

UsageEntitlementAccountId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage entitlement account that's associated with the usage summary.

This field is a relationship field.

Relationship Name: UsageEntitlementAccount

Refers To: UsageEntitlementAccount

UsageEntitlementBucketId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The usage entitlement bucket that's associated with the usage summary.

This field is a relationship field.

Relationship Name: UsageEntitlementBucket

Refers To: UsageEntitlementBucket

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource that's associated with the source of the usage entitlement bucket.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

Associated Objects

This object has these associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

UsageSummaryHistory: History is available for tracked fields of the object.

UsageSummaryOwnerSharingRule: Sharing rules are available for the object.

UsageSummaryShare: Sharing is available for the object.

Usage Management Fields on Standard Objects

Usage Management adds standard and custom fields to some standard Salesforce objects. These fields are available only in orgs where Usage Management is enabled. This object is available in API version 63.0 and later.

[Usage Management Fields on Product2](#)

Standard and custom fields extend the standard Product2 object for use in Usage Management to represent information about products.

Usage Management Fields on Product2

Standard and custom fields extend the standard Product2 object for use in Usage Management to represent information about products.

UsageModelType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of usage model for a product or service.

Valid values are:

- **Anchor**—The main subscription product or service. Available in API version 62.0 and later.
- **Pack**—The add-on product or service that grants additional usage resources for consumption. Available in API version 62.0 and later.
- **Monetary Commitment**—An agreement by a customer to spend a minimum amount for a product or service in a defined period. Available in API version 65.0 and later.
- **Quantity Commitment**—An agreement by a customer to use a minimum quantity of a product or service in a defined period. Available in API version 65.0 and later.

- **Token Commitment**—An agreement by a customer to use a minimum quantity of tokens for a product or service in a defined period. Available in API version 65.0 and later.

SEE ALSO:

[Product2](#)

Usage Management Standard Invocable Actions

Learn more about the standard invocable actions available with Usage Management.

[Invoke Summary Creation Action](#)

Invoke the service that creates various summaries, such as usage, ratable, and liable summaries where the usage amount is zero. The service also checks and updates the billing period of the usage entitlement account if the billing period is expired.

[Process Consumption Overages Action](#)

Process consumption overages for the usage summary records with `SummaryComplete` status. This action uses the entitlement service to process the overages.

[Refresh Usage Entitlement Bucket Action](#)

Refresh entitlements by evaluating the usage entitlement bucket records and creating a new usage entitlement entry.

[Retrigger Entitlement Creation Process Action](#)

Retrigger entitlement creation process for failed or unprocessed assets.

SEE ALSO:

[Actions Developer Guide: Overview](#)

[REST API Developer Guide: Invocable Actions Standard](#)

[Salesforce Help: Usage Management](#)

Invoke Summary Creation Action

Invoke the service that creates various summaries, such as usage, ratable, and liable summaries where the usage amount is zero. The service also checks and updates the billing period of the usage entitlement account if the billing period is expired.

This action is available in API version 63.0 and later.

Special Access Rules

The Invoke Summary Creation action is available in Enterprise, Developer, and Unlimited Editions where Usage Management is enabled. To use this action, you need the Usage Management Run Time User permission.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/invokeSummaryCreationService`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
usageEntitlementAccountId	string	Required. ID of the usage entitlement account record that's used to create summaries.

Outputs

None.

Example

POST

This example shows a sample request for the Invoke Summary Creation action.

```
{
  "inputs": [
    {
      "usageEntitlementAccountId": "3ttDU00000000iZYAQ"
    }
  ]
}
```

This example shows a sample response for the Invoke Summary Creation action.

```
{
  "actionName": "invokeSummaryCreationService",
  "errors": null,
  "isSuccess": true
}
```

SEE ALSO:

[Salesforce Help: Permission Set Licenses, Personas, and User Permissions for Usage Management](#)

Process Consumption Overages Action

Process consumption overages for the usage summary records with `SummaryComplete` status. This action uses the entitlement service to process the overages.

This action is available in API version 63.0 and later.

Special Access Rules

The Process Consumption Overages action is available in Enterprise, Developer, and Unlimited Editions where Usage Management is enabled. To use this action, you need the Usage Management Run Time User permission.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/processConsumptionOverages`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
usageRatableSummaryId	string	Required. ID of the usage ratable summary record that contains the consumption details, and is used to calculate consumption overages and create usage entitlement entry records.

Outputs

None.

Example

POST

This example shows a sample request for the Process Consumption Overages action.

```
{
  "inputs": [
    {
      "usageRatableSummaryId": "3ttDU00000000iZYAQ"
    }
  ]
}
```

This example shows a sample response for the Process Consumption Overages action.

```
{
  "actionName": "processConsumptionOverages",
  "errors": null,
  "isSuccess": true
}
```

SEE ALSO:

[Salesforce Help: Permission Set Licenses, Personas, and User Permissions for Usage Management](#)

Refresh Usage Entitlement Bucket Action

Refresh entitlements by evaluating the usage entitlement bucket records and creating a new usage entitlement entry.

This action is available in API version 63.0 and later.

Special Access Rules

The Refresh Usage Entitlement Bucket action is available in Enterprise, Developer, and Unlimited Editions where Usage Management is enabled. To use this action, you need the Usage Management Run Time User permission.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/refreshUsageEntitlementBucket`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
transactionUsageEntitlementId	string	Required. ID of the transaction usage entitlement record that's associated with the usage entitlement buckets that you need to refresh.

Outputs

None.

Example

POST

This example shows a sample request for the Refresh Usage Entitlement Bucket action.

```
{
  "inputs": [
    {
      "transactionUsageEntitlementId": "3ttDU00000000iZYAQ"
    }
  ]
}
```

This example shows a sample response for the Refresh Usage Entitlement Bucket action.

```
{
  "actionName": "refreshUsageEntitlementBucket",
  "errors": null,
  "isSuccess": true
}
```

SEE ALSO:

[Salesforce Help: Permission Set Licenses, Personas, and User Permissions for Usage Management](#)

Retrigger Entitlement Creation Process Action

Retrigger entitlement creation process for failed or unprocessed assets.

Trigger the entitlement creation process again in these scenarios.

- Process failed assets in the asset to entitlement journey.
- Assetize or create wallets for assets without corresponding records in Usage Management.

This action is available in API version 65.0 and later.

Special Access Rules

The Retrigger Entitlement Creation Process action is available in Enterprise, Developer, and Unlimited Editions where Usage Management is enabled. To use this action, you need the Usage Management Run Time User permission.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/retriggerEntlCreaProc`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
assetId	string	Required. ID of the asset for which you want to trigger the asset to entitlement process again.

Outputs

None.

Example

POST

Here's a sample request for the Retrigger Entitlement Creation Process action.

```
{
  "inputs": [
    {
      "assetId": "02iSB000000JzZFYA0"
    }
  ]
}
```

Here's a sample response for the Retrigger Entitlement Creation Process action.

```
[
  {
    "actionName": "retriggerEntlCreaProc",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": null,
    "sortOrder": -1,
    "version": 1
  }
]
```

Usage Management Business APIs

Use the Usage Management Business APIs to get details of a usage-based product that's associated with an asset, an order item, or a quote line item.

This table lists the available Usage Management resources.

Resource	Description
/asset-management/assets/assetId/usage-details (GET)	Get details of a usage-based product associated with an asset. This covers details of grants, resources, and configured rates for the product, including negotiated rates in case of a rate override.
/commerce/sales-orders/line-items/orderItemId/usage-details (GET)	Get details of a usage-based product associated with an order item.
/commerce/quotes/line-items/quoteLineItemId/usage-details (GET)	Get details of a usage-based product associated with a quote line item.
/revenue/usage-management/binding-objects/bindingObjectId/actions/usage-details (GET)	Get details of grants, resources, rates, and any configured policies for a specified binding object.
/revenue/usage-management/consumption/actions/trace (POST)	Get a comprehensive breakdown of overage charges and resource drawdown, enabling you to view information that's applicable to specific invoice lines.

Resource	Description
/revenue/usage-management/usage-products/actions/validate (POST)	Validate cross-object relationships and business rules for usage-based products.

Resources

Learn more about the available Usage Management API resources.

Request Bodies

Learn more about the available request bodies of Usage Management APIs.

Response Bodies

Learn more about the available response bodies of Usage Management APIs.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

Resources

Learn more about the available Usage Management API resources.

Asset Usage Details (GET)

Get details of a usage-based product associated with an asset. This covers details of grants, resources, and configured rates for the product, including negotiated rates in case of a rate override.

Binding Object Usage Details (GET)

Get details of grants, resources, rates, and any configured policies for a specified binding object.

Consumption Traceabilities (POST)

Get a comprehensive breakdown of overage charges and resource drawdown, enabling you to view information that's applicable to specific invoice lines.

Order Item Usage Details (GET)

Get details of a usage-based product associated with an order item.

Quote Line Item Usage Details (GET)

Get details of a usage-based product associated with a quote line item.

Usage Product Activation (POST)

Activate a usage product and its related records, such as usage resources, grants, policies, and rate card entries, in a single request.

Usage Product Validation (POST)

Validate cross-object relationships and business rules for usage-based products.

Asset Usage Details (GET)

Get details of a usage-based product associated with an asset. This covers details of grants, resources, and configured rates for the product, including negotiated rates in case of a rate override.

Here are the details that this API returns.

- Grants and resources for the product, if rates aren't configured.
- Grants, resources, and any configured rates for the product. The rates are returned by the [Rate Plan \(GET\) API](#).
- Resources that include grants, if applicable, and any negotiated rates for the product in case of a rate override request.

This API doesn't return binding target rates. Use the [Binding Object Usage Details API](#) to retrieve binding target rates.

Resource

```
/asset-management/assets/assetId/usage-details
```

Resource Example

<https://yourInstance.salesforce.com/services/data/v68.0/asset-management/assets/02iRM00000000tCdYAI/usage-details>

Available Version

63.0

HTTP Methods

GET

Path Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
assetId	String	ID of the asset.	Required	63.0

Query Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
effectiveDate	String	Date that's used to search for the applicable rate card entries.	Required	63.0
optionalFields	String[]	Custom fields that you can use to query these objects. AssetRateCardEntry ; or AssetRateAdjustment .	Optional	63.0

Response Body for GET

Usage Details

Binding Object Usage Details (GET)

Get details of grants, resources, rates, and any configured policies for a specified binding object.

Use this API to display the details for a binding object during the selling journey. Additionally, display the details after assetization on the selected binding objects.

The supported binding objects are Account, Contract, BindingObjectCustomExt, or Anchor Asset that's not bound to a target.

Resource

```
/revenue/usage-management/binding-objects/bindingObjectId/actions/usage-details
```

Resource Example

<https://yourInstance.salesforce.com/services/data/v68.0/revenue/user-management/binding-objects/1Bx000004C9GU/actions/user-details?effectiveDate=2025-08-07>

Available Version

65.0

HTTP Methods

GET

Path Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
bindingObjectId	String	ID of the binding object.	Required	65.0

Query Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
effectiveDate	String	Date filter that's used to retrieve the grants, rates, and applicable policies as of the specified date in <code>yyyy-MM-dd</code> format.	Required	65.0

Response Body for GET

Binding Object Usage Detail

Consumption Traceabilities (POST)

Get a comprehensive breakdown of overage charges and resource drawdown, enabling you to view information that's applicable to specific invoice lines.

This API provides an automated, clear, and traceable breakdown of all charges with details of specific rates, tiers, and discounts.

Resource

```
/revenue/usage-management/consumption/actions/trace
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/usage-management/consumption/actions/trace
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "liableSummaryIds": [
    "1HG0000000000001"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
liableSummaryIds	String[]	List of liable summary IDs to trace the consumption.	Required	66.0

Response Body for POST

[Consumption Traceabilities](#)

Order Item Usage Details (GET)

Get details of a usage-based product associated with an order item.

Here are the details that this API returns.

- Grants and resources for the product, if rates aren’t configured.
- Grants, resources, and any configured rates for the product. The rates are returned by the [Rate Plan \(GET\) API](#).
- Resources that include grants, if applicable, and any negotiated rates for the product in case of a rate override request.

This API doesn't return binding target rates. Use the [Binding Object Usage Details API](#) to retrieve binding target rates.

Resource

```
/commerce/sales-orders/line-items/orderItemId/usage-details
```

Resource Example

<https://yourInstance.salesforce.com/services/data/v68.0/commerce/sales-orders/line-items/802SG000003vZ15YAE/usage-details>

https://**yourInstance**.salesforce.com/services/data

Available Version

63.0

HTTP Methods

GET

Path Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
orderId	String	ID of the order.	Required	63.0

Query Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
effectiveDate	String	Date that's used to search for the applicable rate card entries.	Optional	63.0
optionalFields	String[]	Custom fields that you can use to query these objects. OrderItemRateCardEntry ; or OrderItemRateAdjustment .	Optional	63.0

Response Body for GET

Usage Details

Quote Line Item Usage Details (GET)

Get details of a usage-based product associated with a quote line item.

Here are the details that this API returns.

- Grants and resources for the product, if rates aren't configured.

- Grants, resources, and any configured rates for the product. The rates are returned by the [Rate Plan \(GET\) API](#).
- Resources that include grants, if applicable, and any negotiated rates for the product in case of a rate override request.

This API doesn't return binding target rates. Use the [Binding Object Usage Details API](#) to retrieve binding target rates.

Resource

```
/commerce/quotes/line-items/quoteLineItemId/usage-details
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/quotes/line-items/00LXXXXXXXXXABC/usage-details
```

Available Version

62.0

HTTP Methods

GET

Request Parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
effectiveDate	String	Date that's used to search for the applicable rate card entries.	Optional	62.0
optionalFields	String[]	Custom fields that you can use to query these objects. QuoteLineRateCardEntry ; or QuoteLineRateAdjustment .	Optional	62.0

Response Body for GET

[Usage Details](#)

Usage Product Activation (POST)

Activate a usage product and its related records, such as usage resources, grants, policies, and rate card entries, in a single request.

Keep these considerations in mind when you use this API.

- In version 67.0, each request activates one product. If a request includes more than one product, the API returns the `MAX_LIMIT_EXCEEDED` error.
- Each record in the request stays in Draft status until activation runs. If any record for the product fails to activate, the API rolls back all activations for that product.
- The records activate in the order required by their dependencies, so a child record never activates before its parent.

- Each request activates a maximum of 200 records, including the product and all of its associated child records. If the request exceeds 200 records, the API returns the `MAX_LIMIT_EXCEEDED` error.

Resource

```
/revenue/usage-management/usage-products/actions/activate
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/usage-management/usage-products/actions/activate
```

Available Version

67.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "shouldValidateProductSetup": false,
  "activationRequests": [
    {
      "productId": "01txx00000006i2gAAA",
      "usageResourceIds": [
        "0hUxx0000000001",
        "0hUxx0000000002"
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
activation Requests	Usage Activation Request Input[]	List of activation requests. Each entry identifies a product and the usage resources to activate for that product. This list accepts only one entry. If you include more, the API returns the <code>MAX_LIMIT_EXCEEDED</code> error.	Required	67.0
shouldValidate ProductSetup	Boolean	Indicates whether to run product setup validation before activation (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	67.0

Response Body for POST

[Usage Product Activation](#)

Usage Product Validation (POST)

Validate cross-object relationships and business rules for usage-based products.
This API returns validation results with errors and warnings.

Resource

```
/revenue/usage-management/usage-products/actions/validate
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/usage-management/usage-products/actions/validate
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "productIds": [
    "01txx0000006i2gAAA",
    "01txx0000006j2gAAA"
  ],
  "startDate": "2024-01-01T00:00:00Z",
  "endDate": "2024-12-31T23:59:59Z"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
productIds	String[]	List of product IDs to be validated. The maximum limit is 10 valid product IDs.	Required	66.0
startDate	String	Start date of the date range in which all active records are validated.	Optional	66.0
endDate	String	End date of the date range in which all active records are validated.	Optional	66.0

Response Body for POST

[Usage Product Validation](#)

Request Bodies

Learn more about the available request bodies of Usage Management APIs.

[Consumption Traceabilities Input](#)

Input representation of the details of the liable summary IDs that are used to trace the consumption.

[Usage Activation Request Input](#)

Input representation for a single product entry in a usage product activation request. Each entry identifies one product and the usage resources to activate for that product.

[Usage Product Activation Input](#)

Input representation of a usage product activation request.

[Usage Product Validation Input](#)

Input representation of the usage product validation request.

Consumption Traceabilities Input

Input representation of the details of the liable summary IDs that are used to trace the consumption.

JSON Example

```
{
  "liableSummaryIds": [
    "1HG000000000001"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
liableSummaryIds	String[]	List of liable summary IDs to trace the consumption.	Required	66.0

Usage Activation Request Input

Input representation for a single product entry in a usage product activation request. Each entry identifies one product and the usage resources to activate for that product.

JSON Example

```
{
  "productId": "01txx0000006i2gAAA",
  "usageResourceIds": [
    "0hUxx000000001",
    "0hUxx000000002"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
productId	String	ID of the Product2 record whose associated usage records are activated.	Required	67.0
usageResourceIds	String[]	List of usage resource IDs to activate for the given product. The activation extends to all design-time records linked to these resources, such as product usage grants, usage policies, units of measure, units of measure classes, and rate card entries. If this property is empty or omitted, all usage records associated with the given product are activated.	Optional	67.0

Usage Product Activation Input

Input representation of a usage product activation request.

JSON Example

```
{
  "shouldValidateProductSetup": false,
  "activationRequests": [
    {
      "productId": "01txx0000006i2gAAA",
      "usageResourceIds": [
        "0hUxx000000001",
        "0hUxx000000002"
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
activationRequests	Usage Activation Request Input[]	List of activation requests. Each entry identifies a product and the usage resources to activate for that product. This list accepts only one entry. If you include more, the API returns the <code>MAX_LIMIT_EXCEEDED</code> error.	Required	67.0
shouldValidateProductSetup	Boolean	Indicates whether to run product setup validation before activation (<code>true</code>) or not (<code>false</code>). The default value is <code>true</code> .	Optional	67.0

Usage Product Validation Input

Input representation of the usage product validation request.

JSON Example

```
{
  "productIds": [
    "01txx0000006i2gAAA",
    "01txx0000006j2gAAA"
  ],
  "startDate": "2024-01-01T00:00:00Z",
  "endDate": "2024-12-31T23:59:59Z"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
productIds	String[]	List of product IDs to be validated. The maximum limit is 10 valid product IDs.	Required	66.0
startDate	String	Start date of the date range in which all active records are validated.	Optional	66.0
endDate	String	End date of the date range in which all active records are validated.	Optional	66.0

Response Bodies

Learn more about the available response bodies of Usage Management APIs.

[Asset Detail](#)

Output representation of the details of a specific asset.

[Billing Period](#)

Output representation of the details of a specific billing period.

[Binding Object Detail](#)

Output representation of the list of records with the binding target details.

[Binding Object Grant Detail](#)

Output representation of the details of usage resource grants for a specified binding object.

[Binding Object Rate Adjustments](#)

Output representation of the details of binding target rate adjustments.

[Binding Object Rate](#)

Output representation of the details of Binding Object Rates object or Asset Rates object.

[Binding Object Resource Grant And Policy Detail](#)

Output representation of the details of resource grants and binding policies.

[Binding Object Resource Policy Detail](#)

Output representation of the details of a usage resource policy.

[Binding Object Usage Detail](#)

Output representation of the usage details of a binding object.

[Consumption Source Detail](#)

Output representation of the details of a specific consumption source.

[Consumption Traceabilities](#)

Output representation of the overage and resource drawdown details.

[Errors](#)

Output representation of the group of error messages with the same error code.

[Error Details](#)

Output representation of the top-level error detail when validation fails.

[Error Message](#)

Output representation of the details of records that failed with this specific error.

[Error Warning Details](#)

Output representation of the individual warning or error message with associated record details.

[Consumption Traceabilities Data](#)

Output representation of the list of asset details.

[Fields Response](#)

Output representation of the details of the optional fields on the usage-based selling-related objects.

[Grant Detail](#)

Output representation of the details of a grant from the ProductUsageGrant, LineItemUsageResourceGrant, or TransactionUsageEntitlement objects.

[Generic Error Details](#)

Output representation of the error details encountered during the API request.

[Lookup Detail](#)

Output representation of the details of a usage resource record.

[Policy Details](#)

Output representation of the details of a policy.

[Product Activation Result](#)

Output representation of the activation outcome for a single product, including any errors that occurred while activating the product or its associated usage records.

[Product Validation Result](#)

Output representation of the validation result for a specific product.

[Rate Adjustments](#)

Output representation of the details of a rate adjustment.

[Rate and Consumption Source Detail](#)

Output representation of the details of a specific rate and its consumption source.

[Rate Card Entry](#)

Output representation of the details of a rate card entry.

[Record Details](#)

Output representation of the record details including ID and name.

[Resource Detail](#)

Output representation of the details of a specific usage resource.

[Resource Policy Detail](#)

Output representation of the details of a usage resource policy.

[Usage Activation Error](#)

Output representation of a single error encountered while activating a usage product or one of its related records.

[Usage Activation Result](#)

Output representation that groups the activation outcome and the validation outcome for the product in a usage product activation request.

[Usage Details](#)

Output representation of the usage details of a quote, an order, or an asset.

[Usage Details Error Response](#)

Output representation of the details of an error related to usage details.

[Usage Product Activation](#)

Output representation of a usage product activation response.

[Usage Product Validation](#)

Output representation of all the performed validations.

[Usage Resource Grant And Policy Detail](#)

Output representation of the details of a usage resource grant and policy.

[Validation Error](#)

Output representation of the validation errors grouped by rule name.

[Validation Result](#)

Output representation of the validation results grouped by rule name.

[Validation Warning](#)

Output representation of the validation warnings grouped by rule name.

Warnings

Output representation of a group of warning messages with the same warning code.

Warning Message

Output representation of the details of records that triggered this specific warning.

Asset Detail

Output representation of the details of a specific asset.

JSON Example

```
{
  "assets": [
    {
      "assetId": "ASSET1",
      "usageEntitlementAccountId": "1EA000000000001",
      "grantBindingTargetId": "1GB000000000001",
      "billingPeriods": [
        {
          "startDate": "2025-01-01",
          "endDate": "2025-01-31",
          "resources": [
            {
              "liableSummaryId": "1HG000000000001",
              "usageResourceId": "1BX000000000004",
              "usageResourceName": "SF Credits",
              "usageResourceUomId": "1UM000000000001",
              "usageResourceUomUnitCode": "CREDIT",
              "resourceTotalOverageQuantity": 333.33,
              "resourceTotalOverageAmount": 333.33,
              "resourceTotalConsumption": 1500,
              "rateAndConsumptionSources": [
                {
                  "startDate": "2025-01-01",
                  "endDate": "2025-01-31",
                  "rateUomId": "USD",
                  "ratableSummaryId": "URS3",
                  "ratingExecutionId": "1RE000000000001",
                  "overageQuantity": 333.33,
                  "overageAmount": 333.33,
                  "totalConsumption": 1500,
                  "netUnitRate": 1,
                  "consumptionSources": [
                    {
                      "consumptionSourceId": "1AE000000000001",
                      "consumptionUnit": 500
                    },
                    {
                      "consumptionSourceId": "1CO000000000001",
                      "consumptionUnit": 375,
                      "commitRate": 1.5,
                      "targetRate": 2,

```

```
        "cmtAssetRatableSummaryId": "URSCARID1"
      },
      {
        "consumptionSourceId": "1CO0000000000002",
        "consumptionUnit": 125,
        "commitRate": 0.75,
        "targetRate": 1,
        "cmtAssetRatableSummaryId": "URSCARID2"
      }
    ]
  }
}
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
assetId	String	Unique identifier of the related asset.	Big, 66.0	66.0
billingPeriods	Billing Period[]	List of billing periods for the asset.	Big, 66.0	66.0
grantBinding TargetId	String	ID of the object the consumption is bound to.	Big, 66.0	66.0
usageEntitlement AccountId	String	ID of the account that holds the usage entitlement.	Big, 66.0	66.0

Billing Period

Output representation of the details of a specific billing period.

JSON Example

```
{
  "billingPeriods": [
    {
      "startDate": "2025-01-01",
      "endDate": "2025-01-31",
      "resources": [
        {
          "liableSummaryId": "1HG0000000000001",
          "usageResourceId": "1BX0000000000004",
          "usageResourceName": "SF Credits",
          "usageResourceUomId": "1UM0000000000001",
          "usageResourceUomUnitCode": "CREDIT",
          "resourceTotalOverageQuantity": 333.33,
          "resourceTotalOverageAmount": 333.33,

```

```

"resourceTotalConsumption": 1500,
"rateAndConsumptionSources": [
  {
    "startDate": "2025-01-01",
    "endDate": "2025-01-31",
    "rateUomId": "USD",
    "ratableSummaryId": "URS3",
    "ratingExecutionId": "1RE0000000000001",
    "overageQuantity": 333.33,
    "overageAmount": 333.33,
    "totalConsumption": 1500,
    "netUnitRate": 1,
    "consumptionSources": [
      {
        "consumptionSourceId": "1AE0000000000001",
        "consumptionUnit": 500
      },
      {
        "consumptionSourceId": "1CO0000000000001",
        "consumptionUnit": 375,
        "commitRate": 1.5,
        "targetRate": 2,
        "cmtAssetRatableSummaryId": "URSCARID1"
      },
      {
        "consumptionSourceId": "1CO0000000000002",
        "consumptionUnit": 125,
        "commitRate": 0.75,
        "targetRate": 1,
        "cmtAssetRatableSummaryId": "URSCARID2"
      }
    ]
  }
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
endDate	String	End date of the billing period.	Big, 66.0	66.0
resources	Resource Detail []	List of usage resources within the billing period.	Big, 66.0	66.0
startDate	String	Start date of the billing period.	Big, 66.0	66.0

Binding Object Detail

Output representation of the list of records with the binding target details.

JSON Example

This example includes the details of a binding object.

```
{
  "records": [
    {
      "bindingObjectRate": {
        "id": "1QNSB0000001JyH4AU,1QNSB0000001JyI4AU",
        "negotiatedRate": null,
        "negotiatedRateAdjustments": [
          {
            "lowerBound": 101,
            "name": null,
            "rateAdjustmentId": "1DMSB0000001N3C74AK",
            "rateAdjustmentType": "Amount",
            "rateAdjustmentValue": 10,
            "tierUnitOfMeasure": "USD",
            "upperBound": null
          },
          {
            "lowerBound": 1,
            "name": null,
            "rateAdjustmentId": "1DMSB0000001N3C64AK",
            "rateAdjustmentType": "Percentage",
            "rateAdjustmentValue": 30,
            "tierUnitOfMeasure": "USD",
            "upperBound": 100
          }
        ],
        "rate": 100,
        "rateCardEntryId": "1CJSB0000000207R4AQ,1CJSB0000000207S4AQ",
        "rateUnitOfMeasureName": "USD"
      },
      "bindingObjectResourceGrantAndPolicyDetail": {
        "bindingObjectGrantDetail": [
          {
            "effectiveEndDate": "Sat Oct 04 23:59:59 GMT 2025",
            "effectiveStartDate": "Fri Sep 05 00:00:00 GMT 2025",
            "grantType": "Grant",
            "id": "1B0SB0000000Eiv0AE",
            "product": {
              "id": "01tSB0000006XmtqYAG"
            },
            "quantity": 100,
            "record": {
              "id": "02iSB0000000IoETYA0"
            },
            "unitOfMeasure": {
              "id": "0hESB00000003yfp2AA"
            },
            "usageRefreshPolicy": {
              "id": "1BYSB00000001lOH4AY",
              "negotiable": null
            }
          }
        ]
      }
    }
  ]
}
```

```

        "usageRolloverPolicy": {
            "id": "1BVS0000000A1xJ4AS",
            "negotiable": null
        },
        "validityPeriodTerm": 1,
        "validityPeriodUnit": "Month"
    }
],
"bindingObjectResourcePolicyDetail": {
    "drawdownOrder": "ExpiringFirst",
    "id": "1X2SB00000002WT0AY",
    "ratingFrequencyPolicy": {
        "id": "1HJSB00000000G3B4AU",
        "negotiable": null
    },
    "usageAggregationPolicy": {
        "id": "1cfSB00000001xHPYAY",
        "negotiable": null
    },
    "usageCommitmentPolicy": {
        "id": null,
        "negotiable": null
    },
    "usageOveragePolicy": {
        "id": "7UkSB000000002OP0AY",
        "negotiable": null
    }
}
},
"usageResource": {
    "id": "1BRSB00000001x4h4AA"
}
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
binding ObjectRate	Binding Object Rate	Details about the Binding Object Rates object or Asset Rates object.	Big, 65.0	65.0
bindingObject ResourceGrantAnd PolicyDetail	Binding Object Resource Grant and Policy Detail	Details about the resource grants and binding policies.	Big, 65.0	65.0
usageResource	Lookup Detail	Details of the usage resource such as the ID of the record.	Big, 65.0	65.0

Binding Object Grant Detail

Output representation of the details of usage resource grants for a specified binding object.

JSON Example

This example includes the details of usage resource grants for a specified binding object.

```
{
  "bindingObjectGrantDetail": [
    {
      "effectiveEndDate": "Sat Oct 04 23:59:59 GMT 2025",
      "effectiveStartDate": "Fri Sep 05 00:00:00 GMT 2025",
      "grantType": "Grant",
      "id": "1B0SB0000000Eiv0AE",
      "product": {
        "id": "01tSB0000006XMtqYAG"
      },
      "quantity": 100,
      "record": {
        "id": "02iSB0000000IoETYA0"
      },
      "unitOfMeasure": {
        "id": "0hESB00000003yfp2AA"
      },
      "usageRefreshPolicy": {
        "id": "1BYSB00000001lOH4AY",
        "negotiable": null
      },
      "usageRolloverPolicy": {
        "id": "1BVS0000000A1xJ4AS",
        "negotiable": null
      },
      "validityPeriodTerm": 1,
      "validityPeriodUnit": "Month"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
effective EndDate	String	Effective end date for the asset lifecycle.	Big, 65.0	65.0
effective StartDate	String	Effective start date for the asset lifecycle.	Big, 65.0	65.0
grantType	String	Type of usage resource grant.	Big, 65.0	65.0
id	String	ID of the Transaction Usage Entitlement record responsible for the grant.	Big, 65.0	65.0
product	Lookup Detail	Details of the product.	Big, 65.0	65.0
quantity	Double	Quantity of the binding object usage resource grant.	Big, 65.0	65.0
record	Lookup Detail	ID of the asset.	Big, 65.0	65.0

Property Name	Type	Description	Filter Group and Version	Available Version
unitOfMeasure	Lookup Detail	unit of measure of the usage resource.	Big, 65.0	65.0
usageRefresh Policy	Policy Detail	ID of the usage grant refresh policy.	Big, 65.0	65.0
usageRollover Policy	Policy Detail	ID of the usage grant rollover policy.	Big, 65.0	65.0
validityPeriod Term	Double	Validity period term of the usage resource grant.	Big, 65.0	65.0
validityPeriod Unit	String	Validity period unit of the usage resource grant.	Big, 65.0	65.0

Binding Object Rate Adjustments

Output representation of the details of binding target rate adjustments.

JSON Example

This example includes the details of binding target rate adjustments.

```
{
  "negotiatedRateAdjustments": [
    {
      "lowerBound": 101,
      "name": null,
      "rateAdjustmentId": "1DMSB000001N3C74AK",
      "rateAdjustmentType": "Amount",
      "rateAdjustmentValue": 10,
      "tierUnitOfMeasure": "USD",
      "upperBound": null
    },
    {
      "lowerBound": 1,
      "name": null,
      "rateAdjustmentId": "1DMSB000001N3C64AK",
      "rateAdjustmentType": "Percentage",
      "rateAdjustmentValue": 30,
      "tierUnitOfMeasure": "USD",
      "upperBound": 100
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
lowerBound	Double	Minimum quantity for the adjustment to be applicable.	Small, 65.0	65.0

Property Name	Type	Description	Filter Group and Version	Available Version
name	String	Name of the tier or binding object rate adjustment.	Small, 65.0	65.0
rateAdjustmentId	String	ID of the binding object rate adjustment.	Small, 65.0	65.0
rateAdjustmentType	String	Type of the binding object rate adjustment.	Small, 65.0	65.0
rateAdjustmentValue	Double	Value of the binding object rate adjustment.	Small, 65.0	65.0
tierUnitOfMeasure	String	Unit of measure that represents the tier or binding object rate adjustment.	Small, 65.0	65.0
upperBound	Double	Maximum quantity for the adjustment to be applicable.	Small, 65.0	65.0

Binding Object Rate

Output representation of the details of Binding Object Rates object or Asset Rates object.

JSON Example

This example includes the details of a binding object rate.

```
{
  "bindingObjectRate": {
    "id": "1QNSB0000001JyH4AU,1QNSB0000001JyI4AU",
    "negotiatedRate": null,
    "negotiatedRateAdjustments": [
      {
        "lowerBound": 101,
        "name": null,
        "rateAdjustmentId": "1DMSB000001N3C74AK",
        "rateAdjustmentType": "Amount",
        "rateAdjustmentValue": 10,
        "tierUnitOfMeasure": "USD",
        "upperBound": null
      },
      {
        "lowerBound": 1,
        "name": null,
        "rateAdjustmentId": "1DMSB000001N3C64AK",
        "rateAdjustmentType": "Percentage",
        "rateAdjustmentValue": 30,
        "tierUnitOfMeasure": "USD",
        "upperBound": 100
      }
    ],
    "rate": 100,
    "rateCardEntryId": "1CJSB000000207R4AQ,1CJSB000000207S4AQ",
    "rateUnitOfMeasureName": "USD"
  }
}
```

```

    }
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the Binding Object Rate Card Entry or Asset Rate Card Entry object.	Big, 65.0	65.0
negotiatedRate	Double	Negotiated rate available in the Binding Object Rate Card Entry or Asset Rate Card Entry object.	Big, 65.0	65.0
negotiatedRateAdjustments	Binding Object Rate Adjustments[]	List of rate adjustments available in the Binding Object Rate Adjustment or Asset Rate Adjustment.	Big, 65.0	65.0
rate	Double	Rate of the rate card entry associated to the Binding Object Rate Card Entry or Asset Rate Card Entry object.	Big, 65.0	65.0
rateCardEntryId	String	ID of the rate card entry associated to the Binding Object Rate Card Entry or Asset Rate Card Entry object.	Big, 65.0	65.0
rateUnitOfMeasureName	String	Rate unit of measure of the rates.	Big, 65.0	65.0

Binding Object Resource Grant And Policy Detail

Output representation of the details of resource grants and binding policies.

JSON Example

This example includes the details of resource grants and binding policies for a specified binding object.

```

{
  "bindingObjectResourceGrantAndPolicyDetail": {
    "bindingObjectGrantDetail": [
      {
        "effectiveEndDate": "Sat Oct 04 23:59:59 GMT 2025",
        "effectiveStartDate": "Fri Sep 05 00:00:00 GMT 2025",
        "grantType": "Grant",
        "id": "1B0SB0000000Eiv0AE",
        "product": {
          "id": "01tSB000006XMtqYAG"
        },
        "quantity": 100,

```

```

    "record": {
      "id": "02iSB000000IoETYA0"
    },
    "unitOfMeasure": {
      "id": "0hESB0000003yfp2AA"
    },
    "usageRefreshPolicy": {
      "id": "1BYSB00000011OH4AY",
      "negotiable": null
    },
    "usageRolloverPolicy": {
      "id": "1BVS0000000A1xJ4AS",
      "negotiable": null
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  }
],
"bindingObjectResourcePolicyDetail": {
  "drawdownOrder": "ExpiringFirst",
  "id": "1X2SB00000002WT0AY",
  "ratingFrequencyPolicy": {
    "id": "1HJSB0000000G3B4AU",
    "negotiable": null
  },
  "usageAggregationPolicy": {
    "id": "1cfSB00000001xHPYAY",
    "negotiable": null
  },
  "usageCommitmentPolicy": {
    "id": null,
    "negotiable": null
  },
  "usageOveragePolicy": {
    "id": "7UkSB000000002OP0AY",
    "negotiable": null
  }
}
}
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
bindingObjectGrantDetail	Binding Object Grant Detail	Details of the negotiated resource grants for the specified binding object.	Big, 65.0	65.0
bindingObjectResourcePolicyDetail	Binding Object Resource Policy Detail	Detail of the binding policies.	Big, 65.0	65.0

Binding Object Resource Policy Detail

Output representation of the details of a usage resource policy.

JSON Example

This example includes the details of a usage resource policy.

```
{
  "bindingObjectResourcePolicyDetail": {
    "drawdownOrder": "ExpiringFirst",
    "id": "1X2SB00000002WT0AY",
    "ratingFrequencyPolicy": {
      "id": "1HJSB0000000G3B4AU",
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": "1cfSB0000001xHPYAY",
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageOveragePolicy": {
      "id": "7UkSB00000002OP0AY",
      "negotiable": null
    }
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
drawdownOrder	String	Specifies the order or way to process the drawdown. See Usage Management Essentials to know more about a drawdown process.	Big, 65.0	65.0
id	String	ID of the Binding Object Usage Resource Policy record.	Big, 65.0	65.0
ratingFrequency Policy	Policy Detail	Details of the rating frequency policy.	Big, 65.0	65.0
usageAggregation Policy	Policy Detail	Details of the usage aggregation policy.	Big, 65.0	65.0
usageCommitment Policy	Policy Detail	Details of the commitment policy of the usage resource.	Big, 65.0	65.0
usageOverage Policy	Policy Detail	Details of the overage policy of the usage resource.	Big, 65.0	65.0

Binding Object Usage Detail

Output representation of the usage details of a binding object.

JSON Example

This example shows a sample successful response.

```
{
  "records": [
    {
      "bindingObjectRate": {
        "id": "1QNSB0000001JyH4AU,1QNSB0000001JyI4AU",
        "negotiatedRate": null,
        "negotiatedRateAdjustments": [
          {
            "lowerBound": 101,
            "name": null,
            "rateAdjustmentId": "1DMSB000001N3C74AK",
            "rateAdjustmentType": "Amount",
            "rateAdjustmentValue": 10,
            "tierUnitOfMeasure": "USD",
            "upperBound": null
          },
          {
            "lowerBound": 1,
            "name": null,
            "rateAdjustmentId": "1DMSB000001N3C64AK",
            "rateAdjustmentType": "Percentage",
            "rateAdjustmentValue": 30,
            "tierUnitOfMeasure": "USD",
            "upperBound": 100
          }
        ],
        "rate": 100,
        "rateCardEntryId": "1CJSB000000207R4AQ,1CJSB000000207S4AQ",
        "rateUnitOfMeasureName": "USD"
      },
      "bindingObjectResourceGrantAndPolicyDetail": {
        "bindingObjectGrantDetail": [
          {
            "effectiveEndDate": "Sat Oct 04 23:59:59 GMT 2025",
            "effectiveStartDate": "Fri Sep 05 00:00:00 GMT 2025",
            "grantType": "Grant",
            "id": "1B0SB0000000Eiv0AE",
            "product": {
              "id": "01tSB000006XmtqYAG"
            },
            "quantity": 100,
            "record": {
              "id": "02iSB0000000IoETYA0"
            },
            "unitOfMeasure": {
              "id": "0hESB0000003yfp2AA"
            }
          }
        ]
      }
    }
  ]
}
```

```

    },
    "usageRefreshPolicy": {
      "id": "1BYSB00000011OH4AY",
      "negotiable": null
    },
    "usageRolloverPolicy": {
      "id": "1BVS0000000A1xJ4AS",
      "negotiable": null
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  }
],
"bindingObjectResourcePolicyDetail": {
  "drawdownOrder": "ExpiringFirst",
  "id": "1X2SB00000002WT0AY",
  "ratingFrequencyPolicy": {
    "id": "1HJSB0000000G3B4AU",
    "negotiable": null
  },
  "usageAggregationPolicy": {
    "id": "1cfSB0000001xHPYAY",
    "negotiable": null
  },
  "usageCommitmentPolicy": {
    "id": null,
    "negotiable": null
  },
  "usageOveragePolicy": {
    "id": "7UksB00000002OP0AY",
    "negotiable": null
  }
},
"usageResource": {
  "id": "1BR00000001x4h4AA"
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Usage Detail Error Response[]	List of errors encountered during the processing of the API request.	Small, 65.0	65.0
records	Binding Object Detail[]	List of records that contains the binding target details.	Small, 65.0	65.0

Consumption Source Detail

Output representation of the details of a specific consumption source.

JSON Example

```
{
  "consumptionSources": [
    {
      "consumptionSourceId": "1AE0000000000001",
      "consumptionUnit": 500
    },
    {
      "consumptionSourceId": "1CO0000000000001",
      "consumptionUnit": 375,
      "commitRate": 1.5,
      "targetRate": 2,
      "cmtAssetRatableSummaryId": "URSCARID1"
    },
    {
      "consumptionSourceId": "1CO0000000000002",
      "consumptionUnit": 125,
      "commitRate": 0.75,
      "targetRate": 1,
      "cmtAssetRatableSummaryId": "URSCARID2"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
cmtAssetRatableSummaryId	String	ID for querying rating waterfall.	Big, 66.0	66.0
commitRate	Double	Net unit rate at which drawdown is done for commitment products.	Big, 66.0	66.0
consumptionSourceId	String	Object on which the consumption was recorded.	Big, 66.0	66.0
consumptionUnit	Double	Recorded quantity of consumption.	Big, 66.0	66.0
targetRate	Double	Input unit rate which is used for commitment products.	Big, 66.0	66.0

Consumption Traceabilities

Output representation of the overage and resource drawdown details.

JSON Example

```
{
  "success": true,
  "data": {
    "assets": [
```

```

{
  "assetId": "ASSET1",
  "usageEntitlementAccountId": "1EA0000000000001",
  "grantBindingTargetId": "1GB0000000000001",
  "billingPeriods": [
    {
      "startDate": "2025-01-01",
      "endDate": "2025-01-31",
      "resources": [
        {
          "liableSummaryId": "1HG0000000000001",
          "usageResourceId": "1BX0000000000004",
          "usageResourceName": "SF Credits",
          "usageResourceUomId": "1UM0000000000001",
          "usageResourceUomUnitCode": "CREDIT",
          "resourceTotalOverageQuantity": 333.33,
          "resourceTotalOverageAmount": 333.33,
          "resourceTotalConsumption": 1500,
          "rateAndConsumptionSources": [
            {
              "startDate": "2025-01-01",
              "endDate": "2025-01-31",
              "rateUomId": "USD",
              "ratableSummaryId": "URS3",
              "ratingExecutionId": "1RE0000000000001",
              "overageQuantity": 333.33,
              "overageAmount": 333.33,
              "totalConsumption": 1500,
              "netUnitRate": 1,
              "consumptionSources": [
                {
                  "consumptionSourceId": "1AE0000000000001",
                  "consumptionUnit": 500
                },
                {
                  "consumptionSourceId": "1CO0000000000001",
                  "consumptionUnit": 375,
                  "commitRate": 1.5,
                  "targetRate": 2,
                  "cmtAssetRatableSummaryId": "URSCARID1"
                },
                {
                  "consumptionSourceId": "1CO0000000000002",
                  "consumptionUnit": 125,
                  "commitRate": 0.75,
                  "targetRate": 1,
                  "cmtAssetRatableSummaryId": "URSCARID2"
                }
              ]
            }
          ]
        }
      ]
    }
  ]
}

```

```
    ]
  }
  ],
  "error": null
}
```

zProperty Name	Type	Description	Filter Group and Version	Available Version
data	Consumption Traceabilities Data[]	Payload that contains the traceability details.	Big, 66.0	66.0
error	Generic Error Details[]	Error details if the request isn't successful.	Big, 66.0	66.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0

Errors

Output representation of the group of error messages with the same error code.

JSON Example

This example shows a group of error messages with the same error code.

```
{
  "errors": [
    {
      "errorCode": "EFFECTIVITY_MISMATCH",
      "errorMessages": [
        {
          "errorMessage": "PUR and RCE effective date ranges must have overlap for proper rating functionality",
          "errorDetails": []
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Standardized error code. For example, <code>EFFECTIVITY_MISMATCH</code> .	Big, 66.0	66.0
errorMessages	Error Message[]	List of error messages for records that failed with this error code.	Big, 66.0	66.0

Error Details

Output representation of the top-level error detail when validation fails.

JSON Example

This example shows a sample error response.

```
{
  "errors": [
    {
      "errorCode": "VALIDATION_FAILED",
      "message": "Product validation completed with cross-entity errors",
      "products": [
        {
          "productId": "01txx0000006i2gAAA",
          "validationResult": {
            "validationErrors": [],
            "validationWarnings": []
          }
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Standardized error code. For example, VALIDATION_FAILED.	Big, 66.0	66.0
message	String	Human-readable error message that describes the overall validation failure.	Big, 66.0	66.0
products	Product Validation Result[]	List of product validation results.	Big, 66.0	66.0

Error Message

Output representation of the details of records that failed with this specific error.

JSON Example

This example shows an error message with details.

```
{
  "errorMessages": [
    {
      "errorMessage": "PUR and RCE effective date ranges must have overlap for proper rating functionality",
      "errorDetails": [
        {
```

```
{
  "relatedObjectAPIName": "ProductUsageRule",
  "records": [
    {
      "id": "a0bxx0000004CqZAAU",
      "name": "PUR-001"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorMessage	String	Human-readable error message that describes the validation failure.	Big, 66.0	66.0
errorDetails	Error Warning Details []	Details of records that failed with this specific error.	Big, 66.0	66.0

Error Warning Details

Output representation of the individual warning or error message with associated record details.

JSON Example

This example shows error details with record information.

```
{
  "errorDetails": [
    {
      "relatedObjectAPIName": "ProductUsageRule",
      "records": [
        {
          "id": "a0bxx0000004CqZAAU",
          "name": "PUR-001"
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
relatedObjectAPIName	String	API name of the related object.	Big, 66.0	66.0
records	Record Details []	Details of records that triggered the specific warning or error.	Big, 66.0	66.0

Consumption Traceabilities Data

Output representation of the list of asset details.

JSON Example

```
{
  "data": {
    "assets": [
      {
        "assetId": "ASSET1",
        "usageEntitlementAccountId": "1EA0000000000001",
        "grantBindingTargetId": "1GB0000000000001",
        "billingPeriods": [
          {
            "startDate": "2025-01-01",
            "endDate": "2025-01-31",
            "resources": [
              {
                "liableSummaryId": "1HG0000000000001",
                "usageResourceId": "1BX0000000000004",
                "usageResourceName": "SF Credits",
                "usageResourceUomId": "1UM0000000000001",
                "usageResourceUomUnitCode": "CREDIT",
                "resourceTotalOverageQuantity": 333.33,
                "resourceTotalOverageAmount": 333.33,
                "resourceTotalConsumption": 1500,
                "rateAndConsumptionSources": [
                  {
                    "startDate": "2025-01-01",
                    "endDate": "2025-01-31",
                    "rateUomId": "USD",
                    "ratableSummaryId": "URS3",
                    "ratingExecutionId": "1RE0000000000001",
                    "overageQuantity": 333.33,
                    "overageAmount": 333.33,
                    "totalConsumption": 1500,
                    "netUnitRate": 1,
                    "consumptionSources": [
                      {
                        "consumptionSourceId": "1AE0000000000001",
                        "consumptionUnit": 500
                      },
                      {
                        "consumptionSourceId": "1CO0000000000001",
                        "consumptionUnit": 375,
                        "commitRate": 1.5,
                        "targetRate": 2,
                        "cmtAssetRatableSummaryId": "URSCARID1"
                      },
                      {
                        "consumptionSourceId": "1CO0000000000002",
                        "consumptionUnit": 125,
                        "commitRate": 0.75,

```



```
        "targetRate": 1,
        "cmtAssetRatableSummaryId": "URSCARID2"
      }
    ]
  }
}
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
assets	Asset Detail []	List of assets for the specified liable summaries.	Big, 66.0	66.0

Fields Response

Output representation of the details of the optional fields on the usage-based selling-related objects.

JSON Example

```
"fields": {
  "MyCustomDate__c": {
    "displayValue": "2024-09-24",
    "value": "2024-09-24T17:46:30.662Z"
  },
  "MyCustomNumber__c": {
    "displayValue": "20.0",
    "value": 20
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
displayValue	String	Display value of a field.	Big, 63.0	63.0
value	Object	Value of a field in its original data form.	Big, 63.0	63.0

Grant Detail

Output representation of the details of a grant from the ProductUsageGrant, LinelItemUsageResourceGrant, or TransactionUsageEntitlement objects.

JSON Example

```
{
  "negotiatedGrantDetail": {
    "grantType": "Grant",
    "id": "1X6xx000000000ECAY",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "displayName": null,
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "displayName": null,
      "id": "1BVxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 12,
    "validityPeriodUnit": "Month"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
grantType	String	Details about the grant type.	Big, 65.0	65.0
id	String	ID of the usage resource grant.	Big, 65.0	65.0
quantity	Double	Quantity of the negotiated usage resource grant.	Big, 65.0	65.0
usageGrantNegotiable	String	Specifies whether the grant is negotiable or not.	Big, 65.0	65.0
usageRefreshPolicy	Policy Detail	ID of the usage grant refresh policy.	Big, 65.0	65.0
usageRolloverPolicy	Policy Detail	ID of the usage grant rollover policy.	Big, 65.0	65.0
validityPeriodTerm	Double	Validity period term of the grant.	Big, 65.0	65.0
validityPeriodUnit	String	Validity period unit of the grant.	Big, 65.0	65.0

Generic Error Details

Output representation of the error details encountered during the API request.

JSON Example

```
{
  "data": [],
  "error": {
    "errorCode": "INVALID_API_INPUT",
    "message": "Liable summary IDs cannot be null or empty."
  },
  "success": false
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Error code that represents the type of error.	Big, 67.0	67.0
message	String	Detailed error message that specifies the cause of failure.	Big, 67.0	67.0

Lookup Detail

Output representation of the details of a usage resource record.

JSON Example

This example includes the details of a usage resource.

```
{
  "usageResource": {
    "id": "1BRxx0000004C9EGAU"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the usage resource record.	Big, 65.0	65.0

Policy Details

Output representation of the details of a policy.

JSON Example

This example includes the details for different policy types.

```
{
  "bindingObjectGrantDetail": [
    {
      "effectiveEndDate": "Sat Oct 04 23:59:59 GMT 2025",
      "effectiveStartDate": "Fri Sep 05 00:00:00 GMT 2025",
    }
  ]
}
```

```
{
  "grantType": "Grant",
  "id": "1B0SB0000000Eiv0AE",
  "product": {
    "id": "01tSB0000006XMTqYAG"
  },
  "quantity": 100,
  "record": {
    "id": "02iSB0000000IoETYA0"
  },
  "unitOfMeasure": {
    "id": "0hESB0000003yfp2AA"
  },
  "usageRefreshPolicy": {
    "id": "1BYSB00000001lOH4AY",
    "negotiable": null
  },
  "usageRolloverPolicy": {
    "id": "1BVS0000000A1xJ4AS",
    "negotiable": null
  },
  "validityPeriodTerm": 1,
  "validityPeriodUnit": "Month"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the policy.	Big, 65.0	65.0
negotiable	String	Indicates whether the policy is negotiable. Valid values are Negotiable or Non-Negotiable.	Big, 65.0	65.0

Product Activation Result

Output representation of the activation outcome for a single product, including any errors that occurred while activating the product or its associated usage records.

JSON Example

```
{
  "productId": "01txx00000006i2hAAA",
  "errors": [
    {
      "productUsageResourceId": "0iUxx0000000009",
      "usageResourceId": "0hUxx0000000003",
      "message": "Usage Resource not found for product",
      "objectApiName": "ProductUsageResource",
      "fieldName": "UsageResourceId",
      "recordId": null,
    }
  ]
}
```

```
    "recordName": null
  }
]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Usage Activation Error[]	List of errors that occurred while activating the product or its associated usage records.	Big, 67.0	67.0
productId	String	ID of the Product2 record that this activation outcome describes.	Big, 67.0	67.0

Product Validation Result

Output representation of the validation result for a specific product.

JSON Example

This example shows the product validation result.

```
{
  "products": [
    {
      "productId": "01txx0000006i2gAAA",
      "validationResult": {
        "validationErrors": [],
        "validationWarnings": []
      }
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
productId	String	Unique product ID that's being validated.	Big, 67.0	67.0
validationResult	Validation Result	Validation results grouped by rule name.	Big, 67.0	67.0

Rate Adjustments

Output representation of the details of a rate adjustment.

JSON Example

```
"rateAdjustments": [
  {
    "fields": {},
    "lowerBound": 0.0,
```

```
    "name": null,
    "negotiatedRateAdjustmentId": null,
    "rateAdjustmentId": "1ENxx0000004C9BGAU",
    "rateAdjustmentType": "Percentage",
    "rateAdjustmentValue": 10.0,
    "tierUnitOfMeasure": "USD",
    "upperBound": 50.0
  }
]
```

If the `negotiable` property value that's associated with a rate card entry is blank, then the data is derived from Product Catalog Management. If it isn't blank, then the data is derived from Rate Management.

Property Name	Type	Description	Filter Group and Version	Available Version
fields	Map<String, Fields Response >	List of optional fields and their values that belong to the rate adjustment object.	Big, 63.0	63.0
lowerBound	Double	Minimum quantity for the adjustment to be applicable.	Small, 63.0	63.0
name	String	Name of the tier.	Small, 63.0	63.0
negotiatedRateAdjustmentId	String	ID of the negotiated rate adjustment.	Small, 63.0	63.0
rateAdjustmentId	String	ID of the rate adjustment.	Small, 63.0	63.0
rateAdjustmentType	String	Type of the rate adjustment.	Small, 63.0	63.0
rateAdjustmentValue	Double	Value of the rate adjustment.	Small, 63.0	63.0
tierUnitOfMeasure	String	Unit of measure representing the tier.	Small, 63.0	63.0
upperBound	Double	Maximum quantity for the adjustment to be applicable.	Small, 63.0	63.0

Rate and Consumption Source Detail

Output representation of the details of a specific rate and its consumption source.

JSON Example

```
{
  "rateAndConsumptionSources": [
    {
      "startDate": "2025-01-01",
      "endDate": "2025-01-31",
      "rateUomId": "USD",

```

```

    "ratableSummaryId": "URS3",
    "ratingExecutionId": "1RE0000000000001",
    "overageQuantity": 333.33,
    "overageAmount ": 333.33,
    "totalConsumption": 1500,
    "netUnitRate": 1,
    "consumptionSources": [
      {
        "consumptionSourceId": "1AE0000000000001",
        "consumptionUnit": 500
      },
      {
        "consumptionSourceId": "1CO0000000000001",
        "consumptionUnit": 375,
        "commitRate": 1.5,
        "targetRate": 2,
        "cmtAssetRatableSummaryId": "URSCARID1"
      },
      {
        "consumptionSourceId": "1CO0000000000002",
        "consumptionUnit": 125,
        "commitRate": 0.75,
        "targetRate": 1,
        "cmtAssetRatableSummaryId": "URSCARID2"
      }
    ]
  }
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
consumptionSource Details	Consumption Source Detail[]	Details on the consumption source.	Big, 66.0	66.0
endDate	String	End date for the specific rate period.	Big, 66.0	66.0
netUnitRate	Double	Net unit rate.	Big, 66.0	66.0
overageAmt	Double	Amount for the overage quantity.	Big, 66.0	66.0
overageQty	Double	Quantity of consumption that was rated as overage.	Big, 66.0	66.0
ratable SummaryId	String	Unique ID for the summary used in rating.	Big, 66.0	66.0
ratable SummaryStatus	String	Status of ratable summary.	Big, 66.0	66.0
rateUomId	String	Unit of measure for the rate.	Big, 66.0	66.0
rateUomName	String	Name of the rate unit of measure	Big, 66.0	66.0

Property Name	Type	Description	Filter Group and Version	Available Version
ratingExecutionId	String	Execution ID of the rating.	Big, 66.0	66.0
sourceUsageResourceId	String	ID of the source usage resource.	Big, 66.0	66.0
sourceUsageResourceName	String	Name of the source usage resource.	Big, 66.0	66.0
startDate	String	Start date for the specific rate period.	Big, 66.0	66.0
totalConsumption	Double	Total quantity consumed for this rate.	Big, 66.0	66.0

Rate Card Entry

Output representation of the details of a rate card entry.

JSON Example

```
{
  "records": [
    {
      "bindingInstanceTargetType": "Product",
      "bindingInstanceType": "Target",
      "chargeForOverages": "Yes",
      "fields": {},
      "isOptional": false,
      "name": "Paddle Board",
      "negotiable": "Negotiable,Non-Negotiable",
      "negotiatedRate": 20,
      "negotiatedRateCardEntryId": "1ELxx0000004C9JGAU,1ELxx0000004C9KGAU",
      "quantity": 15,
      "rate": 5,
      "rateAdjustments": [
        {
          "fields": {},
          "lowerBound": 0,
          "name": "Tier 1",
          "negotiatedRateAdjustmentId": "1ENxx0000004C9BGAU",
          "rateAdjustmentId": "1ENxx0000004C9BGAU",
          "rateAdjustmentType": "Percentage",
          "rateAdjustmentValue": 10,
          "tierUnitOfMeasure": "USD",
          "upperBound": 50
        }
      ],
      "rateCardEntryId": "1CJxx0000004C9IGA,1CJxx0000004C9JGAU",
      "rateUnitOfMeasureName": "USD",
      "unitOfMeasure": "GB",
    }
  ]
}
```



```
"usageResourceGrantAndPolicyDetail": {
  "grantDetail": {
    "grantType": "Grant",
    "id": "1BXxx0000004C91GAE",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedGrantDetail": {
    "grantType": "Grant",
    "id": "1X6xx000000000ECAY",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedResourcePolicyDetail": {
    "id": "1X5xx000000000ECAY",
    "ratingFrequencyPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  },
  "resourcePolicyDetail": {
    "id": "7Suxx0000004C9kCAE",
```

```

    "ratingFrequencyPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  },
  "usageResourceId": "1BRxx0000004C9CGAU"
}
]
}

```

If the `negotiable` property value is blank, then the data is derived from Product Catalog Management. If it isn't blank, then the data is derived from Rate Management.

Property Name	Type	Description	Filter Group and Version	Available Version
binding Instance TargetType	String	Type of the target object that's associated with this transaction.	Big, 63.0	63.0
bindingInstance Type	String	Type of the binding instance. Valid values are <code>Self</code> or <code>Target</code> .	Big, 63.0	63.0
chargeFor Overages	String	Specifies whether overage is permitted. Valid values are <code>Yes</code> , <code>No</code> , or <code>NA</code> .	Big, 63.0	63.0
fields	Map<String, Fields Response >	List of optional fields and their values that's associated with the rate card entry object.	Big, 63.0	63.0
isOptional	Boolean	Indicates whether the product usage resource is optional when the associated product is one of the commitment usage model types (<code>true</code>) or not (<code>false</code>).	Big, 65.0	65.0
name	String	Name of the resource.	Big, 63.0	63.0
negotiable	String	Type of the base rate and the tier rate, if applicable. Valid values are <code>Negotiable</code> or <code>Non-Negotiable</code> .	Big, 63.0	63.0
negotiated Rate	Double	User-overridden overage rate.	Big, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
negotiatedRateCardEntryId	String	ID of the negotiated rate card entry and the tier rate card entry, if applicable.	Big, 63.0	63.0
quantity	Double	Amount granted for the resource.	Big, 63.0	63.0
rate	Double	Base overage rate.	Big, 63.0	63.0
rateAdjustments	Rate Adjustments []	List of tiers associated with the rate card entry, if applicable.	Big, 63.0	63.0
rateCardEntryId	String	ID of the base rate card entry and the tier rate card entry, if applicable.	Big, 63.0	63.0
rateUnitOfMeasureName	String	Unit of measure for rates in the rate card entry.	Big, 64.0	64.0
unitOfMeasure	String	Unit of measure of the grant. For example, Unit.	Big, 63.0	63.0
usageResourceId	String	ID of the usage resource.	Big, 65.0	65.0
usageResourceGrantAndPolicyDetail	Usage Resource Grant And Policy Detail	Details of a usage resource grant and policy.	Big, 65.0	65.0

Record Details

Output representation of the record details including ID and name.

JSON Example

This example shows the record details with ID and name.

```
{
  "records": [
    {
      "id": "a0bxx0000004CqZAAU",
      "name": "PUR-001"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	Unique identifier of the object.	Big, 66.0	66.0
name	String	Display name of the object.	Big, 66.0	66.0

Resource Detail

Output representation of the details of a specific usage resource.

JSON Example

```
{
  "resources": [
    {
      "liableSummaryId": "1HG000000000001",
      "usageResourceId": "1BX000000000004",
      "usageResourceName": "SF Credits",
      "usageResourceUomId": "1UM000000000001",
      "usageResourceUomUnitCode": "CREDIT",
      "resourceTotalOverageQuantity": 333.33,
      "resourceTotalOverageAmount": 333.33,
      "resourceTotalConsumption": 1500,
      "rateAndConsumptionSources": [
        {
          "startDate": "2025-01-01",
          "endDate": "2025-01-31",
          "rateUomId": "USD",
          "ratableSummaryId": "URS3",
          "ratingExecutionId": "1RE000000000001",
          "overageQuantity": 333.33,
          "overageAmount": 333.33,
          "totalConsumption": 1500,
          "netUnitRate": 1,
          "consumptionSources": [
            {
              "consumptionSourceId": "1AE000000000001",
              "consumptionUnit": 500
            },
            {
              "consumptionSourceId": "1CO000000000001",
              "consumptionUnit": 375,
              "commitRate": 1.5,
              "targetRate": 2,
              "cmtAssetRatableSummaryId": "URSCARID1"
            },
            {
              "consumptionSourceId": "1CO000000000002",
              "consumptionUnit": 125,
              "commitRate": 0.75,
              "targetRate": 1,
              "cmtAssetRatableSummaryId": "URSCARID2"
            }
          ]
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
liableSummaryId	String	Unique identifier for the consumption summary.	Big, 66.0	66.0
liableSummaryStatus	String	Status of liable summary.	Big, 66.0	66.0
rateAndConsumptionSources	Rate And Consumption Source Detail[]	Details on rates and consumption sources.	Big, 66.0	66.0
resourceTotalConsumption	Double	Total quantity of consumption for the resource.	Big, 66.0	66.0
resourceTotalOverageAmount	Double	Total amount for the overage.	Big, 66.0	66.0
resourceTotalOverageQuantity	Double	Total overage quantity.	Big, 66.0	66.0
usageResourceId	String	ID of the specific usage resource.	Big, 66.0	66.0
usageResourceName	String	Name of the usage resource.	Big, 66.0	66.0
usageResourceUomId	String	Unit of measure ID for the usage resource.	Big, 66.0	66.0
usageResourceUomUnitCode	String	Unit of measure code for the usage resource.	Big, 66.0	66.0

Resource Policy Detail

Output representation of the details of a usage resource policy.

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the usage resource policy.	Big, 65.0	65.0
ratingFrequencyPolicy	Policy Detail	Details of the rating frequency policy.	Big, 65.0	65.0
usageAggregationPolicy	Policy Detail	Details of the usage aggregation policy.	Big, 65.0	65.0
usageCommitmentPolicy	Policy Detail	Details of the usage commitment policy.	Big, 65.0	65.0
usageOveragePolicy	Policy Detail	Details of the usage overage policy.	Big, 65.0	65.0

Usage Activation Error

Output representation of a single error encountered while activating a usage product or one of its related records.

JSON Example

```
{
  "productUsageResourceId": "0iUxx0000000678",
  "usageResourceId": "0hUxx000000004",
  "message": "Related Unit of measure records is inactive, activate it first.",
  "objectApiName": "ProductUsageGrant",
  "fieldName": "DefaultUnitofMeasure",
  "recordId": "1BXSM000000404f4AA",
  "recordName": "PUG-000000001"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
fieldName	String	API name of the field that caused the error.	Big, 67.0	67.0
message	String	Human-readable description of the error.	Big, 67.0	67.0
objectApiName	String	API name of the object on which the error occurred.	Big, 67.0	67.0
productUsage ResourceId	String	ID of the ProductUsageResource record that links the product and the usage resource for which the error occurred.	Big, 67.0	67.0
recordId	String	ID of the record that failed activation.	Big, 67.0	67.0
recordName	String	Name of the record that failed activation.	Big, 67.0	67.0
usage ResourceId	String	ID of the usage resource record from the input request for which the error occurred.	Big, 67.0	67.0

Usage Activation Result

Output representation that groups the activation outcome and the validation outcome for the product in a usage product activation request.

JSON Example

```
{
  "productActivationResults": [
    {
      "productId": "01txx0000006i2hAAA",
      "errors": []
    }
  ],
  "productValidationResults": [
    {
```

```
    "productId": "01txx0000006i2gAAA",
    "validationResult": {
      "validationErrors": [],
      "validationWarnings": []
    }
  }
]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
product ActivationResults	Product Activation Result[]	List of product activation results.	Big, 67.0	67.0
product ValidationResults	Product Validation Result[]	List of product validation results.	Big, 67.0	67.0

Usage Details

Output representation of the usage details of a quote, an order, or an asset.

JSON Example

This sample response shows resources that include grants, if applicable, and resources without rates when you retrieve the usage details of an order item.

```
{
  "records": [
    {
      "bindingInstanceTargetType": null,
      "bindingInstanceType": null,
      "chargeForOverages": "Yes",
      "isOptional": false,
      "fields": {},
      "name": "API Calls",
      "negotiable": ",",
      "negotiatedRate": null,
      "negotiatedRateCardEntryId": ",",
      "quantity": 1000,
      "rate": null,
      "rateAdjustments": [],
      "rateCardEntryId": ",",
      "rateUnitOfMeasureName": "USD",
      "unitOfMeasure": null,
      "usageResourceGrantAndPolicyDetail": {
        "grantDetail": {
          "grantType": "Grant",
          "id": "1BXxx0000004C91GAE",
          "quantity": 100,
          "usageGrantNegotiable": "Negotiable",
          "usageRefreshPolicy": {
            "id": "1BYxx0000004C92GAE",
```

```
        "negotiable": "Non-Negotiable"
      },
      "usageRolloverPolicy": {
        "id": "1BVxx0000004C93GAE",
        "negotiable": "Non-Negotiable"
      },
      "validityPeriodTerm": 1,
      "validityPeriodUnit": "Month"
    },
    "negotiatedGrantDetail": {
      "grantType": "Grant",
      "id": "1X6xx000000000ECAY",
      "quantity": 100,
      "usageGrantNegotiable": "Negotiable",
      "usageRefreshPolicy": {
        "id": "1BYxx0000004C92GAE",
        "negotiable": "Non-Negotiable"
      },
      "usageRolloverPolicy": {
        "id": "1BVxx0000004C93GAE",
        "negotiable": "Non-Negotiable"
      },
      "validityPeriodTerm": 1,
      "validityPeriodUnit": "Month"
    },
    "negotiatedResourcePolicyDetail": {
      "id": "1X5xx000000000ECAY",
      "ratingFrequencyPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageCommitmentPolicy": {
        "id": "7Pexx0000004C92CAE",
        "negotiable": "Non-Negotiable"
      },
      "usageOveragePolicy": {
        "id": null,
        "negotiable": null
      }
    },
    "resourcePolicyDetail": {
      "id": "7Suxx0000004C9kCAE",
      "ratingFrequencyPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      }
    }
  },
}
```



```

        "usageCommitmentPolicy": {
            "id": "7Pexx0000004C92CAE",
            "negotiable": "Non-Negotiable"
        },
        "usageOveragePolicy": {
            "id": null,
            "negotiable": null
        }
    },
    "usageResourceId": "1BRxx0000004C9CGAU"
}
]
}

```

This example shows a sample response without negotiated rates when you retrieve the usage details of an order item.

```

{
  "records": [
    {
      "bindingInstanceTargetType": "Product",
      "bindingInstanceType": "Target",
      "chargeForOverages": "Yes",
      "isOptional": false,
      "fields": {},
      "name": "Paddle Board",
      "negotiable": "Negotiable,Non-Negotiable",
      "negotiatedRate": null,
      "negotiatedRateCardEntryId": "",
      "quantity": 15,
      "rate": 5,
      "rateAdjustments": [
        {
          "fields": {},
          "lowerBound": 0,
          "name": null,
          "negotiatedRateAdjustmentId": null,
          "rateAdjustmentId": "1ENxx0000004C9BGAU",
          "rateAdjustmentType": "Percentage",
          "rateAdjustmentValue": 10,
          "tierUnitOfMeasure": "USD",
          "upperBound": 50
        }
      ],
      "rateCardEntryId": "1CJxx0000004C9IGAU,1CJxx0000004C9JGAU",
      "rateUnitOfMeasureName": "USD",
      "unitOfMeasure": "GB",
      "usageResourceGrantAndPolicyDetail": {
        "grantDetail": {
          "grantType": "Grant",
          "id": "1BXxx0000004C91GAE",
          "quantity": 100,
          "usageGrantNegotiable": "Negotiable",
          "usageRefreshPolicy": {
            "id": "1BYxx0000004C92GAE",

```

```
        "negotiable": "Non-Negotiable"
      },
      "usageRolloverPolicy": {
        "id": "1BVxx0000004C93GAE",
        "negotiable": "Non-Negotiable"
      },
      "validityPeriodTerm": 1,
      "validityPeriodUnit": "Month"
    },
    "negotiatedGrantDetail": {
      "grantType": "Grant",
      "id": "1X6xx000000000ECAY",
      "quantity": 100,
      "usageGrantNegotiable": "Negotiable",
      "usageRefreshPolicy": {
        "id": "1BYxx0000004C92GAE",
        "negotiable": "Non-Negotiable"
      },
      "usageRolloverPolicy": {
        "id": "1BVxx0000004C93GAE",
        "negotiable": "Non-Negotiable"
      },
      "validityPeriodTerm": 1,
      "validityPeriodUnit": "Month"
    },
    "negotiatedResourcePolicyDetail": {
      "id": "1X5xx000000000ECAY",
      "ratingFrequencyPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageCommitmentPolicy": {
        "id": "7Pexx0000004C92CAE",
        "negotiable": "Non-Negotiable"
      },
      "usageOveragePolicy": {
        "id": null,
        "negotiable": null
      }
    },
    "resourcePolicyDetail": {
      "id": "7Suxx0000004C9kCAE",
      "ratingFrequencyPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      }
    },
  },
}
```

```

        "usageCommitmentPolicy": {
            "id": "7Pexx0000004C92CAE",
            "negotiable": "Non-Negotiable"
        },
        "usageOveragePolicy": {
            "id": null,
            "negotiable": null
        }
    },
    "usageResourceId": "1BRxx0000004C9CGAU"
}
]
}

```

This sample response shows negotiated rates when you retrieve the usage details of an order item. The negotiated rates are derived from these objects for assets, order items, or quote line items.

- AssetRateCardEntry
- AssetRateAdjustment
- OrderItemRateCardEntry
- OrderItemRateAdjustment
- QuoteLineRateCardEntry
- QuoteLineRateAdjustment

```

{
  "records": [
    {
      "bindingInstanceTargetType": "Product",
      "bindingInstanceType": "Target",
      "chargeForOverages": "Yes",
      "isOptional": false,
      "fields": {},
      "name": "Paddle Board",
      "negotiable": "Negotiable,Non-Negotiable",
      "negotiatedRate": 20,
      "negotiatedRateCardEntryId": "1ELxx0000004C9JGAU,1ELxx0000004C9KGAU",
      "quantity": 15,
      "rate": 5,
      "rateAdjustments": [
        {
          "fields": {},
          "lowerBound": 0,
          "name": "Tier 1",
          "negotiatedRateAdjustmentId": "1ENxx0000004C9BGAU",
          "rateAdjustmentId": "1ENxx0000004C9BGAU",
          "rateAdjustmentType": "Percentage",
          "rateAdjustmentValue": 10,
          "tierUnitOfMeasure": "USD",
          "upperBound": 50
        }
      ],
      "rateCardEntryId": "1CJxx0000004C9IGA U,1CJxx0000004C9JGAU",
    }
  ]
}

```

```
"rateUnitOfMeasureName": "USD",
"unitOfMeasure": "GB",
"usageResourceGrantAndPolicyDetail": {
  "grantDetail": {
    "grantType": "Grant",
    "id": "1BXxx0000004C91GAE",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedGrantDetail": {
    "grantType": "Grant",
    "id": "1X6xx000000000ECAY",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedResourcePolicyDetail": {
    "id": "1X5xx000000000ECAY",
    "ratingFrequencyPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  }
},
```

```

    "resourcePolicyDetail": {
      "id": "7Suxx0000004C9kCAE",
      "ratingFrequencyPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageCommitmentPolicy": {
        "id": "7Pexx0000004C92CAE",
        "negotiable": "Non-Negotiable"
      },
      "usageOveragePolicy": {
        "id": null,
        "negotiable": null
      }
    },
    "usageResourceId": "1BRxx0000004C9CGAU"
  }
]
}

```

This sample response shows details of the custom fields when you retrieve the usage details of an order item.

```

{
  "records": [
    {
      "fields": {
        "MyCustomDate__c": {
          "displayValue": "2024-09-24",
          "value": "2024-09-24T17:46:30.662Z"
        },
        "MyCustomNumber__c": {
          "displayValue": "20.0",
          "value": 20
        }
      },
      "isOptional": false,
      "bindingInstanceTargetType": "Product",
      "bindingInstanceType": "Target",
      "chargeForOverages": "Yes",
      "name": "Therapy",
      "negotiable": "Negotiable,Non-Negotiable",
      "negotiatedRate": 20,
      "negotiatedRateCardEntryId": "1ELxx0000004C9JGAU,1ELxx0000004C9KGAU",
      "quantity": 15,
      "rate": 5,
      "rateAdjustments": [
        {
          "fields": {
            "MyCustomString__c": {
              "displayValue": "My Custom String",

```

```

        "value": "MyCustomString"
    }
},
"lowerBound": 0,
"name": "Tier 1",
"negotiatedRateAdjustmentId": "1ENxx0000004C9BGAU",
"rateAdjustmentId": "1ENxx0000004C9BGAU",
"rateAdjustmentType": "Percentage",
"rateAdjustmentValue": 10,
"tierUnitOfMeasure": "USD",
"upperBound": 50
}
],
"rateCardEntryId": "1CJxx0000004C9IGA U,1CJxx0000004C9JGAU",
"rateUnitOfMeasureName": "USD",
"unitOfMeasure": "GB",
"usageResourceGrantAndPolicyDetail": {
    "grantDetail": {
        "grantType": "Grant",
        "id": "1BXxx0000004C91GAE",
        "quantity": 100,
        "usageGrantNegotiable": "Negotiable",
        "usageRefreshPolicy": {
            "id": "1BYxx0000004C92GAE",
            "negotiable": "Non-Negotiable"
        },
        "usageRolloverPolicy": {
            "id": "1BVxx0000004C93GAE",
            "negotiable": "Non-Negotiable"
        },
        "validityPeriodTerm": 1,
        "validityPeriodUnit": "Month"
    },
    "negotiatedGrantDetail": {
        "grantType": "Grant",
        "id": "1X6xx000000000ECAY",
        "quantity": 100,
        "usageGrantNegotiable": "Negotiable",
        "usageRefreshPolicy": {
            "id": "1BYxx0000004C92GAE",
            "negotiable": "Non-Negotiable"
        },
        "usageRolloverPolicy": {
            "id": "1BVxx0000004C93GAE",
            "negotiable": "Non-Negotiable"
        },
        "validityPeriodTerm": 1,
        "validityPeriodUnit": "Month"
    },
    "negotiatedResourcePolicyDetail": {
        "id": "1X5xx000000000ECAY",
        "ratingFrequencyPolicy": {
            "id": null,
            "negotiable": null
        }
    }
}

```

```

    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  },
  "resourcePolicyDetail": {
    "id": "7Suxx0000004C9kCAE",
    "ratingFrequencyPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  }
},
"usageResourceId": "1BRxx0000004C9CGAU"
}
]
}

```

This sample response shows values for the type and target type of a binding instance if the `BindingInstanceTargetId` value is available in the `QuoteLineItem`, `OrderItem`, and `AssetStatePeriod` objects. Additionally, the rate, negotiated rates, and rate card entry values show the associated details of the binding object.

```

{
  "records": [
    {
      "bindingInstanceTargetType": "Account",
      "bindingInstanceType": "Target",
      "chargeForOverages": "Yes",
      "fields": {},
      "isOptional": false,
      "name": "Data Transfers",
      "negotiable": "Non-Negotiable,Non-Negotiable",
      "negotiatedRate": null,
      "negotiatedRateCardEntryId": "1QNxx0000004CQmGAM,1QNxx0000004CLwGAM",
    }
  ]
}

```

```

"quantity": 250,
"rate": 0.098765,
"rateAdjustments": [
  {
    "fields": {},
    "lowerBound": 0,
    "name": null,
    "negotiatedRateAdjustmentId": null,
    "rateAdjustmentId": "1Soxx0000004CAeCAM",
    "rateAdjustmentType": "Percentage",
    "rateAdjustmentValue": 0,
    "tierUnitOfMeasure": "USD",
    "upperBound": 121
  }
],
"rateCardEntryId": "1CJxx0000004C9CGAU,1CJxx0000004C9GGAU",
"rateUnitOfMeasureName": "USD",
"unitOfMeasure": "GB",
"usageResourceGrantAndPolicyDetail": {
  "grantDetail": {
    "grantType": "Grant",
    "id": "1BXxx0000004C91GAE",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedGrantDetail": {
    "grantType": "Grant",
    "id": "1X6xx000000000ECAY",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedResourcePolicyDetail": {
    "id": "1X5xx000000000ECAY",
    "ratingFrequencyPolicy": {

```



```

        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageCommitmentPolicy": {
        "id": "7Pexx0000004C92CAE",
        "negotiable": "Non-Negotiable"
      },
      "usageOveragePolicy": {
        "id": null,
        "negotiable": null
      }
    },
    "resourcePolicyDetail": {
      "id": "7Suxx0000004C9kCAE",
      "ratingFrequencyPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageAggregationPolicy": {
        "id": null,
        "negotiable": null
      },
      "usageCommitmentPolicy": {
        "id": "7Pexx0000004C92CAE",
        "negotiable": "Non-Negotiable"
      },
      "usageOveragePolicy": {
        "id": null,
        "negotiable": null
      }
    }
  },
  "usageResourceId": "1BRxx0000004C9CGAU"
}
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Usage Detail Error Response[]	List of errors encountered during the processing of the API request.	Small, 63.0	63.0
records	Rate Card Entry[]	List of rate card entry records.	Small, 63.0	63.0

Usage Details Error Response

Output representation of the details of an error related to usage details.

JSON Example

```
{
  "errors": [
    {
      "referenceId": "MyOrderItem",
      "errorCode": "INVALID_API_INPUT",
      "message": "Something has failed"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code associated with the error.	Small, 63.0	63.0
message	String	Message associated with the error.	Small, 63.0	63.0
referenceId	String	Unique ID that's associated with the specific error for tracking and reference purposes.	Small, 63.0	63.0

Usage Product Activation

Output representation of a usage product activation response.

JSON Example

```
{
  "success": true,
  "errors": null,
  "activatedProducts": [
    "01txx0000006i2hAAB"
  ],
  "activationResults": {
    "productActivationResults": [
      {
        "productId": "01txx0000006i2hAAA",
        "errors": [
          {
            "productUsageResourceId": "0iUxx000000009",
            "usageResourceId": "0hUxx000000003",
            "message": "Usage Resource not found for product",
            "objectApiName": "ProductUsageResource",
            "fieldName": "UsageResourceId",
            "recordId": null,
            "recordName": null
          }
        ],
        "productUsageResourceId": "0iUxx00000000678",
        "usageResourceId": "0hUxx000000004",
        "message": "Related Unit of measure records is inactive, activate it first.",
      }
    ]
  }
}
```

```

        "objectApiName": "ProductUsageGrant",
        "fieldName": "DefaultUnitofMeasure",
        "recordId": "1BXSM000000404f4AA",
        "recordName": "PUG-000000001"
    }
]
},
"productValidationResults": [
{
    "productId": "01txx0000006i2gAAA",
    "validationResult": {
        "validationErrors": [
            {
                "ruleName": "Usage vs Rating Effectivity",
                "errors": [
                    {
                        "errorCode": "EFFECTIVITY_MISMATCH",
                        "errorMessages": [
                            {
                                "errorMessage": "PUR and RCE effective date ranges must overlap for
proper rating functionality.",
                                "errorDetails": [
                                    {
                                        "relatedObjectAPIName": "ProductUsageResource",
                                        "records": [
                                            {
                                                "id": "0Wnxx0000004CDEAA2",
                                                "name": "API Calls PUR"
                                            }
                                        ]
                                    },
                                    {
                                        "relatedObjectAPIName": "RateCardEntry",
                                        "records": [
                                            {
                                                "id": "0Rcxx0000004FGHAA2",
                                                "name": "API Calls Rate Entry"
                                            }
                                        ]
                                    }
                                ]
                            }
                        ]
                    }
                ]
            }
        ]
    },
    "validationWarnings": []
}
]
}
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
activated Products	String[]	ID of the product whose associated usage records were activated. The array contains at most one entry.	Big, 67.0	67.0
activation Results	Usage Activation Result	Activation and validation outcome for the product in the request.	Big, 67.0	67.0
errors	Generic Error []	List of top-level API errors. For example, a guardrail violation or an invalid request.	Big, 67.0	67.0
success	Boolean	Indicates whether the API request was processed (<code>true</code>) or rejected at the top level (<code>false</code>).	Big, 67.0	67.0

Usage Product Validation

Output representation of all the performed validations.

JSON Example

This example shows the validation output with errors and warnings.

```
{
  "errors": [
    {
      "errorCode": "VALIDATION_FAILED",
      "message": "Product validation completed with cross-entity errors",
      "products": [
        {
          "productId": "01txx0000006i2gAAA",
          "validationResult": {
            "validationErrors": [
              {
                "errors": [
                  {
                    "errorCode": "EFFECTIVITY_MISMATCH",
                    "errorMessages": [
                      {
                        "errorMessage": "PUR and RCE effective date ranges must have overlap for proper rating functionality",
                        "errorDetails": [
                          {
                            "relatedObjectAPIName": "ProductUsageRule",
                            "records": [
                              {
                                "id": "a0bxx0000004CqZAAU",
                                "name": "PUR-001"
                              }
                            ]
                          }
                        ]
                      }
                    ]
                  }
                ]
              }
            ]
          }
        }
      ]
    }
  ]
}
```

```

    ]
  }
]
},
"ruleName": "Usage vs Rating Effectivity"
}
],
"validationWarnings": []
}
}
]
}
],
"success": false
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
success	Boolean	Indicates whether the product validation passed (true) or failed (false).	Big, 66.0	66.0
errors	Error Details[]	List of top-level error details when validation fails.	Big, 66.0	66.0

Usage Resource Grant And Policy Detail

Output representation of the details of a usage resource grant and policy.

JSON Example

```

{
  "usageResourceGrantAndPolicyDetail": {
    "grantDetail": {
      "grantType": "Grant",
      "id": "1BXxx0000004C91GAE",
      "quantity": 100,
      "usageGrantNegotiable": "Negotiable",
      "usageRefreshPolicy": {
        "id": "1BYxx0000004C92GAE",
        "negotiable": "Non-Negotiable"
      },
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedGrantDetail": {
    "grantType": "Grant",
  }
}

```

```

    "id": "1X6xx000000000ECAY",
    "quantity": 100,
    "usageGrantNegotiable": "Negotiable",
    "usageRefreshPolicy": {
      "id": "1BYxx0000004C92GAE",
      "negotiable": "Non-Negotiable"
    },
    "usageRolloverPolicy": {
      "id": "1BVxx0000004C93GAE",
      "negotiable": "Non-Negotiable"
    },
    "validityPeriodTerm": 1,
    "validityPeriodUnit": "Month"
  },
  "negotiatedResourcePolicyDetail": {
    "id": "1X5xx000000000ECAY",
    "ratingFrequencyPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  },
  "resourcePolicyDetail": {
    "id": "7Suxx0000004C9kCAE",
    "ratingFrequencyPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageAggregationPolicy": {
      "id": null,
      "negotiable": null
    },
    "usageCommitmentPolicy": {
      "id": "7Pexx0000004C92CAE",
      "negotiable": "Non-Negotiable"
    },
    "usageOveragePolicy": {
      "id": null,
      "negotiable": null
    }
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
grantDetail	Grant Detail	Details about the grants from the ProductUsageGrant object.	Big, 65.0	65.0
negotiatedGrantDetail	Grant Detail	Details about the negotiated grants from the LinItemUsageResourceGrant or TransactionUsageEntitlement object.	Big, 65.0	65.0
negotiatedResourcePolicyDetail	Resource Policy Detail	Details about the policy from the LinItemUsageResourcePolicy or BindingObjectUsageResourcePolicy object.	Big, 65.0	65.0
resourcePolicyDetail	Resource Policy Detail	Details about the policy from the ProductUsageResourcePolicy object.	Big, 65.0	65.0

Validation Error

Output representation of the validation errors grouped by rule name.

JSON Example

This example shows a validation error grouped by rule name.

```
{
  "validationErrors": [
    {
      "ruleName": "Usage vs Rating Effectivity",
      "errors": [
        {
          "errorCode": "EFFECTIVITY_MISMATCH",
          "errorMessages": []
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
ruleName	String	Name of the validation rule. For example, Usage vs Rating Effectivity.	Big, 66.0	66.0
errors	Errors[]	List of error code groups for this validation.	Big, 66.0	66.0

Validation Result

Output representation of the validation results grouped by rule name.

JSON Example

This example shows a validation result with errors and warnings.

```
{
  "validationResult": {
    "validationErrors": [
      {
        "ruleName": "Usage vs Rating Effectivity",
        "errors": []
      }
    ],
    "validationWarnings": [
      {
        "ruleName": "Performance Optimization",
        "warnings": []
      }
    ]
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
validationErrors	Validation Error []	List of validation errors grouped by rule name.	Big, 66.0	66.0
validationWarnings	Validation Warning []	List of validation warnings grouped by rule name.	Big, 66.0	66.0

Validation Warning

Output representation of the validation warnings grouped by rule name.

JSON Example

This example shows a validation warning grouped by rule name.

```
{
  "validationWarnings": [
    {
      "ruleName": "Performance Optimization",
      "warnings": [
        {
          "warningCode": "PERFORMANCE_SUBOPTIMAL",
          "warningMessages": []
        }
      ]
    }
  ]
}
```


Property Name	Type	Description	Filter Group and Version	Available Version
ruleName	String	Name of the validation rule. For example, Performance Optimization.	Big, 66.0	66.0
warnings	Warnings[]	List of warning code groups for this validation.	Big, 66.0	66.0

Warnings

Output representation of a group of warning messages with the same warning code.

JSON Example

This example shows a group of warning messages with the same warning code.

```
{
  "warnings": [
    {
      "warningCode": "PERFORMANCE_SUBOPTIMAL",
      "warningMessages": [
        {
          "warningMessage": "PUR and RCE date ranges could be optimized for better performance",
          "warningDetails": []
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
warningCode	String	Standardized warning code. For example, PERFORMANCE_SUBOPTIMAL.	Big, 66.0	66.0
warningMessages	Warning Message[]	List of warning messages for records that triggered with this warning.	Big, 66.0	66.0

Warning Message

Output representation of the details of records that triggered this specific warning.

JSON Example

This example shows a warning message with details.

```
{
  "warningMessages": [
```

```
{
  "warningMessage": "PUR and RCE date ranges could be optimized for better performance",
  "warningDetails": [
    {
      "relatedObjectAPIName": "ProductUsageRule",
      "records": [
        {
          "id": "a0bxx0000004CqZAAU",
          "name": "PUR-001"
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
warningMessage	String	Human-readable warning message that describes the validation concern.	Big, 66.0	66.0
warningDetails	Error Warning Details[]	Details of records that triggered this specific warning.	Big, 66.0	66.0

Usage Management Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[Flow for Usage Management](#)

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

[IndustriesUsageSettings](#)

Represents the settings for Usage Management.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

Flow for Usage Management

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Usage Management exposes additional `actionType` values for the `FlowActionCall` Metadata type.

Field Name	Field Type	Description
<code>actionType</code>	<code>InvokableActionType</code> (enumeration of type string)	Required. The action type. Additional valid values only for Usage Management include <code>invokeSummaryCreationService</code> —Invoke the service that creates various summaries, such as usage, ratable, and liable summaries where the usage amount is zero. The service also checks and updates the billing period of the usage entitlement account if the billing period is expired; <code>processConsumptionOverages</code> —Process consumption overages for the usage summary records with <code>SummaryComplete</code> status. This action uses the entitlement service to process the overages; <code>refreshUsageEntitlementBucket</code> —Refresh entitlements by evaluating the usage entitlement bucket records and creating a new usage entitlement entry; or <code>retriggerEntlCreaProc</code> —Retrigger entitlement creation process for failed or unprocessed assets.

IndustriesUsageSettings

Represents the settings for Usage Management.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

`IndustriesUsageSettings` values are stored in the `IndustriesUsage.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there is only one settings file for each settings component.

Version

`IndustriesUsageSettings` components are available in API version 63.0 and later.

Fields

Field Name	Field Type	Description
<code>enableUsage</code>	<code>boolean</code>	Indicates whether to create and access Usage Management objects to manage product usage and determine rates based on usage (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .

Declarative Metadata Sample Definition

The following is an example of an IndustriesUsageSettings component.

```
<?xml version="1.0" encoding="UTF-8"?>
<IndustriesUsageSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableUsage>true</enableUsage>
</IndustriesUsageSettings>
```

The following is an example package.xml that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>IndustriesUsage</members>
    <name>Settings</name>
  </types>
  <version>[ftest]</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character * (asterisk) in the package.xml manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

CHAPTER 12 Billing

In this chapter ...

- [Billing Standard Objects](#)
- [Billing Fields on Standard Objects](#)
- [Salesforce Payments Objects in Billing](#)
- [Billing Platform Events](#)
- [Billing Standard Invocable Actions](#)
- [Billing Business APIs](#)
- [Billing Apex Reference](#)
- [Billing Metadata API Types](#)

Automate processes related to billing, credit application, and invoice generation. Generate billing schedules by using context service, and create invoices from a billing schedule.

SEE ALSO:

[Salesforce Help: Assign Permissions to Access Billing Features](#)

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise**, **Unlimited**, and **Developer** Editions

Billing Standard Objects

The Billing data model provides objects and fields to manage billing and tax configurations, credit memos, and invoices, and accounting periods for legal entities.

[AccountingPeriod](#)

Represents information about a time period for which businesses prepare reports and analyze performance. Each billing transaction is associated with an accounting period. This object is available in API version 62.0 and later.

[BillingArrangement](#)

Represents the arrangement for invoicing a transaction's billing amount to one or more accounts. The arrangement specifies whether the total amount must be invoiced to the owning account or a different billing account, or whether the invoices must be split among multiple billing accounts. This object is available in API version 66.0 and later.

[BillingArrangementLine](#)

Represents the billing account, billing profile, and the percentage of billing amount to be invoiced. Each billing arrangement line results in a separate invoice addressed to the selected billing account. This object is available in API version 66.0 and later.

[BillingBatchScheduler](#)

Represents a scheduled processing job that triggers recurring invoice batch runs. This object is available in API version 62.0 and later.

[BillingBatchFilterCriteria](#)

Represents the filter that all eligible billing schedules must satisfy in order to be picked up by an invoice run. This object is available in API version 62.0 and later.

[BillingForecast](#)

Represents forecasted invoice lines generated from billing schedules before actual invoicing occurs. This object is available in API version 68.0 and later.

[BillingMilestonePlan](#)

Represents a structured approach to invoicing where invoices are scheduled based on predefined milestones. This object is available in API version 63.0 and later.

[BillingMilestonePlanItem](#)

Represents a specific billing milestone within the billing milestone plan that's used to manage and track billing based on the completion of certain deliverables or stages. This object is available in API version 63.0 and later.

[BillingPeriodItem](#)

Represents a payment period for an invoice. The billing period item is used to pass billing information to an invoice line. This object is available in API version 62.0 and later.

[BillingPolicy](#)

Represents information about a set of billing treatments that define the rules to invoice a customer for an order item. This object is available in API version 62.0 and later.

[BillingSchedule](#)

Represents information about the order item that's used in the invoicing process. This object is available in API version 62.0 and later.

[BillingScheduleGroup](#)

Represents a consolidated view of all the billing schedules related to the order items generated from one asset, including new orders and amendment orders. This object is available in API version 62.0 and later.

[BillingTreatment](#)

Represents information about the billing of an order item. This object is available in API version 62.0 and later.

[BillingTreatmentItem](#)

Represents information about allocation of the total amount of an order item to billing schedules throughout the order item's lifecycle. This object is available in API version 62.0 and later.

[BsgRelationship](#)

Represents a relationship between billing schedule groups to support bundles where one parent billing schedule group has multiple child billing schedule groups. This object is available in API version 62.0 and later.

[CaseServiceProcessExtension](#)

Represents additional information for a case record based on the type of service process for which the case was raised. This object is available in API version 67.0 and later.

[CreditMemo](#)

Represents a document that's used to reduce the amount that a buyer owes a seller under the terms of an earlier invoice. This object is available in API version 62.0 and later.

[CreditMemoAddressGroup](#)

Represents the storage of the buyer's address information, which is used to determine the tax credit amount for a buyer when a credit memo is issued. This object is available in API version 62.0 and later.

[CreditMemoInvApplication](#)

Represents information about the application of a credit memo to an invoice. This object is available in API version 62.0 and later.

[CreditMemoLine](#)

Represents the product, service, adjustment, or tax line items included in a credit memo. This object is available in API version 62.0 and later.

[CreditMemoLineInvoiceLine](#)

Represents a junction between a credit memo line and an invoice line. This object is available in API version 62.0 and later.

[CreditMemoLineTax](#)

Represents tax information of a credit memo line of type `Tax`. This object is available in API version 62.0 and later.

[DebitMemo](#)

Represents the document used to charge an additional amount to a buyer by a seller. An invoice is generated for the debit memo in the next invoice run. This object is available in API version 65.0 and later.

[DebitMemoAddress](#)

Represents the buyer's address information, which is used to determine the tax amount for a buyer when a debit memo is issued. This object is available in API version 65.0 and later.

[DebitMemoLine](#)

Represents the additional charge amount that the buyer must pay for the product, service, or debit memo line tax that's related to the debit memo. This object is available in API version 65.0 and later.

[DebitMemoLineTax](#)

Represents the tax information for a debit memo line. This object is available in API version 66.0 and later.

[GeneralLedgerAccount](#)

Represents information about the accounting codes, types, and names that are used to store and organize financial transactions. This object is available in API version 63.0 and later.

[GeneralLedgerAcctAsgntRule](#)

Represents information about the rule based on which general ledger accounts are assigned to transaction journals that are created for billing transactions. This object is available in API version 63.0 and later.

[GeneralLdgrAcctPrdSummary](#)

Represents a junction between a general ledger account and a legal entity accounting period. Stores information about the total credit amount, total debit amount, opening balance, and closing balance of a general ledger account for a specific legal entity accounting period. This object is available in API version 65.0 and later.

[GeneralLedgerJrnlEntryRule](#)

Represents information about the transaction journal entry rule, based on which transaction journals are created for the selected credit and debit general ledger accounts, transaction amount field, and percentage. This object is available in API version 65.0 and later.

[InvBatchDraftToPostedRun](#)

Represents information about the batch job that posts all invoices with the status as `Draft` that are generated by the invoice batch run associated with the billing schedule. This object is available in API version 62.0 and later.

[Invoice](#)

Represents information about a financial document describing the total amount a buyer must pay for provided products or services. This object is available in API version 62.0 and later.

[InvoiceAddressGroup](#)

Represents the storage of the buyer's address information. This object is available in API version 62.0 and later.

[InvoiceBatchRun](#)

Represents a batch processing job in Billing. During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 62.0 and later.

[InvoiceBatchRunCriteria](#)

Represents a batch processing job and its required criteria in Billing. During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 62.0 and later.

[InvoiceBatchRunRecovery](#)

Represents information about the recovery procedure of an invoice batch run. This object is available in API version 62.0 and later.

[InvoiceDocument](#)

Represents the PDF document generated for an invoice. This object is available in API version 63.0 and later.

[InvoiceLine](#)

Represents the amount that a buyer must pay for a product, service, or fee. Invoice lines are created based on the amount of an order line. This object is available in API version 62.0 and later.

[InvoiceLineRelationship](#)

Represents a relationship between invoice line items to support bundles where one parent invoice line has multiple child invoice lines. This object is available in API version 62.0 and later.

[InvoiceLineTax](#)

Represents tax information of an invoice line of type `Tax`. This object is available in API version 62.0 and later.

[LegalEntity](#)

Represents the way an organization is structured. An organization can be a single legal entity or it can comprise more than one legal entity. This object is available in API version 62.0 and later.

[LegalEntyAccountingPeriod](#)

Represents a junction between a legal entity and an accounting period. This object is available in API version 62.0 and later.

[PaymentAdviceInvoiceRecile](#)

Represents an invoice match with a payment advice line, linking a payment advice line to an open invoice. This object is available in API version 68.0 and later.

[PaymentAdviceReconciliation](#)

Represents the reconciliation of a payment advice with a bank transaction and a resolved account, including match confidence and the reviewer's decision. This object is available in API version 68.0 and later.

[PaymentBatchRun](#)

Represents a batch processing job that processes payments in Billing. During a payment batch run, all the payment schedules that meet the specified criteria are processed and the corresponding Payment records are created. These payments are then applied to invoices or invoice lines. This object is available in API version 64.0 and later.

[PaymentLineInvoiceLine](#)

Represents information about a payment line that's applied to or unapplied from an invoice line. This object is available in API version 64.0 and later.

[PaymentRetryRule](#)

Represents the specific payment retry rule for a failed payment schedule item. Each rule defines actionable parameters such as the maximum number of retries for the failed records and time intervals between subsequent retry attempts. This object is available in API version 66.0 and later.

[PaymentRetryRuleSet](#)

Represents the payment retry rule definition that defines how failed payments are retried based on the error codes across various retry categories. This object is available in API version 66.0 and later.

[PaymentSchedule](#)

Represents information about a set of payments that a customer wants to collect at different times for a certain record. A schedule contains one or more payment schedule items, where each item represents one payment to be processed. Each of a schedule's items can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they match the scheduler's payment criteria. This object is available in API version 64.0 and later.

[PaymentSchedulePolicy](#)

Represents information about the configuration for the payment schedule. This object is available in API version 64.0 and later.

[PaymentScheduleTreatment](#)

Represents information about the processing of payment schedules including the payment method and the payment amount for the payment schedule. This object is available in API version 64.0 and later.

[PaymentScheduleTreatmentDtl](#)

Represents information about the processing of payment schedules after the corresponding invoices are posted. This object is available in API version 64.0 and later.

[PymtSchdDistributionMethod](#)

Represents information about the partial payments that the total payment is divided into. This object is available in API version 64.0 and later.

[PaymentScheduleItem](#)

Represents information about a payment to be processed. Each schedule item can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they match the scheduler's payment criteria. This object is available in API version 64.0 and later.

[PaymentTerm](#)

Represents an agreement between a buyer and a seller about when payment is due for an invoice. This object is available in API version 62.0 and later.

[PaymentTermItem](#)

Represents configuration of a payment term. This object is available in API version 62.0 and later.

[RefundLineCreditMemo](#)

Represents a junction between a refund and a credit memo. This object is available in API version 68.0 and later.

[RefundLineCreditMemoLine](#)

Represents a junction between a refund and a credit memo line. This object is available in API version 68.0 and later.

[RevenueTransactionErrorLog](#)

Represents the details of errors that occurred during the processing of a request. The error record persists until a new error with the same category, primary record, and, if necessary, related record occurs. This object is available in API version 62.0 and later.

[SeqPolicySelectionCondition](#)

Represents the condition used to determine which sequence policy is applied to a record. This object is available in API version 65.0 and later.

[SequenceGapReconciliation](#)

Represents a missing sequence value identified during reconciliation, which can be used later to ensure there are no gaps in the sequence policy numbers. This object is available in API version 65.0 and later.

[SequencePolicy](#)

Represents the configuration of rules and parameters for generating unique, sequential numbers for records. Stores settings such as numbering patterns, prefixes, suffixes, sequence start numbers, increment values, and filter criteria to ensure accurate and compliant numbering. This object is available in API version 65.0 and later.

[TaxEngine](#)

Represents information about an instance of a tax engine provider as well as the merchant credentials for that specific instance. This object is available in API version 62.0 and later.

[TaxEngineInteractionLog](#)

Represents a record of a communication with an external tax engine following a tax calculation request. This object is available in API version 62.0 and later.

[TaxEngineProvider](#)

Represents general information about a service that manages a tax engine. Tax engine providers have a one-to-many relationship with tax engines, where the tax engine record represents a specific configuration of a tax engine that can be assigned to multiple order items. This object is available in API version 62.0 and later.

[TaxPolicy](#)

Represents information about a group of tax treatments, where each treatment represents parameters to determine how a particular product is taxed for a transaction line item. Tax policies are related to products, which pass the policy on to the resulting order items and in turn the billing schedules. This object is available in API version 62.0 and later.

[TaxTreatment](#)

Represents information about tax calculation by external engines. Each product requires a tax policy to determine whether to apply tax. Each tax policy requires at least one tax treatment. The tax treatments determine how taxable products are taxed. This object is available in API version 62.0 and later.

[Tax Treatment Item](#)

Represents tax code information that's used to calculate tax for a product by a specific tax engine. This object is available in API version 66.0 and later.

SEE ALSO:

[Object Reference for the platform: Overview of Salesforce Objects and Fields](#)

[SOAP API Developer Guide: Introduction to SOAP API](#)

AccountingPeriod

Represents information about a time period for which businesses prepare reports and analyze performance. Each billing transaction is associated with an accounting period. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Accounts Receivables Admin permission set to access this object.

Fields

EndDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: Required. The end date of an accounting period.

FinancialYear

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The financial year in which an accounting period falls.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an accounting period indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed an accounting period. If this value is null, it's possible that the user only accessed the accounting period or a related list view (`LastReferencedDate`), but not viewed the accounting period itself.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The auto-generated name of an accounting period. The name is a combination of the accounting period's start date, start month, end date, and end month.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The user who owns an Accounting Period record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

StartDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: Required. The start date of an accounting period.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of an accounting period.

Valid values are Closed or Open.

TotalAssetsAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The sum of all the assets from legal entity accounting periods associated with the accounting period. This field is available in API version 65.0 and later.

TotalEquitiesAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The sum of all the equities from legal entity accounting periods associated with the accounting period. This field is available in API version 65.0 and later.

TotalExpensesAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The sum of all the expenses from legal entity accounting periods associated with the accounting period. This field is available in API version 65.0 and later.

TotalLiabilitiesAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The sum of all the liabilities from legal entity accounting periods associated with the accounting period. This field is available in API version 65.0 and later.

TotalRevenueAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The sum of all the revenue from legal entity accounting periods associated with the accounting period. This field is available in API version 65.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AccountingPeriodShare](#) on page 2517: Sharing is available for the object.

[AccountingPeriodFeed](#) on page 2509: Feed tracking is available for the object.

[AccountingPeriodHistory](#) on page 2515: History is available for tracked fields of the object.

BillingArrangement

Represents the arrangement for invoicing a transaction's billing amount to one or more accounts. The arrangement specifies whether the total amount must be invoiced to the owning account or a different billing account, or whether the invoices must be split among multiple billing accounts. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Fields

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the billing arrangement record was last referenced.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date the billing arrangement record was last viewed.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. A user-defined name for the billing arrangement.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the billing arrangement record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RemainderBillingPercentage

Type: double

Properties: Filter, Sort

Description: Required. The percentage of the billing amount that isn't assigned to any of the billing accounts.

ShouldBillRemainderToAccount

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether to bill the remainder billing percentage to the owning account (`true`) or not (`false`).

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies the status of the billing arrangement.

Valid values are `Active`, `Draft`, or `Inactive`.

VersionNumber

Type: int

Properties: Filter, Group, Nillable, Sort

Description: A numerical value indicating the current version of the billing arrangement record. The version number increases when new billing arrangement line records are added or existing billing arrangement line records are updated.

BillingArrangementLine

Represents the billing account, billing profile, and the percentage of billing amount to be invoiced. Each billing arrangement line results in a separate invoice addressed to the selected billing account. This object is available in API version 66.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the account that's related to the billing arrangement line.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

BillingAccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the billing account record that's related to the billing arrangement line.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: BillingAccount

BillingArrangementId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The ID of the billing arrangement record that's related to the billing arrangement line.

This field is a relationship field.

Relationship Name: BillingArrangement

Relationship Type: Master-detail

Refers To: BillingArrangement (the master object)

BillingArrangementLineName

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

BillingPercentage

Type: double

Properties: Create, Defaulted on create, Filter, Sort, Update

Description: Required. The percentage of the billing amount to be assigned to the billing account of the billing arrangement line.

ShouldBillRemainder

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the remainder percentage must be billed to the billing account of the billing arrangement line (`true`) or not (`false`).

The default value is `false`.

VersionNumber

Type: int

Properties: Filter, Group, Nillable, Sort

Description: A numerical value indicating the current version of the billing arrangement record. The version number increases when new billing arrangement line records are added or existing billing arrangement line records are updated.

BillingBatchScheduler

Represents a scheduled processing job that triggers recurring invoice batch runs. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BillingSchedulerName

Type: string

Properties: Filter, Group, idLookup, Sort

Description: Required. The name of the scheduler.

Comments

Type: textarea

Properties: Filter, Nillable, Sort

Description: Additional details about the billing batch scheduler.

CronExpression

Type: string

Properties: Filter, Group, Sort

Description: Required. This field determines how often the scheduler recurs.

EndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when the scheduler stops triggering batch processing jobs.

FrequencyCadence

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The frequency of the scheduler triggering the invoice batch run.

Valid values are `Daily`— The scheduled job recurs every day, `Monthly`— The scheduled job recurs every month, `Once`— The scheduled job occurs one time and doesn't recur, or `Weekly`— The scheduled job recurs every week.

FrequencyOptions

Type: textarea

Properties: Nillable

Description: This field is a derived field that stores the scheduler configuration.

JobType

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The type of batch processing job that the scheduler triggers.

Valid value is `Invoice` for which the scheduler starts a batch invoice run.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing batch scheduler record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing batch scheduler record. If this value is null, it's possible that the user only accessed the billing batch scheduler record or a related list view (`LastReferencedDate`), but not viewed the billing batch scheduler record itself.

NextRunTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and timestamp of the next scheduled batch invoice run in the user's time zone.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the user who created the scheduler.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RecurringSubType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The frequency at which the batch processing job recurs when the `FrequencyCadence` field value is set to `Monthly`.

Valid values are:

- `Every`— The processing job recurs at every instance of the frequency of the value. For example, if the `RecurringSubType` field value is `Every` and the `FrequencyCadence` field value is `Weekly`, then the batch processing job recurs every week.
- `SpecificDate`— The scheduler triggers the batch processing job on the selected date. For example, if the selected date is 5, and the `FrequencyCadence` field value is `Monthly`, then the job recurs on the fifth day of each month.

RecurringType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The frequency at which the batch processing job is repeated when the `FrequencyCadence` field value is set to `Weekly`.

Valid value is `Every`.

RecursOn

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The interval at which the scheduler triggers a batch processing job.

If the `FrequencyCadence` field value is `Monthly`, you must select either the specific date or the interval when the schedule triggers the job.

Valid values are `First`, `Fourth`, `Last`, `Second`, or `Third`.

Example: To configure the scheduler to trigger the job on the first Monday of the month, set the following fields
`FrequencyCadence=Monthly`, `RecursOn=First`, or `RecursOnDay= Monday`

RecursOnDate

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The date on which the scheduler triggers a batch processing job.

Example: To configure the scheduler to trigger the job on the fifth day of the month, set the following fields
`FrequencyCadence=Monthly` or `RecursOnDate= 5`

Example: To configure the scheduler to trigger the job on the second to last day of the month, set the following fields
`FrequencyCadence=Monthly` or `RecursOnDate=SecondToLast`. If you select `Last`, `SecondToLast`, or `ThirdToLast`, the date of the batch processing job varies depending on the number of days in the month.

For example, consider `SecondToLast` is selected. If the month has 30 days, such as June, then the batch processing job occurs on the 28th day. If the month has 31 days, such as July, then the batch processing job occurs on the 29th day.

RecursOnDay

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The day on which the scheduler triggers a batch processing job.

If the `FrequencyCadence` field value is set to `Weekly`, then you must select the day when the scheduler runs. The scheduler recurs every week on the selected day; for example, weekly on Monday.

Valid values are:

- Sunday
- Monday
- Tuesday
- Wednesday
- Thursday
- Friday
- Saturday

RunCriteriaId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the filter criteria that's defined for the invoice batch run or the payment batch run.

This field is a polymorphic relationship field.

Relationship Name: RunCriteria

Refers To: InvoiceBatchRunCriteria

ShouldExcludeWkendAndHldy

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether weekends and holidays are excluded from the billing schedule (`true`) or not (`false`).

The default value is `false`.

ShouldGenerateInvoiceDocuments

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether the invoice scheduler generates invoice documents (`true`) or not (`false`). This field is available in API version 68.0 and later.

The default value is `false`.

ShouldStartRunImmediately

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether the invoice scheduler must start the run immediately (`true`) or not (`false`).

The default value is `false`. Available in API version 63.0 and later.

StartDate

Type: date

Properties: Filter, Group, Sort

Description: Required. The date when the scheduler triggers its first batch processing job.

StartTime

Type: time

Properties: Filter, Sort

Description: Required. The time when the scheduler triggers the batch processing job.

Status

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The status of the scheduler. Only active schedulers can trigger batch processing jobs.

Valid values are `Active`, `Canceled`, `Draft`, or `Inactive`.

TimeZone

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The time zone is either the value selected when the run was configured, or it's the user's time zone. The time zone is shown in Greenwich Mean Time (GMT).

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingBatchSchedulerShare on **page 2517**: Sharing is available for the object.

BillingBatchFilterCriteria

Represents the filter that all eligible billing schedules must satisfy in order to be picked up by an invoice run. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BatchCriteriaId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the batch criteria record.

This field is a polymorphic relationship field.

Relationship Name: BatchCriteria

Refers To: InvoiceBatchRunCriteria

BillingBatchFilterCriteriaNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the billing batch filter criteria.

ColumnEnum

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The column or field to which the filter criteria are applied.

CriteriaFieldType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The data type of the custom or standard criteria field.

Valid values are: Available in API version 63.0 and later.

- CustomBoolean
- CustomCurrency
- CustomDate
- CustomLookup
- CustomNumber
- CustomPercent
- CustomText

CriteriaSequence

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The order in which the filter criteria are applied on the billing batch.

CustomCriteriaFieldName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The API name of the custom field on the object specified in the `ObjectName` field. The filter criteria is applied on the custom field. This object is available in API version 65.0 and later.

InvoiceRunMatchingValue

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: A value to match during an invoice run. This field is useful for filtering the invoices based on specific criteria during the billing process.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

ObjectName

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The object on which the filter criteria are applied.

Valid values are:

- `AccountBillingAccount` — Available in API version 63.0 and later.
- `BillingAccount` — Available in API version 63.0 and later.
- `BillingSchedule`
- `BillingScheduleGroup`
- `CreditMemo` — Available in API version 63.0 and later.
- `CreditMemoInvApplication` — Available in API version 63.0 and later.
- `CreditMemoLine` — Available in API version 63.0 and later.
- `CreditMemoLineInvoiceLine` — Available in API version 63.0 and later.
- `CreditMemoLineTax` — Available in API version 63.0 and later.
- `DebitMemoLine` — Available in API version 65.0 and later.
- `Invoice` — Available in API version 63.0 and later.
- `InvoiceLine` — Available in API version 63.0 and later.
- `InvoiceLineTax` — Available in API version 63.0 and later.
- `Payment` — Available in API version 64.0 and later.
- `PaymentGateway` — Available in API version 64.0 and later.
- `PaymentLineInvoice` — Available in API version 64.0 and later.
- `PaymentLineInvoiceLine` — Available in API version 64.0 and later.
- `PaymentSchedule` — Available in API version 64.0 and later.
- `PaymentScheduleItem` — Available in API version 64.0 and later.
- `Refund` — Available in API version 64.0 and later.

- `RefundLinePayment` — Available in API version 64.0 and later.

Operation

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The type of comparison or logical operation to be performed on the specified column or field.

Valid values are:

- `Contains` — Available in API version 63.0 and later.
- `Equals`
- `GreaterThan` — Available in API version 63.0 and later.
- `GreaterThanOrEqualTo` — Available in API version 63.0 and later.
- `InList`
- `LessThan` — Available in API version 63.0 and later.
- `LessThanOrEqualTo`
- `NotEquals` — Available in API version 63.0 and later.
- `OfType`
- `StartsWith` — Available in API version 63.0 and later.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the user who created the billing batch filter criteria.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentRunMatchingValue

Type: picklist

Properties: Filter, Group, Nillable, Sort

Description: A value to match during a payment run. This field is useful for filtering the payments based on specific criteria during the billing process. This field is visible but isn't used in API version 62.0.

StandardCriteriaField

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The name of the standard field for the object specified in the `ObjectName` field. The filter criteria is applied on the standard field. Available in API version 63.0 and later.

Value

Type: string

Properties: Filter, Group, Sort

Description: Required. The value to be used in the filter criteria.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingBatchFilterCriteriaHistory on page 2515: History is available for tracked fields of the object.

BillingForecast

Represents forecasted invoice lines generated from billing schedules before actual invoicing occurs. This object is available in API version 68.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Admin permission set to access this object.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the account associated with the billing forecast.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

BillingAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the billing account associated with the billing forecast.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: BillingAccount

BillingArrangementId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the billing arrangement associated with the billing forecast.

This field is a relationship field.

Relationship Name: BillingArrangement

Refers To: BillingArrangement

BillingMethod

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the type of billing used for the billing forecast.

Valid values are `Evergreen`, `OrderAmount`, or `Usage`.

BillingPeriodEndDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The end date of the billing period for the billing forecast.

BillingPeriodStartDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The start date of the billing period for the billing forecast.

BillingScheduleGroupId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the billing schedule group associated with the billing forecast.

This field is a relationship field.

Relationship Name: BillingScheduleGroup

Refers To: BillingScheduleGroup

BillingScheduleId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the billing schedule associated with the billing forecast.

This field is a relationship field.

Relationship Name: BillingSchedule

Refers To: BillingSchedule

BillingTermUnit

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies the unit of the billing term for the billing forecast.

Valid values are:

- BillingMilestonePlan
- Day
- Month
- OneTime
- Quarter
- Semi-Annual
- Week
- Year

Category

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies the category of the billing forecast.

Valid values are AmendQuantity, Amendment, Cancellation, Original, or Renewal.

ChargeAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: Required. The charge amount for the billing forecast.

InvoiceBatchRunId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the invoice batch run associated with the billing forecast.

This field is a relationship field.

Relationship Name: InvoiceBatchRun

Refers To: InvoiceBatchRun

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferencedDate` isn't null, the user accessed this record or list view indirectly.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity accounting period associated with the billing forecast.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity associated with the billing forecast.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number assigned to the billing forecast.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of this record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentTermId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the payment term associated with the billing forecast.

This field is a relationship field.

Relationship Name: PaymentTerm

Refers To: PaymentTerm

Quantity

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The quantity of the product or service for the billing forecast.

ReferenceEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the reference entity associated with the billing forecast.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntity

Refers To: Order, Quote

ReferenceEntityItemId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the reference entity line item associated with the billing forecast.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntityItem

Refers To: DebitMemoLine, OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, QuoteLineItem

UnitPrice

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The unit price of the product or service for the billing forecast.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingForecastShare on **page 2517**: Sharing is available for the object.

BillingMilestonePlan

Represents a structured approach to invoicing where invoices are scheduled based on predefined milestones. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and the Billing Admin permission set to access this object.

Fields

BillingTreatmentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The billing treatment associated with the billing milestone plan.

This field is a relationship field.

Relationship Name: BillingTreatment

Refers To: BillingTreatment

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the billing milestone plan.

ExternalReference

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The external reference item that links a billing milestone plan item to the original transaction item. Available in API version 65.0 and later.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing milestone plan record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing milestone plan record. If this value is null, it's possible that the user only accessed the billing milestone plan record or a related list view (`LastReferencedDate`), but not viewed the billing milestone plan record itself.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the billing milestone plan.

ReferenceItemAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The total reference item amount to be billed.

ReferenceItemId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the reference item that links a billing milestone plan item to the original order item.

This field is a polymorphic relationship field.

Relationship Name: ReferenceItem

Refers To: BillingSchedule, OrderItem

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the billing milestone plan.

Valid values are Active, Cancelled, Completely Billed, or Draft.

BillingMilestonePlanItem

Represents a specific billing milestone within the billing milestone plan that's used to manage and track billing based on the completion of certain deliverables or stages. This object is available in API version 63.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and the Billing Admin permission set to access this object.

Fields

BillingMilestonePlanId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The billing milestone plan associated with the billing milestone plan item.

This field is a relationship field.

Relationship Name: BillingMilestonePlan

Relationship Type: Master-detail

Refers To: BillingMilestonePlan (the master object)

BillingScheduleGroupId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The billing schedule group that's related to the billing milestone plan item. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: BillingScheduleGroup

Refers To: BillingScheduleGroup

CommencementDate

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The action that triggers the start of the billing milestone plan for a date-based milestone.

Valid value is `OrderProductActivation`

CommencementDateOffset

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The offset applied to the commencement date to determine the milestone achievement date for a date-based milestone.

CommencementDateOffsetUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit of time for the commencement date offset.

Valid values are `Days`, `Months`, or `Years`.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the billing milestone plan item.

FlatAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The amount in terms of units of currency, such as \$10 or \$21.52, to invoice from the order item. Used only when `Type` field has a value of `FlatAmount`.

IsMilestoneAccomplished

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether the billing treatment is for milestone billing (`true`) or not (`false`).

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing milestone plan item record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing milestone plan item record. If this value is null, it's possible that the user only accessed the billing milestone plan item record or a related list view (`LastReferencedDate`), but not viewed the billing milestone plan item record itself.

MilestoneAccomplishmentDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date the milestone is achieved for date-based milestones. For event-based milestones, this field indicates the date when the milestone is manually marked as completed.

MilestoneAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount that's billed when the milestone is reached or completed.

MilestoneType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The milestone type for the billing treatment item.

Valid values are `Date` or `Event`.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the billing milestone plan item.

Percentage

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The percentage, such as 10% or 12.5%, to invoice from the order item. Used only when `Type` field has a value of `Percentage`.

ServicePeriodEnd

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The end date of the service associated with the milestone.

Valid value is `Order Product End Date`

ServicePeriodStart

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The start date of the service associated with the milestone.

Valid value is `Order Product Start Date`

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the billing milestone plan item.

Valid values are:

- Cancelled
- Draft
- Error
- Invoiced
- Ready for Invoicing
- Waiting for Milestone Accomplishment

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies whether billing schedules created from this billing treatment item are based on a flat amount or a percentage of the order item's total amount.

Valid values are `FlatAmount`, `Percentage`, or `Remainder`.

BillingPeriodItem

Represents a payment period for an invoice. The billing period item is used to pass billing information to an invoice line. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

Amount

Type: currency

Properties: Filter, Sort

Description: Required. The price for the billing period item. This field is used to calculate the invoice line's amount.

BillingPeriodEndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The end date of a billing period that's used to calculate the invoice line's end date.

BillingPeriodItemNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the billing period item.

BillingPeriodStartDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The start date of a billing period item that's used to calculate the invoice line's start date.

BillingScheduleGroupId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the parent billing schedule group record that's related to the billing period item. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: BillingScheduleGroup

Refers To: BillingScheduleGroup

BillingScheduleId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the parent billing schedule record of the billing period item.

This field is a relationship field.

Relationship Name: BillingSchedule

Relationship Type: Master-detail

Refers To: BillingSchedule (the master object)

InvoiceBatchRunId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the parent invoice batch run record of the billing period item.

This field is a relationship field.

Relationship Name: InvoiceBatchRun

Refers To: InvoiceBatchRun

InvoiceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the parent Invoice record of the Invoice Line record that's generated from the billing period item.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

InvoiceLineId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the Invoice Line record that's generated from the billing period item. This field is populated only when a billing period item is generated by an invoice batch run. Otherwise, this field is empty.

This field is a relationship field.

Relationship Name: InvoiceLine

Refers To: InvoiceLine

InvoiceStatus

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The status of the invoice that contains the invoice line created from the billing period item.

Valid values are:

- **Canceled**— The invoice for this billing period item was canceled.
- **Draft**— The invoice has been created but hasn't been posted.
- **DraftInProgress**— The invoice hasn't been created yet. When the invoice is created, the `InvoiceStatus` field value is changed to `Draft`. If the invoice generation process fails, the `InvoiceStatus` field value shows `DraftInProgress`.
- **Error**— The invoice for this billing period item was generated in error.

- **Pending**— The invoice for this billing period item is being generated.
- **Posted**— An invoice line based on this billing period has been created and added successfully to the invoice.
- **PostingInProgress**— An invoice line based on this billing period has been created and is in the process of being added to the invoice.
- **Voided**— An invoice line based on this billing period was voided.
- **VoidInProgress**— An invoice line based on this billing period is in the process of being voided.

OverageQuantity

Type: double

Properties: Filter, Nillable, Sort

Description: The quantity of the usage overage that has exceeded the initial grant. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

RelatedMilestonePlanItemId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing milestone plan item that creates the billing period item. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: RelatedMilestonePlanItem

Refers To: BillingMilestonePlanItem

RelatedUsageBillPeriodItemId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The method for retrieving billing information for usage-based products. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: RelatedUsageBillPeriodItem

Refers To: UsageBillingPeriodItem

Status

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The status of the billing period item. Draft billing period items aren't evaluated for invoice line creation.

Valid values are `Canceled`, `CatchUpProcessed`. Available in API version 68.0 and later, `Draft`, or `Reviewed`.

TotalUsedQuantity

Type: double

Properties: Filter, Nillable, Sort

Description: The total quantity of the usage resource consumed during the billing period. This includes granted entitlements, excess consumption, or consumption below the granted entitlements. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

UnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The units used to measure the overage. For example, bytes or minutes. Available in API version 63.0 and later.

This field is a relationship field.

Relationship Name: UnitOfMeasure

Refers To: UnitOfMeasure

BillingPolicy

Represents information about a set of billing treatments that define the rules to invoice a customer for an order item. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BillingTreatmentSelection

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Defines how billing treatments are assigned to order items and assets that are related to the billing policy.

Valid values are `Default`, `LegalEntity`, or `Manual`.

DefaultBillingTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: When `BillingTreatmentSelection` has a value of `Default`, the selected billing treatment is used for all the order items and assets that are related to the billing policy.

This field is a relationship field.

Relationship Name: `DefaultBillingTreatment`

Refers To: `BillingTreatment`

Description

Type: `textarea`

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the billing policy.

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing policy indirectly, for example, through a list view or related record.

LastViewedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing policy. If this value is null, it's possible that the user only accessed the billing policy or a related list view (`LastReferencedDate`), but not viewed the accounting period itself.

Name

Type: `string`

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the billing policy.

Status

Type: `picklist`

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the billing policy.

Valid values are `Active`, `Draft`, or `Inactive`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingPolicyHistory on page 2515: History is available for tracked fields of the object.

BillingSchedule

Represents information about the order item that's used in the invoicing process. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BillDayOfMonth

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The day of the month on which a recurring billing process is scheduled to occur.

BilledAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount (excluding tax) that has been invoiced from the billing schedule.

This field is a calculated field.

BillingAccountId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the account that's related to the billing schedule.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: Account

BillingMethod

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of billing used for the source item.

Valid values are:

- Evergreen
- OrderAmount
- Usage—. Available in API version 63.0 and later with Revenue Cloud Billing license.

BillingMilestonePlanId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing milestone plan associated with the billing schedule. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: BillingMilestonePlan

Refers To: BillingMilestonePlan

BillingPeriodAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount to be invoiced each billing period. For example, if the billing period is monthly, this field shows the monthly amount that appears on the invoice line.

BillingScheduleEndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The last date that the billing schedule is available for invoicing. This value is inherited from the `EndDate` field on the order item.

BillingScheduleGroupId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The billing schedule group that contains the billing schedule. Billing schedules are grouped when they have the same source order item. The source order item is the original order item that a customer bought. Afterwards, if the customer amends, cancels, or renews the order item, a new billing schedule is created with the `BillingScheduleGroupId` for the original order item.

This field is a relationship field.

Relationship Name: BillingScheduleGroup

Relationship Type: Master-detail

Refers To: BillingScheduleGroup (the master object)

BillingScheduleNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the billing schedule.

BillingScheduleStartDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when the billing schedule is available for invoicing. This value is inherited from the `ServiceDate` field on the order item.

BillingTerm

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The duration for which the customer is invoiced.

BillingTermUnit

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The unit of measurement of the billing term.

Valid values are:

- `BillingMilestonePlan`—Available in API version 63.0 and later with Revenue Cloud Billing license.
- `Day`
- `Month`
- `OneTime`
- `Quarter`
- `Semi-Annual`
- `Year`

BillingTreatmentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the billing treatment record associated with the billing schedule. Available in API version 67.0 and later.

This field is a relationship field.

Relationship Name: BillingTreatment

Refers To: BillingTreatment

BillingTreatmentItemId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing treatment item that's used to configure invoiceable amounts on the billing schedule.

This field is a relationship field.

Relationship Name: BillingTreatmentItem

Refers To: BillingTreatmentItem

BillingType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The timing of invoicing for a product or service relative to its delivery to the customer.

Valid values are **Advance**— Invoices a product or service before its delivery or **Arrears** — Invoices a product or service after its delivery.

CancellationDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date from when the user can no longer access the service. For example, if a service ends on August 31, the cancellation date is September 1 because that's the date from when the user can no longer use the service. Billing schedules past their cancellation date aren't invoiced.

Category

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The category of the billing schedule.

Valid values are:

- **Amendment**— A billing schedule for an order that was amended. Available in API version 67.0 and later.
- **AmendQuantity**— A billing schedule for an order that changes the quantity.
- **Cancellation** — A billing schedule for an order that was canceled.
- **Original** — A billing schedule for the initial order.
- **Renewal** — A billing schedule for an order that was renewed.

CustomInvoiceGroupKey

Type: string

Properties: Filter, Group, Restricted picklist, Sort

Description: The group identifier for which an invoice must be generated when the invoice group type is **Custom**.

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

ForecastBatchRunId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the invoice batch run associated with this billing schedule that's used for forecasting. This field is available in API version 68.0 and later.

This field is a relationship field.

Relationship Name: ForecastBatchRun

Refers To: InvoiceBatchRun

ForecastStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the lifecycle of the billing schedule in a forecast run. This field is available in API version 68.0 and later.

Valid values are `Error`, `Forecasted`, `PendingForecast`, or `Processing`.

InvBatchDraftToPostedRunId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The batch job that posts all invoices with a status as `Draft` that are generated by the invoice batch run associated with the billing schedule.

This field is a relationship field.

Relationship Name: InvBatchDraftToPostedRun

Refers To: InvBatchDraftToPostedRun

InvoiceBatchRunId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The invoice batch run that evaluated the billing schedule and its billing period items to generate an invoice.

This field is a relationship field.

Relationship Name: InvoiceBatchRun

Refers To: InvoiceBatchRun

InvoiceGroupType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether to generate an invoice for a billing schedule, a custom group, or the default group of account, bill-to-contact, payment term, currency, and tax engine.

Valid values are `Billing Schedule`, `Custom`, or `Default`.

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

InvoiceRunMatchingValue

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The batch value used by the invoice run that evaluated the billing schedule. During an invoice run, billing schedules with the same batch value, including null, are grouped to the same invoice run.

LastForecastRunTargetDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The target date used by the recent forecast batch run that processed this billing schedule. This field is available in API version 68.0 and later.

LineAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount associated with a specific line item in the billing schedule. Available in API version 63.0 and later.

NetUnitPrice

Type: currency

Properties: Filter, Nillable, Sort

Description: The net unit price of the order item for which the billing schedule was created. Available in API version 64.0 and later.

NextBillingDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date that the next billing period starts for the invoice. This date is used to calculate which invoice lines are included on an invoice. When an invoice scheduler or API evaluates an order for invoicing, billing schedules with a next billing date on or before the invoice's target date are included in the invoice.

NextChargeFromDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date that the billing schedule is invoiced in the upcoming billing period. For example, if you invoiced a customer for a billing period of 01/01/24 through 01/31/24, the billing schedule's `NextChargeFromDate` is 02/01/22.

OriginalBillingScheduleId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: If the billing schedule is an amended or canceled billing schedule, then this field shows the original billing schedule. Otherwise, this field is null.

This field is a relationship field.

Relationship Name: OriginalBillingSchedule

Refers To: BillingSchedule

PendingAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount from the current billing term that hasn't been billed yet. For example, the unbilled amount for a month, quarter, or year, depending on this billing schedule's billing term.

PricingTermUnit

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The unit of time for which the pricing of the product applies.

Valid values are `Months`, `Quarterly`, `Semi-Annual`, or `Annual`. Available in API version 66.0 and later.

ProcessingOrder

Type: int

Properties: Filter, Group, Nillable, Sort

Description: Specifies the order in which billing transactions are applied. Available in API version 67.0 and later.

This field is an autogenerated field.

Quantity

Type: double

Properties: Filter, Nillable, Sort

Description: The quantity of the order item that created the billing schedule.

RampIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the ramp deal that groups billing schedules belonging to the same ramped product. This field is available in API version 68.0 and later.

Reference

Type: reference

Properties: Filter, Group, idLookup, Sort

Description: Required. The ID of the parent record of the reference item for which the billing schedule is created. Available in API version 61.0 and later.

ReferenceEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The parent order of the order item that created the billing schedule.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntity

Refers To: Order

ReferenceEntityItemId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The order item or asset that created the billing schedule.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntityItem

Refers To: OrderItem, OrderItemAdjustmentLineItem

ReferenceItem

Type: reference

Properties: Filter, Group, idLookup, Sort

Description: The ID of the transaction line item record for which the billing schedule is created. Available in API version 61.0 and later.

SubCategory

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: The subcategory of the billing schedule. Available in API version 67.0 and later.

Valid values are:

- AsIsRenewal
- BillingFrequencyAmendment
- ChangeEndDate
- DeltaPriceAmend
- PriceAmend
- QuantityAmendment
- SimplifiedCancel
- SimplifiedRenewal

SegmentIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the ramp segment in which the billing schedule is grouped. This field is available in API version 68.0 and later.

SegmentName

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The name of the ramp segment. This field is available in API version 68.0 and later.

SegmentType

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of the ramp segment. This field is available in API version 68.0 and later.

Valid values are `Custom`, `FreeTrial`, `Prorated`, or `Yearly`.

The default value is `Yearly`.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the order item that the billing schedule represents.

Valid values are:

- `WaitingForMilestoneEventAccomplishment`—Available in API version 63.0 and later with Revenue Cloud Billing license.
- `CompletelyBilled`
- `Error`
- `Processing`
- `ReadyForInvoicing`

TaxTreatmentId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the treatment that's used to calculate tax for the billing schedule. This value is defined based on the order item's tax policy.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

TotalAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of the order item represented by the billing schedule.

Type

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: The type of the billing schedule.

Valid values are:

- LineItemAdjustedCharge
- LineItemAdjustment
- LineItemCharge

UnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the unit of measure for the billing schedule. Available in API version 63.0 and later.

This field is a relationship field.

Relationship Name: UnitOfMeasure

Refers To: UnitOfMeasure

UnitPrice

Type: currency

Properties: Filter, Nillable, Sort

Description: The price for an individual unit of the billing schedule's parent order item, including charges, adjustments, and discounts. This value is inherited from the order item's `UnitPrice` field.

UsageResourceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The usage resource associated with the billing schedule. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: UsageResource

Refers To: UsageResource

BillingScheduleGroup

Represents a consolidated view of all the billing schedules related to the order items generated from one asset, including new orders and amendment orders. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

AnchorProdtBillingSchdGrpId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing schedule group for the anchor product in a usage-based product. The anchor product contains the grants for the usage-based product. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: AnchorProdtBillingSchdGrp

Refers To: BillingScheduleGroup

BillDayOfMonth

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The day of the month on which a recurring billing process is scheduled to occur.

BillToContactId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the contact related to the billing schedule group. This field can't be modified when related billing schedules are in processing.

This field is a relationship field.

Relationship Name: BillToContact

Refers To: Contact

BillingAccountId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the account that's related to the billing schedule group.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: Account

BillingAddress

Type: address

Properties: Filter, Nillable

Description: The compound form of the billing address. Read only. See [Address Compound Fields](#) for details on compound address fields.

BillingArrangementId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the billing arrangement that's related to the billing schedule group. Available in API version 66.0 and later.

This field is a relationship field.

Relationship Name: BillingArrangement

Refers To: BillingArrangement

BillingMethod

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The type of billing used for the source item.

Valid values are `Evergreen`, `OrderAmount`, or `Usage`.

BillingResumptionDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when billing for the asset related to the billing schedule group is resumed. Available in API version 63.0 and later.

BillingScheduleGroupNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the billing schedule group.

BillingStartMonth

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: This is a read-only field used with annual billing. The field shows the numbers from 1 through 12, which indicate the month when billing begins for an annual subscription. For example, if billing starts in January, the value is 1; if billing starts in June, the value is 6.

BillingSuspensionDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when billing for the asset related to the billing schedule group is suspended. Available in API version 63.0 and later.

BillingTerm

Type: int

Properties: Filter, Group, Nillable, Sort

Description: This field is used with `BillingTermUnit` field to define a billing cycle. For example, bill every 20 days or every two months. In this example, the `BillingTerm` field value is 20 and the `BillingTermUnit` field value is `Day`.

BillingTermUnit

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The unit of measurement of the billing term.

Valid values are:

- `BillingMilestonePlan`—Available in API version 63.0 and later with Revenue Cloud Billing license.
- `Day`
- `Month`
- `OneTime`
- `Quarter`
- `Semi-Annual`
- `Year`

BillingTreatmentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing treatment item that's used to configure invoiceable amounts on the billing schedule group.

This field is a relationship field.

Relationship Name: `BillingTreatment`

Refers To: BillingTreatment

BillingType

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The timing of invoicing for a product or service relative to its delivery to the customer.

Valid values are **Advance**— Invoices a product or service before its delivery or **Arrears**— Invoices a product or service after its delivery.

BindingInstancelId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The asset or custom object record associated with the billing schedule group. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a polymorphic relationship field.

Relationship Name: BindingInstance

Refers To: Asset

CancellationDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date from when the user can no longer access the service. For example, if a service ends on August 31, the cancellation date is September 1 because that's the date from when the user can no longer use the service. Billing schedules past their cancellation date aren't invoiced.

Controller

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. During the invoicing process, this field determines which date is used when the billing schedule group and billing schedule have a related field with conflicting values. For example, when Controller has a value of `BillingScheduleGroup`, if the billing schedule's billing day of month is 5 while the billing schedule group's billing day of month is 10, the invoice is sent on the 10th day of the month.

Valid values are `BillingScheduleGroup` or `None`.

EffectiveNextBillingDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The earliest `NextBillingDate` from all billing schedules in the billing schedule group. This field is a reference field that isn't used for any features or calculations.

This field is a calculated field.

EndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The end date of the billing schedule group.

ExternalBindingInstance

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The custom target associated with the entitlements that are granted with the sellable product. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

ExternalRefRecordIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The identifier of the external record for which the billing schedule group was created. Available in API version 64.0 and later.

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the legal entity that's related to the billing schedule group.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

NextBillingDateOverride

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The next billing date for all the billing schedules related to the billing schedule group. If specified, this date overrides the next billing dates of the billing schedules. Available in API version 63.0 and later.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the user who created the billing schedule group.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentTermId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the payment term used in this billing schedule group. This field can't be modified when related billing schedules are in processing.

This field is a relationship field.

Relationship Name: PaymentTerm

Refers To: PaymentTerm

PeriodBoundary

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: This field is inherited from the order item's parent quote line item or sales transaction item. The period boundary determines the start and end date of the billing periods.

Valid values are `AlignToCalendar`, `Anniversary`, `DayOfPeriod`, or `LastDayOfPeriod`.

Product2Id

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The product that was charged or ordered to create the billing schedule group.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

ProductName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The name of the product for the order item that's represented by each billing schedule in the billing schedule group.

ProrationPolicyId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the proration policy that applies to this billing schedule group. The proration policy defines how time periods are calculated for orders. For example, whether partial periods are allowed. This field is inherited from the shared proration policy for each billing schedule in the billing schedule group.

This field is a relationship field.

Relationship Name: ProrationPolicy

Refers To: ProrationPolicy

ReferenceEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The asset used to create the billing schedules in the billing schedule group.

This field is a relationship field.

Relationship Name: ReferenceEntity

Refers To: Asset

ReferenceRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the Salesforce record for which the billing schedule group was created. Available in API version 64.0 and later.

This field is a polymorphic relationship field.

Relationship Name: BillingScheduleGroups

SavedPaymentMethodId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the SavedPaymentMethod record that's used to collect payment for the billing schedule group. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: BillingScheduleGroups

Refers To: SavedPaymentMethod

ShipFromAddress

Type: address

Properties: Filter, Nillable

Description: The address from which the product in the billing schedule group is shipped. Available in API version 64.0 and later.

ShippingAddress

Type: address

Properties: Filter, Nillable

Description: The compound form of the shipping address. See [Address Compound Fields](#) for details on compound address fields.

This field is a read-only field.

StartDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The earliest start date from all billing schedules in the billing schedule group.

TaxTreatmentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the tax treatment record that's used to calculate tax for the billing schedule group. This value is defined based on the order item's tax policy.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

TotalBilledAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount that has been invoiced for the billing schedules within the billing schedule group.

This field is a calculated field.

TotalPendingAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount that hasn't yet been invoiced for the billing schedules within the billing schedule group.

This field is a calculated field.

UsageType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The usage type for the billing schedule group.

Valid values are `Revenue Cloud`, `Commerce Cloud`, or `Insurance Cloud`. Available in API version 66.0 and later.

BillingTreatment

Represents information about the billing of an order item. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BillingPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The billing policy that's related to the billing treatment.

This field is a relationship field.

Relationship Name: BillingPolicy

Refers To: BillingPolicy

CanChangeBillingFrequency

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the billing frequency can be changed for the billing treatment (`true`) or not (`false`).

The default value is `false`.

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the billing treatment.

ExcludeFromBilling

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies whether any order items assigned to the treatment are excluded from billing.

Valid values are `No` or `Yes`.

IsMilestoneBilling

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether the billing treatment is for milestone billing (`true`) or not (`false`).

The default value is `false`. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing treatment indirectly, for example, through a list view or related record.

LastViewedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing treatment. If this value is null, it's possible that the user only accessed the billing treatment or a related list view (`LastReferencedDate`), but not viewed the billing treatment itself.

LegalEntityId

Type: `reference`

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity that's used to assign the treatment to order items when the parent billing policy's `BillingTreatmentSelection` field value is `LegalEntity`.

This field is a relationship field.

Relationship Name: `LegalEntity`

Refers To: `LegalEntity`

Name

Type: `string`

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the billing treatment.

Status

Type: `picklist`

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the billing treatment.

Valid values are `Active`, `Draft`, or `Inactive`.

Draft or inactive billing treatments can't be assigned to order items.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingTreatmentHistory on page 2515: History is available for tracked fields of the object.

BillingTreatmentItem

Represents information about allocation of the total amount of an order item to billing schedules throughout the order item's lifecycle. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BillingTreatmentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The parent billing treatment for the billing treatment item.

This field is a relationship field.

Relationship Name: BillingTreatment

Relationship Type: Master-detail

Refers To: BillingTreatment (the master object)

BillingType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The timing of invoicing for a product or service relative to its delivery to the customer. Advance billing invoices a product or service before its delivery, whereas arrears billing invoices it after delivery. The billing system assesses the billing type to determine the next billing date for an order product. Valid values are:

- **Advance**—If the order item is billed in advance, the order's billing day of month is evaluated to choose the nearest date on or before the order product's start date. For example, if a monthly order product's start date is January 1, and the order's billing day of month is 15, the next billing date is December 15.

- **Arrears**—If the order item is billed in arrears, the order's billing day of month is evaluated to choose the nearest date after the order product's start date. For example, if a monthly order product's start date is January 1, and the order's billing day of month is 15, the order product's next billing date is January 15.
- **None**

Controller

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. During the invoicing process, this field determines which value is used when the billing schedule group and billing schedule have a shared field with different values. For example, when Controller has a value of `BillingScheduleGroup`, if the billing schedule's billing day of month is 5 while the billing schedule group's billing day of month is 10, the value of 10 is used.

Valid values are `BillingScheduleGroup` or `None`.

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the billing treatment item.

FlatAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The amount in terms of units of currency (such as \$10 or \$21.52) to invoice from the order item. Used only when Type has a value of `FlatAmount`.

Handling0Amount

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies how invoices are generated for billing period items that have an amount of \$0.

Valid values are `CreateInvoice` or `None`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing treatment item indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing treatment item. If this value is null, it's possible that the user only accessed the billing treatment item or a related list view (`LastReferencedDate`), but not viewed the billing treatment item itself.

MilestoneStartDate

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The occurrence whose date is used to calculate the milestone accomplishment date for the associated billing milestone plan item based on the provided offset details.

Valid value is: This field is available in API version 63.0 and later with Revenue Cloud Billing license.

- `OrderProductActivation`

MilestoneStartDateOffset

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The calculated value that determines the time difference from the start of a milestone. This value is calculated from the milestone start date record. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

MilestoneStartDateOffsetUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit type to use with the milestone start date offset, which defines the milestone date.

Valid values are:

- `Days`
- `Months`
- `Years`

MilestoneType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The milestone type for the billing treatment item.

Valid values are: This field is available in API version 63.0 and later with Revenue Cloud Billing license.

- `Date`
- `Event`

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the billing treatment item.

Percentage

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The percentage (such as 10% or 12.5%) to invoice from the order item. Used only when `Type` field has a value of `Percentage`.

ProcessingOrder

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: Required. The order in which billing schedules are created based on each billing treatment item. Lower numbers are evaluated first. For example, if your billing treatment has a billing treatment item that invoices at 25 percentage and a `ProcessingOrder` of 1, and another item that invoices at 75 percentage and a `ProcessingOrder` of 2, your first billing schedule will be for 25% of the order item's total amount, and your second billing schedule will be for 75% of the order item's total amount.

Sequencing

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The number used to start invoice numbers on invoices generated from this billing treatment item. Valid values are `Manual` or `None`

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the billing treatment item.

Valid values are:

- `Active`
- `Draft`—Draft billing treatment items aren't evaluated for creating billing schedules.

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies whether billing schedules created from this billing treatment item are based on a flat amount or a percentage of the order item's total amount. Valid values are `FlatAmount`, `Percentage`, or `Remainder`

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

BillingTreatmentItemHistory on page 2515: History is available for tracked fields of the object.

BsgRelationship

Represents a relationship between billing schedule groups to support bundles where one parent billing schedule group has multiple child billing schedule groups. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

AssociatedBsgId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the related billing schedule group. In a bundle relationship, this billing schedule group is the child.

This field is a relationship field.

Relationship Name: AssociatedBsg

Refers To: BillingScheduleGroup

AssociatedBsgPricing

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. This field describes how the related billing schedule group is priced relative to the primary billing schedule group.

Valid values are `IncludedInBundlePrice` or `NotIncludedInBundlePrice`.

AssociatedBsgRole

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. This field describes the role of the related billing schedule group in the relationship.

Valid values are `AddOnComponent`, `BundleComponent`, `ClassificationComponent`, or `SetComponent`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a billing schedule group record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a billing schedule group relationship record. If this value is null, it's possible that the user only accessed the billing schedule group relationship record or a related list view (`LastReferencedDate`), but not viewed the billing schedule group relationship record itself.

MainBsgId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the primary billing schedule group. In a bundle relationship, this billing schedule group is the parent. This field is a relationship field.

Relationship Name: MainBsg

Relationship Type: Master-detail

Refers To: BillingScheduleGroup (the master object)

MainBsgRole

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. This field describes the role of the primary billing schedule group in the relationship. Valid values are `AddOn`, `Bundle`, or `Set`.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the billing schedule relationship.

ProductRelationshipTypeId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the relationship type between the main and associated billing schedule group.

This field is a relationship field.

Relationship Name: ProductRelationshipType

Refers To: ProductRelationshipType

CaseServiceProcessExtension

Represents additional information for a case record based on the type of service process for which the case was raised. This object is available in API version 67.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin, Billing Operations User, or Billing Customer Service User permission set to access this object.

Fields

Caseld

Type: reference

Properties: Create, Filter, Group, Sort

Description: The case record related to the invoice.

Relationship Name: Case

Relationship Type: Master-detail

Refers To: Case

CaseServiceProcessExtensionNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The autogenerated number of the case.

CustomServiceProcess

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the name of the service process when the type of service process is Custom.

IntakeMethod

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort, Update

Description: Specifies whether the case was raised internally within the org or by using the self-service Billing portal.

Valid values are:

- Internal
- External

ReferenceRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The record ID associated with the case record such as an invoice record.

This field is a polymorphic relationship field.

Relationship Name: CaseServiceProcessExtensionsByReference

ServiceProcess

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the type of service process that created the case.

Valid values are:

- Extend Invoice Due Date
- Invoice Charge Correction
- Suspend Billing
- Update Bill-To Contact
- Other Billing Inquiries
- Custom

ReferenceRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The record ID associated with the case record such as an invoice record.

This field is a polymorphic relationship field.

Relationship Name: CaseServiceProcessExtensionsByReference

UsageType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the name of the cloud or function that uses the CaseServiceProcessExtension object.

Valid value is Billing.

Usage

This section covers a sample Apex class to support backward compatibility for cases created before the availability of the CaseServiceProcessExtension object. The class finds billing cases that don't yet have extension records, maps service process values from service catalog extended attributes for supported templates. This class also populates required extension fields such as service process, reference record ID, usage type, and intake method. For other billing queries where template entries aren't available in extended attributes, the class optionally accepts product IDs to identify and process those cases. The implementation runs as batch Apex for large data volumes and reports processing results in logs.

This example shows a sample Apex class. You can modify this class as per your requirements.

```
/**
 * Batchable Apex class to backfill CaseServiceProcessExtension records
 * for billing cases that were created in API version 66.0 and earlier.
 *
 * Identifies billing cases with no CaseServiceProcessExtension and populates the extension
 * record.
 *
 * Additionally, accepts a set of Product IDs to identify billing cases and populates the
 * extension record
 * for other billing inquiries.
 *
 * Usage:
 * Set<Id> productIds = new Set<Id>{'01tXX00000000001', '01tXX00000000002'};
 * Database.executeBatch(new BillingCaseServiceProcessExtensionBatch(productIds), 200);
 *
 */
public class BillingCaseServiceProcessExtensionBatch implements Database.Batchable<SObject>,
    Database.Stateful {

    private static final Map<String, String> TEXT_VALUE_TO_SERVICE_PROCESS = new Map<String,
String>{
        'billing_svc_update_billToContact' => 'UpdateBillToContact',
        'billing_svc_due_date_extension' => 'ExtendInvoiceDueDate',
        'billing_svc_incorrect_invoice_charges' => 'InvoiceChargeDispute',
        'billing_svc_suspend_billing' => 'SuspendBilling'
    };

    private static final Map<String, String> PRODUCT_NAME_KEYWORD_TO_SERVICE_PROCESS = new
Map<String, String>{
        'bill to contact' => 'UpdateBillToContact',
        'due date' => 'ExtendInvoiceDueDate',
        'invoice charge' => 'InvoiceChargeDispute',
        'suspend billing' => 'SuspendBilling',
        'other billing' => 'OtherBillingInquiry'
    };

    private final Set<Id> productIds;
```

```

private Integer totalProcessed = 0;
private Integer totalCreated = 0;
private Integer totalErrors = 0;

public BillingCaseServiceProcessExtensionBatch(Set<Id> productIds) {
    this.productIds = productIds != null ? productIds : new Set<Id>();
}

public Database.QueryLocator start(Database.BatchableContext bc) {
    return Database.getQueryLocator([
        SELECT Id, SourceId
        FROM Case
        WHERE SourceId != NULL
        AND Id NOT IN (SELECT CaseId FROM CaseServiceProcessExtension)
    ]);
}

public void execute(Database.BatchableContext bc, List<Case> scope) {
    totalProcessed += scope.size();

    // Build CaseId -> SourceId map and collect unique SourceIds for bulk query
    // Filter for ServiceCatalogRequest IDs (prefix '946')
    Map<Id, Id> caseIdToSourceId = new Map<Id, Id>();
    Set<Id> sourceIds = new Set<Id>();
    for (Case c : scope) {
        if (c.SourceId != null && String.valueOf(c.SourceId).startsWith('946')) {
            caseIdToSourceId.put(c.Id, c.SourceId);
            sourceIds.add(c.SourceId);
        }
    }

    // Single merged query: billing text values + 3tt reference records
    List<SvcCatalogReqExtdAttrVal> attrVals = [
        SELECT SvcCatalogRequestId, TextValue
        FROM SvcCatalogReqExtdAttrVal
        WHERE SvcCatalogRequestId IN :sourceIds
        AND (TextValue IN :TEXT_VALUE_TO_SERVICE_PROCESS.keySet()
            OR TextValue LIKE '3tt%')
    ];

    // Step 1: Identify billing ServiceCatalogRequestIds and their ServiceProcess
    Map<Id, String> sourceIdToServiceProcess = new Map<Id, String>();
    for (SvcCatalogReqExtdAttrVal attr : attrVals) {
        if (TEXT_VALUE_TO_SERVICE_PROCESS.containsKey(attr.TextValue)) {
            sourceIdToServiceProcess.put(
                attr.SvcCatalogRequestId,
                TEXT_VALUE_TO_SERVICE_PROCESS.get(attr.TextValue)
            );
        }
    }

    // Step 2: Identify remaining billing cases via ProductId on ServiceCatalogRequest
    Map<Id, String> sourceIdToCustomServiceProcess = new Map<Id, String>();

```

```

    if (!this.productIds.isEmpty()) {
        Set<Id> unmatchedSourceIds = new Set<Id>();
        for (Id sid : sourceIds) {
            if (!sourceIdToServiceProcess.containsKey(sid)) {
                unmatchedSourceIds.add(sid);
            }
        }

        if (!unmatchedSourceIds.isEmpty()) {
            List<SvcCatalogRequest> catalogRequests = [
                SELECT Id, ProductId, Product.Name
                FROM SvcCatalogRequest
                WHERE Id IN :unmatchedSourceIds
                    AND ProductId IN :productIds
            ];

            for (SvcCatalogRequest scr : catalogRequests) {
                String serviceProcess =
deriveServiceProcessFromProductName(scr.Product.Name);
                sourceIdToServiceProcess.put(scr.Id, serviceProcess);
                if (serviceProcess == 'Custom' && scr.Product.Name != null) {
                    sourceIdToCustomServiceProcess.put(scr.Id, scr.Product.Name);
                }
            }
        }
    }

    // Step 3: Extract Invoice ReferenceRecord values for all confirmed billing cases

    Map<Id, Id> sourceIdToReferenceRecord = new Map<Id, Id>();
    for (SvcCatalogReqExtdAttrVal attr : attrVals) {
        if (attr.TextValue != null
            && attr.TextValue.startsWith('3tt')
            && sourceIdToServiceProcess.containsKey(attr.SvcCatalogRequestId)) {
            sourceIdToReferenceRecord.put(attr.SvcCatalogRequestId, (Id) attr.TextValue);
        }
    }

    // Step 4: For invoice charge dispute and other billing enquiries, check for dispute
records
    // and prefer the dispute invoice ID over the text value-based invoice ID.
    Set<Id> disputeServiceProcessCaseIds = new Set<Id>();
    Map<Id, Id> disputeCaseIdToSourceId = new Map<Id, Id>();
    for (Case c : scope) {
        Id sourceId = caseIdToSourceId.get(c.Id);
        if (sourceId != null && sourceIdToServiceProcess.containsKey(sourceId)) {
            String serviceProcess = sourceIdToServiceProcess.get(sourceId);
            if (serviceProcess == 'InvoiceChargeDispute' || serviceProcess ==
'OtherBillingInquiry') {
                disputeServiceProcessCaseIds.add(c.Id);
                disputeCaseIdToSourceId.put(c.Id, sourceId);
            }
        }
    }

```

```

    }

    if (!disputeServiceProcessCaseIds.isEmpty()) {
        List<Dispute> disputes = [
            SELECT Id, CaseId, InvoiceId
            FROM Dispute
            WHERE CaseId IN :disputeServiceProcessCaseIds
            AND InvoiceId != NULL
        ];

        for (Dispute dispute : disputes) {
            // Override with Dispute's InvoiceId (this takes precedence over TextValue)

            Id sourceId = disputeCaseIdToSourceId.get(dispute.CaseId);
            if (sourceId != null) {
                sourceIdToReferenceRecord.put(sourceId, dispute.InvoiceId);
            }
        }
    }

    // Build CaseServiceProcessExtension records
    List<CaseServiceProcessExtension> extensions = new
List<CaseServiceProcessExtension>();
    for (Case c : scope) {
        Id sourceId = caseIdToSourceId.get(c.Id);
        if (sourceIdToServiceProcess.containsKey(sourceId)) {
            CaseServiceProcessExtension ext = new CaseServiceProcessExtension();
            ext.CaseId = c.Id;
            ext.ServiceProcess = sourceIdToServiceProcess.get(sourceId);
            ext.UsageType = 'Billing';
            ext.IntakeMethod = 'External';
            if (sourceIdToReferenceRecord.containsKey(sourceId)) {
                ext.ReferenceRecordId = sourceIdToReferenceRecord.get(sourceId);
            }
            if (sourceIdToCustomServiceProcess.containsKey(sourceId)) {
                ext.CustomServiceProcess = sourceIdToCustomServiceProcess.get(sourceId);
            }
            extensions.add(ext);
        }
    }

    if (!extensions.isEmpty()) {
        List<Database.SaveResult> results = Database.insert(extensions, false);
        for (Database.SaveResult sr : results) {
            if (sr.isSuccess()) {
                totalCreated++;
            } else {
                totalErrors++;
                for (Database.Error err : sr.getErrors()) {
                    System.debug(
                        LoggingLevel.ERROR,
                        'BillingCaseServiceProcessExtensionBatch insert error: ' +
err.getMessage()

```



```

    }
}

public void finish(Database.BatchableContext bc) {
    System.debug(
        LoggingLevel.INFO,
        'BillingCaseServiceProcessExtensionBatch complete. ' +
        'Cases processed: ' + totalProcessed +
        ', Extensions created: ' + totalCreated +
        ', Errors: ' + totalErrors
    );
}

private static String deriveServiceProcessFromProductName(String productName) {
    if (String.isBlank(productName)) {
        return 'Custom';
    }
    String lowerName = productName.toLowerCase();
    for (String keyword : PRODUCT_NAME_KEYWORD_TO_SERVICE_PROCESS.keySet()) {
        if (lowerName.contains(keyword)) {
            return PRODUCT_NAME_KEYWORD_TO_SERVICE_PROCESS.get(keyword);
        }
    }
    return 'Custom';
}
}

```

CreditMemo

Represents a document that's used to reduce the amount that a buyer owes a seller under the terms of an earlier invoice. This object is available in API version 62.0 and later.

Supported Calls

```
describeLayout(), describeObjects(), getDeleted(), getUpdated(), query(), retrieve(), search(),  
update()
```

Special Access Rules

You need the Credit Memo Operations User permission set to access this object.

Fields

Balance

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the credit memo that's available for allocation.

BillToContactId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: This field is inherited from the account's `Bill to Account` field.

This field is a relationship field.

Relationship Name: BillToContact

Refers To: Contact

BillingAccountId

Type: reference

Properties: Filter, Group, Sort, Update

Description: Required. The ID of the customer account associated with this credit memo.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: Account

Category

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether the credit memo is created due to writing off an invoice, converting negative invoice lines, or referencing an existing record.

Valid values are `InvoiceWriteOff`, `Referenced`, or `Standalone`. This field is available in API version 64.0 and later.

CorpCrcyCnvTotAmtWithTax

Type: double

Properties: Filter, Nillable, Sort

Description: The sum of the total amount with tax on the credit memo in corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date on which the credit memo amounts are converted to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort

Description: The exchange rate that's used to convert credit memo amounts to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The currency ISO code of the corporate currency. Available in API version 63.0 and later.

CreationMode

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether the credit memo originated in Salesforce or an external system.

Valid values are `External` or `Salesforce`.

CreditDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when the credit memo was posted.

CreditMemoLockedDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time when the credit memo was locked. This field is available in API version 68.0 and later.

CreditMemoNumber

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The number of the credit memo.

Description

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: Additional details about the credit memo.

DocumentNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the credit memo.

EffectiveDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The effective date of the credit memo. If this field is empty, the credit date is used. For reporting purposes only; this field drives no other logic.

ExternalReference

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: An external system's ID for the credit memo.

ExternalReferenceDataSource

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The name of the external system that also contains the credit memo.

FuncCrcyCnvTotAmtWithTax

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total amount with tax value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the total amount with tax value is converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the total amount with tax value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

IsCreditMemoLocked

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether the credit memo is locked for editing (`true`) or not (`false`). This field is available in API version 68.0 and later.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a credit memo record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a credit memo record. If this value is null, it's possible that the user only accessed the credit memo record or a related list view (`LastReferencedDate`), but not viewed the credit memo record itself.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period record that's related to the credit memo. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity record that's related to the credit memo. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

NetCreditsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total difference between the credit applied to and credit unapplied from the invoice.

This field is a calculated field.

NetRefundsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total refund amount applied to the credit memo after subtracting the total unapplied refund amount. This field is available in API version 68.0 and later.

This field is a calculated field.

OwnerId

Type: reference

Properties: Filter, Group, Sort, Update

Description: Required. The ID of the user who owns a credit memo record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ReasonCode

Type: picklist

Properties: Filter, Group, Nillable, Sort

Description: The reason code for the credit memo's category. For example, BD can be the reason code when the credit memo's category is `InvoiceWriteOff` and the reason for the invoice write-off is bad debt. This field is available in API version 64.0 and later.

ReferenceEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the record that this credit memo was generated from. For example, the order, order summary, or invoice.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntity

Refers To: Invoice, Order

SavedPaymentMethodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the Saved Payment Method record that's used for the credit memo. This field is available in API version 68.0 and later.

This field is a relationship field.

Relationship Name: SavedPaymentMethod

Refers To: SavedPaymentMethod

SettlementLevel

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether the credit memo amount was applied to an invoice or an invoice line.

SourceAction

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies which Salesforce API created the credit memo.

Valid values are `Invoice`, `NegativeInvoiceLineConversion`, `Standalone`, `VoidPostedInvoice`, or `WriteOffPostedInvoice`—Available in API version 64.0 and later.

Status

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the credit memo.

Valid values are:

- `Canceled`
- `Draft`
- `Error`
- `Pending`
- `Posted`
- `Void In Progress`—Available in API version 64.0 and later.
- `Voided`

TotalAdjustmentAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the `TotalAmount` field values for the credit memo's adjustment lines.

This field is a calculated field.

TotalAdjustmentAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the credit memo's adjustment line amounts, including tax. Available in API versions 62.0 and 63.0.

TotalAdjustmentTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the credit memo's adjustment line tax. Adjustment line balances are excluded. Available in API versions 62.0 and 63.0.

TotalAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the credit memo's `TotalLineAmount` and `TotalAdjustmentAmount` field values.

This field is a calculated field.

TotalAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The total credit memo amount, with tax included.

This field is a calculated field.

TotalChargeAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the `TotalAmount` field values for the credit memo's charge lines.

This field is a calculated field.

TotalChargeAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the credit memo's charge line amounts, including tax. Available in API versions 62.0 and 63.0.

TotalChargeTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the credit memo's charge tax amount. Available in API versions 62.0 and 63.0.

TotalTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the `TotalAmount` field values for the credit memo's tax lines.

This field is a calculated field.

TotalTaxesCapturedAtHeader

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The total tax calculated at the transaction header level. Available in API version 66.0 and later.

CreditMemoAddressGroup

Represents the storage of the buyer's address information, which is used to determine the tax credit amount for a buyer when a credit memo is issued. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`

Special Access Rules

You need the Credit Memo Operations User permission set to access this object.

Fields

Address

Type: address

Properties: Filter, Nillable

Description: The buyer's address.

CreditMemoAddressGroupNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the credit memo address group.

CreditMemold

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the credit memo associated with the address group.

This field is a relationship field.

Relationship Name: CreditMemo

Relationship Type: Master-detail

Refers To: CreditMemo (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a credit memo address group record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a credit memo address group record. If this value is null, it's possible that the user only accessed the credit memo address group record or a related list view (`LastReferencedDate`), but not viewed the credit memo address group record itself.

CreditMemoInvApplication

Represents information about the application of a credit memo to an invoice. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Credit Memo Operations User permission set to access this object.

Fields

Amount

Type: currency

Properties: Filter, Sort

Description: Required. The amount of the credit memo that was applied to or unapplied from the invoice.

AppliedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the credit memo was applied. If the credit memo invoice application's type is `Unapplied`, this value is inherited from the `Applied` date of the credit memo referenced in the `AssociatedLineId` field.

AssociatedLineId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the original credit memo invoice application for a credit memo invoice application that represents an unapplied credit memo.

This field is a relationship field.

Relationship Name: AssociatedLine

Refers To: CreditMemoInvApplication

CreditMemoBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of a credit memo after it's applied or unapplied. This field is a snapshot of the credit memo's balance after the action. This field isn't updated after further changes to the credit memo balance.

CreditMemold

Type: reference

Properties: Filter, Group, Sort

Description: Required. The credit memo that was applied or unapplied.

This field is a relationship field.

Relationship Name: CreditMemo

Refers To: CreditMemo

CreditMemoInvoiceNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the credit memo invoice application.

Date

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when the credit memo amount was applied to the invoice.

Description

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: Additional details about the credit memo applied to an invoice.

EffectiveDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The effective date of the application or unapplication of credit. You can provide this value when applying or unapplying the credit memo. This field is optional and provided only for reporting purposes. It doesn't affect the credit memo invoice application's other fields.

HasBeenUnapplied

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether this credit memo application has been unapplied from the target invoice.

Valid values are `NA`, `No`, or `Yes`.

ImpactAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The net adjustment to the invoice's balance after a credit memo is applied or unapplied. If a credit memo was applied, this value is the negative version of the credit memo invoice application's `Amount` field. If a credit memo was unapplied, this value is the positive version of the credit memo invoice application's `Amount` field.

This field is a calculated field.

InvoiceBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the credit memo after a credit memo is applied or unapplied. This field is a snapshot of the credit memo's balance after the action. This field isn't updated after further changes to the credit memo balance.

InvoiceId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The invoice to which the credit memo is applied.

This field is a relationship field.

Relationship Name: Invoice

Relationship Type: Master-detail

Refers To: Invoice (the master object)

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period record that's related to the credit memo invoice application. This field is available in API version 67.0 and later.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntityAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity record that's related to the credit memo invoice application. This field is available in API version 67.0 and later.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Type

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the credit memo line application was generated because of an apply action (application) or an unapply action (unapplication).

Valid values are `Applied` or `Unapplied`.

UnappliedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when this application was unapplied from the target invoice.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CreditMemoInvApplicationFeed on page 2509: Feed tracking is available for the object.

CreditMemoInvApplicationHistory on page 2515: History is available for tracked fields of the object.

CreditMemoLine

Represents the product, service, adjustment, or tax line items included in a credit memo. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Credit Memo Operations User permission set to access this object.

Fields

AdjustmentAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The amount of this credit memo line item if its type is Adjustment.

AdjustmentAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the adjustment amount and the adjustment tax amount. Available in API versions 62.0 and 63.0.

AdjustmentTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the tax related to the adjustment amount. Available in API versions 62.0 and 63.0.

Balance

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the credit memo line available for allocation.

BillingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the billing address related to this credit memo line.

This field is a relationship field.

Relationship Name: BillingAddress

Refers To: CreditMemoAddressGroup

ChargeAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The amount of this credit memo line item if its type is Charge.

ChargeAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the charge amount and the charge tax amount. Available in API versions 62.0 and 63.0.

ChargeTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the tax related to the charge amount. Available in API versions 62.0 and 63.0.

CorpCurrencyCnvChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The amount of the credit memo line item if its type is `Charge` in corporate currency. Available in API version 63.0 and later.

CorpCurrencyCnvTotalTaxAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The sum of the total amount with the tax on the credit memo line in corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the credit memo line amounts are converted to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the credit memo line amounts to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency. Available in API version 63.0 and later.

CreditMemold

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the parent credit memo.

This field is a relationship field.

Relationship Name: CreditMemo

Relationship Type: Master-detail

Refers To: CreditMemo (the master object)

Description

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: Additional details about the credit memo line.

EndDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The description of the credit memo line.

FuncCrcyCnvTotalTaxAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total tax amount value in functional currency. Available in API version 66.0 and later.

FuncCurrencyCnvChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The charge amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the credit memo line amounts are converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert credit memo line amounts into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity accounting period record of the credit memo line.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity record related to the credit memo line.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

LineAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the credit memo line.

This field is a calculated field.

Name

Type: string

Properties: Filter, Group, idLookup, Sort, Update

Description: Required. The name of the credit memo line.

NetCreditsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount applied to invoice lines from the credit memo. This amount is calculated by subtracting the total unapplied credit amount from the total applied credit amount.

This field is a calculated field.

Product2Id

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the product or service being credited in the credit memo line.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

ReferenceEntityItemId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The order product or invoice line corresponding to this credit memo line.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntityItem

Refers To: InvoiceLine, OrderItem

ReferenceEntityType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of transaction that generated the credit memo line.

Valid values are `Delivery Charge`, `Fee`, or `Order Product`.

ReferenceEntityTypeCode

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of object that generated the credit memo line.

Valid values are `Charge` or `Product`.

ShipFromAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The address from which the product in the credit memo line is shipped. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: ShipFromAddress

Refers To: CreditMemoAddressGroup

ShippingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the shipping address.

This field is a relationship field.

Relationship Name: ShippingAddress

Refers To: CreditMemoAddressGroup

StartDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The first date of the billing for the service for credit memo lines generated from a time-based service.

Status

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The status of the credit memo line. This field is inherited from the credit memo.

TaxAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The total tax amount for the credit memo.

TaxTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the tax treatment record for the credit memo line.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

CreditMemoLineInvoiceLine

Represents a junction between a credit memo line and an invoice line. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

You need the Credit Memo Operations User permission set to access this object.

Fields

Amount

Type: currency

Properties: Filter, Sort

Description: Required. The amount that's been applied to or unapplied from the invoice line.

AppliedDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time when the credit memo line was applied to the invoice line.

CreditMemoLineBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the credit memo line after it's applied to or unapplied from the invoice line.

CreditMemoLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the credit memo line record that's applied to or unapplied from the invoice line.

This field is a relationship field.

Relationship Name: CreditMemoLine

Refers To: CreditMemoLine

CreditMemoLineInvoiceLineNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the credit memo line invoice line.

Description

Type: textarea

Properties: Filter, Group, Nillable, Sort, Update

Description: Additional details about the credit memo line invoice line.

EffectiveDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time when the credit memo line's application to or unapplication from the invoice line becomes effective.

ImpactAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The credit memo line invoice line's financial impact against the customer's accounts receivable. If the credit memo line invoice line's type is `Applied`, the impact amount is the negative equivalent of the credit memo line invoice line's amount. Otherwise, the impact amount is equal to the credit memo line invoice line's amount.

This field is a calculated field.

InvoiceLineBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the invoice line after the credit memo line was applied or unapplied.

InvoiceLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the invoice line record to which the credit memo line has been applied or unapplied.

This field is a relationship field.

Relationship Name: InvoiceLine

Relationship Type: Master-detail

Refers To: InvoiceLine (the master object)

InvoiceLineTaxId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The invoice line tax record to which the credit memo line was applied or unapplied. This field is available in API version 68.0 and later.

This field is a relationship field.

Relationship Name: InvoiceLineTax

Refers To: InvoiceLineTax

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity accounting period record related to the credit memo line invoice line.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity record related to the credit memo line invoice line.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

RelatedCrMemoLineInvLineId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the related credit memo line invoice line record of the type `Applied` when the credit memo line invoice line's type is `Unapplied`.

This field is a relationship field.

Relationship Name: RelatedCrMemoLineInvLine

Refers To: CreditMemoLineInvoiceLine

SettlementType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the type of amount settled by the credit memo line that's applied to the invoice line. This field is available in API version 68.0 and later.

Valid values are `Balance`, `Charge`, or `Tax`.

Type

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the credit memo line has been applied to or unapplied from the invoice line.

Valid values are `Applied` or `Unapplied`.

UnappliedDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time when the credit memo line was unapplied from the invoice line.

UnappliedStatus

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the credit memo line has been unapplied from the invoice line.

Valid values are `NA`, `No`, or `Yes`.

CreditMemoLineTax

Represents tax information of a credit memo line of type `Tax`. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

BillingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing address of the parent credit memo line.

This field is a relationship field.

Relationship Name: BillingAddress

Refers To: CreditMemoAddressGroup

CalculationStatus

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the tax calculation.

Valid values are `Complete`, `Error`, or `None`.

The default value is `None`.

CorpCrcyCnvTaxAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total tax amount of the credit memo line tax in corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the credit memo line tax amounts are converted to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the credit memo line tax amounts to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency. Available in API version 63.0 and later.

CreditMemoLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the parent charge or adjustment credit memo line record that a credit memo line tax is related to. This field is a relationship field.

Relationship Name: CreditMemoLine

Relationship Type: Master-detail

Refers To: CreditMemoLine (the master object)

CreditMemoLineTaxNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying a credit memo line tax.

Description

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: Additional details about the credit memo line tax.

EndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The end date of a credit memo line tax.

FuncCrcyCnvTaxAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The tax amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the tax amount value is converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the tax amount value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the legal entity accounting period record that's related to a credit memo line tax.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity record that's related to a credit memo line tax.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Product2Id

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The product or service being credited in the parent credit memo line. Available in API version 62.0 only.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

ReferenceEntityItemId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The invoice line tax corresponding to a credit memo line tax.

This field is a relationship field.

Relationship Name: ReferenceEntityItem

Refers To: InvoiceLineTax

ShipFromAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ship from address specified in the parent credit memo line. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: ShipFromAddress

Refers To: CreditMemoAddressGroup

ShippingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The shipping address of the parent credit memo line.

This field is a relationship field.

Relationship Name: ShippingAddress

Refers To: CreditMemoAddressGroup

StartDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The start date of a credit memo line tax.

TaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of a credit memo line tax.

TaxCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The code that's used to calculate the tax rate for the parent credit memo line.

TaxDocumentNumber

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The document number that's used to calculate the tax rate for the parent credit memo line.

TaxEffectiveDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date used to calculate the tax amount.

TaxName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The user-defined name for a credit memo line tax.

TaxRate

Type: percent

Properties: Filter, Nillable, Sort

Description: The percentage that's used to calculate tax.

TaxTransactionNumber

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The number of the transaction in the external tax engine that calculated tax for the parent credit memo line.

TaxTreatmentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the tax treatment record that's related to a credit memo line tax.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CreditMemoLineTaxFeed on page 2509: Feed tracking is available for the object.

CreditMemoLineTaxHistory on page 2515: History is available for tracked fields of the object.

DebitMemo

Represents the document used to charge an additional amount to a buyer by a seller. An invoice is generated for the debit memo in the next invoice run. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and one of these permission sets to access this object.

- Billing Admin permission set
- Billing Operations User permission set
- Payments Admin permission set
- Payments Operation User permission set
- Credit Memo Operations User permission set

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The account that's related to the debit memo record.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

CorpCrcyCnvTotChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total charge amount of the debit memo in corporate currency.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The exchange date that's used to convert the debit memo amounts into corporate currency.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the debit memo amounts into corporate currency.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the debit memo.

DocumentNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: An autogenerated number assigned to the debit memo record.

FuncCrcyCnvTotChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total charge amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The exchange date that's used to convert the total charge amount value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the total charge amount value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

InvoiceGenerationStatus

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of invoice generation for the debit memo.

Valid values are:

- Draft Invoice Generated
- None
- Posted Invoice Generated
- Processing
- Ready for Invoice Generation
- Not Applicable—Available in API version 66.0 and later.

InvoiceMatchingRefKeyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the product or Asset ID. This key, combined with the account, currency, and legal entity, is used to find a matching invoice. The invoice lines converted from debit memo lines are then added to this matched invoice.

This field is a polymorphic relationship field.

Relationship Name: InvoiceMatchingRefKey

Refers To: Asset, Product2

InvoiceMatchingRefName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the product's name. This text, combined with the account, currency, and legal entity, is used to find a matching invoice. The invoice lines converted from debit memo lines are then added to this matched invoice.

IsManuallyProcessed

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the debit memo lines of the debit memo are converted to invoice lines manually (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a debit memo address group record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a debit memo address record. If this value is null, it's possible that the user only accessed the debit memo address record or a related list view (`LastReferencedDate`), but not viewed the debit memo address record itself.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity record that's related to the debit memo.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

NextBillingDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date indicates when the next billing period begins for the debit memo. This date is used to determine when invoices are created for the debit memos. When the invoice scheduler or API evaluates debit memos to generate invoices, those with a next billing date on or before the user-specified target date are included in the invoice batch run.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of this object.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PostedDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when the debit memo is posted.

ReasonCode

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Specifies a dynamic picklist of reasons for generating debit memos.

ReferenceRecord

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The record ID associated with the debit memo record. The record ID is a credit memo record. Available in API version 66.0 and later.

This field is a polymorphic relationship field.

Relationship Name: InvoiceMatchingRefKey

Refers To: Credit Memo

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the debit memo.

Valid values are:

- Canceled
- Draft
- Posted
- Void
- Pending—Available in API version 66.0 and later.
- Error—Available in API version 66.0 and later.

TotalAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the debit memo's TotalLineAmount and TotalAdjustmentAmount field values. Available in API version 66.0 and later.

This field is a calculated field.

TotalChargeAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the charge amount field values of the debit memo lines.

This field is a calculated field.

TotalTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the TotalAmount field values for the debit memo's tax lines. Available in API version 66.0 and later.

This field is a calculated field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

DebitMemoFeed on page 2509: Feed tracking is available for the object.

DebitMemoHistory on page 2515: History is available for tracked fields of the object.

DebitMemoOwnerSharingRule on page 2516: Sharing rules are available for the object.

DebitMemoShare on page 2517: Sharing is available for the object.

DebitMemoAddress

Represents the buyer's address information, which is used to determine the tax amount for a buyer when a debit memo is issued. This object is available in API version 65.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and one of these permission sets to access this object.

- Billing Admin permission set
- Billing Operations User permission set

- Payments Admin permission set
- Payments Operation User permission set
- Credit Memo Operations User permission set

Fields

Address

Type: address

Properties: Filter

Description: The billing or shipping address of the debit memo.

DebitMemoAddressNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: The auto-generated reference number for the debit memo address.

DebitMemold

Type: reference

Properties: Create, Filter, Group, Sort

Description: The ID of the debit memo associated with the address.

This field is a relationship field.

Relationship Name: DebitMemo

Relationship Type: Master-detail

Refers To: DebitMemo (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a debit memo address record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a debit memo address record. If this value is null, it's possible that the user only accessed the debit memo address record or a related list view (`LastReferencedDate`), but not viewed the debit memo address record itself.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

DebitMemoAddressHistory on **page 2515**: History is available for tracked fields of the object.

DebitMemoLine

Represents the additional charge amount that the buyer must pay for the product, service, or debit memo line tax that's related to the debit memo. This object is available in API version 65.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and one of these permission sets to access this object.

- Billing Admin permission set
- Billing Operations User permission set
- Payments Admin permission set
- Payments Operation User permission set
- Credit Memo Operations User permission set

Fields

BillingAddressId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The billing address record that's related to the debit memo line.

This field is a relationship field.

Relationship Name: BillingAddress

Refers To: DebitMemoAddress

ChargeAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: The amount of the debit memo line item.

CorpCurrencyCnvChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The charge amount of the debit memo line in corporate currency.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the debit memo line amounts are converted into corporate currency.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert debit memo line amounts into corporate currency.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency.

DebitMemold

Type: reference

Properties: Create, Filter, Group, Sort

Description: The parent debit memo record that's related to the debit memo line record.

This field is a relationship field.

Relationship Name: DebitMemo

Relationship Type: Master-detail

Refers To: DebitMemo (the master object)

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the debit memo line.

EndDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The end date of the debit memo line that determines which billing cycle it must be associated with.

FuncCrcyCnvTotalTaxAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total tax amount value in functional currency. Available in API version 66.0 and later.

FuncCrcyCnvChargeAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The charge amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the debit memo line amounts is converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the debit memo line amounts into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a debit memo address record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a debit memo address record. If this value is null, it's possible that the user only accessed the debit memo address record or a related list view (`LastReferencedDate`), but not viewed the debit memo address record itself.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period record that's related to the debit memo line.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity record that's related to the debit memo line.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: An auto-generated name assigned to the debit memo line.

Product2Id

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the product or service being debited in the debit memo line.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

ReferenceRecordId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The record ID associated with the debit memo line record. The record ID is an asset, invoice line, contract, or refund record.

This field is a polymorphic relationship field.

Relationship Name: ReferenceRecord

Refers To: Asset, Contract, InvoiceLine, Refund, Credit Memo Line

ShippingAddressId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The shipping address record that's related to the debit memo line.

This field is a relationship field.

Relationship Name: ShippingAddress

Refers To: DebitMemoAddress

StartDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The start date of the debit memo line that determines which billing cycle it must be associated with.

TaxTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the tax treatment record that's related to the debit memo line.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

DebitMemoLineFeed on page 2509: Feed tracking is available for the object.

DebitMemoLineHistory on page 2515: History is available for tracked fields of the object.

DebitMemoLineTax

Represents the tax information for a debit memo line. This object is available in API version 66.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need Revenue Cloud Billing license and the Tax Admin permission set to access this object.

Fields

BillingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The billing address specified in the parent debit memo line.

This field is a relationship field.

Relationship Name: BillingAddress

Refers To: DebitMemoAddress

CurrencyIsoCode

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Required. The currency ISO code of the corporate currency.

DebitMemoLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The parent debit memo line that the debit memo tax line is related to.

This field is a relationship field.

Relationship Name: DebitMemoLine

Relationship Type: Master-detail

Refers To: DebitMemoLine (the master object)

DebitMemoLineTaxNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number that identifies a debit memo line tax.

Description

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The description of the debit memo line tax.

EndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The end date of the debit memo line tax that determines which billing cycle it's associated with.

JurisdictionTaxCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The code of the jurisdiction that's used to calculate the tax rate for the parent debit memo line.

JurisdictionTaxName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The user-defined name for the debit memo line tax.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a debit memo line tax record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a debit memo line tax record. If this value is null, it's possible that the user only accessed the debit memo line tax record or a related list view (`LastReferencedDate`), but not viewed the debit memo line tax record itself.

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The legal entity accounting period record associated with the debit memo line.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The legal entity record associated with the debit memo line.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

ShipFromAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The shipping address specified in the parent debit memo line.

This field is a relationship field.

Relationship Name: ShipFromAddress

Refers To: DebitMemoAddress

StartDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The start date of the debit memo line tax that determines which billing cycle it's associated with.

TaxAmount

Type: currency

Properties: Filter, Sort

Description: Required. The total amount of the debit memo line tax.

TaxRate

Type: percent

Properties: Filter, Nillable, Sort

Description: The percentage that's used to calculate tax amount based on the charge amount.

TaxTransactionNumber

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The transaction number in the external tax engine that calculated the tax for the parent debit memo line.

GeneralLedgerAccount

Represents information about the accounting codes, types, and names that are used to store and organize financial transactions. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and the Accounts Receivables Admin permission set to access this object.

Fields

AccountingCode

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The code that's used to organize information about the general ledger account.

AccountingName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The user-specified name for the general ledger account.

AccountingType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The accounting type for the general ledger account.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the general ledger account.

FinancialStatement

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The financial statement that's created by using the information from the general ledger account.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity that's related to the general ledger account.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Filter, Group, idLookup, Sort

Description: An auto-generated name identifying the general ledger account, which is a combination of the accounting code and the account name.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of this object or ID of the creator of this object.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the accounting type for the general ledger account. This field is available in API version 65.0 and later.

Valid values are:

- Asset
- Liability
- Equity

- Revenue
- Expense
- Others

GeneralLedgerAcctAsgntRule

Represents information about the rule based on which general ledger accounts are assigned to transaction journals that are created for billing transactions. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and the Accounts Receivables Admin permission set to access this object.

Fields

CreditGeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The general ledger account for a credit transaction that's related to the general ledger account assignment rule.

This field is a relationship field.

Relationship Name: CreditGeneralLedgerAccount

Refers To: GeneralLedgerAccount

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The currency code of the general ledger account assignment rule for Salesforce orgs with multicurrency enabled.

Valid values are `AUD`—Australian Dollar, `EUR`—Euro, `SGD`—Singapore Dollar, or `USD`—U.S. Dollar The default value is `USD`.

DebitGeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The general ledger account for a debit transaction that's related to the general ledger account assignment rule.

This field is a relationship field.

Relationship Name: DebitGeneralLedgerAccount

Refers To: GeneralLedgerAccount

FilterCriteria

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The filter criteria for the general ledger account assignment rule.

Valid values are `All`, `Any`, or `Custom`.

FilterLogic

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The filter logic for the general ledger account assignment rule when the filter criteria is `Custom`. Transaction journals are created for the transactions of the selected type that meet the defined filter logic.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity that's related to the general ledger account assignment rule.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: A user-defined name for the general ledger account assignment rule.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: The ID of the owner of the general ledger account assignment rule record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Priority

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The priority of the general ledger account assignment rule when there are multiple general ledger account assignment rules defined for a transaction type.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the general ledger account assignment rule.

Valid values are `Active` or `Inactive`.

TransactionAmountField

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The amount field on the transaction type that's used to record the credit or debit amount in the transaction journals that are generated for that specific transaction type. This field is available in API version 64.0 and later.

TransactionType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The transaction type that's related to the general ledger account assignment rule.

Valid values are:

- `CreditMemo`
- `CreditMemoInvApplication`
- `CreditMemoLine`
- `CreditMemoLineInvoiceLine`
- `CreditMemoLineTax`
- `DebitMemoLine`—Available in API version 65.0 and later.
- `Invoice`

- `InvoiceLine`
- `InvoiceLineTax`
- `Payment`—Available in API version 64.0 and later.
- `PaymentLineInvoice`—Available in API version 64.0 and later.
- `PaymentLineInvoiceLine`—Available in API version 64.0 and later.
- `Refund`—Available in API version 64.0 and later.
- `RefundLinePayment`—Available in API version 64.0 and later.

GeneralLdgrAcctPrdSummary

Represents a junction between a general ledger account and a legal entity accounting period. Stores information about the total credit amount, total debit amount, opening balance, and closing balance of a general ledger account for a specific legal entity accounting period. This object is available in API version 65.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and the Accounts Receivables Admin permission set to access this object.

Fields

ClosingBalanceAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The closing balance amount for a general ledger accounting period summary is calculated based on the general ledger account's type. For asset and expense type general ledger accounts, it's the opening balance amount plus total debit amount minus total credit amount. For liability, equity, and revenue type general ledger accounts, it's the opening balance amount plus total credit amount minus total debit amount.

GeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The general ledger account that's related to the general ledger accounting period summary.

This field is a relationship field.

Relationship Name: GeneralLedgerAccount

Relationship Type: Master-detail

Refers To: GeneralLedgerAccount (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed general ledger accounting period summary record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed general ledger accounting period summary record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The legal entity accounting period that's related to the general ledger account.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

OpeningBalanceAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: The opening balance is the same as the closing balance of the previous general ledger account period summary.

TotalCreditAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: The sum of the credit fields from all transaction journals of the general ledger account for a specific legal entity accounting period.

TotalDebitAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: The sum of the debit fields from all transaction journals of the general ledger account for a specific legal entity accounting period.

GeneralLedgerJrnlEntryRule

Represents information about the transaction journal entry rule, based on which transaction journals are created for the selected credit and debit general ledger accounts, transaction amount field, and percentage. This object is available in API version 65.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need Revenue Cloud Billing license and the Accounts Receivables Admin permission set to access this object.

Fields

CreditGeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The general ledger account for a credit transaction.

This field is a relationship field.

Relationship Name: CreditGeneralLedgerAccount

Refers To: GeneralLedgerAccount

DebitGeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: The general ledger account for a debit transaction.

This field is a relationship field.

Relationship Name: DebitGeneralLedgerAccount

Refers To: GeneralLedgerAccount

GeneralLedgerAcctAsgntRuleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The general ledger account assignment rule that's related to the general ledger journal entry rule.

This field is a relationship field.

Relationship Name: GeneralLedgerAcctAsgntRule

Relationship Type: Master-detail

Refers To: GeneralLedgerAcctAsgmtRule (the master object)

Percentage

Type: percent

Properties: Create, Filter, Sort, Update

Description: The percentage of the amount field value that's used to record the credit or debit amount in the transaction journals generated for the general ledger journal entry rule.

TransactionAmountField

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The amount field on the transaction type that's used to record the credit or debit amount in the transaction journals generated for that specific transaction type.

InvBatchDraftToPostedRun

Represents information about the batch job that posts all invoices with the status as `Draft` that are generated by the invoice batch run associated with the billing schedule. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

You need the Billing Operations User permission set to access this object.

Fields

BatchJobId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The batch management job that's used to track the progress of the invoice batch run.

This field is a relationship field.

Relationship Name: BatchJob

Refers To: BatchJob

Comments

Type: textarea

Properties: Filter, Nillable, Sort, Update

Description: Additional notes or comments for the invoice batch draft to posted run record.

CompletionDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The completion date and time of this invoice batch draft to posted run process.

CreditApplicationStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of a credit application to the invoices that are posted by the invoice batch draft to posted run process.

Valid values are Completed, Failed, or NotApplicable.

InvBatchDraftToPostedRunNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated number of the invoice batch draft to posted run record.

InvoiceBatchRunId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the invoice batch run record associated with the invoice batch draft to posted run record.

This field is a relationship field.

Relationship Name: InvoiceBatchRun

Relationship Type: Master-detail

Refers To: InvoiceBatchRun (the master object)

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an invoice batch draft to posted run record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed an invoice batch draft to posted run record. If this value is null, it's possible that the user only accessed the invoice batch draft to posted run record or a related list view (`LastReferencedDate`), but not viewed the invoice batch draft to posted run record itself.

StartDateTime

Type: dateTime

Properties: Filter, Sort

Description: Required. The start date and time of the invoice batch draft to posted run process.

Status

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Required. The status of the invoice batch draft to posted run record.

Valid values are `Completed`, `CompletedWithErrors`, `Failed`, or `Started`.

The default value is `Started`.

TotalDraftInvoicesSelected

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices that are selected to be processed by the invoice batch draft to posted run process.

TotalInvoiceAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of all the invoices posted by the invoice batch draft to posted run process.

TotalInvoicesFailed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices that the invoice batch draft to posted run process failed to post.

TotalPostedInvoices

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices posted by the invoice batch draft to posted run process.

Invoice

Represents information about a financial document describing the total amount a buyer must pay for provided products or services. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Operations User permission set to access this object.

Fields

Balance

Type: currency

Properties: Filter, Nillable, Sort

Description: The outstanding balance of an invoice. The balance is equal to the invoice's total amount with tax, excluding payments and adjustments.

BalanceValue

Type: double

Properties: Filter, Nillable, Sort

Description: The balance value is derived from an existing balance field in an invoice. Available in API version 65.0 and later.

This field is a calculated field.

BillToContactId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The bill to contact ID of the account that's related to an invoice.

This field is a relationship field.

Relationship Name: BillToContact

Refers To: Contact

BillingAccountId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the customer account related to an invoice.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: Account

BillingArrangementId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the billing arrangement record used to generate the invoice. Available in API version 66.0 and later.

This field is a relationship field.

Relationship Name: BillingArrangement

Refers To: BillingArrangement

BillingAccountId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The billing account for which the invoice is generated. Available in API version 66.0 and later.

This field is a relationship field.

Relationship Name: BillingAccount

Refers To: BillingAccount

BillingArrangementVerNumber

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The version number of the billing arrangement record that's used to generate the invoice. Available in API version 66.0 and later.

This field is an autogenerated field.

CorrelationIdentifier

Type: string

Properties: Filter, Group, Nillable, Sort

Description: A unique identifier that's used to associate and track invoices that are generated based on the same billing arrangement. Available in API version 66.0 and later.

This field is an autogenerated field.

CorpCrcyCnvTotAmtWithTax

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The sum of the total amount with tax on the related invoice lines in corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the invoice's total amount with tax was converted to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert invoice's total amount with tax to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency. Available in API version 63.0 and later.

DaysInvoiceOpen

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of days from the day an invoice was created to the day it was paid.

This field is a calculated field.

DaysInvoiceOverdue

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of days since the date when the payment for an invoice was due.

This field is a calculated field.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the invoice.

DocumentNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying an invoice.

DueDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: Required. The date by when the customer must pay an invoice.

FullSettlementDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when the customer has paid an invoice in full.

FuncCrcyCnvTotAmtWithTax

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The functional currency converted to total amount with tax based on the dated exchange rate. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date at which the exchange rate is used for functional currency conversions. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used for functional currency conversions. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

InvBatchDraftToPostedRunId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the invoice batch to posted run record that generated a posted invoice from a draft invoice.

This field is a relationship field.

Relationship Name: InvBatchDraftToPostedRun

Refers To: InvBatchDraftToPostedRun

InvoiceBatchRunId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the invoice batch run record that generated an invoice.

This field is a relationship field.

Relationship Name: InvoiceBatchRun

Refers To: InvoiceBatchRun

InvoiceDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: Required. The date when an invoice was posted. The payment term's net is added to this date to calculate the invoice's due date. For example, an invoice with an invoice date of 04/01 and the related payment term's period as 30 days has a due date of 05/01.

InvoiceLockedDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time at which an invoice is locked.

InvoiceNumber

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Required. The user-specified reference number for the invoice.

IsBillingScheduleGroupSkipped

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the invoice is generated from a billing transaction directly and if the billing schedule group wasn't created for the transaction (`true`), or if the invoice is generated from the billing schedule group that was created for the transaction (`false`).

The default value is `false`. Available in API version 63.0 and later.

IsInvoiceLocked

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether an invoice is locked for editing (`true`) or not (`false`).

The default value is `false`.

LastEmailDispatchStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates the dispatch status of the last email that was sent for the invoice. Available in API version 65.0 and later.

Valid values are:

- Failed
- Sent With Invoice Document
- Sent Without Invoice Document

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an invoice record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed an invoice record. If this value is null, it's possible that the user only accessed the invoice record or a related list view (`LastReferencedDate`), but not viewed the invoice record itself.

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period record that's related to the invoice. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntityAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The legal entity used in this invoice. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

NetCreditsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The net credits applied to an invoice. This amount is calculated by subtracting the sum of all the unapplied lines from the sum of all the applied lines.

This field is a calculated field.

NetPaymentsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The net payments applied to an invoice. This field is visible from API version 62.0 but can only be used from API version 64.0 and later with the Revenue Cloud Billing license.

This field is a calculated field.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the user who owns an Invoice record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentExclusionReason

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The reason for skipping the creation of payment schedules and payment schedule items for the invoice. Available in API version 64.0 and later with the Revenue Cloud Billing license.

PaymentScheduleId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the payment schedule record that's related to the invoice. Available in API version 67.0 and later.

This field is a relationship field.

Relationship Name: PaymentSchedule

Refers To: PaymentSchedule

PaymentTermId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payment term used for an invoice.

This field is a relationship field.

Relationship Name: PaymentTerm

Refers To: PaymentTerm

PostedDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when an invoice was posted.

ReferenceEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the Debit Memo, Credit Memo, or Order record that created an invoice.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntity

Refers To: DebitMemo, CreditMemo, Order

SavedPaymentMethodId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the Saved Payment Method record that's used for the invoice. Available in API version 64.0 and later with the Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: SavedPaymentMethod

Refers To: SavedPaymentMethod

SequencePolicyId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The sequence policy associated with the invoice. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: SequencePolicy

Refers To: SequencePolicy

SettlementLevel

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The level at which the credit was applied.

Valid values are `Invoice` or `InvoiceLine`.

SettlementStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of an invoice's payment.

Valid values are `Not Applicable`, `Not Settled`, `Partially Settled`, or `Settled`.

ShouldExcludePayment

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether to skip creating payment schedules and payment schedule items for the invoice (`true`). Available in API version 64.0 and later with the Revenue Cloud Billing license.

The default value is `false`.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of an invoice.

Valid values are:

- `Canceled`— Indicates that the invoice was generated and later canceled.
- `Draft`— Indicates that the invoice is a draft.
- `Draft In Progress`— Indicates that the draft invoice is in progress.
- `Error`— Indicates that an error occurred when processing the invoice.
- `Pending`— Indicates that the invoice is being processed.
- `Posted`— Indicates that the invoice has been generated and sent to the customer.

- **Posting In Progress**—Indicates that the invoice posting is in progress.
- **Void In Progress**—Indicates that the invoice is pending a status change.
- **Voided**—The invoice's status after the API successfully voids the invoice.

TotalAdjustmentAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the invoice's adjustment line amounts.

This field is a calculated field.

TotalAdjustmentAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the invoice's adjustment line amounts, including tax.

TotalAdjustmentTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of tax applied to the invoice line's adjustment lines.

TotalAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the total amount on the invoice's lines.

This field is a calculated field.

TotalAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the total amount with tax on the invoice's lines.

This field is a calculated field.

TotalChargeAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the amount fields on the invoice's charge-type invoice lines.

This field is a calculated field.

TotalChargeAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the amount fields on the invoice's charge-type invoice lines, including tax.

TotalChargeTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of tax applied to the invoice's charge lines.

TotalConvertedNegAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of all negative invoice lines that were converted to a credit memo. For example, if one negative invoice line was for -\$10 and one was for -\$15, the total amount that's converted to a credit memo is -\$25.

This field is a calculated field.

TotalTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of the tax amount on the invoice lines.

This field is a calculated field.

TotalTaxesCapturedAtHeader

Type: currency

Properties: Filter, Nillable, Sort

Description: The total tax amount for the invoice, captured at the header level by the tax engine. Available in API version 66.0 and later.

UniquelIdentifier

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: The unique identifier of an externally ingested invoice that's used to ensure that duplicate invoices aren't inserted. Available in API version 63.0 and later.

WriteOffStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the invoice write-off request.

This field is unique within your organization.

Valid values are `Completed`, `Failed`, or `InProgress`. Available in API version 64.0 and later. This field is available in API version 64.0 and later with the Revenue Cloud Billing license.

WriteOffTotalChargeAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total charge amount of the invoice that's written off.

This field is unique within your organization. This field is available in API version 64.0 and later with the Revenue Cloud Billing license.

WriteOffTotalTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total tax amount of the invoice that's written off.

This field is unique within your organization. This field is available in API version 64.0 and later with the Revenue Cloud Billing license.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceFeed on **page 2509**: Feed tracking is available for the object.

InvoiceHistory on **page 2515**: History is available for tracked fields of the object.

InvoiceShare on **page 2517**: Sharing is available for the object.

InvoiceAddressGroup

Represents the storage of the buyer's address information. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`

Special Access Rules

You need the Billing Operations User permission set to access this object.

Fields

Address

Type: address

Properties: Filter, Nillable

Description: The buyer's address. See [Compound Field Considerations and Limitations](#) for details on geolocation compound fields.

InvoiceAddressGroupNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the invoice address group.

Invoiceld

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the invoice associated with the address group.

This field is a relationship field.

Relationship Name: Invoice

Relationship Type: Master-detail

Refers To: Invoice (the master object)

InvoiceBatchRun

Represents a batch processing job in Billing. During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BatchJobId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The batch management job that's used to track the progress of the invoice batch run. This field is available in API version 67.0 and later.

This field is a relationship field.

Relationship Name: BatchJob

Refers To: BatchJob

BillingBatchSchedulerId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the related billing batch scheduler.

This field is a relationship field.

Relationship Name: BillingBatchScheduler

Refers To: BillingBatchScheduler

Comments

Type: textarea

Properties: Filter, Nillable, Sort, Update

Description: Additional notes or comments for the invoice batch run.

CompletionTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the invoice batch run finished processing.

CreditApplicationStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of applying credit memos or credit memo lines to invoices or invoice lines during invoices batch runs.

Valid values are:

- Completed
- Failed
- NotApplicable

DocGenCompletionTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The completion time of generating invoice documents by the invoice batch run.

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

DocGenerationBatchProcessId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the document generation batch process that's used to generate documents for this invoice batch run. This field is available in API version 68.0 and later.

This field is a relationship field.

Relationship Name: DocGenerationBatchProcess

Refers To: DocGenerationBatchProcess

DocGenStartTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The start time of generating invoice documents by the invoice batch run.

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

DocGenStatus

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the invoice documents generated by the invoice batch run.

Valid values are: The default value is `Not Started`.

- `Canceled`
- `Completed`
- `Failed`
- `In Progress`
- `Not Started`
- `Paused`

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

ForecastRunDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The start date of the forecast invoice batch run. This field is available in API version 68.0 and later.

ForecastTargetDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The end date of the forecast invoice batch run. This field is available in API version 68.0 and later.

InvoiceBatchRunNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the invoice batch run.

InvoiceDocsGenFailed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of invoice documents that the invoice batch run failed to generate.

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

InvoiceDocsGenerated

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of invoice documents that the invoice batch run generated.

This field is available in API version 63.0 and later with Revenue Cloud Billing license.

JobType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the job type for the batch run. This field is available in API version 68.0 and later.

Valid values are `Catchup`, `Forecast`, `Invoice`, or `Payment`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an invoice batch run record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed an invoice batch run record. If this value is null, it's possible that the user only accessed the invoice batch run record or a related list view (`LastReferencedDate`), but not viewed the invoice batch run record itself.

OwnerId

Type: reference

Properties: Filter, Group, Sort, Update

Description: Required. The ID of the user who created the related billing batch scheduler.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

RecoveryStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the invoice batch run recovery process.

Valid values are:

- **CompletelyRecovered**—All billing schedules included in the recovery run were reset to **Ready for Invoicing**. These billing schedules are included in the next scheduled invoice batch run.
- **PartiallyRecovered**—Some, but not all, billing schedules that were part of the recovery run were reset to **Ready for Invoicing**. The billing schedules that were recovered are included in the next scheduled invoice batch run. The billing schedules that weren't successfully recovered must be manually reset to **Ready for Invoicing** so they can be processed.
- **RecoveryFailed**—The recovery job was unsuccessful.
- **RecoveryStarted**—The recovery job is in progress.

StartTime

Type: dateTime

Properties: Filter, Sort

Description: Required. The timestamp when the invoice batch run started processing.

Status

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Required. The status of the invoice batch run.

Valid values are **Canceled**, **Completed**, **Failed**, **Started**, or **Stopped**.

The default value is **Started**.

StatusSubtype

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status subtype of the invoice batch run. The subtype corresponds to the status of the invoice batch run.

Valid values are: Available in API version 63.0 and later.

- **Billing Schedules Filtering Started**—The data processing engine (DPE) selection service has started. The selection service includes the Billing Schedule records that meet the conditions defined when scheduling the invoice run.

- **Billing Schedules Filtering In Progress**—The invoice run is identifying the billing schedules to include for invoice generation.
- **Billing Schedules Filtering Completed**—The invoice run has identified the billing schedules to include for invoice generation.
- **Invoice Generation Started**—The invoice generation service has started.
- **Invoice Generation In Progress**—The invoice run is generating invoices for the identified billing schedules.
- **Invoice Generation Completed**—The invoice run has finished generating invoices for the identified billing schedules.
- **Invoice Tax Calculation In Progress**—The tax calculation step has started.
- **Billing Schedule and Billing Schedule Group Updates In Progress**—The post processing step has started.
- **Forecast Generation Started**—The forecast generation service has started. Available in API version 68.0 and later.
- **Forecast Generation In Progress**—The invoice run is generating forecast lines. Available in API version 68.0 and later.
- **Forecast Generation Completed**—The invoice run has finished generating forecast lines. Available in API version 68.0 and later.
- **Catch-Up Billing Schedules Started**—The catch-up bill run has started creating billing schedules. Available in API version 68.0 and later.
- **Catch-Up Billing Schedules In Progress**—The catch-up bill run is creating billing schedules. Available in API version 68.0 and later.
- **Catch-Up Billing Schedules Completed**—The catch-up bill run has finished creating billing schedules. Available in API version 68.0 and later.
- **Catch-Up Billing Schedules Summarization In Progress**—The catch-up billing schedules summarization step has started. Available in API version 68.0 and later.
- **Invoice Generation Summarization In Progress**—The invoice generation summarization step has started.
- **Completed**—The invoice batch run has completed successfully.
- **Failed**—The invoice batch run was unsuccessful.

TotalForecastedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total charge amount of all billing forecast lines generated during the batch run. This field is blank when the batch run processes multiple currencies. This field is available in API version 68.0 and later.

TotalForecastLines

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of billing forecast lines that are generated for the forecast invoice batch run. This field is available in API version 68.0 and later.

TotBillSchdUpdtDurDrftToPost

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total duration taken to update the billing schedule from `Draft` to `Posted` status during an invoice batch run.

TotalBillSchedRecovered

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of billing schedules that were a part of the recovery run that were reset to `Ready for Invoicing`. These billing schedules are included in the next scheduled invoice batch run.

TotalBillSchedUnrecovered

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of billing schedules that were a part of the recovery run that weren't reset to `Ready for Invoicing`. These billing schedules that weren't successfully recovered must be manually reset to `Ready for Invoicing` so they can be processed.

TotalBillingSchedulesFailed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of billing schedules that weren't successfully processed. When a billing schedule isn't successfully processed, then the system doesn't generate an invoice for it. For details about errors, check the Revenue Transaction Error Log.

TotalBsSuccessfullyProcessed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of billing schedules for which the system was able to generate and process invoices.

TotalDraftInvoiceAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of all invoices in the `Draft` status.

TotalDraftInvoices

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices in the `Draft` status.

TotalFilteredBillingSchedules

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of billing schedules that met the invoice run scheduler's matching criteria. The matching criteria specify which billing schedules are included in the invoice batch run. The field label is **Total Matching Billing Schedules**.

TotalInvSuccessfullyProcessed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices that were successfully processed.

TotalInvoicedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount of income including taxes that's represented by the successfully processed invoices.

TotalInvoicesCanceled

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices that weren't processed. To find out what went wrong, check the Revenue Transaction Error Log. Then fix the errors and run the invoice batch run recovery process.

TotalInvoicesFailed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices that weren't processed successfully. To find out what went wrong, check the Revenue Transaction Error Log. Then fix the errors and run the invoice batch run recovery process.

TotalInvoicesGenerated

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices that were generated from the billing schedules processed by the invoice batch run.

TotalPostedInvoices

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of invoices in `Posted` status that were generated from the billing schedules.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceBatchRunHistory: History is available for tracked fields of the object.

InvoiceBatchRunShare: Sharing is available for the object.

InvoiceBatchRunCriteria

Represents a batch processing job and its required criteria in Billing. During an invoice batch run, all billing schedules that meet the specified criteria are processed, resulting in the generation of invoices. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BillingCycleCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of billing periods to process per billing schedule. Billing schedules are invoiced for the specified number of billing periods, regardless of a target date. This field is available in API version 68.0 and later.

Comments

Type: textarea

Properties: Filter, Nillable, Sort

Description: Additional notes or comments for the invoice batch run criteria.

CriteriaExpression

Type: textarea

Properties: Filter, Nillable, Sort

Description: The formula that specifies criteria for filtering the billing schedules. For example, you can filter billing schedules by the currency code.

CriteriaMatchType

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Required. The type of matching criteria required for the batch.

Valid value is `MatchAll`.

The default value is `MatchAll`.

ExpectedInvoiceStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of invoice a batch run generates.

Valid values are `Draft` or `Posted`.

InvoiceBatchRunCriteriaNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the invoice batch run criteria.

InvoiceDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date displayed on the invoice. This date is also used for tax calculations.

InvoiceDateOffset

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The offset that's applied to the target date to calculate the invoice date.

IsInvoiceDateFromRunDate

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether the invoice date is derived from the run date (`true`) or not (`false`).

The default value is `false`. Available in API version 63.0 and later.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the user who created the invoice batch run criteria.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ShouldCatchUpBillRun

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether the invoice batch run advances billing schedules to a target date without generating invoices for prior billing periods (`true`) or not (`false`). This field is available in API version 68.0 and later.

The default value is `false`.

ShouldRecalculateAllForecastLn

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether to include all billing schedules in the billing forecast run (`true`) or not (`false`). This field is available in API version 68.0 and later.

The default value is `false`.

TargetDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The target date for the invoice run. Billing schedules having the next billing date on or before this date will be picked up for invoicing.

TargetDayOfMonth

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The day of the month to be used as the target date. Billing schedules with next billing date on or before this target date are selected for invoice generation. For example, if this value is set to the 10th, all schedules with a next billing date of 10th of the corresponding month or earlier are included in the invoice batch run. This field is available in API version 68.0 and later.

TargetMonthOffset

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number of months offset applied to the scheduled run date to calculate the target date. A value of 0 uses the current month, a positive value offsets forward, and a negative value offsets backward. For example, if the run date is 10th July and Target Day of Month is 15, then Target Date would be 15th July if Target Month Offset is 0, 15th August if Target Month Offset is 1, and so on. This field is available in API version 68.0 and later.

TargetDateOffset

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The offset that's applied to the next run date to calculate the target date.

InvoiceBatchRunRecovery

Represents information about the recovery procedure of an invoice batch run. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

BatchJobId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The batch management job that's used to track the progress of the invoice batch run.

This field is a relationship field.

Relationship Name: BatchJob

Refers To: BatchJob

Comments

Type: textarea

Properties: Filter, Nillable, Sort, Update

Description: Additional notes or comments for the invoice batch run recovery.

CompletionTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the invoice batch run recovery finished processing.

InvoiceBatchRunId

Type: reference

Properties: Filter, Group, Sort

Description: Required. A unique identifier of the invoice batch run that's related to this recovery run.

This field is a relationship field.

Relationship Name: InvoiceBatchRun

Relationship Type: Master-detail

Refers To: InvoiceBatchRun (the master object)

InvoiceBatchRunRecoveryNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. A unique identifier of the recovery process for the invoice batch run.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an invoice batch run recovery record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed an invoice batch run recovery record. If this value is null, it's possible that the user only accessed the invoice batch run recovery record or a related list view (`LastReferencedDate`), but not viewed the invoice batch run recovery record itself.

StartTime

Type: dateTime

Properties: Filter, Sort

Description: Required. The timestamp when the invoice batch run recovery started processing.

Status

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Required. The final state of the recovery process for the invoice batch runs.

Valid values are `Completed`, `CompletedWithErrors`, `Failed`, or `Started`.

The default value is `Started`.

InvoiceDocument

Represents the PDF document generated for an invoice. This object is available in API version 63.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need Revenue Cloud Billing license, and the Billing Admin permission set or the Billing Operations User permission set to access this object.

Fields

ContentDocumentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the generated PDF document.

This field is a relationship field.

Relationship Name: ContentDocument

Refers To: ContentDocument

DateGenerated

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date on which the PDF is generated.

DocumentGenerationProcessId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the document generation process that contains the information used to create the PDF invoice.

This field is a relationship field.

Relationship Name: DocumentGenerationProcess

Refers To: DocumentGenerationProcess

DocumentNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. A unique number assigned to the PDF invoice document.

ErrorMessage

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Any errors that occur during PDF generation.

InvoiceId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the Invoice to which the Invoice Doc is attached.

This field is a relationship field.

Relationship Name: Invoice

Relationship Type: Master-detail

Refers To: Invoice (the master object)

Status

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the PDF generation process.

Valid values are `Blocked`, `Cancelled`, `Failure`, `Pending`, or `Success`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceDocumentFeed on page 2509: Feed tracking is available for the object.

InvoiceDocumentHistory on page 2515: History is available for tracked fields of the object.

InvoiceLine

Represents the amount that a buyer must pay for a product, service, or fee. Invoice lines are created based on the amount of an order line. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

AdjustmentAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The sum of adjustments made to the invoice line.

AdjustmentAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of adjustment amounts, including associated taxes related to the invoice line.

AdjustmentTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of tax adjustments to the invoice line.

Balance

Type: currency

Properties: Filter, Nillable, Sort

Description: The outstanding balance for an invoice line. This amount is equal to the invoice's total amount with tax after deducting the payments made.

BillingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: This field is related to an `InvoiceAddressGroup` field containing the billing address for the invoice line. For example, one `InvoiceAddressGroup` field is related to the invoiceLine's `BillingAddressID` field, and another `InvoiceAddressGroup` field is related to the invoiceLine's `ShippingAddressId` field.

This field is a relationship field.

Relationship Name: BillingAddress

Refers To: InvoiceAddressGroup

BillingScheduleGroupId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the billing schedule group for the invoice line.

This field is a relationship field.

Relationship Name: BillingScheduleGroup

Refers To: BillingScheduleGroup

BillingScheduleId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the billing schedule for the invoice line. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

This field is a relationship field.

Relationship Name: BillingSchedule

Refers To: BillingSchedule

ChargeAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The sum of charges made to the invoice line.

ChargeAmountWithTax

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount on a charge invoice line, including tax.

ChargeConvertedNegAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount on a charge invoice line that's converted to credit.

ChargeTaxAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The tax to be applied on a charge invoice line.

ConvertedNegAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount from an invoice line that's converted to credit.

CorpCurrencyCnvChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The sum of charges made to the invoice line in corporate currency. Available in API version 63.0 and later.

CorpCurrencyCnvTotalTaxAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total tax amount of the invoice line in corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the invoice line amounts are converted to corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the invoice line amounts to corporate currency. Available in API version 63.0 and later.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency. Available in API version 63.0 and later.

Description

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The description of the invoice line.

FuncCrcyCnvTotalTaxAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The total tax amount value in functional currency. Available in API version 66.0 and later.

FuncCurrencyCnvChargeAmt

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The charge amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the invoice line amount values are converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the invoice line amount values into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

GroupReferenceEntityItemId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the record that the invoice line corresponds to.

This field is a polymorphic relationship field.

Relationship Name: GroupReferenceEntityItem

Refers To: DebitMemoLine, OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, QuoteLineItem

HasMultipleItems

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether this field merges items from the same billing period (`true`) or not (`false`).

The default value is `false`.

InvoiceId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the invoice record that contains this invoice line.

This field is a relationship field.

Relationship Name: Invoice

Relationship Type: Master-detail

Refers To: Invoice (the master object)

InvoiceLineEndDate

Type: date

Properties: Filter, Group, Sort, Update

Description: Required. The end date of the billing for the service for invoice lines made from a time-based service.

InvoiceLineStartDate

Type: date

Properties: Filter, Group, Sort, Update

Description: Required. The first date of the billing for the service for invoice lines made from a time-based service.

InvoiceStatus

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The status of the invoice line. This field is inherited from the invoice's status.

IsUsageBasedInvoiceLine

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Required. Indicates whether the product is usage-based (`true`) or not (`false`).

The default value is `false`. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity accounting period record used in this invoice line.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity record used in this invoice line.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

LineAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the invoice line.

This field is a calculated field.

Name

Type: string

Properties: Filter, Group, idLookup, Sort, Update

Description: Required. The name of the invoice line.

NetCreditsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total credit memo line amount applied to the invoice line. This amount is calculated by subtracting the unapplied credit memo line amount from the applied credit memo line amount.

This field is a calculated field.

NetPaymentsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total payment amount that's applied to the invoice line after unapplication of payments. This amount is calculated by subtracting the unapplied payment line invoice line amount from the applied payment line invoice line amount. Available in API version 61.0 and later.

This field is a calculated field.

OverageUnitOfMeasure

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The unit that's used to measure the overage. For example, byte or minute. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

ParentInvoiceLineId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the parent invoice line record.

This field is a relationship field.

Relationship Name: ParentInvoiceLine

Refers To: InvoiceLine

Product2Id

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the product that was charged or ordered to create the invoice line.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

Quantity

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The number of units of the order product that created the invoice line.

ReferenceEntityItemId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The order item or adjustment item that created the invoice line.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntityItem

Refers To: OrderItem, OrderItemAdjustmentLineItem

ReferenceEntityType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of transaction that created the invoice line.

Valid values are `Delivery Charge`, `Fee`, or `Order Product`.

ReferenceEntityItemTypeCode

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of object that created the invoice line.

Valid values are `Charge` or `Product`.

ShipFromAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The shipping origin of the invoiced product. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: ShipFromAddress

Refers To: InvoiceAddressGroup

ShippingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the shipping address record associated with the invoice line.

This field is a relationship field.

Relationship Name: ShippingAddress

Refers To: InvoiceAddressGroup

TaxAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The total tax for the invoice line.

TaxProcessingStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The status of the tax processing of the invoice line.

Valid values are:

- `Estimated`

- Pending
- Posted

TaxTreatmentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The tax treatment used on this invoice line.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

Type

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: The type of the invoice line.

Valid values are:

- Adjustment
- Charge
- Tax

UnitOfMeasureId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The unit of measure of the product associated with the invoice line. Available in API version 63.0 and later.

This field is a relationship field.

Relationship Name: UnitOfMeasure

Refers To: UnitOfMeasure

UnitPrice

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The price for one unit of the item on the invoice line.

UsageOverageQuantity

Type: double

Properties: Filter, Nillable, Sort

Description: The quantity of the usage overage that's being invoiced. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

UsageProductBillSchdGrpId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the usage-based product billing schedule group associated with the invoice line. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: UsageProductBillSchdGrp

Refers To: BillingScheduleGroup

UsageProductId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the usage-based product that was charged or ordered to create the invoice line. This field is available in API version 63.0 and later with Revenue Cloud Billing license.

This field is a relationship field.

Relationship Name: UsageProduct

Refers To: Product2

InvoiceLineRelationship

Represents a relationship between invoice line items to support bundles where one parent invoice line has multiple child invoice lines. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

AssociatedInvoiceLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the related invoice line record. In a bundle relationship, this invoice line is the child.

This field is a relationship field.

Relationship Name: AssociatedInvoiceLine

Refers To: InvoiceLine

AssociatedInvoiceLinePricing

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. This field describes how the related invoice line is priced relative to the primary invoice line.

Valid values are `IncludedInBundlePrice` or `NotIncludedInBundlePrice`.

AssociatedInvoiceLineRole

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. This field describes the role of the related invoice line in the relationship. The value is derived from the `AssociatedProductRoleCat` field of the `ProductRelationshipType` object.

Valid values are `AddOnComponent`, `BundleComponent`, `ClassificationComponent`, or `SetComponent`.

InvoiceId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the related invoice record.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an invoice line relationship record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed an invoice line relationship record. If this value is null, it's possible that the user only accessed the invoice line relationship record or a related list view (`LastReferencedDate`), but not viewed the invoice line relationship record itself.

MainInvoiceLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the primary invoice line record. In a bundle relationship, this invoice line is the parent.

This field is a relationship field.

Relationship Name: MainInvoiceLine

Relationship Type: Master-detail

Refers To: InvoiceLine (the master object)

MainInvoiceLineRole

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. This field describes the role of the primary invoice line in the relationship. The value is derived from the `MainProductRoleCat` field of the `ProductRelationshipType` object.

Valid values are `AddOn`, `Bundle`, or `Set`.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the invoice line relationship.

ProductRelationshipTypeId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the product relationship type record between the main and associated invoice lines.

This field is a relationship field.

Relationship Name: ProductRelationshipType

Refers To: ProductRelationshipType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceLineRelationshipFeed on page 2509: Feed tracking is available for the object.

InvoiceLineRelationshipHistory on page 2515: History is available for tracked fields of the object.

InvoiceLineTax

Represents tax information of an invoice line of type `Tax`. This object is available in API version 62.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

BillingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The billing address of the parent invoice line. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

This field is a relationship field.

Relationship Name: BillingAddress

Refers To: InvoiceAddressGroup

ConvertedNegAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The amount from the parent invoice line that's converted to credit. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

CorpCrcyCnvTaxAmount

Type: double

Properties: Filter, Group, Nillable, Sort

Description: The total tax amount of the invoice line tax in corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date on which the invoice line tax amounts are converted to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort

Description: The exchange rate that's used to convert the invoice line tax amounts to the corporate currency. Available in API version 63.0 and later.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The currency ISO code of the corporate currency. Available in API version 63.0 and later.

Description

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: Additional details about the invoice line tax.

EndDate

Type: date

Properties: Filter, Group, Sort, Update

Description: Required. The end date of an invoice line tax.

FuncCrcyCnvTaxAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The tax amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the tax amount value is converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the tax amount value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

InvoiceLineId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the parent charge or adjustment invoice line record that an invoice line tax is related to.

This field is a relationship field.

Relationship Name: InvoiceLine

Relationship Type: Master-detail

Refers To: InvoiceLine (the master object)

InvoiceLineTaxNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying an invoice line tax.

LegalEntityAccountingPeriodId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity accounting period record that's related to an invoice line tax.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity that's related to an invoice line tax.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

NetCreditsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total credit memo line amount that's applied to the invoice line tax. This amount is calculated by subtracting the unapplied credit memo line amount from the applied credit memo line amount. This field is available in API version 68.0 and later.

This field is a calculated field.

NetPaymentsApplied

Type: currency

Properties: Filter, Nillable, Sort

Description: The total payment amount that's applied to the invoice line tax. This amount is calculated by subtracting the unapplied payment line invoice line amount from the applied payment line invoice line amount. This field is available in API version 68.0 and later.

This field is a calculated field.

Product2Id

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The product that was charged or ordered to create the parent invoice line. Available in API version 62.0 only.

This field is a relationship field.

Relationship Name: Product2

Refers To: Product2

Quantity

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The number of units of the order product that created the parent invoice line. Available in API version 62.0 only.

ShipFromAddressId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ship from address specified in the parent invoice line. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: ShipFromAddress

Refers To: InvoiceAddressGroup

ShippingAddressId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the shipping address record of the parent invoice line. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

This field is a relationship field.

Relationship Name: ShippingAddress

Refers To: InvoiceAddressGroup

StartDate

Type: date

Properties: Filter, Group, Sort, Update

Description: Required. The start date of an invoice line tax.

TaxAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The total amount of an invoice line tax. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice. Available in API version 65.0 and later.

TaxCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The code that's used to calculate the tax rate for the parent invoice line. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

TaxDocumentNumber

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The number of the latest record in the external tax engine in which the parent invoice line is included. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

TaxEffectiveDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date used to calculate the tax amount. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

TaxExemptAmount

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The amount that's exempted from tax. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

TaxName

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The user-defined name for an invoice line tax. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

TaxProcessingStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The processing status of the invoice line tax.

Valid values are `Estimated`, `Pending`, or `Posted`.

TaxRate

Type: percent

Properties: Filter, Nillable, Sort, Update

Description: The percentage of the order product price that's used to calculate tax. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

TaxTransactionNumber

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The number of the transaction in the external tax engine that calculated tax for the parent invoice line.

TaxTreatmentId

Type: reference

Properties: Filter, Group, Nillable, Sort, Update

Description: The ID of the tax treatment record that's related to an invoice line tax. Edit access is enabled for this field. You must not modify this field when the invoice line is related to a posted invoice.

This field is a relationship field.

Relationship Name: TaxTreatment

Refers To: TaxTreatment

UnitPrice

Type: currency

Properties: Filter, Nillable, Sort, Update

Description: The price per unit of the order product that's related to an invoice line tax. Available in API version 62.0 only.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

InvoiceLineTaxFeed on page 2509: Feed tracking is available for the object.

InvoiceLineTaxHistory on page 2515: History is available for tracked fields of the object.

LegalEntity

Represents the way an organization is structured. An organization can be a single legal entity or it can comprise more than one legal entity. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Accounts Receivables Admin permission set to access this object.

Fields

CompanyName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name of the company that this legal entity represents.

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the legal entity.

EmailTemplateId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: A template that's used to send emails for the legal entity. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: EmailTemplate

Refers To: EmailTemplate

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a legal entity indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a legal entity. If this value is null, it's possible that the user only accessed the legal entity or a related list view (`LastReferencedDate`), but not viewed the legal entity itself.

LegalEntityAddress

Type: address

Properties: Filter, Nillable

Description: The address of the company that this legal entity represents. See [Address Compound Fields](#) for details on compound address fields.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the legal entity.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the record owner.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ShouldAttachInvoiceDocToEmail

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether to attach the invoice PDF document to the email that's sent for the legal entity (`true`) or not (`false`). This field is available in API version 65.0 and later.

The default value is `false`.

Status

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The status of the legal entity.

Valid values are `Active` or `Inactive`.

LegalEntityAccountingPeriod

Represents a junction between a legal entity and an accounting period. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Accounts Receivables Admin permission set to access this object.

Fields

AccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the accounting period record that's related to a legal entity accounting period.

This field is a relationship field.

Relationship Name: AccountingPeriod

Refers To: AccountingPeriod

ClosureStage

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the closure stage of the legal entity accounting period. This field is available in API version 65.0 and later.

Valid values are `CloseLegalEntityAccountingPeriod`, `Completed`, `Open`, `CreateGeneralLedgerAccountingPeriodSummaries`, or `CreateUnrealizedGainOrLossTransactionJournals`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a legal entity accounting period record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a legal entity accounting period record. If this value is null, it's possible that the user only accessed the legal entity accounting period record or a related list view (`LastReferencedDate`), but not viewed the legal entity accounting period record itself.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the legal entity record that's related to a legal entity accounting period.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Filter, Group, idLookup, Sort

Description: Required. The auto-generated name of a legal entity accounting period. The name is a combination of the names of the legal entity and the accounting period.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the user who owns a legal entity accounting period record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. The status of a legal entity accounting period record.

Valid values are:

- Closed
- Error
- Open
- PendingClosure
- PendingReopen
- Reopened

TotalAssetsAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total assets for a legal entity accounting period is a roll up summary of the closing balances of the general ledger accounting period summary records that are related to an asset type general ledger account. This field is available in API version 65.0 and later.

TotalEquitiesAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total equities for a legal entity accounting period is a roll up summary of the closing balances of the general ledger accounting period summary records that are related to an equity type general ledger account. This field is available in API version 65.0 and later.

TotalExpensesAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total expenses for a legal entity accounting period is a roll up summary of the closing balances of the general ledger accounting period summary records that are related to an expense type general ledger account. This field is available in API version 65.0 and later.

TotalLiabilitiesAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total liabilities for a legal entity accounting period is a roll up summary of the closing balances of the general ledger accounting period summary records that are related to a liability type general ledger account. This field is available in API version 65.0 and later.

TotalRevenueAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total revenue for a legal entity accounting period is a roll up summary of the closing balances of the general ledger accounting period summary records that are related to a revenue type general ledger account. This field is available in API version 65.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

LegalEntityAccountingPeriodShare on [page 2517](#): Sharing is available for the object.

PaymentAdviceInvoiceRecile

Represents an invoice match with a payment advice line, linking a payment advice line to an open invoice. This object is available in API version 68.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

AppliedAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: Required. The net amount from the payment advice line record that indicates the amount the payer intends to clear against the specific invoice.

DeductionAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The deduction or discount amount applied by the payer on the payment advice invoice reconciliation record.

DeductionCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reason code for the deduction applied on the payment advice invoice reconciliation record.

InvoiceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the open invoice record that matched this payment advice invoice reconciliation record. A null value indicates that no matching invoice was found.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

InvoiceNumber

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The invoice number on the payment advice line record that's used to match open invoices.

InvoiceTotalAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The total invoice amount. A null value indicates that no matching invoice was found.

MatchMethodType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Indicates the method that produced the line-level match.

Valid values are `Exact Invoice Number` or `Manual`.

MatchType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies whether this line item was successfully matched to an invoice, remains unmatched, or was manually overridden.

Valid values are `Manual Override`, `Matched`, or `Unmatched Line`.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of this record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentAdviceInvoiceRecileNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the payment advice invoice reconciliation.

PaymentAdviceReconciliationId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the parent payment advice reconciliation related to this payment advice invoice reconciliation record. Each line-level invoice matches back to the overall payment advice reconciliation record that paired the payment advice with a bank transaction and a resolved account.

This field is a relationship field.

Relationship Name: PaymentAdviceReconciliation

Refers To: PaymentAdviceReconciliation

ReviewStatus

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the payment advice invoice reconciliation record in the review process.

Valid values are Accepted, Pending, Rejected, or Resolved Manually.

ReviewedById

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the user that reviewed the payment advice invoice reconciliation record.

This field is a relationship field.

Relationship Name: ReviewedBy

Refers To: User

ReviewedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the reviewer reviewed the payment advice invoice reconciliation record.

SourceSystemName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name or identifier of the system from which this record was sourced.

SourceSystemRecordIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The unique identifier of this record in the source system from which the data originated.

UnmatchedReasonText

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates the reason the payment advice invoice reconciliation record couldn't be matched to an invoice.

Valid values are Invoice Already Paid, Invoice For Different Account, No Matching Invoice, or Other.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentAdviceInvoiceRecileShare on page 2517: Sharing is available for the object.

PaymentAdviceInvoiceRecileHistory on page 2515: History is available for tracked fields of the object.

PaymentAdviceReconciliation

Represents the reconciliation of a payment advice with a bank transaction and a resolved account, including match confidence and the reviewer's decision. This object is available in API version 68.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

To access this object, you need the Billing permission set licenses and the Billing Admin permission set.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the customer account record associated with the payment.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

AccountName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The account name in the Account record.

AmountVariancePercent

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The percentage difference between the payment advice amount and the payment proof amount that's used to determine if the match falls within the configured tolerance.

BatchRunReference

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the batch run that produced the payment advice reconciliation record.

DateVarianceDaysCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of days between the payment date stated on the payment advice and the date the bank recorded the transaction.

MatchMethodType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates the method that produced the payment advice reconciliation.

Valid values are Manual, Reference Number, Tolerance, or Vector Search.

MatchType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Indicates the completeness of the match based on whether the payment advice, bank transaction, and account are matched or if any component is missing.

Valid values are Matched, Unmatched Account, Unmatched Intent, or Unmatched Proof.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of this record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentAdviceAccountScoreNbr

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: A confidence score between 0 and 1 that indicates how closely the payer name on the payment advice matched the resolved account.

PaymentAdvicePayerName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payer name from the payment advice record.

PaymentAdvicePaymentDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payment date from the payment advice record.

PaymentAdviceReconciliationNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the payment advice reconciliation.

PaymentAdviceReferenceNumber

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference number from the payment advice record.

PaymentAdviceTotalAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The total amount from the payment advice record.

ProofAccountScoreNumber

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: A confidence score between 0 and 1 that indicates how closely the payer name on the payment proof matched the resolved account.

ProofAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The transaction amount from the payment proof record.

ProofPayerName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payer name on the payment proof record as indicated by the bank records.

ProofPaymentDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The booking date from the payment proof record.

ProofTransactionReferenceNbr

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference number from the payment proof (bank) transaction.

RejectionReasonText

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The reason for rejecting the payment advice reconciliation, such as wrong account, wrong proof, or duplicate.

Valid values are Duplicate, Other, Wrong Account, or Wrong Proof.

ResolutionNotesText

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: An explanation about the manual resolution provided by the reviewer.

ReviewStatus

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The processing status of the payment advice reconciliation record such as pending review, accepted, or rejected.

Valid values are:

- Accepted
- Deferred
- Pending
- Rejected
- Resolved Manually
- Superseded

ReviewedById

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the user who reviewed the payment advice reconciliation record.

This field is a relationship field.

Relationship Name: ReviewedBy

Refers To: User

ReviewedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when a user reviewed the payment advice reconciliation record.

SourceSystemName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The name or identifier of the system from which this record was sourced.

SourceSystemRecordIdentifier

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The unique identifier of this record in the source system from which the data originated.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PaymentAdviceReconciliationShare](#) on page 2517: Sharing is available for the object.

[PaymentAdviceReconciliationHistory](#) on page 2515: History is available for tracked fields of the object.

PaymentBatchRun

Represents a batch processing job that processes payments in Billing. During a payment batch run, all the payment schedules that meet the specified criteria are processed and the corresponding Payment records are created. These payments are then applied to invoices or invoice lines. This object is available in API version 64.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

BillingBatchSchedulerId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Required. The ID of the billing batch scheduler that's used to schedule the payment batch run.

This field is a relationship field.

Relationship Name: BillingBatchScheduler

Refers To: BillingBatchScheduler

Comments

Type: textarea

Properties: Filter, Nillable, Sort, Update

Description: Additional details about the payment batch run.

CompletionTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time when the payment batch run completed processing payments.

IsPaymentRetry

Type: boolean

Properties: Filter, Nillable, Sort

Description: Indicates whether the payment batch run is for retrying a failed payment (`true`) or not (`false`).

The default value is `false`. Available in API version 66.0 and later.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

OwnerId

Type: reference

Properties: Filter, Group, Sort, Update

Description: Required. The ID of the owner of the Payment Batch Run record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentBatchRunNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the payment batch run.

StartTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time when the payment batch run started processing payments.

Status

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: Required. The status of the payment batch run.

Valid values are `Completed`, `Failed`, `New`, `Started`, or `Stopped`.

The default value is `New`.

TotalFailedScheduleItems

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of payment schedules that weren't processed by the payment batch run. When a payment schedule isn't processed, the system doesn't generate a Payment record for it. For details about errors, check the Revenue Transaction Error Log records for the payment batch run.

TotalFilteredScheduleItems

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of payment schedule items that meet the payment run scheduler's matching criteria. The matching criteria identifies the payment schedule items that are included for processing by the payment batch run.

TotalProcessedScheduleItems

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of payment schedule items that were processed by the payment batch run.

TotalScheduleItemsApplied

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of payment schedule items that were processed and had corresponding payments also applied to invoices or invoice lines.

TotalScheduleItemsApplyFailed

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The total number of payment schedule items that were processed but had corresponding payments that weren't applied to invoices or invoice lines.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentBatchRunHistory on page 2515: History is available for tracked fields of the object.

PaymentBatchRunShare on page 2517: Sharing is available for the object.

PaymentLineInvoiceLine

Represents information about a payment line that's applied to or unapplied from an invoice line. This object is available in API version 64.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The account of the customer who made a payment that's related to the payment line invoice line.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

Amount

Type: currency

Properties: Create, Filter, Sort

Description: Required. The amount that's been applied or unapplied by a payment line.

AppliedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when a payment line was applied to an invoice line.

AppliedImpactAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: If the payment line invoice line's `Type` value is `Applied`, the applied impact amount is the same as the `ImpactAmount` value. The applied impact amount is 0 when the `Type` value is `Unapplied`.

This field is a calculated field.

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the payment line invoice line.

EffectiveDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when a payment line's application to or unapplication from an invoice line becomes effective.

ImpactAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: If the payment line invoice line's `Type` value is `Applied`, the impact amount is the negative equivalent of the payment line invoice line's `Amount` value. Otherwise, it's equal to the payment line invoice line's `Amount` value.

This field is a calculated field.

InvoiceLineBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the invoice line after a payment line was applied to it or unapplied from it.

InvoiceLineId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The invoice line to which a payment line has been applied or unapplied.

This field is a relationship field.

Relationship Name: InvoiceLine

Relationship Type: Master-detail

Refers To: InvoiceLine (the master object)

InvoiceLineTaxId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The invoice line tax record to which the payment line was applied or unapplied. This field is available in API version 68.0 and later.

This field is a relationship field.

Relationship Name: InvoiceLineTax

Refers To: InvoiceLineTax

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period related to the payment line invoice line.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the payment line invoice line.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

PaymentBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the Payment record after it was applied to or unapplied from an invoice line.

PaymentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The parent Payment record that's related to the payment line invoice line.

This field is a relationship field.

Relationship Name: Payment

Refers To: Payment

PaymentLineInvoiceLineNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the payment line invoice line.

RelatedPaymentLineInvclInId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The related payment line invoice line with the `Type` value as `Applied` when the payment line invoice line's `Type` value is `Unapplied`.

This field is a relationship field.

Relationship Name: RelatedPaymentLineInvclLine

Refers To: PaymentLineInvoiceLine

SettlementType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the type of amount settled by the payment line that's applied to the invoice line. This field is available in API version 68.0 and later.

Valid values are `Balance`, `Charge`, or `Tax`.

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether a payment line has been applied to or unapplied from an invoice line.

Valid values are `Applied` or `Unapplied`.

UnappliedDateTime

Type: `dateTime`

Properties: Create, Filter, Nillable, Sort

Description: The date and time when a payment line was unapplied from an invoice line.

UnappliedStatus

Type: `picklist`

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether a payment line has been unapplied from an invoice line.

Valid values are `NA`—Not Applicable, `No`, or `Yes`.

PaymentRetryRule

Represents the specific payment retry rule for a failed payment schedule item. Each rule defines actionable parameters such as the maximum number of retries for the failed records and time intervals between subsequent retry attempts. This object is available in API version 66.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Description

Type: `string`

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the business details for the payment retry rule.

IntervalUnit

Type: `picklist`

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit of time after which a payment batch run must retry the failed payments.

Valid values are `Days`, `Hours`, or `Minutes`.

IntervalValue

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The single or comma-separated numeric values, after which the payment batch run must retry the failed payments.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed the payment retry rule record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed the payment retry rule record.

MaximumRetryCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of retries on the failed payment records.

PaymentGatewayErrorCategory

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The category of payment gateway errors for which the payment retry rule must be applied.

Valid values are:

- `CardLimit`—Card Limit Decline
- `GatewayConnection`—Gateway Connection Error
- `PaymentInformation`—Invalid Payment Details
- `PaymentProcessing`—Payment Processing Error
- `Security`—Security Failure
- `Unknown`—Unknown Error
- `ValidationFailure`—Internal Validation Error

PaymentGatewayErrorCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The raw error code of the payment gateway response.

PaymentGatewayId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unique identifier of the payment gateway for which the payment retry rule must be applied.

This field is a relationship field.

Relationship Name: PaymentGateway

Refers To: PaymentGateway

PaymentRetryRuleSetId

Type: reference

Properties: Create, Filter, Group, Sort

Description: The payment retry rule set of the payment retry rule.

This field is a relationship field.

Relationship Name: PaymentRetryRuleSet

Relationship Type: Master-detail

Refers To: PaymentRetryRuleSet (the master object)

RetryIntervalType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the payment retry rule must be applied to the failed payment records at fixed or staggered intervals of time.

Valid values are `Fixed` or `Staggered`.

PaymentRetryRuleSet

Represents the payment retry rule definition that defines how failed payments are retried based on the error codes across various retry categories. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

CanUseAltrnPaymentMethod

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether an alternate payment method can be used on the last retry of the failed payment schedule item (`true`) or not (`false`). When set to `true`, the mostly recently added payment method is used to retry payments on the failed payment schedule items.

The default value is `false`.

DefaultIntervalUnit

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The unit of time after which a payment batch run must retry the failed payments. The related payment retry rules inherit this value by default.

Valid values are `Days`, `Hours`, or `Minutes`.

DefaultIntervalValue

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: The single or comma-separated numeric values, after which the payment batch run must retry the failed payments. The related payment retry rules inherit this value by default.

DefaultMaximumRetryCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number of retries on the failed payment records. The related payment retry rules inherit this value by default.

DefaultRetryIntervalType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies whether the payment retry rule set must be applied to the failed payment records at fixed or staggered intervals of time. The related payment retry rules inherit this value by default.

Valid values are `Fixed` or `Staggered`.

Description

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The description of the business details for the payment retry rule set.

IsDefaultRuleSet

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the payment retry rule must be set as default for the org (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed the payment retry rule set record.

LastViewedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed the payment retry rule set record.

Name

Type: `string`

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The user-specified name for the payment retry rule set.

Status

Type: `picklist`

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the status of the payment retry rule set.

Valid values are `Active` or `Draft`.

PaymentSchedule

Represents information about a set of payments that a customer wants to collect at different times for a certain record. A schedule contains one or more payment schedule items, where each item represents one payment to be processed. Each of a schedule's items can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they match the scheduler's payment criteria. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

AvailableRequestedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The payment schedule's remaining amount available for the creation of payment schedule items. This value is calculated by deducting the `TotalLineRequestedAmount` value from the `TotalRequestedAmount` value.

This field is a calculated field.

CollectionPlanItemId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The collection plan item for the payment schedule that's related to an invoice.

This field is a relationship field.

Relationship Name: CollectionPlanItem

Refers To: CollectionPlanItem

Comments

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the payment schedule.

DefaultPaymentAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: When a payment run creates payments from a payment schedule item, it sets the payment's account to the item's `PaymentAccountId` value. When the payment schedule item is created, the item's `PaymentAccountId` inherits the schedule's `DefaultPaymentAccountId`. However, you can override the `PaymentAccountId` with a different account as needed. If you do, future payments made from the item use the new account.

This field is a relationship field.

Relationship Name: DefaultPaymentAccount

Refers To: Account

DefaultPaymentMethodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: When a payment run creates payments from a payment schedule item, it sets the payment's payment method to the item's `PaymentMethodId`. When the payment schedule item is created, the item's `PaymentMethodId` inherits the schedule's

DefaultPaymentMethodId. However, you can override the PaymentMethodId with a different method as needed. If you do, future payments made from the item will use the new method.

This field is a polymorphic relationship field.

Relationship Name: DefaultPaymentMethod

Refers To: CardPaymentMethod, SavedPaymentMethod

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and LastReferenceDate is not null, the user accessed this record or list view indirectly.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of the Payment Schedule record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentScheduleNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the payment schedule.

PaymentSource

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description:

ReferenceEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The object record that receives payments as a result of the related payment schedule items that are processed.

This field is a polymorphic relationship field.

Relationship Name: ReferenceEntity

Refers To: CollectionPlan, Contract, Invoice, Order, Quote

RemainingAmountToBeProcessed

Type: currency

Properties: Filter, Nillable, Sort

Description: The total pending amount of payment schedule items that haven't yet been processed for payment. This value is calculated by deducting the `TotalProcessedAmount` value from the `TotalLineRequestedAmount` value.

This field is a calculated field.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the payment schedule.

Valid values are:

- `Canceled`—Payment runs can't evaluate payment schedules or use them to create payments.
- `Completed`— All of the payment schedule's payment schedule items have been processed for payments.
- `Draft`—The payment schedule can be edited and configured. Payment runs don't evaluate draft payment schedules.
- `Open`—The payment schedule is available for payment run evaluation.

TotalAppliedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of all the related payment schedule items that have been applied to payments.

This field is a calculated field.

TotalCanceledAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of all `RequestedAmount` values of all the related payment schedule items with a status of `Canceled`.

This field is a calculated field.

TotalPaymentScheduleItemAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The total amount allocated from the payment schedule to its payment schedule items. This value is calculated by deducting the sum of each payment schedule item's `CanceledAmount` from the sum of each payment schedule item's `RequestedAmount`.

This field is a calculated field.

TotalPaymentsReceived

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of all the total payment received for all the related payment schedule items.

This field is a calculated field.

TotalProcessedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of `ProcessedAmount` values of all the related payment schedule items with a status of `Processed`.

This field is a calculated field.

TotalRequestedAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: Required. The total amount available for a payment schedule to distribute to its payment schedule items. The sum of payment schedule items can't be greater than the `TotalLineRequestedAmount` value of the parent payment schedule.

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The feature using the payment schedule.

Valid value is `CollectionPlan`

PaymentSchedulePolicy

Represents information about the configuration for the payment schedule. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

DefaultTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The default payment schedule treatment.

This field is a relationship field.

Relationship Name: DefaultTreatment

Refers To: PaymentScheduleTreatment

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: The user-entered description for the payment schedule policy.

IsOrgDefault

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: If the payment schedule policy is the default policy for the org, this value is set to `true`. If not, this value is set to `false`. An org can have only one default payment policy.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: The user-entered name of the payment schedule policy.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of the PaymentSchedulePolicy record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The status of the payment schedule policy.

Valid values are `Active`, `Canceled`, `Draft`, or `Inactive`.

TreatmentSelection

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies the payment schedule treatment.

Valid value is:

- `Default`—Uses the payment schedule treatment indicated by the `DefaultTreatmentId` field.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentSchedulePolicyHistory on page 2515: History is available for tracked fields of the object.

PaymentScheduleTreatment

Represents information about the processing of payment schedules including the payment method and the payment amount for the payment schedule. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: The user-entered description of the payment schedule treatment.

DueDateWindow

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The number that indicates the due date window of the payment schedule treatment. Available in API version 67.0 and later.

This field is a calculated field.

GroupingSource

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Specifies how the payment schedule treatments are grouped, such as by an invoice or account. Available in API version 67.0 and later.

Valid values are:

- Invoice
- Account

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The user-entered name of the payment schedule treatment.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of the PaymentScheduleTreatment record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PaymentSchedulePolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the related payment schedule policy.

This field is a relationship field.

Relationship Name: PaymentSchedulePolicy

Refers To: PaymentSchedulePolicy

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the payment schedule treatment.

Valid values are `Active`, `Canceled`, `Draft`, or `Inactive`.

TriggerSource

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The action that caused the payment schedule treatment to be created.

Valid value is `InvoicePosted`

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentScheduleTreatmentHistory on **page 2515**: History is available for tracked fields of the object.

PaymentScheduleTreatmentDtl

Represents information about the processing of payment schedules after the corresponding invoices are posted. This object is available in API version 64.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

DateOffset

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: Required. The date offset is subtracted from the `ProcessingDateReference` value to determine the processing date. It must be a number equal to or less than 0. For example, if the invoice due date is 10/17/2025 and the date offset is -7, the payment schedule item is processed by jobs that run on or before 10/10/2025.

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: The user-entered description for the payment schedule treatment detail.

InstallmentPaymentType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Indicates how the payment amount is divided into multiple payments.

Valid value is `Percentage`

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

PaymentMethodSelectionType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Indicates how the payment method is specified.

Valid values are:

- `Manual`—The user enters the payment method.
- `MostRecentAutopay`—The payment method is the most recently used automatic payment method.
- `DefaultSavedPaymentMethod`—The default payment method used for processing payments. Available in API version 65.0 and later.

PaymentRunMatchingValue

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value for the condition specified for the payment run criteria. When a payment batch run starts, all the payment schedule items that meet the specified criteria are processed.

PaymentScheduleTreatmentDetailNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The system-generated unique identifier for the payment schedule treatment detail.

PaymentScheduleTreatmentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The ID of the related payment schedule treatment.

This field is a relationship field.

Relationship Name: PaymentScheduleTreatment

Relationship Type: Master-detail

Refers To: PaymentScheduleTreatment (the master object)

Percentage

Type: percent

Properties: Create, Filter, Nillable, Sort, Update

Description: The percentage of the source amount that's used to create the payment schedule.

ProcessingDateReference

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The source of the reference date.

Valid value is `InvoiceDueDate`

PymtSchdDistributionMethodId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The distribution method that contains the information on how to create the payment schedule items.

This field is a relationship field.

Relationship Name: PymtSchdDistributionMethod

Refers To: PymtSchdDistributionMethod

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PaymentScheduleTreatmentDtlHistory](#) on **page 2515**: History is available for tracked fields of the object.

PymtSchdDistributionMethod

Represents information about the partial payments that the total payment is divided into. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: The user-entered details of the payment schedule distribution method.

DistributionCount

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: Required. The number of payment schedule items for the payment schedule. The payment schedule items are used to distribute the payment schedule's total payment into partial payments.

DistributionMethodType

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The time interval of the payment distribution method.

Valid value is:

- `FullDistribution`—The full amount on the payment schedule is distributed to a single payment schedule item.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The user-entered name for the payment schedule distribution method.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the owner of the `PaymentScheduleDistributionMethod` record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[PymtSchdDistributionMethodHistory](#) on page 2515: History is available for tracked fields of the object.

PaymentScheduleItem

Represents information about a payment to be processed. Each schedule item can have different payment configuration fields, such as payment methods, payment dates, and payment accounts. When a payment scheduler launches a payment run, the run evaluates active payment schedule items, and picks them up for payment processing if they match the scheduler's payment criteria. This object is available in API version 64.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

AppliedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of a credit memo or payment that's applied to the parent reference entity and is excluded for payment collection.

Comments

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the payment schedule item.

LastPaymentGatewayLogId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The most recent payment gateway log created after a payment gateway request is sent to process a payment based on the payment schedule item.

This field is a relationship field.

Relationship Name: LastPaymentGatewayLog

Refers To: PaymentGatewayLog

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` is not null, the user accessed this record or list view indirectly.

NextPaymentRetryTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The slated time of the next payment retry for the payment schedule item. Available in API version 66.0 and later.

NextPaymentRetryTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The slated time of the next payment retry for the payment schedule item. Available in API version 66.0 and later.

PaymentAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The account assigned to payments made from the payment schedule item. When a payment schedule item is created, its `PaymentAccountId` inherits the payment schedule's `DefaultPaymentAccountId`. However, you can provide a new `PaymentAccountId` at any time. If you change the `PaymentAccountId`, only payments made after the change use the new account.

This field is a relationship field.

Relationship Name: PaymentAccount

Refers To: Account

PaymentBatchRunId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The payment batch run that evaluated the payment schedule item for payment processing.

This field is a relationship field.

Relationship Name: PaymentBatchRun

Refers To: PaymentBatchRun

PaymentGatewayErrorCategory

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The category of payment gateway errors for the payment schedule item.

Valid values are: Available in API version 66.0 and later.

- CardLimit—Card Limit Decline
- GatewayConnection—Gateway Connection Error
- PaymentInformation—Invalid Payment Details
- PaymentProcessing—Payment Processing Error
- Security—Security Failure
- Unknown—Unknown Error
- ValidationFailure—Internal Validation Error

PaymentGatewayErrorCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort

Description: The raw error code from the payment gateway for the payment schedule item. Available in API version 66.0 and later.

PaymentGatewayRespStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the payment gateway response when the payment schedule item is processed.

Valid values are: See [SalesforceResultCode Enum](#) for more information about the values.

- Decline
- Indeterminate
- PermanentFail
- RequiresReview
- Success
- SystemError
- ValidationError

PaymentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payment that a payment run created for the payment schedule item after picking up the parent payment schedule. This field is unique within your organization.

This field is a relationship field.

Relationship Name: Payment

Refers To: Payment

PaymentMethodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payment method assigned to payments created from the payment schedule item. When a payment schedule item is created, its `PaymentMethodId` inherits the payment schedule's `DefaultPaymentMethodId`. However, you can provide a new `PaymentMethodId` at any time. If you change the `PaymentMethodId`, only payments made after the change use the new account.

This field is a polymorphic relationship field.

Relationship Name: PaymentMethod

Refers To: CardPaymentMethod, SavedPaymentMethod

PaymentProcessingMessage

Type: string

Properties: Filter, Nillable, Sort

Description: Information about whether the payment creation process has completed.

PaymentRetryCount

Type: int

Properties: Create, Filter, Group, Nillable, Sort

Description: The number of payment retries that were attempted on the payment schedule item. Available in API version 66.0 and later.

PaymentRunMatchingValue

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The value used to match a payment schedule item to a payment run based on the payment run's matching criteria.

PaymentScheduleId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The parent payment schedule for the payment schedule item.

This field is a relationship field.

Relationship Name: PaymentSchedule

Relationship Type: Master-detail

Refers To: PaymentSchedule (the master object)

PaymentScheduleItemNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The auto-generated reference number for the payment schedule item.

PaymentSource

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The process that created a payment based on the payment schedule item.

Valid values are External Payment or Payment Run.

PaymentsReceived

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The amount that's been received for the payment created for the payment schedule item.

ProcessedAmount

Type: currency

Properties: Filter, Nillable, Sort

Description: The amount of the payment schedule item that has been processed for payment and converted to a payment record.

RequestedAmount

Type: currency

Properties: Create, Filter, Sort, Update

Description: Required. The initial amount of the payment schedule item upon creation.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the payment schedule item.

Valid values are:

- **Applied**—The payment schedule item has been successfully applied.
- **Apply Failed**—The payment run encountered an error when attempting to process the payment schedule item for payment. For more information, review the payment run's revenue transaction error log.
- **Canceled**—The payment schedule item can't be picked up by payment runs for processing. When a user or process changes the item's status to **Canceled**, the item's **CanceledAmount** becomes **RequestedAmount - ProcessedAmount**.
- **Draft**—Payment schedule items are created with this status.
- **Failed**—The payment run has failed to process the payment schedule item for payment.
- **Processed**—The payment run has processed the payment schedule item for payment.
- **Processing**—The payment run is processing the payment schedule item for payment.
- **Ready for Processing**—The payment schedule item is ready to be processed by a payment run.

TargetPaymentProcessingDate

Type: date

Properties: Create, Filter, Group, Sort, Update

Description: Required. The date when the payment run makes a payment request to the payment gateway for the payment schedule item.

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The feature using the payment schedule item.

Valid value is `CollectionPlan`

PaymentTerm

Represents an agreement between a buyer and a seller about when payment is due for an invoice. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the payment term.

IsDefault

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether the payment term is the default term for your Salesforce org (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` field is not null, the user accessed this record or list view indirectly.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the payment term. This name appears on the invoice.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies whether the payment term is available for use on invoices.

Possible values are `Active`, `Draft`, or `Inactive`

The default value is `Draft`.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentTermHistory on page 2515: History is available for tracked fields of the object.

PaymentTermItem

Represents configuration of a payment term. This object is available in API version 62.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the payment term item.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferenceDate` field is not null, the user accessed this record or list view indirectly.

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The autogenerated name of the payment term item.

PaymentTermId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The ID of the parent payment term record.

This field is a relationship field.

Relationship Name: PaymentTerm

Relationship Type: Master-detail

Refers To: PaymentTerm (the master object)

PaymentTimeframe

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The period by when the payment is expected.

Valid value is:

- **Standard**— The payment must be made by the date specified in the payment term. If payment isn't received by the due date, the payment becomes overdue.

Period

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The number of units in the payment period. Used with the `PeriodUnit` field.

For example, to define a payment term of Net 30, enter 30 as the value of the `Period` field and select `Days` as the value of the `PeriodUnit` field.

PeriodUnit

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The unit of time for the payment period.

For example, to define a payment term of Net 30, enter 30 as the value of the `Period` field and select `Days` as the value of the `PeriodUnit` field.

The valid value is `Days`

Type

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies how the payment term and invoice due date are derived.

Valid values are:

- **EOM-Plus-X**—Calculates the invoice due date by adding the `Period` field value to the last day of the month in which the invoice is posted. Available in API version 63.0 and later.
- **Period-Based**—Calculates the invoice due date by adding the `Period` field value to the invoice date.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentTermItemHistory on page 2515: History is available for tracked fields of the object.

RefundLineCreditMemo

Represents a junction between a refund and a credit memo. This object is available in API version 68.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, you need the Billing permission set licenses and the Billing Admin permission set.

Fields

AccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The account associated with the credit memo to which the refund is applied.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

Amount

Type: currency

Properties: Create, Filter, Sort

Description: Required. The refund amount that's been applied to or unapplied from the credit memo.

AppliedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when the refund was applied to the credit memo.

Comments

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the credit memo refund.

CreditMemoBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the credit memo after the refund was applied or unapplied.

CreditMemold

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The credit memo to which the refund has been applied or unapplied.

This field is a relationship field.

Relationship Name: CreditMemo

Relationship Type: Master-detail

Refers To: CreditMemo (the master object)

CreditMemoRefundNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated string assigned to the refund line credit memo record.

EffectiveDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when the refund's application or unapplication takes effect.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferencedDate` isn't null, the user accessed this record or list view indirectly.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period record that's related to the credit memo refund.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the credit memo refund.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

RefundBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the refund after the refund was applied or unapplied.

RefundId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The refund associated with the credit memo.

This field is a relationship field.

Relationship Name: Refund

Refers To: Refund

RelatedCreditMemoRefundId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The applied credit memo refund that's being unapplied.

This field is a relationship field.

Relationship Name: RelatedCreditMemoRefund

Refers To: CreditMemoRefund

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the refund has been applied to or unapplied from the credit memo.

Valid values are `Applied` or `Unapplied`.

UnappliedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when the refund was unapplied from the credit memo.

UnappliedStatus

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the refund has been unapplied from the credit memo.

Valid values are `NA`, `No`, or `Yes`.

RefundLineCreditMemoLine

Represents a junction between a refund and a credit memo line. This object is available in API version 68.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

To access this object, you need the Billing permission set licenses and the Billing Admin permission set.

Fields

Amount

Type: currency

Properties: Create, Filter, Sort

Description: Required. The refund amount that's been applied to or unapplied from the credit memo line.

AppliedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when the refund was applied to the credit memo line.

Comments

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the credit memo line refund.

CreditMemoLineBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the credit memo line after the refund was applied or unapplied.

CreditMemoLineId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The credit memo line to which the refund has been applied or unapplied.

This field is a relationship field.

Relationship Name: CreditMemoLine

Relationship Type: Master-detail

Refers To: CreditMemoLine (the master object)

CreditMemoLineRefundNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated number identifying the credit memo line refund.

EffectiveDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when the refund's application or unapplication takes effect.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed this record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed this record or list view. If this value is null, and `LastReferencedDate` isn't null, the user accessed this record or list view indirectly.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period record that's related to the credit memo line refund.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the credit memo line refund.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

RefundBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance of the refund after the refund was applied or unapplied.

RefundId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The refund associated with the credit memo line.

This field is a relationship field.

Relationship Name: Refund

Refers To: Refund

RelatedCreditMemoLineRefundId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The applied credit memo line refund that's being unapplied.

This field is a relationship field.

Relationship Name: RelatedCreditMemoLineRefund

Refers To: CreditMemoLineRefund

Type

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the refund has been applied to or unapplied from the credit memo line.

Valid values are `Applied` or `Unapplied`.

UnappliedDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort

Description: The date and time when the refund was unapplied from the credit memo line.

UnappliedStatus

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort

Description: Required. Specifies whether the refund has been unapplied from the credit memo line.

Valid values are `NA`, `No`, or `Yes`.

RevenueTransactionErrorLog

Represents the details of errors that occurred during the processing of a request. The error record persists until a new error with the same category, primary record, and, if necessary, related record occurs. This object is available in API version 62.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

You need the Billing Operations User permission set to access this object.

Fields

AsyncOperationTrackerId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the async operation tracker record created by the request. Async operation tracker records contain information about the status of the asynchronous process initiated by the request.

This field is a relationship field.

Relationship Name: AsyncOperationTracker

Refers To: AsyncOperationTracker

BillingScheduleGroupId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the group related to the billing schedule with errors. This field is available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: BillingScheduleGroup

Refers To: BillingScheduleGroup

Category

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies the context of the source of error.

Valid values are:

- ApplyAPI
- AutomatedNegativeInvoiceLineConversion
- AutomaticRefunds
- ConvertNegativeInvoiceLineToCredit—Available in API version 56.0 and later.
- Core Invoice Generation Failure
- CreditInvoiceAPI
- CreditMemoRecoveryApi—Available in API version 66.0 and later.

- CreditTaxIntegrationAPI
- BulkCurrencyConversion—Available in API version 66.0 and later.
- InitiateAmendment—Available in API version 56.0 and later.
- InitiateCancel
- InitiateRenewal
- InsufficientAccess—Insufficient Access to start invoice run.
- InvoiceBatchRun
- InvoiceBatchRunDebitConversion—Available in API version 66.0 and later.
- InvoiceBatchRunInvoiceGeneration
- InvoiceBatchRunPostProcessor
- InvoiceBatchRunPreProcessor
- InvoiceBatchRunRecovery
- InvoiceBatchRunSelectionStep
- InvoiceBatchRunSplitInvoiceGeneration—Available in API version 66.0 and later.
- InvoiceBatchRunSummarizer
- InvoiceBatchRunTaxProcessor
- MaterialLineGeneration—Available in API version 58.0 and later.
- Invalid Tax API Input
- Invalid Tax Integration Input
- LoadSalesRecipientData—Available in API version 66.0 and later.
- OrderTaxCalculationFailure—Available in API version 61.0 and later.
- OrderToAsset
- OrderItemToAsset—Available in API version 59.0 and later.
- OrderToBillingSchedule
- PaymentSale
- PaymentScheduleGeneration—Available in API version 56.0 and later.
- ProcessAutoQuote—Available in API version 66.0 and later.
- PstBaseStepFailure—Available in API version 66.0 and later.
- QuotePriceCalculationFailure—Available in API version 61.0 and later.
- QuoteTaxCalculationFailure—Available in API version 61.0 and later.
- QuoteToOrder—Available in API version 56.0 and later.
- Post Tax API Failure
- Post-Credit Tax Failure
- Pre-Credit Tax Failure
- SetupEnergyAgreement—Available in API version 66.0 and later.
- StandaloneCreditAPI
- StatementOfAccountGeneration—Available in API version 66.0 and later.
- Tax API Failure
- TransactionToContract—Available in API version 59.0 and later.
- Unknown Failure—Available in API version 56.0 and later.

- VoidCreditMemo—Available in API version 66.0 and later.
- VoidPostedInvoiceAPI

ConfiguratorErrorMessage

Type: textarea

Properties: Nillable

Description: The text of the error message. This field is available in API version 66.0 and later.

ErrorCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The error code shown during the request processing, such as INVALID_INPUT.

ErrorLogNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. An auto-generated unique ID that identifies the error.

ErrorMessage

Type: textarea

Properties: Create

Description: This field contains information about the error and how to resolve it.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the user who made the request that resulted in the creation of the error log.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

PrimaryRecord2Id

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the record that's associated with this error. For example, if the error occurred while creating an invoice line from an order line, the primary2 ID is the ID of the order line. This field is available in API version 66.0 and later.

This field is a polymorphic relationship field.

Relationship Name: PrimaryRecord2

Refers To: Account, CreditMemoInvApplication, CreditMemoLine, CreditMemoLineInvoiceLine, CreditMemoLineTax, DebitMemo, DebitMemoLine, InvoiceLine, InvoiceLineTax, LegalEntyAccountingPeriod, Order, PaymentLineInvoice, PaymentLineInvoiceLine, RefundLinePayment

PrimaryRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the record that's associated with this error. For example, if the error occurred while creating an invoice from an order, the primary ID is the ID of the order.

This field is a polymorphic relationship field.

Relationship Name: PrimaryRecord

Refers To: Asset, AsyncOperationTracker, BillingBatchScheduler, BillingSchedule, CreditMemo, InvBatchDraftToPostedRun, Invoice, InvoiceBatchRun, InvoiceBatchRunRecovery, Order, OrderItem, RevenueAsyncOperation, RuleLibraryVersion

PrimaryTextRecord

Type: string

Properties: Create, Filter, Group, Nillable, Sort

Description: The identifier of the primary record associated with the error log. For example, if the error occurred while creating an invoice from an order, the primary text Record ID is the ID of the order.

There are two other fields in the same entity, PrimaryRecord and PrimaryRecord2, that are polymorphic fields, so they're limited to storing IDs from objects in their respective domains. Use this text field for all objects. This field is available in API version 63.0 and later.

RelatedRecord2Id

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Optional. The ID of a record that can provide additional context about the error. For example, if PrimaryRecord2Id is the ID of an order, this field could be the ID of an invoice line. This field is available in API version 66.0 and later.

This field is a polymorphic relationship field.

Relationship Name: RelatedRecord2

Refers To: CreditMemoLine, CreditMemoLineInvoiceLine, CreditMemoLineTax, DebitMemo, GeneralLedgerAccount, GeneralLedgerAcctAsgntRule, InvoiceLine, InvoiceLineTax, Payment, PaymentLineInvoice, PaymentLineInvoiceLine, Refund, RefundLinePayment

RelatedRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of a record that can provide additional context about the error. For example, if PrimaryRecordId is the ID of an order, this field could be the ID of an order item.

This field is a polymorphic relationship field.

Relationship Name: RelatedRecord

Refers To: Asset, BillingBatchScheduler, BillingSchedule, BillingScheduleGroup, CreditMemo, CreditMemoLine, InvBatchDraftToPostedRun, Invoice, InvoiceBatchRun, InvoiceLine, OrderItem

Request

Type: textarea

Properties: Nillable

Description: Optional. A field providing additional information linking the error with the request. This field is available in API version 66.0 and later.

RequestIdIdentifier

Type: string

Properties: Filter, Group, idLookup, Nillable, Sort

Description: A unique ID returned by the request. Use this ID to identify the revenue transaction error log records for a specific request.

RevenueAsyncOperationId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the revenue async operation record created by the request. Revenue async operation records contain information about the status of the asynchronous process initiated by the request. This field is available in API version 57.0 and later.

This field is a relationship field.

Relationship Name: RevenueAsyncOperation

Relationship Type: Lookup

Refers To: RevenueAsyncOperation

Severity

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The severity type for the error message. This field is available in API version 66.0 and later.

Valid values are:

- Error
- Warning

SeqPolicySelectionCondition

Represents the condition used to determine which sequence policy is applied to a record. This object is available in API version 65.0 and later.



Important: Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

ConditionNumber

Type: int

Properties: Create, Filter, Group, Sort, Update

Description: Required. A unique number that's assigned to a condition in a sequence policy.

FilterField

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The field used in the filter condition.

FilterFieldType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The data type of the filter field.

Valid values are:

- Boolean
- Currency
- Date
- DateTime
- MultiPicklist
- Number
- Percent
- Picklist
- Reference
- Text

FilterValue

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The value in the filter condition.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a sequence policy selection condition record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a sequence policy selection condition record. If this value is null, it's possible that the user only accessed the sequence policy selection condition record or a related list view (`LastReferencedDate`), but not viewed the sequence policy selection condition record itself.

Operator

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The relational operator used to compare the filter field with the filter value.

Valid values are `Equals` or `Not Equals`.

SequencePolicyId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The parent sequence policy associated with the sequence policy selection condition. Deleting a sequencing policy automatically removes all its associated criteria.

This field is a relationship field.

Relationship Name: SequencePolicy

Relationship Type: Master-detail

Refers To: SequencePolicy (the master object)

SequencePolicySelectionConditionName

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The name of the sequence policy selection condition.

Usage

You can create, update, or delete sequence policy selection condition records by using sObject API from API version 67.0 and later.

Create a sequence policy selection condition record by making a POST request to this resource.

```
https://yourInstance.salesforce.com/services/data/v68.0/objects/SeqPolicySelectionCondition
```

This example shows a sample request.

```
{
  "SequencePolicyId": "1VdSG000000001fF0AQ",
  "FilterField": "Status",
  "FilterValue": "Draft",
  "Operator": "Equals",
  "ConditionNumber": 1
}
{
  "SequencePolicyId": "1VdSG000000001fF0AQ",
  "FilterField": "Description",
  "FilterValue": "Testing",
  "Operator": "Equals",
  "ConditionNumber": 2
}
```

Update a sequence policy selection condition record by making a PATCH request to this resource.

```
https://yourInstance.salesforce.com/services/data/v68.0/objects/SeqPolicySelectionCondition/id
```

This example shows a sample request.

```
{
  "FilterValue": "654"
}
```

Delete a sequence policy selection condition record by making a DELETE request to this resource.

```
https://yourInstance.salesforce.com/services/data/v68.0/objects/SeqPolicySelectionCondition/id
```

SequenceGapReconciliation

Represents a missing sequence value identified during reconciliation, which can be used later to ensure there are no gaps in the sequence policy numbers. This object is available in API version 65.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

LastReferencedDate

Type: `dateTime`

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed sequence gap reconciliation record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a sequence gap reconciliation record. If this value is null, it's possible that the user only accessed the sequence gap reconciliation record or a related list view (`LastReferencedDate`), but not viewed the sequence gap reconciliation record itself.

OwnerId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The ID of the user who owns a sequence gap reconciliation record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

SequenceGapReconciliationNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The reconciled sequence pattern value.

SequencePolicyId

Type: reference

Properties: Filter, Group, Sort

Description: Required. The parent sequence policy associated with the gap reconciliation. Deleting a sequencing policy automatically removes all its associated criteria.

This field is a relationship field.

Relationship Name: SequencePolicy

Refers To: SequencePolicy

SequenceValue

Type: long

Properties: Filter, Group, Sort

Description: Required. The number that was missed during sequence policy generation.

Status

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The current status of the missed number.

Valid values are Assigned, Blocked, Unassigned, or Under Review.

SequencePolicy

Represents the configuration of rules and parameters for generating unique, sequential numbers for records. Stores settings such as numbering patterns, prefixes, suffixes, sequence start numbers, increment values, and filter criteria to ensure accurate and compliant numbering. This object is available in API version 65.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set to access this object.

Fields

DateStampFormat

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Required. The format of the stamp date that's appended to the sequence number.

Valid values are `MM-YYYY`—Month Year (MM-YYYY), `MM-dd-YYYY`—Month Day Year (MM-DD-YYYY), `None`, `YYYY`—Year (YYYY), or `YYYY-YY`—Org Fiscal Year (YYYY-YY).

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the sequencing policy.

EffectiveFromDateTime

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: Required. The date and time when the policy becomes effective.

ExpirationDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: The date and time when the policy expires.

IncrementByNumber

Type: long

Properties: Filter, Group, Sort

Description: Required. The sequence number increment value.

IsActive

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether the policy is active (`true`) or not (`false`).

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a sequence policy record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a sequence policy record. If this value is null, it's possible that the user only accessed the sequence policy record or a related list view (`LastReferencedDate`), but not viewed the sequence policy record itself.

MaximumSequenceNumber

Type: long

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The maximum number the sequence number can reach. The maximum width is determined by the maximum sequence number value.

MinimumSequenceNumberWidth

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The minimum number of digits a sequence number must have. For example, if the minimum width is set to 3, sequence numbers appear as 001, 002, and so on. If the maximum sequence number is 99999, the width would be 5 digits.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the sequence policy.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the user who owns a sequence policy record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

Prefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: A string added to the start of the sequence number.

SelectionLogic

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The logic that determines the records to which the sequence policy applies.

SequenceMode

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies how sequence numbers are generated.

Valid values are `Basic`—Gaps are allowed, such as when a record is canceled or rolled back or `Gapless`—Numbers follow one after another with no gaps.

SequencePattern

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The structure of a sequence.

SequenceStartNumber

Type: long

Properties: Create, Filter, Group, Sort, Update

Description: Required. The starting sequence number.

Suffix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: A string added to the end of the sequence number.

TargetObject

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The object to which the policy is applied.

TimeZone

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The time zone applicable to the date and time related fields of the policy. When not specified, it takes the user's time zone by default. The time zone is shown in Greenwich Mean Time (GMT).

Usage

You can create, update, or delete sequence policy records by using sObject API from API version 67.0 and later.

Create a sequence policy record by making a POST request to this resource.

```
https://yourInstance.salesforce.com/services/data/v68.0/subjects/SequencePolicy
```

This example shows a sample request.

```
{
  "Name": "Invoice Sequence Policy Testing",
  "Description": "Sequence policy for invoice numbering",
  "TargetObject": "Invoice",
  "SequenceMode": "Gapless",
  "SequencePattern": "IN-{Date}-{SequenceValue}",
  "DateStampFormat": "MM-dd-yyyy",
  "TimeZone": "America/Los_Angeles",
  "IsActive": false,
  "SequenceStartNumber": 1,
  "IncrementByNumber": 1,
  "MaximumSequenceNumber": 99999,
  "MinimumSequenceNumberWidth": 4,
  "EffectiveFromDateTime": "2026-03-01T00:00:00.000Z",
```

```
{
  "ExpirationDateTime": "2027-03-01T00:00:00.000Z"
}
```

Update a sequence policy record by making a PATCH request to this resource.

```
https://yourInstance.salesforce.com/services/data/v68.0/subjects/SequencePolicy/id
```

This example shows a sample request.

```
{
  "Description": "Sequence policy for invoice numbering testing",
  "IsActive": true,
  "MaximumSequenceNumber": 88888
}
{
  "SelectionLogic": "1 AND 2"
}
```

Delete a sequence policy record by making a DELETE request to this resource.

```
https://yourInstance.salesforce.com/services/data/v68.0/subjects/SequencePolicy/id
```

TaxEngine

Represents information about an instance of a tax engine provider as well as the merchant credentials for that specific instance. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

CustomMetadataTypeApiName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The API name of the custom metadata type that defines field mappings for tax callout requests and responses. The custom metadata type name is referenced by the tax engine to identify the metadata configuration to use. This field is available in API version 68.0 and later.

DecisionTableId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the decision table used by the revenue standard tax engine to calculate taxes. If not specified, the standard tax decision table is used by default. This field is available in API version 68.0 and later.

This field is a relationship field.

Relationship Name: DecisionTable

Refers To: DecisionTable

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: The description of an instance of the tax engine provider and merchant credential.

ExternalReference

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: Information about the external platform used for the tax engine.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a tax engine record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a tax engine record. If this value is null, it's possible that the user only accessed the tax engine record or a related list view (`LastReferencedDate`), but not viewed the tax engine record itself.

MerchantCredentialId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Required. The merchant credential setup object in Salesforce. The Tax Calculation API sends the merchant credential's information to the external tax engine that's used for tax calculation.

This field is a relationship field.

Relationship Name: MerchantCredential

Refers To: NamedCredential

SellerCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Required. The seller code of the transaction for which the tax engine integration log was captured.

ShouldCaptureTaxesAtHeader

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether taxes are captured at the header level (`true`) or not (`false`).

The default value is `false`. Available in API version 66.0 and later.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the tax engine record.

Valid values are:

- Active
- Inactive

TaxEngineAddress

Type: address

Properties: Filter

Description: Required. The compound form of the tax engine address. See [Address Compound Fields](#) for details on compound address fields.

This field is a read-only field.

TaxEngineName

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the tax engine record.

TaxEngineProviderId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Required. The tax engine provider that's related to the tax engine record.

This field is a relationship field.

Relationship Name: TaxEngineProvider

Refers To: TaxEngineProvider

TaxPrvdAccountIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unique identifier of the external tax provider's account. Available in API version 63.0 and later.

Type

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The type of the tax engine that's used to calculate tax.

Valid values are `CommerceTaxExtension`, `RevenueCloudTaxExtension`, `StandardTaxEngine`, `RevenueStandardTaxEngine`—Available in API version 66.0 and later, or `StripeNative`. Available in API versions 63.0 and later.

TaxEngineInteractionLog

Represents a record of a communication with an external tax engine following a tax calculation request. This object is available in API version 62.0 and later.

Supported Calls

`delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

Description

Type: textarea

Properties: Filter, Nillable, Sort

Description: Additional details about the tax engine interaction log.

DocumentCode

Type: string

Properties: Filter, Group, Nillable, Sort

Description: Document code of the transaction for which the tax engine integration log was captured.

EffectiveDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date that the tax engine request takes effect. This date is available for reference and bookkeeping only and doesn't have any impact on tax calculation.

InteractionHttpStatusCode

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The HTTP result code of the external callout made to a third-party tax engine provider. Refer to your third-party tax engine provider's documentation for details about the specific codes returned.

InteractionType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Indicates the type of request made to the tax engine.

Valid value is `CalculateTax`

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a tax engine interaction log record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a tax engine interaction log record. If this value is null, it's possible that the user only accessed the tax engine interaction log record or a related list view (`LastReferencedDate`), but not viewed the tax engine interaction log record itself.

ReferenceEntity

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The record on which tax was calculated.

RequestBody

Type: base64

Properties: Nillable

Description: The content of the tax calculation API request.

RequestContentType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of data passed in the request. For example, `application/html` or `text/csv`.

RequestLength

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The character length of text within the request body.

RequestName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The name of the request.

RequestTaxTransactionType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of tax transaction request sent to the tax engine provider. Available in API version 65.0 and later.

Valid values are `Credit`, `Debit`, `VoidOrCredit`, or `VoidOrDebit`.

ResponseContentType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The method used to deliver the tax calculation API response, such as `application/html` or `text/vnd.salesforce.quip-template`.

ResponseLength

Type: int

Properties: Filter, Group, Nillable, Sort

Description: The character length of text within the response body.

ResponseName

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The name of the response from the tax engine.

ResponseTaxTransactionType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of tax transaction response received from the tax engine provider. Available in API version 65.0 and later.

Valid values are `Credit`, `Debit`, or `Void`.

ResultCode

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The code describing the result of the request.

Valid values are `AdapterException`, `ReferenceDocumentCodeMissing`, `Success`, `TaxEngineError`, or `ValidationError`.

TaxEngineId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the tax engine used in the tax calculation process.

This field is a relationship field.

Relationship Name: TaxEngine

Refers To: TaxEngine

TaxEngineInteractionLogNumber

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: A system-generated number for a log entry.

TaxEngineProvider

Represents general information about a service that manages a tax engine. Tax engine providers have a one-to-many relationship with tax engines, where the tax engine record represents a specific configuration of a tax engine that can be assigned to multiple order items. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

ApexAdapterId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the Apex adapter used by the tax provider. This field is unique within your organization.

This field is a relationship field.

Relationship Name: ApexAdapter

Refers To: ApexClass

CustomMetadataTypeApiName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The API name of the custom metadata type that defines field mappings for tax callout requests and responses. The custom metadata type name is referenced by the tax engine provider to identify the metadata configuration to use. Available in API version 65.0 and later.

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the tax engine provider.

DeveloperName

Type: string

Properties: Create, Filter, Group, Sort, Update

Description: Required. The API name for the tax engine provider record.

Language

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The language used by the tax engine provider. Values appear based on their language codes in Salesforce, such as `da` for Danish or `th` for Thai.

MasterLabel

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The label used for the tax engine's API in Salesforce.

NamespacePrefix

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The Apex namespace prefix of the API used for the tax engine.

TaxPolicy

Represents information about a group of tax treatments, where each treatment represents parameters to determine how a particular product is taxed for a transaction line item. Tax policies are related to products, which pass the policy on to the resulting order items and in turn the billing schedules. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

DefaultTaxTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the default tax treatment record. When you order a product, the order product, and in turn the billing schedule receives this tax treatment.

This field is a relationship field.

Relationship Name: DefaultTaxTreatment

Refers To: TaxTreatment

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the tax policy.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed an invoice batch draft to posted run record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a tax policy record. If this value is null, it's possible that the user only accessed the tax policy record or a related list view (`LastReferencedDate`), but not viewed the tax policy record itself.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the tax policy.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the tax policy. To calculate tax for order products, products must have an active tax policy. Tax policies are created with a `Draft` status before being assigned to a product or order product. After activating a tax policy, you can't edit certain policy fields.

Valid values are `Active`, `Draft`, or `Inactive`.

TreatmentSelection

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. Specifies the selection of tax treatments to billing schedules that are related to the tax policy.

Valid values are:

- `Default`—Billing schedules receive the tax treatment defined in the tax policy's `DefaultTreatmentId` field.
- `LegalEntity`—Billing schedules receive the tax treatment based on matching legal entities between itself and the tax treatment.
- `Manual`—Billing schedules don't receive tax treatments based on the tax policy. You must specify the treatment.

TaxTreatment

Represents information about tax calculation by external engines. Each product requires a tax policy to determine whether to apply tax. Each tax policy requires at least one tax treatment. The tax treatments determine how taxable products are taxed. This object is available in API version 62.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Tax Admin permission set to access this object.

Fields

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Additional details about the tax treatment.

IsTaxable

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether to calculate tax for the order items covered by the tax treatment (`true`) or not (`false`). When this value is `true`, the CalculateTax API is called for the order item during the order item's creation.

The default value is `false`.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a tax treatment record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a tax treatment record. If this value is null, it's possible that the user only accessed the tax treatment record or a related list view (`LastReferencedDate`), but not viewed the tax treatment record itself.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the legal entity record that's related to the tax treatment.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the tax treatment.

ProductCode

Type: string

Properties: Create, Filter, Group, idLookup, Nillable, Sort, Update

Description: The code of the product that the tax treatment applies to.

ProductId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the product that the tax treatment applies to.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

ShouldUseTaxTreatmentItems

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates whether the tax codes and product codes of the related tax treatment items must be used when requesting tax calculations (`true`) or not (`false`).

The default value is `false`. The tax code and product code of the tax treatment are ignored by default. Available in API version 66.0 and later.

Status

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The status of the tax treatment record.

Valid values are `Active`, `Draft`, or `Inactive`.

TaxCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference code that's used when an external tax engine calculates tax.

TaxEngineId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the tax engine record that's related to the tax treatment. When tax is calculated for an order item, the tax engine that's related to order item's tax treatment is used. If the tax treatment's `IsTaxable` field value is `True`, the treatment requires a tax engine.

This field is a relationship field.

Relationship Name: TaxEngine

Refers To: TaxEngine

TaxPolicyId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the tax treatment's parent tax policy.

This field is a relationship field.

Relationship Name: TaxPolicy

Refers To: TaxPolicy

Tax Treatment Item

Represents tax code information that's used to calculate tax for a product by a specific tax engine. This object is available in API version 66.0 and later.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set or Tax Admin permission set to access this object.

Fields

Description

Type: textarea

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Additional details about the tax treatment item.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a tax treatment item record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a tax treatment item record. If this value is null, it's possible that the user only accessed the tax treatment item record or a related list view (`LastReferencedDate`), but not viewed the tax treatment item record itself.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Required. The name of the tax treatment item.

ProductCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The code of the product that the tax treatment item applies to.

ProductId

Type: reference

Properties: Create, Filter, Group, Sort, Update

Description: Required. The ID of the product that the tax treatment item applies to.

This field is a relationship field.

Relationship Name: Product

Refers To: Product2

TaxCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference code that's used when an external tax engine calculates tax.

TaxTreatmentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: Required. The parent tax treatment associated with the tax treatment item record.

This field is a relationship field.

Relationship Name: TaxTreatment

Relationship Type: Master-detail

Refers To: TaxTreatment (the master object)

Billing Fields on Standard Objects

Billing adds standard fields to some standard Salesforce objects of other features to represent information specific to Billing. These fields are available only in orgs where Billing is enabled.

[Billing Fields on AccountBillingAccount](#)

Standard fields extend the AccountBillingAccount object for use in Billing to represent information about default billing accounts. This object is available in API version 63.0 and later.

[Billing Fields on AssetActionSource](#)

Standard fields extend the AssetActionSource object for use in Billing to represent information about the billing term.

[Billing Fields on BillingAccount](#)

Standard fields extend the BillingAccount object for use in Billing to represent information about the billing suspension date and the billing resumption date. This object is available in API version 63.0 and later.

[Billing Fields on CollectionPlan](#)

Standard fields extend the CollectionPlan object for use in Billing to represent information about the total invoice balance. This object is available in API version 64.0 and later.

[Billing Fields on CollectionPlanItem](#)

Standard fields extend the CollectionPlanItem object for use in Billing to represent information about the invoice balance. This object is available in API version 64.0 and later.

[Billing Fields on ExpressionSet](#)

Standard fields extend the ExpressionSet object for use in Billing. These fields represent information about an expression set that performs a series of calculations by using lookups and user-defined variables and constants to calculate taxes. This object is available in API version 66.0 and later.

[Billing Fields on Dispute](#)

Represents the details of a billing dispute that involves one invoice and one or more disputed invoice lines. The details include the disputed amount, the approved amount, and the dispute type, subtype and status. This object is available in API version 66.0 and later.

[Billing Fields on DisputeItem](#)

Represents a specific invoice line or charge that's being disputed. The details include the total transaction amount, transaction date, disputed amount, reason, and status of the dispute. This object is available in API version 66.0 and later.

[Billing Fields on OrderItem](#)

Standard fields extend the OrderItem object for use in Billing to represent information about the billing term.

[Billing Fields on Payment](#)

Standard fields extend the Payment object for use in Billing to represent information about corporate currency, transaction amounts in corporate currency, and accounting periods for legal entities. This object is available in API version 64.0 and later.

[Billing Fields on PaymentLineInvoice](#)

Standard fields extend the PaymentLineInvoice object for use in Billing to represent information about legal entities and legal entity accounting periods. This object is available in API version 64.0 and later.

[Billing Fields on QuoteLineItem](#)

Standard fields extend the QuoteLineItem object for use in Billing to represent information about the billing term.

[Billing Fields on Refund](#)

Standard fields extend the Refund object for use in Billing to represent information about corporate currency, transaction amounts in corporate currency, and accounting periods for legal entities. This object is available in API version 64.0 and later.

[Billing Fields on RefundLinePayment](#)

Standard fields extend the Refund Line Payment object for use in Billing to represent information about accounting periods for legal entities. This object is available in API version 64.0 and later.

[Billing Fields on TaxRate](#)

Standard fields extend the TaxRate object for use in Billing. These fields represent information about the tax rate for a transaction that's determined by the applicable tax code and country. This object is available in API version 66.0 and later.

[Billing Fields on TransactionJournal](#)

Standard fields extend the TransactionJournal object for use in Billing to represent information about the general ledger accounts for billing transactions. This object is available in API version 63.0 and later.

Billing Fields on AccountBillingAccount

Standard fields extend the AccountBillingAccount object for use in Billing to represent information about default billing accounts. This object is available in API version 63.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need the Billing Admin permission set, Billing Operations User permission set, or Billing Customer Service User permission set access to this object.

SEE ALSO:

[Energy and Utilities Cloud Developer Guide: AccountBillingAccount](#)

Fields

IsDefaultBillingAccount

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the account is the default billing account (`true`) or not (`false`).

The default value is `false`.

Billing Fields on AssetActionSource

Standard fields extend the AssetActionSource object for use in Billing to represent information about the billing term.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Admin permission set or the Billing Operations User permission set to access this object.

Fields

BillingTerm

Type: `int`

Properties: Defaulted on create, Filter, Group, Nillable, Sort

Description: The number of billing frequency units to combine into a billing period item. Available in API version 68.0 and later.

Billing Fields on BillingAccount

Standard fields extend the BillingAccount object for use in Billing to represent information about the billing suspension date and the billing resumption date. This object is available in API version 63.0 and later.

Supported Calls

`describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`

Special Access Rules

You need the Billing Admin permission set, Billing Operations User permission set, or Billing Customer Service User permission set access to this object.

SEE ALSO:

[Energy and Utilities Cloud Developer Guide: BillingAccount](#)

Fields

AccountID

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Specifies the account that's related to the billing account. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: Account

Refers To: Account

AddTaxIdentificationDetails

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The additional tax identification details, such as a Peppol ID. Available in API version 66.0 and later.

BillDayOfMonth

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: A number from 1 to 31 that indicates the billing date. Available in API version 64.0 and later.

BillToContactId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The contact associated with the billing account. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: BillToContact

Refers To: Contact

BillingResumptionDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when billing for the account is resumed.

BillingSuspensionDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: The date when billing for the account is suspended.

DeliveryTerms

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The standard code in internal trades used to define shipping responsibilities.

Valid values are:

- CFR
- CIF
- CIO
- CPT
- CUS
- DAF
- DAP
- DDP
- DDU
- DEQ
- DES
- DPU
- EXW
- FAS
- FCA
- FOB
- SUP

The default value is `USD`. Available in API version 66.0 and later.

DoesSkipAutomaticPayments

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether to skip the automatic creation of payment schedules and payment schedule items for posted invoices related to billing accounts (`true`) or not (`false`). This boolean value is considered when the automatic creation of payment schedules and payment schedule items is turned on. Available in API version 65.0 and later.

EmailTemplateId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The template used for sending billing account emails. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: EmailTemplate

Refers To: Email template

InvoiceDocumentTemplateId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The document template that's used to generate PDF documents for the invoices that are related to the billing account. Available in API version 66.0 and later.

This field is a relationship field.

Relationship Name: InvoiceDocumentTemplate

Refers To: DocumentTemplate

IsDefaultBillingProfile

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the billing account is the default billing profile (`true`) or not (`false`). Available in API version 65.0 and later.

PaymentTermId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The payment term associated with the billing account. Available in API version 64.0 and later.

This field is a relationship field.

Relationship Name: PaymentTerm

Refers To: PaymentTerm

SavedPaymentMethodId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The saved payment method that's used to collect payments for the default billing profile of an account when the automatic creation of payment schedules and payment schedule items is turned on. Available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: SavedPaymentMethod

Refers To: SavedPaymentMethod

ShippingAddress

Type: address

Properties: Filter, Nillable

Description: The shipping address of the billing account. Available in API version 64.0 and later.

ShouldAttachInvoiceDocToEmail

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether to attach the invoice PDF document to the email that's sent to the billing account. Available in API version 65.0 and later.

The default value is false.

TaxExemptionExpirationDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date until which the tax exemption is valid. Available in API version 66.0 and later.

TaxExemptionNumber

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: A unique identifier used to indicate that a transaction is tax exempt. Available in API version 66.0 and later.

TaxExemptionStatus

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The status of the tax exemption with values defined by the user. Available in API version 66.0 and later.

TaxIdentificationNumber

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The tax identification number such as a VAT ID. Available in API version 66.0 and later.

Billing Fields on CollectionPlan

Standard fields extend the CollectionPlan object for use in Billing to represent information about the total invoice balance. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Collections and Recovery Specialist permission set to access this object.

SEE ALSO:

[Industries Common Resources Developer Guide: CollectionPlan](#)

Fields

TotalInvoiceBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The sum of all invoice balances for collection plan items associated with the collection plan.

OverdueRiskIndicator

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Indicates the overdue risk level for the collection plan. Available in API version 67.0 and later.

Valid values are:

- Low
- Medium
- High

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CollectionPlanChangeEvent on **page 2507**: Change events are available for the object.

CollectionPlanFeed on **page 2509**: Feed tracking is available for the object.

CollectionPlanHistory on **page 2515**: History is available for tracked fields of the object.

CollectionPlanShare on **page 2517**: Sharing is available for the object.

Billing Fields on CollectionPlanItem

Standard fields extend the CollectionPlanItem object for use in Billing to represent information about the invoice balance. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Collections and Recovery Specialist permission set to access this object.

SEE ALSO:

[Industries Common Resources Developer Guide: CollectionPlanItem](#)

Fields

InvoiceBalance

Type: currency

Properties: Filter, Nillable, Sort

Description: The balance amount of the invoice associated with the collection plan item.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

CollectionPlanItemChangeEvent on **page 2507**: Change events are available for the object.

CollectionPlanItemFeed on **page 2509**: Feed tracking is available for the object.

CollectionPlanItemHistory on **page 2515**: History is available for tracked fields of the object

Billing Fields on ExpressionSet

Standard fields extend the ExpressionSet object for use in Billing. These fields represent information about an expression set that performs a series of calculations by using lookups and user-defined variables and constants to calculate taxes. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

UsageType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Description: Required. The Revenue Standard Tax Calculation value that's using the expression set to calculate taxes.

Billing Fields on Dispute

Represents the details of a billing dispute that involves one invoice and one or more disputed invoice lines. The details include the disputed amount, the approved amount, and the dispute type, subtype and status. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Operations User or the Billing Customer Service User permission set to access this object.

SEE ALSO:

[Financial Services Cloud Developer Guide: Dispute](#)

Fields

InvoiceId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The invoice ID associated with the dispute.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

RevisedDueDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The revised due date for the invoice.

BillingSuspensionDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when billing for the account is suspended.

BillingResumptionDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date when billing for the account is resumed.

RevisedBillToContact

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The revised billing contact for the invoice.

This field is a relationship field.

Relationship Name: Contact

Refers To: Contact

ResolutionAction

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The action taken to resolve the dispute.

Valid values are `Resolve` with `No Action` or `Issue Credit Memo`

ResolutionActionStatus

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The status of the resolution action.

Valid values are `In Progress`, `Closed`, or `Error`

MaySetContactAsDefault

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the revised billing contact is set as default for future invoices (`true`) or not (`false`).

The default value is `false`.

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the name of the cloud or function that uses the Dispute object.

Valid value is `Billing`.

Billing Fields on DisputeItem

Represents a specific invoice line or charge that's being disputed. The details include the total transaction amount, transaction date, disputed amount, reason, and status of the dispute. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Operations User or the Billing Customer Service User permission set to access this object.

SEE ALSO:

[Financial Services Cloud Developer Guide: DisputeItem](#)

Fields

ApprovedAmount

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The amount that's approved to be credited to the customer.

InvoiceLineId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The invoice line ID associated with the dispute.

This field is a relationship field.

Relationship Name: Invoice Line

Refers To: Invoice Line

Billing Fields on OrderItem

Standard fields extend the OrderItem object for use in Billing to represent information about the billing term.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Admin permission set or the Billing Operations User permission set to access this object.

SEE ALSO:

[Object Reference for the Salesforce Platform: OrderItem](#)

Fields

BillingReference2

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference to the original order item for which this amend, renew, or cancel record is created.

BillingTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference to the billing treatment.

This field is a relationship field.

Relationship Name: BillingTreatment

Refers To: BillingTreatment

BillingTerm

Type: int

Properties: Defaulted on create, Filter, Group, Nillable, Sort

Description: The number of billing frequency units to combine into a billing period item. Available in API version 68.0 and later.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The reference to the legal entity.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

NetUnitPrice

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The net unit price of the related order item. Available in API version 64.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[OrderItemChangeEvent](#) on page 2507: Change events are available for the object.

[OrderItemFeed](#) on page 2509: Feed tracking is available for the object.

[OrderItemHistory](#) on page 2515: History is available for tracked fields of the object.

Billing Fields on Payment

Standard fields extend the Payment object for use in Billing to represent information about corporate currency, transaction amounts in corporate currency, and accounting periods for legal entities. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

SEE ALSO:

[Object Reference for the platform: Payment](#)

Fields

CorporateCurrencyCnvAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The payment amount in corporate currency.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the payment amount is converted into corporate currency.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the payment amount into corporate currency.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency.

FunctionalCurrencyCnvAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the amount value is converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the amount value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period related to the payment.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntityAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the payment.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentFeed on page 2509: Feed tracking is available for the object.

Billing Fields on PaymentLineInvoice

Standard fields extend the PaymentLineInvoice object for use in Billing to represent information about legal entities and legal entity accounting periods. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

SEE ALSO:

[Object Reference for the platform: PaymentLineInvoice](#)

Fields

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period related to the payment line invoice.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntyAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the payment line invoice.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

PaymentLineInvoiceHistory on **page 2515:** History is available for tracked fields of the object.

Billing Fields on QuoteLineItem

Standard fields extend the QuoteLineItem object for use in Billing to represent information about the billing term.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Billing Admin permission set or the Billing Operations User permission set to access this object.

SEE ALSO:

[Object Reference for the Salesforce Platform: QuoteLineItem](#)

Fields

BillingReference

Type: string

Properties: Create, Filter, Group, Nillable, Sort

Description: Reference to original order item for which this amend/renew/cancel record is created.

BillingTerm

Type: int

Properties: Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Description: The number of billing frequency units to combine into a billing period item. Available in API version 68.0 and later.

BillingTreatmentId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Reference to BillingTreatment.

This field is a relationship field.

Relationship Name: BillingTreatment

Refers To: BillingTreatment

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Reference to LegalEntity.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[QuoteLineItemChangeEvent](#) on page 2507: Change events are available for the object.

[QuoteLineItemHistory](#) on page 2515: History is available for tracked fields of the object.

Billing Fields on Refund

Standard fields extend the Refund object for use in Billing to represent information about corporate currency, transaction amounts in corporate currency, and accounting periods for legal entities. This object is available in API version 64.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

SEE ALSO:

[Object Reference for the platform: Refund](#)

Fields

CorporateCurrencyCnvAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The refund amount in corporate currency.

CorporateCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the refund amount is converted into corporate currency.

CorporateCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the refund amount into corporate currency.

CorporateCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The currency ISO code of the corporate currency.

FunctionalCurrencyCnvAmount

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The amount value in functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnDate

Type: date

Properties: Filter, Group, Nillable, Sort, Update

Description: The date on which the amount value is converted into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyCvsnRate

Type: double

Properties: Filter, Nillable, Sort, Update

Description: The exchange rate that's used to convert the amount value into functional currency. Available in API version 66.0 and later.

FunctionalCurrencyIsoCode

Type: string

Properties: Filter, Group, Nillable, Sort, Update

Description: The ISO code of the functional currency. Available in API version 66.0 and later.

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period related to the refund.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntityAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the refund.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

ReasonCode

Type: picklist

Properties: Filter, Group, Nillable, Sort

Description: Specifies a unique code that identifies the primary reason for a refund. Available in API version 68.0 and later.

ReferenceRecordId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the record that this refund was issued against. For example, an invoice, credit memo, or payment. Available in API version 68.0 and later.

This field is a polymorphic relationship field.

Relationship Name: ReferenceRecord

Refers To: CreditMemo

Billing Fields on RefundLinePayment

Standard fields extend the Refund Line Payment object for use in Billing to represent information about accounting periods for legal entities. This object is available in API version 64.0 and later.

Special Access Rules

You need the Revenue Cloud Billing license, and the Payment Admin permission set or the Payment Operations User permission set to access this object.

Fields

LegalEntityAccountingPeriodId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity accounting period related to the refund.

This field is a relationship field.

Relationship Name: LegalEntityAccountingPeriod

Refers To: LegalEntityAccountingPeriod

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity related to the refund.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

RefundLinePaymentHistory on **page 2515**: History is available for tracked fields of the object.

Billing Fields on TaxRate

Standard fields extend the TaxRate object for use in Billing. These fields represent information about the tax rate for a transaction that's determined by the applicable tax code and country. This object is available in API version 66.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Billing Admin permission set or Tax Admin permission set access to this object.

Fields

ApplicationBasis

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies whether the tax rate is applied on the net or gross amount.

Valid values are `Gross` or `Net`

The default value is `Gross`.

City

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The city to which the tax rate applies.

Country

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The country name that's derived from the `GeoCountry` field value.

This field is a calculated field.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The currency ISO code that's applicable to the tax rate.

EndDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date until when the tax rate is valid.

FlatTaxAmount

Type: double

Properties: Create, Filter, Nillable, Sort, Update

Description: The flat tax amount that's applied to the transaction.

LastReferencedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last accessed a tax rate record indirectly, for example, through a list view or related record.

LastViewedDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The timestamp when the current user last viewed a tax rate record. If this value is null, it's possible that the user only accessed the debit memo line tax record or a related list view (. LastReferencedDate), but not viewed the debit memo line tax record itself.

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort

Description: The legal entity to which the tax rate applies.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

Name

Type: string

Properties: Autonumber, Defaulted on create, Filter, idLookup, Sort

Description: Required. The name of the invoice line.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. The ID of the user who owns a TaxRate record.

This field is a polymorphic relationship field.

Relationship Name: Owner

Refers To: Group, User

ProductCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The code of the product for which the tax rate applies.

RateUsageType

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether the tax rate is created for Commerce or Revenue Cloud.

Valid values are `Commerce` or `RevCloud`

The default value is `Commerce`.

StartDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date from when the tax rate is valid.

State

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The state name that's derived from the `GeoState` field value.

This field is a calculated field.

ZipCode

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The postal or ZIP code to which the tax rate applies.

Billing Fields on TransactionJournal

Standard fields extend the `TransactionJournal` object for use in Billing to represent information about the general ledger accounts for billing transactions. This object is available in API version 63.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

You need the Revenue Cloud Billing license and the Accounts Receivables Admin permission set to access this object.

SEE ALSO:

[Loyalty Management Developer Guide: TransactionJournal](#)

Fields

ActivityDate

Type: dateTime

Properties: Create, Filter, Sort, Update

Description: The date and time when a billing transaction record is posted or processed.

Credit

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The transaction record amount when a credit general ledger account is specified.

CreditGeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the general ledger account for a debit transaction that's related to the transaction journal.

This field is a relationship field.

Relationship Name: CreditGeneralLedgerAccount

Refers To: GeneralLedgerAccount

Debit

Type: currency

Properties: Create, Filter, Nillable, Sort, Update

Description: The transaction record amount when a debit general ledger account is specified.

DebitGeneralLedgerAccountId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The ID of the General Ledger (GL) Treatment based on which transaction journals must be generated for the billing transaction.

This field is a relationship field.

Relationship Name: DebitGeneralLedgerAccount

Refers To: GeneralLedgerAccount

ForeignExchangeGainOrLossType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Specifies the type of foreign exchange gain or loss for the transaction journal. This field is available in API version 65.0 and later.

Valid values are:

- Realized
- Unrealized
- UnrealizedReversal

GeneralLedgerAcctAsgntRuleId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The general ledger account assignment rule used to assign general ledger accounts to transaction journals that's created for billing transactions.

This field is a relationship field.

Relationship Name: GeneralLedgerAcctAsgntRule

Refers To: GeneralLedgerAcctAsgntRule

GenLdgrJournalEntryRuleId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The general ledger journal entry rule used to assign general ledger accounts to transaction journals created for billing transactions. This field is available in API version 65.0 and later.

This field is a relationship field.

Relationship Name: GenLdgrJournalEntryRule

Refers To: GeneralLedgerJrnlEntryRule

LegalEntityId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The legal entity that's related to the transaction journal.

This field is a relationship field.

Relationship Name: LegalEntity

Refers To: LegalEntity

ReferenceTransactionRecordId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The transaction record for which the transaction journal is created.

This field is a polymorphic relationship field.

Relationship Name: ReferenceTransactionRecord

Refers To: CreditMemo, CreditMemoInvApplication, CreditMemoLine, CreditMemoLineInvoiceLine, CreditMemoLineTax, Invoice, InvoiceLine, InvoiceLineTax, Payment, PaymentLineInvoice, PaymentLineInvoiceLine, Refund

TransactionType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The transaction type that's related to the transaction journal.

Valid values are:

- CreditMemo
- CreditMemoInvApplication
- CreditMemoLine
- CreditMemoLineTax
- CreditMemoLineInvoiceLine
- DebitMemoLine—Available in API version 65.0 and later.
- Invoice
- InvoiceLine
- InvoiceLineTax
- Payment—Available in API version 64.0 and later.
- PaymentLineInvoice—Available in API version 64.0 and later.
- PaymentLineInvoiceLine—Available in API version 64.0 and later.
- Refund—Available in API version 64.0 and later.
- RefundLine—Available in API version 64.0 and later.

UniquelIdentifier

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: An auto-generated identifier for the transaction journal when the usage type is Billing. The identifier is a combination of the reference transaction record ID, the general ledger account assignment rule ID, and other internal-only fields.

UsageType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of usage.

Valid value is `Billing`

Salesforce Payments Objects in Billing

Billing provides access to some standard Salesforce Payments objects that you can use to authorize payments, connect to an external payment gateway, group all the payment transactions that are processed for a particular transaction, and store payment methods. You can access these objects with the Revenue Cloud Billing license.

For more information about these Salesforce Payments objects, refer to these resources.

- [PaymentAuthAdjustment](#)
- [PaymentAuthorization](#)
- [PaymentGateway](#)
- [PaymentGatewayLog](#)
- [PaymentGatewayProvider](#)
- [PaymentGroup](#)
- [PaymentMethod](#)

Billing Platform Events

Salesforce publishes standard platform events in response to an action that occurred in the org or to report errors. For example, the `InvoiceProcessedEvent` platform event sends notification to the customer when the billing invoice activity is complete. You can subscribe to a standard platform event by using the subscription mechanism that the event supports.

[BillingScheduleCreatedEvent](#)

Notifies subscribers when the `/commerce/invoicing/billing-schedules/actions/create` request is complete. This object is available in API version 63.0 and later.

[CreditInvoiceProcessedEvent](#)

Represents the notification to the customers after the process initiated by the `/commerce/invoicing/invoices/{invoiceId}/actions/credit` request is complete. This object is available in API version 62.0 and later.

[CreditMemoProcessedEvent](#)

Represents the notification to the customers after the process initiated by the `/commerce/invoicing/credit-memos` request is complete. This object is available in API version 62.0 and later.

[InvoiceProcessedEvent](#)

Represents the notification to the customers after the process started by the `/commerce/billing/invoices` request is complete. The process groups billing schedules by grouping keys and creates one invoice per grouping key. The `InvoiceProcessedEvent` platform event is a top-level object that contains a list of `InvoiceProcessedDetailEvents` platform events, where each detail event represents an attempt to create one invoice. This object is available in API version 62.0 and later.

[NegInvcLineProcessedEvent](#)

Represents the notification to the customers when a negative invoice line is converted to a credit memo. This object is available in API version 62.0 and later.

SequenceAssignedEvent

Represents the notification to customers about the assignment of a sequence to a target record. This process is initiated by the `/sequences/actions/assign` request. This object is available in API version 65.0 and later.

VoidInvoiceProcessedEvent

Represents the notification to the customers after the process started by the `/commerce/invoicing/invoices/{invoiceId}/actions/void` request is complete. The request attempts to void an invoice by crediting an invoice and changing its status to `Voided`, which prevents further changes. This object is available in API version 62.0 and later.

BillingScheduleCreatedEvent

Notifies subscribers when the `/commerce/invoicing/billing-schedules/actions/create` request is complete. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

`/event/billingschedulecreatedevent.`

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

[BillSchdCreatedEventDetail](#)

Contains details about each order item in the `/commerce/invoicing/billing-schedules/actions/create` request and any errors that occurred while processing the request. This object is included in an `BillingScheduleCreatedEvent` message. You can't subscribe to the `BillSchdCreatedEventDetail` platform event directly. This object is available in API version 63.0 and later.

Fields

BillingScheduleCreatedEventDetail

Type: [BillSchdCreatedEventDetail](#) on page 2056

Properties: Nillable

Description: One `BillingScheduleCreatedEventDetail` entry is created for each order item in the `BillingScheduleCreatedEvent` request. One `BillSchdCreatedEventDetail` entry is created for each error that occurred.

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that is populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdIdentifier

Type: string

Properties: Nillable

Description: ID returned in the `CreateBillingScheduleFromOrderItem` response. Use this ID to identify the `BillingScheduleCreatedEvent` for a specific request.

BillSchdCreatedEventDetail

Contains details about each order item in the `/commerce/invoicing/billing-schedules/actions/create` request and any errors that occurred while processing the request. This object is included in an `BillingScheduleCreatedEvent` message. You can't subscribe to the `BillSchdCreatedEventDetail` platform event directly. This object is available in API version 63.0 and later.

Supported Calls

`describeSObjects()`

Special Access Rules

This object is available when Billing is enabled in your org.

Fields

BillingScheduleId

Type: reference

Properties: Nillable

Description: If the request was successful, this field contains the ID of the billing schedule for the order item.

This field is a relationship field.

Relationship Name: BillingSchedule

Refers To: BillingSchedule

ErrorCode

Type: string

Properties: Nillable

Description: If the request wasn't successful, this field contains the error code.

ErrorMessage

Type: string

Properties: Nillable

Description: If the request wasn't successful, this field contains the error message.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

IsSuccess

Type: boolean

Properties: Defaulted on create

Description: Indicates whether the request to create a billing schedule for the order item is successful (`true`) or not (`false`).
The default value is `false`.

OrderItemId

Type: reference

Properties:

Description: The ID of the order item used in the `/actions/standardCreateBillingScheduleFromOrderItem` REST request.
This field is a relationship field.

Relationship Name: OrderItem

Refers To: OrderItem

CreditInvoiceProcessedEvent

Represents the notification to the customers after the process initiated by the `/commerce/invoicing/invoices/{invoiceId}/actions/credit` request is complete. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

`/event/CreditInvoiceProcessedEvent`.

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

[CrMemoProcessErrDtlEvent](#)

Represents the information about errors that occurred while creating or applying a credit memo as part of a request. This object is included in a `CreditInvoiceProcessedEvent`, `CreditMemoProcessedEvent`, `NegInvcLineProcessedEvent`, or `VoidInvoiceProcessedEvent` platform event message. You can't subscribe to `CrMemoProcessErrDtlEvent` platform event directly. This object is available in API version 62.0 and later.

Fields

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

CrMemoProcessErrDtlEvents

Type: [CrMemoProcessErrDtlEvent\[\]](#)

Properties: Nillable

Description: A compilation of error messages and error codes for a failed request. See the `ErrorDetails` field for error messages and error codes.

CreditMemold

Type: reference

Properties: Nillable

Description: The credit memo created as the result of a successful request.

This field is a relationship field.

Relationship Name: CreditMemo

Refers To: CreditMemo

ErrorDetails

Type: string

Properties: Nillable

Description: If the request fails, this field shows error messages, error codes, and the ID of the record on which the errors occurred.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

InvoiceId

Type: reference

Properties: Nillable

Description: The invoice credited as the result of a successful request.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

IsSuccess

Type: boolean

Properties: Defaulted on create

Description: Required. Indicates whether the request was successful (`true`) or not (`false`).

The default value is `false`.

ReplayId

Type: string

Properties: Nillable

Description: An ID value that's populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdIdentifier

Type: string

Properties: Nillable

Description: The unique ID returned in the response. Use this ID to identify the event for a specific request.

CrMemoProcessErrDtlEvent

Represents the information about errors that occurred while creating or applying a credit memo as part of a request. This object is included in a `CreditInvoiceProcessedEvent`, `CreditMemoProcessedEvent`, `NegInvcLineProcessedEvent`, or `VoidInvoiceProcessedEvent` platform event message. You can't subscribe to `CrMemoProcessErrDtlEvent` platform event directly. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`

Special Access Rules

This object is available when Billing is enabled.

Fields

ErrorCode

Type: string

Properties: Nillable

Description: Reference code for the type of error that occurred.

ErrorMessage

Type: string

Properties: Nillable

Description: Information about the error that occurred during processing.

ErrorSourceId

Type: reference

Properties: Nillable

Description: The ID of the record on which the error occurred during the credit memo creation process and the application process.

This field is a polymorphic relationship field.

Relationship Name: ErrorSource

Refers To: CreditMemo, CreditMemoLine, Invoice, InvoiceLine

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

CreditMemoProcessedEvent

Represents the notification to the customers after the process initiated by the `/commerce/invoicing/credit-memos` request is complete. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

/event/CreditMemoProcessedEvent.

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

Fields

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

CrMemoProcessErrDtlEvents

Type: [CrMemoProcessErrDtlEvent\[\]](#)

Properties: Nillable

Description: A compilation of error messages and error codes for a failed request. See the `ErrorDetails` field for error messages and error codes.

CreditMemold

Type: reference

Properties: Nillable

Description: The credit memo created as the result of a successful request.

This field is a relationship field.

Relationship Name: CreditMemo

Refers To: CreditMemo

ErrorDetails

Type: string

Properties: Nillable

Description: If the request fails, this field shows error messages, error codes, and the ID of the record on which the errors occurred.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

IsSuccess

Type: boolean

Properties: Defaulted on create

Description: Required. Indicates whether the request was successful (`true`) or not (`false`).

The default value is `false`.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that's populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdIdentifier

Type: string

Properties: Nillable

Description: The unique ID returned in the response. Use this ID to identify the event for a specific request.

InvoiceProcessedEvent

Represents the notification to the customers after the process started by the `/commerce/billing/invoices` request is complete. The process groups billing schedules by grouping keys and creates one invoice per grouping key. The

`InvoiceProcessedEvent` platform event is a top-level object that contains a list of `InvoiceProcessedDetailEvents` platform events, where each detail event represents an attempt to create one invoice. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

`/event/InvoiceProcessedEvent`.

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

[InvoiceErrorDetailEvent](#)

Represents information about the errors that occurred during the processing of a `/commerce/billing/invoices` request. This object is included in an `InvoiceProcessedEvent` platform event message. You can't subscribe to `InvoiceProcessedEvent` platform event directly. This object is available in API version 62.0 and later.

[InvoiceProcessedDetailEvent](#)

Represents the notification to customers regarding the results of an attempt to create an invoice from billing schedules as part of `/commerce/billing/invoices` request. The `InvoiceProcessedDetailEvent` platform event contains the results of an attempt to create an invoice from one or more billing schedules that share a grouping key. Each `InvoiceProcessedDetailEvent` platform event for an action is grouped within the parent `InvoiceProcessedDetailEvent` platform event. This object is available in API version 62.0 and later.

Fields

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

InvoiceErrorDetailEvent

Type: [InvoiceErrorDetailEvent\[\]](#)

Properties: Nillable

Description: Information about errors that occurred during processing.

InvoiceProcessedDetailEvents

Type: [InvoiceProcessedDetailEvent\[\]](#)

Properties: Nillable

Description: A list of `InvoiceProcessedDetailEvent` records. Each record contains information about an attempt to create an invoice from one or more billing schedules that share a grouping key.

IsSuccess

Type: boolean

Properties: Defaulted on create

Description: Required. Indicates whether the Create Order from Invoice action was successful (`true`) or not (`false`).

The default value is `false`.

ReplayId

Type: string

Properties: Nillable

Description: An identification (ID) value that's populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A user can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdentifier

Type: string

Properties: Nillable

Description: A unique ID returned in the `/commerce/billing/invoices` response. Use this ID to identify the event for a specific request.

InvoiceErrorDetailEvent

Represents information about the errors that occurred during the processing of a `/commerce/billing/invoices` request. This object is included in an `InvoiceProcessedEvent` platform event message. You can't subscribe to `InvoiceProcessedEvent` platform event directly. This object is available in API version 62.0 and later.

Supported Calls

`describeObjects()`

Special Access Rules

This object is available when Billing is enabled.

Fields

ErrorCode

Type: string

Properties: None

Description: Reference code for the type of error that occurred.

ErrorMessage

Type: string

Properties: None

Description: Information about the error that occurred during processing.

ErrorSourceId

Type: reference

Properties: Nillable

Description: The ID of the record where the error occurred. This record can be an invoice or a billing schedule.

This field is a polymorphic relationship field.

Relationship Name: ErrorSource

Refers To: BillingSchedule, Invoice

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

InvoiceProcessedDetailEvent

Represents the notification to customers regarding the results of an attempt to create an invoice from billing schedules as part of `/commerce/billing/invoices` request. The `InvoiceProcessedDetailEvent` platform event contains the results of an attempt to create an invoice from one or more billing schedules that share a grouping key. Each `InvoiceProcessedDetailEvent` platform event for an action is grouped within the parent `InvoiceProcessedDetailEvent` platform event. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

`/event/InvoiceProcessedEvent`.

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

Fields

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

InvoiceErrorDetailEvents

Type: [InvoiceErrorDetailEvent](#)[]

Properties: Nillable
Description: A list of errors that occurred while attempting to create the invoice.

Invoiceld
Type: reference
Properties: Nillable
Description: The ID of the new invoice.
This field is a relationship field.
Relationship Name: Invoice
Refers To: Invoice

InvoiceStatus
Type: string
Properties: Nillable
Description: The value of the `Status` field on the invoice.

IsSuccess
Type: boolean
Properties: Defaulted on create
Description: Required. Indicates whether the invoice creation attempt was successful (`true`) or not (`false`).
The default value is `false`.

NegInvLineProcessedEvent
Represents the notification to the customers when a negative invoice line is converted to a credit memo This object is available in API version 62.0 and later.

Supported Calls
`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

/event/NegInvcLineProcessedEvent.

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

Fields

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

CrMemoProcessErrDtlEvents

Type: [CrMemoProcessErrDtlEvent](#)

Properties: Nillable

Description: A compilation of error messages and error codes for a failed request. See the `ErrorDetails` field for error messages and error codes.

CreditMemord

Type: reference

Properties: Nillable

Description: The ID of the credit memo created as a result of the successful conversion of a negative invoice line.

This field is a relationship field.

Relationship Name: CreditMemo

Refers To: CreditMemo

ErrorDetails

Type: string

Properties: Nillable

Description: If the request fails, this field shows error messages, error codes, and the ID of the record on which the errors occurred.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

InvoiceId

Type: reference

Properties: Nillable

Description: The ID of the invoice that this event is in reference to.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

IsAutomatedNegativeInvoiceLineConversion

Type: boolean

Properties: Defaulted on create

Description: Indicates whether this event is generated either by an automated process to convert negative invoice lines to credit memos (`true`) or by a manual process (`false`).

The default value is `false`.

IsSuccess

Type: boolean

Properties: Defaulted on create

Description: Required. Indicates whether the negative invoice lines were converted successfully to credit memos (`true`) or not (`false`).

The default value is `false`.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that's populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdIdentifier

Type: string

Properties: Nillable

Description: The unique identifier of the request. This field is always empty.

SequenceAssignedEvent

Represents the notification to customers about the assignment of a sequence to a target record. This process is initiated by the `/sequences/actions/assign` request. This object is available in API version 65.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	
Pub/Sub API	
Streaming API (CometD)	

Subscription Channel

`/event/SequenceAssignedEvent.`

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing and Sequential Numbering is enabled.

Fields

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that's populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

SequenceAssignmentDateTime

Type: dateTime

Properties: Nillable

Description: The date and time when the sequence pattern value was assigned to the target record.

SequencePatternValue

Type: string

Properties: Nillable

Description: The complete sequence value that's assigned to the target record.

SequencePolicyIdentifier

Type: string

Properties: Nillable

Description: The ID of the sequence policy that's related to the event.

SequenceValue

Type: string

Properties: Nillable

Description: The sequence value that's assigned to the target record.

TargetObjectName

Type: string

Properties: Nillable

Description: The name of the object to which the sequence policy is applicable.

TargetRecordIdentifier

Type: string

Properties: Nillable

Description: The ID of the target record to which the sequence policy is applied.

VoidInvoiceProcessedEvent

Represents the notification to the customers after the process started by the `/commerce/invoicing/invoices/{invoiceId}/actions/void` request is complete. The request attempts to void an invoice by crediting an invoice and changing its status to `Voided`, which prevents further changes. This object is available in API version 62.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	Yes
Flows	Yes
Processes	Yes
Pub/Sub API	Yes
Streaming API (CometD)	Yes

Subscription Channel

`/event/VoidInvoiceProcessedEvent`.

Event Delivery Allocation Enforced

No

Special Access Rules

This object is available when Billing is enabled.

Fields

CorrelationIdentifier

Type: string

Properties: Nillable

Description: Reserved for future use.

CrMemoProcessErrDtlEvents

Type: [CrMemoProcessErrDtlEvent](#)[]

Properties: Nillable

Description: A compilation of error messages and error codes for a failed request. See the `ErrorDetails` field for error messages and error codes.

CreditMemoid

Type: reference

Properties: Nillable

Description: The ID of the credit memo created to void the invoice as the result of a successful request.

This field is a relationship field.

Relationship Name: CreditMemo

Refers To: CreditMemo

ErrorDetails

Type: string

Properties: Nillable

Description: If the request fails, this field shows error messages, error codes, and the ID of the record on which the errors occurred.

EventUuid

Type: string

Properties: Nillable

Description: A universally unique identifier (UUID) that identifies a platform event message.

InvoiceId

Type: reference

Properties: Nillable

Description: The invoice that was voided as the result of a successful request.

This field is a relationship field.

Relationship Name: Invoice

Refers To: Invoice

IsSuccess

Type: boolean

Properties: Defaulted on create

Description: Required. Indicates whether the request was successful (`true`) or not (`false`).

The default value is `false`.

ReplayId

Type: string

Properties: Nillable

Description: Represents an ID value that’s populated by the system and refers to the position of the event in the event stream. Replay ID values aren’t guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.

RequestIdIdentifier

Type: string

Properties: Nillable

Description: The unique ID returned in the `/commerce/billing/invoices/{invoiceId}/actions/void` response. Use this ID to identify the event for a specific request.

Billing Standard Invocable Actions

Use standard invocable actions to automate processes such as credit application, billing schedules creation, and invoice management.

Commerce Payments Invocable Actions

This table provides a list of the invocable actions of Commerce Payments, which can be used for Billing.

Resource	Description
/services/data/v68.0/actions/standard/applyPayment (POST)	Apply a payment record to an invoice header by creating a PaymentLineInvoice record with Applied type.
/services/data/v68.0/actions/standard/paymentSale (POST)	Capture a payment without any prior authorization, and create a payment record.

Billing provides these invocable actions.

[Create Collection Plan Action](#)

Create one or more collection plans, each with its optional nested collection plan items.

[Apply Credit Action](#)

Apply a credit memo or credit memo line to an invoice or invoice line, respectively.

[Apply Payments and Credits by Rules Action](#)

Apply payments and credits to posted invoices by adhering to the specified rules.

[Automate Refund Action](#)

Initiate refund orchestration for a credit memo generated from a subscription cancellation or negative amendment.

[Process Refund Credit Memo Action](#)

Initiates a refund against a posted credit memo. This action locks the credit memo, calls the Commerce Refund API, and returns the refund and application record IDs.

[Create Billing Schedules From Billing Transaction Action](#)

Create one or more billing schedules for a specified billing transaction ID.

[Create Standalone Billing Schedules Action](#)

Creates billing schedules for internal or external transaction records by calling the Create Standalone Billing Schedules API.

[Extend Invoice Due Date Action](#)

Update the due date on an invoice to accommodate payment extensions or resolve billing disputes.

[Generate Account Statement](#)

Generates a comprehensive account statement for a specified account with transaction history and balance information.

[Generate Invoice Documents Action](#)

Asynchronously generate PDF documents for the invoices associated with an invoice batch run record that are in the `Draft` or `Posted` status.

[Issue Credit Memo Action](#)

Issue credit memos for disputed invoices to resolve billing disputes.

[Post Draft Credit Memo Action](#)

Post a draft credit memo to a credit memo record for review and approval.

[Post Draft Invoice Action](#)

Update the status of an invoice from `Draft` to `Posted` for a credit memo application.

[Post Draft Invoice Batch Run Action](#)

Update the status of a batch of invoices from `Draft` to `Posted` for a credit memo application.

[Recover Billing Schedules Action](#)

Recover one or more billing schedules in the `Error` or `Processing` status.

[Send Dunning Email Action](#)

Run an orchestration that sends dunning process emails for collection plans to recover overdue revenue and notify customers about amounts still due.

[Suspend Billing Action](#)

Suspend or resume the billing of an account to handle billing disputes.

[Update Bill To Contact Action](#)

Update the Bill to Contact detail on an invoice to ensure accurate billing communication and routing.

[Unapply Credit Action](#)

Unapply a credit memo or credit memo line from an invoice or invoice line, respectively.

[Unapply Payment Action](#)

Unapplies a payment that's already been applied to an invoice or invoice line by crediting the amount back to the payment and the invoice or invoice line.

[Void Posted Credit Memo Action](#)

Invoke the Void Posted Credit Memo API by providing a credit memo ID.

[Write Off Invoices Action](#)

Write off partially paid or unpaid invoices to manage pending debts and to maintain accurate financial records. This action calls the Posted Invoice List Write-Off (POST) API.

SEE ALSO:

- [Actions Developer Guide: Overview](#)
- [REST API Developer Guide: Invocable Actions Standard](#)

Create Collection Plan Action

Create one or more collection plans, each with its optional nested collection plan items.

Create multiple collection plans in a single request, each with optional nested collection plan items. If an item fails to create, its parent collection plan is rolled back.

This action is available in API version 68.0 and later.

Special Access Rules

The Create Collection Plan action is available in Enterprise, Developer, and Unlimited Editions where Billing is enabled.

Supported REST HTTP Methods

- URI**
`/services/data/v68.0/actions/standard/createCollectionPlan`
- Formats**
JSON, XML
- HTTP Methods**
POST
- Authentication**
Authorization: Bearer *token*

Inputs

Input	Type	
compositeCollectionPlanInput	CompositeCollectionPlanInput	        

Input	Type	qib
		ot de hæ otb ralp rac di a da til fo otb ralp di db — til fo otb ralp sp db — otb ralp retl sp

Outputs

Output	Type	qib
compositeCollection PlanResult	CompositeCollectionPlanResult	etp te tat sid a de sil htw ero te of hæ otb

Output	Type	
		
		
		
		
		
		
		
		

Example

POST

This example shows a sample request for the Create Collection Plan action.

```
{
  "inputs": [
    {
      "compositeCollectionPlanInput": {
        "collectionPlans": [
          {
            "accountId": "001xx000003DGXYA2",
            "contactId": "003xx000004TXYZA1",
            "initialDueAmount": 7500.00,
            "collectionPlanSegment": "High Risk",
            "dueDate": "2026-06-15",
            "collectionPlanReasonId": "0cR0000000000001",
            "usageType": "Billing",
            "overdueRiskIndicator": "High",
            "collectionPlanItems": [
              { "invoiceId": "inv0000000000001" },
              { "invoiceId": "inv0000000000002" }
            ]
          }
        ]
      }
    }
  ]
}
```

This example shows a sample response for the Create Collection Plan action.

```
[
  {
    "actionName": "createCollectionPlan",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outputValues": {
```



```
    "compositeCollectionPlanResult": {
      "results": [
        {
          "collectionPlanId": "1Eu0000000000001AAA",
          "collectionPlanItemIds": [
            "1Ev0000000000001AAA",
            "1Ev0000000000002AAA"
          ],
          "isSuccess": true,
          "errors": null
        }
      ]
    },
    "sortOrder": -1,
    "version": 1
  }
}
```

Apply Credit Action

Apply a credit memo or credit memo line to an invoice or invoice line, respectively.

This action credits the amount of the credit memo or credit memo line to the corresponding invoice or invoice line, reducing both their balances.

This action is available in API version 62.0 and later.

Special Access Rules

The Apply Credit action is available in Enterprise, Developer, and Unlimited Editions where Billing is enabled. To use this action, you need the Credit Memo Operations User permission set.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/applyCredit

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
appliedCreditAmount	double	Required. Credit amount applied to an invoice or invoice line.
creditSourceRecordId	string	Required. ID of the credit memo or credit memo line that's applied to an invoice or invoice line.
creditTargetRecordId	string	Required. ID of the invoice or invoice line record that the credit is applied to.

Input	Type	Description
description	string	Additional details about the credit memo or credit memo line to be applied to an invoice or invoice line.
effectiveDate	string	Date to use for applying the credit memo to an invoice or invoice line.

Outputs

Output	Type	Description
recordId	string	ID of the credit memo invoice application or credit memo line invoice line record of type Applied that the action created.

Example

POST

This example shows a sample request for the Apply Credit action.

```
{
  "inputs": [
    {
      "appliedCreditAmount": 20,
      "creditTargetRecordId": "3ttDU00000000iZYAQ",
      "creditSourceRecordId": "50gDU000000007NYAQ",
      "description": "Applied credit memo to an invoice",
      "effectiveDate": "2024-08-27"
    }
  ]
}
```

This example shows a sample response for the Apply Credit action.

```
{
  "actionName": "applyCredit",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outputValues": {
    "recordId": "4sFDU00000000652AA"
  },
  "sortOrder": -1,
  "version": 1
}
```

Apply Payments and Credits by Rules Action

Apply payments and credits to posted invoices by adhering to the specified rules.

This action uses predefined logic to allocate payments and credits, reducing any manual intervention and errors.

This action is available in API version 66.0 and later.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/applyPaymentsAndCreditsByRules

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
accountId	reference	Required. The ID of the account to perform the settlement of payments and credits against invoices in adherence with the applied rules.
targetDate	date	Optional. The date used to select invoices and invoice lines with a posted date equal to or later than the target date to apply payments and credits.

Outputs

Output	Type	Description
rulesApplicationResponse	Apex defined	The Apex RulesApplicationResponse record that contains the results of rules application including the list of applied rules, application details, and any errors.

Example

POST

Here's a sample request for the Apply Payments and Credits by Rules action.

```
{
  "inputs": [
    {
      "accountId": "001AAC0001NmajhYBB",
      "targetDate": "2025-08-27"
    }
  ]
}
```

Here's a sample success response for the Apply Payments and Credits by Rules action.

```
[
  {
    "actionName": "applyPaymentsAndCreditsByRules",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "rulesApplicationResponse": {
```

```

    "rulesApplicationSummary": {
      "totalPaymentApplications": 1,
      "totalCreditMemoApplications": 1,
      "fetchedPaymentsCount": 1,
      "fetchedCreditMemosCount": 1,
      "areAllInvoicesConsidered": true
    },
    "isSuccess": true,
    "errors": null,
    "appliedRules": [
      "Match Balance",
      "Prioritize Highest Balance Invoices"
    ]
  },
  "sortOrder": -1,
  "version": 1
}
]

```

Here's a sample error response for the Apply Payments and Credits by Rules action.

```

[
  {
    "actionName": "applyPaymentsAndCreditsByRules",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "rulesApplicationResponse": {
        "rulesApplicationSummary": null,
        "isSuccess": false,
        "errors": [
          {
            "message": "We couldn't find eligible invoices to apply rules-based credits
and payments. ",
            "errorCode": null
          }
        ],
        "appliedRules": null
      }
    },
    "sortOrder": -1,
    "version": 1
  }
]

```

Automate Refund Action

Initiate refund orchestration for a credit memo generated from a subscription cancellation or negative amendment.

When you cancel a subscription or make a change that lowers the price (a negative amendment), a credit memo is generated. A credit memo is a record that represents the amount to be returned. Use this action to process the refund for that credit memo.

During an invoice batch run, Revenue Cloud Billing uses these two org preferences to run the refund orchestration.

- Conversion of negative invoice lines to credit memo and credit memo lines—When turned on, this org preference creates a credit memo from the negative invoice lines of a cancellation or a negative amendment, and then emits a credit memo event.
- Issue refunds and settle balances — Listens to the credit memo event and starts the refund orchestration for the converted credit memo.

Turn off these org preferences to call this action directly and choose which credit memo receives a refund.

In both modes, the orchestration runs these steps in order.

- Remove payments from the original invoice. Partial removal isn’t supported, so each selected payment is removed in full. For example, if an invoice has two payments P1 (\$20) and P2 (\$15) and the refund amount is \$30, the orchestration removes both P1 and P2 in full for a total of \$35.
- Apply back any extra amount to the invoice. In the example above, \$35 was removed but only \$30 is needed for the refund. The orchestration applies the extra \$5 from P2 back to the original invoice.
- Apply the credit memo to the original invoice to record the credit.
- Send a refund request to the payment gateway. The payment gateway is the service that processes the customer's payment method. For example, a credit card processor. In the example above, the orchestration sends two separate refund requests, one for P1 (\$20) and one for P2 (\$10, the portion not applied back).
- Record each refund against its original payment.

The orchestration selects the fewest payments to unapply so that the total unapplied amount is at least equal to the refund amount.

This action is available in API version 67.0 and later.

For more information about automated refunds in Subscription Management, see [Automate a refund \(Subscription Management reference\)](#).

Special Access Rules

The Automate Refund action is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/automateRefund`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
creditMemoId	ID	Required. ID of the credit memo to generate a refund.
invoiceId	ID	ID of the invoice that the credit memo converts from. This ID matches the value in the Reference Entity field of the credit memo object. When you omit this input, the action reads the invoice ID from the Reference Entity field. When you provide this input, the value must match the Reference Entity field. If the values don’t match, the action returns a validation error.

Outputs

Output	Type	Description
statusUrl	string	URL to poll for the <code>RefundAsyncOperation</code> status. Use this URL to access the tracking record for the credit memo and check the current orchestration run status.

Example

POST

This sample request is for the Automate Refund action.

```
{
  "inputs": [
    {
      "creditMemoId": "3ttxx0000000001AAA",
      "invoiceId": "3ttxx0000000002BBB"
    }
  ]
}
```

This sample response shows a successful invocation with a status URL.

```
[
  {
    "actionName": "automateRefund",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "statusUrl": "/services/data/v67.0/async-operations/00Dxx000000000EAA/status"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

This sample shows an error response for an invalid credit memo ID.

```
[
  {
    "actionName": "automateRefund",
    "errors": [
      {
        "statusCode": "INVALID_INPUT",
        "message": "The value \"INVALID\" for the creditMemoId parameter is invalid.",
        "fields": []
      }
    ],
    "invocationId": null,
    "isSuccess": false,
    "outcome": null,
    "outputValues": null,
  }
]
```

```

    "sortOrder": -1,
    "version": 1
  }
]

```

Process Refund Credit Memo Action

Initiates a refund against a posted credit memo. This action locks the credit memo, calls the Commerce Refund API, and returns the refund and application record IDs.

This action is available in API version 68.0 and later.

Special Access Rules

The Process Refund Credit Memo action is available in Enterprise, Unlimited, and Developer Editions where Billing is enabled. To use this action, your org needs the Payment Run Advance permission.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/processUnreferencedRefund`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>appliedToId</code>	reference	Required. ID of the posted credit memo to refund against.
<code>currencyIsoCode</code>	string	Optional. ISO currency code for the refund. Required when multi-currency is enabled. The value must match the currency of the credit memo.
<code>refundNotes</code>	string	Optional. Notes stored in the refund record comments.
<code>paymentMethodId</code>	reference	Optional. ID of the payment method to issue the refund on. The payment method must be valid and active.
<code>refundAmount</code>	double	Required. Amount to refund. The value must be greater than 0 and less than or equal to the remaining balance of the credit memo.
<code>refundReason</code>	string	Optional. Reason for the refund.

Outputs

Output	Type	Description
<code>processRefundResponse</code>	Apex defined Result type	Result of the refund operation. Contains these fields <code>success</code> (boolean)—Indicates whether the refund was processed successfully (<code>true</code>) or not (<code>false</code>); <code>refundId</code>

Output	Type	Description
		(string)—ID of the created refund record; <code>applicationId</code> (string)—ID of the created application junction record (<code>CreditMemoRefund</code> or <code>CreditMemoLineRefund</code>) that links the refund to the credit memo; or <code>errors</code> (list of Apex-defined <code>ProcessRefundCreditMemoErrorResponse</code>)—List of errors returned if the refund wasn't processed successfully. Each error contains an <code>errorCode</code> and a <code>message</code> . Possible error codes are <code>INVALID_CREDIT_MEMO</code> —The specified credit memo isn't in a valid state for refund processing, <code>AMOUNT_EXCEEDS_BALANCE</code> —The refund amount exceeds the remaining balance on the credit memo, <code>CREDIT_MEMO_LOCKED</code> —The credit memo is locked by another operation, <code>LIMIT_EXCEEDED</code> —The number of requests exceeds the maximum allowed (50), <code>MISSING_REQUIRED_FIELD</code> —A required input parameter is missing, or <code>EXTERNAL_SERVICE_EXCEPTION</code> —The Commerce Refund API call failed without a more specific error.

Example

POST

This sample request is for the Process Refund Credit Memo action.

```
{
  "inputs": [
    {
      "appliedToId": "0PMxx0000000001AAA",
      "refundAmount": 100,
      "currencyIsoCode": "USD",
      "refundReason": "Customer requested refund",
      "paymentMethodId": "08pxx0000000001AAA",
      "refundNotes": "Refund processed per case 00298475."
    }
  ]
}
```

This sample response shows a successful invocation.

```
[
  {
    "actionName": "processUnreferencedRefund",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "processRefundResponse": {
        "success": true,
        "refundId": "0Rfxx0000000001AAA",
        "applicationId": "0CMxx0000000001AAA",
        "errors": []
      }
    },
    "sortOrder": -1,
  }
]
```



```

    "version": 1
  }
]

```

This sample shows an error response for a credit memo already locked by another operation.

```

[
  {
    "actionName": "processUnreferencedRefund",
    "errors": [
      {
        "statusCode": "CREDIT_MEMO_LOCKED",
        "message": "The Credit Memo is currently locked by another operation. Please try again.",
        "fields": []
      }
    ],
    "invocationId": null,
    "isSuccess": false,
    "outcome": null,
    "outputValues": null,
    "sortOrder": -1,
    "version": 1
  }
]

```

Create Billing Schedules From Billing Transaction Action

Create one or more billing schedules for a specified billing transaction ID.

This action calls the [Create Billing Schedules for Orders \(POST\) API](#) to retrieve the billing transaction items associated with the billing transaction ID. The API generates the corresponding billing schedules for each of the billing transaction items for operations such as transaction modifications, renewals, cancellations, and new sales.

This action is available in API version 62.0 and later.

Special Access Rules

The Create Billing Schedules From Billing Transaction action is available in Enterprise, Unlimited, and Developer Editions where Billing is enabled. To use this action, you need the Create Billing Schedules From Billing Transactions API permission set.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/createBillingSchedulesFromBillingTransaction

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>billingTransactionId</code>	string	Required. ID of the billing transaction record to create one or more billing schedules for.
<code>executeAsync</code>	boolean	Optional. Indicates whether to process the request asynchronously (<code>true</code>). The default value is <code>false</code> (synchronous). Available in API version 68.0 and later.

Outputs

Output	Type	Description
<code>requestId</code>	string	Universally Unique Identifier (UUID) that's used to track the status of the asynchronous action.
<code>statusUrl</code>	string	URL that's used to check the status of the API request.

Example

POST

This example shows a sample request for the Create Billing Schedules From Billing Transaction action.

```
{
  "inputs": [
    {
      "billingTransactionId": "801xx000003JztvAAC"
    }
  ]
}
```

This example shows a sample response for the Create Billing Schedules From Billing Transaction action.

```
{
  "actionName": "createBillingSchedulesFromBillingTransaction",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "requestId": "4sFDU00000000652AA",
    "statusUrl": "/services/data/v62.0/subjects/AsyncOperationTracker/16Pxx0000004NhAEAU"
  },
  "sortOrder": -1,
  "version": 1
}
```

SEE ALSO:

[Revenue Cloud Developer Guide: Context-Aware Billing Schedule API](#)

Create Standalone Billing Schedules Action

Creates billing schedules for internal or external transaction records by calling the Create Standalone Billing Schedules API.

This action is available in API version 64.0 and later.

See [Create Standalone Billing Schedules \(POST\) API](#) to know more about the mandatory and optional tags, sample transaction details, and sample payloads for various types of transactions.

Special Access Rules

This action is available in Enterprise, Unlimited, and Developer Editions with the Revenue Cloud Billing license. To use this action, you need the Billing Operations permission set.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/createBillingSchedulesFromTrxn`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>contextDefinitionName</code>	string	Required. Name of the context definition that contains the mappings for the transaction record and billing schedules.
<code>executeAsync</code>	boolean	Optional. Indicates whether to process the request asynchronously (<code>true</code>). The default value is <code>false</code> (synchronous). Available in API version 68.0 and later.
<code>readContextMappingName</code>	string	Required. Name of the context mapping with the mapping for the transaction.
<code>saveContextMappingName</code>	string	Required. Name of the context mapping with the mapping for the billing schedule and billing schedule group. The save context mapping is used to save the billing schedule.
<code>transactionDetails</code>	string	Required. A JSON string containing the ID of the transaction record that the billing schedule is created for and other additional transaction details.

Outputs

Output	Type	Description
<code>requestId</code>	string	Unique request identifier that you can use to poll the asynchronous request.
<code>statusUrl</code>	string	Status URL that's used to track the operation.

Example

POST

Here's a sample request for the Create Billing Schedules From Transaction action.

```
{
  "inputs": [
    {
      "transactionDetails":
"contextDefinitionName": "StandaloneBillingContext__stdctx",
      "readContextMappingName": "TransactionMapping",
      "saveContextMappingName": "BSGEntitiesMapping"
    }
  ]
}
```

Here's a sample response for the Create Billing Schedules From Transaction action.

```
{
  "actionName": "createBillingSchedulesFromTrxn",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "requestId": "16PZ6000000CnKRMA0",
    "statusUrl": "/services/data/v64.0/objects/AsyncOperationTracker/16PZ6000000CnKRMA0"
  },
  "sortOrder": -1,
  "version": 1
}
```

Extend Invoice Due Date Action

Update the due date on an invoice to accommodate payment extensions or resolve billing disputes.

Specify the invoice ID and the revised due date to adjust the payment timeline. Use this action to extend or change the due date on an invoice.

This action is available in API version 66.0 and later.

Special Access Rules

The Extend Invoice Due Date Action is available in Enterprise, Developer, and Unlimited Editions where Dispute Management is enabled in Billing.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/blngSvcExtendInvoiceDueDate

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
invoiceId	string	ID of the invoice whose due date must be revised.
revisedDueDateTime	date	Date and time that's to be updated as the new due date on the invoice.

Outputs

Output	Type	Description
additional Information	string	Any additional information to be included in the response.
isSuccess	boolean	Indicates whether the due date is updated on the invoice record (<i>true</i>) or not (<i>false</i>).

Example

POST

This sample request is for the Extend Invoice Due Date action.

```
{
  "inputs": [
    {
      "invoiceID": "801xx000003GYexAAG",
      "revisedDueDate": "2025-03-31"
    }
  ]
}
```

This sample response is for the Extend Invoice Due Date action.

```
[
  {
    "actionName": "blngSvcExtendInvoiceDueDate",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "isSuccess": true,
      "additionalInformation": "{\\"status\\":\\"Due date updated successfully\\"}"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Generate Account Statement

Generates a comprehensive account statement for a specified account with transaction history and balance information.

An account statement includes these details.

- Transaction History—List of all financial transactions, such as invoices, credit memos, debit memos, payments, and refunds, within a specified date range.
- Open Balances—Non-zero balances for invoices and other transactions.
- Account Summary—Aggregated totals including beginning balance, total charges, total payments, and ending balance.
- Multi-currency Support—Transactions across multiple currencies.

This action is available in API version 66.0 and later.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/generateAccountStatement`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>accountId</code>	string	Required. ID of the account for which to generate the statement of account.
<code>associatedAccountIds</code>	string	List of associated account IDs from hierarchy to include in the statement. You can specify a maximum of 50 accounts.
<code>correlationId</code>	string	Correlation ID that tracks messages related to the request. These messages are logged in Splunk by the different services involved in the request. If this ID isn't specified, a random Universally Unique Identifier (UUID) is created.
<code>customFields</code>	string	JSON string specifying custom fields to include in the statement. As a best practice, we recommend that you limit the number of custom fields up to 30 fields. Valid objects to specify the associated fields are <code>Invoice</code> , <code>CreditMemo</code> , <code>Payment</code> , <code>DebitMemo</code> , <code>Refund</code> , or <code>Account</code> . Available in API version 67.0 and later.
<code>documentTemplateId</code>	string	Document template ID to use for PDF generation. If you don't specify a value, the default account statement template is used.
<code>shouldShowOpenBalancesOnly</code>	boolean	Indicates whether to show only accounts with non-zero balances (<code>true</code>) or complete transaction history within date range (<code>false</code>).
<code>sortBy</code>	string	Required. Criteria for sorting transactions. The default and valid value is <code>Date</code> .
<code>sortingOrder</code>	string	Sort order for transactions. Values are <code>Ascending</code> or <code>Descending</code> . The default value is <code>Desc</code> .
<code>startDate</code>	date	Required. The date from when the transaction history is to be considered in YYYY MM DD format. This parameter value is required when the <code>shouldShowOpenBalancesOnly</code>

Input	Type	Description
		parameter value is <code>false</code> . The date must be within the last 90 days and can't be in the future.
transactionTypes	string	List of transaction types to include in the statement. If you don't specify a value or if it's empty, all transaction types are included. Valid values are <code>All</code> , <code>Invoice</code> , <code>CreditMemo</code> , <code>Payment</code> , <code>DebitMemo</code> , or <code>Refund</code> .

Example:

```
{"Invoice": ["field1", "field2"], "Account": {"base": ["field1"], "associated": ["field2"]}}
```

Outputs

Output	Type	Description
accountId	string	ID of the account for which to generate the account statement.
requestIdentifier	string	Unique request identifier for tracking the async operation.
statusUrl	string	URL that tracks the status of the request and retrieves the generated document.
templateId	string	Document template ID that's used for PDF generation.

Example

POST

This example shows a sample request for the Generate Account Statement action.

```
{
  "inputs": [
    {
      "accountId": "001000000000001AAA",
      "shouldShowOpenBalancesOnly": false,
      "startDate": "2025-01-01",
      "transactionTypes": [
        "All"
      ],
      "sortBy": "Date",
      "sortingOrder": "Descending",
      "associatedAccountIds": [
        "001000000000002AAA",
        "001000000000003AAA"
      ],
      "documentTemplateId": "a0T000000000001AAA",
      "customFields": "{\"Invoice\": [\"TotalAmountWithTax\"], \"Account\": {\"base\": [\"Phone\", \"Fax\"], \"associated\": [\"Website\"]}}}"
    }
  ]
}
```

This example shows a sample response for the Generate Account Statement action.

```
{
  "accountId": "001AAC0001O5W9pYBF",
  "errors": [],
  "requestIdentifier": "3267407f-0c96-4b8a-a8e0-bb7a71c91a2f",
  "statusUrl": "16PAAC000008AIM",
  "success": true,
  "templateId": "2dtAAC000002oiIYBQ"
}
```

Generate Invoice Documents Action

Asynchronously generate PDF documents for the invoices associated with an invoice batch run record that are in the `Draft` or `Posted` status.

This action uses the ID of the invoice batch run record to find the draft or posted invoices from the batch and to generate the PDF documents for its invoices that are in the `Draft` or `Posted` status. This action creates a `DocGenerationBatchProcess` record that contains the Document Generation Process and Invoice Document records for each of the invoices. This action is available in API version 63.0 and later with Revenue Cloud Billing.

Special Access Rules

The Generate Invoice Documents action is available in Enterprise, Unlimited, and Developer Editions where Revenue Cloud Billing is enabled. The org must have Billing Docgen enabled and an active Invoice Document Template to generate PDF documents. To use this action, you need either the Billing Operations User or the Billing Admin permission set, along with the Docgen Designer and Docgen Designer Standard User permission sets.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/generateInvoiceDocuments`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>invoiceBatchRunId</code>	string	Required. ID of the invoice batch run record that created the draft or posted invoices.

Outputs

Output	Type	Description
<code>requestId</code>	string	An alphanumeric string to track the status of the document generation request.
<code>requestStatus</code>	boolean	Indicates whether the operation is successful (<code>true</code>) or not (<code>false</code>).

Example

POST

This example shows a sample request for the Generate Invoice Documents action.

```
{
  "inputs": [
    {
      "invoiceBatchRunId": "5IRSG000001Az014AC"
    }
  ]
}
```

This example shows a sample response for the Generate Invoice Documents action.

```
{
  "actionName": "generateInvoiceDocuments",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "requestId": "4sFDU00000000652AA",
    "requestStatus": true
  }
}
```

Issue Credit Memo Action

Issue credit memos for disputed invoices to resolve billing disputes.

Specify the credit request list to automate the creation of credit memos during the dispute resolution process. The credit request list includes the invoice ID, the total credit amount, an optional description, and a detailed list of specific invoice lines with their corresponding credit amounts.

This action is available in API version 66.0 and later.

Special Access Rules

The Issue Credit Memo Action is available in Enterprise, Developer, and Unlimited Editions where Dispute Management is enabled in Billing.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/blngDsptIssueCreditMemo

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
creditRequestList	Apex-defined	List of Apex-defined creditRequestInputRepresentations objects that contains the invoice ID, credit amount, description, and a list of creditLineRequestInputRepresentations objects. The creditLineRequestInputRepresentations objects include the invoice line ID, credit line amount, and a description. See CreditLineRequestInputRepresentations Apex class.

Outputs

Output	Type	Description
creditResponse	Apex-defined	An Apex-defined creditResponseOutputRepresentations object that contains the status and any additional information.

Example

POST

This sample request is for the Issue Credit Memo action.

```
{
  "inputs": [
    {
      "creditRequestList": [
        {
          "invoiceId": "801xx000003GYexAAG",
          "creditAmount": 100,
          "description": "Credit for disputed charges",
          "creditLineRequestInputRepresentations": [
            {
              "invoiceLineId": "801xx000003GYeyAAG",
              "creditLineAmount": 50,
              "description": "Line-level credit"
            }
          ]
        }
      ]
    }
  ]
}
```

This sample response is for the Issue Credit Memo action.

```
[
  {
    "actionName": "blngDsptIssueCreditMemo",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
  }
]
```

```
{
  "outputValues": {
    "creditResponse": {
      "success": true,
      "message": "Credit memo issued successfully"
    }
  },
  "sortOrder": -1,
  "version": 1
}
```

Post Draft Credit Memo Action

Post a draft credit memo to a credit memo record for review and approval.

This action is available in API version 65.0 and later.

Supported REST HTTP Methods

URI: /services/data/v**68.0**/actions/standard/postDraftCreditMemo

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
correlationId	string	Splunk correlation ID to use to track messages that are related to the request and logged in Splunk by the different services involved in the request. If not specified, the service creates a random Universally Unique Identifier (UUID).
creditMemoId	string	Required. ID of the credit memo record in <code>Draft</code> status to be posted.

Outputs

Output	Type	Description
requestIdentifier	string	The UUID that's used to track the status of the asynchronous action.
statusUrl	string	The URL to use to check the status of the request.

Example

POST

This example shows a sample request that contains the ID of the credit memo to be posted.

```
{
  "inputs": [
    {
      "creditMemoId": "50gDU00000001MdYAI"
    }
  ]
}
```

This example shows a sample successful response.

```
[
  {
    "actionName": "postDraftCreditMemo",
    "errors": [],
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "statusUrl": "/services/data/v68.0/subjects/AsyncOperationTracker/16PDU000000A4nw2AC",

      "requestIdentifier": "d3a9d9ce-2a83-4a08-bcf3-df0348a0008c"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Post Draft Invoice Action

Update the status of an invoice from `Draft` to `Posted` for a credit memo application.

This action uses the ID of the draft invoice and triggers an asynchronous process to post the invoice. This action is available in API version 62.0 and later.

Special Access Rules

The Post Draft Invoice action is available in Enterprise, Unlimited, and Developer Editions where Billing is enabled. To use this action, you need the Billing Operations User permission set.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/postDraftInvoice`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
correlationId	string	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).
invoiceId	string	Required. ID of the <code>Draft</code> invoice to be posted.

Outputs

Output	Type	Description
requestIdentifier	string	UUID that's used to track the status of the asynchronous action.
statusUrl	string	URL that's used to check the status of the API request.

Example

POST

This example shows a sample request for the Post Draft Invoice action.

```
{
  "inputs": [
    {
      "invoiceId": "3ttDU00000000iZYAQ"
    }
  ]
}
```

This example shows a sample response for the Post Draft Invoice action.

```
{
  "actionName": "postDraftInvoice",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "requestIdentifier": "4sFDU00000000652AA",
    "statusUrl": "/services/data/v62.0/subjects/AsyncOperationTracker/16Pxx0000004NhAEAU"
  }
}
```

Post Draft Invoice Batch Run Action

Update the status of a batch of invoices from `Draft` to `Posted` for a credit memo application.

This action uses the ID of the invoice batch run record to find draft invoices from the batch and to post the draft invoices to an invoice record. This action is available in API version 62.0 and later.

Special Access Rules

The Post Draft Invoice Batch Run action is available in Enterprise, Unlimited, and Developer Editions where Billing is enabled. To use this action, you need the Billing Operations User permission set.

Supported REST HTTP Methods

URI: /services/data/v~~68.0~~**69.0**/actions/standard/postDraftInvoiceBatchRun

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
invoiceBatchRunId	string	Required. ID of the invoice batch run record that created the draft invoices.

Outputs

Output	Type	Description
invBatchDraftToPostedRunId	string	ID of the record that's created to track the batch process of posting draft invoices. These draft invoices are associated with the parent invoice batch run record.

Example

POST

This example shows a sample request for the Post Draft Invoice Batch Run action.

```
{
  "inputs": [
    {
      "invoiceBatchRunId": "5IRSG000001Az014AC"
    }
  ]
}
```

This example shows a sample response for the Post Draft Invoice Batch Run action.

```
{
  "actionName": "postDraftInvoiceBatchRun",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "invBatchDraftToPostedRunId": "4sFDU00000000652AA"
  }
}
```

Recover Billing Schedules Action

Recover one or more billing schedules in the `Error` or `Processing` status.

This action uses the ID of the billing schedule record in the `Error` or `Processing` status to retrieve the latest generated invoice. This action also retrieves any other billing schedules in the `Error` or `Processing` status associated with that invoice.

This action is available in API version 62.0 and later.

Special Access Rules

The Recover Billing Schedules action is available in Enterprise, Unlimited, and Developer Editions where Billing is enabled. To use this action, you need the Manage Errors Using Invoice Error Recovery API permission set.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/recoverBillingSchedules`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>billingScheduleId</code>	string	Required. ID of the billing schedule record in the <code>Error</code> or <code>Processing</code> status.

Outputs

Output	Type	Description
<code>successBillingScheduleIds</code>	string	Comma-separated list of IDs associated with the parent billing schedule record in the <code>Error</code> or <code>Processing</code> status.

Example

POST

This example shows a sample request for the Recover Billing Schedules action.

```
{
  "inputs": [
    {
      "billingScheduleId": "801xx000003JztvAAC"
    }
  ]
}
```

This example shows a sample response for the Recover Billing Schedules action.

```
{
  "actionName": "recoverBillingSchedules",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "successBillingScheduleIds": ["4sFDU00000000652AA", 16Pxx0000004NhAEAU]
  },
  "sortOrder": -1,
  "version": 1
}
```

Send Dunning Email Action

Run an orchestration that sends dunning process emails for collection plans to recover overdue revenue and notify customers about amounts still due.

Specify the collection plan for the dunning emails. Optionally, specify the email template by name or by ID. The action triggers an orchestration that sends dunning process emails for a collection plan based on your configured timeline.

This action is available in API version 67.0 and later.

Special Access Rules

The Send Dunning Email action is available in Enterprise, Unlimited, and Developer Editions of Revenue Cloud.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/blngSendDunningEmail`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
collectionPlanId	string	Required. ID of the collection plan record for dunning emails.
emailTemplateNameOrId	string	Email template name or ID to use for the reminder email. If not specified, the default email template is used.

Outputs

Output	Type	Description
isDunningEmailSent	boolean	Indicates whether the dunning email related to the collection plan was sent (<code>true</code>) or not (<code>false</code>).

Output	Type	Description
additional Information	string	Additional information to be passed on with the response.

Example

POST

This sample request is for the Send Dunning Email action.

```
{
  "inputs": [
    {
      "collectionPlanId": "0PLxxxxxxxxxxxxxxxx",
      "emailTemplateNameOrId": "Dunning_Reminder_Template"
    }
  ]
}
```

This sample response is for the Send Dunning Email action.

```
[
  {
    "actionName": "blngSendDunningEmail",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "isDunningEmailSent": true,
      "additionalInformation": null
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Suspend Billing Action

Suspend or resume the billing of an account to handle billing disputes.

Specify the account ID and a date when billing must be suspended. Optionally, specify the date when billing must be resumed. The action suspends billing for the account from the suspension date and, if provided, resumes billing on the resumption date.

This action is available in API version 66.0 and later.

Special Access Rules

The Suspend Billing Action is available in Enterprise, Developer, and Unlimited Editions where Dispute Management is enabled in Billing.

Supported REST HTTP Methods

URI: /services/data/v~~68.0~~**69.0**/actions/standard/blngSvcSuspendBilling

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
accountId	string	ID of the account for which billing must be suspended.
resumptionDate	date	Date when the billing must be resumed.
suspensionDate	date	Date when the billing must be suspended.

Outputs

Output	Type	Description
additional Information	string	Any additional information to be included in the response.
isSuccess	boolean	Indicates whether the billing related to the specified account was suspended (<i>true</i>) or not (<i>false</i>). The default value is <i>false</i> .

Example

POST

This sample request is for the Suspend Billing action.

```
{
  "inputs": [
    {
      "accountId": "001xx000003GYexAAG",
      "suspensionDate": "2025-03-01",
      "resumptionDate": "2025-03-15"
    }
  ]
}
```

This sample response is for the Suspend Billing action.

```
[
  {
    "actionName": "blngSvcSuspendBilling",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
  }
]
```

```
"outcome": null,
"outputValues": {
  "isSuccess": true,
  "additionalInformation": "{\"status\":\"Billing suspended successfully\"}"
},
"sortOrder": -1,
"version": 1
}
]
```

Update Bill To Contact Action

Update the Bill to Contact detail on an invoice to ensure accurate billing communication and routing.

Specify the invoice ID and the new Bill to Contact detail. Optionally, indicate whether the new contact must be set as the default for future invoices. Use this action to change the contact to be billed on an invoice, for example, when handling a billing dispute.

This action is available in API version 66.0 and later.

Special Access Rules

The Update Bill To Contact Action is available in Enterprise, Developer, and Unlimited Editions where Dispute Management is enabled in Billing.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/blngSvcUpdateBillToContact`

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
<code>invoiceId</code>	string	ID of the invoice whose Bill to Contact detail must be updated.
<code>newBillToContactId</code>	string	ID of the Bill to Contact record to be updated on the invoice.
<code>setAsDefault</code>	boolean	Indicates whether the new Bill to Contact detail must be set as default for future invoices (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .

Outputs

Output	Type	Description
<code>additionalInformation</code>	string	Any additional information to be included in the response.

Output	Type	Description
<code>isSuccess</code>	boolean	Indicates whether the Bill to Contact detail is updated on the invoice record (<code>true</code>) or not (<code>false</code>).

Example

POST

This sample request is for the Update Bill To Contact action.

```
{
  "inputs": [
    {
      "invoiceID": "3ttxx0000000001AAA",
      "newBillToContactid": "003xx000004XYZPAA4",
      "setAsDefault": true
    }
  ]
}
```

This sample response is for the Update Bill To Contact action.

```
[
  {
    "actionName": "blngSvcUpdateBillToContact",
    "errors": null,
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "isSuccess": true,
      "additionalInformation": "{\"status\":\"Success\",\"notes\":\"Default billing contact updated.\"}"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Unapply Credit Action

Unapply a credit memo or credit memo line from an invoice or invoice line, respectively.

This action unapplies the credit from an invoice or invoice line. This process involves crediting the applied amount of the credit memo invoice application or credit memo line invoice line record to the related credit memo or credit memo line and invoice or invoice line.

This action is available in API version 62.0 and later.

Special Access Rules

The Apply Credit action is available in Enterprise, Developer, and Unlimited Editions where Billing is enabled. To use this action, you need the Credit Memo Operations User permission set.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/unapplyCredit

Formats: JSON, XML

HTTP Methods: POST

Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
effectiveDate	string	Date when the credit is unapplied from an invoice or invoice line.
description	string	Additional details about the credit memo invoice application or credit memo line invoice line record of type <code>Applied</code> that's processed.
recordId	string	Required. ID of the credit memo invoice application or credit memo line invoice line record of type <code>Applied</code> that's processed to unapply the credit.

Outputs

Output	Type	Description
recordId	string	ID of the credit memo invoice application or credit memo line invoice line record of type <code>Unapplied</code> that the action created.

Example

POST

This example shows a sample request for the Unapply Credit action.

```
{
  "inputs": [
    {
      "recordId": "4sFDU000000005g2AA",
      "description": "Unapplied credit memo from an invoice",
      "effectiveDate": "2024-08-27"
    }
  ]
}
```

This example shows a sample response for the Unapply Credit action.

```
{
  "actionName": "unapplyCredit",
  "errors": null,
  "invocationId": null,
  "isSuccess": true,
  "outputValues": {
```

```
    "recordId": "4sFDU00000000602AA"
  },
  "sortOrder": -1,
  "version": 1
}
```

Unapply Payment Action

Unapplies a payment that's already been applied to an invoice or invoice line by crediting the amount back to the payment and the invoice or invoice line.

If the **Apply Payments to Invoices** setting is enabled, payments can be applied to invoices, which creates the `PaymentLineInvoice` records of type `Applied`. If the **Apply Payments to Invoices feature** setting is disabled, payments can be applied to invoice lines, which creates the `PaymentLineInvoiceLine` records of type `Applied`.

When payments are unapplied, the `PaymentLineInvoice` or `PaymentLineInvoiceLine` records of type `Applied` has the associated `PaymentLineInvoice` or `PaymentLineInvoiceLine` records of type `Unapplied`.

This action is available in API version 64.0 and later.

Special Access Rules

This action is available in Enterprise, Unlimited, and Developer Editions where Billing is enabled. To use this action, you need the `Payment Ops` permission set.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/unapplyPayment`

Formats: JSON, XML

HTTP Methods: POST

Authentication: `Authorization: Bearer token`

Inputs

Input	Type	Description
<code>description</code>	<code>string</code>	Additional details about the payment line invoice or payment line invoice line that's processed to unapply the payment.
<code>effectiveDateTime</code>	<code>datetime</code>	Date and time to use for unapplying the payment from an invoice or invoice line.
<code>recordId</code>	<code>id</code>	Required ID of the payment line invoice or payment line invoice line record of type <code>Applied</code> that's processed to unapply the payment.

Outputs

Output	Type	Description
recordId	id	ID of the payment line invoice or payment line invoice line record of type Unapplied that the action created.
unappliedDateTime	datetime	Date and time when the payment was unapplied.

Example

POST

This sample request is for the Unapply Payment action.

```
{
  "inputs": [
    {
      "description": "Unapply payment",
      "effectiveDateTime": "2024-08-11T07:53:15.000Z",
      "recordId": "1PLR00000000dDOAQ"
    }
  ]
}
```

This sample response is for the Unapply Payment action.

```
{
  "actionName": "unapplyPayment",
  "errors": null,
  "isSuccess": true,
  "outputValues": {
    "recordId": "1PLR00000000dDOAQ",
    "unappliedDateTime": "2024-08-11T08:09:01.000Z"
  },
  "sortOrder": -1,
  "version": 1
}
```

Void Posted Credit Memo Action

Invoke the Void Posted Credit Memo API by providing a credit memo ID.
This action is available in API version 66.0 and later.

Supported REST HTTP Methods

URI: /services/data/v68.0/actions/standard/voidPostedCreditMemo
Formats: JSON, XML
HTTP Methods: POST
Authentication: Authorization: Bearer *token*

Inputs

Input	Type	Description
creditMemoId	string	Required. ID of the credit memo record in posted status to be voided.

Outputs

Output	Type	Description
debitMemoId	string	ID of the created debit memo record.
statusUrl	string	URL to use to check the status of the request.

Example

POST

Here's a sample request for the Void Posted Credit Memo action.

```
{
  "inputs": [
    {
      "creditMemoId": "50gSG0000001y5NYAQ"
    }
  ]
}
```

Here's a sample response for the Void Posted Credit Memo action.

```
[
  {
    "actionName": "voidPostedCreditMemo",
    "errors": [],
    "invocationId": null,
    "isSuccess": true,
    "outcome": null,
    "outputValues": {
      "debitMemoId": "4DmSG0000001YcIP0A0",
      "statusUrl": "/services/data/v68.0/subjects/AsyncOperationTracker/16PSG000001qlyL2AQ"
    },
    "sortOrder": -1,
    "version": 1
  }
]
```

Write Off Invoices Action

Write off partially paid or unpaid invoices to manage pending debts and to maintain accurate financial records. This action calls the Posted Invoice List Write-Off (POST) API.

This action is available in API version 64.0 and later.

Special Access Rules

The Write Off Invoices action is available in Enterprise, Developer, and Unlimited Editions where Billing is enabled. To use this action, you need the Billing Operations User and Credit Memo Operations User permission sets.

Supported REST HTTP Methods

URI: `/services/data/v68.0/actions/standard/writeOffInvoices`

Formats: JSON, XML

HTTP Methods: GET

Authentication: Authorization: Bearer *token*

Notes: You can also call the associated Connect REST API endpoint or InvoiceWriteOff Apex methods. See [Posted Invoice List Write-Off \(POST\)](#) API or [InvoiceWriteOff Namespace](#).

Inputs

Input	Type	Description
<code>writeOffInvoiceInputList</code>	Apex defined	Required. A collection of Apex input records that contain details about the invoices to be written off. See InvoiceWriteOff Namespace for the list of input parameters.

Outputs

Output	Type	Description
<code>writeOffInvoiceResponseList</code>	Apex defined	A collection of Apex output records that contain details about the invoices that were written off. See InvoiceWriteOff Namespace for the list of output parameters.

Example

GET

This sample request is for the Write Off Invoices action.

```
{
  "inputs": [
    {
      "apexClass": "InvoiceWriteOff__WriteOffInvoiceInputList",
      "bytlength": 0,
      "configuration": false,
      "defaultValue": null,
      "description": "A collection of Apex WriteOffInvoiceInputList records that contain details about the invoices to be written-off.",
      "label": "WriteOffInvoiceInputList",
      "maxOccurs": 1,

```

```

    "name": "writeOffInvoiceInputList",
    "picklistValues": null,
    "placeholderText": null,
    "required": true,
    "sObjectType": null,
    "setupReferenceType": null,
    "toolingType": null,
    "type": null
  }
]
}

```

This sample response is for the Write Off Invoices action.

```

{
  "outputs": [
    {
      "additionalAttributes": null,
      "apexClass": "InvoiceWriteOff__WriteOffInvoiceResponseList",
      "description": "A collection Apex WriteOffInvoiceResponseList records that contain details about the invoices that were written off.",
      "label": "WriteOffInvoiceResponseList",
      "maxOccurs": 1,
      "name": "writeOffInvoiceResponseList",
      "picklistValues": null,
      "sObjectType": null,
      "type": null
    }
  ]
}

```

Billing Business APIs

Use the Billing Business APIs to manage credit application and to handle billing scenarios.

These sections list the available resources.

Credits

Resource	Description
/commerce/invoicing/credit-memos/<i>creditMemoId</i>/actions/apply (POST)	Adjust or correct already issued invoices by applying an existing credit memo to an invoice.
/commerce/invoicing/credit-memo-inv-applications/<i>creditMemoInvApplicationId</i>/actions/unapply (POST)	Unapply a credit memo from an invoice and return the invoice and the credit memo to their pre-application states.
/commerce/invoicing/credit-memo-lines/<i>creditMemoLineId</i>/actions/apply (POST)	Adjust or correct already issued invoices by applying an existing

Resource	Description
	credit memo line to an invoice line.
/commerce/invoicing/credit-memo-line-invoice-line/creditMemoLineInvoiceLineId/actions/unapply (POST)	Unapply a credit memo line from an invoice line and return the invoice line and the credit memo line to their pre-application states.
/commerce/invoicing/credit-memos/actions/generate (POST)	Create a credit memo without applying it to an invoice. You can credit the invoice at a later date.
/commerce/invoicing/invoices/collection/actions/checkout (POST)	Create a unified checkout transaction that generates billing schedules, an invoice, and an optional payment in a single request.
/commerce/invoicing/invoices/invoiceId/actions/void (POST)	Void a posted invoice to rebill the customer, if necessary.
/commerce/invoicing/invoices/invoiceId/actions/convert-to-credit on page 2176 (POST)	Convert a list of invoice lines with a negative amount into a posted credit memo. This conversion is applicable for a single invoice at a time.
/commerce/invoicing/invoices/invoiceId/actions/credit on page 2146 (POST)	Create a credit memo and apply it to an invoice. The credit memo can fully or partially credit the invoice.
/commerce/invoicing/credit/collection/actions/post on page 2181 (POST)	Post a draft credit memo to a credit memo record for review and approval.
/commerce/billing/credit-memos/creditMemoId/actions/void on page 2206 (POST)	Void a credit memo in posted state.
/revenue/billing/refunds/unreferenced-refunds/actions/process (POST)	Initiate a refund against a credit memo.

Billing Schedules

Resource	Description
/commerce/invoicing/billing-schedules/actions/create (POST)	Generate billing schedules for orders by using context service.

Resource	Description
/commerce/invoicing/standalone/billing-schedules/actions/create (POST)	Generate billing schedules from any internal or external transaction by using context service.
/commerce/invoicing/billing-schedules/collection/actions/recover (POST)	Recover the latest generated invoice associated with the billing schedules in the <code>Error</code> or <code>Processing</code> status.
/commerce/invoicing/actions/suspend-billing (POST)	Suspend billing for billing schedule groups or an account for a predefined period.
/commerce/invoicing/actions/resume-billing (POST)	Resume billing for billing schedule groups or an account that's currently on hold.

Invoices

Resource	Description
/commerce/invoicing/invoices/collection/actions/post (POST)	Update the status of the invoice from <code>Draft</code> to <code>Posted</code> .
/commerce/invoicing/invoice-batch-runs/<i>invoiceBatchRunId</i>/actions/draft-to-posted (POST)	Update a batch of invoices from <code>Draft</code> to <code>Posted</code> status for a credit memo application.
/commerce/invoicing/invoices/collection/actions/preview (POST)	Generate preview invoices, which includes the estimated tax amounts, for a billing transaction for the next two billing periods.
/commerce/invoicing/invoices/collection/actions/ingest (POST)	Ingest or generate an invoice from an internal or external billing transaction data.
/commerce/billing/invoices/invoice-batch-doogen/<i>invoiceBatchRunId</i>/actions/<i>actionName</i> (POST)	Asynchronously generate PDF documents for the invoices that are in the <code>Draft</code> or <code>Posted</code> status and are associated with an invoice batch run record.
/commerce/billing/invoices/invoice-batch-doogen/<i>invoiceBatchRunId</i>/actions/<i>actionName</i> (POST)	Asynchronously regenerate PDF documents for the invoices that are in the <code>Draft</code> or <code>Posted</code>

Resource	Description
	status and failed in an earlier invoice batch run.
/commerce/invoicing/invoices/actions/write-off (POST)	Create credit memos with the total charge amount on the invoice as the write-off amount and close the invoice.
/commerce/invoicing/invoice-batch-runs/actions/send-email (POST)	Send emails for the posted invoices of a specified invoice batch run ID.
/commerce/invoicing/invoices/collection/actions/generate (POST)	Create an invoice for an account, order, or a list of billing schedules.
/revenue/billing/transactions/actions/apply (POST)	Apply payments and credits to an account's invoices based on specified rules defined on the Billing Settings page.
/revenue/billing/document/actions/generate (POST)	Generate an invoice document for a record, and update any junction object record.

Invoice Scheduler

Resource	Description
/commerce/invoicing/invoice-schedulers (POST)	Create or update an invoice scheduler to automatically generate invoices. Use the criteria and filters of the invoice scheduler to set up the invoice run schedules based on your requirements.
/commerce/invoicing/invoice-batch-runs/invoiceBatchRunId/actions/recover (POST)	Recover records associated with a failed invoice run. Recovery is required only when billing schedules remain in the Processing, Void In Progress, or Error status.

Invoice Sequencing

Resource	Description
/connect/sequences/policy (POST)	Create a sequence policy to configure a unique, sequential number for posted invoices or credit memos.
/connect/sequences/policy/sequencePolicyId (PATCH)	Update the settings of a sequence policy that defines how unique, sequential numbers are generated by using specific patterns, values, and filters.
/connect/sequences/actions/assign (POST)	Assign sequence pattern values to objects based on the configured sequence policy.
/connect/sequences/gap-reconciliation (POST)	Restore a missing sequence value identified by using this API in gapless-enabled sequences. This sequence value can be used later in the subsequent sequence policy numbering, ensuring there are no gaps.

Account Statement

Resource	Description
/revenue/billing/accounts/accountId/statement (POST)	Generate comprehensive account statement with transaction history and balance information.

Payments

Resource	Description
/commerce/billing/payments/paymentId/actions/apply (POST)	Allocate the balance of a payment to reduce the balance of an invoice. The response includes an ID of the payment line invoice or payment line invoice line that represents the

Resource	Description
	payment balance allocated against the invoice.
/commerce/billing/payments/paymentId/paymentlines/paymentLineId/actions/unapply (POST)	Revert the application of a payment line from an invoice, and return the payment and invoices to their preapplication state. Use this API to correct an input during the payment application process.
/commerce/billing/refunds/refundId/actions/apply (POST)	Make a refund transaction against a payment.

Tax Calculation

Resource	Description
/commerce/taxes/actions/calculate (POST)	Calculate tax for a transaction.
/commerce/invoicing/invoices/collection/actions/calculate-estimated-tax (POST)	Calculate estimated tax for invoices with invoice lines that have the <code>TaxProcessingStatus</code> as either <code>Pending</code> or <code>Estimated</code> .

Salesforce Commerce Payments API

Resource	Description
/commerce/payments/payment-methods (POST)	Tokenize a payment method.
/commerce/payments/sales (POST)	Make a payment sale.
/commerce/payments/payments/paymentId/refunds (POST)	Create a refund for a payment.
/commerce/payments/authorizations (POST)	Authorize a payment.
/commerce/payments/authorizations/authorizationId/reversals (POST)	Reverse an authorized payment.
/commerce/payments/authorizations/authorizationId/captures (POST)	Capture an authorized payment.

[Billing Business API Limits](#)

Learn about the default limits on the usage of the Billing business APIs.

[Resources](#)

Learn more about the available Billing API resources.

[Request Bodies](#)

Learn more about the available request bodies of Billing APIs.

[Response Bodies](#)

Learn more about the available response bodies of Billing APIs.

SEE ALSO:

[Connect REST API Developer Guide: Introduction](#)

Billing Business API Limits

Learn about the default limits on the usage of the Billing business APIs.

Limit	Value	Scale Recommendations
The number of billing schedules that can be processed by the Create Invoices By Using Billing Schedules API .	200	Use Invoice Scheduler to scale up to 2000 invoice lines. See Invoice Scheduler or Batch Invoice Scheduler (POST) API .
The number of invoice lines that can be generated by the Create Invoices By Using Billing Schedules API .	200	Use Invoice Scheduler to scale up to 2000 invoice lines. See Invoice Scheduler or Batch Invoice Scheduler (POST) API .
The number of billing schedules that can be processed by the Recover Billing Schedule List API .	200	Use this API to follow the default API limits.
The number of invoices that can be processed by the Apply Credit Memos API .	300	Use this API recursively to apply left-over credits after 300 invoice lines.
The number of invoice lines that can be processed by the Apply Credit Memo Lines API .	300	Use this API iteratively for every 300 invoice lines to support more than 300 invoice lines.
The number of invoices that can be processed by the Create and Apply Credit Memos API .	300	Use this API to follow the default API limits. The limits include the count for both charge and tax lines.
The number of credit memo lines of type Charge that can be created by the Create a Standalone Credit Memo API .	300	Use this API to follow the default API limits. The limits include the count for both charge and tax lines.
The number of invoice lines that can be processed by the	300	Use this API to follow the default API limits. The limits

EDITIONS

Available in: Lightning Experience

Available in: **Enterprise, Unlimited, and Developer** Editions

Limit	Value	Scale Recommendations
Convert Negative Invoice Lines to Credits API , which excludes the number of associated invoice line taxes.		include the count for invoice charge lines only.
The number of billing transaction items that can be processed by the Create Billing Schedules for Orders API .	1000	This API supports creation of 1000 order lines as billing schedules.
The number of reference IDs that can be processed by the Suspend Billing API and the Resume Billing API .	200	Use this API to follow the default API limits.
The number of invoice lines that's supported by the Invoice Draft to Posted Status API .	200	Use this API to follow the default API limits.
The number of records that can be processed by the Invoice Ingestion API .	500	Use this API to follow the default API limits. The limits include the count for all invoices, invoice lines, taxes, and address group records.
The number of invoice lines or billing schedules that can be processed by the Invoice Preview API .	200	Use this API to follow the default API limits.
The number of invoice lines that can be processed by the Void a Posted Invoice API .	2000	Use this API to follow the default API limits.
The number of invoices that can be processed by the Posted Invoice List Write-Off API .	300	Use this API to follow the default API limits.
The number of invoice lines that can be generated on an invoice by the Batch Invoice Scheduler (POST) API . The number of records that can be recovered from a failed invoice run by the Batch Invoice Run Recovery (POST) API .	2000	Use this API to support the creation or recovery of up to 2,000 invoice lines on a single invoice.
The number of invoice lines that's supported by the Batch Invoices Draft to Posted Status (POST) API .	2000	Use this API to support 2000 invoice lines with no limit on the number of supported invoices.
The number of invoices that's supported by the Tax Calculation API .	1	Use this API to follow the default API limits.
The number of invoice lines that's supported by the Tax Calculation API .	500	The request can include 500 invoice lines. To avoid limit-related issues, test your TaxEngineAdapter Apex interface's implementation to make sure that it adheres to the Apex limit for total heap size .

Limit	Value	Scale Recommendations
The number of invoice lines that's supported by the Tax Calculation API interface when used with the Invoice Creation API .	200	The request can include 200 invoice lines. To avoid limit-related issues, test your TaxEngineAdapter Apex interface's implementation to make sure that it adheres to the Apex limit for total heap size .
The number of invoice lines that's supported by the Tax Calculation API interface when used with the Invoice Batch Run API .	2000	The request can include 2000 invoice lines. To avoid limit-related issues, test your TaxEngineAdapter Apex interface's implementation to make sure that it adheres to the Apex limit for total heap size .
The number of records that's supported by the Payment Line Apply API .	1	Payment supports application for either an Invoice or InvoiceLine record based on the settlement-level preferences.
The number of records that's supported by the Payment Line Unapply API .	1	Payment supports unapplication for either a PaymentLineInvoice or PaymentLineInvoiceLine record based on the settlement-level preferences.

Resources

Learn more about the available Billing API resources.

[Sequence Gap Reconciliation \(POST\)](#)

Restore a missing sequence value identified by using this API in gapless-enabled sequences. This sequence value can be used later in the subsequent sequence policy numbering, ensuring there are no gaps.

[Sequence Assignment \(POST\)](#)

Assign sequence pattern values to objects based on the configured sequence policy.

[Batch Invoices Document Generation \(POST\)](#)

Asynchronously generate PDF documents for the invoices that are in the `Draft` or `Posted` status and are associated with an invoice batch run record.

[Batch Invoices Document Generation Retry \(POST\)](#)

Asynchronously regenerate PDF documents for the invoices that are in the `Draft` or `Posted` status and failed in an earlier invoice batch run.

[Batch Invoices Draft to Posted Status \(POST\)](#)

Update a batch of invoices from `Draft` to `Posted` status for a credit memo application.

[Batch Invoice Scheduler \(POST, PUT\)](#)

Create or update an invoice scheduler to automatically generate invoices. Use the criteria and filters of the invoice scheduler to set up the invoice run schedules based on your requirements.

[Batch Payment Scheduler \(POST\)](#)

Create a payment scheduler to automate and process payment runs on a recurring basis.

[Billing Arrangement \(GET\)](#)

Retrieve a billing arrangement and its associated billing arrangement lines.

[Billing Schedule Recovery List \(POST\)](#)

Recover the latest generated invoice associated with the billing schedules in the `Error` or `Processing` status.

[Composite Collection Plan Creation \(POST\)](#)

Create one or more collection plans, each with its collection plan items, in a single request.

[Create Billing Schedules for Orders \(POST\)](#)

Generate billing schedules for orders by using context service.

[Create Sequence Policy \(POST\)](#)

Create a sequence policy to configure a unique, sequential number for posted invoices or credit memos.

[Create Standalone Billing Schedules \(POST\)](#)

Generate billing schedules from any internal or external transaction by using context service.

[Create and Apply Credit Memo \(POST\)](#)

Create a credit memo and apply it to an invoice. The credit memo can fully or partially credit the invoice.

[Apply Credit Memo \(POST\)](#)

Adjust or correct already issued invoices by applying an existing credit memo to an invoice.

[Unapply Credit Memo \(POST\)](#)

Unapply a credit memo from an invoice and return the invoice and the credit memo to their pre-application states.

[Apply Credit Memo Line \(POST\)](#)

Adjust or correct already issued invoices by applying an existing credit memo line to an invoice line.

[Unapply Credit Memo Line \(POST\)](#)

Unapply a credit memo line from an invoice line and return the invoice line and the credit memo line to their pre-application states.

[Generate On-Demand Invoice Document \(POST\)](#)

Generate an invoice document for a record, and update any junction object record.

[Generate Account Statement \(POST\)](#)

Generate comprehensive account statement with transaction history and balance information.

[Invoice Creation \(POST\)](#)

Create an invoice for an account, order, or a list of billing schedules.

[Invoice Draft to Posted Status \(POST\)](#)

Update the status of the invoice from `Draft` to `Posted`.

[Invoice Ingestion \(POST\)](#)

Ingest or generate an invoice from an internal or external billing transaction data.

[Invoice Estimated Tax Calculation \(POST\)](#)

Calculate estimated tax for invoices with invoice lines that have the `TaxProcessingStatus` as either `Pending` or `Estimated`.

[Invoice Preview \(POST\)](#)

Generate preview invoices, which includes the estimated tax amounts, for a billing transaction for the next two billing periods.

[Invoice Run Recovery \(POST\)](#)

Recover records associated with a failed invoice run. Recovery is required only when billing schedules remain in the `Processing`, `Void In Progress`, or `Error` status.

[Negative Invoice Lines to Credit Conversion \(POST\)](#)

Convert a list of invoice lines with a negative amount into a posted credit memo. This conversion is applicable for a single invoice at a time.

[Payment Line Apply \(POST\)](#)

Allocate the balance of a payment to reduce the balance of an invoice. The response includes an ID of the payment line invoice or payment line invoice line that represents the payment balance allocated against the invoice.

[Payment Line Unapply \(POST\)](#)

Revert the application of a payment line from an invoice, and return the payment and invoices to their preapplication state. Use this API to correct an input during the payment application process.

[Payment Scheduler Update \(PATCH\)](#)

Activate or deactivate a payment scheduler. You can set the status of a payment scheduler to **Active**, **Canceled**, **Draft**, or **Inactive**.

[Post a Draft Memo \(POST\)](#)

Post a draft credit memo to a credit memo record for review and approval.

[Rules Application \(POST\)](#)

Apply payments and credits to an account's invoices based on specified rules defined on the Billing Settings page.

[Posted Invoice List Write-Off \(POST\)](#)

Create credit memos with the total charge amount on the invoice as the write-off amount and close the invoice.

[Void a Posted Invoice \(POST\)](#)

Void a posted invoice to rebill the customer, if necessary.

[Refund Line Apply \(POST\)](#)

Make a refund transaction against a payment.

[Send Emails for Posted Invoices \(POST\)](#)

Send emails for the posted invoices of a specified invoice batch run ID.

[Resume Billing \(POST\)](#)

Resume billing for billing schedule groups or an account that's currently on hold.

[Suspend Billing \(POST\)](#)

Suspend billing for billing schedule groups or an account for a predefined period.

[Standalone Credit Memo \(POST\)](#)

Create a credit memo without applying it to an invoice. You can credit the invoice at a later date.

[Billing Checkout \(POST\)](#)

Create a unified checkout transaction that generates billing schedules, an invoice, and an optional payment in a single request.

[Tax Calculation \(POST\)](#)

Calculate tax for a transaction.

[Update Sequence Policy \(PATCH\)](#)

Update the settings of a sequence policy that defines how unique, sequential numbers are generated by using specific patterns, values, and filters.

[Void Posted Credit Memo \(POST\)](#)

Void a credit memo in posted state.

[Refund Credit Memo \(POST\)](#)

Initiate a refund against a credit memo.

Sequence Gap Reconciliation (POST)

Restore a missing sequence value identified by using this API in gapless-enabled sequences. This sequence value can be used later in the subsequent sequence policy numbering, ensuring there are no gaps.

Special Access Rules

You need the Billing Admin permission set to use this API.

Resource

```
/connect/sequences/gap-reconciliation
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/sequences/gap-reconciliation
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request that specifies the list of sequence policies for gap reconciliation.

```
{
  "sequencePolicyIds": [
    "1vdx0000000abc",
    "1vdx0000000def"
  ]
}
```

This example shows a sample request that specifies the target invoice object for gap reconciliation.

```
{
  "targetObjects": [
    "Invoice"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
sequencePolicyIds	String[]	List of IDs of the sequence policies.	Required if the targetObjects	65.0

Name	Type	Description	Required or Optional	Available Version
			property isn't specified. You must not specify both properties.	
targetObjects	String[]	List of objects to which the policies are applied. Valid values are <code>Invoice</code> ; or <code>CreditMemo</code> —Available in API version 66.0 and later.	Required if the <code>sequencePolicyIds</code> property isn't specified. You must not specify both properties.	65.0

Response Body for POST

[Sequence Gap Reconciliation](#)

Sequence Assignment (POST)

Assign sequence pattern values to objects based on the configured sequence policy.

Special Access Rules

You need the Billing Admin permission set to use this API.

Resource

```
/connect/sequences/actions/assign
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/sequences/actions/assign
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "targetObjectIds": [
```

```
    "3tttxx00000005nhAAA",
    "3tttxx00000006bhAAA"
  ],
  "sequencePolicyId": "1Vdxx0000004CFU"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
sequencePolicyId	String	ID of the sequence policy.	Optional	65.0
shouldPublishPlatformEvent	Boolean	Indicates whether to publish a platform event when a sequence is assigned to a target record (<code>true</code>) or not (<code>false</code>).	Optional	65.0
targetObjectIds	String[]	List of records to which the sequence pattern values are assigned.	Required	65.0

Response Body for POST

[Sequences Assignment](#)

Batch Invoices Document Generation (POST)

Asynchronously generate PDF documents for the invoices that are in the `Draft` or `Posted` status and are associated with an invoice batch run record.

Special Access Rules

This API is available with Revenue Cloud Billing. To use this API, enable Document Generation for Billing. Additionally, you need either the Billing Operations User permission set or the Billing Admin permission set, along with the Docgen Designer permission set and Docgen Designer Standard User permission set.

Resource

```
/commerce/billing/invoices/invoice-batch-docgen/invoiceBatchRunId/actions/actionName
```

- The `invoiceBatchRunId` parameter is the ID of the invoice batch run record that created the `Draft` or `Posted` invoices.
- The `actionName` parameter is the name of the action you want to perform on the specified invoice batch run record.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/billing/invoices/invoice-batch-docgen/5Kp00250639sAX/actions/run
```

Available Version

63.0

HTTP Methods

POST

Response Body for POST

[Batch Invoice Document Generation](#)

Batch Invoices Document Generation Retry (POST)

Asynchronously regenerate PDF documents for the invoices that are in the `Draft` or `Posted` status and failed in an earlier invoice batch run.

Special Access Rules

This API is available with Revenue Cloud Billing. To use this API, enable Document Generation for Billing. Additionally, you need either the Billing Operations User permission set or the Billing Admin permission set, along with the Docgen Designer permission set and Docgen Designer Standard User permission set.

Resource

```
/commerce/billing/invoices/invoice-batch-docgen/invoiceBatchRunId/actions/actionName
```

- The `invoiceBatchRunId` parameter is the ID of the invoice batch run record that created the `Draft` or `Posted` invoices.
- The `actionName` parameter is the name of the action you want to perform on the specified invoice batch run record. In this case, the action is to retry generating the `Draft` or `Posted` invoices that failed earlier.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/billing/invoices/invoice-batch-docgen/51Pw0000004G3nGM/actions/retry
```

Available Version

63.0

HTTP Methods

POST

Response Body for POST

[Batch Invoice Document Generation](#)

Batch Invoices Draft to Posted Status (POST)

Update a batch of invoices from `Draft` to `Posted` status for a credit memo application.

Special Access Rules

To use this API, you need the Billing Operations User permission set.

Resource

```
/commerce/invoicing/invoice-batch-runs/invoiceBatchRunId/actions/draft-to-posted
```

This API posts the draft invoices and changes the status of the invoices from Draft to Posted.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoice-batch-runs/51RN20000000CA94AT/actions/draft-to-posted
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
invoiceBatchRunId	String	ID of the invoice batch run record that creates the draft invoices.	Required	62.0

Response Body for POST

[Invoice Batch Draft To Posted](#)

Batch Invoice Scheduler (POST, PUT)

Create or update an invoice scheduler to automatically generate invoices. Use the criteria and filters of the invoice scheduler to set up the invoice run schedules based on your requirements.

Special Access Rules

You need the Billing Operations User and Data Pipelines Base User permission sets to use this API. See [Data Pipelines](#).

Resource

```
/commerce/invoicing/invoice-schedulers
```

```
/commerce/invoicing/invoice-schedulers/billingBatchSchedulerId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoice-schedulers
```

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoice-schedulers/5B5xx0000004TwGGAU
```

Available Version

62.0

HTTP Methods

POST, PUT

PUT is supported in version 63.0 and later for invoice schedulers with `Draft` or `Inactive` status.

Request Body for POST

JSON Example

This example shows a sample request to create an invoice scheduler that generates invoices once.

```
{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDate": "2024-05-22",
  "invoiceDate": "2024-05-22",
  "frequencyCadence": "Once",
  "frequencyCadenceOptions": {},
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {
      "operation": "InList",
      "value": "Batch 2,Batch 3,Batch 4",
      "criteriaSequence": 1,
      "objectName": "BillingSchedule",
      "fieldName": "InvoiceRunMatchingValue"
    },
    {
      "operation": "Equals",
      "value": "001xx000003GZG5AAO",
      "criteriaSequence": 2,
      "objectName": "BillingSchedule",
      "fieldName": "BillingAccount"
    },
    {
      "operation": "Equals",
      "value": "0fwxx0000000001AAA",
      "criteriaSequence": 3,
      "objectName": "BillingScheduleGroup",
      "fieldName": "LegalEntity"
    }
  ]
}
```

```

    },
    {
      "operation": "InList",
      "value": "OneTime,Recurring",
      "criteriaSequence": 4,
      "objectName": "BillingSchedule",
      "fieldName": "BillingTermUnit"
    },
    {
      "operation": "Equals",
      "value": "USD",
      "criteriaSequence": 5,
      "objectName": "BillingSchedule",
      "fieldName": "Currency_Iso_code"
    }
  ]
}

```

This example shows a sample request to create an invoice scheduler that generates invoices daily.

```

{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "endDate": "2026-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDateOffset": 0,
  "invoiceDateOffset": 0,
  "isInvoiceDateFromRunDate": true,
  "frequencyCadence": "Daily",
  "frequencyCadenceOptions": {},
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {
      "operation": "InList",
      "value": "Batch 2,Batch 3,Batch 4",
      "criteriaSequence": 1,
      "objectName": "BillingSchedule",
      "fieldName": "InvoiceRunMatchingValue"
    },
    {
      "operation": "Equals",
      "value": "001xx000003GZG5AAO",
      "criteriaSequence": 2,
      "objectName": "BillingSchedule",
      "fieldName": "BillingAccount"
    },
    {
      "operation": "Equals",
      "value": "0fwxx0000000001AAA",
      "criteriaSequence": 3,
      "objectName": "BillingScheduleGroup",
      "fieldName": "LegalEntity"
    }
  ],
}

```

```

    {
      "operation": "InList",
      "value": "OneTime,Recurring",
      "criteriaSequence": 4,
      "objectName": "BillingSchedule",
      "fieldName": "BillingTermUnit"
    },
    {
      "operation": "InList",
      "value": "USD",
      "criteriaSequence": 5,
      "objectName": "BillingSchedule",
      "fieldName": "Currency_Iso_code"
    }
  ]
}

```

This example shows a sample request to create an invoice scheduler that generates invoices weekly.

```

{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "endDate": "2026-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDateOffset": 0,
  "invoiceDateOffset": 0,
  "isInvoiceDateFromRunDate": false,
  "frequencyCadence": "Weekly",
  "frequencyCadenceOptions": {
    "recursOnDay": "Sunday"
  },
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {
      "operation": "InList",
      "value": "Batch 2,Batch 3,Batch 4",
      "criteriaSequence": 1,
      "objectName": "BillingSchedule",
      "fieldName": "InvoiceRunMatchingValue"
    },
    {
      "operation": "Equals",
      "value": "001xx000003GZG5AAO",
      "criteriaSequence": 2,
      "objectName": "BillingSchedule",
      "fieldName": "BillingAccount"
    },
    {
      "operation": "Equals",
      "value": "0fwxx0000000001AAA",
      "criteriaSequence": 3,
      "objectName": "BillingScheduleGroup",
      "fieldName": "LegalEntity"
    }
  ]
}

```

```

    },
    {
      "operation": "InList",
      "value": "OneTime,Recurring",
      "criteriaSequence": 4,
      "objectName": "BillingSchedule",
      "fieldName": "BillingTermUnit"
    },
    {
      "operation": "Equals",
      "value": "USD",
      "criteriaSequence": 5,
      "objectName": "BillingSchedule",
      "fieldName": "Currency_Iso_code"
    }
  ]
}

```

This example shows a sample request to create an invoice scheduler that generates invoices monthly on a specific date.

```

{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "endDate": "2026-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDateOffset": 0,
  "invoiceDateOffset": 0,
  "isInvoiceDateFromRunDate": false,
  "frequencyCadence": "Monthly",
  "frequencyCadenceOptions": {
    "recurringSubType": "SpecificDate",
    "recursOnDate": "L-1",
    "shouldExcludeWkendAndHldy": true
  },
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {
      "operation": "InList",
      "value": "Batch 2,Batch 3,Batch 4",
      "criteriaSequence": 1,
      "objectName": "BillingSchedule",
      "fieldName": "InvoiceRunMatchingValue"
    },
    {
      "operation": "Equals",
      "value": "001xx000003GZG5AAO",
      "criteriaSequence": 2,
      "objectName": "BillingSchedule",
      "fieldName": "BillingAccount"
    },
    {
      "operation": "Equals",
      "value": "0fwxx0000000001AAA",

```

```

        "criteriaSequence": 3,
        "objectName": "BillingScheduleGroup",
        "fieldName": "LegalEntity"
    },
    {
        "operation": "InList",
        "value": "OneTime,Recurring",
        "criteriaSequence": 4,
        "objectName": "BillingSchedule",
        "fieldName": "BillingTermUnit"
    },
    {
        "operation": "Equals",
        "value": "USD",
        "criteriaSequence": 5,
        "objectName": "BillingSchedule",
        "fieldName": "Currency_Iso_code"
    }
]
}

```

This example shows a sample request to create an invoice scheduler that runs immediately.

```

{
    "schedulerName": "InvoiceScheduler",
    "status": "Draft",
    "invoiceStatus": "Posted",
    "frequencyCadenceOptions": {
        "shouldStartRunImmediately": true
    },
    "frequencyCadence": "Once",
    "targetDate": "2024-08-28",
    "invoiceDate": "2024-08-28",
    "filterCriteria": [
        {
            "operation": "InList",
            "value": "Batch 2,Batch 3,Batch 4",
            "criteriaSequence": 1,
            "objectName": "BillingSchedule",
            "fieldName": "InvoiceRunMatchingValue"
        },
        {
            "operation": "Equals",
            "value": "001xx000003GZG5AAO",
            "criteriaSequence": 2,
            "objectName": "BillingSchedule",
            "fieldName": "BillingAccount"
        },
        {
            "operation": "Equals",
            "value": "0fwxx0000000001AAA",
            "criteriaSequence": 3,
            "objectName": "BillingScheduleGroup",
            "fieldName": "LegalEntity"
        }
    ]
}

```

```

    {
      "operation": "InList",
      "value": "OneTime,Recurring",
      "criteriaSequence": 4,
      "objectName": "BillingSchedule",
      "fieldName": "BillingTermUnit"
    },
    {
      "operation": "Equals",
      "value": "USD",
      "criteriaSequence": 5,
      "objectName": "BillingSchedule",
      "fieldName": "Currency_Iso_code"
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
billing CycleCount	Integer	Number of billing cycles or billing periods to be invoiced.	Optional	68.0
endDate	String	End date of the invoice scheduler.	Optional	63.0
filter Criteria	Batch Invoice Filter Criteria Input[]	List of line items of the filter criteria.	Optional	62.0
frequency Cadence	String	Frequency to run the invoice scheduler.	Required	62.0
frequency Cadence Options	Frequency Cadence Options	Frequency cadence options for the invoice scheduler.	Required	62.0
invoiceDate	String	Date shown on the invoice. This date is also used for tax calculations.	Required if the <code>frequencyCadence</code> property is set to <code>Once</code> .	62.0
invoiceDate Offset	Integer	Offset applied to the target date, which is the number of days added to or subtracted from the invoice date, to calculate the updated invoice date.	Required if the <code>frequencyCadence</code> property is set to <code>Daily</code> , <code>Weekly</code> , or <code>Monthly</code> .	62.0
invoiceStatus	String	Status of the invoice that specifies the expected invoice status from an invoice batch run. Valid values are <code>Draft</code> or <code>Posted</code> .	Required	62.0

Name	Type	Description	Required or Optional	Available Version
isInvoice DateFrom RunDate	Boolean	Indicates whether the invoice date is applicable from the date when the invoice scheduler is run (<code>true</code>) or not (<code>false</code>).	Optional	63.0
jobType	String	Type of job the scheduler runs. Valid values are <code>Catchup</code> , <code>Forecast</code> , <code>Invoice</code> , or <code>Payment</code> .	Optional	68.0
preferredTime	String	Preferred time for the invoice batch run.	Required	62.0
schedulerName	String	Name of the invoice scheduler, which must be unique in your org.	Required	62.0
shouldCatchUp BillRun	Boolean	Indicates whether the invoice batch run advances billing schedules to a target date without generating invoices for prior billing periods (<code>true</code>) or not (<code>false</code>).	Optional	68.0
should Generate Invoice Documents	Boolean	Indicates whether invoice documents are automatically generated during batch processing for runs triggered by the scheduler (<code>true</code>) or not (<code>false</code>).	Optional	68.0
should Recalculate AllForecastLn	Boolean	Indicates whether to recalculate all forecast lines for all billing schedules regardless of forecast status (<code>true</code>) or only eligible ones (<code>false</code>). Applies only to forecast job runs.	Optional	68.0
startDate	String	Start date of the invoice scheduler.	Required	62.0
status	String	Status of the invoice scheduler. Valid values are <code>Draft</code> , <code>Active</code> , or <code>Inactive</code> .	Required	62.0
targetDate	String	Target date of the invoice batch run. Billing schedules having the next billing date before this date are picked up for invoicing. The target date must be less than or equal to the maximum allowed target date for the org.	Required if the <code>frequency</code> <code>Cadence</code> property is set to <code>Once</code> .	62.0
target DateOffset	Integer	Target date offset applied to the next invoice run date to calculate the target date. The offset is the number of days added to or subtracted from the next billing date.	Required if the <code>frequency</code> <code>Cadence</code> property is set to <code>Daily</code> , <code>Weekly</code> , or <code>Monthly</code> .	62.0
targetDay OfMonth	Integer	Day of the month to use for calculating the target date. Values are 1 through 28, -3 (third-to-last day), -2 (second-to-last day), or -1 (last day).	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
targetMonth Offset	Integer	Number of months relative to each scheduled run for calculating the target date. For example, 0 is the current month, 1 is the next month, and -1 is the previous month.	Optional	68.0
timezone	String	Time zone that's applicable for the invoice scheduler.	Optional	62.0

Valid values are:

- Once
- Daily
- Weekly
- Monthly

Response Body for POST

[Batch Invoice Scheduler](#)

Batch Payment Scheduler (POST)

Create a payment scheduler to automate and process payment runs on a recurring basis.

Special Access Rules

You need the Payment Ops permission set to use this API.

Resource

```
/commerce/payments/payment-schedulers/
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/payments/payment-schedulers/
```

Available Version

64.0

HTTP Methods

POST

Request Body for POST

JSON Example

JSON Example

```
{
  "schedulerName": "Payment Scheduler",
  "startDate": "2022-01-01",
  "endDate": "2022-12-31",
  "preferredTime": "02:05:00.000",
  "frequencyCadence": "Monthly",
  "recursEveryMonthOnDay": "28",
  "criteriaMatchType": "MatchAny",
  "status": "Active",
  "filterCriteria": [
    {
      "objectName": "PaymentScheduleItem",
      "fieldName": "PaymentRunMatchingValue",
      "operation": "Equals",
      "value": "1",
      "criteriaSequence": 1
    },
    {
      "objectName": "PaymentScheduleItem",
      "fieldName": "PaymentRunMatchingValue",
      "operation": "Equals",
      "value": "2",
      "criteriaSequence": 2
    },
    {
      "objectName": "PaymentScheduleItem",
      "fieldName": "PaymentRunMatchingValue",
      "operation": "Equals",
      "value": "3",
      "criteriaSequence": 3
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
criteriaMatchType	String	Match type for the criteria of the payment scheduler. Valid values are <code>Match Any</code> or <code>Match None</code> .	Required if the <code>frequencyCadence</code> property is set to <code>Monthly</code> .	64.0
endDate	String	End date of the payment scheduler.	Required if the <code>frequencyCadence</code> property is set to <code>Monthly</code> .	64.0

Name	Type	Description	Required or Optional	Available Version
frequencyCadence	String	Frequency cadence of the payment scheduler.	Required	64.0
filterCriteria	Payment Run Batch Filter Criteria Input	List of criteria that are used to filter the payment run details.	Required if the <code>frequencyCadence</code> property is set to <code>Monthly</code> .	64.0
preferredTime	String	Preferred time for the payment scheduler run.	Required	64.0
recursEveryMonthOnDay	String	Date when the payment scheduler recurs.	Required if the <code>frequencyCadence</code> property is set to <code>Monthly</code> .	64.0
schedulerName	String	Name of the payment scheduler.	Required	64.0
startDate	String	Start date of the payment scheduler.	Required	64.0
status	String	Status of the payment scheduler. Valid values are <code>Active</code> , <code>Canceled</code> , <code>Draft</code> , or <code>Inactive</code> .	Required	64.0

Valid values are:

- Once
- Daily
- Weekly
- Monthly

Response Body for POST

[Batch Payments Scheduler](#)

Billing Arrangement (GET)

Retrieve a billing arrangement and its associated billing arrangement lines.

This API fetches billing information, including the split percentage allocation for accounts, the remainder percentage, and whether adjustments are applied to the owning account.

Resource

```
/revenue/billing/billing-arrangement/billingArrangementId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/billing/billing-arrangement//revenue/billing/billing-arrangement/Id0000000004zAAA
```

Available Version

66.0

HTTP Methods

GET

Request Parameter for GET

Parameter Name	Type	Description	Required or Optional	Available Version
billingArrangementId	String	Unique ID of the billing arrangement to retrieve.	Required	66.0

Response Body for GET

[Billing Arrangement](#)

Billing Schedule Recovery List (POST)

Recover the latest generated invoice associated with the billing schedules in the **Error** or **Processing** status.

Billing schedules include critical details such as the amount to be billed, next billing date, and status. An invoice can be associated with one or more billing schedules. When an invoice is generated or posted, the billing schedules are updated to reflect the accurate state of the invoice. The billing schedules associated with an invoice are marked in the **Error** status if any of the invoicing processes have errors. Use this API to recover the invoice associated with the billing schedules in the **Error** or **Processing** status.

Special Access Rules

You need the Manage Errors Using Invoice Error Recovery API permission set to use this API.

Resource

```
/commerce/invoicing/billing-schedules/collection/actions/recover
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/billing-schedules/collection/actions/recover
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "billingScheduleIds": ["44bDU000000000XXYY"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billingScheduleIds	String[]	IDs of the billing schedules to recover the invoice for. You can recover one billing schedule per API request.	Required	62.0

Response Body for POST

[Billing Schedule Recovery List](#)

Composite Collection Plan Creation (POST)

Create one or more collection plans, each with its collection plan items, in a single request.

This API creates each collection plan in the request together with its nested collection plan items. Each collection plan runs independently, so the request can partially succeed across plans. Within a single collection plan, if any of its collection plan items fail to create, the parent collection plan is rolled back. The response returns a result for each collection plan in the request that indicates whether the collection plan was created successfully and includes any errors.

Special Access Rules

Set up collections and enable invoicing in your org.

Resource

```
/connect/collections/composite-collection-plan
```

Resource example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/collections/composite-collection-plan
```

Available version

68.0

HTTP methods

POST

Request body for POST

JSON example

```
{
  "collectionPlans": [
    {
      "accountId": "001xx000003DGXYA2",
      "contactId": "003xx000004TXYZA1",
      "initialDueAmount": 7500.00,
      "collectionPlanSegment": "High Risk",
      "dueDate": "2026-06-15",
      "collectionPlanReasonId": "0cR0000000000001",
      "usageType": "Billing",
      "overdueRiskIndicator": "High",
      "collectionPlanItems": [
        {
          "invoiceId": "inv00000000000001"
        },
        {
          "invoiceId": "inv00000000000002"
        }
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
collection Plans	Collection Plan Input[]	List of collection plans to create. Each plan can include a nested list of collection plan items to create with it. Specify at least 1 collection plan.	Required	68.0

Response body for POST

[Composite Collection Plan](#)

Create Billing Schedules for Orders (POST)

Generate billing schedules for orders by using context service.

Special Access Rules

The org must have the standard billing context definition with the target mapping. This context definition is available in orgs with Billing enabled. Additionally, you need the Create Billing Schedules From Billing Transactions API permission set and the Context Service Runtime permission set to use this API.

See these [requirements](#) to learn more about the configuration prerequisites.

Resource

```
/commerce/invoicing/billing-schedules/actions/create
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/billing-schedules/actions/create
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "billingTransactionIds": [ "801xx000003H1H9AAK" ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billing Transaction Ids	String[]	ID of the billing transaction. This property value is the ID of the order if the source of the billing request is for the Order object. If the order product associated with the specified order ID doesn't have an associated billing treatment ID, the API considers the default billing treatment ID. The generated billing schedule group has the default billing treatment ID. The API supports only one billing transaction ID in the input.	Required	62.0

Response Body for POST

[Context-Aware Billing Schedule](#)

Create Sequence Policy (POST)

Create a sequence policy to configure a unique, sequential number for posted invoices or credit memos.

A sequence policy ensures unique identification and systematic tracking of financial transactions, supporting regulatory compliance and preventing fraud. You can create a sequence policy for invoices or credit memos only.

Special Access Rules

You need the Billing Admin permission set to use this API.

Resource

```
/connect/sequences/policy
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/sequences/policy
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request to create a sequence policy.

```
{
  "name": "Sample Sequence Policy",
  "description": "This is a sample sequence policy.",
  "effectiveFromDateTime": "2025-08-10",
  "expirationDateTime": "2025-09-20",
  "isActive": true,
  "sequenceMode": "Basic",
  "targetObject": "Invoice",
  "dateStampFormat": "Yyyy",
  "sequenceStartNumber": 1,
  "incrementNumber": 1,
  "maximumSequenceNumber": 1000,
  "minimumSequenceNumberWidth": 2,
  "filterCriteria": "Custom",
  "selectionLogic": "selectionLogic",
  "sequencePattern": "INV-{SequenceValue}-abc",
  "selectionCondition": [
    {
      "filterField": "AppType",
      "operator": "Equals",
      "filterValue": "RLM",
      "conditionNumber": 1
    },
    {
      "filterField": "Status",
      "operator": "Equals",
      "filterValue": "Posted",

```



```

        "conditionNumber": 2
    },
    {
        "filterField": "LegalEntity",
        "operator": "Equals",
        "filterValue": "US",
        "conditionNumber": 3
    }
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
dateStamp Format	String	Format of the stamp date that's appended to the sequence number. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
description	String	Additional details about the sequence policy.	Optional	65.0
effectiveFrom DateTime	String	Date and time when the policy becomes effective. The default value is the current date.	Required	65.0
expiration DateTime	String	Date and time when the policy expires.	Optional	65.0
filter Criteria	String	Criteria to filter the target objects.	Required	65.0
increment Number	Integer	Value by which the sequence number increases until it reaches the maximum number. This value must be greater than or equal to 1. The default value is 1. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
isActive	Boolean	Indicates whether the policy is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Required	65.0
maximumSequence Number	Integer	Maximum number the sequence number can reach.	Optional	65.0
minimumSequence NumberWidth	Integer	Minimum number of digits a sequence number must have. You can't edit this property by using the Update Sequence Policy API.	Optional	65.0
name	String	Name of the sequence policy.	Required	65.0

Name	Type	Description	Required or Optional	Available Version
selectionCondition	Selection Condition Input[]	Criteria to determine which sequence policy is applied to a record. This property includes conditions based on any standard or custom fields of the record.	Optional	65.0
selectionLogic	String	Logic that determines the objects that the sequence policy applies to.	Optional	65.0
sequenceMode	String	Specifies how sequence numbers are generated. Valid values are Basic —Assigns sequential numbers without gap reconciliation; or Gapless —Assigns sequential numbers with gap reconciliation. The usage of this value ensures that the posted invoices or credit memos don't have any numbering gaps for audits and compliance. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
sequencePattern	String	Pattern structure that's followed for the sequence.	Required	65.0
sequenceStartNumber	Integer	Starting value of the sequence number, which must be greater than or equal to 0. The default value is 1. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
targetObject	String	Object that the policy is applied to. Valid values are Invoice ; or CreditMemo —Available in API version 66.0 and later. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
timeZone	String	Time zone that's applicable for the sequence policy.	Optional	65.0

Response Body for POST

[Sequence Policy](#)

Create Standalone Billing Schedules (POST)

Generate billing schedules from any internal or external transaction by using context service.

You can create a billing schedule from any sObject such as **WorkOrder**, **Cart**, **Order**, **Opportunity**, and **insurance policy**. Or, you can also generate billing schedules from order items.

The Create Standalone Billing Schedules (POST) API uses the StandaloneBillingContext context definition to hydrate the context of the transaction. The context definition includes these mappings.

- The TransactionMapping maps the fields of the transaction to the attributes of the Transaction node.
- The BSGEntitiesMapping maps the attributes of the Billing Schedule node, the Billing Schedule Group node, and Billing Schedule Group Relationship node to the fields of the corresponding Salesforce objects.

For the StandaloneBillingContext context definition to hydrate all the required data, transaction data for the mandatory context tags are required. Here are the topics that mention the mandatory and optional tags, sample transaction details, and sample payloads for various types of transactions.

- [One-Time New Sale Transaction](#) on page 2241
- [Term-Defined New Sale Transaction](#) on page 2244
- [Evergreen New Sale Transaction](#) on page 2248
- [New Sale Transaction With Bundled Products](#) on page 2252
- [New Sale Transaction With Ramped Products](#) on page 2258
- [New Sale Transaction With Usage Products](#) on page 2263
- [Amended Transaction](#) on page 2267
- [Renewal Transaction](#) on page 2277
- [Early Renewal Transaction](#) on page 2282
- [Canceled Transaction](#) on page 2288

Special Access Rules

This API is available with the Revenue Cloud Billing license.

Resource

```
/commerce/invoicing/standalone/billing-schedules/actions/create
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/standalone/billing-schedules/actions/create
```

Available Version

64.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "transactionDetails": "{ \"nodeName\": [{ \"id\": \"801Az00000aynKZ1AY\",
  \"businessObjectType\": \"Order\" } ] }",
```

```

"transactionContextDetails": {
  "contextDefinitionName": "StandaloneBillingContext",
  "intraContextCustomMappingName": "CustomContextMapping",
  "readContextMappingName": "OrderTransactionMapping",
  "saveContextMappingName": "BSGEntitiesMapping"
}
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
transactionContextDetails	Standalone Billing Schedule Metadata Input[]	Details of the context definition and its mappings that are used to hydrate the transaction data and save it in the appropriate Billing fields.	Required	64.0
transactionDetails	String	Input JSON data that includes the ID of the transaction record for which the billing schedule must be created and other additional transaction details. The API request supports a single mapping ID. You can send separate requests for line items and line details by using their respective mapping IDs. However, this approach can result in duplicate billing schedules for the same line items and line details.	Required	64.0

Response Body for POST

[Context-Aware Billing Schedule](#)

SEE ALSO:

[Salesforce Help: Context Service](#)

[Industries Common Resources Developer Guide: Context Service](#)

[BillingScheduleGroup](#)

Create and Apply Credit Memo (POST)

Create a credit memo and apply it to an invoice. The credit memo can fully or partially credit the invoice.

Use this API to adjust an outstanding invoice balance or rectify errors in an invoice. In the API request, pass a list of invoice lines to credit. Keep these considerations in mind when you use this API.

- The request must contain at least one invoice line. Each invoice line must have the invoice line's ID, the amount to credit, and any optional tax details. The invoice lines must be a part of the invoice passed in the resource.
- The amount to credit must not exceed the charge or adjustment amount of an individual invoice line.
- The request body's credit amount inclusive of taxes must not exceed the target invoice line's amount inclusive of taxes, except for taxes calculated through an external tax service.

- The request body's total credit amount inclusive of taxes calculated through an external tax service must not exceed the outstanding invoice balance, which is also inclusive of taxes.

This API creates and posts a credit memo. The credit memo has one credit memo line for each invoice line passed in the API request. The invoice balance reduces by a value equal to the credit memo's balance. This API modifies the balance of a posted invoice or invoice line based on the specified credit application level for your org. See [Apply Credits to Posted Invoices or Invoice Lines](#).

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/invoices/invoiceId/actions/credit
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/3tttR0000000008NETAV/actions/credit
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
invoiceId	String	ID of the invoice to be credited partially or fully. The status of the invoice must be Posted.	Required	62.0

Request Body for POST

JSON Example

This example shows a sample request with the `Calculate` tax strategy.

```
{
  "type": "POSTED",
  "taxStrategy": "Calculate",
  "taxEffectiveDate": "2024-07-20",
  "effectiveDate": "2024-07-20",
  "description": "Credit Invoice",
  "invoiceLines": [
    {
```

```

        "invoiceLineId": "5TVR00000004SiqOBE",
        "amountToCredit": 5
    }
]
}

```

This example shows a sample request with the `CopyFromInvoiceLine` tax strategy.

```

{
  "type": "POSTED",
  "taxStrategy": "CopyFromInvoiceLine",
  "effectiveDate": "2020-05-22",
  "description": "Credit Invoice",
  "invoiceLines": [
    {
      "invoiceLineId": "5TVR00000004SiqOBE",
      "amountToCredit": "5",
      "taxStrategy": "CopyFromInvoiceLine"
    }
  ]
}

```

This example shows a sample request with the `ManualOverride` and `CopyFromInvoiceLine` tax strategies.

```

{
  "type": "POSTED",
  "taxStrategy": "ManualOverride",
  "taxEffectiveDate": "2021-08-01",
  "effectiveDate": "2021-08-01",
  "description": "Credit issued because product was malfunctioning.",
  "invoiceLines": [
    {
      "invoiceLineId": "5TVR00000004SiqOBE",
      "amountToCredit": 100,
      "taxStrategy": "ManualOverride",
      "taxEffectiveDate": "2021-08-01T21:22:41.000Z",
      "taxes": [
        {
          "taxAmount": 15,
          "taxName": "abc",
          "taxCode": "taxCode",
          "taxRate": 7
        }
      ],
      "addresses": {
        "billingAddress": {
          "street": "1 Market St #300",
          "city": "San Francisco",
          "state": "CA",
          "country": "US",
          "postalCode": "94105",
          "latitude": "37.789901",
          "longitude": "-122.396923"
        },
        "shippingAddress": {

```

```
      "street": "415 Mission St",
      "city": "San Francisco",
      "state": "CA",
      "country": "US",
      "postalCode": "94105",
      "latitude": "37.789901",
      "longitude": "-122.396923"
    }
  },
  {
    "invoiceLineId": "5TVR00000004SiqOAE",
    "amountToCredit": 200,
    "taxStrategy": "CopyFromInvoiceLine"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description for the credit memo to be created.	Optional	62.0
effectiveDate	String	Date when the credit memo takes effect.	Optional	62.0
invoiceLines	Credit Invoice Line Input[]	List of the invoice lines to be credited. The invoice line IDs must be related to the invoice ID specified in the API request. If invoice lines aren't specified, the API request results in an error.	Required	62.0
taxEffective Date	String	Date when the tax takes effect to recalculate the taxes.	Optional	62.0
taxStrategy	String		Required	62.0
type	String		Optional	62.0

Supported values:

- Ignore—Specifies that the creation of tax lines must be ignored.
- ManualOverride—Specifies that the provided tax values must be considered for taxes.
- CopyFromInvoiceLine—Specifies that tax values must be copied from the invoice line.
- Calculate—Specifies that tax must be calculated by using the API.

Response Body for POST

[Revenue Async Line Level](#)

Apply Credit Memo (POST)

Adjust or correct already issued invoices by applying an existing credit memo to an invoice.

Specify the credit memo ID and the amounts to be applied, with the total of all applied amounts not exceeding the credit memo's balance.

The credit amount for each invoice can't surpass the original charge or adjustment amount, and the overall credit amount must not exceed the invoice's outstanding balance. The exceptions include any taxes calculated by an external service.

For example, your organization sold 10 tablets at US\$500 each, totaling \$5000, to a vendor who later reported that 6 tablets were defective. Your accounts receivable team creates a \$3000 credit memo by using the standalone Credit Memo API. Additionally, the team applies this credit to the original invoice by using the Apply Credit Memo API.

When the [credit application level is Invoice Line](#), this API applies the credit memo amount to all invoice lines starting from the highest amount until the full credit is applied or all lines are settled.

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/credit-memos/creditMemoId/actions/apply
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/credit-memos/50gsg00000000xAT1A2/actions/apply
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
creditMemoId	String	ID of the credit memo record.	Required	62.0

Request Body for POST

JSON Example

```
{
  "applications": [
    {
```



```
    "appliedToId": "3ttxx000000003FAAQ",
    "amount": 10,
    "description": "Apply to invoice for refund",
    "effectiveDate": "2024-07-01"
  },
  {
    "appliedToId": "3ttxx0000000001AAA",
    "amount": 100
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
applications	Credit Memo Apply Application Input[]	List of one or more applications to apply the credit memo for. Each application represents an invoice that’s credited by using the balance of the specified credit memo.	Required	62.0

Response Body for POST

[Credit Memo Apply List](#)

Unapply Credit Memo (POST)

Unapply a credit memo from an invoice and return the invoice and the credit memo to their pre-application states.

Use this resource if an error occurred when a credit is issued. For example, if an incorrect credit memo is applied to an invoice, or if a credit memo is created for an incorrect amount, use this resource to unapply the credit memo.

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/credit-memo-inv-applications/creditMemoInvApplicationId/actions/unapply
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/credit-memo-inv-applications/445300000244244/actions/unapply
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
creditMemoInvApplicationId	String	ID of the credit memo invoice application.	Required	62.0

Request Body for POST

JSON Example

```
{
  "description": "Unapply credit memo from invoice to revert an error",
  "effectiveDate": "2024-07-01"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Explanation or reason for unapplying the credit memo.	Optional	62.0
effectiveDate	String	Effective date for the credit memo.	Optional	62.0

Response Body for POST

[Credit Memo Unapply](#)

Apply Credit Memo Line (POST)

Adjust or correct already issued invoices by applying an existing credit memo line to an invoice line.

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/credit-memo-lines/creditMemoLineId/actions/apply
```

Resource Example

`https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/credit-memo-lines/9xSG00000000LHVA2/actions/apply`

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
creditMemo LineId	String	ID of the credit memo line record.	Required	62.0

Request Body for POST

JSON Example

```
{
  "applyCreditDetails": [
    {
      "invoiceLineId": "5TVSG0000002ZJR4A2",
      "appliedAmount": 5,
      "description": "Apply to invoice line 1",
      "effectiveDate": "2024-07-01"
    },
    {
      "invoiceLineId": "5TVSG0000002ZJS4A2",
      "appliedAmount": 10,
      "description": "Apply to invoice line 2",
      "effectiveDate": "2024-07-01"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
applyCredit Details	Credit Memo Line Application Input[]	List of one or more applications to apply the credit memo line for. Each application represents an invoice line that's credited by using the balance of the specified credit memo line.	Required	62.0

Response Body for POST

[Credit Memo Line Applied](#)

Unapply Credit Memo Line (POST)

Unapply a credit memo line from an invoice line and return the invoice line and the credit memo line to their pre-application states.

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/credit-memo-line-invoice-line/creditMemoLineInvoiceLineId/actions/unapply
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/credit-memo-line-invoice-line/45G500000021Q92AT45G500000021Q92AT/actions/unapply
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
creditMemoLineInvoiceLineId	String	ID of the credit memo line invoice line record.	Required	62.0

Request Body for POST

JSON Example

```
{
  "description": "Unapply a credit memo line from invoice line 1",
  "effectiveDate": "2024-07-01"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Explanation or reason for unapplying the credit memo line.	Optional	62.0
effectiveDate	String	Effective date for the credit memo line.	Optional	62.0

Response Body for POST

Credit Memo Line Unapplied

Generate On-Demand Invoice Document (POST)

Generate an invoice document for a record, and update any junction object record.

Resource

```
/revenue/billing/document/actions/generate
```

Resource Example

[https://**yourInstance**.salesforce.com/services/data/v68.0/revenue/billing/document/actions/generate](https://yourInstance.salesforce.com/services/data/v68.0/revenue/billing/document/actions/generate)

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

[illegible]

Properties

Name	Type	Description	Required or Optional	Available Version
<code>documentTemplateId</code>	String	Document template ID to use for PDF generation. The document template must be active with <code>UsageType</code> as <code>INVOICE</code> . If you don't specify this value, the system auto-resolves by using the default template.	Optional	66.0
<code>documentTitle</code>	String	Custom title for the generated document. If you don't specify a value, the value is auto-generated.	Optional	66.0
<code>recordId</code>	String	Record ID of the object the document is generated for. You can specify invoice ID only.	Required	66.0
<code>shouldForceGenerate</code>	Boolean	Indicates whether to regenerate the document (<code>true</code>) or not (<code>false</code>). If set to <code>true</code> , this API generates a document, replacing any existing ones. If set to <code>false</code> , this API skips the generation of document if invoice already has an associated document. The default value is <code>false</code> .	Optional	66.0
<code>tokenData</code>	String	Token data to generate the document.	Optional	66.0

Response Body for POST

[On-Demand Document Generation Response](#)

Generate Account Statement (POST)

Generate comprehensive account statement with transaction history and balance information.

An account statement includes these details.

- Transaction History—List of all financial transactions, such as invoices, credit memos, debit memos, payments, and refunds, within a specified date range.
- Open Balances—Non-zero balances for invoices and other transactions.
- Account Summary—Aggregated totals including beginning balance, total charges, total payments, and ending balance.
- Multi-currency Support—Transactions across multiple currencies.

Resource

```
/revenue/billing/accounts/accountId/statement
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/billing/accounts/accountId/statement
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "shouldShowOpenBalancesOnly": false,
  "startDate": "2025-09-01",
  "transactionTypes": {
    "transactionTypes": [
      "Invoice"
    ]
  },
  "sortBy": "DueDate",
  "sortingOrder": "Ascending",
  "associatedAccountIds": {
    "associatedAccountIds": [
      "001xx000003DGb5AAG",
      "001xx000003DGb6AAG"
    ]
  },
  "documentTemplateId": "0TRxx000000002YGAQ",
  "correlationId": "monthly-statement-sept-2025",
  "customFields": "{\n\"Invoice\": [\n\"TotalAmountWithTax\"], \n\"Account\": {\n\"base\": [\n\"Phone\", \n\"Fax\"], \n\"associated\": [\n\"Website\"]}}}"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
associatedAccountIds	String[]	List of associated account IDs from hierarchy to include in the statement. You can specify up to 50 accounts.	Optional	66.0
correlationId	String	Correlation ID for tracking the request across systems.	Optional	66.0
customFields	String	JSON string specifying custom fields to include in the statement. As a best practice, we recommend that you limit the number of custom fields up to 30 fields. Valid objects to specify the associated fields are Invoice, CreditMemo, Payment, DebitMemo, Refund, or Account. Here's the expected format.	Optional	67.0

Name	Type	Description	Required or Optional	Available Version
documentTemplateId	String	Document template ID to use for PDF generation. If you don't specify a value, the system auto-resolves by using the default template.	Optional	66.0
showOpenBalancesOnly	Boolean	Indicates whether to show open balances only (<code>true</code>) or not (<code>false</code>). If set to <code>true</code> , the API shows only accounts with non-zero balances. If set to <code>false</code> , this API shows complete transaction history within the date range from the start date.	Optional	66.0
sortBy	String	Criteria for sorting transactions. The default and valid value is <code>Date</code> .	Optional	66.0
sortingOrder	String	Sort order for transactions. Valid values are <code>Ascending</code> or <code>Descending</code> . The default value is <code>Descending</code> .	Optional	66.0
startDate	String	Start date for the transaction history. The required format is <code>YYYY-MM-DD</code> . The system processes records up to 90 days from this date.	Required	66.0
transactionTypes	String[]	List of transaction types to include in the statement. If you don't specify a value or the value is empty, all transaction types are included. Valid values are <code>All</code> , <code>CreditMemo</code> , <code>DebitMemo</code> , <code>Invoice</code> , <code>Payment</code> , or <code>Refund</code> .	Optional	66.0

Example:

```
{"Invoice": ["field1", "field2"], "Account": {"base": ["field1"], "associated": ["field2"]}}
```

Response Body for POST

[Account Statement Response](#)

Invoice Creation (POST)

Create an invoice for an account, order, or a list of billing schedules.

This API request creates billing period items for the matching billing schedules. The billing period items are created for the period between the next charge date of the billing schedule and the specified target date. Invoice lines are created by processing these billing period items. These invoice lines are then grouped into invoices based on the defined grouping criteria on the billing schedule.

This API also applies any available credits on an account to settle an invoice and to reduce its balance. To apply available credits, ensure the **Apply Credits to Posted Invoices** setting from Billing Settings is turned on.

Special Access Rules

You need the Generate Invoices From Billing Schedule API, Billing Operations User, or Billing Customer Service permission set to use this API.

Resource

```
/commerce/invoicing/invoices/collection/actions/generate
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/collection/actions/generate
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

Note: The `billingTransactionId` property takes precedence over the `accountId` property followed by the `billingScheduleIds` property when values for these properties are specified in the input request.

JSON Example

```
{
  "accountId": "001SG00000mYtRWYA0",
  "action": "Posted",
  "billingScheduleIds": [
    "44bSG000000CVeMYAW"
  ],
  "billingTransactionId": "801SG00000mYtaXYAS",
  "correlationId": null,
  "invoiceDate": "2024-01-12",
  "targetDate": "2024-01-12"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account record to create the invoices for.	Required if the <code>billingScheduleIds</code> or <code>billingTransactionId</code> property isn't specified.	63.0

Name	Type	Description	Required or Optional	Available Version
action	String		Required	62.0
billingScheduleIds	String[]	List of billing schedule IDs that's used to create the invoices. You can specify a maximum of 200 billing schedules.	Required if the <code>accountId</code> or <code>billingTransactionId</code> property isn't specified.	62.0
billingTransactionId	String	ID of the billing transaction record, which is the order ID, to create the invoices for.	Required if the <code>accountId</code> or <code>billingScheduleIds</code> property isn't specified.	63.0
correlationId	String	Property that's tagged against the published <code>InvoiceProcessedEvent</code> event, if specified.	Optional	62.0
invoiceDate	String	Stamping date of the invoice in ISO 8601 format.	Required	62.0
targetDate	String	Date in ISO 8601 format used to decide the billing periods that are included to create invoices.	Required	62.0

Supported values:

- Draft
- Posted

Response Body for POST

[Revenue Async Response](#)

Invoice Draft to Posted Status (POST)

Update the status of the invoice from Draft to Posted.

This API calls an external tax engine or provides information to your tax adapter implementation to calculate taxes for the draft invoice, post the invoice, and update the related billing schedules and billing periods.

Special Access Rules

You need the Billing Operations User permission set to use this API.

Resource

```
/commerce/invoicing/invoices/collection/actions/post
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/collection/actions/post
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "invoiceIds": ["3tttx0000004CIjAAM"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).	Optional	62.0
invoiceIds	String[]	IDs of the invoice records in <code>Draft</code> status to be posted. You can post one draft invoice per API request.	Required	62.0

Response Body for POST

[Revenue Async Response](#)

Invoice Ingestion (POST)

Ingest or generate an invoice from an internal or external billing transaction data.

Create invoices from any external or internal transaction. For example, create invoices by using external orders, policies, quotes, or internal data, such as assets or quotes.

You can also perform these additional tasks.

- Ingest invoices from any external system into Billing to manage invoice operations such as issuing credits against an invoice or voiding an invoice.
- Generate invoices from debit memos from API version 66.0 and later.

Keep these considerations in mind when you use this API.

- If the Convert Negative Invoice Lines to Credit Memo Lines feature isn't enabled, use the [Negative Invoice Lines to Credit Conversion API](#) to create a credit memo against an ingested negative invoice line.
- Use the [Apply Credit Action](#) to apply a credit memo to an invoice.
- To ingest legacy invoices, create at least one invoice line.
- To generate invoices from debit memos, specify the debit memo ID as the `referenceEntityId` property value in the request body of this API. Make sure that the debit memo is in `Posted` status and is ready for invoice generation. The invoice is generated in `Draft` status.

Resource

```
/commerce/invoicing/invoices/collection/actions/ingest
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/collection/actions/ingest
```

Available Version

63.0

HTTP Methods

POST

Request Body for POST

JSON Example to Ingest a Draft Invoice With a Tax Callout

```
{
  "invoices": [
    {
      "shouldCalculateTax": true,
      "taxCalculationStatus": "Estimated",
      "graph": {
        "graphId": "CreateInvoice",
        "records": [
          {
            "referenceId": "refAccount",
            "record": {
              "attributes": {
                "type": "Account",
                "method": "GET",
                "id": "ExternalId__c/123"
              }
            }
          ]
        }
      }
    }
  ]
}
```

```

},
{
  "referenceId": "refContact",
  "record": {
    "attributes": {
      "type": "Contact",
      "method": "GET",
      "id": "ExternalId__c/123"
    }
  }
},
{
  "referenceId": "refInvoice",
  "record": {
    "attributes": {
      "type": "Invoice",
      "method": "POST"
    },
    "billingAccountId": "@{refAccount.Id}",
    "billToContactId": "@{refContact.Id}",
    "paymentTermId": "20Xxx0000004CFUGA2",
    "referenceEntityId": "801xx000003GeQQAA0",
    "status": "Draft",
    "invoiceDate": "2024-12-19",
    "currencyIsoCode": "USD",
    "dueDate": "2024-12-19",
    "invoiceNumber": "DOC-10",
    "description": "Sample Invoice",
    "uniqueIdentifier": "5873af8f-f007-4aa0-9e3d-53a08c3f59de"
  }
},
{
  "referenceId": "refBillingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "123 Main St",
    "city": "NewYork",
    "postalCode": "10001",
    "state": "New York",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refShippingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    }
  }
}

```

```

    },
    "street": "123 Main St",
    "city": "NewYork",
    "postalCode": "10001",
    "state": "New York",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refShipFromAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "1 Market Street",
    "city": "San Francisco",
    "postalCode": "94105",
    "state": "CA",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refInvoiceLine1",
  "record": {
    "attributes": {
      "type": "InvoiceLine",
      "method": "POST"
    },
    "name": "productName1",
    "product2Id": "01txx0000006ic4AAA",
    "invoiceLineStartDate": "2024-11-10",
    "invoiceLineEndDate": "2024-11-13",
    "quantity": "10",
    "unitPrice": "10",
    "chargeAmount": "100",
    "invoiceId": "@{refInvoice.id}",
    "referenceEntityItemId": "802xx000001neB9AAI",
    "billingAddressId": "@{refBillingAddress.id}",
    "shippingAddressId": "@{refShippingAddress.id}",
    "shipFromAddressId": "@{refShipFromAddress.id}",
    "taxTreatmentId": "1ttxx0000000BOTAA2",
    "legalEntityId": "0fwxx0000000001AAA",
    "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
  }
},
{
  "referenceId": "refInvoiceLine2",

```

```

"record": {
  "attributes": {
    "type": "InvoiceLine",
    "method": "POST"
  },
  "name": "productName2",
  "product2Id": "01txx0000006ic4AAA",
  "invoiceLineStartDate": "2024-11-10",
  "invoiceLineEndDate": "2024-11-15",
  "quantity": "10",
  "unitPrice": "10",
  "chargeAmount": "100",
  "invoiceId": "@{refInvoice.id}",
  "referenceEntityItemId": "802xx000001neB9AAI",
  "billingAddressId": "@{refBillingAddress.id}",
  "shippingAddressId": "@{refShippingAddress.id}",
  "shipFromAddressId": "@{refShipFromAddress.id}",
  "taxTreatmentId": "1ttxx00000001DpAAI",
  "legalEntityId": "0fwxx0000000001AAA",
  "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
}
},
{
  "referenceId": "refInvoiceLineTax",
  "record": {
    "attributes": {
      "type": "InvoiceLineTax",
      "method": "POST"
    },
    "taxAmount": 7.25,
    "taxCode": "CA-94121",
    "taxName": "CALIFORNIA",
    "taxRate": 0.25,
    "taxEffectiveDate": "2024-11-10",
    "taxDocumentNumber": "123",
    "taxExemptAmount": 0,
    "taxTransactionNumber": "kl",
    "description": "Associated tax line.",
    "invoiceLineId": "@{refInvoiceLine1.id}"
  }
},
{
  "referenceId": "refInvoiceLineTax1",
  "record": {
    "attributes": {
      "type": "InvoiceLineTax",
      "method": "POST"
    },
    "taxAmount": "10",
    "taxCode": "CA-94121",
    "taxName": "CALIFORNIA",
    "taxRate": 0.25,
    "taxEffectiveDate": "2024-11-10",
    "taxDocumentNumber": "123",

```

```

        "taxExemptAmount": 0,
        "taxTransactionNumber": "125",
        "invoiceLineId": "@{refInvoiceLine2.id}",
        "description": "Associated tax line."
      }
    ]
  }
}

```

JSON Example to Ingest a Draft Invoice Without a Tax Callout

```

{
  "invoices": [
    {
      "taxCalculationStatus": "Estimated",
      "graph": {
        "graphId": "123",
        "records": [
          {
            "referenceId": "refAccount",
            "record": {
              "attributes": {
                "type": "Account",
                "method": "GET",
                "id": "TestExternalId__c/123"
              }
            }
          },
          {
            "referenceId": "refInvoice",
            "record": {
              "attributes": {
                "type": "Invoice",
                "method": "POST"
              },
              "billingAccountId": "@{refAccount.Id}",
              "billToContactId": "003xx000004Wk8qAAC",
              "paymentTermId": "20Xxx0000004CFUGA2",
              "referenceEntityId": "801xx000003GeQQAA0",
              "status": "Draft",
              "invoiceDate": "2024-12-19",
              "currencyIsoCode": "USD",
              "dueDate": "2024-12-19",
              "invoiceNumber": "DOC-10",
              "description": "testInvoice",
              "uniqueIdentifier": "c76011a1-e113-49d9-9c54-3b5c68950ada"
            }
          }
        ]
      },
      "referenceId": "refBillingAddress",
      "record": {
        "attributes": {

```



```

        "type": "InvoiceAddressGroup",
        "method": "POST"
    },
    "street": "123 Main St",
    "city": "NewYork",
    "postalCode": "10001",
    "state": "New York",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
}
},
{
    "referenceId": "refShippingAddress",
    "record": {
        "attributes": {
            "type": "InvoiceAddressGroup",
            "method": "POST"
        },
        "street": "123 Main St",
        "city": "NewYork",
        "postalCode": "10001",
        "state": "New York",
        "country": "US",
        "longitude": "123.456",
        "latitude": "78.910",
        "invoiceId": "@{refInvoice.id}"
    }
},
{
    "referenceId": "refShipFromAddress",
    "record": {
        "attributes": {
            "type": "InvoiceAddressGroup",
            "method": "POST"
        },
        "street": "1 Market Street",
        "city": "San Francisco",
        "postalCode": "94105",
        "state": "CA",
        "country": "US",
        "longitude": "123.456",
        "latitude": "78.910",
        "invoiceId": "@{refInvoice.id}"
    }
},
{
    "referenceId": "refInvoiceLine1",
    "record": {
        "attributes": {
            "type": "InvoiceLine",
            "method": "POST"
        },
    },

```

```

      "name": "productName1",
      "product2Id": "01txx0000006ic4AAA",
      "invoiceLineStartDate": "2024-11-10",
      "invoiceLineEndDate": "2024-11-13",
      "quantity": "10",
      "unitPrice": "10",
      "chargeAmount": "100",
      "invoiceId": "@{refInvoice.id}",
      "referenceEntityItemId": "802xx000001neB9AAI",
      "billingAddressId": "@{refBillingAddress.id}",
      "shippingAddressId": "@{refShippingAddress.id}",
      "shipFromAddressId": "@{refShipFromAddress.id}",
      "taxTreatmentId": "1ttxx0000000BOTAA2",
      "legalEntityId": "0fwxx0000000001AAA",
      "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
    }
  },
  {
    "referenceId": "refInvoiceLine2",
    "record": {
      "attributes": {
        "type": "InvoiceLine",
        "method": "POST"
      },
      "name": "productName2",
      "product2Id": "01txx0000006ic4AAA",
      "invoiceLineStartDate": "2024-11-10",
      "invoiceLineEndDate": "2024-11-15",
      "quantity": "10",
      "unitPrice": "10",
      "chargeAmount": "100",
      "invoiceId": "@{refInvoice.id}",
      "referenceEntityItemId": "802xx000001neB9AAI",
      "billingAddressId": "@{refBillingAddress.id}",
      "shippingAddressId": "@{refShippingAddress.id}",
      "shipFromAddressId": "@{refShipFromAddress.id}",
      "taxTreatmentId": "1ttxx00000001DpAAI",
      "legalEntityId": "0fwxx0000000001AAA",
      "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
    }
  },
  {
    "referenceId": "refInvoiceLineTax",
    "record": {
      "attributes": {
        "type": "InvoiceLineTax",
        "method": "POST"
      },
      "taxAmount": 7.25,
      "taxCode": "CA-94121",
      "taxName": "CALIFORNIA",
      "taxRate": 0.25,
      "taxEffectiveDate": "2024-11-10",
      "taxDocumentNumber": "123",

```

```

        "taxExemptAmount": 0,
        "taxTransactionNumber": "kl",
        "description": "description for tax Line",
        "invoiceLineId": "@{refInvoiceLine1.id}"
    }
},
{
    "referenceId": "refInvoiceLineTax1",
    "record": {
        "attributes": {
            "type": "InvoiceLineTax",
            "method": "POST"
        },
        "taxAmount": "10",
        "taxCode": "CA-94121",
        "taxName": "CALIFORNIA",
        "taxRate": 0.25,
        "taxEffectiveDate": "2024-11-10",
        "taxDocumentNumber": "123",
        "taxExemptAmount": 0,
        "taxTransactionNumber": "125",
        "invoiceLineId": "@{refInvoiceLine2.id}",
        "description": "description for tax Line"
    }
}
]
}
]
}
}

```

JSON Example to Ingest Posted Invoices

```

{
  "invoices": [
    {
      "taxCalculationStatus": "Posted",
      "graph": {
        "graphId": "123",
        "records": [
          {
            "referenceId": "refAccount",
            "record": {
              "attributes": {
                "type": "Account",
                "method": "GET",
                "id": "ExternalId__c/123"
              }
            }
          },
          {
            "referenceId": "refInvoice",
            "record": {
              "attributes": {
                "type": "Invoice",

```

```

        "method": "POST"
    },
    "billingAccountId": "001SG00000njpF3YAI",
    "billToContactId": "003xx000004Wk8qAAC",
    "paymentTermId": "20Xxx0000004CFUGA2",
    "referenceEntityId": "801xx000003GeQQAA0",
    "status": "Posted",
    "invoiceDate": "2024-12-19",
    "currencyIsoCode": "USD",
    "dueDate": "2024-12-19",
    "invoiceNumber": "DOC-10",
    "description": "Sample Invoice",
    "uniqueIdentifier": "9994b2c4-c0c3-47c3-806f-ae6elf16bac3"
}
},
{
    "referenceId": "refBillingAddress",
    "record": {
        "attributes": {
            "type": "InvoiceAddressGroup",
            "method": "POST"
        },
        "street": "123 Main St",
        "city": "NewYork",
        "postalCode": "10001",
        "state": "New York",
        "country": "US",
        "longitude": "123.456",
        "latitude": "78.910",
        "invoiceId": "@{refInvoice.id}"
    }
},
{
    "referenceId": "refShippingAddress",
    "record": {
        "attributes": {
            "type": "InvoiceAddressGroup",
            "method": "POST"
        },
        "street": "123 Main St",
        "city": "NewYork",
        "postalCode": "10001",
        "state": "New York",
        "country": "US",
        "longitude": "123.456",
        "latitude": "78.910",
        "invoiceId": "@{refInvoice.id}"
    }
},
{
    "referenceId": "refShipFromAddress",
    "record": {
        "attributes": {
            "type": "InvoiceAddressGroup",

```

```

        "method": "POST"
    },
    "street": "1 Market Street",
    "city": "San Francisco",
    "postalCode": "94105",
    "state": "CA",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
}
},
{
    "referenceId": "refInvoiceLine1",
    "record": {
        "attributes": {
            "type": "InvoiceLine",
            "method": "POST"
        },
        "name": "productName1",
        "product2Id": "01txx0000006ic4AAA",
        "invoiceLineStartDate": "2024-11-10",
        "invoiceLineEndDate": "2024-11-13",
        "quantity": "10",
        "unitPrice": "10",
        "chargeAmount": "100",
        "invoiceId": "@{refInvoice.id}",
        "referenceEntityItemId": "802xx000001neB9AAI",
        "billingAddressId": "@{refBillingAddress.id}",
        "shippingAddressId": "@{refShippingAddress.id}",
        "shipFromAddressId": "@{refShipFromAddress.id}",
        "taxTreatmentId": "1ttxx0000000BOTAA2",
        "legalEntityId": "0fwxx0000000001AAA",
        "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
    }
},
{
    "referenceId": "refInvoiceLine2",
    "record": {
        "attributes": {
            "type": "InvoiceLine",
            "method": "POST"
        },
        "name": "productName2",
        "product2Id": "01txx0000006ic4AAA",
        "invoiceLineStartDate": "2024-11-10",
        "invoiceLineEndDate": "2024-11-15",
        "quantity": "10",
        "unitPrice": "10",
        "chargeAmount": "100",
        "invoiceId": "@{refInvoice.id}",
        "referenceEntityItemId": "802xx000001neB9AAI",
        "billingAddressId": "@{refBillingAddress.id}",
        "shippingAddressId": "@{refShippingAddress.id}",

```

```

        "shipFromAddressId": "@{refShipFromAddress.id}",
        "taxTreatmentId": "1ttxx00000001DpAAI",
        "legalEntityId": "0fwxx0000000001AAA",
        "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
    },
    {
        "referenceId": "refInvoiceLineTax1",
        "record": {
            "attributes": {
                "type": "InvoiceLineTax",
                "method": "POST"
            },
            "taxAmount": "10",
            "taxCode": "CA-94121",
            "taxName": "CALIFORNIA",
            "taxRate": 0.25,
            "taxEffectiveDate": "2024-11-10",
            "taxDocumentNumber": "123",
            "taxExemptAmount": 0,
            "taxTransactionNumber": "125",
            "invoiceLineId": "@{refInvoiceLine1.id}",
            "description": "Associated tax line."
        }
    }
]
}
}
}
}
}

```

JSON Example to Generate Invoices From Debit Memos

```

{
  "invoices": [
    {
      "shouldCalculateTax": true,
      "taxCalculationStatus": "Estimated",
      "graph": {
        "graphId": "CreateInvoice",
        "records": [
          {
            "referenceId": "refInvoice",
            "record": {
              "attributes": {
                "type": "Invoice",
                "method": "POST"
              },
              "accountId": "001SB00001V3RxNYAV",
              "billToContactId": "003xx000004WhUQAA0",
              "referenceEntityId": "4DmAAC000008UP70BM",
              "status": "Draft",
              "invoiceDate": "2024-12-19",
              "dueDate": "2024-12-19",
              "description": "Sample Invoice"
            }
          }
        ]
      }
    }
  ]
}

```

```
{
  "invoices": [
    {
      "id": "1",
      "type": "Invoice",
      "status": "Pending",
      "amount": 1000,
      "tax": 100,
      "total": 1100,
      "description": "Invoice for 1000 units of product X"
    },
    {
      "id": "2",
      "type": "Invoice",
      "status": "Estimated",
      "amount": 2000,
      "tax": 200,
      "total": 2200,
      "description": "Invoice for 2000 units of product X"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
invoices	Invoice Ingestion Input[]	List of invoices to be generated or ingested, enabling the submission and processing of multiple invoices in a single request. This API supports one invoice per request. To send 25 requests at a time, see the Composite Batch request .	Required	63.0

Response Body for POST

[Invoice Ingestion](#)

Invoice Estimated Tax Calculation (POST)

Calculate estimated tax for invoices with invoice lines that have the `TaxProcessingStatus` as either `Pending` or `Estimated`.

Resource

```
/commerce/invoicing/invoices/collection/actions/calculate-estimated-tax
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/collection/actions/calculate-estimated-tax
```

Available Version

63.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "invoiceIds": ["3ttxx0000004CIjAAM"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).	Optional	63.0
invoiceIds	String[]	IDs of the invoices for which the estimated tax must be calculated. You can specify one invoice per API request.	Required	63.0

Response Body for POST

[Revenue Async Response](#)

Invoice Preview (POST)

Generate preview invoices, which includes the estimated tax amounts, for a billing transaction for the next two billing periods.

Invoice preview provides details of the upcoming invoices for orders or quotes within the system.

Special Access Rules

You need the Billing Operations User or Billing Customer Service permission set to use this API.

See these [requirements](#) to learn more about the configuration prerequisites.

Resource

```
/commerce/invoicing/invoices/collection/actions/preview
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/collection/actions/preview
```

Available Version

63.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "billingTransactionId": "801Z600000004LoIAI",
  "numberOfBillingPeriods": 2,
  "previewDate": "2024-12-04"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billingTransactionId	String	ID of the record to generate the preview invoices for.	Required	63.0
numberOfBillingPeriods	Integer	Number of billing periods that the invoice preview is generated for. If unspecified, the default value is 2.	Optional	64.0
previewDate	String	The date on which the preview invoice is generated. For the first invoice, the preview date is the target date for generating the invoice. For the second invoice, the target date is calculated based on the preview date and the minimum billing frequency of the transactions. The default value is the current date.	Optional	63.0

Response Body for POST

[Invoice Preview](#)

Invoice Run Recovery (POST)

Recover records associated with a failed invoice run. Recovery is required only when billing schedules remain in the Processing, Void In Progress, or Error status.

Special Access Rules

To use this API, you need the Invoice Scheduler API permission set.

Resource

```
/commerce/invoicing/invoice-batch-runs/invoiceBatchRunId/actions/recover
```

The `invoiceBatchRunId` parameter is the ID of the failed invoice batch run record whose details you want to retrieve.

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoice-batch-runs/51Pxx00000041wGZU/actions/recover
```

Available Version

62.0

HTTP Methods

POST

Response Body for POST

[Invoice Batch Run Recovery](#) on page 2383

Negative Invoice Lines to Credit Conversion (POST)

Convert a list of invoice lines with a negative amount into a posted credit memo. This conversion is applicable for a single invoice at a time.

Keep these considerations in mind when you use this API.

- All invoice lines must be related to the same invoice.
- The invoice line must have a negative amount.
- The invoice line must not be a previously converted credit memo.
- The invoice must have the `Posted` status.
- The invoice must not have any active settlements such as credit applications.

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/invoices/invoiceId/actions/convert-to-credit
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/3tbsx000000000tAAI/actions/convert-to-credit
```

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
invoiceId	String	ID of the invoice whose negative invoice lines must be converted into a posted credit memo.	Required	62.0

Request Body for POST

JSON Example

```
{
  "invoiceLines": ["5TVxx0000004C92GAE", "5TVxx0000004C93GAE"],
  "description": "Convert negative invoice lines into credit",
  "effectiveDate": "2022-05-18"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description stamped on the credit memo that's created after the negative invoice line conversion.	Optional	62.0
effectiveDate	String	Date stamped on the credit memo that's created after the negative invoice line conversion.	Required	62.0
invoiceLines	String[]	Complete list of the negative invoice lines along with the associated invoice line taxes. The specified negative invoice lines are converted into a posted credit memo.	Optional	62.0

Response Body for POST

[Convert Negative Invoice Lines](#)

Payment Line Apply (POST)

Allocate the balance of a payment to reduce the balance of an invoice. The response includes an ID of the payment line invoice or payment line invoice line that represents the payment balance allocated against the invoice.

Use the Commerce Payments APIs to send your payment and refund details to external payment gateways for processing against a customer's bank. See [Commerce Payments resources](#) to check the APIs for payment gateways, payment captures, and payment authorizations.

Resource

```
/commerce/billing/payments/paymentId/actions/apply
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/billing/payments/1PIR0000000000dDQAQ/actions/apply
```

Available Version

64.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
paymentId	String	ID of the payment record.	Required	64.0

Request Body for POST

JSON Example

```
{
  "appliedToId": "3ttR000000001IkIAI",
  "amount": 10,
  "effectiveDate": "2020-08-11T07:53:15.000Z",
  "comments": "Apply payment",
  "associatedAccountId": "001R00000060AyuIAE"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
amount	Double	Amount that's applied. The amount must be less than the invoice line and payment balance.	Required	64.0
appliedToId	String	ID of the invoice line that this payment is applied to. Specify the IDs for these records.	Required	64.0

Name	Type	Description	Required or Optional	Available Version
associated AccountId	String	ID of the associated account.	Optional	64.0
comments	String	Comments that you can add to the payment line application.	Optional	64.0
effectiveDate	String	Date from which the payment line application takes effect.	Optional	64.0

Supported values:

- Invoice
- Invoice Line

Response Body for POST

Payment Line Apply

Payment Line Unapply (POST)

Revert the application of a payment line from an invoice, and return the payment and invoices to their preapplication state. Use this API to correct an input during the payment application process.

For example, you can use this API to revert an incorrect payment that's applied to an invoice, or to rectify an incorrect amount.

Use the Commerce Payments APIs to send your payment and refund details to external payment gateways for processing against a customer's bank. See [Commerce Payments resources](#) to check the APIs for payment gateways, payment captures, and payment authorizations.

Resource

```
/commerce/billing/payments/paymentId/paymentlines/paymentLineId/actions/unapply
```

Resource Example

<https://yourInstance.salesforce.com/services/data/v68.0/commerce/billing/payments/0a01j0000000010/payentlines/1PFR000000000dDQ/actions/unapply>

Available Version

64.0

HTTP Methods

POST

Path Parameters for POST

Name	Type	Description	Required or Optional	Available Version
paymentId	String	ID of the payment record.	Required	64.0
paymentLineId	String	ID of the payment line record.	Required	64.0

Request Body for POST

JSON Example

```
{
  "effectiveDate": "2025-05-22T11:30:25.000Z",
  "comments": "Unapply payment"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
comments	String	Comments that you can add when you revert a payment line application.	Optional	64.0
effectiveDate	String	Date from when the reversal of the payment line application is in effect.	Optional	64.0

Response Body for POST

[Payment Line Unapply](#)

Payment Scheduler Update (PATCH)

Activate or deactivate a payment scheduler. You can set the status of a payment scheduler to **Active**, **Canceled**, **Draft**, or **Inactive**.

Special Access Rules

You need the **Payment Ops** permission set to use this API.

Resource

```
/commerce/payments/payment-schedulers/billingBatchSchedulerId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/payments/payment-schedulers/5BSxx0000004TwGGAU
```

Available Version

64.0

HTTP Methods

PATCH

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
billingBatchSchedulerId	String	ID of the payment scheduler record.	Required	64.0

Request Body for PATCH

JSON Example

JSON Example

```
{
  "status": "Active"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
status	String	Status that must be set to activate or deactivate a payment scheduler.	Required	64.0

Valid values are:

- Active
- Canceled
- Draft
- Inactive

Response Body for PATCH

[Payments Scheduler Update](#)

Post a Draft Memo (POST)

Post a draft credit memo to a credit memo record for review and approval.

Resource

```
/commerce/invoicing/credit/collection/actions/post
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v65.0/commerce/invoicing/credit/collection/actions/post
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{  
  "creditMemoIds": ["50gDU00000001MnYAI"]  
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to use to track messages that are related to the request and logged in Splunk by the different services involved in the request. If not specified, the service creates a random Universally Unique Identifier (UUID).	Optional	65.0
creditMemoIds	String[]	ID of the credit memo record in Draft status to be posted. You can post one draft credit memo per API request.	Required	65.0

Response Body for POST

[Credit Memo Post](#)

Rules Application (POST)

Apply payments and credits to an account's invoices based on specified rules defined on the Billing Settings page.

This API uses predefined logic to allocate payments and credits, reducing any manual intervention and errors.

Resource

```
/revenue/billing/transactions/actions/apply
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/billing/transactions/actions/apply
```

Available Version

66.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "accountId": "001xx000003DGbQAAW",
  "targetDate": "2024-01-15"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account to perform the settlement of payments and credits against invoices in adherence with the applied rules.	Required	66.0
targetDate	String	The date used to select invoices and invoice lines with a posted date equal to or later than the target date to apply payments and credits.	Optional	66.0

Response Body for POST

[Rules Application](#)

Posted Invoice List Write-Off (POST)

Create credit memos with the total charge amount on the invoice as the write-off amount and close the invoice.

You can write off invoices to maintain accurate financial records and to prioritize invoices with a higher probability of payment, which is essential for compliance with accounting standards.

Special Access Rules

To use this API, you need the Billing Operations User or Credit Memo Operations User permission set.

Resource

```
/commerce/invoicing/invoices/actions/write-off
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/actions/write-off
```

Available Version

64.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "invoices": [
    {
      "invoiceId": "3ttxx00000000cjAAA",
      "reasonCode": "Bad Debt",
      "description": "Bad Debt"
    },
    {
      "invoiceId": "3ttxx00000000cjAAA",
      "reasonCode": "Concession",
      "description": "Concession"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
invoices	Posted Invoice Write-Off Input[]	Details of the invoices that you want to write off.	Required	64.0

Response Body for POST

[Posted Invoice List Write-Off](#)

Void a Posted Invoice (POST)

Void a posted invoice to rebill the customer, if necessary.

This API request changes the invoice status from `Posted` to `Void In Progress`. The invoice remains in the `Void In Progress` status until the credit is applied and financial fields are recalculated on the invoice's related billing period items and billing schedule. The invoice status changes to `Voided` after all recalculations are completed.

Keep these considerations in mind when you use this API.

- The balance and total amount on the invoice must be equal. If these amounts aren't equal due to payments or credits, the API request fails.
- You can't call other APIs on an invoice with the `Void In Progress` status. You also can't update the invoice fields.
- You can void only the most recently posted invoice on a billing schedule.
- To void an invoice that has payments or credits, use the [Credit Memo Unapply \(POST\)](#) API.

Credit Memos

The void process creates a credit memo, which contains one credit memo line for each invoice line, including tax lines. For example, if the invoice line has a balance of US\$20, the related credit memo line has a balance of \$20. The credit memo's balance is then allocated to the invoice header's balance, reducing it to zero. A credit memo invoice application is created to record the details of the void process.

Negative Invoice Lines

If an invoice has negative invoice lines that aren't converted to a credit memo, you can use this endpoint to void the posted invoice.

Special Access Rules

You need the Void a Posted Invoice API permission set to use this API.

Resource

```
/commerce/invoicing/invoices/invoiceId/actions/void
```

Resource Example

https://**yourInstance**.salesforce.com/services/data/v**68.0**/commerce/invoicing/invoices/~~3ttax000000000~~**XtAAI**/actions/void

Available Version

62.0

HTTP Methods

POST

Path Parameter for POST

Properties

Name	Type	Description	Required or Optional	Available Version
invoiceId	String	ID of the posted invoice to be voided.	Required	62.0

Response Body for POST

[Revenue Async Response](#)

Refund Line Apply (POST)

Make a refund transaction against a payment.

Resource

```
/commerce/billing/refunds/refundId/actions/apply
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/billing/refunds/0aQR000000004ZkKMAU/actions/apply
```

Available Version

64.0

HTTP Methods

POST

Path Parameter for POST

Name	Type	Description	Required or Optional	Available Version
refundId	String	ID of the refund record.	Required	64.0

Request Body for POST

JSON Example

```
{
  "appliedToId": "0aQR000000004ZkKMAU",
  "amount": 10,
  "effectiveDate": "2020-08-11T07:53:15.000Z",
  "comments": "Payment application."
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
amount	Double	Amount to refund.	Required	64.0
appliedToId	String	ID of a payment or credit memo record. The refund is applied to this object.	Required	64.0
comments	String	Additional details of the refund request.	Optional	64.0
effectiveDate	String	Date from when the refund is in effect.	Optional	64.0

Response Body for POST

[Refund Line Apply](#)

Send Emails for Posted Invoices (POST)

Send emails for the posted invoices of a specified invoice batch run ID.

Each email includes a custom message template in the email body and an attachment of the Invoice Document PDF. The email template is based on the user preferences defined on the Billing Profile, Legal Entity, or Billing Settings page.

Special Access Rules

Enable the **Configure Email Delivery Settings** toggle from the Billing Settings page from Setup.

Resource

```
/commerce/invoicing/invoice-batch-runs/actions/send-email
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoice-batch-runs/actions/send-email
```

Available Version

65.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "invoiceBatchRunId": "5IRLT000001SIJB4A4"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
invoiceBatchRunId	String	ID of the invoice batch run record to send emails for the posted invoices of an invoice batch run.	Required	65.0

Response Body for POST

[Send Email Response](#)

Resume Billing (POST)

Resume billing for billing schedule groups or an account that’s currently on hold.

Resource

```
/commerce/invoicing/actions/resume-billing
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/actions/resume-billing
```

Available Version

63.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "referenceIds":
  [
    {
      "referenceId": "001DU000001o2UwYAI",
      "resumeDate": "2024-11-27"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceIds	Resume Billing Object Input[]	Input representation of the account or billing schedule group IDs to resume the billing operation for.	Required	63.0

Response Body for POST

[Suspend Resume Billing](#)

Suspend Billing (POST)

Suspend billing for billing schedule groups or an account for a predefined period.

Resource

```
/commerce/invoicing/actions/suspend-billing
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/actions/suspend-billing
```

Available Version

63.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "referenceIds":
  [
    {
      "referenceId": "001DU000001o2UwYAI",
      "suspendDate": "2024-11-27",
      "resumeDate": "2024-12-27"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceIds	Suspend Billing Object Input[]	Input representation of the account or billing schedule group IDs to suspend the billing operation for.	Required	63.0

Response Body for POST

[Suspend Resume Billing](#)

Standalone Credit Memo (POST)

Create a credit memo without applying it to an invoice. You can credit the invoice at a later date.

In the API request, specify the credit memo header information, charge parameters, adjustment parameters, and tax parameters. A credit memo requires at least one credit memo line. The credit memo line can be a charge or an adjustment.

Specify the credit memo lines that you want as lists of charges and adjustments. Each credit memo line must be related to a product.

Special Access Rules

You need the Credit Memo Operations User permission set to use this API.

Resource

```
/commerce/invoicing/credit-memos/actions/generate
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/credit-memos/actions/generate
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a sample request with the `Ignore` tax strategy.

```
{
  "billingAccountId": "001j000000WCFB800x",
  "type": "Posted",
  "description": "Standalone credit memo with ignored tax.",
  "currencyIsoCode": "USD",
```



```

"taxStrategy": "Ignore",
"charges": [
  {
    "chargeAmount": 100,
    "productId": "01tR0000000njDiIAI"
  }
]
}

```

This example shows a sample request with the `ManualOverride` tax strategy.

```

{
  "billingAccountId": "001DU000001nhoPYAQ",
  "description": "creditmemo-1",
  "currencyIsoCode": "USD",
  "taxStrategy": "ManualOverride",
  "charges": [
    {
      "productId": "01tDU000000EpKkYAK",
      "chargeAmount": 1000,
      "taxes": [
        {
          "taxAmount": 7.25,
          "taxCode": "CA-94121",
          "taxName": "CALIFORNIA",
          "taxRate": 0.25
        }
      ]
    }
  ]
}

```

This example shows a sample request with the `Calculate` tax strategy for a charge line.

```

{
  "billingAccountId": "001DU000001nhoPYAQ",
  "description": "Standalone Credit Memo",
  "type": "Posted",
  "currencyIsoCode": "USD",
  "taxStrategy": "Ignore",
  "charges": [
    {
      "productId": "01tR0000000njDiIAI",
      "chargeAmount": 10,
      "taxStrategy": "Calculate",
      "treatmentId": "1ttxx00000001VZAAAY"
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
billToContactId	String	Contact related to the credit memo.	Optional	62.0
billingAccountId	String	ID of the account that the credit is issued to.	Required	62.0
charges	Standalone Credit Memo Charge Input[]	Charge lines of the credit memo. Requires at least one charge line.	Required	62.0
currencyIsoCode	String	ISO code currency of the new credit that's issued.	Optional	62.0
customFields	Map	Custom field values on the credit memo record, as key-value pairs.	Optional	68.0
description	String	Description for the new credit that's issued.	Optional	62.0
effectiveDate	String	Effective date of the credit memo. If the value isn't specified, then it's null.	Optional	62.0
externalReference	String	ID of the external reference for the credit memo.	Optional	62.0
externalReferenceDataSource	String	Source of the external reference for the credit memo.	Optional	62.0
taxEffectiveDate	String	Effective date of the credit memo tax. If the value isn't specified, then it's null.	Optional	62.0
taxStrategy	String	Specifies how tax lines must be created for the standalone credit memos.	Required	62.0
type	String		Optional	62.0

Valid values are:

- **Ignore**—Specifies that the creation of tax lines must be ignored.
- **Manual Override**—Specifies that the provided tax values must be considered for taxes.
- **Calculate**—Specifies that tax must be calculated by using the API.

Response Body for POST

[Revenue Async Response](#)

Billing Checkout (POST)

Create a unified checkout transaction that generates billing schedules, an invoice, and an optional payment in a single request.

Use this API to process a checkout transaction for invoicing and payment. Specify account or customer details, line items, billing information, and payment details. You can also preview the invoice without committing the checkout transaction.

Special Access Rules

You need the Billing Checkout access permission to use this API.

Resource

```
/commerce/invoicing/invoices/collection/actions/checkout
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/invoicing/invoices/collection/actions/checkout
```

Available Version

68.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "previewInvoice": false,
  "shouldCapturePayment": true,
  "isPartialPaymentAllowed": false,
  "accountId": "001xx0000004C90",
  "invoiceDate": "2026-09-01",
  "invoiceTargetDate": "2026-12-31",
  "currencyIsoCode": "USD",
  "amount": 1400.00,
  "billingContact": {
    "firstName": "Alex",
    "lastName": "Rivera",
    "email": "alex.rivera@example.com",
    "phone": "+1-415-555-0100"
  },
  "billingAddress": {
    "street": "415 Mission St",
    "city": "San Francisco",
    "state": "California",
    "stateCode": "CA",
    "country": "United States",
    "countryCode": "US",
    "postalCode": "94105"
  },
  "shippingAddress": {
    "street": "415 Mission St",
    "city": "San Francisco",
    "stateCode": "CA",
```

```

    "countryCode": "US",
    "postalCode": "94105"
  },
  "paymentDetails": {
    "paymentGatewayId": "0cgxx0000004C91",
    "idempotencyKey": "checkout-2026-09-01-abc123",
    "savedPaymentMethodDetails": {
      "merchantAccount": "0dmxx0000004C92",
      "gatewayToken": "tok_1PabcXYZ",
      "gatewayReference": "cus_0Ref123",
      "type": "Card",
      "name": "Acme Corp Visa"
    }
  },
  "lineItems": [
    {
      "productName": "Platform Subscription",
      "transactionId": "TXN-PLATFORM-001",
      "quantity": 10,
      "unitPrice": 100.00,
      "netUnitPrice": 100.00,
      "lineTotal": 1000.00,
      "startDate": "2026-09-01",
      "endDate": "2027-08-31",
      "sellingModelType": "TermDefined",
      "periodBoundary": "DayOfPeriod",
      "billingDayOfMonth": 1,
      "billingTermUnit": "Month",
      "billingTerm": 12,
      "taxTreatmentId": "0cXxx0000004C94",
      "billingTreatmentId": "0cYxx0000004C95",
      "bundleProductDetails": [
        {
          "productName": "Premium Support Add-on",
          "associatedTransactionPricing": "IncludedInBundlePrice",
          "quantity": 10,
          "unitPrice": 200.00,
          "netUnitPrice": 200.00,
          "lineTotal": 200.00,
          "sellingModelType": "TermDefined",
          "periodBoundary": "DayOfPeriod",
          "billingDayOfMonth": 1,
          "billingTermUnit": "Month",
          "billingTerm": 12,
          "taxTreatmentId": "0cXxx0000004C94",
          "billingTreatmentId": "0cYxx0000004C95"
        }
      ]
    },
    {
      "productName": "Platform Subscription",
      "transactionId": "TXN-PLATFORM-002",
      "quantity": 10,
      "unitPrice": 100.00,
      "netUnitPrice": 100.00,
      "lineTotal": 1000.00,
      "startDate": "2026-09-01",
      "endDate": "2027-08-31",
      "sellingModelType": "TermDefined",
      "periodBoundary": "DayOfPeriod",
      "billingDayOfMonth": 1,
      "billingTermUnit": "Month",
      "billingTerm": 12,
      "taxTreatmentId": "0cXxx0000004C94",
      "billingTreatmentId": "0cYxx0000004C95",
      "bundleProductDetails": [
        {
          "productName": "Premium Support Add-on",
          "associatedTransactionPricing": "IncludedInBundlePrice",
          "quantity": 10,
          "unitPrice": 200.00,
          "netUnitPrice": 200.00,
          "lineTotal": 200.00,
          "sellingModelType": "TermDefined",
          "periodBoundary": "DayOfPeriod",
          "billingDayOfMonth": 1,
          "billingTermUnit": "Month",
          "billingTerm": 12,
          "taxTreatmentId": "0cXxx0000004C94",
          "billingTreatmentId": "0cYxx0000004C95"
        }
      ]
    }
  ],
  "ramps": [
    {
      "productId": "01txx0000004C93",
      "startDate": "2026-09-01",
      "endDate": "2027-02-28",
      "quantity": 10,
    }
  ]
}

```

```

        "unitPrice": 100.00,
        "netUnitPrice": 100.00,
        "lineTotal": 500.00,
        "sellingModelType": "TermDefined",
        "periodBoundary": "DayOfPeriod",
        "billingDayOfMonth": 1,
        "billingTermUnit": "Month",
        "billingTerm": 6
    },
    {
        "productId": "01txx0000004C93",
        "startDate": "2027-03-01",
        "endDate": "2027-08-31",
        "quantity": 10,
        "unitPrice": 100.00,
        "netUnitPrice": 100.00,
        "lineTotal": 500.00,
        "sellingModelType": "TermDefined",
        "periodBoundary": "DayOfPeriod",
        "billingDayOfMonth": 1,
        "billingTermUnit": "Month",
        "billingTerm": 6
    }
]
},
{
    "productName": "Onboarding Fee",
    "quantity": 1,
    "unitPrice": 200.00,
    "netUnitPrice": 200.00,
    "lineTotal": 200.00,
    "sellingModelType": "OneTime",
    "billingTermUnit": "OneTime",
    "billingTerm": 1
}
]
}

```

JSON Example — Using an Existing Payment Record

This example passes `paymentId` directly for an existing payment record, instead of `paymentDetails`.

```

{
    "accountId": "001SG00001QDo2kYAD",
    "currencyIsoCode": "USD",
    "amount": 60,
    "previewInvoice": false,
    "shouldCapturePayment": false,
    "paymentId": "0aQSG0000020WoL2AU",
    "lineItems": [
        {
            "productId": "01txx0000004C91",
            "quantity": 1,
            "unitPrice": 60.00,
            "netUnitPrice": 60.00,

```

```

    "lineTotal": 60.00
  }
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account placing the order. Use this or customerDetails.	Optional	68.0
amount	Double	Total amount to charge for this checkout transaction.	Required	68.0
billing Address	Address Input	Customer's billing address. Use this or billingProfileId.	Optional	68.0
billing Contact	Billing Contact Input	Billing customer details when billingProfileId isn't provided. Creates the contact if it doesn't exist.	Optional	68.0
billing ProfileId	String	ID of an existing billing profile. Use this or billingAddress.	Optional	68.0
currencyIso Code	String	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	Required	68.0
customer Details	Billing Checkout Customer Details Input	Customer details used to create a customer when accountId isn't provided.	Optional	68.0
invoiceDate	String	Date that appears on the generated invoice (YYYY-MM-DD). Defaults to the transaction date.	Optional	68.0
invoiceTarget Date	String	End date for the billing period to include on this invoice (YYYY-MM-DD). Creates a targeted invoice.	Optional	68.0
isPartial Payment Allowed	Boolean	Indicates whether partial payment is allowed for this payment context (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Optional	68.0
lineItems	Billing Checkout Line Item Input[]	Array of products being purchased.	Required	68.0
payment Details	Billing Checkout Payment Details Input	Raw payment details used to tokenize a new card or bank account. Use this or paymentMethodId.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
paymentId	String	ID of an existing payment record to associate with this checkout transaction. Not allowed when <code>shouldCapturePayment</code> is <code>true</code> , and not allowed together with <code>amount</code> .	Optional	68.0
paymentMethod Id	String	ID of a saved payment method. Use this or <code>paymentDetails</code> .	Optional	68.0
preview Invoice	Boolean	If <code>true</code> , returns a preview of the invoice without committing the checkout transaction.	Optional	68.0
shipping Address	Address Input	Customer's shipping address.	Optional	68.0
shouldCapture Payment	Boolean	If <code>true</code> , captures the payment as part of the checkout transaction.	Optional	68.0

Response Body for POST

[Billing Checkout](#)

Tax Calculation (POST)

Calculate tax for a transaction.

Special Access Rules

To use this API, you need the `CalculateTaxes` API permission set.

Resource

```
/commerce/taxes/actions/calculate
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/taxes/actions/calculate
```

Available Version

62.0

HTTP Methods

POST

Request Body for POST

JSON Example

This example shows a tax request for a specified invoice as the reference entity.

```
{
  "addresses": {
    "billTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "soldTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "shipFrom": {
      "street": "123 Alaskan Way",
      "city": "Seattle",
      "state": "WA",
      "country": "US",
      "postalCode": "98101"
    },
    "shipTo": {
      "street": "123 Main street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    }
  },
  "currencyIsoCode": "USD",
  "customerDetails": {
    "accountId": "001xx000003HYD5AAO"
  },
  "description": "Monthly invoice for account 001xx000003HYEhAAO",
  "documentCode": "3ttxx0000000C7d_Debit-4wAxx000000000DEAY",
  "effectiveDate": "2022-03-09T10:30:41.000Z",
  "isCommit": true,
  "lineItems": [
    {
      "quantity": 1,
      "amount": 100,
      "taxCode": "TX0001",
      "productCode": "Y0001",
      "productSKU": "PRES-RX-12896745",
      "description": "New Product",
      "effectiveDate": "2022-03-09T10:30:41.000Z",
      "lineNumber": "5TVxx0000004C92GAE",
      "addresses": {
```



```

    "shipFrom": {
      "street": "123 Alaskan Way",
      "city": "Seattle",
      "state": "WA",
      "country": "US",
      "postalCode": "98101",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "shipTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "soldTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "billTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    }
  }
},
"referenceDocumentCode" = null,
"referenceEntityId": "3ttxx0000000C7d",
"shouldVoidTax": false,
"taxEngineId": "4wAxx0000000g8v",
"taxType": "Actual",
"taxTransactionType": "Debit",
"transactionDate": "2022-03-09T10:30:41.000Z"
}

```

This example shows a tax request for a specified credit memo as the reference entity.

```

{
  "addresses": {
    "billTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",

```

```

    "state": "WA",
    "postalCode": "98110",
    "country": "US"
  },
  "soldTo": {
    "street": "123 Main Street",
    "city": "Bainbridge Island",
    "state": "WA",
    "postalCode": "98110",
    "country": "US"
  },
  "shipFrom": {
    "street": "123 Alaskan Way",
    "city": "Seattle",
    "state": "WA",
    "country": "US",
    "postalCode": "98101"
  },
  "shipTo": {
    "street": "123 Main street",
    "city": "Bainbridge Island",
    "state": "WA",
    "postalCode": "98110",
    "country": "US"
  }
},
"currencyIsoCode": "USD",
"customerDetails": {
  "accountId": "001xx000003HYD5AAO"
},
"description": "Monthly credit memo for account 001xx000003HYEhAAO",
"documentCode": "50gxx000000g27KAAQ-4wAxx000000000ODEAY",
"effectiveDate": "2022-03-09T10:30:41.000Z",
"isCommit": true,
"lineItems": [
  {
    "quantity": 1,
    "amount": 100,
    "taxCode": "TX0001",
    "productCode": "Y0001",
    "productSKU": "PRES-RX-12896745",
    "description": "New Product",
    "effectiveDate": "2022-03-09T10:30:41.000Z",
    "lineNumber": "5TVxx0000004C92GAE",
    "addresses": {
      "shipFrom": {
        "street": "123 Alaskan Way",
        "city": "Seattle",
        "state": "WA",
        "country": "US",
        "postalCode": "98101",
        "latitude": 45.12,
        "longitude": 45.12
      },

```

```

    "shipTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "soldTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "billTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    }
  }
},
"referenceDocumentCode" = null,
"referenceEntityId": "50gxx000000g27K",
"shouldVoidTax": false,
"taxEngineId": "4wAxx000000g8v",
"taxType": "Actual",
"taxTransactionType": "Debit",
"transactionDate": "2022-03-09T10:30:41.000Z"
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
addresses	Addresses	Address details for tax calculation.	Optional	62.0
currencyIsoCode	String	Currency ISO code that's used for tax calculation.	Optional	62.0
customerDetails	Customer Details	Customer details for determining the applicable tax.	Optional	62.0
description	String	Description of the tax transaction.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
documentCode	String	Unique identifier for the tax document. If the <code>documentCode</code> property isn't specified, the tax engine auto-generates it.	Optional	62.0
effectiveDate	String	Date when the tax rules are applied. If a tax rate changes on a specific date, the <code>effectiveDate</code> property ensures the correct rate is applied based on the transaction's timing. For credit-based tax callouts, specify the original invoice date.	Optional	62.0
isCommit	Boolean	Indicates whether to submit the transaction to the tax engine for reporting (<code>true</code>) or not (<code>false</code>). This property value is <code>true</code> for invoices and credit memos with the <code>Posted</code> status.	Optional	62.0
lineItems	Line Item Input []	Details of the line items for calculating the applicable tax.	Required	62.0
reference DocumentCode	String	Reference document code. For subsequent transactions such as a credit tax, this property value specifies the original document code. For credit-based tax callouts, specify the original invoice ID.	Optional	62.0
reference EntityId	String	ID of the related quote, invoice, and other transaction documents.	Optional	62.0
sellerDetails	Seller Details Input	Seller details for tax calculation.	Optional	62.0
shouldVoidTax	Boolean	Indicates whether to void the tax transaction associated with a document that's mentioned as the <code>referenceDocumentCode</code> property value with <code>taxType</code> property value as <code>Actual</code> and <code>isCommit</code> property value set to <code>true</code> . Keep these considerations in mind when you use this property.	Optional	65.0
taxEngineId	String	ID of the tax engine that's used to calculate tax.	Required	62.0
tax TransactionType	String	Type of the tax transaction. Valid values are <code>Debit</code> —Increases tax liability for the seller, requiring the seller to pay tax on the transaction, <code>Credit</code> —Decreases tax liability for the seller, resulting in a tax refund for the seller, or <code>Void</code> —Reserved for internal use. The default value is <code>Debit</code> .	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
taxType	String	Type of the tax. Valid values are <code>Actual</code> —Exact tax amount that's calculated based on actual sales or <code>Estimated</code> — Estimated tax amount, which is adjusted later to match actual tax calculations. For draft invoices and quote records, the tax type is marked as <code>Estimated</code> . After draft invoices are posted and the status changes to <code>Posted</code> , the tax type is updated to <code>Actual</code> . Similarly, when a quote record is finalized and converted into an actual order, the tax type is also updated to <code>Actual</code> .	Required	62.0
transactionDate	String	Date of the transaction that appears on the invoice, order, and other transaction documents.	Required	62.0

Supported values:

- If the `shouldVoidTax` property value is set to `true`, then the operation returns a response with `documentCode` property value updated to `referenceDocumentCode` property value that was originally sent in the request payload. The response also includes the `taxTransactionType` property value as `Void`. This indicates that the document specified in the `referenceDocumentCode` property value is voided.
- If document is locked or you can't void the tax transaction for any reason, then you can use the Tax Calculation request to perform another transaction such as a Credit Tax request. In this scenario, the response includes the `documentCode` property value that was sent in the request payload.
- If the document that's mentioned in the `referenceDocumentCode` property value isn't available in the tax engine, then an error response occurs with `ResultCode` value as `ReferenceDocumentCodeMissing`.

Response Body for POST

[Tax Calculation](#)

Update Sequence Policy (PATCH)

Update the settings of a sequence policy that defines how unique, sequential numbers are generated by using specific patterns, values, and filters.

Special Access Rules

You need the Billing Admin permission set to use this API.

Resource

```
/connect/sequences/policy/sequencePolicyId
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/connect/sequences/policy/1Vdxx0000000GRNAA2
```

Available Version

65.0

HTTP Methods

PATCH

Request Body for PATCH

JSON Example

This example shows a sample request to create a sequence policy.

```
{
  "name": "Sample Sequence Policy",
  "description": "This is a sample sequence policy.",
  "effectiveFromDateTime": "2025-08-10",
  "expirationDateTime": "2025-09-20",
  "isActive": true,
  "sequenceMode": "Basic",
  "targetObject": "Invoice",
  "dateStampFormat": "Yyyy",
  "sequenceStartNumber": 1,
  "incrementNumber": 1,
  "maximumSequenceNumber": 1000,
  "minimumSequenceNumberWidth": 2,
  "filterCriteria": "Custom",
  "selectionLogic": "selectionLogic",
  "sequencePattern": "INV-{SequenceValue}-abc",
  "selectionCondition": [
    {
      "filterField": "AppType",
      "operator": "Equals",
      "filterValue": "RLM",
      "conditionNumber": 1
    },
    {
      "filterField": "Status",
      "operator": "Equals",
      "filterValue": "Posted",
      "conditionNumber": 2
    },
    {
      "filterField": "LegalEntity",
      "operator": "Equals",
      "filterValue": "US",
      "conditionNumber": 3
    }
  ]
}
```

```

  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
dateStamp Format	String	Format of the stamp date that's appended to the sequence number. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
description	String	Additional details about the sequence policy.	Optional	65.0
effectiveFrom DateTime	String	Date and time when the policy becomes effective. The default value is the current date.	Required	65.0
expiration DateTime	String	Date and time when the policy expires.	Optional	65.0
filter Criteria	String	Criteria to filter the target objects.	Required	65.0
increment Number	Integer	Value by which the sequence number increases until it reaches the maximum number. This value must be greater than or equal to 1. The default value is 1. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
isActive	Boolean	Indicates whether the policy is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Required	65.0
maximumSequence Number	Integer	Maximum number the sequence number can reach.	Optional	65.0
minimumSequence NumberWidth	Integer	Minimum number of digits a sequence number must have. You can't edit this property by using the Update Sequence Policy API.	Optional	65.0
name	String	Name of the sequence policy.	Required	65.0
selection Condition	Selection Condition Input[]	Criteria to determine which sequence policy is applied to a record. This property includes conditions based on any standard or custom fields of the record.	Optional	65.0
selection Logic	String	Logic that determines the objects that the sequence policy applies to.	Optional	65.0

Name	Type	Description	Required or Optional	Available Version
sequenceMode	String	Specifies how sequence numbers are generated. Valid values are Basic —Assigns sequential numbers without gap reconciliation; or Gapless —Assigns sequential numbers with gap reconciliation. The usage of this value ensures that the posted invoices or credit memos don't have any numbering gaps for audits and compliance. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
sequencePattern	String	Pattern structure that's followed for the sequence.	Required	65.0
sequenceStartNumber	Integer	Starting value of the sequence number, which must be greater than or equal to 0. The default value is 1. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
targetObject	String	Object that the policy is applied to. Valid values are Invoice ; or CreditMemo —Available in API version 66.0 and later. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
timeZone	String	Time zone that's applicable for the sequence policy.	Optional	65.0

Response Body for PATCH

[Sequence Policy](#)

Void Posted Credit Memo (POST)

Void a credit memo in posted state.

The API response returns a unique identifier. In case of any asynchronous errors, a RevenueTransactionErrorLog record is created.

Resource

```
/commerce/billing/credit-memos/creditMemoId/actions/void
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/commerce/billing/credit-memos/50gvB00000003khrV2Q/actions/void
```


Available Version

66.0

HTTP Methods

POST

Path Parameter for POST

Properties

Name	Type	Description	Required or Optional	Available Version
creditMemoId	String	ID of the posted credit memo to be voided.	Required	66.0

Request Body for POST

As this API accepts a credit memo ID as a path parameter in the URL, specify an empty request body.

Response Body for POST

[Void Posted Credit Memo](#)

Refund Credit Memo (POST)

Initiate a refund against a credit memo.

Initiates a refund for a credit memo. Locks the credit memo, calls the Commerce Refund API, and applies the refund inline (sync) or defers the apply until the payment gateway event is received (async).

Resource

```
/revenue/billing/refunds/unreferenced-refunds/actions/process
```

Resource Example

```
https://yourInstance.salesforce.com/services/data/v68.0/revenue/billing/refunds/unreferenced-refunds/actions/process
```

Available Version

68.0

HTTP Methods

POST

Request Body for POST

JSON Example

```
{
  "appliedToId": "0PMxx0000000001AAA",
  "refundAmount": 100,
  "currencyIsoCode": "USD",
  "refundReason": "Customer requested refund",
  "paymentMethodId": "08pxx0000000001AAA",
  "refundNotes": "Refund processed per case 00298475."
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
appliedToId	String	ID of the credit memo that the refund is applied to.	Required	68.0
currencyIsoCode	String	ISO currency code. Required when multi-currency is enabled. Must match the credit memo's currency.	Required if multi-currency is enabled	68.0
paymentMethodId	String	ID of the payment method to issue the refund. Must reference a valid, active payment method.	Required	68.0
refundAmount	Double	Amount to be refunded. Must be greater than 0 and not exceed the remaining balance on the credit memo.	Required	68.0
refundNotes	String	Optional notes that are stored in the comments of the refund entity.	Optional	68.0
refundReason	String	Reason for the refund.	Required	68.0

Response Body for POST

[Refund Credit Memo](#)

Request Bodies

Learn more about the available request bodies of Billing APIs.

[Address Input](#)

Input representation of the details of an address.

[Addresses Input](#)

Input representation of the details of the addresses for calculating tax.

[Batch Invoice Filter Criteria Input](#)

Input representation of the filter criteria for an invoice batch run.

[Batch Invoice Scheduler Input](#)

Input representation of the details of the request to create an invoice scheduler.

[Billing Checkout Input](#)

Input representation of the checkout transaction details used to create the order, invoice, and payment.

[Billing Schedule Recovery Input](#)

Input representation of the details of the billing schedules to recover the associated invoice.

[Context-Aware Billing Schedule](#)

Input representation of the billing transaction details.

[Standalone Billing Schedule Input](#)

Input representation of the request to create a billing schedule based on transaction details. This representation includes the transaction and context service details.

[Standalone Billing Schedule Metadata Input](#)

Input representation of the metadata details to create a billing schedule. This representation includes the name of the context definition and context mapping along with the mapping details of the transaction, billing schedule, and billing schedule group.

[Composite Collection Plan Input](#)

Input representation of one or more collection plans, each with its optional nested collection plan items.

[Collection Plan Input](#)

Input representation of a single collection plan, including its optional nested collection plan items.

[Collection Plan Item Input](#)

Input representation of a single collection plan item to create under a collection plan.

[Convert Negative Invoice Lines Input](#)

Input representation of the details of the request to convert a list of negative invoice lines into a credit.

[Credit Invoice Input](#)

Input representation of the details of the request to create a credit memo.

[Credit Invoice Line Input](#)

Input representation of the details of the invoice lines to be credited.

[Credit Invoice Line Tax Input](#)

Input representation of the details of the tax lines to be created manually for the invoice line.

[Credit Memo Addresses Input](#)

Input representation of the details of the billing and shipping addresses.

[Credit Memo Apply Input](#)

Input representation of the request to apply a credit memo to an invoice.

[Credit Memo Apply Application Input](#)

Input representation of the request to specify one or more applications to apply a credit memo for, with each application representing an invoice.

[Credit Memo Draft to Posted Input](#)

Input representation of the request to post a draft credit memo.

[Credit Memo Unapply Input](#)

Input representation of the request to unapply a credit memo from an invoice.

[Credit Memo Line Apply Input](#)

Input representation of the details of the request to apply a credit memo line to an invoice line.

[Credit Memo Line Application Input](#)

Input representation of the request to specify one or more applications to apply a credit memo line for, with each application representing an invoice line.

[Credit Memo Line Unapply Input](#)

Input representation of the details of the request to unapply a credit memo line from an invoice line.

[Customer Details Input](#)

Input representation of the customer details for tax calculation.

[Frequency Cadence Options](#)

Input representation of the frequency cadence options for an invoice scheduler.

[Graph Record for Invoice Ingestion](#)

A Graph record is an object that's a part of the graph structure, representing both the fields and relationships among different objects. Each record in the graph can contain attributes, which are fields of the object, and references to other related records.

[Invoice Draft To Posted Input](#)

Input representation of the details of the draft invoice that's posted.

[Invoice Estimated Tax Calculation Input](#)

Details of the invoice for which the estimated tax must be calculated.

[Invoice Ingestion Input](#)

Input representation of the details of the invoice to be processed. The details include the tax processing status, user preferences for tax callouts, and associated object graph representation.

[Invoice Input for Ingestion](#)

Input representation of the details of the invoice that must be generated for or ingested into Billing.

[Invoice Input](#)

Input representation of the details of the billing schedule.

[Invoice Preview Input](#)

Input representation of the details of the billing transaction that the preview invoices are generated for.

[Line Item Input](#)

Input representation of the details of the line item for tax calculation.

[On-Demand Document Generation Input](#)

Input representation of the details to generate a comprehensive on-demand document for specified record types.

[Payment Line Apply Input](#)

Input representation of the payment line details. This representation covers details on allocation of a payment to a specific invoice line. It also provides additional context through optional fields such as associated account and effective date.

[Payment Line Unapply Input](#)

Input representation of the payment line details. This representation covers fields that you can specify to revert a payment line application to their preapplication state.

[Payment Run Batch Filter Criteria Input](#)

Input representation of the filter criteria for an invoice batch run. This representation covers the criteria and sequence for filtering payment run details. It specifies the field and object names, comparison operations, and values to be used for filtering.

[Payment Batch Scheduler Input](#)

Input representation of the details of the request to create a payment scheduler. This representation sets the rules and timing for a payment scheduler, including match types, dates, frequency, and filter criteria.

[Payment Scheduler Update Input](#)

Input representation of the details of the request to update the status of a payment scheduler. This representation defines the status of a payment scheduler, which can be set to Active, Canceled, Draft, or Inactive.

[Posted Invoice List Write-Off Input](#)

Input representation of the request to write off a list of posted invoices. This representation includes the details of invoices that you want to write off.

[Posted Invoice Write-Off Input](#)

Input representation of the details of the request to write off a posted invoice. This representation includes invoice details such as invoice ID and reason for writing off invoices.

[Refund Credit Memo Input](#)

Input representation of the details required to initiate a refund against a credit memo.

[Refund Line Apply Input](#)

Input representation of the details of a transaction refund request. This representation outlines the properties of a refund, including the refund amount and ID of the payment or credit memo record that the refund is applied to.

[Resume Billing Input](#)

Input representation of the details of the request to resume the billing operation for an account or a billing schedule group.

[Resume Billing Object Input](#)

Input representation of the details such as the ID of the account or billing schedule group along with the effective date. These details are used to start the billing operation.

[Rules Application Input](#)

Input representation for applying payments and credits to invoices based on rules.

[Selection Condition Input](#)

Input representation of the criteria that's used to determine which sequencing policy is applied to a record. The criteria stores the conditions based on any standard or custom fields of the record.

[Seller Details Input](#)

Input representation of the seller details for tax calculation.

[Send Email Input](#)

Input representation of the request to send an email for an invoice batch run.

[Sequence Policy Input](#)

Input representation of the configured rules and properties to generate unique, sequential numbers for objects.

[Sequence Gap Reconciliation Input](#)

Input representation of the details that are used to identify and reconcile gaps in sequence values based on the sequence policy or target object.

[Sequences Assignment Input](#)

Input representation of the details of the target objects to which the sequence pattern values are assigned.

[Standalone Credit Memo Charge Input](#)

Input representation of the details of the charge lines of a credit memo.

[Standalone Credit Memo Input](#)

Input representation of the details required to create a standalone credit memo.

[Standalone Credit Memo Tax Input](#)

Input representation of the details of the tax request.

[Account Statement Input](#)

Input representation of the details required to generate a comprehensive account statement with transaction history and balance information.

[Suspend Billing Input](#)

Input representation of the details of the request to suspend the billing operation for an account or a billing schedule group.

[Suspend Billing Object Input](#)

Input representation of the details such as the ID of the account or billing schedule group along with the effective dates. These details are used to suspend the billing operation.

[Tax Calculation Input](#)

Input representation of the details of the request to calculate tax.

[Void Posted Credit Memo Input](#)

Input representation of the details of a credit memo to be voided.

[Void Posted Invoice Input](#)

Input representation of the details of the invoice to be voided.

Address Input

Input representation of the details of an address.

JSON Example

JSON Example

```
"billingAddress": {
  "street": "1 Market St #300",
  "city": "San Francisco",
  "state": "CA",
  "country": "US",
  "postalCode": "94105",
  "latitude": "37.789901",
  "longitude": "-122.396923"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
city	String	Address city.	Optional	62.0
country	String	Address country.	Optional	62.0
latitude	Double	Latitude for the address.	Optional	62.0
locationCode	String	Location code for the address.	Optional	62.0
longitude	Double	Longitude for the address.	Optional	62.0
postalCode	String	Postal code for the address.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
state	String	Address state.	Optional	62.0
street	String	Address street.	Optional	62.0

Addresses Input

Input representation of the details of the addresses for calculating tax.

JSON Example

```
{
  "addresses": {
    "billTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "soldTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "shipFrom": {
      "street": "123 Alaskan Way",
      "city": "Seattle",
      "state": "WA",
      "country": "US",
      "postalCode": "98101"
    },
    "shipTo": {
      "street": "123 Main street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    }
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billTo	Address Input	Billing address of the item.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
shipFrom	Address Input	Address that the item is shipped from.	Optional	62.0
shipTo	Address Input	Address that the item is shipped to.	Required	62.0
soldTo	Address Input	Address of the entity that the item is sold to.	Optional	62.0

Batch Invoice Filter Criteria Input

Input representation of the filter criteria for an invoice batch run.

JSON Example

```

"filterCriteria": [
  {
    "operation": "InList",
    "value": "Batch 2,Batch 3,Batch 4",
    "criteriaSequence": 1,
    "objectName": "BillingSchedule",
    "fieldName": "InvoiceRunMatchingValue"
  },
  {
    "operation": "Equals",
    "value": "001xx000003GZG5AAO",
    "criteriaSequence": 2,
    "objectName": "BillingSchedule",
    "fieldName": "BillingAccount"
  },
  {
    "operation": "Equals",
    "value": "0fwxx0000000001AAA",
    "criteriaSequence": 3,
    "objectName": "BillingScheduleGroup",
    "fieldName": "LegalEntity"
  },
  {
    "operation": "InList",
    "value": "OneTime,Recurring",
    "criteriaSequence": 4,
    "objectName": "BillingSchedule",
    "fieldName": "BillingTermUnit"
  },
  {
    "operation": "Equals",
    "value": "USD",
    "criteriaSequence": 5,
    "objectName": "BillingSchedule",
    "fieldName": "Currency_Iso_code"
  }
]

```


Properties

Name	Type	Description	Required or Optional	Available Version
fieldName	String	Name of the field that this filter is applicable for. Valid values are <code>Currency_Iso_code</code> —If multiple currencies are enabled for the org, then this value is required, <code>InvoiceRunMatchingValue</code> , <code>BillingAccount</code> , <code>LegalEntity</code> , or <code>BillingTermUnit</code> .	Required	62.0
objectName	Object	Name of the object that the filter is applicable for. Valid values are <code>BillingSchedule</code> or <code>BillingScheduleGroup</code> .	Required	62.0
operation	String	Operation to be performed for comparison. Valid values are <code>Equals</code> ; <code>InList</code> —This value supports only the <code>InvoiceRunMatchingValue</code> and <code>BillingTermUnit</code> fields with API version 62.0 and later. In addition, this value supports the <code>CurrencyIsoCode</code> field with API version 63.0 and later; or <code>NotEquals</code> .	Required	62.0
value	String	Value for the filter criteria.	Required	62.0

Batch Invoice Scheduler Input

Input representation of the details of the request to create an invoice scheduler.

JSON Example

This example shows a sample request to create an invoice scheduler that generates invoices once.

```
{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDate": "2024-05-22",
  "invoiceDate": "2024-05-22",
  "frequencyCadence": "Once",
  "frequencyCadenceOptions": {},
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {
```

```

    "operation": "InList",
    "value": "Batch 2,Batch 3,Batch 4",
    "criteriaSequence": 1,
    "objectName": "BillingSchedule",
    "fieldName": "InvoiceRunMatchingValue"
  },
  {
    "operation": "Equals",
    "value": "001xx000003GZG5AAO",
    "criteriaSequence": 2,
    "objectName": "BillingSchedule",
    "fieldName": "BillingAccount"
  },
  {
    "operation": "Equals",
    "value": "0fwxx0000000001AAA",
    "criteriaSequence": 3,
    "objectName": "BillingScheduleGroup",
    "fieldName": "LegalEntity"
  },
  {
    "operation": "InList",
    "value": "OneTime,Recurring",
    "criteriaSequence": 4,
    "objectName": "BillingSchedule",
    "fieldName": "BillingTermUnit"
  },
  {
    "operation": "Equals",
    "value": "USD",
    "criteriaSequence": 5,
    "objectName": "BillingSchedule",
    "fieldName": "Currency_Iso_code"
  }
]
}

```

This example shows a sample request to create an invoice scheduler that generates invoices daily.

```

{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "endDate": "2026-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDateOffset": 0,
  "invoiceDateOffset": 0,
  "isInvoiceDateFromRunDate": true,
  "frequencyCadence": "Daily",
  "frequencyCadenceOptions": {},
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {
      "operation": "InList",

```

```

        "value": "Batch 2,Batch 3,Batch 4",
        "criteriaSequence": 1,
        "objectName": "BillingSchedule",
        "fieldName": "InvoiceRunMatchingValue"
    },
    {
        "operation": "Equals",
        "value": "001xx000003GZG5AAO",
        "criteriaSequence": 2,
        "objectName": "BillingSchedule",
        "fieldName": "BillingAccount"
    },
    {
        "operation": "Equals",
        "value": "0fwxx0000000001AAA",
        "criteriaSequence": 3,
        "objectName": "BillingScheduleGroup",
        "fieldName": "LegalEntity"
    },
    {
        "operation": "InList",
        "value": "OneTime,Recurring",
        "criteriaSequence": 4,
        "objectName": "BillingSchedule",
        "fieldName": "BillingTermUnit"
    },
    {
        "operation": "InList",
        "value": "USD",
        "criteriaSequence": 5,
        "objectName": "BillingSchedule",
        "fieldName": "Currency_Iso_code"
    }
]
}

```

This example shows a sample request to create an invoice scheduler that generates invoices weekly.

```

{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "endDate": "2026-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDateOffset": 0,
  "invoiceDateOffset": 0,
  "isInvoiceDateFromRunDate": false,
  "frequencyCadence": "Weekly",
  "frequencyCadenceOptions": {
    "recursOnDay": "Sunday"
  },
  "timezone": "Asia/Kolkata",
  "status": "Active",
  "filterCriteria": [
    {

```

```

    "operation": "InList",
    "value": "Batch 2,Batch 3,Batch 4",
    "criteriaSequence": 1,
    "objectName": "BillingSchedule",
    "fieldName": "InvoiceRunMatchingValue"
  },
  {
    "operation": "Equals",
    "value": "001xx000003GZG5AAO",
    "criteriaSequence": 2,
    "objectName": "BillingSchedule",
    "fieldName": "BillingAccount"
  },
  {
    "operation": "Equals",
    "value": "0fwxx0000000001AAA",
    "criteriaSequence": 3,
    "objectName": "BillingScheduleGroup",
    "fieldName": "LegalEntity"
  },
  {
    "operation": "InList",
    "value": "OneTime,Recurring",
    "criteriaSequence": 4,
    "objectName": "BillingSchedule",
    "fieldName": "BillingTermUnit"
  },
  {
    "operation": "Equals",
    "value": "USD",
    "criteriaSequence": 5,
    "objectName": "BillingSchedule",
    "fieldName": "Currency_Iso_code"
  }
]
}

```

This example shows a sample request to create an invoice scheduler that generates invoices monthly on a specific date.

```

{
  "schedulerName": "InvoiceScheduler",
  "startDate": "2024-05-06",
  "endDate": "2026-05-06",
  "invoiceStatus": "POSTED",
  "preferredTime": "00:45",
  "targetDateOffset": 0,
  "invoiceDateOffset": 0,
  "isInvoiceDateFromRunDate": false,
  "frequencyCadence": "Monthly",
  "frequencyCadenceOptions": {
    "recurringSubType": "SpecificDate",
    "recursOnDate": "L-1",
    "shouldExcludeWkendAndHldy": true
  },
  "timezone": "Asia/Kolkata",
}

```

```

"status": "Active",
"filterCriteria": [
  {
    "operation": "InList",
    "value": "Batch 2,Batch 3,Batch 4",
    "criteriaSequence": 1,
    "objectName": "BillingSchedule",
    "fieldName": "InvoiceRunMatchingValue"
  },
  {
    "operation": "Equals",
    "value": "001xx000003GZG5AAO",
    "criteriaSequence": 2,
    "objectName": "BillingSchedule",
    "fieldName": "BillingAccount"
  },
  {
    "operation": "Equals",
    "value": "0fwxx0000000001AAA",
    "criteriaSequence": 3,
    "objectName": "BillingScheduleGroup",
    "fieldName": "LegalEntity"
  },
  {
    "operation": "InList",
    "value": "OneTime,Recurring",
    "criteriaSequence": 4,
    "objectName": "BillingSchedule",
    "fieldName": "BillingTermUnit"
  },
  {
    "operation": "Equals",
    "value": "USD",
    "criteriaSequence": 5,
    "objectName": "BillingSchedule",
    "fieldName": "Currency_Iso_code"
  }
]
}

```

This example shows a sample request to create an invoice scheduler that runs immediately.

```

{
  "schedulerName": "InvoiceScheduler",
  "status": "Draft",
  "invoiceStatus": "Posted",
  "frequencyCadenceOptions": {
    "shouldStartRunImmediately": true
  },
  "frequencyCadence": "Once",
  "targetDate": "2024-08-28",
  "invoiceDate": "2024-08-28",
  "filterCriteria": [
    {
      "operation": "InList",

```

```

        "value": "Batch 2,Batch 3,Batch 4",
        "criteriaSequence": 1,
        "objectName": "BillingSchedule",
        "fieldName": "InvoiceRunMatchingValue"
    },
    {
        "operation": "Equals",
        "value": "001xx000003GZG5AAO",
        "criteriaSequence": 2,
        "objectName": "BillingSchedule",
        "fieldName": "BillingAccount"
    },
    {
        "operation": "Equals",
        "value": "0fwxx0000000001AAA",
        "criteriaSequence": 3,
        "objectName": "BillingScheduleGroup",
        "fieldName": "LegalEntity"
    },
    {
        "operation": "InList",
        "value": "OneTime,Recurring",
        "criteriaSequence": 4,
        "objectName": "BillingSchedule",
        "fieldName": "BillingTermUnit"
    },
    {
        "operation": "Equals",
        "value": "USD",
        "criteriaSequence": 5,
        "objectName": "BillingSchedule",
        "fieldName": "Currency_Iso_code"
    }
]
}

```

This example shows a sample request to create an invoice scheduler where generating invoice documents is enabled and the invoice date offset is defined.

```

{
  "schedulerName": "InvoiceScheduler",
  "status": "Draft",
  "invoiceStatus": "Draft",
  "startDate": "2023-09-01",
  "endDate": "2026-09-17",
  "preferredTime": "00:15",
  "frequencyCadence": "Daily",
  "frequencyCadenceOptions": {
    "shouldExcludeWkendAndHldy": true,
    "shouldStartRunImmediately": false
  },
  "timezone": "America/Los_Angeles",
  "targetDateOffset": "2",
  "invoiceDateOffset": "4",
  "isInvoiceDateFromRunDate": false,

```

```

"shouldRunDpeOnCore": false,
"shouldGenerateInvoiceDocuments": true,
"billingCycleCount": "4",
"filterCriteria": [
  {
    "criteriaSequence": 1,
    "operation": "InList",
    "objectName": "BillingSchedule",
    "fieldName": "InvoiceRunMatchingValue",
    "value": "Batch 1"
  },
  {
    "criteriaSequence": 2,
    "operation": "InList",
    "objectName": "BillingSchedule",
    "fieldName": "BillingTermUnit",
    "value": "Usage"
  },
  {
    "criteriaSequence": 3,
    "operation": "InList",
    "objectName": "BillingSchedule",
    "fieldName": "Currency_Iso_code",
    "value": "JPY"
  }
]
}

```

This example shows a sample request to create an invoice scheduler that has the `jobType` property set to `Catchup`.

```

{
  "schedulerName": "InvoiceScheduler",
  "status": "Draft",
  "startDate": "2023-09-01",
  "preferredTime": "00:15",
  "frequencyCadence": "Once",
  "frequencyCadenceOptions": {
    "shouldExcludeWkendAndHldy": false,
    "shouldStartRunImmediately": false
  },
  "timezone": "America/Los_Angeles",
  "targetDate": "2026-09-25",
  "billingCycleCount": "4",
  "shouldCatchUpBillRun": true,
  "filterCriteria": [
    {
      "criteriaSequence": 1,
      "operation": "InList",
      "objectName": "BillingSchedule",
      "fieldName": "InvoiceRunMatchingValue",
      "value": "Batch 1"
    },
    {
      "criteriaSequence": 2,
      "operation": "InList",

```

```

        "objectName": "BillingSchedule",
        "fieldName": "BillingTermUnit",
        "value": "Usage"
    },
    {
        "criteriaSequence": 3,
        "operation": "InList",
        "objectName": "BillingSchedule",
        "fieldName": "Currency_Iso_code",
        "value": "JPY"
    }
],
"jobType": "Catchup"
}

```

This example shows a sample request to create an invoice scheduler where the `targetDayOfMonth` and `targetMonthOffset` properties are defined.

```

{
  "schedulerName": "InvoiceScheduler",
  "status": "Active",
  "invoiceStatus": "Draft",
  "startDate": "2020-09-01",
  "endDate": "2026-09-10",
  "preferredTime": "00:00",
  "frequencyCadence": "Monthly",
  "frequencyCadenceOptions": {
    "recurringSubType": "Every",
    "recursOn": "First",
    "recursOnDay": "Monday",
    "shouldExcludeWkendAndHldy": true,
    "shouldStartRunImmediately": false
  },
  "timezone": "America/Los_Angeles",
  "invoiceDateOffset": "5",
  "isInvoiceDateFromRunDate": true,
  "shouldRunDpeOnCore": false,
  "shouldGenerateInvoiceDocuments": false,
  "billingCycleCount": 1,
  "filterCriteria": [
    {
      "criteriaSequence": 1,
      "operation": "InList",
      "objectName": "BillingSchedule",
      "fieldName": "InvoiceRunMatchingValue",
      "value": "Batch 1"
    },
    {
      "criteriaSequence": 2,
      "operation": "InList",
      "objectName": "BillingSchedule",
      "fieldName": "BillingTermUnit",
      "value": "Usage"
    }
  ]
}

```



```
        "criteriaSequence": 3,
        "operation": "InList",
        "objectName": "BillingSchedule",
        "fieldName": "Currency_Iso_code",
        "value": "INR"
    }
],
"targetDayOfMonth": 3,
"targetMonthOffset": 4
}
```

This example shows a sample request to create a forecast scheduler that runs immediately with the `shouldRecalculateAllForecastLn` property set to `true`.

```
{
  "schedulerName": "ForecastScheduler",
  "jobType": "Forecast",
  "status": "Active",
  "frequencyCadence": "Once",
  "frequencyCadenceOptions": {
    "shouldStartRunImmediately": true
  },
  "targetDate": "2026-09-04",
  "filterCriteria": [],
  "shouldRecalculateAllForecastLn": true
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billing CycleCount	Integer	Number of billing cycles or billing periods to be invoiced.	Optional	68.0
endDate	String	End date of the invoice scheduler.	Optional	63.0
filter Criteria	Batch Invoice Filter Criteria Input[]	List of line items of the filter criteria.	Optional	62.0
frequency Cadence	String	Frequency to run the invoice scheduler.	Required	62.0
frequency Cadence Options	Frequency Cadence Options	Frequency cadence options for the invoice scheduler.	Required	62.0
invoiceDate	String	Date shown on the invoice. This date is also used for tax calculations.	Required if the <code>frequencyCadence</code> property is set to <code>Once</code> .	62.0

Name	Type	Description	Required or Optional	Available Version
invoiceDate Offset	Integer	Offset applied to the target date, which is the number of days added to or subtracted from the invoice date, to calculate the updated invoice date.	Required if the frequency Cadence property is set to <code>Daily</code> , <code>Weekly</code> , or <code>Monthly</code> .	62.0
invoiceStatus	String	Status of the invoice that specifies the expected invoice status from an invoice batch run. Valid values are <code>Draft</code> or <code>Posted</code> .	Required	62.0
isInvoice DateFrom RunDate	Boolean	Indicates whether the invoice date is applicable from the date when the invoice scheduler is run (<code>true</code>) or not (<code>false</code>).	Optional	63.0
jobType	String	Type of job the scheduler runs. Valid values are <code>Catchup</code> , <code>Forecast</code> , <code>Invoice</code> , or <code>Payment</code> .	Optional	68.0
preferredTime	String	Preferred time for the invoice batch run.	Required	62.0
schedulerName	String	Name of the invoice scheduler, which must be unique in your org.	Required	62.0
shouldCatchUp BillRun	Boolean	Indicates whether the invoice batch run advances billing schedules to a target date without generating invoices for prior billing periods (<code>true</code>) or not (<code>false</code>).	Optional	68.0
should Generate Invoice Documents	Boolean	Indicates whether invoice documents are automatically generated during batch processing for runs triggered by the scheduler (<code>true</code>) or not (<code>false</code>).	Optional	68.0
should Recalculate AllForecastLn	Boolean	Indicates whether to recalculate all forecast lines for all billing schedules regardless of forecast status (<code>true</code>) or only eligible ones (<code>false</code>). Applies only to forecast job runs.	Optional	68.0
startDate	String	Start date of the invoice scheduler.	Required	62.0
status	String	Status of the invoice scheduler. Valid values are <code>Draft</code> , <code>Active</code> , or <code>Inactive</code> .	Required	62.0
targetDate	String	Target date of the invoice batch run. Billing schedules having the next billing date before this date are picked up for invoicing. The target date must be less than or equal to the maximum allowed target date for the org.	Required if the frequency Cadence property is set to <code>Once</code> .	62.0

Name	Type	Description	Required or Optional	Available Version
targetDateOffset	Integer	Target date offset applied to the next invoice run date to calculate the target date. The offset is the number of days added to or subtracted from the next billing date.	Required if the frequency Cadence property is set to Daily, Weekly, or Monthly.	62.0
targetDayOfMonth	Integer	Day of the month to use for calculating the target date. Values are 1 through 28, -3 (third-to-last day), -2 (second-to-last day), or -1 (last day).	Optional	68.0
targetMonthOffset	Integer	Number of months relative to each scheduled run for calculating the target date. For example, 0 is the current month, 1 is the next month, and -1 is the previous month.	Optional	68.0
timezone	String	Time zone that's applicable for the invoice scheduler.	Optional	62.0

Valid values are:

- Once
- Daily
- Weekly
- Monthly

Billing Checkout Input

Input representation of the checkout transaction details used to create the order, invoice, and payment.

JSON Example

```
{
  "previewInvoice": false,
  "shouldCapturePayment": true,
  "isPartialPaymentAllowed": false,
  "accountId": "001xx0000004C90",
  "invoiceDate": "2026-09-01",
  "invoiceTargetDate": "2026-12-31",
  "currencyIsoCode": "USD",
  "amount": 1400.00,
  "billingContact": {
    "firstName": "Alex",
    "lastName": "Rivera",
    "email": "alex.rivera@example.com",
```

```
    "phone": "+1-415-555-0100"
  },
  "billingAddress": {
    "street": "415 Mission St",
    "city": "San Francisco",
    "state": "California",
    "stateCode": "CA",
    "country": "United States",
    "countryCode": "US",
    "postalCode": "94105"
  },
  "shippingAddress": {
    "street": "415 Mission St",
    "city": "San Francisco",
    "stateCode": "CA",
    "countryCode": "US",
    "postalCode": "94105"
  },
  "paymentDetails": {
    "paymentGatewayId": "0cgxx0000004C91",
    "idempotencyKey": "checkout-2026-09-01-abc123",
    "savedPaymentMethodDetails": {
      "merchantAccount": "0dmxx0000004C92",
      "gatewayToken": "tok_1PabcXYZ",
      "gatewayReference": "cus_0Ref123",
      "type": "Card",
      "name": "Acme Corp Visa"
    }
  },
  "lineItems": [
    {
      "productName": "Platform Subscription",
      "transactionId": "TXN-PLATFORM-001",
      "quantity": 10,
      "unitPrice": 100.00,
      "netUnitPrice": 100.00,
      "lineTotal": 1000.00,
      "startDate": "2026-09-01",
      "endDate": "2027-08-31",
      "sellingModelType": "TermDefined",
      "periodBoundary": "DayOfPeriod",
      "billingDayOfMonth": 1,
      "billingTermUnit": "Month",
      "billingTerm": 12,
      "taxTreatmentId": "0cXxx0000004C94",
      "billingTreatmentId": "0cYxx0000004C95",
      "bundleProductDetails": [
        {
          "productName": "Premium Support Add-on",
          "associatedTransactionPricing": "IncludedInBundlePrice",
          "quantity": 10,
          "unitPrice": 200.00,
          "netUnitPrice": 200.00,
          "lineTotal": 200.00,

```

```

        "sellingModelType": "TermDefined",
        "periodBoundary": "DayOfPeriod",
        "billingDayOfMonth": 1,
        "billingTermUnit": "Month",
        "billingTerm": 12,
        "taxTreatmentId": "0cXxx0000004C94",
        "billingTreatmentId": "0cYxx0000004C95"
    }
],
"ramps": [
    {
        "productId": "01txx0000004C93",
        "startDate": "2026-09-01",
        "endDate": "2027-02-28",
        "quantity": 10,
        "unitPrice": 100.00,
        "netUnitPrice": 100.00,
        "lineTotal": 500.00,
        "sellingModelType": "TermDefined",
        "periodBoundary": "DayOfPeriod",
        "billingDayOfMonth": 1,
        "billingTermUnit": "Month",
        "billingTerm": 6
    },
    {
        "productId": "01txx0000004C93",
        "startDate": "2027-03-01",
        "endDate": "2027-08-31",
        "quantity": 10,
        "unitPrice": 100.00,
        "netUnitPrice": 100.00,
        "lineTotal": 500.00,
        "sellingModelType": "TermDefined",
        "periodBoundary": "DayOfPeriod",
        "billingDayOfMonth": 1,
        "billingTermUnit": "Month",
        "billingTerm": 6
    }
]
},
{
    "productName": "Onboarding Fee",
    "quantity": 1,
    "unitPrice": 200.00,
    "netUnitPrice": 200.00,
    "lineTotal": 200.00,
    "sellingModelType": "OneTime",
    "billingTermUnit": "OneTime",
    "billingTerm": 1
}
]
}

```

JSON Example — Using an Existing Payment Record

This example passes `paymentId` directly for an existing payment record instead of `paymentDetails`.

```
{
  "accountId": "001SG00001QDo2kYAD",
  "currencyIsoCode": "USD",
  "amount": 60,
  "previewInvoice": false,
  "shouldCapturePayment": false,
  "paymentId": "0aQSG0000020WoL2AU",
  "lineItems": [
    {
      "productId": "01txx0000004C91",
      "quantity": 1,
      "unitPrice": 60.00,
      "netUnitPrice": 60.00,
      "lineTotal": 60.00
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account placing the order. Use <code>accountId</code> or <code>customerDetails</code> .	Optional	68.0
amount	Double	Total amount to charge for this checkout transaction.	Required	68.0
billing Address	Address Input	Customer's billing address. Use <code>billingAddress</code> or <code>billingProfileId</code> .	Optional	68.0
billing Contact	Billing Contact Input	Billing customer details when <code>billingProfileId</code> isn't provided. Creates the contact if it doesn't exist.	Optional	68.0
billing ProfileId	String	ID of an existing billing profile. Use <code>billingProfileId</code> or <code>billingAddress</code> .	Optional	68.0
currencyIso Code	String	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	Required	68.0
customer Details	Billing Checkout Customer Details Input	Customer details used to create a customer when <code>accountId</code> isn't provided.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
invoiceDate	String	Date that appears on the generated invoice (YYYY-MM-DD). Defaults to the transaction date.	Optional	68.0
invoiceTarget Date	String	End date for the billing period to include on this invoice (YYYY-MM-DD). Creates a targeted invoice.	Optional	68.0
isPartial Payment Allowed	Boolean	Indicates whether partial payment is allowed for this payment context (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Optional	68.0
lineItems	Billing Checkout Line Item Input[]	Array of products being purchased.	Required	68.0
payment Details	Billing Checkout Payment Details Input	Raw payment details used to tokenize a new card or bank account. Use <code>paymentDetails</code> or <code>paymentMethodId</code> .	Optional	68.0
paymentId	String	ID of an existing payment record to associate with this checkout transaction. Not allowed when <code>shouldCapturePayment</code> is <code>true</code> , and not allowed together with <code>amount</code> .	Optional	68.0
paymentMethod Id	String	ID of a saved payment method. Use <code>paymentMethodId</code> or <code>paymentDetails</code> .	Optional	68.0
preview Invoice	Boolean	If <code>true</code> , returns a preview of the invoice without committing the checkout transaction.	Optional	68.0
shipping Address	Address Input	Customer's shipping address.	Optional	68.0
shouldCapture Payment	Boolean	If <code>true</code> , captures the payment as part of the checkout transaction.	Optional	68.0

[Billing Contact Input](#)

Input representation of billing contact details used when `billingProfileId` isn't provided. Creates the contact if it doesn't exist.

[Billing Checkout Customer Details Input](#)

Input representation of customer details used to create a customer when `accountId` isn't provided.

[Billing Checkout Line Item Input](#)

Input representation of a single line item being purchased in the checkout transaction.

Billing Checkout Payment Details Input

Input representation of payment details used during checkout, referencing a saved payment method.

Billing Contact Input

Input representation of billing contact details used when billingProfileId isn't provided. Creates the contact if it doesn't exist.

JSON Example

```
{
  "firstName": "Jane",
  "lastName": "Doe",
  "email": "jane.doe@example.com",
  "phone": "4155550100"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
email	String	Email address of the billing contact.	Optional	68.0
firstName	String	First name of the billing contact.	Optional	68.0
lastName	String	Last name of the billing contact.	Optional	68.0
phone	String	Phone number of the billing contact.	Optional	68.0

Billing Checkout Customer Details Input

Input representation of customer details used to create a customer when accountId isn't provided.

JSON Example

```
{
  "companyName": "Acme Corporation",
  "currencyIsoCode": "USD",
  "email": "billing@acme.example.com",
  "website": "https://www.acme.example.com"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
companyName	String	Name of the customer's company.	Optional	68.0
currencyIso Code	String	ISO currency code for the customer.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
email	String	Email address of the customer.	Optional	68.0
website	String	Website of the customer.	Optional	68.0

Billing Checkout Line Item Input

Input representation of a single line item being purchased in the checkout transaction.

JSON Example

```
{
  "productId": "01txx0000004C91",
  "productName": "Professional Services",
  "transactionId": "TXN-PROF-SERVICES-001",
  "quantity": 2,
  "unitPrice": 100.00,
  "netUnitPrice": 90.00,
  "lineTotal": 180.00,
  "startDate": "2026-09-01",
  "endDate": "2027-08-31",
  "sellingModelType": "TermDefined",
  "periodBoundary": "DayOfPeriod",
  "billingDayOfMonth": 1,
  "billingTermUnit": "Month",
  "billingTerm": 12,
  "taxTreatmentId": "0cXxx0000004C93",
  "billingTreatmentId": "0cYxx0000004C94"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billingDayOfMonth	Integer	The day of the month a recurring billing process is scheduled to occur for the transaction. Required when periodBoundary is DayOfPeriod.	Optional	68.0
billingTerm	Integer	Number of billing term units. Must be 1 for OneTime selling models.	Optional	68.0
billingTermUnit	String	Unit of measurement for the billing term. Required when sellingModelType is TermDefined or Evergreen. Valid values are OneTime, Day, Week, Month, Quarter, SemiAnnual, Year, or BillingMilestonePlan.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
billingTreatmentId	String	ID of the billing treatment used to create the billing schedule for the transaction. If you don't specify a <code>billingTreatmentId</code> , the org-default <code>billingTreatmentId</code> is considered.	Optional	68.0
bundleProductDetails	Bundle Product Details Input[]	Array of child products. Its presence indicates that this line item is a bundle parent. Supports nested bundles.	Optional	68.0
endDate	String	End date for the line item's billing schedule (YYYY-MM-DD). Required when <code>sellingModelType</code> is <code>TermDefined</code> or a <code>billingTermUnit</code> is provided. Defaults to the invoice date when omitted.	Optional	68.0
lineTotal	Double	Net unit price multiplied by quantity.	Required	68.0
netUnitPrice	Double	Net unit price after discount calculation.	Optional	68.0
periodBoundary	String	Period boundary for the billing schedule. Required when <code>sellingModelType</code> is <code>TermDefined</code> or <code>Evergreen</code> . Valid values are <code>AlignToCalendar</code> , <code>Anniversary</code> , <code>DayOfPeriod</code> , or <code>LastDayOfPeriod</code> .	Optional	68.0
productId	String	Unique product ID of the item.	Required	68.0
productName	String	Unique product name of the item.	Optional	68.0
quantity	Integer	Quantity of the product being purchased.	Required	68.0
ramps	Billing Checkout Ramp Input[]	Schedule of changes in quantity or price for this line item.	Optional	68.0
sellingModelType	String	Selling model of the line item. Defaults to <code>OneTime</code> . A <code>TermDefined</code> or <code>Evergreen</code> value requires <code>billingTermUnit</code> . Valid values are <code>OneTime</code> , <code>TermDefined</code> , or <code>Evergreen</code> .	Optional	68.0
startDate	String	Start date for the line item's billing schedule (YYYY-MM-DD). Defaults to the invoice date.	Optional	68.0
taxTreatmentId	String	The tax treatment ID used to calculate tax for the transaction. If you don't specify a <code>taxTreatmentId</code> , the org-default <code>taxTreatmentId</code> is considered.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
transactionId	String	Client-supplied transaction identifier for this line item. Used as the transaction ID on the generated billing transaction and as the grouping key for its ramp segments and bundle components. Defaults to the product name or product ID when omitted.	Optional	68.0
unitPrice	Double	Price per unit before any discounts are applied.	Required	68.0

[Bundle Product Details Input](#)

Input representation of a bundle line item's child product. Recursive to support nested bundles.

[Billing Checkout Ramp Input](#)

Input representation of a ramp period describing a change in quantity or price for a line item over time.

Bundle Product Details Input

Input representation of a bundle line item's child product. Recursive to support nested bundles.

JSON Example

```
{
  "productId": "01txx0000004C92",
  "productName": "Add-On Support",
  "associatedTransactionPricing": "IncludedInBundlePrice",
  "quantity": 1,
  "unitPrice": 50.00,
  "netUnitPrice": 50.00,
  "lineTotal": 50.00,
  "sellingModelType": "TermDefined",
  "periodBoundary": "DayOfPeriod",
  "billingDayOfMonth": 1,
  "billingTermUnit": "Month",
  "billingTerm": 12,
  "taxTreatmentId": "0cXxx0000004C93",
  "billingTreatmentId": "0cYxx0000004C94",
  "bundleProductDetails": []
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
associatedTransactionPricing	String	When your transaction is part of a bundle, this value describes how the child transaction is priced in relation to the	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
		primary transaction. The default value is <code>IncludedInBundlePrice</code> . Valid values are <code>IncludedInBundlePrice</code> or <code>NotIncludedInBundlePrice</code> .		
<code>billingDayOfMonth</code>	Integer	The day of the month a recurring billing process is scheduled to occur for the transaction. Required when <code>periodBoundary</code> is <code>DayOfPeriod</code> .	Optional	68.0
<code>billingTerm</code>	Integer	Number of billing term units. Must be 1 for <code>OneTime</code> selling models.	Optional	68.0
<code>billingTermUnit</code>	String	Unit of measurement for the billing term. Required when <code>sellingModelType</code> is <code>TermDefined</code> or <code>Evergreen</code> . Valid values are <code>OneTime</code> , <code>Day</code> , <code>Week</code> , <code>Month</code> , <code>Quarter</code> , <code>SemiAnnual</code> , <code>Year</code> , or <code>BillingMilestonePlan</code> .	Optional	68.0
<code>billingTreatmentId</code>	String	ID of the billing treatment used to create the billing schedule for the transaction. If you don't specify a <code>billingTreatmentId</code> , the org-default <code>billingTreatmentId</code> is considered.	Optional	68.0
<code>bundleProductDetails</code>	Bundle Product Details Input[]	Nested array of child products for bundle-of-bundles scenarios, including pricing.	Optional	68.0
<code>lineTotal</code>	Double	Net unit price multiplied by quantity.	Required	68.0
<code>netUnitPrice</code>	Double	Net unit price after discount calculation.	Optional	68.0
<code>periodBoundary</code>	String	Period boundary for the billing schedule. Required when <code>sellingModelType</code> is <code>TermDefined</code> or <code>Evergreen</code> . Valid values are <code>AlignToCalendar</code> , <code>Anniversary</code> , <code>DayOfPeriod</code> , or <code>LastDayOfPeriod</code> .	Optional	68.0
<code>productId</code>	String	Product ID of the child component.	Required	68.0
<code>productName</code>	String	Product name of the child component.	Optional	68.0
<code>quantity</code>	Integer	Quantity of the child component.	Required	68.0
<code>sellingModelType</code>	String	Selling model of the child component. Defaults to <code>OneTime</code> . A <code>TermDefined</code> or <code>Evergreen</code> value requires <code>billingTermUnit</code> . Valid values are	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
		OneTime, TermDefined, or Evergreen.		
taxTreatmentId	String	ID of the tax treatment used to calculate tax for the transaction. If you don't specify a taxTreatmentId, the org-default taxTreatmentId is considered.	Optional	68.0
unitPrice	Double	Price per unit before any discounts are applied.	Required	68.0

Billing Checkout Ramp Input

Input representation of a ramp period describing a change in quantity or price for a line item over time.

JSON Example

```
{
  "productId": "01txx0000004C91",
  "startDate": "2026-01-01",
  "endDate": "2026-06-30",
  "quantity": 5,
  "unitPrice": 90.00,
  "netUnitPrice": 81.00,
  "lineTotal": 450.00,
  "sellingModelType": "TermDefined",
  "periodBoundary": "DayOfPeriod",
  "billingDayOfMonth": 1,
  "billingTermUnit": "Month",
  "billingTerm": 6,
  "taxTreatmentId": "0cXxx0000004C93",
  "billingTreatmentId": "0cYxx0000004C94"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billingDayOfMonth	Integer	The day of the month a recurring billing process is scheduled to occur for the transaction. Required when periodBoundary is DayOfPeriod.	Optional	68.0
billingTerm	Integer	Number of billing term units. Must be 1 for OneTime selling models.	Optional	68.0
billingTermUnit	String	Unit of measurement for the billing term. Required when sellingModelType	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
		is TermDefined or Evergreen. Valid values are OneTime, Day, Week, Month, Quarter, SemiAnnual, Year, or BillingMilestonePlan.		
billingTreatmentId	String	ID of the billing treatment used to create the billing schedule for the transaction. If you don't specify a billingTreatmentId, the org-default billingTreatmentId is considered.	Optional	68.0
endDate	String	End date for this ramp period (YYYY-MM-DD).	Optional	68.0
lineTotal	Double	Total price for this ramp period.	Required	68.0
netUnitPrice	Double	Net unit price after discount calculation. Auto-calculated.	Optional	68.0
periodBoundary	String	Period boundary for the billing schedule. Required when sellingModelType is TermDefined or Evergreen. Valid values are AlignToCalendar, Anniversary, DayOfPeriod, or LastDayOfPeriod.	Optional	68.0
productId	String	ID of the ramped product.	Optional	68.0
quantity	Integer	Quantity for this specific period.	Optional	68.0
sellingModelType	String	Selling model of the line item. Defaults to OneTime. A TermDefined or Evergreen value requires billingTermUnit. Valid values are OneTime, TermDefined, or Evergreen.	Optional	68.0
startDate	String	Start date for this ramp period (YYYY-MM-DD).	Optional	68.0
taxTreatmentId	String	ID of the tax treatment used to calculate tax for the transaction. If you don't specify a taxTreatmentId, the org-default taxTreatmentId is considered.	Optional	68.0
unitPrice	Double	Price per unit before any discounts are applied.	Optional	68.0

Billing Checkout Payment Details Input

Input representation of payment details used during checkout, referencing a saved payment method.

JSON Example

```
{
  "idempotencyKey": "a1B2c3D4-e5F6-7890-gH1i-2j3K4l5M6n7O",
  "paymentGatewayId": "0cGxx0000004C99",
  "savedPaymentMethodId": "0cAxx0000004C98"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
idempotencyKey	String	Unique key used to retry the checkout payment safely without creating a duplicate charge.	Optional	68.0
paymentGatewayId	String	Unique ID of the preconfigured payment gateway.	Optional	68.0
savedPaymentMethodDetails	Saved Payment Method Details Input	Details required to create a saved payment method during checkout.	Optional	68.0
savedPaymentMethodId	String	Unique ID of the saved payment method to use during checkout.	Optional	68.0

[Saved Payment Method Details Input](#)

Input representation of the details required to create a saved payment method during checkout.

Saved Payment Method Details Input

Input representation of the details required to create a saved payment method during checkout.

JSON Example

```
{
  "gatewayToken": "tok_1NxyzAbcDef",
  "type": "Card",
  "name": "Corporate Visa",
  "gatewayReference": "pm_1NxyzAbcDef",
  "merchantAccount": "0MAxx0000004C9A"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
gatewayReference	String	Reference ID of the payment method at the gateway.	Optional	68.0
gatewayToken	String	Token that represents the saved payment method at the gateway.	Required	68.0
merchantAccount	String	ID of the merchant account associated with the payment method.	Optional	68.0
name	String	Name of the saved payment method.	Optional	68.0
type	String	Type of the saved payment method. Valid values are <code>Card</code> , <code>Us_bank_account</code> , <code>Sepa_debit</code> , <code>Ideal</code> , <code>Bancontact</code> , <code>Bacs_debit</code> , <code>Au_becs_debit</code> , or <code>Amazon_pay</code> .	Required	68.0

Billing Schedule Recovery Input

Input representation of the details of the billing schedules to recover the associated invoice.

JSON Example

```
{
  "billingScheduleIds": ["44bDU00000000XXYYAY"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billingScheduleIds	String[]	IDs of the billing schedules to recover the invoice for. You can recover one billing schedule per API request.	Required	62.0

Context-Aware Billing Schedule

Input representation of the billing transaction details.

JSON Example

```
{
  "billingTransactionIds": [ "801xx000003H1H9AAK" ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billingTransactionIds	String[]	ID of the billing transaction. This property value is the ID of the order if the source of the billing request is for the Order object. If the order product associated with the specified order ID doesn't have an associated billing treatment ID, the API considers the default billing treatment ID. The generated billing schedule group has the default billing treatment ID. The API supports only one billing transaction ID in the input.	Required	62.0

Standalone Billing Schedule Input

Input representation of the request to create a billing schedule based on transaction details. This representation includes the transaction and context service details.

The Create Standalone Billing Schedules (POST) API uses the StandaloneBillingContext context definition to hydrate the context of the transaction. The context definition includes these mappings.

- The TransactionMapping maps the fields of the transaction to the attributes of the Transaction node.
- The BSGEntitiesMapping maps the attributes of the Billing Schedule node, the Billing Schedule Group node, and Billing Schedule Group Relationship node to the fields of the corresponding Salesforce objects.

For the StandaloneBillingContext context definition to hydrate all the required data, transaction data for the mandatory context tags are required. Here are the topics that mention the mandatory and optional tags, sample transaction details, and sample payloads for various types of transactions.

- [One-Time New Sale Transaction](#) on page 2241
- [Term-Defined New Sale Transaction](#) on page 2244
- [Evergreen New Sale Transaction](#) on page 2248
- [New Sale Transaction With Bundled Products](#) on page 2252
- [New Sale Transaction With Ramped Products](#) on page 2258
- [New Sale Transaction With Usage Products](#) on page 2263
- [Amended Transaction](#) on page 2267
- [Renewal Transaction](#) on page 2277
- [Early Renewal Transaction](#) on page 2282
- [Canceled Transaction](#) on page 2288

JSON Example

```
{
  "transactionDetails": "{\\\"nodeName\\\": [{\\\"id\\\":\\\"801Az00000aynKZIAY\\\",
\\\"businessObjectType\\\": \\\"Order\\\"}]}\",
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "OrderTransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
transactionContextDetails	Standalone Billing Schedule Metadata Input[]	Details of the context definition and its mappings that are used to hydrate the transaction data and save it in the appropriate Billing fields.	Required	64.0
transactionDetails	String	Input JSON data that includes the ID of the transaction record for which the billing schedule must be created and other additional transaction details. The API request supports a single mapping ID. You can send separate requests for line items and line details by using their respective mapping IDs. However, this approach can result in duplicate billing schedules for the same line items and line details.	Required	64.0

[One-Time New Sale Transaction](#)

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with the OneTime selling model type.

[Term-Defined New Sale Transaction](#)

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with the TermDefined selling model type.

[Evergreen New Sale Transaction](#)

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with the Evergreen selling model type.

[New Sale Transaction With Bundled Products](#)

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with bundled products.

New Sale Transaction With Ramped Products

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with ramped products.

New Sale Transaction With Usage Products

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with usage-based products.

Amended Transaction

Learn how amendments update quantity, price, and end date in billing schedules along with delta-only price transactions and billing-frequency changes at the billing schedule level.

Renewal Transaction

Create a renewal billing schedule for termed subscriptions that continues without a gap, starting the day after the current billing schedule group ends and running for the same term length.

Early Renewal Transaction

Early Renewal ends the current term at an effective date and starts a renewed term to a new end date, creating two billing schedules in one request. The request creates a negative segment for the remaining original term and a positive segment for the renewal term.

Canceled Transaction

Cancel an entire billing schedule from a specified date. Specify only the cancellation date and billing schedule group identifier. The API computes the logic to split the cancellation across overlapping billing schedules and creates one cancel transaction per segment.

One-Time New Sale Transaction

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with the OneTime selling model type.

Considerations

Keep these important considerations in mind when you provide the details for new sale transactions with the OneTime selling model type.

- The `BillingActionType__std` value for any new sale transaction must be `Add`.
- When a new sale transaction is for the OneTime selling model type, the `SellingModelType` value must be `OneTime`.
- If you don't provide the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, or the `LegalEntityId__std` value, the default `TaxTreatmentId` for the transaction, `BillingTreatmentId`, and `LegalEntityId` of your Salesforce org is considered. If your org doesn't have any default values, an error occurs.
- If your transaction is for an sObject record, only specify the record ID as the `id` value in the `transactionDetails` property value. All the other transaction details are automatically fetched from the sObject record if those details are mapped in the context definition.

JSON Example

This example includes the transaction data for a new sale transaction with the OneTime selling model type.

```
{
  "Transaction": [
    {
      "id": "ot1",
      "SellingModelType__std": "OneTime",
      "ParentTransactionId__std": "sample",
```

```
    "TransactionId__std": "ot1",
    "ProductName__std": "OneTimeProduct",
    "StartDate__std": "2025-02-20",
    "UnitPrice__std": 10,
    "Quantity__std": 5,
    "TotalPrice__std": 50,
    "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
    "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
    "AccountId__std": "001LT00000dPVrlyAG",
    "BillingProfileId__std": "001LT00000dPVrlyAG",
    "BillingCity__std": "HYD",
    "ShippingCity__std": "VSKP",
    "BillingActionType__std": "Add",
    "CurrencyIsoCode__std": "USD"
  }
]
```

This example shows the request payload to create a billing schedule for a new sale transaction with the OneTime selling model type.

```
{
  "transactionDetails":
  "ParentTransactionId__std": "ot1",
  "TransactionId__std": "ot1",
  "ProductName__std": "OneTimeProduct",
  "StartDate__std": "2025-02-20",
  "UnitPrice__std": 10,
  "Quantity__std": 5,
  "TotalPrice__std": 50,
  "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
  "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
  "AccountId__std": "001LT00000dPVrlyAG",
  "BillingProfileId__std": "001LT00000dPVrlyAG",
  "BillingCity__std": "HYD",
  "ShippingCity__std": "VSKP",
  "BillingActionType__std": "Add",
  "CurrencyIsoCode__std": "USD",
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you're creating a billing schedule for a new sale transaction with the OneTime selling model type, make sure that you specify the required values in the transactionDetails property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
ParentTransactionId__std	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the ReferenceEntityId field on the BillingScheduleobject is populated. For other sObject records or external records, the Reference field on the BillingSchedule object is populated.	Optional

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
AccountId__std	The ID of the Account record that's related to the transaction.	BillingAccountId field on the BillingScheduleGroup object	Required
BillingProfileId__std	The ID of the billing profile that's related to the transaction, which is used to resolve billing configurations if not specified at transaction level. See Billing Profile requirements.	Not applicable.	Optional
BillingCity__std	The city in the billing address of the transaction.	BillingCity field on the BillingScheduleGroup object	Any one of the billing address fields is required.
ShippingCity__std	The city in the shipping address of the transaction.	ShippingCity field on the BillingScheduleGroup object	Any one of the shipping address fields is required.
SellingModelType__std	The selling model type indicates whether the transaction is for a one-time product, a term-defined product, or an evergreen product. Specify <code>OneTime</code> as the SellingModelType for the transaction that's related to a product that's sold once.	BillingMethod on the BillingSchedule object is populated as OrderAmount.	Required
TransactionId__std	The ID of the transaction that you want to create a billing schedule for.	If the transaction is an OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, or QuoteLineItem record, the ReferenceEntityItemId field on the BillingSchedule object is populated. For other sObject records or external records, the ReferenceItem field on the BillingSchedule object is populated.	Required
ProductName__std	The name of the product that's related to the transaction that you want to create a billing schedule for.	ProductName field on the BillingScheduleGroup object	Either the ProductName or the ProductId is required
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
TaxTreatmentId__std	The ID of the tax treatment that's used to calculate tax for the transaction. If you don't specify a TaxTreatmentId, the org-default TaxTreatmentId is considered.	TaxTreatmentId field on the BillingScheduleGroup object	Required
BillingTreatmentId__std	The ID of the billing treatment that's used to create the billing schedule for the transaction. If you don't specify a BillingTreatmentId, the org-default BillingTreatmentId is considered.	BillingTreatmentId field on the BillingScheduleGroup object	Required
CurrencyIsoCode__std	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	CurrencyIsoCode field on the BillingScheduleGroup object	Required for Salesforce orgs with multiple currencies enabled
BillingActionType__std	The action that you want to perform for the transaction. Valid value is <code>Add</code> .	Category field on the BillingSchedule object is populated as <code>Original</code> .	Required
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required

SEE ALSO:

[BillingSchedule](#)
[BillingScheduleGroup](#)
[BsgRelationship](#)

Term-Defined New Sale Transaction

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with the `TermDefined` selling model type.

Considerations

Keep these important considerations in mind when you provide the details for new sale transactions with the `TermDefined` selling model type.

- The `BillingActionType__std` value for any new sale transaction must be `Add`.
- When a new sale transaction is for the `TermDefined` selling model type, the `SellingModelType` value must be `TermDefined`.

- When a new sale transaction is for the TermDefined selling model type, the `BillingTermUnit__std` and `PeriodBoundary__std` values are required.
- If you don't provide the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, or the `LegalEntityId__std` value for the transaction, the default `TaxTreatmentId`, `BillingTreatmentId`, and `LegalEntityId` of your Salesforce org is considered. If your org doesn't have any default values, an error occurs.
- If your transaction is for an sObject record, only specify the record ID as the `id` value in the `transactionDetails` property value. All the other transaction details are automatically fetched from the sObject record if those details are mapped in the context definition.

JSON Example

This example includes the transaction data for a new sale transaction with the TermDefined selling model type.

```
{
  "Transaction": [
    {
      "id": "ter1",
      "SellingModelType__std": "TermDefined",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "ter1",
      "ProductName__std": "TermedQuarterlyProduct",
      "StartDate__std": "2025-01-01",
      "EndDate__std": "2025-12-31",
      "PeriodBoundary__std": "DayOfPeriod",
      "BillingDayOfMonth__std": 1,
      "UnitPrice__std": 10,
      "Quantity__std": 5,
      "TotalPrice__std": 120,
      "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
      "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
      "AccountId__std": "001LT00000dPVrlyAG",
      "BillingProfileId__std": "001LT00000dPVrlyAG",
      "BillingCity__std": "HYD",
      "ShippingCity__std": "VSKP",
      "BillingTermUnit__std": "Month",
      "BillingActionType__std": "Add",
      "CurrencyIsoCode__std": "USD"
    }
  ]
}
```

This example shows the request payload to create a billing schedule for a new sale transaction with the TermDefined selling model type.

```
{
  "transactionDetails":
  "1ttLT000000EV7DYAW", "1BTLT00000008yT4AQ", "001LT00000dPVrlyAG", "001LT00000dPVrlyAG", "HYD", "VSKP", "Month", "Add", "USD"

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you're creating a billing schedule for a new sale transaction with the TermDefined selling model type, make sure that you specify the mandatory values in the `transactionDetails` property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
<code>ParentTransactionId__std</code>	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the <code>ReferenceEntityId</code> field on the <code>BillingSchedule</code> object is populated. For other <code>sObject</code> records or external records, the <code>Reference</code> field on the <code>BillingSchedule</code> object is populated.	Required
<code>AccountId__std</code>	The ID of the Account record that's related to the transaction.	<code>BillingAccountId</code> field on the <code>BillingScheduleGroup</code> object	Required
<code>BillingProfileId__std</code>	The ID of the billing profile (Billing Account record) that's related to the transaction. See Billing Profile requirements.	<code>BillingAccountId</code> field on the <code>BillingSchedule</code> object	Optional
<code>BillingCity__std</code>	The city in the billing address of the transaction.	<code>BillingCity</code> field on the <code>BillingScheduleGroup</code> object	Any one of the billing address fields is required.
<code>ShippingCity__std</code>	The city in the shipping address of the transaction.	<code>ShippingCity</code> field on the <code>BillingScheduleGroup</code> object	Any one of the shipping address fields is required.
<code>SellingModelType__std</code>	The selling model type indicates whether the transaction is for a one-time product, a term-defined product, or an evergreen product. Specify <code>TermDefined</code> as the <code>SellingModelType</code> for the transaction that's related to a product that's sold for a specific term.	<code>BillingMethod</code> on the <code>BillingSchedule</code> object is populated as <code>OrderAmount</code> .	Required
<code>TransactionId__std</code>	The ID of the transaction that you want to create a billing schedule for.	If the transaction is an <code>OrderItem</code> , <code>OrderItemAdjustmentLineItem</code> , <code>OrderItemDetail</code> , <code>QuoteLineDetail</code> , or <code>QuoteLineItem</code> record, the <code>ReferenceEntityItemId</code>	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
		field on the BillingScheduleobject is populated. For other sObject records or external records, the Referenceltem field on the BillingSchedule object is populated.	
ProductName__std	The name of the product that's related to the transaction that you want to create a billing schedule for.	ProductName field on the BillingScheduleGroup object	Either the ProductName or the ProductId is required
PeriodBoundary__std	The period boundary determines the start and end date of the billing period.	PeriodBoundary field on the BillingScheduleGroup object	Required
BillingDayOfMonth__std	The day of the month on which a recurring billing process is scheduled to occur for the transaction.	BillDayOfMonth field on the BillingScheduleGroup object	Required
EndDate__std	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Required
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
TaxTreatmentId__std	The ID of the tax treatment that's used to calculate tax for the transaction. If you don't specify a TaxTreatmentId, the org-default TaxTreatmentId is considered.	TaxTreatmentId field on the BillingScheduleGroup object	Required
BillingTermUnit__std	The unit of measurement of the billing term.	BillingTermUnit field on the BillingSchedule object	Required
BillingTreatmentId__std	The ID of the billing treatment that's used to create the billing schedule for the transaction. If you don't specify a BillingTreatmentId, the org-default BillingTreatmentId is considered.	BillingTreatmentId field on the BillingScheduleGroup object	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
CurrencyIsoCode__std	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	CurrencyIsoCode field on the BillingScheduleGroup object	Required for Salesforce orgs with multiple currencies enabled
BillingActionType__std	The action that you want to perform for the transaction. Valid value is Add.	Category field on the BillingSchedule object is populated as Original.	Required
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total cost to the customer for the transaction, from the start date to the end date.	TotalAmount field on the BillingSchedule object	Required

Valid PeriodBoundary__std values:

- AlignToCalendar
- Anniversary
- DayOfPeriod
- LastDayOfPeriod

Valid BillingTermUnit__std values:

- Month
- Quarter
- Semi-Annual
- Year

SEE ALSO:

[BillingSchedule](#)
[BillingScheduleGroup](#)
[BsgRelationship](#)

Evergreen New Sale Transaction

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with the Evergreen selling model type.

Considerations

Keep these important considerations in mind when you provide the details for new sale transactions with the Evergreen selling model type.

- The `BillingActionType__std` value for any new sale transaction must be `Add`.
- When a new sale transaction is for the Evergreen selling model type, the `SellingModelType` value must be `Evergreen`.
- When a new sale transaction is for the Evergreen selling model type, the `BillingTermUnit` and `PeriodBoundary` values are required.
- If you don't provide the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, or the `LegalEntityId__std` value for the transaction, the default `TaxTreatmentId`, `BillingTreatmentId`, and `LegalEntityId` of your Salesforce org is considered. If your org doesn't have any default values, an error occurs.
- If your transaction is for an sObject record, only specify the record ID as the `id` value in the `transactionDetails` property value. All the other transaction details are automatically fetched from the sObject record if those details are mapped in the context definition.

JSON Example

This example includes the transaction data for a new sale transaction with the Evergreen selling model type.

```
{
  "Transaction": [
    {
      "id": "evgl",
      "SellingModelType_std": "Evergreen",
      "ParentTransactionId_std": "sample",
      "TransactionId_std": "evgl",
      "ProductName_std": "EvergreenSemiAnnualProduct",
      "StartDate_std": "2025-01-01",
      "PeriodBoundary_std": "DayOfPeriod",
      "BillingDayOfMonth_std": 1,
      "BillingStartMonth_std": 3,
      "UnitPrice_std": 10,
      "Quantity_std": 1,
      "TotalPrice_std": 10,
      "TaxTreatmentId_std": "1ttLT000000EV7DYAW",
      "BillingTreatmentId_std": "1BTLT00000008yT4AQ",
      "AccountId_std": "001LT00000dPVrlyAG",
      "BillingProfileId_std": "001LT00000dPVrlyAG",
      "BillingCity_std": "HYD",
      "ShippingCity_std": "VSKP",
      "BillingTermUnit_std": "Semi-Annual",
      "BillingActionType_std": "Add",
      "CurrencyIsoCode_std": "USD"
    }
  ]
}
```

This example shows the request payload to create a billing schedule for a new sale transaction with the Evergreen selling model type.

```
{
  "transactionDetails":
"transactionDetails": {
  "contextDefinitionName": "StandaloneBillingContext__stdctx",
  "intraContextCustomMappingName": "CustomContextMapping",
  "readContextMappingName": "TransactionMapping",
  "saveContextMappingName": "BSGEntitiesMapping"
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

```

    }
  }

```

When you're creating a billing schedule for a new sale transaction with the Evergreen selling model type, make sure that you specify the mandatory values in the `transactionDetails` property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
<code>ParentTransactionId__std</code>	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the <code>ReferenceEntityId</code> field on the <code>BillingScheduleobject</code> is populated. For other <code>sObject</code> records or external records, the <code>Reference</code> field on the <code>BillingSchedule</code> object is populated.	Optional
<code>AccountId__std</code>	The ID of the Account record that's related to the transaction.	<code>BillingAccountId</code> field on the <code>BillingScheduleGroup</code> object	Required
<code>BillingProfileId__std</code>	The ID of the billing profile (Billing Account record) that's related to the transaction. See Billing Profile requirements.	<code>BillingAccountId</code> field on the <code>BillingSchedule</code> object	Optional
<code>BillingCity__std</code>	The city in the billing address of the transaction.	<code>BillingCity</code> field on the <code>BillingScheduleGroup</code> object	Any one of the billing address fields is required.
<code>ShippingCity__std</code>	The city in the shipping address of the transaction.	<code>ShippingCity</code> field on the <code>BillingScheduleGroup</code> object	Any one of the shipping address fields is required.
<code>SellingModelType__std</code>	The selling model type indicates whether the transaction is for a one-time product, a term-defined product, or an evergreen product. Specify <code>Evergreen</code> as the <code>SellingModelType</code> for the transaction that's related to a product that's sold for an indefinite term.	<code>BillingMethod</code> on the <code>BillingSchedule</code> object is populated as <code>OrderAmount</code> .	Required
<code>TransactionId__std</code>	The ID of the transaction that you want to create a billing schedule for.	If the transaction is an <code>OrderItem</code> , <code>OrderItemAdjustmentLineItem</code> , <code>OrderItemDetail</code> , <code>QuoteLineDetail</code> , or <code>QuoteLineItem</code> record,	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
		the ReferenceEntityItemId field on the BillingSchedule object is populated. For other sObject records or external records, the ReferenceItem field on the BillingSchedule object is populated.	
ProductName__std	The name of the product that's related to the transaction that you want to create a billing schedule for.	ProductName field on the BillingScheduleGroup object	Either the ProductName or the ProductId is required
PeriodBoundary__std	The period boundary determines the start and end date of the billing period.	PeriodBoundary field on the BillingScheduleGroup object	Required
BillingDayOfMonth__std	The day of the month on which a recurring billing process is scheduled to occur for the transaction.	BillDayOfMonth field on the BillingScheduleGroup object	Required
BillingStartMonth__std	The month when billing begins for an annual subscription. This value can be any number from 1 through 12. For example, if billing starts in January, the value is 1. If billing starts in June, the value is 6.	BillingStartMonth field on the BillingScheduleGroup object	Required
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
TaxTreatmentId__std	The ID of the tax treatment that's used to calculate tax for the transaction. If you don't specify a TaxTreatmentId, the org-default TaxTreatmentId is considered.	TaxTreatmentId field on the BillingScheduleGroup object	Required
BillingTermUnit__std	The unit of measurement of the billing term. Valid values are Month, Quarter, Semi-Annual, or Year.	BillingTermUnit field on the BillingSchedule object	Required
BillingTreatmentId__std	The ID of the billing treatment that's used to create the billing schedule for the transaction. If you don't	BillingTreatmentId field on the	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
	specify a BillingTreatmentId, the org-default BillingTreatmentId is considered.	BillingScheduleGroup object	
CurrencyIsoCode__std	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	CurrencyIsoCode field on the BillingScheduleGroup object	Required for Salesforce orgs with multiple currencies enabled
BillingActionType__std	The action that you want to perform for the transaction. Valid value is Add.	Category field on the BillingSchedule object is populated as Original.	Required
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total cost to the customer for the transaction for each billing period, such as month, quarter, or year, based on the billing frequency.	TotalAmount field on the BillingSchedule object	Required

Valid PeriodBoundary__std values:

- AlignToCalendar
- Anniversary
- DayOfPeriod
- LastDayOfPeriod

SEE ALSO:

[BillingSchedule](#)
[BillingScheduleGroup](#)
[BsgRelationship](#)

New Sale Transaction With Bundled Products

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with bundled products.

Considerations

Keep these important considerations in mind when you provide the details for new sale transactions with bundled products.

- The BillingActionType__std value for any new sale transaction must be Add.
- For new sale transactions with bundled products, the MainTransactionId__std value is required for all the child transactions.

- If you don't provide the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, or the `LegalEntityId__std` value for the transaction, the default `TaxTreatmentId`, `BillingTreatmentId`, and `LegalEntityId` of your Salesforce org is considered. If your org doesn't have any default values, an error occurs.
- If your transaction is for an sObject record, only specify the record ID as the `id` value in the `transactionDetails` property value. All the other transaction details are automatically fetched from the sObject record if those details are mapped in the context definition.
- To understand the requirements for the various selling model types, see these resources.
 - [One-Time New Sale Transaction](#) on page 2241
 - [Term-Defined New Sale Transaction](#) on page 2244
 - [Evergreen New Sale Transaction](#) on page 2248

JSON Example

This sample is for a new sale transaction for bundled products with two levels of nesting and with these selling model types.

- The main root product's selling model type is `OneTime`.
- The second root product's selling model type is `OneTime`.
- The child products' selling model types are `TermDefined` and `Evergreen`.

```
{
  "Transaction": [
    {
      "id": "sample1",
      "SellingModelType__std": "OneTime",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "sample1",
      "ProductName__std": "OneTimeProduct",
      "StartDate__std": "2025-02-20",
      "UnitPrice__std": 10,
      "Quantity__std": 1,
      "TotalPrice__std": 10,
      "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
      "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
      "AccountId__std": "001LT00000dPVrlyAG",
      "BillToContactId__std": "003LT0000038bALYAY",
      "BillingCity__std": "HYD",
      "ShippingCity__std": "VSKP",
      "BillingActionType__std": "Add",
      "CurrencyIsoCode__std": "USD"
    },
    {
      "id": "sample2",
      "SellingModelType__std": "OneTime",
      "ParentTransactionId__std": "abc",
      "TransactionId__std": "sample2",
      "ProductName__std": "OneTimeProduct",
      "StartDate__std": "2025-02-20",
      "UnitPrice__std": 10,
      "Quantity__std": 1,
      "TotalPrice__std": 10,
      "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
    }
  ]
}
```

```

    "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
    "AccountId__std": "001LT00000dPVrlyAG",
    "BillToContactId__std": "003LT0000038bALYAY",
    "BillingActionType__std": "Add",
    "CurrencyIsoCode__std": "USD",
    "BillingCity__std": "HYD",
    "ShippingCity__std": "VSKP",
    "AssociatedTransactionPricing__std": "IncludedInBundlePrice",
    "MainTransactionRole__std": "Bundle",
    "AssociatedTransactionRole__std": "BundleComponent",
    "MainTransactionId__std": "sample1"
  },
  {
    "id": "sample3",
    "SellingModelType__std": "TermDefined",
    "ParentTransactionId__std": "sample",
    "TransactionId__std": "sample3",
    "ProductName__std": "TermedQuarterlyProduct",
    "StartDate__std": "2025-01-01",
    "EndDate__std": "2025-12-31",
    "PeriodBoundary__std": "DayOfPeriod",
    "BillingDayOfMonth__std": 1,
    "BillingStartMonth__std": 2,
    "UnitPrice__std": 10,
    "Quantity__std": 1,
    "TotalPrice__std": 120,
    "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
    "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
    "AccountId__std": "001LT00000dPVrlyAG",
    "BillToContactId__std": "003LT0000038bALYAY",
    "BillingTermUnit__std": "Quarter",
    "BillingActionType__std": "Add",
    "CurrencyIsoCode__std": "USD",
    "BillingCity__std": "HYD",
    "ShippingCity__std": "VSKP",
    "AssociatedTransactionPricing__std": "IncludedInBundlePrice",
    "MainTransactionRole__std": "Bundle",
    "AssociatedTransactionRole__std": "BundleComponent",
    "MainTransactionId__std": "sample2"
  },
  {
    "id": "sample4",
    "SellingModelType__std": "Evergreen",
    "ParentTransactionId__std": "sample",
    "TransactionId__std": "sample4",
    "ProductName__std": "EvergreenSemiAnnualProduct",
    "StartDate__std": "2025-01-01",
    "PeriodBoundary__std": "DayOfPeriod",
    "BillingDayOfMonth__std": 1,
    "BillingStartMonth__std": 3,
    "UnitPrice__std": 10,
    "Quantity__std": 1,
    "TotalPrice__std": 10,
    "TaxTreatmentId__std": "1ttLT000000EV7DYAW",

```



```
    "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
    "AccountId__std": "001LT00000dPVrlyAG",
    "BillToContactId__std": "003LT0000038bALYAY",
    "BillingTermUnit__std": "Semi-Annual",
    "BillingActionType__std": "Add",
    "BillingPostalCode__std": "94105",
    "CurrencyIsoCode__std": "USD",
    "BillingCity__std": "HYD",
    "ShippingCity__std": "VSKP",
    "AssociatedTransactionPricing__std": "IncludedInBundlePrice",
    "MainTransactionRole__std": "Bundle",
    "AssociatedTransactionRole__std": "BundleComponent",
    "MainTransactionId__std": "sample2"
  }
}
```

This example shows the request payload to create a billing schedule for a new sale transaction for bundled products.

```
{
  "transactionDetails":
  [REDACTED]

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you're creating a billing schedule for a new sale transaction with bundled products, make sure that you specify the mandatory values in the `transactionDetails` property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
BillToContactId__std	The ID of the Contact record that's related to the transaction.	BillToContactId field on the BillingScheduleGroup object	Required
ParentTransactionId__std	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the ReferenceEntityId field on the BillingScheduleobject is populated. For other sObject records or external records, the Reference field on the	Optional

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
		BillingSchedule object is populated.	
AccountId__std	The ID of the Account record that's related to the transaction.	BillingAccountId field on the BillingScheduleGroup object	Required
BillingCity__std	The city in the billing address of the transaction.	BillingCity field on the BillingScheduleGroup object	Any one of the billing address fields is required.
BillingPostalCode__std	The postal code in the billing address of the transaction.	BillingPostalCode field on the BillingScheduleGroup object	Any one of the billing address fields is required.
ShippingCity__std	The city in the shipping address of the transaction.	ShippingCity field on the BillingScheduleGroup object	Any one of the shipping address fields is required.
SellingModelType__std	The selling model type indicates whether the transaction is for a one-time product, a term-defined product, or an evergreen product. Specify <code>OneTime</code> as the <code>SellingModelType</code> for the transaction that's related to a product that's sold once.	BillingMethod on the BillingSchedule object is populated as <code>OrderAmount</code> .	Required
TransactionId__std	The ID of the transaction that you want to create a billing schedule for.	If the transaction is an <code>OrderItem</code> , <code>OrderItemAdjustmentLineItem</code> , <code>OrderItemDetail</code> , <code>QuoteLineDetail</code> , or <code>QuoteLineItem</code> record, the <code>ReferenceEntityItemId</code> field on the <code>BillingSchedule</code> object is populated. For other <code>sObject</code> records or external records, the <code>ReferenceItem</code> field on the <code>BillingSchedule</code> object is populated.	Required
ProductName__std	The name of the product that's related to the transaction that you want to create a billing schedule for.	ProductName field on the BillingScheduleGroup object	Either the ProductName or the ProductId value is required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
PeriodBoundary__std	The period boundary determines the start and end date of the billing period. Valid values are <code>AlignToCalendar</code> , <code>Anniversary</code> , <code>DayOfPeriod</code> , or <code>LastDayOfPeriod</code> .	PeriodBoundary field on the BillingScheduleGroup object	Required for child products with the <code>TermDefined</code> or <code>Evergreen</code> selling model types.
BillingDayOfMonth__std	The day of the month on which a recurring billing process is scheduled to occur for the transaction.	BillDayOfMonth field on the BillingScheduleGroup object	Required for child products with the <code>TermDefined</code> or <code>Evergreen</code> selling model types.
BillingStartMonth__std	The month when billing begins for an annual subscription. This value can be any number from 1 through 12. For example, if billing starts in January, the value is 1. If billing starts in June, the value is 6.	BillingStartMonth field on the BillingScheduleGroup object	Required for child products with the <code>Evergreen</code> selling model type.
EndDate__std	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Required for child products with the <code>TermDefined</code> selling model type.
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
TaxTreatmentId__std	The ID of the tax treatment that's used to calculate tax for the transaction. If you don't specify a <code>TaxTreatmentId</code> , the org-default <code>TaxTreatmentId</code> is considered.	TaxTreatmentId field on the BillingScheduleGroup object	Required
BillingTermUnit__std	The unit of measurement of the billing term. Valid values are <code>Month</code> , <code>Quarter</code> , <code>Semi-Annual</code> , or <code>Year</code> .	BillingTermUnit field on the BillingSchedule object	Required for child products with the <code>TermDefined</code> or <code>Evergreen</code> selling model types.
BillingTreatmentId__std	The ID of the billing treatment that's used to create the billing schedule for the transaction. If you don't specify a <code>BillingTreatmentId</code> , the org-default <code>BillingTreatmentId</code> is considered.	BillingTreatmentId field on the BillingScheduleGroup object	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
CurrencyIsoCode__std	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	CurrencyIsoCode field on the BillingScheduleGroup object	Required for Salesforce orgs with multiple currencies enabled .
BillingActionType__std	The action that you want to perform for the transaction. Valid value is <code>Add</code> .	Category field on the BillingSchedule object is populated as <code>Original</code> .	Required
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required
MainTransactionId__std	When your transaction is part of a bundle, this value is the ID of the main transaction record for all the child transactions.	MainBsgId field on the BsgRelationship object	Required for all the child products.
MainTransactionRole__std	When your transaction is part of a bundle, this value is the role of the primary transaction in the bundle relationship. Valid values are <code>AddOn</code> , <code>Bundle</code> , or <code>Set</code> .	MainBsgRole field on the BsgRelationship object	Required for all the child products.
AssociatedTransactionRole__std	When your transaction is part of a bundle, this value is the role of the child transaction in the bundle relationship. Valid values are <code>BundleComponent</code> or <code>ClassificationComponent</code> .	AssociatedBsgRole field on the BsgRelationship object	Required for all the child products.
AssociatedTransactionPricing__std	When your transaction is part of a bundle, this value describes how the child transaction is priced in relation to the primary transaction. Valid values are <code>IncludedInBundlePrice</code> or <code>NotIncludedInBundlePrice</code> .	AssociatedBsgPricing field on the BsgRelationship object	Required for all the child products.

SEE ALSO:

[BillingSchedule](#)
[BillingScheduleGroup](#)
[BsgRelationship](#)

New Sale Transaction With Ramped Products

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with ramped products.

Considerations

Keep these important considerations in mind when you provide the details for new sale transactions with ramped products.

- The `BillingActionType__std` value for any new sale transaction must be `Add`.
- For new sale transactions with a ramped product, the `RampIdentifier__std` value is required.
- If you don't provide the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, or the `LegalEntityId__std` value for the transaction, the default `TaxTreatmentId`, `BillingTreatmentId`, and `LegalEntityId` of your Salesforce org is considered. If your org doesn't have any default values, an error occurs.
- The billing schedules for transactions with the same `RampIdentifier__std` value are created for the same billing schedule group.
- To understand the requirements for the various selling model types, see these resources.
 - [One-Time New Sale Transaction](#) on page 2241
 - [Term-Defined New Sale Transaction](#) on page 2244
 - [Evergreen New Sale Transaction](#) on page 2248

JSON Example

This example includes the transaction data for a new sale transaction with ramped products and a `TermDefined` selling model.

```
{
  "Transaction": [
    {
      "id": "ter1",
      "SellingModelType__std": "TermDefined",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "ter1",
      "ProductName__std": "TermedQuarterlyProduct",
      "StartDate__std": "2025-01-01",
      "EndDate__std": "2026-12-31",
      "PeriodBoundary__std": "DayOfPeriod",
      "BillingDayOfMonth__std": 1,
      "UnitPrice__std": 10,
      "Quantity__std": 5,
      "TotalPrice__std": 120,
      "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
      "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
      "AccountId__std": "001LT00000dPVrlyAG",
      "BillingProfileId__std": "001LT00000dPVrlyAG",
      "BillingCity__std": "HYD",
      "ShippingCity__std": "VSKP",
      "BillingTermUnit__std": "Month",
      "BillingActionType__std": "Add",
      "CurrencyIsoCode__std": "USD",
      "RampIdentifier__std": "ramp1"
    },
    {
      "id": "ter2",
      "SellingModelType__std": "TermDefined",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "ter2",
      "ProductName__std": "TermedQuarterlyProduct",
```

```

    "StartDate__std": "2025-01-01",
    "EndDate__std": "2026-12-31",
    "PeriodBoundary__std": "DayOfPeriod",
    "BillingDayOfMonth__std": 1,
    "UnitPrice__std": 10,
    "Quantity__std": 5,
    "TotalPrice__std": 120,
    "TaxTreatmentId__std": "1ttLT000000EV7DYAW",
    "BillingTreatmentId__std": "1BTLT00000008yT4AQ",
    "AccountId__std": "001LT00000dPVrlyAG",
    "BillingProfileId__std": "001LT00000dPVrlyAG",
    "BillingCity__std": "HYD",
    "ShippingCity__std": "VSKP",
    "BillingTermUnit__std": "Month",
    "BillingActionType__std": "Add",
    "CurrencyIsoCode__std": "USD",
    "RampIdentifier__std": "ramp1"
  }
]
}

```

This example shows the request payload to create a billing schedule for a new sale transaction with ramped products and a `TermDefined` selling model.

```
{
  "transactionDetails":
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you're creating a billing schedule for a new sale transaction with ramped products, make sure that you specify the mandatory values in the `transactionDetails` property value.

Name	Description	Mapped Field	Required or Optional
<code>ParentTransactionId__std</code>	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the ReferenceEntityId field on the BillingScheduleobject is populated. For other sObject records or external records, the Reference field on the BillingSchedule object is populated.	Optional

Name	Description	Mapped Field	Required or Optional
AccountId__std	The ID of the Account record that's related to the transaction.	BillingAccountId field on the BillingScheduleGroup object	Required
BillingProfileId__std	The ID of the billing profile (Billing Account record) that's related to the transaction. See Billing Profile requirements.	BillingAccountId field on the BillingSchedule object	Optional
BillingCity__std	The city in the billing address of the transaction.	BillingCity field on the BillingScheduleGroup object	Any one of the billing address fields is required.
ShippingCity__std	The city in the shipping address of the transaction.	ShippingCity field on the BillingScheduleGroup object	Any one of the shipping address fields is required.
SellingModelType__std	The selling model type indicates whether the transaction is for a one-time product, a term-defined product, or an evergreen product. Specify <code>OneTime</code> as the SellingModelType for the transaction that's related to a product that's sold once.	BillingMethod on the BillingSchedule object is populated as OrderAmount.	Required
TransactionId__std	The ID of the transaction that you want to create a billing schedule for.	If the transaction is an OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, or QuoteLineItem record, the ReferenceEntityItemId field on the BillingSchedule object is populated. For other sObject records or external records, the ReferenceItem field on the BillingSchedule object is populated.	Required
ProductName__std	The name of the product that's related to the transaction that you want to create a billing schedule for.	ProductName field on the BillingScheduleGroup object	Either the ProductName or the ProductId is required
PeriodBoundary__std	The period boundary determines the start and end date of the billing period.	PeriodBoundary field on the BillingScheduleGroup object	Required for products with the <code>TermDefined</code> or <code>Evergreen</code> selling model types.

Name	Description	Mapped Field	Required or Optional
BillingDayOfMonth__std	The day of the month on which a recurring billing process is scheduled to occur for the transaction.	BillDayOfMonth field on the BillingScheduleGroup object	Required for products with the TermDefined or Evergreen selling model types.
EndDate__std	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Required for products with the TermDefined selling model type.
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
TaxTreatmentId__std	The ID of the tax treatment that's used to calculate tax for the transaction. If you don't specify a TaxTreatmentId, the org-default TaxTreatmentId is considered.	TaxTreatmentId field on the BillingScheduleGroup object	Required
BillingTermUnit__std	The unit of measurement of the billing term.	BillingTermUnit field on the BillingSchedule object	Required for products with the TermDefined or Evergreen selling model types.
BillingTreatmentId__std	The ID of the billing treatment that's used to create the billing schedule for the transaction. If you don't specify a BillingTreatmentId, the org-default BillingTreatmentId is considered.	BillingTreatmentId field on the BillingScheduleGroup object	Required
CurrencyIsoCode__std	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	CurrencyIsoCode field on the BillingScheduleGroup object	Required for Salesforce orgs with multiple currencies enabled .
RampIdentifier__std	When the transaction is part of a ramp deal, the RampIdentifier value is a unique identifier for that ramp. All the transactions with the same RampIdentifier value are grouped to have billing schedules for the same billing schedule group.	This value isn't populated on any BillingSchedule or BillingScheduleGroup field.	Required
BillingActionType__std	The action that you want to perform for the transaction. Valid value is Add .	Category field on the BillingSchedule object is populated as Original .	Required
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required

Name	Description	Mapped Field	Required or Optional
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required

Valid PeriodBoundary__std values:

- AlignToCalendar
- Anniversary
- DayOfPeriod
- LastDayOfPeriod

Valid BillingTermUnit__std values:

- Month
- Quarter
- Semi-Annual
- Year

New Sale Transaction With Usage Products

Understand the required values and key considerations before you create a billing schedule for a new sale transaction with usage-based products.

Considerations

Keep these important considerations in mind when you provide the details for new sale transactions with a usage-based product.

- The `BillingActionType__std` value for any new sale transaction must be `Add`.
- For new sale transactions with a usage-based product, the `ProductUsageModelType__std` and `BindingInstance__std` values are required.
- If you don't provide the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, or the `LegalEntityId__std` value for the transaction, the default `TaxTreatmentId`, `BillingTreatmentId`, and `LegalEntityId` of your Salesforce org is considered. If your org doesn't have any default values, an error occurs.
- To understand the requirements for the various selling model types, see these resources.
 - [One-Time New Sale Transaction](#) on page 2241
 - [Term-Defined New Sale Transaction](#) on page 2244
 - [Evergreen New Sale Transaction](#) on page 2248

JSON Example

This sample is for a new sale transaction for a usage-based product with a `TermDefined` selling model.

```
{
  "Transaction": [
    {
      "id": "termDefined",
      "SellingModelType__std": "TermDefined",
      "ParentTransactionId__std": "sample",

```

```
    "TransactionId__std": "onetimeUsage2",
    "StartDate__std": "2025-01-01",
    "EndDate__std": "2025-12-31",
    "PeriodBoundary__std": "DayOfPeriod",
    "BillingDayOfMonth__std": 1,
    "BillingTermUnit__std": "Month",
    "UnitPrice__std": 10,
    "Quantity__std": 1,
    "TotalPrice__std": 120,
    "AccountId__std": "001xx000003GgEJAA0",
    "BillingProfileId__std": "001LT00000dPVr1YAG",
    "BillingActionType__std": "Add",
    "CurrencyIsoCode__std": "USD",
    "BillingCity__std": "Hyderabad",
    "ShippingCity__std": "SFO",
    "ProductUsageModelType__std": "Anchor",
    "BindingInstance__std": "001xx000003GgChAAK",
    "ProductId__std": "01txx0000006i3DAAQ"
  }
}
```

This example shows the request payload to create a billing schedule for a new sale transaction for usage-based products with a TermDefined selling model.

```
{
  "transactionDetails":
"ParentTransactionId__std": "001xx000003GgEJAA0",
"BillingProfileId__std": "001LT00000dPVr1YAG",
"BillingActionType__std": "Add",
"CurrencyIsoCode__std": "USD",
"BillingCity__std": "Hyderabad",
"ShippingCity__std": "SFO",
"ProductUsageModelType__std": "Anchor",
"BindingInstance__std": "001xx000003GgChAAK",
"ProductId__std": "01txx0000006i3DAAQ"

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

Before using the Create Standalone Billing Schedules API for usage-based products, [Create a Usage Product Grant Binding Policy record](#) with the grant binding type as Target.

When you're creating a billing schedule for a new sale transaction with a usage-based product, make sure that you specify the mandatory values in the transactionDetails property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
ParentTransactionId__std	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the ReferenceEntityId field on the BillingScheduleobject is populated. For other	Optional

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
		sObject records or external records, the Reference field on the BillingSchedule object is populated.	
AccountId__std	The ID of the Account record that's related to the transaction.	BillingAccountId field on the BillingScheduleGroup object	Required
BillingProfileId__std	The ID of the billing profile (Billing Account record) that's related to the transaction. See Billing Profile requirements.	BillingAccountId field on the BillingSchedule object	Optional
BillingCity__std	The city in the billing address of the transaction.	BillingCity field on the BillingScheduleGroup object	Any one of the billing address fields is required.
ShippingCity__std	The city in the shipping address of the transaction.	ShippingCity field on the BillingScheduleGroup object	Any one of the shipping address fields is required.
SellingModelType__std	The selling model type indicates whether the transaction is for a one-time product, a term-defined product, or an evergreen product. Specify <code>OneTime</code> as the SellingModelType for the transaction that's related to a product that's sold once.	BillingMethod on the BillingSchedule object is populated as OrderAmount.	Required
TransactionId__std	The ID of the transaction that you want to create a billing schedule for.	If the transaction is an OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, or QuoteLineItem record, the ReferenceEntityItemId field on the BillingSchedule object is populated. For other sObject records or external records, the ReferenceItem field on the BillingSchedule object is populated.	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
ProductId__std	The ID of the product that's related to the transaction that you want to create a billing schedule for.	Product2Id field on the BillingScheduleGroup object	Either the ProductName or the ProductId is required
PeriodBoundary__std	The period boundary determines the start and end date of the billing period.	PeriodBoundary field on the BillingScheduleGroup object	Required for products with the TermDefined or Evergreen selling model types.
BillingDayOfMonth__std	The day of the month on which a recurring billing process is scheduled to occur for the transaction.	BillDayOfMonth field on the BillingScheduleGroup object	Required for products with the TermDefined or Evergreen selling model types.
EndDate__std	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Required for products with the TermDefined selling model type.
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
BillingTermUnit__std	The unit of measurement of the billing term.	BillingTermUnit field on the BillingSchedule object	Required for products with the TermDefined or Evergreen selling model types.
CurrencyIsoCode__std	The currency code of the transaction amount if your Salesforce org has multi-currency enabled.	CurrencyIsoCode field on the BillingScheduleGroup object	Required for Salesforce orgs with multiple currencies enabled .
BillingActionType__std	The action that you want to perform for the transaction. Valid value is Add.	Category field on the BillingSchedule object is populated as Original.	Required
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
<code>ProductUsageModelType__std</code>	The type of usage model for the transaction product or service.	<code>BillingMethod</code> value field on the <code>BillingSchedule</code> object is populated as <code>OrderAmount</code> .	Required
<code>BindingInstance__std</code>	The ID of the Asset record or custom object record that's related to the transaction.	<code>BindingInstanceId</code> on the <code>BillingScheduleGroup</code> object	Required

Valid `PeriodBoundary__std` values:

- `AlignToCalendar`
- `Anniversary`
- `DayOfPeriod`
- `LastDayOfPeriod`

Valid `BillingTermUnit__std` values:

- `Month`
- `Quarter`
- `Semi-Annual`
- `Year`

Valid `ProductUsageModelType__std` values:

- `Anchor`—Anchor is the main subscription product or service.
- `Pack`—Pack is the add-on product or service that grants additional usage resources for consumption.

Amended Transaction

Learn how amendments update quantity, price, and end date in billing schedules along with delta-only price transactions and billing-frequency changes at the billing schedule level.

Considerations

Keep these important considerations in mind when providing the details for amended transactions.

- The `BillingActionType__std` value for any amended transaction must be `Amend`.
- When you provide a negative quantity, make sure that it's less than the total quantity of the related transaction.
- If your transaction is for an sObject record, only specify the record ID as the `id` value in the `transactionDetails` property value. All the other transaction details are automatically fetched from the sObject record if those details are mapped in the context definition.

Amendment Payload Types

The Create Standalone Billing Schedules API accepts two amendment payload types in the `transactionDetails` node. Use the type that matches the level of detail you want to provide in the request.

Simplified amendment payloads support these scenarios.

- Negative amendment to reduce quantity
- Positive amendment to add quantity
- Price amendment to change net or unit price from an effective date
- End date change to extend or shorten the subscription term
- Delta price change to pass a price delta as a single adjustment
- Billing frequency update at the billing schedule group level

Simplified Amendment Payload

Set `BillingActionType__std` to `Amend`. Set `BillingSubActionType__std` to `QuantityAmend`, `PriceAmend`, `EndDateChange`, `DeltaPriceAmend`, or `BillingFrequencyChange` depending on the scenario. Include `TransactionId__std` and `StartDate__std`. Identify the source with either `RelatedTransactionId__std` (one billing schedule) or `BillingScheduleGroupId__std` (a billing schedule group). The examples in the scenario-specific sections in this topic use `RelatedTransactionId__std`. For amendments by using a billing schedule group as source, use `BillingScheduleGroupId__std` instead.

Negative Amendment (QuantityAmend)

Reduce quantity from a start date by specifying the reduction quantity as a negative number along with the start date.

If you specify a related transaction, the reduction is applied against that transaction's billing schedules. If you specify a billing schedule group ID, the API applies reductions in Last In, First Out (LIFO) order within that billing schedule group.

The API determines which billing schedules to reduce, validates that sufficient net quantity exists, and checks whether price can be derived through proration or whether `TotalPrice` can be accepted when specified.

This sample includes a negative `Quantity__std` for the quantity to remove from the effective date.

```
{
  "Transaction": [
    {
      "TransactionId__std": "a2",
      "RelatedTransactionId__std": "a1",
      "StartDate__std": "2025-05-01",
      "Quantity__std": -2,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "QuantityAmend"
    }
  ]
}
```

This sample shows the request payload for the same negative quantity amendment.

```
{
  "transactionDetails":
    [{"Transaction": [{"TransactionId__std": "a2", "RelatedTransactionId__std": "a1", "StartDate__std": "2025-05-01", "Quantity__std": -2, "BillingActionType__std": "Amend", "BillingSubActionType__std": "QuantityAmend"}]}],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
  }
}
```

```

    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

This sample shows the transaction data that references a billing schedule group.

```

{
  "Transaction": [
    {
      "TransactionId__std": "a2",
      "BillingScheduleGroupId__std": "9Ws00000AXB00AAI",
      "StartDate__std": "2025-05-01",
      "Quantity__std": -2,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "QuantityAmendment"
    }
  ]
}

```

This sample shows the request payload when billing schedule group is used as a reference.

```

{
  "transactionDetails":
  [{"TransactionId__std": "a2", "BillingScheduleGroupId__std": "9Ws00000AXB00AAI", "StartDate__std": "2025-05-01", "Quantity__std": -2, "BillingActionType__std": "Amend", "BillingSubActionType__std": "QuantityAmendment"}],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

Positive Amendment (QuantityAmend)

Add quantity from a start date. Specify minimal information in the payload. The API derives the billing schedule to amend and, if not specified, the unit price and total price. Use a positive `Quantity__std` for the quantity to add from the effective date.

```

{
  "Transaction": [
    {
      "TransactionId__std": "a2",
      "RelatedTransactionId__std": "a1",
      "StartDate__std": "2025-05-01",
      "Quantity__std": 2,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "QuantityAmend"
    }
  ]
}

```

This sample shows the request payload for the same positive quantity amendment.

```

{
  "transactionDetails":
  [{"TransactionId__std": "a2", "RelatedTransactionId__std": "a1", "StartDate__std": "2025-05-01", "Quantity__std": 2, "BillingActionType__std": "Amend", "BillingSubActionType__std": "QuantityAmend"}],

```

```

"transactionContextDetails": {
  "contextDefinitionName": "StandaloneBillingContext__stdctx",
  "intraContextCustomMappingName": "CustomContextMapping",
  "readContextMappingName": "TransactionMapping",
  "saveContextMappingName": "BSGEntitiesMapping"
}
}

```

This sample shows the transaction data that references a billing schedule group.

```

{
  "Transaction": [
    {
      "TransactionId__std": "a2",
      "BillingScheduleGroupId__std": "9Ws00000AXB00AAI",
      "StartDate__std": "2025-05-01",
      "Quantity__std": 2,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "QuantityAmendment"
    }
  ]
}

```

This sample shows the request payload when billing schedule group is used as a reference.

```

{
  "transactionDetails":
  [{"TransactionId__std": "a2", "BillingScheduleGroupId__std": "9Ws00000AXB00AAI", "StartDate__std": "2025-05-01", "Quantity__std": 2, "BillingActionType__std": "Amend", "BillingSubActionType__std": "QuantityAmendment"}],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

Price Amendment (PriceAmend)

Change the price from a given start date. For example, apply a new net unit price or unit price. The API cancels the existing billing schedule(s) from that date and creates new positive amendment billing schedule with the updated price . Specify the new NetUnitPrice__std or UnitPrice__std effective on StartDate__std. This sample uses net unit price.

```

{
  "Transaction": [
    {
      "TransactionId__std": "ter3",
      "RelatedTransactionId__std": "ter1",
      "StartDate__std": "2026-04-01",
      "NetUnitPrice__std": 20,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "PriceAmend"
    }
  ]
}

```


This sample shows the request payload for the same price amendment.

```
{
  "transactionDetails":
  [{"Transaction__std": "ter3", "ReferenceId__std": "ter1", "StartDate__std": "2026-01-01", "NetUnitPrice__std": 2, "BillingType__std": "Amend", "BillingSubActionType__std": "PriceAmend"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

This sample shows the transaction data that references a billing schedule group with delta quantity to amend price on an entire billing schedule group.

```
{
  "Transaction": [
    {
      "TransactionId__std": "ter4",
      "BillingScheduleGroupId__std": "9Wsxx000000026fCAA",
      "StartDate__std": "2026-06-01",
      "NetUnitPrice__std": 30,
      "Quantity__std": 1,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "PriceAmend"
    }
  ]
}
```

This sample shows the request payload when billing schedule group is used as a reference.

```
{
  "transactionDetails":
  [{"Transaction__std": "ter4", "BillingScheduleId__std": "9Wsxx000000026fCAA", "StartDate__std": "2026-06-01", "NetUnitPrice__std": 30, "Quantity__std": 1, "BillingType__std": "Amend", "BillingSubActionType__std": "PriceAmend"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

End Date Change (EndDateChange)

Change the end date of the subscription or of a specific billing schedule under a billing schedule group from a specified start date. The API cancels the existing billing schedule(s) from that start date and creates a new positive amendment billing schedule from the start date to the new end date.

Specify `StartDate__std` to specify when the change is effective and `EndDate__std` for the new end of the term.

```
{
  "Transaction": [
    {
      "TransactionId__std": "ter3",
```

```

    "RelatedTransactionId__std": "ter1",
    "StartDate__std": "2026-05-01",
    "EndDate__std": "2026-09-01",
    "BillingActionType__std": "Amend",
    "BillingSubActionType__std": "EndDateChange"
  }
]
}

```

This sample shows the request payload for the same end date change on one billing schedule by using related transaction ID.

```

{
  "transactionDetails":
    [{"transaction_id": "ter1", "related_transaction_id": "ter1", "start_date": "2026-05-01", "end_date": "2026-09-01", "billing_action": "Amend", "billing_sub_action": "EndDateChange"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

This sample shows the transaction data that references a billing schedule group for end date change on one billing schedule group.

```

{
  "Transaction": [
    {
      "TransactionId__std": "ter3",
      "BillingScheduleGroupId__std": "9Wsxx000000026fCAA",
      "StartDate__std": "2026-05-01",
      "EndDate__std": "2026-09-01",
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "ChangeEndDate"
    }
  ]
}

```

This sample shows the request payload when billing schedule group is used as a reference.

```

{
  "transactionDetails":
    [{"transaction_id": "ter3", "billing_schedule_group_id": "9Wsxx000000026fCAA", "start_date": "2026-05-01", "end_date": "2026-09-01", "billing_action": "Amend", "billing_sub_action": "ChangeEndDate"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

Delta Price Change (DeltaPriceAmend)

Change a subscription's price mid-term. For example, manage modifications such as add or remove features, or apply special discounts and price uplifts.

Send `Quantity__std` as 0 with `TotalPrice__std` set to the delta amount, or send a non-zero quantity with `NetUnitPrice__std` as the delta net unit price. This sample shows the zero-quantity delta total price pattern.

```
{
  "Transaction": [
    {
      "TransactionId__std": "amendmentSampleId1",
      "RelatedTransactionId__std": "ter1",
      "StartDate__std": "2025-07-01",
      "TotalPrice__std": 600,
      "Quantity__std": 0,
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "DeltaPriceAmend"
    }
  ]
}
```

This sample shows the request payload for the same delta price change.

```
{
  "transactionDetails":
    [{"TransactionId__std": "amendmentSampleId1", "RelatedTransactionId__std": "ter1", "StartDate__std": "2025-07-01", "TotalPrice__std": 600, "Quantity__std": 0, "BillingActionType__std": "Amend", "BillingSubActionType__std": "DeltaPriceAmend"}],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

Billing Frequency Update at Billing Schedule Group (BillingFrequencyChange)

Change how often the subscription bills for all billing schedules in a billing schedule group. Set `BillingSubActionType__std` to `BillingFrequencyChange`, identify the group with `BillingScheduleGroupId__std`, set `BillingTermUnit__std` to the new term unit (for example, `Quarter`), and set `StartDate__std` when the new frequency is effective. Include `TransactionId__std`. Optionally, include `BillingStartMonth__std` when the billing selling model requires it for that term unit.

```
{
  "Transaction": [
    {
      "TransactionId__std": "bfTer1",
      "BillingScheduleGroupId__std": "9Ws00000AXB00AAI",
      "StartDate__std": "2025-05-01",
      "BillingTermUnit__std": "Quarter",
      "BillingActionType__std": "Amend",
      "BillingSubActionType__std": "BillingFrequencyChange"
    }
  ]
}
```

This sample shows the request payload for the same billing frequency update.

```
{
  "transactionDetails":
```

```

"transactionContextDetails": {
  "contextDefinitionName": "StandaloneBillingContext__stdctx",
  "intraContextCustomMappingName": "CustomContextMapping",
  "readContextMappingName": "TransactionMapping",
  "saveContextMappingName": "BSGEntitiesMapping"
}
}

```

Detailed Amendment Payload

Send each amendment as its own transaction with `BillingActionType__std` set to `Amend`. Include identifiers, `RelatedTransactionId__std`, and the financial fields for each line. Use this payload type when you already computed quantities, unit prices, and total prices. This sample includes one positive amendment and two negative amendments for the same related transaction.

This sample includes the transaction data for an amendment.

```

{
  "Transaction": [
    {
      "id": "sampleA1",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "sampleA1",
      "RelatedTransactionId__std": "ter1",
      "StartDate__std": "2025-04-01",
      "UnitPrice__std": 10,
      "Quantity__std": 1,
      "TotalPrice__std": 90,
      "BillingActionType__std": "Amend"
    },
    {
      "id": "sampleA2",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "sampleA2",
      "RelatedTransactionId__std": "ter1",
      "StartDate__std": "2025-03-01",
      "UnitPrice__std": 10,
      "Quantity__std": -2,
      "TotalPrice__std": -200,
      "BillingActionType__std": "Amend"
    },
    {
      "id": "sampleA3",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "sampleA3",
      "RelatedTransactionId__std": "ter1",
      "StartDate__std": "2025-03-01",
      "UnitPrice__std": 10,
      "Quantity__std": -1,
      "TotalPrice__std": -100,
      "BillingActionType__std": "Amend"
    }
  ]
}

```

This sample shows the request payload to create a billing schedule for an amendment.

```
{
  "transactionDetails":
  "ParentTransactionId__std": "ParentTransactionId",

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you're creating a billing schedule for an amended transaction, make sure that you specify the mandatory values in the transactionDetails property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
ParentTransactionId__std	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the ReferenceEntityId field on the BillingScheduleobject is populated. For other sObject records or external records, the Reference field on the BillingSchedule object is populated.	Optional
TransactionId__std	The unique identifier reference to apply to the billing schedule with amendment or updated billing frequency. The Reference and Referenceltem field on a billing schedule has this value appended with a unique ID generated string.	If the transaction is an OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, or QuoteLineItem record, the ReferenceEntityItemId field on the BillingScheduleobject is populated. For other sObject records or external records, the Referenceltem field on the BillingSchedule object is populated.	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
<code>BillingStartMonth__std</code>	The month when billing begins for an annual subscription. This value can be any number from 1 through 12. For example, if billing starts in January, the value is 1. If billing starts in June, the value is 6.	BillingStartMonth field on the BillingScheduleGroup object	Optional. Required if the billing term unit is Quarter, Semi-Annual, or Annual.
<code>EndDate__std</code>	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Optional. Required in case of an end date change of a subscription.
<code>StartDate__std</code>	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
<code>Quantity__std</code>	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
<code>BillingTermUnit__std</code>	The unit of measurement of the billing term. Valid values are Month, Quarter, Semi-Annual, or Year.	BillingTermUnit field on the BillingSchedule object	Optional
<code>RelatedTransactionId__std</code>	The ID of the related transaction that must be referenced for an amendment.	This value isn't populated on any BillingSchedule or BillingScheduleGroup field.	Required
<code>BillingScheduleGroupId__std</code>	ID of the billing schedule group that must be referenced for an amendment.	Not applicable.	Specify either <code>RelatedTransactionId__std</code> or <code>BillingScheduleGroupId__std</code> in your request if you're sending a simplified payload.
<code>BillingActionType__std</code>	The action that you want to perform for the transaction. Specify <code>Amend</code> as the BillingActionType for amended transactions.	Category field on the BillingSchedule object is populated as <code>AmendQuantity</code> .	Required
<code>BillingSubActionType__std</code>	The sub-action that you want to perform for the transaction. Specify <code>PriceAmend</code> , <code>QuantityAmend</code> , or <code>DeltaPriceAmend</code> as the BillingActionType to specify minimal details in the payload for a price, quantity, or delta price amendment respectively. Specify <code>EndDateChange</code> as the BillingActionType to change the end date of a subscription. Specify <code>BillingFrequencyChange</code> as the	SubCategory field on the BillingSchedule object	Optional

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
	BillingActionType to update the billing frequency at the billing schedule group level. Available in API version 67.0 and later.		
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required
NetUnitPrice__std	The net unit price of the transaction.	NetUnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required

Renewal Transaction

Create a renewal billing schedule for termed subscriptions that continues without a gap, starting the day after the current billing schedule group ends and running for the same term length.

Considerations

Keep these important considerations in mind when you specify the details for renewal transactions.

- The `BillingActionType__std` value for renewal transactions must be `Renew`.
- The quantity for renewal transactions must be a nonzero positive number.
- The start date of the renewal transaction must be before the maximum end date of all the existing billing schedules associated with the billing schedule group.
- The end date of the renewal transaction must be after the maximum end date of all the existing transactions associated with the billing schedule group of the related transaction.
- Specify a `RelatedTransactionId__std` value with a positive quantity.
- For a particular `RelatedTransactionId`, you can create a billing schedule only for a single renewal transaction.
- For renewal transactions, the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, and the `LegalEntityId__std` value of the related transaction are considered.

Renewal Payload Types

The Create Standalone Billing Schedules API accepts two renewal payload types in the `transactionDetails` node. Use the type that matches the level of detail you want to provide in the request.

Simplified renewal payloads support these scenarios.

- Renewal to start a new term after the related transaction or billing schedule group reaches its end
- As-is renewal to renew each existing billing schedule at its own quantity and net unit price

Detailed renewal payloads cover the same outcomes when you specify all transaction details and financial fields.

Simplified Renewal Payload

Set `BillingActionType__std` to `Renew`. Set `BillingSubActionType__std` to `SimplifiedRenewal` for a standard renewal, or to `AsIsRenewal` for an as-is renewal. Include `TransactionId__std`. Identify the source with either `RelatedTransactionId__std` (one billing schedule) or `BillingScheduleGroupId__std` (a billing schedule group). For a standard renewal, you can omit dates and pricing. The API can derive start date, end date, quantity, and price from the related transaction record or billing schedule group. You can add optional dates or pricing when you want to override derived values. The examples in this topic use `RelatedTransactionId__std`. For renewals with billing schedule group as source, use `BillingScheduleGroupId__std` instead.

Renewal (SimplifiedRenewal)

Use this payload structure when the new term begins after the prior term ends. This sample shows the minimum fields. Keep these considerations in mind when you specify a simplified payload.

- If you specify a billing schedule group ID, start date is required. If you omit the start date and specify a related transaction ID, the API sets the start date to a day after the end date of the related billing schedule.
- If you specify a billing schedule group ID, end date is required. If you omit the end date and specify a related transaction ID, the API sets the end date by adding one full billing schedule term to that billing schedule's end date (plus one day).
- If you specify a billing schedule group ID, unit price and net unit price are required. If you omit the unit price and net unit price, and specify a related transaction ID, the API sets the unit price and net unit price values from the related billing schedule.
- If you specify a billing schedule group ID, quantity is required. If you omit the quantity and specify a related transaction ID, the API sets the renewal quantity from the related billing schedule.

This sample shows the transaction data for the simplified renewal with related transaction ID as a reference.

```
{
  "Transaction": [
    {
      "TransactionId__std": "ren1",
      "RelatedTransactionId__std": "ter1",
      "BillingActionType__std": "Renew",
      "BillingSubActionType__std": "SimplifiedRenewal"
    }
  ]
}
```

This sample shows the request payload for the simplified renewal with related transaction ID as a reference.

```
{
  "transactionDetails":
    "{\"Transaction\": [{\"TransactionId__std\": \"ren1\", \"RelatedTransactionId__std\": \"ter1\", \"BillingActionType__std\": \"Renew\", \"BillingSubActionType__std\": \"SimplifiedRenewal\"}]}",
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

This sample shows the transaction data for the simplified renewal with billing schedule group ID as a reference.

```
{
  "Transaction": [
    {
```



```

    "TransactionId__std": "ter3",
    "BillingScheduleGroupId__std": "9Ws00000AXB00AAI",
    "BillingActionType__std": "Renew",
    "BillingSubActionType__std": "SimplifiedRenewal",
    "Quantity__std": 5,
    "UnitPrice__std": 10,
    "StartDate__std": "2025-12-15",
    "EndDate__std": "2026-12-14"
  }
]
}

```

This sample shows the request payload for the simplified renewal with billing schedule group ID as a reference.

```

{
  "transactionDetails":
    "Transaction": [{"TransactionId__std": "9Ws00000AXB00AAI", "BillingScheduleGroupId__std": "9Ws00000AXB00AAI", "BillingActionType__std": "Renew", "BillingSubActionType__std": "SimplifiedRenewal", "Quantity__std": 5, "UnitPrice__std": 10, "StartDate__std": "2025-12-15", "EndDate__std": "2026-12-14"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

As-is Renewal (AsIsRenewal)

Use this payload structure when multiple billing schedules under the reference have different quantities or net unit prices and you want one renewal billing schedule per source schedule.

```

{
  "Transaction": [
    {
      "TransactionId__std": "asIsRen1",
      "RelatedTransactionId__std": "ter1",
      "BillingActionType__std": "Renew",
      "BillingSubActionType__std": "AsIsRenewal"
    }
  ]
}

```

This sample shows the request payload for the same as-is renewal.

```

{
  "transactionDetails":
    "Transaction": [{"TransactionId__std": "asIsRen1", "RelatedTransactionId__std": "ter1", "BillingActionType__std": "Renew", "BillingSubActionType__std": "AsIsRenewal"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

This sample shows the request payload for the as-is renewal with billing schedule group ID as a reference.

```
{
  "Transaction": [
    {
      "TransactionId__std": "asIsRenew2",
      "BillingScheduleGroupId__std": "9Ws00000AXB00AAI",
      "BillingActionType__std": "Renew",
      "BillingSubActionType__std": "AsIsRenewal"
    }
  ]
}
```

This sample shows the request payload for the as-is renewal with billing schedule group ID as a reference.

```
{
  "transactionDetails":
    [{"TransactionId__std":"asIsRenew2","BillingScheduleGroupId__std":"9Ws00000AXB00AAI","BillingActionType__std":"Renew","BillingSubActionType__std":"AsIsRenewal"}],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

Detailed Renewal Payload

Send each renewal row with `BillingActionType__std` set to `Renew` and include identifiers, related transaction, dates, quantity, unit price, and total price. Use this payload type when you already computed the renewal lines yourself.

This sample includes the transaction data for a standard renewal after the end date.

```
{
  "Transaction": [
    {
      "id": "temp1001",
      "TotalPrice__std": 10,
      "Quantity__std": 1,
      "UnitPrice__std": 10,
      "StartDate__std": "2026-03-01",
      "EndDate__std": "2027-12-31",
      "TransactionId__std": "temp1001",
      "BillingActionType__std": "Renew",
      "RelatedTransactionId__std": "temp1"
    }
  ]
}
```

This sample shows the request payload to create a billing schedule for a renewal.

```
{
  "transactionDetails":
    [{"TransactionId__std":"temp1001","TotalPrice__std":10,"Quantity__std":1,"UnitPrice__std":10,"StartDate__std":"2026-03-01","EndDate__std":"2027-12-31","TransactionId__std":"temp1001","BillingActionType__std":"Renew","RelatedTransactionId__std":"temp1"}],
  "transactionContextDetails": {
```

```
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you renew a new-sale transaction after its end date, those transactions are called renewal transactions. For example, a new-sale transaction starts on 01/01/2025 and ends on 12/31/2025, and you renew it to start on 03/01/2026 and end on 12/31/2026.

When you're creating a billing schedule for a renewal transaction, make sure that you provide the mandatory values in the `transactionDetails` property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
TransactionId__std	The unique identifier reference to apply to the renewal billing schedule. The Reference and Referenceltem field on a billing schedule has this value appended with a unique ID generated string.	If the transaction is an OrderItem, OrderItemAdjustmentLinItem, OrderItemDetail, QuoteLineDetail, or QuoteLinItem record, the ReferenceEntityItemId field on the BillingScheduleobject is populated. For other sObject records or external records, the Referenceltem field on the BillingSchedule object is populated.	Required
EndDate__std	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Required
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
RelatedTransactionId__std	The ID of the original transaction that's related to the renewal transaction.	This value isn't populated on any BillingSchedule or BillingScheduleGroup field.	Required

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
<code>BillingScheduleGroupId_std</code>	ID of the billing schedule group that must be referenced to renew the billing schedule group.	Not applicable.	Specify either <code>RelatedTransactionId_std</code> or <code>BillingScheduleGroupId_std</code> in your request if you're sending a simplified payload.
<code>BillingActionType_std</code>	The action that you want to perform for the transaction. Specify <code>Renew</code> as the <code>BillingActionType</code> for renewal transactions.	Category field on the <code>BillingSchedule</code> object is populated as <code>Renewal</code> .	Required
<code>BillingSubActionType_std</code>	The sub-action that you want to perform for the transaction. Specify <code>AsIsRenewal</code> as the <code>BillingActionType</code> to specify minimal details in the payload for an as-is renewal. Specify <code>SimplifiedRenewal</code> as the <code>BillingActionType</code> to specify minimal details in the payload for a renewal or an early renewal. Available in API version 67.0 and later.	<code>SubCategory</code> field on the <code>BillingSchedule</code> object	Optional
<code>UnitPrice_std</code>	The unit price of the transaction.	<code>UnitPrice</code> field on the <code>BillingSchedule</code> object	Either the <code>UnitPrice</code> or the <code>NetUnitPrice</code> value is required
<code>TotalPrice_std</code>	The total price of the transaction.	<code>TotalAmount</code> field on the <code>BillingSchedule</code> object	Required

Early Renewal Transaction

Early Renewal ends the current term at an effective date and starts a renewed term to a new end date, creating two billing schedules in one request. The request creates a negative segment for the remaining original term and a positive segment for the renewal term.

Considerations

Keep these important considerations in mind when you specify the details for early renewal transactions.

- The `BillingActionType_std` value for early renewal transactions must be `Renew`.
- When you're creating billing schedules for early renewal transactions, your input payload must have details for two transactions.
 - A transaction to cancel the existing new-sale transaction. The details of this transaction must include a negative quantity to cancel billing for the remaining period. The quantity for this transaction must be the negative equivalent of the total quantity of all the existing billing schedules associated with the same billing schedule group.
 - Another transaction that specifies the early renewal details, which must have a positive quantity.
 - The `BillingActionType_std` value for both these transactions must be `Renew`.

- The start date of the early renewal transaction must be:
 - Before the end date of the related transaction.
 - Before the maximum end date of all the existing billing schedules associated with the billing schedule group of the related transaction.
 - The same as the start date of all the existing billing schedules associated with the same billing schedule group or after it.
- The end date for the early renewal transaction must be after the maximum end date of all the existing transactions associated with the billing schedule group of the related transaction.
- For early renewal transactions, the `TaxTreatmentId__std` value, the `BillingTreatmentId__std` value, and the `LegalEntityId__std` value of the related transaction are considered.

Early Renewal Payload Types

The Create Standalone Billing Schedules API accepts two early renewal payload types in the `transactionDetails` node. Use the type that matches the level of detail you want to provide in the request.

Simplified early renewal payloads support these scenarios.

- Early renewal by related transaction by using `SimplifiedRenewal` sub-action type with an effective start date before the current term end and a new end date.
- Early renewal by billing schedule group by using `SimplifiedRenewal` sub-action type with the same date rules at the group level
- Early as-is renewal by using `AsIsRenewal` sub-action type when each underlying billing schedule should renew at its own quantity and net unit price from an effective date before the group end.

For renewal that begins after the prior term or billing schedule group ends, see [Renewal Transaction](#) on page 2277.

Detailed early renewal payloads use separate cancel and renewal rows when you supply full transaction and financial fields yourself.

Simplified Early Renewal Payload

Set `BillingActionType__std` to `Renew`. Set `BillingSubActionType__std` to `SimplifiedRenewal` for a blended early renewal, or to `AsIsRenewal` for an early as-is renewal. Include `TransactionId__std`, `StartDate__std` (before the related transaction or group end), and `EndDate__std` for the new term. Identify the source with either `RelatedTransactionId__std` (one billing schedule) or `BillingScheduleGroupId__std` (a billing schedule group). The API can derive quantity and pricing when you omit those fields.

Early Renewal by Related Transaction (SimplifiedRenewal)

```
{
  "Transaction": [
    {
      "TransactionId__std": "earlyRen1",
      "RelatedTransactionId__std": "ter1",
      "StartDate__std": "2025-12-15",
      "EndDate__std": "2026-12-14",
      "BillingActionType__std": "Renew",
      "BillingSubActionType__std": "SimplifiedRenewal"
    }
  ]
}
```

This sample shows the request payload for the same simplified early renewal by using related transaction ID.

```
{
  "transactionDetails":
  "Transaction": [{"TransactionId__std": "earlyRen1", "BillingScheduleGroupId__std": "9Wsxx00000001ovCAA", "BillingActionType__std": "Renew", "BillingSubActionType__std": "SimplifiedRenewal", "Quantity__std": 5, "UnitPrice__std": 10, "StartDate__std": "2025-12-15", "EndDate__std": "2026-12-14"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

Early Renewal by Billing Schedule Group (SimplifiedRenewal)

```
{
  "Transaction": [
    {
      "TransactionId__std": "earlyRen2",
      "BillingScheduleGroupId__std": "9Wsxx00000001ovCAA",
      "BillingActionType__std": "Renew",
      "BillingSubActionType__std": "SimplifiedRenewal",
      "Quantity__std": 5,
      "UnitPrice__std": 10,
      "StartDate__std": "2025-12-15",
      "EndDate__std": "2026-12-14"
    }
  ]
}
```

This sample shows the request payload for the same simplified early renewal by using billing schedule group.

```
{
  "transactionDetails":
  "Transaction": [{"TransactionId__std": "earlyRen2", "BillingScheduleGroupId__std": "9Wsxx00000001ovCAA", "BillingActionType__std": "Renew", "BillingSubActionType__std": "SimplifiedRenewal", "Quantity__std": 5, "UnitPrice__std": 10, "StartDate__std": "2025-12-15", "EndDate__std": "2026-12-14"}],

  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

Early As-is Renewal (AsIsRenewal)

Use this pattern when the billing schedule group has multiple billing schedules with different quantities or net unit prices and the renewal effective date is before the group end.

```
{
  "Transaction": [
    {
      "TransactionId__std": "asIsEarly1",
      "BillingScheduleGroupId__std": "9Wsxx00000001ovCAA",
      "StartDate__std": "2025-12-15",
      "EndDate__std": "2026-12-14",

```

```

        "BillingActionType__std": "Renew",
        "BillingSubActionType__std": "AsIsRenewal"
    }
]
}

```

This sample shows the request payload for the same early as-is renewal.

```

{
  "transactionDetails":
    ("test1", ("TransactionId__std": "5551", "BillingSubId__std": "940000102", "StartDate__std": "2025", "EndDate__std": "2024", "BillingType__std": "Ren", "BillingSubType__std": "AsIsRenewal"))],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "interContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}

```

Detailed Early Renewal Payload

Send two transactions with `BillingActionType__std` set to `Renew` for each row. The first transaction ends billing for the remainder of the current term with a negative quantity. The second transaction starts the new term with a positive quantity. Include identifiers, related transaction, dates, unit price, and total price for each row.

This sample includes the transaction data for an early renewal.

```

{
  "Transaction": [
    {
      "id": "temp71",
      "TotalPrice__std": -10,
      "Quantity__std": -1,
      "UnitPrice__std": 10,
      "StartDate__std": "2026-12-31",
      "EndDate__std": "2027-12-31",
      "TransactionId__std": "temp71",
      "BillingActionType__std": "Renew",
      "RelatedTransactionId__std": "test21"
    },
    {
      "id": "temp72",
      "TotalPrice__std": 10,
      "Quantity__std": 1,
      "UnitPrice__std": 10,
      "StartDate__std": "2026-12-31",
      "EndDate__std": "2027-12-31",
      "TransactionId__std": "temp72",
      "BillingActionType__std": "Renew",
      "RelatedTransactionId__std": "test21"
    }
  ]
}

```

This sample shows the request payload to create a billing schedule for an early renewal.

```
{
  "transactionDetails": {
    "id": "1",
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you renew a new-sale transaction before its end date, those transactions are called early renewal transactions. For example, a new-sale transaction starts on 01/01/2025 and ends on 12/31/2025, and you renew it to start on 12/01/2025 and end on 12/31/2026.

When a billing schedule is created for an early renewal transaction, it results in these updates.

- The cancellation date on the original billing schedule is populated.
- A billing schedule with a negative quantity is created and can be used for a refund.
- A billing schedule with a positive quantity is created for the early renewal transaction.

When you're creating a billing schedule for an early renewal transaction, make sure that you provide the mandatory values in the `transactionDetails` property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Definition	Description	Mapped Field	Required or Optional
TransactionId__std	The unique identifier reference to apply to the renewal billing schedule. The Reference and Referenceltem field on a billing schedule has this value appended with a unique ID generated string.	If the transaction is an OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, or QuoteLineItem record, the ReferenceEntityItemid field on the BillingScheduleobject is populated. For other sObject records or external records, the Referenceltem field on the BillingSchedule object is populated.	Required
EndDate__std	The end date of the transaction.	BillingScheduleEndDate field on the BillingSchedule object	Required for a positive transaction. Optional for a negative transaction.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
Quantity__std	The quantity of the transaction.	Quantity field on the BillingSchedule object	Required
RelatedTransactionId__std	The ID of the transaction against which you're doing an early renewal. This transaction must have a positive quantity.	This value isn't populated on any BillingSchedule or BillingScheduleGroup field.	Required
BillingScheduleGroupId__std	ID of the billing schedule group that must be referenced to renew each billing schedule in the billing schedule group early.	Not applicable.	Specify either <u>RelatedTransactionId__std</u> or <u>BillingScheduleGroupId__std</u> in your request if you're sending a simplified payload.
BillingScheduleId__std	ID of the billing schedule group that must be referenced to renew each billing schedule in the billing schedule group early.	Not applicable.	Specify either <u>RelatedTransactionId__std</u> or <u>BillingScheduleId__std</u> in your request if you're sending a simplified payload.
BillingActionType__std	The action that you want to perform for the transaction. Specify <code>Renew</code> as the BillingActionType for early renewal transactions.	Category field on the BillingSchedule object is populated as <code>Renewal</code> .	Required
BillingSubActionType__std	The sub-action that you want to perform for the transaction. Specify <code>AsIsRenewal</code> as the BillingActionType to specify minimal details in the payload for an as-is renewal. Specify <code>SimplifiedRenewal</code> as the BillingActionType to specify minimal details in the payload for a renewal or an early renewal. Available in API version 67.0 and later.	SubCategory field on the BillingSchedule object	Optional
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required

Canceled Transaction

Cancel an entire billing schedule from a specified date. Specify only the cancellation date and billing schedule group identifier. The API computes the logic to split the cancellation across overlapping billing schedules and creates one cancel transaction per segment.

Considerations

Keep these important considerations in mind when you provide the details for canceled transactions.

- The `BillingActionType__std` value for any amended transaction must be `Cancel`.
- If you provide a quantity, make sure that it matches the total quantity of the related transaction.
- If there are multiple canceled transactions associated with the same related transaction, specify the same start date for all of these transactions.
- Specify the canceled transaction details for all the billing schedules that are associated with the same billing schedule group.
- If your transaction is for an `sObject` record, only specify the record ID as the `id` value in the `transactionDetails` property value. All the other transaction details are automatically fetched from the `sObject` record if those details are mapped in the context definition.

Cancellation Payload Types

The Create Standalone Billing Schedules API accepts two cancellation payload types in `transactionDetails` node. Use the type that matches the level of details you want to provide in the request.

Simplified Cancellation Payload

Send a single transaction in the `Transaction` array. Set `BillingActionType__std` to `Cancel` and `BillingSubActionType__std` to `SimplifiedCancel`. Identify the source to cancel with `RelatedTransactionId__std` (one billing schedule) or `BillingScheduleGroupId__std` (a billing schedule group), and include `TransactionId__std` and `StartDate__std` for the effective cancellation date.

This sample shows the transaction data with `BillingScheduleGroupId__std` to cancel a billing schedule group.

```
{
  "Transaction": [
    {
      "TransactionId__std": "cTer5",
      "BillingScheduleGroupId__std": "9Wsxx000000009hCAA",
      "StartDate__std": "2026-08-01",
      "BillingActionType__std": "Cancel",
      "BillingSubActionType__std": "SimplifiedCancel"
    }
  ]
}
```

This sample shows a simplified cancellation request.

```
{
  "transactionDetails":
  [{"transactionId__std":"cTer5","BillingScheduleGroupId__std":"9Wsxx000000009hCAA","StartDate__std":"2026-08-01","BillingActionType__std":"Cancel","BillingSubActionType__std":"SimplifiedCancel"}],
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

```

    }
  }
}

```

This sample shows the transaction data with `RelatedTransactionId__std` to cancel a billing schedule.

```

{
  "Transaction": [
    {
      "TransactionId__std": "ter4",
      "RelatedTransactionId__std": "evg1",
      "StartDate__std": "2026-02-01",
      "BillingActionType__std": "Cancel",
      "BillingSubActionType__std": "SimplifiedCancel"
    }
  ]
}

```

This sample shows a simplified cancellation request.

```

{
  "transactionDetails":
  "{\\\"Transaction\\\": [{\\\"TransactionId__std\\\": \\\"ter4\\\", \\\"RelatedTransactionId__std\\\": \\\"evg1\\\", \\\"StartDate__std\\\": \\\"2026-02-01\\\", \\\"BillingActionType__std\\\": \\\"Cancel\\\", \\\"BillingSubActionType__std\\\": \\\"SimplifiedCancel\\\"}]}\",
  \"transactionContextDetails\": {
    \"contextDefinitionName\": \"StandaloneBillingContext__stdctx\",
    \"readContextMappingName\": \"TransactionMapping\",
    \"saveContextMappingName\": \"BSGEntitiesMapping\"
  }
}

```

Detailed Cancellation Payload

Send one cancel transaction for each positive billing schedule that you want to end. Each transaction uses

`BillingActionType__std` set to `Cancel`. You specify `RelatedTransactionId__std` and the financial fields, such as quantity, unit price, and total price, for each line. Use this sample structure when you already computed the cancel lines and amounts yourself.

This sample shows a detailed cancellation for a single billing schedule. It uses a compact set of fields and does not use `SimplifiedCancel` sub-action type. For a detailed cancellation with multiple transactions, see the following sample.

This sample includes the transaction data for a cancellation.

```

{
  "Transaction": [
    {
      "id": "termedCancel1",
      "ParentTransactionId__std": "sample",
      "TransactionId__std": "termedCancel1",
      "RelatedTransactionId__std": "ot1",
      "StartDate__std": "2025-03-01",
      "UnitPrice__std": 10,
      "TotalPrice__std": -50,
      "BillingActionType__std": "Cancel"
    }
  ]
}

```

This sample shows the request payload to create a billing schedule for a cancellation.

```
{
  "transactionDetails":
  "TransactionId__std": "ParentTransactionId", "TransactionId__std": "ChildTransactionId", "SalesId": "2500", "Type": "1", "MapId": "5", "BillingScheduleId": "1",
  "transactionContextDetails": {
    "contextDefinitionName": "StandaloneBillingContext__stdctx",
    "intraContextCustomMappingName": "CustomContextMapping",
    "readContextMappingName": "TransactionMapping",
    "saveContextMappingName": "BSGEntitiesMapping"
  }
}
```

When you're creating a billing schedule for a canceled transaction, make sure that you specify the mandatory values in the transactionDetails property value.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
ParentTransactionId__std	The ID of the parent transaction record. For example, if the transaction is at a level similar to that of an Order Item record, the parent transaction will be at a level similar to that of an Order record.	If the transaction is a child Order or Quote record, the ReferenceEntityId field on the BillingScheduleobject is populated. For other sObject records or external records, the Reference field on the BillingSchedule object is populated.	Optional
TransactionId__std	The unique identifier reference to apply to the canceled billing schedule. The Reference and ReferenceItem field on a billing schedule has this value appended with a unique ID generated string.	If the transaction is an OrderItem, OrderItemAdjustmentLineItem, OrderItemDetail, QuoteLineDetail, or QuoteLineItem record, the ReferenceEntityItemId field on the BillingScheduleobject is populated. For other sObject records or external records, the ReferenceItem field on the BillingSchedule object is populated.	Optional if you're sending a simplified payload. If you don't specify this value, the API creates unique transaction IDs.

Context Tag in the Transaction Node of the StandaloneBillingContext Context Definition	Description	Mapped Field	Required or Optional
StartDate__std	The start date of the transaction.	BillingScheduleStartDate field on the BillingSchedule object	Required
RelatedTransactionId__std	The ID of the related transaction that must be referenced to cancel one billing schedule.	This value isn't populated on any BillingSchedule or BillingScheduleGroup field.	Required
BillingScheduleGroupId__std	ID of the billing schedule group that must be referenced to cancel the billing schedule group.	Not applicable.	Specify either <code>RelatedTransactionId__std</code> or <code>BillingScheduleGroupId__std</code> in your request if you're sending a simplified payload.
BillingActionType__std	The action that you want to perform for the transaction. Specify <code>Cancel</code> as the BillingActionType for canceled transactions.	Category field on the BillingSchedule object is populated as Cancellation.	Required
BillingSubActionType__std	The sub-action that you want to perform for the transaction. Specify <code>SimplifiedCancel</code> as the BillingActionType to specify minimal details in the payload for canceled transactions. Available in API version 67.0 and later.	SubCategory field on the BillingSchedule object	Optional
UnitPrice__std	The unit price of the transaction.	UnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required
TotalPrice__std	The total price of the transaction.	TotalAmount field on the BillingSchedule object	Required
NetUnitPrice__std	The net unit price of the transaction.	NetUnitPrice field on the BillingSchedule object	Either the UnitPrice or the NetUnitPrice value is required

Standalone Billing Schedule Metadata Input

Input representation of the metadata details to create a billing schedule. This representation includes the name of the context definition and context mapping along with the mapping details of the transaction, billing schedule, and billing schedule group.

JSON Example

```
{
  "transactionDetails": "{\\\"nodeName\\\": [{\\\"id\\\":\\\"001SG000004Fv1GYAS\\\",
\\\"businessObjectType\\\": \\\"Account\\\", \\\"Quantity\\\":\\\"4\\\" , \\\"Name\\\": \\\"TestAccount\\\"}]}\",

  \"transactionContextDetails\": {
    \"contextDefinitionName\": \"StandaloneBillingContext\",
    \"intraContextCustomMappingName\": \"CustomContextMapping\",
    \"readContextMappingName\": \"OrderTransactionMapping\",
    \"saveContextMappingName\": \"BSGEntitiesMapping\"
  }
}
```

This example shows a sample request to generate billing schedules from order items by specifying the BillingContext standard context definition as the context definition name.

```
{
  \"transactionDetails\": \"{\\\"nodeName\\\": [{\\\"id\\\":\\\"001SG000004Fv1GYAS\\\",
\\\"businessObjectType\\\": \\\"Account\\\", \\\"Quantity\\\":\\\"4\\\" , \\\"Name\\\": \\\"TestAccount\\\"}]}\",

  \"transactionContextDetails\": {
    \"contextDefinitionName\": \"BillingContext__stdctx\",
    \"readContextMappingName\": \"OrderEntitiesMapping\",
    \"saveContextMappingName\": \"BSGEntitiesMapping\"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
context Definition Name	String	Name of the context definition that's used to hydrate the context to generate the billing schedule. To generate billing schedules from order items, specify the BillingContext standard context definition as the context definition name. Applicable from API version 66.0 and later.	Required	64.0
intraContext CustomMapping Name	String	Name of the cross-context custom mapping that's used to map Billing fields to Transaction fields. Use this mapping to populate the Billing fields with the values stored in custom transaction fields.	Optional	65.0
readContext MappingName	String	Name of the context mapping with the mapping for the transaction.	Required	64.0
saveContext MappingName	String	Name of the context mapping with the mapping for the billing schedule and billing schedule group.	Required	64.0

Composite Collection Plan Input

Input representation of one or more collection plans, each with its optional nested collection plan items.

JSON example

```
{
  "collectionPlans": [
    {
      "accountId": "001xx000003DGXYA2",
      "contactId": "003xx000004TXYZA1",
      "initialDueAmount": 7500.00,
      "collectionPlanSegment": "High Risk",
      "dueDate": "2026-06-15",
      "collectionPlanReasonId": "0cR0000000000001",
      "usageType": "Billing",
      "overdueRiskIndicator": "High",
      "collectionPlanItems": [
        {
          "invoiceId": "inv00000000000001"
        },
        {
          "invoiceId": "inv00000000000002"
        }
      ]
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
collection Plans	Collection Plan Input []	List of collection plans to create. Each plan can include a nested list of collection plan items to create with it. Specify at least 1 collection plan.	Required	68.0

Collection Plan Input

Input representation of a single collection plan, including its optional nested collection plan items.

JSON example

```
{
  "accountId": "001xx000003DGXYA2",
  "contactId": "003xx000004TXYZA1",
  "initialDueAmount": 7500,
  "collectionPlanSegment": "High Risk",
  "dueDate": "2026-06-15",
  "collectionPlanReasonId": "0cR0000000000001",
  "usageType": "Billing",
  "overdueRiskIndicator": "High",
  "collectionPlanItems": [
```

```

    {
      "invoiceId": "inv0000000000001"
    },
    {
      "invoiceId": "inv0000000000002"
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account associated with the collection plan.	Required	68.0
collectionPlanItems	Collection Plan Item Input[]	List of collection plan items to create under this collection plan. If an item fails to create, the parent collection plan is rolled back.	Optional	68.0
collectionPlanReasonId	String	ID of the collection plan reason associated with the collection plan.	Optional	68.0
collectionPlanSegment	String	Predefined segment associated with the collection plan. The segment is derived from criteria such as the collection amount and the number of days past due. Because this segment is a dynamic value that you define, the valid values vary by org.	Optional	68.0
contactId	String	ID of the contact associated with the collection plan.	Optional	68.0
dueDate	String	Date by which the payment toward the outstanding amount is expected, in YYYY-MM-DD format.	Optional	68.0
initialDueAmount	Double	Initial due amount of the collection.	Optional	68.0
overdueRiskIndicator	String	Overdue risk level for the collection plan. Valid values are: • High • Low • Medium	Optional	68.0
usageType	String	Usage type of the collection plan. Valid value is <code>Billing</code> .	Required	68.0

Collection Plan Item Input

Input representation of a single collection plan item to create under a collection plan.

JSON example

```
{
  "collectionPlanId": "1Eu00000000001AAA",
  "invoiceId": "inv000000000001"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
collectionPlanId	String	ID of the collection plan that the item belongs to. When the item is nested within a collection plan in the same request, this property defaults to the parent collection plan.	Optional	68.0
invoiceId	String	ID of the invoice associated with the collection plan item. The invoice must have a status of <code>Posted</code> and a settlement status other than <code>Settled</code> . All invoices associated with a collection plan must use the same currency.	Required only if <code>collectionPlanItems</code> is present	68.0

Convert Negative Invoice Lines Input

Input representation of the details of the request to convert a list of negative invoice lines into a credit.

JSON Example

```
{
  "invoiceLines": ["5TVxx0000004C92GAE", "5TVxx0000004C93GAE"],
  "description": "Convert negative invoice lines into credit",
  "effectiveDate": "2022-05-18"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description stamped on the credit memo that's created after the negative invoice line conversion.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
effectiveDate	String	Date stamped on the credit memo that's created after the negative invoice line conversion.	Required	62.0
invoiceLines	String[]	Complete list of the negative invoice lines along with the associated invoice line taxes. The specified negative invoice lines are converted into a posted credit memo.	Optional	62.0

Credit Invoice Input

Input representation of the details of the request to create a credit memo.

JSON Example

This example shows a sample request with the `Calculate` tax strategy.

```
{
  "type": "POSTED",
  "taxStrategy": "Calculate",
  "taxEffectiveDate": "2024-07-20",
  "effectiveDate": "2024-07-20",
  "description": "Credit Invoice",
  "invoiceLines": [
    {
      "invoiceLineId": "5TVR00000004SiqOBE",
      "amountToCredit": 5
    }
  ]
}
```

This example shows a sample request with the `CopyFromInvoiceLine` tax strategy.

```
{
  "type": "POSTED",
  "taxStrategy": "CopyFromInvoiceLine",
  "effectiveDate": "2020-05-22",
  "description": "Credit Invoice",
  "invoiceLines": [
    {
      "invoiceLineId": "5TVR00000004SiqOBE",
      "amountToCredit": "5",
      "taxStrategy": "CopyFromInvoiceLine"
    }
  ]
}
```

This example shows a sample request with the `ManualOverride` and `CopyFromInvoiceLine` tax strategies.

```
{
  "type": "POSTED",
```

```
"taxStrategy": "ManualOverride",
"taxEffectiveDate": "2021-08-01",
"effectiveDate": "2021-08-01",
"description": "Credit issued because product was malfunctioning.",
"invoiceLines": [
  {
    "invoiceLineId": "5TVR00000004SiqOBE",
    "amountToCredit": 100,
    "taxStrategy": "ManualOverride",
    "taxEffectiveDate": "2021-08-01T21:22:41.000Z",
    "taxes": [
      {
        "taxAmount": 15,
        "taxName": "abc",
        "taxCode": "taxCode",
        "taxRate": 7
      }
    ],
    "addresses": {
      "billingAddress": {
        "street": "1 Market St #300",
        "city": "San Francisco",
        "state": "CA",
        "country": "US",
        "postalCode": "94105",
        "latitude": "37.789901",
        "longitude": "-122.396923"
      },
      "shippingAddress": {
        "street": "415 Mission St",
        "city": "San Francisco",
        "state": "CA",
        "country": "US",
        "postalCode": "94105",
        "latitude": "37.789901",
        "longitude": "-122.396923"
      }
    }
  },
  {
    "invoiceLineId": "5TVR00000004SiqOAE",
    "amountToCredit": 200,
    "taxStrategy": "CopyFromInvoiceLine"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description for the credit memo to be created.	Optional	62.0
effectiveDate	String	Date when the credit memo takes effect.	Optional	62.0
invoiceLines	Credit Invoice Line Input[]	List of the invoice lines to be credited. The invoice line IDs must be related to the invoice ID specified in the API request. If invoice lines aren't specified, the API request results in an error.	Required	62.0
taxEffectiveDate	String	Date when the tax takes effect to recalculate the taxes.	Optional	62.0
taxStrategy	String		Required	62.0
type	String		Optional	62.0

Supported values:

- **Ignore**—Specifies that the creation of tax lines must be ignored.
- **ManualOverride**—Specifies that the provided tax values must be considered for taxes.
- **CopyFromInvoiceLine**—Specifies that tax values must be copied from the invoice line.
- **Calculate**—Specifies that tax must be calculated by using the API.

Credit Invoice Line Input

Input representation of the details of the invoice lines to be credited.

JSON Example

```
"invoiceLines": [
  {
    "invoiceLineId": "5TVR00000004SiqOBE",
    "amountToCredit": 100,
    "taxStrategy": "ManualOverride",
    "taxEffectiveDate": "2021-08-01T21:22:41.000Z",
    "taxes": [
      {
        "taxAmount": 15,
        "taxName": "abc",
        "taxCode": "taxCode",
        "taxRate": 7
      }
    ]
  },
  {
    "addresses": {
      "billingAddress": {
```

```

        "street": "1 Market St #300",
        "city": "San Francisco",
        "state": "CA",
        "country": "US",
        "postalCode": "94105",
        "latitude": "37.789901",
        "longitude": "-122.396923"
    },
    "shippingAddress": {
        "street": "415 Mission St",
        "city": "San Francisco",
        "state": "CA",
        "country": "US",
        "postalCode": "94105",
        "latitude": "37.789901",
        "longitude": "-122.396923"
    }
},
{
    "invoiceLineId": "5TVR00000004SiqOAE",
    "amountToCredit": 200,
    "taxStrategy": "CopyFromInvoiceLine"
}
]

```

Properties

Name	Type	Description	Required or Optional	Available Version
addresses	Credit Memo Addresses Input[]	Addresses to be created manually for this invoice line and the overridden tax lines. These addresses are only applicable if this invoice line is using the <code>ManualOverride</code> tax strategy.	Optional	62.0
amountToCredit	Double	Amount to be credited from this invoice line.	Required	62.0
invoiceLineId	String	ID of the invoice line record to be credited. The invoice line ID must be related to the invoice ID specified in the API request.	Required	62.0
isTaxOnlyCredit	Boolean	Indicates whether the applicable tax amount is credited for the charge or adjustment amount (<code>true</code>), or the applicable tax amount is credited along with the charge or adjustment amount (<code>false</code>). The default value is <code>false</code> .	Optional	62.0
taxEffectiveDate	String	Date when the tax takes effect and the invoice line is credited.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
taxStrategy	String	Tax strategy for crediting the invoice line. This tax strategy takes precedence over the taxStrategy property value specified in the Credit Invoice Input .	Optional	62.0
taxes	Credit Invoice Line Tax Input[]	List of tax lines to be created manually for this invoice line.	Required if the taxStrategy property value is ManualOverride.	62.0

Valid values are:

- Ignore—Specifies that the creation of tax lines must be ignored.
- ManualOverride—Specifies that the provided tax values must be considered for taxes.
- CopyFromInvoiceLine—Specifies that tax values must be copied from the invoice line.
- Calculate—Specifies that tax must be calculated by using the API.

Credit Invoice Line Tax Input

Input representation of the details of the tax lines to be created manually for the invoice line.

JSON Example

```

    "taxes": [
      {
        "taxAmount": 15,
        "taxName": "abc",
        "taxCode": "taxCode",
        "taxRate": 7
      }
    ]

```

Properties

Name	Type	Description	Required or Optional	Available Version
taxAmount	Double	Amount of tax to be applied related to this invoice line.	Required	62.0
taxCode	String	Tax code to be applied related to this invoice line to create the tax line.	Optional	62.0
taxName	String	Name of tax to be applied related to this invoice line.	Optional	62.0
taxRate	Double	Tax rate used to create the tax line.	Optional	62.0

Credit Memo Addresses Input

Input representation of the details of the billing and shipping addresses.

JSON Example

```
{
  "billingAddress": {
    "street": "1 Market St #300",
    "city": "San Francisco",
    "state": "CA",
    "country": "US",
    "postalCode": "94105",
    "latitude": "37.789901",
    "longitude": "-122.396923"
  },
  "shippingAddress": {
    "street": "415 Mission St",
    "city": "San Francisco",
    "state": "CA",
    "country": "US",
    "postalCode": "94105",
    "latitude": "37.789901",
    "longitude": "-122.396923"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billing Address	Address Input[]	Billing address for charge or adjustment line.	Optional	62.0
shipping Address	Address Input[]	Shipping address for charge or adjustment line.	Optional	62.0

Credit Memo Apply Input

Input representation of the request to apply a credit memo to an invoice.

JSON Example

```
{
  "applications": [
    {
      "appliedToId": "3ttxx000000003FAQ",
      "amount": 10,
      "description": "Apply to invoice for refund",
      "effectiveDate": "2024-07-01"
    }
  ]
}
```

```
    },
    {
      "appliedToId": "3ttxx0000000001AAA",
      "amount": 100
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
applications	Credit Memo Apply Application Input[]	List of one or more applications to apply the credit memo for. Each application represents an invoice that's credited by using the balance of the specified credit memo.	Required	62.0

Credit Memo Apply Application Input

Input representation of the request to specify one or more applications to apply a credit memo for, with each application representing an invoice.

JSON Example

```
"applications": [
  {
    "appliedToId": "3ttxx0000000003FAAQ",
    "amount": 10,
    "description": "Apply to invoice for refund",
    "effectiveDate": "2024-07-01"
  },
  {
    "appliedToId": "3ttxx0000000001AAA",
    "amount": 100
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
amount	Double	Credit amount to be applied to the invoice.	Required	62.0
appliedToId	String	ID of the invoice record to apply the credit for.	Required	62.0
description	String	Explanation or reason for applying the credit memo.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
effectiveDate	String	Effective date for the credit memo.	Optional	62.0

Credit Memo Draft to Posted Input

Input representation of the request to post a draft credit memo.

JSON Example

```
{
  "creditMemoIds": ["50gDU00000001MnYAI"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to use to track messages that are related to the request and logged in Splunk by the different services involved in the request. If not specified, the service creates a random Universally Unique Identifier (UUID).	Optional	65.0
creditMemoIds	String[]	ID of the credit memo record in Draft status to be posted. You can post one draft credit memo per API request.	Required	65.0

Credit Memo Unapply Input

Input representation of the request to unapply a credit memo from an invoice.

JSON Example

```
{
  "description": "Unapply credit memo from invoice to revert an error",
  "effectiveDate": "2024-07-01"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Explanation or reason for unapplying the credit memo.	Optional	62.0
effectiveDate	String	Effective date for the credit memo.	Optional	62.0

Credit Memo Line Apply Input

Input representation of the details of the request to apply a credit memo line to an invoice line.

JSON Example

```
{
  "applyCreditDetails": [
    {
      "invoiceLineId": "5TVSG0000002ZJR4A2",
      "appliedAmount": 5,
      "description": "Apply to invoice line 1",
      "effectiveDate": "2024-07-01"
    },
    {
      "invoiceLineId": "5TVSG0000002ZJS4A2",
      "appliedAmount": 10,
      "description": "Apply to invoice line 2",
      "effectiveDate": "2024-07-01"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
applyCreditDetails	Credit Memo Line Application Input[]	List of one or more applications to apply the credit memo line for. Each application represents an invoice line that's credited by using the balance of the specified credit memo line.	Required	62.0

Credit Memo Line Application Input

Input representation of the request to specify one or more applications to apply a credit memo line for, with each application representing an invoice line.

JSON Example

```
"applyCreditDetails": [
{
"invoiceLineId": "5TVSG0000002ZJR4A2",
"appliedAmount": 5,
"description": "Apply to invoice line 1",
"effectiveDate": "2024-07-01"
},
{
"invoiceLineId": "5TVSG0000002ZJS4A2",
"appliedAmount": 10,
"description": "Apply to invoice line 2",
"effectiveDate": "2024-07-01"
}
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
appliedAmount	Double	Credit amount to be applied to the invoice line.	Required	62.0
description	String	Explanation or reason for applying the credit memo line.	Optional	62.0
effectiveDate	String	Effective date for the credit memo line.	Optional	62.0
invoiceLineId	String	ID of the invoice line record to apply the credit for.	Required	62.0

Credit Memo Line Unapply Input

Input representation of the details of the request to unapply a credit memo line from an invoice line.

JSON Example

```
{
"description": "Unapply a credit memo line from invoice line 1",
"effectiveDate": "2024-07-01"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Explanation or reason for unapplying the credit memo line.	Optional	62.0
effectiveDate	String	Effective date for the credit memo line.	Optional	62.0

Customer Details Input

Input representation of the customer details for tax calculation.

JSON Example

```
{
  "accountId": "001R000000000zSMAQ"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	Salesforce account ID of the customer.	Optional	62.0

Frequency Cadence Options

Input representation of the frequency cadence options for an invoice scheduler.

JSON Example

```
"frequencyCadenceOptions": {
  "recurringSubType" : "Every",
  "recursOn" : "First",
  "recursOnDay" : "Sunday",
  "shouldExcludeWkendAndHldy": true
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
recurringSubType	String	Subtype of the recurring frequency for the invoice run. Valid values are Every —Specifies if the invoice scheduler	Required if the frequency	62.0

Name	Type	Description	Required or Optional	Available Version
		must generate the invoices on a recurring frequency on a specific cadence. Use this value to generate invoices on a specific day of the month. For example, you can specify that the invoice scheduler must generate the invoices every first Monday of the month; or <code>SpecificDate</code> —Specifies if the invoice scheduler must generate the invoices on a recurring frequency on a specific date. Use this value to generate invoices on a monthly basis on a specific date.	Cadence property is set to <code>Monthly</code> .	
<code>recursOn</code>	String	Cadence that specifies when the invoice scheduler must generate the invoices on a recurring frequency. For example, you can specify that the invoice scheduler must generate the invoices every first Monday of the month. Valid values are <code>First</code> , <code>Second</code> , <code>Third</code> , <code>Fourth</code> , or <code>Last</code> .	Required if the <code>frequency</code> Cadence property is set to <code>Monthly</code> .	62.0
<code>recursOnDate</code>	String	Date when the invoice scheduler must generate the invoices on a specific date. The supported values are 1 through 28—Specify any date from 1 through 28, <code>L</code> —Specifies that the invoice scheduler must generate the invoices on the last day of the month, <code>L-1</code> —Specifies that the invoice scheduler must generate the invoices on the second to last day of the month, or <code>L-2</code> —Specifies that the invoice scheduler must generate the invoices on the third to last day of the month.	Required if the <code>recurringSubType</code> property is set to <code>SpecificDate</code> .	62.0
<code>recursOnDay</code>	String	Day of the week when the invoice scheduler must generate the invoices on a recurring frequency. For example, you can specify that the invoice scheduler must generate the invoices every Monday or every first Monday of a month. Valid values are <code>Sunday</code> , <code>Monday</code> , <code>Tuesday</code> , <code>Wednesday</code> , <code>Thursday</code> , <code>Friday</code> , or <code>Saturday</code> .	Required if the <code>frequency</code> Cadence property is set to <code>Weekly</code> or <code>Monthly</code> .	62.0
<code>shouldExcludeWkendAndHldy</code>	Boolean	Indicates whether to exclude weekends and holidays from the billing schedule (<code>true</code>) or not (<code>false</code>).	Required if the <code>frequency</code> Cadence property is set to <code>Monthly</code> .	62.0

Graph Record for Invoice Ingestion

A Graph record is an object that's a part of the graph structure, representing both the fields and relationships among different objects. Each record in the graph can contain attributes, which are fields of the object, and references to other related records.

Invoice ingestion supports a Graph record count of 500. The supported Graph attribute types for invoice ingestion are Account, Contact, Invoice, InvoiceLine, InvoiceLineTax, and InvoiceAddressGroup.

A Graph record has these properties and associated fields.

Field	Description
referenceId	Unique identifier of the record that's used to reference the record in the graph.
record	Object containing the actual data for the record.
record.attributes.type	Standard object of the referenced record. In this scenario, this field indicates an InvoiceAddressGroup attribute type.
record.attributes.method	Method that defines the operation on the record. For example, POST to create a record, PUT to update a record, or GET to get record data.

JSON Example

```
{
  "referenceId": "refBillingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    //Contains the actual data
  }
}
```

Account Record

Keep these considerations in mind when you specify an Account record as the Graph attribute type.

- The supported Graph attribute method is GET only.
- The supported record count that you can specify for each account is one only.
- The id field on attributes is the value of the externalId field API Name in [Account](#). Use this field to resolve the Salesforce Account ID from the custom external ID field. See [Use an 'External ID' to set the values for audit fields](#).

JSON Example

```
{
  "referenceId": "refAccount",
  "record": {
    "attributes": {
      "type": "Account",
      "method": "GET",
      "id": "AccountId__c/7661eaaf-f527-4dcf-beb3-301f3eddc9e"
    }
  }
}
```

```
}
}
```

Contact Record

Keep these considerations in mind when you specify a Contact record as the Graph attribute type.

- The supported Graph attribute method is GET only.
- The supported record count that you can specify for Contact is one only.
- The id field on attributes is the value of the externalId field API Name in [Contact](#). Use this field to resolve the Salesforce Contact ID from the custom external ID field. See [Use an 'External ID' to set the values for audit fields](#).

JSON Example

```
{
  "referenceId": "refContact",
  "record": {
    "attributes": {
      "type": "Contact",
      "method": "GET",
      "id": "ContactId__c/7661eaaf-f527-4dcf-beb3-301f3eddc9e"
    }
  }
}
```

Invoice Record

Keep these considerations in mind when you specify an Invoice record as the Graph attribute type.

- The supported Graph attribute method is POST only.
- The supported record count that you can specify for Invoice is one only.
- An invoice with `Draft` status can't have a posted date.
- You can't use an invoice with `Draft` status when the `taxCalculationStatus` property value is `Posted`. The `taxCalculationStatus` property must be `Estimated` or `Pending`.
- You can't use an invoice with `Posted` status when the `shouldCalculateTax` property is `true`.
- An invoice with `Posted` status can't include the `Estimated` or `Pending` as the `taxCalculationStatus` property values. The tax processing status must be `Posted`.
- An invoice with `Posted` status with an invoice line marked as `taxable` must include an `invoiceLineTax` for that invoice line.
- An invoice with `Posted` status with an invoice line marked as `nontaxable` must not include an `invoiceLineTax` for that invoice line.
- The `invoice.CreationMode` field value is `External`. This field differentiates the invoices created from a billing schedule or an invoice ingestion. For invoices created from a billing schedule, the value is `Salesforce`. For invoices created from an invoice ingestion, the value is `External`.
- The due date of an invoice graph is in the future or with a valid payment term, or your Salesforce org has a default payment term set.

JSON Example

```
{
  "referenceId": "refInvoice",
```

```

"record": {
  "attributes": {
    "type": "Invoice",
    "method": "POST"
  },
  "invoiceDate": "2024-01-01",
  "billingAccountId": "001xx000003Dzo9AAC",
  "billToContactId": "003xx000004TzFoAAI",
  "paymentTermId": "20Xxx0000004CFUGA2",
  "referenceEntityId": "801xx000003GeQQAA0",
  "status": "Draft",
  "currencyIsoCode": "USD",
  "dueDate": "2024-02-01",
  "postedDate": "2024-01-02",
  "invoiceNumber": "INV-12345",
  "uniqueIdentifier": "1a9380c1-8042-422d-bcc5-70c3f51c2588",
  "description": "Consulting Services",
  "shouldExcludePayment": true,
  "paymentExclusionReason": "Not applicable."
}
}

```

Table 16: Properties

NAME	Standard Object Field	Description	Required or Optional
invoiceDate	Invoice.invoiceDate	Date when the invoice was created or issued.	Required
billingAccountId	Invoice.billingAccountId	Billing account associated with this invoice, which you can resolve with the <code>externalId</code> field by using the GET method.	Required
billToContactId	Invoice.billToContactId	Contact to whom the invoice is billed, which you can resolve with the <code>externalId</code> field by using the GET method.	Required
paymentTermId	Invoice.paymentTermId	Payment term associated with the invoice. If a value isn't specified, then the default payment term ID is used.	Optional
referenceEntityId	Invoice.referenceEntityId	Reference to a related object, if applicable. To generate invoices from debit memos, specify the debit memo ID as the property value. Make sure that the debit memo is in <code>Posted</code> status. Available in API version 66.0 and later. The invoice is generated in <code>Draft</code> status.	Optional
status	Invoice.status	Status of the invoice. Valid values are <code>Draft</code> or <code>Posted</code> . The default value is <code>Draft</code> .	Optional
currencyIsoCode	Invoice.currencyIsoCode	ISO code representing the currency of the invoice. This property must be specified if multi-currency is enabled in the organization.	Optional

NAME	Standard Object Field	Description	Required or Optional
dueDate	Invoice.dueDate	Due date for the invoice payment. If a value isn't specified, then this value is set based on the payment term.	Optional
postedDate	Invoice.postedDate	Date the invoice was posted to the system. Until API version 64.0, the default value is the current date irrespective of the value that's specified in the input payload. In API version 65.0 and later, the posted date specified in the input payload is considered.	Required in API version 65.0 and later.
invoiceNumber	Invoice.invoiceNumber	Unique identifier for the invoice.	Optional
uniqueIdentifier	Invoice.uniqueIdentifier	Unique identifier for the invoice. This property is used as the idempotency key to avoid duplicate invoice generation.	Optional
description	Invoice.description	Short description of the invoice or the billed items.	Optional
shouldExcludePayment	InvoiceshouldExcludePayment	Indicates whether to exclude the payment during invoice generation and skip creating payment schedules and payment schedule items for the invoice (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 68.0 and later.	Optional
paymentExclusionReason	InvoicepaymentExclusionReason	Reason for excluding the payment for the invoice. Available in API version 68.0 and later.	Optional

Invoice Line Record

Keep these considerations in mind when you specify an Invoice Line record as the Graph attribute type.

- The supported Graph attribute method is POST only.
- The Graph must include at least one Graph record with the InvoiceLine attribute type.
- The invoice line end date must be greater than or equal to the invoice line start date.

JSON Example

```
{
  "referenceId": "refInvoiceLine",
  "record": {
    "attributes": {
      "type": "InvoiceLine",
      "method": "POST"
    },
    "name": "Parle G",
    "invoiceLineStartDate": "2024-01-01",
    "invoiceLineEndDate": "2024-01-31",
    "quantity": 10,
    "unitPrice": 25,
    "chargeAmount": 250,
    "invoiceId": "@{refInvoice.id}",
    "shippingAddressId": "@{refShippingAddress.id}",
  }
}
```

```

    "billingAddressId": "@{refBillingAddress.id}",
    "referenceEntityItemId": "802xx000001neB9AAI",
    "taxTreatmentId": "1ttxx0000000BOTAA2",
    "legalEntityId": "0fwxx0000000001AAA",
    "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE",
    "product2Id": "01ttxx0000006ic4AAA",
    "usageProductId": "01ttxx0000006ic5AAA",
    "isUsageBasedInvoiceLine": false,
    "usageOverageQuantity": 5,
    "unitOfMeasureId": "0hExx0000000001EAA",
    "description": "Sample product description"
  }
}

```

Table 17: Properties

NAME	Standard Object Field	Description	Required or Optional
name	InvoiceLine.name	Name or description of the invoice line item.	Required
invoiceLineStartDate	InvoiceLine.invoiceLineStartDate	Start date for the invoice line period. For example, the date when the product or service is provided.	Required
invoiceLineEndDate	InvoiceLine.invoiceLineEndDate	End date for the invoice line period. For example, the date when the product or service ends.	Required
quantity	InvoiceLine.quantity	Quantity of the product or billed service in this invoice line.	Required
unitPrice	InvoiceLine.unitPrice	Price per unit of the product or billed service.	Required
chargeAmount	InvoiceLine.chargeAmount	Total charge amount for this invoice line, which is calculated as quantity * unit price.	Required
invoiceId	InvoiceLine.invoiceId	Reference to the invoice that this invoice line is associated with.	Required
shippingAddressId	InvoiceLine.shippingAddressId	Shipping address associated with this invoice line.	Required
billingAddressId	InvoiceLine.billingAddressId	Billing address associated with this invoice line.	Required
referenceEntityItemId	InvoiceLine.referenceEntityItemId	Reference to a related object record for this invoice line.	Optional
taxTreatmentId	InvoiceLine.taxTreatmentId	Tax treatment applied to this invoice line such as taxable or nontaxable. If the <code>TaxTreatmentId</code> property isn't specified in the request, it's retrieved from the organization's default values . If the organization's defaults aren't set, an error is thrown.	Optional
legalEntityId	InvoiceLine.legalEntityId	Legal entity that this invoice line belongs to. If the <code>LegalEntityId</code> property isn't specified in the request, it's retrieved from the organization's default values . If the organization's defaults aren't set, an error is thrown.	Optional

NAME	Standard Object Field	Description	Required or Optional
legalEntityAccountingPeriodId	InvoiceLine.legalEntityAccountingPeriodId	Accounting period for the legal entity that this invoice line belongs to.	Optional
product2Id	InvoiceLine.product2Id	Identifier for the product that's billed in this invoice line.	Optional
usageProductId	InvoiceLine.usageProductId	Identifier for the usage-based product if this invoice line is for usage-based billing.	Optional
isUsageBasedInvoiceLine	InvoiceLine.isUsageBasedInvoiceLine	Boolean value that indicates whether this invoice line is for a usage-based product (<code>true</code>) or not (<code>false</code>).	Optional
usageOverageQuantity	InvoiceLine.usageOverageQuantity	Quantity of usage overage for this invoice line, if applicable.	Optional
unitOfMeasureId	InvoiceLine.unitOfMeasureId	Identifier for the unit of measure for the product or service, such as each, kg, or lb.	Optional
description	InvoiceLine.description	Description of the invoice line item with additional details.	Optional

Tax Record

Keep these considerations in mind when you specify a Tax record as the Graph attribute type.

- The supported Graph attribute method is POST only.
- The associated standard object is InvoiceLineTax.
- The invoiceLineTax graph record must not include the `taxCalculationStatus` property value as Pending.

JSON Example

```
{
  "referenceId": "refInvoiceLineTax",
  "record": {
    "attributes": {
      "type": "InvoiceLineTax",
      "method": "POST"
    },
    "taxTransactionNumber": "TX123456789",
    "taxAmount": 15.00,
    "taxRate": 0.08,
    "taxName": "Sales Tax",
    "taxCode": "TX-SALES",
    "taxEffectiveDate": "2024-01-01",
    "invoiceLine": "@{refInvoiceLine.id}",
    "taxDocumentNumber": "TAXDOC987654",
    "taxExemptAmount": 0.00,
    "description": "Exempt from VAT"
  }
}
```

Table 18: Properties

NAME	Standard Object Field	Description	Required or Optional
taxTransactionNumber	InvoiceLineTax.transactionNumber	Unique identifier of the tax transaction related to this invoice line tax.	Required
taxAmount	InvoiceLineTax.taxAmount	Total tax amount applied to the invoice line.	Required
taxRate	InvoiceLineTax.taxRate	Rate at which the tax is applied on the invoice line.	Required
taxName	InvoiceLineTax.taxName	Name of the tax applied on the invoice line, such as Sales Tax or Value Added Tax (VAT).	Required
taxCode	InvoiceLineTax.taxCode	Tax code that corresponds to the applied tax rate.	Required
taxEffectiveDate	InvoiceLineTax.taxEffectiveDate	Effective date from which the tax rate applies.	Required
invoiceLine	InvoiceLineTax.invoiceLine	Reference to the invoice line this tax record is associated with.	Required
taxDocumentNumber	InvoiceLineTax.documentNumber	Document number associated with the tax transaction, such as tax return document or government filing number.	Required
taxExemptAmount	InvoiceLine.billingAddressId	Billing address associated with this invoice line.	Required
description	InvoiceLineTax.description	Additional details about the tax.	Optional

Shipping Address Record

Keep these considerations in mind when you specify a Shipping Address record as the Graph attribute type.

- The supported Graph attribute method is POST only.
- The associated standard object is InvoiceAddressGroup.

JSON Example

```
{
  "referenceId": "refShippingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "456 Elm St",
    "city": "Springfield",
    "postalCode": "62701",
    "state": "IL",
    "country": "USA",
    "longitude": "-89.6501",
    "latitude": "39.7817",
    "invoiceId": "@{refInvoice.id}"
  }
}
```

Table 19: Properties

NAME	Standard Object Field	Description	Required or Optional
invoiceId	InvoiceAddressGroup.invoice	Unique identifier of the invoice associated with this shipping address.	Required
street	InvoiceAddressGroup.street	Street address where the goods or services are shipped to.	Required
city	InvoiceAddressGroup.city	City where the shipment is delivered.	Required
postalCode	InvoiceAddressGroup.postalCode	Postal or ZIP code for the shipping address.	Required
state	InvoiceAddressGroup.state	State or province of the delivery location.	Required
country	InvoiceAddressGroup.country	Country where the shipment is delivered.	Required
longitude	InvoiceAddressGroup.longitude	Geographic longitude of the shipping address location for mapping purposes.	Optional
latitude	InvoiceAddressGroup.latitude	Geographic latitude of the shipping address location for mapping purposes.	Optional

Billing Address Record

Keep these considerations in mind when you specify a Billing Address record as the Graph attribute type.

- The supported Graph attribute method is POST only.
- The associated standard object is InvoiceAddressGroup.

JSON Example

```
{
  "referenceId": "refBillingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "789 Oak St",
    "city": "Los Angeles",
    "postalCode": "90001",
    "state": "CA",
    "country": "USA",
    "longitude": "-118.2437",
    "latitude": "34.0522",
    "invoiceId": "@{refInvoice.id}"
  }
}
```

Table 20: Properties

NAME	Standard Object Field	Description	Required or Optional
invoiceId	InvoiceAddressGroup.invoice	Unique identifier of the invoice associated with this billing address.	Required

NAME	Standard Object Field	Description	Required or Optional
street	InvoiceAddressGroup.street	Street address for billing purposes.	Required
city	InvoiceAddressGroup.city	City for billing address.	Required
postalCode	InvoiceAddressGroup.postalCode	Postal or ZIP code for the billing address.	Required
state	InvoiceAddressGroup.state	State or province for the billing address.	Required
country	InvoiceAddressGroup.country	Country for the billing address.	Required
longitude	InvoiceAddressGroup.longitude	Geographic longitude of the billing address location for mapping purposes.	Optional
latitude	InvoiceAddressGroup.latitude	Geographic latitude of the billing address location for mapping purposes.	Optional

Invoice Draft To Posted Input

Input representation of the details of the draft invoice that's posted.

JSON Example

```
{
  "invoiceIds": ["3ttxx0000004CIjAAM"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).	Optional	62.0
invoiceIds	String[]	IDs of the invoice records in Draft status to be posted. You can post one draft invoice per API request.	Required	62.0

Invoice Estimated Tax Calculation Input

Details of the invoice for which the estimated tadsfsefx must be calculated.

JSON Example

```
{
  "invoiceIds": ["3ttxx0000004CIjAAM"]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).	Optional	63.0
invoiceIds	String[]	IDs of the invoices for which the estimated tax must be calculated. You can specify one invoice per API request.	Required	63.0

Invoice Ingestion Input

Input representation of the details of the invoice to be processed. The details include the tax processing status, user preferences for tax callouts, and associated object graph representation.

Properties

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).	Optional	63.0
graph	Object Graph Input	Graph that represents the invoice structure for invoice ingestion or generation. The supported Graph attribute types for invoice ingestion are Account, Contact, Invoice, InvoiceLine, InvoiceLineTax, and InvoiceAddressGroup. See Graph Record for Invoice Ingestion .	Required	63.0
should CalculateTax	Boolean	Indicates whether the estimated tax must be calculated for the ingested invoice	Optional	63.0

Name	Type	Description	Required or Optional	Available Version
		(true) or not (false). The default value is false.		
taxCalculation Status	String	Status of the tax calculation, which is saved on the invoice line. Valid values are Estimated, Pending, or Posted. The default value is Pending.	Optional	63.0

Invoice Input for Ingestion

Input representation of the details of the invoice that must be generated for or ingested into Billing.

JSON Example to Ingest a Draft Invoice With a Tax Callout

```
{
  "invoices": [
    {
      "shouldCalculateTax": true,
      "taxCalculationStatus": "Estimated",
      "graph": {
        "graphId": "CreateInvoice",
        "records": [
          {
            "referenceId": "refAccount",
            "record": {
              "attributes": {
                "type": "Account",
                "method": "GET",
                "id": "ExternalId__c/123"
              }
            }
          },
          {
            "referenceId": "refContact",
            "record": {
              "attributes": {
                "type": "Contact",
                "method": "GET",
                "id": "ExternalId__c/123"
              }
            }
          },
          {
            "referenceId": "refInvoice",
            "record": {
              "attributes": {
                "type": "Invoice",
                "method": "POST"
              }
            }
          }
        ]
      }
    }
  ]
}
```



```

        "billingAccountId": "@{refAccount.Id}",
        "billToContactId": "@{refContact.Id}",
        "paymentTermId": "20Xxx0000004CFUGA2",
        "referenceEntityId": "801xx000003GeQQAA0",
        "status": "Draft",
        "invoiceDate": "2024-12-19",
        "currencyIsoCode": "USD",
        "dueDate": "2024-12-19",
        "invoiceNumber": "DOC-10",
        "description": "Sample Invoice",
        "uniqueIdentifier": "5873af8f-f007-4aa0-9e3d-53a08c3f59de"
    },
    {
        "referenceId": "refBillingAddress",
        "record": {
            "attributes": {
                "type": "InvoiceAddressGroup",
                "method": "POST"
            },
            "street": "123 Main St",
            "city": "NewYork",
            "postalCode": "10001",
            "state": "New York",
            "country": "US",
            "longitude": "123.456",
            "latitude": "78.910",
            "invoiceId": "@{refInvoice.id}"
        }
    },
    {
        "referenceId": "refShippingAddress",
        "record": {
            "attributes": {
                "type": "InvoiceAddressGroup",
                "method": "POST"
            },
            "street": "123 Main St",
            "city": "NewYork",
            "postalCode": "10001",
            "state": "New York",
            "country": "US",
            "longitude": "123.456",
            "latitude": "78.910",
            "invoiceId": "@{refInvoice.id}"
        }
    },
    {
        "referenceId": "refShipFromAddress",
        "record": {
            "attributes": {
                "type": "InvoiceAddressGroup",
                "method": "POST"
            },

```

```

        "street": "1 Market Street",
        "city": "San Francisco",
        "postalCode": "94105",
        "state": "CA",
        "country": "US",
        "longitude": "123.456",
        "latitude": "78.910",
        "invoiceId": "@{refInvoice.id}"
    }
},
{
    "referenceId": "refInvoiceLine1",
    "record": {
        "attributes": {
            "type": "InvoiceLine",
            "method": "POST"
        },
        "name": "productName1",
        "product2Id": "01txx0000006ic4AAA",
        "invoiceLineStartDate": "2024-11-10",
        "invoiceLineEndDate": "2024-11-13",
        "quantity": "10",
        "unitPrice": "10",
        "chargeAmount": "100",
        "invoiceId": "@{refInvoice.id}",
        "referenceEntityItemId": "802xx000001neB9AAI",
        "billingAddressId": "@{refBillingAddress.id}",
        "shippingAddressId": "@{refShippingAddress.id}",
        "shipFromAddressId": "@{refShipFromAddress.id}",
        "taxTreatmentId": "1ttxx0000000BOTAA2",
        "legalEntityId": "0fwxx0000000001AAA",
        "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
    }
},
{
    "referenceId": "refInvoiceLine2",
    "record": {
        "attributes": {
            "type": "InvoiceLine",
            "method": "POST"
        },
        "name": "productName2",
        "product2Id": "01txx0000006ic4AAA",
        "invoiceLineStartDate": "2024-11-10",
        "invoiceLineEndDate": "2024-11-15",
        "quantity": "10",
        "unitPrice": "10",
        "chargeAmount": "100",
        "invoiceId": "@{refInvoice.id}",
        "referenceEntityItemId": "802xx000001neB9AAI",
        "billingAddressId": "@{refBillingAddress.id}",
        "shippingAddressId": "@{refShippingAddress.id}",
        "shipFromAddressId": "@{refShipFromAddress.id}",
        "taxTreatmentId": "1ttxx00000001DpAAI",
    }
}

```

```

        "legalEntityId": "0fwxx0000000001AAA",
        "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
    },
    {
        "referenceId": "refInvoiceLineTax",
        "record": {
            "attributes": {
                "type": "InvoiceLineTax",
                "method": "POST"
            },
            "taxAmount": 7.25,
            "taxCode": "CA-94121",
            "taxName": "CALIFORNIA",
            "taxRate": 0.25,
            "taxEffectiveDate": "2024-11-10",
            "taxDocumentNumber": "123",
            "taxExemptAmount": 0,
            "taxTransactionNumber": "k1",
            "description": "Associated tax line.",
            "invoiceLineId": "@{refInvoiceLine1.id}"
        }
    },
    {
        "referenceId": "refInvoiceLineTax1",
        "record": {
            "attributes": {
                "type": "InvoiceLineTax",
                "method": "POST"
            },
            "taxAmount": "10",
            "taxCode": "CA-94121",
            "taxName": "CALIFORNIA",
            "taxRate": 0.25,
            "taxEffectiveDate": "2024-11-10",
            "taxDocumentNumber": "123",
            "taxExemptAmount": 0,
            "taxTransactionNumber": "125",
            "invoiceLineId": "@{refInvoiceLine2.id}",
            "description": "Associated tax line."
        }
    }
]
}
}
}
}
}

```

JSON Example to Ingest a Draft Invoice Without a Tax Callout

```

{
  "invoices": [
    {

```

```

"taxCalculationStatus": "Estimated",
"graph": {
  "graphId": "123",
  "records": [
    {
      "referenceId": "refAccount",
      "record": {
        "attributes": {
          "type": "Account",
          "method": "GET",
          "id": "TestExternalId__c/123"
        }
      }
    },
    {
      "referenceId": "refInvoice",
      "record": {
        "attributes": {
          "type": "Invoice",
          "method": "POST"
        },
        "billingAccountId": "@{refAccount.Id}",
        "billToContactId": "003xx000004Wk8qAAC",
        "paymentTermId": "20Xxx0000004CFUGA2",
        "referenceEntityId": "801xx000003GeQQAA0",
        "status": "Draft",
        "invoiceDate": "2024-12-19",
        "currencyIsoCode": "USD",
        "dueDate": "2024-12-19",
        "invoiceNumber": "DOC-10",
        "description": "testInvoice",
        "uniqueIdentifier": "c76011a1-e113-49d9-9c54-3b5c68950ada"
      }
    },
    {
      "referenceId": "refBillingAddress",
      "record": {
        "attributes": {
          "type": "InvoiceAddressGroup",
          "method": "POST"
        },
        "street": "123 Main St",
        "city": "NewYork",
        "postalCode": "10001",
        "state": "New York",
        "country": "US",
        "longitude": "123.456",
        "latitude": "78.910",
        "invoiceId": "@{refInvoice.id}"
      }
    },
    {
      "referenceId": "refShippingAddress",
      "record": {

```

```

    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "123 Main St",
    "city": "NewYork",
    "postalCode": "10001",
    "state": "New York",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refShipFromAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "1 Market Street",
    "city": "San Francisco",
    "postalCode": "94105",
    "state": "CA",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refInvoiceLine1",
  "record": {
    "attributes": {
      "type": "InvoiceLine",
      "method": "POST"
    },
    "name": "productName1",
    "product2Id": "01ttxx0000006ic4AAA",
    "invoiceLineStartDate": "2024-11-10",
    "invoiceLineEndDate": "2024-11-13",
    "quantity": "10",
    "unitPrice": "10",
    "chargeAmount": "100",
    "invoiceId": "@{refInvoice.id}",
    "referenceEntityItemId": "802xx000001neB9AAI",
    "billingAddressId": "@{refBillingAddress.id}",
    "shippingAddressId": "@{refShippingAddress.id}",
    "shipFromAddressId": "@{refShipFromAddress.id}",
    "taxTreatmentId": "1ttxx0000000BOTAA2",
    "legalEntityId": "0fwxx0000000001AAA",
    "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
  }
}

```

```

},
{
  "referenceId": "refInvoiceLine2",
  "record": {
    "attributes": {
      "type": "InvoiceLine",
      "method": "POST"
    },
    "name": "productName2",
    "product2Id": "01txx0000006ic4AAA",
    "invoiceLineStartDate": "2024-11-10",
    "invoiceLineEndDate": "2024-11-15",
    "quantity": "10",
    "unitPrice": "10",
    "chargeAmount": "100",
    "invoiceId": "@{refInvoice.id}",
    "referenceEntityItemId": "802xx000001neB9AAI",
    "billingAddressId": "@{refBillingAddress.id}",
    "shippingAddressId": "@{refShippingAddress.id}",
    "shipFromAddressId": "@{refShipFromAddress.id}",
    "taxTreatmentId": "1ttxx00000001DpAAI",
    "legalEntityId": "0fwxx0000000001AAA",
    "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
  }
},
{
  "referenceId": "refInvoiceLineTax",
  "record": {
    "attributes": {
      "type": "InvoiceLineTax",
      "method": "POST"
    },
    "taxAmount": 7.25,
    "taxCode": "CA-94121",
    "taxName": "CALIFORNIA",
    "taxRate": 0.25,
    "taxEffectiveDate": "2024-11-10",
    "taxDocumentNumber": "123",
    "taxExemptAmount": 0,
    "taxTransactionNumber": "k1",
    "description": "description for tax Line",
    "invoiceLineId": "@{refInvoiceLine1.id}"
  }
},
{
  "referenceId": "refInvoiceLineTax1",
  "record": {
    "attributes": {
      "type": "InvoiceLineTax",
      "method": "POST"
    },
    "taxAmount": "10",
    "taxCode": "CA-94121",
    "taxName": "CALIFORNIA",

```

```

        "taxRate": 0.25,
        "taxEffectiveDate": "2024-11-10",
        "taxDocumentNumber": "123",
        "taxExemptAmount": 0,
        "taxTransactionNumber": "125",
        "invoiceLineId": "@{refInvoiceLine2.id}",
        "description": "description for tax Line"
      }
    ]
  }
}

```

JSON Example to Ingest Posted Invoices

```

{
  "invoices": [
    {
      "taxCalculationStatus": "Posted",
      "graph": {
        "graphId": "123",
        "records": [
          {
            "referenceId": "refAccount",
            "record": {
              "attributes": {
                "type": "Account",
                "method": "GET",
                "id": "ExternalId__c/123"
              }
            }
          },
          {
            "referenceId": "refInvoice",
            "record": {
              "attributes": {
                "type": "Invoice",
                "method": "POST"
              },
              "billingAccountId": "001SG00000njpF3YAI",
              "billToContactId": "003xx000004Wk8qAAC",
              "paymentTermId": "20Xxx0000004CFUGA2",
              "referenceEntityId": "801xx000003GeQQAA0",
              "status": "Posted",
              "invoiceDate": "2024-12-19",
              "currencyIsoCode": "USD",
              "dueDate": "2024-12-19",
              "invoiceNumber": "DOC-10",
              "description": "Sample Invoice",
              "uniqueIdentifier": "9994b2c4-c0c3-47c3-806f-ae6e1f16bac3"
            }
          }
        ]
      }
    }
  ]
}

```

```

},
{
  "referenceId": "refBillingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "123 Main St",
    "city": "NewYork",
    "postalCode": "10001",
    "state": "New York",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refShippingAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "123 Main St",
    "city": "NewYork",
    "postalCode": "10001",
    "state": "New York",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refShipFromAddress",
  "record": {
    "attributes": {
      "type": "InvoiceAddressGroup",
      "method": "POST"
    },
    "street": "1 Market Street",
    "city": "San Francisco",
    "postalCode": "94105",
    "state": "CA",
    "country": "US",
    "longitude": "123.456",
    "latitude": "78.910",
    "invoiceId": "@{refInvoice.id}"
  }
},
{
  "referenceId": "refInvoiceLine1",

```



```

"record": {
  "attributes": {
    "type": "InvoiceLine",
    "method": "POST"
  },
  "name": "productName1",
  "product2Id": "01txx0000006ic4AAA",
  "invoiceLineStartDate": "2024-11-10",
  "invoiceLineEndDate": "2024-11-13",
  "quantity": "10",
  "unitPrice": "10",
  "chargeAmount": "100",
  "invoiceId": "@{refInvoice.id}",
  "referenceEntityItemId": "802xx000001neB9AAI",
  "billingAddressId": "@{refBillingAddress.id}",
  "shippingAddressId": "@{refShippingAddress.id}",
  "shipFromAddressId": "@{refShipFromAddress.id}",
  "taxTreatmentId": "1ttxx0000000BOTAA2",
  "legalEntityId": "0fwxx0000000001AAA",
  "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
},
{
  "referenceId": "refInvoiceLine2",
  "record": {
    "attributes": {
      "type": "InvoiceLine",
      "method": "POST"
    },
    "name": "productName2",
    "product2Id": "01txx0000006ic4AAA",
    "invoiceLineStartDate": "2024-11-10",
    "invoiceLineEndDate": "2024-11-15",
    "quantity": "10",
    "unitPrice": "10",
    "chargeAmount": "100",
    "invoiceId": "@{refInvoice.id}",
    "referenceEntityItemId": "802xx000001neB9AAI",
    "billingAddressId": "@{refBillingAddress.id}",
    "shippingAddressId": "@{refShippingAddress.id}",
    "shipFromAddressId": "@{refShipFromAddress.id}",
    "taxTreatmentId": "1ttxx00000001DpAAI",
    "legalEntityId": "0fwxx0000000001AAA",
    "legalEntityAccountingPeriodId": "1HLxx0000004C92GAE"
  },
  {
    "referenceId": "refInvoiceLineTax1",
    "record": {
      "attributes": {
        "type": "InvoiceLineTax",
        "method": "POST"
      },
      "taxAmount": "10",

```

```

        "taxCode": "CA-94121",
        "taxName": "CALIFORNIA",
        "taxRate": 0.25,
        "taxEffectiveDate": "2024-11-10",
        "taxDocumentNumber": "123",
        "taxExemptAmount": 0,
        "taxTransactionNumber": "125",
        "invoiceLineId": "@{refInvoiceLine1.id}",
        "description": "Associated tax line."
    }
  }
]
}

```

JSON Example to Generate Invoices From Debit Memos

```

{
  "invoices": [
    {
      "shouldCalculateTax": true,
      "taxCalculationStatus": "Estimated",
      "graph": {
        "graphId": "CreateInvoice",
        "records": [
          {
            "referenceId": "refInvoice",
            "record": {
              "attributes": {
                "type": "Invoice",
                "method": "POST"
              },
              "accountId": "001SB00001V3RxNYAV",
              "billToContactId": "003xx000004WhUQAA0",
              "referenceEntityId": "4DmAAC000008UP70BM",
              "status": "Draft",
              "invoiceDate": "2024-12-19",
              "dueDate": "2024-12-19",
              "description": "Sample Invoice"
            }
          }
        ]
      }
    }
  ]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
invoices	Invoice Ingestion Input[]	List of invoices to be generated or ingested, enabling the submission and processing of multiple invoices in a single request. This API supports one invoice per request. To send 25 requests at a time, see the Composite Batch request .	Required	63.0

Invoice Input

Input representation of the details of the billing schedule.

JSON Example

```
{
  "accountId": "001SG00000mYtRWYA0",
  "action": "Posted",
  "billingScheduleIds": [
    "44bSG000000CVeMYAW"
  ],
  "billingTransactionId": "801SG00000mYtaXYAS",
  "correlationId": null,
  "invoiceDate": "2024-01-12",
  "targetDate": "2024-01-12"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account record to create the invoices for.	Required if the <code>billingScheduleIds</code> or <code>billingTransactionId</code> property isn't specified.	63.0
action	String		Required	62.0
billingScheduleIds	String[]	List of billing schedule IDs that's used to create the invoices. You can specify a maximum of 200 billing schedules.	Required if the <code>accountId</code> or <code>billingTransactionId</code>	62.0

Name	Type	Description	Required or Optional	Available Version
			property isn't specified.	
billing TransactionId	String	ID of the billing transaction record, which is the order ID, to create the invoices for.	Required if the accountId or billing ScheduleIds property isn't specified.	63.0
correlationId	String	Property that's tagged against the published InvoiceProcessedEvent event, if specified.	Optional	62.0
invoiceDate	String	Stamping date of the invoice in ISO 8601 format.	Required	62.0
targetDate	String	Date in ISO 8601 format used to decide the billing periods that are included to create invoices.	Required	62.0

Supported values:

- Draft
- Posted

Invoice Preview Input

Input representation of the details of the billing transaction that the preview invoices are generated for.

JSON Example

```
{
  "billingTransactionId": "801Z600000004LoIAI",
  "numberOfBillingPeriods": 2,
  "previewDate": "2024-12-04"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billing TransactionId	String	ID of the record to generate the preview invoices for.	Required	63.0

Name	Type	Description	Required or Optional	Available Version
numberOfBillingPeriods	Integer	Number of billing periods that the invoice preview is generated for. If unspecified, the default value is 2.	Optional	64.0
previewDate	String	The date on which the preview invoice is generated. For the first invoice, the preview date is the target date for generating the invoice. For the second invoice, the target date is calculated based on the preview date and the minimum billing frequency of the transactions. The default value is the current date.	Optional	63.0

Line Item Input

Input representation of the details of the line item for tax calculation.

JSON Example

```
{
  "lineItems": [
    {
      "quantity": 1,
      "amount": 100,
      "taxCode": "TX0001",
      "productCode": "Y0001",
      "productSKU": "PRES-RX-12896745",
      "description": "New Product",
      "effectiveDate": "2022-03-09T10:30:41.000Z",
      "lineNumber": "5TVxx0000004C92GAE",
      "addresses": {
        "shipFrom": {
          "street": "123 Alaskan Way",
          "city": "Seattle",
          "state": "WA",
          "country": "US",
          "postalCode": "98101",
          "latitude": 45.12,
          "longitude": 45.12
        },
        "shipTo": {
          "street": "123 Auburn Blvd",
          "city": "Sacramento",
          "state": "CA",
          "country": "US",
          "postalCode": "95841",
          "latitude": 45.12,
          "longitude": 45.12
        }
      }
    }
  ],
}
```

```

    "soldTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "billTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    }
  }
}
]
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
addresses	Addresses Input	Address types that specify different locations associated with the transaction of the line item.	Optional	62.0
amount	Double	Total amount for the line item.	Required	62.0
description	String	Description of the line item.	Optional	62.0
effectiveDate	String	Date that tax rules are applicable from. This property value overrides the global effective date.	Optional	62.0
legalEntity	String	Legal entity that's related to the tax treatment.	Optional	63.0
lineNumber	String	Unique identifier for the line item.	Required	62.0
productCode	String	Product code of the line item according to the tax treatment rules of the tax engine.	Optional	62.0
productId	String	ID of the product.	Optional	63.0
productSKU	String	Unique identifier of a product that can be used to identify products that are exempted from tax.	Optional	64.0
quantity	Double	Quantity of the line item.	Required	62.0

Name	Type	Description	Required or Optional	Available Version
taxCode	String	Tax code of the line item according to the tax treatment rules of the tax engine.	Optional	62.0
unitPrice	Double	Unit price of the product.	Optional	63.0

On-Demand Document Generation Input

Input representation of the details to generate a comprehensive on-demand document for specified record types.

JSON Example

```
{
  "recordId": "3ttasd98776266777",
  "shouldForceRegenerate": true,
  "documentTemplateId": "0694x000000XyzABC",
  "documentTitle": "DOC-00000012",
  "tokenData": "
  \"date\":\"2023-08-25\", \"lat\":\"37.7749\", \"lon\":\"-122.421\", \"city\":\"San Francisco\", \"state\":\"CA\", \"country\":\"US\", \"company\":\"Sonia BAT Account\", \"product\":\"Market
  S\", \"companyId\":\"261\", \"latAlt\":\"57.99\", \"latErr\":\"50.00\", \"incident\":\"10/8/2025\", \"companySize\":\"9405\", \"incident\":\"09/8/2025\", \"company\":\"San
  Francisco\", \"CompanyCountry\":\"US\", \"AccountName\":\"Sonia BAT Account\"}"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
documentTemplateId	String	Document template ID to use for PDF generation. The document template must be active with UsageType as INVOICE. If you don't specify this value, the system auto-resolves by using the default template.	Optional	66.0
documentTitle	String	Custom title for the generated document. If you don't specify a value, the value is auto-generated.	Optional	66.0
recordId	String	Record ID of the object the document is generated for. You can specify invoice ID only.	Required	66.0
shouldForceRegenerate	Boolean	Indicates whether to regenerate the document (true) or not (false). If set to true, this API generates a document, replacing any existing ones. If set to false, this API skips the generation of document	Optional	66.0

Name	Type	Description	Required or Optional	Available Version
		if invoice already has an associated document. The default value is <code>false</code> .		
tokenData	String	Token data to generate the document.	Optional	66.0

Payment Line Apply Input

Input representation of the payment line details. This representation covers details on allocation of a payment to a specific invoice line. It also provides additional context through optional fields such as associated account and effective date.

JSON Example

```
{
  "appliedToId": "3ttR000000001IkIAI",
  "amount": 10,
  "effectiveDate": "2020-08-11T07:53:15.000Z",
  "comments": "Apply payment",
  "associatedAccountId": "001R00000060AyuIAE"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
amount	Double	Amount that's applied. The amount must be less than the invoice line and payment balance.	Required	64.0
appliedToId	String	ID of the invoice line that this payment is applied to. Specify the IDs for these records.	Required	64.0
associatedAccountId	String	ID of the associated account.	Optional	64.0
comments	String	Comments that you can add to the payment line application.	Optional	64.0
effectiveDate	String	Date from which the payment line application takes effect.	Optional	64.0

Supported values:

- Invoice
- Invoice Line

Payment Line Unapply Input

Input representation of the payment line details. This representation covers fields that you can specify to revert a payment line application to their preapplication state.

JSON Example

```
{
  "effectiveDate": "2025-05-22T11:30:25.000Z",
  "comments": "Unapply payment"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
comments	String	Comments that you can add when you revert a payment line application.	Optional	64.0
effectiveDate	String	Date from when the reversal of the payment line application is in effect.	Optional	64.0

Payment Run Batch Filter Criteria Input

Input representation of the filter criteria for an invoice batch run. This representation covers the criteria and sequence for filtering payment run details. It specifies the field and object names, comparison operations, and values to be used for filtering.

JSON Example

```
"filterCriteria": [
  {
    "objectName": "PaymentScheduleItem",
    "fieldName": "PaymentRunMatchingValue",
    "operation": "Equals",
    "value": "1",
    "criteriaSequence": 1
  },
  {
    "objectName": "PaymentScheduleItem",
    "fieldName": "PaymentRunMatchingValue",
    "operation": "Equals",
    "value": "2",
    "criteriaSequence": 2
  },
  {
    "objectName": "PaymentScheduleItem",
    "fieldName": "PaymentRunMatchingValue",
    "operation": "Equals",
    "value": "3",

```

```

    "criteriaSequence": 3
  }
]

```

Properties

Name	Type	Description	Required or Optional	Available Version
criteriaSequence	Integer	Sequence that's used to filter the payment run details.	Required	64.0
fieldName	String	Name of the field that this filter is applicable for. Valid value is <code>PaymentRunMatchingValue</code> .	Required	64.0
objectName	Object	Name of the object that the filter is applicable for. Valid value is <code>PaymentScheduleItem</code> .	Required	64.0
operation	String	Operation that's used for comparison. Valid values are <code>Equals</code> , <code>InList</code> , or <code>NotEquals</code> .	Required	64.0
value	String	Value that's used for the filter criteria.	Required	64.0

Payment Batch Scheduler Input

Input representation of the details of the request to create a payment scheduler. This representation sets the rules and timing for a payment scheduler, including match types, dates, frequency, and filter criteria.

JSON Example

JSON Example

```

{
  "schedulerName": "Payment Scheduler",
  "startDate": "2022-01-01",
  "endDate": "2022-12-31",
  "preferredTime": "02:05:00.000",
  "frequencyCadence": "Monthly",
  "recursEveryMonthOnDay": "28",
  "criteriaMatchType": "MatchAny",
  "status": "Active",
  "filterCriteria": [
    {
      "objectName": "PaymentScheduleItem",
      "fieldName": "PaymentRunMatchingValue",
      "operation": "Equals",
      "value": "1",
      "criteriaSequence": 1
    }
  ],

```

```

{
  {
    "objectName": "PaymentScheduleItem",
    "fieldName": "PaymentRunMatchingValue",
    "operation": "Equals",
    "value": "2",
    "criteriaSequence": 2
  },
  {
    "objectName": "PaymentScheduleItem",
    "fieldName": "PaymentRunMatchingValue",
    "operation": "Equals",
    "value": "3",
    "criteriaSequence": 3
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
criteria MatchType	String	Match type for the criteria of the payment scheduler. Valid values are Match Any or Match None.	Required if the frequencyCadence property is set to Monthly.	64.0
endDate	String	End date of the payment scheduler.	Required if the frequencyCadence property is set to Monthly.	64.0
frequency Cadence	String	Frequency cadence of the payment scheduler.	Required	64.0
filter Criteria	Payment Run Batch Filter Criteria Input	List of criteria that are used to filter the payment run details.	Required if the frequencyCadence property is set to Monthly.	64.0
preferredTime	String	Preferred time for the payment scheduler run.	Required	64.0
recursEvery MonthOnDay	String	Date when the payment scheduler recurs.	Required if the frequencyCadence property is set to Monthly.	64.0
schedulerName	String	Name of the payment scheduler.	Required	64.0
startDate	String	Start date of the payment scheduler.	Required	64.0

Name	Type	Description	Required or Optional	Available Version
status	String	Status of the payment scheduler. Valid values are Active, Canceled, Draft, or Inactive.	Required	64.0

Valid values are:

- Once
- Daily
- Weekly
- Monthly

Payment Scheduler Update Input

Input representation of the details of the request to update the status of a payment scheduler. This representation defines the status of a payment scheduler, which can be set to Active, Canceled, Draft, or Inactive.

JSON Example

JSON Example

```
{
  "status": "Active"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
status	String	Status that must be set to activate or deactivate a payment scheduler.	Required	64.0

Valid values are:

- Active
- Canceled
- Draft
- Inactive

Posted Invoice List Write-Off Input

Input representation of the request to write off a list of posted invoices. This representation includes the details of invoices that you want to write off.

JSON Example

```
{
  "invoices": [
    {
      "invoiceId": "3ttxx00000000cjAAA",
      "reasonCode": "Bad Debt",
      "description": "Bad Debt"
    },
    {
      "invoiceId": "3ttxx00000000cjAAA",
      "reasonCode": "Concession",
      "description": "Concession"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
invoices	Posted Invoice Write-Off Input[]	Details of the invoices that you want to write off.	Required	64.0

Posted Invoice Write-Off Input

Input representation of the details of the request to write off a posted invoice. This representation includes invoice details such as invoice ID and reason for writing off invoices.

JSON Example

```
{
  "invoices": [
    {
      "invoiceId": "3ttxx00000000cjAAA",
      "reasonCode": "Bad Debt",
      "description": "Bad Debt"
    },
    {
      "invoiceId": "3ttxx00000000cjAAA",
      "reasonCode": "Concession",
      "description": "Concession"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
invoiceId	String	ID of the invoice record that you want to write off.	Required	64.0
reason	String	Reason for writing off invoices.	Optional	64.0
reasonCode	String	Code that categorizes the write-off reason. For example, if the reason for the invoice write-off is a disputed amount, the reason code can be Disputed Amount (DA).	Required	64.0

Refund Credit Memo Input

Input representation of the details required to initiate a refund against a credit memo.

JSON Example

```
{
  "appliedToId": "0PMxx0000000001AAA",
  "refundAmount": 100,
  "currencyIsoCode": "USD",
  "refundReason": "Customer requested refund",
  "paymentMethodId": "08pxx0000000001AAA",
  "refundNotes": "Refund processed per case 00298475."
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
appliedToId	String	ID of the credit memo that the refund is applied to.	Required	68.0
currencyIso Code	String	ISO currency code. Required when multi-currency is enabled. Must match the credit memo's currency.	Required if multi-currency is enabled	68.0
paymentMethod Id	String	ID of the payment method to issue the refund. Must reference a valid, active payment method.	Required	68.0
refundAmount	Double	Amount to be refunded. Must be greater than 0 and not exceed the remaining balance on the credit memo.	Required	68.0
refundNotes	String	Optional notes that are stored in the comments of the refund entity.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
refundReason	String	Reason for the refund.	Required	68.0

Refund Line Apply Input

Input representation of the details of a transaction refund request. This representation outlines the properties of a refund, including the refund amount and ID of the payment or credit memo record that the refund is applied to.

JSON Example

```
{
  "appliedToId": "0aQR00000004ZkKMAU",
  "amount": 10,
  "effectiveDate": "2020-08-11T07:53:15.000Z",
  "comments": "Payment application."
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
amount	Double	Amount to refund.	Required	64.0
appliedToId	String	ID of a payment or credit memo record. The refund is applied to this object.	Required	64.0
comments	String	Additional details of the refund request.	Optional	64.0
effectiveDate	String	Date from when the refund is in effect.	Optional	64.0

Resume Billing Input

Input representation of the details of the request to resume the billing operation for an account or a billing schedule group.

JSON Example

```
{
  "referenceIds": [
    {
      "referenceId": "001DU000001o2UwYAI",
      "resumeDate": "2024-11-27"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceIds	Resume Billing Object Input[]	Input representation of the account or billing schedule group IDs to resume the billing operation for.	Required	63.0

Resume Billing Object Input

Input representation of the details such as the ID of the account or billing schedule group along with the effective date. These details are used to start the billing operation.

JSON Example

```
{
  "referenceIds":
  [
    {
      "referenceId": "001DU000001o2UwYAI",
      "resumeDate": "2024-11-27"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceId	String	ID of the account or billing schedule group to resume the billing operation for.	Required	63.0
resumeDate	String	Date when the billing operation is resumed. If a date isn't specified, the default value is today's date. The billing operation starts immediately and any future suspension dates aren't applicable.	Required	63.0

Rules Application Input

Input representation for applying payments and credits to invoices based on rules.

JSON Example

```
{
  "accountId": "001xx000003DGbQAAW",
}
```



```
  "targetDate": "2024-01-15"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the account to perform the settlement of payments and credits against invoices in adherence with the applied rules.	Required	66.0
targetDate	String	The date used to select invoices and invoice lines with a posted date equal to or later than the target date to apply payments and credits.	Optional	66.0

Selection Condition Input

Input representation of the criteria that's used to determine which sequencing policy is applied to a record. The criteria stores the conditions based on any standard or custom fields of the record.

JSON Example

```
{
  "selectionCondition": [
    {
      "filterField": "AppType",
      "operator": "Equals",
      "filterValue": "RLM",
      "conditionNumber": 1
    },
    {
      "filterField": "Status",
      "operator": "Equals",
      "filterValue": "Posted",
      "conditionNumber": 2
    },
    {
      "filterField": "LegalEntity",
      "operator": "Equals",
      "filterValue": "US",
      "conditionNumber": 3
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
conditionNumber	Integer	Unique number that's assigned to a condition in a sequence policy.	Required	65.0
filterField	String	Field used in the filter condition.	Required	65.0
filterValue	String	Value in the filter condition.	Required	65.0
operator	String	Relational operator that's used to compare the filter field with the filter value. Valid values are <code>Equals</code> or <code>NotEquals</code> .	Required	65.0

Seller Details Input

Input representation of the seller details for tax calculation.

JSON Example

```
{
  "code": "ADIDAS"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
code	String	Seller code as specified in the tax engine.	Required	62.0

Send Email Input

Input representation of the request to send an email for an invoice batch run.

JSON Example

```
{
  "invoiceBatchRunId": "5IRLT000001SIJB4A4"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
invoiceBatchRunId	String	ID of the invoice batch run record to send emails for the posted invoices of an invoice batch run.	Required	65.0

Sequence Policy Input

Input representation of the configured rules and properties to generate unique, sequential numbers for objects.

JSON Example

This example shows a sample request to create a sequence policy.

```
{
  "name": "Sample Sequence Policy",
  "description": "This is a sample sequence policy.",
  "effectiveFromDateTime": "2025-08-10",
  "expirationDateTime": "2025-09-20",
  "isActive": true,
  "sequenceMode": "Basic",
  "targetObject": "Invoice",
  "dateStampFormat": "Yyy",
  "sequenceStartNumber": 1,
  "incrementNumber": 1,
  "maximumSequenceNumber": 1000,
  "minimumSequenceNumberWidth": 2,
  "filterCriteria": "Custom",
  "selectionLogic": "selectionLogic",
  "sequencePattern": "INV-{SequenceValue}-abc",
  "selectionCondition": [
    {
      "filterField": "AppType",
      "operator": "Equals",
      "filterValue": "RLM",
      "conditionNumber": 1
    },
    {
      "filterField": "Status",
      "operator": "Equals",
      "filterValue": "Posted",
      "conditionNumber": 2
    },
    {
      "filterField": "LegalEntity",
      "operator": "Equals",
      "filterValue": "US",
      "conditionNumber": 3
    }
  ]
}
```

```

    ]
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
dateStamp Format	String	Format of the stamp date that's appended to the sequence number. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
description	String	Additional details about the sequence policy.	Optional	65.0
effectiveFrom DateTime	String	Date and time when the policy becomes effective. The default value is the current date.	Required	65.0
expiration DateTime	String	Date and time when the policy expires.	Optional	65.0
filter Criteria	String	Criteria to filter the target objects.	Required	65.0
increment Number	Integer	Value by which the sequence number increases until it reaches the maximum number. This value must be greater than or equal to 1. The default value is 1. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
isActive	Boolean	Indicates whether the policy is active (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .	Required	65.0
maximumSequence Number	Integer	Maximum number the sequence number can reach.	Optional	65.0
minimumSequence NumberWidth	Integer	Minimum number of digits a sequence number must have. You can't edit this property by using the Update Sequence Policy API.	Optional	65.0
name	String	Name of the sequence policy.	Required	65.0
selection Condition	Selection Condition Input[]	Criteria to determine which sequence policy is applied to a record. This property includes conditions based on any standard or custom fields of the record.	Optional	65.0

Name	Type	Description	Required or Optional	Available Version
selection Logic	String	Logic that determines the objects that the sequence policy applies to.	Optional	65.0
sequenceMode	String	Specifies how sequence numbers are generated. Valid values are Basic —Assigns sequential numbers without gap reconciliation; or Gapless —Assigns sequential numbers with gap reconciliation. The usage of this value ensures that the posted invoices or credit memos don't have any numbering gaps for audits and compliance. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
sequence Pattern	String	Pattern structure that's followed for the sequence.	Required	65.0
sequenceStart Number	Integer	Starting value of the sequence number, which must be greater than or equal to 0. The default value is 1. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
targetObject	String	Object that the policy is applied to. Valid values are Invoice ; or CreditMemo —Available in API version 66.0 and later. You can't edit this property by using the Update Sequence Policy API.	Required	65.0
timeZone	String	Time zone that's applicable for the sequence policy.	Optional	65.0

Sequence Gap Reconciliation Input

Input representation of the details that are used to identify and reconcile gaps in sequence values based on the sequence policy or target object.

JSON Example

This example shows a sample request that specifies the list of sequence policies for gap reconciliation.

```
{
  "sequencePolicyIds": [
    "1vdx0000000abc",
    "1vdx0000000def"
  ]
}
```

This example shows a sample request that specifies the target invoice object for gap reconciliation.

```
{
  "targetObjects": [
    "Invoice"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
sequencePolicyIds	String[]	List of IDs of the sequence policies.	Required if the <code>targetObjects</code> property isn't specified. You must not specify both properties.	65.0
targetObjects	String[]	List of objects to which the policies are applied. Valid values are <code>Invoice</code> ; or <code>CreditMemo</code> —Available in API version 66.0 and later.	Required if the <code>sequencePolicyIds</code> property isn't specified. You must not specify both properties.	65.0

Sequences Assignment Input

Input representation of the details of the target objects to which the sequence pattern values are assigned.

JSON Example

```
{
  "targetObjectIds": [
    "3ttxx00000005nhAAA",
    "3ttxx00000006bhAAA"
  ],
  "sequencePolicyId": "1Vdxx0000004CFU"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
sequencePolicyId	String	ID of the sequence policy.	Optional	65.0

Name	Type	Description	Required or Optional	Available Version
shouldPublish PlatformEvent	Boolean	Indicates whether to publish a platform event when a sequence is assigned to a target record (<code>true</code>) or not (<code>false</code>).	Optional	65.0
target ObjectIds	String[]	List of records to which the sequence pattern values are assigned.	Required	65.0

Standalone Credit Memo Charge Input

Input representation of the details of the charge lines of a credit memo.

JSON Example

```
"charges": [
  {
    "chargeAmount": 100,
    "productId": "01tR0000000njDiIAI"
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
addresses	Credit Memo Addresses Input	Details of the billing and shipping addresses.	Optional	62.0
chargeAmount	Double	Charge amount for the credit memo.	Required	62.0
customFields	Map	Custom field values on each credit memo line in the charges list, as key-value pairs.	Optional	68.0
description	String	Description of the created credit memo charge line.	Optional	62.0
endDate	String	End date of the credit memo charge line.	Optional	62.0
isTax OnlyCredit	Boolean	Indicates whether the credit is for tax only (<code>true</code>) or not (<code>false</code>).	Optional	62.0
productId	String	ID of the product record that the credit memo is issued on.	Optional	62.0
productName	String	Name of the product that the credit memo is issued on.	Optional	62.0
startDate	String	Start date of the credit memo charge line.	Optional	62.0

Name	Type	Description	Required or Optional	Available Version
taxEffectiveDate	String	Date from when the tax is applicable.	Optional	62.0
taxes	Standalone Credit Memo Tax Input[]	List of credit memo tax lines.	Optional	62.0
taxStrategy	String	Tax strategy to be applied to this credit memo charge line, child treatment lines, and tax lines. You can override the tax strategy at the individual credit memo lines or tax lines level.	Optional	62.0
treatmentId	String	ID of the tax treatment record that's used to calculate tax.	Optional	62.0

Valid values are:

- **Ignore**—Specifies that the creation of tax lines must be ignored.
- **Manual Override**—Specifies that the provided tax values must be considered for taxes.
- **Calculate**—Specifies that tax must be calculated by using the API.

Standalone Credit Memo Input

Input representation of the details required to create a standalone credit memo.

JSON Example

This example shows a sample request with the **Ignore** tax strategy.

```
{
  "billingAccountId": "001j000000WCFB800x",
  "type": "Posted",
  "description": "Standalone credit memo with ignored tax.",
  "currencyIsoCode": "USD",
  "taxStrategy": "Ignore",
  "charges": [
    {
      "chargeAmount": 100,
      "productId": "01tR0000000njDiIAI"
    }
  ]
}
```

This example shows a sample request with the **ManualOverride** tax strategy.

```
{
  "billingAccountId": "001DU000001nhoPYAQ",
  "description": "creditmemo-1",
  "currencyIsoCode": "USD",
  "taxStrategy": "ManualOverride",
}
```



```
"charges": [
  {
    "productId": "01tDU000000EpKkYAK",
    "chargeAmount": 1000,
    "taxes": [
      {
        "taxAmount": 7.25,
        "taxCode": "CA-94121",
        "taxName": "CALIFORNIA",
        "taxRate": 0.25
      }
    ]
  }
]
```

This example shows a sample request with the `Calculate` tax strategy for a charge line.

```
{
  "billingAccountId": "001DU000001nhoPYAQ",
  "description": "Standalone Credit Memo",
  "type": "Posted",
  "currencyIsoCode": "USD",
  "taxStrategy": "Ignore",
  "charges": [
    {
      "productId": "01tR0000000njDiIAI",
      "chargeAmount": 10,
      "taxStrategy": "Calculate",
      "treatmentId": "1ttxx00000001VZAAY"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
billTo ContactId	String	Contact related to the credit memo.	Optional	62.0
billing AccountId	String	ID of the account that the credit is issued to.	Required	62.0
charges	Standalone Credit Memo Charge Input[]	Charge lines of the credit memo. Requires at least one charge line.	Required	62.0
currency IsoCode	String	ISO code currency of the new credit that's issued.	Optional	62.0
customFields	Map	Custom field values on the credit memo record, as key-value pairs.	Optional	68.0

Name	Type	Description	Required or Optional	Available Version
description	String	Description for the new credit that's issued.	Optional	62.0
effectiveDate	String	Effective date of the credit memo. If the value isn't specified, then it's null.	Optional	62.0
externalReference	String	ID of the external reference for the credit memo.	Optional	62.0
externalReferenceDataSource	String	Source of the external reference for the credit memo.	Optional	62.0
taxEffectiveDate	String	Effective date of the credit memo tax. If the value isn't specified, then it's null.	Optional	62.0
taxStrategy	String	Specifies how tax lines must be created for the standalone credit memos.	Required	62.0
type	String		Optional	62.0

Valid values are:

- Ignore—Specifies that the creation of tax lines must be ignored.
- Manual Override—Specifies that the provided tax values must be considered for taxes.
- Calculate—Specifies that tax must be calculated by using the API.

Standalone Credit Memo Tax Input

Input representation of the details of the tax request.

JSON Example

```
[
  {
    "taxAmount": 200,
    "taxName": "Federal Tax",
    "taxRate": 1
  },
  {
    "taxAmount": 500,
    "taxName": "State Tax",
    "taxRate": 1
  }
]
```

Properties

Name	Type	Description	Required or Optional	Available Version
taxAmount	Double	Amount of tax to be applied.	Required	62.0
taxCode	String	Tax code to be used to create the tax line.	Optional	62.0
taxName	String	Name of tax to be applied.	Optional	62.0
taxRate	Double	Tax rate to be used to create the tax line.	Optional	62.0

Account Statement Input

Input representation of the details required to generate a comprehensive account statement with transaction history and balance information.

JSON Example

```
{
  "shouldShowOpenBalancesOnly": false,
  "startDate": "2025-09-01",
  "transactionTypes": {
    "transactionTypes": [
      "Invoice"
    ]
  },
  "sortBy": "DueDate",
  "sortingOrder": "Ascending",
  "associatedAccountIds": {
    "associatedAccountIds": [
      "001xx000003DGb5AAG",
      "001xx000003DGb6AAG"
    ]
  },
  "documentTemplateId": "0TRxx000000002YGAQ",
  "correlationId": "monthly-statement-sept-2025",
  "customFields": "{\"Invoice\": [\"TotalAmountWithTax\"], \"Account\": {\"base\": [\"Phone\", \"Fax\"], \"associated\": [\"Website\"]}}}"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
associatedAccountIds	String[]	List of associated account IDs from hierarchy to include in the statement. You can specify up to 50 accounts.	Optional	66.0

Name	Type	Description	Required or Optional	Available Version
correlationId	String	Correlation ID for tracking the request across systems.	Optional	66.0
customFields	String	JSON string specifying custom fields to include in the statement. As a best practice, we recommend that you limit the number of custom fields up to 30 fields. Valid objects to specify the associated fields are <code>Invoice</code> , <code>CreditMemo</code> , <code>Payment</code> , <code>DebitMemo</code> , <code>Refund</code> , or <code>Account</code> . Here's the expected format.	Optional	67.0
documentTemplateId	String	Document template ID to use for PDF generation. If you don't specify a value, the system auto-resolves by using the default template.	Optional	66.0
showOpenBalancesOnly	Boolean	Indicates whether to show open balances only (<code>true</code>) or not (<code>false</code>). If set to <code>true</code> , the API shows only accounts with non-zero balances. If set to <code>false</code> , this API shows complete transaction history within the date range from the start date.	Optional	66.0
sortBy	String	Criteria for sorting transactions. The default and valid value is <code>Date</code> .	Optional	66.0
sortingOrder	String	Sort order for transactions. Valid values are <code>Ascending</code> or <code>Descending</code> . The default value is <code>Descending</code> .	Optional	66.0
startDate	String	Start date for the transaction history. The required format is <code>YYYY-MM-DD</code> . The system processes records up to 90 days from this date.	Required	66.0
transactionTypes	String[]	List of transaction types to include in the statement. If you don't specify a value or the value is empty, all transaction types are included. Valid values are <code>All</code> , <code>CreditMemo</code> , <code>DebitMemo</code> , <code>Invoice</code> , <code>Payment</code> , or <code>Refund</code> .	Optional	66.0

Example:

```
{"Invoice": ["field1", "field2"], "Account": {"base": ["field1"], "associated": ["field2"]}}
```

Suspend Billing Input

Input representation of the details of the request to suspend the billing operation for an account or a billing schedule group.

JSON Example

```
{
  "referenceIds":
  [
    {
      "referenceId": "001DU000001o2UwYAI",
      "suspendDate": "2024-11-27",
      "resumeDate": "2024-12-27"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceIds	Suspend Billing Object Input[]	Input representation of the account or billing schedule group IDs to suspend the billing operation for.	Required	63.0

Suspend Billing Object Input

Input representation of the details such as the ID of the account or billing schedule group along with the effective dates. These details are used to suspend the billing operation.

JSON Example

```
{
  "referenceIds":
  [
    {
      "referenceId": "001DU000001o2UwYAI",
      "suspendDate": "2024-11-27",
      "resumeDate": "2024-12-27"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
referenceId	String	ID of the account or billing schedule group to suspend the billing operation for.	Required	63.0
resumeDate	String	Date until when the account or billing schedule group is suspended for billing.	Required	63.0
suspendDate	String	Date when the account or billing schedule group is suspended for billing.	Required	63.0

Tax Calculation Input

Input representation of the details of the request to calculate tax.

JSON Example

This example shows a tax request for a specified invoice as the reference entity.

```
{
  "addresses": {
    "billTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "soldTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "shipFrom": {
      "street": "123 Alaskan Way",
      "city": "Seattle",
      "state": "WA",
      "country": "US",
      "postalCode": "98101"
    },
    "shipTo": {
      "street": "123 Main street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    }
  }
},
```

```
"currencyIsoCode": "USD",
"customerDetails": {
  "accountId": "001xx000003HYD5AAO"
},
"description": "Monthly invoice for account 001xx000003HYEhAAO",
"documentCode": "3ttxx0000000C7d_Debit-4wAxx000000000ODEAY",
"effectiveDate": "2022-03-09T10:30:41.000Z",
"isCommit": true,
"lineItems": [
  {
    "quantity": 1,
    "amount": 100,
    "taxCode": "TX0001",
    "productCode": "Y0001",
    "productSKU": "PRES-RX-12896745",
    "description": "New Product",
    "effectiveDate": "2022-03-09T10:30:41.000Z",
    "lineNumber": "5TVxx0000004C92GAE",
    "addresses": {
      "shipFrom": {
        "street": "123 Alaskan Way",
        "city": "Seattle",
        "state": "WA",
        "country": "US",
        "postalCode": "98101",
        "latitude": 45.12,
        "longitude": 45.12
      },
      "shipTo": {
        "street": "123 Auburn Blvd",
        "city": "Sacramento",
        "state": "CA",
        "country": "US",
        "postalCode": "95841",
        "latitude": 45.12,
        "longitude": 45.12
      },
      "soldTo": {
        "street": "123 Auburn Blvd",
        "city": "Sacramento",
        "state": "CA",
        "country": "US",
        "postalCode": "95841",
        "latitude": 45.12,
        "longitude": 45.12
      },
      "billTo": {
        "street": "123 Auburn Blvd",
        "city": "Sacramento",
        "state": "CA",
        "country": "US",
        "postalCode": "95841",
        "latitude": 45.12,
        "longitude": 45.12
      }
    }
  }
]
```

```

    }
  }
},
"referenceDocumentCode" = null,
"referenceEntityId": "3ttxx0000000C7d",
"shouldVoidTax": false,
"taxEngineId": "4wAxx0000000g8v",
"taxType": "Actual",
"taxTransactionType": "Debit",
"transactionDate": "2022-03-09T10:30:41.000Z"
}

```

This example shows a tax request for a specified credit memo as the reference entity.

```

{
  "addresses": {
    "billTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "soldTo": {
      "street": "123 Main Street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    },
    "shipFrom": {
      "street": "123 Alaskan Way",
      "city": "Seattle",
      "state": "WA",
      "country": "US",
      "postalCode": "98101"
    },
    "shipTo": {
      "street": "123 Main street",
      "city": "Bainbridge Island",
      "state": "WA",
      "postalCode": "98110",
      "country": "US"
    }
  },
  "currencyIsoCode": "USD",
  "customerDetails": {
    "accountId": "001xx000003HYD5AAO"
  },
  "description": "Monthly credit memo for account 001xx000003HYEhAAO",
  "documentCode": "50gxx000000g27KAAQ-4wAxx000000000DEAY",
  "effectiveDate": "2022-03-09T10:30:41.000Z",
  "isCommit": true,
  "lineItems": [

```



```

{
  "quantity": 1,
  "amount": 100,
  "taxCode": "TX0001",
  "productCode": "Y0001",
  "productSKU": "PRES-RX-12896745",
  "description": "New Product",
  "effectiveDate": "2022-03-09T10:30:41.000Z",
  "lineNumber": "5TVxx0000004C92GAE",
  "addresses": {
    "shipFrom": {
      "street": "123 Alaskan Way",
      "city": "Seattle",
      "state": "WA",
      "country": "US",
      "postalCode": "98101",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "shipTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "soldTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    },
    "billTo": {
      "street": "123 Auburn Blvd",
      "city": "Sacramento",
      "state": "CA",
      "country": "US",
      "postalCode": "95841",
      "latitude": 45.12,
      "longitude": 45.12
    }
  }
},
],
"referenceDocumentCode" = null,
"referenceEntityId": "50gxx000000g27K",
"shouldVoidTax": false,
"taxEngineId": "4wAxx000000g8v",
"taxType": "Actual",

```

```

"taxTransactionType": "Debit",
"transactionDate": "2022-03-09T10:30:41.000Z"
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
addresses	Addresses	Address details for tax calculation.	Optional	62.0
currencyIsoCode	String	Currency ISO code that's used for tax calculation.	Optional	62.0
customerDetails	Customer Details	Customer details for determining the applicable tax.	Optional	62.0
description	String	Description of the tax transaction.	Optional	62.0
documentCode	String	Unique identifier for the tax document. If the <code>documentCode</code> property isn't specified, the tax engine auto-generates it.	Optional	62.0
effectiveDate	String	Date when the tax rules are applied. If a tax rate changes on a specific date, the <code>effectiveDate</code> property ensures the correct rate is applied based on the transaction's timing. For credit-based tax callouts, specify the original invoice date.	Optional	62.0
isCommit	Boolean	Indicates whether to submit the transaction to the tax engine for reporting (<code>true</code>) or not (<code>false</code>). This property value is <code>true</code> for invoices and credit memos with the <code>Posted</code> status.	Optional	62.0
lineItems	Line Item Input []	Details of the line items for calculating the applicable tax.	Required	62.0
reference DocumentCode	String	Reference document code. For subsequent transactions such as a credit tax, this property value specifies the original document code. For credit-based tax callouts, specify the original invoice ID.	Optional	62.0
reference EntityId	String	ID of the related quote, invoice, and other transaction documents.	Optional	62.0
sellerDetails	Seller Details Input	Seller details for tax calculation.	Optional	62.0
shouldVoidTax	Boolean	Indicates whether to void the tax transaction associated with a document that's mentioned as the	Optional	65.0

Name	Type	Description	Required or Optional	Available Version
		<code>referenceDocumentCode</code> property value with <code>taxType</code> property value as <code>Actual</code> and <code>isCommit</code> property value set to <code>true</code> . Keep these considerations in mind when you use this property.		
<code>taxEngineId</code>	String	ID of the tax engine that's used to calculate tax.	Required	62.0
<code>taxTransactionType</code>	String	Type of the tax transaction. Valid values are <code>Debit</code> —Increases tax liability for the seller, requiring the seller to pay tax on the transaction, <code>Credit</code> —Decreases tax liability for the seller, resulting in a tax refund for the seller, or <code>Void</code> —Reserved for internal use. The default value is <code>Debit</code> .	Optional	62.0
<code>taxType</code>	String	Type of the tax. Valid values are <code>Actual</code> —Exact tax amount that's calculated based on actual sales or <code>Estimated</code> —Estimated tax amount, which is adjusted later to match actual tax calculations. For draft invoices and quote records, the tax type is marked as <code>Estimated</code> . After draft invoices are posted and the status changes to <code>Posted</code> , the tax type is updated to <code>Actual</code> . Similarly, when a quote record is finalized and converted into an actual order, the tax type is also updated to <code>Actual</code> .	Required	62.0
<code>transactionDate</code>	String	Date of the transaction that appears on the invoice, order, and other transaction documents.	Required	62.0

Supported values:

- If the `shouldVoidTax` property value is set to `true`, then the operation returns a response with `documentCode` property value updated to `referenceDocumentCode` property value that was originally sent in the request payload. The response also includes the `taxTransactionType` property value as `Void`. This indicates that the document specified in the `referenceDocumentCode` property value is voided.
- If document is locked or you can't void the tax transaction for any reason, then you can use the Tax Calculation request to perform another transaction such as a Credit Tax request. In this scenario, the response includes the `documentCode` property value that was sent in the request payload.
- If the document that's mentioned in the `referenceDocumentCode` property value isn't available in the tax engine, then an error response occurs with `ResultCode` value as `ReferenceDocumentCodeMissing`.

Void Posted Credit Memo Input

Input representation of the details of a credit memo to be voided.

Properties

Name	Type	Description	Required or Optional	Available Version
creditMemoId	String	ID of the posted credit memo to be voided.	Required	66.0

Void Posted Invoice Input

Input representation of the details of the invoice to be voided.

Properties

Name	Type	Description	Required or Optional	Available Version
invoiceId	String	ID of the posted invoice to be voided.	Required	62.0

Response Bodies

Learn more about the available response bodies of Billing APIs.

[Addresses](#)

Output representation of the details of the addresses that are used for calculating tax.

[Address](#)

Output representation of the location code associated with an address.

[Batch Invoice Document Generation](#)

Output representation of the request to generate or regenerate the PDF documents for the invoices that are in the `Draft` or `Posted` status.

[Error Response](#)

Output representation of the error details encountered during the API request.

[Error Response for Batch Invoice Document Generation](#)

Output representation of the error details associated with the Batch Invoice Document Generation API.

[Batch Invoice Scheduler](#)

Output representation of the details of an invoice scheduler.

[Batch Payment Scheduler](#)

Output representation of the details of a payment scheduler.

[Billing Checkout](#)

Output representation of the billing checkout transaction result.

[Billing Arrangement](#)

Output representation that contains the details of a billing arrangement, including its status, configuration settings, and associated lines.

[Billing Arrangement Line](#)

Output representation that contains the details of a specific line item within a billing arrangement, defining how charges are split for an account.

[Billing Batch Scheduler](#)

Output representation of the details of a created invoice or payment scheduler.

[Billing Schedule Recovery List](#)

Output representation of the recovered details of the billing schedules and associated invoice.

[Billing Schedule Recovery](#)

Output representation of the details of the recovered billing schedules.

[Composite Collection Plan](#)

Output representation of the results for each collection plan.

[Collection Plan](#)

Output representation of the result of a single collection plan creation request.

[Collection Plan Error](#)

Output representation of an error that occurred while creating a collection plan.

[Context-Aware Billing Schedule](#)

Output representation of the context-aware billing schedule.

[Context-Aware Billing Schedule Error](#)

Output representation of the error response related to the generation of the billing schedule.

[Convert Negative Invoice Lines](#)

Output representation of the details of the created memo along with the status of the request.

[Credit Memo Apply](#)

Output representation of the list of applied credit memo results.

[Credit Memo Apply List](#)

Output representation of the list of applied credit memo results.

[Credit Memo Post](#)

Output representation of the request to post a credit memo.

[Credit Memo Unapply](#)

Output representation of the details of the credit memo invoice application record with the status of the request.

[Credit Memo Line Applied](#)

Output representation of the list of applied credit memo line results.

[Credit Memo Line Applied Response](#)

Output representation of the list of applied credit memo line results.

[Credit Memo Line Unapplied](#)

Output representation of the details of the credit memo line invoice line record with the status of the request.

[Document Details](#)

Output representation of the details of the generated document.

[Invoice Batch Draft To Posted](#)

Output representation of the batch update details of the invoices from `Draft` to `Posted` status.

[Invoice Batch Run Recovery](#)

Output representation of the details of the invoice batch run recovery record.

[Invoice Ingestion](#)

Output representation of the details of the generated invoices.

[Invoice Ingestion Details](#)

Output representation of the details of a generated invoice.

[Invoice Ingestion Output Error](#)

Output representation of the details of an invoice generation error.

[Invoice Line Preview](#)

Output representation of the invoice line preview result.

[Invoice Preview](#)

Output representation of the invoice preview result.

[Invoice Preview Result](#)

Output representation of the list of preview invoices that are generated for the billing transaction.

[Invoice Recovery](#)

Output representation of the details of the recovered invoice and billing schedules.

[Line Item](#)

Output representation of the details of the line item.

[On-Demand Document Generation Response](#)

Output representation of the details of the generated document along with error response.

[Payment Line Apply](#)

Output representation of the details of the applied payment line. The details include the ID of the payment record and date when the payment line was applied.

[Payment Line Unapply](#)

Output representation of the details of the reversed payment line application. The details include the ID of the payment line record and date when the payment line application was reversed.

[Payment Scheduler Update](#)

Output representation of the details of the updated payment scheduler. This representation covers the updated status value of the specified payment scheduler.

[Posted Invoice List Write-Off](#)

Output representation of the list of invoices that are written off.

[Posted Invoice Write-Off](#)

Output representation of the details of a posted invoice that's written off.

[Posted Invoice Write-Off Error](#)

Output representation of the error response that's associated with a request to write off a posted invoice.

[Reference Line Error](#)

Output representation of the details of the line level errors.

[Refund Credit Memo](#)

Output representation for the process refund against a credit memo API.

[Refund Line Applied Response](#)

Output representation of the details of an applied refund. This representation includes the properties of a refund line, such as the date when the refund is applied against a payment and ID of the refund line record.

[Revenue Async Line Level](#)

Output representation of the result of the API request for the async line level operations.

[Revenue Async Response](#)

Output representation of the result of the API request with the request identifier.

[Rules Application](#)

Output representation of the details of rules application.

[Rules Application Error](#)

Output representation of the error details for rules application failure.

[Rules Application Summary](#)

Output representation of the summary of the application rule. This includes the number of payments and credit memos for the account, the total number of payments and credit memos that's applied to invoices, and whether all invoices for an account are considered (true) or not (false).

[Send Email Error](#)

Output representation of the error response of the API request to send emails for posted invoices.

[Send Email Response](#)

Output representation of the API request to send emails for posted invoices.

[Sequence Error](#)

Output representation of the error response that's associated with a request to create or update a sequence policy, or assign sequences.

[Sequence Gap Reconciliation Error](#)

Output representation of the errors encountered during the processing of the API request.

[Sequence Gap Reconciliation](#)

Output representation of the details of the sequence gap reconciliation.

[Sequence Policy](#)

Output representation that shows the status of the assigned sequence pattern values.

[Sequences Assignment](#)

Output representation with the status of the assigned sequence pattern values.

[Sequences Assignment Result](#)

Output representation of the details of the assigned sequence values to target objects.

[Statement of Account](#)

Output representation of the details of the generated account statement with async tracking details.

[Suspend Resume Billing](#)

Output representation of the list of accounts and billing schedule groups, which are suspended or resumed for billing operations.

[Suspend Resume Billing Object](#)

Output representation of the details of accounts and billing schedule groups, which are suspended or resumed for billing operations, along with the status of the API request.

[Tax Amount Details](#)

Output representation of the details of the tax amount.

[Tax Calculation](#)

Output representation of the details of the calculated tax.

[Tax Details](#)

Output representation of the tax details for each line item.

[Tax Engine Log](#)

Output representation of the logs that the tax engine generates.

[Tax Imposition](#)

Output representation of the details of the imposed tax.

[Tax Jurisdiction](#)

Output representation of the details of the tax jurisdiction for the tax line.

[Void Posted Credit Memo](#)

Output representation of the request to void a posted credit memo.

Addresses

Output representation of the details of the addresses that are used for calculating tax.

JSON Example

```
{
  "addresses": {
    "shipFrom": {
      "locationCode": "67890"
    },
    "shipTo": {
      "locationCode": "12345"
    },
    "soldTo": {
      "locationCode": "12345"
    }
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
shipFrom	Address on page 2366	Address that the item is shipped from.	Big, 62.0	62.0
shipTo	Address on page 2366	Address that the item is shipped to.	Big, 62.0	62.0
soldTo	Address on page 2366	Address that the item is sold to.	Big, 62.0	62.0

Address

Output representation of the location code associated with an address.

JSON Example

```
{
  "locationCode": "123456789"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
locationCode	String	Unique location code of the address.	Big, 62.0	62.0

Batch Invoice Document Generation

Output representation of the request to generate or regenerate the PDF documents for the invoices that are in the `Draft` or `Posted` status.

JSON Example

```
{
  "errors": [
    {
      "errorCode": "API_DISABLED_FOR_ORG",
      "errorMessage": "Document Generation is not enabled for this org!"
    },
    {
      "errorCode": "INVALID_API_INPUT",
      "errorMessage": "Invalid Invoice Batch Run Id"
    }
  ],
  "requestIdentifier": "5IRDU000000009i4AA",
  "success": false
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Batch Invoice Document Generation Error []	Details of the error if the operation fails.	Big, 63.0	63.0
requestIdentifier	String	Unique ID that's associated with the specific error, and is used for tracking and referencing the request.	Big, 63.0	63.0
success	Boolean	Indicates whether the operation is successful (<code>true</code>) or not (<code>false</code>).	Big, 63.0	63.0

Error Response

Output representation of the error details encountered during the API request.

JSON Example

This example shows a sample error response.

```
{
  "errors": [
    {
      "errorCode": "INVALID_STATUS",
      "message": "CreditMemo 50gxx00000000XtAAI is not in the Posted status."
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code that indicates the type of error.	Big, 66.0	66.0
message	String	Message stating the reason for error, if any.	Big, 66.0	66.0

Error Response for Batch Invoice Document Generation

Output representation of the error details associated with the Batch Invoice Document Generation API.

JSON Example

```
"errors": {
  "errorCode": "API_DISABLED_FOR_ORG",
  "message": "Document Generation is not enabled for this org!"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Big, 63.0	63.0
errorMessage	String	Error message for the resultant error.	Big, 63.0	63.0

Batch Invoice Scheduler

Output representation of the details of an invoice scheduler.

JSON Example

```
{
  "billingBatchScheduler": {
    "id": "5BSxx0000004TwGGAU"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
billingBatchScheduler	Billing Batch Scheduler	Details of the created invoice scheduler.	Big, 62.0	62.0

Batch Payment Scheduler

Output representation of the details of a payment scheduler.

JSON Example

```
{
  "billingBatchScheduler": {
    "id": "5BSxx0000004TwGGAU"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
billingBatchScheduler	Billing Batch Scheduler	Details of the payment scheduler.	Big, 64.0	64.0

Billing Checkout

Output representation of the billing checkout transaction result.

JSON Example

```
{
  "checkoutStatus": "InProgressPayment",
  "paymentId": "0azXXXXXXXXXXXXXXXX",
  "paymentMethodId": "0dpXXXXXXXXXXXXXXXX",
  "asyncOperationTrackerId": "9btXXXXXXXXXXXXXXXX",
  "statusURL": "/services/data/v64.0/subjects/RevenueAsyncOperation/9btXXXXXXXXXXXXXXXX",
  "invoicePreview": null,
  "errorsList": []
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
asyncOperationTrackerId	String	ID of the AsyncOperationTracker record that tracks the async message queue processing of this checkout.	Small, 68.0	68.0

Property Name	Type	Description	Filter Group and Version	Available Version
checkoutStatus	String	End-to-end status of the checkout process.	Small, 68.0	68.0
errorsList	Billing Checkout Error[]	Details of the errors generated during the checkout transaction.	Big, 68.0	68.0
invoicePreview	Invoice Preview Result	Invoice Preview API response for the checkout cart. Populated only when <code>previewInvoice</code> is <code>true</code> .	Big, 68.0	68.0
paymentId	String	ID of the successful payment record.	Big, 68.0	68.0
paymentMethodId	String	ID of the newly saved payment method, if a new payment method was saved.	Big, 68.0	68.0
statusURL	String	URL to poll for the status of the async checkout processing (the <code>RevenueAsyncOperation</code> record).	Small, 68.0	68.0

[Billing Checkout Error](#)

Output representation of an error that occurred during a checkout transaction.

Billing Checkout Error

Output representation of an error that occurred during a checkout transaction.

JSON Example

```
{
  "errorCode": "PaymentAmountMustMatchInvoiceTotal",
  "message": "The payment amount must match the invoice total for a full payment."
}
```

Properties

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Error code for the checkout failure.	Small, 68.0	68.0
message	String	Message that states the reason for the error, if any.	Small, 68.0	68.0

Billing Arrangement

Output representation that contains the details of a billing arrangement, including its status, configuration settings, and associated lines.

JSON Example

```
{
  "billingArrangementId": "1bdxx000000004rAAA",
  "name": "Acme Shared Billing Definition",
  "isAdjustmentToOwnAccount": true,
  "remainderPercentage": 15,
  "versionNumber": 1,
  "numOfAssociatedBSGs": 5,
  "status": "Active",
  "billingArrangementLines": [
    {
      "billingArrangementLineId": "1blxx000000006TAAQ",
      "accountId": "accId1",
      "billingAccountId": "bAccId1",
      "isRemainderAdjustmentAccount": false,
      "percentage": 60
    },
    {
      "billingArrangementLineId": "1blxx000000001dAAA",
      "accountId": "accId2",
      "billingAccountId": "bAccId2",
      "isRemainderAdjustmentAccount": false,
      "percentage": 25
    }
  ],
  "isSuccess": true,
  "error": null
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
billingArrangementId	String	Unique ID of the billing arrangement.	Big, 66.0	66.0
billingArrangementLines	Billing Arrangement Line[]	List of billing arrangement lines associated with the latest version of the billing arrangement.	Big, 66.0	66.0
error	Error Response Output	Error details if the request was unsuccessful.	Big, 66.0	66.0
isAdjustmentToOwnAccount	Boolean	Indicates whether the remainder of the bill is adjusted to the owning account (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
isSuccess	Boolean	Indicates whether the request was successfully processed (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
name	String	Name of the billing arrangement.	Big, 66.0	66.0
numOfAssociatedBSGs	Integer	Total number of billing schedule groups associated with the billing arrangement.	Big, 66.0	66.0

Property Name	Type	Description	Filter Group and Version	Available Version
remainderPercentage	Double	Remaining percentage of the bill after all line allocations are calculated.	Big, 66.0	66.0
status	String	Status of the billing arrangement. Valid values are <code>Draft</code> , <code>Active</code> , or <code>Inactive</code> .	Big, 66.0	66.0
versionNumber	Integer	Current version number of the billing arrangement.	Big, 66.0	66.0

Billing Arrangement Line

Output representation that contains the details of a specific line item within a billing arrangement, defining how charges are split for an account.

JSON Example

```
{
  "billingArrangementLineId": "1blxx000000006TAAQ",
  "accountId": "accId1",
  "billingAccountId": "bAccId1",
  "isRemainderAdjustmentAccount": false,
  "percentage": 60.00
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
accountId	String	ID of the account associated with the billing line.	Big, 66.0	66.0
billing AccountId	String	ID of the billing account responsible for this portion of the bill.	Big, 66.0	66.0
billingArrangement LineId	String	Unique ID of the billing arrangement line.	Big, 66.0	66.0
isRemainder AdjustmentAccount	Boolean	Indicates whether the specific line is designated as the adjustment account for any remainder (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
percentage	Double	Percentage of the charge allocated to this line.	Big, 66.0	66.0

Billing Batch Scheduler

Output representation of the details of a created invoice or payment scheduler.

JSON Example

```
"billingBatchScheduler": {  
  "id": "5BSxx0000004TwGGAU"  
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the invoice or payment scheduler.	Big, 62.0	62.0

Billing Schedule Recovery List

Output representation of the recovered details of the billing schedules and associated invoice.

JSON Example

```
{  
  "recoveryResults": [  
    {  
      "billingSchedules": [  
        {  
          "billingScheduleId": "44bDU000000000XX",  
          "billingScheduleStatus": "ReadyForInvoicing"  
        }  
      ],  
      "invoiceErrors": [],  
      "invoiceId": null,  
      "success": true  
    }  
  ]  
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
recovery Results	Invoice Recovery []	Details of the recovered invoice and billing schedules.	Big, 62.0	62.0

Billing Schedule Recovery

Output representation of the details of the recovered billing schedules.

JSON Example

```
"billingSchedules": [  
  {  
    "billingScheduleId": "44bDU000000000XX",  
    "billingScheduleStatus": "ReadyForInvoicing"  
  }  
]
```

```
}  
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
billingScheduleId	String	ID of the billing schedule.	Big, 62.0	62.0
billingScheduleStatus	String	Flag that indicates the billing schedule status.	Big, 62.0	62.0

Composite Collection Plan

Output representation of the results for each collection plan.

JSON example

```
{  
  "results": [  
    {  
      "collectionPlanId": "1Eu000000000001AAA",  
      "collectionPlanItemIds": [  
        "1Ev000000000001AAA",  
        "1Ev000000000002AAA"  
      ],  
      "isSuccess": true,  
      "errors": null  
    }  
  ]  
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
results	Collection Plan[]	List of results, with one result for each collection plan in the request.	Big, 68.0	68.0

Collection Plan

Output representation of the result of a single collection plan creation request.

JSON example

```
{  
  "collectionPlanId": "1Eu000000000001AAA",  
  "collectionPlanItemIds": [  
    "1Ev000000000001AAA",  
    "1Ev000000000002AAA"  
  ],  
  "isSuccess": true,  
}
```



```
"errors": null
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
collectionPlanId	String	ID of the created collection plan. This value is null if the creation failed.	Big, 68.0	68.0
collectionPlanItemIds	String[]	IDs of the created collection plan items. This value is null if the creation failed.	Big, 68.0	68.0
errors	Collection Plan Error []	List of errors that occurred while creating the collection plan. This value is null if the creation succeeded.	Big, 68.0	68.0
isSuccess	Boolean	Indicates whether collection plan creation was successful (<code>true</code>) or not (<code>false</code>).	Big, 68.0	68.0

Collection Plan Error

Output representation of an error that occurred while creating a collection plan.

JSON example

```
{
  "errorCode": "MISSING_REQUIRED_FIELD",
  "message": "Account Id is required to create a Collection Plan when UsageType is Billing.",
  "fields": [
    "accountId"
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Machine-readable code that identifies the error, such as <code>MISSING_REQUIRED_FIELD</code> .	Big, 68.0	68.0
fields	String[]	Names of the fields related to the error.	Big, 68.0	68.0
message	String	Human-readable description of the error.	Big, 68.0	68.0

Context-Aware Billing Schedule

Output representation of the context-aware billing schedule.

JSON Example

This request shows a sample success response.

```
{
  "errors": null,
  "requestIdentifier": "16Pxx0000004CaS",
  "statusURL": "/services/data/v68.0/subjects/AsyncOperationTracker/16Pxx0000004CaSEAU",
  "success": true
}
```

This request shows a sample error response.

```
{
  "errors": [
    {
      "errorCode": "REQUIRED_FIELD_MISSING",
      "errorMessage": "Required fields are missing: billToContact",
      "referenceId": "802xx000001nmb5"
    }
  ],
  "requestIdentifier": "16Pxx0000004CYq",
  "statusURL": "/services/data/v68.0/subjects/AsyncOperationTracker/16Pxx0000004CYqEAM",
  "success": false
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Context Aware Billing Schedule Error[]	Error response if the generation of the billing schedule fails.	Big, 62.0	62.0
request Identifier	String	Unique request identifier that you can use to poll the asynchronous request.	Big, 62.0	62.0
statusURL	String	Status URL to track the operation.	Big, 62.0	62.0
success	Boolean	Indicates whether the processing of the billing schedule is successful (<code>true</code>) or not (<code>false</code>).	Big, 62.0	62.0

Context-Aware Billing Schedule Error

Output representation of the error response related to the generation of the billing schedule.

```
"errors": [
  {
    "errorCode": "REQUIRED_FIELD_MISSING",
    "errorMessage": "Required fields are missing: billToContact",
    "referenceId": "802xx000001nmb5"
  }
]
```

```

    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Big, 62.0	62.0
errorMessage	String	Error message for the resultant error.	Big, 62.0	62.0
referenceId	String	Reference ID of the source item that resulted in the error.	Big, 62.0	62.0

Convert Negative Invoice Lines

Output representation of the details of the created memo along with the status of the request.

JSON Example

```

{
  "id": "50gxx000000g0WwAAI",
  "success": true,
  "errors": []
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors encountered during the processing of the API request.	Big, 62.0	62.0
id	String	ID of the credit memo that's created after the conversion of the negative invoice lines.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Credit Memo Apply

Output representation of the list of applied credit memo results.

JSON Example

```

"applyCreditResults" : [ {
  "appliedToId" : "3ttxx000000003FAAQ",
  "errors" : null,
  "id" : "4sFxx00000002ppEAA",
  "success" : true
}, {
  "appliedToId" : "3ttxx0000000001AAA",
  "errors" : null,

```

```

    "id" : "4sFxx00000002pqEAA",
    "success" : true
  } ]

```

Property Name	Type	Description	Filter Group and Version	Available Version
appliedToId	String	ID of the invoice record that the credit is applied to.	Big, 62.0	62.0
errors	Error Response	List of errors encountered during the processing of the API request.	Big, 62.0	62.0
id	String	ID of the credit memo invoice application.	Big, 62.0	62.0
success	Boolean	Indicates whether the credit memo is successfully applied (<code>true</code>) or not (<code>false</code>).	Big, 62.0	62.0

Credit Memo Apply List

Output representation of the list of applied credit memo results.

JSON Example

```

{
  "applyCreditResults" : [ {
    "appliedToId" : "3ttxx000000003FAAQ",
    "errors" : null,
    "id" : "4sFxx00000002ppEAA",
    "success" : true
  }, {
    "appliedToId" : "3ttxx0000000001AAA",
    "errors" : null,
    "id" : "4sFxx00000002pqEAA",
    "success" : true
  } ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
applyCreditResults	Credit Memo Apply	Output list of the applied credit memo results.	Big, 62.0	62.0

Credit Memo Post

Output representation of the request to post a credit memo.

JSON Example

This example shows a sample successful response.

```
{
  "errors": [],
  "requestIdentifier": "d3a9d9ce-2a83-4a08-bcf3-df0348a0008c",
  "statusURL": "/services/data/v68.0/subjects/AsyncOperationTracker/16PDU000000A4oz2AC",
  "success": true
}
```

This example shows a sample error response.

```
{
  "errors": [
    {
      "errorCode": "BAD_REQUEST",
      "message": "You can post up to 1 credit memo at a time."
    }
  ],
  "requestIdentifier": "9065b043-dcc3-4dcf-b5a1-55fdf5a79f7b",
  "statusURL": "",
  "success": false
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors		List of errors encountered during the processing of the API request.	Big, 65.0	65.0
requestIdentifier	String	Unique request identifier for the request.	Big, 65.0	65.0
statusURL	String	Status URL for tracking this operation.	Big, 65.0	65.0
success	Boolean	Indicates whether the API request was successful (true) or not (false).	Big, 65.0	65.0

Credit Memo Unapply

Output representation of the details of the credit memo invoice application record with the status of the request.

JSON Example

```
{
  "errors": [],
  "id": "4sFxx00000002ppEAA",
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors encountered during the processing of the API request.	Big, 62.0	62.0
id	String	ID of the credit memo invoice application record.	Small, 62.0	62.0
success	Boolean	Indicates whether the credit memo is successfully unapplied (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Credit Memo Line Applied

Output representation of the list of applied credit memo line results.

JSON Example

```
{
  "appliedCreditResponses": [
    {
      "creditMemoLineInvoiceLineId": "4sGSG0000002pMb2AI",
      "errors": null,
      "invoiceLineId": "5TVSG0000003CuH4AU",
      "success": true
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
applied CreditResponses	Credit Memo Line Applied Response[]	Output list for the applied credit memo line results.	Big, 62.0	62.0

Credit Memo Line Applied Response

Output representation of the list of applied credit memo line results.

JSON Example

```
"appliedCreditResponses": [
  {
    "creditMemoLineInvoiceLineId": "4sGSG0000002pMb2AI",
    "errors": null,
    "invoiceLineId": "5TVSG0000003CuH4AU",
    "success": true
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
creditMemoLineInvoiceLineId	String	ID of the credit memo line invoice line ID.	Big, 62.0	62.0
errors	Error Response	List of errors encountered during the processing of the API request.	Big, 62.0	62.0
invoiceLineId	String	ID of the invoice line record that the credit is applied to.	Big, 62.0	62.0
success	Boolean	Indicates whether the credit memo line is successfully applied (<code>true</code>) or not (<code>false</code>).	Big, 62.0	62.0

Credit Memo Line Unapplied

Output representation of the details of the credit memo line invoice line record with the status of the request.

JSON Example

```
{
  "creditMemoLineInvoiceLineId": "4sGSG0000002pOD2AY",
  "errors": [],
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
creditMemoLineInvoiceLineId	String	ID of the credit memo line invoice line record.	Small, 62.0	62.0
errors	Error Response	List of errors encountered during the processing of the API request.	Big, 62.0	62.0
success	Boolean	Indicates whether the credit memo line is successfully unapplied (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Document Details

Output representation of the details of the generated document.

JSON Example

```
{
  "details": {
    "documentEntityId": "1BBSM00000003KT4AY",
    "documentGenerationProcessId": "0nnSM00000009jFYAQ",
    "documentTitle": "DOC-000000197",
    "existingDocumentId": "069SM0000002PYQLYA4",
    "recordId": "3ttSM00000000o58YAA",
    "documentTemplateId": "0694x000000XyzABC"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
documentEntityId	String	Identifier of the related object record that manages the relationship between the source record and the generated document. For example, InvoiceDocument for Invoice records.	Big, 66.0	66.0
documentGenerationProcessId	String	Identifier of the document generation process record that's created to track this document generation request.	Big, 66.0	66.0
documentTemplateId	String	Identifier of the document template that's used to generate the PDF.	Big, 66.0	66.0
documentTitle	String	Document title or name of the generated document.	Big, 66.0	66.0
existingDocumentId	String	Identifier of the existing content document if a document is already generated and is available to view.	Big, 66.0	66.0
recordId	String	Identifier of the source record the document is generated for.	Big, 66.0	66.0

Invoice Batch Draft To Posted

Output representation of the batch update details of the invoices from `Draft` to `Posted` status.

JSON Example

```
{
  "invoiceBatchDraftToPostedId": "4sFDU00000000652AA",
  "success": true
}
```


Property Name	Type	Description	Filter Group and Version	Available Version
invoiceBatchDraftToPostedId	String	ID of the invoice batch draft to posted run record that's created to track the batch process of posting the draft invoices that are associated with the parent invoice batch run record.	Small, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Small, 62.0	62.0

Invoice Batch Run Recovery

Output representation of the details of the invoice batch run recovery record.

JSON Example

```
{
  "invoiceBatchRunRecoveryId": ["0wBxx0000004TtwGAU"]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
invoiceBatchRunRecoveryId	String	ID of the invoice batch run recovery record for the specified invoice batch run. This record represents the background recovery process.	Small, 62.0	62.0

Invoice Ingestion

Output representation of the details of the generated invoices.

JSON Example

```
{
  "invoices": [
    {
      "errors": null,
      "invoiceId": "3ttxx0000000GRNAA2",
      "requestIdentifier": "16e80fbc-e7b3-4462-9439-745647fcf0a8",
      "statusURL": "/services/data/v63.0/subjects/AsyncOperationTracker/16Pxx0000004Gz2EAE",
      "success": true
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
invoices	Invoice Ingestion []	Result that contains the details for each generated invoice.	Big, 63.0	63.0

Invoice Ingestion Details

Output representation of the details of a generated invoice.

JSON Example

```
{
  "invoices": [
    {
      "errors": null,
      "invoiceId": "3ttxx0000000GRNAA2",
      "requestIdentifier": "16e80fbc-e7b3-4462-9439-745647fcf0a8",
      "statusURL": "/services/data/v63.0/subjects/AsyncOperationTracker/16Pxx0000004Gz2EAE",
      "success": true
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Invoice Ingestion Output Error []	Details of the errors if the request was unsuccessful.	Small, 63.0	63.0
invoiceId	String	ID of the Invoice record that's created in Salesforce.	Small, 63.0	63.0
request Identifier	String	Unique request identifier that can be used to poll the async request.	Small, 63.0	63.0
statusURL	String	Status URL for tracking the estimated tax callout operation.	Big, 63.0	63.0
success	Boolean	Indicates whether the API request was successful (<code>true</code>) or not (<code>false</code>).	Small, 63.0	63.0

Invoice Ingestion Output Error

Output representation of the details of an invoice generation error.

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code that indicates the type of error.	Small, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
message	String	Message that states the reason for error, if any.	Small, 63.0	63.0
referenceId	String	Reference ID that maps to the subrequest's response and can be used to reference the response in later subrequests.	Small, 63.0	63.0

Invoice Line Preview

Output representation of the invoice line preview result.

JSON Example

```
"invoiceLineDetailList": [  
  {  
    "billingFrequency": "OneTime",  
    "chargeAmount": "1990.00",  
    "endDate": "2024-07-18",  
    "lineAmount": "2189.00",  
    "productName": "Laptop",  
    "quantity": "10.0",  
    "startDate": "2024-07-18",  
    "taxAmount": "199.0",  
    "unitPrice": "199.0"  
  }  
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
billingFrequency	String	The frequency at which the invoice line is created for the billing transaction.	Big, 63.0	63.0
endDate	String	The end date of the billing for the service for invoice lines made from a time-based service.	Big, 63.0	63.0
lineAmount	String	The amount of the invoice line.	Big, 63.0	63.0
productName	String	The name of the product that was charged or ordered to create the invoice line.	Big, 63.0	63.0
quantity	String	The number of units of the order product that created the invoice line.	Big, 63.0	63.0
startDate	String	The first date of the billing for the service for invoice lines made from a time-based service.	Big, 63.0	63.0
taxAmount	String	The tax amount for the invoice line.	Big, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
unitPrice	String	The price for one unit of the item on the invoice line.	Big, 63.0	63.0

Invoice Preview

Output representation of the invoice preview result.

JSON Example

```
"invoiceDetailList": [
  {
    "accountId": "001z6000005aQj8",
    "currencyIsoCode": "USD",
    "dueDate": "2025-01-03",
    "invoiceDate": "2024-12-04",
    "invoiceLineDetailList": [
      {
        "billingFrequency": "OneTime",
        "chargeAmount": "1990.00",
        "endDate": "2024-07-18",
        "lineAmount": "2189.00",
        "productName": "Laptop",
        "quantity": "10.0",
        "startDate": "2024-07-18",
        "taxAmount": "199.0",
        "unitPrice": "199.0"
      }
    ],
    "totalAmount": "1990.00",
    "totalAmountWithTax": "2189.00",
    "totalTaxAmount": "199.0"
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
accountId	String	The account ID of the billing transaction.	Big, 63.0	63.0
currencyCode	String	The currency code for the amount fields.	Big, 63.0	63.0
dueDate	String	The date by when the customer must pay an invoice that's generated for the billing transaction.	Big, 63.0	63.0
invoiceDate	String	The date when an invoice that's generated for the billing transaction is posted.	Big, 63.0	63.0

Property Name	Type	Description	Filter Group and Version	Available Version
invoiceLines	Invoice Line Preview []	The details of the invoice lines related to the invoices that are generated for the billing transaction.	Big, 63.0	63.0
totalAmount	String	The sum of the total amount on the invoice lines of an invoice that's generated for the billing transaction.	Big, 63.0	63.0
totalAmountWithTax	String	The sum of the total amount including tax on the invoice lines of an invoice that's generated for the billing transaction.	Big, 63.0	63.0
totalTaxAmount	String	The sum of the tax amount on the invoice lines of an invoice that's generated for the billing transaction.	Big, 63.0	63.0

Invoice Preview Result

Output representation of the list of preview invoices that are generated for the billing transaction.

JSON Example

```
{
  "invoiceDetailList": [
    {
      "accountId": "001Z6000005aQj8",
      "currencyIsoCode": "USD",
      "dueDate": "2025-01-03",
      "invoiceDate": "2024-12-04",
      "invoiceLineDetailList": [
        {
          "billingFrequency": "OneTime",
          "chargeAmount": "1990.00",
          "endDate": "2024-07-18",
          "lineAmount": "2189.00",
          "productName": "Laptop",
          "quantity": "10.0",
          "startDate": "2024-07-18",
          "taxAmount": "199.0",
          "unitPrice": "199.0"
        }
      ],
      "totalAmount": "1990.00",
      "totalAmountWithTax": "2189.00",
      "totalTaxAmount": "199.0"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
invoiceDetail List	Invoice Preview []	Details of the invoices that are generated for the billing transaction.	Big, 63.0	63.0

Invoice Recovery

Output representation of the details of the recovered invoice and billing schedules.

JSON Example

```
{
  "recoveryResults": [
    {
      "billingSchedules": [
        {
          "billingScheduleId": "44bDU000000000XX",
          "billingScheduleStatus": "ReadyForInvoicing"
        }
      ],
      "invoiceErrors": [],
      "invoiceId": null,
      "success": true
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
billing Schedules	Billing Schedule Recovery []	Billing schedules associated with this invoice.	Big, 62.0	62.0
invoiceErrors	Error Response	List of errors encountered during the invoice recovery.	Big, 62.0	62.0
invoiceId	String	ID of the recovered invoice.	Big, 62.0	62.0
invoiceStatus	String	Flag that indicates the invoice status.	Big, 62.0	62.0
success	Boolean	Indicates whether the overall transaction was successful or not (<code>true</code>) or not (<code>false</code>).	Big, 62.0	62.0

Line Item

Output representation of the details of the line item.

JSON Example

```
{
  "lineItems": [
    {
      "addresses": {
        "shipFrom": {
          "locationCode": "67890"
        },
        "shipTo": {
          "locationCode": "12345"
        },
        "soldTo": {
          "locationCode": "12345"
        }
      },
      "amountDetails": {
        "exemptAmount": 0,
        "taxAmount": 12.5,
        "totalAmount": 100,
        "totalAmountWithTax": 112.5
      },
      "effectiveDate": "2022-03-09T10:55:38.416Z",
      "lineNumber": "001xx000003HYEiAAO",
      "productCode": "Y0001",
      "quantity": 1,
      "taxCode": "TX0001",
      "taxes": [
        {
          "exemptAmount": 0,
          "exemptReason": "NoExemption",
          "imposition": {
            "type": "General"
          },
          "jurisdiction": {
            "country": "US",
            "id": "63000",
            "level": "CIT",
            "name": "SEATTLE",
            "region": "WA",
            "stateAssignedNo": "1726"
          },
          "rate": 12.5,
          "tax": 12.5,
          "taxId": "11000378132466",
          "taxableAmount": 100
        }
      ]
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
addresses	Addresses	Different types of addresses that are used for the transaction of the line item.	Big, 62.0	62.0
amountDetails	Tax Amount Details	Details of the transaction amount and the taxes applicable for the line item.	Big, 62.0	62.0
effectiveDate	String	Date when the tax rules are applied on the line item.	Big, 62.0	62.0
lineNumber	String	Unique identifier of the line item.	Big, 62.0	62.0
productCode	String	Product code of the line item as defined by the tax engine.	Big, 62.0	62.0
quantity	Double	Quantity of the line item.	Big, 62.0	62.0
taxCode	String	Tax code of the line item according to the tax engine.	Big, 62.0	62.0
taxes	Tax Details []	Tax details of the line item.	Big, 62.0	62.0

On-Demand Document Generation Response

Output representation of the details of the generated document along with error response.

JSON Example

```
{
  "requestIdentifier": "aad8ee2d-d94d-4760-8759-a2c5d63ce6db",
  "isSuccess": true,
  "details": {
    "documentEntityId": "1BBSM00000003KT4AY",
    "documentGenerationProcessId": "0nnSM00000009jFYAQ",
    "documentTitle": "DOC-000000197",
    "existingDocumentId": "069SM0000002PYQLYA4",
    "recordId": "3ttSM0000000o58YAA",
    "documentTemplateId": "0694x000000XyzABC"
  },
  "errors": []
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
details	Document Details []	Details of the generated document.	Big, 66.0	66.0
errors	Error Response []	Error details of any issues encountered during the enqueue operation.	Big, 66.0	66.0
isSuccess	Boolean	Status of the enqueueing PDF generation task.	Big, 66.0	66.0

Property Name	Type	Description	Filter Group and Version	Available Version
requestIdentifier	String	Unique request identifier that's used to poll the asynchronous request.	Big, 66.0	66.0

Payment Line Apply

Output representation of the details of the applied payment line. The details include the ID of the payment record and date when the payment line was applied.

JSON Example

```
{
  "appliedDate": "2020-08-11T08:09:01.000Z",
  "id": "1PLR000000000dDOAQ"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
appliedDate	String	Date when the payment line was applied.	Big, 64.0	64.0
id	String	ID of the payment line record.	Big, 64.0	64.0

Payment Line Unapply

Output representation of the details of the reversed payment line application. The details include the ID of the payment line record and date when the payment line application was reversed.

JSON Example

```
{
  "unappliedDate": "2020-08-11T08:09:01.000Z",
  "id": "1PLR000000000dDOAQ"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the payment line record.	Big, 64.0	64.0
unappliedDate	String	Date when the payment line application was reversed.	Big, 64.0	64.0

Payment Scheduler Update

Output representation of the details of the updated payment scheduler. This representation covers the updated status value of the specified payment scheduler.

JSON Example

```
{
  "status": "Active"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
status	String	Updated status value of the specified payment scheduler.	Big, 64.0	64.0

Valid values are:

- Active
- Canceled
- Draft
- Inactive

Posted Invoice List Write-Off

Output representation of the list of invoices that are written off.

JSON Example

```
{
  "result": [
    {
      "requestIdentifier": null,
      "invoiceId": "3t00000000CwAGI",
      "success": false,
      "errors": {
        "errorCode": "INVALID_API_INPUT",
        "errorMessage": "Reason is missing."
      }
    },
    {
      "requestIdentifier": 37612787,
      "invoiceId": "3t00000000CwAAI",
      "success": true,
      "errors": {
        "errorCode": null,
        "errorMessage": null
      }
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Posted Invoice Write-Off []	Details of the invoices for which the write-off process is initiated.	Big, 64.0	64.0

Posted Invoice Write-Off

Output representation of the details of a posted invoice that's written off.

JSON Example

```
{
  "result": [
    {
      "requestIdentifier": null,
      "invoiceId": "3t00000000CwAGI",
      "success": false,
      "errors": {
        "errorCode": "INVALID_API_INPUT",
        "errorMessage": "Reason is missing"
      }
    },
    {
      "requestIdentifier": 37612787,
      "invoiceId": "3t00000000CwAAI",
      "success": true,
      "errors": {
        "errorCode": null,
        "errorMessage": null
      }
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Posted Invoice Write-Off Error []	If the request fails, this property contains a list of errors.	Small, 64.0	64.0
invoiceId	String	ID of the invoice record that's written off.	Big, 64.0	64.0
request Identifier	String	If the request is successful, this property contains an asynchronous API request identifier for an invoice ID.	Big, 64.0	64.0
success	Boolean	Indicates whether the invoice write-off request was successful (<code>true</code>) or not (<code>false</code>).	Big, 64.0	64.0

Posted Invoice Write-Off Error

Output representation of the error response that's associated with a request to write off a posted invoice.

JSON Example

```
{
  "errors": {
    "errorCode": "INVALID_API_INPUT",
    "errorMessage": "Reason is missing"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code that represents the error.	Small, 64.0	64.0
errorMessage	String	Message that describes the error.	Small, 64.0	64.0

Reference Line Error

Output representation of the details of the line level errors.

JSON Example

If the API request fails, the `referenceLineErrorResults` property contains a list of errors grouped by the invoice line IDs.

```
[
  {
    "referenceLineId": "5TV9A000007x2gz",
    "errors": [
      {
        "errorCode": "INVALID_INPUT",
        "message": "Invalid invoice line id"
      }
    ]
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	List of errors with error code and error message for the specified invoice line ID.	Big, 62.0	62.0
reference LineId	String	ID of the invoice line specified in the API request that has an issue, causing the API request to fail.	Small, 62.0	62.0

Refund Credit Memo

Output representation for the process refund against a credit memo API.

JSON Example

```
{
  "applications": [
    {
      "applicationId": "OCMxx0000000001AAA",
      "appliedToId": "OPMxx0000000001AAA"
    }
  ],
  "errors": [],
  "refundId": "ORfxx0000000001AAA",
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
applications	Refund Application []	Application records created by the refund. One CreditMemoRefund record for a top-level credit memo, or one CreditMemoLineRefund record per applied line for a line-level credit memo.	Big, 68.0	68.0
errors	Refund Error []	Details of the errors if the API request was unsuccessful.	Big, 68.0	68.0
refundId	String	ID of the created record.	Big, 68.0	68.0
success	Boolean	Indicates whether the refund was successfully initiated (<code>true</code>) or not (<code>false</code>).	Big, 68.0	68.0

[Refund Application](#)

Output representation of a single refund application record created by the refund against a credit memo API.

[Refund Error](#)

Output representation of an error that occurred during a refund against a credit memo.

Refund Application

Output representation of a single refund application record created by the refund against a credit memo API.

JSON Example

```
{
  "applicationId": "4sFxx00000002ppEAA",

```

```
{
  "appliedToId": "a1Yxx0000004C95"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
applicationId	String	ID of the created application junction entity (CreditMemoRefund or CreditMemoLineRefund).	Big, 68.0	68.0
appliedToId	String	ID of the record that the refund was applied to (the credit memo or a credit memo line).	Big, 68.0	68.0

Refund Error

Output representation of an error that occurred during a refund against a credit memo.

JSON Example

```
{
  "errorCode": "AMOUNT_EXCEEDS_BALANCE",
  "message": "The refund amount exceeds the remaining balance on the credit memo."
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code that represents the error, for example INVALID_CREDIT_MEMO, AMOUNT_EXCEEDS_BALANCE, or CREDIT_MEMO_LOCKED.	Big, 68.0	68.0
message	String	Message that states the reason for the error.	Big, 68.0	68.0

Refund Line Applied Response

Output representation of the details of an applied refund. This representation includes the properties of a refund line, such as the date when the refund is applied against a payment and ID of the refund line record.

JSON Example

```
{
  "appliedDate": "2020-08-11T08:09:01.000Z",
  "id": "0dRR000000000CsMAI"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
appliedDate	String	Date when the refund is applied against a payment.	Big, 64.0	64.0
id	String	ID of the refund line record.	Big, 64.0	64.0

Revenue Async Line Level

Output representation of the result of the API request for the async line level operations.

JSON Example

```
{
  "success": true,
  "requestIdentifier": "237e9877-e79b-12d4-a765-321741963000",
  "errors": []
}
```

If the API request fails, the `referenceLineErrorResults` property contains a list of errors grouped by the invoice line IDs.

```
[
  {
    "referenceLineId": "5TV9A000007x2gz",
    "errors": [
      {
        "errorCode": "INVALID_INPUT",
        "message": "Invalid invoice line id"
      }
    ]
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	Details of errors, if any.	Big, 62.0	62.0
referenceLineErrorResults	Reference Line Error[]	List of errors grouped by the invoice line IDs if the API request fails.	Big, 62.0	62.0
referenceLineType	String	Reference type for the reference line entity in the <code>referenceLineErrorResults</code> property.	Big, 62.0	62.0
requestIdentifier	String	Unique identifier of the request.	Big, 62.0	62.0
statusURL	String	URL to track the status of the operation.	Big, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Big, 62.0	62.0

Revenue Async Response

Output representation of the result of the API request with the request identifier.

JSON Example

```
{
  "errors": null,
  "requestIdentifier": "ae6f23bc-f056-44b7-aa4d-c7f6fc5e0cf4",
  "success": true
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Error Response	Details of errors, if any.	Big, 62.0	62.0
request Identifier	String	Unique identifier of the request.	Big, 62.0	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Big, 62.0	62.0

Rules Application

Output representation of the details of rules application.

JSON Example

This example shows the rules application response.

```
{
  "isSuccess": true,
  "rulesApplicationSummary": {
    "fetchedPaymentsCount": 250,
    "fetchedCreditMemosCount": 250,
    "totalPaymentApplications": 250,
    "totalCreditMemoApplications": 200,
    "areAllInvoicesConsidered": true
  },
  "appliedRules": [
    "Match ID",
    "Match Balance"
  ],
}
```



```
"errors": []
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
isSuccess	Boolean	Indicates whether the rules are applied (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
rulesApplication Summary	Rules Application Summary	Summary of the application rule. This includes the number of payments and credit memos for the account, the total number of payments and credit memos that are applied to invoices, and whether all invoices for an account are considered (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
appliedRules	String[]	Rules that were applied. Valid values are Match ID, Match Balance, Prioritize Highest Balance Invoices, or Prioritize Oldest Invoices.	Big, 66.0	66.0
errors	Rules Application Error[]	Details of the errors if the API request was unsuccessful.	Big, 66.0	66.0

Rules Application Error

Output representation of the error details for rules application failure.

JSON Example

This example shows the rules application error.

```
{
  "errors": [
    {
      "errorCode": "INVALID_ACCOUNT",
      "message": "The specified account does not exist or is not accessible."
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code that indicates the type of error.	Big, 66.0	66.0
message	String	Message that states the reason for error, if any.	Big, 66.0	66.0

Rules Application Summary

Output representation of the summary of the application rule. This includes the number of payments and credit memos for the account, the total number of payments and credit memos that's applied to invoices, and whether all invoices for an account are considered (true) or not (false).

JSON Example

This example shows the rules application summary.

```
{
  "rulesApplicationSummary": {
    "fetchedPaymentsCount": 5,
    "fetchedCreditMemosCount": 2,
    "totalPaymentApplications": 3,
    "totalCreditMemoApplications": 1,
    "areAllInvoicesConsidered": true
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
fetched PaymentsCount	Integer	Total number of payments related to the account.	Big, 66.0	66.0
fetchedCredit MemosCount	Integer	Total number of credit memos or credit memo lines related to the account.	Big, 66.0	66.0
totalPayment Applications	Integer	Total number of payments that are applied to the invoices or invoice lines.	Big, 66.0	66.0
totalCredit Memo Applications	Integer	Total number of credit memos that are applied to the invoice or invoice lines.	Big, 66.0	66.0
areAll Invoices Considered	Boolean	Indicates whether all invoices are considered (true) or not (false).	Big, 66.0	66.0

Send Email Error

Output representation of the error response of the API request to send emails for posted invoices.

JSON Example

This example shows a sample response with an error scenario.

```
{
  "errors": [
    {
      "errorCode": "INVALID_API_INPUT",
      "errorMessage": "Specify a valid invoiceBatchRunId."
    }
  ]
}
```

```

    }
  ],
  "requestIdentifier": "5IRxx0000004CKKGA2",
  "success": false
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Unique code for the error.	Big, 65.0	65.0
errorMessage	String	Descriptive message for the error.	Big, 65.0	65.0

Send Email Response

Output representation of the API request to send emails for posted invoices.

JSON Example

This example shows a sample response when the request is successful.

```

{
  "errors": [],
  "requestIdentifier": "5IRLT000001SIJB4A4",
  "success": true
}

```

This example shows a sample response with an error scenario.

```

{
  "errors": [
    {
      "errorCode": "INVALID_API_INPUT",
      "errorMessage": "Specify a valid invoiceBatchRunId."
    }
  ],
  "requestIdentifier": "5IRxx0000004CKKGA2",
  "success": false
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Send Email Error[]	List of errors that occurred while trying to enqueue the request. In case of errors while sending emails, you can check the Revenue Transaction Error Logs of the InvoiceBatchRun record and associated Invoice record. An error occurs for these scenarios. The contact email or user isn't configured; The configured email template isn't valid; or Email is sent through a contact	Big, 65.0	65.0

Property Name	Type	Description	Filter Group and Version	Available Version
		email, and the contact doesn't have an associated user. In this scenario, the emails are counted against the general email limits. An error is thrown if you exceed the email limits.		
requestIdentifier	String	Unique identifier for the request, which corresponds to the invoice batch run ID.	Big, 65.0	65.0
success	Boolean	Indicates whether the request to start the email sending process was successfully enqueued (<code>true</code>) or not (<code>false</code>).	Big, 65.0	65.0

Sequence Error

Output representation of the error response that's associated with a request to create or update a sequence policy, or assign sequences.

JSON Example

This example shows a sample error response.

```
{
  "error": {
    "errorCode": "INVALID_INPUT",
    "message": "Specify a valid selectionLogic."
  },
  "isSuccess": false,
  "sequencePolicyId": null
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Big, 65.0	65.0
message	String	Error message for the resultant error.	Big, 65.0	65.0

Sequence Gap Reconciliation Error

Output representation of the errors encountered during the processing of the API request.

JSON Example

This example shows a sample error response.

```
{
  "jobId": "",
  "sequencePolicyIds": [
```

```
    "1vdx0000000abc",
    "1vdx0000000def"
  ],
  "targetObjects": [
    "Invoice"
  ],
  "status": "NotSubmitted",
  "submittedAt": "",
  "error": {
    "errorCode": "INVALID_INPUT",
    "message": "Specify a value for either sequencePolicyIds or targetObjects."
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code for the resultant error.	Big, 65.0	65.0
errorMessage	String	Error message for the resultant error.	Big, 65.0	65.0

Sequence Gap Reconciliation

Output representation of the details of the sequence gap reconciliation.

JSON Example

This example shows a sample successful response.

```
{
  "jobId": "0Blxx0000006P12",
  "sequencePolicyIds": [
    "1vdx0000000uyr",
    "1vdx0000000lrf"
  ],
  "targetObjects": [
    "Invoice"
  ],
  "status": "Submitted",
  "submittedAt": "2025-06-05T09:12:28Z",
  "error": {}
}
```

This example shows a sample error response for an invalid input.

```
{
  "jobId": "",
  "sequencePolicyIds": [
    "1vdx0000000abc",
    "1vdx0000000def"
  ],
  "targetObjects": [
    "Invoice"
  ],
  "status": "NotSubmitted",
  "submittedAt": "",
  "error": {
    "errorCode": "INVALID_INPUT",
    "message": "Specify a value for either sequencePolicyIds or targetObjects."
  }
}
```

```

    },
    "status": "NotSubmitted",
    "submittedAt": "",
    "error": {
      "errorCode": "INVALID_INPUT",
      "message": "Missing required field in the request."
    }
  }
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Sequence Gap Reconciliation Error []	List of errors encountered during the processing of the API request.	Big, 65.0	65.0
jobId	String	Unique identifier assigned to the sequence gap reconciliation asynchronous process.	Big, 65.0	65.0
sequencePolicyIds	String[]	List of IDs of the sequence policies.	Big, 65.0	65.0
status	String	Status of the sequence gap reconciliation API request. Valid values are Submitted or NotSubmitted.	Big, 65.0	65.0
submittedAt	String	Date and time when the reconciliation request was submitted to the async job.	Big, 65.0	65.0
targetObjects	String[]	List of objects to which the policies are applied.	Big, 65.0	65.0

Sequence Policy

Output representation that shows the status of the assigned sequence pattern values.

JSON Example

This example shows a sample successful response.

```

{
  "error": null,
  "isSuccess": true,
  "sequencePolicyId": "1Vdxx0000000GRNAA2"
}

```

This example shows a sample error response.

```

{
  "error": {
    "errorCode": "INVALID_INPUT",
    "message": "Specify a valid selectionLogic."
  },
  "isSuccess": false,
}

```

```
"sequencePolicyId": null
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
error	Sequence Error []	Details of any error that encountered during the processing of the API request.	Big, 65.0	65.0
isSuccess	Boolean	Indicates whether the sequence policy is generated (<code>true</code>) or not (<code>false</code>).	Big, 65.0	65.0
sequencePolicyId	String	ID of the sequence policy.	Big, 65.0	65.0

Sequences Assignment

Output representation with the status of the assigned sequence pattern values.

JSON Example

This example shows a sample successful response.

```
{
  "errors": null,
  "sequencesAssignment": [
    {
      "errors": null,
      "isSuccess": true,
      "sequencePatternValue": "INV-1234-2025-04-12-001",
      "targetObjectId": "3ttxx000000085dAAA"
    }
  ],
  "status": "Success"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Sequence Error []	Error encountered during the processing of the API request.	Big, 65.0	65.0
sequencesAssignment	Sequences Assignment Result []	Details of the sequence pattern values assignment.	Big, 65.0	65.0
status	String	Status of the sequence policy assignment. Valid values are <code>PartialSuccess</code> , <code>Success</code> , or <code>Failed</code> .	Big, 65.0	65.0

Sequences Assignment Result

Output representation of the details of the assigned sequence values to target objects.

JSON Example

This example shows a sample successful response.

```
{
  "errors": null,
  "sequencesAssignment": [
    {
      "errors": null,
      "isSuccess": true,
      "sequencePatternValue": "INV-1234-2025-04-12-001",
      "targetObjectId": "3ttxx000000085dAAA"
    }
  ],
  "status": "Success"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errors	Sequence Error []	Error encountered during the processing of the API request.	Big, 65.0	65.0
isSuccess	Boolean	Indicates whether the sequence pattern value is assigned (<code>true</code>) or not (<code>false</code>).	Big, 65.0	65.0
sequencePatternValue	String	Sequence pattern value assigned to the target object.	Big, 65.0	65.0
sequencePolicyId	String	ID of the sequence policy assigned to the target object.	Big, 65.0	65.0
targetObjectId	String	Record to which the sequence pattern value is assigned.	Big, 65.0	65.0

Statement of Account

Output representation of the details of the generated account statement with async tracking details.

JSON Example

This example shows a sample successful response.

```
{
  "requestIdentifier": "a0Bxx000000001ZEAQ",
  "statusURL":
"/services/data/v60.0/commerce/billing/document-generation-process/a0Bxx000000001ZEAQ/status",

  "success": true,
  "accountId": "001xx000003DGb2AAG",
  "templateId": "0TRxx000000001XGAQ",
  "errors": null
}
```


This example shows a sample error response.

```
{
  "success": false,
  "errors": [
    {
      "code": "ACCOUNT_NOT_FOUND",
      "message": "Account with ID 001XX000004DKy5YAG not found",
      "field": "accountId"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
accountId	String	Primary account ID the statement is generated for.	Big, 66.0	66.0
errors	Error Response[]	List of errors encountered during the processing of the API request.	Big, 66.0	66.0
requestIdentifier	String	Unique identifier for the request.	Big, 66.0	66.0
statusURL	String	Status URL to track the operation.	Big, 66.0	66.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Big, 66.0	66.0
templateId	String	Document template ID that's used to generate the PDF.	Big, 66.0	66.0

Suspend Resume Billing

Output representation of the list of accounts and billing schedule groups, which are suspended or resumed for billing operations.

JSON Example

```
{
  "result":{
    {
      "referenceId": "001DU000001o2UwYAI",
      "success": true,
      "errorcode": null,
      "errorMessage":null
    },
    {
      "referenceId": "001DU000001o2UuYAI",
      "success": false,
      "errorcode": "INVALID_API_INPUT",
      "errorMessage":"Billing is already suspended for 9Wsxx000000006TCAQ."
    }
  ]
}
```

```
}
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Suspend Resume Billing Object[]	Details of the accounts or billing schedule groups that the suspend or resume billing request is initiated for.	Big, 63.0	63.0

Suspend Resume Billing Object

Output representation of the details of accounts and billing schedule groups, which are suspended or resumed for billing operations, along with the status of the API request.

JSON Example

```
{
  "result": {
    {
      "referenceId": "1",
      "isSuccess": true,
      "errorCode": null,
      "errorMessage": null
    }
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
errorCode	String	Code indicating the type of error.	Big, 63.0	63.0
errorMessage	String	Message stating the reason for the error, if any.	Big, 63.0	63.0
isSuccess	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	Big, 63.0	63.0
referenceId	String	ID of the account or billing schedule group that the suspend or resume billing request is initiated for.	Big, 63.0	63.0

Tax Amount Details

Output representation of the details of the tax amount.

JSON Example

```
{
  "exemptAmount": 0.0,
  "taxAmount": 12.5,
  "totalAmount": 100.0,
  "totalAmountWithTax": 112.5
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
exemptAmount	Double	Amount exempted from taxation.	Big, 62.0	62.0
taxAmount	Double	Tax amount applicable to the transaction.	Big, 62.0	62.0
totalAmount	Double	Total amount without tax.	Big, 62.0	62.0
totalAmountWithTax	Double	Total amount with tax. The totalAmountWithTax property value is the sum of the taxAmount and totalAmount property values.	Big, 62.0	62.0

Tax Calculation

Output representation of the details of the calculated tax.

JSON Example

```
{
  "referenceEntityId": "001xx000003HYEhAAO",
  "status": "Committed",
  "taxEngineLogs": [
    {
      "createdDate": "2022-03-09T10:55:38.000Z",
      "id": "311xx00000000PpAAI",
      "resultCode": "Success"
    }
  ],
  "taxTransactionType": "Debit",
  "taxType": "Actual",
  "transactionDate": "2022-03-09T10:30:41.000Z",
  "addresses": {
    "shipFrom": {
      "locationCode": "67890"
    },
    "shipTo": {
      "locationCode": "23456"
    },
    "soldTo": {
      "locationCode": "23456"
    }
  }
},
```

```

"amountDetails": {
  "exemptAmount": 0.0,
  "taxAmount": 12.5,
  "totalAmount": 100.0,
  "totalAmountWithTax": 112.5
},
"currencyIsoCode": "USD",
"description": "Monthly invoice for account 001xx000003HYEhAAO",
"documentCode": "INV-003",
"effectiveDate": "2022-03-09T10:55:38.410Z",
"lineItems": [
  {
    "addresses": {
      "shipFrom": {
        "locationCode": "67890"
      },
      "shipTo": {
        "locationCode": "12345"
      },
      "soldTo": {
        "locationCode": "12345"
      }
    },
    "amountDetails": {
      "exemptAmount": 0.0,
      "taxAmount": 12.5,
      "totalAmount": 100.0,
      "totalAmountWithTax": 112.5
    },
    "effectiveDate": "2022-03-09T10:55:38.416Z",
    "lineNumber": "001xx000003HYEiAAO",
    "productCode": "Y0001",
    "quantity": 1.0,
    "taxCode": "TX0001",
    "taxes": [
      {
        "exemptAmount": 0.0,
        "exemptReason": "NoExemption",
        "imposition": {
          "type": "General"
        },
        "jurisdiction": {
          "country": "US",
          "id": "63000",
          "level": "CIT",
          "name": "SEATTLE",
          "region": "WA",
          "stateAssignedNo": "1726"
        },
        "rate": 12.5,
        "tax": 12.5,
        "taxId": "11000378132466",
        "taxableAmount": 100.0
      }
    ]
  }
]

```

```

    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
adapterError	Error Response	Details of the adapter error.	Big, 62.0	62.0
addresses	Addresses	Addresses that are used for calculating tax.	Big, 62.0	62.0
amountDetails	Tax Amount Details	Details of the transaction amount and taxes.	Big, 62.0	62.0
currencyIsoCode	String	Currency ISO code that's used for tax calculation.	Big, 62.0	62.0
description	String	Description of the transaction status.	Big, 62.0	62.0
documentCode	String	Unique identifier for the tax document. If the <code>documentCode</code> property isn't specified, the tax engine auto-generates it.	Big, 62.0	62.0
effectiveDate	String	Date when the tax rules are applied.	Big, 62.0	62.0
lineItems	Line Item []	Line items that the taxes are calculated for.	Big, 62.0	62.0
reference DocumentCode	String	Reference document code. For subsequent transactions such as a credit tax, the <code>referenceDocumentCode</code> property value refers to the original document code.	Big, 62.0	62.0
reference EntityId	String	ID of the related quote, invoice, or other transaction documents.	Big, 62.0	62.0
status	String	Commit status of the tax transaction. Valid values are <code>Committed</code> —Committed transaction, which is marked for tax reporting or <code>Uncommitted</code> —Uncommitted transaction, which isn't marked for tax reporting.	Big, 62.0	62.0
taxEngineLogs	Tax Engine Log []	Records that the tax engine generates while calculating taxes for the transaction.	Big, 62.0	62.0
tax TransactionId	String	Unique ID for the tax transaction.	Big, 62.0	62.0
transactionDate	String	Date of the transaction that appears on the invoice, order, and other transaction documents.	Big, 62.0	62.0
taxTransaction Type	String	Tax transaction type. Valid values are <code>Debit</code> —Increases tax liability for the user, requiring the user to pay tax on the	Big, 62.0	62.0

Property Name	Type	Description	Filter Group and Version	Available Version
		transaction, <code>Credit</code> —Decreases tax liability for the user, resulting in a tax refund for the user, or <code>Void</code> —Specifies that the tax engine has voided the document that's mentioned as the <code>referenceDocumentCode</code> property value.		
<code>taxType</code>	String	Type of calculated tax. Valid values are <code>Actual</code> —Exact tax amount that's calculated based on the actual sales or <code>Estimated</code> — Estimated tax amount, which is adjusted later to match the actual tax calculations.	Big, 62.0	62.0

Tax Details

Output representation of the tax details for each line item.

JSON Example

```
{
  "taxes": [
    {
      "exemptAmount": 0,
      "exemptReason": "NoExemption",
      "imposition": {
        "type": "General"
      },
      "jurisdiction": {
        "country": "US",
        "id": "63000",
        "level": "CIT",
        "name": "SEATTLE",
        "region": "WA",
        "stateAssignedNo": "1726"
      },
      "rate": 12.5,
      "tax": 12.5,
      "taxId": "11000378132466",
      "taxableAmount": 100
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
exemptAmount	Double	Amount exempted from taxation for the line item.	Big, 62.0	62.0
exemptReason	String	Reason for the tax exemption.	Big, 62.0	62.0
imposition	Tax Imposition	Tax imposition details applicable to the line item.	Big, 62.0	62.0
jurisdiction	Tax Jurisdiction	Details of the tax jurisdiction.	Big, 62.0	62.0
rate	Double	Tax rate applied to the taxable amount to calculate the tax.	Big, 62.0	62.0
tax	Double	Actual amount of tax that's applicable to the line item.	Big, 62.0	62.0
taxId	String	Unique identifier such as a code or a number that's assigned to a specific tax. This value helps users identify which type of tax is applied.	Big, 62.0	62.0
taxableAmount	Double	Total amount of the line item that's eligible for taxation.	Big, 62.0	62.0

Tax Engine Log

Output representation of the logs that the tax engine generates.

JSON Example

```
{
  "taxEngineLogs": [
    {
      "createdDate": "2022-03-09T10:55:38.000Z",
      "id": "311xx00000000PpAAI",
      "resultCode": "Success"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
createdDate	String	Date when the tax engine creates the log.	Big, 62.0	62.0
id	String	ID of the tax engine log record.	Big, 62.0	62.0
resultCode	String	Result code associated with the created log.	Big, 62.0	62.0

Tax Imposition

Output representation of the details of the imposed tax.

JSON Example

```
{
  "type": "Parish",
  "name": "Burbank"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
name	String	Name of the tax imposition.	Big, 62.0	62.0
type	String	Type of the tax imposition.	Big, 62.0	62.0

Tax Jurisdiction

Output representation of the details of the tax jurisdiction for the tax line.

JSON Example

```
{
  "country": "US",
  "id": "63000",
  "level": "CIT",
  "name": "SEATTLE",
  "region": "WA",
  "stateAssignedNo": "1726"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
country	String	Country of the tax jurisdiction.	Big, 62.0	62.0
id	String	ID of the tax jurisdiction.	Big, 62.0	62.0
level	String	Level of the tax jurisdiction, for example, State and Federal.	Big, 62.0	62.0
name	String	Name of the tax jurisdiction authority.	Big, 62.0	62.0
region	String	Parent region of the tax jurisdiction.	Big, 62.0	62.0
stateAssignedNo	String	Number of the assigned state.	Big, 62.0	62.0

Void Posted Credit Memo

Output representation of the request to void a posted credit memo.

JSON Example

This example shows a sample success response.

```
{
  "errors": null,
  "statusURL": "/services/data/v68.0/subjects/AsyncOperationTracker/16Pxx0000004LdkEAE",
  "debitMemoId": "4Dmxx00000000XtAAK",
  "success": true
}
```

This example shows a sample error response.

```
{
  "errors": [
    {
      "errorCode": "INVALID_STATUS",
      "message": "CreditMemo 50gxx00000000XtAAI is not in the Posted status."
    }
  ],
  "debitMemoId": "",
  "success": false
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
debitMemoId	String	ID of the created debit memo.	Big, 66.0	66.0
errors	Error Response[]	List of errors specific to this API request that were encountered during voiding the credit memo.	Big, 66.0	66.0
isSuccess	Boolean	Indicates whether the API request was successful (true) or not (false).	Big, 66.0	66.0
statusURL	String	Status URL for tracking this operation.	Big, 66.0	66.0

Billing Apex Reference

Billing provides the `ConnectApi` namespace (also called `Connect` in Apex) that contains classes for accessing the same capabilities that are available in the Billing Business APIs. Additionally, you can use other built-in Apex classes and interfaces grouped by namespace. This table lists the available Billing Apex methods with the associated Connect REST API.

Apex Method	Connect REST API
<code>convertNegativeInvoiceLines</code> (<code>ConvertNegativeInvoiceLinesInput</code> , <code>invoiceId</code>)	Negative Invoice Lines to Credit Conversion (POST)

Apex Method	Connect REST API
<code>generateInvoices(inputRequest)</code>	Invoices By Using Billing Schedules (POST)
<code>recoverBillingSchedules(inputRequest)</code>	Billing Schedule Recovery List (POST)
<code>creditInvoice(CreditInvoiceInput, invoiceId)</code>	Credit Memo Create and Apply (POST)
<code>applyCreditMemos(CreditMemoApplyInput, creditMemoId)</code>	Credit Memo Apply List (POST)
<code>unapplyCreditMemos(CreditMemoUnapplyInput, creditMemoInvApplicationId)</code>	Credit Memo Unapply (POST)
<code>applyCreditMemoLines(CreditMemoLineApplyInput, creditMemoLineId)</code>	Credit Memo Line Apply (POST)
<code>unapplyCreditMemoLines(CreditMemoLineUnapplyInput, creditMemoLineInvoiceLineId)</code>	Credit Memo Line Unapply (POST)
<code>triggerInvoiceBatchDraftToPosted(invoiceBatchRunId)</code>	Invoices Batch Draft to Posted Status (POST)
<code>postDraftInvoices(inputRequest)</code>	Invoice Draft to Posted Status (POST)
<code>createCreditMemos(CreditMemoInputRequest)</code>	Credit Memo Create and Apply (POST)
<code>voidPostedInvoice(invoiceId)</code>	Posted Invoice Voidance (POST)
<code>calculateTax(calculateTax)</code>	Tax Calculation (POST)
<code>applyPaymentLine(PaymentLineApplyInput, paymentId)</code>	Payment Line Apply (POST)
<code>unapplyPaymentLine(PaymentLineUnapplyInput, paymentId, paymentLineId)</code>	Payment Line Unapply (POST)
<code>applyRefundLine(RefundLineApplyInput, refundId)</code>	Refund Line Apply (POST)
<code>reconcileSequences(sequenceGapReconciliationInputRepresentation)</code>	Sequence Gap Reconciliation (POST)
<code>sequenceAssignment(sequencesAssignmentInputRepresentation)</code>	Sequence Assignment (POST)
<code>voidPostedCreditMemo(VoidPostedCreditMemoInput, creditMemoId)</code>	Void Posted Credit Memo (POST)

For more information about Apex classes that are available for Commerce Payments, see [CommercePayments Namespace](#).

ConnectApi Namespace

The `ConnectApi` namespace (also called Connect in Apex) provides classes to manage credit applications and billing scenarios.

[InvoiceWriteOff Namespace](#)

Create credit memos with the total charge amount on the invoice as the write-off amount and close the invoice.

[IssueCreditMemo Namespace](#)

Issue credit memos from disputed invoices. Use this namespace to create and apply credit memos against invoices or invoice lines based on dispute adjustments.

[RulesAppln Namespace](#)

Apply payments and credits to posted invoices by adhering to the specified rules.

[TaxEngineAdapter Interface](#)

Retrieves and evaluates the details from a tax engine to define tax details.

ConnectApi Namespace

The `ConnectApi` namespace (also called `Connect` in Apex) provides classes to manage credit applications and billing scenarios.

These classes are available in the `ConnectApi` namespace.

[BatchInvoiceApplication Class](#)

Update a batch of invoices from Draft to Posted status for a credit memo application. by using the `BatchInvoiceApplication` class.

[Billing Class](#)

Manage billing scenarios by using the `Billing` class. You can convert negative invoice lines, create and apply a credit memo to an invoice, generate invoices, and recover billing schedules.

[CreditMemoApply Class](#)

Manage credit memo applications by using the `CreditMemoApply` class.

[CreditMemoLineApply Class](#)

Manage credit memo line applications by using the `CreditMemoLineApply` class.

[HarmonizeBilling Class](#)

Update the status of the invoice from Draft to Posted by using the `HarmonizeBilling` class.

[PaymentsBilling Class](#)

Use the `PaymentsBilling` class to allocate the balance of a payment to reduce the balance of an invoice. Additionally, revert the application of a payment line from an invoice.

[SequencingWithoutAura Class](#)

Manage invoice sequencing processes by using the `SequencingWithoutAura` class.

[ConnectApi Input Classes](#)

Billing includes these Apex input classes.

[ConnectApi Output Classes](#)

Billing includes these Apex output classes.

[ConnectApi Enums](#)

Enums specific to the `ConnectApi` namespace.

BatchInvoiceApplication Class

Update a batch of invoices from Draft to Posted status for a credit memo application. by using the `BatchInvoiceApplication` class.

Namespace

[ConnectApi](#)

BatchInvoiceApplication Methods

These methods are for `BatchInvoiceApplication`. All methods are static.

[triggerInvoiceBatchDraftToPosted\(invoiceBatchRunId\)](#)

Update a batch of invoices from Draft to Posted status for a credit memo application.

triggerInvoiceBatchDraftToPosted(invoiceBatchRunId)

Update a batch of invoices from Draft to Posted status for a credit memo application.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.InvoiceBatchDraftToPostedResult  
triggerInvoiceBatchDraftToPosted(String invoiceBatchRunId)
```

Parameters

invoiceBatchRunId

Type: String

ID of the invoice batch run record that creates the draft invoices.

Return Value

Type: [ConnectApi.InvoiceBatchDraftToPostedResult](#) on page 2451

Usage

You need the Billing Operations User permission set to use this method.

This method posts the draft invoices and changes the status of the invoices from `Draft` to `Posted`.

Billing Class

Manage billing scenarios by using the Billing class. You can convert negative invoice lines, create and apply a credit memo to an invoice, generate invoices, and recover billing schedules.

Namespace

ConnectApi

Billing Methods

These methods are for Billing. All methods are static.

[convertNegativeInvoiceLines\(ConvertNegativeInvoiceLinesInput, invoiceId\)](#)

Convert a list of invoice lines with a negative amount into a posted credit memo. This conversion is applicable for a single invoice at a time.

[createCreditMemos\(CreditMemoInputRequest\)](#)

Create a credit memo without applying it to an invoice. You can credit the invoice at a later date.

[creditInvoice\(CreditInvoiceInput, invoiceId\)](#)

Create a credit memo and apply it to an invoice. The credit memo can fully or partially credit the invoice.

[generateInvoices\(inputRequest\)](#)

Create an invoice from a billing schedule.

[recoverBillingSchedules\(inputRequest\)](#)

Recover the latest generated invoice associated with the billing schedules in the Error or Processing status.

[voidPostedCreditMemo\(VoidPostedCreditMemoInput, creditMemoid\)](#)

Invoke the Void Posted Credit Memo API by providing a credit memo ID.

[voidPostedInvoice\(invoiceId\)](#)

Void a posted invoice to rebill the customer, if necessary.

convertNegativeInvoiceLines (ConvertNegativeInvoiceLinesInput, invoiceId)

Convert a list of invoice lines with a negative amount into a posted credit memo. This conversion is applicable for a single invoice at a time.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.ConvertNegativeInvoiceLinesResult
convertNegativeInvoiceLines (ConnectApi.ConvertNegativeInvoiceLinesInputRequest
ConvertNegativeInvoiceLinesInput, String invoiceId)
```

```
ConnectApi.Billing, convertNegativeInvoiceLines,
[ConnectApi.ConvertNegativeInvoiceLinesInputRequest, String],
ConnectApi.ConvertNegativeInvoiceLinesResult
```

Parameters

*ConvertNegativeInvoiceLinesInput*Type: [ConnectApi.ConvertNegativeInvoiceLinesInputRequest](#) on page 2438

Input parameters to convert a negative invoice line to a credit.

invoiceId

Type: String

ID of the invoice whose negative invoice lines must be converted.

Return Value

Type: [ConnectApi.ConvertNegativeInvoiceLinesResult](#) on page 2451

Usage

You need the Credit Memo Operations User permission set to use this method.

Keep these considerations in mind when you use this method.

- All invoice lines must be related to the same invoice.
- The invoice line must have a negative amount.
- The invoice line must not be a previously converted credit memo.
- The invoice must have the `Posted` status.
- The invoice must not have any active settlements such as credit applications.

createCreditMemos (CreditMemoInputRequest)

Create a credit memo without applying it to an invoice. You can credit the invoice at a later date.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.RevenueAsyncRepresentation  
createCreditMemos (ConnectApi.StandaloneCreditMemoInputRequest CreditMemoInputRequest)
```

Parameters

*CreditMemoInputRequest*Type: [ConnectApi.StandaloneCreditMemoInputRequest](#) on page 2446

Input representation of the details required to create a standalone credit memo.

Return Value

Type: [ConnectApi.RevenueAsyncRepresentation](#) on page 2453

Usage

You need the Credit Memo Operations User permission set to use this method.

Specify the credit memo header information, charge parameters, adjustment parameters, and tax parameters. A credit memo requires at least one credit memo line. The credit memo line can be a charge or an adjustment.

Specify the credit memo lines that you want as lists of charges and adjustments. Each credit memo line must be related to a product.

creditInvoice(CreditInvoiceInput, invoiceId)

Create a credit memo and apply it to an invoice. The credit memo can fully or partially credit the invoice.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.RevenueAsyncLineLevelOutputResponse  
creditInvoice(ConnectApi.CreditInvoiceInputRequest CreditInvoiceInput, String invoiceId)
```

```
ConnectApi.Billing, creditInvoice, [ConnectApi.CreditInvoiceInputRequest, String],  
ConnectApi.RevenueAsyncLineLevelOutputResponse
```

Parameters

CreditInvoiceInput

Type: [ConnectApi.CreditInvoiceInputRequest](#) on page 2439

Input representation of the details of the request to create a credit memo.

invoiceId

Type: String

ID of the invoice to be credited partially or fully. The status of the invoice must be Posted.

Return Value

Type: [ConnectApi.RevenueAsyncLineLevelOutputResponse](#) on page 2453

Usage

Use this method to adjust an outstanding invoice balance or rectify errors in an invoice. Pass a list of invoice lines to credit. Keep these considerations in mind when you use this API.

- The request must contain at least one invoice line. Each invoice line must have the invoice line's ID, the amount to credit, and any optional tax details. The invoice lines must be a part of the invoice passed in the resource.
- The amount to credit must not exceed the charge or adjustment amount of an individual invoice line.
- The request body's credit amount inclusive of taxes must not exceed the target invoice line's amount inclusive of taxes, except for taxes calculated through an external tax service.
- The request body's total credit amount inclusive of taxes calculated through an external tax service must not exceed the outstanding invoice balance, which is also inclusive of taxes.

This method creates and posts a credit memo. The credit memo has one credit memo line for each invoice line passed in the API request. The invoice's balance is then reduced by a value equal to the credit memo's balance. This API modifies the balance of a posted invoice or invoice line based on the specified credit application level for your org. See [Apply Credits to Posted Invoices or Invoice Lines](#).

generateInvoices (inputRequest)

Create an invoice from a billing schedule.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.RevenueAsyncRepresentation  
generateInvoices (ConnectApi.InvoiceInputRepresentation inputRequest)
```

```
ConnectApi.Billing, generateInvoices, [ConnectApi.InvoiceInputRepresentation],  
ConnectApi.RevenueAsyncRepresentation
```

Parameters

inputRequest

Type: [ConnectApi.InvoiceInputRepresentation](#) on page 2443

Input representation of the details of the billing schedule.

Return Value

Type: [ConnectApi.RevenueAsyncRepresentation](#) on page 2453

Usage

You need the Generate Invoices From Billing Schedule API permission set to use this method.

This method creates one billing period item for each unbilled period between the billing schedule's next billing date and the invoice's target date. Additionally, one invoice line is created for each billing period item. This method creates up to six billing periods per request.

recoverBillingSchedules (inputRequest)

Recover the latest generated invoice associated with the billing schedules in the `Error` or `Processing` status.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.BillingScheduleRecoveryResults  
recoverBillingSchedules (ConnectApi.BillingScheduleRecoveryInputRequest inputRequest)  
  
ConnectApi.Billing, recoverBillingSchedules,  
[ConnectApi.BillingScheduleRecoveryInputRequest], ConnectApi.BillingScheduleRecoveryResults
```

Parameters

inputRequest

Type: [ConnectApi.BillingScheduleRecoveryInputRequest](#) on page 2437

Input representation of the details of the billing schedules to recover the associated invoice.

Return Value

Type: [ConnectApi.BillingScheduleRecoveryResults](#) on page 2450

Usage

You need the Manage Errors Using Invoice Error Recovery API permission set to use this method.

Billing schedules include critical details such as the amount to be billed, next billing date, and status. An invoice can be associated with one or more billing schedules. When an invoice is generated or posted, the billing schedules are updated to reflect the accurate state of the invoice. The billing schedules associated with an invoice are marked in the `Error` status if any of the invoicing processes have errors. Use this method to recover the invoice associated with the billing schedules in the `Error` or `Processing` status.

voidPostedCreditMemo (VoidPostedCreditMemoInput, creditMemoId)

Invoke the Void Posted Credit Memo API by providing a credit memo ID.

API Version

66.0

Requires Chatter

No

Signature

```
public static ConnectApi.VoidPostedCreditMemoOutputRepresentation  
voidPostedCreditMemo (ConnectApi.VoidPostedCreditMemoInputRepresentation  
VoidPostedCreditMemoInput, String creditMemoId)
```

```
ConnectApi.Billing, voidPostedCreditMemo,  
[ConnectApi.VoidPostedCreditMemoInputRepresentation, String],  
ConnectApi.VoidPostedCreditMemoOutputRepresentation
```

Parameters

VoidPostedCreditMemoInput

Type: [ConnectApi.VoidPostedCreditMemoInputRepresentation](#)

Input representation of the details of a credit memo to be voided.

creditMemoId

Type: String

Required. ID of the credit memo record in posted status to be voided.

Return Value

Type: [ConnectApi.VoidPostedCreditMemoOutputRepresentation](#)

voidPostedInvoice (invoiceId)

Void a posted invoice to rebill the customer, if necessary.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.RevenueAsyncRepresentation voidPostedInvoice (String invoiceId)
```

Parameters

invoiceId

Type: String

ID of the posted invoice to be voided.

Return Value

Type: [ConnectApi.RevenueAsyncRepresentation](#) on page 2453

Usage

You need the Void a Posted Invoice API permission set to use this method.

This method changes the invoice status from `Posted` to `Void In Progress`. The invoice remains in the `Void In Progress` status until the credit is applied and financial fields are recalculated on the invoice's related billing period items and billing schedule. The invoice status changes to `Voided` after all recalculations are completed.

Keep these considerations in mind when you use this method.

- The balance and total amount on the invoice must be equal. If these amounts aren't equal due to payments or credits, the API request fails.
- You can't call other APIs on an invoice with the `Void In Progress` status. You also can't update the invoice fields.
- You can void only the most recently posted invoice on a billing schedule.
- To void an invoice that has payments or credits, use the [Credit Memo Unapply \(POST\)](#) API.

Credit Memos

The void process creates a credit memo, which contains one credit memo line for each invoice line, including tax lines. For example, if the invoice line has a balance of US\$20, the related credit memo line has a balance of \$20. The credit memo's balance is then allocated to the invoice header's balance, reducing it to zero. A credit memo invoice application is created to record the details of the void process.

Negative Invoice Lines

If an invoice has negative invoice lines that aren't converted to a credit memo, you can use this endpoint to void the posted invoice.

CreditMemoApply Class

Manage credit memo applications by using the `CreditMemoApply` class.

Namespace

[ConnectApi](#)

CreditMemoApply Methods

These methods are for `CreditMemoApply`. All methods are static.

[applyCreditMemos\(CreditMemoApplyInput, creditMemoid\)](#)

Adjust or correct already issued invoices by applying an existing credit memo to an invoice.

[unapplyCreditMemos\(CreditMemoUnapplyInput, creditMemoInvApplicationId\)](#)

Unapply a credit memo from an invoice and return the invoice and the credit memo to their pre-application states.

applyCreditMemos (CreditMemoApplyInput, creditMemoId)

Adjust or correct already issued invoices by applying an existing credit memo to an invoice.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.ApplyCreditResults  
applyCreditMemos (ConnectApi.CreditMemoApplyInputRequest CreditMemoApplyInput, String  
creditMemoId)
```

Parameters

CreditMemoApplyInput

Type: [ConnectApi.CreditMemoApplyInputRequest](#) on page 2441

Input representation of the request to apply a credit memo to an invoice.

creditMemoId

Type: String

ID of the credit memo record.

Return Value

Type: [ConnectApi.ApplyCreditResults](#) on page 2449

Usage

Specify the credit memo ID and the amounts to be applied, with the total of all applied amounts not exceeding the credit memo's balance.

The credit amount for each invoice can't surpass the original charge or adjustment amount, and the overall credit amount must not exceed the invoice's outstanding balance. The exceptions include any taxes calculated by an external service.

For example, your organization sold 10 tablets at US\$500 each, totaling \$5000, to a vendor who later reported that 6 tablets were defective. Using this method, your accounts receivable team creates a \$3000 credit memo and applies this credit to the original invoice.

unapplyCreditMemos (CreditMemoUnapplyInput, creditMemoInvApplicationId)

Unapply a credit memo from an invoice and return the invoice and the credit memo to their pre-application states.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.UnapplyCreditResult  
unapplyCreditMemos (ConnectApi.CreditMemoUnapplyInputRequest CreditMemoUnapplyInput,  
String creditMemoInvApplicationId)
```

Parameters

*CreditMemoUnapplyInput*Type: [ConnectApi.CreditMemoUnapplyInputRequest](#) on page 2442

Input representation of the request to unapply a credit memo from an invoice.

creditMemoInvApplicationId

Type: String

ID of the credit memo invoice application.

Return Value

Type: [ConnectApi.UnapplyCreditResult](#) on page 2455

Usage

Use this method if an error occurred when a credit is issued. For example, if an incorrect credit memo is applied to an invoice, or if a credit memo is created for an incorrect amount, use this method to unapply the credit memo.

CreditMemoLineApply Class

Manage credit memo line applications by using the CreditMemoLineApply class.

Namespace

[ConnectApi](#)

CreditMemoLineApply Methods

These methods are for `CreditMemoLineApply`. All methods are static.

[applyCreditMemoLines\(CreditMemoLineApplyInput, creditMemoLineId\)](#)

Adjust or correct already issued invoices by applying an existing credit memo line to an invoice line.

[unapplyCreditMemoLines\(CreditMemoLineUnapplyInput, creditMemoLineInvoiceLineId\)](#)

Unapply a credit memo line from an invoice line and return the invoice line and the credit memo line to their pre-application states.

`applyCreditMemoLines(CreditMemoLineApplyInput, creditMemoLineId)`

Adjust or correct already issued invoices by applying an existing credit memo line to an invoice line.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.CreditMemoLineAppliedResponse  
applyCreditMemoLines (ConnectApi.CreditMemoLineApplyInput CreditMemoLineApplyInput,  
String creditMemoLineId)
```

Parameters

CreditMemoLineApplyInput

Type: [ConnectApi.CreditMemoLineApplyInput](#) on page 2441

Input representation of the details of the request to apply a credit memo line to an invoice line.

creditMemoLineId

Type: String

ID of the credit memo line record.

Return Value

Type: [ConnectApi.CreditMemoLineAppliedResponse](#) on page 2450

Usage

You need the Credit Memo Operations User permission set to use this method.

unapplyCreditMemoLines (CreditMemoLineUnapplyInput, creditMemoLineInvoiceLineId)

Unapply a credit memo line from an invoice line and return the invoice line and the credit memo line to their pre-application states.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.CreditMemoLineUnappliedResponse  
unapplyCreditMemoLines (ConnectApi.CreditMemoLineUnapplyInput CreditMemoLineUnapplyInput,  
String creditMemoLineInvoiceLineId)
```

Parameters

CreditMemoLineUnapplyInput

Type: [ConnectApi.CreditMemoLineUnapplyInput](#) on page 2442

Input representation of the details of the request to unapply a credit memo line from an invoice line.

creditMemoLineInvoiceLineId

Type: String

ID of the credit memo line invoice line record.

Return Value

Type: [ConnectApi.CreditMemoLineUnappliedResponse](#) on page 2450

Usage

You need the Credit Memo Operations User permission set to use this method.

HarmonizeBilling Class

Update the status of the invoice from Draft to Posted by using the HarmonizeBilling class.

Namespace

[ConnectApi](#)

HarmonizeBilling Methods

These methods are for `HarmonizeBilling`. All methods are static.

[postDraftInvoices\(inputRequest\)](#)

Update the status of the invoice from Draft to Posted.

postDraftInvoices (inputRequest)

Update the status of the invoice from Draft to Posted.

API Version

62.0

Requires Chatter

No

Signature

```
public static ConnectApi.RevenueAsyncRepresentation  
postDraftInvoices (ConnectApi.InvoiceDraftToPostedInputRequest inputRequest)
```

Parameters

inputRequest

Type: [ConnectApi.InvoiceDraftToPostedInputRequest](#) on page 2442

Input representation of the details of the draft invoice that's posted.

Return Value

Type: [ConnectApi.RevenueAsyncRepresentation](#) on page 2453

Usage

You need the Billing Operations User permission set to use this method.

This method calls an external tax engine to calculate taxes for the draft invoice, posts the invoice, and updates the related billing schedules and billing periods.

PaymentsBilling Class

Use the PaymentsBilling class to allocate the balance of a payment to reduce the balance of an invoice. Additionally, revert the application of a payment line from an invoice.

Namespace

[ConnectApi](#)

PaymentsBilling Methods

These methods are for `PaymentsBilling`. All methods are static.

[applyPaymentLine\(PaymentLineApplyInput, paymentId\)](#)

Allocate the balance of a payment to reduce the balance of an invoice. The response includes an ID of the payment line invoice that represents the payment balance allocated against the invoice.

[applyRefundLine\(RefundLineApplyInput, refundId\)](#)

Make a refund transaction against a payment.

[unapplyPaymentLine\(PaymentLineUnapplyInput, paymentId, paymentLineId\)](#)

Revert the application of a payment line from an invoice, and return the payment and invoices to their pre-application state. Use this method if you need to correct an input during the payment application process.

[unapplyPaymentLine\(PaymentLineUnapplyInput, paymentLineId\)](#)

Revert the application of a payment line from an invoice, and return the payment and invoices to their pre-application state. Use this method if you need to correct an input during the payment application process.

applyPaymentLine(PaymentLineApplyInput, paymentId)

Allocate the balance of a payment to reduce the balance of an invoice. The response includes an ID of the payment line invoice that represents the payment balance allocated against the invoice.

API Version

64.0

Requires Chatter

No

Signature

```
public static ConnectApi.PaymentLineApplyResponse  
applyPaymentLine (ConnectApi.PaymentLineApplyRequest PaymentLineApplyInput, String  
paymentId)
```

Parameters

PaymentLineApplyInput

Type: [ConnectApi.PaymentLineApplyRequest](#) on page 2443

Input representation of the payment line details.

paymentId

Type: String

ID of the payment record.

Return Value

Type: [ConnectApi.PaymentLineApplyResponse](#) on page 2452

Usage

Use the Commerce Payments APIs to send your payment and refund details to external payment gateways for processing against a customer's bank. See [Commerce Payments resources](#) to check the APIs for payment gateways, payment captures, and payment authorizations.

applyRefundLine (RefundLineApplyInput, refundId)

Make a refund transaction against a payment.

API Version

64.0

Requires Chatter

No

Signature

```
public static ConnectApi.RefundLineApplyResponse  
applyRefundLine (ConnectApi.RefundLineApplyRequest RefundLineApplyInput, String refundId)
```

Parameters

RefundLineApplyInput

Type: [ConnectApi.RefundLineApplyRequest](#) on page 2444

Input representation of the details of a transaction refund request. This representation outlines the properties of a refund, including the refund amount and ID of the payment or credit memo record that the refund is applied to.

refundId

Type: String

ID of the refund record.

Return Value

Type: [ConnectApi.RefundLineApplyResponse](#) on page 2453

unapplyPaymentLine(PaymentLineUnapplyInput, paymentId, paymentLineId)

Revert the application of a payment line from an invoice, and return the payment and invoices to their pre-application state. Use this method if you need to correct an input during the payment application process.

API Version

64.0

Requires Chatter

No

Signature

```
public static ConnectApi.PaymentLineUnapplyResponse  
unapplyPaymentLine (ConnectApi.PaymentLineUnapplyRequest PaymentLineUnapplyInput, String  
paymentId, String paymentLineId)
```

Parameters

PaymentLineUnapplyInput

Type: [ConnectApi.PaymentLineUnapplyRequest](#) on page 2444

Input representation of the payment line details.

paymentId

Type: String

ID of the payment record.

paymentLineId

Type: String

ID of the payment line record.

Return Value

Type: [ConnectApi.PaymentLineUnapplyResponse](#) on page 2452

Usage

Use the Commerce Payments APIs to send your payment and refund details to external payment gateways for processing against a customer's bank. See [Commerce Payments resources](#) to check the APIs for payment gateways, payment captures, and payment authorizations.

unapplyPaymentLine (PaymentLineUnapplyInput, paymentLineId)

Revert the application of a payment line from an invoice, and return the payment and invoices to their pre-application state. Use this method if you need to correct an input during the payment application process.

API Version

64.0

Requires Chatter

No

Signature

```
public static ConnectApi.PaymentLineUnapplyResponse  
unapplyPaymentLine (ConnectApi.PaymentLineUnapplyRequest PaymentLineUnapplyInput, String  
paymentLineId)
```

Parameters

*PaymentLineUnapplyInput*Type: [ConnectApi.PaymentLineUnapplyRequest](#) on page 2444

Input representation of the payment line details.

paymentLineId

Type: String

ID of the payment line record.

Return Value

Type: [ConnectApi.PaymentLineUnapplyResponse](#) on page 2452

Usage

Use the Commerce Payments APIs to send your payment and refund details to external payment gateways for processing against a customer's bank. See [Commerce Payments resources](#) to check the APIs for payment gateways, payment captures, and payment authorizations.

SequencingWithoutAura Class

Manage invoice sequencing processes by using the SequencingWithoutAura class.

Namespace

[ConnectApi](#)

SequencingWithoutAura Methods

These methods are for `SequencingWithoutAura`. All methods are static.

[reconcileSequences\(sequenceGapReconciliationInputRepresentation\)](#)

Restore a missing sequence value identified by using this API in gapless-enabled sequences. This sequence value can be used later in the subsequent sequence policy numbering, ensuring there are no gaps.

[sequenceAssignment\(sequencesAssignmentInputRepresentation\)](#)

Assign sequence pattern values to objects based on the configured sequence policy.

reconcileSequences (sequenceGapReconciliationInputRepresentation)

Restore a missing sequence value identified by using this API in gapless-enabled sequences. This sequence value can be used later in the subsequent sequence policy numbering, ensuring there are no gaps.

API Version

65.0

Requires Chatter

No

Signature

```
public static ConnectApi.sequenceGapReconciliationOutputRepresentation  
reconcileSequences (ConnectApi.sequenceGapReconciliationInputRepresentation  
sequenceGapReconciliationInputRepresentation)
```

Parameters

sequenceGapReconciliationInputRepresentation

Type: [ConnectApi.SequenceGapReconciliationInputRepresentation](#) on page 2445

The details of the input used to identify and reconcile gaps in sequence values based on the sequence policy or target object.

Return Value

Type: [ConnectApi.SequenceGapReconciliationOutputRepresentation](#) on page 2454

Usage

You need the Billing Admin permission set to use this method.

sequenceAssignment (sequencesAssignmentInputRepresentation)

Assign sequence pattern values to objects based on the configured sequence policy.

API Version

65.0

Requires Chatter

No

Signature

```
public static ConnectApi.SequencesAssignmentOutputRepresentation  
sequenceAssignment (ConnectApi.SequencesAssignmentInputRepresentation  
sequencesAssignmentInputRepresentation)
```

Parameters

sequencesAssignmentInputRepresentation

Type: [ConnectApi.SequencesAssignmentInputRepresentation](#) on page 2445

The details of the target objects to which the sequence pattern values are assigned.

Return Value

Type: [ConnectApi.SequencesAssignmentOutputRepresentation](#) on page 2454

Usage

You need the Billing Admin permission set to use this method.

ConnectApi Input Classes

Billing includes these Apex input classes.

[ConnectApi.ApplicationsRequest](#)

Connect API representation of an application item input request for credit memo apply api

[ConnectApi.BillingAddressRequest](#)

Input representation of the details of an address.

[ConnectApi.BillingScheduleRecoveryInputRepresentation](#)

Input representation of the details of the billing schedules to recover the associated invoice.

[ConnectApi.ConvertNegativeInvoiceLinesInputRequest](#)

Input representation of the request details to convert a negative invoice line into a credit.

[ConnectApi.CreditDetailsApplyInput](#)

Input representation of the request to specify one or more applications to apply a credit memo line for, with each application representing an invoice line.

[ConnectApi.CreditInvoiceInputRequest](#)

Input representation of the details of the request to create a credit memo.

[ConnectApi.CreditInvoiceInvoiceLine](#)

Input representation of the details of the invoice lines to be credited.

[ConnectApi.CreditInvoiceInvoiceLineTax](#)

Input representation of the details of the tax lines to be created manually for the invoice line.

[ConnectApi.CreditMemoAddressesInputRequest](#)

Input representation of the details of the billing and shipping addresses.

[ConnectApi.CreditMemoApplyInputRequest](#)

Input representation of the request to apply a credit memo to an invoice.

[ConnectApi.CreditMemoLineApplyInput](#)

Input representation of the details of the request to apply a credit memo line to an invoice line.

[ConnectApi.CreditMemoLineUnapplyInput](#)

Input representation of the details of the request to unapply a credit memo line from an invoice line.

[ConnectApi.CreditMemoUnapplyInputRequest](#)

Input representation of the request to unapply a credit memo from an invoice.

[ConnectApi.InvoiceDraftToPostedInputRequest](#)

Input representation of the details of the draft invoice that's posted.

[ConnectApi.InvoiceInputRepresentation](#)

Input representation of the details of the billing schedule.

[ConnectApi.PaymentLineApplyRequest](#)

Input representation of the payment line details. This representation covers details on allocation of a payment to a specific invoice line. It also provides additional context through optional fields, such as associated account and effective date.

[ConnectApi.PaymentLineUnapplyRequest](#)

Input representation of the payment line details. This representation covers fields that you can specify to revert a payment line application.

[ConnectApi.RefundLineApplyRequest](#)

Input representation of the details of a transaction refund request. This representation outlines the properties of a refund, including the refund amount and ID of the payment or credit memo record that the refund is applied to.

[ConnectApi.SequenceGapReconciliationInputRepresentation](#)

The details of the input used to identify and reconcile gaps in sequence values based on the sequence policy or target object.

[ConnectApi.SequencesAssignmentInputRepresentation](#)

The details of the target objects to which the sequence pattern values are assigned.

[ConnectApi.StandaloneCreditMemoChargeInputRequest](#)

Input representation of the details of the charge lines of a credit memo.

[ConnectApi.StandaloneCreditMemoInputRequest](#)

Input representation of the details required to create a standalone credit memo.

[ConnectApi.StandaloneCreditMemoTaxInputRequest](#)

Connect API representation of Tax input request

[ConnectApi.VoidPostedCreditMemoInputRepresentation](#)

Input representation of the details of a credit memo to be voided.

ConnectApi.ApplicationsRequest

Connect API representation of an application item input request for credit memo apply api

Property	Type	Description	Required or Optional	Available Version
amount	Double	Credit amount to be applied to the invoice.	Required	62.0
appliedToId	String	ID of the invoice record to apply the credit for.	Required	62.0
description	String	Explanation or reason for applying the credit memo.	Optional	62.0
effectiveDate	String	Effective date for the credit memo.	Optional	62.0

ConnectApi.BillingAddressRequest

Input representation of the details of an address.

Property	Type	Description	Required or Optional	Available Version
city	String	Address city.	Optional	62.0
country	String	Address country.	Optional	62.0
latitude	Double	Latitude for the address.	Optional	62.0
locationCode	String	Location code for the address.	Optional	62.0
longitude	Double	Longitude for the address.	Optional	62.0
postalCode	String	Postal code for the address.	Optional	62.0
state	String	Address state.	Optional	62.0
street	String	Address street.	Optional	62.0

ConnectApi.BillingScheduleRecoveryInputRepresentation

Input representation of the details of the billing schedules to recover the associated invoice.

Property	Type	Description	Required or Optional	Available Version
billingScheduleIds	List<String>	IDs of the billing schedules to recover the invoice for. You can recover one billing schedule per API request.	Required	62.0

ConnectApi.ConvertNegativeInvoiceLinesInputRequest

Input representation of the request details to convert a negative invoice line into a credit.

Property	Type	Description	Required or Optional	Available Version
description	String	Description stamped on the credit memo that's created after the negative invoice line conversion.	Optional	62.0
effectiveDate	String	Date stamped on the credit memo that's created after the negative invoice line conversion.	Required	62.0
invoiceId	String	ID of the invoice whose negative invoice lines must be converted into a posted credit memo.	Required	62.0
invoiceLines	List<String>	Complete list of the negative invoice lines along with the associated invoice line taxes. The specified negative invoice lines are converted into a posted credit memo.	Required	62.0

ConnectApi.CreditDetailsApplyInput

Input representation of the request to specify one or more applications to apply a credit memo line for, with each application representing an invoice line.

Property	Type	Description	Required or Optional	Available Version
appliedAmount	Double	Credit amount to be applied to the invoice line.	Required	62.0
description	String	Explanation or reason for applying the credit memo line.	Optional	62.0
effectiveDate	String	Effective date for the credit memo line.	Optional	62.0
invoiceLineId	String	ID of the invoice line record to apply the credit for.	Required	62.0

ConnectApi.CreditInvoiceInputRequest

Input representation of the details of the request to create a credit memo.

Property	Type	Description	Required or Optional	Available Version
description	String	Description for the credit memo to be created.	Optional	62.0
effectiveDate	String	Date when the credit memo takes effect.	Optional	62.0
invoiceLines	List<ConnectApi.CreditInvoiceLine>	List of the invoice lines to be credited. The invoice line IDs must be related to the invoice ID specified in the API request. If invoice lines aren't specified, the API request results in an error.	Required	62.0
taxEffectiveDate	String	Date when the tax takes effect to recalculate the taxes.	Optional	62.0
taxStrategy	ConnectApi.TaxStrategyEnum	Tax strategy to be applied across invoice lines. You can override the tax strategy at the individual invoice line level or at the tax line level.	Required	62.0
type	ConnectApi.CreditMemoTypeEnum	Type of credit memo to be created. Valid values are <code>Posted</code> and <code>Draft</code> . Specify <code>Draft</code> as a value in your request to create draft credit memos.	Optional	62.0

taxStrategy values:

- `Ignore`—Specifies that the creation of tax lines must be ignored.
- `ManualOverride`—Specifies that the provided tax values must be considered for taxes.
- `CopyFromInvoiceLine`—Specifies that tax values must be copied from the invoice line.
- `Calculate`—Specifies that tax must be calculated by using the API.

ConnectApi.CreditInvoiceInvoiceLine

Input representation of the details of the invoice lines to be credited.

Property	Type	Description	Required or Optional	Available Version
addresses	ConnectApi.CreditMemoAddressRequest	Addresses to be created manually for this invoice line and the overridden tax lines. These addresses are only applicable if this invoice line is using the <code>ManualOverride</code> tax strategy.	Optional	62.0

Property	Type	Description	Required or Optional	Available Version
amountToCredit	Double	Amount to be credited from this invoice line.	Required	62.0
invoiceLineId	String	ID of the invoice line record to be credited. The invoice line ID must be related to the invoice ID specified in the API request.	Required	62.0
isTaxOnlyCredit	Boolean	Indicates whether the applicable tax amount is credited for the charge or adjustment amount (<code>true</code>), or the applicable tax amount is credited along with the charge or adjustment amount (<code>false</code>). The default value is <code>false</code> .	Optional	62.0
taxEffectiveDate	String	Date when the tax takes effect and the invoice line is credited.	Optional	62.0
taxStrategy	ConnectApi.TaxStrategyEnum ConnectApi.TaxStrategyEnum	Tax strategy for crediting the invoice line. This tax strategy takes precedence over the <code>taxStrategy</code> property value specified in the Credit Invoice Input .	Optional	62.0
taxes	list<ConnectApi.InvoiceTax> list<ConnectApi.InvoiceTax>	List of tax lines to be created manually for this invoice line.	Required if the <code>taxStrategy</code> property value is <code>ManualOverride</code> .	62.0

taxStrategy values:

- `Ignore`—Specifies that the creation of tax lines must be ignored.
- `ManualOverride`—Specifies that the provided tax values must be considered for taxes.
- `CopyFromInvoiceLine`—Specifies that tax values must be copied from the invoice line.
- `Calculate`—Specifies that tax must be calculated by using the API.

ConnectApi.CreditInvoiceInvoiceLineTax

Input representation of the details of the tax lines to be created manually for the invoice line.

Property	Type	Description	Required or Optional	Available Version
taxAmount	Double	Amount of tax to be applied related to this invoice line.	Required	62.0

Property	Type	Description	Required or Optional	Available Version
taxCode	String	Tax code to be applied related to this invoice line to create the tax line.	Optional	62.0
taxName	String	Name of tax to be applied related to this invoice line.	Optional	62.0
taxRate	Double	Tax rate used to create the tax line.	Optional	62.0

ConnectApi.CreditMemoAddressesInputRequest

Input representation of the details of the billing and shipping addresses.

Property	Type	Description	Required or Optional	Available Version
billingAddress	ConnectApi.BillingAddressRequest	Billing address for charge or adjustment line.	Optional	62.0
shippingAddress	ConnectApi.BillingAddressRequest	Shipping address for charge or adjustment line.	Optional	62.0

ConnectApi.CreditMemoApplyInputRequest

Input representation of the request to apply a credit memo to an invoice.

Property	Type	Description	Required or Optional	Available Version
applications	List<ConnectApi.CreditMemoApplication>	List of one or more applications to apply the credit memo for. Each application represents an invoice that's credited by using the balance of the specified credit memo.	Required	62.0
creditMemoId	String	ID of the credit memo record.	Required	62.0

ConnectApi.CreditMemoLineApplyInput

Input representation of the details of the request to apply a credit memo line to an invoice line.

Property	Type	Description	Required or Optional	Available Version
applyCreditDetails	List<ConnectApi.CreditMemoLineApply>	List of one or more applications to apply the credit memo line for. Each application	Required	62.0

Property	Type	Description	Required or Optional	Available Version
		represents an invoice line that's credited by using the balance of the specified credit memo line.		
creditMemoLineId	String	ID of the credit memo line record.	Required	62.0

ConnectApi.CreditMemoLineUnapplyInput

Input representation of the details of the request to unapply a credit memo line from an invoice line.

Property	Type	Description	Required or Optional	Available Version
creditMemoLineId	String	ID of the credit memo line invoice line record.	Required	62.0
description	String	Explanation or reason for unapplying the credit memo line.	Optional	62.0
effectiveDate	String	Effective date for the credit memo line.	Optional	62.0

ConnectApi.CreditMemoUnapplyInputRequest

Input representation of the request to unapply a credit memo from an invoice.

Property	Type	Description	Required or Optional	Available Version
creditMemoApplicationId	String	ID of the credit memo invoice application.	Required	62.0
description	String	Explanation or reason for unapplying the credit memo.	Optional	62.0
effectiveDate	String	Effective date for the credit memo.	Optional	62.0

ConnectApi.InvoiceDraftToPostedInputRequest

Input representation of the details of the draft invoice that's posted.

Property	Type	Description	Required or Optional	Available Version
correlationId	String	Splunk correlation ID to track the messages that are related to the request and are logged in Splunk by the different services involved in the request. If the ID isn't specified, the service creates a random Universally Unique Identifier (UUID).	Optional	62.0

Property	Type	Description	Required or Optional	Available Version
invoiceIds	List<String>	IDs of the invoice records in <code>Draft</code> status to be posted. You can post one draft invoice per API request.	Required	62.0

ConnectApi.InvoiceInputRepresentation

Input representation of the details of the billing schedule.

Property	Type	Description	Required or Optional	Available Version
action	ConnectApi.InvoiceAction	Type of invoice to be created.	Required	62.0
billingScheduleIds	List<String>	List of billing schedule IDs that's used to create the invoices. You can specify a maximum of 200 billing schedules.	Required	62.0
correlationId	String	Property that's tagged against the published <code>InvoiceProcessedEvent</code> event, if specified.	Optional	62.0
invoiceDate	String	Stamping date of the invoice in ISO 8601 format.	Required	62.0
targetDate	String	Date in ISO 8601 format used to decide the billing periods that are included to create invoices.	Required	62.0

action values:

- Draft
- Posted

ConnectApi.PaymentLineApplyRequest

Input representation of the payment line details. This representation covers details on allocation of a payment to a specific invoice line. It also provides additional context through optional fields, such as associated account and effective date.

Property	Type	Description	Required or Optional	Available Version
amount	Double	Amount that's applied. The amount must be less than the invoice line and payment balance.	Required	64.0

Property	Type	Description	Required or Optional	Available Version
appliedToId	String	ID of the invoice line that this payment is applied to. Specify the IDs for these records.	Required	64.0
associatedAccountId	String	ID of the associated account.	Optional	64.0
comments	String	Comments that you can add to the payment line application.	Optional	64.0
effectiveDate	Datetime	Date from which the payment line application takes effect.	Optional	64.0

appliedToId values:

- Invoice
- Invoice Line

ConnectApi.PaymentLineUnapplyRequest

Input representation of the payment line details. This representation covers fields that you can specify to revert a payment line application.

Property	Type	Description	Required or Optional	Available Version
comments	String	Comments that you can add when you revert a payment line application.	Optional	64.0
effectiveDate	Datetime	Date from when the reversal of the payment line application is in effect.	Optional	64.0

ConnectApi.RefundLineApplyRequest

Input representation of the details of a transaction refund request. This representation outlines the properties of a refund, including the refund amount and ID of the payment or credit memo record that the refund is applied to.

Property	Type	Description	Required or Optional	Available Version
amount	Double	Amount to refund.	Required	64.0
appliedToId	String	ID of a payment or credit memo record. The refund is applied to this object.	Required	64.0
comments	String	Additional details of the refund request.	Optional	64.0

Property	Type	Description	Required or Optional	Available Version
effectiveDate	Datetime	Date from when the refund is in effect.	Optional	64.0

ConnectApi.SequenceGapReconciliationInputRepresentation

The details of the input used to identify and reconcile gaps in sequence values based on the sequence policy or target object.

Property	Type	Description	Required or Optional	Available Version
sequencePolicyIds	List<String>	List of IDs of the sequence policies.	Required if the <code>targetObjects</code> property isn't specified. You must not specify both properties.	65.0
targetObjects	List<String>	List of objects to which the policies are applied.	Required if the <code>sequencePolicyIds</code> property isn't specified. You must not specify both properties.	65.0

ConnectApi.SequencesAssignmentInputRepresentation

The details of the target objects to which the sequence pattern values are assigned.

Property	Type	Description	Required or Optional	Available Version
sequencePolicyId	String	ID of the sequence policy.	Optional	65.0
shouldPublishPlatformEvent	Boolean	Indicates whether to publish a platform event when a sequence is assigned to a target record (<code>true</code>) or not (<code>false</code>).	Optional	65.0
targetObjectIds	List<String>	List of records to which the sequence pattern values are assigned.	Required	65.0

ConnectApi.StandaloneCreditMemoChargeInputRequest

Input representation of the details of the charge lines of a credit memo.

Property	Type	Description	Required or Optional	Available Version
addresses	Credit Memo Addresses Input	Details of the billing and shipping addresses.	Optional	62.0
chargeAmount	Double	Charge amount for the credit memo.	Required	62.0
description	String	Description of the created credit memo charge line.	Optional	62.0
endDate	String	End date of the credit memo charge line.	Optional	62.0
isTaxOnlyCredit	Boolean	Indicates whether the credit is for tax only (<code>true</code>) or not (<code>false</code>).	Optional	62.0
productId	String	ID of the product record that the credit memo is issued on.	Optional	62.0
productName	String	Name of the product that the credit memo is issued on.	Optional	62.0
startDate	String	Start date of the credit memo charge line.	Optional	62.0
taxEffectiveDate	String	Date from when the tax is applicable.	Optional	62.0
taxes	Credit Memo Taxes	List of credit memo tax lines.	Optional	62.0
taxStrategy	Credit Memo Tax Strategy	Tax strategy to be applied to this credit memo charge line, child treatment lines, and tax lines. You can override the tax strategy at the individual credit memo lines or tax lines level.	Optional	62.0
treatmentId	String	ID of the tax treatment record that's used to calculate tax.	Optional	62.0

taxStrategy values:

- `Ignore`—Specifies that the creation of tax lines must be ignored.
- `Manual Override`—Specifies that the provided tax values must be considered for taxes.
- `Calculate`—Specifies that tax must be calculated by using the API.

ConnectApi.StandaloneCreditMemoInputRequest

Input representation of the details required to create a standalone credit memo.

Property	Type	Description	Required or Optional	Available Version
billToContactId	String	Contact related to the credit memo.	Optional	62.0
billingAccountId	String	ID of the account that the credit is issued to.	Required	62.0

Property	Type	Description	Required or Optional	Available Version
charges	String ChargeLineItem	Charge lines of the credit memo. Requires at least one charge line.	Required	62.0
currencyIsoCode	String	ISO code currency of the new credit that's issued.	Optional	62.0
description	String	Description for the new credit that's issued.	Optional	62.0
effectiveDate	String	Effective date of the credit memo. If the value isn't specified, then it's null.	Optional	62.0
externalReference	String	ID of the external reference for the credit memo.	Optional	62.0
externalReferenceSource	String	Source of the external reference for the credit memo.	Optional	62.0
taxEffectiveDate	String	Effective date of the credit memo tax. If the value isn't specified, then it's null.	Optional	62.0
taxStrategy	ConnectApi.StandaloneCreditMemoTaxStrategy	Specifies how tax lines must be created for the standalone credit memos.	Required	62.0
type	ConnectApi.CreditMemoType	Type of credit memo to be created. Valid values are <code>Posted</code> and <code>Draft</code> . Specify <code>Draft</code> as a value in your request to create draft credit memos.	Optional	62.0

taxStrategy values:

- `Ignore`—Specifies that the creation of tax lines must be ignored.
- `Manual Override`—Specifies that the provided tax values must be considered for taxes.
- `Calculate`—Specifies that tax must be calculated by using the API.

ConnectApi.StandaloneCreditMemoTaxInputRequest

Connect API representation of Tax input request

Property	Type	Description	Required or Optional	Available Version
taxAmount	Double	Amount of tax to be applied.	Required	62.0
taxCode	String	Tax code to be used to create the tax line.	Optional	62.0
taxName	String	Name of tax to be applied.	Optional	62.0
taxRate	Double	Tax rate to be used to create the tax line.	Optional	62.0

ConnectApi.VoidPostedCreditMemoInputRepresentation

Input representation of the details of a credit memo to be voided.

Property	Type	Description	Required or Optional	Available Version
creditMemoId	String	ID of the posted credit memo to be voided.	Required	66.0

ConnectApi Output Classes

Billing includes these Apex output classes.

[ConnectApi.AppliedCreditResponse](#)

Output representation of the list of applied credit memo line results.

[ConnectApi.ApplyCreditResults](#)

Output representation of the list of applied credit memo results.

[ConnectApi.ApplyCreditResult](#)

Connect API representation of credit memo apply output result

[ConnectApi.BillingScheduleRecoveryResult](#)

Output representation of the details of the recovered billing schedules.

[ConnectApi.BillingScheduleRecoveryResults](#)

Output representation of the recovered details of the billing schedules and associated invoice.

[ConnectApi.CreditMemoLineAppliedResponse](#)

Output representation of the list of applied credit memo line results.

[ConnectApi.CreditMemoLineUnappliedResponse](#)

Output representation of the details of the credit memo line invoice line record with the status of the request.

[ConnectApi.ConvertNegativeInvoiceLinesResult](#)

Output representation of the details of the credit memo along with the status of the request.

[ConnectApi.InvoiceBatchDraftToPostedResult](#)

Output representation of the batch update details of the invoices from `Draft` to `Posted` status.

[ConnectApi.InvoiceRecoveryResult](#)

Output representation of the details of the recovered invoice and billing schedules.

[ConnectApi.PaymentLineApplyResponse](#)

Output representation of the details of the applied payment line. The details include the ID of the payment record and date when the payment line was applied.

[ConnectApi.PaymentLineUnapplyResponse](#)

Output representation of the details of the reversed payment line application. The details include the ID of the payment line record and date when the payment line application was reversed.

[ConnectApi.ReferenceLineError](#)

Output representation of the details of the line level errors.

[ConnectApi.RefundLineApplyResponse](#)

Output representation of the details of an applied refund. This representation includes the properties of a refund line, such as the date when the refund is applied against a payment and ID of the refund line record.

[ConnectApi.RevenueAsyncLineLevelOutputResponse](#)

Output representation of the result of the API request for the async line level operations.

[ConnectApi.RevenueAsyncRepresentation](#)

Output representation of the result of the API request with the request identifier.

[ConnectApi.SequenceErrorOutputRepresentation](#)

Output representation of the error response that's associated with a request to create or update a sequence policy, or assign sequences.

[ConnectApi.SequenceGapReconciliationOutputRepresentation](#)

Output representation of the details of the sequence gap reconciliation.

[ConnectApi.SequenceGapReconciliationErrorOutputRepresentation](#)

List of errors encountered during the processing of the API request.

[ConnectApi.SequencesAssignmentOutputRepresentation](#)

Output representation showing the status of the assigned sequence pattern values.

[ConnectApi.SequencesAssignmentResultOutputRepresentation](#)

Output representation of the details of the assigned sequence values to target objects.

[ConnectApi.UnapplyCreditResult](#)

Output representation of the details of the credit memo invoice application record with the status of the request.

[ConnectApi.VoidPostedCreditMemoOutputRepresentation](#)

Output representation of the request to void a posted credit memo.

ConnectApi.AppliedCreditResponse

Output representation of the list of applied credit memo line results.

Property Name	Type	Description	Available Version
creditMemoLineInvoiceLineId	String	ID of the credit memo line invoice line ID.	62.0
errors	List< ConnectApi.ErrorResponse >	List of errors encountered during the processing of the API request.	62.0
invoiceLineId	String	ID of the invoice line record that the credit is applied to.	62.0
success	Boolean	Indicates whether the credit memo line is successfully applied (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.ApplyCreditResults

Output representation of the list of applied credit memo results.

Property Name	Type	Description	Available Version
applyCreditResults	List< ConnectApi.ApplyCreditResult >	Output list of the applied credit memo results.	62.0

ConnectApi.ApplyCreditResult

Connect API representation of credit memo apply output result

Property Name	Type	Description	Available Version
appliedToId	String	ID of the invoice record that the credit is applied to.	62.0
errors	List< ConnectApiErrorResponse >	List of errors encountered during the processing of the API request.	62.0
id	String	ID of the credit memo invoice application.	62.0
success	Boolean	Indicates whether the credit memo is successfully applied (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.BillingScheduleRecoveryResult

Output representation of the details of the recovered billing schedules.

Property Name	Type	Description	Available Version
billingScheduleId	String	ID of the billing schedule.	62.0
billingScheduleStatus	String	Flag that indicates the billing schedule status.	62.0

ConnectApi.BillingScheduleRecoveryResults

Output representation of the recovered details of the billing schedules and associated invoice.

Property Name	Type	Description	Available Version
recoveryResults	List< ConnectApiBillingScheduleRecoveryResult >	Details of the recovered invoice and billing schedules.	62.0

ConnectApi.CreditMemoLineAppliedResponse

Output representation of the list of applied credit memo line results.

Property Name	Type	Description	Available Version
appliedCreditResponses	List< ConnectApiAppliedCreditResponse >	Output list for the applied credit memo line results.	62.0

ConnectApi.CreditMemoLineUnappliedResponse

Output representation of the details of the credit memo line invoice line record with the status of the request.

Property Name	Type	Description	Available Version
creditMemoLineInvoiceLineId	String	ID of the credit memo line invoice line record.	62.0
errors	List< ConnectApiErrorResponse >	List of errors encountered during the processing of the API request.	62.0
success	Boolean	Indicates whether the credit memo line is successfully unapplied (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.ConvertNegativeInvoiceLinesResult

Output representation of the details of the credit memo along with the status of the request.

Property Name	Type	Description	Available Version
errors	List< ConnectApiErrorResponse >	List of errors encountered during the processing of the API request.	62.0
id	String	ID of the credit memo that's created after the conversion of the negative invoice lines.	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.InvoiceBatchDraftToPostedResult

Output representation of the batch update details of the invoices from `Draft` to `Posted` status.

Property Name	Type	Description	Available Version
invoiceBatchDraftToPostedId	String	ID of the invoice batch draft to posted run record that's created to track the batch process of posting the draft invoices that are associated with the parent invoice batch run record.	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.InvoiceRecoveryResult

Output representation of the details of the recovered invoice and billing schedules.

Property Name	Type	Description	Available Version
billingSchedules	List< ConnectApiSchedulePayload >	Billing schedules associated with this invoice.	62.0
invoiceErrors	List< ConnectApiErrorResponse >	List of errors encountered during the invoice recovery.	62.0
invoiceId	String	ID of the recovered invoice.	62.0

Property Name	Type	Description	Available Version
invoiceStatus	String	Flag that indicates the invoice status.	62.0
success	Boolean	Indicates whether the overall transaction was successful or not (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.PaymentLineApplyResponse

Output representation of the details of the applied payment line. The details include the ID of the payment record and date when the payment line was applied.

Property Name	Type	Description	Available Version
appliedDate	Datetime	Date when the payment line was applied.	64.0
id	String	ID of the payment line record.	64.0

ConnectApi.PaymentLineUnapplyResponse

Output representation of the details of the reversed payment line application. The details include the ID of the payment line record and date when the payment line application was reversed.

Property Name	Type	Description	Available Version
id	String	ID of the payment line record.	64.0
unappliedDate	Datetime	Date when the payment line application was reversed.	64.0

ConnectApi.ReferenceLineError

Output representation of the details of the line level errors.

Property Name	Type	Description	Available Version
errors	List< ConnectApiErrorResponse >	List of errors with error code and error message for the specified invoice line ID.	62.0
referenceLineId	String	ID of the invoice line specified in the API request that has an issue, causing the API request to fail.	62.0

ConnectApi.RefundLineApplyResponse

Output representation of the details of an applied refund. This representation includes the properties of a refund line, such as the date when the refund is applied against a payment and ID of the refund line record.

Property Name	Type	Description	Available Version
appliedDate	Datetime	Date when the refund is applied against a payment.	64.0
id	String	ID of the refund line record.	64.0

ConnectApi.RevenueAsyncLineLevelOutputResponse

Output representation of the result of the API request for the async line level operations.

Property Name	Type	Description	Available Version
errors	List< ConnectApiErrorResponse >	Details of errors, if any.	62.0
referenceLineErrorResults	List< ConnectApiReferenceLineError >	List of errors grouped by the invoice line IDs if the API request fails.	62.0
referenceLineType	String	Reference type for the reference line entity in the <code>referenceLineErrorResults</code> property.	62.0
requestIdentifier	String	Unique identifier of the request.	62.0
statusURL	String	URL to track the status of the operation.	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.RevenueAsyncRepresentation

Output representation of the result of the API request with the request identifier.

Property Name	Type	Description	Available Version
errors	List< ConnectApiErrorResponse >	Details of errors, if any.	62.0
requestIdentifier	String	Unique identifier of the request.	62.0
success	Boolean	Indicates whether the API request is successful (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.SequenceErrorOutputRepresentation

Output representation of the error response that's associated with a request to create or update a sequence policy, or assign sequences.

Property Name	Type	Description	Available Version
errorCode	String	Code for the resultant error.	65.0
message	String	Error message for the resultant error.	65.0

ConnectApi.SequenceGapReconciliationOutputRepresentation

Output representation of the details of the sequence gap reconciliation.

Property Name	Type	Description	Available Version
error	ConnectApi.SequenceErrorOutputRepresentation	List of errors encountered during the processing of the API request.	65.0
jobId	String	Unique identifier assigned to sequence gap reconciliation asynchronous process.	65.0
sequencePolicyIds	List<String>	List of IDs of the sequence policies.	65.0
status	StatusEnum	The status of sequence reconciliation API request. Valid values are Submitted or NotSubmitted.	65.0
submittedAt	String	Date and time when the reconciliation request was submitted to the async job.	65.0
targetObjects	List<String>	List of objects to which the policies are applied.	65.0

ConnectApi.SequenceGapReconciliationErrorOutputRepresentation

List of errors encountered during the processing of the API request.

Property Name	Type	Description	Available Version
errorCode	String	Code for the resultant error.	65.0
errorMessage	String	Error message for the resultant error.	65.0

ConnectApi.SequencesAssignmentOutputRepresentation

Output representation showing the status of the assigned sequence pattern values.

Property Name	Type	Description	Available Version
errors	ConnectApi.SequenceErrorOutputRepresentation	Error encountered during the processing of the API request.	65.0
sequencesAssignment	ConnectApi.SequenceAssignmentOutputRepresentation	Details of the sequence pattern values assignment.	65.0

Property Name	Type	Description	Available Version
status	SequenceResponseStatusEnum	Status of the sequence policy assignment. Valid values are <code>PartialSuccess</code> , <code>Success</code> , or <code>Failed</code> .	65.0

ConnectApi.SequencesAssignmentResultOutputRepresentation

Output representation of the details of the assigned sequence values to target objects.

Property Name	Type	Description	Available Version
errors	ConnectApi.ErrorResponse ConnectApi.ErrorResponse	Error encountered during the processing of the API request.	65.0
isSuccess	Boolean	Indicates whether the sequence pattern value was assigned (<code>true</code>) or not (<code>false</code>).	65.0
sequencePatternValue	String	Sequence pattern value assigned to the target object.	65.0
sequencePolicyId	String	ID of the sequence policy assigned to the target object.	65.0
targetObjectId	String	Record to which the sequence pattern value is assigned.	65.0

ConnectApi.UnapplyCreditResult

Output representation of the details of the credit memo invoice application record with the status of the request.

Property Name	Type	Description	Available Version
errors	List< ConnectApi.ErrorResponse >	List of errors encountered during the processing of the API request.	62.0
id	String	ID of the credit memo invoice application record.	62.0
success	Boolean	Indicates whether the credit memo is successfully unapplied (<code>true</code>) or not (<code>false</code>).	62.0

ConnectApi.VoidPostedCreditMemoOutputRepresentation

Output representation of the request to void a posted credit memo.

Property Name	Type	Description	Available Version
debitMemoId	String	ID of the created debit memo.	66.0
errors	List< ConnectApi.ErrorResponse >	List of errors specific to this API request that were encountered during voiding the credit memo.	66.0

Property Name	Type	Description	Available Version
<code>isSuccess</code>	Boolean	Indicates whether the API request was successful (<code>true</code>) or not (<code>false</code>).	66.0
<code>statusURL</code>	String	Status URL for tracking this operation.	66.0

ConnectApi Enums

Enums specific to the `ConnectApi` namespace.

`ConnectApi` enums inherit all properties and methods of Apex enums.

Enums are not versioned. Enum values are returned in all API versions.

Enum	Description
<code>ConnectApi.InvoiceAction</code>	Type of invoice to be created.
<code>ConnectApi.TaxStrategyEnum</code>	Tax strategy to be applied across invoice lines. You can override the tax strategy at the individual invoice line level or at the tax line level.
<code>ConnectApi.CreditMemoTypeEnum</code>	Type of credit memo to be created. Valid values are <code>Posted</code> and <code>Draft</code> . Specify <code>Draft</code> as a value in your request to create draft credit memos.
<code>ConnectApi.StandaloneTaxStrategyEnum</code>	Specifies how tax lines must be created for the standalone credit memos.
<code>ConnectApi.SequenceResponseStatusEnum</code>	Status of the sequence policy assignment.
<code>ConnectApi.StatusEnum</code>	The status of sequence reconciliation API request. Valid values are <code>Submitted</code> or <code>NotSubmitted</code> .

`ConnectApi.InvoiceAction` values:

- `Draft`
- `Posted`

`ConnectApi.TaxStrategyEnum` values:

- `Ignore`—Specifies that the creation of tax lines must be ignored.
- `ManualOverride`—Specifies that the provided tax values must be considered for taxes.
- `CopyFromInvoiceLine`—Specifies that tax values must be copied from the invoice line.
- `Calculate`—Specifies that tax must be calculated by using the API.

`ConnectApi.StandaloneTaxStrategyEnum` values:

- `Ignore`—Specifies that the creation of tax lines must be ignored.
- `Manual Override`—Specifies that the provided tax values must be considered for taxes.
- `Calculate`—Specifies that tax must be calculated by using the API.

`ConnectApi.SequenceResponseStatusEnum` values:

- `PartialSuccess`
- `Success`

- Failed

InvoiceWriteOff Namespace

Create credit memos with the total charge amount on the invoice as the write-off amount and close the invoice.

The `InvoiceWriteOff` namespace includes these classes.

Usage

You need the Billing Operations User or Credit Memo Operations User permission set to access this namespace.

[WriteOffInvoiceInput Class](#)

Contains invoice details that are used for the request to write off an invoice.

[WriteOffInvoiceInputList Class](#)

Contains invoice details to write off a list of posted invoices.

[WriteOffInvoiceResponse Class](#)

Contains properties to store the response details to the request to write off a posted invoice.

[WriteOffInvoiceResponseError Class](#)

Contains properties to store the error response that's associated with a request to write off a posted invoice.

[WriteOffInvoiceResponseList Class](#)

Contains properties to store the response details of the list of invoices that are written off.

WriteOffInvoiceInput Class

Contains invoice details that are used for the request to write off an invoice.

Namespace

[InvoiceWriteOff](#) on page 2457

[WriteOffInvoiceInput Constructors](#)

Learn more about the constructors available with the `WriteOffInvoiceInput` class.

[WriteOffInvoiceInput Properties](#)

Learn more about the properties available with the `WriteOffInvoiceInput` class.

WriteOffInvoiceInput Constructors

Learn more about the constructors available with the `WriteOffInvoiceInput` class.

The `WriteOffInvoiceInput` class includes these constructors.

[WriteOffInvoiceInput\(invoiceId, reasonCode, reason\)](#)

Initializes the `WriteOffInvoiceInput` class that stores the invoice details and reason for writing off invoices.

[WriteOffInvoiceInput\(\)](#)

Initializes the `WriteOffInvoiceInput` class.

WriteOffInvoiceInput(invoiceId, reasonCode, reason)

Initializes the WriteOffInvoiceInput class that stores the invoice details and reason for writing off invoices.

Signature

```
public WriteOffInvoiceInput(String invoiceId, String reasonCode, String reason)
```

Parameters

invoiceId

Type: String

ID of the invoice record that you want to write off.

reasonCode

Type: String

Code that categorizes the write-off reason. For example, if the reason for the invoice write-off is a disputed amount, the reason code can be Disputed Amount (DA).

reason

Type: String

Reason for writing off invoices.

WriteOffInvoiceInput()

Initializes the WriteOffInvoiceInput class.

Signature

```
public WriteOffInvoiceInput()
```

WriteOffInvoiceInput Properties

Learn more about the properties available with the WriteOffInvoiceInput class.

The `WriteOffInvoiceInput` class includes these properties.

[invoiceId](#)

Sets the ID of the invoice record that must be written off.

[reason](#)

Sets the reason for writing off invoices.

[reasonCode](#)

Sets the code that categorizes the write-off reason.

invoiceId

Sets the ID of the invoice record that must be written off.

Signature

```
public String invoiceId {get; set;}
```

Property Value

Type: String

reason

Sets the reason for writing off invoices.

Signature

```
public String reason {get; set;}
```

Property Value

Type: String

reasonCode

Sets the code that categorizes the write-off reason.

Signature

```
public String reasonCode {get; set;}
```

Property Value

Type: String

WriteOffInvoiceInputList Class

Contains invoice details to write off a list of posted invoices.

Namespace

[InvoiceWriteOff](#) on page 2457

[WriteOffInvoiceInputList Constructors](#)

Learn more about the constructors available with the WriteOffInvoiceInputList class.

[WriteOffInvoiceInputList Properties](#)

Learn more about the properties available with the WriteOffInvoiceInputList class.

WriteOffInvoiceInputList Constructors

Learn more about the constructors available with the WriteOffInvoiceInputList class.

The `WriteOffInvoiceInputList` class includes these constructors.

[WriteOffInvoiceInputList\(writeOffInvoiceInputList\)](#)

Initializes the WriteOffInvoiceInputList class that stores the details of invoices that you want to write off.

[WriteOffInvoiceInputList\(\)](#)

Initializes the WriteOffInvoiceInputList class.

WriteOffInvoiceInputList (writeOffInvoiceInputList)

Initializes the WriteOffInvoiceInputList class that stores the details of invoices that you want to write off.

Signature

```
public WriteOffInvoiceInputList (List<InvoiceWriteOff.WriteOffInvoiceInput>
writeOffInvoiceInputList)
```

Parameters

writeOffInvoiceInputList

Type: List<[InvoiceWriteOff.WriteOffInvoiceInput](#) on page 2457>

Input representation of the request to write off a list of posted invoices.

WriteOffInvoiceInputList ()

Initializes the WriteOffInvoiceInputList class.

Signature

```
public WriteOffInvoiceInputList ()
```

WriteOffInvoiceInputList Properties

Learn more about the properties available with the WriteOffInvoiceInputList class.

The WriteOffInvoiceInputList class includes these properties.

[writeOffInvoiceInputList](#)

Input representation of the request to write off a list of posted invoices.

writeOffInvoiceInputList

Input representation of the request to write off a list of posted invoices.

Signature

```
public List<InvoiceWriteOff.WriteOffInvoiceInput> writeOffInvoiceInputList {get; set;}
```

Property Value

Type: List<[InvoiceWriteOff.WriteOffInvoiceInput](#) on page 2457>

WriteOffInvoiceResponse Class

Contains properties to store the response details to the request to write off a posted invoice.

Namespace

[InvoiceWriteOff](#) on page 2457

[WriteOffInvoiceResponse Constructors](#)

Learn more about the constructors available with the WriteOffInvoiceResponse class.

[WriteOffInvoiceResponse Properties](#)

Learn more about the properties available with the WriteOffInvoiceResponse class.

WriteOffInvoiceResponse Constructors

Learn more about the constructors available with the WriteOffInvoiceResponse class.

The `WriteOffInvoiceResponse` class includes these constructors.

[WriteOffInvoiceResponse\(errors, invoiceId, requestIdIdentifier, success\)](#)

Initializes the WriteOffInvoiceResponse class that stores the response details to the request to write off a posted invoice.

WriteOffInvoiceResponse(errors, invoiceId, requestIdIdentifier, success)

Initializes the WriteOffInvoiceResponse class that stores the response details to the request to write off a posted invoice.

Signature

```
public WriteOffInvoiceResponse (InvoiceWriteOff.WriteOffInvoiceResponseError errors,  
String invoiceId, String requestIdIdentifier, Boolean success)
```

Parameters

errors

Type: [InvoiceWriteOff.WriteOffInvoiceResponseError](#) on page 2463

If the request fails, this property contains a list of errors.

invoiceId

Type: String

ID of the invoice record that's written off.

requestIdentifier

Type: String

If the request is successful, this property contains an asynchronous API request identifier for an invoice ID.

success

Type: Boolean

Indicates whether the invoice write-off request was successful (`true`) or not (`false`).

WriteOffInvoiceResponse Properties

Learn more about the properties available with the WriteOffInvoiceResponse class.

The `WriteOffInvoiceResponse` class includes these properties.

[errors](#)

Get the list of errors if the request to write off posted invoices fails.

[invoiceId](#)

Get the ID of the invoice record that's written off.

[requestIdentifier](#)

Get the identifier of the asynchronous API request for an invoice ID if the request is successful.

[success](#)

Get the request status of the invoice write-off request.

errors

Get the list of errors if the request to write off posted invoices fails.

Signature

```
public InvoiceWriteOff.WriteOffInvoiceResponseError errors {get; set;}
```

Property Value

Type: [InvoiceWriteOff.WriteOffInvoiceResponseError](#) on page 2463

invoiceId

Get the ID of the invoice record that's written off.

Signature

```
public String invoiceId {get; set;}
```

Property Value

Type: String

requestIdentifier

Get the identifier of the asynchronous API request for an invoice ID if the request is successful.

Signature

```
public String requestIdentifier {get; set;}
```

Property Value

Type: String

success

Get the request status of the invoice write-off request.

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: Boolean

WriteOffInvoiceResponseError Class

Contains properties to store the error response that's associated with a request to write off a posted invoice.

Namespace

[InvoiceWriteOff](#) on page 2457

[WriteOffInvoiceResponseError Constructors](#)

Learn more about the constructors available with the WriteOffInvoiceResponseError class.

[WriteOffInvoiceResponseError Properties](#)

Learn more about the properties available with the WriteOffInvoiceResponseError class.

WriteOffInvoiceResponseError Constructors

Learn more about the constructors available with the WriteOffInvoiceResponseError class.

The `WriteOffInvoiceResponseError` class includes these constructors.

[WriteOffInvoiceResponseError\(errorCode, errorMessage\)](#)

Initializes the WriteOffInvoiceResponseError class that stores the error response that's associated with a request to write off a posted invoice.

WriteOffInvoiceResponseError(errorCode, errorMessage)

Initializes the WriteOffInvoiceResponseError class that stores the error response that's associated with a request to write off a posted invoice.

Signature

```
public WriteOffInvoiceResponseError(String errorCode, String errorMessage)
```

Parameters

errorCode

Type: String

Code that represents the error.

errorMessage

Type: String

Message that describes the error.

WriteOffInvoiceResponseError Properties

Learn more about the properties available with the WriteOffInvoiceResponseError class.

The WriteOffInvoiceResponseError class includes these properties.

[errorCode](#)

Get the error code details.

[errorMessage](#)

Get the error message details.

errorCode

Get the error code details.

Signature

```
public String errorCode {get; set;}
```

Property Value

Type: String

errorMessage

Get the error message details.

Signature

```
public String errorMessage {get; set;}
```

Property Value

Type: String

WriteOffInvoiceResponseList Class

Contains properties to store the response details of the list of invoices that are written off.

Namespace

[InvoiceWriteOff](#) on page 2457

[WriteOffInvoiceResponseList Constructors](#)

Learn more about the constructors available with the WriteOffInvoiceResponseList class.

[WriteOffInvoiceResponseList Properties](#)

Learn more about the properties available with the WriteOffInvoiceResponseList class.

WriteOffInvoiceResponseList Constructors

Learn more about the constructors available with the WriteOffInvoiceResponseList class.

The `WriteOffInvoiceResponseList` class includes these constructors.

[WriteOffInvoiceResponseList\(writeOffInvoiceResponseList\)](#)

Initializes the WriteOffInvoiceResponseList class that stores the response details of the list of invoices that are written off.

[WriteOffInvoiceResponseList\(\)](#)

Initializes the WriteOffInvoiceResponseList class.

WriteOffInvoiceResponseList (writeOffInvoiceResponseList)

Initializes the WriteOffInvoiceResponseList class that stores the response details of the list of invoices that are written off.

Signature

```
public WriteOffInvoiceResponseList (List<InvoiceWriteOff.WriteOffInvoiceResponse>  
writeOffInvoiceResponseList)
```

Parameters

writeOffInvoiceResponseList

Type: List<[InvoiceWriteOff.WriteOffInvoiceResponse](#) on page 2461>

Details of the invoices for which the write-off process is initiated.

WriteOffInvoiceResponseList ()

Initializes the WriteOffInvoiceResponseList class.

Signature

```
public WriteOffInvoiceResponseList ()
```

WriteOffInvoiceResponseList Properties

Learn more about the properties available with the WriteOffInvoiceResponseList class.

The `WriteOffInvoiceResponseList` class includes these properties.

[writeOffInvoiceResponseList](#)

Get the details of the invoices for which the write-off posted invoice process is initiated.

writeOffInvoiceResponseList

Get the details of the invoices for which the write-off posted invoice process is initiated.

Signature

```
public List<InvoiceWriteOff.WriteOffInvoiceResponse> writeOffInvoiceResponseList {get; set; }
```

Property Value

Type: [List<InvoiceWriteOff.WriteOffInvoiceResponse>](#) on page 2461>

IssueCreditMemo Namespace

Issue credit memos from disputed invoices. Use this namespace to create and apply credit memos against invoices or invoice lines based on dispute adjustments.

You can access this namespace if Dispute Management is enabled in Billing.

The `IssueCreditMemo` namespace includes these classes.

[CreditLineRequestInputRepresentations Class](#)

Represents a single line-level credit request. Specifies the invoice line to credit, the amount to apply, and an optional description.

[CreditRequestInputRepresentations Class](#)

Represents a credit request for an invoice. Contains invoice and dispute identifiers, total credit amount, category, and line-level credit details for issuing a credit memo.

[CreditResponseOutputRepresentations Class](#)

Represents the result of a credit memo operation. Indicates success or failure and any additional information or message.

CreditLineRequestInputRepresentations Class

Represents a single line-level credit request. Specifies the invoice line to credit, the amount to apply, and an optional description.

Namespace

[IssueCreditMemo](#) on page 2466

[CreditLineRequestInputRepresentations Constructors](#)

[CreditLineRequestInputRepresentations Properties](#)

CreditLineRequestInputRepresentations Constructors

The `CreditLineRequestInputRepresentations` class includes these constructors.

[CreditLineRequestInputRepresentations\(invoiceLineId, creditLineAmount, description\)](#)

Creates a credit line request for the specified invoice line, amount, and description.

[CreditLineRequestInputRepresentations\(\)](#)

Creates an empty credit line request.

CreditLineRequestInputRepresentations (invoiceLineId, creditLineAmount, description)

Creates a credit line request for the specified invoice line, amount, and description.

Signature

```
public CreditLineRequestInputRepresentations (String invoiceLineId, Double
creditLineAmount, String description)
```

Parameters

invoiceLineId

Type: String

The ID of the invoice line to which the credit applies.

creditLineAmount

Type: Double

The monetary amount to credit for this invoice line.

description

Type: String

Optional description or reason for the credit line.

CreditLineRequestInputRepresentations ()

Creates an empty credit line request.

Signature

```
public CreditLineRequestInputRepresentations ()
```

CreditLineRequestInputRepresentations Properties

The `CreditLineRequestInputRepresentations` class includes these properties.

[creditLineAmount](#)

The monetary amount to credit for this invoice line.

[description](#)

Optional description or reason for the credit line.

[invoiceLineId](#)

The ID of the invoice line to which the credit applies.

creditLineAmount

The monetary amount to credit for this invoice line.

Signature

```
public Double creditLineAmount {get; set;}
```

Property Value

Type: Double

description

Optional description or reason for the credit line.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

invoiceLineId

The ID of the invoice line to which the credit applies.

Signature

```
public String invoiceLineId {get; set;}
```

Property Value

Type: String

CreditRequestInputRepresentations Class

Represents a credit request for an invoice. Contains invoice and dispute identifiers, total credit amount, category, and line-level credit details for issuing a credit memo.

Namespace

[IssueCreditMemo](#) on page 2466

[CreditRequestInputRepresentations Constructors](#)

[CreditRequestInputRepresentations Properties](#)

CreditRequestInputRepresentations Constructors

The `CreditRequestInputRepresentations` class includes these constructors.

[CreditRequestInputRepresentations\(invoiceId, creditAmount, description, disputeId, category, creditLineRequestInputRepresentations\)](#)

Creates a credit request with the given invoice, amount, description, dispute, category, and line-level credit details.

[CreditRequestInputRepresentations\(invoiceId, creditAmount, description, creditLineRequestInputRepresentations\)](#)

Creates a credit request with the given invoice, amount, description, and line-level credit details.

`CreditRequestInputRepresentations()`

Creates an empty credit request.

`CreditRequestInputRepresentations(invoiceId, creditAmount, description, disputeId, category, creditLineRequestInputRepresentations)`

Creates a credit request with the given invoice, amount, description, dispute, category, and line-level credit details.

Signature

```
public CreditRequestInputRepresentations(String invoiceId, Double creditAmount, String
description, String disputeId, String category,
List<IssueCreditMemo.CreditLineRequestInputRepresentations>
creditLineRequestInputRepresentations)
```

Parameters

invoiceId

Type: String

ID of the invoice to credit.

creditAmount

Type: Double

Total credit amount to apply to the invoice.

description

Type: String

Optional description for the credit request.

disputeId

Type: String

ID of the billing dispute associated with this credit request.

category

Type: String

Category of the credit memo.

creditLineRequestInputRepresentations

Type: List<[IssueCreditMemo.CreditLineRequestInputRepresentations](#) on page 2466>

List of line-level credit requests for this invoice.

`CreditRequestInputRepresentations(invoiceId, creditAmount, description, creditLineRequestInputRepresentations)`

Creates a credit request with the given invoice, amount, description, and line-level credit details.

Signature

```
public CreditRequestInputRepresentations(String invoiceId, Double creditAmount, String
description, List<IssueCreditMemo.CreditLineRequestInputRepresentations>
creditLineRequestInputRepresentations)
```

Parameters

invoiceId

Type: String

ID of the invoice to credit.

creditAmount

Type: Double

Total credit amount to apply to the invoice.

description

Type: String

Optional description for the credit request.

creditLineRequestInputRepresentations

Type: List<[IssueCreditMemo.CreditLineRequestInputRepresentations](#) on page 2466>

List of line-level credit requests for this invoice.

CreditRequestInputRepresentations ()

Creates an empty credit request.

Signature

```
public CreditRequestInputRepresentations ()
```

CreditRequestInputRepresentations Properties

The `CreditRequestInputRepresentations` class includes these properties.

[category](#)

The credit memo category.

[creditAmount](#)

The total credit amount to apply to the invoice.

[creditLineRequestInputRepresentations](#)

List of line-level credit requests for this invoice.

[description](#)

Optional description for the credit request.

[disputeld](#)

The ID of the billing dispute associated with this credit request.

invoiceId

The ID of the invoice to credit.

category

The credit memo category.

Signature

```
public String category {get; set;}
```

Property Value

Type: String

creditAmount

The total credit amount to apply to the invoice.

Signature

```
public Double creditAmount {get; set;}
```

Property Value

Type: Double

creditLineRequestInputRepresentations

List of line-level credit requests for this invoice.

Signature

```
public List<IssueCreditMemo.CreditLineRequestInputRepresentations>  
creditLineRequestInputRepresentations {get; set;}
```

Property Value

Type: List<[IssueCreditMemo.CreditLineRequestInputRepresentations](#) on page 2466>

description

Optional description for the credit request.

Signature

```
public String description {get; set;}
```

Property Value

Type: String

disputeId

The ID of the billing dispute associated with this credit request.

Signature

```
public String disputeId {get; set;}
```

Property Value

Type: String

invoiceId

The ID of the invoice to credit.

Signature

```
public String invoiceId {get; set;}
```

Property Value

Type: String

CreditResponseOutputRepresentations Class

Represents the result of a credit memo operation. Indicates success or failure and any additional information or message.

Namespace

[IssueCreditMemo](#) on page 2466

Usage

Example

[CreditResponseOutputRepresentations Constructors](#)

[CreditResponseOutputRepresentations Properties](#)

CreditResponseOutputRepresentations Constructors

The `CreditResponseOutputRepresentations` class includes these constructors.

[CreditResponseOutputRepresentations\(success, additionalInformation\)](#)

Creates a response with the given success flag and additional information.

CreditResponseOutputRepresentations(success, additionalInformation)

Creates a response with the given success flag and additional information.

Signature

```
public CreditResponseOutputRepresentations(Boolean success, String additionalInformation)
```

Parameters

success

Type: Boolean

Indicates whether the credit memo is issued successfully (`true`) or not (`false`).

additionalInformation

Type: String

Additional information or message, such as error details or confirmation.

CreditResponseOutputRepresentations Properties

The `CreditResponseOutputRepresentations` class includes these properties.

[additionalInformation](#)

Additional information or message, such as error details or confirmation.

[success](#)

Indicates whether the credit memo is issued successfully (`true`) or not (`false`).

additionalInformation

Additional information or message, such as error details or confirmation.

Signature

```
public String additionalInformation {get; set;}
```

Property Value

Type: String

success

Indicates whether the credit memo is issued successfully (`true`) or not (`false`).

Signature

```
public Boolean success {get; set;}
```

Property Value

Type: Boolean

RulesAppln Namespace

Apply payments and credits to posted invoices by adhering to the specified rules.

The `RulesAppln` namespace includes these classes.

[RulesApplicationErrorResponse Class](#)

Contains properties to store error details that occurred during the rules application.

[RulesApplicationResponse Class](#)

Contains properties to store the response details for the rules application request.

[RulesApplicationSummaryResponse Class](#)

Contains properties to store the summary details of the rules application, including payment and credit memo counts and application statistics.

RulesApplicationErrorResponse Class

Contains properties to store error details that occurred during the rules application.

Namespace

[RulesAppln](#) on page 2474

[RulesApplicationErrorResponse Constructors](#)

Learn more about the constructors available with the `RulesApplicationErrorResponse` class.

[RulesApplicationErrorResponse Properties](#)

Learn more about the properties available with the `RulesApplicationErrorResponse` class.

RulesApplicationErrorResponse Constructors

Learn more about the constructors available with the `RulesApplicationErrorResponse` class.

The `RulesApplicationErrorResponse` class includes these constructors.

[RulesApplicationErrorResponse\(errorCode, message\)](#)

Initializes the `RulesApplicationErrorResponse` class that stores error details that occurred during the rules application.

[RulesApplicationErrorResponse\(\)](#)

Initializes an empty instance of the `RulesApplicationErrorResponse` class.

RulesApplicationErrorResponse(errorCode, message)

Initializes the `RulesApplicationErrorResponse` class that stores error details that occurred during the rules application.

Signature

```
public RulesApplicationErrorResponse(String errorCode, String message)
```

```
RulesAppln.RulesApplicationErrorResponse, newinstance, [String, String],  
RulesAppln.RulesApplicationErrorResponse
```

Parameters

errorCode

Type: String

Error code that identifies the type of error that occurred during the rules application.

message

Type: String

Error message that describes the error that occurred during the rules application.

RulesApplicationErrorResponse ()

Initializes an empty instance of the RulesApplicationErrorResponse class.

Signature

```
public RulesApplicationErrorResponse ()
```

```
RulesAppln.RulesApplicationErrorResponse, newinstance, [],  
RulesAppln.RulesApplicationErrorResponse
```

RulesApplicationErrorResponse Properties

Learn more about the properties available with the RulesApplicationErrorResponse class.

The RulesApplicationErrorResponse class includes these properties.

[errorCode](#)

Get the error code that identifies the type of error that occurred during the rules application.

[message](#)

Get the error message that describes the error that occurred during the rules application.

errorCode

Get the error code that identifies the type of error that occurred during the rules application.

Signature

```
public String errorCode {get; set;}
```

```
RulesAppln.RulesApplicationErrorResponse, errorCode
```

Property Value

Type: String

message

Get the error message that describes the error that occurred during the rules application.

Signature

```
public String message {get; set;}
```

```
RulesAppln.RulesApplicationErrorResponse, message
```

Property Value

Type: String

RulesApplicationResponse Class

Contains properties to store the response details for the rules application request.

Namespace

[RulesAppln](#) on page 2474

[RulesApplicationResponse Constructors](#)

Learn more about the constructors available with the RulesApplicationResponse class.

[RulesApplicationResponse Properties](#)

Learn more about the properties available with the RulesApplicationResponse class.

RulesApplicationResponse Constructors

Learn more about the constructors available with the RulesApplicationResponse class.

The `RulesApplicationResponse` class includes these constructors.

[RulesApplicationResponse\(isSuccess, appliedRules, rulesApplicationSummary, errors\)](#)

Initializes the RulesApplicationResponse class that stores the response details for the rules application request.

[RulesApplicationResponse\(\)](#)

Initializes an empty instance of the RulesApplicationResponse class.

RulesApplicationResponse(isSuccess, appliedRules, rulesApplicationSummary, errors)

Initializes the RulesApplicationResponse class that stores the response details for the rules application request.

Signature

```
public RulesApplicationResponse(Boolean isSuccess, List<String> appliedRules,
RulesAppln.RulesApplicationSummaryResponse rulesApplicationSummary,
List<RulesAppln.RulesApplicationErrorResponse> errors)
```

```
RulesAppln.RulesApplicationResponse, newInstance, [Boolean, List<String>,
RulesAppln.RulesApplicationSummaryResponse, List<RulesAppln.RulesApplicationErrorResponse>],
RulesAppln.RulesApplicationResponse
```

Parameters

isSuccess

Type: Boolean

Indicates whether the rules are applied (`true`) or not (`false`).

appliedRules

Type: List<String>

Comma-delimited list of applied rules.

rulesApplicationSummary

Type: [RulesAppln.RulesApplicationSummaryResponse](#) on page 2479

Details of the rules application that includes these details.

- Payment and credit memo count for the account
- Payment and credit memo count that's applied to invoices or invoice lines
- Details of rules

errors

Type: List<[RulesAppln.RulesApplicationErrorResponse](#) on page 2474>

List of error responses that occurred during the rules application.

RulesApplicationResponse()

Initializes an empty instance of the RulesApplicationResponse class.

Signature

```
public RulesApplicationResponse()
```

```
RulesAppln.RulesApplicationResponse, newInstance, [], RulesAppln.RulesApplicationResponse
```

RulesApplicationResponse Properties

Learn more about the properties available with the RulesApplicationResponse class.

The RulesApplicationResponse class includes these properties.

[appliedRules](#)

Get the comma-delimited list of rules that were applied.

[errors](#)

Get the list of error responses that occurred during the rules application.

[isSuccess](#)

Get the boolean value that indicates whether the rules were applied (true) or not (false).

[rulesApplicationSummary](#)

Get the details of the rules application that includes payment and credit memo count for the account, payment and credit memo count that's applied to invoices or invoice lines, and whether the exact amount rule is applied.

appliedRules

Get the comma-delimited list of rules that were applied.

Signature

```
public List<String> appliedRules {get; set;}
```

```
RulesAppln.RulesApplicationResponse, appliedRules
```

Property Value

Type: List<String>

errors

Get the list of error responses that occurred during the rules application.

Signature

```
public List<RulesAppln.RulesApplicationErrorResponse> errors {get; set;}
```

```
RulesAppln.RulesApplicationResponse, errors
```

Property Value

Type: List<[RulesAppln.RulesApplicationErrorResponse](#) on page 2474>

isSuccess

Get the boolean value that indicates whether the rules were applied (true) or not (false).

Signature

```
public Boolean isSuccess {get; set;}
```

```
RulesAppln.RulesApplicationResponse, isSuccess
```

Property Value

Type: Boolean

rulesApplicationSummary

Get the details of the rules application that includes payment and credit memo count for the account, payment and credit memo count that's applied to invoices or invoice lines, and whether the exact amount rule is applied.

Signature

```
public RulesAppln.RulesApplicationSummaryResponse rulesApplicationSummary {get; set;}  
RulesAppln.RulesApplicationResponse, rulesApplicationSummary
```

Property Value

Type: [RulesAppln.RulesApplicationSummaryResponse](#) on page 2479

RulesApplicationSummaryResponse Class

Contains properties to store the summary details of the rules application, including payment and credit memo counts and application statistics.

Namespace

[RulesAppln](#) on page 2474

[RulesApplicationSummaryResponse Constructors](#)

Learn more about the constructors available with the RulesApplicationSummaryResponse class.

[RulesApplicationSummaryResponse Properties](#)

Learn more about the properties available with the RulesApplicationSummaryResponse class.

RulesApplicationSummaryResponse Constructors

Learn more about the constructors available with the RulesApplicationSummaryResponse class.

The RulesApplicationSummaryResponse class includes these constructors.

[RulesApplicationSummaryResponse\(fetchedPaymentsCount, fetchedCreditMemosCount, totalPaymentApplications, totalCreditMemoApplications, areAllInvoicesConsidered\)](#)

Initializes the RulesApplicationSummaryResponse class that stores the summary details of the rules application.

[RulesApplicationSummaryResponse\(\)](#)

Initializes an empty instance of the RulesApplicationSummaryResponse class.

```
RulesApplicationSummaryResponse(fetchedPaymentsCount, fetchedCreditMemosCount,  
totalPaymentApplications, totalCreditMemoApplications, areAllInvoicesConsidered)
```

Initializes the RulesApplicationSummaryResponse class that stores the summary details of the rules application.

Signature

```
public RulesApplicationSummaryResponse(Integer fetchedPaymentsCount, Integer fetchedCreditMemosCount, Integer totalPaymentApplications, Integer totalCreditMemoApplications, Boolean areAllInvoicesConsidered)
```

```
RulesAppln.RulesApplicationSummaryResponse, newInstance, [Integer, Integer, Integer, Integer, Boolean], RulesAppln.RulesApplicationSummaryResponse
```

Parameters

fetchedPaymentsCount

Type: Integer

Number of payment records retrieved for an account.

fetchedCreditMemosCount

Type: Integer

Number of credit memo or credit memo line records retrieved for an account.

totalPaymentApplications

Type: Integer

Number of payments that are applied to invoices and invoice lines.

totalCreditMemoApplications

Type: Integer

Number of credit memos that are applied to the invoice or invoice lines.

areAllInvoicesConsidered

Type: Boolean

Indicates whether all invoices are considered (true) or not (false).

RulesApplicationSummaryResponse ()

Initializes an empty instance of the RulesApplicationSummaryResponse class.

Signature

```
public RulesApplicationSummaryResponse ()
```

```
RulesAppln.RulesApplicationSummaryResponse, newInstance, [], RulesAppln.RulesApplicationSummaryResponse
```

RulesApplicationSummaryResponse Properties

Learn more about the properties available with the RulesApplicationSummaryResponse class.

The RulesApplicationSummaryResponse class includes these properties.

[**areAllInvoicesConsidered**](#)

Indicates whether all invoices are considered (true) or not (false).

[fetchedCreditMemosCount](#)

Get the number of credit memo or credit memo line records retrieved for an account.

[fetchedPaymentsCount](#)

Get the number of payment records retrieved for an account.

[totalCreditMemoApplications](#)

Get the number of credit memos that are applied to the invoice or invoice lines.

[totalPaymentApplications](#)

Get the number of payments that are applied to invoices and invoice lines.

areAllInvoicesConsidered

Indicates whether all invoices are considered (true) or not (false).

Signature

```
public Boolean areAllInvoicesConsidered {get; set;}
```

```
RulesAppln.RulesApplicationSummaryResponse, areAllInvoicesConsidered
```

Property Value

Type: Boolean

fetchedCreditMemosCount

Get the number of credit memo or credit memo line records retrieved for an account.

Signature

```
public Integer fetchedCreditMemosCount {get; set;}
```

```
RulesAppln.RulesApplicationSummaryResponse, fetchedCreditMemosCount
```

Property Value

Type: Integer

fetchedPaymentsCount

Get the number of payment records retrieved for an account.

Signature

```
public Integer fetchedPaymentsCount {get; set;}
```

```
RulesAppln.RulesApplicationSummaryResponse, fetchedPaymentsCount
```

Property Value

Type: Integer

totalCreditMemoApplications

Get the number of credit memos that are applied to the invoice or invoice lines.

Signature

```
public Integer totalCreditMemoApplications {get; set;}
```

```
RulesAppln.RulesApplicationSummaryResponse, totalCreditMemoApplications
```

Property Value

Type: Integer

totalPaymentApplications

Get the number of payments that are applied to invoices and invoice lines.

Signature

```
public Integer totalPaymentApplications {get; set;}
```

```
RulesAppln.RulesApplicationSummaryResponse, totalPaymentApplications
```

Property Value

Type: Integer

TaxEngineAdapter Interface

Retrieves and evaluates the details from a tax engine to define tax details.

You can extend the TaxEngineAdapter interface to define a custom tax adapter based on your requirements. Use the custom tax adapter with Billing services to implement standard tax.

Create a custom object and associated fields to store tax details, such as tax rate for a country. For example, create a custom object named CountryTaxRate with Country_Code and Tax_Rate fields. Create records to define the details for these fields.

Methods

- [processRequest \(requestType\)](#) — The processRequest method takes an instance of TaxEngineContext class and returns a response with the calculated tax details through the TaxDetailsResponse class or an error response through the ErrorResponse class.

[TaxEngineAdapter Example Implementation](#)

Refer to the example implementation of the TaxEngineAdapter interface to accept information from a tax engine and evaluate the information to define tax details.

[Tax Mappings for Invoices and Credits](#)

You can extend and customize the existing tax interface by using custom metadata types and tax mappings. These customizations help you with unique business requirements such as the inclusion of specific data for accurate calculations and audits.

SEE ALSO:

[Salesforce Help: Tax Calculation for Invoices](#)

[Billing Business APIs: Tax Calculation \(POST\)](#)

[Billing Standard Objects: TaxEngineProvider, TaxEngine, TaxPolicy, and TaxTreatment](#)

[Tax Engine Reference Gateway Adapter](#)

TaxEngineAdapter Example Implementation

Refer to the example implementation of the `TaxEngineAdapter` interface to accept information from a tax engine and evaluate the information to define tax details.

Namespace

See [commercetax](#) namespace to view the list of available classes.

Usage

The `TaxEngineAdapter` interface accepts information from the tax engine through the `TaxEngineContext` class. The interface evaluates the information to define tax in the response with details, such as tax amount and addresses. The response is used to update and create entities in the Salesforce org.

Considerations

From Winter '26, the available state and country values from orgs that are configured with [State and Country/Territory Picklists](#) are also supported.



Example: Use these steps to build a sample tax adapter implementation. Each tax adapter implementation varies based on your implementation requirements. Customize this example to suit your business requirements.

See [Tax Engine Reference Gateway Adapter](#) for reference implementations of a tax engine adapter.

- Get the tax rates from the created custom object. See [TaxEngineAdapter Interface](#) on page 2482.
- The custom adapter class implements the `TaxEngineAdapter` interface. The `processRequest` method takes an instance of `TaxEngineContext` class and returns a response with the calculated tax details through the `TaxDetailsResponse` class or an error response through the `ErrorResponse` class.

```
global virtual class StandardTaxAdapter implements commercetax.TaxEngineAdapter {
    global commercetax.TaxEngineResponse processRequest (commercetax.TaxEngineContext
    taxEngineContext) {
        commercetax.RequestType requestType = taxEngineContext.getRequestType();

        // Map of tax field name to the value of the corresponding entity field
        (EntityFieldName) at header level
        Map<String, Object> customTaxAttributeHeaderLevelMap = new Map<String,
        Object>();
        // Map of tax field name to the value of the corresponding entity field
        (EntityFieldName) at line level
```

```

        Map<String, Object> customTaxAttributeLineLevelMap = new Map<String,
Object>();
        // Map of tax field name to the value of the corresponding entity field
(EntityFieldName) at line tax level
        Map<String, Object> customTaxAttributeLineTaxLevelMap = new Map<String,
Object>();

        commercetax.CustomTaxAttributesResponse customTaxAttributeHeaderLevelResponse
= new commercetax.CustomTaxAttributesResponse();
        commercetax.CustomTaxAttributesResponse customTaxAttributeLineLevelResponse
= new commercetax.CustomTaxAttributesResponse();
        commercetax.CustomTaxAttributesResponse customTaxAttributeLineTaxLevelResponse
= new commercetax.CustomTaxAttributesResponse();

customTaxAttributeHeaderLevelResponse.setData(customTaxAttributeHeaderLevelMap);
        customTaxAttributeLineLevelResponse.setData(customTaxAttributeLineLevelMap);

customTaxAttributeLineTaxLevelResponse.setData(customTaxAttributeLineTaxLevelMap);

        commercetax.CalculateTaxRequest request = (commercetax.CalculateTaxRequest)
taxEngineContext.getRequest();
        if (request.documentCode == null) {
            return new
commercetax.ErrorResponse(commercetax.resultcode.TaxEngineError, '404', 'documentCode
is mandatory');
        }
        if (request.documentCode == 'TaxEngineError') {
            return new
commercetax.ErrorResponse(commercetax.resultcode.TaxEngineError, '504', 'documentCode
- not supported');
        }
        if (request.documentCode == 'simulateUnhandledExceptionInAdapter') {
            Integer foo = 5 / 0;
        }
        if (request.documentCode == 'simulateValidationFailureInAdapter') {
            return new commercetax.ErrorResponse(
                commercetax.resultcode.TaxEngineError,
                '400',
                'validations for documentCode failed in adapter'
            );
        }
        if (request.documentCode == 'simulateMalformedErrorInAdapter') {
            return new
commercetax.ErrorResponse(commercetax.resultcode.TaxEngineError, null, 'malformed
adapter error response');
        }
        if (request.documentCode == 'simulateTaxEngineProcessFailure') {
            return new
commercetax.ErrorResponse(commercetax.resultcode.TaxEngineError, '500', 'Tax Engine
couldnt process your request');
        }
        if (request.documentCode == 'simulateReferenceDocumentCodeMissing') {

```

```

        return new
commercetax.ErrorResponse(commercetax.resultcode.ReferenceDocumentCodeMissing, '400',
'Ref Document Code not found');
    }

    if (requestType == commercetax.RequestType.CalculateTax) {
        commercetax.calculatetaxtype type = request.taxtype;
        String docCode = '';
        if (request.DocumentCode == 'simulateEmptyDocumentCode')
            docCode = '';
        else if (request.DocumentCode != null)
            docCode = request.DocumentCode;
        else if (request.ReferenceEntityId != null)
            docCode = request.ReferenceEntityId;
        else
            docCode = String.valueOf(getRandomInteger(0, 2147483647));
        commercetax.CalculateTaxResponse response = new
commercetax.CalculateTaxResponse();
        response.setCustomTaxAttributes(customTaxAttributeHeaderLevelResponse);

        if (request.isCommit == true) {
            response.setStatus(commercetax.TaxTransactionStatus.Committed);
        } else {
            response.setStatus(commercetax.TaxTransactionStatus.Uncommitted);
        }

        if (request.shouldVoidTax) {
            if
(request.documentCode.startsWith('simulateCalculateWhenRefDocIsLocked')) {
                response.setDocumentCode(docCode);
                response.setReferenceDocumentCode(request.referenceDocumentCode);

                if (request.taxTransactionType == null) {
response.setTaxTransactionType(commercetax.TaxTransactionType.Debit);
                } else {
                    response.setTaxTransactionType(request.taxTransactionType);
                }
            } else if
(request.documentCode.startsWith('simulateRandomRefDocumentCode')) {
                response.setDocumentCode(docCode);

response.setReferenceDocumentCode('simulateRandomRefDocumentCode2');
                response.setTaxTransactionType(request.taxTransactionType);
            } else if (request.documentCode.startsWith('simulateRandomCode'))
{
                response.setDocumentCode('simulateRandomCode2');
                response.setReferenceDocumentCode(null);

response.setTaxTransactionType(commercetax.TaxTransactionType.Void);
            } else {
                response.setDocumentCode(request.referenceDocumentCode);
                response.setReferenceDocumentCode(null);
            }
        }
    }

```

```

response.setTaxTransactionType(commercetax.TaxTransactionType.Void);
    }
    } else {
        response.setDocumentCode(docCode);
        response.setReferenceDocumentCode(request.referenceDocumentCode);

        if (request.taxTransactionType == null) {
response.setTaxTransactionType(commercetax.TaxTransactionType.Debit);
            } else {
                response.setTaxTransactionType(request.taxTransactionType);
            }
        }

        response.setTaxType(type);
        response.setStatusDescription('statusDescription');
        if (request.sellerDetails.code == 'testSellerCode') {
            response.setDescription('SellerCode fetched from TaxEngine entity');

        } else {
            response.setDescription('description');
        }
        response.setEffectiveDate(system.now());
        if (request.transactionDate == null) {
            response.setTransactionDate(system.now());
        } else {
            response.setTransactionDate(request.transactionDate);
        }

        if (request.currencyIsoCode == null || request.currencyIsoCode == '')
    {
        response.setCurrencyIsoCode('USD');
    } else {
        response.setCurrencyIsoCode(request.currencyIsoCode);
    }
    response.setReferenceEntityId(request.ReferenceEntityId);
    Double totalTax = 0.0;
    Double totalAmount = 0.0;
    Map<String, Double> countryTaxRateMap = getTaxes(request.lineItems);
    List<commercetax.LineItemResponse> lineItemResponses = new
List<commercetax.LineItemResponse>();
    for (Commercetax.TaxLineItemRequest lineItem : request.lineItems) {
        String country = getCountryFromLineItem(lineItem);
        if (country == null) {
            return new commercetax.ErrorResponse(
                commercetax.resultcode.TaxEngineError,
                '400',
                'Country is mandatory for each line item'
            );
        }

        Double taxRate = countryTaxRateMap.get(country);
        if (taxRate == null) {

```



```

        return new commercetax.ErrorResponse(
            commercetax.resultcode.TaxEngineError,
            '404',
            'No tax rate found for the specified country: ' + country
        );
    }
    commercetax.AddressesResponse addressesRes = new
commercetax.AddressesResponse();
    if (request.DocumentCode == 'SetsNullForResponseWithoutException')
    {
        addressesRes.setShipFrom(null);
        addressesRes.setShipTO(null);
        addressesRes.setSoldTo(null);
    } else {
        setAddresses(addressesRes, lineItem);
        //System.debug('Line item addresses: ' + addressesRes);
    }
    //System.debug('ProductSKU: ' + lineItem.productSKU);
    //System.debug('ReferenceDocumentCode: ' +
lineItem.referenceDocumentCode);
    commercetax.LineItemResponse lineItemResponse = new
commercetax.LineItemResponse();

lineItemResponse.setCustomTaxAttributes(customTaxAttributeLineLevelResponse);
    Double totalLineTax = 0;
    List<commercetax.TaxDetailsResponse> taxDetailsResponses = new
List<commercetax.TaxDetailsResponse>();
    for (integer i = 0; i < 1; i++) {
        Integer rate = 1;
        Double taxableAmount = lineItem.amount;
        commercetax.TaxDetailsResponse taxDetailsResponse = new
commercetax.TaxDetailsResponse();
        taxDetailsResponse.setRate(Double.valueOf(rate));
        taxDetailsResponse.setTaxableAmount(taxableAmount);
        Double tax = taxableAmount * rate;
        totalLineTax += tax;
        taxDetailsResponse.setTax(taxableAmount * rate);
        taxDetailsResponse.setExemptAmount(0);
        taxDetailsResponse.setExemptReason('exemptReason');
        taxDetailsResponse.setTaxRegionId('taxRegionId');
        taxDetailsResponse.setTaxId(String.valueOf(getRandomInteger(0,
2323233)));
        taxDetailsResponse.setSerCode('serCode');

taxDetailsResponse.setCustomTaxAttributes(customTaxAttributeLineTaxLevelResponse);
        taxDetailsResponse.setTaxAuthorityTypeId('taxAuthorityTypeId');

        if (request.DocumentCode == 'SetsNullForResponseWithoutException')
        {
            taxDetailsResponse.setImposition(null);
        } else {
            commercetax.ImpositionResponse imposition = new
commercetax.ImpositionResponse();
            imposition.setSubType('subtype');

```

```

        imposition.setType('type');
        taxDetailsResponse.setImposition(imposition);
    }

    if (request.DocumentCode == 'SetsNullForResponseWithoutException')
    {
        taxDetailsResponse.setJurisdiction(null);
    } else {
        commercetax.JurisdictionResponse jurisdiction = new
commercetax.JurisdictionResponse();
        jurisdiction.setCountry('country');
        jurisdiction.setRegion('region');
        jurisdiction.setName('name');
        jurisdiction.setStateAssignedNumber('stateAssignedNo');
        jurisdiction.setId('id');
        jurisdiction.setLevel('level');
        taxDetailsResponse.setJurisdiction(jurisdiction);
    }

    taxDetailsResponses.add(taxDetailsResponse);
}
lineItemResponse.setTaxes(taxDetailsResponses);
totalTax += totalLineTax;
totalAmount += lineItem.amount;

if (request.DocumentCode == 'SetsNullForResponseWithException') {
    lineItemResponse.setAmountDetails(null);
} else {
    commercetax.AmountDetailsResponse amountResponse = new
commercetax.AmountDetailsResponse();
    amountResponse.setTotalAmountWithTax(totalTax + totalAmount);
    amountResponse.setExemptAmount(0);
    amountResponse.setTotalAmount(totalAmount);
    amountResponse.setTaxAmount(totalTax);
    lineItemResponse.setAmountDetails(amountResponse);
}
lineItemResponse.setEffectiveDate(system.now());
lineItemResponse.setTaxCode(lineItem.taxCode);
lineItemResponse.setProductCode(lineItem.ProductCode);
lineItemResponse.setLineNumber(lineItem.linenummer);
lineItemResponse.setIsTaxable(true);
lineItemResponse.setQuantity(lineItem.quantity);
if (request.DocumentCode == 'SetsNullForResponseWithoutException')
{
    lineItemResponse.setAddresses(null);
} else {
    lineItemResponse.setAddresses(addressesRes);
}
lineItemResponses.add(lineItemResponse);
}
if (request.DocumentCode == 'SetsNullForResponseWithException') {
    lineItemResponses.add(null);
}
if (request.documentCode == 'nolines') {

```

```

        // logic to skip adding lines to response
    } else {
        response.setLineItems(lineItemResponses);
    }
    if (request.DocumentCode == 'SetsNullForResponseWithException') {
        response.setAmountDetails(null);
    } else {
        commercetax.AmountDetailsResponse headerAmountResponse = new
commercetax.AmountDetailsResponse();
        headerAmountResponse.setTotalAmountWithTax(totalTax + totalAmount);

        headerAmountResponse.setExemptAmount(0);
        headerAmountResponse.setTotalAmount(totalAmount);
        headerAmountResponse.setTaxAmount(totalTax);
        response.setAmountDetails(headerAmountResponse);
    }
    commercetax.AddressesResponse addressesRes = new
commercetax.AddressesResponse();
    commercetax.AddressResponse addRes = new commercetax.AddressResponse();

    addRes.setLocationCode('street, city, state, country, postalCode');
    addressesRes.setShipFrom(addRes);
    addressesRes.setShipTO(addRes);
    addressesRes.setSoldTo(addRes);
    response.setAddresses(addressesRes);
    return response;
} else
    return null;
}

public static Integer getRandomInteger(Integer min, Integer max) {
    return min + (Integer.valueOf(Math.random()) * (max - min));
}

// Method to get the tax rates for the line items based on the address country
codes
private Map<String, Double> getTaxes(List<commercetax.TaxLineItemRequest>
lineItems) {
    Set<String> countryCodes = new Set<String>();
    // Collecting all unique the country codes
    for (commercetax.TaxLineItemRequest lineItem : lineItems) {
        String country = getCountryFromLineItem(lineItem);
        if (country != null) {
            countryCodes.add(country);
        }
    }
    // Query tax rates for the unique country codes and store it in a map
    Map<String, Double> countryTaxRateMap = new Map<String, Double>();
    if (!countryCodes.isEmpty()) {
        // Query the tax rate from the custom object based on the country code
        List<CountryTaxRate__c> taxRates = [
            SELECT Country_Code__c, Tax_Rate__c
            FROM CountryTaxRate__c
            WHERE Country_Code__c IN :countryCodes

```

```

    ];
    for (CountryTaxRate__c taxRate : taxRates) {
        countryTaxRateMap.put(taxRate.Country_Code__c, taxRate.Tax_Rate__c);
    }
}
return countryTaxRateMap;
}
// Method to retrieve the country for the line item
private String getCountryFromLineItem(commercetax.TaxLineItemRequest lineItem)
{
    if (lineItem.addresses != null) {
        commercetax.TaxAddressRequest addressRequest = lineItem.addresses.shipTo;

        if (addressRequest != null && addressRequest.country != null) {
            return addressRequest.country;
        }
    }
    return null;
}

// Method to set addresses in the line item response
private void setAddresses(commercetax.AddressesResponse addressesRes,
Commercetax.TaxLineItemRequest lineItem) {
    commercetax.LineTaxAddressesRequest addressesReq = lineItem.addresses;
    if (addressesReq == null) {
        return;
    }
    addressesRes.setShipFrom(getShipFromAddressRes(addressesReq));
    addressesRes.setShipTo(getShipToAddressRes(addressesReq));
    addressesRes.setSoldTo(getSoldToAddressRes(addressesReq));
}

private commercetax.AddressResponse
getShipFromAddressRes(commercetax.LineTaxAddressesRequest addressesReq) {
    return getAddressRes(addressesReq.shipFrom);
}

private commercetax.AddressResponse
getShipToAddressRes(commercetax.LineTaxAddressesRequest addressesReq) {
    return getAddressRes(addressesReq.shipTo);
}

private commercetax.AddressResponse
getSoldToAddressRes(commercetax.LineTaxAddressesRequest addressesReq) {
    if (addressesReq.soldTo != null) {
        return getAddressRes(addressesReq.soldTo);
    } else {
        return getAddressRes(addressesReq.billTo);
    }
}

private commercetax.AddressResponse getAddressRes(commercetax.TaxAddressRequest
addressReq) {

```

```

        if (addressReq == null) {
            return null;
        }

        commercetax.AddressResponse addressRes = new commercetax.AddressResponse();

        List<String> addressEle = new List<String>();
        if (addressReq.street != null)
            addressEle.add(addressReq.street);
        if (addressReq.city != null)
            addressEle.add(addressReq.city);
        if (addressReq.state != null)
            addressEle.add(addressReq.state);
        if (addressReq.country != null)
            addressEle.add(addressReq.country);
        if (addressReq.postalCode != null)
            addressEle.add(addressReq.postalCode);

        addressRes.setLocationCode(String.join(addressEle, ', '));
        return addressRes;
    }
}

```

- Select `StandardTaxAdapter` as the provider when you create a tax engine record in your org.

Tax Mappings for Invoices and Credits

You can extend and customize the existing tax interface by using custom metadata types and tax mappings. These customizations help you with unique business requirements such as the inclusion of specific data for accurate calculations and audits.

Here are some prerequisites before you work with the tax mappings for invoices and credits.

- See [custom metadata types](#) to specify all your tax mapping definitions.
- See [details on extension of your tax contract](#) with custom fields.
- Tax callout extensions are supported for the Invoice, Invoice Line, Invoice Line Tax, Credit Memo, Credit Memo Line, and Credit Memo Line Tax objects.

Request Mappings for Header Attributes

This table defines the request mappings between the header attributes of a tax callout and fields of applicable objects.

Header Attributes	Invoice Mapping	Negative Invoice Mapping	Credit Mapping
currencyIsoCode	Invoice.CurrencyISOCode	Invoice.CurrencyISOCode	CreditMemo.CurrencyISOCode
isCommit	If status is <code>DRAFT</code> then this value is <code>False</code> . If status is <code>POSTED</code> , then this value is <code>True</code> .	If status is <code>DRAFT</code> then this value is <code>False</code> . If status is <code>POSTED</code> , then this value is <code>True</code> .	This value is <code>True</code> until Summer '25. From Winter '26, if status is <code>DRAFT</code> , then this value is <code>False</code> . If status is <code>POSTED</code> , then this value is <code>True</code> .
referenceEntityId	Invoice.ID	Invoice.ID	CreditMemo.ID

Header Attributes	Invoice Mapping	Negative Invoice Mapping	Credit Mapping
taxEngineId	TaxTreatment.TaxEngine.ID	TaxTreatment.TaxEngine.ID	TaxTreatment.TaxEngine.ID
transactionDate	SystemDate	SystemDate	SystemDate
sellerDetails			
code	TaxEngine.SellerCode	TaxEngine.SellerCode	TaxEngine.SellerCode
customerDetails			
accountId	Invoice.BillingAccount.ID	Invoice.BillingAccount.ID	CreditMemo.BillingAccount.ID
code	NULL	NULL	NULL
exemptionNo	Invoice.BillingAccount.TaxExemptionNumber. Available from Spring '26.	Invoice.BillingAccount.TaxExemptionNumber. Available from Spring '26.	CreditMemo.BillingAccount.TaxExemptionNumber. Available from Spring '26.
exemptionReason	NULL	NULL	NULL
exemptionStatus	Invoice.BillingAccount.TaxExemptionStatus. Available from Spring '26.	Invoice.BillingAccount.TaxExemptionStatus. Available from Spring '26.	CreditMemo.BillingAccount.TaxExemptionStatus. Available from Spring '26.
exemptionExpirationDate	Invoice.BillingAccount.TaxExemptionExpirationDate. Available from Spring '26.	Invoice.BillingAccount.TaxExemptionExpirationDate. Available from Spring '26.	CreditMemo.BillingAccount.TaxExemptionExpirationDate. Available from Spring '26.
deliveryTerms	Invoice.BillingAccount.DeliveryTerms. Available from Spring '26.	Invoice.BillingAccount.DeliveryTerms. Available from Spring '26.	CreditMemo.BillingAccount.DeliveryTerms. Available from Spring '26.
billingProfileId	Invoice.BillingAccount.ID. Available from Spring '26.	Invoice.BillingAccount.ID. Available from Spring '26.	CreditMemo.BillingAccount.ID. Available from Spring '26.
additionalTaxIdentificationDetails	Invoice.BillingAccount.AdditionalTaxIdentificationDetails. Available from Spring '26.	Invoice.BillingAccount.AdditionalTaxIdentificationDetails. Available from Spring '26.	CreditMemo.BillingAccount.AdditionalTaxIdentificationDetails. Available from Spring '26.
taxIdentificationNumber	Invoice.BillingAccount.TaxIdentificationNumber. Available from Spring '26.	Invoice.BillingAccount.TaxIdentificationNumber. Available from Spring '26.	CreditMemo.BillingAccount.TaxIdentificationNumber. Available from Spring '26.
taxType	If status is <code>DRAFT</code> , then this value is <code>Estimated</code> . If status is <code>POSTED</code> , then this value is <code>Actual</code> .	If status is <code>DRAFT</code> , then this value is <code>Estimated</code> . If status is <code>POSTED</code> , then this value is <code>Actual</code> .	This value is <code>Actual</code> until Summer '25. From Winter '26, if status is <code>DRAFT</code> , then this value is <code>Estimated</code> . If status is <code>POSTED</code> , then this value is <code>Actual</code> .
taxTransactionType	Debit	Credit	Credit
effectiveDate	invoice.InvoiceDate	If you're creating from negative lines, then this value is the original <code>Invoice.InvoiceDate</code> value.	If you're using standalone credit memo, then this value is the <code>CreditMemo.CreditDate</code> value.
addresses			
billTo	NULL	NULL	NULL

Header Attributes	Invoice Mapping	Negative Invoice Mapping	Credit Mapping
shipTo	NULL	NULL	NULL
shipFrom	NULL	NULL	NULL
soldTo	NULL	NULL	NULL
taxEngineAddress	TaxEngine.Address	TaxEngine.Address	TaxEngine.Address
referenceDocumentCode	NULL	If you're converting from negative lines, then this value is the original document code <code>Invoice.ID & "Debit" & TaxEngine.ID</code> .	If you're using standalone credit memo, then this value is NULL. Otherwise, this value is the <code>documentCode</code> value of the original invoice.
description	Invoice.Description	Invoice.Description	Invoice.Description
documentCode	<code>Invoice.ID & "_Debit_" & TaxEngine.ID</code>	<code>Invoice.ID & "_Credit_" & TaxEngine.ID</code>	<code>CreditMemo.ID & "_Credit_" & TaxEngine.ID</code>
shouldVoid	FALSE	From Winter '26, if the request is to void a posted invoice, then this value is TRUE. Else, it is FALSE.	FALSE
lineItems	Refer to the next line attributes section.	Refer to the next line attributes section.	Refer to the next line attributes section.

Request Mappings for Line Attributes

This table defines the request mappings between the line attributes of a tax callout and fields of applicable objects.

Line Attributes	Invoice Mapping	Negative Invoices	Credit Mapping
taxCode	TaxTreatment.TaxCode	TaxTreatment.TaxCode	TaxTreatment.TaxCode
productCode	TaxTreatment.ProductCode	TaxTreatment.ProductCode	TaxTreatment.ProductCode
productId	InvoiceLine.ProductId	InvoiceLine.ProductId	ProductId
amount	InvoiceLine.ChargeAmount	InvoiceLine.ChargeAmount	CreditMemoLine.ChargeAmount
effectiveDate	InvoiceLine.Invoice.InvoiceDate	If you're creating from negative lines, then this value is the original <code>Invoice.InvoiceDate</code> value.	<code>CreditMemoLine.CreditMemo.CreditDate</code>
lineNumber	InvoiceLine.ID	InvoiceLine.ID	CreditMemoLine.ID
description	InvoiceLine.Description	InvoiceLine.Description	CreditMemoLine.Description
quantity	InvoiceLine.Quantity	InvoiceLine.Quantity	NULL

Line Attributes	Invoice Mapping	Negative Invoices	Credit Mapping
addresses			
billTo	InvoiceLine.BillingAddress.Address	InvoiceLine.BillingAddress.Address	CreditMemoLine.BillingAddress.Address
shipTo	InvoiceLine.ShippingAddress.Address	InvoiceLine.ShippingAddress.Address	CreditMemoLine.ShippingAddress.Address
shipFrom	InvoiceLine.ShippingFrom.Address	InvoiceLine.ShippingFrom.Address	CreditMemoLine.ShippingFrom.Address
soldTo	NULL	NULL	NULL
productsku	InvoiceLine.Product.productCode	InvoiceLine.Product.productCode	CreditMemoLine.Product.productCode
referenceDocumentCode	NULL	If you're converting from negative lines, then this value is the original Document Code - "Invoice.ID" & "Debit" & TaxEngine.ID.	If you're using standalone credit memo, then this value is NULL. Otherwise, this value is the documentCode value of the original invoice.

Response Mappings for Header Attributes

This table defines the response mappings between the header attributes of a tax callout and fields of applicable objects. This response structure is used to create the InvoiceLineTax records.

Header Attributes	Invoice Mapping	Negative Invoice Mapping	Credit Mapping
currencyIsoCode	Invoice.CurrencyISOCode	Invoice.CurrencyISOCode	CreditMemo.CurrencyISOCode
isCommit	Not persisted.	Not persisted.	Not persisted.
referenceEntityId	Invoice.ID	Invoice.ID	CreditMemo.ID
taxEngineId	TaxTreatment.TaxEngine.ID	TaxTreatment.TaxEngine.ID	TaxTreatment.TaxEngine.ID
transactionDate	SystemDate	SystemDate	SystemDate
sellerDetails			
code	TaxEngine.SellerCode	TaxEngine.SellerCode	TaxEngine.SellerCode
customerDetails			
accountId	Invoice.BillingAccount.ID	Invoice.BillingAccount.ID	Invoice.BillingAccount.ID
code	Not persisted.	Not persisted.	Not persisted.
exemptionNo	Not persisted.	Not persisted.	Not persisted.
exemptionReason	Not persisted.	Not persisted.	Not persisted.
taxType	If status is DRAFT, then this value is Estimated. If status is POSTED, then this value is Actual.	If status is DRAFT, then this value is Estimated. If status is POSTED, then this value is Actual.	Actual

Header Attributes	Invoice Mapping	Negative Invoice Mapping	Credit Mapping
taxTransactionType	Debit	Credit	Credit
effectiveDate	invoice.InvoiceDate	If you're creating from negative lines, then this value is the original <code>Invoice.InvoiceDate</code> value.	If you're using standalone credit memo, then this value is the <code>CreditMemo.CreditDate</code> value. If you're creating from negative lines, then this value is the original <code>Invoice.InvoiceDate</code> value.
addresses			
billTo	Not persisted.	Not persisted.	Not persisted.
shipTo	Not persisted.	Not persisted.	Not persisted.
shipFrom	Not persisted.	Not persisted.	Not persisted.
soldTo	Not persisted.	Not persisted.	Not persisted.
taxEngineAddress	Not persisted.	Not persisted.	Not persisted.
referenceDocumentCode	Not persisted.	Not persisted.	Not persisted.
description	Not persisted.	Not persisted.	Not persisted.
documentCode	Invoice.ID & "_Debit_" & TaxEngine.ID	Invoice.ID & "_Credit_" & TaxEngine.ID	CreditMemo.ID & "_Credit_" & TaxEngine.ID
status	Committed		
taxEngineLogs			
resultCode	TaxEngineInteractionLog.ResultCode	TaxEngineInteractionLog.ResultCode	TaxEngineInteractionLog.ResultCode
createddate	Not persisted.	Not persisted.	Not persisted.
Id	Not persisted.	Not persisted.	Not persisted.
transactionDate	Not persisted.	Not persisted.	Not persisted.
amountDetails			
exemptAmount	Not persisted.	Not persisted.	Not persisted.
taxAmount	If header tax is enabled, then this value is <code>Invoice.TotalTaxesCapturedAtHeader</code>	If header tax is enabled, then this value is <code>Invoice.TotalTaxesCapturedAtHeader</code>	If header tax is enabled, then this value is <code>CreditMemo.TotalTaxesCapturedAtHeader</code>
totalAmount	Not persisted.	Not persisted.	Not persisted.
totalAmountWithTax	Not persisted.	Not persisted.	Not persisted.
lineItems	Refer to the next line attributes section.	Refer to the next line attributes section.	Refer to the next line attributes section.

Response Mappings for Line Attributes

This table defines the response mappings between the line attributes of a tax callout and fields of applicable objects.

Line Attributes	Invoice Mapping	Negative Invoices	Credit Mapping
taxCode	InvoiceLineTax.taxCode	InvoiceLineTax.taxCode	InvoiceLineTax.taxCode
productCode	Not persisted.	Not persisted.	Not persisted.
productId	Not persisted.	Not persisted.	Not persisted.
amountDetails			
exemptAmount	Not persisted.	Not persisted.	Not persisted.
taxAmount	Not persisted.	Not persisted.	Not persisted.
totalAmount	Not persisted.	Not persisted.	Not persisted.
totalAmountWithTax	Not persisted.	Not persisted.	Not persisted.
effectiveDate	InvoiceLineTax.taxEffectiveDate	InvoiceLineTax.taxEffectiveDate	CreditMemoLineTax.taxEffectiveDate
lineNumber	InvoiceLineTax.InvoiceLine	InvoiceLineTax.InvoiceLine	CreditMemoLineTax.CreditMemLine
description	Not persisted.	Not persisted.	Not persisted.
quantity	Not persisted.	Not persisted.	Not persisted.
addresses			
billTo	Not persisted.	Not persisted.	Not persisted.
shipTo	Not persisted.	Not persisted.	Not persisted.
shipFrom	Not persisted.	Not persisted.	Not persisted.
soldTo	Not persisted.	Not persisted.	Not persisted.
productsku	Not persisted.	Not persisted.	Not persisted.
referenceDocumentCode	Not persisted.	Not persisted.	Not persisted.
taxes	Refer to the next tax attributes section.	Refer to the next tax attributes section.	Refer to the next tax attributes section.

Response Mappings for Tax Attributes

This table defines the response mappings between the tax attributes of a tax callout and fields of applicable objects.

Line Attributes	Invoice Mapping	Negative Invoices	Credit Mapping
exemptAmount	InvoiceLineTax.taxExemptAmount	InvoiceLineTax.taxExemptAmount	Not persisted.
exemptReason	Not persisted.	Not persisted.	Not persisted.
imposition			

Line Attributes	Invoice Mapping	Negative Invoices	Credit Mapping
type	Not persisted.	Not persisted.	Not persisted.
Name	InvoiceLineTax.TaxName	InvoiceLineTax.TaxName	CreditMemoLineTax.TaxName
jurisdiction			
country	Not persisted.	Not persisted.	Not persisted.
id	Not persisted.	Not persisted.	Not persisted.
level	Not persisted.	Not persisted.	Not persisted.
name	Not persisted.	Not persisted.	Not persisted.
region	Not persisted.	Not persisted.	Not persisted.
stateAssignedNo	Not persisted.	Not persisted.	Not persisted.
rate	InvoiceLineTax.taxRate	InvoiceLineTax.taxRate	CreditMemoLineTax.TaxRate
tax	InvoiceLineTax.taxAmount	InvoiceLineTax.taxAmount	CreditMemoLineTax.TaxAmount
taxId	InvoiceLineTax.TaxTransactionNumber	InvoiceLineTax.TaxTransactionNumber	CreditMemoLineTax.TaxTransactionNumber
taxableAmount	Not persisted.	Not persisted.	Not persisted.

Billing Metadata API Types

Metadata API enables you to access some types and feature settings that you can customize in the user interface.

[BillingSettings](#)

Represents the settings for Salesforce Billing.

[Flow for Billing](#)

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

[PaymentsSharingSettings](#)

Represents the settings to enable account-based sharing to view details related to Revenue Cloud Billing on the objects for Payments and Refunds.

SEE ALSO:

[Metadata API Developer Guide: Understanding Metadata API](#)

BillingSettings

Represents the settings for Salesforce Billing.

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

The `BillingSettings` values are stored in the `BillingSettings.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there’s only one settings file for each settings component.

Version

`BillingSettings` components are available in API version 62.0 and later.

Special Access Rules

These settings are available when Billing is enabled.

Fields

Field Name	Field Type	Description
<code>acctRecGlaAccount</code>	string	General ledger account to record the credit amount for unrealized or realized losses and the debit amount for unrealized or realized gains in transaction journals. Available in API version 64.0 and later.
<code>billingContextDefinition</code>	string	Name of the context definition that the Create Billing Schedules for Orders API uses to understand your order data. Available in API version 64.0 and later.
<code>billingContextSourceMapping</code>	string	Name of the context mapping that links Order fields to billing transaction context nodes. Available in API version 64.0 and later.
<code>billingIntraCtxtSrcMapping</code>	string	Name of the custom context mapping that maps your custom or standard Order fields to billing transaction context nodes. Available in API version 64.0 and later.
<code>defaultAPClosureDPEDefnName</code>	string	Org-wide default value to specify the Data Processing Engine (DPE) definition to close legal entity accounting periods. Available in API version 64.0 and later.
<code>defaultApplyCreditMemoFlow</code>	string	Default flow that’s used to apply the credit memo to invoices. Available in API version 64.0 and later.
<code>defaultBillingTreatment</code>	string	Org-wide default value to specify the name of the billing treatment. Available in API version 64.0 and later.
<code>defaultEmailTemplate</code>	string	Default email template to send the generated invoice PDFs. Available in API version 64.0 and later.
<code>defaultInvPreviewTemplate</code>	string	Default template to generate PDFs of invoice previews. Available in API version 64.0 and later.

Field Name	Field Type	Description
defaultInvoiceDocTemplate	string	Default template to generate PDFs of invoices. Available in API version 64.0 and later.
defaultLegalEntity	string	Org-wide default value to specify the name of the legal entity. Available in API version 64.0 and later.
defaultTaxTreatment	string	Org-wide default value to specify the name of the tax treatment. Available in API version 64.0 and later.
enableBillingDisputeManagement	boolean	Indicates whether to enable Dispute Management (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 66.0 and later.
enableBillingForecast	boolean	Indicates whether to enable billing forecasts (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 68.0 and later.
enableBillingSetup	boolean	Indicates whether to enable Billing setting (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
enableCreditMemoSequenceService	boolean	Indicates whether to mandate the application of sequence policy for credit memos (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 66.0 and later with Revenue Cloud Billing.
enableCreditApplicationToPostedInvoices	boolean	Indicates whether to enable Apply Credits to Posted Invoices setting (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . This setting automates settlement of invoices through application of credits to posted invoices. The credit application level determines whether credits are automatically applied to invoices or invoice lines.
enableFailedPaymentsRetry	boolean	Indicates whether to retry failed payment schedule items automatically based on the defined payment retry rules (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 66.0 and later.
enableForeignExchangeTrxnJmlCreation	boolean	Indicates whether to create Transaction Journal records for invoices that hold balance amounts (partially settled and not fully settled posted invoices) to record foreign exchange unrealized gains or losses during the closure activity of a legal entity accounting period. The default value is <code>false</code> . Available in API version 65.0 and later with Revenue Cloud Billing.
enableInvoiceEmailDelivery	boolean	Indicates whether to enable Configure Email Delivery Settings (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 63.0 and later with Revenue Cloud Billing.
enableInvoicePdfGeneration	boolean	Indicates whether to enable Document Generation setting (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 63.0 and later with Revenue Cloud Billing.
enableInvoiceSequenceService	boolean	Indicates whether to mandate the application of sequence policy for posted invoices (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . If enabled, each posted invoice is assigned an invoice number. Available in API version 65.0 and later with Revenue Cloud Billing.
enableNegInvoiceInConversionToCreditMemoIn	boolean	Indicates whether to enable Convert Negative Invoice Lines to Credit Memo Lines setting (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .

Field Name	Field Type	Description
<code>enablePaymentSchedulesAndItemsCreation</code>	boolean	Indicates whether to create a default payment schedule policy and payment schedule treatment (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . If enabled, payment schedules and payment schedule items are created during financial transactions such as posting of invoices. Available in API version 64.0 and later with Revenue Cloud Billing.
<code>enableRefundIssuingAndBalanceSettlement</code>	boolean	Indicates whether to issue refunds and settle balances (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . If enabled, refunds are issued and credit memos are applied to any remaining invoice balance when customers amend or cancel an order. Available in API version 67.0 and later.
<code>enableTransactionJournalCreation</code>	boolean	Indicates whether to create Transaction Journal records based on the defined general ledger account assignment rules for the billing entities when billing transaction records are created or updated (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 63.0 and later with Revenue Cloud Billing. Billing transaction records include these transaction types.
<code>enableTransactionsApplicationToInvoices</code>	boolean	Indicates whether to enable Credit Application Level setting (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Revenue Cloud Advanced: This setting applies balances of credit memos to invoices or balances of credit memo lines to invoice lines. For the latter, amounts and balances on the invoices are rolled-up from the related invoice lines. Revenue Cloud Billing: This setting applies balances of credit memos and payments to invoices or balances of credit memo lines and payments lines to invoice lines. For the latter, amounts and balances on the invoices are rolled-up from the related invoice lines.
<code>enableTxnAmountsStorageInCorpCurrency</code>	boolean	Indicates whether to allow conversion of amounts of the Invoice, Invoice Line, Credit Memo, and Credit Memo Line records to your corporate currency (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 63.0 and later. Store the converted amounts in corporate currency-specific amount fields.
<code>realisedGainGLAccount</code>	string	Name of the general ledger account to record realized gains in transaction journals. Available in API version 64.0 and later.
<code>realisedLossGLAccount</code>	string	Name of the general ledger account to record realized losses in transaction journals. Available in API version 64.0 and later.
<code>ruleBasedCrAndPyntAppln</code>	string	Automates the settlement of the posted invoices by applying payments and credits that meet the specified application rules. The rules application level determines whether payments or credits are applied first to the invoices. The ruleset displays a list of selectable rules. Available in API version 66.0 and later.
<code>unrealisedGainGLAccount</code>	string	Name of the general ledger account to record unrealized gains in transaction journals. Available in API version 64.0 and later.

Field Name	Field Type	Description
unrealisedLossGlaAccount	string	Name of the general ledger account to record unrealized losses in transaction journals. Available in API version 64.0 and later.

enableTransactionJournalCreation values:

- Invoice
- Invoice Line
- Invoice Line Tax
- Credit Memo
- Credit Memo Line
- Credit Memo Line Tax
- Payment
- Refund
- Payment Line Invoice
- Payment Line Invoice Line
- Credit Memo Inv Application
- Credit Memo Line Invoice Line

Declarative Metadata Sample Definition

The following is an example of a BillingSettings component.

```
<BillingSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <enableBillingForecast>true</enableBillingForecast>
  <enableBillingSetup>true</enableBillingSetup>
  <enableForeignExchangeTrxnJrnlCreation>true</enableForeignExchangeTrxnJrnlCreation>
  <enableInvoicePdfGeneration>true</enableInvoicePdfGeneration>
  <enableTransactionsApplicationToInvoices>true</enableTransactionsApplicationToInvoices>

  <enableCrMemoApplicationToPostedInvoices>true</enableCrMemoApplicationToPostedInvoices>

  <enableInvoiceEmailDelivery>true</enableInvoiceEmailDelivery>
  <enableInvoiceSequenceService>true</enableInvoiceSequenceService>
  <enableTransactionJournalCreation>true</enableTransactionJournalCreation>
  <enableTrxnAmountsStorageInCorpCurrency>true</enableTrxnAmountsStorageInCorpCurrency>

  <enablePaymentSchedulesAndItemsCreation>true</enablePaymentSchedulesAndItemsCreation>
</BillingSettings>
```

The following is an example package.xml that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>Billing</members>
    <name>Settings</name>
  </types>
```

```
<version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character * (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

Flow for Billing

Represents the metadata associated with a flow. With Flow, you can create an application that navigates users through a series of screens to query and update records in the database. You can also execute logic and provide branching capability based on user input to build dynamic applications.

FlowActionCall

Billing exposes additional `actionType` values for the `FlowActionCall` Metadata type.

Field Name	Field Type	Description
<code>actionType</code>	<code>InvokableActionType</code> (enumeration of type string)	Required. The action type. Additional valid values only for Billing include <code>applyCredit</code> —Apply a credit memo or credit memo line to an invoice or invoice line, respectively; <code>unapplyCredit</code> —Unapply a credit memo or credit memo line from an invoice or invoice line, respectively; <code>postDraftInvoice</code> —Update the status of an invoice from <code>Draft</code> to <code>Posted</code> for a credit memo application; <code>postDraftInvoiceBatchRun</code> —Update the status of a batch of invoices from <code>Draft</code> to <code>Posted</code> for a credit memo application; <code>createBillingSchedulesFromBillingTransaction</code> —Create one or more billing schedules for a specified billing transaction ID; <code>recoverBillingSchedules</code> —Recover one or more billing schedules in the <code>Error</code> or <code>Processing</code> status; <code>generateInvoiceDocuments</code> —Asynchronously generate PDF documents for the invoices associated with an invoice batch run record that are in the <code>Draft</code> or <code>Posted</code> status; <code>createBillingSchedulesFromTrxn</code> —Creates billing schedules for internal or external transaction records by calling the Create Standalone Billing Schedules API; <code>unapplyPayment</code> —Unapplies a payment that's already been applied to an invoice or invoice line by crediting the amount back to the payment and the invoice or invoice line; <code>writeOffInvoices</code> —Write off partially paid or unpaid invoices to manage pending debts and to maintain accurate financial records. This action calls the Posted Invoice List Write-Off (POST) API; <code>assignSequences</code> —Assigns sequence pattern values to target invoice records based on the specified sequence policy; <code>postDraftCreditMemo</code> —Post a draft credit memo to a credit memo record for review and approval;

Field Name	Field Type	Description
		<code>generateAccountStatement</code>—Generates a comprehensive account statement for a specified account with transaction history and balance information; <code>blngDsptIssueCreditMemo</code>—Issue credit memos for disputed invoices to resolve billing disputes; <code>blngSvcExtendInvoiceDueDate</code>—Update the due date on an invoice to accommodate payment extensions or resolve billing disputes; <code>blngSvcSuspendBilling</code>—Suspend or resume the billing of an account to handle billing disputes; <code>blngSvcUpdateBillToContact</code>—Update the Bill to Contact detail on an invoice to ensure accurate billing communication and routing; <code>blngSendDunningEmail</code>—Run an orchestration that sends dunning process emails for collection plans to recover overdue revenue and notify customers about amounts still due; <code>automateRefund</code>—Initiate refund orchestration for a credit memo generated from a subscription cancellation or negative amendment; or <code>processUnreferencedRefund</code>—Initiate a refund against a posted credit memo. This action locks the credit memo, calls the Commerce Refund API, and returns the refund and application record IDs.<code>createCollectionPlan</code>—Create one or more collection plans, each with its optional nested collection plan items.

PaymentsSharingSettings

Represents the settings to enable account-based sharing to view details related to Revenue Cloud Billing on the objects for Payments and Refunds.

Use account-based sharing to view Revenue Cloud Billing details on these objects.

- Payment
- Payment Authorization
- Payment Authorization Adjustment
- Refund
- Saved Payment Method

Parent Type and Manifest Access

This type extends the [Metadata](#) metadata type and inherits its `fullName` field.

In the package manifest, all the settings metadata types for the org are accessed using the “Settings” name. See [Settings](#) for more details.

File Suffix and Directory Location

The `PaymentsSharingSettings` values are stored in the `PaymentsSharing.settings` file in the `settings` folder. The `.settings` files are different from other named components, because there’s only one settings file for each settings component.

Version

PaymentsSharingSettings components are available in API version 64.0 and later.

Special Access Rules

If you don't have the View All Records permission to the Payments and Refunds objects, then you can:

- View the records only when the records have a value for the `Account` field and a shared Account ID.
- Use Payment Sale API and Payment Authorization API irrespective of whether the Account ID is null or shared.
- Use Payment Capture API, Authorization Reversal API, Create Payment Refund Billing API, and Apply Refunds to Payments API only when the corresponding Authorization or Payment record has a shared Account ID.

See [Commerce Payments resources](#).

Fields

Field Name	Field Type	Description
<code>delegatePaymentSharingToAccount</code>	boolean	Indicates whether sharing for these objects must be delegated to the corresponding Account record (<code>true</code>) or not (<code>false</code>). Payment, Payment Authorization, Payment Authorization Adjustment, Refund, or Saved Payment Method. The default value is <code>false</code> . If this field's value is set to <code>true</code> , you get access to these objects based on the access you have for the Account object. For example, if you have Read access to the Account object, you get Read access to the objects for Payments and Refunds. For saved payment method, the sharing is delegated to merchant account instead of account if the user has Manage Saved Payment Methods user permission.

Declarative Metadata Sample Definition

The following is an example of a PaymentsSharingSettings component.

```
<?xml version="1.0" encoding="UTF-8"?>
<PaymentsSharingSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <delegatePaymentSharingToAccount>true</delegatePaymentSharingToAccount>
</PaymentsSharingSettings>
```

The following is an example `package.xml` that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>PaymentsSharing</members>
    <name>Settings</name>
  </types>
  <version>68.0</version>
</Package>
```

Wildcard Support in the Manifest File

The wildcard character * (asterisk) in the `package.xml` manifest file doesn't apply to metadata types for feature settings. The wildcard applies only when retrieving all settings, not for an individual setting. For details, see [Settings](#). For information about using the manifest file, see [Deploying and Retrieving Metadata with the Zip File](#).

CHAPTER 13 Revenue Management Associated Objects

In this chapter ...

- [StandardObjectNameChangeEvent](#)
- [StandardObjectNameFeed](#)
- [StandardObjectNameHistory](#)
- [StandardObjectNameOwnershipRule](#)
- [StandardObjectNameShare](#)
- [Event](#)
- [Task](#)

This section provides a list of objects associated to standard objects of Revenue Management with their standard fields.

Some fields may not be listed for some objects. To see the system fields for each object, see [System Fields](#) in the *Object Reference for Salesforce and Lightning Platform*.

To verify the complete list of fields for an object, use a describe call from the API or inspect with an appropriate tool. For example, inspect the WSDL or use a schema viewer.

StandardObjectNameChangeEvent

A `ChangeEvent` object is available for each object that supports Change Data Capture. You can subscribe to a stream of change events using Change Data Capture to receive data tied to record changes in Salesforce. Changes include record creation, updates to an existing record, deletion of a record, and undeletion of a record. A change event isn't a Salesforce object—it doesn't support CRUD operations or queries. It's included in the object reference so you can discover which Salesforce objects support change events.

Supported Calls

`describeSObjects()`

Special Access Rules

- All objects may not be available in your org. Some objects require specific feature settings and permissions to be enabled.
- For more special access rules, if any, see the documentation for the standard object. For example, for `AccountChangeEvent`, see the special access rules for `Account`.

Change Event Support

Change events are available for all custom objects and a subset of standard objects. Change events that correspond to custom settings are partially supported. They aren't supported in Apex triggers but are supported in other types of subscribers. For more information about standard object support, see the [Objects That Support Change Events](#) section below.

Change Event Name

The name of a change event is based on the name of the corresponding object for which it captures the changes.

Standard Object Change Event Name

```
<Standard_Object_Name>ChangeEvent
```

Example: `AccountChangeEvent`

Custom Object Change Event Name

```
<Custom_Object_Name>__ChangeEvent
```

Example: `MyCustomObject__ChangeEvent`

Change Event Fields

The fields that a change event can include correspond to the fields on the associated parent Salesforce object, with a few exceptions. For example, `AccountChangeEvent` fields correspond to the fields on `Account`.

The fields that a change event doesn't include are:

- The `IsDeleted` system field.
- The `SystemModStamp` system field.
- Any field whose value isn't on the record and is derived from another record or from a formula, except roll-up summary fields, which are included. Examples are formula fields. Examples of fields with derived values include `LastActivityDate` and `PhotoUrl`.

Each change event also contains header fields. The header fields are included inside the `ChangeEventHeader` field. They contain information about the event, such as whether the change was an update or delete and the name of the object, like `Account`.

In addition to the event payload, the event schema ID is included in the `schema` field. Also included is the event-specific field, `replayId`, which is used for retrieving past events.

Event Message Example

This example is an event message in JSON format for a new account record creation.

```
{
  "schema": "IeRuaY6cbI_HsV8Rv1Mc5g",
  "payload": {
    "ChangeEventHeader": {
      "entityName": "Account",
      "recordIds": [
        "<record_ID>"
      ],
      "changeType": "CREATE",
      "changeOrigin": "com/salesforce/api/soap/51.0;client=SfdcInternalAPI/",
      "transactionKey": "0002343d-9d90-e395-ed20-cf416ba652ad",
      "sequenceNumber": 1,
      "commitTimestamp": 1612912679000,
      "commitNumber": 10716283339728,
      "commitUser": "<User_ID>"
    },
    "Name": "Acme",
    "Description": "Everyone is talking about the cloud. But what does it mean?",
    "OwnerId": "<Owner_ID>",
    "CreatedDate": "2021-02-09T23:17:59Z",
    "CreatedBy": "<User_ID>",
    "LastModifiedDate": "2021-02-09T23:17:59Z",
    "LastModifiedBy": "<User_ID>"
  },
  "event": {
    "replayId": 6
  }
}
```

API Version and Schema

When you subscribe to change events, the subscription uses the latest API version and the event messages received reflect the latest field definitions. For more information, see [API Version and Event Schema](#) in the *Change Data Capture Developer Guide*.

Usage

For more information about Change Data Capture, see [Change Data Capture Developer Guide](#).

StandardObjectNameFeed

StandardObjectNameFeed is the model for all feed objects associated with standard objects. These objects represent the posts and feed-tracked changes of a standard object.

The object name is variable and uses *StandardObjectNameFeed* syntax. For example, *AccountFeed* represents the posts and feed-tracked changes on an account record. We list the available associated feed objects at the end of this topic. For specific version information, see the documentation for the standard object.

Supported Calls

`delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

Special Access Rules

In the internal org, users can delete all feed items they created. This rule varies in Experience Cloud sites where threaded discussions and delete-blocking are enabled. Site members can delete all feed items they created, provided the feed items don't have content nested under them—like a comment, answer, or reply. Where the feed item has nested content, only feed moderators and users with the Modify All Data permission can delete threads.

To delete feed items they didn't create, users must have one of these permissions:

- Modify All Data
- Modify All Records on the parent object, like Account for AccountFeed
- Moderate Chatter



Note: Users with the Moderate Chatter permission can delete only the feed items and comments they can see.

Only users with this permission can delete items in unlisted groups.

For more special access rules, if any, see the documentation for the standard object. For example, for AccountFeed, see the special access rules for Account.

Fields

BestCommentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: The ID of the comment marked as best answer on a question post. This field is available in API version 44.0 and later.

Body

Type: textarea

Properties: Nillable, Sort

Description: The body of the post. Required when **Type** is `TextPost`. Optional when **Type** is `ContentPost` or `LinkPost`.

CommentCount

Type: int

Properties: Filter, Group, Sort

Description: The number of comments associated with this feed item.

In a feed that supports pre-moderation, `CommentCount` isn't updated until a comment is published. For example, say that you comment on a post that already has one published comment and your comment triggers moderation. Now there are two comments on the post, but the count says there's only one. In a moderated feed, comments aren't counted until approved by an admin or someone with Can Approve Feed Post and Comment or Modify All Data. Feed moderation has implications on how you retrieve feed comments. In a moderated feed, rather than retrieving comments by looping through `CommentCount`, go through pagination until the end of comments is returned.

ConnectionId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: When a `PartnerNetworkConnection` modifies a record that is tracked, the `CreatedBy` field contains the ID of the system administrator. The `ConnectionId` contains the ID of the `PartnerNetworkConnection`. Available if Salesforce to Salesforce is enabled for your organization.

ContentData

Type: base64

Properties: Nillable

Description: Available in API version 36.0 and earlier only. Required if `Type` is `ContentPost`. Encoded file data in any format, and can't be 0 bytes. Setting this field automatically sets `Type` to `ContentPost`.

ContentDescription

Type: textarea

Properties: Nillable, Sort

Description: Available in API version 36.0 and earlier only. The description of the file specified in `ContentData`.

ContentFileName

Type: string

Properties: Group, Nillable, Sort

Description: Available in API version 36.0 and earlier only. This field is required if `Type` is `ContentPost`. The name of the file uploaded to the feed. Setting `ContentFileName` automatically sets `Type` to `ContentPost`.

ContentSize

Type: int

Properties: Group, Nillable, Sort

The `<img>` tag is accessible only through the API and must reference files in Salesforce similar to this example: `</img>`

In API version 35.0 and later, the system replaces special characters in rich text with escaped HTML. In API version 34.0 and prior, all rich text appears as a plain-text representation.

LikeCount

Type: int

Properties: Filter, Group, Sort

Description: The number of likes associated with this feed item.

LinkUrl

Type: url

Properties: Nillable, Sort

Description: The URL of a `LinkPost`.

NetworkScope

Type: picklist

Properties: Group, Nillable, Restricted picklist, Sort

Description: Specifies whether this feed item is available in the default Experience Cloud site, a specific Experience Cloud site, or all sites. This field is available in API version 26.0 and later, if digital experiences is enabled for your org. `NetworkScope` can have the following values:

- `NetworkId`—The ID of the Experience Cloud site in which the `FeedItem` is available. If left empty, the feed item is only available in the default Experience Cloud site.
- `AllNetworks`—The feed item is available in all Experience Cloud sites.

Note the following exceptions for `NetworkScope`:

- Only feed items with a `Group` or `User` parent can set a `NetworkId` or a null value for `NetworkScope`.
- For feed items with a record parent, users can set `NetworkScope` only to `AllNetworks`.
- You can't filter a feed item on the `NetworkScope` field.

ParentId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the record that is tracked in the feed. The detail page for the record displays the feed.

RelatedRecordId

Type: reference

Properties: Group, Nillable, Sort

Description: ID of the `ContentVersion` record associated with a `ContentPost`. This field is null for all posts except `ContentPost`.

Title

Type: string

Properties: Group, Nillable, Sort

Description: The title of the feed item. When the `Type` is `LinkPost`, the `LinkUrl` is the URL and this field is the link name.

Type

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: The type of feed item:

- `ActivityEvent`—indirectly generated event when a user or the API adds a [Task](#) associated with a feed-enabled parent record (excluding email tasks on cases). Also occurs when a user or the API adds or updates a [Task](#) or [Event](#) associated with a case record (excluding email and call logging).
For a recurring Task with CaseFeed disabled, one event is generated for the series only. For a recurring Task with CaseFeed enabled, events are generated for the series and each occurrence.
- `AdvancedTextPost`—created when a user posts a group announcement and, in Lightning Experience as of API version 39.0 and later, when a user shares a post.
- `AnnouncementPost`—Not used.
- `ApprovalPost`—generated when a user submits an approval.
- `BasicTemplateFeedItem`—Not used.
- `CanvasPost`—a post made by a canvas app posted on a feed.
- `CollaborationGroupCreated`—generated when a user creates a public group.
- `CollaborationGroupUnarchived`—Not used.
- `ContentPost`—a post with an attached file.
- `CreatedRecordEvent`—generated when a user creates a record from the publisher.
- `DashboardComponentAlert`—generated when a dashboard metric or gauge exceeds a user-defined threshold.
- `DashboardComponentSnapshot`—created when a user posts a dashboard snapshot on a feed.
- `LinkPost`—a post with an attached URL.
- `PollPost`—a poll posted on a feed.
- `ProfileSkillPost`—generated when a skill is added to a user's Chatter profile.
- `QuestionPost`—generated when a user posts a question.
- `ReplyPost`—generated when Chatter Answers posts a reply.
- `RypplePost`—generated when a user creates a Thanks badge in WDC.
- `TextPost`—a direct text entry on a feed.
- `TrackedChange`—a change or group of changes to a tracked field.
- `UserStatus`—automatically generated when a user adds a post. Deprecated.

The following values appear in the `Type` picklist for all feed objects but apply only to CaseFeed:

- `CaseCommentPost`—generated event when a user adds a case comment for a case object
- `EmailMessageEvent`—generated event when an email related to a case object is sent or received
- `CallLogPost`—generated event when a user logs a call for a case through the user interface. CTI calls also generate this event.

- `ChangeStatusPost`—generated event when a user changes the status of a case
- `AttachArticleEvent`—generated event when a user attaches an article to a case

If you set `Type` to `ContentPost`, also specify `ContentData` and `ContentFileName`.

Visibility

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Specifies whether this feed item is available to all users or internal users only. This field is available in API version 26.0 and later, if digital experiences is enabled for your organization. `Visibility` can have the following values:

- `AllUsers`—The feed item is available to all users who have permission to see the feed item.
- `InternalUsers`—The feed item is available to internal users only.

Note the following exceptions for `Visibility`:

- For record posts, `Visibility` is set to `InternalUsers` for all internal users by default.
- External users can set `Visibility` only to `AllUsers`.
- On user and group posts, only internal users can set `Visibility` to `InternalUsers`.

Usage

A feed for an object is automatically created when a user enables feed tracking for the object. Use feeds to track changes to records. For example, `AccountFeed` tracks changes to an account record. Use feed objects to retrieve the content of feed fields, such as type of feed or feed ID.

- `NewsFeed` and `UserProfileFeed` are available in API version 18.0 through API version 26.0. In API version 27.0 and later, `NewsFeed` and `UserProfileFeed` are no longer available in SOAP API. Use Connect REST API to access `NewsFeed` and `UserProfileFeed`.

Use the `NewsFeed` object to query and retrieve lead feed items associated with a converted lead record.

- For `NewsFeed` and `UserProfileFeed`, users who don't have the View All Data permission have the following limitations when querying records: Must specify a `LIMIT` clause and the limit must be less than or equal to 1000. Can include a `WHERE` clause that references object fields, but can't include references to fields in related objects. For example, you can filter by `CreatedDate` or `ParentId`, but not by `Parent.Name`. Can include an `ORDER BY` clause that references object fields, but can't include references to fields in related objects. For example, `ORDER BY CreatedDate` or `ParentId`, but not by `Parent.Name`. To query for the most recent feed items, `ORDER BY CreatedDate DESC, Id DESC`.

Note the following SOQL restrictions. No SOQL limit if logged-in user has View All Data permission. If not, specify a `LIMIT` clause of 1,000 records or fewer. SOQL `ORDER BY` on fields using relationships isn't available. Use `ORDER BY` on fields on the root object in the SOQL query.

- The name `Article_Type__Feed` is variable, where `Article Type` is the object name for the article type associated with the article. For example, `Offer__Feed` represents a feed on an article of type `Offer`.
- Field Service must be enabled in your organization for `ServiceAppointmentFeed`, `ServiceCrewFeed`, `ServiceMemberFeed`, `ServiceResourceCapacityFeed`, `ServiceResourceFeed`, `ServiceResourceSkillFeed`, `ServiceTerritoryFeed`, `ServiceTerritoryMemberFeed`, and `SkillRequirementFeed`.
- For `WorkOrderFeed`, Work Orders or Field Service must be enabled in your organization.

- On `UserFeed`, if you use the `FeedComment` object to comment on a user record, the user can delete the comment. For example, if John Smith adds a comment to the feed on Sasha Jones' user record, Sasha can delete the comment.

StandardObjectNameHistory

StandardObjectNameHistory is the model for all history objects associated with standard objects. These objects represent the history of changes to the values in the fields of a standard object.

The object name is variable and uses *StandardObjectNameHistory* syntax. For example, `AccountHistory` represents the history of changes to the values of an account record's fields. We list the available associated history objects at the end of this topic. For specific version information, see the documentation for the standard object.

Supported Calls

`describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`

You can also enable `delete()` in API version 42.0 and later. See [Enable delete of Field History and Field History Archive](#).

Special Access Rules

For specific special access rules, if any, see the documentation for the standard object. For example, for `AccountHistory`, see the special access rules for `Account`.

Fields

StandardObjectId

Type: reference

Properties: Filter, Group, Sort

Description: ID of the standard object.

DataType

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort

Description: Data type of the field that was changed.

Field

Type: picklist

Properties: Filter, Group, Restricted picklist, Sort

Description: Name of the field that was changed.

NewValue

Type: anyType

Properties: Nillable, Sort

Description: New value of the field that was changed.

OldValue

Type: anyType

Properties: Nillable, Sort

Description: Old value of the field that was changed.

StandardObjectNameOwnerSharingRule

StandardObjectNameOwnerSharingRule is the model for all owner sharing rule objects associated with standard objects. These objects represent a rule for sharing a standard object with users other than the owner.

The object name is variable and uses *StandardObjectNameOwnerSharingRule* syntax. For example, *ChannelProgramOwnerSharingRule* is a rule for sharing a channel program with users other than the channel program owner. The available associated owner sharing rule objects are listed at the end of this topic. For specific version information, see the standard object documentation.



Note: To enable access to this object, contact Salesforce customer support. But we recommend that you use Metadata API to programmatically update owner sharing rules instead because it triggers automatic sharing rule recalculation. The [SharingRules](#) Metadata API type is enabled for all orgs.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

For specific special access rules, if any, see the documentation for the standard object. For example, for *ChannelProgramOwnerSharingRule*, see the special access rules for *ChannelProgram*.

Fields

AccessLevel

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: Determines the level of access users have to records. Values are `Read` (read only) or `Edit` (read/write)

Description

Type: textarea

Properties: Create, Filter, Nillable, Sort, Update

Description: Description of the sharing rule. Maximum length is 1,000 characters.

DeveloperName

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The unique name of the object in the API. This name can contain only underscores and alphanumeric characters and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package, and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique `DeveloperName` for each record. If no `DeveloperName` is specified, performance can slow while Salesforce generates one for each record.

GroupId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the source group. Records that are owned by users in the source group trigger the rule to give access.

Name

Type: string

Properties: Create, Filter, Group, idLookup, Sort, Update

Description: Label of the sharing rule as it appears in the UI. Maximum length is 80 characters.

UserOrGroupId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the user or group that you're granting access to.

StandardObjectNameShare

StandardObjectNameShare is the model for all share objects associated with standard objects. These objects represent a sharing entry on the standard object.

The object name is variable and uses *StandardObjectNameShare* syntax. For example, `AccountBrandShare` is a sharing entry on an account brand. For specific version information, see the standard object documentation.

You can only create, edit, and delete sharing entries for standard objects whose `RowCause` field is set to `Manual`. Sharing entries for standard objects with different `RowCause` values are created as a result of your Salesforce org's sharing configuration and are read-only. For some sharing mechanisms, such as sharing sets, sharing entries aren't stored at all.



Note: While Salesforce currently maintains read-only sharing entries for multiple sharing mechanisms, it's possible that we'll stop storing certain share records to improve performance. As a best practice, don't create customizations that rely on the availability of these sharing entries. Any changes to sharing behavior will be communicated before they occur.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

For specific special access rules, if any, see the documentation for the standard object. For example, for AccountBrandShare, see the special access rules for AccountBrand.

Fields

AccessLevel

Type: picklist

Properties: Create, Filter, Group, Restricted picklist, Sort, Update

Description: The level of access allowed. Values are `All` (owner), `Edit` (read/write), or `Read` (read only)

ParentId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the parent record.

RowCause

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Reason that the sharing entry exists.

UserOrGroupId

Type: reference

Properties: Create, Filter, Group, Sort

Description: ID of the user or group that has been given access to the object.

Event

Represents an event in the calendar. In the user interface, event and task records are collectively referred to as activities.

 **Important:** Where possible, we changed noninclusive terms to align with our company value of Equality. We maintained certain terms to avoid any effect on customer implementations.

- An `EventRelation` object can't be related to a child event, and child events don't include the invitee related list.
- `query()`, `delete()`, and `update()` aren't allowed with events related to more than one contact in API versions 25.0 and earlier.
- `create()` and `update()` aren't available for read-only fields on Lightning Experience event series.
- `upsert()` and `undelete()` aren't supported for syncing changes made to events through the API using the feature Lightning Sync.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AcceptedEventInviteIds

Type: `JunctionIdList`

Properties: Create, Update

Description: A string array of contact or lead IDs who accepted this event. This `JunctionIdList` is linked to the `AcceptedEventRelation` child relationship.

 **Warning:** Adding a `JunctionIdList` field name to the `fieldsToNull` property deletes all related junction records. This action can't be undone.

AccountId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Represents the ID of the related account. The `AccountId` is determined as follows.

If the value of `whatId` is any of the following objects, then Salesforce uses that object's `AccountId`.

- Account
- Opportunity
- Contract
- Custom object that's a child of Account

If the value of the `whatId` field is any other object, and the value of the `whoId` field is a contact object, then Salesforce uses that contact's `AccountId`. If your org uses Shared Activities, Salesforce uses the `AccountId` of the primary contact.

Otherwise, Salesforce sets the value of the `AccountId` field to `null`.

This is a relationship field.

Relationship Name: Account

Relationship Type: Lookup

Refers To: Account

ActivityDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Contains the event's due date if the `IsAllDayEvent` flag is set to `true`. This field is a date field with a timestamp that's always set to midnight in the Coordinated Universal Time (UTC) time zone. Don't attempt to alter the timestamp to account for time zone differences. Label is **Due Date Only**.

This field is required in API versions 12.0 and earlier if the `IsAllDayEvent` flag is set to `true`.

The value for this field and `StartDateTime` must match, or one of them must be `null`.

ActivityDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Contains the event's due date if the `IsAllDayEvent` flag is set to `false`. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate. Label is **Due Date Time**.

This field is required in API versions 12.0 and earlier if the `IsAllDayEvent` flag is set to `false`.

The value for this field and `StartDateTime` must match, or one of them must be `null`.

ClientGuid

Type: string

Properties: Filter, Group, Nillable, Sort

Description: The client globally unique identifier identifies the external API client used to create the event. Label is **Client GUID**.

CurrencyIsoCode

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Available only for orgs with the multicurrency feature enabled. Contains the ISO code for any currency allowed by the organization.

DeclinedEventInviteIds

Type: JunctionIdList

Properties: Create, Update

Description: A string array of contact, lead, or user IDs who declined this event. This `JunctionIdList` is linked to the `DeclinedEventRelation` child relationship.



Warning: Adding a `JunctionIdList` field name to the `fieldsToNull` property deletes all related junction records. This action can't be undone.

Description

Type: textarea

Properties: Create, Nillable, Update

Description: Contains a text description of the event. Limit: 32,000 characters.

Division

Type: picklist

Properties: Defaulted on create, Filter, Group, Restricted picklist, Sort

Description: A logical segment of your organization's data. For example, if your company is organized into different business units, you could create a division for each business unit, such as "North America," "Healthcare," or "Consulting." Available only if the organization has the Division permission enabled.

DurationInMinutes

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Contains the event length, in minutes. Even though this field represents a temporal value, it's an integer type—not a Date/Time type.

Required in API versions 12.0 and earlier if `IsAllDayEvent` is false.

In API versions 13.0 and later, this field is optional, depending on the following:

- If `IsAllDayEvent` is true, you can supply a value for either `DurationInMinutes` or `EndTime`. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are `null`, the duration defaults to one day.
- If `IsAllDayEvent` is false, a value must be supplied for either `DurationInMinutes` or `EndTime`. Supplying values in both fields is allowed if the values add up to the same amount of time.

If the multiday event feature is enabled, then API versions 13.0 and later support values greater than 1440 for the `DurationInMinutes` field. API versions 12.0 and earlier can't access event objects whose `DurationInMinutes` is greater than 1440. For more information, see [Multiday Events](#).

Depending on your API version, errors with the `DurationInMinutes` and `EndTime` fields may appear in different places.

- Versions 38.0 and before—Errors always appear in the `DurationInMinutes` field.
- Versions 39.0 and later—If there's no value for the `DurationInMinutes` field, errors appear in the `EndTime` field. Otherwise, they appear in the `DurationInMinutes` field.

EndDate

Type: date

Properties: Filter, Group, Nillable, Sort

Description: Read-only. Available in API versions 46.0 and later. This field supplies the date value that appears in the `EndTime` field. This field is a date field with a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone.

EndTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Available in API versions 13.0 and later. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate.

This field is optional, depending on the following:

- If `IsAllDayEvent` is true, you can supply a value for either `DurationInMinutes` or `EndTime`. Supplying values in both fields is allowed if the values add up to the same amount of time. If both fields are `null`, the duration defaults to one day.
- If `IsAllDayEvent` is false, a value must be supplied for either `DurationInMinutes` or `EndTime`. Supplying values in both fields is allowed if the values add up to the same amount of time.

Depending on your API version, errors with the `DurationInMinutes` and `EndTime` fields may appear in different places.

- Versions 38.0 and before—Errors always appear in the `DurationInMinutes` field.
- Versions 39.0 and later—If there's no value for the `DurationInMinutes` field, errors appear in the `EndTime` field. Otherwise, they appear in the `DurationInMinutes` field.

EventSubtype

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Provides standard subtypes to facilitate creating and searching for events. This field isn't updateable.

EventWhoIds

Type: JunctionIdList

Properties: Create, Update

Description: A string array of contact or lead IDs used to create many-to-many relationships with a shared event. `EventWhoIds` is available when the shared activities setting is enabled. The first contact or lead ID in the list becomes the primary `whoId` if you don't specify a primary `whoId`. If you set the `EventWhoIds` field to null, all entries in the list are deleted and the value of `whoId` is added as the first entry.

 **Warning:** Adding a `JunctionIdList` field name to the `fieldsToNull` property deletes all related junction records. This action can't be undone.

GroupEventType

Type: picklist

Properties: Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Read-only. Available in API versions 19.0 and later.

The possible values are:

- 0 (Non-group event)—An event with no invitees.
- 1 (Group event)—An event with invitees.
- 2 (Proposed event)—An event created when a user requests a meeting with a contact, lead, or person account using the Salesforce user interface. When the user confirms the meeting, the proposed event becomes a group event. You can't create, edit, or delete proposed events in the API. This value is no longer used in API version 41.0 and later.
- 3 (IsRecurrence2 Series Pattern)—An event representing an event series recurrence pattern in Lightning Experience.

IsAllDayEvent

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the `ActivityDate` field (`true`) or the `ActivityDateTime` field (`false`) is used to define the date or time of the event. Label is **All-Day Event**. See also [DurationInMinutes](#) and [EndDateTime](#).

IsArchived

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the event has been archived.

IsChild

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the event is a child of another event (`true`) or not (`false`).

For a child event, you can update `IsReminderSet` and `ReminderDateTime` only. You can query and delete a child event. If the objects related to the child event are different from those objects related to the parent event (this difference is possible if you use API version 25.0 or earlier) and one of the objects related to the child event is deleted, the objects related to the parent event are updated to ensure data integrity.

IsClientManaged

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the event is managed by an external client. If the value of this field is false, the event isn't owned or managed by an external client, and Salesforce can be used to update it. If the value is true, Salesforce can be used to change only noncritical fields on the event. Label is **Is Client Managed**.

IsGroupEvent

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the event is a group event—that is, whether it has invitees (`true`) or not (`false`).

IsPrivate

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether users other than the creator of the event can (`false`) or can't (`true`) see the event details when viewing the event user's calendar. However, users with the View All Data or Modify All Data permission can see private events in reports

and searches, or when viewing other users' calendars. Private events can't be associated with opportunities, accounts, cases, campaigns, contracts, leads, or contacts. Label is **Private**.

IsRecurrence

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort

Description: Indicates whether a Salesforce Classic event is scheduled to repeat itself (`true`) or only occurs one time (`false`). This field is read-only when updating records, but not when creating them. If this field value is `true`, then `RecurrenceEndDateOnly`, `RecurrenceStartDateTime`, `RecurrenceType`, and any recurrence fields associated with the given recurrence type must be populated. Label is **Create recurring series of events**.

IsRecurrence2

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Read-only. This field is available in API version 44.0 and later. Indicates whether a Lightning Experience event is scheduled to repeat (`true`) or only occurs one time (`false`). If this field value is `true`, then `Recurrence2PatternText` and `Recurrence2PatternVersion` must be populated. Label is **Repeat**.

IsRecurrence2Exception

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Read-only. This field is available in API version 44.0 and later. Indicates whether an individual event in a Lightning Experience event series has a recurrence pattern that's different from the rest of the series, making it an exception.

IsRecurrence2Exclusion

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Read-only. This field is available in API version 44.0 and later. Indicates when updates to a Lightning Experience event series recurrence pattern have been made, but affect future event occurrences only. For past event occurrences, `IsRecurrence2Exclusion` is set to `true`, excluding past occurrences from the series recurrence pattern.

IsReminderSet

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether the activity is a reminder (`true`) or not (`false`).

IsVisibleInSelfService

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether an event associated with an object can be viewed in the Customer Portal (`true`) or not (`false`). If your org has enabled digital experiences, events marked `IsVisibleInSelfService` are visible to any external user in the Experience Cloud site, as long as the user has access to the record the event was created on. This field is available when Customer Portal or partner portal is enabled OR Digital experiences is enabled and you have Customer Portal or partner portal licenses

Location

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Contains the location of the event.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Contains the ID of the user or public calendar who owns the event. Label is **Assigned to ID**.

This is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Calendar, User

Recurrence2PatternStartDate

Type: dateTime

Properties: Filter, Nillable, Sort

Description: Read-only. This field is available in API version 44.0 and later. Indicates the date and time when the Lightning Experience event series begins. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate.

Recurrence2PatternText

Type: textarea

Properties: Create, Nillable

Description: The RRULE that describes the recurrence pattern for Lightning Experience event series. Supports a subset of the RFC 5545 standard for internet calendaring and scheduling. See the Event Series section in this topic for usage examples. This field has a maximum length of 512 characters.

This field is available in API version 44.0 and later, and has the `Create` property in API version 52.0 and later.

Recurrence2PatternTimeZone

Type: string

Properties: Filter, Group, Nillable, Sort

Description: This field is available in API version 44.0 and later. Indicates the time zone in which the Lightning Experience event series was created or updated. This field uses standard Java TimeZone IDs. For example, America/Los_Angeles.

Recurrence2PatternVersion

Type: picklist

Properties: Filter, Group, Nillable, Restricted picklist, Sort,

Description: Read-only. This field is available in API version 44.0 and later. Indicates the standard specifications for Lightning Experience event series recurrence patterns. The only possible value is 1 (RFC 5545 v4 RRULE)—RFC 5545 is a standard set of specifications for internet calendaring and scheduling that `IsRecurrence2` adheres to for series recurrence patterns. RFC 5545 specifications for series recurrence patterns are called RRULES. For examples of RRULE usage, see the Lightning Experience Event Series and Recurring Events section in this topic.

RecurrenceActivityId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Read-only. Not required on create. Contains the ID of the main record of the Salesforce Classic recurring event. Subsequent occurrences have the same value in this field.

RecurrenceDayOfMonth

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the day of the month on which the event repeats.

RecurrenceDayOfWeekMask

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the day or days of the week on which the Salesforce Classic recurring event repeats. This field contains a bitmask. The values are as follows: Sunday = 1, Monday = 2, Tuesday = 4, Wednesday = 8, Thursday = 16, Friday = 32, or Saturday = 64. Multiple days are represented as the sum of their numerical values. For example, Tuesday and Thursday = 4 + 16 = 20.

RecurrenceEndDateOnly

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the last date on which the event repeats. For multiday Salesforce Classic recurring events, this date is the day on which the last occurrence starts. This field is a date field with a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. Don't attempt to alter the timestamp to account for time zone differences.

RecurrenceInstance

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates the frequency of the Salesforce Classic event's recurrence. For example, 2nd or 3rd.

RecurrenceInterval

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the interval between Salesforce Classic recurring events.

RecurrenceMonthOfYear

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates the month in which the Salesforce Classic recurring event repeats.

RecurrenceStartDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Indicates the date and time when the Salesforce Classic recurring event begins. The value must precede the `RecurrenceEndDateOnly`. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate.

RecurrenceTimeZoneSidKey

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates the time zone associated with a Salesforce Classic recurring event. For example, "UTC-8:00" for Pacific Standard Time.

RecurrenceType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates how often the Salesforce Classic event repeats. For example, daily, weekly, or every nth month (where "nth" is defined in `RecurrenceInstance`).

ReminderDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Represents the time when the reminder is scheduled to fire, if `IsReminderSet` is set to `true`. If `IsReminderSet` is set to `false`, then the user may have deselected the reminder checkbox in the Salesforce user interface, or the reminder has already fired at the time indicated by the value.

ShowAs

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates how this event appears when another user views the calendar: Busy, Out of Office, or Free. Label is **Show Time As**.

StartDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Indicates the start date and time of the event. Available in versions 13.0 and later.

If the Event `IsAllDayEvent` flag is set to true (indicating that it's an all-day Event), then the event start date information is contained in the `StartDateTime` field. The time portion of this field is always transferred in the Coordinated Universal Time (UTC) time zone. Translate the time portion to or from a local time zone for the user or the application, as appropriate.

If the Event `IsAllDayEvent` flag is set to false (indicating that it isn't an all-day event), then the event start date information is contained in the `StartDateTime` field. The time portion is always transferred in the Coordinated Universal Time (UTC) time zone. You need to translate the time portion to or from a local time zone for the user or the application, as appropriate.

If this field has a value, then `ActivityDate` and `ActivityDateTime` must either be `null` or match the value of this field.

Subject

Type: combobox

Properties: Create, Filter, Nillable, Sort, Update

Description: The subject line of the event, such as Call, Email, or Meeting. Limit: 255 characters.

Type

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Indicates the event type, such as Call, Email, or Meeting.

UndecidedEventInviteIds

Type: JunctionIdList

Properties: Create, Update

Description: A string array of contact, lead, or user IDs who are undecided about this event. This `JunctionIdList` is linked to the `UndecidedEventRelation` child relationship.



Warning: Adding a `JunctionIdList` field name to the `fieldsToNull` property deletes all related junction records. This action can't be undone.

WhatCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: Available if your organization has enabled Shared Activities. Represents the count of related EventRelations pertaining to the `WhatId`. The count of the `WhatId` must be 1 or less.

WhatId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The `WhatId` represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. `WhatIds` are polymorphic. Polymorphic means a `WhatId` is equivalent to the ID of a related object. The label is `Related To ID`.

This is a polymorphic relationship field.

Relationship Name: What

Relationship Type: Lookup

Refers To: Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem

WhoCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: Available to organizations that have Shared Activities enabled. Represents the count of related EventRelations pertaining to the `WhoId`.

Whold

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The `Whold` represents a human such as a lead or a contact. `Wholds` are polymorphic. Polymorphic means a `Whold` is equivalent to a contact's ID or a lead's ID. The label is `Name ID`.

If Shared Activities is enabled, the value of this field is the ID of the related lead or primary contact. If you add, update, or remove the `WhoId` field, you might encounter problems with triggers, workflows, and data validation rules that are associated with the record. The label is `Name ID`.

If the `JunctionIdList` field is used, all `WhoIds` are included in the relationship list.

Beginning in API version 37.0, if the contact or lead ID in the `WhoId` field isn't in the `EventWhoIds` list, no error occurs and the ID is added to the `EventWhoIds` as the primary `WhoId`. If `WhoId` is set to null, an arbitrary ID from the existing `EventWhoIds` list is promoted to the primary position.

This is a polymorphic relationship field.

Relationship Name: Who

Relationship Type: Lookup

Refers To: Contact, Lead

Usage

Use Event to manage calendar appointments.

Queries on events are denied before they time out if they involve amounts of data that are deemed too large. In such cases, the exception code `OPERATION_TOO_LARGE` is returned. If you receive `OPERATION_TOO_LARGE`, refactor your query to return or scan a smaller amount of data.

When querying for events with a specific due date, you must filter on both the `ActivityDateTime` and `ActivityDate` fields. For example to find all events with a due date of February 14, 2003, you need two filters:

- One filter with the `ActivityDate` field equal to the Coordinated Universal Time (UTC) time zone on February 14, 2003.
- One filter with the `ActivityDate` field greater than or equal to midnight on February 14, 2003 in the user's local time zone AND less than or equal to midnight on February 15, 2003 in the user's local time zone.

Alternatively, in API version 13.0 and later, you can find events with a specific due date by filtering on `StartTime`. For example, to find all events with a due date of February 14, 2003, filter with the `StartTime` greater than or equal to midnight on February 14, 2003 in the user's local time zone AND less than or equal to midnight on February 15, 2003 in the user's local time zone.

The `EventId` field of an `EventRelation` object always points to the master record. An invitee on a group event can query the `EventRelation` object to view the master record.

Multiday Events

- Multiday events are available in API version 13.0 and later. Also, in earlier versions SOQL queries don't return multiday events.
- Multiday events are enabled through the user interface from Setup by entering *Activity Settings* in the *Quick Find* box, then selecting **Activity Settings**.
- If the multiday event feature is enabled, then API versions 13.0 and later support values greater than 1440 for the `DurationInMinutes` field. API versions 12.0 and earlier can't access event objects whose `DurationInMinutes` is greater than 1440.
- Multiday events can't exceed 14 days.

Event Series and Recurring Events

In Lightning Experience, events with multiple occurrences are called event series, and are indicated when the `IsRecurrence2` field is set to `true`. In Salesforce Classic, events with multiple occurrences are called recurring events, and are indicated when the `IsRecurrence` field is set to `true`. Both fields can't be set to true for the same event.

- Lightning Experience event series are available in API version 44.0 and later as read-only fields. Recurrence patterns, specified by the `Recurrence2PatternText` field, are creatable in API version 52.0 and later. Salesforce Classic recurring events are available in API version 7.0 and later. In earlier versions, SOQL queries don't return any Lightning Experience event series.
- After an event is created, you can't change the values of `IsRecurrence2` or `IsRecurrence` from `true` to `false` or vice versa.
- You can't set fields associated with `IsRecurrence2` for events where `IsRecurrence` is set to `true`, or vice versa.
- For Lightning Experience event series where `IsRecurrence2` is `true`, if you'd like to delete a single or all remaining events, use the REST API call. For Salesforce Classic recurring events where `IsRecurrence` is `true`, all past and future events in the series are removed when you delete the recurring event series through the API. However, when you delete the recurring event series through the user interface, only future occurrences are removed.
- For Lightning Experience event series in API version 58.0 and later, when you change a future event, events in the entire series also change. When you change a past event, `IsRecurrence2Exception` is set to `true` and only that past event changes.
- When creating a Salesforce Classic recurring event series, the duration of the event must be 24 hours or less. When the Salesforce Classic recurring event series is created, you can extend the length of individual occurrences beyond 24 hours if Multiday events are enabled; see **Multiday Events**.
- For Salesforce Classic recurring events, `RecurrenceStartDateTime`, `RecurrenceEndDateOnly`, `RecurrenceType`, and any properties associated with the given recurrence type (see the Recurrence Field Usage for Salesforce Classic Recurring Events table) must be populated.
- When updating a Salesforce Classic recurring event series, it's not possible to update the `EventRelation` for the event series object and the `EventRelation` for the series object occurrences at the same time.
- Lightning Experience event series have no series ID, so it's not possible to locate other occurrences in the series. In Salesforce Classic recurring events, you can use `RecurrenceActivityId` to locate other occurrences.
- For both Lightning Experience event series and Salesforce Classic recurring events, when a series repeats every day, month, or year, you can only schedule occurrences one time per day, month, or year. The week option lets you schedule occurrences multiple days per week.

[Limits for Lightning Experience event series](#) and [limits for Salesforce Classic recurring events](#) also apply.

Lightning Experience Event Series and Recurring Events

Use the `Recurrence2PatternText` field to specify the recurrence pattern for Lightning Experience event series. These recurrence patterns, called reference rules or RRULES, support a subset of the RFC 5545 standards. This table includes common RRULE examples.

Recurrence Pattern	RRULE Example
Every day for five days	<code>RRULE:FREQ=DAILY;INTERVAL=1;COUNT=5</code>
Every Monday, Tuesday, Wednesday, Thursday, and Friday with no end date	<code>RRULE:FREQ=WEEKLY;INTERVAL=1;BYDAY=MO,TU,WE,TH,FR</code>
Every two weeks on Monday and Friday for 10 occurrences	<code>RRULE:FREQ=WEEKLY;INTERVAL=2;BYDAY=MO,FR;COUNT=10</code>
Monthly on the first day of the month until January 1, 2020	<code>RRULE:FREQ=MONTHLY;INTERVAL=1;BYMONTHDAY=1;UNTIL=20200101T000000Z</code>
Yearly on July 4th for three years (in this example, specify the date using <code>StartDateTime</code>)	<code>RRULE:FREQ=YEARLY;INTERVAL=1;BYMONTH=7;BYMONTHDAY=4;COUNT=3</code>
Daily until January 1, 2022 with no end date	<code>RRULE:FREQ=DAILY;UNTIL=20220101T000000Z</code>
Every third Friday of the month with no end date	<code>RRULE:FREQ=MONTHLY;BYSETPOS=3;BYDAY=FR</code>

The RRULE defined by `Recurrence2PatternText` supports a subset of the RFC 5545 standard for internet calendaring and scheduling. Supported RRULE parts include `FREQ`, `BYMONTH`, `BYMONTHDAY`, `BYDAY`, `WKST`, `BYSETPOS`, `INTERVAL`, `UNTIL`, and `COUNT`.

When the event record is saved, the RRULE might be modified to follow the required format:

- The RRULE parts are placed in the following order: `FREQ`, `BYMONTH`, `BYMONTHDAY`, `BYDAY`, `WKST`, `BYSETPOS`, `INTERVAL`, `UNTIL`, and `COUNT`.
- Any missing default values are inserted. For example, if the RRULE doesn't include `INTERVAL`, then `INTERVAL=1` is added.
- The RRULE is prefaced with `RRULE:` if that preface is missing.

RRULE Part	Supported RFC 5545 Implementation
<code>FREQ</code>	Required. Indicates the type of recurrence rule.
<code>BYMONTH</code>	The month. Valid values are 1 to 12.
<code>BYMONTHDAY</code>	The day of the month. Valid values are 1 to 31. If <code>BYMONTHDAY</code> is 31 and the month has fewer than 31 days, the event is created on the last day of the month.
<code>BYDAY</code>	A comma-separated list of days of the week. Valid values are <code>SU</code> , <code>MO</code> , <code>TU</code> , <code>WE</code> , <code>TH</code> , <code>FR</code> , <code>SA</code> . For RRULES with yearly or monthly frequency, <code>BYDAY</code> must be one of a single day, weekend days, weekdays, or every day of the week. Each <code>BYDAY</code> value can be preceded by an integer that indicates the nth occurrence of a specific day within the monthly or yearly RRULE. Allowed values are -1, 1, 2, 3, and 4. You can't use different numbers in the <code>BYDAY</code> values. For example, this RRULE isn't supported: <code>RRULE:FREQ=MONTHLY;INTERVAL=2;COUNT=10;BYDAY=1SU,-1SU</code> If <code>BYDAY</code> values are prefaced with a number, the RRULE can't include <code>BYSETPOS</code> .
<code>WKST</code>	Specifies the day on which the workweek starts. Valid values are <code>MO</code> , <code>TU</code> , <code>WE</code> , <code>TH</code> , <code>FR</code> , <code>SA</code> , and <code>SU</code> . Default value is based on the user's locale.
<code>BYSETPOS</code>	A comma-separated list of values that correspond to the nth occurrence within the set of recurrence instances specified by the rule. Valid values are -1, 1, 2, 3, or 4. Default value is 1. For example, to indicate the last weekday of the month, use: <code>RRULE:FREQ=MONTHLY;BYDAY=MO,TU,WE,TH,FR;BYSETPOS=-1</code> .
<code>INTERVAL</code>	The repetition interval. Valid values are an integer between 1 and 999 if <code>FREQ=DAILY</code> , an integer between 1 and 99 if <code>FREQ=WEEKLY</code> or <code>FREQ=MONTHLY</code> , or 1 if <code>FREQ=YEARLY</code> . Default value is 1.
<code>UNTIL</code>	Specifies the datetime in UTC format when the recurrence rule stops. The supported format is <code>yyyyMMddTHH:mm:ssZ</code> , for example: <code>20210419T083000Z</code> . An RRULE can't contain both <code>UNTIL</code> and <code>COUNT</code> . A recurring event without either <code>UNTIL</code> or <code>COUNT</code> repeats indefinitely.
<code>COUNT</code>	The number of occurrences. Allowed values are 1 to 999. An RRULE can't contain both <code>UNTIL</code> and <code>COUNT</code> . A recurring event without either <code>UNTIL</code> or <code>COUNT</code> repeats indefinitely.
<code>BYWEEKNO</code>	Specifies a comma-separated list of values that specify weeks of the year. Valid values are 1 to 53 or -53 to -1. For example, to indicate specific weeks in a year, use: <code>RRULE:BYWEEKNO=20,-20</code> . This rule part can't be used when the <code>FREQ</code> rule part is set to anything other than <code>YEARLY</code> . For example, 3 represents the third week of the year. Note: Assuming a Monday week start, week 53 can only occur when Thursday is January 1 or if it's a leap year and Wednesday is January 1.
<code>BYYEARDAY</code>	Specifies a comma-separated list of values that specify days of the year. Valid values are 1 to 366 or -366 to -1. For example, to indicate specific days in a year, use: <code>RRULE:BYYEARDAY=1,100,200</code> ; or, <code>RRULE:BYYEARDAY=1,-2</code> .

FREQ values:

- **DAILY**—supported parts include FREQ, INTERVAL, UNTIL, and COUNT.
- **WEEKLY**—supported parts include INTERVAL, UNTIL, COUNT, BYDAY, and WKST. BYDAY is required, but can't be preceded by a number.

For example, to indicate weekly on Tuesday and Thursday until September 1, 2023, use

`RRULE:FREQ=WEEKLY;UNTIL=20230901T000000Z;BYDAY=TU,TH`

- **MONTHLY** —supported patterns include:

- **BYMONTHDAY**

For example, to indicate monthly on the third day of the month use: `RRULE:FREQ=MONTHLY;BYMONTHDAY=3`

- **BYDAY and BYSETPOS**

For example, to indicate the last weekday of the month, use

`RRULE:FREQ=MONTHLY;BYDAY=MO,TU,WE,TH,FR;BYSETPOS=-1`

- **BYDAY, where the BYDAY values are specified with a numeric value**

For example, to indicate monthly on the first Friday for 10 occurrences, use

`RRULE:FREQ=MONTHLY;COUNT=10;BYDAY=1FR`

- **YEARLY** —supported patterns include:

- **BYMONTH, BYDAY, and BYSETPOS**

For example, to indicate every year on the second Friday of January, use

`RRULE:FREQ=YEARLY;BYMONTH=1;BYDAY=FR;BYSETPOS=2`

- **BYMONTH and BYMONTHDAY**

For example, to indicate every year on October 31, use `RRULE:FREQ=YEARLY;BYMONTH=10;BYMONTHDAY=31`

For example, to create a maintenance pattern such as twice in May, and September on 7th and 15th; and one time in

June/July/August on the 1st, use two RRULEs: `RRULE:FREQ=MONTHLY;BYMONTH=5,9;BYMONTHDAY=7,15`

`RRULE:FREQ=MONTHLY;BYMONTH=6,7,8;BYMONTHDAY=1`

Salesforce Classic Event Series and Recurring Events

This table describes the usage of recurrence fields for Salesforce Classic recurring events. Each recurrence type must have all of its properties set. All unused properties must be set to null.

RecurrenceType Value	Properties	Example Pattern
RecursDaily	RecurrenceInterval	Every second day
RecursEveryWeekday	RecurrenceDayOfWeekMask	Every weekday - can't be Saturday or Sunday
RecursMonthly	RecurrenceDayOfMonth RecurrenceInterval	Every second month, on the third day of the month
RecursMonthlyNth	RecurrenceInterval RecurrenceInstance RecurrenceDayOfWeekMask	Every second month, on the last Friday of the month
RecursWeekly	RecurrenceInterval RecurrenceDayOfWeekMask	Every three weeks on Wednesday and Friday

RecurrenceType Value	Properties	Example Pattern
RecursYearly	RecurrenceDayOfMonth RecurrenceMonthOfYear	Every March on the 26th day of the month
RecursYearlyNth	RecurrenceDayOfWeekMask RecurrenceInstanceRecurrenceMonthOfYear	The first Saturday in every October

Attendees, Invitees, and Resources

The field `GroupEventType` indicates that event participants are included on an event. You can add a resource to an event only when the resource is available. The only attendance status that can be assigned to resources is Accepted. Events can't be saved when resources you've added aren't available.

JunctionIdList

To create an event using `JunctionIdList`, IDs are pulled from the related contacts and both the event and the `EventRelation` records are created in one API call. If the `EventRelation` fails, the event is rolled back because it's all done in a single API call.

```
public void createEventNew(Contact[] contacts) {
    String[] contactIds = new String[contacts.size()];
    for (int i = 0; i < contacts.size(); i++) {
        contactIds[i] = contacts[i].getID();
    }
    Event event = new Event();
    event.setSubject("New Event");
    event.setEventWhoIds(contactIds);
    SaveResult[] results = null;
    try {
        results = connection.create(new Event[] {
            task
        });
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

Syncing Events with Lightning Sync

Attendee statuses (Accepted or Maybe, Declined, or No Response) sync from Microsoft® Exchange or Google to Salesforce, but not from Salesforce to Exchange or Google. Be wary of creating API flows that update attendee status in Salesforce for users set up to sync both ways. Eventually the original Exchange or Google status overrides the update made in Salesforce.

Shared Field-Level Security for Event and Task Objects

Metadata deployments for the Event object must include the field-level security for the Task object. Shared field-level security prevents each object from changing the field-level security of the associated object.

Metadata deployments that include field-level security for only one of either the Event or Task objects can cause field-level security changes to the other object that aren't reflected in the metadata.

- If field-level security is enabled for one object, then field-level security is enabled for both objects.
- If field-level security is disabled for one object, then it's disabled for both objects.



Note: A missing entry in the metadata is treated as field-level security being disabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[EventChangeEvent](#) (API version 44.0): Change events are available for the object.

[EventFeed](#) (API version 20.0): Feed tracking is available for the object.

Task

Represents a business activity such as making a phone call or other to-do items. In the user interface, Task and Event records are collectively referred to as activities.



Note: Task fields related to calls are exclusive to Salesforce CRM Call Center. Also, `query()`, `delete()`, and `update()` aren't allowed with tasks related to more than one contact in API versions 23.0 and earlier.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

AccountId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Represents the ID of the related Account. The `AccountId` is determined as follows.

If the value of `WhatId` is any of the following objects, then Salesforce uses that object's `AccountId`.

- Account
- Opportunity
- Contract
- Custom object that is a child of Account

If the value of the `WhatId` field is any other object, and the value of the `WhoId` field is a Contact object, then Salesforce uses that contact's `AccountId`. (If your organization uses Shared Activities, then Salesforce uses the `AccountId` of the primary contact.)

Otherwise, Salesforce sets the value of the `AccountId` field to `null`.

This is a relationship field.

Relationship Name: Account

Relationship Type: Lookup

Refers To: Account

ActivityDate

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: Represents the due date of the task. This field has a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. The timestamp is not relevant; do not attempt to alter it to accommodate time zone differences. Label is **Due Date**.

This field can't be set or updated for a recurring task (`IsRecurrence` is `true`).

CallDisposition

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description:

Represents the result of a given call, for example, "we'll call back," or "call unsuccessful." Limit is 255 characters.

Not subject to field-level security, available for any user in an organization with Salesforce CRM Call Center.

CallDurationInSeconds

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description:

Duration of the call in seconds.

Not subject to field-level security, available for any user in an organization with Salesforce CRM Call Center.

CallObject

Type: string

Properties: Create, Filter, Group, Nillable, Sort, Update

Description:

Name of a call center. Limit is 255 characters.

Not subject to field-level security, available for any user in an organization with Salesforce CRM Call Center.

CallType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description:

The type of call being answered: Inbound, Internal, or Outbound.

CompletedDateTime

Type: dateTime

Properties: Filter, Nillable, Sort

Description: The date and time the task was saved with a Closed status.

- For insert, if the task is saved with a Closed status the field is set. If the task is saved with an Open status the field is set to NULL.
- For update, if the task is saved with a new Closed status, the field is reset.

If the task is saved with a new non-closed status, the field is reset to NULL.

If the task is saved with the same closed status (that is, unchanged) there is no change to the field.

The status is a dynamic enum. If the Closed mapping is changed it won't cause an update of existing tasks. Only new insert/update operations are affected.

ConnectionReceivedId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the PartnerNetworkConnection that shared this record with your organization. This field is available if you enabled Salesforce to Salesforce.

ConnectionSentId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: ID of the PartnerNetworkConnection that you shared this record with. This field is available if you enabled Salesforce to Salesforce. This field is supported using API versions earlier than 15.0. In all other API versions, this field's value is null. You can use the new PartnerNetworkRecordConnection object to forward records to connections.

Description

Type: textarea

Properties: Create, Nillable, Update

Description: Contains a text description of the task.

IsArchived

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the event has been archived. The default value of this field is `false`.

IsClosed

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates whether the task has been completed (`true`) or not (`false`). The default value of this field is `false`. Is only set indirectly via the `Status` picklist. Label is **Closed**.

IsHighPriority

Type: boolean

Properties: Defaulted on create, Filter, Group, Sort

Description: Indicates a high-priority task. This field is derived from the `Priority` field. The default value of this field is `false`.

IsRecurrence

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort

Description: Indicates whether the task is scheduled to repeat itself (`true`) or only occurs once (`false`). The default value of this field is `false`. This field is read-only on update, but not on create. If this field value is `true`, then `RecurrenceStartDateOnly`, `RecurrenceEndDateOnly`, `RecurrenceType`, and any recurrence fields associated with the given recurrence type must be populated. See [Recurring Tasks](#).

IsReminderSet

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether a popup reminder has been set for the task (`true`) or not (`false`). The default value of this field is `false`.

IsVisibleInSelfService

Type: boolean

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Indicates whether a task associated with an object can be viewed in the Customer Portal (`true`) or not (`false`).

If your organization has digital experiences enabled, tasks marked `IsVisibleInSelfService` are visible to any external user in the Experience Cloud site, as long as the user has access to the record the task was created on.

OwnerId

Type: reference

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: ID of the User or Group who owns the record. Label is **Assigned To ID**. This field accepts Groups of type Queue only.

In the user interface, Group IDs correspond with the queue's list view names. To create or update tasks assigned to Group, use v48.0 or later.

This is a polymorphic relationship field.

Relationship Name: Owner

Relationship Type: Lookup

Refers To: Group, User

Priority

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates the importance or urgency of a task, such as high or low. The default value of this field is `Normal`.

RecurrenceActivityId

Type: reference

Properties: Filter, Group, Nillable, Sort

Description: Read-only. Not required on create. ID of the main record of the recurring task. Subsequent occurrences have the same value in this field.

RecurrenceDayOfMonth

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The day of the month in which the task repeats.

RecurrenceDayOfWeekMask

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The day or days of the week on which the task repeats. This field contains a bitmask. The values are as follows: Sunday = 1, Monday = 2, Tuesday = 4, Wednesday = 8, Thursday = 16, Friday = 32, or Saturday = 64. Multiple days are represented as the sum of their numerical values. For example, Tuesday and Thursday = $4 + 16 = 20$.

RecurrenceEndDateOnly

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The last date on which the task repeats. This field has a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. The timestamp is not relevant; do not attempt to alter it to accommodate time zone differences.

RecurrenceInstance

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The frequency of the recurring task.

Possible values are `First`—1st, `Fourth`—4th, `Last`—last, `Second`—2nd, or `Third`—3rd

RecurrenceInterval

Type: int

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The interval between recurring tasks.

RecurrenceMonthOfYear

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The month of the year in which the task repeats.

RecurrenceRegeneratedType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Represents what triggers a repeating task to repeat. Add this field to a page layout together with the `RecurrenceInterval` field, which determines the number of days between the triggering date (due date or close date) and the due date of the next repeating task in the series.

Label is **Repeat This Task**. This field has the following picklist values:

- **None:** The task doesn't repeat.
- **After due date:** The next repeating task will be due the specified number of days after the current task's due date.
- **After the task is closed:** The next repeating task will be due the specified number of days after the current task is closed.
- **(Task closed):** This task, now closed, was opened as part of a repeating series.



Note: When tasks in a series are set to repeat after their due date, Salesforce doesn't create recurrences that would have been due in the past. Instead, Salesforce keeps adding the interval until a repeated task has a due date in the future.

For example, suppose that someone sets a task to repeat three days after it's due. But, that person doesn't complete the task (mark it Closed) until five days after it's due. Instead of creating a task that's already overdue, Salesforce gives the new task a due date of tomorrow. This due date is equivalent to 6 days after the due date; two intervals of three days each.

If that person completes the repeating task (marks it Closed) before the due date, the next task is still due three days after the due date.

RecurrenceStartDateOnly

Type: date

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The date when the recurring task begins. Must be a date and time before `RecurrenceEndDateOnly`.

RecurrenceTimeZoneSidKey

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: The time zone associated with the recurring task. For example, "UTC-8:00" for Pacific Standard Time.

RecurrenceType

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort, Update

Description: Indicates how often the task repeats. For example, daily, weekly, or every nth month (where “nth” is defined in `RecurrenceInstance`).

ReminderDateTime

Type: dateTime

Properties: Create, Filter, Nillable, Sort, Update

Description: Represents the time when the reminder is scheduled to fire, if `IsReminderSet` is set to `true`. If `IsReminderSet` is set to `false`, then the user may have deselected the reminder checkbox in the Salesforce user interface, or the reminder has already fired at the time indicated by the value.

Status

Type: picklist

Properties: Create, Defaulted on create, Filter, Group, Sort, Update

Description: Required. Indicates the status of the task. The default value of this field is `Not Started`. Each predefined `Status` field implies a value for the `IsClosed` flag. To obtain picklist values, query the `TaskStatus` object.

Possible values are:

- Completed
- Deferred
- In Progress
- Not Started
- Waiting on someone else



Note: This field can't be updated for recurring tasks (`IsRecurrence` is `true`).

Subject

Type: combobox

Properties: Create, Filter, Nillable, Sort, Update

Description: The subject line of the task, such as “Call” or “Send Quote.” Limit: 255 characters.

TaskSubtype

Type: picklist

Properties: Create, Filter, Group, Nillable, Restricted picklist, Sort

Description: Provides standard subtypes to facilitate creating and searching for specific task subtypes. This field isn't updateable.

`TaskSubtype` values:

- Task

- Email
- LinkedIn —Available in API version 56.0 and later.
- List Email
- Cadence
- Call

 **Note:** The `Cadence` subtype is an internal value used by Sales Engagement, and can't be set manually.

TaskWholds

Type: JunctionIdList

Properties: Create, Update

Description: A string array of contact or lead IDs related to this task. This `JunctionIdList` field is linked to the `TaskWhoRelations` child relationship. `TaskWhoIds` is only available when the shared activities setting is enabled. The first contact or lead ID in the list becomes the primary `WhoId` if you don't specify a primary `WhoId`. If you set the `EventWhoIds` field to null, all entries in the list are deleted and the value of `WhoId` is added as the first entry.

 **Warning:** Adding a `JunctionIdList` field name to the `fieldsToNull` property deletes all related junction records. This action can't be undone.

Type

Type: picklist

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The type of task, such as Call or Meeting.

WhatCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: Available to organizations that have Shared Activities enabled. Count of related `TaskRelations` pertaining to `WhatId`. Count of the `WhatId` must be 1 or less.

WhatId

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description: The `WhatId` represents nonhuman objects such as accounts, opportunities, campaigns, cases, or custom objects. `WhatIds` are polymorphic. Polymorphic means a `WhatId` is equivalent to the ID of a related object. The label is `Related To ID`.

This is a polymorphic relationship field.

Relationship Name: What

Relationship Type: Lookup

Refers To: Account, Accreditation, AssessmentIndicatorDefinition, AssessmentTask, AssessmentTaskContentDocument, AssessmentTaskDefinition, AssessmentTaskOrder, Asset, AssetRelationship, AssignedResource, Award, BoardCertification, BusinessLicense, BusinessMilestone, BusinessProfile, Campaign, CareBarrier, CareBarrierDeterminant, CareBarrierType, CareDeterminant, CareDeterminantType, CareDiagnosis, CareInterventionType, CareMetricTarget, CareObservation, CareObservationComponent, CarePgmProvHealthcareProvider, CarePreauth, CarePreauthItem, CareProgram, CareProgramCampaign, CareProgramEligibilityRule, CareProgramEnrollee, CareProgramEnrolleeProduct, CareProgramEnrollmentCard, CareProgramGoal, CareProgramProduct, CareProgramProvider, CareProgramTeamMember, CareProviderAdverseAction, CareProviderFacilitySpecialty, CareProviderSearchableField, CareRegisteredDevice, CareRequest, CareRequestDrug, CareRequestExtension, CareRequestItem, CareSpecialty, CareSpecialtyTaxonomy, CareTaxonomy, Case, CommSubscriptionConsent, ContactEncounter, ContactEncounterParticipant, ContactRequest, Contract, CoverageBenefit, CoverageBenefitItem, CreditMemo, DelegatedAccount, DocumentChecklistItem, EnrollmentEligibilityCriteria, HealthcareFacility, HealthcareFacilityNetwork, HealthcarePayerNetwork, HealthcarePractitionerFacility, HealthcareProvider, HealthcareProviderNpi, HealthcareProviderSpecialty, HealthcareProviderTaxonomy, IdentityDocument, Image, IndividualApplication, Invoice, ListEmail, Location, MemberPlan, Opportunity, Order, OtherComponentTask, PartyConsent, PersonLifeEvent, PlanBenefit, PlanBenefitItem, ProcessException, Product2, ProductItem, ProductRequest, ProductRequestLineItem, ProductTransfer, PurchaserPlan, ReceivedDocument, ResourceAbsence, ReturnOrder, ReturnOrderLineItem, ServiceAppointment, ServiceResource, Shift, Shipment, ShipmentItem, Solution, Visit, VisitedParty, VolunteerProject, WorkOrder, WorkOrderLineItem

WhoCount

Type: int

Properties: Filter, Group, Nillable, Sort

Description: Available to organizations that have Shared Activities enabled. Count of related TaskRelations pertaining to `whoId`.

Whold

Type: reference

Properties: Create, Filter, Group, Nillable, Sort, Update

Description:

The Whold represents a human such as a lead or a contact. Wholds are polymorphic. Polymorphic means a Whold is equivalent to a contact's ID or a lead's ID. The label is `Name ID`.

If Shared Activities is enabled, the value of this field is the ID of the related lead or primary contact. If you add, update, or remove the Whold field, you might encounter problems with triggers, workflows, and data validation rules that are associated with the record. The label is `Name ID`.

Beginning in API version 37.0, if the contact or lead ID in the `whoId` field is not in the `TaskWhoIds` list, no error occurs and the ID is added to the `TaskWhoIds` as the primary `whoId`. If `whoId` is set to null, an arbitrary ID from the existing `TaskWhoIds` list is promoted to the primary position.

This is a polymorphic relationship field.

Relationship Name: Who

Relationship Type: Lookup

Refers To: Contact, Lead

Usage

Recurring Tasks

- Recurring tasks are available in API version 16.0 and later.
- After a task is created, it can't be changed from recurring to nonrecurring or vice versa.
- When a user creates a series of recurring tasks, Salesforce creates a main record and subsequent occurrences. For the main record, `IsRecurrence` is set to `true` and other fields that define the recurrence pattern are populated. The ID of the main record of the recurring task is saved in the subsequent occurrences, in the `RecurrenceActivityId` field.
- When you delete a recurring task series through the API, all open and closed task occurrences in the series are removed. However, when you delete a recurring task series through the user interface, only open tasks occurrences (`IsClosed` is `false`) in the series are removed.
- If `IsRecurrence` is `true`, then `RecurrenceStartDateOnly`, `RecurrenceEndDateOnly`, `RecurrenceType`, and any properties associated with the given recurrence type (see the following table) must be populated.
- When you change the `RecurrenceStartDateOnly` field or the recurrence pattern, all open tasks occurrences in the series are deleted and new open task occurrences are created based on the new recurrence pattern. The following fields determine the recurrence pattern: `RecurrenceType`, `RecurrenceTimeZoneSidKey`, `RecurrenceInterval`, `RecurrenceDayOfWeekMask`, `RecurrenceDayOfMonth`, `RecurrenceInstance`, and `RecurrenceMonthOfYear`.
- When you change the value of `RecurrenceEndDateOnly` to an earlier date (for example, from January 20 to January 10), all open task occurrences in the series with the `ActivityDate` value greater than the new end date value are deleted. Other open and closed task occurrences in the series are not affected.
- When you change the value of `RecurrenceEndDateOnly` to a later date (for example, from January 10 to January 20), new task occurrences are created up to the new end date. Existing open and closed tasks in the series are not affected.

This table describes the usage of recurrence fields for Salesforce Classic recurring events. Each recurrence type must have all of its properties set. All unused properties must be set to null.

RecurrenceType Value	Properties	Example Pattern
RecursDaily	RecurrenceInterval	Every second day
RecursEveryWeekday	RecurrenceDayOfWeekMask	Every weekday - can't be Saturday or Sunday
RecursMonthly	RecurrenceDayOfMonth RecurrenceInterval	Every second month, on the third day of the month
RecursMonthlyNth	RecurrenceInterval RecurrenceInstance RecurrenceDayOfWeekMask	Every second month, on the last Friday of the month
RecursWeekly	RecurrenceInterval RecurrenceDayOfWeekMask	Every three weeks on Wednesday and Friday
RecursYearly	RecurrenceDayOfMonth RecurrenceMonthOfYear	Every March on the 26th day of the month
RecursYearlyNth	RecurrenceDayOfWeekMask RecurrenceInstance RecurrenceMonthOfYear	The first Saturday in every October

JunctionIdList

The `JunctionIdList` field is now implemented in the `Event` and `Task` objects. With a single API call, it's easy to create many-to-many relationships between the `Event` or `Task` object with contacts, leads, or users.

To create a `Task` with related `Contacts` without `JunctionIdList`, you first have to create the task, then use the returned task ID to create the `TaskRelation` records. If the `TaskRelation` save call fails, error handling is your responsibility because the task has already been committed to the database.

```
public void createTasksOld(Contact[] contacts) {
    Task task = new Task();
    task.setSubject("New Task");
    SaveResult[] results = null;
    try {
        results = connection.create(new Task[] {
            task
        });
        if (results[0].isSuccess()) {
            TaskRelation[] relations = new TaskRelation[contacts.size()];
            for (int i = 0; i < contacts.length; i++) {
                relations[i] = new TaskRelation();
                relations[i].setTaskId(results[0].getID());
                relations[i].setRelationId(contacts[i].getID());
            }
            results = connection.create(relations);
        }
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

To create a task using `JunctionIdList`, IDs are pulled from the related contacts and both the task and the `TaskRelation` records are created in one API call. If the `TaskRelation` fails, the task is rolled back because it's all done in a single API call.

```
public void createTaskNew(Contact[] contacts) {
    String[] contactIds = new String[contacts.size()];
    for (int i = 0; i < contacts.size(); i++) {
        contactIds[i] = contacts[i].getID();
    }
    Task task = new Task();
    task.setSubject("New Task");
    task.setTaskWhoIds(contactIds);
    SaveResult[] results = null;
    try {
        results = connection.create(new Task[] {
            task
        });
    } catch (ConnectionException ce) {
        ce.printStackTrace();
    }
}
```

Shared Field-Level Security for Event and Task Objects

Metadata deployments for the `Task` object should always include the field-level security for the `Event` object. Shared field-level security prevents each object from changing the field-level security of the associated object.

Metadata deployments that include field-level security for only one of either the Event or Task objects can cause field-level security changes to the other object that aren't reflected in the metadata.

- If field-level security is enabled for one object, then field-level security is enabled for both objects.
- If field-level security is disabled for one object, then it's disabled for both objects.



Note: A missing entry in the metadata is treated as field-level security being disabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[TaskChangeEvent](#) (API version 44.0): Change events are available for the object.

[TaskFeed](#) (API version 20.0): Feed tracking is available for the object.