Experiment 3: Flask Application

Name of Student	Soham Satpute
Class Roll No	D15A/51
D.O.P.	20/02/2025
D.O.S.	13/03/2025
Sign and Grade	

AIM: To develop a basic Flask application with multiple routes and demonstrate the handling of GET and POST requests.

PROBLEM STATEMENT:

Design a Flask web application with the following features:

- 1. A homepage (/) that provides a welcome message and a link to a contact form.
 - a. Create routes for the homepage (/), contact form (/contact), and thank-you page (/thank_you).
- 2. A contact page (/contact) where users can fill out a form with their name and email.
- 3. Handle the form submission using the POST method and display the submitted data on a thank-you page (/thank you).
 - a. On the contact page, create a form to accept user details (name and email).
 - b. Use the POST method to handle form submission and pass data to the thank-you page
- 4. Demonstrate the use of GET requests by showing a dynamic welcome message on the homepage when the user accesses it with a query parameter, e.g., /welcome?name=<user name>.
 - a. On the homepage (/), use a query parameter (name) to display a personalized welcome message.

Theory:-

1. Core Features of Flask

Flask is a lightweight and flexible web framework for Python. It is widely used for developing web applications due to its simplicity and scalability. The core features of Flask include:

- 1. **Lightweight and Modular** Flask has a small core and allows developers to add extensions as needed.
- 2. **Built-in Development Server and Debugger** It provides an interactive debugger and a development server for testing applications.
- 3. **Routing Mechanism** It allows defining URL patterns for handling different types of requests.
- 4. **Jinja2 Templating Engine** Flask supports Jinja2, which enables dynamic HTML rendering with the use of variables and logic.
- 5. **Integrated Unit Testing Support** Flask includes features to test applications efficiently.
- 6. **Support for HTTP Methods** Flask handles different HTTP methods such as GET, POST, PUT, and DELETE.
- 7. **Session and Cookie Management** Flask allows managing user sessions and cookies securely.
- 8. **Blueprints for Modular Applications** It enables breaking large applications into smaller, reusable modules.

2. Why do we use Flask (__name__) in Flask?

In Flask, the statement Flask (__name__) is used to create an instance of the Flask application. The __name __ parameter is essential for the following reasons:

- 1. **Determining the Root Path** Flask uses __name__ to locate resources such as templates and static files.
- 2. **Enabling Debugging Features** It helps in identifying the correct module name when debugging errors.
- 3. **Handling Routing Properly** It ensures that Flask knows where the application is being executed from.

Thus, Flask (__name__) plays a crucial role in setting up a Flask application correctly.

3. What is Template and Template Inheritance in Flask?

Flask uses the **Jinja2 templating engine** to separate logic from presentation, making HTML files more dynamic and reusable.

Template Inheritance allows a developer to create a base template and extend it in child templates. This helps in maintaining a consistent layout across multiple pages.

Base Template (base.html)

```
html CopyEdit
```

•

Child Template (index.html)

```
html CopyEdit
```

```
{% extends "base.html" %}
{% block title %}Home Page{% endblock %}
{% block content %}Welcome to my website!{% endblock %}
```

•

This mechanism ensures code reusability and efficient web page management.

4. What HTTP Methods are Implemented in Flask?

Flask supports multiple HTTP methods, primarily:

- 1. **GET** Retrieves data from the server.
- 2. **POST** Sends data to the server, often used for form submissions.
- 3. **PUT** Updates existing resources on the server.
- 4. **DELETE** Deletes a resource from the server.

Example in Flask:

python CopyEdit

5. Difference Between Flask and Django

Flask and Django are both popular Python web frameworks, but they have key differences:

Feature	Flask	Django
Туре	Micro-framework	Full-stack framework
Flexibility	More flexible, requires external libraries	Comes with built-in features
Routing	Manually defined	Automatic routing support
ORM Support	Needs extensions like SQLAlchemy	Comes with Django ORM
Template Engine	Jinja2	Django Template Language (DTL)
Best For	Small to medium applications	Large-scale applications

Flask is preferred for lightweight applications, while Django is suitable for complex projects requiring built-in functionalities.

6. Routing in Flask

Routing in Flask refers to mapping a URL to a specific function. It helps in handling different requests and serving appropriate responses.

Example:

python CopyEdit

```
@app.route('/home') def home():
return "Welcome to the Home Page"
```

This means that when a user visits /home, the home () function executes.

7. URL Building in Flask

Flask provides url for () to dynamically generate URLs based on function names.

Example:

python CopyEdit

```
from flask import url_for
@app.route('/profile/<username>') def
profile(username): return f"Profile
Page of {username}"

# Generating URL url_for('profile',
username='JohnDoe') # Output: /profile/JohnDoe
```

This ensures flexibility and avoids hardcoding URLs.

8. GET Request in Flask

A **GET request** is used to fetch data from a server.

Example:

python CopyEdit

Visiting /user in a browser triggers the get user () function, which returns user details.

9. POST Request in Flask

A **POST request** is used to send data to the server.

Example:

```
python CopyEdit
```

When a user submits a form, the server processes the data and returns a response.

```
OUTPUT:-
App.py:

from flask import Flask, render_template, request, redirect, url_for


app = Flask(__name__)

@app.route('/')
def home():
    name = request.args.get('name', 'Guest')
    return f'''''
```

```
<html>
  <head>
     link
href='https://fonts.googleapis.com/css2?family=Poppins:wght@300;400;600&display=swap'
rel='stylesheet'>
     <style>
       body {{ font-family: 'Poppins', sans-serif; background-color: #f5f5f5; margin: 0; text-
align: center; }}
       .container {{ margin-top: 100px; }}
       h1 {{ color: #333; }}
       .btn {{ text-decoration: none; color: white; font-weight: bold; padding: 12px 24px; border-
radius: 8px; background-color: #007BFF; box-shadow: 2px 2px 5px rgba(0, 0, 0, 0.2); display:
inline-block; }}
       .btn:hover {{ background-color: #0056b3; }}
     </style>
  </head>
  <body>
    <div class='container'>
       <h1>Welcome, {name}!</h1>
       <a href='/contact' class='btn'>Go to Contact Form</a>
    </div>
  </body>
  </html>
  ,,,,,,
@app.route('/contact', methods=['GET', 'POST'])
def contact():
  if request.method == 'POST':
    name = request.form['name']
    email = request.form['email']
    return redirect(url for('thank you', name=name, email=email))
  return """
  <html>
  <head>
href='https://fonts.googleapis.com/css2?family=Poppins:wght@300;400;600&display=swap'
rel='stylesheet'>
     <style>
       body {{ font-family: 'Poppins', sans-serif; background-color: #f5f5f5; margin: 0; }}
       .container {{ max-width: 400px; margin: 100px auto; background: #fff; padding: 20px;
border-radius: 8px; box-shadow: 0px 0px 10px #ccc; }}
```

```
label {{ font-weight: bold; color: #333; display: block; margin-top: 10px; }}
       input {{ padding: 10px; width: 100%; margin-top: 5px; border: 1px solid #ccc; border-
radius: 4px; }}
       .btn {{ background: #007BFF; color: white; border: none; padding: 12px; cursor: pointer;
width: 100%; border-radius: 4px; font-weight: bold; }}
       .btn:hover {{ background: #0056b3; }}
     </style>
  </head>
  <body>
     <div class='container'>
       <h2>Contact Us</h2>
       <form method='POST' action='/contact'>
          <label for='name'>Name:</label>
          <input type='text' name='name' required>
          <label for='email'>Email:</label>
         <input type='email' name='email' required>
          <input type='submit' value='Submit' class='btn'>
       </form>
    </div>
  </body>
  </html>
  ** ** **
@app.route('/thank you')
def thank you():
  name = request.args.get('name', 'Unknown')
  email = request.args.get('email', 'Not provided')
  return f"""
  <html>
  <head>
     link
href='https://fonts.googleapis.com/css2?family=Poppins:wght@300;400;600&display=swap'
rel='stylesheet'>
     <style>
       body {{ font-family: 'Poppins', sans-serif; background-color: #f5f5f5; text-align: center; }}
       .container {{ margin-top: 100px; }}
       h1 {{ color: #28a745; }}
       p {{ color: #333; }}
       .success-icon {{ font-size: 50px; color: #28a745; }}
     </style>
  </head>
```


Results:-

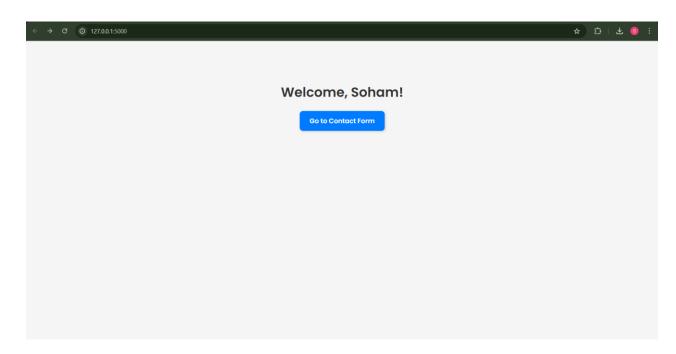



Contact Us

Name: Soham Email: satputes203@gmail.com Submit

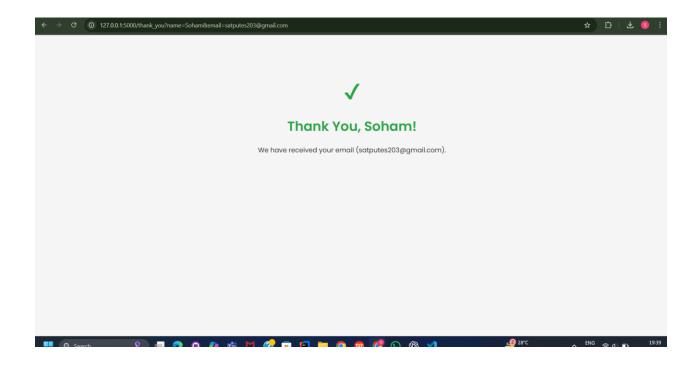

```
* Serving Flask app 'app'

* Serving Flask app 'app'

* Debug mode: on

WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.

* Running on http://127.0.0.1:5000

Press CTRL+C to quit

* Restarting with stat

* Debugger is active!

* Debugger PIN: 240-677-281

127.0.0.1 - - [26/Mar/2025 19:38:39] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [26/Mar/2025 19:38:41] "GET /contact HTTP/1.1" 200 -
127.0.0.1 - - [26/Mar/2025 19:38:48] "POST /contact HTTP/1.1" 302 -
127.0.0.1 - - [26/Mar/2025 19:38:48] "GET /thank_you?name=Soham&email=satputes203@gmail.com HTTP/1.1" 200 -

* Detected change in 'C:\\soham22\\Flask\\Reguests\\ann.nv'. reloading
```