


	Develop a Java foregoin to orche and an empty method Shape that contains two integers and an empty method maned foring Agree (), forevid those classes point Rectargle: By and one Circle such that each one of the classes extends the
	and an Circle such that each are grants only the mothers.
	class Shope. Each one of classy contains only the mother. printpareals a that prints the ones of given shape.
	hainthneal) o that fulling
	· ; 0=1 4x 3
4	imbort to inva util scorner.
	import inva viil. Scannon; abstract class Shape
	17 Jalan J. San J. Carrier Ord - 188 JEROSE
= 37	
	5 this, a = a;
	His.b = 6 6;
	· Oslidah. He
	S : Christell like
	Class Rectangle extends Shahe
	3 hublic Rectorate (int a, int b)
	5 Supor (a, b);
	J .
	void print Agreal)
	5
	Systemout printel (" Byca of reactorgle: "+(a*6))
	25
	class 1911argle extends Shape
	class Porlangle extends Shape 5 public Porlangle (Int a, Int 6)
	{ Supres (a, 6);



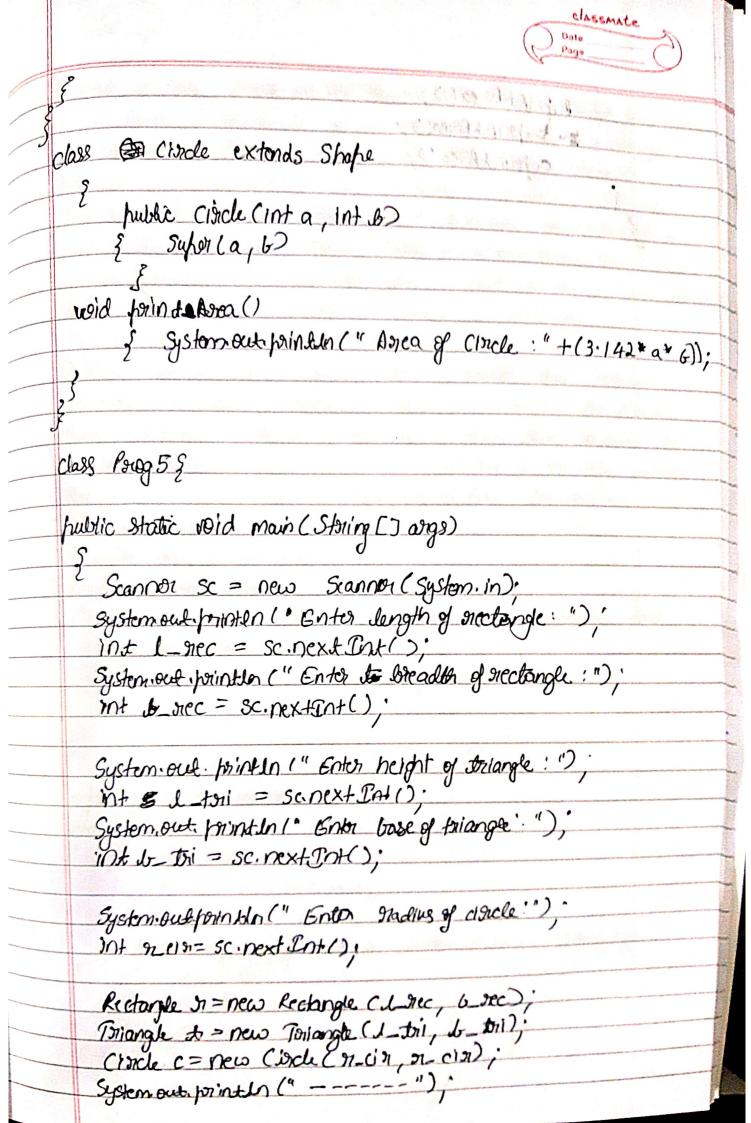

91. forint Agreal); c. forint Agreal);

1-liver die 1

erials, linea high whole riduit

System & renew class of resonal frametics

South of the cold of the cold


Congress pointing thing they be the

Charles to the season of the s

Some of the second seco

reduction to pero reading the series of the series

in the second se

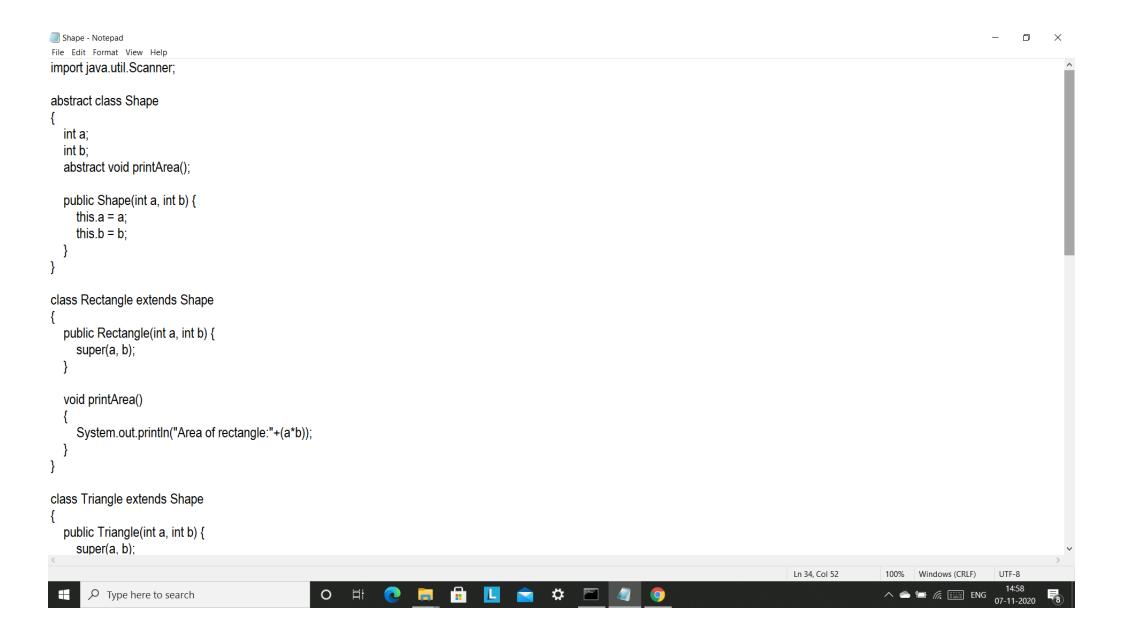

Shape - Notepad File Edit Format View Help public Triangle(int a, int b) { super(a, b); void printArea() { System.out.println("Area of triangle:"+(.2*a*b)); class Circle extends Shape public Circle(int a, int b) { super(a, b); void printArea() { System.out.println("Area of Circle:"+(3.142*a*b)); class Prog5 { public static void main(String[] args) { Scanner sc = new Scanner(System.in); System.out.print("Enter length of rectangle:"); int I_rec = sc.nextInt(); System.out.print("Enter breadth of rectangle:"); int b_rec = sc.nextInt(); System.out.print("Enter height of triangle:"); Ln 34, Col 52 100% Windows (CRLF) ^ **─ ☐** *[...* ENG 07-11-2020 Type here to search

