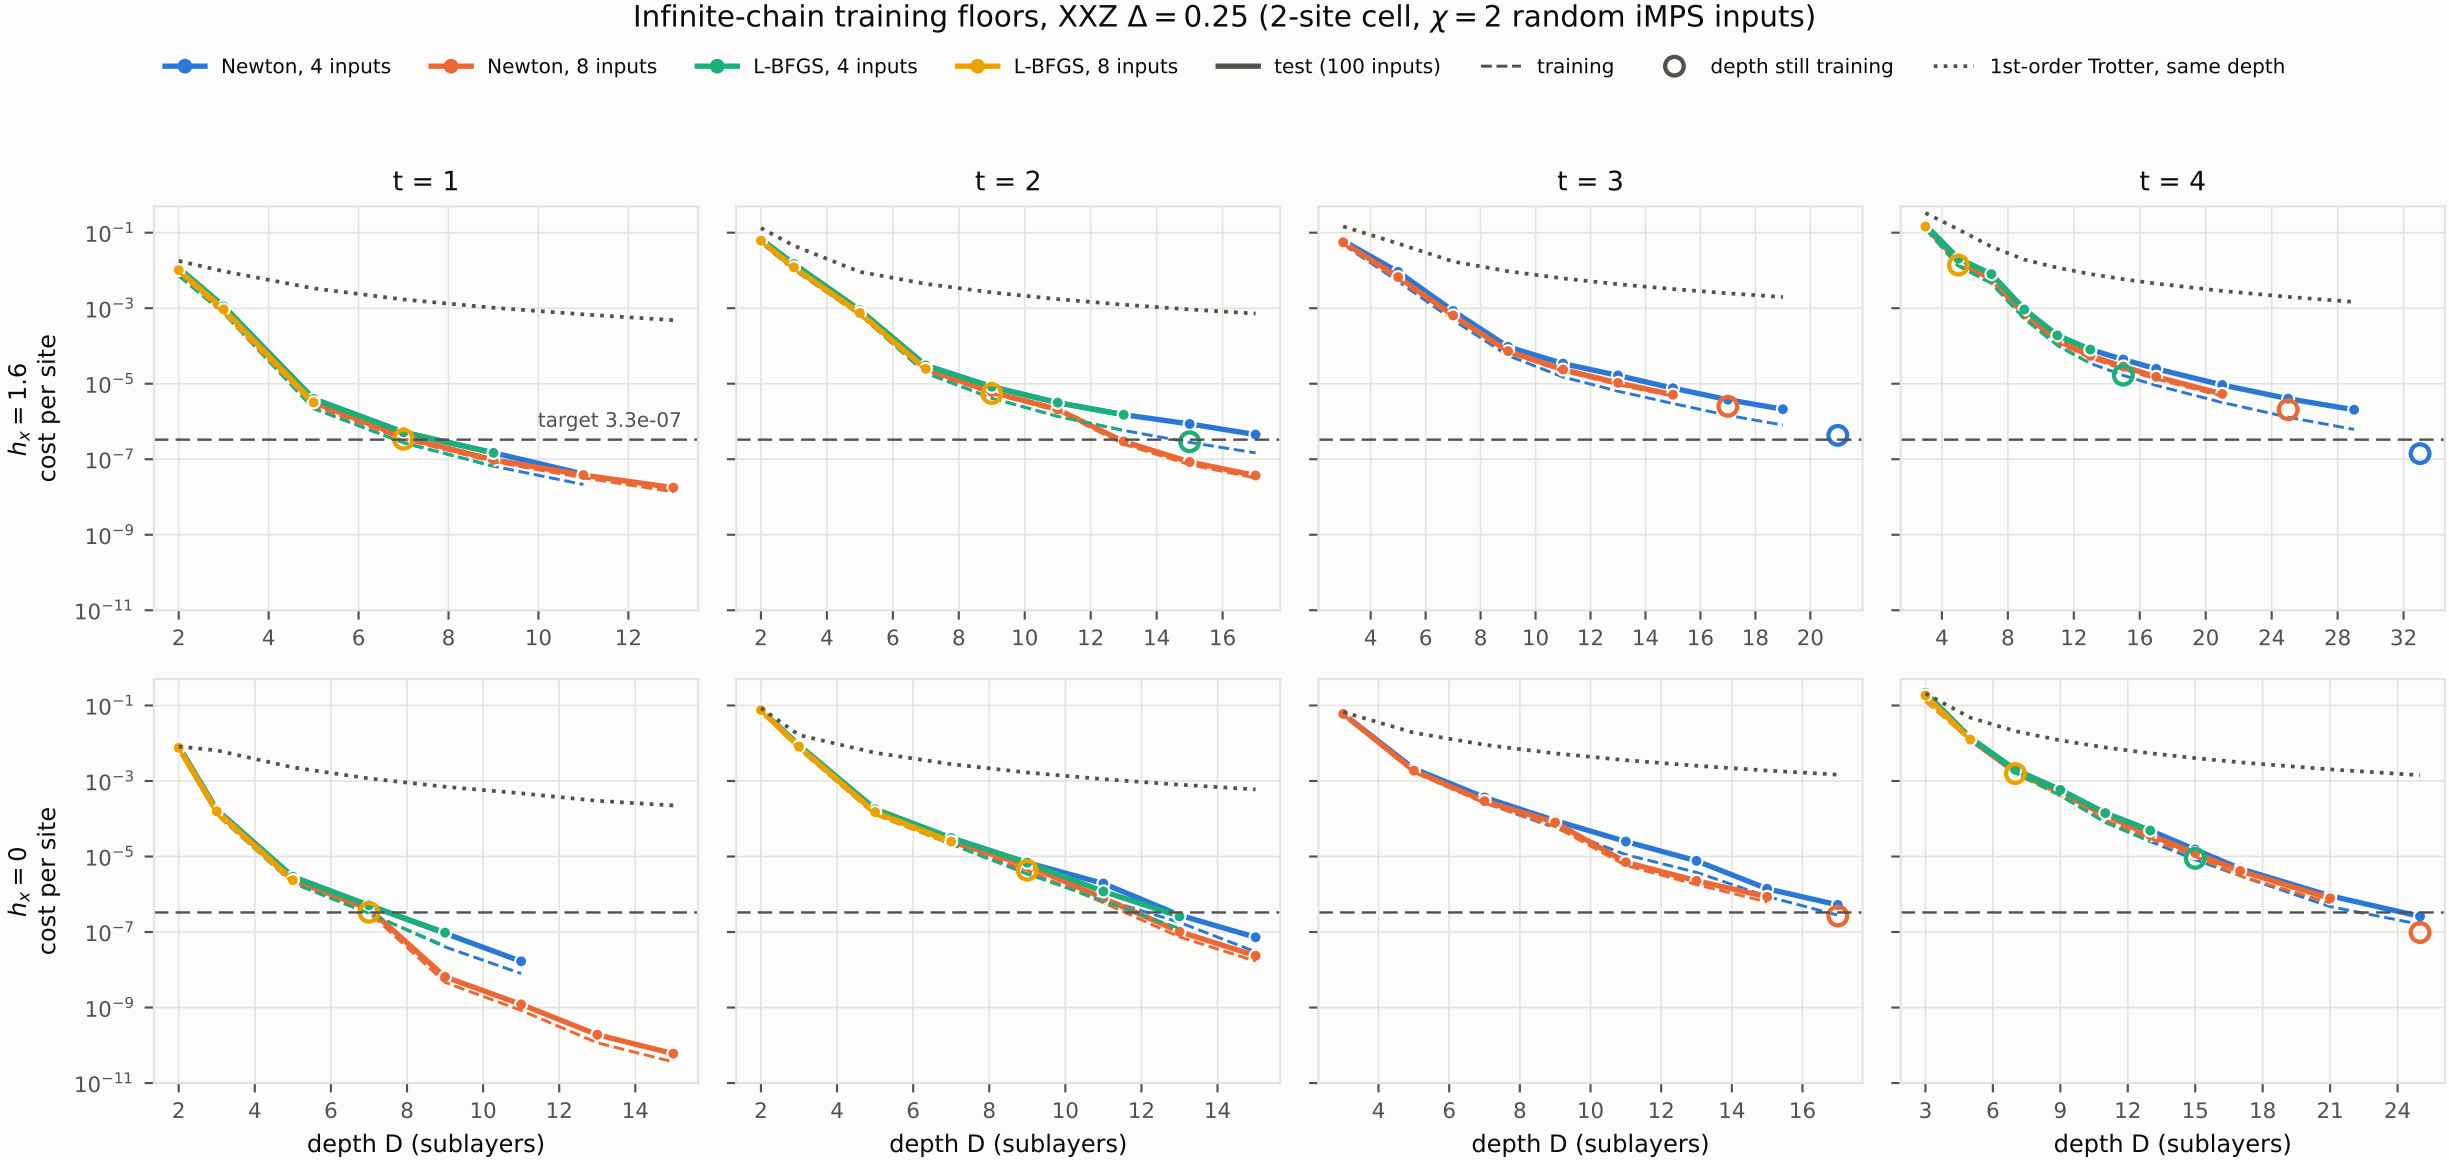
Infinite-chain training floors, XXZ Δ = 0.25 (2-site cell, χ = 2 random iMPS inputs)
Newton, 4 inputs
Newton, 8 inputs
L-BFGS, 4 inputs
L-BFGS, 8 inputs
test (100 inputs)
training
depth still training
1st-order Trotter, same depth
t = 1
t = 2
t = 3
t = 4
$h_\chi = 1.6$ cost per site
$h_\chi = 0$ cost per site
target 3.3e-07
depth D (sublayers)