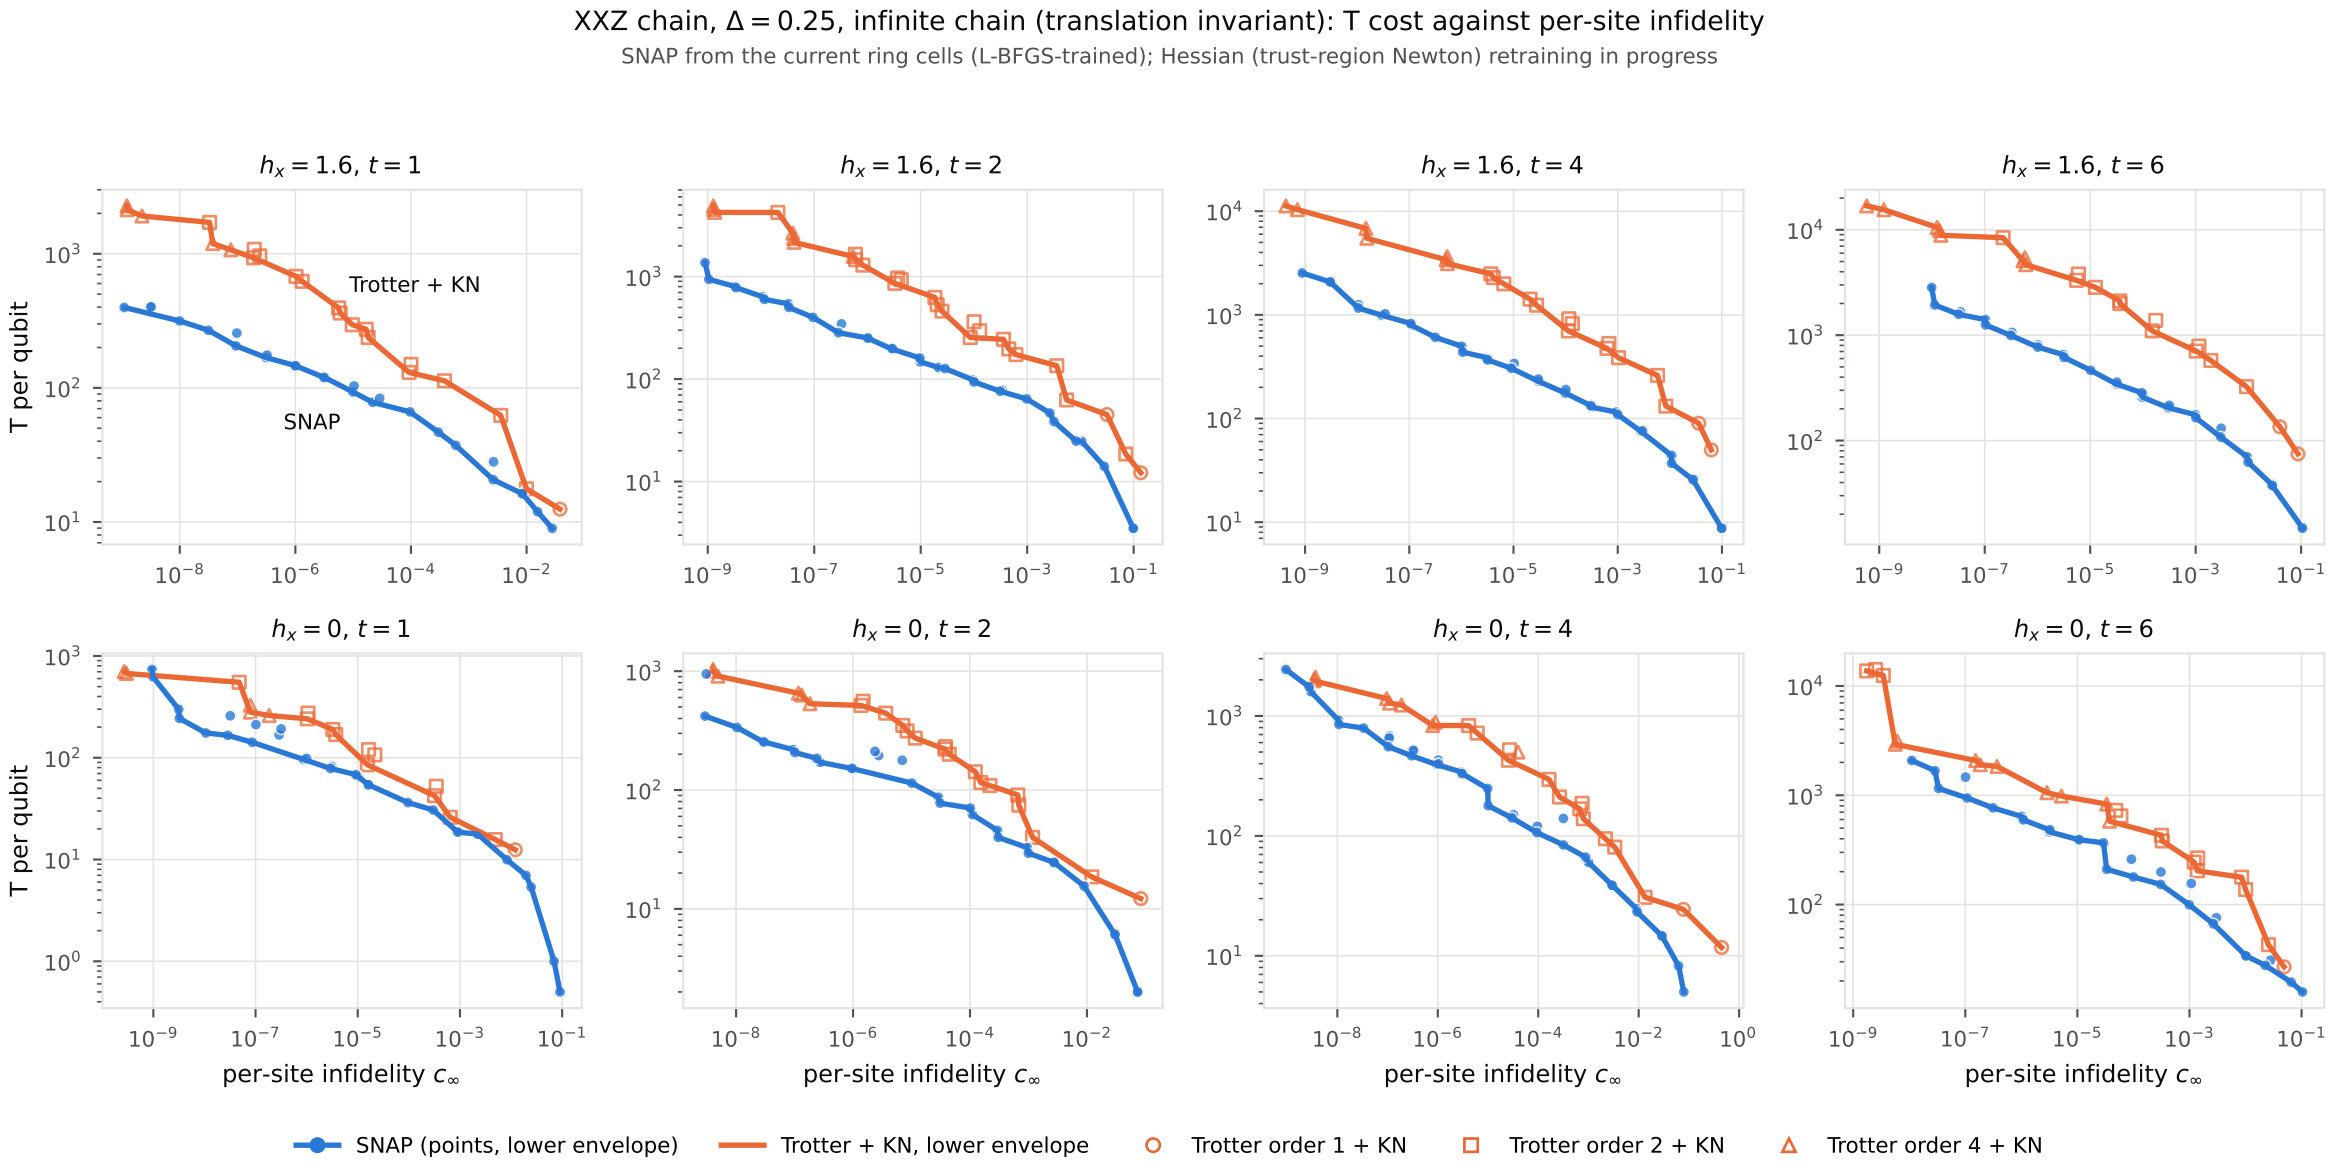
XXZ chain, Δ = 0.25, infinite chain (translation invariant): T cost against per-site infidelity
SNAP from the current ring cells (L-BFGS-trained); Hessian (trust-region Newton) retraining in progress
$h_x = 1.6$, $t = 1$
$h_x = 1.6$, $t = 2$
$h_x = 1.6$, $t = 4$
$h_x = 1.6$, $t = 6$
$h_x = 0$, $t = 1$
$h_x = 0$, $t = 2$
$h_x = 0$, $t = 4$
$h_x = 0$, $t = 6$
Trotter + KN
SNAP
T per qubit
per-site infidelity c_∞
SNAP (points, lower envelope)
Trotter + KN, lower envelope
Trotter order 1 + KN
Trotter order 2 + KN
Trotter order 4 + KN