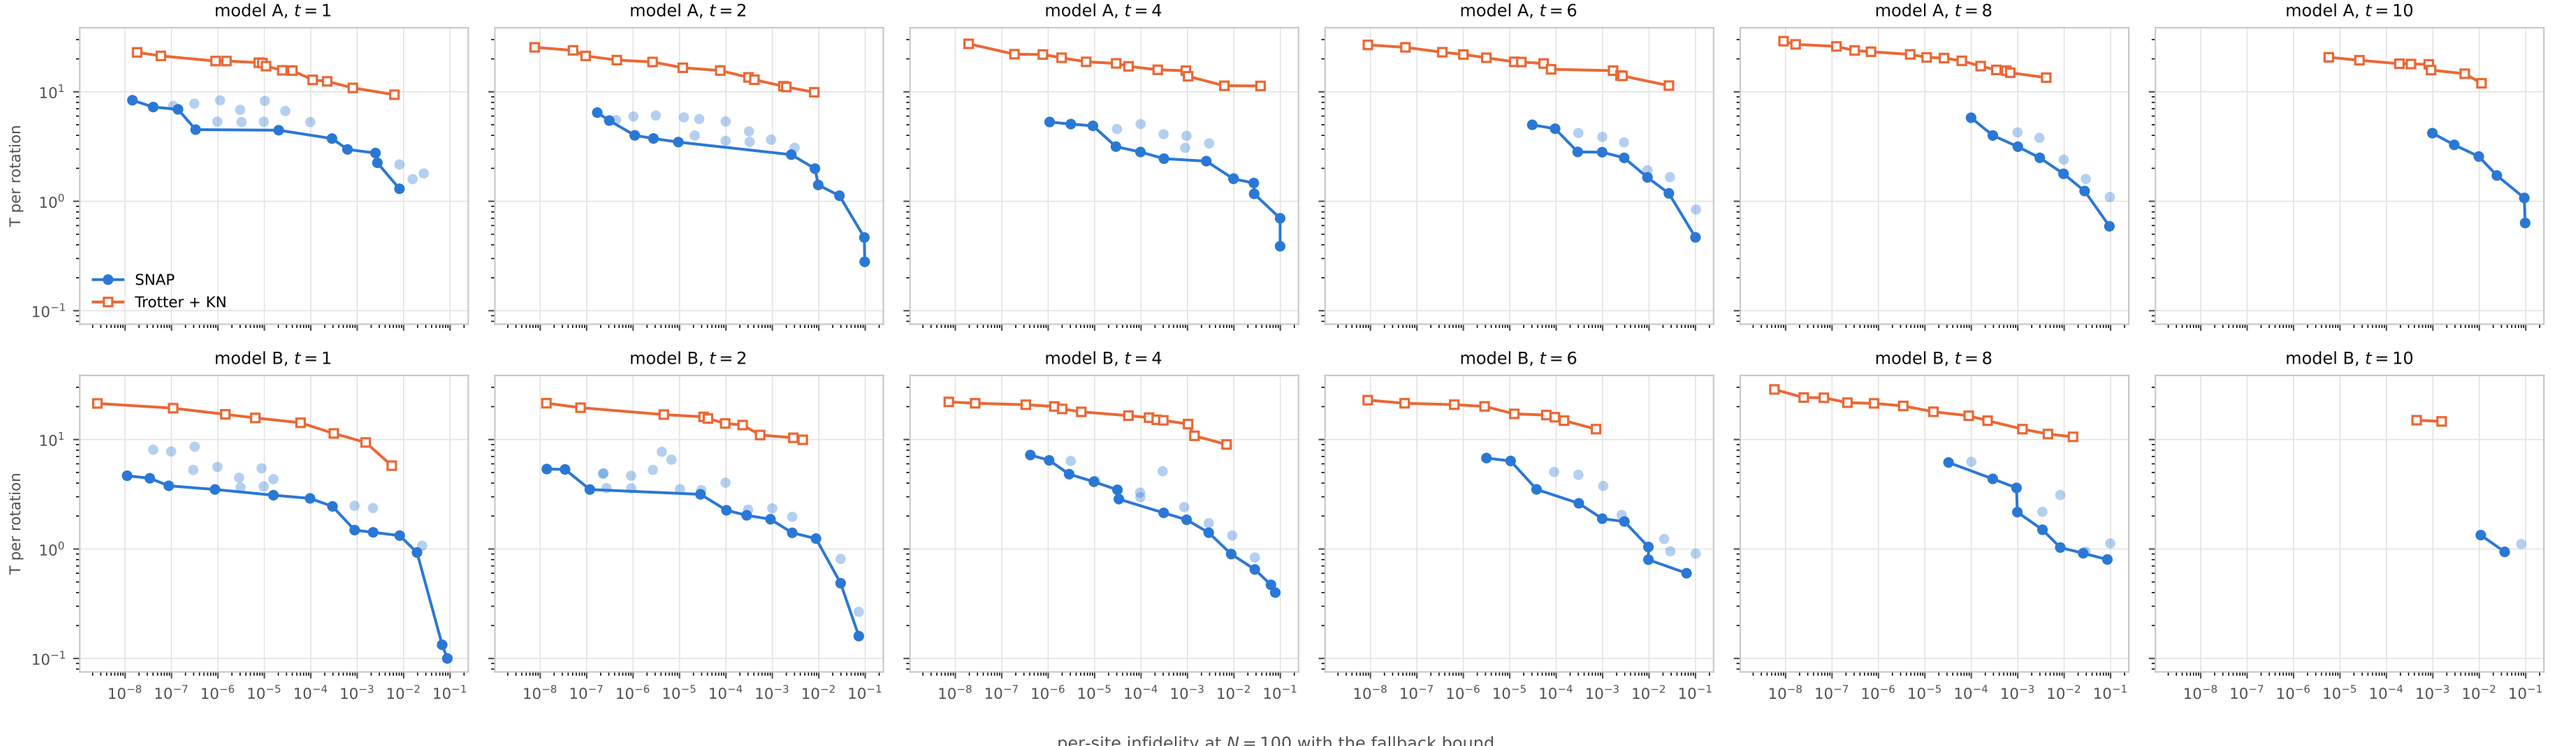
model A, $t = 1$
model A, $t = 2$
model A, $t = 4$
model A, $t = 6$
model A, $t = 8$
model A, $t = 10$
model B, $t = 1$
model B, $t = 2$
model B, $t = 4$
model B, $t = 6$
model B, $t = 8$
model B, $t = 10$
T per rotation
SNAP
Trotter + KN
per-site infidelity at $N = 100$ with the fallback bound