

Event Enable SAP Using SAP Advanced Event Mesh - Day 3

1. [What you'll learn: Overview](#)
2. [What you need: Prerequisites](#)
3. [Set up Integration Suite and Import Event Enabled Integration Flows](#)
4. [Scenario 1 - SalesOrder: AEMLegacyOutputAdapter \(mandatory\)](#)
5. [Automation of AEM setup via APIs and CI/CD \(OPTIONAL\)](#)
6. [Scenario 2 - SalesOrder: AEMSONNotificationV2 \(mandatory\)](#)
7. [Scenario 3 - BusinessPartner: AEMBusinessPartner AddressCheck \(OPTIONAL\)](#)
8. [Scenario 4 – SalesOrder: AEMSalesOrderToDatastore & DatastoreToLegacyOutputAdapter \(OPTIONAL\)](#)
9. [Security and fine grained access control to topics](#)
10. [Troubleshooting](#)
11. [Takeaways](#)

Event Enable SAP Using SAP Advanced Event Mesh - Day 3

1. What you'll learn: Overview

Day 3 of 5. Topics covered :

- Configuring an AEM brokers' queues and topic subscriptions.
- Event enabling integration flows and connecting them to AEM brokers to create event-driven integration flows.
- How to use the broker's config APIs to automate configuration and enable CI/CD pipelines.
- Fine-grained security access in AEM.

2. What you need: Prerequisites


- Complete all activities in day 1 & 2.
You access and use the same broker you setup previously as well as the simulator to push events for testing.
- Have access to an active Integration Suite Cloud Integration tenant.
- Have an SFTP server and account credentials if you want to test successful integration of events to a file based interface of a legacy system (**optional**).
- Access to SAP Data Quality Management for location data via a provided service instance (by your hosts) or permission to activate or use your own instance.
(We'll show you how to activate one, if you don't have it already). (**optional**)

3. Set up Integration Suite and Import Event Enabled Integration Flows

A) Download and import the template integration flows package

Download [AEM-Rapid-Pilot-day3.zip](#)

And Import AEM-Rapid-Pilot-day3.zip as a new package into your Integration Suite tenant:

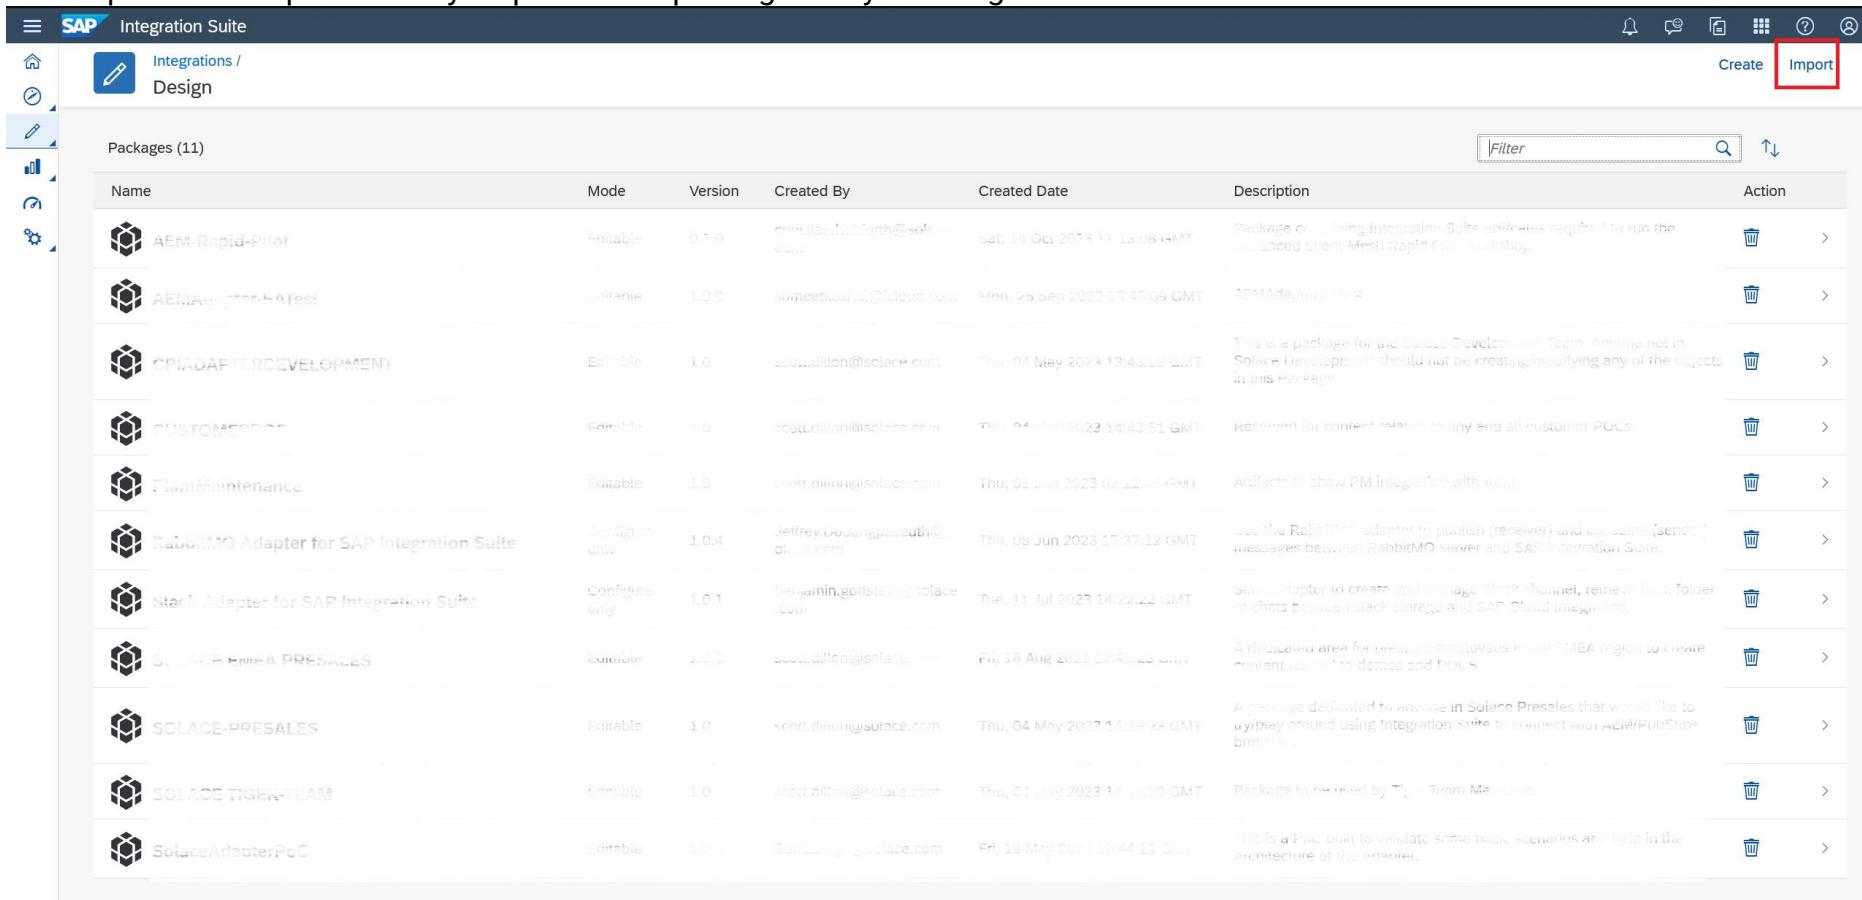

The screenshot shows the SAP Integration Suite interface. The top navigation bar includes icons for Home, Integrations / Design, Create, and Import (which is highlighted with a red box). The main content area displays a table titled "Packages (11)". The table has columns for Name, Mode, Version, Created By, Created Date, Description, and Action. Each row represents a different package, such as "AEM-Rapid-Pilot", "AEMAdapter-S4Test", "CPIADAPTERDEVELOPMENT", etc. The "Import" button in the top right corner is specifically highlighted.

Name	Mode	Version	Created By	Created Date	Description	Action
AEM-Rapid-Pilot	Editable	0.1.0	christian.murth@solace.com	Sat, 14 Oct 2023 10:13:08 GMT	Package containing Integration Suite artifacts required to run the Advanced Event Mesh Rapid Pilot workshop.	
AEMAdapter-S4Test	Editable	1.0.0	sumeethoswami@solace.com	Mon, 25 Sep 2023 03:45:09 GMT	AEMAdapter-S4Test	
CPIADAPTERDEVELOPMENT	Editable	1.0	scott.dillon@solace.com	Thu, 04 May 2023 13:43:55 GMT	This is a package for the Solace Development Team. Anyone not in Solace Development should not be creating/modifying any of the objects in this Package.	
CUSTOMERPOCS	Editable	1.0	scott.dillon@solace.com	Thu, 04 May 2023 14:43:51 GMT	Reserved for content related to any and all customer POCs.	
PlantMaintenance	Editable	1.0	scott.dillon@solace.com	Thu, 01 Jun 2023 04:22:06 GMT	Artifacts to show PM integration with AEM.	
RabbitMQ Adapter for SAP Integration Suite	Configure only	1.0.4	Jeffrey.Cooling@solace.com	Thu, 08 Jun 2023 15:37:12 GMT	Add the RabbitMQ adapter to publish (receiver) and consume (sender) messages between RabbitMQ server and SAP Integration Suite.	
Slack Adapter for SAP Integration Suite	Configure only	1.0.1	benjamin.gottstein@solace.com	Tue, 11 Jul 2023 14:22:22 GMT	Slack Adapter to create and manage slack channel, retrieve, Read, folder or chats between slack storage and SAP Cloud Integration.	
Solace EMEA PRESALES	Editable	1.0.0	scott.dillon@solace.com	Fri, 18 Aug 2023 17:45:25 GMT	A dedicated area for pre-sales employees in the EMEA region to create scenarios related to demos and POCs.	
SOLACE-PRESALES	Editable	1.0	scott.dillon@solace.com	Thu, 04 May 2023 14:34:24 GMT	A package dedicated to anyone in Solace Presales that would like to play around using Integration Suite to connect with AMQP/PubSub+ brokers.	
SOLACE TIGER-L-BAM	Editable	1.0	scott.dillon@solace.com	Thu, 01 May 2023 14:46:20 GMT	Package to be used by Tiger Team members.	
SolaceAdapterPoC	Editable	1.0.0	Sumeethoswami@solace.com	Fri, 19 May 2023 13:44:11 GMT	This is a PoC built to validate some basic scenarios and help in the architecture of the adapter.	

B) Importing the official SAP AdvancedEventMesh Adapter into your CI tenant

A new Advanced Event Mesh specific adapter was made available in January 2024. If you haven't used this adapter in your CI tenant before, you may need to import it once. Follow these steps to get the official adapter from SAP.

- Navigate to your newly imported package: AEM-Rapid-Pilot-day3.
- Take a copy of the AEMLegacyOutputAdapter flow.

The screenshot shows the SAP Integration Suite interface. At the top, there's a navigation bar with 'Integrations and APIs / AEM-Rapid-Pilot-day3 /' and buttons for 'Edit' and 'Export'. Below the navigation, the package name 'AEM-Rapid-Pilot-day3' is shown, along with a lock icon and the message 'Locked by: christian.holtfurth@solace.com (you)'. The package description is 'Package containing Integration Suite flows required for day 3 of the Rapid Pilot workshop - export package.' It also shows vendor 'Solace', mode 'Editable', and version '1.0.0'. The main area has tabs for 'Overview', 'Artifacts (3)', 'Documents', and 'Tags', with 'Artifacts (3)' selected. A search bar at the top right says 'Filter Artifacts'. The table below lists three artifacts:

Name	Type	Version	Actions
AEMBusinessPartnerAddressCheck	Integration Flow	1.1.8	Copy View metadata Download Configure Deploy
AEMLegacyOutputAdapter	Integration Flow	1.0.11	Copy View metadata Download Configure Deploy
AEMSONNotificationV2	Integration Flow	1.0.5	Copy View metadata Download Configure Deploy

- Choose a new name. (Accepting the default of `AEMLegacyOutputAdapter_copy` will do.)

- Then open and edit your copy named `AEMLegacyOutputAdapter_copy` or similar.

SAP Integration Suite

Integrations and APIs / AEM-Rapid-Pilot-day3 / AEMLegacyOutputAdapter_copy / AEMLegacyOutputAdapter_copy Deployment Status: Not Deployed

Edit Configure Deploy Delete

Search Step

The screenshot shows the SAP Integration Suite interface. At the top, there's a navigation bar with icons for home, integrations, APIs, and deployment status. Below it is a toolbar with various icons for file operations like save, delete, and search. The main area displays an integration process diagram titled "Integration Process". The diagram consists of three main components: "Sender" (represented by a white box with a blue icon), "Integration Process" (a central box containing "Start" and "End" events connected by a dashed arrow), and "Receiver" (another white box with a blue icon). The "AdvancedEventMesh" connector is used between the Sender and the Integration Process, and the "SFTP" connector is used between the Integration Process and the Receiver. The "Edit" button in the top right is circled in red. Below the diagram, the "Integration Flow" tab is selected in a sidebar, showing tabs for General, Runtime Configuration, Error Configuration, References, Externalized Parameters, Problems, and Deployment Status. The "General" tab is active, displaying fields for Name (AEMLegacyOutputAdapter_copy) and ID (AEMLegacyOutputAdapter_copy), and a large empty Description field.

Integration Flow


General Runtime Configuration Error Configuration References Externalized Parameters Problems Deployment Status

Name: AEMLegacyOutputAdapter_copy


ID: AEMLegacyOutputAdapter_copy

Description:

- Select the line named AdvancedEventMesh and delete it by clicking on the rubbish bin icon that appears.

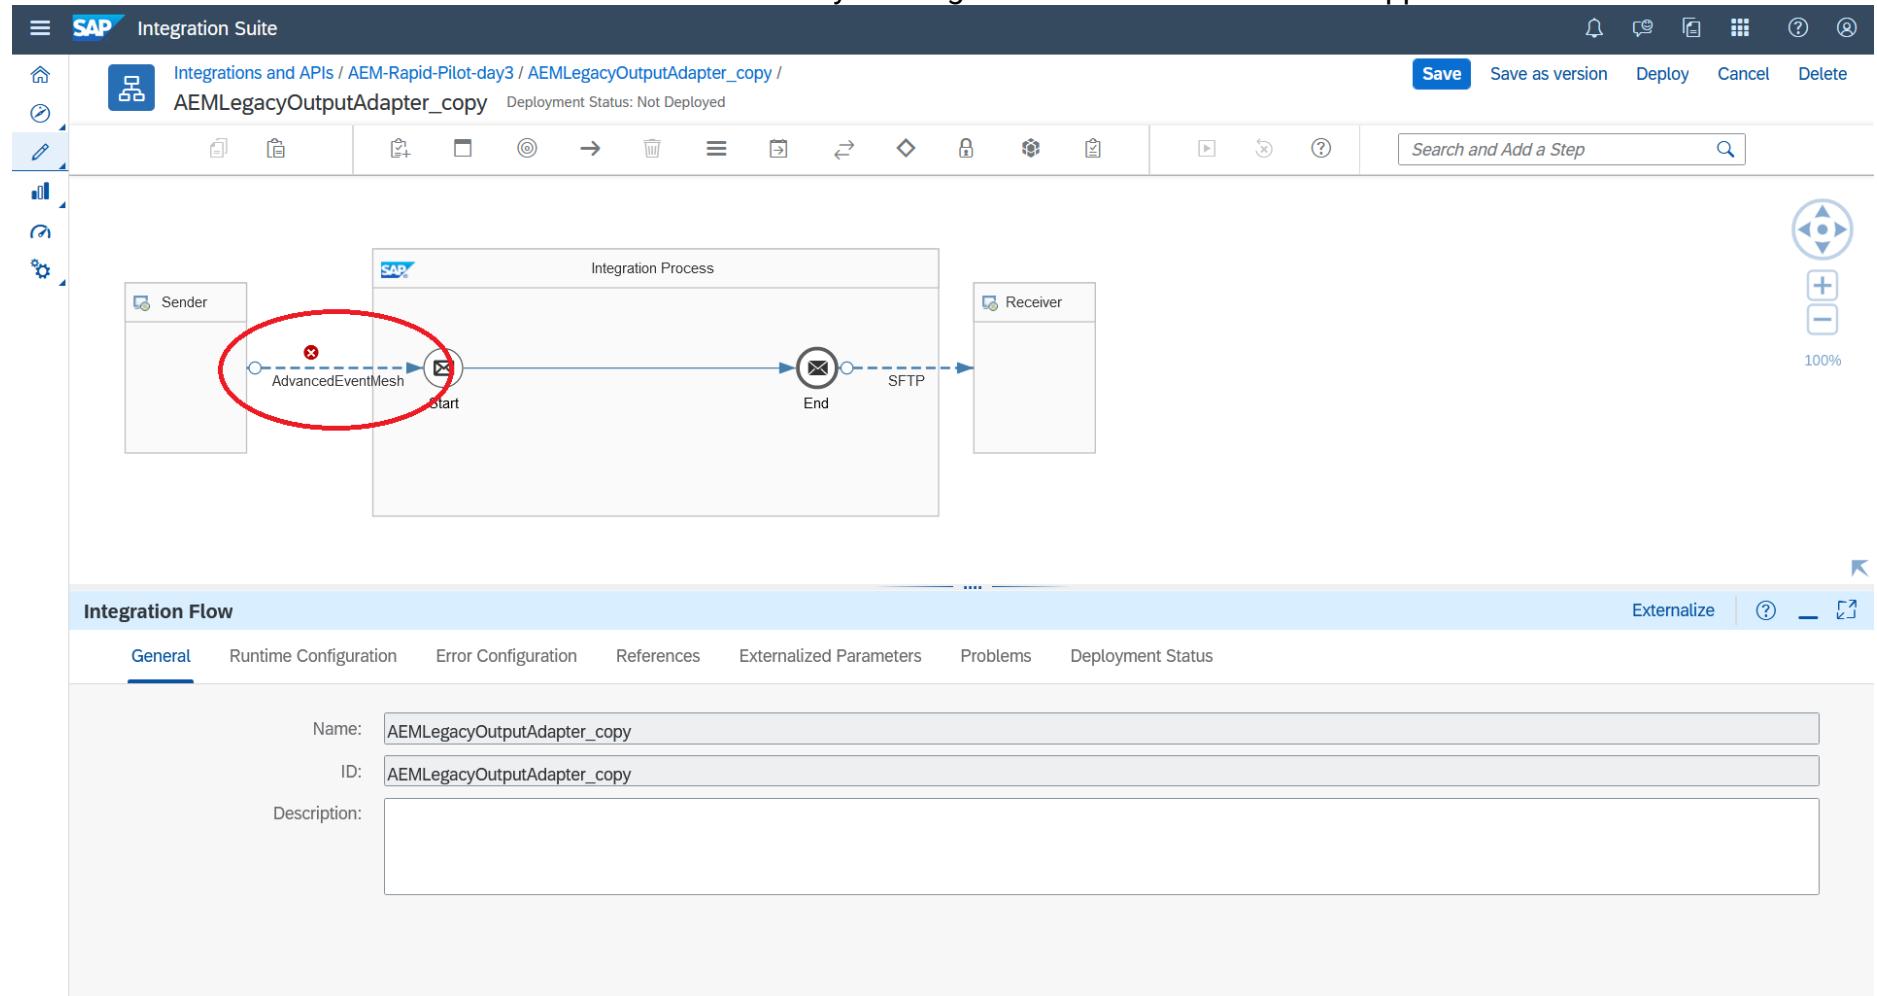

- After deletion, select the connector tool from the top and reconnect the Sender box to the Start icon.

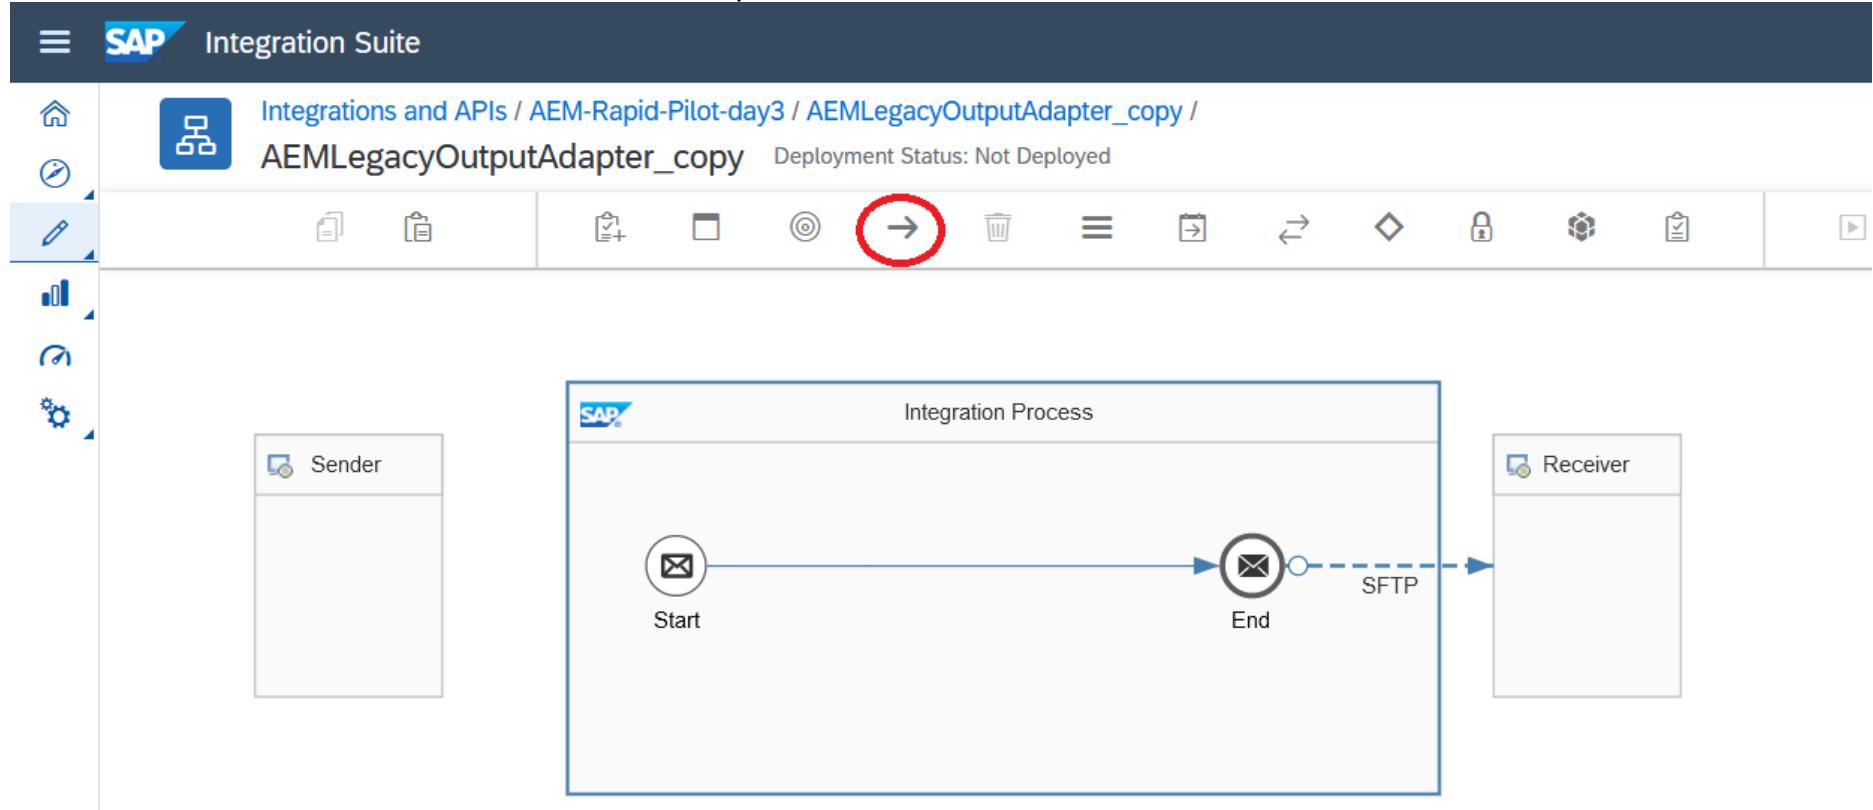

- You should see a pop up appear in which you can select the AdvancedEventMesh adapter. Selecting this should pull the SAP version of this adapter into your CI tenant.

That's it, we should now be good to proceed. (You can cancel the changes in your copy `AEMLegacyOutputAdapter_copy` or similar and delete the copy of the flow now.)

Skip over step C) if you have successfully completed this step.

C) Download and import the AEM adapter for Integration Suite

A new Advanced Event Mesh specific adapter was made available in January 2024.

Only follow this step if you can't see the AdvancedEventMesh adapter in your Integration Suite tenant or if you want to use the preview version (provided) instead.

In that case, follow the steps in this section to get a preview of the AEM adapter:

- Download [Integration Suite AEM Adapter](#)
- Import the AEM adapter into your Integration Suite tenant and deploy this adapter.

Import the adapter into your package.

The screenshot shows the SAP Integration Suite interface. At the top, there are navigation links: Header, Overview, Artifacts (3), Documents, and Tags. On the right, there are buttons for Save, Export, Cancel, and Delete Package. Below these, a search bar labeled 'Filter Artifacts' is present. The main area displays a list of artifacts. One artifact, 'AEMBusinessPartnerAddressCheck', has its context menu open, showing options like Data Type, Function Libraries, Integration Adapter (which is highlighted in blue), Integration Flow, Message Mapping, Message Type, OData API, REST API, SOAP API, Script Collection, and Value Mapping. The 'Integration Adapter' option is specifically highlighted with a blue border.

Name	Type	Actions
AEMBusinessPartnerAddressCheck Business Partner address checking flow, uses SAP BTP's Data Quality Management service for geo-location data to check and correct addresses in Business Partner events. Created	Integration Flow	>
AEMLegacyOutputAdapter Legacy adapter iflow for processing events and writing them into a file over SFTP for legacy system import. Created	Integration Flow	>
AEMSalesOrderNotification Sales Order email notification flow. Created	Integration Flow	>

Extract the downloaded zip and select the .esa file in the upload dialog. Runtime Profile should be Cloud Integration. (You should not be seeing the warning message `Integration adapter with the ID 'AdvancedEventMesh' already exists`. If you do, then you

can skip this step as the adapter has already been made available to you.)

Add Integration Adapter

Integration Adapter:*

Name: AdvancedEventMesh
ID: AdvancedEventMesh
Version:
Runtime Profile:*

Description:

Type: ...
Application:

✖ Integration adapter with the ID 'AdvancedEventMesh' already exists.
[Show More](#)

Deploy the adapter after import.

Actions <input type="button" value="Filter Artifacts"/>			
Name	Type	Version	Actions
<input type="checkbox"/> AdvancedEventMesh	Integration Adapter	1.0.0	<input type="button" value="View metadata"/> <input type="button" value="Download"/> <input type="button" value="Deploy"/>
<small>Created</small> <small>anack dynamic topic</small>			<input type="button" value="Actions"/>


See [SAP documentation](#) for more detailed instructions

4. Scenario 1 - SalesOrder: AEMLegacyOutputAdapter (mandatory)

Setup/configure SAP AEM broker service

In this section we will create the required input queues for your integration flows.

- Go to Cluster Manager -> {your service} -> Manage -> Queues - to open the Broker UI

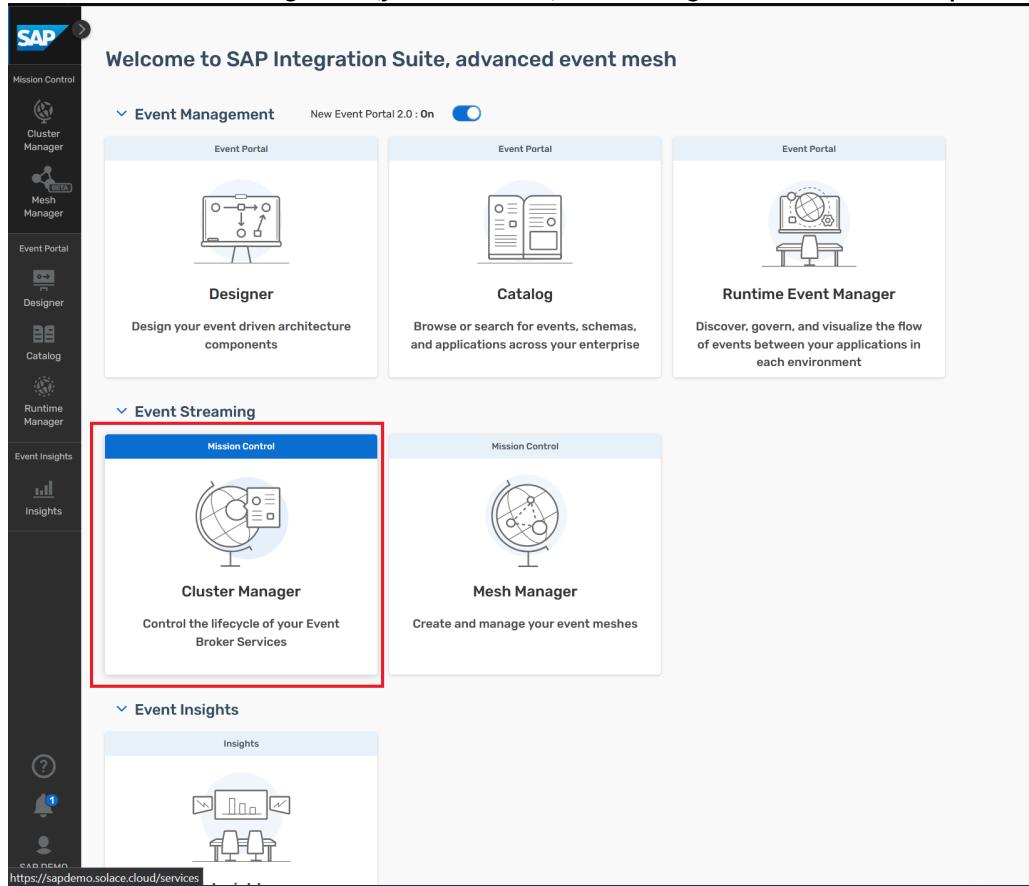

Services

[Create Service](#) Only show my services

All Services (14)

 eu1 SAP DEMO (eu-central-1) Enterprise 250 Class Christian Holtfurth ● Running 	 us1 GKE - US Central (Iowa) Enterprise 250 Class Christian Holtfurth ● Running 	 aws ap1 EKS - Asia Pacific (Singapore) Enterprise 250 Class Christian Holtfurth ● Running 
 MontrealBroker-10.1 EKS - Canada Central(Montreal) Developer Class Scott Dillon ● Running 	 US-Central AKS - Central US (Iowa) Developer Class Karl Ossoinig ● Running 	 sa1 EKS - Africa (Cape Town) Enterprise 250 Class Christian Holtfurth ● Running 
 cn1 AKS - East Asia (Hong Kong) Enterprise 250 Class Christian Holtfurth ● Running 	 BTP Hackathon September EKS - Canada Central(Montreal) Developer Class brad.caldwell@solace.com ● Running 	 MyMesh-Svc1 AKS - East US 2 (Virginia) Developer Class Karl Ossoinig ● Running 
 MyMesh-Svc2 EKS - US West (Oregon) Developer Class Karl Ossoinig ● Running 	 My-First-Service EKS - Canada Central(Montreal) Enterprise 250 Class Andrea Kelso ● Running 	 test GKE - Asia South (Mumbai) Enterprise 1K Class Christian Holtfurth ● Running 
 testbrokersap1 GKE - EU(London) Enterprise 1K Class Christian Holtfurth ● Running 	 Karls-special-broker-just-for... AKS - Canada Central (Toronto) Enterprise 5K Class Karl Ossoinig ● Running 	

MontrealBroker-10.1

Status Connect **Manage** Monitoring Configuration Try Me!

Open Broker Manager ...

Event Broker Service Settings

Deletion Protection | **Delete Service** | **Advanced Options**

Authentication
Enabled



Certificate Authorities
0 Client Certificate Authorities
1 Domain Certificate Authority



Client Profiles
1 Client Profile



Broker Manager Quick Settings



Message VPN



Clients



Queues



Access Control



Bridges

Other Management Tools

- SEMP - REST API
The Solace Element Management Protocol (SEMP) is a REST API that you can use to manage the Event Broker Service.
- Broker Manager - Web Application
The Broker Manager is a browser-based administration console that you can use to manage the Event Broker Service.
- SolAdmin - Desktop Application
SolAdmin is a legacy desktop application that you can use to manage the Event Broker Service.

To create the queues in the next sections, repeatedly click on the "+ Queue" button to bring up the create queue dialog.

SAP
montrealbroker-10-1...

Queues
Topic Endpoints
Templates
Action
+ Queue

<input type="checkbox"/>	Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
<input type="checkbox"/>	#partner/6nqj	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	#clusterer5b2ca535481099a637...	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	800,000	1	N/A	Yes
<input type="checkbox"/>	AFMSPILOTASAPIQ	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	172,320	74.03	5,000	0	N/A	Yes
<input type="checkbox"/>	AFMSALESORDERADP002	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	BraDDMQ	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	2	0.0012	5,000	0	N/A	Yes
<input type="checkbox"/>	BraUDemo	On	On	Non-Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	BradTest	On	Off	Non-Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartner	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	1,110	0.3937	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	664	0.2895	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckedinvalid	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	443	0.1659	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckerDMO	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	3	0.0009	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterIn	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterInDMO	On	Off	Exclusive	0	<div style="width: 100%;">100%</div>	28	0.0487	50	0	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterOut	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CISalesOrder	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	20	0.0187	50	0	N/A	Yes
<input type="checkbox"/>	CISalesOrderChecked	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes

Page
First
Next >
Last Update: 2023-10-21 08:32:04
Refresh Data
Show
20

Provide the name as given (in the next sections).

Create Queue

Queue Name

Cancel Create

Open up the "Advanced Queue Settings" section, then follow along and provide the details as showing in the screenshots below.

Edit Queue Settings

TestQueue

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Owner

Non-Owner Permission

Maximum Consumer Count

Show Advanced Settings

Cancel Apply

Tips >>

Click on a label or an input field to see help message.

Create the following queues and provide the details as given (copy & paste where appropriate).

1. **CILegacyAdapterIn queue**

- Name: CILegacyAdapterIn
- Owner: solace-cloud-client
- Non-Owner Permission: No access
- DMQ Name: CILegacyAdapterInDMQ
- Redelivery: enabled
- Try Forever: disabled
- Maximum Redelivery Count: 3

SAP

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

[Message VPN](#)

Clients

Queues

Connectors

Access Control

Telemetry

Replay

Bridges

JMS JNDI

Try Me!

Advanced Messaging

Caches

Transactions

[System](#)

Clustering

Queues | CILegacyAdapterIn

Summary **Settings** Subscriptions Consumers Messages Queued Stats

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Alert Thresholds Clear Raise

Owner

Non-Owner Permission

Maximum Consumer Count

Alert Thresholds Clear Raise

Maximum Message Size (B)

Maximum Delivered Unacknowledged Messages per Flow


DMO Name

Enable Client Delivery Count

Delivery Delay (sec)

Message Priority

Respect Message Priority

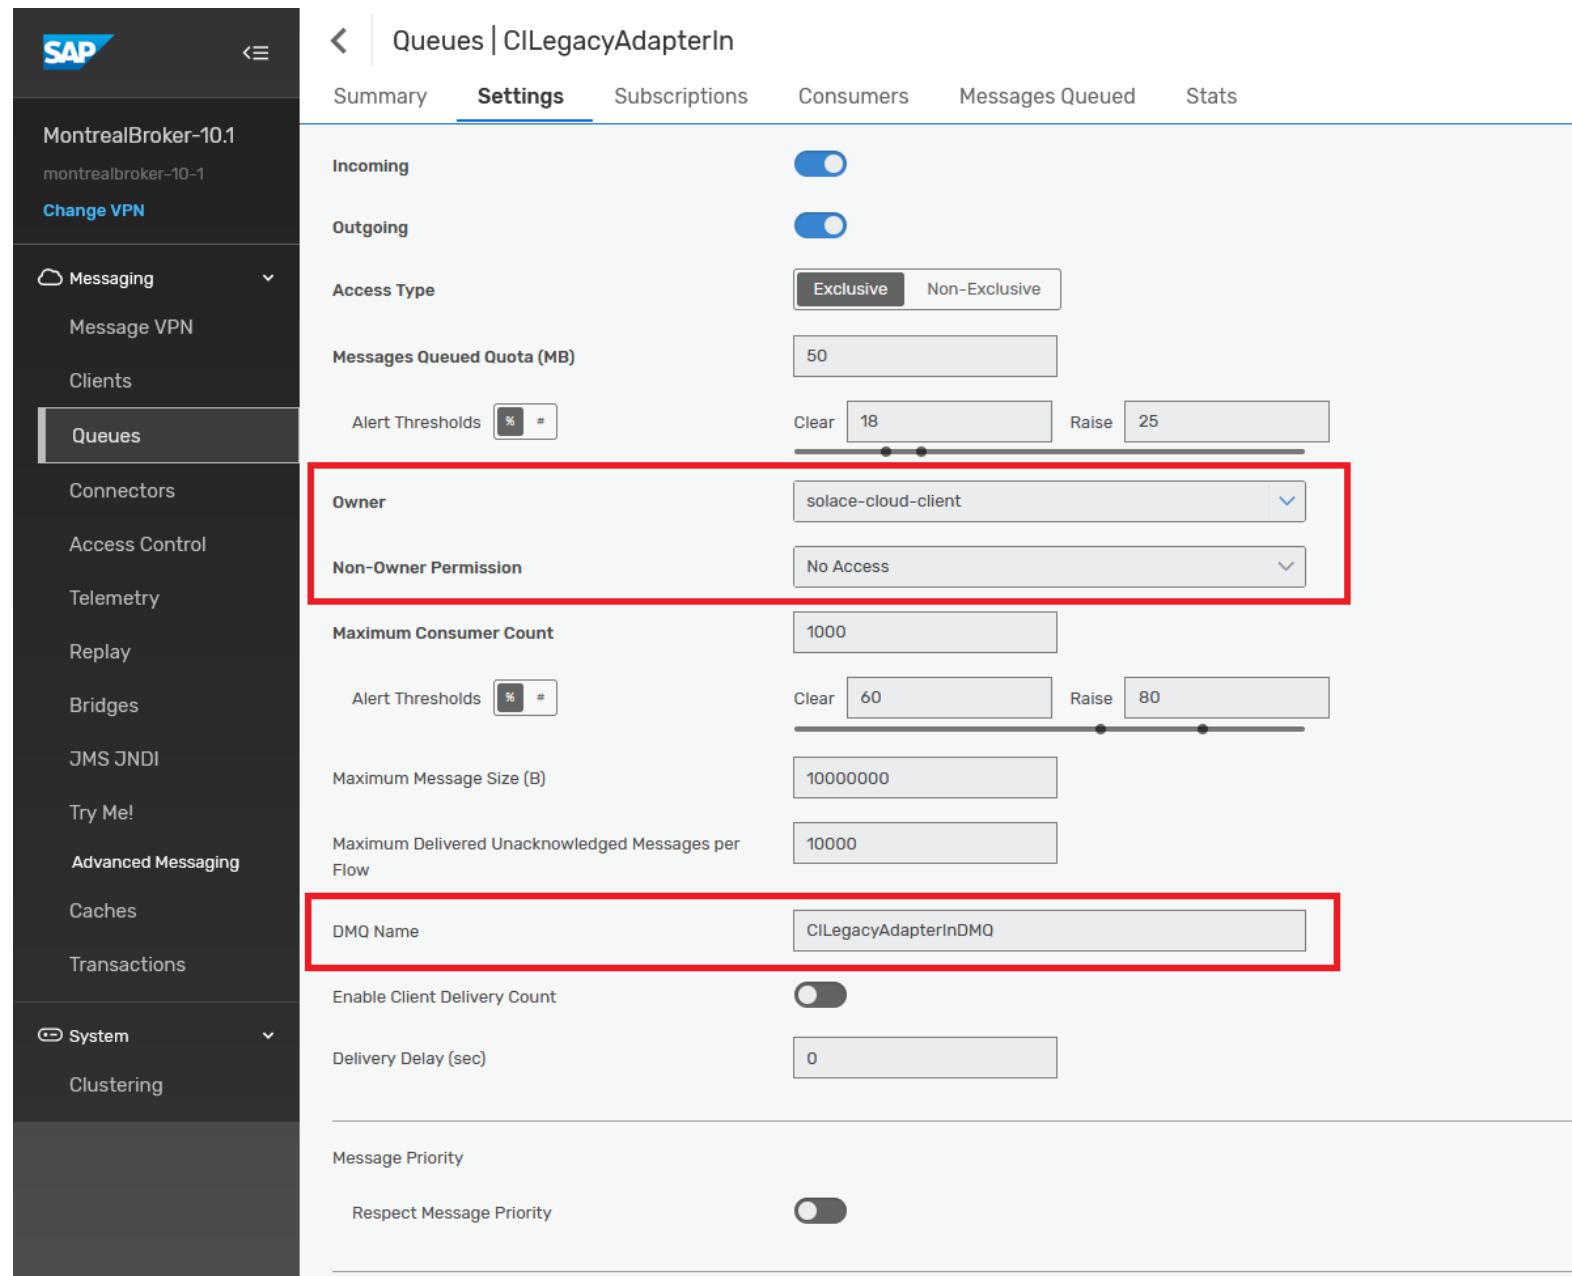

SAP

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Messaging

Message VPN

Clients

Queues

Connectors

Access Control

Telemetry

Replay

Bridges

JMS JNDI

Try Me!

Advanced Messaging

Caches

Transactions

System

Clustering

Queues | CILegacyAdapterIn

Summary Settings Subscriptions Consumers Messages Queued Stats

Message Expiry

Respect TTL

Maximum TTL (sec)

Redelivery

Try Forever

Maximum Redelivery Count

Delayed Redelivery

Multiplier

Initial Delay

Maximum Delay

Congestion Control

Reject Messages to Sender on Discard ▼

Reject Low Priority Messages

Reject Low Priority Messages Limit

Alert Thresholds % #

Clear Raise ▼

Redelivery

Try Forever

Maximum Redelivery Count

Delayed Redelivery

Multiplier

Initial Delay

Maximum Delay

Reject Messages to Sender on Discard ▼

Reject Low Priority Messages

Reject Low Priority Messages Limit

Alert Thresholds % #

Clear Raise ▼

- Once the queue is created, click on the queue name in the list, navigate to the Subscriptions tab and open the subscriptions dialog.

The screenshot shows the SAP Queue Management interface. On the left, there's a sidebar with a dark background containing the SAP logo, the text "MontrealBroker-10.1", "montrealbroker-10-1", "Change VPN", and a "Messaging" section with "Message VPN", "Clients", and "Queues". The "Queues" item is highlighted with a white border. The main area has a light gray background and displays "Queues | TestQueue". At the top, there are tabs: "Summary", "Settings", "Subscriptions" (which is circled in red), "Consumers", "Messages Queued", and "Stats". Below the tabs, it says "0 Subscriptions" and features a search bar with "Search by topic". To the right of the search bar is an "Action" button with a grid icon and a "+ Subscription" button (also circled in red). On the far right, there's a small profile icon and the text "montrealbroker-10-1-...". The main content area is currently empty, showing a table header with a checkbox and the word "Topic".

- Add the following subscriptions to the queue
- sap.com/salesorder/create/v1/>
- sap.com/salesorder/change/v1/>
- sap.com/salesorder/retry/v1
- salesorder/retry/v1

SAP

MontrealBroker-10.1

montrealbroker-10-1

Change VPN

Messaging

Message VPN

Clients

Queues

Connectors

Queues | CILegacyAdapterIn

Summary Settings **Subscriptions** Consumers Messages Queued Stats

4 Subscriptions Search by topic

Topic
sap.com/salesorder/create/V1/>
sap.com/salesorder/change/V1/>
sap.com/salesorder/retry/V1
salesorder/retry/V1

2. CILegacyAdapterInDMQ queue

- **Name:** CILegacyAdapterInDMQ
- **Owner:** solace-cloud-client
- **Non-Owner Permission:** No access

SAP

< Queues | CILegacyAdapterInDMQ

Summary **Settings** Subscriptions Consumers Messages Queued Stats

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Messaging ▾
Message VPN
Clients
Queues
Connectors
Access Control
Telemetry
Replay

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Owner ▾

Non-Owner Permission ▾

Maximum Consumer Count

Now, before we jump back into Integration Suite: Let's head to our Advanced Event Mesh Console and go to Cluster Manager, select the service that you want to connect your Integration Suite flows to and go to the "Connect" tab. Take a note of the connectivity details underneath "Solace Messaging" (click on the section to open it up):

The screenshot shows the SAP Mission Control interface for the MontrealBroker-10.1 instance. The left sidebar includes links for Cluster Manager, Mesh Manager (Beta), Designer, Catalog, Runtime Manager, Insights, and SAP DEMO. The main content area has a header "MontrealBroker-10.1" with tabs for Status, Connect, Manage, Monitoring, Configuration, and Try Me! A sub-header "Connect Using a Supported Client Library" is followed by a dropdown "View by: Protocol". Below this, a section titled "Client Libraries" lists various Solace client libraries:

Client Library	Description	Action
Solace Java API (Java)	Start messaging with client libraries that use the Solace Message Format (SMF) protocol over TCP.	Get Started
Solace JCSMP API (JCSMP)		Get Started
Solace JavaRTO (Java)		Get Started
Solace JMS API (Java)		Get Started
Solace C (C)		Get Started
Solace Python (Python)		Get Started
Solace Go API (Go)		Get Started
Solace .NET (.NET)		Get Started
Spring Boot Java API (Spring)		Get Started
Spring Boot JMS API (Spring)		Get Started
Spring Cloud Stream		Get Started

Below the client library list, there are sections for "Solace Web Messaging" and "AMQP". A red box highlights the "Connection Details" section on the right, which contains fields for Username, Password, Message VPN, Secured SMF Host, Public Internet, TrustStore, and Download PEM.

We will need them in the next steps when configuring our flows.

The connect tab lists all the various connectivity details for the various supported protocols. Our Cloud Integration AEM adapter uses the Solace Messaging protocol, which is AEM's very own protocol with a broad feature support. Each AEM service also comes with a default client user called `solace-cloud-client` that is configured for convenience reasons and is allowed to publish and subscribe to all topics. We will be using this user for all our iflows. In a real production environment where security is important, you or your administrator will likely have this user disabled and will be creating separate users for each of the applications that connect to the AEM broker. Or this may even be deferred to an external authentication service over LDAP or OAuth with no client users stored on the broker itself and managed by your IAM service instead.


Now that we have set up all the prerequisites for our Integration Suite flows, we can take a look at the individual flows and prepare them for deployment.

Configure Your Integration Suite Flow

Security Configuration

Let's configure the security details we will need to connect to the various services like AEM & SFTP server.


- Go to Integration Suite Monitor Artifacts -> Manage Security -> Security Material.

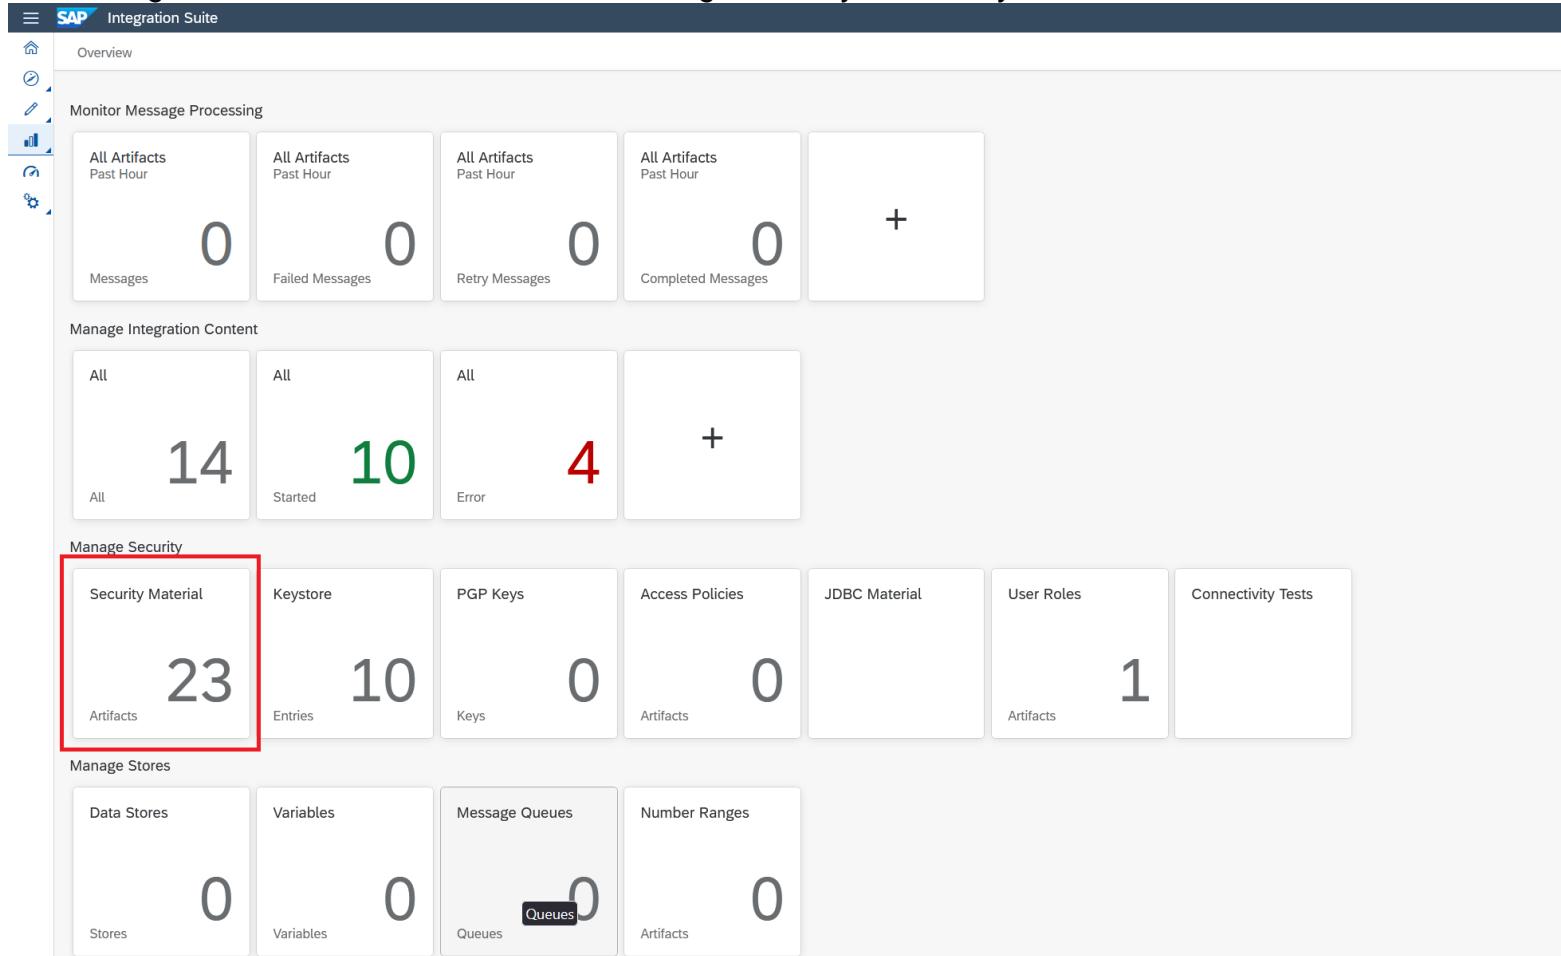

- In here, create security credentials for your AEM broker service, and SFTP server (sftp optional).
- Create SecureParameter `CABrokerUserPass` and store the password for your `solace-cloud-client` application user credentials.
- Create UserCredentials `sftpuser` and store SFTP servers user and password credentials (these can be prepopulated with dummy values for now).

Configure/Deploy AEMLegacyOutputAdapter

1. Let's take a look at the AEMLegacyOutputAdapter iflow:

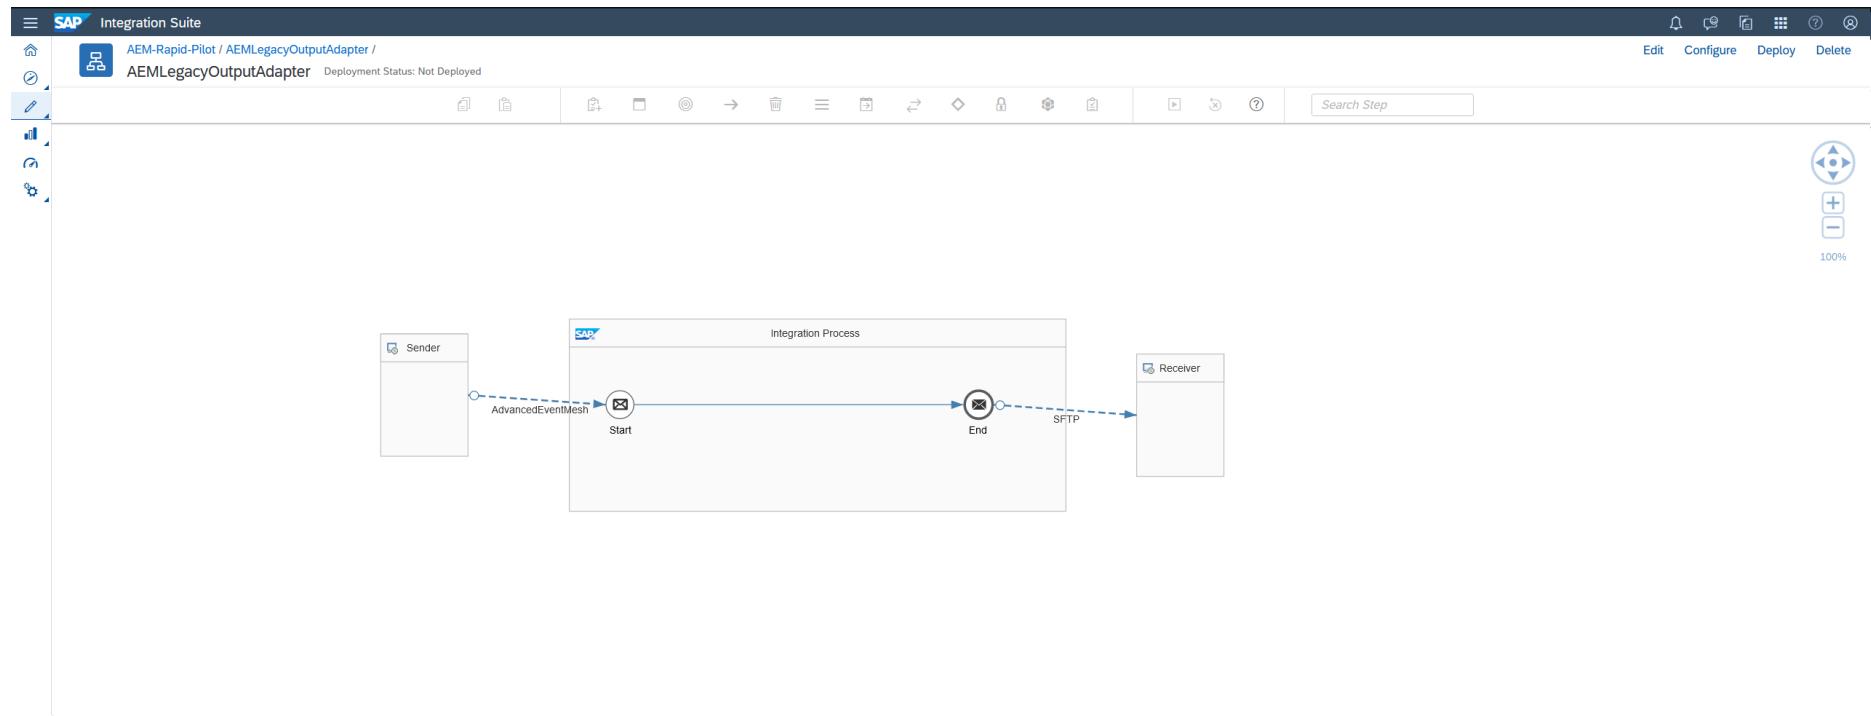

This flow is really straightforward. It receives Sales Order events and appends them to a file over SFTP. This could be used for legacy system integration (as the name suggests) for systems that do not have capabilities to receive data/events in an event-driven fashion and instead are relying on batch-based file imports. AEM + CI could send all relevant events in real-time to the file and the downstream legacy system can then simply consume the file in batch intervals (or potentially triggered by a file detector if available), move/delete the import file and AEM + CI will simply create a new one as soon as the next event arrives.

Now we are going to use this simple flow to demonstrate the error handling capabilities of AEM. The flow will try to send events to a file, but we have deliberately misconfigured the SFTP adapter to point to an invalid destination, so all messages delivery attempts

will fail and trigger the AEM adapter's retry behaviour (that's intended).

Once the max configured retry attempts are exceeded, the AEM broker will move the message to a configured DMQ for exception processing.

Let's take a look at some of the relevant settings of the AEM adapter that control this behaviour.

SAP Integration Suite

Integrations / AEM-Rapid-Pilot / AEMLegacyOutputAdapter / AEMLegacyOutputAdapter Deployment Status: Not Deployed

Integration Process

```
graph LR; Sender[Sender] --> AdvancedEventMesh((AdvancedEventMesh)); AdvancedEventMesh --> End((End)); End -- SFTP --> Receiver[Receiver]
```

AdvancedEventMesh

General Connection Processing

SENDER PROCESSING DETAILS

Consumer Mode: Guaranteed

Parallel Consumers: 1

Queue Name: CILegacyAdapterIn

Selector:

Acknowledgment Mode: Automatic On Exchange Complete

Settlement Outcome After Maximum Attempts: Failed

Maximum Message Processing Attempts: 2

Retry Interval (in ms): 500

Maximum Retry Interval (in ms): 500

Exponential Backoff Multiplier: 1.0

Let's look at these settings one by one:

1. **Acknowledgement Mode: "Automatic on Exchange Complete"**

The most important setting when it comes to not accidentally acknowledging and therefore removing a message from the broker's queue. This setting tells the flow/AEM adapter to only acknowledge (ack) the message after the flow has successfully completed processing the message. If any failure occurs, the AEM adapter will instead send a negative acknowledgment back (nack) to tell the broker to keep the message and retry it, because it couldn't be successfully processed by the flow. The alternative is to immediately ack the message when it's received, which will always result in the message being removed from the queue even if the flow fails to successfully process the message. (!!)

2. **Settlement Outcome After Maximum Attempts: "Failed"**

This setting controls the nack type and behaviour, we have two options here:

a) **Failed**, which will nack the message back to the broker and let the broker check the retry count of the message to trigger retries based on the queue settings and only sending messages to DMQ when the retry count on the message has exceeded the max retry settings on the queue.

b) **Rejected**, which will nack the message telling the broker to immediately move the message to DMQ when the AEM adapter settings (Maximum Message Processing Attempts) are exceeded irrespective of queue settings.

3. **Max. Message Processing Attempts: 2**

Controls how often we want to retry a message inside the iflow before we "give up" and pass it back to the broker.

4. **Retry interval, Max Retry Interval and Exponential Backoff Multiplier**

These are all settings that control how quickly we want to retry and whether we want to incrementally increase our retry delay with each failure. A good retry delay value prevents the iflow from repeatedly retrying a message within a few milli-seconds and gives some time for transient error situations to clear before we retry.

Note that the error handling and retry settings go hand-in-hand with the DMQ and retry settings on the input queue for this flow (queue retry settings multiply with the internal retry settings in the iflow, e.g. if the iflow tries 2 times internally every time we pass it a message and the broker is configured to retry the same message 3 times to the broker, then we might get 8 executions before the message is actually stopped being processed and moved to the DMQ [(1 initial attempt + 3 times retry) * 2 times retry inside the iflow = 8 processing attempts]):

SAP

< Queues | CILegacyAdapterIn

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Message VPN

Clients

Queues

Connectors

Access Control

Telemetry

Replay

Bridges

JMS JNDI

Try Me!

Advanced Messaging

Caches

Transactions

System

Clustering

Summary **Settings** Subscriptions Consumers Messages Queued Stats

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Alert Thresholds % #

Clear Raise

Owner

Non-Owner Permission

Maximum Consumer Count

Alert Thresholds % #

Clear Raise

Maximum Message Size (B)

Maximum Delivered Unacknowledged Messages per Flow


DMQ Name

Enable Client Delivery Count

Delivery Delay (sec)

Message Priority

Respect Message Priority

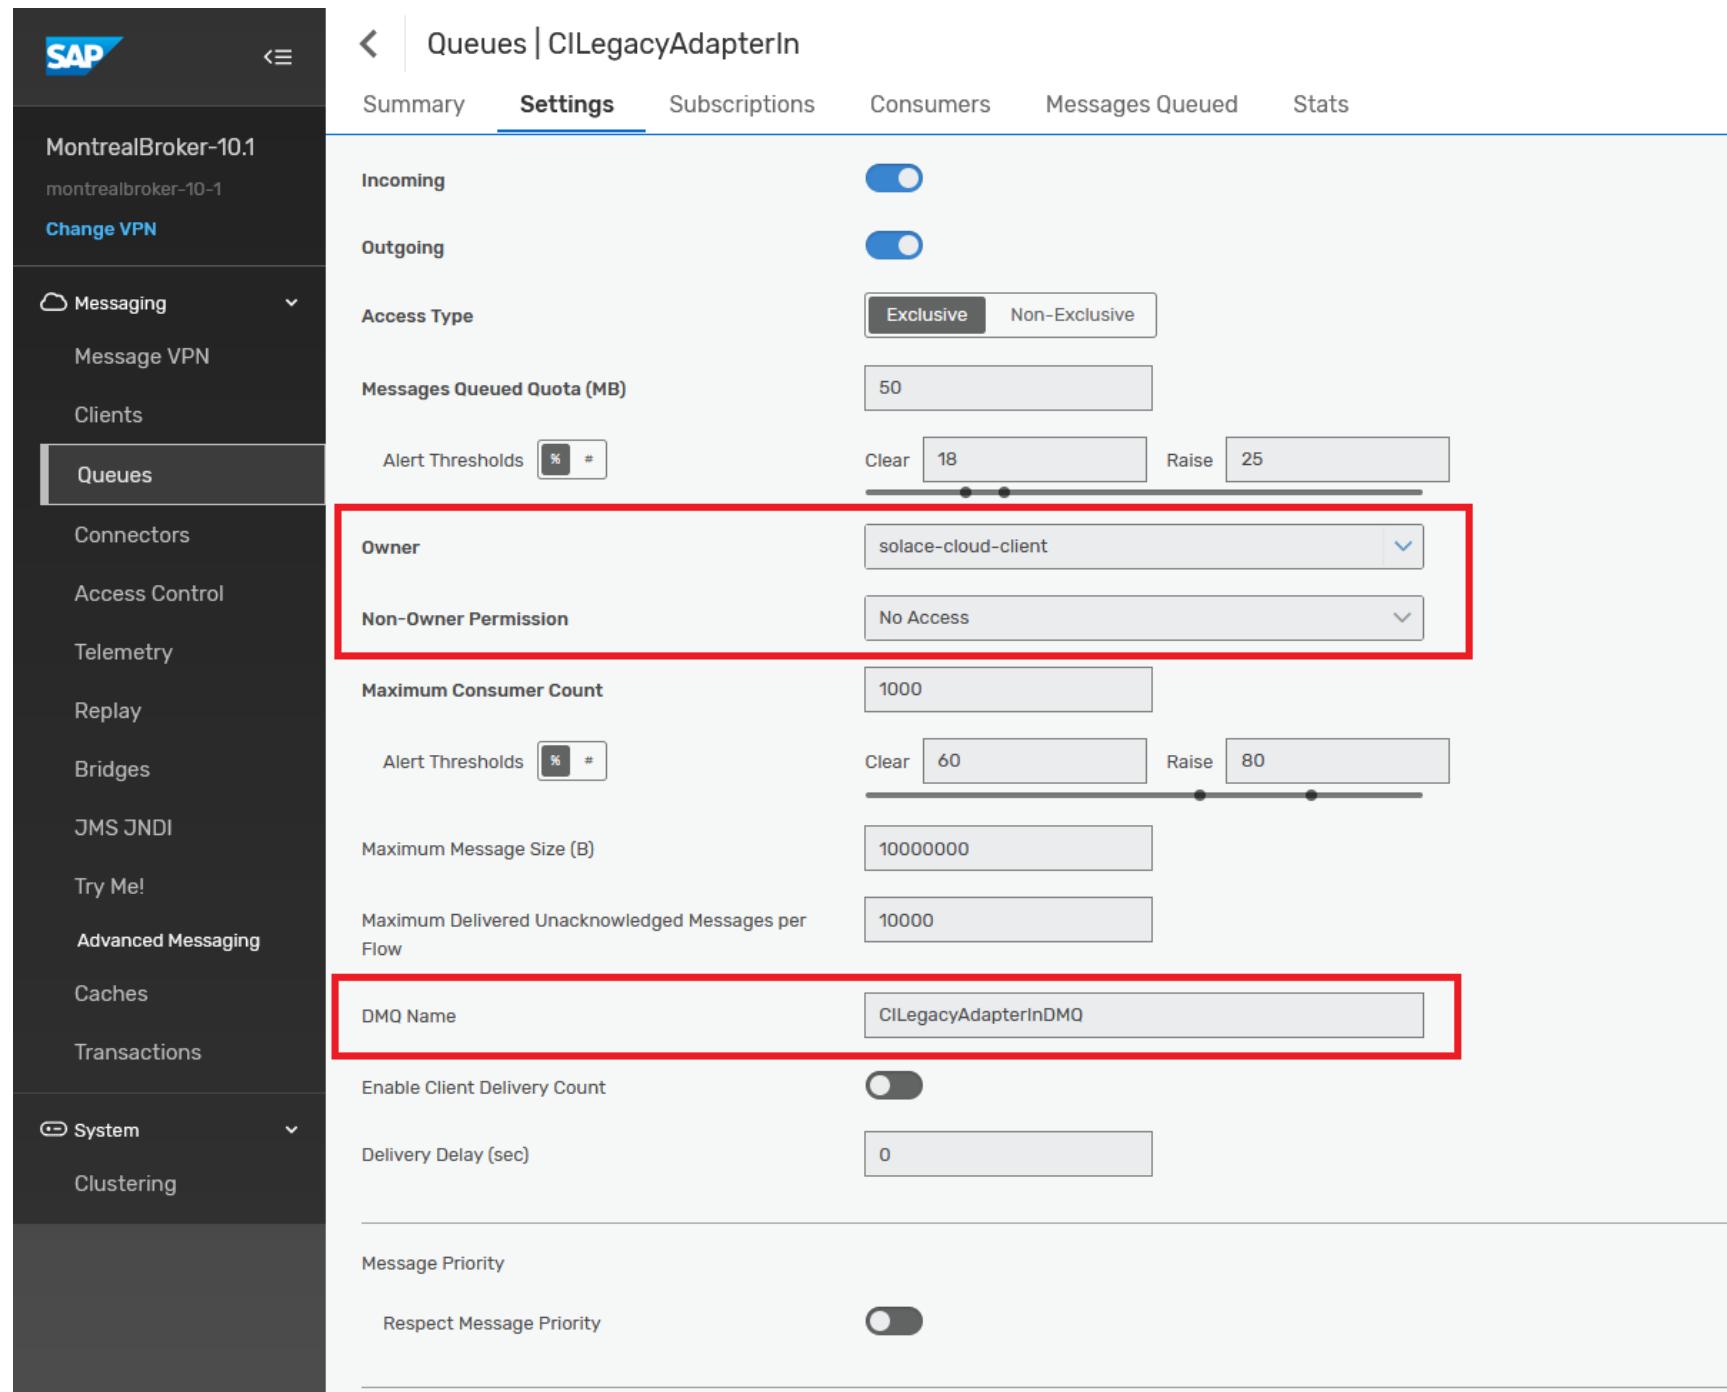

The screenshot shows the SAP Solace Cloud UI for managing queues. The left sidebar lists various configuration sections like Messaging, Clients, and System. The main area is titled 'Queues | CILegacyAdapterIn' and has tabs for Summary, Settings, Subscriptions, Consumers, Messages Queued, and Stats. The 'Settings' tab is active. Key settings shown include 'Incoming' and 'Outgoing' toggles, access type (Exclusive selected), message quota (50 MB), alert thresholds (18% clear, 25% raise), owner ('solace-cloud-client'), non-owner permission ('No Access'), maximum consumer count (1000), delivery delay (0 sec), and a red-highlighted DMQ name ('CILegacyAdapterInDMQ'). A 'Respect Message Priority' toggle is also present.

SAP

< Queues | CILegacyAdapterIn

Summary **Settings** Subscriptions Consumers Messages Queued Stats

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Messaging [Message VPN](#) [Clients](#) [Queues](#) [Connectors](#) [Access Control](#) [Telemetry](#) [Replay](#) [Bridges](#) [JMS JNDI](#) [Try Me!](#) [Advanced Messaging](#) [Caches](#) [Transactions](#)

System [Clustering](#)

Message Expiry

Respect TTL

Maximum TTL (sec)

Redelivery

Try Forever

Maximum Redelivery Count

Delayed Redelivery

Multiplier

Initial Delay

Maximum Delay

Congestion Control

Reject Messages to Sender on Discard

Reject Low Priority Messages

Reject Low Priority Messages Limit

Alert Thresholds

Clear Raise

Alert Thresholds

Clear Raise

Note: The delayed redelivery settings on the queue are not currently used by the AEM adapter. We can only set these settings in the adapter itself, but the queue needs to have a DMQ configured, a max redelivery count set (as opposed to retrying forever) and the events/messages have had to be published as DMQ eligible by the publisher.

2.

Configuring and deploying the AEMLegacyOutputAdapter iflow:

Remember the connectivity details for our AEM broker from the previous step? We will need those now.

The screenshot shows the SAP Mission Control interface with the 'MontrealBroker-10.1' cluster selected. The left sidebar includes links for Mission Control, Cluster Manager, Mesh Manager, Event Portal, Designer, Catalog, Runtime Manager, Event Insights, and SAP DEMO. The main content area has a header 'Connect Using a Supported Client Library' and a sub-header 'Client Libraries'. A red box highlights the 'Connection Details' section, which contains the following configuration:

- Username: solace-cloud-client
- Password: <https://solace-cloud-client:5723@solacecloud20>
- Message VPN: montrealbroker-10-1
- Secured SMF Host: <https://solace-cloud-client:56443>
- Public Internet: <https://solace-cloud-client:5723@solacecloud20.messaging.solacecloud.com>
- TrustStore: [Download PEM](#)

Below the connection details, there are sections for 'Solace Messaging' (using client libraries like Java, JCSMP, JavaRTO, JMS API, C, Python, Go, .NET, Spring Boot Java API, Spring Boot JMS API, and Spring Cloud Stream) and 'AMQP' (using open APIs).

- Hit configure at the top right and fill in the details to connect to your AEM broker service:

Configure "AEMLegacyOutputAdapter"

	Sender	Receiver
Connection	Sender: <input type="text" value="Sender"/> Adapter Type: <input type="text" value="AdvancedEventMesh"/> Host: <input type="text" value="tcp://montrealbroker.messaging.solace.cloud:55443"/> Message VPN: <input type="text" value="montrealbroker-10-1"/> Username: <input type="text" value="solace-cloud-client"/> Password Secure Alias: <input type="text" value="CABrokerUserPass"/>	

Configure "AEMLegacyOutputAdapter"

	Sender	Receiver
Target	Receiver: <input type="text" value="Receiver"/> Adapter Type: <input type="text" value="SFTP"/> Address: <input type="text" value="londonlab.solace.com:22234"/> Proxy Type: <input type="text" value="Internet"/> Authentication: <input type="text" value="User Name/Password"/> Credential Name: <input type="text" value="sftpuser"/>	

- Then hit deploy at the bottom right.

3. Check that your flow was deployed successfully and fix if necessary.


- Go to Monitor Artifacts -> Manage Integration Content -> All.
You should be seeing the AEMLegacyOutputAdapter flow as Started, similar to this view:

The screenshot shows the SAP Integration Suite interface. On the left, there is a navigation sidebar with icons for Home, Overview, Integration Content, Filter by Name or ID, and a search bar. Below this is a list of integration flows categorized by type and status.

Name	Status
AEMSalesOrderNotification	Started
AEMBusinessPartnerAddressCheck	Started
AEMLegacyOutputAdapter	Started
enack-idemo	Started
AdvancedEventMesh	Started
PubSubPlusEA	Started
Rainer test 01	Error
AEMLegacyInputAdapter	Error
BradTest	Error
SAP AEM Demo	Error
Slack	Started
SapBiposConnector	Started
AssignTechnician	Started
RabbitMQ	Started

The main panel displays the details for the "AEMSalesOrderNotification" integration flow. It shows the deployment information: Deployed On: Oct 05, 2023, 14:27:07, Deployed By: christian.holtfurth@solace.com, ID: AEMSalesOrderNotification, Version: 1.0.0, and Package: SOLACE-TIGER-TEAM. There are tabs for Endpoints, Status Details, Artifact Details, and Log Configuration. The Status Details tab indicates that the integration flow is deployed successfully. The Artifact Details tab provides links to Monitor Message Processing, View deployed Artifact, and Navigate to Artifact Editor. The Log Configuration section shows a dropdown for Log Level set to Info.

- Go to your AEM Console and navigate to Cluster Manager -> {your service} -> Manage and click on the Queues tile:

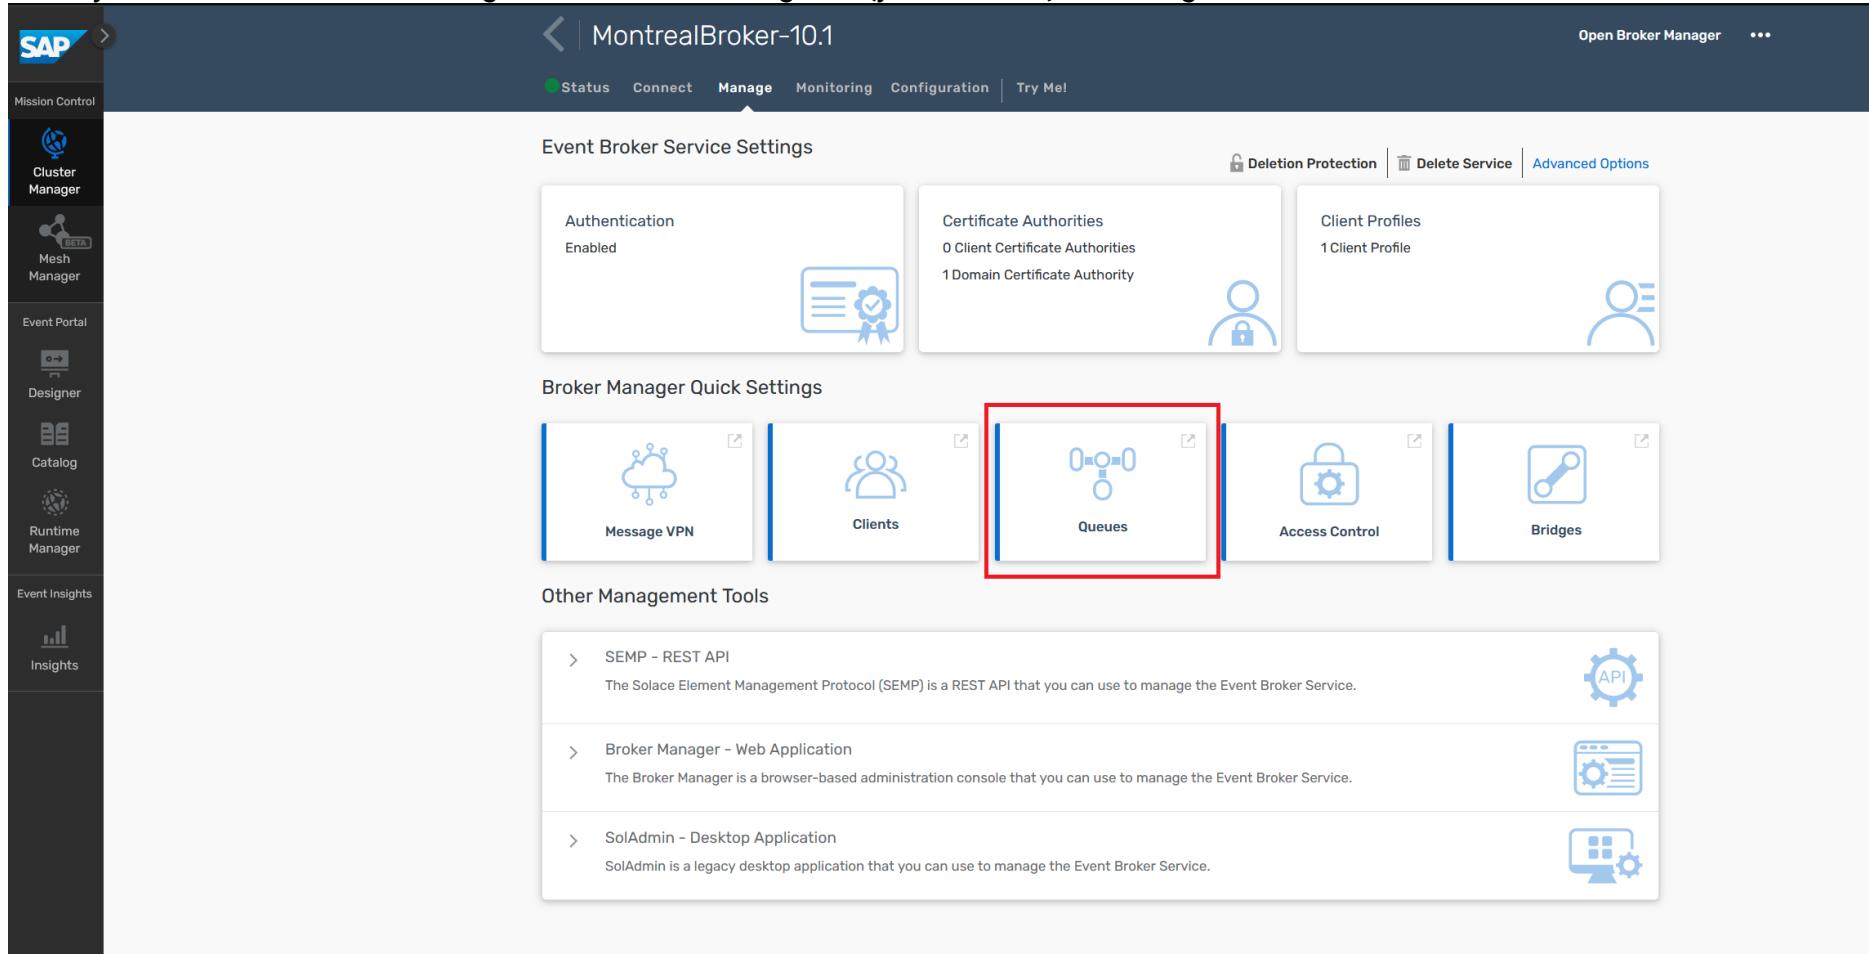

The screenshot shows the AEM Cluster Manager interface for the service 'MontrealBroker-10.1'. The left sidebar includes links for Mission Control, Cluster Manager (selected), Mesh Manager (BETA), Designer, Catalog, Runtime Manager, and Insights. The main content area displays 'Event Broker Service Settings' with sections for Authentication (Enabled), Certificate Authorities (0 Client Certificate Authorities, 1 Domain Certificate Authority), and Client Profiles (1 Client Profile). Below this is the 'Broker Manager Quick Settings' section, which includes tiles for Message VPN, Clients, Queues (highlighted with a red box), Access Control, and Bridges. At the bottom is the 'Other Management Tools' section, listing SEMP - REST API, Broker Manager - Web Application, and SolAdmin - Desktop Application.

Event Broker Service Settings

- Authentication: Enabled
- Certificate Authorities: 0 Client Certificate Authorities, 1 Domain Certificate Authority
- Client Profiles: 1 Client Profile


Broker Manager Quick Settings

- Message VPN
- Clients
- Queues** (highlighted)
- Access Control
- Bridges

Other Management Tools

- SEMP - REST API: The Solace Element Management Protocol (SEMP) is a REST API that you can use to manage the Event Broker Service.
- Broker Manager - Web Application: The Broker Manager is a browser-based administration console that you can use to manage the Event Broker Service.
- SolAdmin - Desktop Application: SolAdmin is a legacy desktop application that you can use to manage the Event Broker Service.

- Check that the AEMLegacyOutputAdapter input queue has at least one consumer connected to it.

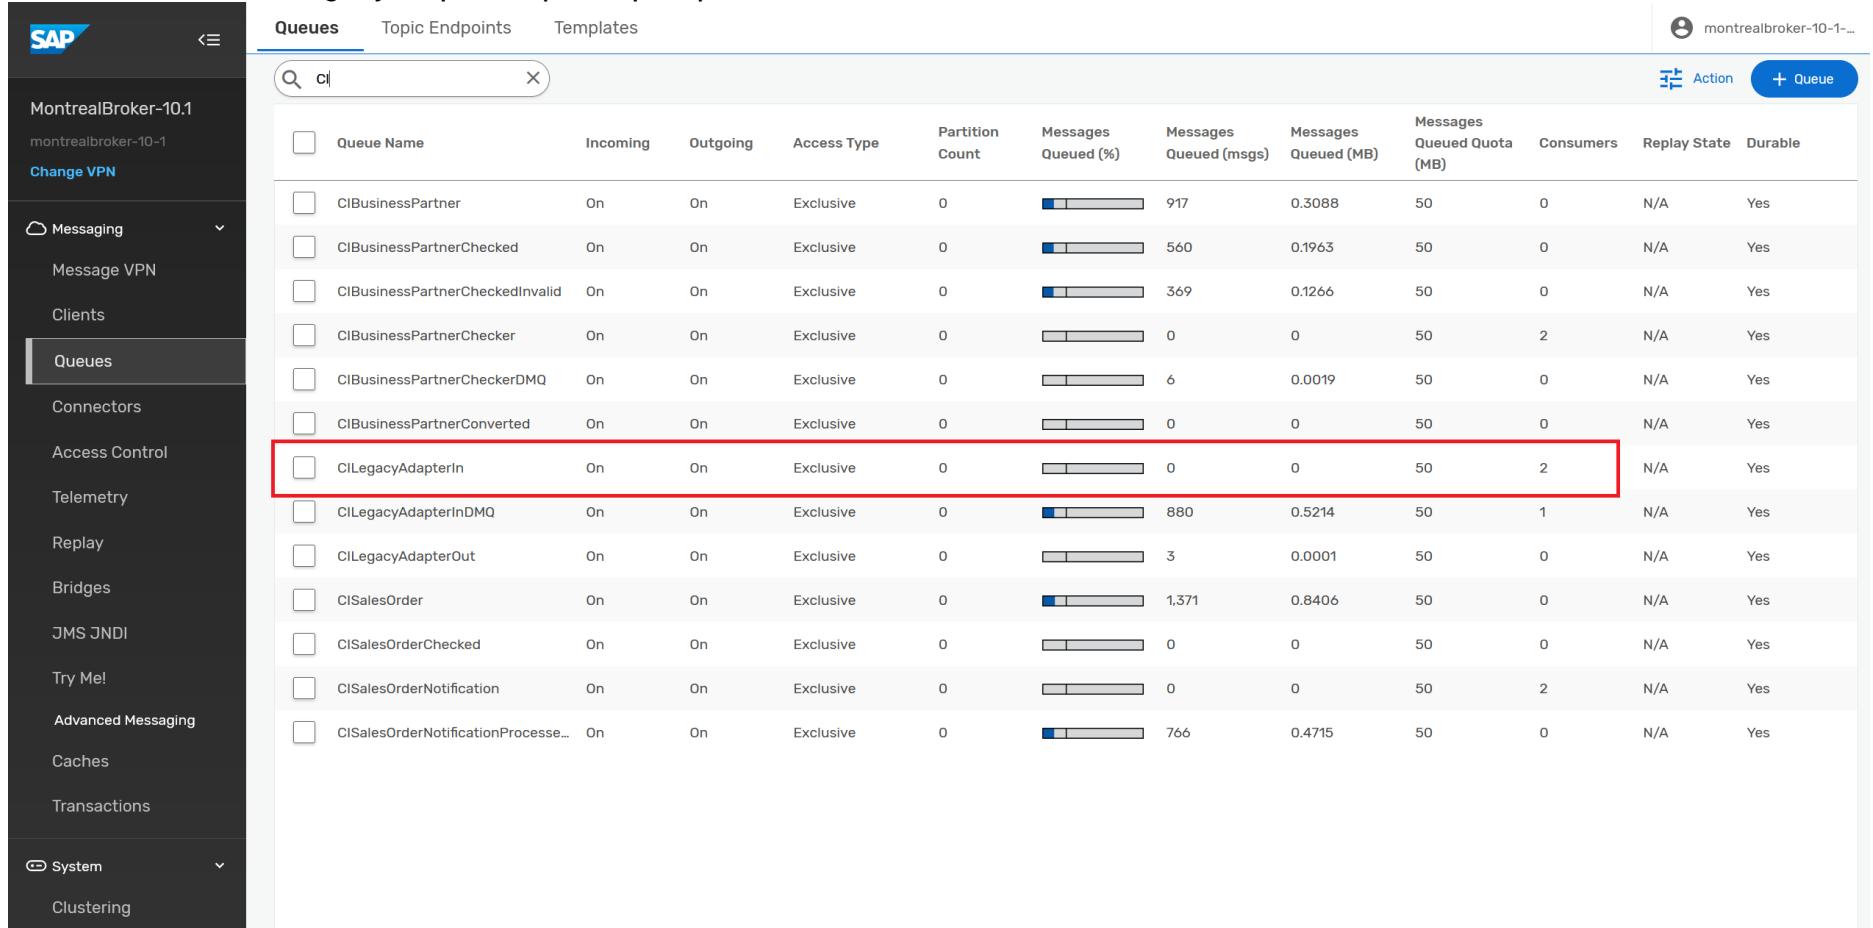

The screenshot shows the SAP Message Broker interface with the 'Queues' tab selected. The left sidebar includes sections like 'MontrealBroker-10.1', 'Change VPN', 'Messaging', 'Clients', 'Queues' (which is highlighted), 'Connectors', 'Access Control', 'Telemetry', 'Replay', 'Bridges', 'JMS JNDI', 'Try Me!', 'Advanced Messaging', 'Caches', 'Transactions', 'System', and 'Clustering'. The main area displays a table of queues with the following columns: Queue Name, Incoming, Outgoing, Access Type, Partition Count, Messages Queued (%), Messages Queued (msgs), Messages Queued (MB), Messages Queued Quota (MB), Consumers, Replay State, and Durable. A search bar at the top filters results for 'ci'. One specific row, 'CILegacyAdapterIn', is highlighted with a red box. This row shows 0 consumers connected to the queue.

Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
CIBusinessPartner	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	917	0.3088	50	0	N/A	Yes
CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	560	0.1963	50	0	N/A	Yes
CIBusinessPartnerCheckedInvalid	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	369	0.1266	50	0	N/A	Yes
CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	0	0	50	2	N/A	Yes
CIBusinessPartnerCheckerDMQ	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	6	0.0019	50	0	N/A	Yes
CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	0	0	50	0	N/A	Yes
CILegacyAdapterIn	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	0	0	50	2	N/A	Yes
CILegacyAdapterInDMQ	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	880	0.5214	50	1	N/A	Yes
CILegacyAdapterOut	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	3	0.0001	50	0	N/A	Yes
CISalesOrder	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	1,371	0.8406	50	0	N/A	Yes
CISalesOrderChecked	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	0	0	50	0	N/A	Yes
CISalesOrderNotification	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	0	0	50	2	N/A	Yes
CISalesOrderNotificationProcesse...	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc; border: 1px solid black;"></div>	766	0.4715	50	0	N/A	Yes

Congrats!

If you can see your consumers connected to your queue, then your iflow is successfully up and running waiting for event messages to arrive. 😊

Complete the success path for this scenario (OPTIONAL step for later)

Only complete this step *after* you have seen the flow interact end to end with the UI5 components and the BPA process in this Dead Message Queue (DMQ) error handling scenario.


The legacy output adapter is simulating appending events to a file via an SFTP adapter, which could be imported to a legacy system. **The workshop scenario doesn't require a working sftp destination**, as we are using this iflow to simulate a failure to demonstrate the retry and error handling capabilities of AEM. The iflow will try a few times to deliver each event to the SFTP destination. After 3 failed attempts messages will be moved to a Dead Message Queue for manual processing by a UI5 and Business Process Automation workflow.

If, **AFTER** successful demonstration of the error handling, you would still like to see a successful delivery of events to a file via sftp, you will need an sftp server and sftp credentials to configure the flow with a valid endpoint (sftp server address and username password) and import the ssh identidy into .

Security Configuration

Let's go back and configure the security details we will need to connect to the SFTP server.

- Go to Integration Suite Monitor Artifacts -> Manage Security -> Security Material.

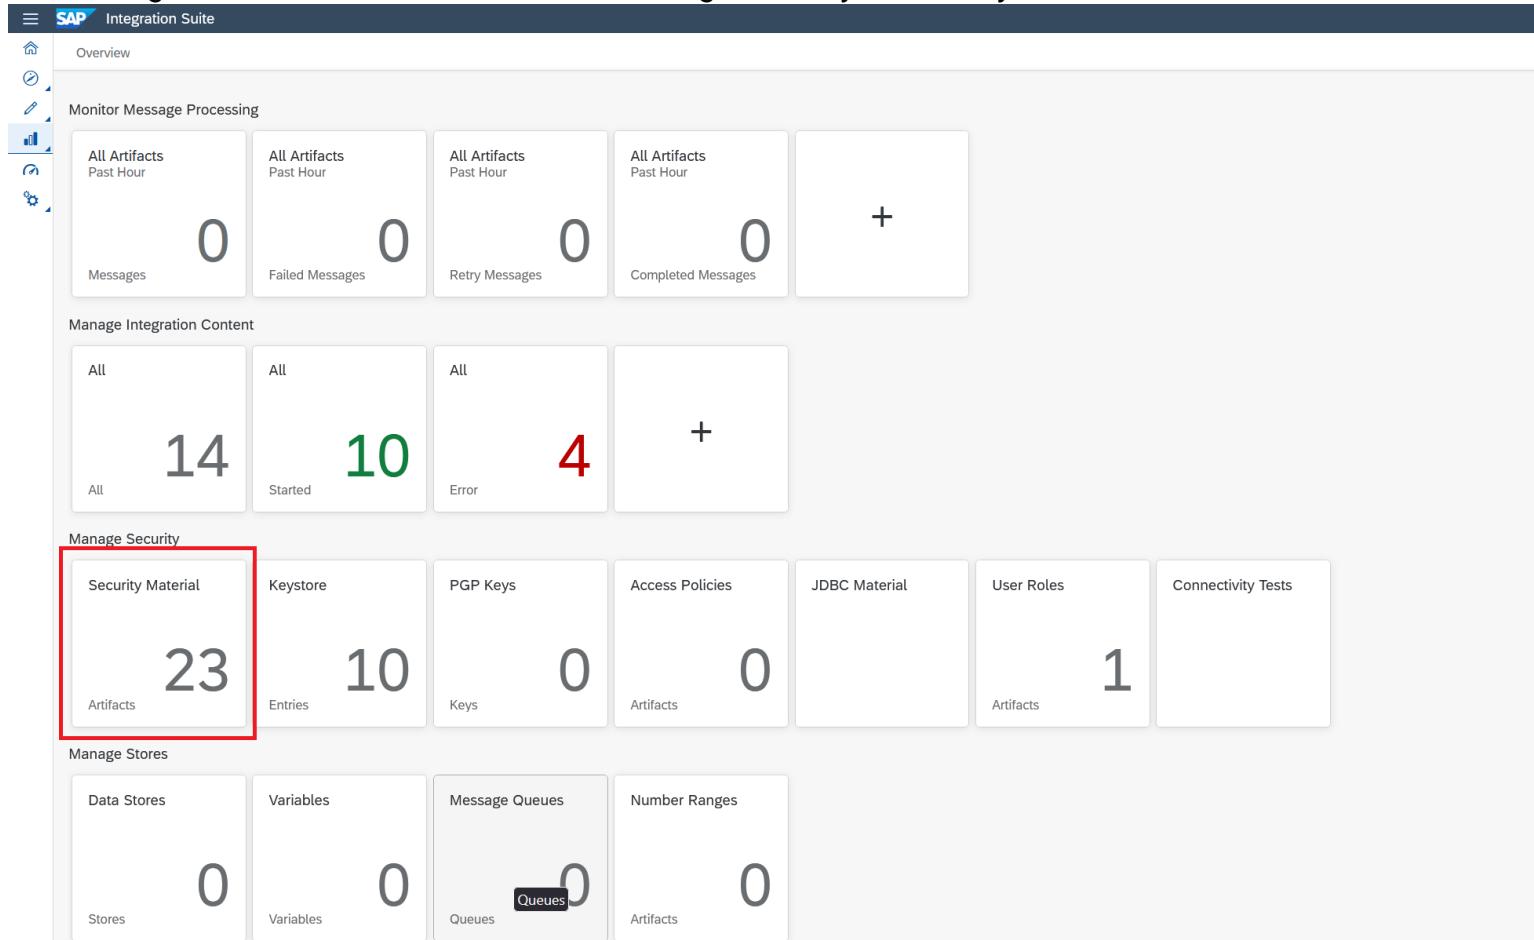

- Update UserCredentials `sftpuser` and store your SFTP servers user and password credentials.

- You may also need to create a known.hosts file, populate it with your SFTP server's ssh id if you want to complete this optional step of successfully sending events to a file via SFTP (success path of the AEMLegacyOutputAdapter flow). See [this post](#) by Pravesh Shukla if you need help with this step.

Configure and Deploy your iflows

Go back to your iflow, reconfigure the SFTP adapter with your SFTP servers address and redeploy.

5. Automation of AEM setup via APIs and CI/CD (OPTIONAL)

Advanced Event Mesh APIs & CI

All configuration within AEM can be automated using a combination of two APIs:

- AEM Cloud API (for any configuration on the AEM Cloud Console)
- The broker's SEMP API (for any configuration on the broker service directly)

The documentation of these APIs can be found in the AEM docs [here](#)

Both these APIs are RESTful and can be used in numerous ways to pull/push configuration like queues and client configuration through CI/CD pipelines or configure/promote Event Portal content in step with code promotion from environment to environment.

Sample CI/CD Configuration Tool

There are many options/tools that can be used to automate these tasks, like Jenkins, Ansible, scripts, Terraform etc. For the purpose of this exercise we are going to use a sample application written in CAP that has the nice advantage of running in our

browser that we can point at our broker's API and feed some configuration files.

The screenshot shows a web-based configuration tool. At the top, there are four input fields: "Semp Base Path", "VPN Name", "Username", and "Password". Below these is a large text area labeled "Config Json Payload" where configuration JSON can be pasted. To the right of this area is a blue "Create Configuration" button. A red callout at the bottom of the form area contains the text "Key in all the information above to create configuration".

Pushing AEM Configuration for Scenario 2 & 3

Here we will look at one example for automating our broker configuration for scenario 2 & 3 respectively, which will save us some time not having to repeat similar configuration steps like in scenario 1 again and again.

The AEM Rapid Pilot - Automatic Configuration can be accessed [here](#)

We will need some details from your AEM service again to connect the configuration tool with your AEM service. Let's head to our Advanced Event Mesh Console and go to Cluster Manager, select the service that you want to connect your Integration Suite flows to and go to the "Manage" tab. Take a note of the connectivity details underneath "SEMP - REST API" (click on the section to open it up):

The screenshot shows the SAP Advanced Event Mesh Cluster Manager interface for the service 'MontrealBroker-10.1'. The left sidebar includes links for Mission Control, Cluster Manager (selected), Mesh Manager (Beta), Event Portal, Designer, Catalog, Runtime Manager, KPI, Event Insights, and SAP DEMO.

The main content area has tabs for Status, Connect, Manage (selected), Monitoring, Configuration, and Try Mel. It features 'Broker Manager Quick Settings' for Message VPN, Clients, Queues, Access Control, and Bridges. Below this is a section titled 'Other Management Tools'.

A red box highlights the 'SEMP - REST API' section in the 'Other Management Tools' area. This section contains the following information:

- SEMP - REST API:** Describes the Solace Element Management Protocol (SEMP) as a REST API for managing the Event Broker Service.
- Manage with SEMP:** Includes a 'Base path to the config API' field with two URLs:
 - Public Internet: <https://mr-connection-qhgik3f2ezp.messaging.solace.cloud:943/SEMP/v2/config>
 - Internal: <https://montrealbroker.messaging.solace.cloud:943/SEMP/v2/config>
- SEMP Credentials:** Fields for 'Message VPN Name' (set to 'montrealbroker-10-1'), 'Username' (set to 'montrealbroker-10-1-admin'), and 'Password' (represented by a masked asterisk).
- Help links:** Buttons for 'Spec', 'Help', and 'Tutorials'.

Below this section are links for 'Broker Manager - Web Application' (described as a browser-based administration console) and 'SolAdmin - Desktop Application'.

And copy & paste the URL, vpn name, admin username and password into the config tool:

The screenshot shows a web-based configuration tool with the following interface elements:

- Header:** The Solace logo on the left, the title "AEM Rapid Pilot - Automatic Configuration" in the center, and the SAP logo on the right.
- Input Fields (top row):**
 - 1g.solace.cloud:943/SEMP/v
 - montrealbroker-10-1
 - montrealbroker-10-1-admin
 - (redacted password)
- Configuration JSON Preview:** A large text area containing the following JSON configuration:

```
    "subscriptions": [
        "sap.com/salesorder/create/V1/>"
    ],
},
{
    "name": "CISalesOrderNotificationProcessed",
    "type": "exclusive",
    "owner": "solace-cloud-client",
    "subscriptions": [
        "sap.com/salesorder/notified/V1/>"
    ]
}
```

Buttons:

- A large "Create Configuration" button at the bottom of the preview area.

Please download the configuration file from [AEM configuration file](#) and copy & paste the content into the "Config JSON Payload" input field.

Hit "Create Configuration" to apply this config to your broker.

6. Scenario 2 - SalesOrder: AEMSONotificationV2 (mandatory)

Setup/Configure Dependency Services

We will give you connectivity details to one of our brokers where we have an iflow deployed that is configured to send emails via an external email service to enable us to automatically send welcome/confirmation emails.

Setup/configure SAP AEM broker service

You can skip over this step for configuring the AEM queues if you have used the CI/CD tool in section 5 to automate the configuration in the previous step. Resume with the Integration Suite flow configuration next.

In this section we will create the required input queues for your integration flows.

- Go to Cluster Manager -> {your service} -> Manage -> Queues - to open the Broker UI

Welcome to SAP Integration Suite, advanced event mesh

New Event Portal 2.0 : On

Event Management

- Event Portal**
 - Designer**
Design your event driven architecture components
 - Catalog**
Browse or search for events, schemas, and applications across your enterprise
 - Runtime Event Manager**
Discover, govern, and visualize the flow of events between your applications in each environment

Event Streaming

- Mission Control**
 - Cluster Manager**
Control the lifecycle of your Event Broker Services
 - Mesh Manager**
Create and manage your event meshes

Event Insights

- Insights**

SAP DEMO
<https://sapdemo.solace.cloud/services>

Services

[Create Service](#)

Filter by service name Only show my services

All Services (14)

eu1 SAP DEMO (eu-central-1) Enterprise 250 Class Christian Holtfurther ● Running	us1 GKE - US Central (Iowa) Enterprise 250 Class Christian Holtfurther ● Running	aws ap1 EKS - Asia Pacific (Singapore) Enterprise 250 Class Christian Holtfurther ● Running
aws MontrealBroker-10.1 EKS - Canada Central(Montreal) Developer Class Scott Dillon ● Running	US-Central AKS - Central US (Iowa) Developer Class Karl Ossoinig ● Running	aws sa1 EKS - Africa (Cape Town) Enterprise 250 Class Christian Holtfurther ● Running
cn1 AKS - East Asia (Hong Kong) Enterprise 250 Class Christian Holtfurther ● Running	aws BTP Hackathon September EKS - Canada Central(Montreal) Developer Class brad.caldwell@solace.com ● Running	MyMesh-Svc1 AKS - East US 2 (Virginia) Developer Class Karl Ossoinig ● Running
aws MyMesh-Svc2 EKS - US West (Oregon) Developer Class Karl Ossoinig ● Running	aws My-First-Service EKS - Canada Central(Montreal) Enterprise 250 Class Andrea Kelso ● Running	test GKE - Asia South (Mumbai) Enterprise 1K Class Christian Holtfurther ● Running
testbrokersap1 GKE - EU(London) Enterprise 1K Class Christian Holtfurther ● Running	Karls-special-broker-just-for-... AKS - Canada Central (Toronto) Enterprise 5K Class Karl Ossoinig ● Running	

MontrealBroker-10.1

Status Connect **Manage** Monitoring Configuration Try Me!

Open Broker Manager ⋮

Event Broker Service Settings

Deletion Protection Delete Service Advanced Options

Authentication Enabled 

Certificate Authorities 0 Client Certificate Authorities 1 Domain Certificate Authority 

Client Profiles 1 Client Profile 

Broker Manager Quick Settings

Message VPN 

Clients 

Queues 

Access Control 

Bridges 

Other Management Tools

SEMP – REST API 
The Solace Element Management Protocol (SEMP) is a REST API that you can use to manage the Event Broker Service.

Broker Manager – Web Application 
The Broker Manager is a browser-based administration console that you can use to manage the Event Broker Service.

SolAdmin – Desktop Application 
SolAdmin is a legacy desktop application that you can use to manage the Event Broker Service.

To create the queues in the next sections, repeatedly click on the "+ Queue" button to bring up the create queue dialog.

SAP
montrealbroker-10-1...

Queues
Topic Endpoints
Templates
Action
+ Queue

<input type="checkbox"/>	Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
<input type="checkbox"/>	#partner/6nvj	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	#clusterer5b2ca535481099a637...	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	800,000	1	N/A	Yes
<input type="checkbox"/>	AFMSPILOTASAPIQ	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	172,320	74.03	5,000	0	N/A	Yes
<input type="checkbox"/>	AFMSALESORDERADP002	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	BraDDMQ	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	2	0.0012	5,000	0	N/A	Yes
<input type="checkbox"/>	BraUDemo	On	On	Non-Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	BradTest	On	Off	Non-Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartner	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	1,110	0.3937	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	664	0.2895	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckedinvalid	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	443	0.1659	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckerDMO	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	5	0.0000	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterIn	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterInDMO	On	Off	Exclusive	0	<div style="width: 100%;">100%</div>	28	0.0487	50	0	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterOut	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CISalesOrder	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	20	0.0187	50	0	N/A	Yes
<input type="checkbox"/>	CISalesOrderChecked	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes

Page
First
Next >
Last Update: 2023-10-21 08:32:04
Refresh Data
Show
20

Provide the name as given (in the next sections).

Create Queue

Queue Name

Cancel

Create

Open up the "Advanced Queue Settings" section, then follow along and provide the details as showing in the screenshots below.

The screenshot shows the 'Edit Queue Settings' dialog for a queue named 'TestQueue'. The 'Incoming' toggle switch is turned on. The 'Outgoing' toggle switch is turned on. Under 'Access Type', the 'Exclusive' button is selected. The 'Messages Queued Quota (MB)' field contains '5000'. The 'Owner' dropdown menu is open. The 'Non-Owner Permission' dropdown menu is open and shows 'Consume'. The 'Maximum Consumer Count' field contains '1000'. In the top right corner, there are 'Cancel' and 'Apply' buttons. A red box highlights the 'Show Advanced Settings' button in the top right corner of the main settings area.

Create the following queues and provide the details as given.

1. CISalesOrderNotification queue

- **Name:** CISalesOrderNotification
- **Owner:** solace-cloud-client
- **Non-Owner Permission:** No access
- **Redelivery:** enabled
- **Try Forever:** disabled

- Maximum Redelivery Count: 3

SAP

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

[Messaging](#) ▾
Message VPN
Clients
Queues

Connectors
Access Control
Telemetry
Replay
Bridges
JMS JNDI
Try Me!
Advanced Messaging
Caches
Transactions

[System](#) ▾
Clustering

Queues | CISalesOrderNotification

Summary **Settings** Subscriptions Consumers Messages Queued Stats

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Alert Thresholds Clear Raise

Owner

Non-Owner Permission

Maximum Consumer Count

Alert Thresholds Clear Raise

Maximum Message Size (B)

Maximum Delivered Unacknowledged Messages per Flow

DMQ Name

Enable Client Delivery Count

Delivery Delay (sec)

Message Priority
Respect Message Priority

SAP

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

[Messaging](#) ▾
Message VPN
Clients
Queues
Connectors
Access Control
Telemetry
Replay
Bridges
JMS JNDI
[Try Me!](#)
Advanced Messaging
Caches
Transactions

[System](#) ▾
Clustering

Queues | CISalesOrderNotification

Summary **Settings** Subscriptions Consumers Messages Queued Stats

Message Expiry

Respect TTL

Maximum TTL (sec)

Redelivery

Try Forever

Maximum Redelivery Count

Delayed Redelivery

Multiplier

Initial Delay

Maximum Delay

Congestion Control

Reject Messages to Sender on Discard ▼

Reject Low Priority Messages


Reject Low Priority Messages Limit

Alert Thresholds % # Clear 60 Raise 80 

Disaster Recovery

Consumer Acknowledgment Propagation

- Once the queue is created, click on the queue name in the list, navigate to the Subscriptions tab and open the subscriptions dialog.

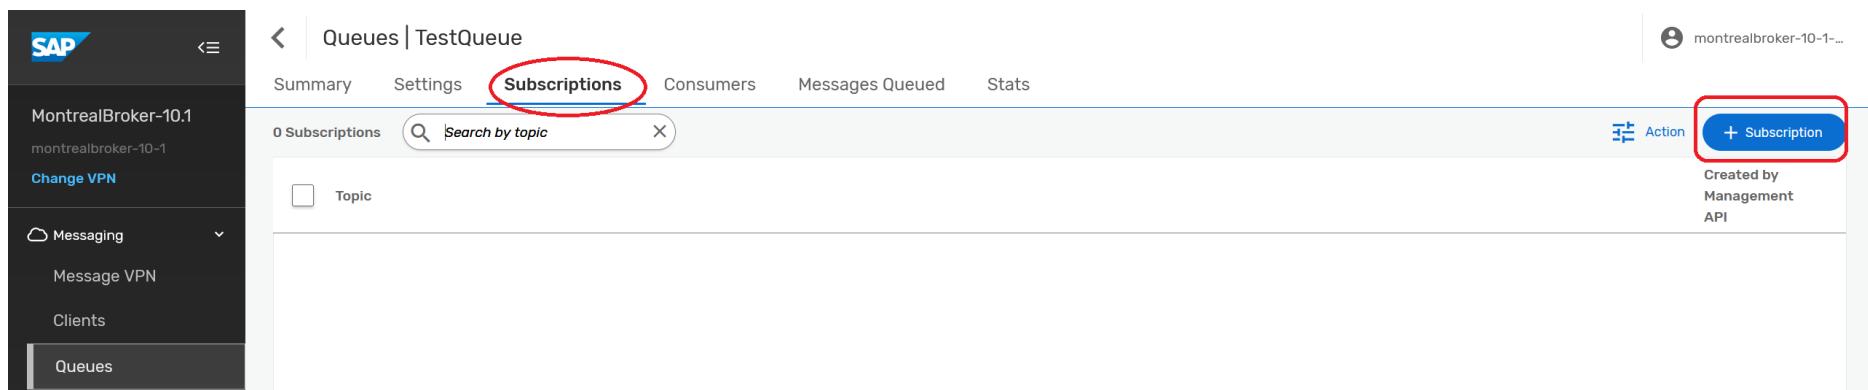

The screenshot shows the SAP Fiori interface for managing queues. On the left, there's a sidebar with navigation links: MontrealBroker-10.1, Change VPN, Messaging (Message VPN, Clients, Queues), and Queues. The main area is titled 'Queues | TestQueue' and has tabs for Summary, Settings, Subscriptions (which is active and highlighted with a red circle), Consumers, Messages Queued, and Stats. Below the tabs, it says '0 Subscriptions' and features a search bar with 'Search by topic'. In the bottom right corner of the main content area, there's a blue button with a plus sign and the text '+ Subscription' (also highlighted with a red circle). The status bar at the top right indicates the session is for 'montrealbroker-10-1...'.

- Add the following subscriptions to the queue
- `sap.com/salesorder/create/v1/>`

The screenshot shows the SAP Solace Cloud interface. On the left, there's a sidebar with the SAP logo and navigation links: MontrealBroker-10.1, montrealbroker-10-1, Change VPN, Messaging (selected), Message VPN, Clients, and Queues (selected). The main area is titled 'Queues | CISalesOrderNotification' and has tabs for Summary, Settings, Subscriptions (selected), Consumers, Messages Queued, and Stats. Under the Subscriptions tab, it says '1 Subscriptions' and shows a search bar with 'Search by topic'. A single subscription is listed with the topic 'sap.com/salesorder/create/V1/>'.

2. CISalesOrderNotificationProcessed queue (optional - if you want to see/check the output of the flow)

- Name: CISalesOrderNotificationProcessed
- Owner: solace-cloud-client
- Non-Owner Permission: No access

The screenshot shows the SAP Solace Cloud interface. On the left, there's a sidebar with a dark background containing the SAP logo, the broker name "MontrealBroker-10.1", and a "Change VPN" button. Below these are several navigation items: "Messaging" (with a dropdown arrow), "Message VPN", "Clients", "Queues" (which is highlighted with a white background), "Connectors", "Access Control", "Telemetry", "Replay", and "Bridges". The main content area has a header "Queues | CISalesOrderNotificationProcessed" with a back arrow. Below the header is a navigation bar with tabs: "Summary", "Settings" (which is underlined in blue, indicating it's active), "Subscriptions", "Consumers", "Messages Queued", and "Stats". The "Settings" tab contains the following configuration options:

- Incoming:** A toggle switch is turned on.
- Outgoing:** A toggle switch is turned on.
- Access Type:** A radio button group with "Exclusive" selected and "Non-Exclusive" as an option.
- Messages Queued Quota (MB):** A text input field set to "50".
- Owner:** A dropdown menu set to "solace-cloud-client".
- Non-Owner Permission:** A dropdown menu set to "No Access".
- Maximum Consumer Count:** A text input field set to "1000".

- Once the queue is created, click on the queue name in the list, navigate to the Subscriptions tab and open the subscriptions dialog.

SAP

Queues | TestQueue

MontrealBroker-10.1

montrealbroker-10-1

Change VPN

Messaging

Message VPN

Clients

Queues

Summary

Settings

Subscriptions

0 Subscriptions

Search by topic

Action

+ Subscription

Created by Management API

- Add the following subscriptions to the queue
- sap.com/salesorder/notified/V1/>

SAP

Queues | CISalesOrderNotificationProcessed

MontrealBroker-10.1

montrealbroker-10-1

Change VPN

Messaging

Message VPN

Clients

Queues

Summary

Settings

Subscriptions

1 Subscriptions

Search by topic

Topic

sap.com/salesorder/notified/V1/>

Configure Your Integration Suite Flow

Continue here, if you have completed the CI/CD section or configured your queues manually in the step above.

One thing, before we jump back into Integration Suite: Let's head to our Advanced Event Mesh Console and go to Cluster Manager, select the service that you want to connect your Integration Suite flows to and go to the "Connect" tab. Take a note of the connectivity details underneath "Solace Messaging" (click on the section to open it up):

The screenshot shows the SAP Mission Control interface with the 'Cluster Manager' selected in the sidebar. The main page displays the 'MontrealBroker-10.1' cluster. The 'Connect' tab is active. Under the 'Connect Using a Supported Client Library' section, the 'Solace Messaging' option is expanded, revealing a list of client libraries. A red box highlights the 'Connection Details' section for the 'Solace Java API' entry, which includes fields for Username, Password, Message VPN, Secured SMF Host, Public Internet, TrustStore, and Download PEM.

Client Libraries	Connection Details
Solace Java API	Username: solace-cloud-client Password: https://solacecloudclient: Message VPN: montrealbroker-10-1 Secured SMF Host: Public Internet: TrustStore: Download PEM
Solace JCSMP API	
Solace JavaRTO	
Solace JMS API	
Solace C	
Solace Python	
Solace Go API	
Solace .NET	
Spring Boot Java API	
Spring Boot JMS API	
Spring Cloud Stream	
Solace Web Messaging	
AMQP	

We will need them in the next steps when configuring our flows.


The connect tab lists all the various connectivity details for the various supported protocols. Our Cloud Integration AEM adapter uses the Solace Messaging protocol, which is AEM's very own protocol with a broad feature support. Each AEM service also comes with a default client user called `solace-cloud-client` that is configured for convenience reasons and is allowed to publish and subscribe to all topics. We will be using this user for all our iflows. In a real production environment where security is important, you or your administrator will likely have this user disabled and will be creating separate users for each of the applications that connect to the AEM broker. Or this may even be deferred to an external authentication service over LDAP or OAuth.

Now that we have set up all the prerequisites for our Integration Suite flows, we can take a look at the individual flows and prepare them for deployment.

0) - Security Configuration

Let's configure the security details we will need to connect to the various services like AEM & email service iflow's AEM broker.


- Go to Integration Suite Monitor Artifacts -> Manage Security -> Security Material.

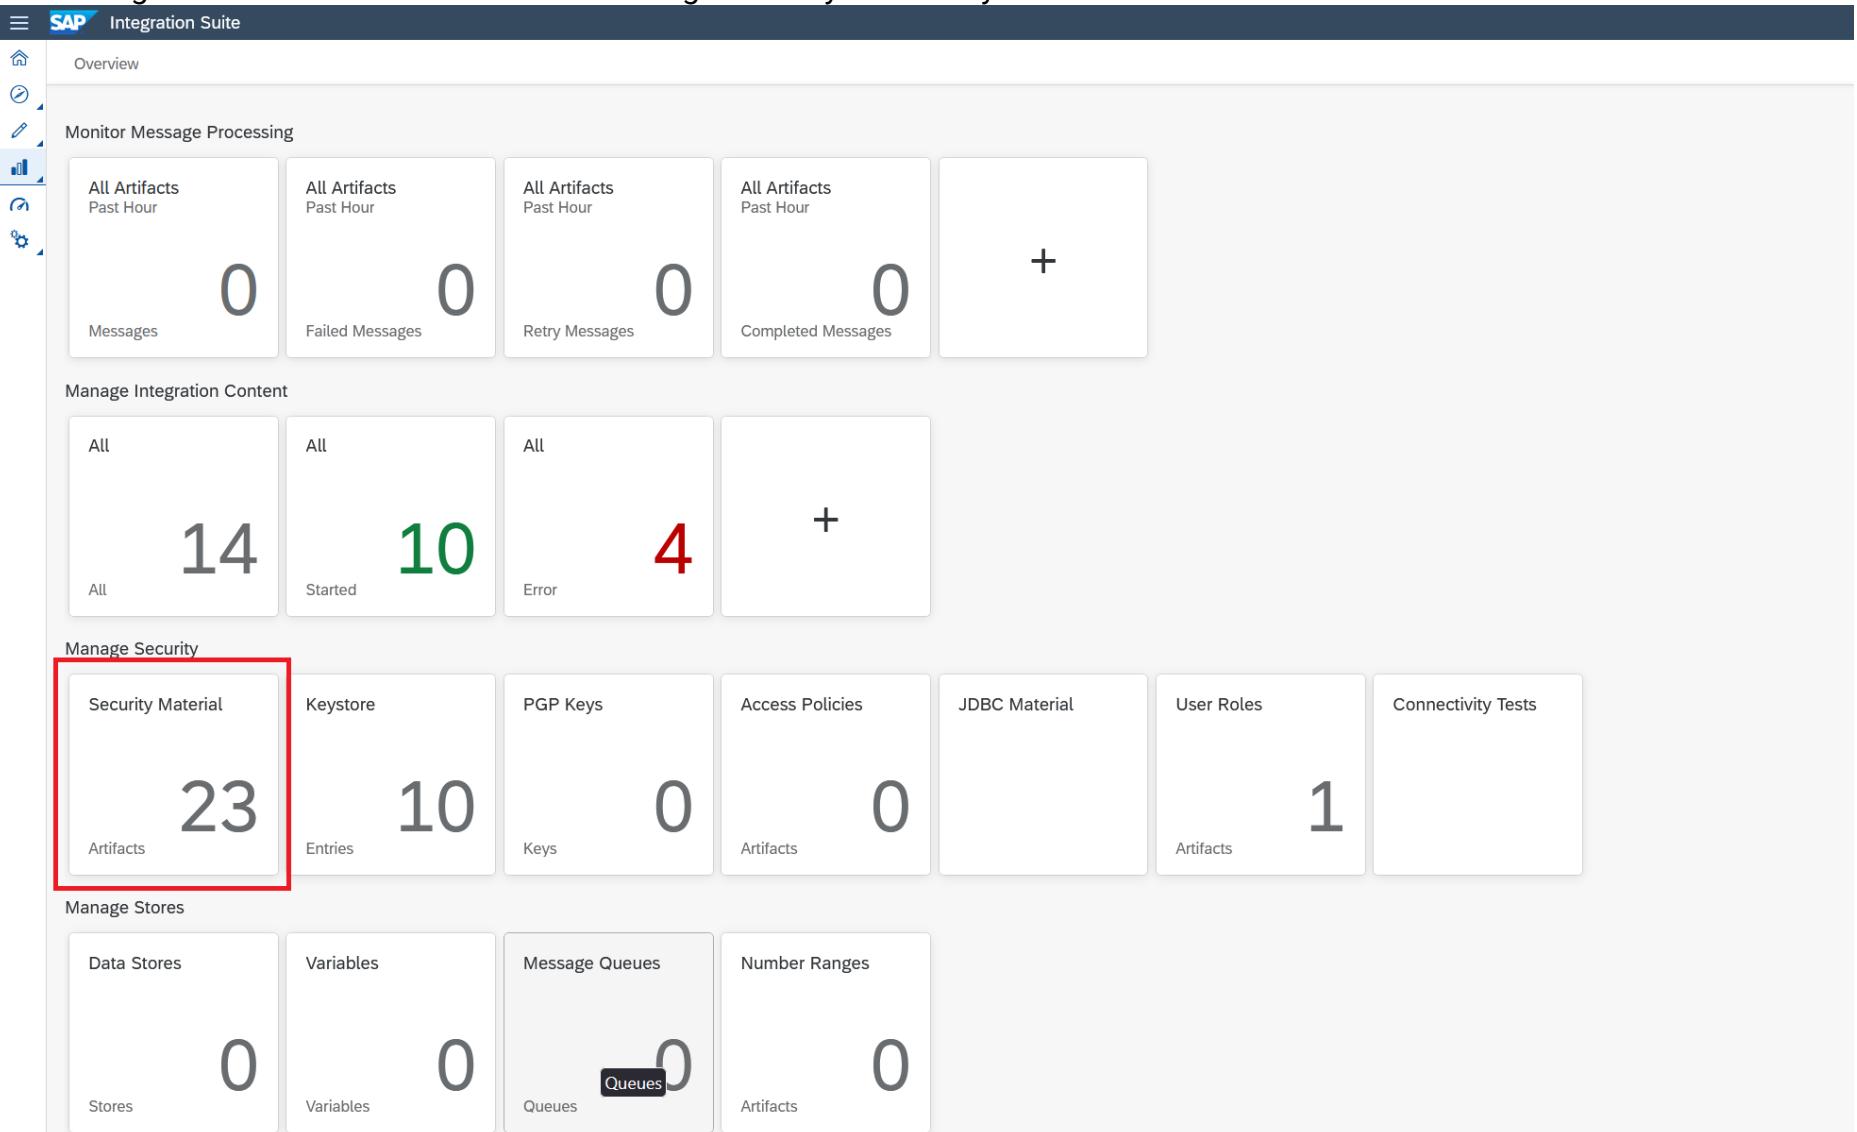

- In here, create security credentials for your AEM broker service (**if not already done**) & email server.
- Create SecureParameter `CABrokerUserPass` and store the password for your `solace-cloud-client` application user credentials.
- Create another SecureParamter `email-profile-pwd` and store the password we have handed out in the workshop.

Configure/Deploy AEMSONNotificationV2

1. Let's take a look at the AEMSONNotificationV2 iflow:

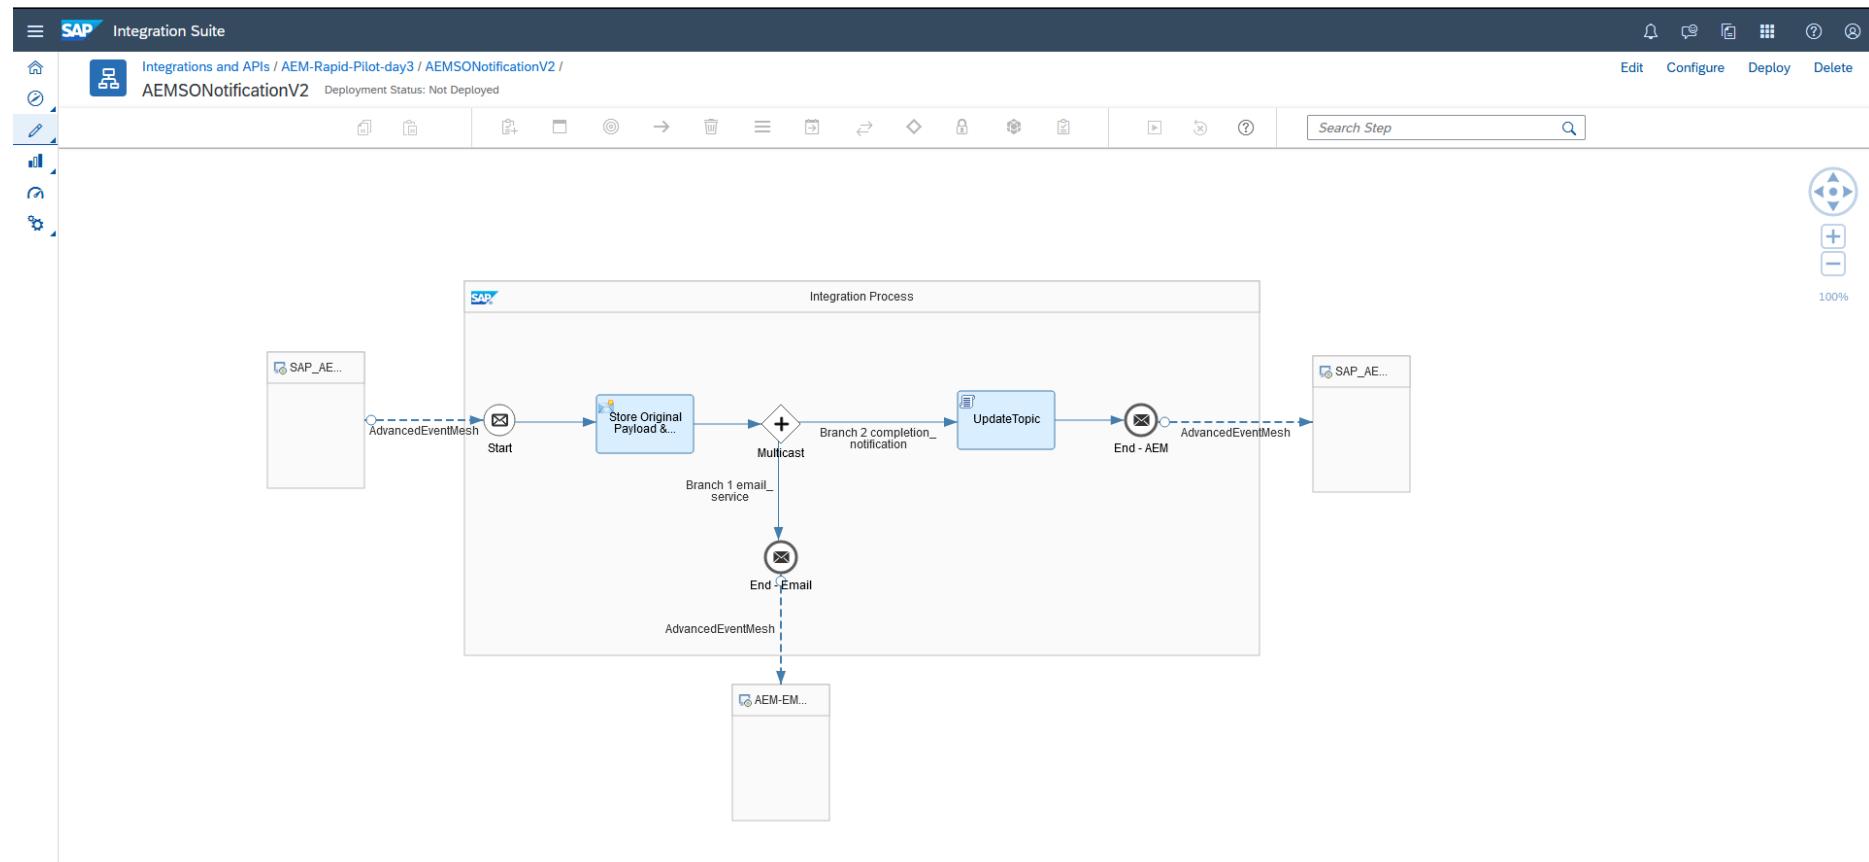


This flow gets triggered by Sales Order events and does two things:

- It creates an email request and by forwarding this event to an email service iflow on another broker (hosted by us) on topic `sap.com/emailnotification/created/V1`.

b) It sends a new event to `sap.com/salesorder/notified/V1/{salesOrg}/{distributionChannel}/{division}/{customerId}` to indicate that the email request was successfully forwarded.

2. Configuring and deploying the AEMSONNotificationV2 iflow:

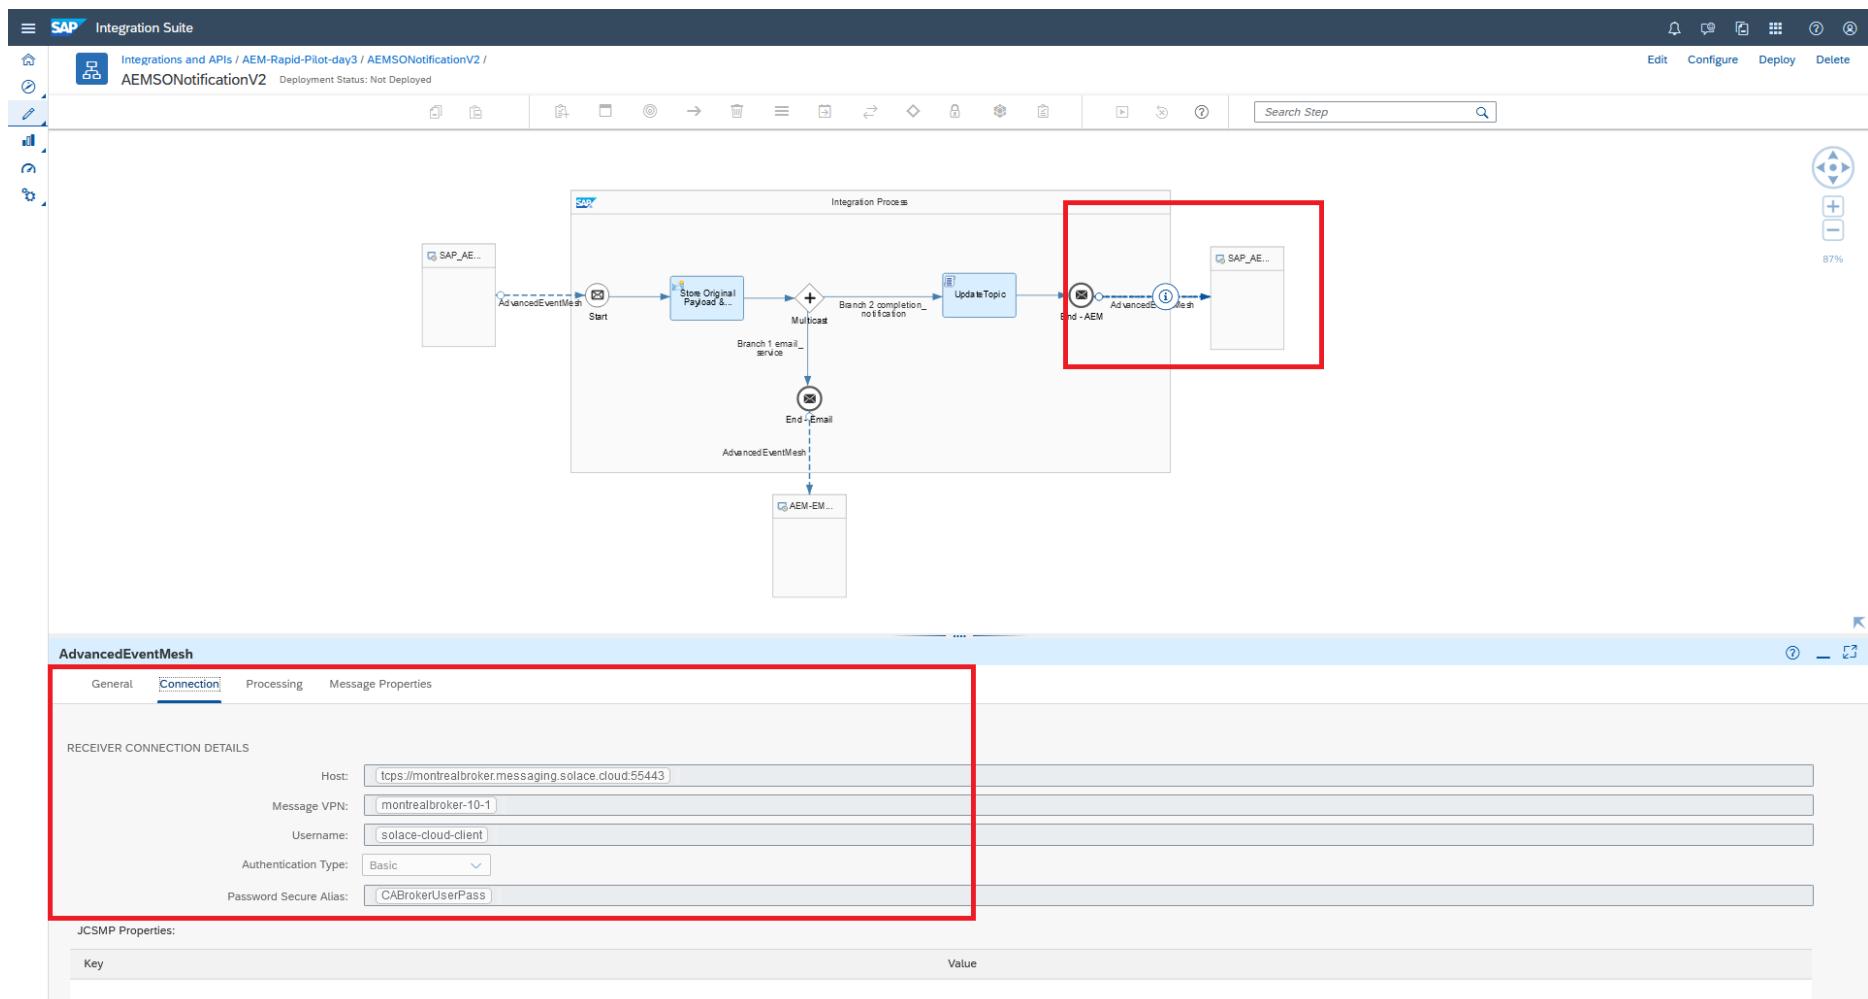

- Populate the connection details for the AEM broker service to send an event to the AEM broker provided by us whenever the flow successfully sends a notification email.
- Hit configure at the top right and fill in the details to connect to your AEM broker service:

If you get confused about which parts of your iflow to connect to your broker and which ones to connect to our broker, remember this simple rule:

The sender and receiver (left and right of your iflow) connect to your broker. The connector down at the bottom connects to our, from your point of view external, broker.

Configure "AEMSONNotificationV2"

Sender Receiver

Connection

Sender:	SAP_AEM_Sender
Adapter Type:	AdvancedEventMesh
Host:	tcp://montrealbroker.messaging.solace.cloud:55443
Message VPN:	montrealbroker-10-1
Username:	solace-cloud-client
Password Secure Alias:	CABrokerUserPass

Configure "AEMSONNotificationV2"

Sender **Receiver**

Connection

Receiver:	SAP_AEM_Receiver
Adapter Type:	AdvancedEventMesh
Host:	tcp://montrealbroker.messaging.solace.cloud:55443
Message VPN:	montrealbroker-10-1
Username:	solace-cloud-client
Password Secure Alias:	CABrokerUserPass

- No need to configure the adapter connecting to our email service, we've prepopulated this one and we have already deployed the necessary security configuration in the step above.

- Then hit deploy at the bottom right.

3. Check that your flow was deployed successfully and fix if necessary.

- Go to Monitor Artifacts -> Manage Integration Content -> All.

You should be seeing the AEMSONNotificationV2 flow as Started, similar to this view (instead of AEMSalesOrderNotification, you should see AEMSONNotificationV2):

The screenshot shows the SAP Integration Suite interface. On the left, there is a sidebar with various icons and a list of integration artifacts. The main area displays the details for the 'AEMSalesOrderNotification' artifact. The artifact information includes:

- Deployed On: Oct 05, 2023, 14:27:07
- ID: AEMSalesOrderNotification
- Deployed By: christian.holtfurth@solace.com
- Version: 1.0.0
- Package: SOLACE-TIGER-TEAM

The artifact details section shows:

- Endpoints:** There are no endpoints configured.
- Status Details:** The Integration Flow is deployed successfully.
- Artifact Details:** Includes links to Monitor Message Processing, View deployed Artifact, and Navigate to Artifact Editor.
- Log Configuration:** Log Level dropdown set to Info.

The sidebar on the left lists other integration artifacts such as AEMBusinessPartnerAddressCheck, AEMLegacyOutputAdapter, and various Slack and SAP adapters.

- Go to your AEM Console and navigate to Cluster Manager -> {your service} -> Manage and click on the Queues tile:

The screenshot shows the SAP AEM Cluster Manager interface for the service 'MontrealBroker-10.1'. The left sidebar includes links for Mission Control, Cluster Manager (selected), Mesh Manager (BETA), Event Portal, Designer, Catalog, Runtime Manager, Event Insights, and Insights.

The main content area displays 'Event Broker Service Settings' with sections for Authentication (Enabled), Certificate Authorities (0 Client Certificate Authorities, 1 Domain Certificate Authority), and Client Profiles (1 Client Profile). Below this is the 'Broker Manager Quick Settings' section, which includes tiles for Message VPN, Clients, Queues (highlighted with a red box), Access Control, and Bridges.

At the bottom is the 'Other Management Tools' section, listing SEMP - REST API, Broker Manager - Web Application, and SolAdmin - Desktop Application, each with a corresponding icon.

- Check that the AEMSalesOrderNotification input queue has at least one consumer connected to it.

SAP

MontrealBroker-10.1

montrealbroker-10-1

[Change VPN](#)

[Messaging](#) ▾

- Message VPN
- Clients
- Queues**
- Connectors
- Access Control
- Telemetry
- Replay
- Bridges
- JMS JNDI
- Try Me!
- Advanced Messaging
- Caches
- Transactions

[System](#) ▾

- Clustering

Queues Topic Endpoints Templates

Action + Queue

<input type="checkbox"/>	Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
<input type="checkbox"/>	CIBusinessPartner	On	On	Exclusive	0	<div style="width: 10px;"></div>	917	0.3088	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 10px;"></div>	560	0.1963	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckedInvalid	On	On	Exclusive	0	<div style="width: 10px;"></div>	369	0.1266	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 10px;"></div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckerDMQ	On	On	Exclusive	0	<div style="width: 10px;"></div>	6	0.0019	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 10px;"></div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CLegacyAdapterIn	On	On	Exclusive	0	<div style="width: 10px;"></div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CLegacyAdapterInDMQ	On	On	Exclusive	0	<div style="width: 10px;"></div>	880	0.5214	50	1	N/A	Yes
<input type="checkbox"/>	CLegacyAdapterOut	On	On	Exclusive	0	<div style="width: 10px;"></div>	3	0.0001	50	0	N/A	Yes
<input type="checkbox"/>	CISSalesOrder	On	On	Exclusive	0	<div style="width: 10px;"></div>	1,371	0.8406	50	0	N/A	Yes
<input type="checkbox"/>	CISSalesOrderChecked	On	On	Exclusive	0	<div style="width: 10px;"></div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CISSalesOrderNotification	On	On	Exclusive	0	<div style="width: 10px;"></div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CISSalesOrderNotificationProcesse...	On	On	Exclusive	0	<div style="width: 10px;"></div>	766	0.4715	50	0	N/A	Yes

7. Scenario 3 - BusinessPartner: AEMBusinessPartner AddressCheck (OPTIONAL)

Setup/Configure Dependency Services

One of our iflows that we are going to deploy is invoking the SAP Data Quality Management service (DQM) to check and cleanse address data in the BusinessPartner events. For the flow to work properly, you will need a working DQM service subscription so you can configure your iflow with this. For completing this section, you have two options:

A) Use DQM service credentials provided by us during the workshop

SAP is providing us with a credentials for a SAP owned DQM service instance. We will hand out the token and connectivity details to our DQM service, which can use instead.

B) Alternative: Activate your own SAP Data Quality Management service in BTP

Please note that if you want to proceed down this route, it may take some time to complete, so you may want to complete this in your own time after the workshop.

The good news, if you don't have a DQM subscription already or are not using our instance, then you can use a free tier subscription for this purpose. Please follow along the steps in this [blog post](#) by Hozumi Nakano to active the service.

Additionally, you will have to create a service instance and a service key to be configured with your integration flow later. Follow [these steps](#) to create a service instance and key.

Take a note of the URL and user credentials once you've activated the service.

Setup/configure SAP AEM broker service

You can skip over this step for configuring the AEM queues if you have used the CI/CD tool in section 5 to automate the configuration in the previous step. Resume with the Integration Suite flow configuration next.

In this section we will create the required input queues for your integration flows.

- Go to Cluster Manager -> {your service} -> Manage -> Queues - to open the Broker UI

Welcome to SAP Integration Suite, advanced event mesh

New Event Portal 2.0 : On

Event Management

- Event Portal**
 - Designer**
Design your event driven architecture components
 - Catalog**
Browse or search for events, schemas, and applications across your enterprise
 - Runtime Event Manager**
Discover, govern, and visualize the flow of events between your applications in each environment

Event Streaming

- Mission Control**
 - Cluster Manager**
Control the lifecycle of your Event Broker Services
 - Mesh Manager**
Create and manage your event meshes

Event Insights

- Insights**

<https://sapdemo.solace.cloud/services>

The screenshot shows the SAP Integration Suite Mission Control interface. The left sidebar contains navigation links for Mission Control, Cluster Manager, Mesh Manager (Beta), Event Portal, Designer, Catalog, Runtime Manager, Event Insights, and Help. The main content area is titled "Welcome to SAP Integration Suite, advanced event mesh". It features a "New Event Portal 2.0 : On" toggle switch. Under "Event Management", there are three "Event Portal" sections: "Designer" (with a sub-section for "Cluster Manager" which is highlighted with a red box), "Catalog", and "Runtime Event Manager". Under "Event Streaming", there are two "Mission Control" sections: "Cluster Manager" and "Mesh Manager". Under "Event Insights", there is an "Insights" section. The bottom of the screen shows the URL "https://sapdemo.solace.cloud/services".

Services

Create Service

Filter by service name

Only show my services



All Services (14)

eu1 SAP DEMO (eu-central-1)

Enterprise 250 Class
Christian Holtfurth
 Running

us1 GKE - US Central (Iowa)

Enterprise 250 Class
Christian Holtfurth
 Running

ap1 EKS - Asia Pacific (Singapore)

Enterprise 250 Class
Christian Holtfurth
 Running

aws MontrealBroker-10.1 EKS - Canada Central(Montreal)

Developer Class
Scott Dillon
 Running

US-Central AKS - Central US (Iowa)

Developer Class
Karl Ossoinig
 Running

sa1 EKS - Africa (Cape Town)

Enterprise 250 Class
Christian Holtfurth
 Running

cn1 AKS - East Asia (Hong Kong)

Enterprise 250 Class
Christian Holtfurth
 Running

aws BTP Hackathon September EKS - Canada Central(Montreal)

Developer Class
brad.caldwell@solace.com
 Running

MyMesh-Svc1 AKS - East US 2 (Virginia)

Developer Class
Karl Ossoinig
 Running

aws MyMesh-Svc2 EKS - US West (Oregon)

Developer Class
Karl Ossoinig
 Running

aws My-First-Service EKS - Canada Central(Montreal)

Enterprise 250 Class
Andrea Kelso
 Running

test GKE - Asia South (Mumbai)


Enterprise 1K Class
Christian Holtfurth
 Running

testbrokersap1 GKE - EU(London)

Enterprise 1K Class
Christian Holtfurth
 Running

Karls-special-broker-just-for... AKS - Canada Central (Toronto)

Enterprise 5K Class
Karl Ossoinig
 Running

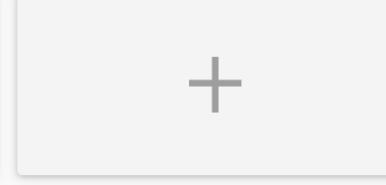

MontrealBroker-10.1

Status Connect **Manage** Monitoring Configuration Try Me!

Open Broker Manager ...

Event Broker Service Settings

Authentication Enabled

Certificate Authorities 0 Client Certificate Authorities 1 Domain Certificate Authority

Client Profiles 1 Client Profile

Deletion Protection Delete Service Advanced Options

Broker Manager Quick Settings

Message VPN

Clients

Queues

Access Control

Bridges

Other Management Tools

SEMP - REST API

The Solace Element Management Protocol (SEMP) is a REST API that you can use to manage the Event Broker Service.

Broker Manager - Web Application

The Broker Manager is a browser-based administration console that you can use to manage the Event Broker Service.

SolAdmin - Desktop Application

SolAdmin is a legacy desktop application that you can use to manage the Event Broker Service.

To create the queues in the next sections, repeatedly click on the "+ Queue" button to bring up the create queue dialog.

SAP
montrealbroker-10-1...

Queues
Topic Endpoints
Templates
Action
+ Queue

<input type="checkbox"/>	Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
<input type="checkbox"/>	#partner/6nvj	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	#clusterer5b2ca535481099a637...	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	800,000	1	N/A	Yes
<input type="checkbox"/>	ADMPILOTASAPIQ	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	172,320	74.03	5,000	0	N/A	Yes
<input type="checkbox"/>	AFMSALESORDERADP002	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	BraDDMQ	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	2	0.0012	5,000	0	N/A	Yes
<input type="checkbox"/>	BraUDemo	On	On	Non-Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	BradTest	On	Off	Non-Exclusive	0	<div style="width: 100%;">100%</div>	0	0	5,000	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartner	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	1,110	0.3937	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	664	0.2895	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckedinvalid	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	443	0.1659	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerCheckerDMO	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	5	0.0000	50	0	N/A	Yes
<input type="checkbox"/>	CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterIn	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	2	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterInDMO	On	Off	Exclusive	0	<div style="width: 100%;">100%</div>	28	0.0487	50	0	N/A	Yes
<input type="checkbox"/>	CILegacyAdapterOut	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes
<input type="checkbox"/>	CISalesOrder	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	20	0.0187	50	0	N/A	Yes
<input type="checkbox"/>	CISalesOrderChecked	On	On	Exclusive	0	<div style="width: 100%;">100%</div>	0	0	50	0	N/A	Yes

Page
First
Next >
Last Update: 2023-10-21 08:32:04
Refresh Data
Show
20

Provide the name as given (in the next sections).

Create Queue

Queue Name

[Cancel](#)

[Create](#)

Open up the "Advanced Queue Settings" section, then follow along and provide the details as showing in the screenshots below.

The screenshot shows the 'Edit Queue Settings' interface for a queue named 'TestQueue'. The interface has a blue header bar with 'Edit Queue Settings' on the left and 'Cancel' and 'Apply' buttons on the right. Below the header, there are several configuration options:

- Incoming:** A toggle switch that is turned on (blue).
- Outgoing:** A toggle switch that is turned on (blue).
- Access Type:** A radio button group where 'Exclusive' is selected (highlighted in grey), and 'Non-Exclusive' is unselected.
- Messages Queued Quota (MB):** An input field containing the value '5000'.
- Owner:** A dropdown menu currently showing a single option.
- Non-Owner Permission:** A dropdown menu currently showing the option 'Consume'.
- Maximum Consumer Count:** An input field containing the value '1000'.

On the right side of the interface, there is a vertical sidebar with the following sections:

- Show Advanced Settings:** A blue link with a red rectangular box drawn around it.
- Tips >>** A blue link.
- A note: 'Click on a label or an input field to see help message.'

Create the following queues and provide the details as given.

1. CIBusinessPartnerChecker queue

- Name:** CIBusinessPartnerChecker
- Owner:** solace-cloud-client
- Non-Owner Permission:** No access
- DMQ Name:** CIBusinessPartnerCheckerDMQ
- Redelivery:** enabled
- Try Forever:** disabled
- Maximum Redelivery Count:** 3

SAP

< Queues | CIBusinessPartnerChecker

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Messaging

Message VPN

Clients

Queues

Connectors

Access Control

Telemetry

Replay

Bridges

JMS JNDI

Try Me!

Advanced Messaging

Caches

Transactions

System

Clustering

Summary **Settings** Subscriptions Consumers Messages Queued Stats

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Alert Thresholds % # Clear Raise

Owner

Non-Owner Permission

Maximum Consumer Count

Alert Thresholds % # Clear Raise


Maximum Message Size (B)

Maximum Delivered Unacknowledged Messages per Flow

DMQ Name

Enable Client Delivery Count

Delivery Delay (sec)

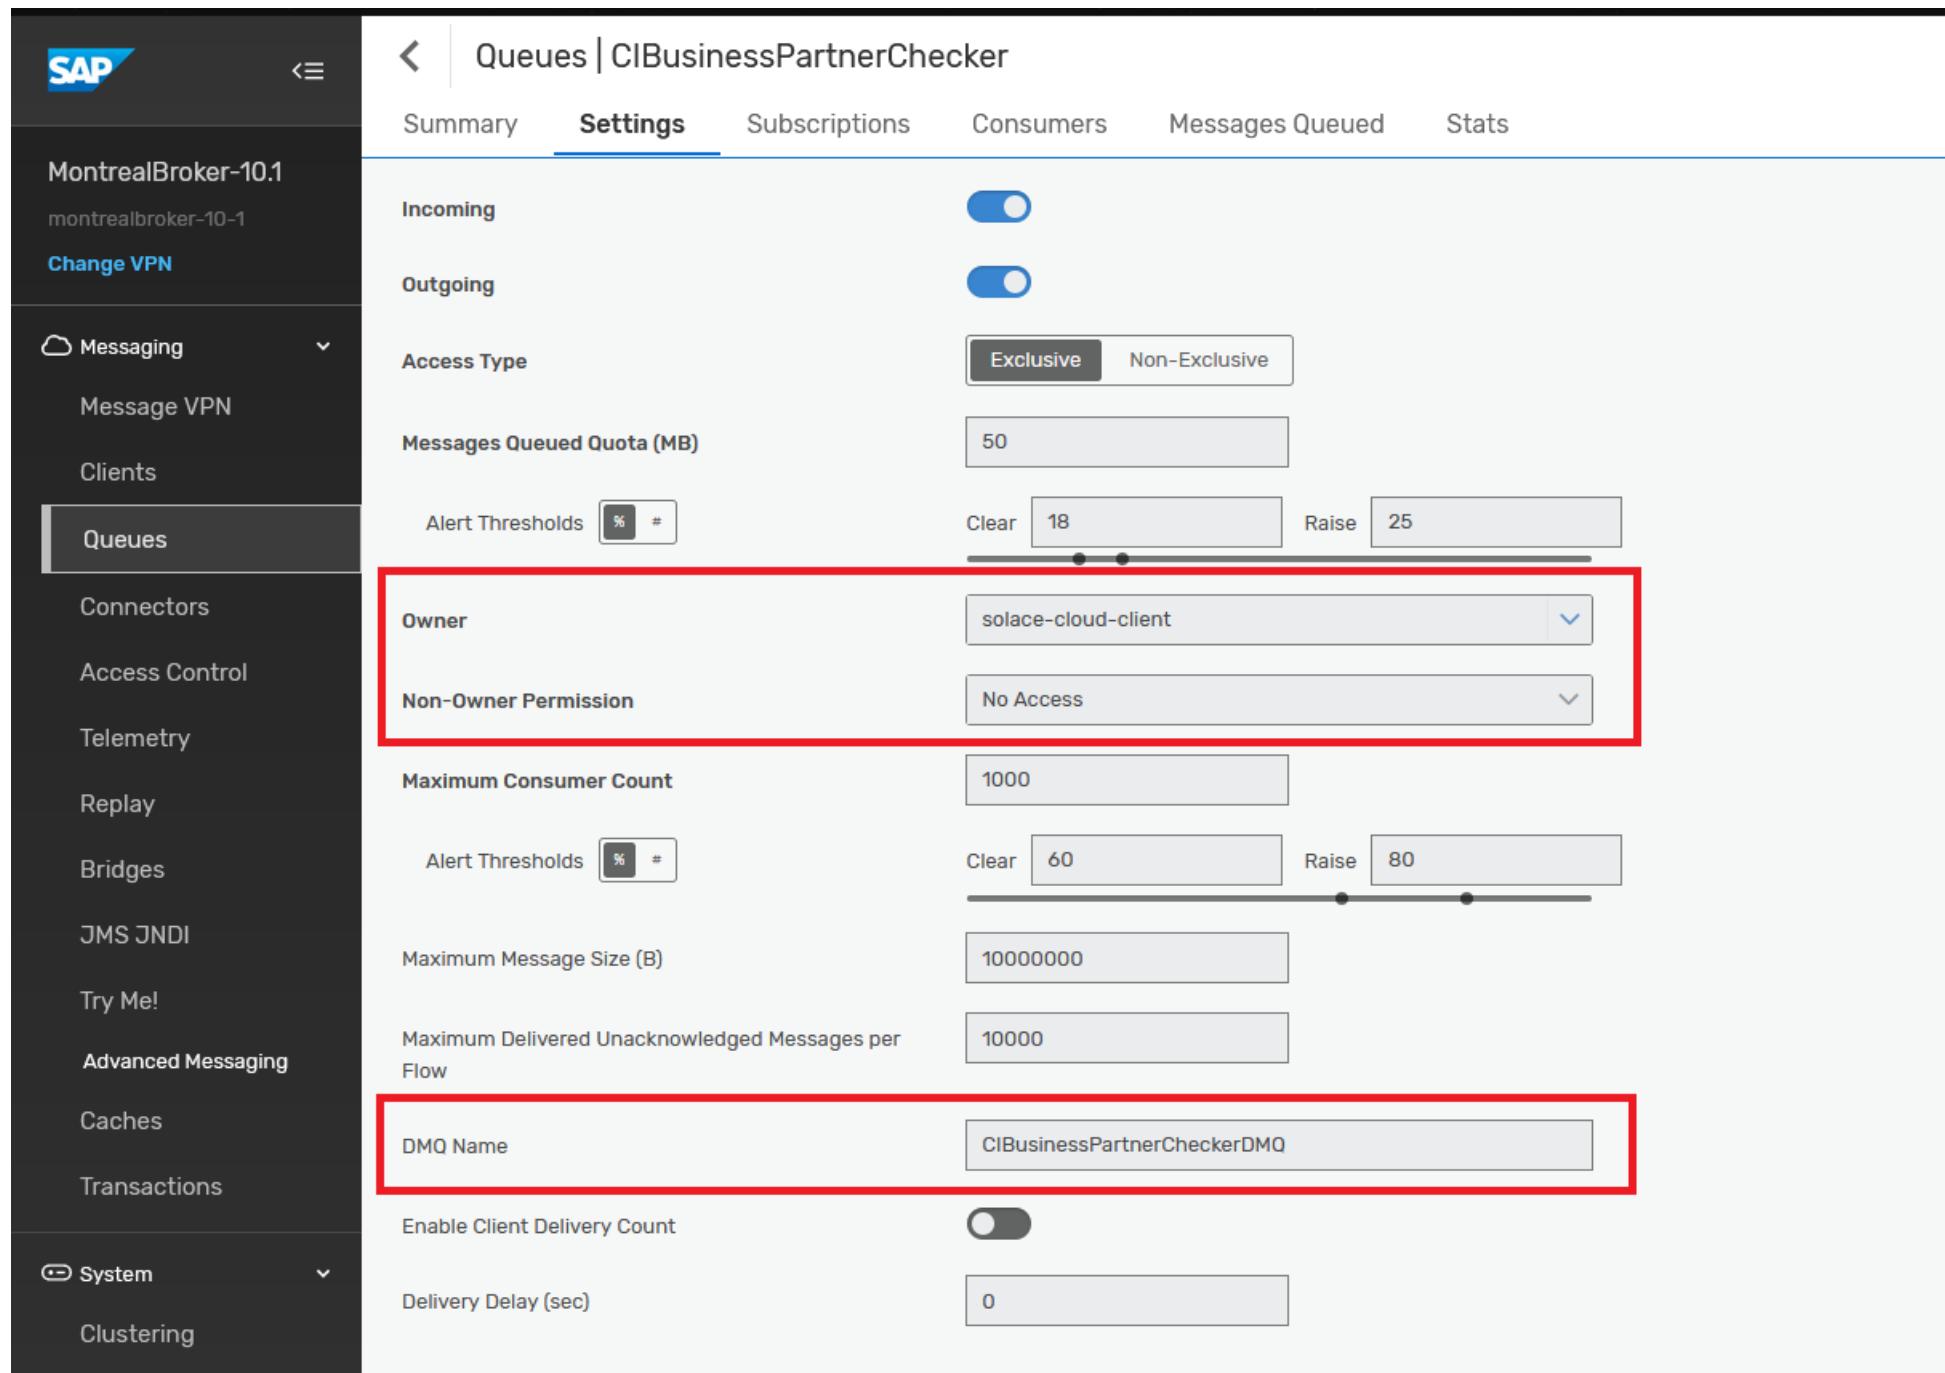

SAP

< Queues | CIBusinessPartnerChecker

Summary **Settings** Subscriptions Consumers Messages Queued Stats

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Messaging ▾

- Message VPN
- Clients
- Queues**
- Connectors
- Access Control
- Telemetry
- Replay
- Bridges
- JMS JNDI
- Try Me!
- Advanced Messaging
- Caches
- Transactions

System ▾

- Clustering

Message Expiry

Respect TTL

Maximum TTL (sec)

Redelivery

Try Forever

Maximum Redelivery Count

Delayed Redelivery

Multiplier

Initial Delay

Maximum Delay

Congestion Control

Reject Messages to Sender on Discard

Reject Low Priority Messages

Reject Low Priority Messages Limit

Alert Thresholds Clear 60 Raise 80

- Once the queue is created, click on the queue name in the list, navigate to the Subscriptions tab and open the subscriptions dialog.

SAP Fiori interface showing the 'Queues | TestQueue' screen. The left sidebar shows 'MontrealBroker-10.1' and 'Queues' is selected. The top navigation bar has tabs: Summary, Settings, **Subscriptions**, Consumers, Messages Queued, and Stats. The 'Subscriptions' tab is highlighted with a red circle. Below it, there is a search bar 'Search by topic' and a blue button labeled '+ Subscription' which is also circled in red.

- Add the following subscriptions to the queue
- <sap.com/businesspartner/create/V1/>
- <sap.com/businesspartner/change/V1/>

SAP Fiori interface showing the 'Queues | CIBusinessPartnerChecker' screen. The left sidebar shows 'MontrealBroker-10.1' and 'Queues' is selected. The top navigation bar has tabs: Summary, Settings, **Subscriptions**, Consumers, Messages Queued, and Stats. The 'Subscriptions' tab is highlighted. Below it, there is a search bar 'Search by topic' and a list of two subscriptions: 'sap.com/businesspartner/create/V1/' and 'sap.com/businesspartner/change/V1/'. This list is highlighted with a large red box.

2. CIBusinessPartnerCheckerDMQ queue

- Name: CIBusinessPartnerCheckerDMQ
- Owner: solace-cloud-client
- Non-Owner Permission: No access

SAP

MontrealBroker-10.1
montrealbroker-10-1
[Change VPN](#)

Cloud Messaging ▾
Message VPN
Clients
Queues
Connectors
Access Control
Telemetry
Replay
Bridges
JMS JNDI
Try Me!
Advanced Messaging
Caches
Transactions

System ▾
Clustering

Edit Queue Settings

CIBusinessPartnerCheckerDMQ

Incoming

Outgoing

Access Type Exclusive Non-Exclusive

Messages Queued Quota (MB)

Owner ▾

Non-Owner Permission ▾

Maximum Consumer Count

Maximum Message Size (B)

Maximum Delivered Unacknowledged Messages per Flow

DMQ Name

Enable Client Delivery Count

Delivery Delay (sec)

Message Priority

Message Expiry

3. CIBusinessPartnerChecked queue


(optional – only if you want to see/check the output of the flow e.g. for troubleshooting purposes)

- Name: CIBusinessPartnerChecked
- Owner: solace-cloud-client
- Non-Owner Permission: No access

The screenshot shows the SAP Solace Cloud interface for managing queues. On the left, a sidebar menu lists various broker components: MontrealBroker-10.1, Change VPN, Messaging (Message VPN, Clients, Queues), Connectors, Access Control, Telemetry, Replay, Bridges, and JMS JNDI. The 'Queues' item is currently selected. The main content area is titled 'Queues | CIBusinessPartnerChecked' and displays the 'Settings' tab. The configuration includes:

- Incoming: Enabled (blue toggle switch)
- Outgoing: Enabled (blue toggle switch)
- Access Type: Exclusive (selected button)
- Messages Queued Quota (MB): 50
- Owner: solace-cloud-client
- Non-Owner Permission: No Access
- Maximum Consumer Count: 1000

- Once the queue is created, click on the queue name in the list, navigate to the Subscriptions tab and open the subscriptions dialog.

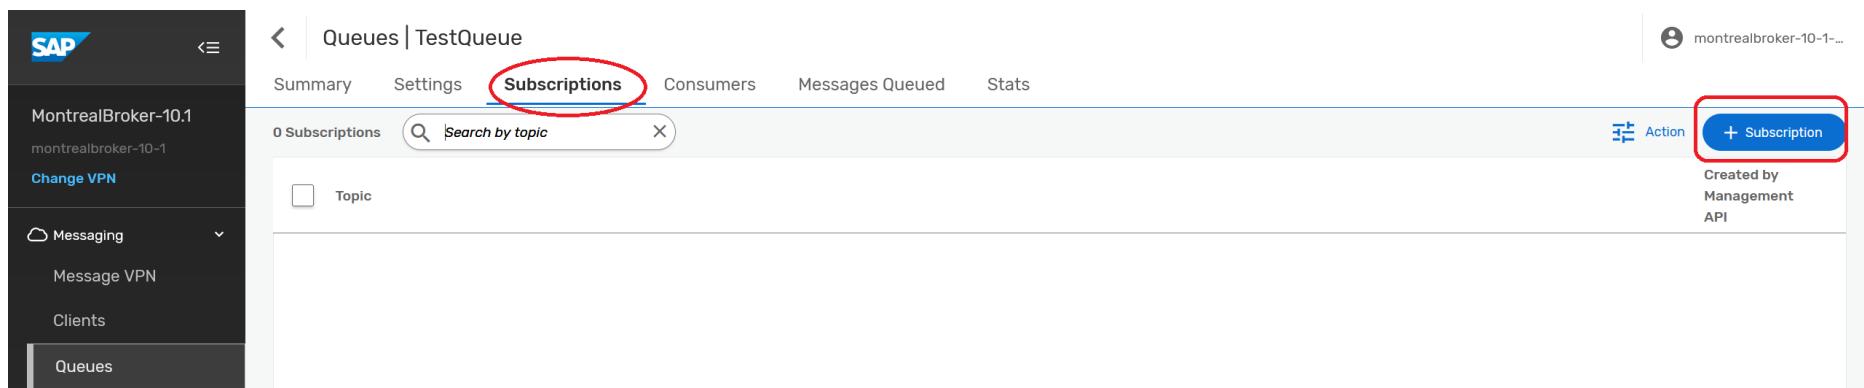

The screenshot shows the SAP Fiori interface for managing queues. On the left, there's a sidebar with navigation links: MontrealBroker-10.1, Change VPN, Messaging (Message VPN, Clients, Queues), and a back arrow. The main area is titled 'Queues | TestQueue' and has tabs for Summary, Settings, Subscriptions (which is active and highlighted with a red circle), Consumers, Messages Queued, and Stats. Below the tabs, it says '0 Subscriptions' and has a search bar 'Search by topic'. On the far right, there's a user icon and the text 'montrealbroker-10-1...'. At the bottom right of the main content area, there's a blue button with a plus sign and the text '+ Subscription' (also highlighted with a red circle). The overall theme is light gray with blue and red accents.

- Add the following subscriptions to the queue
- `sap.com/businesspartner/addressChecked/v1/>`
- `!sap.com/businesspartner/addressChecked/*/*/Invalid`

The screenshot shows the SAP Solace Cloud interface for managing queues. The left sidebar has 'MontrealBroker-10.1' selected under 'Message VPN'. The 'Queues' option is highlighted. The main area is titled 'Queues | CIBusinessPartnerChecked' and shows the 'Subscriptions' tab is active. It displays '2 Subscriptions' with a search bar. Two topics are listed: 'sap.com/businesspartner/addressChecked/V1/>' and '!sap.com/businesspartner/addressChecked/V1/*/*/Invalid'. The second topic is enclosed in a red box.

Notice the second subscription that starts with ! ?

This is called a topic exception and removes any events matching topic subscription

`sap.com/businesspartner/addressChecked/V1/*/*/Invalid` from the previously matched list of events matched by `sap.com/businesspartner/addressChecked/V1/>`. This is a really handy feature to exclude subsets of events matched by a larger topic subscription. See [link](#) for more details on Solace's topic syntax.

4. CIBusinessPartnerCheckedInvalid queue

(optional – only if you want to see/check the output of the flow e.g. for troubleshooting purposes)

- Name: CIBusinessPartnerCheckedInvalid
- Owner: solace-cloud-client

- Non-Owner Permission: No access

SAP

Queues | CIBusinessPartnerCheckedInvalid

MontrealBroker-10.1

montréalbroker-10-1

Change VPN

Messaging

- Message VPN
- Clients
- Queues**
- Connectors
- Access Control
- Telemetry
- Replay

Settings

Summary **Settings** Subscriptions Consumers Messages Queued Stats

Incoming	<input checked="" type="checkbox"/>
Outgoing	<input checked="" type="checkbox"/>
Access Type	<input checked="" type="button"/> Exclusive <input type="button"/> Non-Exclusive
Messages Queued Quota (MB)	50
Owner	solace-cloud-client
Non-Owner Permission	No Access
Maximum Consumer Count	1000

- Once the queue is created, click on the queue name in the list, navigate to the Subscriptions tab and open the subscriptions dialog.

The screenshot shows the SAP Cloud Platform Management Cockpit interface. On the left, a sidebar menu is open with the 'Queues' option selected. The main content area is titled 'Queues | TestQueue'. The top navigation bar includes tabs for 'Summary', 'Settings', 'Subscriptions' (which is highlighted and circled in red), 'Consumers', 'Messages Queued', and 'Stats'. Below the tabs, it says '0 Subscriptions' and features a search bar labeled 'Search by topic'. On the right side, there is an 'Action' button and a blue button labeled '+ Subscription' which is also circled in red. A small tooltip for the '+ Subscription' button reads 'Created by Management API'. The overall theme is light blue and white.

- Add the following subscriptions to the queue
- sap.com/businesspartner/addressChecked/v1/*/*/invalid

This screenshot shows the SAP Cloud Platform Management Cockpit interface for a different queue named 'CIBusinessPartnerCheckedInvalid'. The sidebar menu shows 'Queues' as the selected option. The main content area is titled 'Queues | CIBusinessPartnerCheckedInvalid'. The top navigation bar includes tabs for 'Summary', 'Settings', 'Subscriptions' (which is highlighted), 'Consumers', 'Messages Queued', and 'Stats'. Below the tabs, it says '1 Subscriptions' and features a search bar labeled 'Search by topic'. A single subscription entry is listed: 'sap.com/businesspartner/addressChecked/V1/*/*/Invalid', which is enclosed in a large red rectangular box. The interface has a dark grey header and sidebar, with a light grey main content area.

Configure Your Integration Suite Flow

Continue here, if you have completed the CI/CD section or configured your queues manually in the step above.

One thing, before we jump back into Integration Suite: Let's head to our Advanced Event Mesh Console and go to Cluster Manager, select the service that you want to connect your Integration Suite flows to and go to the "Connect" tab. Take a note of the connectivity details underneath "Solace Messaging" (click on the section to open it up):

The screenshot shows the SAP Mission Control interface for the MontrealBroker-10.1 instance. The left sidebar includes links for Cluster Manager, Mesh Manager (Beta), Designer, Catalog, Runtime Manager, Insights, and SAP DEMO. The main content area has a header "MontrealBroker-10.1" with tabs for Status, Connect, Manage, Monitoring, Configuration, and Try Me! A sub-header "Connect Using a Supported Client Library" is followed by a dropdown "View by: Protocol". Below this, a section titled "Client Libraries" lists various Solace client libraries:

Client Library	Description	Action
Solace Java API (Java)	Start messaging with client libraries that use the Solace Message Format (SMF) protocol over TCP.	Get Started
Solace JCSMP API (JCSMP)		Get Started
Solace JavaRTO (Java)		Get Started
Solace JMS API (Java)		Get Started
Solace C (C)		Get Started
Solace Python (Python)		Get Started
Solace Go API (Go)		Get Started
Solace .NET (.NET)		Get Started
Spring Boot Java API (Spring)		Get Started
Spring Boot JMS API (Spring)		Get Started
Spring Cloud Stream		Get Started

Below the client library list, there are sections for "Solace Web Messaging" and "AMQP". A red box highlights the "Connection Details" section on the right, which contains fields for Username, Password, Message VPN, Secured SMF Host, Public Internet, TrustStore, and Download PEM.

We will need them in the next steps when configuring our flows.


The connect tab lists all the various connectivity details for the various supported protocols. Our Cloud Integration AEM adapter uses the Solace Messaging protocol, which is AEM's very own protocol with a broad feature support. Each AEM service also comes with a default client user called `solace-cloud-client` that is configured for convenience reasons and is allowed to publish and subscribe to all topics. We will be using this user for all our iflows. In a real production environment where security is important, you or your administrator will likely have this user disabled and will be creating separate users for each of the applications that connect to the AEM broker. Or this may even be deferred to an external authentication service over LDAP or OAuth.

Now that we have set up all the prerequisites for our Integration Suite flows, we can take a look at the individual flows and prepare them for deployment.

0) - Security Configuration

Let's configure the security details we will need to connect to the various services like AEM.

- Go to Integration Suite Monitor Artifacts -> Manage Security -> Security Material.

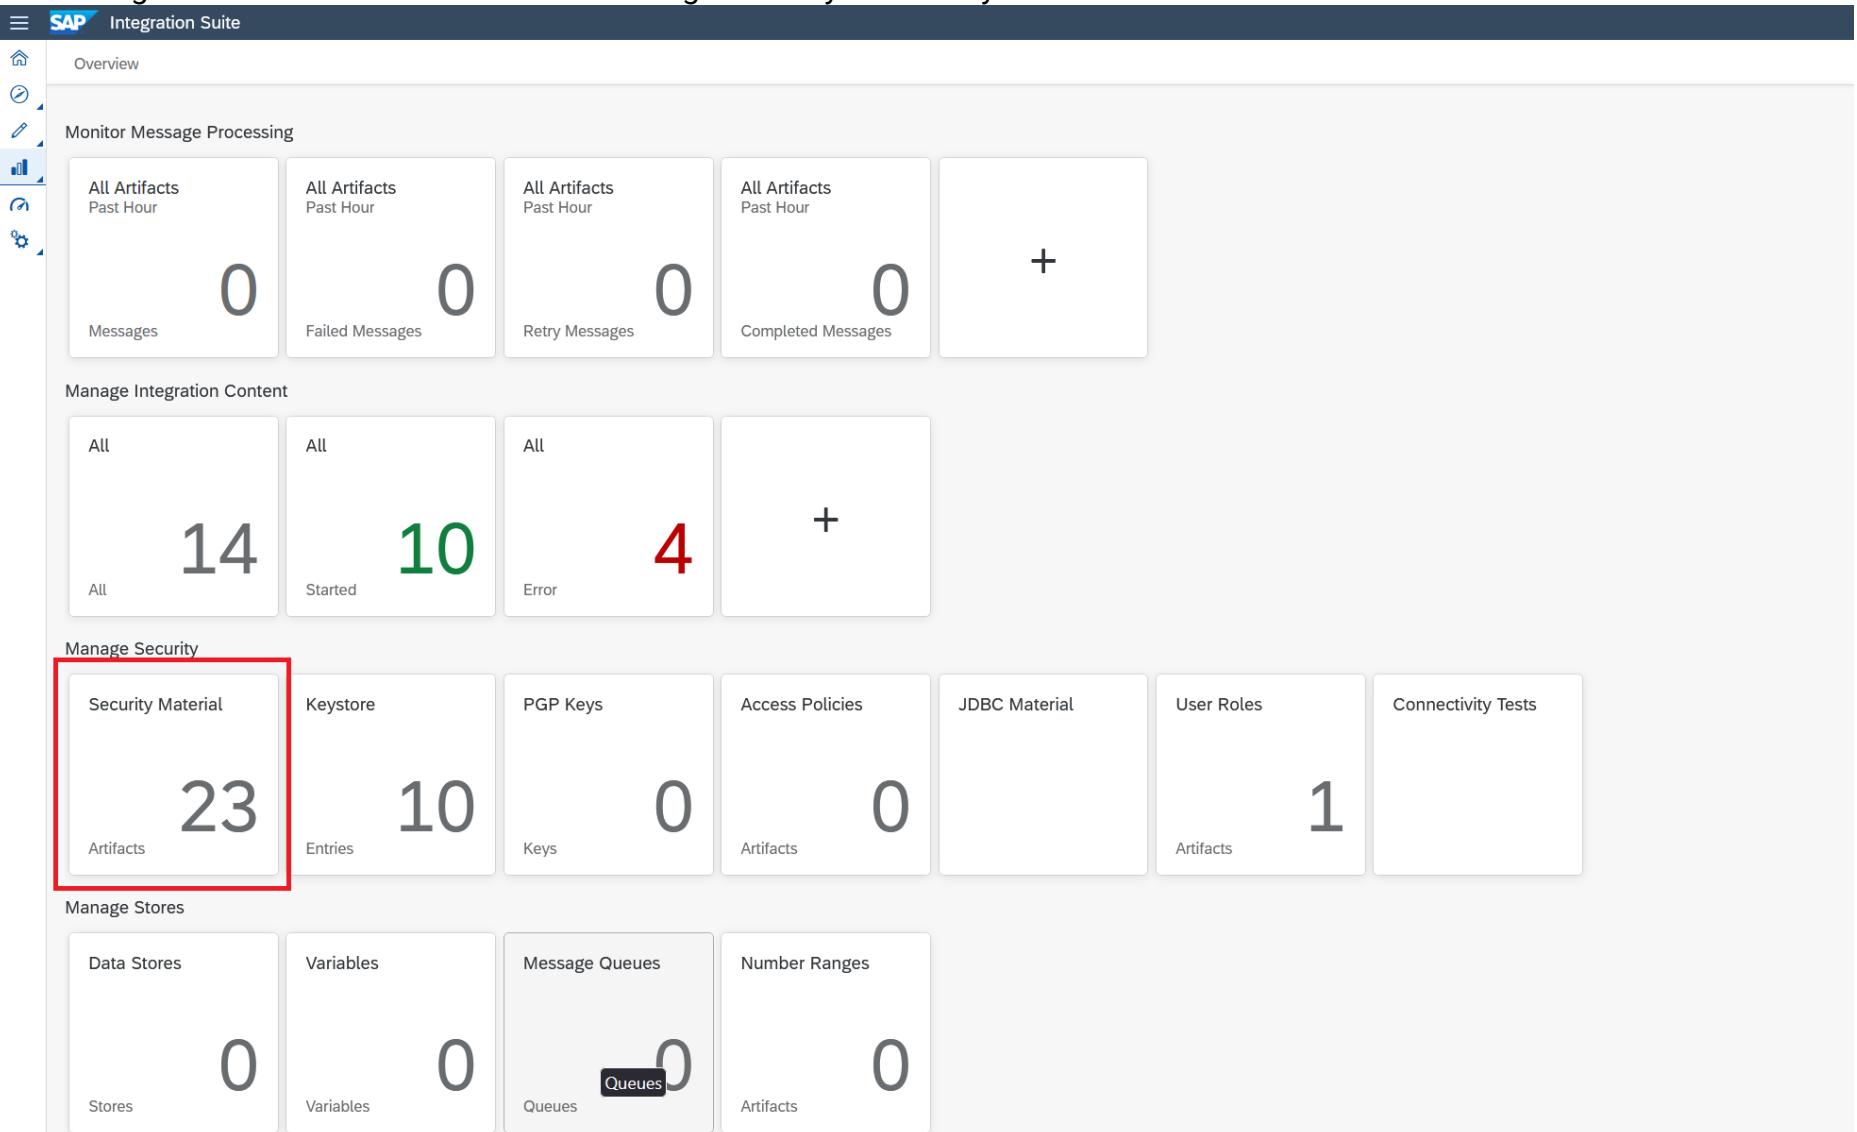

- In here, create security credentials for your AEM broker service (**if not already done**).
- Create SecureParameter `CABrokerUserPass` and store the password for your `solace-cloud-client` application user credentials.
- Create OAuth2 Client Credentials and store your credentials from your DQM service key.
- Token Service URL (should end in /oauth/token)
- Client ID

- Client Secret (either use your own or the one we will have handed out during the workshop.)

Edit OAuth2 Client Credentials

Name:*	DQMCred
Description:	Client credential for calling DQM service
Token Service URL:*	https://scpsubaccount.authentication.eu10.hana.ondemand.com/oauth2/token
Client ID:	
Client Secret:*	
Client Authentication:*	Send as Request Header 
Scope:	
Content Type:	application/json 
Resource:	
Audience:	

[Deploy](#) [Cancel](#)

SAP Integration Suite


Overview / Manage Security Material

Security Material (23)

Name	Type	Status	Deployed By	Deployed On	Actions
emaildaemon	User Credentials	Deployed	christian.holtfurther@solace.com	Sep 15, 2023, 15:45:15	
solace-credentials	User Credentials	Deployed	valerie.froehlicher@solace.com	Sep 11, 2023, 10:15:26	
aon_iam_secure-west-europe-aes	Secure Parameter	Deployed	markus.rehbech@solace.com	Sep 07, 2023, 16:08:26	
amsclient-iam.pwd	Secure Parameter	Deployed	andrew.mackenzie@solace.com	Sep 06, 2022, 16:09:19	
MarkusRehbech	Secure Parameter	Deployed	markus.rehbech@solace.com	Aug 24, 2023, 15:21:29	
amsclient-iam.pwd	Secure Parameter	Deployed	andrew.mackenzie@solace.com	Aug 18, 2023, 16:08:19	
known.hosts	SSH Known Hosts	Deployed	christian.holtfurther@solace.com	Aug 10, 2023, 17:02:34	
sftpuser	User Credentials	Deployed	christian.holtfurther@solace.com	Aug 08, 2023, 17:24:49	
Crafted	User Credentials	Deployed	brian.caufield@solace.com	Jul 16, 2023, 17:45:44	
dh-production-credentials	Secure Parameter	Deployed	benjamin.euristem@solace.com	Jul 19, 2023, 07:37:42	
DQMCred	OAuth2 Client Credentials	Deployed	scott.dillon@solace.com	Jul 12, 2023, 12:55:30	
CABrokerUserPass	Secure Parameter	Deployed	christian.holtfurther@solace.com	Jul 11, 2023, 14:45:27	
CABrokerUser	Secure Parameter	Deployed	christian.holtfurther@solace.com	Jul 11, 2023, 14:44:59	
subBroker	Secure Parameter	Deployed	benjenie.sattetain@solace.com	Jul 10, 2023, 16:22:39	
sts-10-04-pass	Secure Parameter	Deployed	Sankar.Sundaresan@solace.com	Jul 04, 2023, 16:38:37	
test-service-1234-pass	Secure Parameter	Deployed	Sunil.Singh@solace.com	Jul 04, 2023, 16:39:44	
sunil Singh	User Credentials	Deployed	Sunil.Singh@solace.com	Jun 02, 2023, 16:04:50	
JD_SC_PWD	Secure Parameter	Deployed	Jeffrey.Dunnington@solace.com	Jun 01, 2023, 15:52:52	
MacmillanBroker	User Credentials	Deployed	scott.dillon@solace.com	Jun 01, 2023, 08:27:11	
DevPass	Secure Parameter	Deployed	Sunil.Singh@solace.com	May 26, 2023, 16:48:05	
TEST	Secure Parameter	Deployed	scott.dillon@solace.com	May 26, 2023, 16:49:52	
HQRED	User Credentials	Deployed	scott.dillon@solace.com	May 10, 2023, 17:09:28	
AEMCRED	User Credentials	Deployed	scott.dillon@solace.com	May 09, 2023, 20:42:19	

Configure/Deploy AEMBusinessPartnerAddressCheck (OPTIONAL)

1. Let's take a look at the AEMBusinessPartnerAddressCheck iflow:

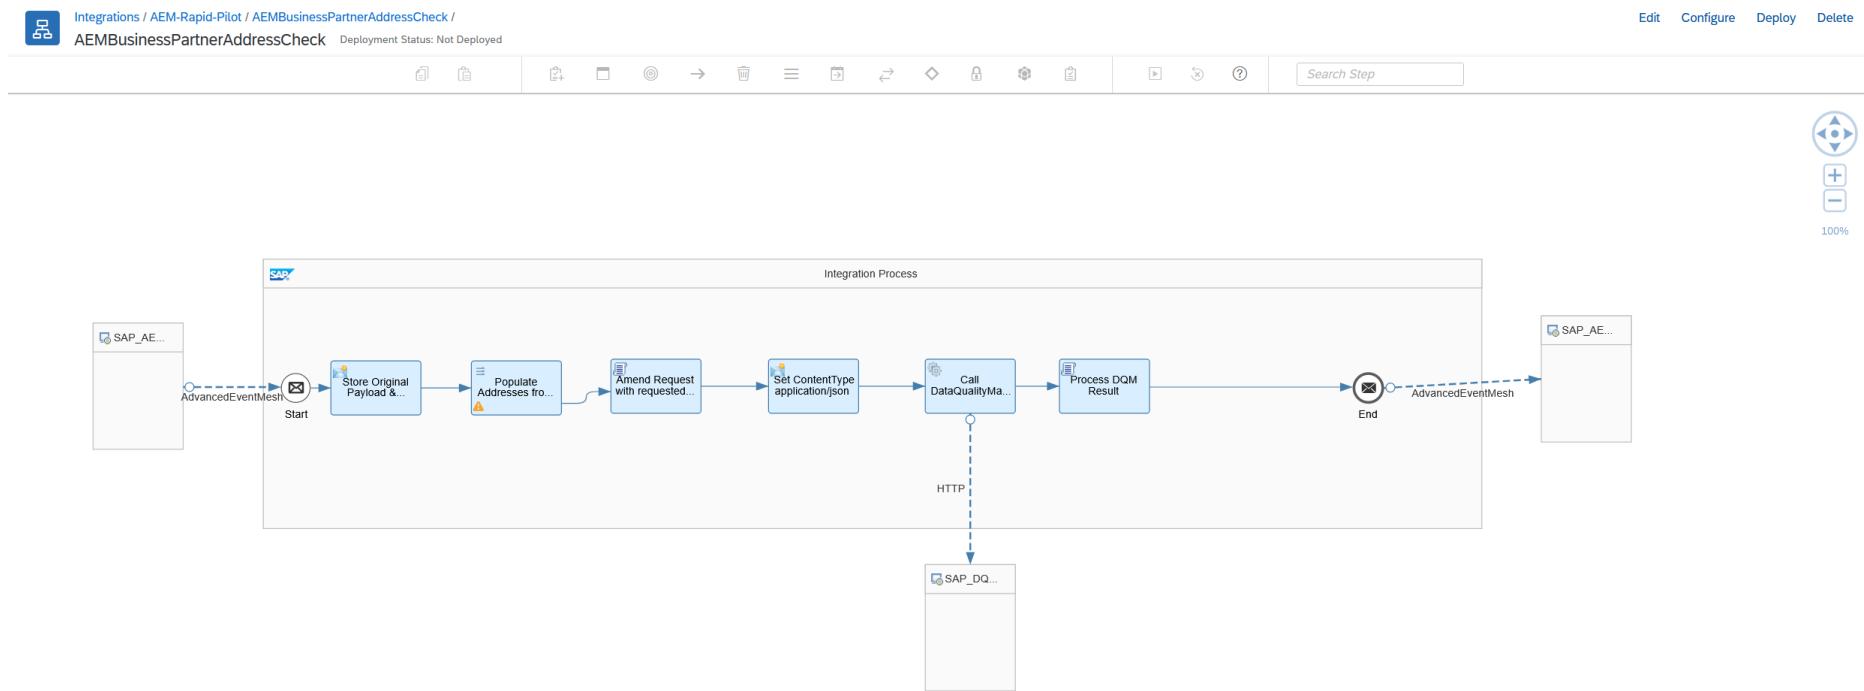

This flow receives Business Partner Create and Change events and invokes the Data Quality Management Service in BTP to check and correct the addresses inside the Business Partner event payload. It does this by

- Storing the original event payload in an environment variable.
- Populating the DQM request payload with the addresses in the input event.
- Invoking the DQM service over REST and

d) Parsing the response, checking whether the DQM service evaluated the input addresses to be Valid, Invalid, Blank or has Corrected them.

e) Merging any corrected addresses back into the original payload.

f) And finally publishing the result back as a new event to the AEM broker with an updated topic in the format:

`sap.com/businesspartner/addressChecked/V1/{businessPartnerType}/{partnerId}/{addressCheckStatus}`

Let's also look at what happens in order to publish a new event back to the Advanced Event Mesh broker. First of all, on the integration flow overall configuration settings, we are preserving the destination header field to have access to the original topic that this event was published on. This matters, because the event may contain valuable meta-data that helps us and downstream consumers filter for events relevant to them and it saves us from reparsing the payload, which can be CPU and I/O intensive.

Integration Flow

The screenshot shows the 'Integration Flow' configuration page with the 'Runtime Configuration' tab selected. The page includes tabs for General, Runtime Configuration, Error Configuration, References, Externalized Parameters, Problems, and Deployment Status. Under 'Runtime Configuration', there are several settings: 'Runtime Profile' set to 'Cloud Integration', 'Namespace Mapping' (empty), 'Allowed Header(s)' containing 'Destination' (which is highlighted with a red box), and 'HTTP Session Reuse' set to 'None'.

Secondly we are using a couple of lines in the script that is evaluating the DQM service result and merging the corrected addresses back into the original payload to retrieve and parse the original topic, replace one level (the verb) to create a new event and amend another extra meta-data level that contains the result of the address check (either Valid, Corrected, Invalid or Blank), which can be used by downstream systems to filter for specific outcomes. We are storing the newly created topic in the Destination field of the message header.

SAP Integration Suite

AEM-Rapid-Pilot / AEMBusinessPartnerAddressCheck / script2.js / script2.js

```
1 /* Refer the link below to learn more about the use cases of script.
2 https://help.sap.com/viewer/368c481cd6954bdfa5d0435479fd4eaf/Cloud/en-US/148851bf8192412cba1f9d2c17f4bd25.html
3
4 If you want to know more about the SCRIPT APIs, refer the link below
5 https://help.sap.com/doc/a56f52e1a58e4e2bac7f7adb45b2e26/Cloud/en-US/index.html */
6 importClass(com.sap.gateway.ip.core.customdev.util.Message);
7 importClass(java.util.HashMap);
8
9 function processData(message) {
10     //Body
11     var DQMresponse = String(message.getBody( new java.lang.String().getClass()));
12     DQMresponse = JSON.parse(DQMresponse);
13
14     var origBody = message.getProperty("ORIGPAYLOAD");
15     var origTopic = message.getProperty("ORIGTOPIC");
16     origBody = JSON.parse(origBody);
17
18     var i=0;
19     var addressStatus = "Unknown";
20     origBody.businessPartner.forEach(function(bp){
21         bp.addressLink.forEach(function(link) {
22             link.address.forEach(function(address) {
23                 const currAddress=DQMresponse.addressOutput[i];
24                 if (currAddress.addr_asmt_info == "C") {
25                     //corrected address, copy changes over from each addressoutput into customer addressoutput
26                     address.street = currAddress.std_addr_prim_address + currAddress.std_addr_sec_address;
27                     address.city = currAddress.std_addr_locality_full;
28                     address.zipCode = currAddress.std_addr_postcode_full;
29                     address.country = currAddress.std_addr_country_2char;
30                     //additional fields available, not used:
31                     //currAddress.std_addr_region_full
32                     addressStatus = "Corrected";
33                     i++;
34                 } else if (currAddress.addr_asmt_info == "V") {
35                     //valid address, nothing to do
36                     addressStatus = "Valid";
37                 } else if (currAddress.addr_asmt_info == "I") {
38                     //invalid address, can't autofix, just flag on the topic
39                     addressStatus = "Invalid";
40                 } else if (currAddress.addr_asmt_info == "B") {
41                     //invalid address, can't autofix, just flag on the topic
42                     addressStatus = "Blank";
43                 }
44             })
45         })
46     })
47
48     var topicLevels = origTopic.split("/");
49     topicLevels[2] = "addressChecked";
50     var outputTopic = topicLevels.join("/") + "/" + addressStatus;
51
52     message.setHeader("Destination", outputTopic);
53     message.setBody(JSON.stringify(origBody));
54     return message;
55 }
```

Lastly, the AEM Receiver adapter is configured to persistently (to avoid message loss) publish to a topic, taking the value from the header field that we set in the previous step/script.

AdvancedEventMesh

General Connection **Processing** Message Properties

PUBLISHER PROCESSING DETAILS

Delivery Mode: Persistent ▾


Endpoint Type: Topic ▾

Destination Name: \${header.Destination}


Message Type: Automatic ▾

SYNCHRONOUS REQUEST PROCESSING DETAILS

Convert Publish Into Synchronous Requestor?:

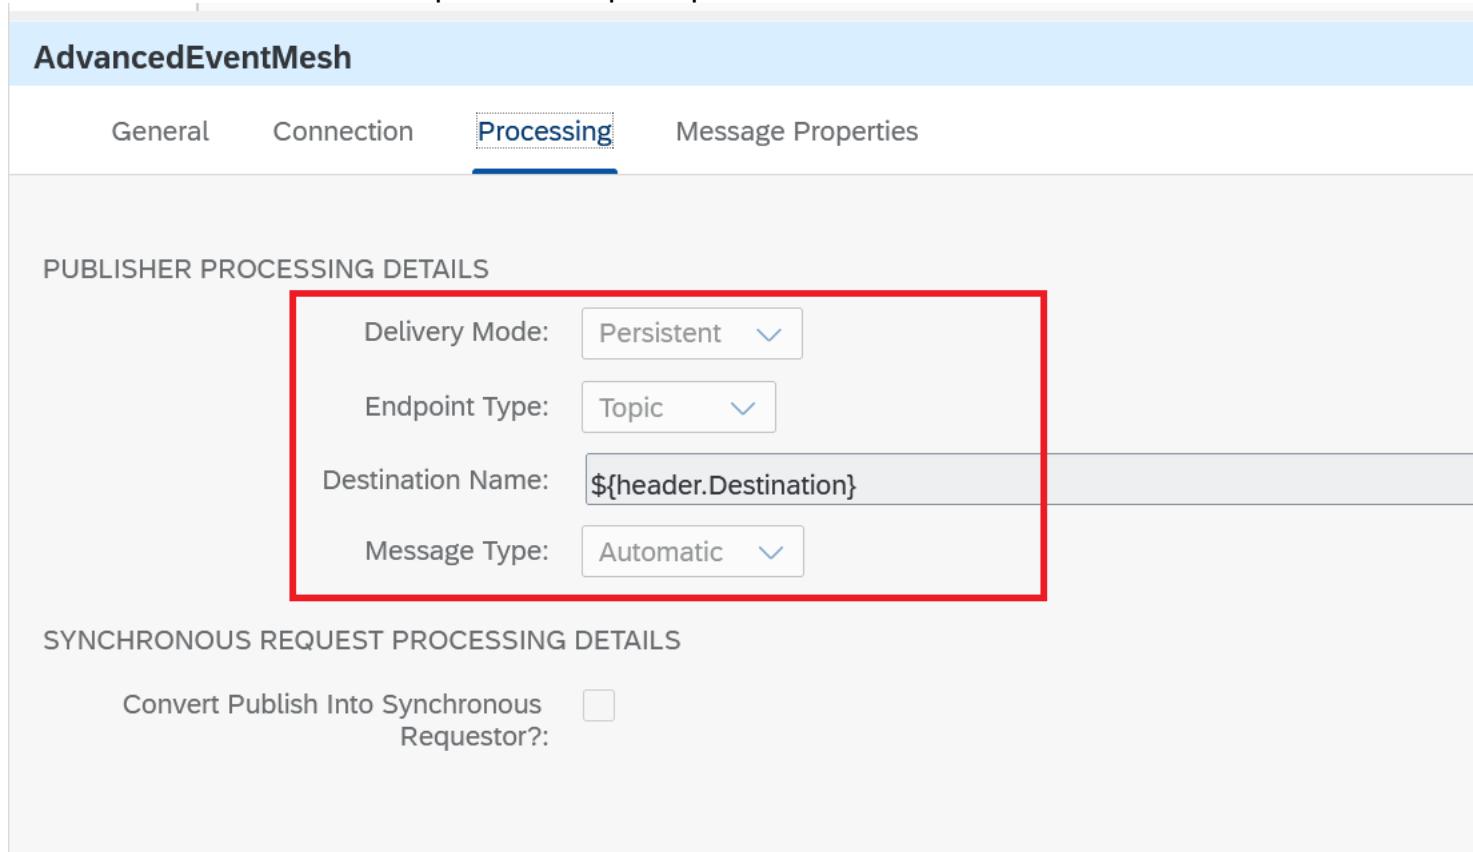

2. Configuring and deploying the AEMBusinessPartnerAddressCheck iflow:

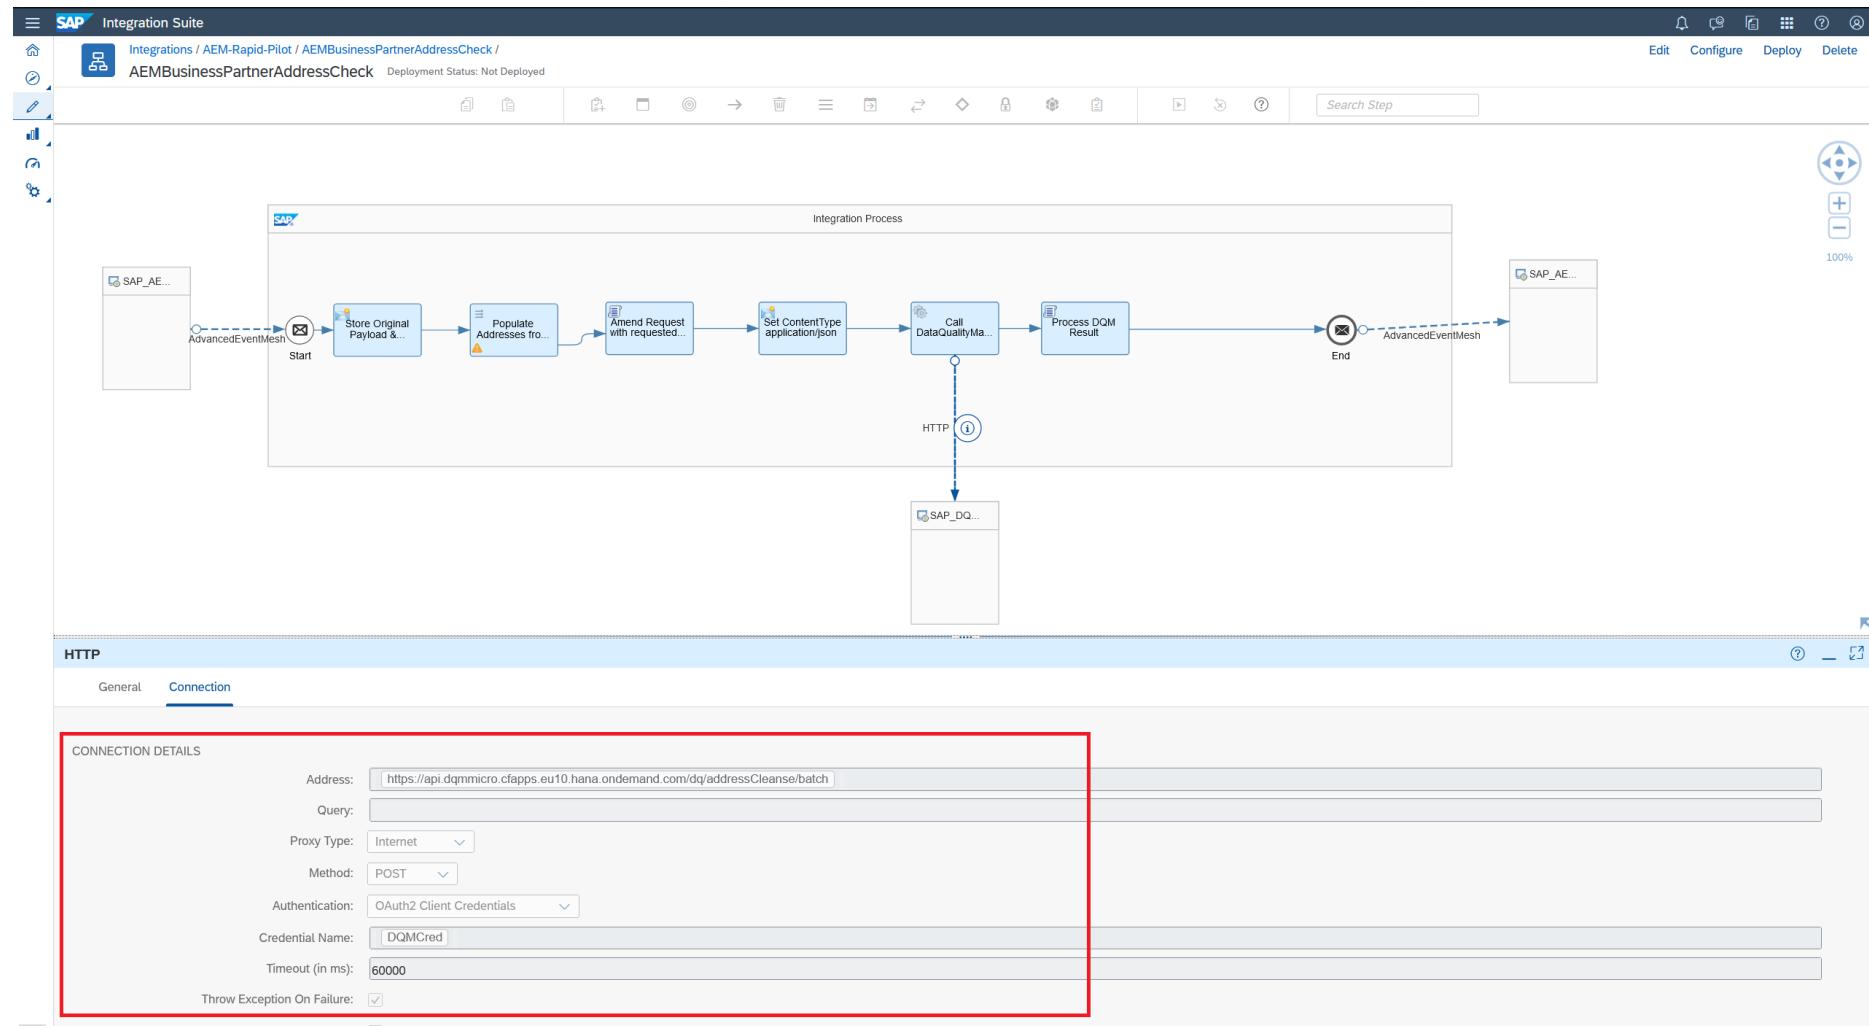

You will need to:

- Populate the connection details for the DQM service call out with the ones for your own DQM service instance. (You don't need to change the address, if you are using our DQM service. If you are using your own DQM service, you'll need to take the API URL from your token and append `/dq/addressCleanse/batch` to the end of it. It should look something like <https://api.dqmmicro.cfapps.eu10.hana.ondemand.com/dq/addressCleanse/batch>).
- Hit configure at the top right and fill in the details to connect to your AEM broker service:

Configure "AEMBusinessPartnerAddressCheck"

Sender Receiver

Connection	Sender:	SAP_AEM_Sender
	Adapter Type:	AdvancedEventMesh
	Host:	tcps://mr-connection-qhgik3f2ezp.messaging.solace.cloud:55443
	Message VPN:	montrealbroker-10-1
	Username:	solace-cloud-client
Password Secure Alias:	CABrokerUserPass	

Configure "AEMBusinessPartnerAddressCheck"

Sender **Receiver**

Receiver:	SAP_AEM_Receiver
Adapter Type:	AdvancedEventMesh
Connection	
Host:	tcps://mr-connection-qhgik3f2ezp.messaging.solace.cloud:55443{{<aem_server_url_smf_endpoint>}}
<aem_server_url_smf_endpoint>:	tcps://mr-connection-qhgik3f2ezp.messaging.solace.cloud:55443
Message VPN:	montrealbroker-10-1{{<aem_message_vpn>}}
<aem_message_vpn>:	montrealbroker-10-1
Username:	solace-cloud-client{{<aem_client_user_name>}}
<aem_client_user_name>:	solace-cloud-client
Password Secure Alias:	CABrokerUserPass{{<aem_client_user_password_alias>}}
<aem_client_user_password_alias>:	CABrokerUserPass

- Then hit deploy at the bottom right.

3. Check that your flow was deployed successfully and fix if necessary.

- Go to Monitor Artifacts -> Manage Integration Content -> All.

You should be seeing the AEMBusinessPartnerAddressCheck flow as Started, similar to this view:

The screenshot shows the SAP Integration Suite interface. On the left, there is a sidebar with icons for Overview, Integration Content, and other monitoring tools. The main area is titled "Manage Integration Content / All". A search bar at the top allows filtering by Name or ID. Below the search bar, a table lists various integration flows, each with a name, status (e.g., Started, Error), and type (e.g., Integration Flow, Adapter). The "AEMSalesOrderNotification" flow is selected and expanded. Its details are shown on the right, including deployment information (Deployed On: Oct 05, 2023, 14:27:07, Deployed By: christian.holtfurther@solace.com, ID: AEMSalesOrderNotification, Version: 1.0.0, Package: SOLACE-TIGER-TEAM) and artifact details. The "Status Details" section indicates the flow is deployed successfully. The "Log Configuration" section shows a dropdown for Log Level set to "Info".

- Go to your AEM Console and navigate to Cluster Manager -> {your service} -> Manage and click on the Queues tile:

The screenshot shows the SAP AEM Cluster Manager interface for the service 'MontrealBroker-10.1'. The left sidebar includes links for Mission Control, Cluster Manager (selected), Mesh Manager (BETA), Event Portal, Designer, Catalog, Runtime Manager, Event Insights, and Insights.

The main content area displays 'Event Broker Service Settings' with sections for Authentication (Enabled), Certificate Authorities (0 Client Certificate Authorities, 1 Domain Certificate Authority), and Client Profiles (1 Client Profile). Below this is the 'Broker Manager Quick Settings' section, which includes tiles for Message VPN, Clients, Queues (highlighted with a red box), Access Control, and Bridges. The 'Queues' tile features a network icon and the word 'Queues'.

At the bottom is the 'Other Management Tools' section, listing SEMP - REST API, Broker Manager - Web Application, and SolAdmin - Desktop Application, each with a corresponding icon.

- Check that the CIBusinessPartnerChecker input queue has at least one consumer connected to it.

The screenshot shows the SAP Message Broker administration interface. The left sidebar contains navigation links for various components like Messaging, Clients, Queues, Connectors, etc. The main area is titled 'Queues' and displays a table of queue statistics. A search bar at the top of the table area has the letter 'c' typed into it. The table columns include Queue Name, Incoming, Outgoing, Access Type, Partition Count, Messages Queued (%), Messages Queued (msgs), Messages Queued (MB), Messages Queued Quota (MB), Consumers, Replay State, and Durable. One specific row, 'CIBusinessPartnerChecker', is highlighted with a red border.



<input type="checkbox"/> Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
<input type="checkbox"/> CIBusinessPartner	On	On	Exclusive	0	<div style="width: 10px;"></div>	917	0.3088	50	0	N/A	Yes
<input type="checkbox"/> CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 10px;"></div>	560	0.1963	50	0	N/A	Yes
<input type="checkbox"/> CIBusinessPartnerCheckedInvalid	On	On	Exclusive	0	<div style="width: 10px;"></div>	369	0.1266	50	0	N/A	Yes
<input type="checkbox"/> CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 0px;"></div>	0	0	50	2	N/A	Yes
<input type="checkbox"/> CIBusinessPartnerCheckerDMQ	On	On	Exclusive	0	<div style="width: 10px;"></div>	6	0.0019	50	0	N/A	Yes
<input type="checkbox"/> CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 0px;"></div>	0	0	50	0	N/A	Yes
<input type="checkbox"/> CLegacyAdapterIn	On	On	Exclusive	0	<div style="width: 0px;"></div>	0	0	50	2	N/A	Yes
<input type="checkbox"/> CLegacyAdapterInDMQ	On	On	Exclusive	0	<div style="width: 10px;"></div>	880	0.5214	50	1	N/A	Yes
<input type="checkbox"/> CLegacyAdapterOut	On	On	Exclusive	0	<div style="width: 10px;"></div>	3	0.0001	50	0	N/A	Yes
<input type="checkbox"/> CISalesOrder	On	On	Exclusive	0	<div style="width: 10px;"></div>	1,371	0.8406	50	0	N/A	Yes
<input type="checkbox"/> CISalesOrderChecked	On	On	Exclusive	0	<div style="width: 0px;"></div>	0	0	50	0	N/A	Yes
<input type="checkbox"/> CISalesOrderNotification	On	On	Exclusive	0	<div style="width: 0px;"></div>	0	0	50	2	N/A	Yes
<input type="checkbox"/> CISalesOrderNotificationProcesse...	On	On	Exclusive	0	<div style="width: 10px;"></div>	766	0.4715	50	0	N/A	Yes

Congratulations, if you are seeing both the Started iflow as well as the consumers on the queue, then that confirms that your iflow is running and has successfully opened and bound to the queue waiting for event to flow!


8. Scenario 4 - SalesOrder: AEMSalesOrderToDatastore & DatastoreToLegacyOutputAdapter (OPTIONAL)

With the introduction of the Advanced Event Mesh, not all customers will be ready to adopt an Event Driven approach for all of their applications. They will be able to innovate in some areas but also have to sustain existing applications that use Flat Files. In this scenario, we will use a couple of the common Cloud Integration artifacts to facilitate this scenario. We will use 2 iFlows to accomplish this.

This iFlow “AEMSalesOrderToDatastore” will subscribe to events on the Advanced Event Mesh, convert them to XML (E.g. The DataStore object only works with XML) and then write them into the DataStore.

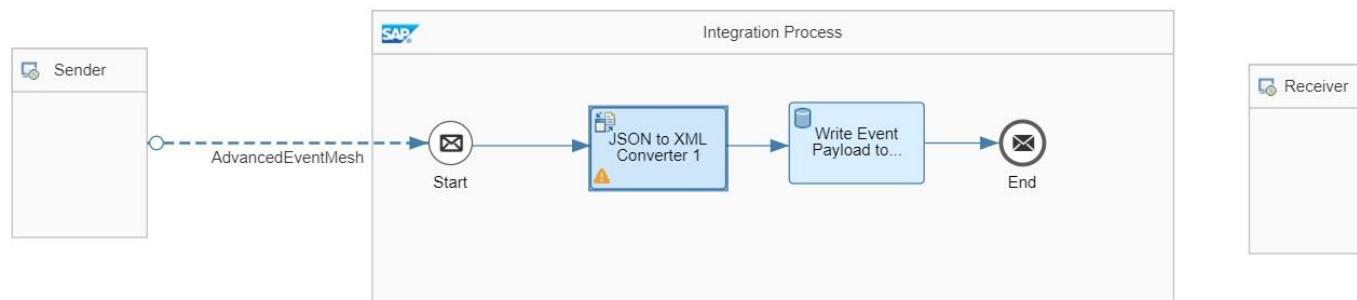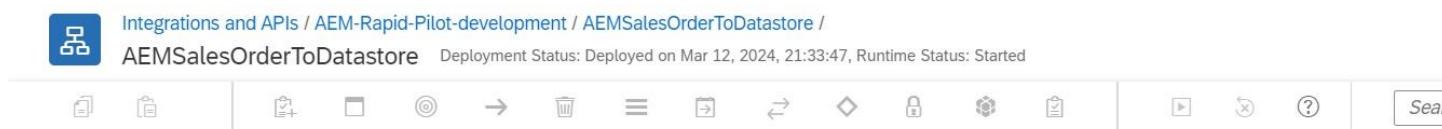

We will then use a second iFlow to pull the events from the DataStore, convert them back to JSON and then use the SFTP adapter to create a flat file full of these events.

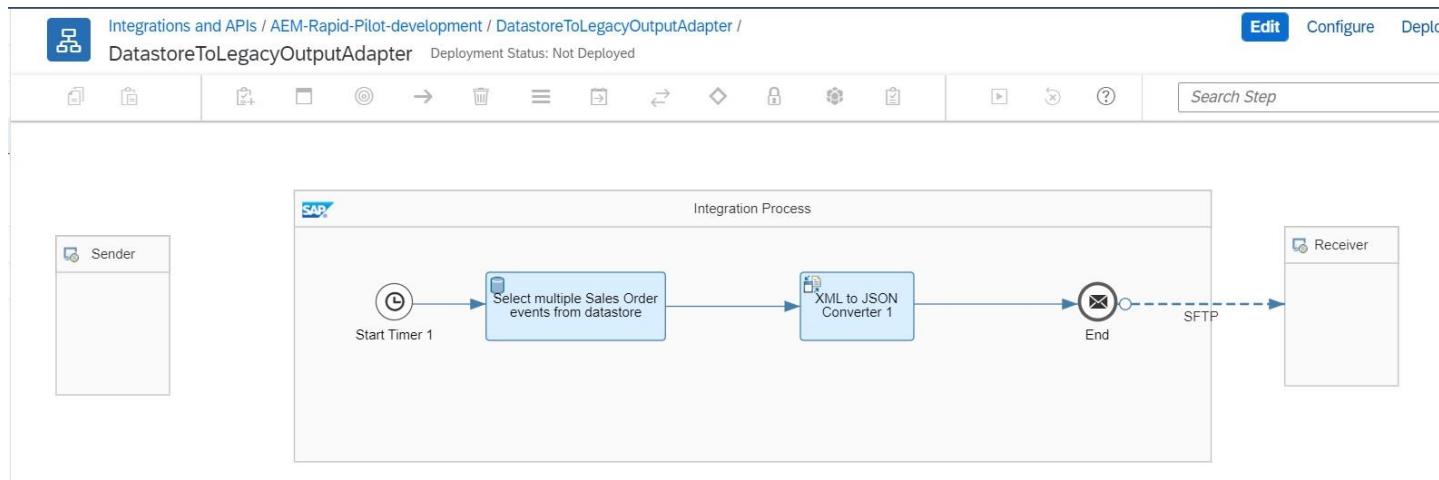

The first iFlow “AEMSalesOrderToDatastore” can be downloaded [HERE](#). You will follow the same process as earlier to import the iFlow – except this time we are just importing 1 iFlow into our package instead of a whole package (head to your iFlow package to import a single flow into that package).

Under the Connection tab, you will need to specify your host and of course, as per the first iFlow, we will be using the same secure credential that you created in the first section.




AdvancedEventMesh

- [General](#)
- [Connection](#) selected
- [Processing](#)

SENDER CONNECTION DETAILS

Host:	YOURAEMBROKER
Message VPN:	montrealbroker-10-1
Username:	solace-cloud-client
Authentication Type:	Basic
Password Secure Alias:	CABrokerUserPass

Just notice that the name of the queue is FFSalesOrders. This artifact was included in the list of objects earlier in the CI/CD step so you shouldn't have to do anything to create that object. However, it would be prudent to check the AEM console to make sure that artifact is there. Also, notice on the adapter settings there is a retry capability with a few properties.

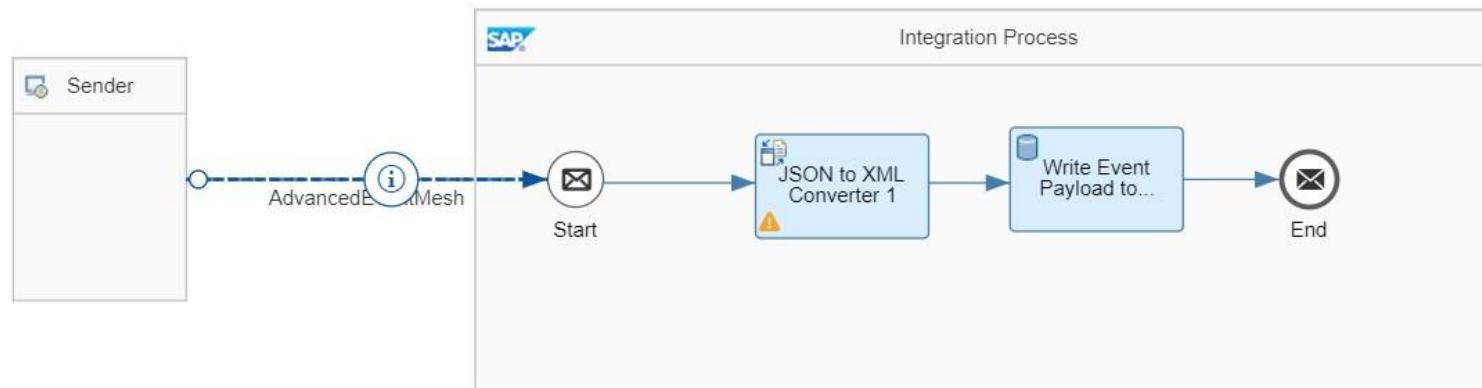

AdvancedEventMesh

General Connection Processing

SENDER PROCESSING DETAILS

Consumer Mode: Guaranteed

Parallel Consumers: 1

Queue Name: FFSalesOrders

Selector:

Acknowledgment Mode: Automatic Immediate

Maximum Message Processing Attempts: 5

Data Ingestion Frequency: 1000

Deploy the iFlow and do a quick test by creating another order with the [UI5 Order Entry Application](#).

From the monitor, you should now see a Data Store as shown in the screenshot. (** Of course, if you are using the Data Store object, you should see the number incremented ***)

The screenshot shows the SAP Integration Suite interface. The left sidebar has a navigation menu with items like Home, Discover, Design, Monitor (which is selected), and Settings. The main area is titled 'Overview' and contains several sections: 'Connectivity Tests' (empty), and 'Manage Stores' which includes tiles for Data Stores (1), Variables (0), Message Queues (0), and Number Ranges (0). The 'Data Stores' tile is highlighted with a blue border.

Clicking on the Data Stores Tile, you should see the name of the Data Store specified in the iFlow.

The screenshot shows the SAP Integration Suite interface. The left sidebar has a navigation menu with the following items:

- Home
- Discover >
- Design < (with a dropdown arrow)
- Integrations and APIs
- Monitor < (with a dropdown arrow)
- Integrations and APIs (highlighted with a light blue background)
- Inspect
- Settings >

The main content area is titled "Overview / Manage Data Stores". It displays a table with one row:

Data Stores (1)	Filter by Name	Actions
AggregateSalesOrders	17	Global

If after you submit the new order with the UI5 application, you see at least 1 Object appear in this window, you are on the right track and should proceed to the next section iFlow which will be pulling these orders out of the Data Store.

The second iFlow “DatastoreToLegacyOutputAdapter” can be downloaded [HERE](#). Same as above, import the iFlow.

Once imported, the only thing that needs to be configured are the SFTP properties. You will need to change the properties to reflect your SFTP server. There are 2 security materials that need to be created so that the SFTP credentials can be properly used in the iFlow.

First go back to the Manage Security section within Cloud Integration.

SAP Integration Suite

Home

Discover >

Design >

Monitor > **Integrations and APIs**

Inspect

Settings >

Overview

Monitor Message Processing

All Artifacts Past Hour 0 Messages	All Artifacts Past Hour 0 Failed Messages	All Artifacts Past Hour 0 Retry Messages
---	--	---

Manage Integration Content

All 25 All	All 25 Started	All 0 Error
----------------------	--------------------------	-----------------------

Manage Security

Security Material 29 Artifacts	Keystore 10 Entries	PGP Keys 0 Keys
--	-------------------------------	---------------------------

Here you will create these 2 artifacts.

Name	Type	Status	Deployed By	Deployed On
known.hosts	SSH Known Hosts	Deployed	brad.caldwell@solace.com	Mar 12, 2024, 13:42:43
sftpuser	User Credentials	Deployed	brad.caldwell@solace.com	Mar 12, 2024, 09:40:17

First let's create the User Credentials for the sftpuser. Click "Create" then "User Credentials". Use the name- sftpuser. Then input the Username and password to your sftp server and click "Deploy"

Edit User Credentials

Name: * sftpuser

Description:

Type: * User Credentials


User: * sftpuser

Password:

Repeat Password:

Deploy Cancel


Now let's add the SSH Known Hosts. This one requires a few extra steps. First, we need to run a connectivity test to the SFTP server which will give us the "Host Key"

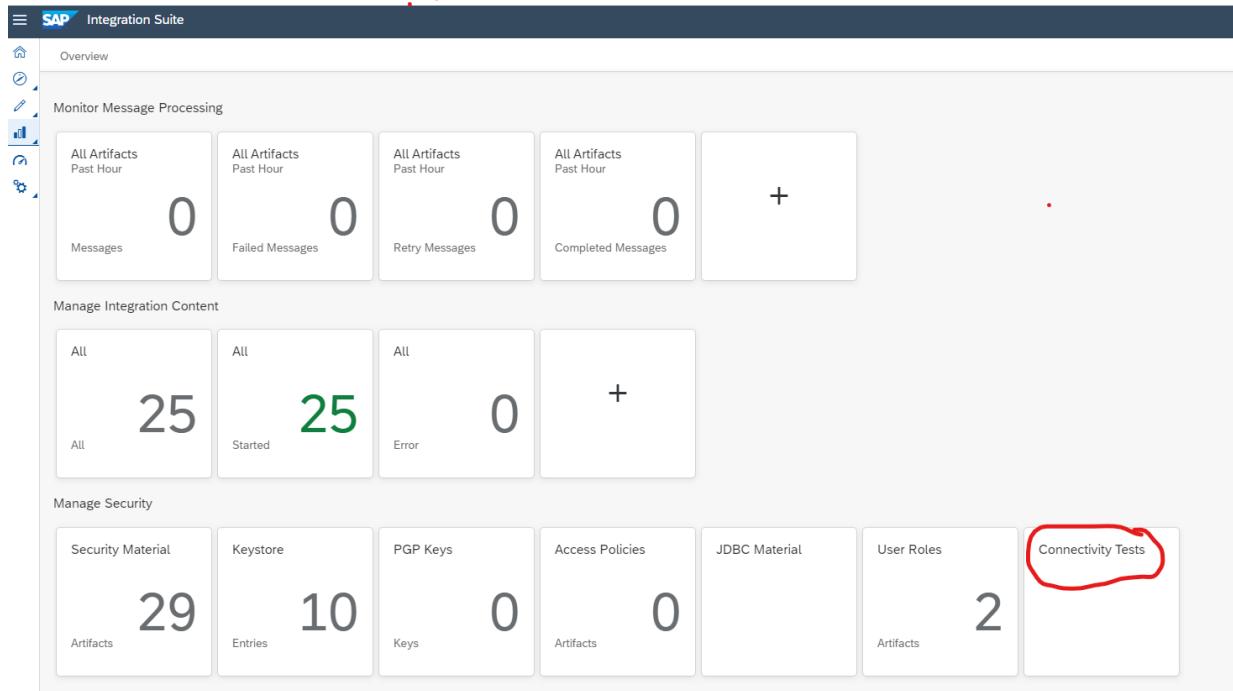

Choose the SSH option at the top. Enter your SFTP server address in the Host field. Add Port. Click “Send” to test the connection. If the connection is successful, you can now click “Copy Host Key” to obtain your Host Key.

Now that you have the Host Key. You can open a text file like notepad, paste the host Key you copied and name the file known.hosts.txt. the name does not actually matter because IS will automatically change the name for you when you upload the .txt. Once you have saved the .txt file with your host key in it, go back to the Security Material tile where we created the user credentials and at the top select “Upload” > Know Hosts (SSH). Select the .txt file that you just saved and click “Deploy.” (Note: if you have an existing Known.host from a prior project you can skip this step if you are using the same sftp server or you can download the existing host and update the new Host Key and re-upload)

Now that your Credentials and SSH key are available you will be able to properly connect to your SFTP server using the SFTP adaptor in Cloud Integration. Now you can go back to the “DatastoreToLegacyOutputAdapter” iFlow that you imported and update the SFTP Adaptor Target settings with your credentials. Make sure to add the Port at the end of your address like the screenshot below and use the sftpuser credential in the Credential Name field. For the File Access Parameters we use Filezilla which is a free FTP solution that can be downloaded [HERE](#). Within Filezilla you can connect to your SFTP server and create a Directory that we will send and read our flat files from. We called ours RPP, but feel free to choose your own name for both the directory and the file. We named the file salesorders because we are simulating sales order objects. Lastly uncheck the “Append Timestamp” box. We won’t need it for testing. Make sure to save your changes.

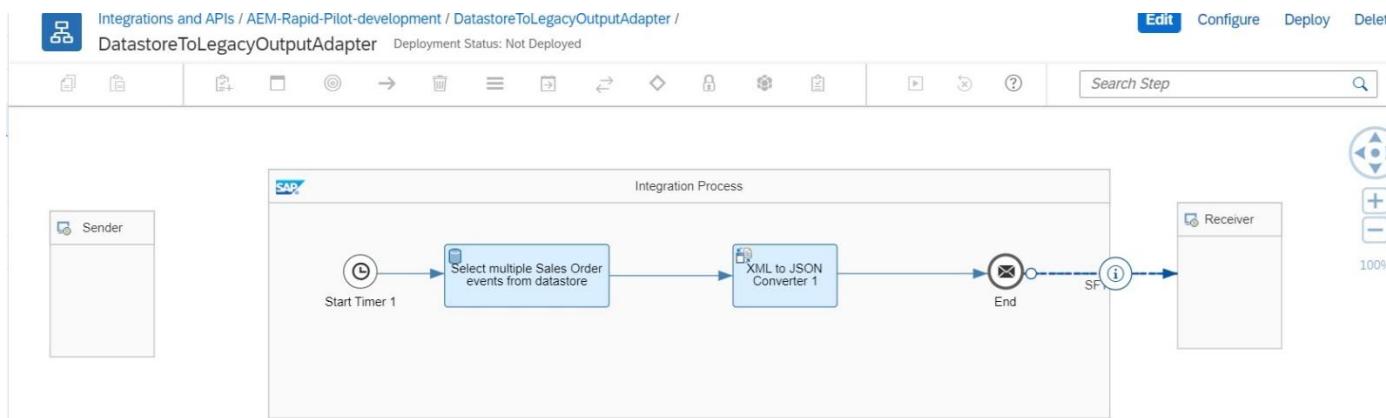

SFTP

Target

FILE ACCESS PARAMETERS

- Directory: RPP
- File Name: Salesorders
- Append Timestamp:

CONNECTION PARAMETERS

- Address: london.solace.com:22234
- Proxy Type: Internet
- Authentication: User Name/Password
- Credential Name: sftpuser
- Timeout (in ms): 10000

As you can see in the next screenshot, nothing here to change but it references the same DataStore object and we specify ‘10’ as the number of “Events” that should be grabbed from the DataStore during each poll.

Integrations and APIs / AEM-Rapid-Pilot-development / DatastoreToLegacyOutputAdapter / DatastoreToLegacyOutputAdapter Deployment Status: Not Deployed

Edit Configure Deploy

Sender Receiver

Integration Process

```

graph LR
    Start((Start)) --> Timer1((Start Timer 1))
    Timer1 --> Select[Select multiple Sales Order events from datastore]
    Select --> Info(( ))
    Info --> Convert[XML to JSON Converter 1]
    Convert --> End((End))
    End -.- SFTP[SFTP]
    SFTP --> Receiver[Receiver]
  
```

Select

General Processing

Data Store Name: AggregateSalesOrders

Visibility: Global

Number of Polled Messages: 10

Delete On Completion:

Once your SFTP properties are configured, just one last thing to check/modify. During our testing, we set the timer to be “execute once”. As configured, it will run just one time after it’s deployed. So, now you can deploy your iFlow via top right button “Deploy”, you should see a flat file appear with all of your Sales Orders in the directory you specified in the SFTP properties. We are using FileZilla as the SFTP Client, it seems to work well.

9. Security and fine grained access control to topics

For this section and in general, we would like to take this opportunity to answer a common question. Is it possible to prevent clients from publishing to certain Topics and/or subscribing to certain topics?

The answer is absolutely!

We would like everyone to experience an Access Control List and how it can be used to control what is published or subscribed.

Experimenting publishing and subscribing to protected topics

From the console, we need to navigate to the broker manager. You can get there by either clicking on the "Open Broker Manager" button or clicking any of the Tiles labelled "Clients", "Queues", "Access Control".

The screenshot shows the Solace Broker Manager interface for the broker named "MontrealBroker-10.1". At the top, there is a navigation bar with links for Status, Connect, Manage, Monitoring, Configuration, and Try Me!. The "Manage" link is currently selected. On the right side of the header, there is a button labeled "Open Broker Manager" which is highlighted with a red box. Below the header, there is a section titled "Event Broker Service Settings" with three cards: "Authentication" (Enabled), "Certificate Authorities" (0 Client Certificate Authorities, 1 Domain Certificate Authority), and "Client Profiles" (1 Client Profile). There is also a "Deletion Protection" section with options for "Delete Protection" and "Delete Service". Below this, there is a section titled "Broker Manager Quick Settings" with five cards: "Message VPN", "Clients", "Queues", "Access Control", and "Bridges". At the bottom, there is a section titled "Other Management Tools".

You will then see the Broker Manager Screen and on the left you will see a more advanced "try-me" test client. Click on it, to reveal the information you must provide to connect: For this screen, you will be trying to connect to our Broker (Note: We are doing this because your iFlow on Day 3 will send an Event to our broker to send an email) where we have created an ACL to limit what you can do and on what topics you can publish. The information you will use is as follows:

```
Broker URL: wss://montrealbroker.messaging.solace.cloud:443
Message VPN: montrealbroker-10-1
Client UserName: email-profile
Client Password: ***** <- provided during the course
```

The screenshot shows the SAP Solace Cloud interface for "Send and Receive". On the left, a sidebar lists various components: MontrealBroker-10.1, messaging, clients, queues, connectors, access control, telemetry, replay, bridges, JMS JNDI, Try Me!, Advanced Messaging, caches, transactions, System, and Clustering. The "Try Me!" button is highlighted.

The main area is titled "Publisher" and contains the "Establish Connection" section. It includes fields for "Broker URL" (wss://mr-connection-qhglik3f2ezp.messaging.solace.cloud:443), "Message VPN" (montrealbroker-10-1), "Client Username" (email-profile), and "Client Password" (redacted). A "Disconnect" button is visible.

The "Publish" section allows selecting a topic or queue to publish to. The "Topic" option is selected, and the topic name "try-me" is entered in the input field. The "Delivery Mode" is set to "Direct".

The "Message Content" field contains the message "Hello world!".

Once you have entered in the connectivity information, you should see the "Connected" message in blue.

Once connected, change nothing and hit "Publish", you should immediately see the "Publish ACL Denied" on this action because the ACL will not permit you to complete this action.

SAP

MontrealBroker-10.1

montréalbroker-10-1

Change VPN

Messaging

Message VPN

Clients

Queues

Connectors

Access Control

Telemetry

Replay

Bridges

JMS JNDI

Try Me!

Advanced Messaging

Caches

Transactions

System

Clustering

Version 10.4.1.2b

Send and Receive

Publisher

Establish Connection Connected

Publish
Select a topic or queue to publish to:
 Topic Queue
try-me
Delivery Mode:
 Direct Persistent

Message Content
Hello world!

Subscribe
How do you want to receive messages:
Subscribe to a topic to receive direct messages
try-me
Bind to an endpoint to receive guaranteed messages

Messages (Most Recent 20)
0 Direct 0 Persistent 0 Non-Persistent

Try Me!

Message is rejected with error

Publish ACL Denied

Messages Published
1 Direct 0 Persistent

The screenshot shows the SAP Integration Suite Send and Receive interface. On the left, a sidebar lists various components like Messaging, Message VPN, and Connectors. The 'Try Me!' option under Advanced Messaging is highlighted. The main area is titled 'Send and Receive' and is divided into 'Publisher' and 'Subscriber' sections. In the Publisher section, 'Establish Connection' is connected, and a 'Publish' section is set up to publish to a topic named 'try-me'. The message content is 'Hello world!'. In the Subscriber section, 'Establish Connection' is not connected, and a 'Subscribe' section is set up to subscribe to the same topic 'try-me'. Below these, there's a 'Bind to an endpoint to receive guaranteed messages' section. At the bottom, a message box shows an error: 'Message is rejected with error Publish ACL Denied'. Statistics at the bottom show 1 Direct message published.

Now, let's try the exact same thing with the subscription. Hit the "Connect" button, and you should see the connection properties already populated so accept this and hit connect.

Subscriber

Establish Connection

Not Connected

Broker URL Same as Publisher
wss://mr-connection-qhglik3f2ezp.messaging.solace.cloud:44

Message VPN Same as Publisher
montrealbroker-10-1

Client Username Same as Publisher
email-profile

Client Password
.....

Subscribe

How do you want to receive messages

Subscribe to a topic to receive direct messages

try-me

Subscribe

The screenshot shows the 'Subscriber' configuration page. At the top, it says 'Establish Connection' with a status of 'Not Connected'. It includes fields for 'Broker URL' (set to 'Same as Publisher' with value 'wss://mr-connection-qhglik3f2ezp.messaging.solace.cloud:44'), 'Message VPN' (set to 'Same as Publisher' with value 'montrealbroker-10-1'), 'Client Username' (set to 'Same as Publisher' with value 'email-profile'), and 'Client Password' (redacted). Below this is a 'Subscribe' section with a dropdown menu set to 'Subscribe to a topic to receive direct messages' and a text input field containing 'try-me'. A 'Subscribe' button is at the bottom of this section.

Once connected, you will see this:

The screenshot shows the MQTT.js Subscriber interface. At the top, it says "Establish Connection" and "% Connected" with a progress bar. To the right is a "Disconnect" button. Below this is a "Subscribe" section with the heading "How do you want to receive messages". A dropdown menu is open, showing "Subscribe to a topic to receive direct messages" with "try-me" selected. There is also a "Bind to an endpoint to receive guaranteed messages" option. At the bottom, there is a "Messages (Most Recent 20)" section showing 0 Direct, 0 Persistent, and 0 Non-Persistent messages. It includes "Clear Stats" and "Clear Messages" buttons.

From here, just hit the Subscribe button and you should see the following screen:

Subscriber

Establish Connection

% Connected



Disconnect

Subscribe

How do you want to receive messages

Subscribe to a topic to receive direct messages



Subscribe

Subscribed Topics

try-me

Subscription request failed with error



Subscription ACL Denied

Bind to an endpoint to receive guaranteed messages



Messages (Most Recent 20)

Clear Stats Clear Messages

0 Direct 0 Persistent 0 Non-Persistent

Again, you have been "Denied" - That was expected. 😊

Now, lets head back to the "Publisher" and change the "Topic" to <sap.com/emailnotification/created/v1> Use the following structure for your Message Content....be sure to copy the entire structure below including all of the curly braces. This is the structure that is passed to the Solace Event Mesh for processing. If successful, you should receive an email shortly after publishing with the information contained in the message. In the structure below, please replace "YOUREMAILADDRESS" with your actual email address prior to hitting the publish button.

```
{"orderHeader": [{"salesOrderNumber": "SO2958", "creator": "John Doe", "date": "2023-08-11", "salesType": "Online", "ordertype": "Expedited", "salesOrg": "SA03", "distributionChannel": "DC01", "division": "DV02", "netvalue": 423.76, "currency": "CAD", "customer": [{"customerId": "CUST008", "customerName": "scott", "zipCode": "13579", "street": "Seventh Avenue", "phone": "555-888-9999"}, {"country": "USA", "city": "Houston", "emailAddress": [{"email": "YOUREMAILADDRESS"}]}], "orderItem": [{"item": "ITEM013", "material": "MAT013", "materialType": "Product", "itemType": "Standard", "itemDescription": "Volt Electric bike", "orderSchedule": [{"scheduleNumber": "SCH013", "quantity": 40, "uom": "EA"}]}]}]
```

Send and Receive

Publisher

Establish Connection > Connected Disconnect

Publish Select a topic or queue to publish to Show Advanced

Topic Queue

sap.com/emailnotification/created/V1

Delivery Mode

Direct Persistent

Message Content

```
{"orderHeader": [{"salesOrderNumber": "SO2958", "creator": "John Doe", "date": "2023-08-11", "salesType": "Online", "orderType": "Expedited", "salesOrg": "SA03", "distributionChannel": "D001", "division": "DV02", "netValue": 423.76, "currency": "CAD"}, {"customer": [{"customerId": "CUST008", "customerName": "scott", "zipCode": "13579", "street": "Seventh Avenue", "phone": "555-888-9999", "country": "USA", "city": "Houston", "emailAddress": [{"email": "scott.dillon@solace.com"}]}]}, {"orderItem": ...}]}
```

Messages Published 1 Direct 0 Persistent Clear Stats

Publish

If you have entered the topic and message body correctly, you should see that 1 message has been published.

So how did we do that? The magic happens in the ACL Profile as shown next.

Broker Topic ACLs

We have changed the Default Publish Action to be Disallow. In other words, unless we specify an exception, the user profile associated with this ACL cannot publish anything by default. In this case, as you can see, we have listed one exception.

The screenshot shows the 'ACL Profiles' interface for an 'email-profile'. The 'Publish Topic' tab is selected. Under 'Publish Default Action', a dropdown menu is set to 'Disallow'. Below this, there is a search bar labeled 'Exceptions' with a placeholder 'Search by topic' and a clear button. Two checkboxes are present: 'Publish Exception Topic' and 'sap.com/emailnotification/created/V1', with the second one being checked. The entire 'sap.com/emailnotification/created/V1' row is highlighted with a yellow background.

For the subscription settings, it's very simple: We specify the Default Action is "Disallow" and do not provide any exceptions. AKA, this ACL does not permit any subscriptions.



ACL Profiles | email-profile

[Client Connect](#)[Publish Topic](#)[**Subscribe Topic**](#)[Subscribe Share Name](#)[Profile Users](#)

Subscribe Default Action

Disallow



Exceptions




Search by topic



Subscribe Exception Topic

Now that you have this understanding, you will see when you configure/deploy this iFlow why we have a Username "email-profile". It has been assigned the ACL email-profile so the iFlow can publish to our broker but only on that topic. Everything else is prohibited by the email-profile user ACL, so it can only be used for this single purpose.

See below screenshot for where you would have used these credentials in your iflow.

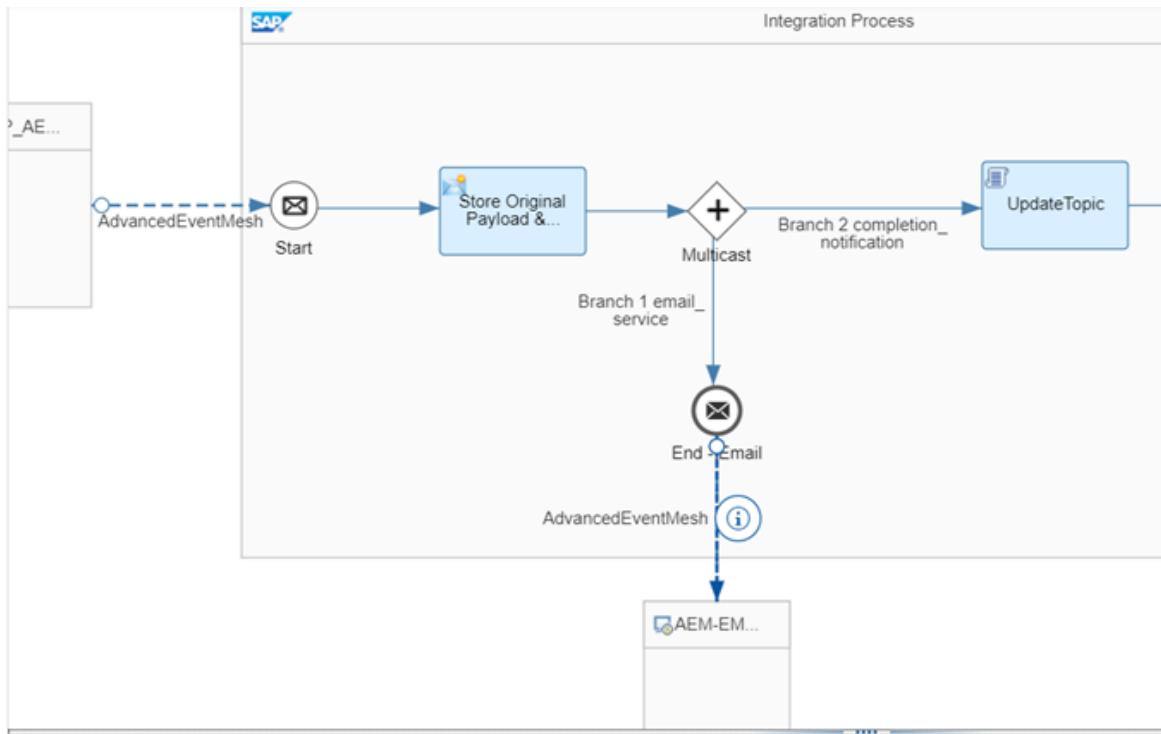

AdvancedEventMesh

General **Connection** Processing Message Properties

RECEIVER CONNECTION DETAILS

Host:	tcp://montrealbroker.messaging.solace.cloud:55443
Message VPN:	montrealbroker-10-1
Username:	email-profile
Authentication Type:	Basic
Password Secure Alias:	email-profile-pwd

As you can see, broker ACLs are a quite powerful tool to tightly control access to the broker and its topics. You can separately control publish topics and subscribe topics and even IP address ranges that clients are allowed to connect from. In addition to topic ACLs, remember that queue access is controlled by the queue ownership model and the "other permission".

10. Troubleshooting

Checking that your flow was deployed successfully.


- Go to Monitor Artifacts -> Manage Integration Content -> All.
You should be seeing your flow as Started, similar to this view:

The screenshot shows the SAP Integration Suite interface. On the left, there's a sidebar with icons for Home, Overview, Integration Content, Filter by Name or ID, and a gear icon. The main area is titled "Integration Content (14)". A table lists various integration artifacts:

Name	Status
AEMSalesOrderNotification	Started
Integration Flow	
AEMBusinessPartnerAddressCheck	Started
Integration Flow	
AEMLegacyOutputAdapter	Started
Integration Flow	
anackidemo	Started
Integration Flow	
AdvancedEventMesh	Started
Integration Adapter	
PubSubPlusEA	Started
Integration Adapter	
Rainer-test-01	Error
Integration Flow	
AEMLegacyInputAdapter	Error
Integration Flow	
BradTest	Error
Integration Flow	
SAP aEM Demo	Error
Integration Flow	
Slack	Started
Integration Adapter	
SapRtpSotConnector	Started
Integration Adapter	
AssignTechnician	Started
Integration Flow	
RabbitMQ	Started
Integration Adapter	

To the right, a detailed view for "AEMSalesOrderNotification" is shown. It includes deployment details (Deployed On: Oct 05, 2023, 14:27:07, Deployed By: christian.holtfurther@solace.com, ID: AEMSalesOrderNotification, Version: 1.0.0, Package: SOLACE-TIGER-TEAM), tabs for Endpoints, Status Details, Artifact Details, and Log Configuration, and a status message indicating success.

- Go to your AEM Console and navigate to Cluster Manager -> {your service} -> Manage and click on the Queues tile:

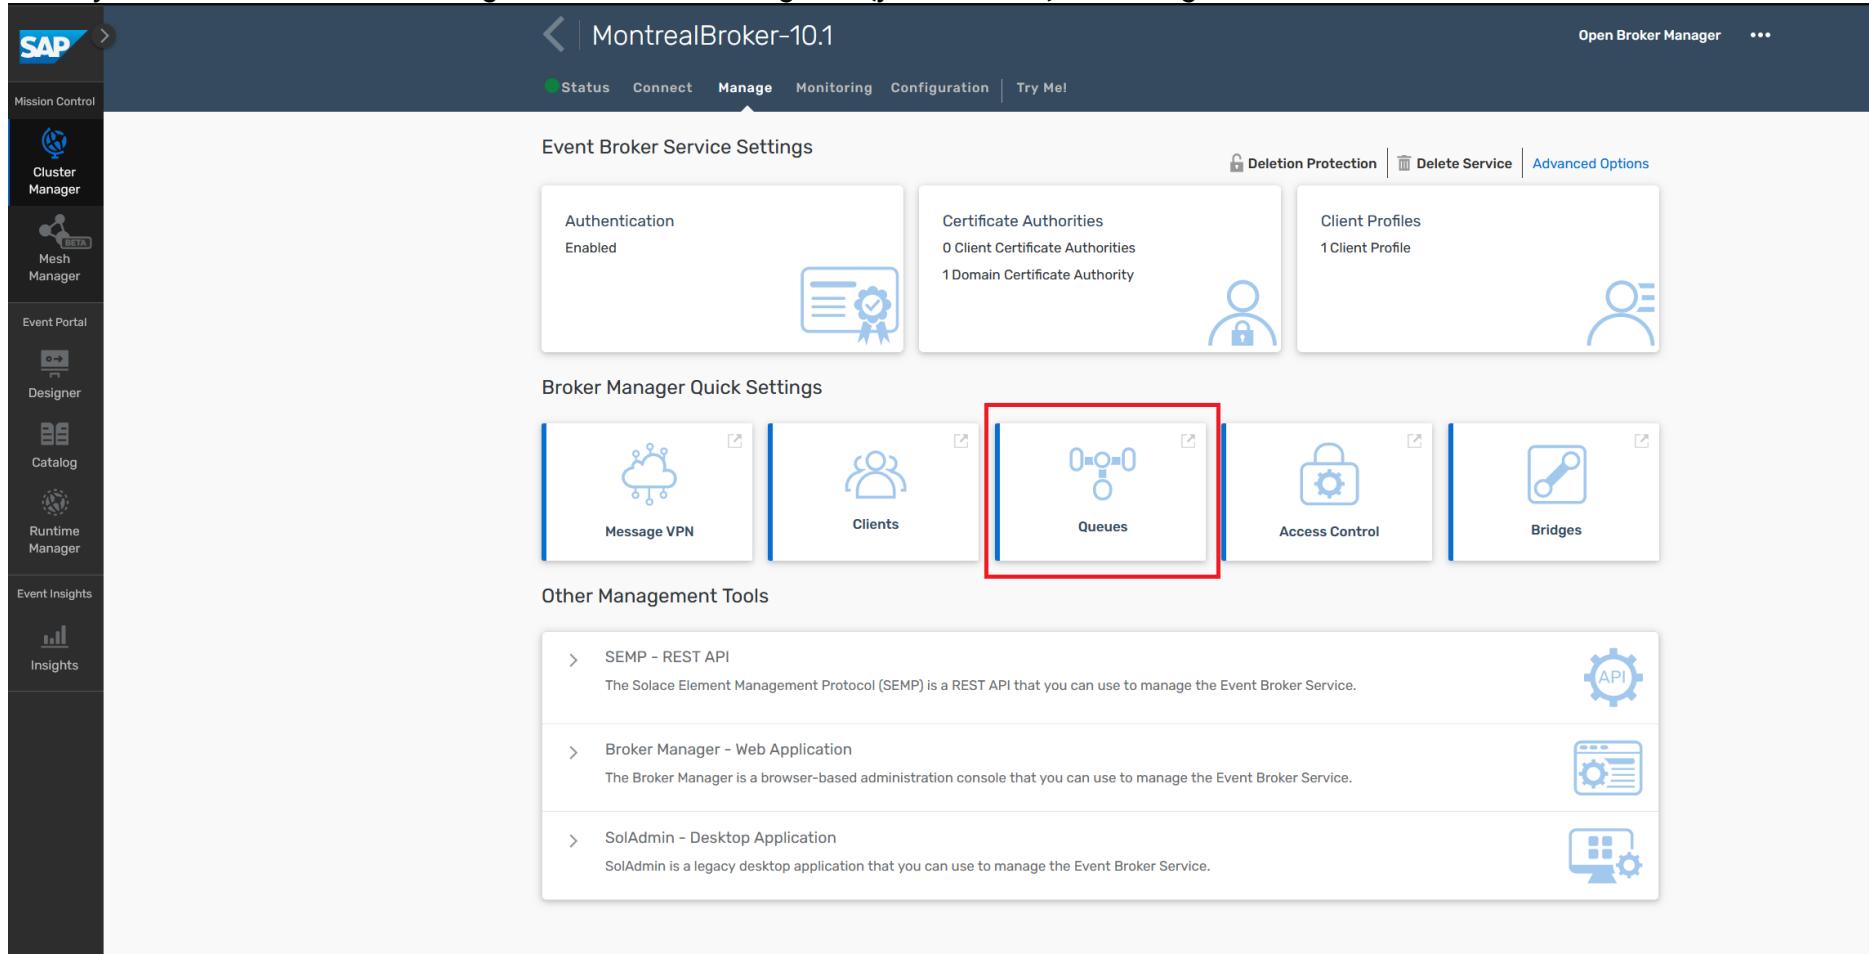

The screenshot shows the AEM Cluster Manager interface for the service 'MontrealBroker-10.1'. The left sidebar includes links for Mission Control, Cluster Manager (selected), Mesh Manager (BETA), Designer, Catalog, Runtime Manager, and Insights. The main content area displays 'Event Broker Service Settings' with sections for Authentication (Enabled), Certificate Authorities (0 Client Certificate Authorities, 1 Domain Certificate Authority), and Client Profiles (1 Client Profile). Below this is the 'Broker Manager Quick Settings' section, which includes tiles for Message VPN, Clients, Queues (highlighted with a red box), Access Control, and Bridges. At the bottom is the 'Other Management Tools' section, listing SEMP - REST API, Broker Manager - Web Application, and SolAdmin - Desktop Application.

Event Broker Service Settings

- Authentication: Enabled
- Certificate Authorities: 0 Client Certificate Authorities, 1 Domain Certificate Authority
- Client Profiles: 1 Client Profile

Broker Manager Quick Settings

- Message VPN
- Clients
- Queues** (highlighted)
- Access Control
- Bridges

Other Management Tools

- SEMP - REST API: The Solace Element Management Protocol (SEMP) is a REST API that you can use to manage the Event Broker Service.
- Broker Manager - Web Application: The Broker Manager is a browser-based administration console that you can use to manage the Event Broker Service.
- SolAdmin - Desktop Application: SolAdmin is a legacy desktop application that you can use to manage the Event Broker Service.

- Check that the input queue for your flow has at least one consumer connected to it.

The screenshot shows the SAP Cloud Platform SAP Message Broker Queues overview page. The left sidebar navigation includes: MontrealBroker-10.1, montrealbroker-10-1, Change VPN, Messaging (Message VPN, Clients, Queues selected), Connectors, Access Control, Telemetry, Replay, Bridges, JMS JNDI, Try Me!, Advanced Messaging, Caches, Transactions, System (System, Clustering). The main content area displays a table of queues:

Queue Name	Incoming	Outgoing	Access Type	Partition Count	Messages Queued (%)	Messages Queued (msgs)	Messages Queued (MB)	Messages Queued Quota (MB)	Consumers	Replay State	Durable
CIBusinessPartner	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	917	0.3088	50	0	N/A	Yes
CIBusinessPartnerChecked	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	560	0.1963	50	0	N/A	Yes
CIBusinessPartnerCheckedInvalid	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	369	0.1266	50	0	N/A	Yes
CIBusinessPartnerChecker	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	0	0	50	2	N/A	Yes
CIBusinessPartnerCheckerDMQ	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	6	0.0019	50	0	N/A	Yes
CIBusinessPartnerConverted	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	0	0	50	0	N/A	Yes
CILegacyAdapterIn	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	0	0	50	2	N/A	Yes
CILegacyAdapterInDMQ	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	880	0.5214	50	1	N/A	Yes
CILegacyAdapterOut	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	3	0.0001	50	0	N/A	Yes
CISalesOrder	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	1,371	0.8406	50	0	N/A	Yes
CISalesOrderChecked	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	0	0	50	0	N/A	Yes
CISalesOrderNotification	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	0	0	50	2	N/A	Yes
CISalesOrderNotificationProcesse...	On	On	Exclusive	0	<div style="width: 100px; height: 10px; background-color: #ccc;"></div>	766	0.4715	50	0	N/A	Yes

Checking your flow is running successfully.

- Go to Monitor Artifacts -> Monitor Message Processing -> All Artifacts (Past Hour).
In this view you can see whether your flows are being triggered and completing successfully or running into any errors.

SAP Integration Suite

Overview / Monitor Message Processing

Time: Past Week Status: All Artifact: All Artifacts

ID: Message, Correlation or Application Message

Messages (23199) 1 / 464 AEMLegacyOutputAdapter Last Updated at: Feb 24, 2024, 03:33:51

Artifact Name	Status
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:33:52	1 sec 9 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:33:51	308 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:33:51	310 ms
SalesOrderToBPaiFlow	Completed
Feb 24, 2024, 03:30:17	8 ms
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:26:53	1 sec 8 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:26:53	308 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:26:52	309 ms
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:25:53	1 sec 8 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:25:53	308 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:25:52	309 ms
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:24:53	1 sec 9 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:24:53	307 ms

Status Properties Logs Artifact Details

Message processing failed.

Processing Time: 308 ms

Error Details
org.apache.camel.component.file.GenericFileOperationException: Cannot connect to sap-sftp://sftpuser@london.solace.com:22234, cause: com.jcraft.jsch.JSchException: timeout: socket is not established

Properties

Message ID: AGXZY588bFC7WonFwORs0u7NYXBw
Correlation ID: AGXZY59G67AxbTMk0sfgyYypoABQ

Logs

Log Level: Info
Instance ID: 1

Artifact Details

Manage Integration Content
View deployed Artifact
Navigate to Artifact Editor

Name: AEMLegacyOutputAdapter
ID: AEMLegacyOutputAdapter

Open Text View

(Please note that the AEMLegacyOutputAdapter flow is meant to fail in the initial scenario.) You can use this view to see various details about the flow execution and click on the trace/log to see exactly where the flow has failed. (If the log is set to info and isn't giving you enough information to troubleshoot, then you may want to go over to the flow monitor as seen in the previous step to change it to a more detailed level.)

SAP Integration Suite

Overview / Monitor Message Processing

Time: Past Week Status: All Artifact: All Artifacts ID: Message, Correlation or Application Message

Messages (23199) 1 / 464 AEMLegacyOutputAdapter Last Updated at: Feb 24, 2024, 03:33:51

Artifact Name	Status
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:33:52	1 sec 9 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:33:51	308 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:33:51	310 ms
SalesOrderToBPaiFlow	Completed
Feb 24, 2024, 03:30:17	8 ms
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:26:53	1 sec 8 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:26:53	308 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:26:52	309 ms
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:25:53	1 sec 8 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:25:53	308 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:25:52	309 ms
AEMSONNotificationV2	Completed
Feb 24, 2024, 03:24:53	1 sec 9 ms
AEMLegacyOutputAdapter	Failed
Feb 24, 2024, 03:24:53	307 ms

Status Properties Logs Artifact Details

Message processing failed.

Processing Time: 308 ms

Error Details
org.apache.camel.component.file.GenericFileOperationException: Cannot connect to sap-sftp://sftpuser@london.solace.com:22234, cause: com.jcraft.jsch.JSchException: timeout: socket is not established

Properties

Message ID: AGXZY588bFC7WonFwORs0u7NYXBw
Correlation ID: AGXZY59G67AxbTMk0sfgyYypoABQ

Logs

Log Level: Info
Instance ID: 1

Artifact Details

Manage Integration Content
View deployed Artifact
Navigate to Artifact Editor

Name: AEMLegacyOutputAdapter
ID: AEMLegacyOutputAdapter

Open Text View

SAP Integration Suite

Overview / Monitor Message Processing / Message Processing Run

Run Steps (3)

	SFTP	1/1
	SFTP	
	Segment 1	302 ms
	End	
	Segment 1	1 ms
	PubSubPlusEA	
	Segment 1	< 3 ms

Integration Flow Model Log Content

Integration Process

```
graph LR; subgraph IP [Integration Process]; direction LR; Start((Start)) -->|PubSubPlusEA| S1(( )); S1 -->|SFTP| End((End)); end; Sender[Sender] -->|PubSubPlusEA| S1; S1 -->|SFTP| End; End -->|SFTP| Receiver[Receiver]
```

100%

11. Takeaways

- Configuring AEM broker queues, subscriptions and queue related settings
- Import additional adapters into Integration Suite (if not already present)
- Import Integration Suite packages
- Configure security related settings in Integration Suite
- Understand event-driven iflows and configure them for your AEM environment
- Receive events in Integration Suite and publish new events
- Access topic information and parse and modify topic levels to publish to new dynamic Topics
- Understand retry and error processing capabilities in the AEM adapter and the AEM broker
- How to use the broker's config APIs to automate configuration and enable CI/CD pipelines.
- How fine-grained security access in AEM works.

Thanks for participating in this codelab! Let us know what you thought in the [Solace Community Forum](#)! If you found any issues along the way we'd appreciate it if you'd raise them by clicking the Report a mistake button at the bottom left of this codelab.