

Absolute FRF proxy — tempTvalm

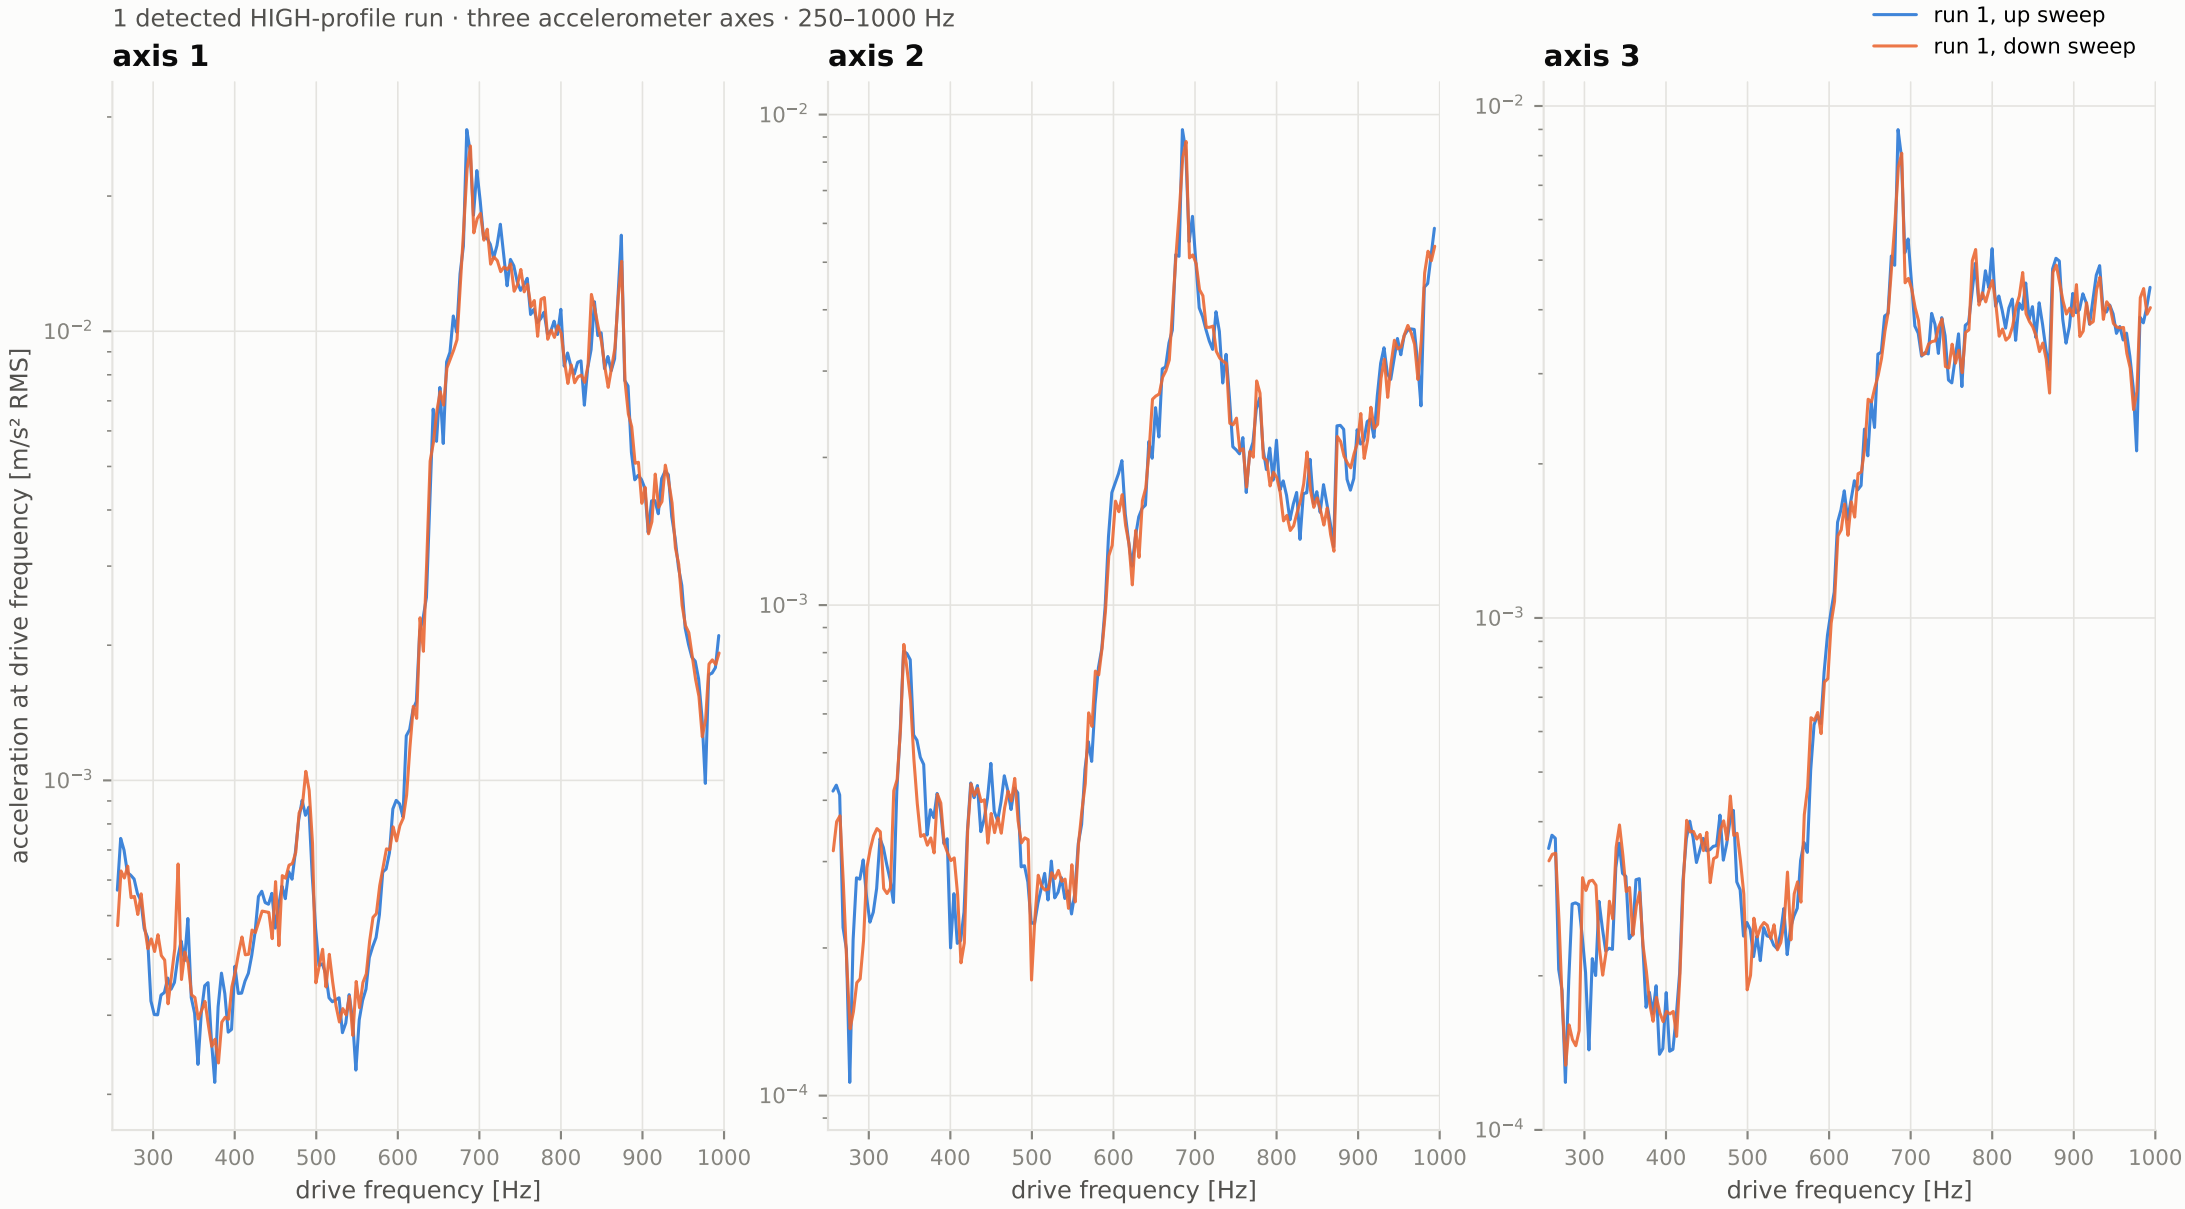

Unnormalised drive-frequency response extracted from the measured acceleration. No excitation channel was recorded, so this is an FRF proxy—not acceleration divided by a measured input.


Level-normalised FRF proxy — tempTvalm

1 detected HIGH-profile run · three accelerometer axes · 250–1000 Hz

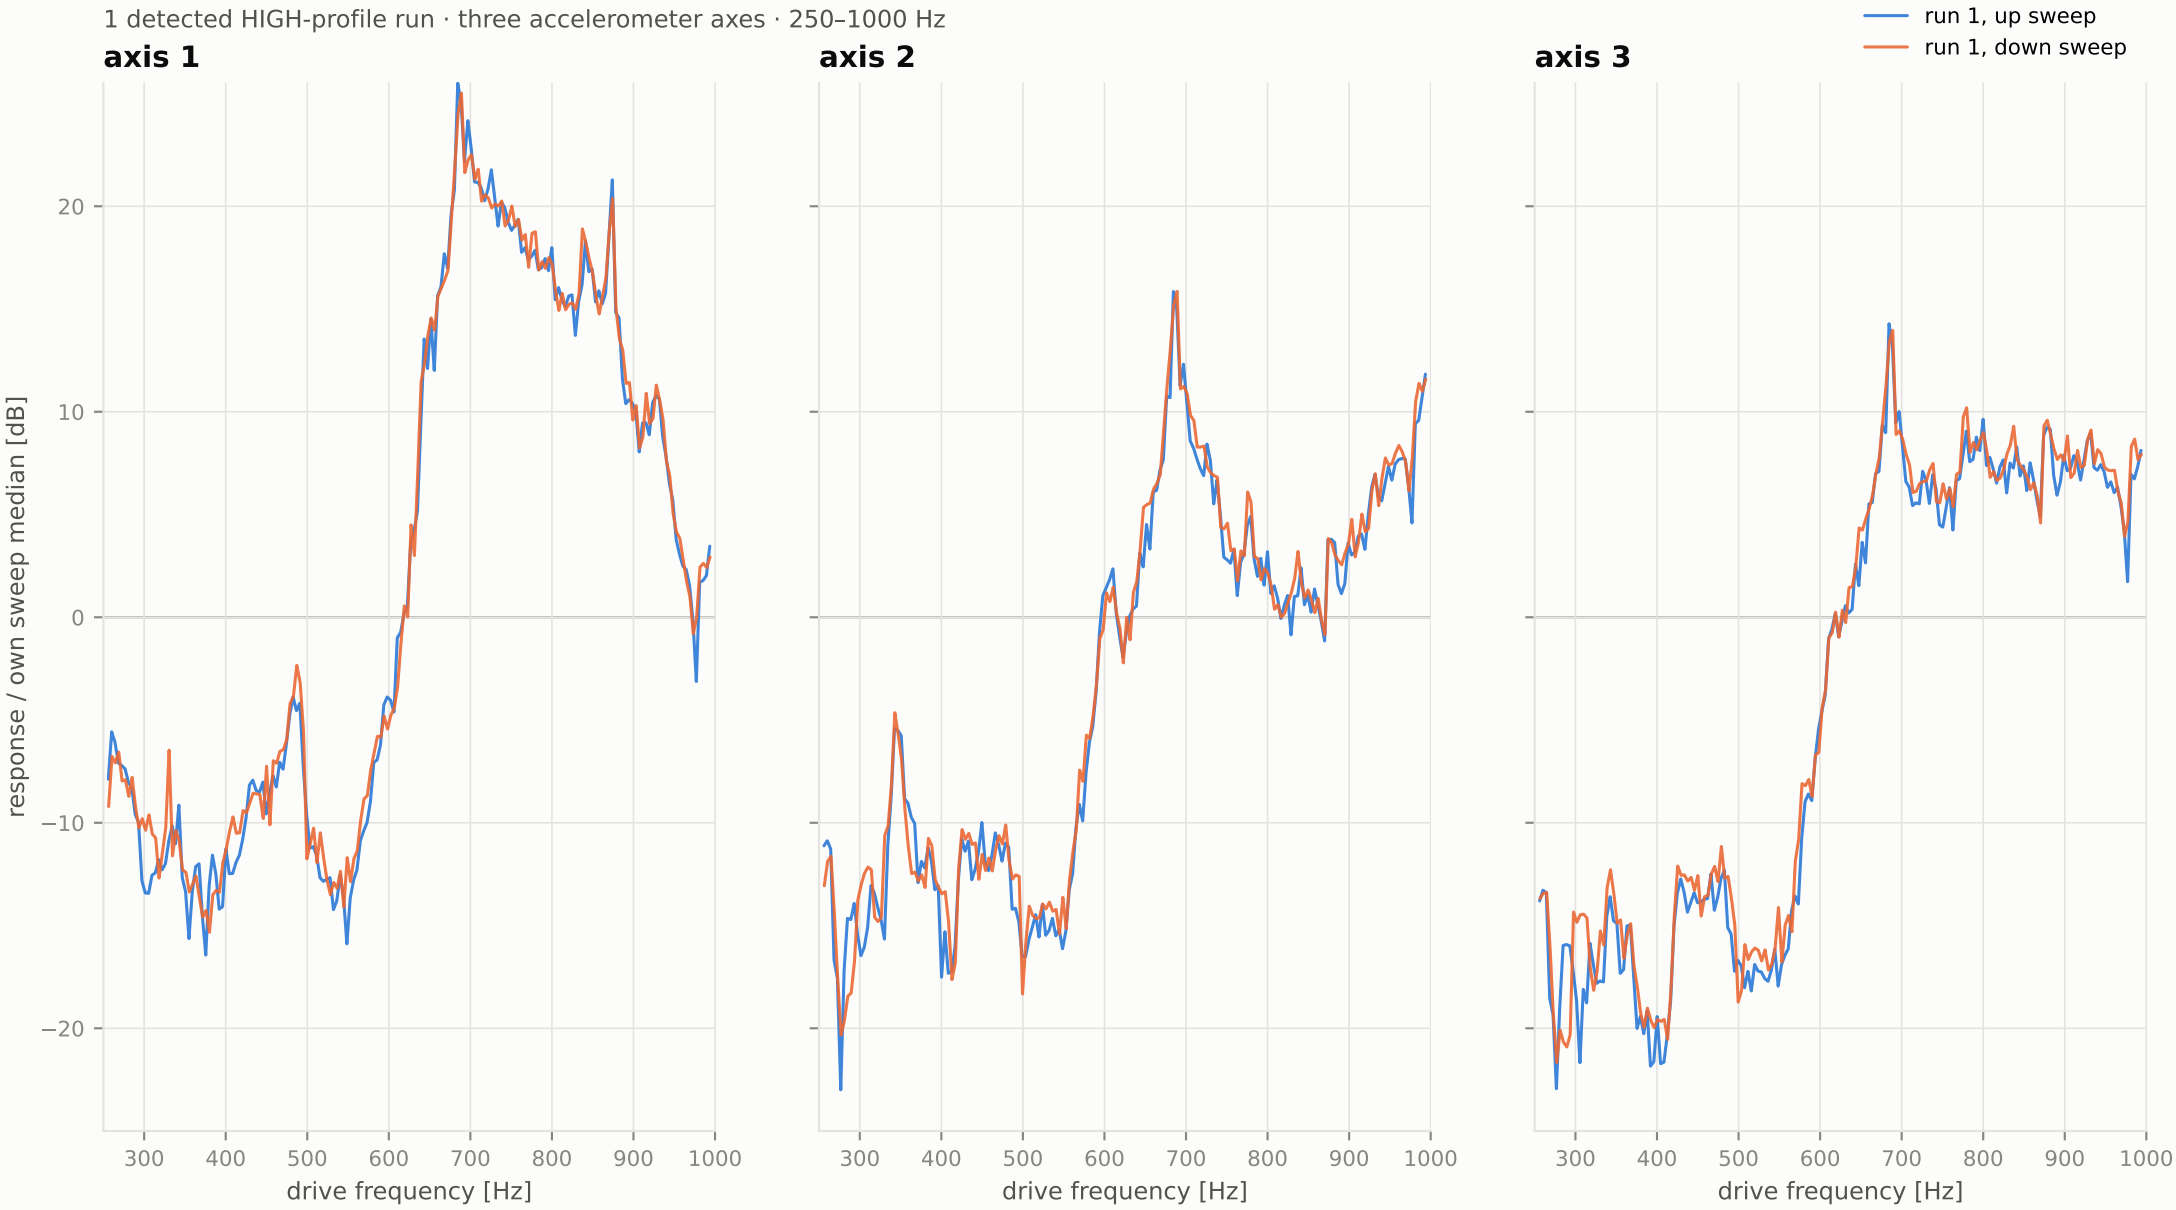


Shape-only comparison. Every sweep and axis is divided by its own median response over 250–1000 Hz; 0 dB is that median. Normalisation does not reconstruct the missing input measurement.

Absolute FRF proxy — tempTvalm2

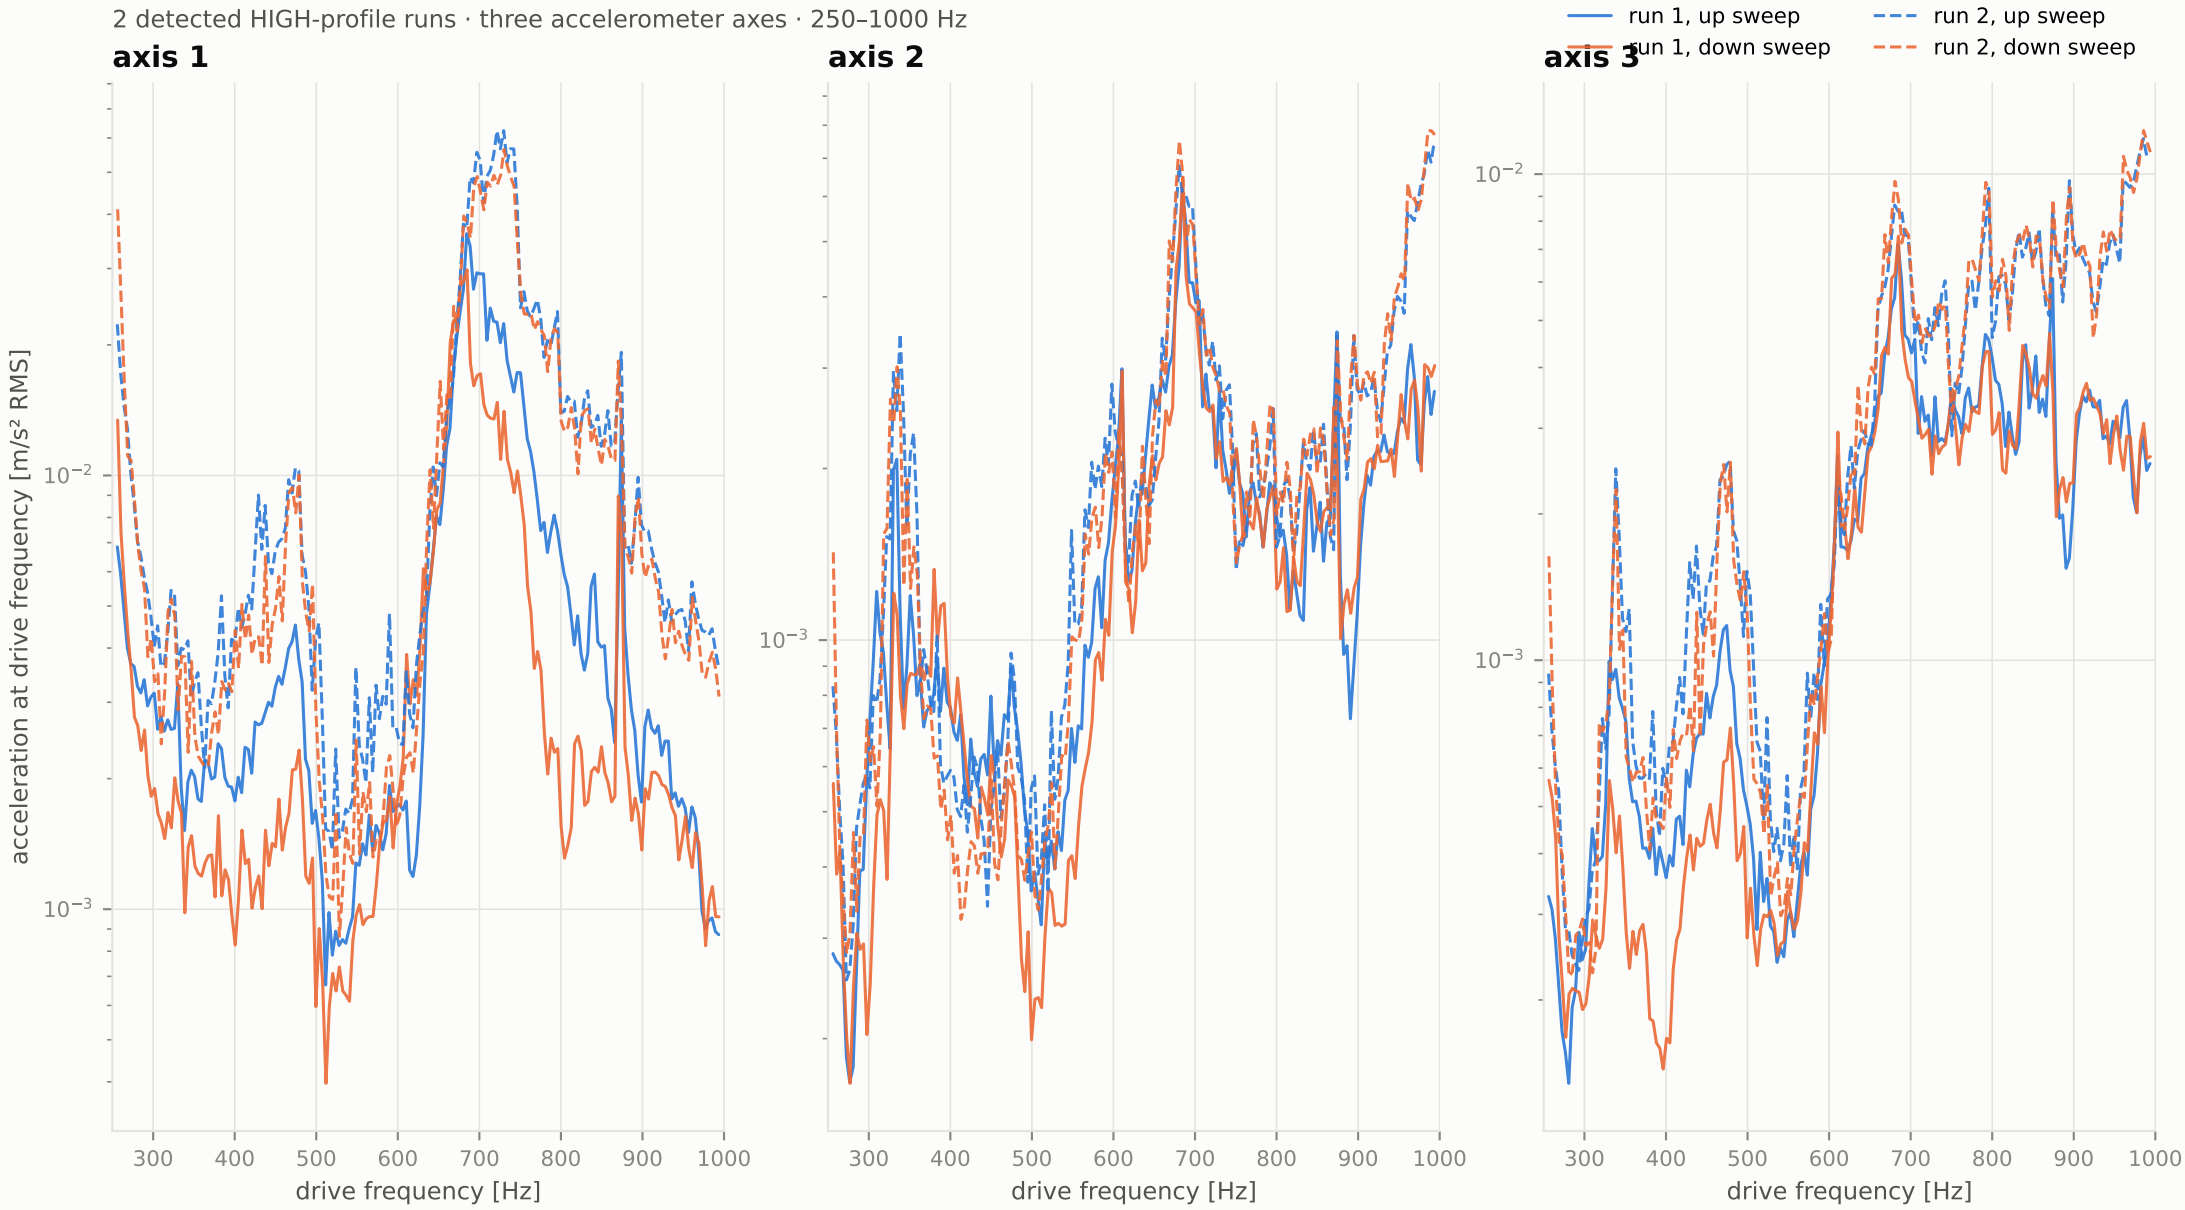

Unnormalised drive-frequency response extracted from the measured acceleration. No excitation channel was recorded, so this is an FRF proxy—not acceleration divided by a measured input.

Level-normalised FRF proxy — tempTvalm2

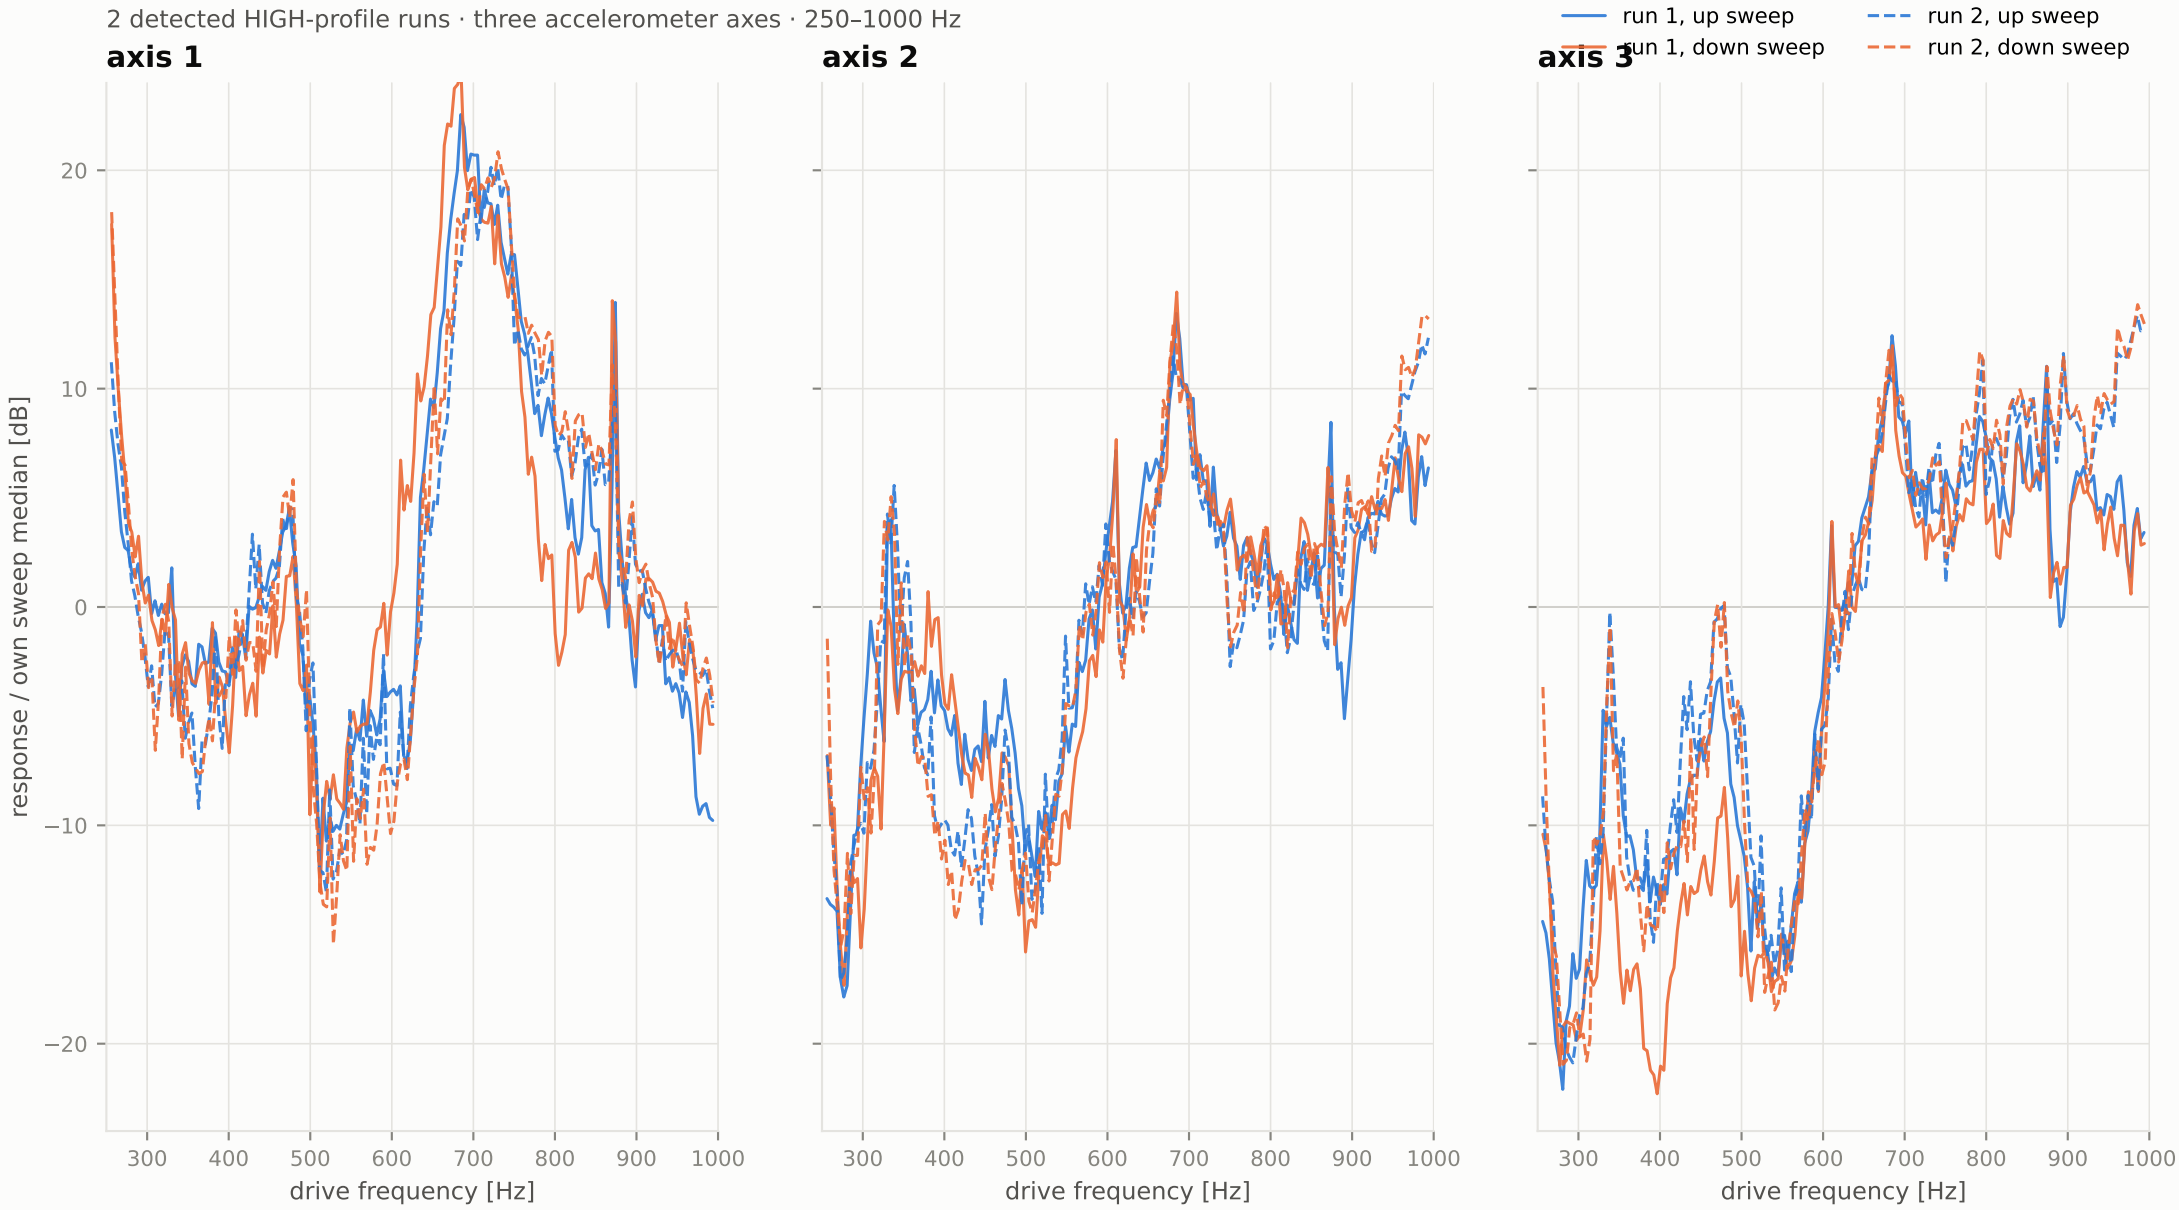

Shape-only comparison. Every sweep and axis is divided by its own median response over 250–1000 Hz; 0 dB is that median. Normalisation does not reconstruct the missing input measurement.