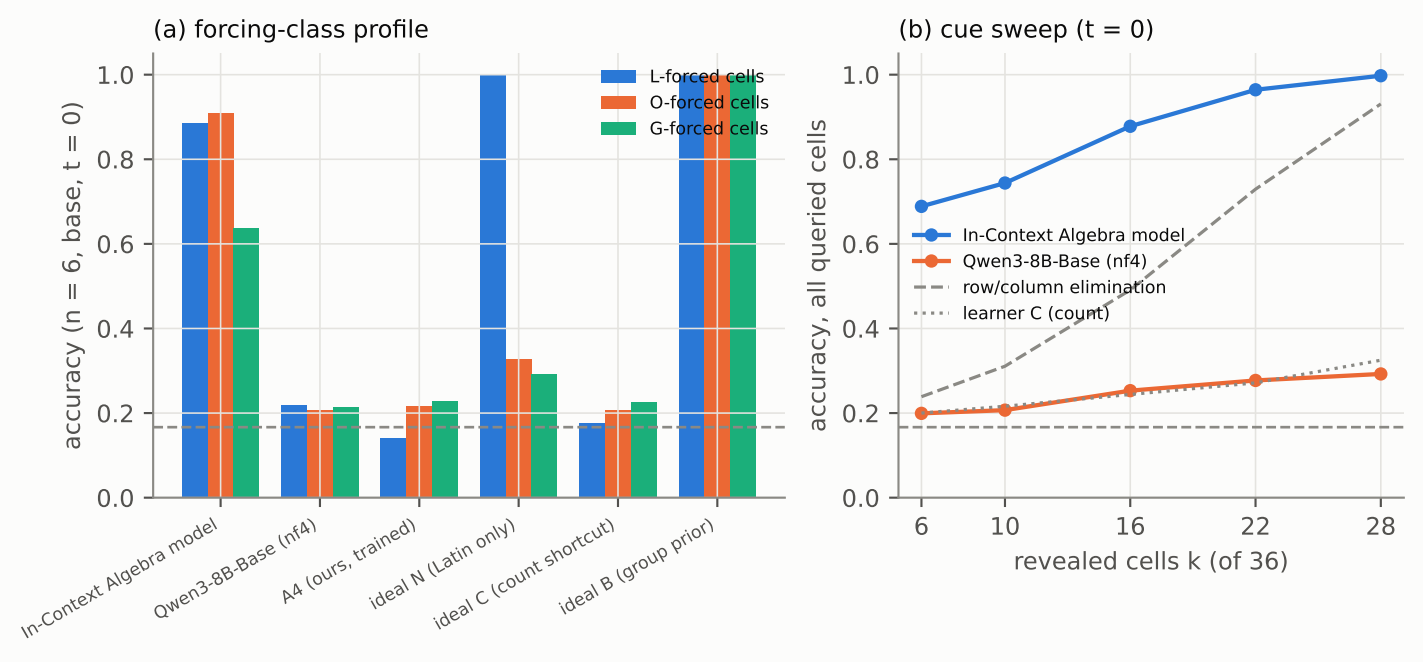
(a) forcing-class profile
accuracy (n = 6, base, t = 0)
1.0
0.8
0.6
0.4
0.2
0.0
L-forced cells
O-forced cells
G-forced cells
In-Context Algebra model
Qwen3-8B-Base (nf4)
A4 (ours, trained)
ideal N (Latin only)
ideal C (count shortcut)
ideal B (group prior)
(b) cue sweep (t = 0)
accuracy, all queried cells
1.0
0.8
0.6
0.4
0.2
0.0
In-Context Algebra model
Qwen3-8B-Base (nf4)
row/column elimination
learner C (count)
6
10
16
22
28
revealed cells k (of 36)