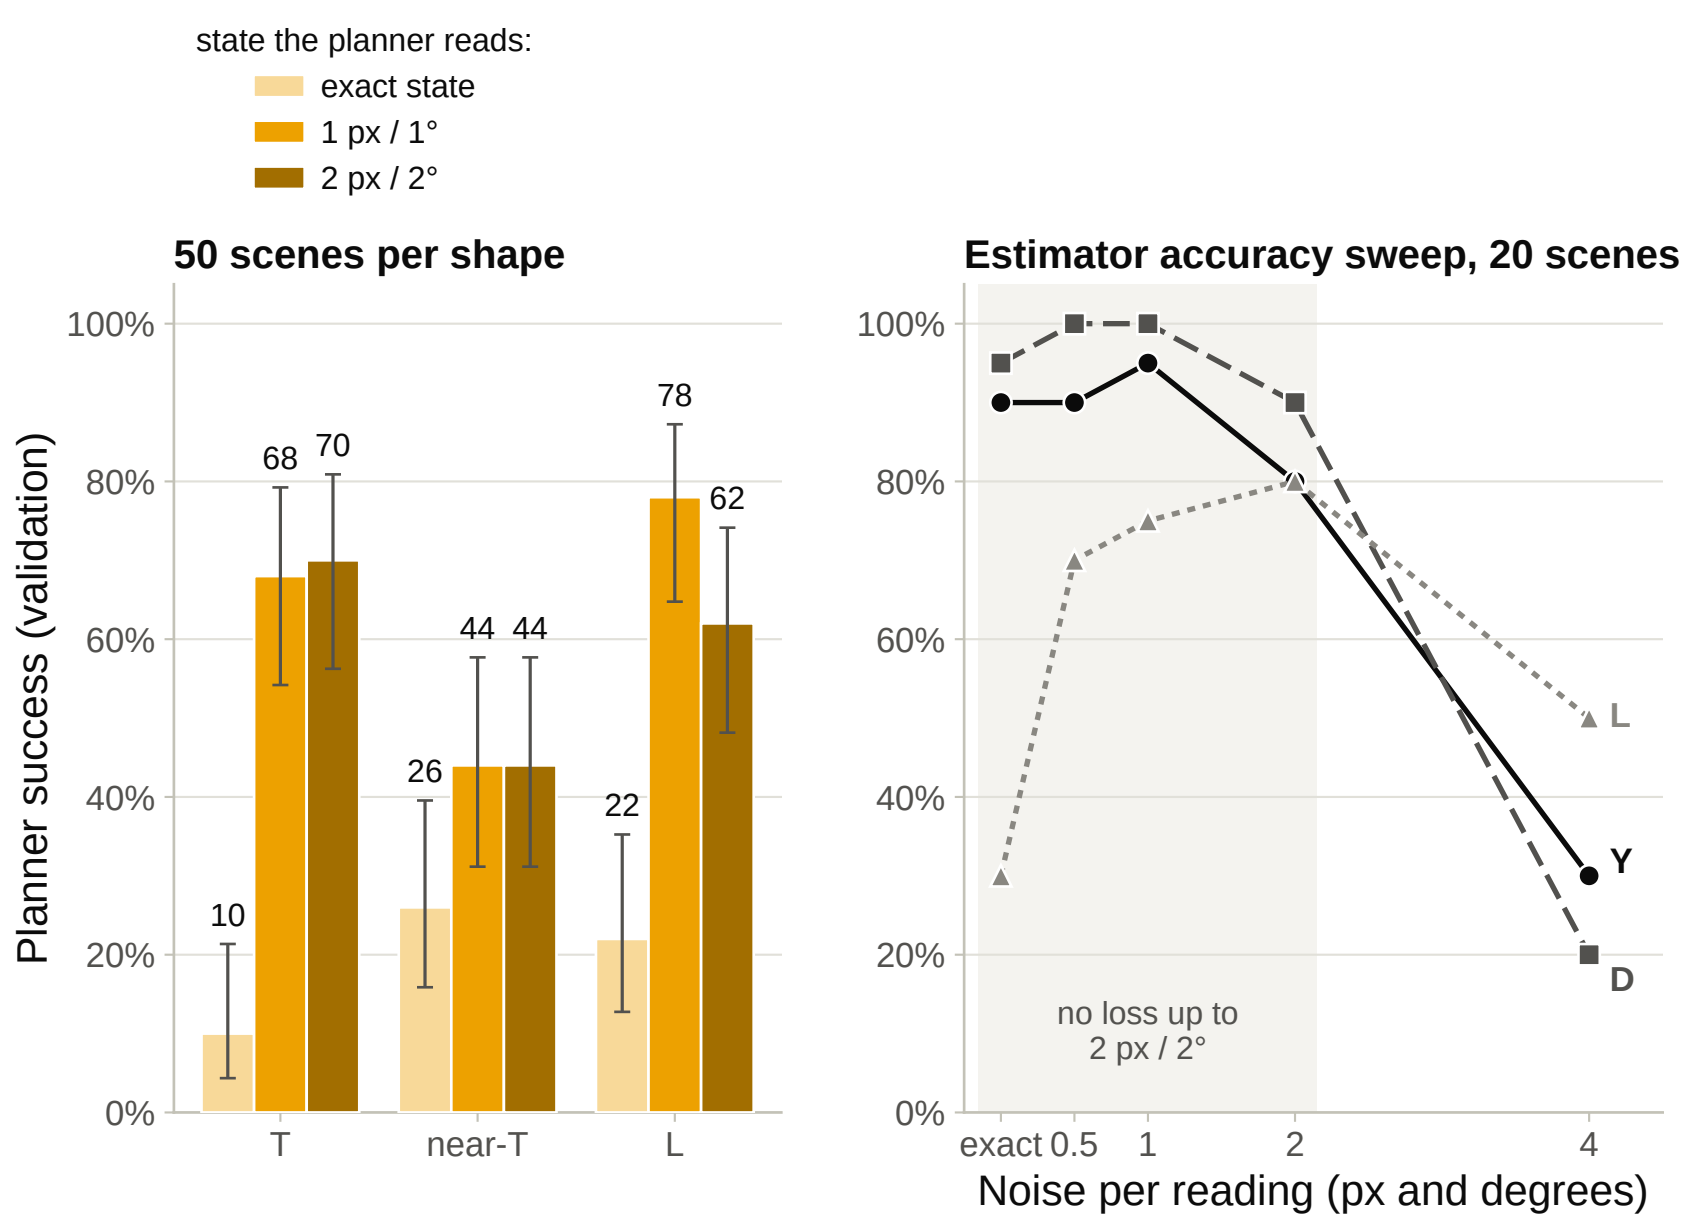

The planner teacher reads the simulator state with independent Gaussian noise each control. Left: 1 px / 1 degree noise turns T from 5 into 34 of 50 (the exact-state planner repeats the same nearly-right push). Right: an image-based estimator would need about 2 px / 2 degrees (0.4 of a 96 px camera pixel). Data: teacher_planner.csv (LEARNING_FINDINGS.md section 6).