

Introducing network topology

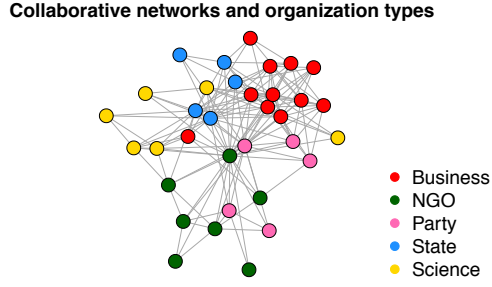


Figure 1: You may conjecture that organizations with the same type are more likely to collaborate each other at first glance; but there has been a lack of statistical method to **test if there exists any significant relationship between network topology and node-specific attributes** and if any, which node exerts the most dependency on network.

Introducing two simple Euclidean distance matrix in the context of network

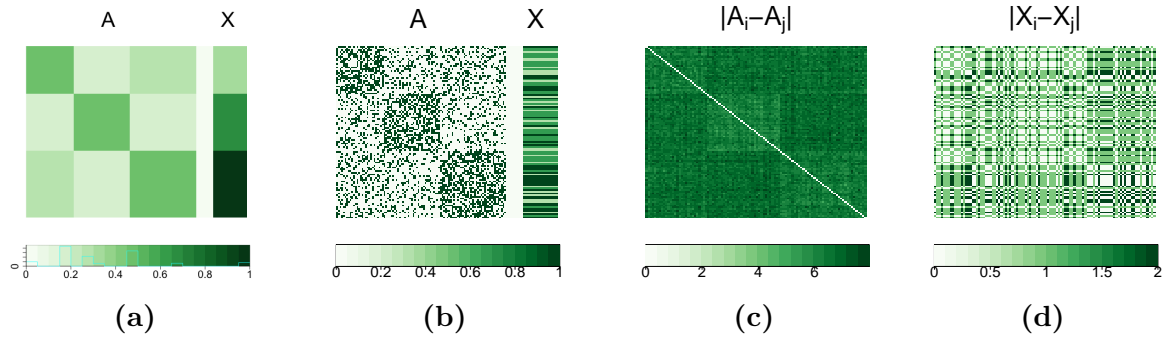


Figure 2: Assume that a set of edges follow certain stochastic block model, also depending on the distribution function of nodal attributes X (a), then with some amount of noise we have a realized adjacency matrix and a set of attribute outcomes (b) of which Euclidean distances (c & d) are suggested to be used in standard distance-based independence test **but neither of them manifests block structures evident in the data generating model and each column (or row) of an adjacency matrix is constructed dependently on the others.**

Introduce a family of network distance matrices

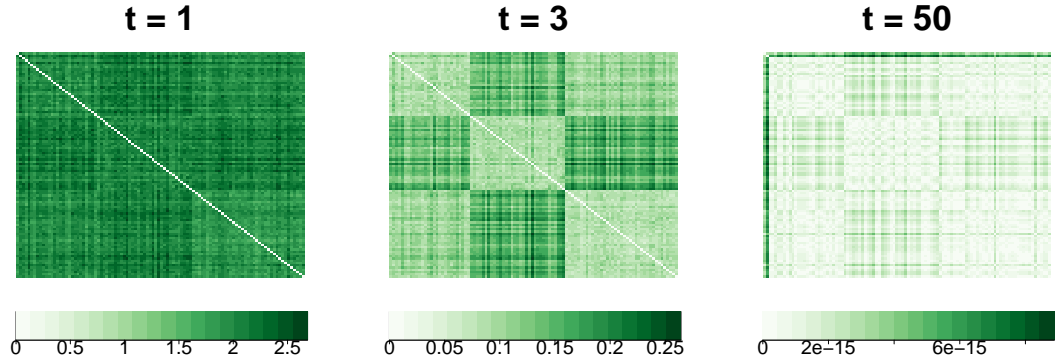


Figure 3: *Diffusion matrix*, as a proposed alternative for Euclidean distance of A , provides **one-parameter family of network-based distances** where at early stage, e.g. at $t = 1$, distance matrix is very similar to Euclidean distance of A but as time goes by the pattern shown in the distance matrix changes, and **at optimal time point $t^* = 3$ distance matrix shows most clear block structures** and at the same time it exhibits most dependence to distance matrix of X .

Highest power of MGC under diffusion maps

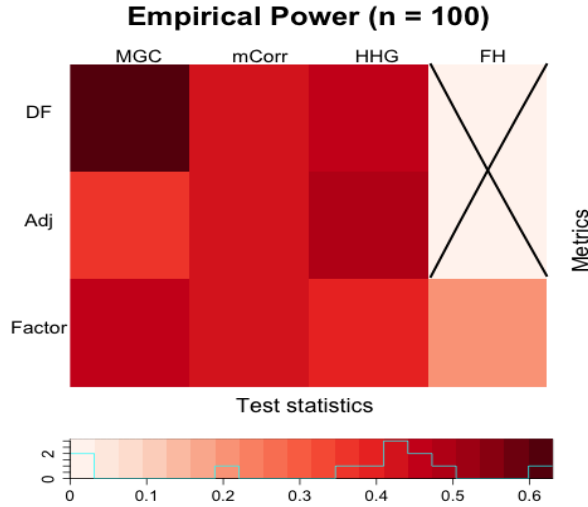


Figure 4: This power heatmap illustrates the superior power of multiscale generalized correlation (MGC) under diffusion distance matrix (DF) in three SBM (model ??), compared to under adjacency matrix distance (Adj) or latent factor distance (Factor). **This demonstrates that especially in the presence of nonlinear network dependency, MGC statistic along with a family of diffusion distances catches non monotonic correlations efficiently than the other statistics and metrics.**

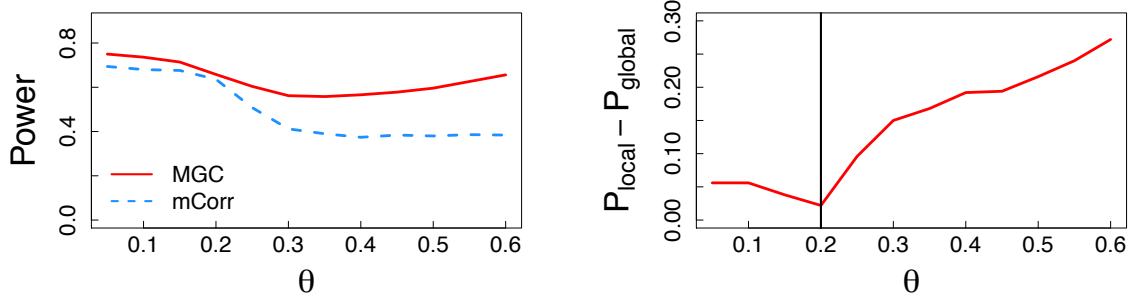


Figure 5: X-axis of θ controls the existence/amount of nonlinear dependency and in this particular case nonlinearity exists when $\theta > 0.2$ and gets larger as it increases. You can see the discrepancy in power between global and local scale tests also gets larger accordingly, **mostly due to decreasing power of global test but relatively stable power of MGC under nonlinear dependency** as presented in the left panel.

Superiority of the proposed method under non-linear dependency

Degree-corrected SBM with increased variability in node distribution

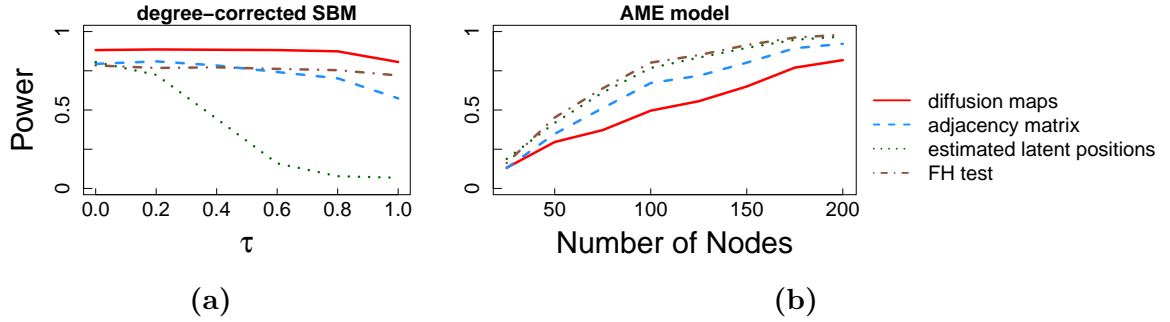


Figure 6: (a) In degree-corrected SBM where the variability in degree distribution increases as τ increases, testing power of diffusion maps are more likely to be robust against increasing variability compared to other network metrics, e.g. adjacency matrix or latent positions. FH test statistics allowing different dimensions of network factors perform consistently well but still have less power than MGC. (b) MGC utilizing diffusion distances loses some power under additive and multiplicative model which favors estimated latent position metrics, but MGC does as good as FH tests under latent factor metrics which closes to the truth. This reveals the flexibility in distance-based matrix in MGC statistics, which can be chosen depending on model fit or preliminary knowledge.

Validity of the method even under competitor's model

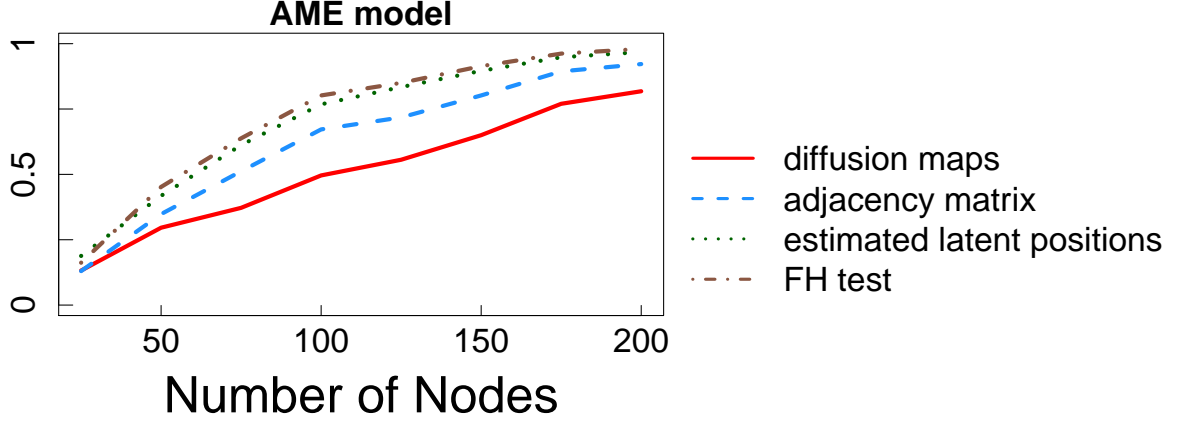


Figure 7: Even under additive and multiplicative model which favors estimated latent position metrics, MGC lost some power when using diffusion maps and adjacency matrix but MGC **does** as good as FH tests under latent factor metrics which is the truth, which supports excellent ability of MGC in diverse, nearly true network metrics.

Node Contribution

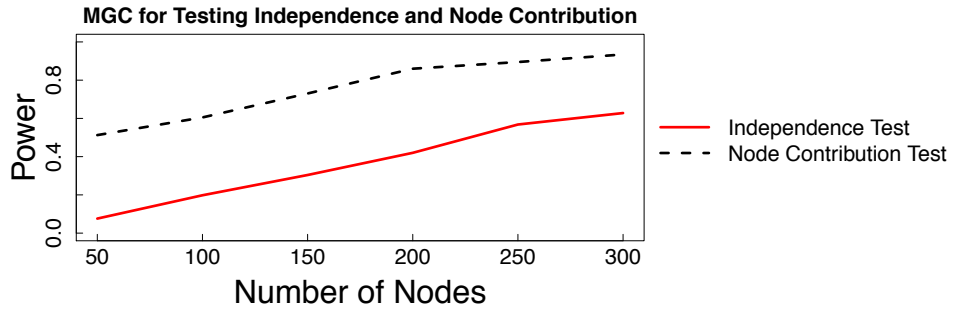


Figure 8: This plot describes both power of MGC and the rate of correctly-ranked node contribution increase as the number of nodes increases when only half of the nodes for each simulation actually are set to contribute to the independence test, **which validates the use of node contribution measure in independence test.**

Political Network

Collaborative networks and organization types

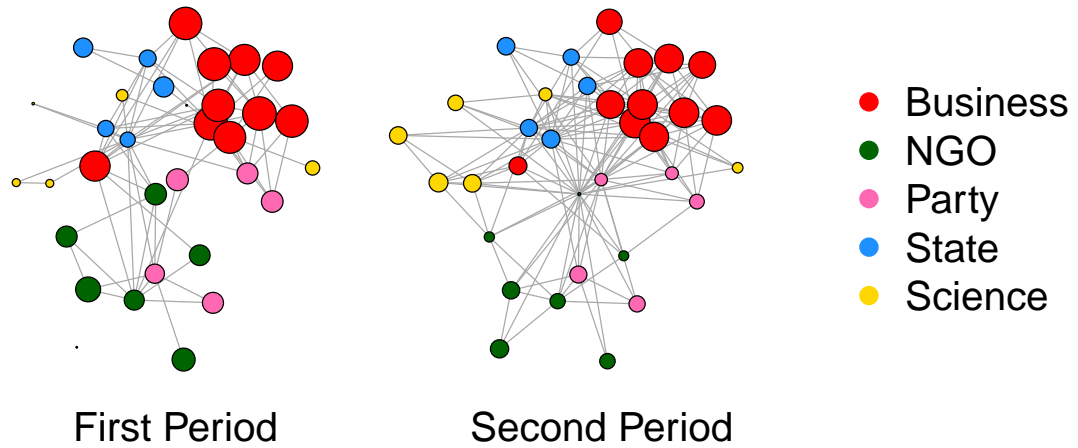


Figure 9: Both networks depict the collaboration network during the two time periods where it turns out significant network dependency in types of organizations. **Using MGC statistics, we are not only able to test network independence but also rank each node in terms of the amount of contribution to detecting dependence, which is proportional to node size here.**

1 Checklist

- 1. 1 sentence summary We propose the nonparametric method to test independence between network and nodal attributes using multiscaled generalizing correlation with family of network-based distances applied.
- 2. 1 paragraph summary
 - (i) big opportunity sentence: Network data are ubiquitous.
 - (ii) specific opportunity : We are interested in investigating relationship between network topology and a random variable associated with each node.
 - (iii) challenge sentence : Network topology is high-dimensional data and there is often no standardized structure on network.
 - (iv) gap sentence : Network model-based approach fails to deal with increasing information with no standard pattern of network.
 - (v) action sentence : Multiscale generalized correlation (MGC) statistic successfully detects the nature dependence between two data sets and we are going to utilize a family of network-based distances when implementing MGC in testing independence.
 - (vi) resolution sentence : As a result we have multiscale test statistics which provide the evidence of dependence between network and nodal attributes, more robust to nonlinear dependence and increased variability compared to the other statistics and other metrics.
- 5 paragraph intro
 - (i) bulleted list of 3-5 main factors that created an opportunity for your work.
 - Statisticians have long considered the problem of revealing the relationship between two different sets.

Among data having diverse types and dimensions, network is now an ubiquitous dataset which is very likely to possess the properties of both high dimensionality and nonlinearity.

Beyond the interests in network topology, we consider the relationship between network topology and a random variable associated with each node.
 - (ii) one sentence summary of the gap, that is, the key ingredient that is missing.

Network model-based statistics presumed that all nodes would exhibit the same pattern of dependence on their network relationship as specified in the model, which cannot be assured in network data.
 - (iii) bulleted list of 3-5 main challenges that must be overcome.
 - Whatever the true nature of network is and however network is correlated with its nodal attributes, our testing statistics should aim at detecting significant association between network and nodal attributes.
 - We have to consider increasing amount of information inherent in network data as number of nodes increases.

- There exists an dependency among columns of an adjacency matrix so theoretically we cannot directly use an Euclidean distance of an adjacency matrix.

- 2-3 sentence summary of what you did

First of all, considering the properties of network data, we propose applying multi-scale generalized correlation statistics into testing network independence which deal with correlation between high-dimensional data sets which might have nonlinear dependence. However we confront with the difficulty in finding an appropriate an iid node-specific coordinates of which Euclidean distance will be an ingredient for MGC statistics. We claim that diffusion maps derived from random walk on graph furnish robust network metrics against to increased variability in edge distributions as well as they satisfy theoretical constraints for a jointly exchangeable graph.

- 2-3 sentence summary on how your work changes the world.

Beyond the traditional setting of the data in independence test, i.e. two random vectors, we suggest the method to investigate unique but also ubiquitous data of network and its nodal attributes by utilizing the method testing two random vectors. By suggesting using a family of network metrics which are equipped with favored theoretical and practical properties, we are able to better understand relative locations of each node over network and also how the amount of dependency changes along with diffusion time. Moreover now away from the assumption on globally existing monotonic dependence, MGC with diffusion distances performs better than the other statistics or metrics under nonlinear dependence and we measure each node's contribution to detecting the dependence.

- Outline of the results : list the evidence that supports that you filled the gap
- outline of discussion, to include:
 - (i) bulleted list of previous related work
 - (ii) bulleted list of potential extensions