

# To Store or Not to Store: a graph theoretical approach for Dataset Versioning

ANXIN (BOB) GUO\*, Northwestern University, USA

JINGWEI (SOFIA) LI\*, Northwestern University, USA

PATTARA SUKPRASERT, Northwestern University, USA

SAMIR KHULLER, Northwestern University, USA

AMOL DESHPANDE, The University of Maryland - College Park, USA

KOYEL MUKHERJEE, Adobe Research, India

Our work is motivated by the study of the *Dataset Versioning* problem: given a graph, where vertices denote different versions and edges capture edit operations to derive one version from another, an efficient storage scheme needs to make decisions as to which versions to store and which to reconstruct on demand using the stored versions and edit operations. In one central variant, which we call MINSUM RETRIEVAL (MSR), the goal is to minimize the sum of retrieval costs given that the storage cost is bounded. This problem arises in every collaborative tool, e.g., version control for source code, and/or intermediate data sets constructed during data analysis pipelines. The problem we study (and its variants) was originally formulated in the pioneering paper by Bhattacharjee et al. [VLDB' 15], which modeled this as a graph problem and developed a reasonably fast and efficient heuristic called Local Move Greedy (LMG). While being a fundamental problem encountered in practical systems, there is no research that studies the approximability hardness of these questions.

We first show that the best known heuristic, namely LMG, can be arbitrarily bad in some situations. In fact, it is hard to get  $o(n)$ -approximation for MSR on general graphs even if we relax the storage constraints by  $O(\log n)$  times. Similar hardness results are shown for other variants.

Motivated by the fact that the graphs arising in practice from typical edit operations have some nice underlying properties, we propose poly-time approximation algorithms that work very well when the given graphs are tree-like.

As version graphs typically have low treewidth, we develop new algorithms for bounded treewidth graphs.

On the experimental side, we propose two new heuristics. First, we extend LMG, the best-known heuristic, by considering more potential “moves” and come up with a new heuristic named LMG-All. The run time of LMG-All is comparable to LMG, while it consistently performs better than LMG across a wide variety of datasets, i.e., version graphs. Second, we utilize our algorithm for tree instances on the minimum-storage arborescence of an instance, yielding an algorithm that is qualitatively better than LMG and LMG-All, but with a worse running time.

Apart from MINSUM RETRIEVAL, we show similar results for all other variants defined by Bhattacharjee et al. [VLDB' 15].

\*Both authors contributed equally to this research.

---

Authors' addresses: Anxin (Bob) Guo, [anxinbguo@gmail.com](mailto:anxinbguo@gmail.com), Northwestern University, Evanston, Illinois, USA, 60208; Jingwei (Sofia) Li, [jingweisofili@gmail.com](mailto:jingweisofili@gmail.com), Northwestern University, Evanston, Illinois, USA, 60208; Pattara Sukprasert, [pattara@u.northwestern.edu](mailto:pattara@u.northwestern.edu), Northwestern University, Evanston, Illinois, USA, 60208; Samir Khuller, [samir.khuller@northwestern.edu](mailto:samir.khuller@northwestern.edu), Northwestern University, Evanston, Illinois, USA, 60208; Amol Deshpande, [amol@cs.umd.edu](mailto:amol@cs.umd.edu), The University of Maryland - College Park, College Park, Maryland, USA, 20742; Koyel Mukherjee, [komukher@adobe.com](mailto:komukher@adobe.com), Adobe Research, India.

---

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

© 2023 Association for Computing Machinery.

XXXX-XXXX/2023/3-ART \$15.00

<https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

### ACM Reference Format:

Anxin (Bob) Guo, Jingwei (Sofia) Li, Pattara Sukprasert, Samir Khuller, Amol Deshpande, and Koyel Mukherjee. 2023. To Store or Not to Store: a graph theoretical approach for Dataset Versioning . 1, 1 (March 2023), 40 pages. <https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

## 1 INTRODUCTION

Tremendous amount of data is produced daily due to the increasing usage of online collaboration tools for data storage and management: multiple users might collaborate to produce many versions of a raw data set. The management of all these versions, however, has become increasingly challenging in large enterprises. When we have thousands of versions, each of several terabytes, then storing all versions is extremely costly and wasteful. Reducing data storage and data management costs is a major concern for enterprises [59].

Important not just in online collaborative settings, dataset versioning is also a key concern for enterprise data lakes as well, that are managing huge volumes of customer data [61]. Often, existing versions of huge tabular datasets might require a few records (or rows) to be modified (for example, product catalogs), thus resulting in a new version for each such modification. This becomes challenging at the terabyte and petabyte scale and storing all of the versions can incur a huge storage and data management cost for the enterprise. Additionally, dataset versioning is a concern for Data Science and Machine learning (and Deep Learning) pipelines as well, as several versions of the data can get generated by the applications of simple transformations on existing data for training and insight generation purposes, thereby increasing the storage and management costs. It is no surprise therefore that data version control is emerging as one of the hot areas in industry [1–6], and even popular cloud solution providers like Databricks are now capturing data lineage information that can help in effective data version management [63].

In a pioneering paper, Bhattacharjee et al. [13] proposed an innovative model capturing the trade-off between *storage* cost and *retrieval* (recreation) cost. The common use case of their model includes version control (e.g., git, mercurial, svn), collaborative data science and analysis, and sharing data sets and intermediate results among data pipelines. The problem studied by the authors can be defined as follows. Given datasets and a subset of the “*deltas*” between them (shown as directed edges connecting versions), find a compact representation that minimizes the overall storage as well as the retrieval costs of the versions. This involves a decision for each version – either we *materialize* it, (store the version explicitly) or we rely on the edit operations to retrieve the version from another materialized version when necessary. The downside of the latter is that to retrieve a version that was not materialized, we will have to incur a computational overhead as well as a delay while the user waits. There are some follow-up works [26, 42, 72]. However, those works either formulate new problems in different use cases [26, 42, 57] or implement a system incorporating the feature to store specific versions and deltas [42, 64, 69]. We will discuss this in more detail in Section 2.4.

Figure 1, taken from Bhattacharjee et al. [13], illustrates the central point through different storage options. (i) shows the input graph, with annotated storage and retrieval costs (for an edge, the retrieval cost indicates the cost to reconstruct the target version given the source version). If the storage size is not a concern, we should store all versions as in (ii). For (iii) and (iv), it is clear that, by storing  $v_3$ , we shorten the retrieval times of  $v_3$  and  $v_5$ .

This retrieval/storage trade-off leads to the combinatorial problem of minimizing one type of cost, given a constraint on the other. There are variations of our objective function as well: retrieval cost of a solution can be measured by either the maximum or total (or equivalently average) retrieval cost of files. This yields four different optimization problems (Problems 3-6 in Table 1).

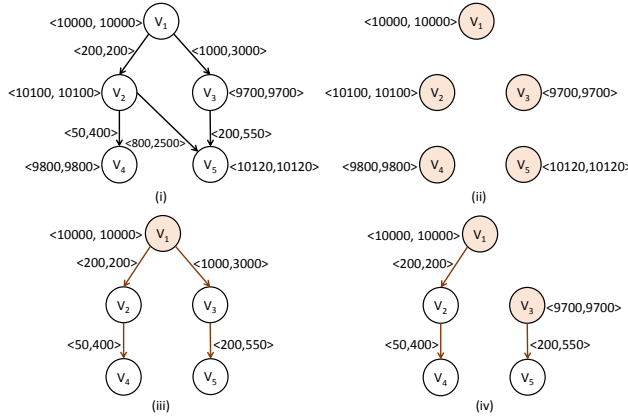


Fig. 1. (i) A version graph over 5 datasets – annotation  $\langle a, b \rangle$  indicates a storage cost of  $a$  and a retrieval cost of  $b$ ; (ii, iii, iv) three possible storage graphs. The figure is taken from [13]

	Problem Name	Storage Cost	Retrieval Cost
Prob. 1	MIN SPANNING TREE	$\min$	$\mathcal{R}(v) < \infty, \forall v$
Prob. 2	SHORTEST PATH TREE	$< \infty$	$\min \{\max_v R(v)\}$
Prob. 3	MINSUM RETRIEVAL (MSR)	$\leq \mathcal{S}$	$\min \{\sum_v R(v)\}$
Prob. 4	MINMAX RETRIEVAL (MMR)	$\leq \mathcal{S}$	$\min \{\max_v R(v)\}$
Prob. 5	BOUNDED SUM RETRIEVAL (BSR)	$\min$	$\sum_v R(v) \leq \mathcal{R}$
Prob. 6	BOUNDED MAX RETRIEVAL (BMR)	$\min$	$\max_v R(v) \leq \mathcal{R}$

Table 1. Problems 1-6

Fundamentally, we can think of the problem as a multi-root arborescence problem in a directed graph. A single-root arborescence in a directed (weighted) graph  $G = (V, E)$  is a rooted tree such that every node is reachable from the root, and efficient algorithms for finding a minimum weight arborescence are known.

In our multi-root version, we can imagine that nodes have labels and our goal is to select a subset of nodes (multiple roots) and every node not selected should have a directed path from one of the roots to it. Edges may have multiple costs associated with them, relating to storage and computation (reconstruction) costs. The total sum of the node label values and edge costs directly contributes to the storage cost, and the path length to nodes, directly determines the delay to materialize those versions.

### 1.1 Our Contributions

We provide the first set of provable *inapproximability results* and *approximation algorithms* for the aforementioned optimization problems that trade-off between retrieval and storage costs from different angles.

**Hardness.** Table 2 summarizes all hardness results in this paper. Notably, it's impossible to approximate any of the problems within a constant factor on general directed graphs, with MSR being especially hard. This also motivated the consideration for special graph classes.

Problem	Graph type	Assumptions	Inapproximability
MSR	arborescence	Triangle inequality Single weight <sup>1</sup>	1
	undirected		$1 + \frac{1}{e} - \epsilon$
	general		$\Omega(n)^2$
MMR	undirected		$2 - \epsilon$
	general		$\log^* n - \omega(1)$
BSR	arborescence		1
	undirected		$(\frac{1}{2} - \epsilon) \log n$
BMR	undirected		$(1 - \epsilon) \log n$

Table 2. Hardness results

**Tree Algorithms.** We propose algorithms that work well when the given graph is a tree (even this special case is not trivial, as we will see). Specifically, for any graph whose underlying undirected graph is a tree, we show that BMR can be solved exactly and efficiently, and that there exists a  $(1 + \epsilon)$ -approximation algorithm for MSR.

Inspired by these algorithms on trees, we also proposed new heuristics on general graphs. Compared to the best heuristics in [13], we improve the MSR solution by several orders of magnitude and the BMR solution by up to 50%.

**Bounded Tree-width Algorithms.** We extend our approximation algorithms for trees to graphs that are close to trees, as measured by a property called *treewidth* [11]. Our extensions to bounded treewidth graphs give  $(1 + \epsilon)$ -approximation for MSR and MMR, as well as  $(1, 1 + \epsilon)$  bi-criteria approximation for BSR and BMR. One motivation behind our attention on bounded treewidth graph is that *Series-parallel graphs*<sup>3</sup>, which are very similar to version graphs derived from repositories, has bounded treewidth. In fact, a graph has treewidth at most two if and only if every biconnected component is a series-parallel graph [15]. To confirm our hypothesis, we measure treewidths from various repositories. [Bob: trying to phrase this](#) datasharing, styleguide, and leetcode have treewidth 2, 3, and 6 respectively.

**New Heuristic.** Additionally for MSR, we show that LMG, the algorithm proposed in [13], may perform arbitrarily poorly. This behavior is in line with the hardness results and is confirmed by experiments. On the other hand, we propose a slight modification named “LMG-All”(LMGA) which dominates the performance of LMG (by up to around 100 times in certain cases), while exhibiting decent run time on sparse graphs.

Inspired by our algorithms on trees, we also propose two new dynamic programming (DP) heuristics for MSR and BMR respectively. Both algorithms perform extremely well in almost all experiments, even when the input graph is not tree-like.

## 2 PRELIMINARIES

In this section, the definition of the problems, notations, simplifications, and assumptions will be formally introduced.

<sup>1</sup>Both are assumptions in previous work [13] that simplify the problems. In other words, our hardness results apply even when the weights  $r$  and  $s$  are equal on the edges, and when the weight satisfies the triangle inequality. These assumptions were not made in any other sections of this paper.

<sup>2</sup>This is true even if we relax  $S$  by  $O(\log n)$ .

<sup>3</sup>See, e.g., Eppstein [27] for formal definition.

Graphs	Problems	Algorithm	Approx.	Run Time
General Digraph	MSR	LMG-All	heuristic	close to LMG
Bounded Treewidth	MSR & MMR	DP-BTW	$1 + \epsilon$	$\text{poly}(n, \frac{1}{\epsilon})$
	BSR & BMR		$(1, 1 + \epsilon)$	
Bidirectional Tree	MMR	DP-BMR	exact	$n^2 \log \mathcal{R}_{\max}$
	BMR			$n^2$

Table 3. Algorithms Summary. Here,  $\mathcal{R}_{\max}$  is defined to be the maximum retrieval cost between any pair of vertices in the tree.

## 2.1 Problem Setting

In the problems we study, we are given a directed graph  $G = (V, E)$ . The given graph is a *version graph* where vertices represent *versions* and edges capture “*delta*” between versions. More precisely, every edge  $e = (u, v)$  is associated with two weight functions: storage cost  $s_e$  and retrieval cost  $r_e$ .<sup>4</sup> It takes  $r_e$  time to retrieve  $v$  given that we have retrieved  $u$ . The cost of storing (materializing)  $e$  is  $s_e$ , and the cost of storing  $v$  is  $s_v$ . Since there is usually a smallest unit of retrieval/storage cost in real world, we will work with nonnegative integers, that is,  $s_e, r_e \in \mathbb{N}$  for all  $e \in E$ .

In order to retrieve a version  $v$  from a materialized version  $u$ , there must be some path  $P\{(u_{i-1}, u_i)\}_{i=1}^n$  with  $u_0 = u, u_n = v$ , such that all edges along this path are stored. In such cases, we say that  $v$  can be retrieved from  $u$  with retrieval cost  $\sum_{i=1}^n r_{(u_{i-1}, u_i)}$ . In the rest of the paper, we say  $v$  is “retrieved from  $u$ ” if  $u$  is in the path to retrieve  $v$ , and  $v$  is “retrieved from materialized  $u$ ” if in addition  $u$  is materialized.

The general optimization goal is to select a set of versions  $M \subseteq V$  and a set of edges  $F \subseteq E$  of **small** size (w.r.t. storage cost  $s$ ) such that for each  $v \in V \setminus M$ , the length of shortest path in  $F$  (w.r.t. retrieval cost  $r$ ) from any node  $m \in M$  to  $v$  is optimized (different versions of the problem optimize different measures). We denote the cost of this shortest path as  $R(v)$ .

In some previous works, an **auxiliary root** is added to the graph to simplify the problem. Though not used in our approximation algorithms, this is an important simplification for defining problems and for many previous heuristics. We briefly explain the concept here: instead of finding both set of versions and set of edges, we could simplify the problem by adding an auxiliary root  $v_{aux}$  to the graph and let edges in the form  $(v_{aux}, v)$  capture the storage cost of storing  $v$  explicitly.

More precisely, we generate a graph  $G_{aux} = (V_{aux} = V \cup \{v_{aux}\}, E_{aux} = E \cup E')$  from  $G = (V, E)$  where  $E' = \{(v_{aux}, v) \mid v \in V\}$ . Each  $e = (v_{aux}, v) \in E_{aux}$  has  $s_e = s_v$  and  $r_e = 0$ . It is straightforward to see that any solution  $M \subseteq V, F \subseteq E$  has a 1-to-1 correspondence with a directed spanning tree rooted at  $v_{aux}$ . In particular, problems 1 and 2 reduce to familiar problems on  $G_{aux}$  (see below). **Bob:** I’m think about adding another picture for the auxiliary graph.

## 2.2 Problem Definition

Different problems are formulated based on different optimization goals. Recall that, after simplification, we want to select a set of edges  $F \subseteq E_{aux}$  such that  $H = (V_{aux}, F)$  is an arborescence rooted at  $v_{aux}$ . We let  $s(H) = \sum_{e \in F} s_e$  be the total storage cost. We also let  $R(H) = \sum_{v \in V_{aux}} R(v)$  be the total retrieval cost.

Since the two objectives are negatively correlated, and since we want to capture both aspects, one natural way is to constrain one objective and optimize the other objective. The following optimization goals were originally defined in Bhattacharjee et al. [13] though we might use different names for brevity. See Table 1 for the 6 problem definitions.

<sup>4</sup>We may use  $s_{u,v}$  in place of  $s_e$  and  $r_{u,v}$  in place of  $r_e$ .

Since the first two problems are well studied, we do not discuss them further. In a way, MSR and BSR (MMR and BMR, resp.), are closely related. If we have an algorithm for MSR (MMR, resp.), we can turn it into an algorithm for BSR (BMR, resp.) by binary-searching over  $\mathcal{S}$ . Vice versa, if we have an algorithm for BSR (BMR, resp.), we can solve MSR (MMR, resp.) by binary-searching over  $\mathcal{R}$ .

Bob: added back the following section. TODO: check its compatibility.

### 2.3 Further Assumptions

Motivated by real world application and tractability, we will introduce some further simplifications or complications. Many of these assumptions are also used in Ghuge and Nagarajan [36].

**Triangle inequality:** It is natural to assume that both weights satisfy triangle inequality, i.e.,  $r_{u,v} \leq r_{u,w} + r_{w,v}$ , since we can always implement the delta  $r_{u,v}$  by implementing first  $r_{u,w}$  and then  $r_{w,v}$ . In fact, a more general triangle inequality should hold on  $G_{aux}$ , i.e., materializing  $u$  and storing  $(u, v)$  shouldn't cost less space than materializing  $v$  directly.

All hardness results in this paper hold under the generalized triangle inequality.

**Directedness:** It is possible that for two versions  $u$  and  $v$ ,  $r_{u,v} \neq r_{v,u}$ . In real world, deletion is also significantly faster and easier to store than addition of content. Therefore, Bhattacharjee et al. [13] considered both directed and undirected cases; we argue that it is usually more natural to model the problems as directed graphs and focus on that case. Note that in the most general directed setting, it's possible that we are given the delta  $(u, v)$  but not  $(v, u)$ . (or equivalently,  $s_{v,u} \geq s_u$ )

**Single weight function:** This is the special case where the storage cost function and retrieval cost function are identical. This can be seen in real world, for example, when we use simple diff to produce deltas. We note all our hardness results hold for single weight functions, and all but ?? hold even for undirected graphs. All our approximations hold for directed graphs with two weight functions.

**Arborescence and trees:** An *arborescence*, or a directed spanning tree, is a connected digraph where all vertices except a designated root have in-degree 1, and the root has in-degree 0. If each version is a modification on top of another version, then the "natural" deltas automatically form an arboreal input instance.<sup>5</sup> For practical reasons, we also consider *bi-directional tree* instances, meaning that both  $(u, v)$  and  $(v, u)$  are available deltas.<sup>6</sup> Experiment shows that having deltas in both direction can greatly improve the quality of the optimal solution (Section 6).

**Bounded treewidth:** At a high level, treewidth measures how similar a graph is to a tree [11]. As one notable class of graphs with bounded tree-widths, series-parallel graphs highly resemble the version graphs we derive from real-world repositories. Therefore, graphs with bounded treewidth is a natural consideration with high practical utility.

**Non-uniform demand** Some versions may be requested more often than others. To model this, we may introduce *demands*  $d_v$  for  $v \in V$ , and replace total re-creation cost  $(\sum_v R(v))$  with *weighted* total re-creation cost  $(\sum_v d_v R(v))$  in MSR and BSR. Bob: Since space is no longer a problem we can try to propose this. We also have a corresponding hardness result for MSR under this variation. TODO: talk about MMR and BMR also.

### 2.4 Related Works

**2.4.1 Theory.** There has been little theoretical analysis on the exact problems we study. The optimization problems are first formalized in Bhattacharjee et al. [13], which also compared the effectiveness of several proposed heuristics on both real-world and synthetic data. They defined six

<sup>5</sup>This does not hold true for version controls because of the merge operation.

<sup>6</sup>While both edges are available, their storage costs and retrieval costs are not necessarily identical.



variants of the problem, two of which are polynomial-time solvable, and the other four are NP-hard (see Section 2.2). Zhang et al. [72] followed-up by considering a new objective that's a weighted sum of objectives in MSR and MMR. They also modified the heuristics to fit this objective. There are similar concepts, including *Light Approximate Shortest-path Tree (LAST)* [51] and *Shallow-light Tree (SLT)* [38, 41, 50, 54, 58, 62]. However, this line of work focuses mainly on undirected graphs and their algorithms don't generalize to the directed case. Among the two problems mentioned, SLT is closely related to MMR and BMR. Here, the goal is to find a tree that is **light** (minimize weight) and **shallow** (bounded depth). To the best of our knowledge, there are only two works that give approximation algorithms for directed shallow-light trees. Chimani and Spoerhase [23] gives a bi-criteria  $(1 + \epsilon, n^\epsilon)$ -approximation algorithm that runs in polynomial-time. Their run-time analysis is quite complicated, but it is at least  $n^{O(1/\epsilon)}$ . Recently, Ghuge and Nagarajan [36] showed that a problem called "submodular tree orienteering" has a  $O(\frac{\log n}{\log \log n})$  approximation algorithm that runs in quasi-polynomial time. In this problem, we want to find a directed tree  $T$  rooted at  $r$  such that  $s(T) \leq S$  and maximize  $f(V(T))$  where the objective function  $f$  is a submodular function. The authors also extended their algorithm so that it works when both **retrieval costs** and **storage costs** are constrained. Their algorithm can be adapted into  $O(\frac{\log^2 n}{\log \log n})$ -approximation for MMR and BMR where the approximation part is on the storage cost. For MSR and BMR, their algorithm gives  $(O(\frac{\log^2 n}{\log \log n}), O(\frac{\log^2 n}{\log \log n}))$ -approximation. The idea is to run their algorithm for many rounds, where the objective of each round is to **cover as many nodes as possible**. We also note that our assumptions, namely, triangle inequality and integral weights are also used in their paper [36].

**Bob:** There are commented paragraphs here in the source code. Should we add them back in?

**2.4.2 Systems.** To implement a system captured by our problems, components spanning multiple lines of works are required. For example, to get a graph structure, one has to keep track of history of changes. This is related to the topic of data provenance [20, 66]. Given a graph structure, the question of modeling "deltas" is also of interest. There is a line of work dedicated to studying how to implement diff algorithms in different contexts [21, 43, 55, 68, 70].

In the case where we have more flexibility, one may think of creating deltas from different versions without much of the change history. However, computing all possible deltas is too wasteful, hence it is necessary to utilize other approaches to identify similar versions/datasets. Such line of work is known in the literature as dataset discovery or dataset similarity [16, 18, 30, 46, 61].

After the work of Bhattacharjee et al. [13], there are several followup works that implemented systems with a feature that saves only selected versions to reduce redundancy. There are works that focus on version control for relational databases [12, 19, 22, 42, 56, 64, 65, 69] and works that focus on graph snapshots [52, 57, 71]. However, since their focus was on designing full-fledged systems, the algorithms proposed for these systems are rather simple heuristics, without rigorous theoretical results. Here is a non-exhaustive list of examples. *OrpheusDB* [42] tackled a similar problem but was designed specifically for relational databases. *Forkbase* [69] is a version control system for blockchain-like instances with built-in fork semantics. *Pensieve* [71] is a system designed specifically for storing graphs. Derakhshan et al. [26] formulated a more generalized problem, which includes time intervals. However, since they deal with data science & machine learning pipelines, they only consider instances where the underlying graphs are directed acyclic.

**2.4.3 Usecases.** In a version control system such as git, our problem is similar to what `git pack` command aims to do.<sup>7</sup> The original heuristic for `git pack`, as described in an IRC log, is to sort

<sup>7</sup><https://www.git-scm.com/docs/git-pack-objects>

objects in particular order and only create deltas between objects in the same window.<sup>8</sup> It is shown in Bhattacharjee et al. [13] that git's heuristic does not work well compared to other methods.<sup>9</sup> For svn, the most recent version and deltas to the past versions are stored [60]. Other existing data version management systems include [2–6], which offer git-like capabilities suited for different use cases, such as data science pipelines in enterprise setting, machine learning-focused, data lake storage, graph visualization, etc.

### 3 HARDNESS RESULTS

We hereby list the main hardness (inapproximability) results of the two problems.

For completeness, we hereby define the notion of approximation algorithms used in this paper.

**$\rho$ -approximation algorithm** Let  $\mathcal{P}$  be a minimization problem where we want to come up with a feasible solution  $x$  satisfying some constraints (e.g.,  $a \cdot x \leq b$ ). We say that an algorithm  $\mathcal{A}$  is a  $\rho$ -approximation algorithm for  $\mathcal{P}$  if  $x_{\mathcal{A}}$ , the solution produced by  $\mathcal{A}$  is feasible and that  $OPT \leq f(x_{\mathcal{A}}) \leq \rho \cdot OPT$  where  $OPT$  is an optimal objective value and  $f(x)$  is the objective value of a solution  $x$ . Here,  $\rho$  is an *approximation ratio*. Generally, we want  $\mathcal{A}$  to run in polynomial time.

**Polynomial-time approximation scheme (PTAS)** A polynomial-time approximation scheme is an algorithm  $\mathcal{A}$  that, when given any fixed  $\epsilon > 0$ , can produce an  $(1 + \epsilon)$ -approximation in time that's polynomial in the instance size. We say that  $\mathcal{A}$  is a *fully polynomial-time approximation scheme (FPTAS)* if the runtime of  $\mathcal{A}$  is polynomial in both the instance size and  $1/\epsilon$ .

**Bi-criteria approximation** In problems such as ours where optimizing an objective function while meeting all constraints is challenging, we can consider relaxing both aspects. We say that an algorithm  $\mathcal{A}$   $(\alpha, \beta)$ -approximates problem  $\mathcal{P}$  if the objective value of its output is at most  $\alpha$  times the objective value of an optimal solution **and** the constraints are violated at most  $\beta$  times.<sup>10</sup>

#### 3.1 Heuristics can be Arbitrarily Bad

First, we consider the approximation factor of the best heuristic for MSR in [13], Local Move Greedy (LMG). The gist of this algorithm is to start with the arborescence that minimizes the storage cost, and iteratively materialize a version that most efficiently reduces retrieval cost per unit storage. In other words, in each step, a version is materialized with maximum  $\rho$  where  $\rho = \frac{\text{reduction in total of retrieval costs}}{\text{increase in storage cost}}$ . For completeness, the pseudo code of LMG is provided in Algorithm 1 in the appendix.

Note also that we work with the modified graph  $G_{aux}$  with the auxiliary root, as defined in Section 2.1. Here we show that, even on simple instances, LMG could perform poorly as an approximation algorithm.

**THEOREM 3.1.** *LMG has an arbitrarily bad approximation factor for MINSUM RETRIEVAL, even under the following assumptions: (1)  $G$  is a directed path; (2) there is a single weight function; and (3) triangle inequality holds.*

**PROOF.** Consider the following chain of three nodes; the storage costs for nodes and the storage/retrieval costs for edges are labeled in Figure 2 (let  $a$  be large and  $\epsilon = b/c$  be close to 0). To save space, we do not show  $v_{aux}$  but only the nodes of the version graph.

It's easy to check that triangle inequality holds on this graph.

In the first step of LMG, the minimum storage solution of the graph is  $\{A, (A, B), (B, C)\}$  with storage cost  $a + (1 - \epsilon)b + (1 - \epsilon)c$ .

<sup>8</sup><https://github.com/git/git/blob/master/Documentation/technical/pack-heuristics.txt>

<sup>9</sup>There is a blog post that further discusses the point: <http://www.cs.umd.edu/~amol/DBGGroup/2015/06/26/datahub.html>

<sup>10</sup>We allow  $x \leq \beta y$  if the constraint  $x \leq y$  is presented.






Fig. 2. An adversarial example for LMG.

Next, in the greedy step, two options are available: (1). Choosing  $B$  and delete  $(A, B)$ :  $\rho_1 = \frac{2(1-\epsilon)b}{\epsilon b} = \frac{2}{\epsilon} - 1$ ; (2). Choosing  $C$  and delete  $(B, C)$ :  $\rho = \frac{(1-\epsilon)b + (1-\epsilon)c}{\epsilon c} = \frac{(1-\epsilon)b}{\epsilon c} + \frac{1-\epsilon}{\epsilon} = \frac{1}{\epsilon} - \epsilon < \frac{2}{\epsilon} - 1$ .

With any storage constraint in range  $[a + (1 - \epsilon)b + c, a + b + c)$ , LMG will choose (1) which gives a total retrieval cost of  $(1 - \epsilon)c$ . Note that with  $\mathcal{S} < a + b + c$ , LMG is not able to conduct step (2) after taking step (1). However, by choosing (2), which is also feasible, the total retrieval cost is  $(1 - \epsilon)b$ . The proof is finished by observing  $c/b$  can be arbitrarily large.  $\square$

### 3.2 Optimizations problems with known hardness

Before we show our hardness results, it is useful to introduce several other NP-hard problems to reduce from.

**Definition 3.2 (SET COVER).** Elements  $U = \{o_1, \dots, o_n\}$  and subsets  $S_1, \dots, S_m \subseteq U$  are given. The goal is to find  $A \subseteq [m]$  with minimum cardinality such that  $\bigcup_{i \in A} S_i = U$ .

SET COVER has no  $c \ln n$ -approximation for any  $c < 1$ , unless  $\text{NP} \subseteq \text{DTIME}(n^{O(\log \log n)})$  [28].

**Definition 3.3 (SUBSET SUM).** Given real values  $a_1, \dots, a_n$  and a target value  $T$ . The goal is to find  $A \subseteq [n]$  such that  $\sum_{i \in A} a_i$  is maximized but not greater than  $T$ .

SUBSET SUM is also NP-hard, but its FPTAS is well studied [34, 35, 44, 48, 49].

**Definition 3.4 (K-MEDIAN and ASYMMETRIC K-MEDIAN).** Given nodes  $V = \{1, \dots, n\}$ ,  $k$ , and symmetric (resp. asymmetric) distance measures  $D_{i,j}$  for  $i, j \in V$  that satisfies triangle inequality. The goal is to find a set of nodes  $A \subseteq V$  of cardinality at most  $k$  that minimizes

$$\sum_{v \in V} \min_{c \in A} D_{v,c}.$$

The symmetric problem is well studied. The best known approximation lower bound for this problem is  $1 + \frac{1}{e}$ . We note that an inapproximability result of  $1 + \frac{2}{e}$  [45] is often mistakenly quoted for this problem, whereas the authors actually studied the  $k$ -median variant where the “facilities” and “clients” are in different sets. With the same method we can only get the hardness of  $1 + 1/e$  in our definition.

The asymmetric counterpart is rarely studied. The manuscript [7] showed that there is no  $(\alpha, \beta)$ -approximation ( $\beta$  is the relaxation factor on  $k$ ) if  $\beta \leq \frac{1}{2}(1 - \epsilon)(\ln n - \ln \alpha - O(1))$ , unless  $\text{NP} \subseteq \text{DTIME}(n^{O(\log \log n)})$ .

Notably, even symmetric  $k$ -median is inapproximable when triangle inequality is not assumed on the distance measure  $D$ . [67] However, this hardness is not preserved by the standard reduction to MSR (as in ??), since the path distance on graphs inherently satisfies triangle inequality.

**Definition 3.5 (K-CENTER and ASYMMETRIC K-CENTER).** Given nodes  $V = \{1, \dots, n\}$ ,  $k$ , and asymmetric distance measures  $D_{i,j}$  for  $i, j \in V$  that satisfies triangle inequality. The goal is to find a set of nodes  $A \subseteq V$  of cardinality at most  $k$  that minimizes

$$\max_{v \in V} \min_{c \in A} D_{v,c}.$$

The symmetric problem has a greedy 2-approximation, which is optimal unless  $P = NP$  [37].

The asymmetric variant has  $\log^* k$  approximation algorithms [8], and one cannot get a better approximation than  $\log^* n$  unless  $NP \subseteq DTIME(n^{O(\log \log n)})$ , if we allow  $k$  to be arbitrary [24].

### 3.3 Hardness Results on General Graphs

In this subsection, we prove the various hardness of approximations on general input graphs. We first focus on **MINSUM RETRIEVAL** and **MINMAX RETRIEVAL** where the constraint is on storage cost and the objective is on the retrieval cost. We then shift our attention to **BOUNDEDMAX RETRIEVAL** and **BOUNDEDSUM RETRIEVAL** in which the constraint is of retrieval cost and the objective function is on minimizing storage cost.

#### 3.3.1 Hardness for **MINSUM RETRIEVAL** and **MINMAX RETRIEVAL**.

Here we restate Theorem ??:

**THEOREM 3.6.** *On version graphs with  $n$  nodes, even assuming single weight function and triangle inequality, there is no:*

- (1)  $(\alpha, \beta)$ -approximation for **MINSUM RETRIEVAL** if  $\beta \leq \frac{1}{2}(1 - \epsilon) \left( \ln n - \ln \alpha - O(1) \right)$ ; in particular, for some constant  $c$ , there is no  $(c \cdot n)$ -approximation without relaxing storage constraint by some  $\Omega(\log n)$  factor, unless  $NP \subseteq DTIME(n^{O(\log \log n)})$ ;
- (2)  $(1 + \frac{1}{\epsilon} - \epsilon)$ -approximation for **MINSUM RETRIEVAL** on undirected graphs for all  $\epsilon > 0$ , unless  $NP \subseteq DTIME(n^{O(\log \log n)})$ ;
- (3)  $(\log^*(n) - \omega(1))$ -approximation for **MINMAX RETRIEVAL**, unless  $NP \subseteq DTIME(n^{O(\log \log n)})$ ;
- (4)  $(2 - \epsilon)$ -approximation for **MINMAX RETRIEVAL** on undirected graphs for all  $\epsilon > 0$ , unless  $NP = P$ .

Here,  $\log^*(n)$  denotes the number of logarithms it takes to decrease  $n$  down to  $3/2$ .

**PROOF. MINSUM RETRIEVAL.** There is an approximation-preserving (AP) reduction<sup>11</sup> from (ASYMMETRIC) **K-MEDIAN** to **MSR**. Let  $s_{u,v} = r_{u,v} = d_{u,v}$ , the distance from  $u$  to  $v$  in a (asymmetric)  $k$ -median instance. By setting the size of each version  $v$  to some large  $N$  and storage constraint to be  $S = kN + n$ , we can restrict the instance to materialize at most  $k$  nodes and retrieve all other nodes through deltas. For large enough  $N$ , an  $(\alpha, \beta)$ -approximation for **MSR** provides an  $(\alpha, \beta)$ -approximation for (ASYMMETRIC) **K-MEDIAN**, just by outputting the materialized nodes. The desired results follow from known hardness for asymmetric [7] or symmetric (Section 3.2) **K-MEDIAN**.

**MINMAX RETRIEVAL.** A similar AP reduction exists from (ASYMMETRIC) **K-CENTER** to **MMR**. Again, we can set all materialization costs to  $N$  and  $c_{u,v} = r_{u,v} = d_{u,v}$ , and the desired result follows from the hardness of asymmetric [24] and symmetric [37] **K-CENTER**.  $\square$

#### 3.3.2 Hardness for **BOUNDEDSUM RETRIEVAL** and **BOUNDEDMAX RETRIEVAL**.

Recall Theorem ??:

**THEOREM 3.7.** *On both directed and undirected version graphs with  $n$  nodes, even assuming single weight function and triangle inequality, there is no:*

- (1)  $c_1 \ln n$ -approximation for **BOUNDEDSUM RETRIEVAL** for any  $c_1 < 0.5$ ;
- (2)  $c_2 \ln n$ -approximation for **BOUNDEDMAX RETRIEVAL** for any  $c_2 < 1$ .

unless  $NP \subseteq DTIME(n^{O(\log \log n)})$ .

To prove this theorem, we will present our reduction to these two problems from **SET COVER**. We then show their structural properties on Lemmas 3.8 and 3.9. We finally show the proof at the end of this section.

<sup>11</sup>See, e.g., [25] for more detail.

**Reduction** Given a set cover instance with sets  $A_1, \dots, A_m$  and elements  $o_1, \dots, o_n$ , we construct the following version graph:

1. Build versions  $a_i$  corresponding to  $A_i$ , and  $b_j$  corresponding to  $o_j$ . All versions have size  $N$  for some large  $N \in \mathbb{N}$ .
2. For all  $i, j \in [m]$ ,  $i \neq j$ , create symmetric delta  $(a_i, a_j)$  of weight 1. For each  $o_j \in A_i$ , create symmetric delta  $(a_i, b_j)$  of weight 1.

**LEMMA 3.8 (BMR'S STRUCTURE).** Assume we are given an approximate solution to BMR on the above version graph under max retrieval constraint  $\mathcal{R} = 1$ . In polynomial time, we can produce another solution, of equivalent or better quality, such that:

- (1) Only the set versions are materialized. i.e., all  $\{b_j\}_{j=1}^n$  are retrieved via deltas.
- (2) The storage cost does not exceed that of the original approximate solution, and the maximum retrieval cost is feasible.

**PROOF OF LEMMA 3.8.** We show (1) by contradiction. Suppose the algorithm produces a solution that materializes  $b_j$ .

*Case 1:* If there exists  $a_i$  that needs to be retrieved through  $b_j$  (i.e.,  $o_j \in A_i$ ), then we can replace the materialization of  $b_j$  with that of  $a_i$  and replace edges of the form  $(b_j, a_k)$  with  $(a_i, a_k)$ . It is straightforward to see that neither storage cost nor retrieval cost increased in this process.

*Case 2:* If no other node is dependent on  $b_j$ , we can pick any  $a_i$  such that  $(a_i, b_j)$  exists (again,  $o_j \in A_i$ ). If  $a_i$  is already materialized in the original solution, then we can store  $(a_i, b_j)$  instead of materializing  $b_j$ , which decreases storage cost.

*Case 3:* If no  $a_i$  adjacent to  $b_j$  is materialized in the original solution, then some delta  $(a_{i'}, a_i)$  has to be stored with the former materialized to satisfy the  $\mathcal{R} = 1$  constraint. We can hence materialize  $a_i$ , delete the delta  $(a_{i'}, a_i)$ , and again replace the materialization of  $b_j$  with the delta  $(a_i, b_j)$  without increasing the storage. Figure 3 illustrates this case.  $\square$

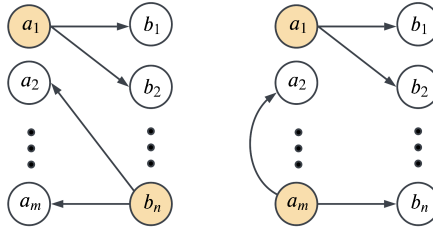


Fig. 3. Case 1 in proof of Lemma 3.8. The improved solution is on the right.

**LEMMA 3.9 (BSR'S STRUCTURE).** Assume we are given an approximate solution to BSR on the above version graph under total retrieval constraint  $\mathcal{R} = m - m_{\text{OPT}} + n$ , where  $m_{\text{OPT}}$  is the size of the optimal set cover. In polynomial time, we can produce an improved solution such that:

- (1) Only the set versions are materialized. i.e., all  $\{b_j\}_{j=1}^n$  are retrieved via deltas.
- (2) The storage cost does not exceed that of the original approximate solution, and the total retrieval cost is feasible.

**PROOF OF LEMMA 3.9.** We refer to the same three cases as in Lemma 3.8, and we want to show that, if  $b_j$  is materialized,

*Case 1:* if some  $a_i$  is retrieved through  $b_j$ , we can apply the same modification as Lemma 3.8. We can replace the materialization of  $b_j$  with that of  $a_i$ , and replace edges of the form  $(b_j, a_k)$  with  $(a_i, a_k)$ . Neither the storage nor the retrieval cost increases in this case.

Now we WLOG assume no deltas  $(b_j, a_i)$  are chosen.

*Case 2:* if no  $a_i$  is retrieved through  $b_j$ , and some  $a_i$  adjacent to  $b_j$  is materialized, then method in Lemma 3.8 needs to be modified a bit in order to remove the materialization of  $b_j$ . If we simply retrieve  $b_j$  via the delta  $(a_i, b_j)$ , we would lower the storage cost by  $N - 1$  and *increase* the total retrieval cost by 1. This renders the solution infeasible if the total retrieval constraint is already tight.

To tackle this, we analyze the properties of the solutions with total retrieval cost exactly  $\mathcal{R}$ . Observe that all solutions must materialize at least  $m_{\text{OPT}}$  nodes at all time, so a configuration exhausting the constraint  $R$  must have some version  $w$  with retrieval cost at least 2. If this  $w$  is a set version, we can loosen the retrieval constraint by storing a delta of cost 1 from some materialized set instead. If  $w$  is an element version, then we can materialize its parent version (a set covering it), which increases storage cost by  $N - 1$  and decreases total retrieval cost by at least 2.

Either case, by performing the above action if necessary, we can resolve case 2 and obtain a approximate solution that's not worse than before.

*Case 3:* this is where each  $a_i$  adjacent to  $b_j$  neither retrieves through  $b_j$  nor is materialized. Fix an  $a_i$ , then some delta  $(a_i, a_i)$  has to be stored to retrieve  $a_i$ ; we can WLOG assume that the former is materialized. We can thus materialize  $a_i$ , delete the delta  $(a_i, a_i)$ , and again replace the materialization of  $b_j$  with the delta  $(a_i, b_j)$  with no increase in either costs.  $\square$

Equipped with Lemma 3.8 and Lemma 3.9, we are now ready to show the proof for ??.

**PROOF FOR ??.** Assumign  $m = O(n)$  in the set cover instance, we present an AP reduction from SET COVER to both BMR and BSR.

**BOUNDEDMAX RETRIEVAL** To produce a set cover solution, we take an improved approximate solution for BMR, and output the family of sets whose corresponding versions are materialized. Since none of the  $b_j$ 's is stored, they have to be re-created from some  $a_i$ . Moreover, under the constraint  $\mathcal{R} = 1$ , they have to be a 1-hop neighbor of some  $a_i$ , meaning the materialized  $a_i$  covers all of the elements in the set cover instance.

Finally, we prove that the approximation factor is preserved: for large  $N$ , the improved solution has objective value  $\approx N|\{i : a_i \text{ materialized}\}|$ . Hence, assuming  $n = O(m)$ , an  $\alpha(|V|)$ -approximation for MMR provides a  $(\alpha(n) + O(1))$ -approximation for set cover. Hence we can't have  $\alpha(|V|) = c \ln n$  for  $c < 1$  unless  $\text{NP} \subseteq \text{DTIME}(n^{O(\log \log n)})$ . [28]

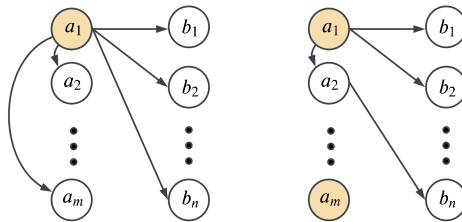


Fig. 4. The BSR case in proof of ?? . The solution on the right has one version ( $b_2$ ) of retrieval cost 2, hence it must materialize an additional version  $a_m$  to satisfy the total retrieval constraint.

**BOUNDED SUM RETRIEVAL** Assume for the moment that we know  $m_{\text{OPT}}$ , then we can set total retrieval constraint to be  $\mathcal{R} = m - m_{\text{OPT}} + n$ , and work with an improved approximate solution. This

choice of  $\mathcal{R}$  is made so that an optimal solution must materialize the set versions corresponding to a minimum set cover. All other nodes must be retrieved via a single hop.

By Lemma 3.9, we assume all element versions are retrieved from a (not necessarily materialized) set version that covers it. If  $m = O(n)$ , an  $\alpha(|V|)$ -approximation of BMR materializes  $m_{\text{ALG}} \leq (\alpha(n) + O(1))m_{\text{OPT}}$  nodes.

Note that, by materializing additional nodes, we are allowing a set  $B$  of  $b_j$ 's to have retrieval cost  $\geq 2$ . Let  $H$  denote the set of "hopped sets"  $A_i$ , which are not materialized yet are necessary to retrieve some  $b_j$  through the delta  $(a_i, b_j)$ . By analyzing the total retrieval cost, we can bound  $|H|$  by:

$$|H| \leq |B| \leq m_{\text{ALG}} - m_{\text{OPT}}$$

Specifically, each additional  $b_j \in B$  increases retrieval cost by at least 1 compared to the optimal configuration; yet each of the  $m_{\text{ALG}} - m_{\text{OPT}}$  additionally materialized set versions only decreases total retrieval cost by 1. It follows that the family of sets

$$S = \{A_i : a_i \text{ materialized}\} \cup H$$

is a  $[2\alpha(n) - O(1)]$ -approximation solution for the corresponding SET COVER instance.  $S$  is feasible because all of the  $b_j$ 's are retrieved through some  $(a_i, b_j)$ , where  $A_i \in S$ ; on the other hand, the size of both sets on the right hand side are at most  $(\alpha(n) + O(1))m_{\text{OPT}}$ , hence the approximation factor holds. Thus, any  $\alpha(|V|) = c \ln n$  for any  $c < 0.5$  will result in a SET COVER approximation factor of  $2c \cdot \ln(n)$ .

We finish the proof by noting that, without knowing  $m_{\text{OPT}}$  in advance, we can run the above procedure for each possible guess of the value  $m_{\text{OPT}}$ , and obtaining a feasible set cover each iteration. The desired approximation factor is still preserved by outputting the minimum set cover solution over the guesses.  $\square$

**Bob: the following has to do with demand.** As a side note, MINSUM RETRIEVAL becomes impossibly hard on general graphs when non-uniform demands are allowed:

**THEOREM 3.10.** *On directed version graphs with  $r = s$ , triangle inequality, and non-uniform demand, MINSUM RETRIEVAL is inapproximable.*

PROOF. This follows from the same reduction from ASYMMETRIC K-MEDIAN as in ??  $\square$

### 3.4 Hardness on Arborescence

We show that MSR and BSR are NP-hard on arborescence instances. This essentially shows that our FPTAS algorithm for MSR in Section 5.1 is the best we can do in polynomial time.

**THEOREM 3.11.** *On arborescence inputs, MINSUM RETRIEVAL and BOUNDED SUM RETRIEVAL are NP-hard even when we assume single weight function and triangle inequality.*

In order to prove the theorem above, we rely on the following reduction which connects two problems together.

**LEMMA 3.12.** *If there exists poly-time algorithm  $\mathcal{A}$  that solves BOUNDED SUM RETRIEVAL (resp. BOUNDED MAX RETRIEVAL) on some set of input instances, then there exists a poly-time algorithm solving MINSUM RETRIEVAL (resp. MIN MAX RETRIEVAL) on the same set of input instances.*

PROOF. Suppose we want to solve a MSR (resp. MMR) instance with storage constraint  $S$ . We can use  $\mathcal{A}$  as a subroutine and conduct binary search for the minimum retrieval constraint  $\mathcal{R}^*$  under which BSR (resp. BMR) has optimal objective at most  $S$ .  $\mathcal{R}^*$  is thus an optimal solution for our problem at hand.

To see that the binary search takes  $\text{poly}(n)$  steps, we note that the search space for the target retrieval constraint is bounded by  $n^2 r_{\max}$  for BSR and  $n r_{\max}$  for BMR, where  $r_{\max} = \max_{e \in E} r_e$ .  $\square$

Now we show the proof for Theorem 3.11.

**PROOF OF THEOREM 3.11.** Assuming Lemma 3.12, it suffices to show the NP-hardness of MSR on these inputs.

Consider an instance of SUBSET SUM problem with values  $a_1, \dots, a_n$  and target  $T$ . This problem can be reduced to MSR on an  $n$ -nary arborescence of depth one. Let the root version be  $v_0$  and its children  $v_1, \dots, v_n$ . The materialization cost of  $v_i$  is set to be  $a_i + 1$  for  $i \in [n]$ , while that of  $v_0$  is some  $N$  large enough so that the generalized triangle inequality holds. For each  $i \in [n]$ , we can set both retrieval and storage costs of edge  $(v_0, v_i)$  to be 1.

Consider MSR on this graph with storage constraint  $S = N + n + T$ . From an optimal solution, we can construct set  $A = \{i \in [n] : v_i \text{ materialized}\}$ , an optimal solution for the above SUBSET SUM instance.  $\square$

#### 4 EXACT ALGORITHM FOR MMR AND BMR ON BI-DIRECTIONAL TREES

By Lemma 3.12, we can use an algorithm for BMR to solve for MMR. Therefore, in this section, it suffices to focus on the problem BMR, namely, we are given constraint  $\mathcal{R}$  on the maximal retrieval cost, and we want to minimize the total storage cost. We refer to Appendix C for the pseudo code of the complete algorithm (Algorithm 2).

Let  $T = (V, E)$  be a bi-directional tree instance (abbreviated "tree" in the rest of the section) with given maximum retrieval cost constraint  $\mathcal{R}$ . We can arbitrarily pick a vertex  $v_{\text{root}}$  as root, and orient the tree such that the root has no parent, while all other nodes have exactly one parent. This process is straightforward, so we will assume that the given tree is rooted for the rest of the section.

For some  $v \in V$ , let  $T_{[v]}$  denote the subtree of  $T$  rooted at  $v$ . If  $v$  is retrieved from materialized  $u$ , we use  $p_v^u$  to denote the parent of  $v$  on the unique  $u - v$  path to retrieve  $v$ . We write  $p_v^v = v$ . We now describe a dynamic programming (DP) algorithm DP-BMR that solves BMR exactly on  $T$ .

**DP variables.** For  $u, v \in V$ , we define  $\text{DP}[v][u]$  to be the minimum storage cost of a *partial solution* on  $T_{[v]}$  with respect to version  $u$ . The partial solution is defined as a solution with all descendants of  $v$  are retrieved from some materialized node in  $T_{[v]}$ , while  $v$  is retrieved from a materialized version  $u$ , *potentially outside of the subtree  $T_{[v]}$* . See Figure 5 for an illustration.

Importantly, also note that when calculating the storage cost for  $\text{DP}[v][u]$ , if  $u$  is not a part of  $T_{[v]}$ , the incident edge  $(p_v^u, v)$  is involved in the calculation, while other edges in the  $u - v$  path, or the cost to materialize  $u$ , are not involved in it.

**Base case.** We iterate from the leaves up. Let  $R(u, v)$  denote the retrieval cost of the path from  $u$  to  $v$ . For a leaf  $v$ , we set  $\text{DP}[v][v] = s_v$ , and  $\text{DP}[v][u] = s_{(p_v^u, v)}$  for all  $u \neq v$  with  $R(u, v) \leq \mathcal{R}$ . Here,  $p_v^u$  is just the unique parent of  $v$  in the tree structure.

All choices of  $u, v$  such that  $R(u, v) > \mathcal{R}$  are infeasible, and we therefore set  $\text{DP}[v][u] = \infty$  in these cases.

**Recurrence.** For convenience, we define a helper variable  $\text{OPT}[v]$  to be the minimum storage cost on the subproblem  $T_{[v]}$ , such that  $v$  is either materialized or retrieved from one of its descendants.<sup>12</sup> In other words,

$$\text{OPT}[v] = \min\{\text{DP}[v][w] : w \in V(T_{[v]})\}$$

For recurrence on  $\text{DP}[v][u]$  such that  $R(v, u) \leq \mathcal{R}$ , there are three possible cases of the relationship between  $v$  and  $u$  (see Figure 5 for illustration). In each case, we outline what we add to  $\text{DP}[v][u]$  below.

<sup>12</sup>Note that the case where  $v$  is retrieved from  $u$  outside of  $T_{[v]}$  is not considered in this helper variable.



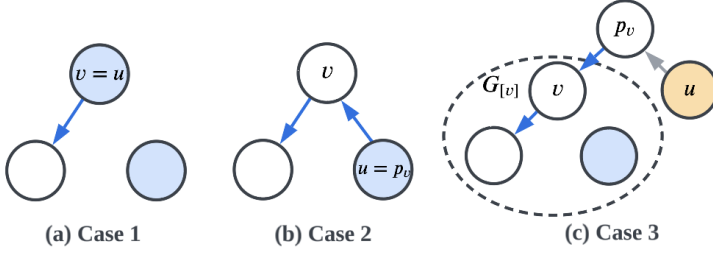


Fig. 5. 3 cases of DP-BMR. The blue nodes and edges are stored in the partial solution.

*Case 1.* If  $u = v$ , we materialize  $v$ , and each child  $w$  of  $v$  can be either materialized, retrieved from their materialized descendants, or retrieved from the materialized  $u = v$  ( $u$  for the other two cases). Note that this is exactly  $\min\{OPT[w], DP[w][u]\}$ , and similar facts hold for the following two cases as well.

*Case 2.* If  $u \in V(T_{[v]}) \setminus \{v\}$ , we would store the edge  $(p_v^u, v)$ . Note that  $p_v^u$  is a child of  $v$  and hence is also retrieved from the materialized  $u$ , so we must add  $DP[p_v^u][u]$ . We then add  $\min\{OPT[w], DP[w][u]\}$  for all other children  $w$  of  $v$ .

*Case 3.* If  $u \notin V(T_{[v]})$ , we add the edge  $(p_v^u, v)$ , where  $p_v^u$  is the parent of  $v$  in the tree structure. We then add  $\min\{OPT[w], DP[w][u]\}$  for all children as before.

**Output** We output  $OPT[v_{root}]$ , which is the storage cost of the optimal solution. To output the configuration achieving this optimum, we can use the standard procedure where we store the configuration at each DP.

**THEOREM 4.1.** *BOUNDEDMAX RETRIEVAL is solvable on bidirectional tree instances in  $O(n^2)$  time.*

**PROOF. Time complexity**

It is straightforward to see that, for each  $v, u$ , computing  $DP[v][u]$  takes  $O(deg(v))$  time. Hence, computing all the dynamic programming table takes

$$\sum_{u \in V} \sum_{v \in V} deg(v) = \sum_{u \in V} O(n) = O(n^2).$$

Moreover, it takes  $O(n^2)$  time to compute the values  $R(u, v)$  on a tree. We thus conclude that DP-BMR runs in  $O(n^2)$  time.

**Optimality** We will show by induction that our DP table calculates optimal solution corresponding to each state, i.e.,  $DP[v][u]$  represents the total storage cost needed for  $T_{[v]}$  given that  $v$  is retrieved from materialized  $u$ . Note that if  $u \notin T_{[v]}$ , then only the edge  $(p_v^u, v)$  is considered in  $DP[v][u]$  among all edges in  $u - v$  path in  $T$ .

In the base case on each leaf  $v$ , we set  $DP[v][v] = s_v$ , and  $DP[v][u] = s_{(p_v^u, v)}$  if  $u - v$  path has length at most  $\mathcal{R}$ . This is consistent with the optimal storage cost on the trivial subproblems.

Inductively, suppose we want to compute  $DP[v][u]$ . Notice that the storage needed for two children  $w, w'$  are independent from each other, implying that we can consider them separately. For each child  $w$ , if  $u \notin T_{[w]}$ , then  $w$  can either be retrieved through  $u$  or some other node in  $T_{[w]}$ . Hence, we add to  $DP[v][u]$  the minimum between  $OPT[w] = \min_{u' \in T_{[w]}} DP[w][u']$  and  $DP[w][u]$ . Otherwise, if  $u \in T_{[w]}$ , in order for  $v$  to be retrieved through  $u$ ,  $w$  has to be retrieved through  $u$ , so we add  $DP[w][u]$  to  $DP[v][u]$ . Finally, we increase  $DP[v][u]$  by  $s_{(p_v^u, v)}$  if  $u \neq v$  and  $s_v$  if  $u = v$ . These are all possible cases. Given that  $DP[w][u]$  is computed correctly, for all  $w \in T_{[v]}$  and  $u \in V$ , then we compute  $DP[v][u]$  correctly.

By induction, we conclude that the DP table is computed correctly. Since the table can capture all feasible solutions, it must capture an optimal solution as well. Hence, our algorithm outputs an optimal answer.  $\square$

## 5 FULLY POLYNOMIAL TIME APPROXIMATION SCHEME FOR MSR VIA DYNAMIC PROGRAMMING

In this section we focus on problem MSR and present a fully polynomial time approximation scheme (FPTAS) on digraphs whose *underlying undirected graph* has bounded treewidth. Similar techniques can be extended to all three other versions of the problems. However, we focus on the method itself and omit the details for the other three problems due to space constraints.

We start by describing a dynamic programming (DP) algorithm on trees in Section 5.1. In Section 5.2, we define all notations necessary for the latter subsection. Finally, in Section 5.3, we show how to extend our DP to the bounded treewidth graphs.

### 5.1 Warm-up: Bidirectional Trees

As shown in Theorem 3.1, the previously best-working LMG algorithm performs arbitrarily badly even on directed paths. In this section, as a warm-up to the more general algorithm in Section 5.3, we will present an FPTAS for bidirectional tree instances of MSR via dynamic programming. This algorithm also inspired a practical heuristic DP-MSR, presented in section Section 6.2.3.

We can WLOG assume the tree has a designated root  $v_{root}$  and a parent-child hierarchy. We can further assume that the tree is binary, via the standard trick of vertex splitting and adding edges of zero weight if necessary. See Appendix D.1 for details.

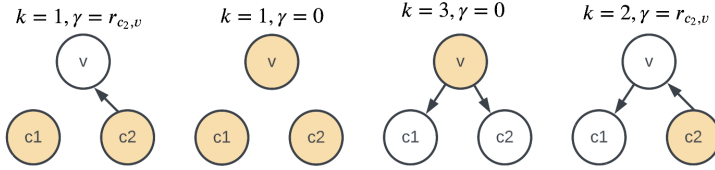


Fig. 6. An illustration of DP variables in Section 5.1

**DP variables.** We explain the DP variables defined for MINSUM RETRIEVAL here: we define  $DP[v][k][\gamma][\rho]$  to be the minimum storage cost for the subproblem with constraints  $v, k, \gamma, \rho$  such that (with examples illustrated in Figure 6)

- (1) *Root for subproblem*  $v \in V$  is a version on the tree; in each iteration, we consider the subtree rooted at  $v$ .
- (2) *Dependency number*  $k \in \mathbb{N}$  stands for the number of versions that will be retrieved via  $v$  (including  $v$  itself) in the subproblem solution. This is useful when calculating the extra retrieval cost incurred by retrieving  $v$  from its parent.
- (3) *Root retrieval*  $\gamma \in \mathbb{N}$  represents the cost of retrieving version  $v$ , the root in the subproblem. This is useful when calculating the extra retrieval cost incurred by retrieving the parent of  $v$  from  $v$ . Note that the root retrieval cost will be discretized, as specified later.
- (4) *Total retrieval*  $\rho \in \mathbb{N}$  represents the total retrieval cost of the subsolution. Similar to  $\gamma$ ,  $\rho$  will also be discretized.

**Discretizing retrieval costs.** Let  $r_{max} = \max_{e \in E} \{r_e\}$ . The possible total retrieval cost  $\rho$  is within range  $\{0, 1, \dots, n^2 r_{max}\}$ . To make the DP tractable, we partition this range further and define

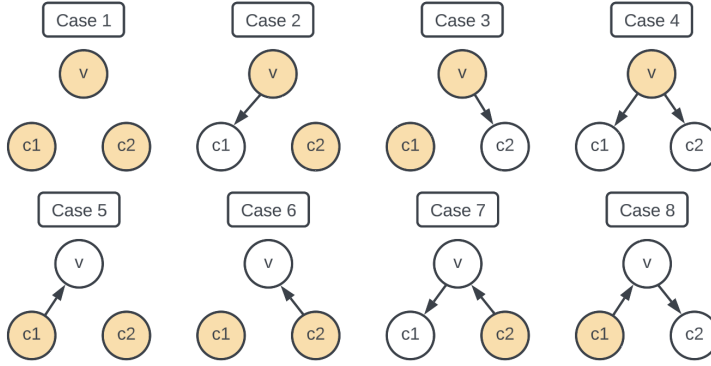


Fig. 7. Eight types of connections on a binary tree. A node is colored if it is materialized or retrieved via delta from outside the chart. Otherwise, an uncolored node is retrieved from another node as illustrated with the arrows.

approximated retrieval cost  $r'_{u,v}$  for edge  $(u, v) \in E$  as follows:

$$r'_{u,v} = \lceil \frac{r_{u,v}}{l} \rceil \quad \text{where } l = \frac{n^2 r_{\max}}{T(\epsilon)}, T(\epsilon) = \frac{n^4}{\epsilon},$$

and  $T(\epsilon)$  is the number of “ticks” we want to partition the retrieval range into. The specific choice for  $T(\epsilon)$  will become useful in the proof for Theorem 5.1. We will work with  $r'$  in the rest of the subsection.

**Base case** For a leaf  $v$ , we let  $DP[v][1][0][0] = s_v$ .

**Recurrence step** For each iteration, we take the minimum over all possible situations as illustrated in Figure 7. The recurrence relation for all cases is given in Appendix D.2, and explained in detail for the representative cases below:

**5.1.1 Dealing with dependency.** This refers to the case where a child is to be retrieved from its parent  $v$ . Consider case 2 in Figure 7 as an example. Note that  $\gamma = 0$  in case 2 since  $v$  is materialized. The minimum storage cost in case 2 (given  $v, k, \gamma = 0, \rho$ ) is:

$$S_2 = s_v + s_{v,c_1} - s_{c_1} + \min_{\rho_1 \leq \rho} \left\{ DP[c_1][k-1][0][\rho_1 - (k-1)r'_{v,c_1}] \right. \quad (1)$$

$$\left. + \min_{k', \gamma_2} \{ DP[c_2][k'][\gamma_2][\rho - \rho_1] \} \right\} \quad (2)$$

In Eq. (1), note the dependency number for  $c_1$  needs to be  $k-1$  for that of  $v$  to be  $k$ . The choice of  $\rho_1$  determines how we are allocating retrieval costs budget  $\rho$  to  $c_1$  and  $c_2$  respectively. Specifically, the total retrieval cost allocated to subproblem on  $G_{[c_1]}$  is  $\rho_1 - (k-1) \cdot r'_{v,c_1}$  since an extra  $(k-1) \cdot r'_{v,c_1}$  cost is incurred by the edge  $(v, c_1)$ , as it is used  $(k-1)$  times by all versions depending on  $c_1$ .

In Eq. (2), for a given choice of  $\rho_1$ , we want to find the minimum storage cost over the dependency and retrieval cost of  $c_2$ . Minimizing this sum of Eqs. (1) and (2) over all possible combinations of budget splitting yields the minimum storage cost for case 2.

**Uprooting** We introduce *Uprooting*, a process extensively used in the next section. In the above example, the subproblem solution on  $G_{[c_1]}$  materializes  $c_1$ , yet in case 2 we would replace this materialization with the diff  $(v, c_1)$ . This explains the  $-s_{c_1}$  term in the equation for  $S_2$ .

In general, the restriction of a global solution on a subproblem  $G_{[v]}$  does not result in a feasible *partial solution*, due to the possibility of some  $v \in V(G_{[z]})$  that's retrieved from versions outside of  $G_{[z]}$ . The uprooting process allows us to utilize the DP variables on the subproblem in this case. Conversely, by reversing this process (*un-uproot*), we can check if a subproblem is *compatible* with a bigger problem. We explain this in more detail on Section 5.3.

**Distributing dependency** An additional complication arise in case 4, where  $v$  is required to have dependency number  $k$  and root retrieval 0. For each  $k_1 + k_2 = k - 1$ , we must go through subproblems where  $c_1$  have dependency number  $k_1$  and  $c_2$  has that of  $k_2$ .

**5.1.2 Dealing with retrieval.** In contrast with dependencies, this refers to the case where  $v$  is retrieved from one of its children. We take case 5 as an example: given  $v, k = 0, \gamma, \rho$ ,

$$\begin{aligned} S_5 = & s_{c_1, v} \\ & + \min_{\rho_1 \leq \rho} \left\{ \min_{k_1} \{DP[c_1][k_1][\gamma - r_{c_1, v}][\rho_1 - \gamma]\} \right. \\ & \left. + \min_{k_2, \gamma'} \{DP[c_2][k_2][\gamma'][\rho - \rho_1]\} \right\} \end{aligned}$$

We allocate the retrieval cost similar to case 2. We will care less about the dependency number, over which we will take minimum. The retrieval cost for  $c_1$  now has to be  $\gamma - r_{c_1, v}$  since  $v$  has to be retrieved from  $c_1$ . Note importantly that now we are counting the retrieval cost for  $v$  in  $\rho_1$ , and so the retrieval cost remaining for the left subproblem now is  $\rho_1 - \gamma$ . Notice that since only one way of retrieving  $v$  will be stored, this retrieval cost will not be over-counted in any cases.

Similarly, we take minimum on all other unused parameters to get the best storage for case 5.

**5.1.3 Combining the ideas.** We take case 8 as an example where both retrieval and dependencies are involved. In case 8,  $v$  is retrieved from child  $c_1$  (retrieval), and child  $c_2$  is retrieved from  $v$  (dependency). Given  $v, k, \gamma, \rho$ , we claim that:

$$\begin{aligned} S_8 = & s_{c_1, v} + s_{v, c_2} - s_{c_2} \\ & + \min_{\rho_1 + \rho_2 = \rho} \left\{ \min_{k'} \{DP[c_1][k'][\gamma - r_{c_1, v}][\rho_1 - \gamma]\} \right. \\ & \left. + DP[c_2][k - 1][0][\rho_2 - (k - 1) \cdot (r_2 + \gamma)] \right\} \end{aligned}$$

Note that the  $c_1$  side is identical to that for case 5. In combining both dependency and retrieval cases, there is slight adjustment in the dependency side: since  $v$  now might also depend on nodes further down  $c_1$  side, the total extra retrieval cost created by adding edge  $(v, c_2)$  becomes  $(k - 1) \cdot (r_2 + \gamma)$  instead of  $(k - 1) \cdot (r_2)$ .

**Output** Finally, with storage constraint  $\mathcal{S}$  and root of the tree  $v_{root}$ , we output the configuration that outputs the minimum  $\rho$  which achieves the following

$$\exists k \leq n, \gamma \in \mathbb{N} \quad \text{s.t.} \quad DP[v_{root}][k][\gamma][\rho] \leq \mathcal{S}$$

We shall formally state the following theorem.

**THEOREM 5.1.** *For all  $\epsilon > 0$ , there is a  $(1 + \epsilon)$ -approximation algorithm for MINSUM RETRIEVAL on bidirectional trees that runs in  $O(n^{11}\epsilon^{-2})$ .*

## 5.2 Treewidth-Related Definitions

We now consider a more general class of version graphs: any  $G$  whose *underlying undirected graph*  $G_0$  has treewidth bounded by some constant  $k$ .

**Definition 5.2 (Tree Decomposition [11]).** A tree decomposition of an undirected graph  $G_0 = (V_0, E_0)$  is a tree  $T = (V_T, E_T)$ , where each  $z \in V_T$  is associated with a subset (“bag”)  $S_z$  of  $V_0$ . s The bags must satisfy the following conditions:

- [wide]  $\bigcup_{z \in V_T} S_z = V_0$ ; For each  $v \in V_0$ , the bags containing  $v$  induce a connected subtree of  $T$ ;
- For each  $(u, v) \in E_0$ , there exists  $z \in V_T$  such that  $S_z$  contains both  $u$  and  $v$ .

The *width* of a tree decomposition  $T = (V_T, E_T)$  is  $\max_{z \in V_T} |S_z| - 1$ .

The *treewidth* of undirected graph  $G_0$  is the minimum width over all tree decompositions of  $G_0$ .

It follows that undirected forests have treewidth 1. We further note that there is also a notion of directed treewidth [47], but it’s not suitable for our purpose.

For our purpose, we will WLOG assume a special kind of tree decomposition:

**Definition 5.3 (Nice Tree Decomposition [15]).** A nice tree decomposition is a tree decomposition with a designated root, where each node is one of the following types:

- [wide] a **leaf**, which has no children; a **separator**, which has one child, and whose bag is a subset of the child’s bag; a **join**, which has two children, and whose bag is exactly the union of its children’s bags.

Given a bound  $k$  on the treewidth, there are multiple algorithms for calculating a desired tree decomposition of width  $k$  [9, 14, 32], or an approximation of  $k$  [10, 29, 31, 53]. For our case, the algorithm by Bodlaender [9] can be used to compute a tree decomposition in time  $2^{O(k^3)} \cdot O(n)$ , which is polynomial in  $n$  if the treewidth  $k$  of the given input is constant. Given such a tree decomposition, we can in  $O(|V_0|)$  time find a nice tree decomposition of the same width with  $O(k|V_0|)$  nodes [15].

## 5.3 Generalized Dynamic Programming

Here we outline the DP for MSR on graphs whose underlying undirected graph  $G_0$  has treewidth at most  $k - 1$ . In order to extend our algorithm in Section 5.1 to bounded treewidth graphs, we utilize the techniques from Hajiaghayi [40].

**5.3.1 DP States.** Similar to the warm-up, we will do the DP bottom-up on each  $z \in V_T$  in the nice tree decomposition  $T$ . When we are at node  $z$ , let  $V_{[z]} = \bigcup_{z' \in V(T_{[z]})} S_{z'}$  denote the set of vertices that were already considered bags up to bag  $S_z$ , including  $S_z$ . We now define the *DP states*. At a high level, each state describes some number of *partial solutions* on the subgraph  $V_{[z]}$ . When building a complete solution on  $G$  from the partial solutions, the state variables should give us *all* the information we need.

Each DP state on  $z \in V_T$  consists of a tuple of functions

$$\mathcal{T}_z = (\text{Par}_z, \text{Dep}_z, \text{Ret}_z, \text{Anc}_z)$$

and a natural number  $\rho_z$ :

- [wide] *Parent function*  $\text{Par}_z : S_z \mapsto V_{[z]}$  describing the partial solution restricted on  $S_z$ . If  $\text{Par}_z(v) \neq v$  then  $v$  will be retrieved through the edge  $(\text{Par}_z(v), v)$ . If  $\text{Par}_z(v) = v$  then  $v$  will be materialized. *Dependency function*  $\text{Dep}_z : S_z \mapsto [n]$ . Similar to the dependency parameter

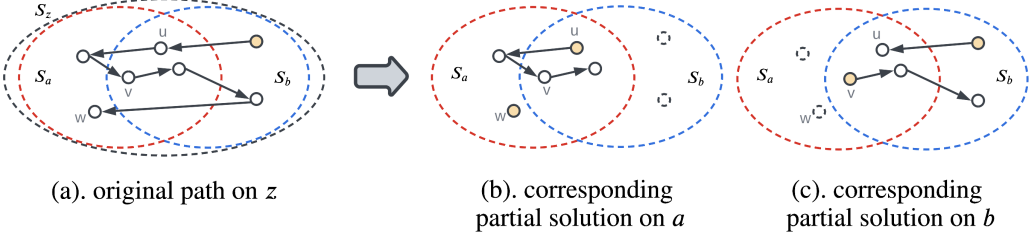


Fig. 8. Illustration for compatibility. A node is colored if it is materialized.

in the warm-up,  $\text{Dep}_z(v)$  counts the number of nodes whose retrieval requires the retrieval of  $v$ . *Retrieval cost function*  $\text{Ret}_z : S_z \mapsto \{0, \dots, K\}$ . Similar to the root retrieval parameter in the warm-up,  $\text{Ret}_z(v)$  denotes the retrieval cost of version  $v$  in the partial solution on  $V_{[z]}$ . *Ancestor function*  $\text{Anc}_z : S_z \mapsto 2^{S_z}$ .  $u \in \text{Anc}_z(v)$  denotes that  $u$  is retrieved in order to retrieve  $v$ , i.e.  $v$  is dependent on  $u$ . Different from the tree case, to produce a spanning forest here, we need this extra information to avoid directed cycles.  $\rho_z$ , the total retrieval cost of the subproblem according to the partial solution. Similar to its counterpart in the warm-up,  $\rho_z$  will be discretized by the same technique that makes the approximation an FPTAS.

A feasible state on  $z \in V_T$  is a pair  $(\mathcal{T}_z, \rho_z)$  as defined, which correctly describes some partial solution on  $V_{[z]}$  whose retrieval cost is exactly  $\rho_z$ . Each state is further associated with a storage value  $\sigma(\mathcal{T}_z, \rho_z) \in \mathbb{Z}^+$ , indicating the minimum storage needed to achieve the state  $(\mathcal{T}_z, \rho_z)$  on  $V_{[z]}$ . We call a minimum-storage solution “the partial solution  $\mathcal{T}_z$ ” for convenience.

Since we have described our states, we are now ready to describe how to compute each state.

**5.3.2 Recurrence on leaves.** For each leaf  $z \in V_T$ , we can enumerate all possible choices of  $\text{Par}_z$  on  $S_z$ . It’s easy to calculate the corresponding  $\text{Dep}_z$ ,  $\text{Ret}_z$ , and  $\text{Anc}_z$  functions, as well as the retrieval cost  $\rho_z$  and storage cost  $\sigma(\mathcal{T}_z, \rho_z)$  for each choice of  $\text{Par}_z$ . These are all the feasible states.

**5.3.3 Recurrence on separators.** On a separator  $z$  with child  $c$ , because  $S_z \subseteq S_c$ , the feasible states on  $z$  are just restrictions of those on  $c$ :

$$\sigma(\mathcal{T}_z, \rho_z) = \min\{\sigma(\mathcal{T}_c, \rho_z) : \mathcal{T}_c|_{S_z} = \mathcal{T}_z\}$$

where  $\mathcal{T}_c|_{S_z}$  is the natural restriction of  $\mathcal{T}_c$  on  $S_z$ :

$$\mathcal{T}_c|_{S_z} = \left( \text{Par}_c|_{S_z}, \text{Dep}_c|_{S_z}, \text{Ret}_c|_{S_z}, \text{Anc}_c|_{S_z} \right)$$

where  $\text{Anc}_c|_{S_z}$  is  $\text{Anc}_c$  restricted on  $S_z$  with the additional requirement that its output is also an intersection with  $S_z$ . (So that the range of  $\text{Anc}_z$  is  $2^{S_z}$ , as in the definition.)

**5.3.4 Recurrence on joins.** Suppose we are at a join  $z$  with children  $a, b$ , where  $S_z = S_a \cup S_b$ .

**Compatibility.** Naturally, we want to find all partial solutions  $(\mathcal{T}_a, \rho_a)$  and  $(\mathcal{T}_b, \rho_b)$  that combine into a given  $(\mathcal{T}_z, \rho_z)$ , and then take the minimum over the objective of all combinations. The first attempt is to consider the states  $\mathcal{T}_a, \mathcal{T}_b$  to be  $\mathcal{T}_z|_{S_a}$  and  $\mathcal{T}_z|_{S_b}$ . However, in  $\mathcal{T}_z$  there could be  $v \in S_a$  such that  $\text{Par}_z(v) \in V_{[b]} \setminus S_a$ , as in node  $u$  of Figure 8. To resolve this, we apply similar ideas to the *uprooting* process in Section 5.1, and pick  $\mathcal{T}_a$  which materializes this  $v$  and fits the restriction of the solution  $\mathcal{T}_z$  on the subproblem  $V_{[a]}$ , as in (b) of Figure 8. We say a state tuple  $(\mathcal{T}_a, \mathcal{T}_b)$  is *compatible*



with  $\mathcal{T}_z$  if they can combine into  $\mathcal{T}_z$ . Let COMPATIBILITY<sup>13</sup> be a procedure that takes  $\mathcal{T}_a, \mathcal{T}_b, \mathcal{T}_z$  and returns true iff  $(\mathcal{T}_a, \mathcal{T}_b)$  is compatible with  $\mathcal{T}_z$ .

**Checking compatibility and the Un-Uprooting process.** COMPATIBILITY checks whether  $\mathcal{T}_a, \mathcal{T}_b$  are indeed the ‘restrictions’ of  $\mathcal{T}_z$  on  $S_a$  and  $S_b$  in Figure 8’s sense. To give a high-level idea, when calculating the restriction of  $\mathcal{T}_z$  on  $\mathcal{T}_a$ , four edge cases are considered and analyzed separately, as illustrated in Figure 9. Here we briefly outline the steps.

From the above definition of compatibility, we note that for each  $v \in S_a$ , we have either  $\text{Par}_z(v) = \text{Par}_a(v)$ , or  $\text{Par}_z(v) \in V_{[b]} \setminus S_a$  is a node from  $b$ ’s side. In the latter case, we call such  $v$  an “uprooted node”, and we denote the set of all uprooted nodes in  $S_a$  (resp.  $S_b$ ) as  $U_a$  (resp.  $U_b$ ). As an example,  $U_a$  comprises of vertices  $u, w$  and  $U_b$  has vertex  $v$  in the case of Figure 8. This procedure of finding such  $U_a, U_b$  is defined SCAN UPROOTED NODES<sup>13</sup>. After obtaining  $U_a, U_b$ , the subroutine UN-UPROOT<sup>13</sup> is called. It reverses the idea of “uprooting” as described in the warm-up. We refer to the full version for details.

The next step in COMPATIBILITY is to distribute the external dependencies to  $V_{[a]} \setminus S_a$  and  $V_{[b]} \setminus S_b$ , much like how we distribute dependency number  $k$  to the two children in case 4 of Figure 7.

**Calculating  $\rho$  and recurrence** Given that  $(\mathcal{T}_a, \mathcal{T}_b)$  are compatible with  $\mathcal{T}_z$ , we want to find the objective,  $\sigma(\mathcal{T}_z, \rho_z)$ , with the recurrence relation involving  $\sigma(\mathcal{T}_a, \rho_a) + \sigma(\mathcal{T}_b, \rho_b)$  for suitable  $\rho_a$  and  $\rho_b$ . However, we can’t simply take  $\rho_a + \rho_b = \rho_z$  due to the combining processes above. We thus implement DISTRIBUTE RETRIEVAL<sup>13</sup> to calculate  $\rho_\Delta$  such that  $\rho_a + \rho_b = \rho_z - \rho_\Delta$  and then iterate through all satisfying  $\rho_a$  and  $\rho_b$ .

**Recurrence relation.** Finally, we have all we need for the recurrence relation:

$$\sigma(\mathcal{T}_z, \rho_z) = \min \{ \sigma(\mathcal{T}_a, \rho_a) + \sigma(\mathcal{T}_b, \rho_b) - \text{uproot} - \text{overcount} \}$$

where the minimum is taken over all  $(\mathcal{T}_a, \mathcal{T}_b)$  that are compatible with  $\mathcal{T}_z$  and all  $\rho_a + \rho_b = \rho_z - \rho_\Delta$ , and

$$\begin{aligned} \text{uproot} &= \sum_{v \in U_a} (s_v - s_{\text{Par}_z(v), v}) + \sum_{v \in U_b} (s_v - s_{\text{Par}_z(v), v}), \text{ and} \\ \text{overcount} &= \sum_{v \in S_a \cap S_b} s_{\text{Par}_z(v), v}. \end{aligned}$$

If  $k$  is constant, then both recurrence relations take  $\text{poly}(n)$  time. This is because there are  $\text{poly}(n)$  many states on  $a$  and  $b$ , and it takes  $\text{poly}(n)$  steps to check the compatibility of  $(\mathcal{T}_a, \mathcal{T}_b)$  with  $\mathcal{T}_z$  and compute  $\rho_\Delta$ .

**Output** The minimum storage cost of a global solution is hence just  $\min\{\sigma(\mathcal{T}_z), \rho_z\}$  over all states  $\mathcal{T}_z$  and  $\rho_z$ , where  $z$  is the designated root of the nice tree decomposition.

We conclude this section with the following theorem.

**THEOREM 5.4.** *For a constant  $k \geq 1$ , on the set of graphs whose underlying undirected graph has treewidth at most  $k$ , MINSUM RETRIEVAL admits an FPTAS, while BOUNDED SUM RETRIEVAL has an  $(1, 1 + \epsilon)$  bi-criteria approximation that finishes in  $\text{poly}(n, \frac{1}{\epsilon})$  time.*

## 6 EXPERIMENTS AND IMPROVED HEURISTICS FOR MSR AND BMR

In this section, we propose three new heuristics that are inspired by empirical observations and theoretical results. We will discuss the experimental setup, datasets used, and experimental results for empirical validation of the performance of the algorithms. The performance and run time of these new algorithms are compared with previous best-performing heuristics.

<sup>13</sup>We will provide pseudocode in the full version.

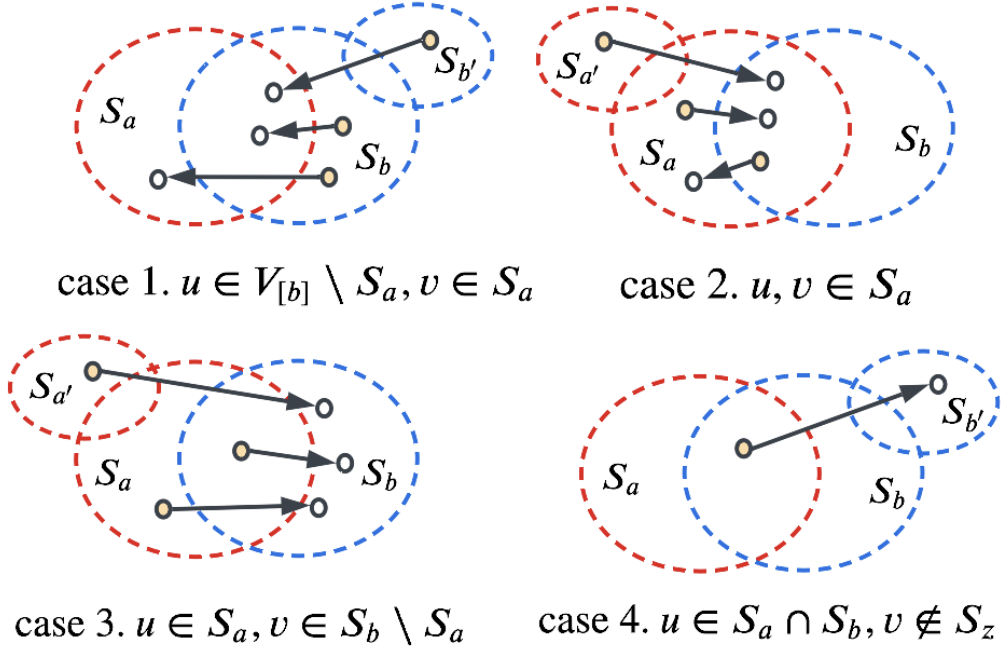


Fig. 9. Four types of edge  $(u, v)$  involved when restricting  $\mathcal{T}_z$  to  $\mathcal{T}_a$ .

### 6.1 Datasets and Construction of Graphs

We use real-world GitHub repositories of varying sizes as datasets, from which we construct version graphs. Each commit corresponds to a node with its weight (storage cost) equal to its size in bytes. Between each pair of parent and child commits, we construct bidirectional edges. The storage and retrieval costs of the edges are calculated, in bytes, based on the actions (such as addition, deletion, and modification of files) required to change one version to the other in the direction of the edge. We use simple diff to calculate the deltas, hence the storage and retrieval costs are proportional to each other. Graphs generated this way are called “**natural graphs**” in the rest of the section.

In addition, we also aim to test (1) the cases where the retrieval and storage costs of an edge can greatly differ from each other, and (2) the effect of tree-like shapes of graphs on the performance of algorithms. Therefore, we also conduct experiments on modified graphs in the following two ways:

**[wide]Random compression.** We simulate compression of data by scaling storage cost with a random factor between 0.3 and 1, and increasing the retrieval cost by 20% (for decompression). In realistic cases, storage and retrieval costs for the “delta” between two versions are often proportional, but randomness is added for generality of our experiments.

**ER construction.** Instead of the naturally constructing edges between each pair of parent-child commits, we construct the edges as in an Erdős-Rényi random graph: between each pair  $(u, v)$  of nodes, with probability  $p$  both deltas  $(u, v)$  and  $(v, u)$  are constructed, and with probability  $1 - p$  neither are constructed. This creates graphs much less tree-like than the natural construction, and as shown by [sofia: refer to treewidth data](#), tree-widths increases with higher  $p$  value.

The datasets we use are from GitHub’s repositories, namely, LeetCodeAnimation<sup>14</sup>, styleguide<sup>15</sup>, 996.ICU<sup>16</sup>, and freeCodeCamp<sup>17</sup>. The characteristic of these datasets can be found in Table 4.

Dataset	#nodes	#edges	avg. materialization	avg. storage
datasharing	29	74	7672	395
styleguide	493	1250	1.4e6	8659
996.ICU	3189	9210	1.5e7	337038
freeCodeCamp	31270	71534	2.5e7	14800
LeetCodeAnimation	246	628	1.7e8	1.2e7
LeetCode 0.05	246	3032	1.7e8	1.0e8
LeetCode 0.2	246	11932	1.7e8	1.0e8
LeetCode 1	246	60270	1.7e8	1.0e8

Table 4. Natural and ER graphs overview.

We ran the experiments on a PC with an Intel i9-13900K and 64GB RAM. We used the python packages Networkx [39] and GitPython to generate version graphs. All algorithms were implemented using C++. To compute minimum spanning arborescence, we applied Gabow et al.’s algorithm [33], and we used Böther et al.’s code for implementation [17].

## 6.2 Algorithms Implementation

**6.2.1 Baselines.** In considering MSR and BMR, we used LMG (refer to Section 3.1) and Modified Prim(MP)Koyel: where is Modified Prim defined or explained, and justified as a baseline? as the respective baselines in assessing the performance of algorithms. Both are best-performing heuristics in previous experiments for the respective problems [13].

**6.2.2 LMGA: improving LMG.** For MSR, we implemented a modification for LMG named LMG-All (LMGA). Instead of searching for the most efficient version to materialize per step, we can enlarge the scope of this search to explore the payoff of modifying any single edge.

Specifically, we will keep a set of active edges  $E_{active}$ , initialized to  $E(G_{aux})$ . On each iteration, let  $Par(v)$  be the parent of  $v$  in the current solution  $T$ . For all  $e = (u, v) \in E_{active}$ , we will consider the potential solution  $T_e$ , obtained by adding the edge  $e$  and removing  $(Par(v), v)$  from  $T$ . We then update  $T$  to  $T_{e^*}$  and remove  $e^*$  from  $E_{active}$ , where  $e^*$  maximizes  $\rho_e = \frac{R(T) - R(T_e)}{S(T_e) - S(T)}$ .

While LMGA considers more edges than LMG, it is not obvious that LMGA always provides a better solution. Due to its greedy nature, the first move might be better, but it may possibly be stuck in a worse local optimum.

**6.2.3 DP heuristics.** We also propose DP heuristics on both MSR and BMR, as inspired by algorithms in Sections 4 and 5. Importantly, we note that DP algorithms proposed for bounded treewidth graphs involve the calculation of nice tree decompositions and complicated subroutines (UN-UPROOTING, etc.), which severely slow down the running time on graphs with high treewidths. To speed up the algorithm, we instead only run the DP on bi-directional trees (namely, with treewidth 1) extracted from our general input graphs, with the steps below:

[wide]Calculate a minimum spanning arborescence  $A$  of the graph  $G$  rooted at the first commit  $v_1$ . We use the sum of retrieval and storage costs as weight. Generate a bidirectional

<sup>14</sup><https://github.com/MisterBooo/LeetCodeAnimation>

<sup>15</sup><https://github.com/google/styleguide>

<sup>16</sup><https://github.com/996icu/996.ICU>

<sup>17</sup><https://github.com/freeCodeCamp/freeCodeCamp>

tree  $G'$  from  $A$ . Namely, we have  $(u, v), (v, u) \in E(G')$  for each edge  $(u, v) \in E(A)$ . Run the proposed DP for MSR and BMR on directed trees (see Section 5.1 and Section 4) with input  $G'$ , and return the solution.

In addition, we also implement the following modifications for *MSR* to further speed up the algorithm:

[wide]Total *storage* cost is discretized instead of retrieval cost, since the former generally has a smaller range. Geometric discretization is used instead of linear discretization. A pruning step is added, where the DP variable discards all subproblem solutions whose storage cost exceeds some bound.

All three original features are necessary in the proof for our theoretical results, but in practice, the modified implementations show comparable results but significantly improves the running time.

### 6.3 Results and Discussion

**6.3.1 Results in MSR.** Section 6.3.1, Figure 11, and Figure 12 demonstrate the performance of the three MSR algorithms on natural graphs, randomly compressed natural graphs, and random compression ER graphs. Note that the data are presented in *logarithmic scale*. The running times for the algorithms are shown in ?? and Figure 12. Note since run time for most non-ER graphs exhibit similar trends, many are omitted here due to space constraint. Also note that, since all data points by the DP-MSR are generated with a single run of the DP, its running time is shown as a horizontal line over the full range for storage constraint.

We run DP-MSR with  $\epsilon = 0.05$  on most graphs, except  $\epsilon = 0.1$  for freeCodeCamp (for the feasibility of run time). The pruning value for DP variables is at twice the minimum storage for uncompressed graphs, and ten times the minimum storage for randomly compressed graphs.

**Performance analysis.** On most graphs, DP-MSR outperforms LMGA, which in turn outperforms LMG. This is especially clear on natural version graphs, where DP-MSR solutions are near 1000 times better than LMG solutions on 996.ICU. in Section 6.3.1.

On naturally constructed graphs (Section 6.3.1), LMGA often has comparable performance with LMG when storage constraint is low. This is possibly because both algorithms can only iterate a few times when the storage constraint is almost tight. DP-MSR, on the other hand, performs much better on natural graphs even for low storage constraint.

On graphs with simulated random compression (Figure 11), the dominance of DP in performance over the other two algorithms become less significant. This is anticipated because of the fact that DP only runs on a subgraph of the input graph. Intuitively, most of the information is already contained in a minimum spanning tree when storage and retrieval costs are proportional. Otherwise, the dropped edges may be useful. (They could have large retrieval but small storage, and vice versa. )

Finally, LMG's performance relative to our new algorithms is much worse on ER graphs. This may be due to the fact that LMG cannot look at non-auxiliary edges once the minimum arborescence is initialized, and hence losing most of the information brought by the extra edges. (Figure 12).

**Run time analysis.** For all natural graphs, we observe that LMGA uses no more time than LMG (as shown in Figure 11). Moreover, LMGA is significantly quicker than LMG on large natural graphs, which was unexpected considering that the two algorithms have almost identical structures in implementation. Possibly, this can be due to the fact that LMG makes bigger, more expensive changes on each iteration (materializing a node with many dependencies, for instance) as compared to LMGA.

As expected, though, LMGA takes much more time than the other two algorithms on denser ER graphs (Figure 12), due to the large number of edges.

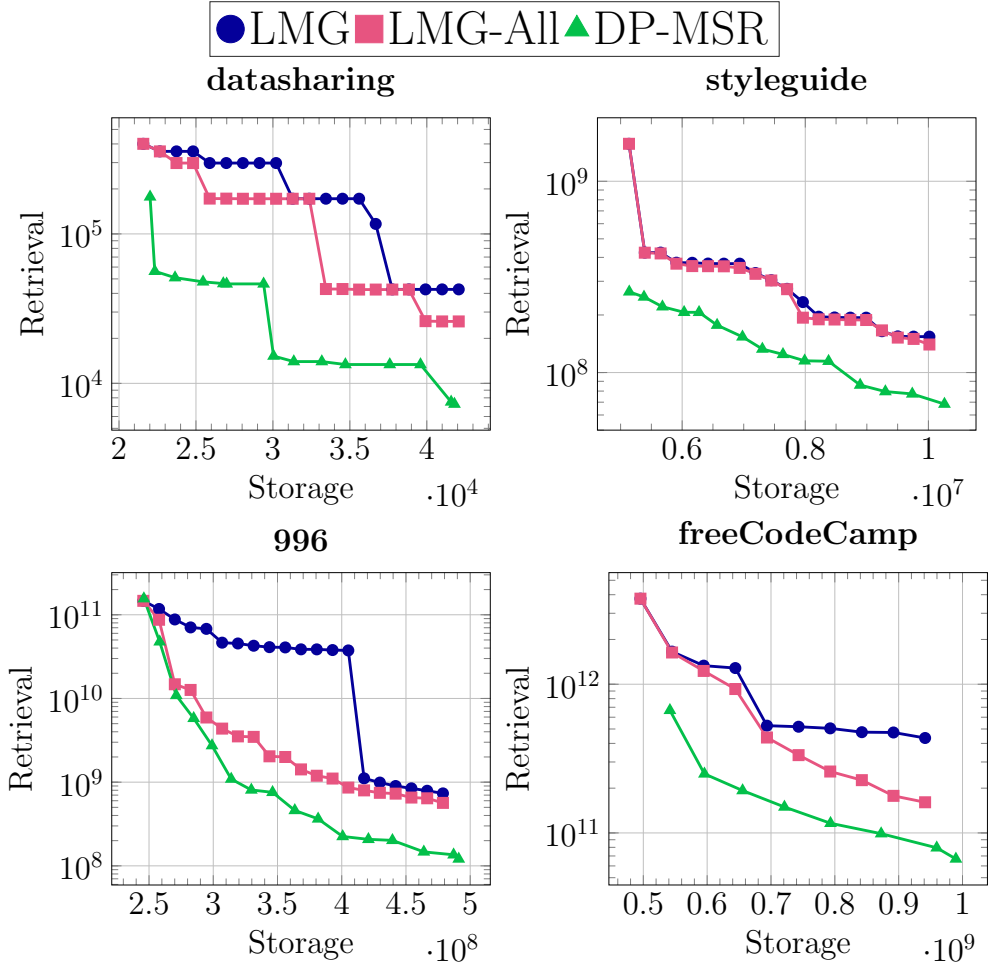


Fig. 10. Performance of MSR algorithms on natural graphs.

DP-MSR is often slower than LMG, except when ran on the natural construction of large graphs (Figure 11). However, unlike LMG and LMGA, the DP algorithm returns a whole spectrum of solutions at once, so it's difficult to make a direct comparison between the two. We also note that the runtime of DP heavily depends on the choice of  $\epsilon$  and the storage pruning value. Hence, the user can trade-off the runtime with solution's qualities by parameterize the algorithm with coarser configuration (i.e., higher  $\epsilon$ ).

**6.3.2 Results in BMR.** As compared to MSR algorithms, the performance and run time of our BMR algorithms are much more predictable and stable. They exhibit similar trends across different ways of graph construction as mentioned in earlier sections. **Bob: Surprisingly, DP-BMR even outperformed MP on non-tree-like ER constructions.**

Due to space limitation, we present the results on natural graphs, as shown in Figure 13, to respectively illustrate their performance and run time.

**Performance analysis.** For every graph we tested, DP-BMR outperforms MP on most of the retrieval constraint ranges. As the retrieval constraint increases, the gap between MP and DP-BMR solution also increases. We also observe that DP-BMR performs worse than MP when the retrieval constraint is at zero. This is because the bidirectional tree have fewer edges than the original graph. (Recall that the same behavior happened for DP-MSR on compressed graphs)

We also note that, unlike MP, the objective value of DP-BMR solution monotonically decreases with respect to retrieval constraint. This is again expected since they are essentially optimal solutions the problem on the bidirectional tree.

**Run time analysis.** For all graphs, the runtimes of DP-BMR and MP are comparable within a constant factor. This is true with varying graph shapes and construction methods in all our experiments, and representative data is exhibited in Figure 13. Unlike LMG and LMGA, their runtimes do not change much with varying constraint values.

**6.3.3 Overall Evaluation.** For MSR, we recommend always using one of LMGA and DP-MSR in place of LMG for practical use. On sparse graphs, LMGA dominates LMG both in performance and run time. DP-MSR can also provide a frontier of better solutions in a reasonable amount of time, regardless of the input.

For BMR, DP-BMR usually outperforms MP, except when the retrieval constraint is close to zero. Therefore, we recommend using DP in most situations.

## 7 CONCLUSION

**Bob: Do we need to change this?** In this paper, we developed fully polynomial time approximation algorithms for graphs with bounded treewidth, motivated by the fact that series-parallel graphs always have treewidth two. This captures the typical manner in which edit operations are applied on versions. However, due to the high complexity of these algorithms, they are not yet practical to handle the size of typical graphs that we would want to apply them to. On the other hand, we showed experimentally other heuristics can improve the practical performance of the standard LMG and MP, with a small loss in running time.

*Future Works.* There are many possible future directions. For one, a polynomial-time algorithm with bounded approximation ratio for general graph is desirable. Even for restricted classes of graphs, any development of a practical algorithm that can handle larger scale graphs is interesting. Moreover, in enterprise setting, often some versions are requested more often than others. It would be interesting to extend our work to handle such use cases.

## REFERENCES

- [1] 2005. Git. <https://github.com/git/git>. last accessed: 13-Oct-22.
- [2] 2016. Pachyderm. <https://github.com/pachyderm/pachyderm>. last accessed: 13-Oct-22.
- [3] 2017. DVC. <https://github.com/iterative/dvc>. last accessed: 13-Oct-22.
- [4] 2019. Dolt. <https://github.com/dolthub/dolt>. last accessed: 13-Oct-22.
- [5] 2019. TerminusDB. <https://github.com/terminusdb/terminusdb>. last accessed: 13-Oct-22.
- [6] 2020. LakeFS. <https://github.com/treeverse/lakeFS>. last accessed: 13-Oct-22.
- [7] Aaron Archer. 2000. Inapproximability of the Asymmetric Facility Location and k-Median Problems. (2000).
- [8] Aaron Archer. 2001. Two  $O(\log^k)$ -Approximation Algorithms for the Asymmetric k-Center Problem. In *Integer Programming and Combinatorial Optimization*, Karen Aardal and Bert Gerards (Eds.). Springer Berlin Heidelberg, Berlin, Heidelberg, 1–14.
- [9] Stefan Arnborg, Derek G. Corneil, and Andrzej Proskurowski. 1987. Complexity of Finding Embeddings in a k-Tree. *SIAM Journal on Algebraic Discrete Methods* 8, 2 (1987), 277–284. <https://doi.org/10.1137/0608024> arXiv:<https://doi.org/10.1137/0608024>



- [10] Mahdi Belbasi and Martin Fürer. 2021. Finding All Leftmost Separators of Size  $\leq k$ . In *Combinatorial Optimization and Applications: 15th International Conference, COCOA 2021, Tianjin, China, December 17–19, 2021, Proceedings* (Tianjin, China). Springer-Verlag, Berlin, Heidelberg, 273–287. [https://doi.org/10.1007/978-3-030-92681-6\\_23](https://doi.org/10.1007/978-3-030-92681-6_23)
- [11] Umberto Bertelè and Francesco Brioschi. 1973. On non-serial dynamic programming. *Journal of Combinatorial Theory, Series A* 14, 2 (1973), 137–148. [https://doi.org/10.1016/0097-3165\(73\)90016-2](https://doi.org/10.1016/0097-3165(73)90016-2)
- [12] Anant Bhardwaj, Souvik Bhattacharjee, Amit Chavan, Amol Deshpande, Aaron J Elmore, Samuel Madden, and Aditya G Parameswaran. 2014. DataHub: Collaborative Data Science & Dataset Version Management at Scale. *arXiv* (2014). <https://doi.org/10.48550/arxiv.1409.0798> arXiv:1409.0798
- [13] Souvik Bhattacharjee, Amit Chavan, Silu Huang, Amol Deshpande, and Aditya G. Parameswaran. 2015. Principles of Dataset Versioning: Exploring the Recreation/Storage Tradeoff. *Proc. VLDB Endow.* 8, 12 (2015), 1346–1357. <https://doi.org/10.14778/2824032.2824035>
- [14] Hans L. Bodlaender. 1993. A Linear Time Algorithm for Finding Tree-Decompositions of Small Treewidth. In *Proceedings of the Twenty-Fifth Annual ACM Symposium on Theory of Computing* (San Diego, California, USA) (STOC '93). Association for Computing Machinery, New York, NY, USA, 226–234. <https://doi.org/10.1145/167088.167161>
- [15] Hans L. Bodlaender. 1998. A partial k-arboretum of graphs with bounded treewidth. *Theoretical Computer Science* 209, 1 (1998), 1–45. [https://doi.org/10.1016/S0304-3975\(97\)00228-4](https://doi.org/10.1016/S0304-3975(97)00228-4)
- [16] Alex Bogatu, Alvaro A. A. Fernandes, Norman W. Paton, and Nikolaos Konstantinou. 2020. Dataset Discovery in Data Lakes. *2020 IEEE 36th International Conference on Data Engineering (ICDE)* 00 (2020), 709–720. <https://doi.org/10.1109/icde48307.2020.00067> arXiv:2011.10427
- [17] Maximilian Böther, Otto Kißig, and Christopher Weyand. 2023. Efficiently Computing Directed Minimum Spanning Trees. In *2023 Proceedings of the Symposium on Algorithm Engineering and Experiments (ALENEX)*. SIAM, 86–95.
- [18] Dan Brickley, Matthew Burgess, and Natasha Noy. 2019. Google Dataset Search: Building a search engine for datasets in an open Web ecosystem. *The World Wide Web Conference* (2019), 1365–1375. <https://doi.org/10.1145/3308558.3313685>
- [19] Jackson Brown and Nicholas Weber. 2021. DSDB: An Open-Source System for Database Versioning & Curation. *2021 ACM/IEEE Joint Conference on Digital Libraries (JCDL)* 00 (2021), 299–307. <https://doi.org/10.1109/jcdl52503.2021.00044>
- [20] Peter Buneman, Sanjeev Khanna, and Wang-Chiew Tan. 2000. Data Provenance: Some Basic Issues. *Lecture Notes in Computer Science* (2000), 87–93. [https://doi.org/10.1007/3-540-44450-5\\_6](https://doi.org/10.1007/3-540-44450-5_6)
- [21] Randal C. Burns and Darrell D. E. Long. 1998. In-place reconstruction of delta compressed files. *Proceedings of the seventeenth annual ACM symposium on Principles of distributed computing - PODC '98* (1998), 267–275. <https://doi.org/10.1145/277697.277747>
- [22] Amit Chavan and Amol Deshpande. 2017. DEX: Query Execution in a Delta-based Storage System. *Proceedings of the 2017 ACM International Conference on Management of Data* (2017), 171–186. <https://doi.org/10.1145/3035918.3064056>
- [23] Markus Chimani and Joachim Spoerhase. 2015. Network Design Problems with Bounded Distances via Shallow-Light Steiner Trees. In *32nd International Symposium on Theoretical Aspects of Computer Science (STACS 2015) (Leibniz International Proceedings in Informatics (LIPIcs))*, Ernst W. Mayr and Nicolas Ollinger (Eds.), Vol. 30. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, 238–248. <https://doi.org/10.4230/LIPIcs.STACS.2015.238>
- [24] Julia Chuzhoy, Sudipto Guha, Eran Halperin, Sanjeev Khanna, Guy Kortsarz, Robert Krauthgamer, and Joseph (Seffi) Naor. 2005. Asymmetric K-Center is  $\log^* n$ -Hard to Approximate. *J. ACM* 52, 4 (jul 2005), 538–551. <https://doi.org/10.1145/1082036.1082038>
- [25] P. Crescenzi. 1997. A short guide to approximation preserving reductions. In *Proceedings of Computational Complexity. Twelfth Annual IEEE Conference*. 262–273. <https://doi.org/10.1109/CCC.1997.612321>
- [26] Behrouz Derakhshan, Alireza Rezaei Mahdiraji, Zoi Kaoudi, Tilmann Rabl, and Volker Markl. 2022. Materialization and Reuse Optimizations for Production Data Science Pipelines (SIGMOD '22). Association for Computing Machinery, New York, NY, USA, 1962–1976. <https://doi.org/10.1145/3514221.3526186>
- [27] David Eppstein. 1992. Parallel recognition of series-parallel graphs. *Information and Computation* 98, 1 (1992), 41–55.
- [28] Uriel Feige. 1998. A Threshold of  $\ln n$  for Approximating Set Cover. *J. ACM* 45, 4 (jul 1998), 634–652. <https://doi.org/10.1145/285055.285059>
- [29] Uriel Feige, MohammadTaghi Hajiaghayi, and James R. Lee. 2005. Improved Approximation Algorithms for Minimum-Weight Vertex Separators. In *Proceedings of the Thirty-Seventh Annual ACM Symposium on Theory of Computing* (Baltimore, MD, USA) (STOC '05). Association for Computing Machinery, New York, NY, USA, 563–572. <https://doi.org/10.1145/1060590.1060674>
- [30] Raul Castro Fernandez, Ziawash Abedjan, Famien Koko, Gina Yuan, Sam Madden, and Michael Stonebraker. 2018. Aurum: A Data Discovery System. *2018 IEEE 34th International Conference on Data Engineering (ICDE)* (2018), 1001–1012. <https://doi.org/10.1109/icde.2018.00094>
- [31] Fedor V. Fomin, Daniel Lokshantov, Saket Saurabh, Michał Pilipczuk, and Marcin Wrochna. 2018. Fully Polynomial-Time Parameterized Computations for Graphs and Matrices of Low Treewidth. *ACM Trans. Algorithms* 14, 3, Article 34 (jun 2018), 45 pages. <https://doi.org/10.1145/3186898>

- [32] Fedor V. Fomin, Ioan Todinca, and Yngve Villanger. 2015. Large Induced Subgraphs via Triangulations and CMSO. *SIAM J. Comput.* 44, 1 (2015), 54–87. <https://doi.org/10.1137/140964801> arXiv:<https://doi.org/10.1137/140964801>
- [33] Harold N Gabow, Zvi Galil, Thomas Spencer, and Robert E Tarjan. 1986. Efficient algorithms for finding minimum spanning trees in undirected and directed graphs. *Combinatorica* 6, 2 (1986), 109–122.
- [34] George Gens and Eugene Levner. 1994. A fast approximation algorithm for the subset-sum problem. *INFOR: Information Systems and Operational Research* 32, 3 (1994), 143–148.
- [35] GB Gens and YV Levner. 1978. Approximate algorithms for certain universal problems in scheduling theory. *Engineering Cybernetics* 16, 6 (1978), 31–36.
- [36] Rohan Ghuge and Viswanath Nagarajan. 2022. Quasi-polynomial algorithms for submodular tree orienteering and directed network design problems. *Mathematics of Operations Research* 47, 2 (2022), 1612–1630.
- [37] Teofilo F Gonzalez. 1985. Clustering to minimize the maximum intercluster distance. *Theoretical computer science* 38 (1985), 293–306.
- [38] Bernhard Haeupler, D. Ellis Hershkowitz, and Goran Zuzic. 2021. Tree Embeddings for Hop-Constrained Network Design. In *Proceedings of the 53rd Annual ACM SIGACT Symposium on Theory of Computing (Virtual, Italy) (STOC 2021)*. Association for Computing Machinery, New York, NY, USA, 356–369. <https://doi.org/10.1145/3406325.3451053>
- [39] Aric Hagberg, Pieter Swart, and Daniel S Chult. 2008. *Exploring network structure, dynamics, and function using NetworkX*. Technical Report. Los Alamos National Lab.(LANL), Los Alamos, NM (United States).
- [40] Mohammad Taghi Hajiaghayi. 2001. *Algorithms for graphs of (locally) bounded treewidth*. Ph.D. Dissertation. Citeseer.
- [41] Mohammad Taghi Hajiaghayi, Guy Kortsarz, and Mohammad R Salavatipour. 2009. Approximating buy-at-bulk and shallow-light k-Steiner trees. *Algorithmica* 53, 1 (2009), 89–103.
- [42] Silu Huang, Liqi Xu, Jialin Liu, Aaron J. Elmore, and Aditya Parameswaran. 2020. ORPHEUSDB: bolt-on version for relational databases (extended version). *The VLDB Journal* 29, 1 (2020), 509–538. <https://doi.org/10.1007/s00778-019-00594-5>
- [43] James J. Hunt, Kiem-Phong Vo, and Walter F. Tichy. 1998. Delta algorithms: an empirical analysis. *ACM Transactions on Software Engineering and Methodology (TOSEM)* 7, 2 (1998), 192–214. <https://doi.org/10.1145/279310.279321>
- [44] Oscar H. Ibarra and Chul E. Kim. 1975. Fast Approximation Algorithms for the Knapsack and Sum of Subset Problems. *J. ACM* 22, 4 (oct 1975), 463–468. <https://doi.org/10.1145/321906.321909>
- [45] Kamal Jain, Mohammad Mahdian, and Amin Saberi. 2002. A New Greedy Approach for Facility Location Problems. In *Proceedings of the Thirty-Fourth Annual ACM Symposium on Theory of Computing (Montreal, Quebec, Canada) (STOC '02)*. Association for Computing Machinery, New York, NY, USA, 731–740. <https://doi.org/10.1145/509907.510012>
- [46] Yasith Jayawardana and Sampath Jayarathna. 2019. DFS: A Dataset File System for Data Discovering Users. *2019 ACM/IEEE Joint Conference on Digital Libraries (JCDL)* 00 (2019), 355–356. <https://doi.org/10.1109/jcdl.2019.00068> arXiv:1905.13363
- [47] Thor Johnson, Neil Robertson, P. D. Seymour, and Robin Thomas. 2001. Directed tree-width. *Journal of Combinatorial Theory. Series B* 82, 1 (May 2001), 138–154. <https://doi.org/10.1006/jctb.2000.2031> Funding Information: 1Partially supported by the NSF under Grant DMS-9701598. 2 Research partially supported by the DIMACS Center, Rutgers University, New Brunswick, NJ 08903. 3Partially supported by the NSF under Grant DMS-9401981. 4Partially supported by the ONR under Contact N00014-97-1-0512. 5Partially supported by the NSF under Grant DMS-9623031 and by the NSA under Contract MDA904-98-1-0517.
- [48] Richard M Karp. 1975. The fast approximate solution of hard combinatorial problems. In *Proc. 6th South-Eastern Conf. Combinatorics, Graph Theory and Computing (Florida Atlantic U. 1975)*. 15–31.
- [49] Hans Kellerer, Renata Mansini, Ulrich Pferschy, and Maria Grazia Speranza. 2003. An efficient fully polynomial approximation scheme for the subset-sum problem. *J. Comput. System Sci.* 66, 2 (2003), 349–370.
- [50] M. Reza Khani and Mohammad R. Salavatipour. 2016. Improved Approximations for Buy-at-Bulk and Shallow-Light k-Steiner Trees and (k,2)-Subgraph. *J. Comb. Optim.* 31, 2 (feb 2016), 669–685. <https://doi.org/10.1007/s10878-014-9774-5>
- [51] Samir Khuller, Balaji Raghavachari, and Neal E. Young. 1995. Balancing Minimum Spanning Trees and Shortest-Path Trees. *Algorithmica* 14, 4 (1995), 305–321. <https://doi.org/10.1007/BF01294129>
- [52] Udayan Khurana and Amol Deshpande. 2012. Efficient Snapshot Retrieval over Historical Graph Data. *arXiv* (2012). <https://doi.org/10.48550/arxiv.1207.5777> arXiv:1207.5777 Graph database systems — stroing dynamic graphs so that a graph at a specific time can be queried. Vertices are marked with bits encoding information on which versions it belong to.
- [53] Tuukka Korhonen. 2022. A Single-Exponential Time 2-Approximation Algorithm for Treewidth. In *2021 IEEE 62nd Annual Symposium on Foundations of Computer Science (FOCS)*. 184–192. <https://doi.org/10.1109/FOCS52979.2021.00026>
- [54] Guy Kortsarz and David Peleg. 1997. Approximating shallow-light trees. In *Proceedings of the eighth annual ACM-SIAM symposium on Discrete algorithms*. 103–110.
- [55] Josh MacDonald. 2000. *File system support for delta compression*. Ph.D. Dissertation. Masters thesis. Department of Electrical Engineering and Computer Science, University of California at Berkley.

- [56] Michael Maddox, David Goehring, Aaron J. Elmore, Samuel Madden, Aditya Parameswaran, and Amol Deshpande. 2016. Decibel: The Relational Dataset Branching System. *Proceedings of the VLDB Endowment. International Conference on Very Large Data Bases* 9, 9 (2016), 624–635. <https://doi.org/10.14778/2947618.2947619>
- [57] Naga Nithin Manne, Shilvi Satpati, Tanu Malik, Amitabha Bagchi, Ashish Gehani, and Amitabh Chaudhary. 2022. CHEX: multiversion replay with ordered checkpoints. *Proceedings of the VLDB Endowment* 15, 6 (2022), 1297–1310. <https://doi.org/10.14778/3514061.3514075>
- [58] Madhav V Marathe, Ramamoorthi Ravi, Ravi Sundaram, SS Ravi, Daniel J Rosenkrantz, and Harry B Hunt III. 1998. Bicriteria network design problems. *Journal of algorithms* 28, 1 (1998), 142–171.
- [59] Koyel Mukherjee, Raunak Shah, Shiv K. Saini, Karanpreet Singh, Khushi , Harsh Kesarwani, Kavya Barnwal, and Ayush Chauhan. 2023. Towards Optimizing Storage Costs on the Cloud. *IEEE 39th International Conference on Data Engineering (ICDE) (To Appear)* (2023).
- [60] William Nagel. 2006. Subversion: not just for code anymore. *Linux Journal* 2006, 143 (2006), 10.
- [61] Fatemeh Nargesian, Erkang Zhu, Renée J. Miller, Ken Q. Pu, and Patricia C. Arocena. 2019. Data Lake Management: Challenges and Opportunities. *Proc. VLDB Endow.* 12, 12 (aug 2019), 1986–1989. <https://doi.org/10.14778/3352063.3352116>
- [62] R. Ravi. 1994. Rapid rumor ramification: approximating the minimum broadcast time. In *Proceedings 35th Annual Symposium on Foundations of Computer Science*. 202–213. <https://doi.org/10.1109/SFCS.1994.365693>
- [63] Paul Roome, Tao Feng, and Sachin Thakur. 2022. Announcing the Availability of Data Lineage With Unity Catalog. <https://www.databricks.com/blog/2022/06/08/announcing-the-availability-of-data-lineage-with-unity-catalog.html>. last accessed: 13-Oct-22.
- [64] Maximilian E Schule, Lukas Karnowski, Josef Schmeißer, Benedikt Kleiner, Alfons Kemper, and Thomas Neumann. 2019. Versioning in Main-Memory Database Systems: From MusaeusDB to TardisDB. *Proceedings of the 31st International Conference on Scientific and Statistical Database Management* (2019), 169–180. <https://doi.org/10.1145/3335783.3335792>
- [65] Adam Seering, Philippe Cudre-Mauroux, Samuel Madden, and Michael Stonebraker. 2012. Efficient Versioning for Scientific Array Databases. *2012 IEEE 28th International Conference on Data Engineering* 1 (2012), 1013–1024. <https://doi.org/10.1109/icde.2012.102>
- [66] Yogesh L Simmhan, Beth Plale, Dennis Gannon, et al. [n.d.]. A survey of data provenance techniques. ([n. d.]).
- [67] Roberto Solis-Oba. 2006. *Approximation Algorithms for the k-Median Problem*. Springer Berlin Heidelberg, Berlin, Heidelberg, 292–320. [https://doi.org/10.1007/11671541\\_10](https://doi.org/10.1007/11671541_10)
- [68] Dimitre Trendafilov Nasir Memon Torsten Suel. 2002. zdelta: An efficient delta compression tool. (2002).
- [69] Sheng Wang, Tien Tuan Anh Dinh, Qian Lin, Zhongle Xie, Meihui Zhang, Qingchao Cai, Gang Chen, Beng Chin Ooi, and Pingcheng Ruan. 2018. Forkbase: An Efficient Storage Engine for Blockchain and Forkable Applications. *Proc. VLDB Endow.* 11, 10 (jun 2018), 1137–1150. <https://doi.org/10.14778/3231751.3231762>
- [70] Wen Xia, Hong Jiang, Dan Feng, Lei Tian, Min Fu, and Yukun Zhou. 2014. Ddelta: A deduplication-inspired fast delta compression approach. *Performance Evaluation* 79 (2014), 258–272. <https://doi.org/10.1016/j.peva.2014.07.016>
- [71] Tangwei Ying, Hanhua Chen, and Hai Jin. 2020. Pensieve: Skewness-Aware Version Switching for Efficient Graph Processing. In *Proceedings of the 2020 ACM SIGMOD International Conference on Management of Data* (Portland, OR, USA) (SIGMOD '20). Association for Computing Machinery, New York, NY, USA, 699–713. <https://doi.org/10.1145/3318464.3380590>
- [72] Yin Zhang, Huiping Liu, Cheqing Jin, and Ye Guo. 2018. Storage and Recreation Trade-Off for Multi-version Data Management. In *Web and Big Data*, Yi Cai, Yoshiharu Ishikawa, and Jianliang Xu (Eds.). Springer International Publishing, Cham, 394–409.

## A DEFINITIONS: APPROXIMATION ALGORITHMS

### B PSEUDO CODE FOR LOCAL MOVE GREEDY

Here we present in Algorithm 1 the pseudo code for LMG, as explained in Section 3.1.

### C PSEUDO CODE FOR DP-BMR

Here we present in Algorithm 2 the pseudo code for DP-BMR, as explained in Section 4.

---

**Algorithm 1** LOCAL MOVE GREEDY (LMG)
 

---

```

1: Input: Extended version graph  $G_{aux}$ , storage constraint  $S$ .
2:  $T \leftarrow$  minimum arborescence of  $G_{aux}$  rooted at  $v_{aux}$  w.r.t. weight function  $s$ .
3: Let  $S(T)$  be the total storage cost of  $T$ .
4: Let  $R(v)$  be the retrieval cost of  $v$  in  $T$ .
5: Let  $P(v)$  be the parent of  $v$  in  $T$ .
6:  $U \leftarrow V$ .
7: while  $S(T) < S$  do
8:    $(\rho_{max}, v_{max}) \leftarrow (0, \emptyset)$ .
9:   for  $v \in U$  with  $S(T) + s_v - s_{P(v),v} \leq S$  do
10:     $T' \leftarrow T \setminus \{(P(v), v)\} \cup \{(v_{aux}, v)\}$ .
11:     $\Delta = \sum_v (R(v) - R_{T'}(v))$ 
12:    if  $\Delta / (s_v - s_{P(v),v}) > \rho_{max}$  then
13:       $\rho_{max} \leftarrow \Delta / (s_v - s_{P(v),v})$ .
14:       $v_{max} \leftarrow v$ .
15:    end if
16:   end for
17:    $T \leftarrow T \setminus \{(P(v_{max}), v_{max})\} \cup \{(v_{aux}, v_{max})\}$ .
18:    $U \leftarrow U \setminus \{v_{max}\}$ .
19:   if  $U = \emptyset$  then
20:     return  $T$ .
21:   end if
22: end while
23: return  $T$ .

```

---

## D DP ON TREE VIA FPTAS 5.1

### D.1 WLOG considering binary tree

**LEMMA D.1.** *If algorithm  $\mathcal{A}$  solves BMR on binary tree instances in  $O(f(n))$  time where  $n$  is the number of vertices in the tree, then there exists algorithm  $\mathcal{A}'$  solving BMR on all tree instances in  $O(f(2n))$  time.*

PROOF SKETCH. If a node  $v$  has more than two children, we modify the graph as follows:

- (1) Create node  $v'$  and attach it as a child of  $v$ .
- (2) Move all but the left-most children of  $v$  to be children of  $v'$
- (3) Set the deltas of  $(v, v') = (v', v) = 0$ ; set  $(v', c_i) = (v, c_i)$  and  $(c_i, v') = (c_i, v)$  for all transferred children  $c_i$ .

By repeating this process we obtain a binary tree with  $\leq 2n$  nodes which has the same optimal objective value as before. Hence, after producing a binary tree, we can utilize the algorithm for binary tree to solve BMR on any tree.  $\square$

### D.2 DP for MSR

We present the 5 cases in the recurrent step here as promised in Section 5.1. All other cases are symmetric to the cases we present, hence omitted. Referring to ??, we calculate the minimum storage cost in case  $i$  as  $S_i$ .

**Algorithm 2** DP-BMR

---

```

1: Input:  $T$ , a bidirectional tree and  $\mathcal{R}$ , the max retrieval cost constraint;
2: Orient  $T$  arbitrarily, and sort  $V$  in reverse topological order;
3:  $DP[v][u] \leftarrow \infty$  for all  $v, u \in V$ ;
4: for  $v$  in  $V$  do
5:   for  $u$  in  $V$  such that  $R(u, v) \leq \mathcal{R}$  do
6:     if  $u = v$  then
7:        $DP[v][u] \leftarrow s_v$ ;
8:     else
9:        $DP[v][u] \leftarrow s_{p[v],v}$ , where  $p[v]$  is the node before  $v$  on the path from  $u$  to  $v$ ;
10:    end if
11:    for  $w$  child of  $v$  do
12:      if  $w$  in the path from  $u$  to  $v$  then
13:         $DP[v][u] \leftarrow DP[v][u] + DP[w][u]$ ;
14:      else
15:         $DP[v][u] \leftarrow DP[v][u] + \min\{OPT[w], DP[w][u]\}$ ;
16:      end if
17:    end for
18:     $OPT[v] \leftarrow \min\{DP[v][w] : w \in V(T_{[v]})\}$ ;
19:  end for
20: end for
21: Output:  $OPT[v_{root}]$ .

```

---

$$\begin{aligned}
S_1 &= s_v & + \min_{\rho_1 + \rho_2 = \rho} \left\{ \min_{k_1, \gamma_1} \{DP[c_1][k_1][\gamma_2][\rho_1]\} \right. \\
& & \quad \left. + \min_{k_2, \gamma_2} \{DP[c_2][k_2][\gamma_2][\rho_2]\} \right\} \\
S_3 &= s_v + s_{v, c_2} - s_{c_2} & + \min_{\rho_1 + \rho_2 = \rho} \left\{ \min_{k', \gamma_1} \{DP[c_1][k'][\gamma_1][\rho_1]\} \right. \\
& & \quad \left. + DP[c_2][k-1][0][\rho_2 - (k-1)r_{v, c_2}] \right\} \\
S_4 &= s_v + s_{v, c_1} - s_{c_1} + s_{v, c_2} - s_{c_2} & + \min_{\rho_1 + \rho_2 = \rho} \min_{k_1 + k_2 = k-1} \left\{ DP[c_1][k_1][0][\rho_1 - k_1 r_{v, c_1}] \right. \\
& & \quad \left. + DP[c_2][k_2][0][\rho_2 - k_2 r_{v, c_2}] \right\} \\
S_6 &= s_{c_2, v} & + \min_{\rho_1 + \rho_2 = \rho} \left\{ \min_{k_2} \{DP[c_2][k_2][\gamma - r_{c_2, v}][\rho_2 - \gamma]\} \right. \\
& & \quad \left. + \min_{k_1, \gamma'} \{DP[c_1][k_1][\gamma'][\rho_1]\} \right\} \\
S_7 &= s_{c_2, v} + s_{v, c_1} - s_{c_1} & + \min_{\rho_1 + \rho_2 = \rho} \left\{ DP[c_1][k-1][0][\rho_1 - (k-1) \cdot (r_{v, c_1} + \gamma)] \right. \\
& & \quad \left. + \min_{k'} \{DP[c_2][k'][\gamma - r_{c_2, v}][\rho_2 - \gamma]\} \right\}
\end{aligned}$$

We also include a proof for Theorem 5.1 in this section. We first show a lemma:

**LEMMA D.2.** *The DP algorithm can output a configuration with total retrieval cost at most  $\text{OPT} + \epsilon r_{\max}$  in  $\text{poly}(n, 1/\epsilon)$  time.*

PROOF. Set the  $T(\epsilon) = \frac{n^4}{\epsilon}$ , and so  $l = \frac{n^2 r_{\max}}{T(\epsilon)} = \frac{\epsilon r_{\max}}{n^2}$ . Note that the overestimation for each edge  $\leq l$ . Note further that in the optimal solution,  $\leq n^2$  edges are materialized, so if  $\rho^*$  is outputted as the minimal total retrieval cost, we have

$$\text{total retrieval of output} = l\rho^* \leq \text{OPT} + n^2 l \leq \text{OPT} + \epsilon r_{\max}$$

□

Now we restate Theorem 5.1:

**THEOREM D.3.** *There is an FPTAS for BSR on bidirectional trees.*

PROOF. Given parameter  $\epsilon$ , we can use the DP algorithm as a black box and iterate the following for up to  $n$  times:

- (1) Run the DP for the given  $\epsilon$  on the current graph. Record the output.
- (2) Let  $(u, v)$  be the most retrieval cost-heavy edge. We now set  $r_{(u,v)} = 0$  and  $s_{(u,v)} = s_v$ . If the new graph is infeasible for the given storage constraint, or if all edges have already been modified, exit the loop.

At the end, we output the best out of all recorded outputs. This improves the previous bound when  $r_{\max} > \text{OPT}$ : at some point we will eventually have  $r_{\max} \leq \text{OPT}$ , which means the output configuration, if mapped back to the original input, is a feasible  $(1 + \epsilon)$ -approximation. □

## E SUPPLEMENTARY MATERIALS FOR SECTION 5.3

### E.1 Proof of lemma ??

PROOF OF LEMMA ??. Notice that for some  $v \in V$  of the original undirected graph, the set of bags containing  $v$  form a connected subtree in the tree decomposition  $T$ . Therefore, if  $v \in S'_a \setminus S_a$  where  $a'$  is a descendant of  $a$  in  $T$ , then it is not possible that  $v$  also appears in  $S_b$  where  $b$  is a sibling of  $a$ , since otherwise the set of bags containing  $v$  do not connected subtree in  $T$ . □

Finally, combined with the lemma, we can easily check that all edges involving vertices in  $S_z$  are covered by exactly one case in Figure 9.

### E.2 Calculation of $\rho$

We hereby demonstrate that the method for calculating  $\rho_\Delta$  in Algorithm 6 is indeed correct.

For a pair of compatible partial solutions  $\mathcal{T}_a, \mathcal{T}_b$  with regards to  $\mathcal{T}_z$ ,  $\rho_\Delta$  is defined such that  $\rho_a + \rho_b = \rho_z - \rho_\Delta$ . Therefore, as we go down a path described by  $\mathcal{T}_z$  in topological order, we analyze how many times the retrieval cost of an edge is counted by both  $\rho_a$  and  $\rho_b$  as compared to that by  $\rho_z$ . For example, in figure 14, the retrieval cost of edge  $(1, 2)$  is counted 8 times in  $\mathcal{T}_z$ , zero times in  $\mathcal{T}_a$ , and twice in  $\mathcal{T}_b$ . The details are as below:

- (1) We observe that all edges in  $\mathcal{T}_a$  and  $\mathcal{T}_b$  are must also be in  $\mathcal{T}_z$ : in COMPATIBILITY, no additional edges. Hence, it suffices to focus on all edges of  $\mathcal{T}_z$
- (2) For each  $v$  not materialized in  $\mathcal{T}$ , we use the temporary variable Count to denote how many times the edge  $e = (\text{Par}_z(v), v)$  is over/undercounted in  $\rho_z$ .

To put this formally, we can abuse notation and let  $\text{Dep}_z(e)$  be the number of times  $r_e$  is counted towards total retrieval cost in  $\mathcal{T}_z$ . Then we have

$$\text{Count} = \text{Dep}_z(e) - (\text{Dep}_a(e) + \text{Dep}_b(e))$$

where if  $\text{Par}_a(v) \neq \text{Par}_z(v)$ , clearly  $\text{Dep}_a(e)$  should be 0, since it's not even stored in  $\mathcal{T}_a$ .



- (3) If both endpoints of  $e$  are in  $S_z$ , then the amount of retrieval cost overcount in  $\rho_z$  is exactly  $\text{Count} \cdot r_e$ . On the other hand, if  $e$  is a delta from outside  $S_z$ , the overcount should be  $\text{Count} \cdot \text{Ret}_z(v)$ , since the entire retrieval cost of  $v$  is overcounted  $\text{Count}$  times.

### E.3 Algorithms in Section 5.3

We present the pseudo code for Algorithms 3, 4, and 5 below, as mentioned in Section 5.3:

---

#### Algorithm 3 SCAN UPROOTED NODES

---

```

1: Input:  $S_z, S_a, S_b, \mathcal{T}_z$ ;
2:  $U_a \leftarrow \emptyset; U_b \leftarrow \emptyset$ ;
3: for  $v \in S_z$  do
4:   if  $v \in S_a$  and  $\text{Par}_z(v) \in S_b \setminus S_a$  then
5:      $U_a \leftarrow U_a \cup \{v\}$ ;
6:   else if  $v \in S_b$  and  $\text{Par}_z(v) \in S_a \setminus S_b$  then
7:      $U_b \leftarrow U_b \cup \{v\}$ ;
8:   end if
9: end for
10: return  $U_a, U_b$ .

```

---



---

#### Algorithm 4 UN-UPROOT

---

```

1: Input:  $(S_z, \mathcal{T}_z, S_a, U_a, S_b, U_b)$ ;
2:  $\mathcal{T}'_a := (\text{Par}'_a, \text{Dep}'_a, \text{Ret}'_a, \text{Anc}'_a) \leftarrow \mathcal{T}_z$ ;
3:  $\mathcal{T}'_b := (\text{Par}'_b, \text{Dep}'_b, \text{Ret}'_b, \text{Anc}'_b) \leftarrow \mathcal{T}_z$ ;
4: Sort  $S_z$  in topological order according to  $\text{Anc}_z$ ;
5: for  $v \in S_z$  do
6:   if  $v \in U_a$  then ▷ Case 1 in Figure 9
7:      $\text{Par}'_a(v) \leftarrow v; \text{Ret}'_a(v) \leftarrow 0; \text{Anc}'_a(v) \leftarrow \emptyset$ ;
8:     for  $u \in \text{Anc}'_b(v)$  do
9:        $\text{Dep}'_b(u) \leftarrow \text{Dep}'_b(u) - \text{Dep}'_b(v) + 1$ ; ▷ Dependents of  $v$  are no longer considered.
10:    end for
11:   else if  $v \in U_b$  then ▷ Case 2 in Figure 9.
12:      $\text{Par}'_b(v) \leftarrow v; \text{Ret}'_b(v) \leftarrow 0; \text{Anc}'_b(v) \leftarrow \emptyset$ ;
13:     for  $u \in \text{Anc}'_a(v)$  do
14:        $\text{Dep}'_a(u) \leftarrow \text{Dep}'_a(u) - \text{Dep}'_a(v) + 1$ ;
15:    end for
16:   else ▷ Case 3 in Figure 9.
17:      $\text{Anc}'_a(v) \leftarrow \text{Anc}'_a(\text{Par}_z(v)) \cup \{\text{Par}_z(v)\}$ ;
18:      $\text{Anc}'_b(v) \leftarrow \text{Anc}'_b(\text{Par}_z(v)) \cup \{\text{Par}_z(v)\}$ ;
19:      $\text{Ret}'_a(v) \leftarrow \text{Ret}'_a(\text{Par}_z(v)) + r_{\text{Par}_z(v),v}$ ;
20:      $\text{Ret}'_b(v) \leftarrow \text{Ret}'_b(\text{Par}_z(v)) + r_{\text{Par}_z(v),v}$ ;
21:   end if
22: end for
23: return  $\mathcal{T}'_a, \mathcal{T}'_b$ .

```

---

**Algorithm 5** COMPATIBILITY

---

```

1: Input:  $S_z, S_a, S_b, \mathcal{T}_a, \mathcal{T}_b$ ;
2:  $U_a, U_b \leftarrow \text{SCAN UPROOTED NOTE}(S_z, S_a, S_b, \mathcal{T}_z)$ ;
3: for  $v \in S_z$  do                                      $\triangleright$  Checking alignment of the Par functions.
4:   if  $(v \in U_a \text{ and } \text{Par}_a(v) \neq v) \text{ or } (v \in U_b \text{ and } \text{Par}_b(v) \neq v)$  then
5:     return False;
6:   else if  $v \notin U_a \cup U_b \text{ and } (\text{Par}_z(v) \neq \text{Par}_a(v) \text{ or } \text{Par}_z(v) \neq \text{Par}_b(v))$  then
7:     return False;
8:   end if
9: end for
10:  $\mathcal{T}'_a, \mathcal{T}'_b \leftarrow \text{UN-UPROOT}(S_z, \mathcal{T}_z, S_a, U_a, S_b, U_b)$ ;
11: for  $v \in S_a \cap S_b$  do
12:    $\text{ExtDep}_z \leftarrow \text{Dep}_z(v) - \sum_{w \in S_z: \text{Par}_z(w)=v} \text{Dep}_z(w)$ ;       $\triangleright$  "External dependency"; number of
   dependent nodes outside  $S_z$ . This counts the number of Case 4 as in Figure 9.
13:    $\text{ExtDep}_a \leftarrow \text{Dep}_a(v) - \sum_{w \in S_a: \text{Par}_a(w)=v} \text{Dep}_a(w)$ ;
14:    $\text{ExtDep}_b \leftarrow \text{Dep}_b(v) - \sum_{w \in S_b: \text{Par}_b(w)=v} \text{Dep}_b(w)$ ;
15:   if  $\text{ExtDep}_z \neq \text{ExtDep}_a + \text{ExtDep}_b$  then                                      $\triangleright$ 
16:     return False;
17:   end if
18:   for  $u \in \text{Anc}'_a(v)$  do
19:      $\text{Dep}'_a(u) \leftarrow \text{Dep}'_a(u) - (\text{ExtDep}_z - \text{ExtDep}_a)$ ;       $\triangleright$  subtract external dependencies in
      $V_{[b]} \setminus S_b$  from  $\mathcal{T}'_a$ 
20:   end for
21:   for  $u \in \text{Anc}'_b(v)$  do
22:      $\text{Dep}'_b(u) \leftarrow \text{Dep}'_b(u) - (\text{ExtDep}_z - \text{ExtDep}_b)$ ;
23:   end for
24: end for
25: if  $\mathcal{T}_a = \mathcal{T}'_a$  and  $\mathcal{T}_b = \mathcal{T}'_b$  then
26:   return True;
27: else
28:   return False;
29: end if

```

---

**E.4 Proof for Theorem 5.4**

We briefly explain the following theorem below:

**THEOREM E.1.** *For a constant  $k \geq 1$ , on the set of graphs whose underlying undirected graph has treewidth at most  $k$ , MSR and MMR admit an FPTAS, while BSR and BMR have an  $(1, 1 + \epsilon)$  bi-criteria approximation that finishes in  $\text{poly}(n, \frac{1}{\epsilon})$  time.*

To see this is an FPTAS for MSR, the proof becomes almost identical to the proof of Theorem 5.1 (Appendix D.2) once we note that the number of partial solutions on each  $z$  is  $\text{poly}(n)$ .

An FPTAS for MMR arises from similar method. When the objective becomes maximum retrieval cost, we can use  $\rho_z$  to represent the maximum retrieval cost in the partial solution. We modify  $\text{Dep}_z(v)$  to represent the highest retrieval cost among all the nodes that are dependent on  $v$ . This is

**Algorithm 6** DISTRIBUTE RETRIEVAL

---

```

1: Input:  $S_z, \mathcal{T}_z, \rho_z, S_a, S_b, \mathcal{T}_a, \mathcal{T}_b$ ;
2:  $\rho_\Delta \leftarrow 0$ ; ▷ We Want  $\rho_z - \rho_\Delta = \rho_a + \rho_b$ 
3: for  $v \in S_z$  such that  $\text{Par}_z(v) \neq v$  do
4:    $\text{Count} \leftarrow \text{Dep}_z(v)$ ; ▷ the number of times  $r_{\text{Par}_z(v),v}$  is counted
5:   if  $\text{Par}_a(v) = \text{Par}_z(v)$  then
6:      $\text{Count} \leftarrow \text{Count} - \text{Dep}_a(v)$ ;
7:   end if
8:   if  $\text{Par}_b(v) = \text{Par}_z(v)$  then
9:      $\text{Count} \leftarrow \text{Count} - \text{Dep}_b(v)$ ;
10:  end if
11:  if  $\text{Par}_z(v) \in S_z$  then
12:     $\rho_\Delta \leftarrow \rho_\Delta + \text{Count} \cdot r_{\text{Par}_z(v),v}$ ; ▷ The edge  $r_{\text{Par}_z(v),v}$  is over/undercounted.
13:  else
14:     $\rho_\Delta \leftarrow \rho_\Delta + \text{Count} \cdot \text{Ret}_z(v)$ ; ▷ The entire  $\text{Ret}_z(v)$  is over/undercounted.
15:  end if
16: end for
17: return  $\rho_\Delta$ 

```

---

an FPTAS because, again, we have  $\text{poly}(n)$  number of states on each  $z$  that describes the necessary information of a partial solution to its parent.

Also note the same algorithms extend to  $(1, 1 + \epsilon)$  bi-criteria approximation algorithms for BSR and BMR naturally, as the objective and constraint are reversed.

**F ILP FORMULATION**

In the following formulation, we have integer variables  $\{x_e\}$  representing how many  $v \in V$  is retrieved through the edge  $e$ .  $I_e$  is a Boolean variable denoting whether edge  $e$  is stored. We work on the extend graph with the auxiliary node  $v_{aux}$  for convenience.

$$\begin{aligned}
\min \quad & \sum_{e \in E} r_e x_e && \text{s.t.} \\
& x_e \leq |V - 1| I_e && \text{(indicator constraint)} \\
& \sum_{e \in E} s_e I_e \leq \mathcal{R} && \text{(storage cost)} \\
& \sum_{e \in \text{In}(u)} x_e = \sum_{e \in \text{Out}(u)} x_e + 1 \quad \forall u \in V \setminus \{v_{aux}\} && \text{(sink)} \\
& x_e \in \{0, 1, \dots, |V|\} \\
& I_e \in \{0, 1\}
\end{aligned}$$

**G LMG AND LMG-ALL'S PERFORMANCE ON DIFFERENT CUTOFFS**

Here we present the quick experiments mentioned in Section 6.2.2:

**H PSEUDO CODE FOR LMG-ALL**

Here we present in Algorithm 7 the pseudo code for LMG-All, as explained in Section 6.2.2.

---

**Algorithm 7** LMG-ALL
 

---

```

1: Input: Extended version graph  $G_{aux}$ , storage constraint  $\mathcal{S}$ .
2:  $T \leftarrow$  minimum arborescence of  $G_{aux}$  rooted at  $v_{aux}$  w.r.t. weight function  $s$ .
3: Let  $R(T)$  and  $S(T)$  be the total retrieval and storage cost of  $T$ .
4: Let  $P(v)$  be the parent of  $v$  in  $T$ .
5: while  $S(T) < \mathcal{S}$  do
6:    $(\rho_{max}, (u_{max}, v_{max})) \leftarrow (0, \emptyset)$ .
7:   for  $e = (u, v) \in E$  where  $u$  is not a descendant of  $v$  in  $T$  do
8:      $T_e = T \setminus (P(v), v) \cup \{e\}$ 
9:     if  $R(T_e) > R(T)$  then
10:      continue;
11:     else if  $S(T_e) \leq S(T)$  then
12:        $\rho_e \leftarrow \infty$ ;
13:     else
14:        $\rho_e \leftarrow (R(T) - R(T_e)) / (s_e - s_{P(v),v})$ ;
15:     end if
16:     if  $\rho_e > \rho_{max}$  then
17:        $\rho_{max} \leftarrow \rho_e$ .
18:        $(u_{max}, v_{max}) \leftarrow e$ .
19:     end if
20:   end for
21:   if  $\rho_{max} = 0$  then
22:     return  $T$ .
23:   end if
24:    $T \leftarrow T \setminus \{(P(v_{max}), v_{max})\} \cup \{(u_{max}, v_{max})\}$ .
25: end while
26: return  $T$ .

```

---

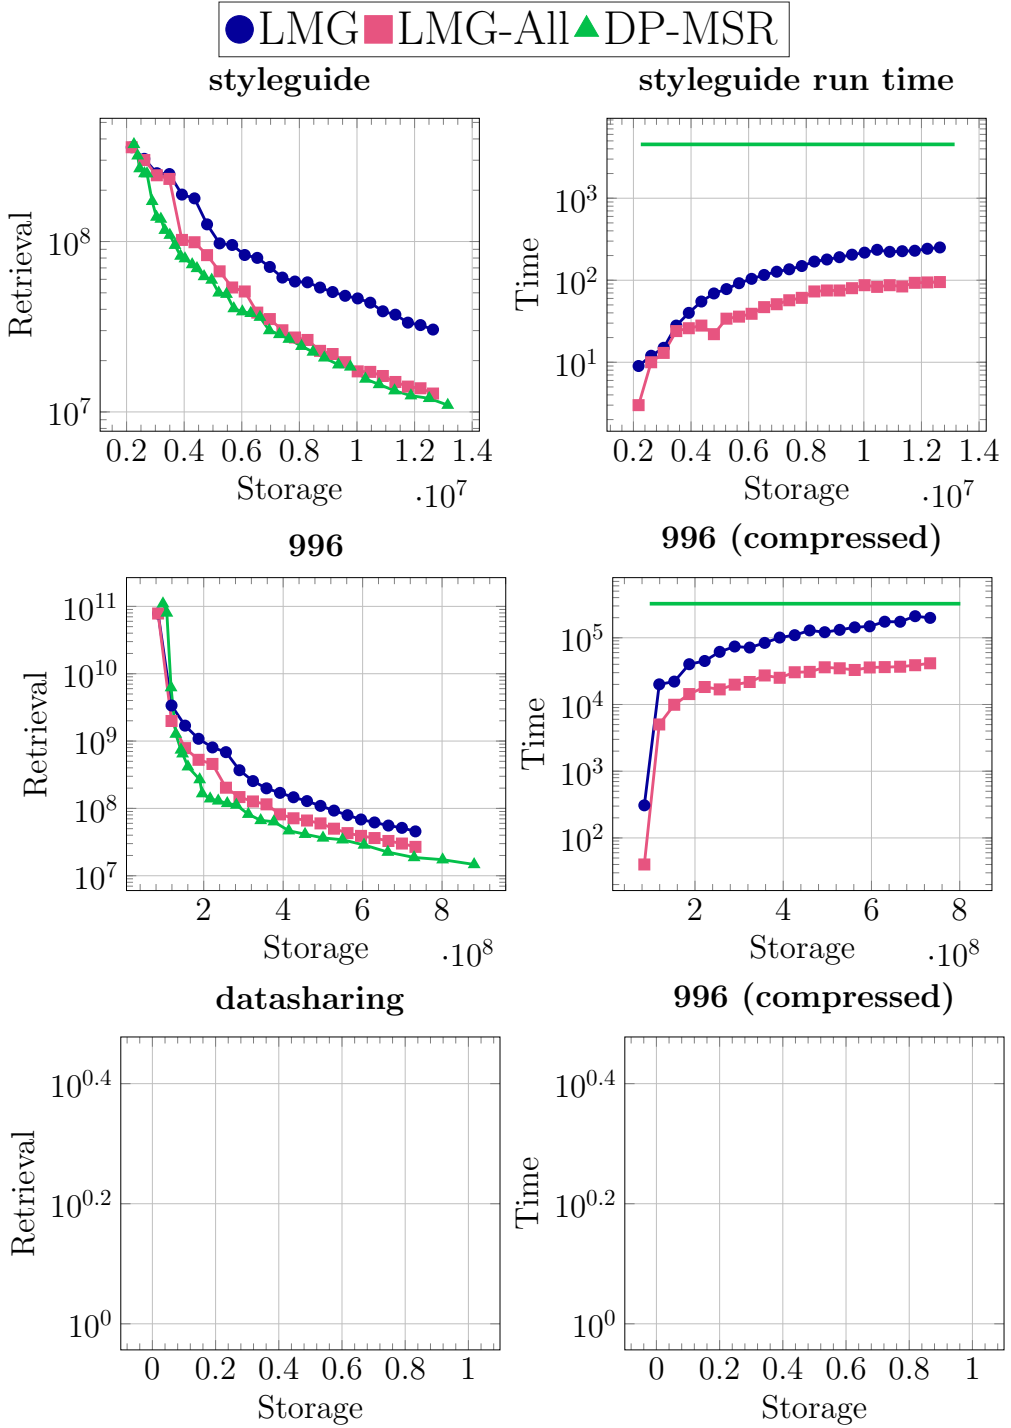
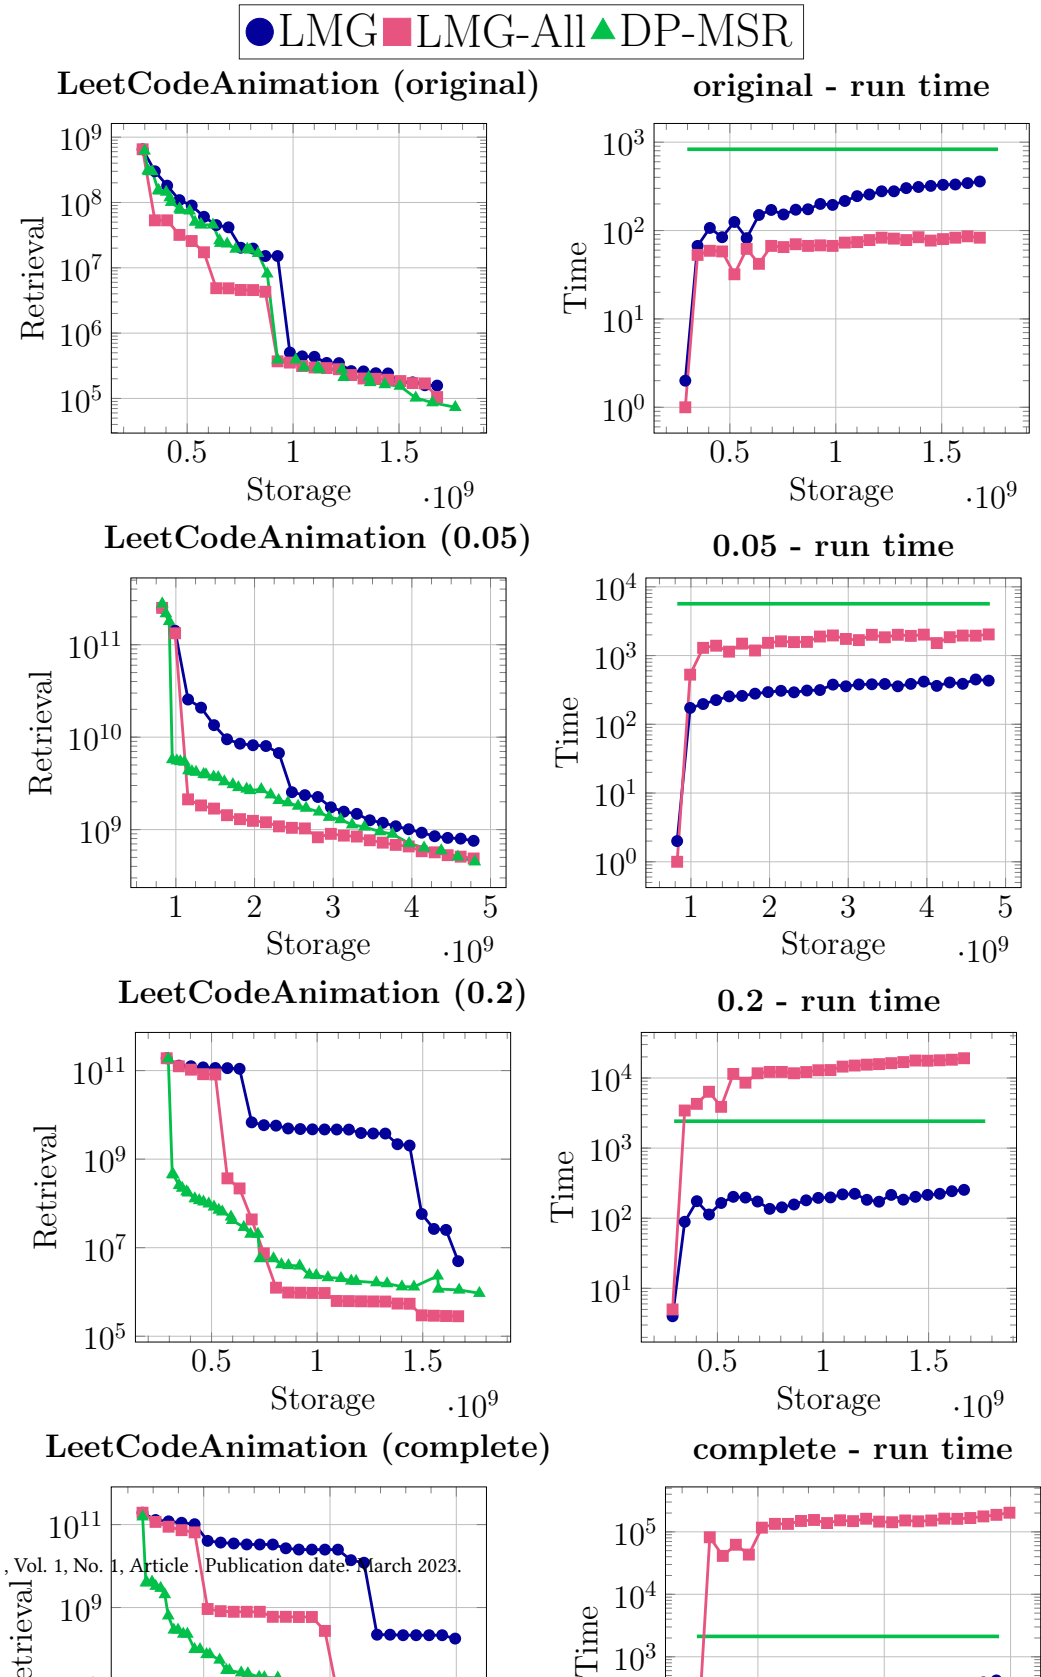


Fig. 11. Performance and run time of MSR algorithms on compressed graphs.



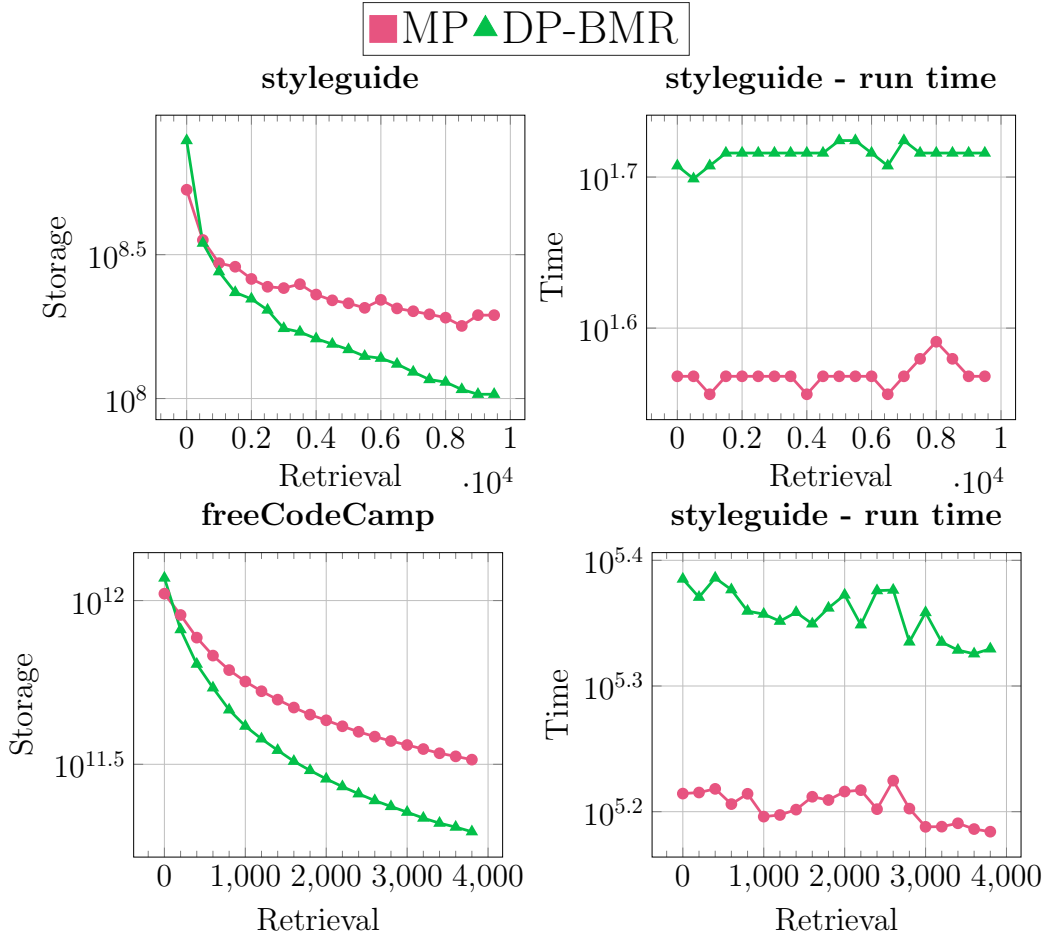


Fig. 13. Performance and run time of BMR algorithms on natural version graphs.



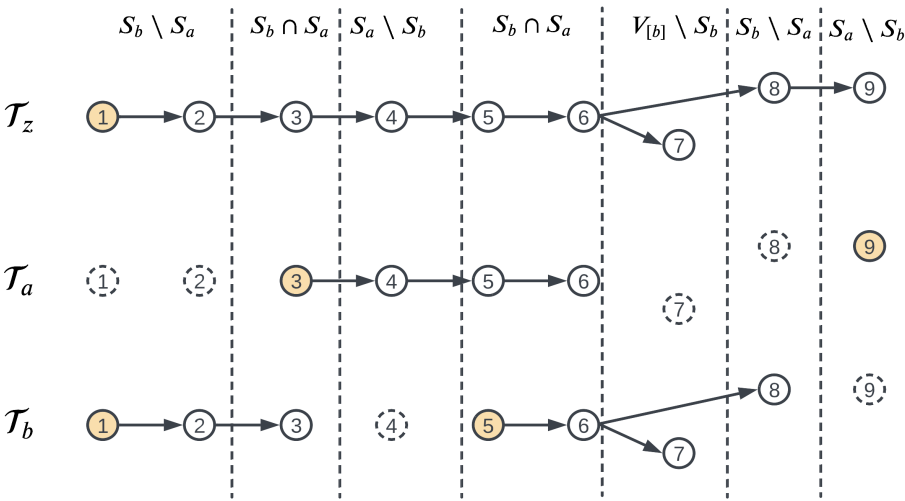


Fig. 14. Illustration of the retrieval path for Figure 8

<div>pictures/LMG vs cutoff, GP-merge.png</div>	<div>pictures/LMG vs cutoff, GP-merge.png</div>
<div>pictures/LMG vs cutoff, gitignore-merge.png</div>	<div>pictures/LMG_all vs cutoff, gitignore-merge.png</div>

Fig. 15. The performance of LMG and LMG-All when given different cutoffs. LMG-All is presented on the right hand side.