



Name: Anumala Niharika

Roll No:2403A52234

Batch:09

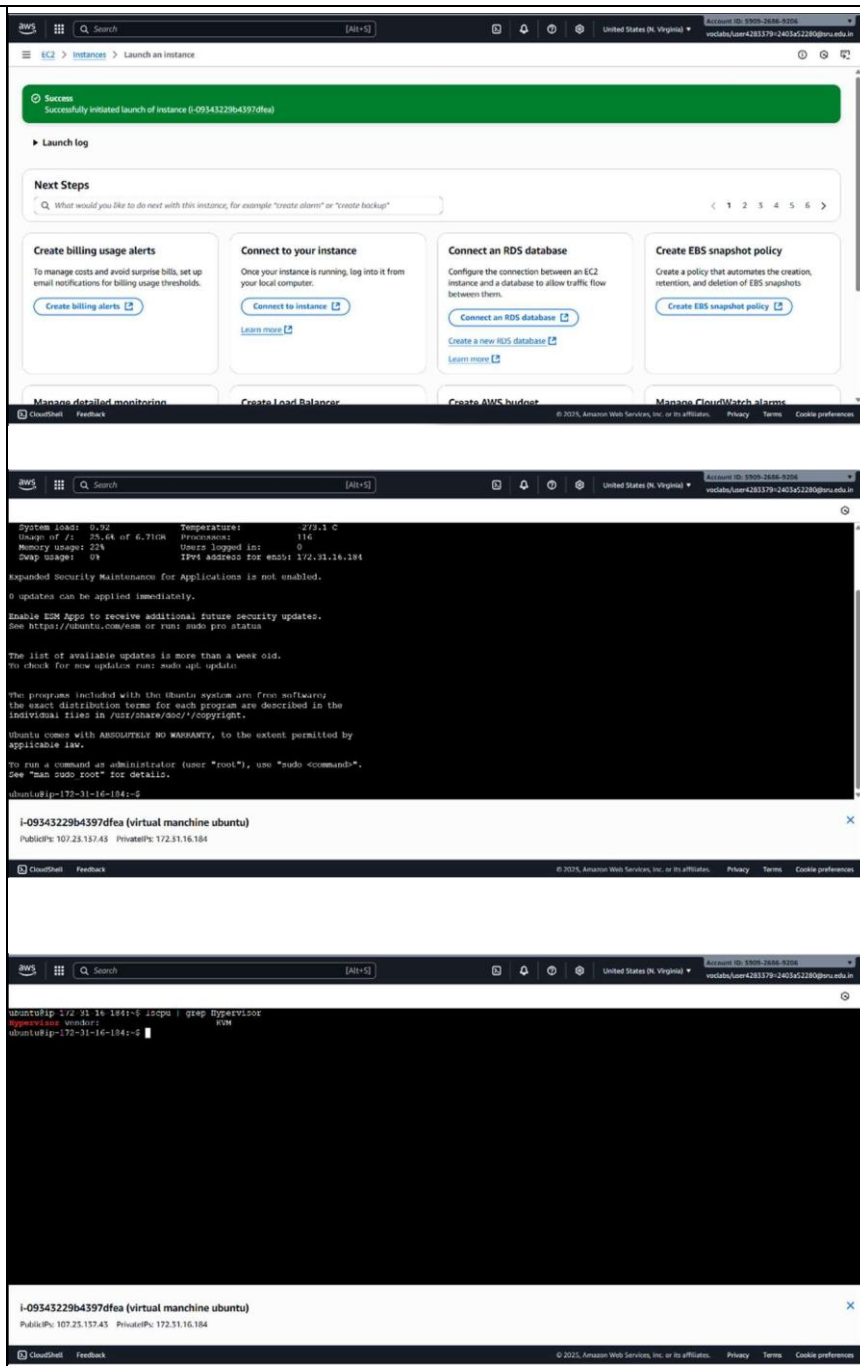

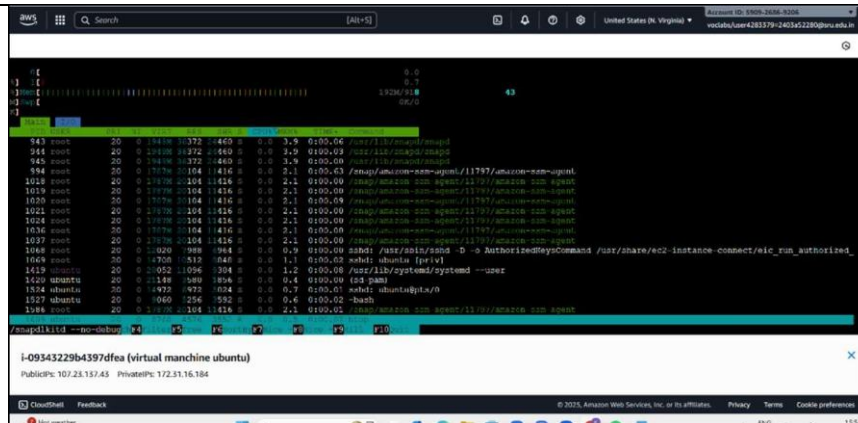

Task 2: Docker Container –

Play with Docker (PWD)

Website: <https://labs.play-with-docker.com/>

Sign in with Docker Hub account (free)

Click “Start” → “Add New Instance”

→ it launches an online terminal with Docker pre-installed.

```
docker run hello-world
```

```
docker run -d -p 8080:80 nginx
```

Expected output: Screenshot of browser showing “Welcome to NGINX”



01:58:18

CLOSE SESSION

Instances

+ ADD NEW INSTANCE

192.168.0.14
node1

GIVE FEEDBACK

d3hplta9_d3hpmks69qi000e9bkb0

IP: 192.168.0.14 OPEN PORT

Memory CPU

SSH: ssh ip172-18-0-87-d3hplta91nsg00e4jug@direct.labs.play

DELETE EDITOR

```

#####
#         Welcome!         #
# This is a sandbox environment. Using personal credentials #
# is HIGHLY discouraged. Any consequences of doing so are #
# completely the user's responsibility.                     #
# The VM's team.                                             #
#####
(node1) (local) root@192.168.0.14 ~
$

```

01:52:45

CLOSE SESSION

Instances

+ ADD NEW INSTANCE

192.168.0.14
node1

GIVE FEEDBACK

d3hplta9_d3hpmks69qi000e9bkb0

IP: 192.168.0.14 OPEN PORT

Memory CPU

SSH: ssh ip172-18-0-87-d3hplta91nsg00e4jug@direct.labs.play

DELETE EDITOR

```

This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:
1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
   (amd64)
3. The Docker daemon created a new container from that image which runs the
   executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it
   to your terminal.

To try something more ambitious, you can run an Ubuntu container with:
$ docker run -it ubuntu bash

Share images, automate workflows, and more with a free Docker ID:
https://hub.docker.com/

For more examples and ideas, visit:
https://docs.docker.com/get-started/

(node1) (local) root@192.168.0.14 ~
$

```

Net secure

ip172-18-0-87-d3hplta91nsg00e4jug:8080.direct.labs.play with docker.com

Star

Search

Welcome to nginx!

If you see this page, the nginx web server is successfully installed and working. Further configuration is required.

For online documentation and support please refer to nginx.org.
Commercial support is available at nginx.com.

Thank you for using nginx.

Task 3: Write short note: “Difference between VM and Container – with one example of industry use.”

Virtual Machines (VMs) and Containers are both technologies used to run applications in isolated environments, but they differ in architecture and resource efficiency:

- VMs simulate entire physical machines, including their own operating system (OS), using a hypervisor. This makes them heavier and slower to start.
- Containers share the host OS kernel and isolate applications at the process level, making them lightweight, faster to start, and more resource-efficient.

	Industry Example: In financial services, companies like JPMorgan Chase use containers (e.g., Docker with Kubernetes) to deploy microservices for real-time fraud detection. This allows rapid scaling and efficient resource use compared to traditional VM-based setups. Submit Screenshots! Naming Convention: B_No_StudentName_CC_A-16.pdf	
--	--	--