

GET /users

Request Details

URL: <https://jsonplaceholder.typicode.com/users>

Method: GET

Headers: None

Body: None


Response Details

Status Code: 200 OK

Response: List of users returned successfully

Analysis

The API successfully returned all user records with status code 200 OK.

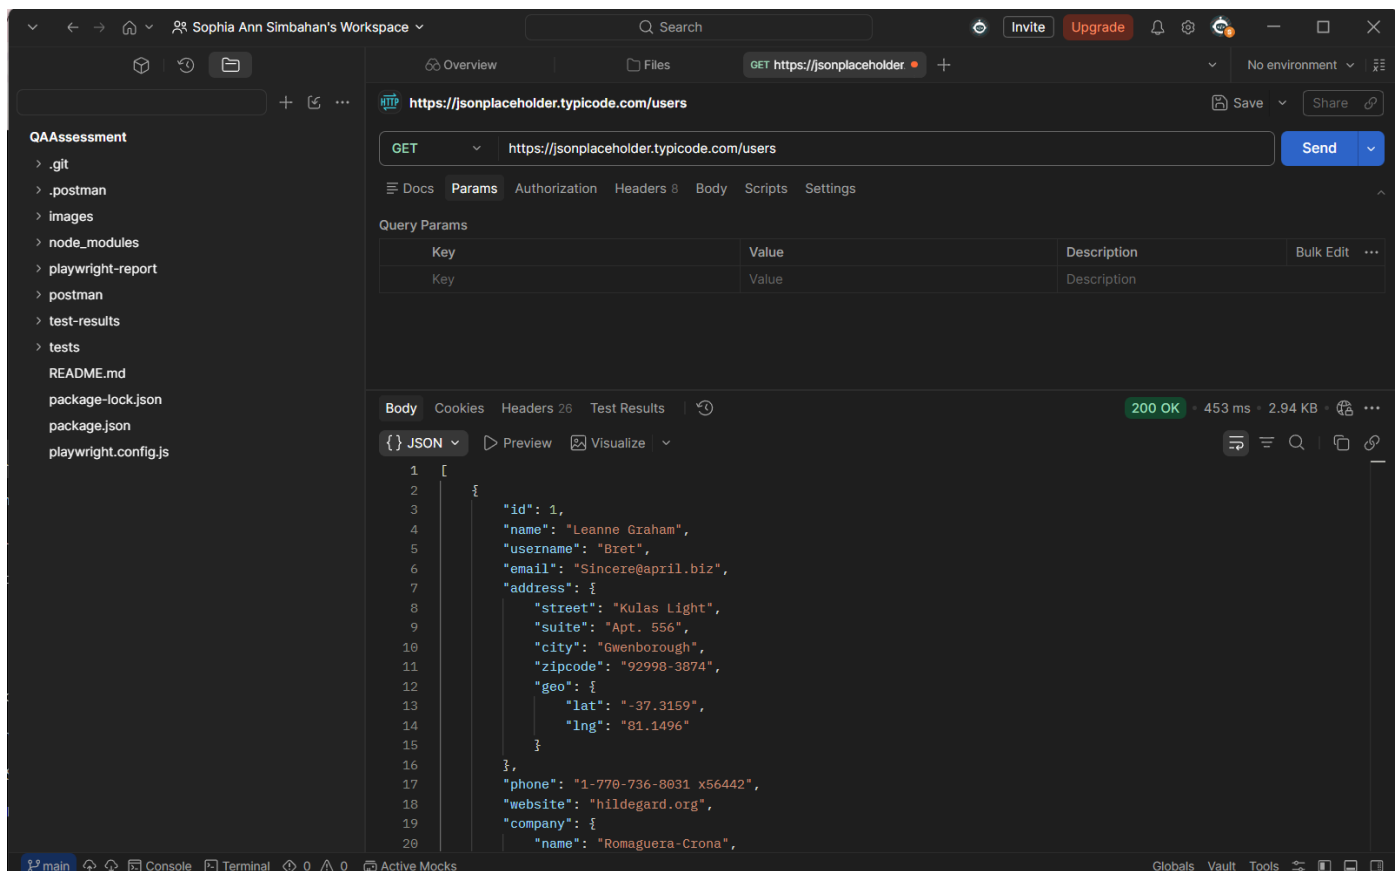

The screenshot shows a REST client interface with a sidebar on the left containing a file explorer. The main panel displays a GET request to <https://jsonplaceholder.typicode.com/users>. The response is a JSON array of user objects, with the status code 200 OK and a response time of 453 ms. The first user object is expanded, showing details such as name, username, email, address, and phone.

```
1 [
2   {
3     "id": 1,
4     "name": "Leanne Graham",
5     "username": "Bret",
6     "email": "Sincere@april.biz",
7     "address": {
8       "street": "Kulas Light",
9       "suite": "Apt. 556",
10      "city": "Gwenborough",
11      "zipcode": "92998-3874",
12      "geo": {
13        "lat": "-37.3159",
14        "lng": "81.1496"
15      }
16    },
17    "phone": "1-770-736-8031 x56442",
18    "website": "hildegard.org",
19    "company": {
20      "name": "Romaguera-Crona",
```

GET /users/1

Request Details

URL: <https://jsonplaceholder.typicode.com/users/1>

Method: GET

Headers: None
Body: None

Response Details

Status Code: 200 OK

Response Body:

Specific user details were returned successfully.

Analysis

The API successfully retrieved the user information for user ID 1 with correct response data and structure.

The screenshot shows a REST client interface with the following details:

- URL:** `https://jsonplaceholder.typicode.com/users/1`
- Method:** GET
- Status:** 200 OK
- Response Body (JSON):**

```
1 {
2   "id": 1,
3   "name": "Leanne Graham",
4   "username": "Bret",
5   "email": "Sincere@april.biz",
6   "address": {
7     "street": "Kulas Light",
8     "suite": "Apt. 556",
9     "city": "Gwenborough",
10    "zipcode": "92998-3874",
11    "geo": {
12      "lat": "-37.3159",
13      "lng": "81.1496"
14    }
15  },
16  "phone": "1-770-736-8031 x56442",
17  "website": "hildegard.org",
18  "company": {
19    "name": "Romaguera-Crona",
20    "catchPhrase": "Multi-layered client-server neural-net",
```

POST /posts

Request Details

URL: `https://jsonplaceholder.typicode.com/posts`

Method: POST

Headers: Content-Type: application/json

Body:

```
{
  "title": "QA Test Post",
  "body": "This is a sample API test.",
  "userId": 1
}
```

Response Details


Status Code: 201 Created

Response Body:

New post data was returned successfully with generated ID.

Analysis

The API successfully simulated creating a new post and returned status code 201 Created with a generated post ID.

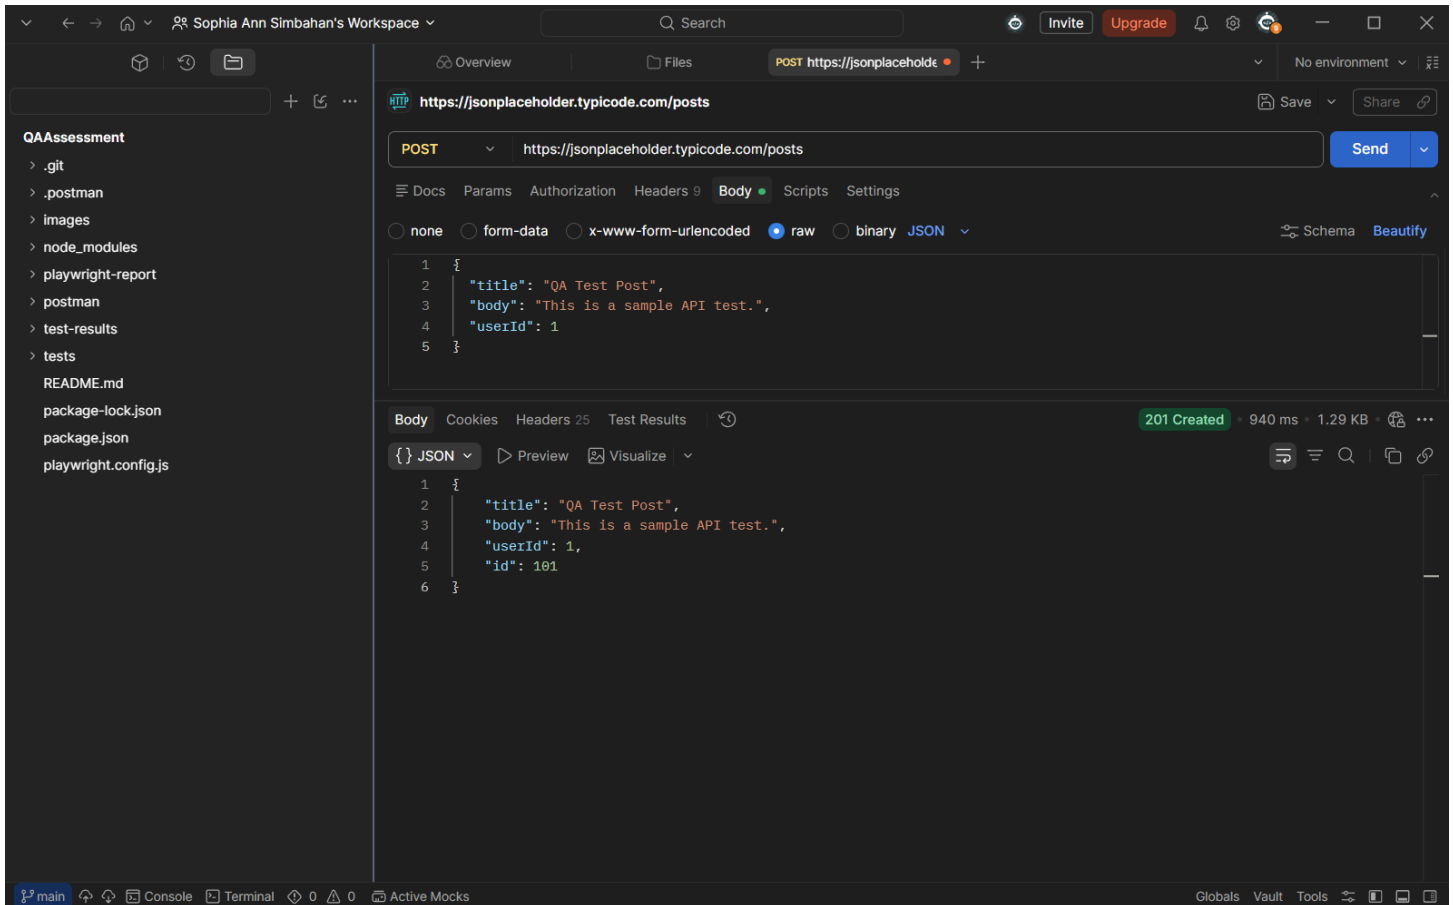

PUT /posts/1

Request Details

URL: <https://jsonplaceholder.typicode.com/posts/1>

Method: PUT

Headers: Content-Type: application/json

Body:

```
{
  "id": 1,
  "title": "Updated Post",
  "body": "Updated content",
  "userId": 1
}
```

Response Details


Status Code: 200 OK

Response Body:

Updated post data was returned successfully.

Analysis

The API successfully simulated updating an existing post and returned the modified resource with status code 200 OK.

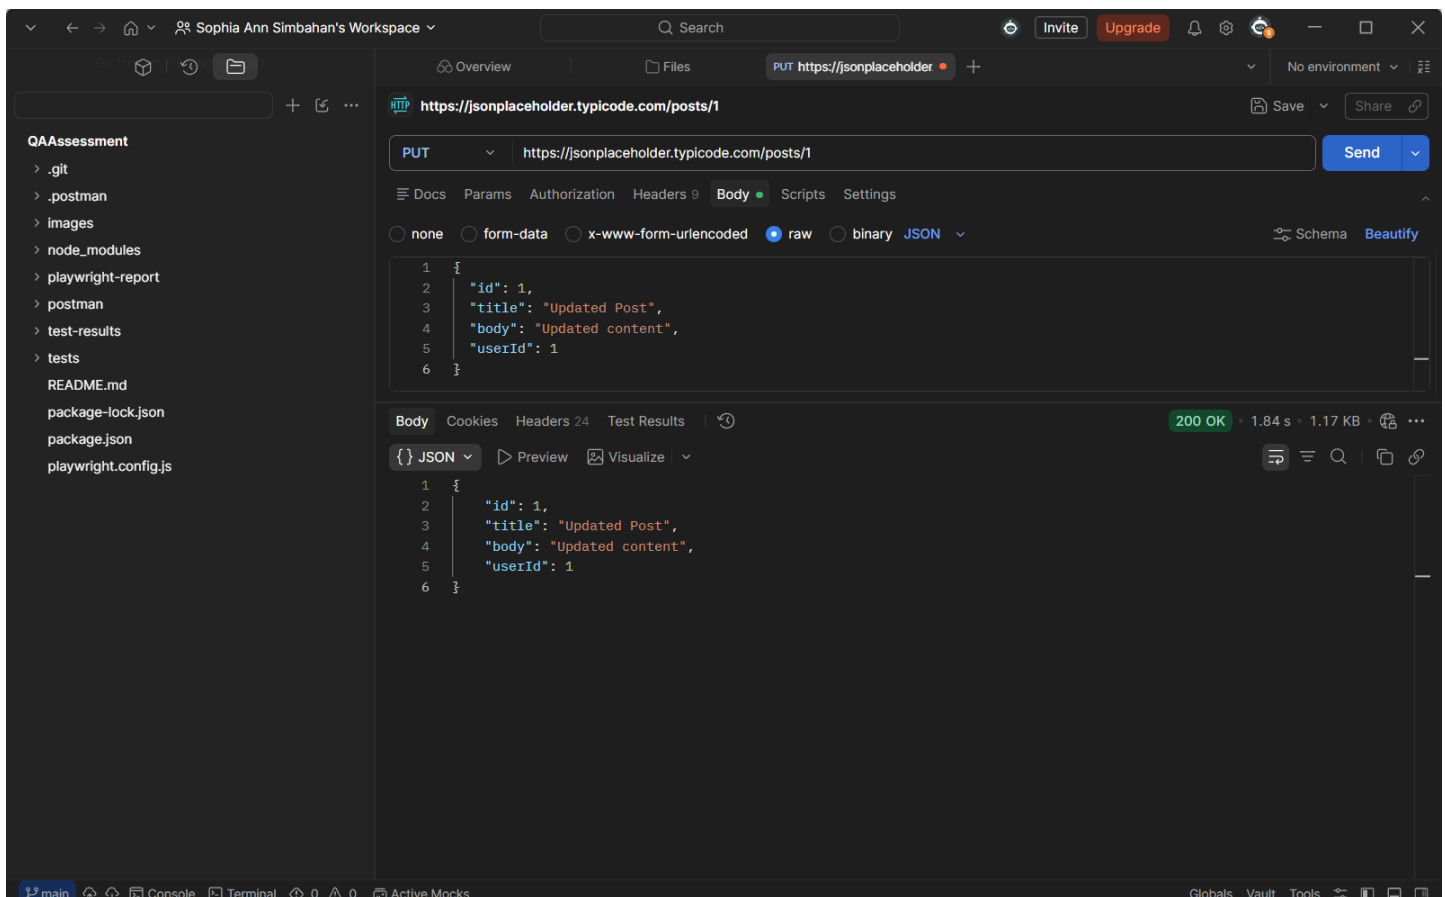

EDGE CASES

GET /users

Request Details

URL: <https://jsonplaceholder.typicode.com/userz>
Method: GET
Headers: None
Body: None

Response Details

Status Code: 404 Not Found
Response Body:
Endpoint not found.

Analysis

The API correctly returned a 404 Not Found status for an invalid endpoint request.

The screenshot shows the Postman interface with a GET request to <https://jsonplaceholder.typicode.com/userz>. The request is configured with the method GET, no headers, and no body. The response status is 404 Not Found, with a response time of 1.26 s and a size of 1.08 KB. The response body is empty, indicated by the JSON icon and the number 1.

Left sidebar (File Explorer):

- QAAssessment
 - > .git
 - > .postman
 - > images
 - > node_modules
 - > playwright-report
 - > postman
 - > test-results
 - > tests
 - README.md
 - package-lock.json
 - package.json
 - playwright.config.js

Bottom status bar: main, Console, Terminal, 0, 0, Active Mocks, Globals, Vault, Tools

GET /users/1 - GET /users/999

Request Details

URL: <https://jsonplaceholder.typicode.com/users/999>

Method: GET

Headers: None

Body: None

Response Details

Status Code: 404 Not Found

Response Body:

Empty object returned.

Analysis

The API returned an empty response for a non-existing user ID, which indicates that the requested resource does not exist.

The screenshot displays a REST client interface with a sidebar on the left showing a file explorer for 'QAAssessment'. The main panel shows a GET request to <https://jsonplaceholder.typicode.com/users/999>. The request is configured with the method 'GET' and the URL. The response is shown in the 'Body' tab, indicating a '404 Not Found' status with a response time of 108 ms and a size of 1.1 KB. The response body is an empty JSON object:

```
{}
```

.

QAAssessment

- > .git
- > .postman
- > images
- > node_modules
- > playwright-report
- > postman
- > test-results
- > tests
- README.md
- package-lock.json
- package.json
- playwright.config.js

Overview Files GET <https://jsonplaceholder.typicode.com/users/999> + No environment

<https://jsonplaceholder.typicode.com/users/999> Save Share

GET <https://jsonplaceholder.typicode.com/users/999> Send

Docs Params Authorization Headers 9 Body Scripts Settings

☐ none ☐ form-data ☒ x-www-form-urlencoded ☐ raw ☐ binary

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 24 Test Results 404 Not Found 108 ms 1.1 KB

{ } JSON Preview Debug with AI

```
1 {}
```

main Console Terminal 0 0 Active Mocks Globals Vault Tools

POST /posts (Missing Title)

Request Details

URL: <https://jsonplaceholder.typicode.com/posts>

Method: POST

Headers: Content-Type: application/json

Body:

```
{
  "body": "Missing title test",
  "userId": 1
}
```

Response Details


Status Code: 201 Created

Response Body:

Request was still accepted despite missing title field.

Analysis

The mock API accepted the incomplete request because JSONPlaceholder does not enforce strict input validation.

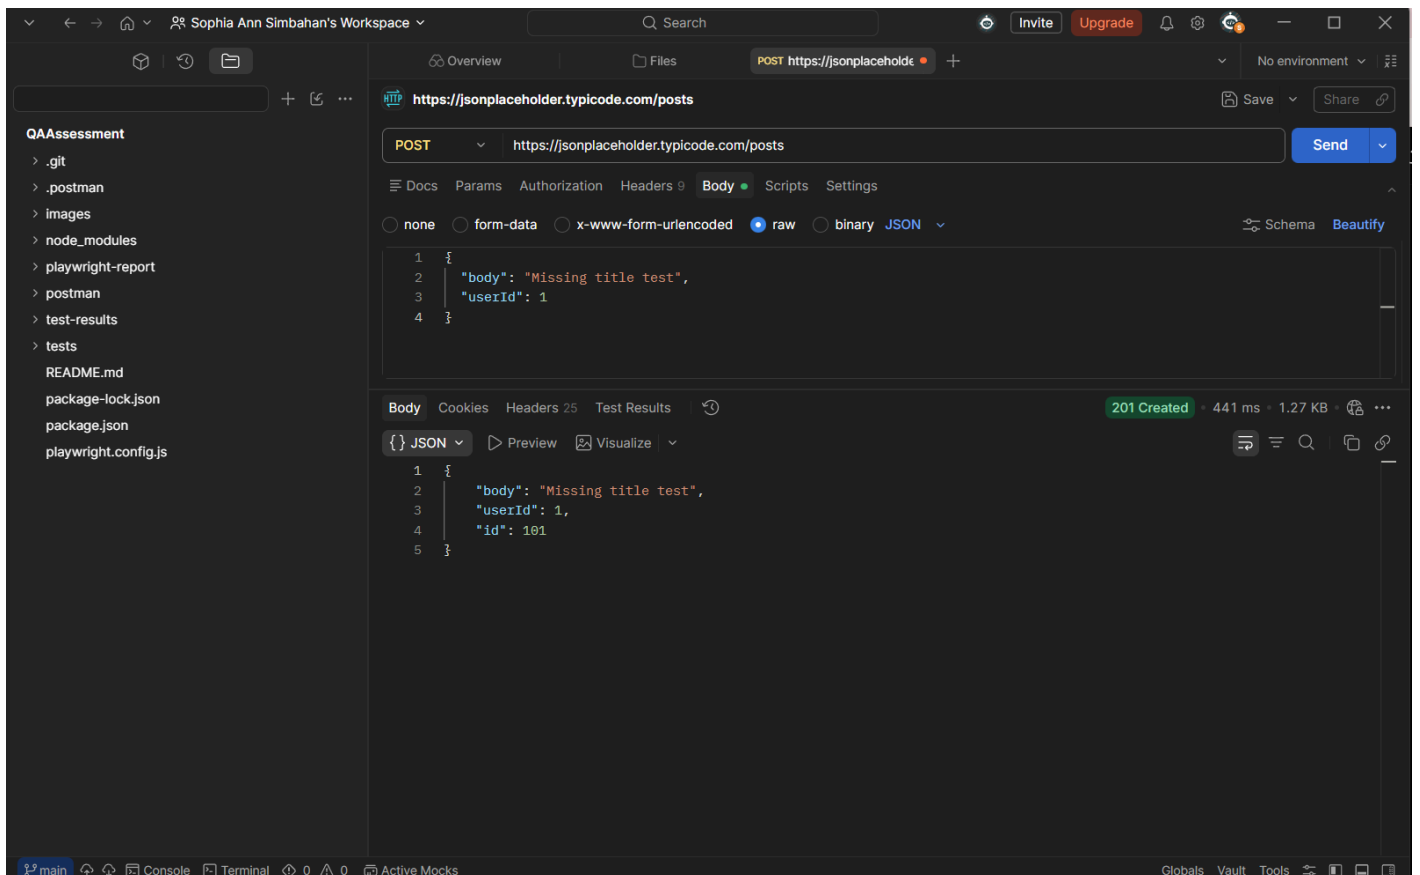

PUT /posts/1 (Empty Body)

Request Details

URL: <https://jsonplaceholder.typicode.com/posts/1>

Method: PUT

Headers: Content-Type: application/json

Body:

```
{}
```

Response Details

Status Code: 200 OK

Response Body:

API accepted the empty request body.

Analysis

The mock API accepted the empty update request because JSONPlaceholder simulates responses without strict backend validation.

