
sasoptpy Documentation

Release 1.0.0-alpha

SAS Institute Inc.

Feb 19, 2020

CONTENTS

1	Overview	3
1.1	About sasoptpy	3
1.2	What's New	5
1.3	License	5
2	Installation	9
2.1	Python version support and dependencies	9
2.2	Getting sasoptpy	9
3	User Guide	11
3.1	Introduction to Optimization	11
3.2	Basic Functionality	14
3.3	Sessions	20
3.4	Models	21
3.5	Model components	31
3.6	Workspaces	37
3.7	Handling Data	43
3.8	Workflows	49
4	Examples	57
4.1	Viya Examples / Concrete	57
4.2	Viya Examples / Abstract	142
4.3	SAS (saspy) Examples	158
5	API Reference	165
5.1	Core	165
5.2	Abstract	220
5.3	Interface	229
5.4	Functions	236
5.5	Tests	262
6	Version History	269
6.1	v0.2.1 (February 26, 2019)	269
6.2	v0.2.0 (July 30, 2018)	270
6.3	v0.1.2 (April 24, 2018)	271
6.4	v0.1.1 (February 26, 2018)	272
6.5	v0.1.0 (December 22, 2017)	273
	Python Module Index	275
	Index	277

PDF Version

Date: Feb 19, 2020 **Version:** 1.0.0-alpha

Links: [Repository](#) | [Issues](#) | [Releases](#) | [Community](#)

sasoptpy is a Python package that provides a modeling interface for [SAS Viya](#) and SAS/OR optimization solvers. It provides a quick way for users to deploy optimization models and solve them by using the [SAS Viya Optimization Action Set](#).

sasoptpy can handle linear, mixed integer linear, nonlinear, and black-box optimization problems. You can use native Python structures like dictionaries, tuples, and lists to define an optimization problem. *sasoptpy* supports [Pandas](#) objects extensively.

Under the hood, *sasoptpy* uses the [swat package](#) to communicate with SAS Viya, and uses the [saspy package](#) to communicate with SAS 9.4 installations.

sasoptpy is an interface to SAS Optimization solvers. Check [SAS/OR](#) and [PROC OPTMODEL](#) for more details about optimization tools provided by SAS and an interface to model optimization problems inside SAS.

See the SAS Global Forum paper: [Optimization Modeling with Python and SAS Viya](#)

OVERVIEW

1.1 About sasoptpy

sasoptpy is a Python package that provides easy and integrated ways of working with SAS Optimization and SAS/OR optimization solvers. It enables developers to model optimization problems with ease by providing high-level building blocks.

1.1.1 Capabilities

sasoptpy is very flexible in terms of optimization problem types it supports and workflow alternatives.

Solvers

It currently supports the following model types:

- Linear problems
- Integer linear problems / Mixed integer linear problems
- Quadratic problems
- Nonlinear / Black-box problems

Data

It supports working with both client-side data and server-side data. When data are available on the client-side, it populates the model with integrated data and brings the solution back to the client. When data are available on the server-side, it generates the code to be able to populate the model on the server. You can retrieve the final solution after the solve.

Platforms

sasoptpy can be used with SAS Viya 3.3 or later and SAS 9.4, in all the supporting operating systems.

1.1.2 Road map

sasoptpy has the broader goal of supporting all the functionality of the SAS Optimization and SAS/OR solvers, and providing a high-level set of tools for easily working with models.

1.1.3 Versioning

sasoptpy follows [Semantic Versioning](#) as of version 1.0.0.

- Any backwards incompatible changes increase the major version number (X.y.z).
- Minor changes and improvements increase the the minor version number (x.Y.z).
- Patches increase the patch version number (x.y.Z).
- Pre-releases are marked by using *alpha* and *beta*, and release candidates are marked using *rc* identifiers.

1.1.4 License

sasoptpy is an open-source package and uses the standard [Apache 2.0 license](#).

1.1.5 Support

Have any questions?

- If you have a package-related issue, feel free to report it on [GitHub](#).
- If you have an optimization-related question, consider asking it on [SAS Communities](#).
- For further technical support, reach [SAS Technical Support](#).

1.1.6 Contribution

Contributions are always welcome. Clone the project to your working environment and submit pull requests as you see fit. For more details, see the guidelines at the [GitHub repository](#).

1.1.7 Highlighted Works

A list of highlighted projects and blog posts:

- [Fastest, cheapest, greenest: How will football fans choose which matches to attend?](#)
- [1 tournament, 12 countries: A logistical maze?](#)
- [Using SAS Optimization with Python and containers](#)
- [Bringing Analytics to the Soccer Transfer Season](#)
- [Visiting all 30 Major League Baseball Stadiums - with Python and SAS Viya](#)

1.2 What's New

1.2.1 v1.0.0-alpha (TBD)

New Features

- Added workspaces; see more info in *User Guide* and *example*
- Added *configurations*
- Added *abstract actions* that allow server-side operations. Highlights include:
 - `actions.read_data()` and `actions.create_data()`
 - `actions.for_loop()` and `actions.cofor_loop()`
 - `actions.print_item()`
 - `actions.solve()`
- Added structure decorators for better control of submissions

Changes

- Refactored the entire package. sasoptpy now has *core*, *abstract*, *interface*, *session*, and *util* directories
- Experimental RESTful API was dropped
- `get_obj_by_name` function was removed
- *Iso* solver was renamed to *blackbox*
- Because of the use of literal strings (**PEP 498**), only Python 3.6 or later versions are supported

Bug Fixes

- Fixed: Arithmetic operations with powers are generating incorrect results
- Fixed: Variable groups with space in their index are not getting values
- Fixed: Constraints without directions do not produce an error
- Fixed: Documentation does not mention conda-forge library requirement
- Fixed: Single-dimensional parameters are hard to access

1.3 License

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction,

(continues on next page)

(continued from previous page)

and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of

(continues on next page)

(continued from previous page)

this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and

(continues on next page)

(continued from previous page)

may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

INSTALLATION

2.1 Python version support and dependencies

sasoptpy is developed and tested for Python version 3.6+.

It requires the following packages:

- numpy
- saspy
- swat
- pandas

2.2 Getting *sasoptpy*

You can install *sasoptpy* by using *pip* or *conda*:

```
pip install sasoptpy  
conda install -c sas-institute sasoptpy
```

Any dependencies should be installed automatically.

Depending on your installation, you might need to add *conda-forge* channel to *conda* by using:

```
conda config --append channels conda-forge
```

2.2.1 GitHub repository

You can also get stable and development versions of *sasoptpy* from the GitHub repository. To get the latest version, call:

```
git clone https://github.com/sassoftware/sasoptpy.git
```

Then inside the *sasoptpy* folder, call:

```
pip install .
```

Alternatively, you can use:

```
python setup.py install
```

3.1 Introduction to Optimization

Optimization is an umbrella term for maximizing or minimizing a given target, which can be represented as a function. It is often used in real-life problems from finance to aviation, from chemistry to sports analytics.

Optimization problems can describe a business problem or a physical concept. Any phenomena that can be represented as a function can be optimized by several algorithms. It lies at the heart of several tools we use every day, from routing to Machine Learning.

3.1.1 Steps of Optimization

Optimization problems often consists of the following steps¹²:

1. Observe the system and define the problem
2. Gather relevant data
3. Develop a formulation
4. Solve the model
5. Interpret the solution

Often, a process is observed by the modeler to identify the problems. Several examples are finding the shortest path between two locations, maximizing a profit, and maximizing the accuracy of a handwriting recognition algorithm.

Collecting data is often the most daunting process. In the age of big data, it is often difficult to distinguish noise from relevant data. After data are gathered, you can write a formulation. A proper formulation is critical because features such as linearity and convexity greatly impact the performance of solution algorithms, especially for large problems.

Solving a model requires an optimization algorithm. SAS Optimization provides several optimization algorithms to solve a variety of different formulations. See *types of optimization* for more information on this topic.

Finally, the modeler should decide whether the result of an optimization process is valid. If not, the process should be repeated by adding the missing pieces until a satisfactory result is obtained.

¹ Hillier, Frederick S., and Gerald J. Lieberman. Introduction to operations research. McGraw-Hill Science, Engineering & Mathematics, 1995.

² SAS Institute. SAS/OR 15.1 User's Guide: Mathematical Programming Examples. SAS institute, 2018.

3.1.2 Basic Elements

There might be several elements in the definition of an optimization formulation. To clarify these elements, consider an optimization problem of finding a route from your home to the airport.

1. **Variables:** Variables are parameters that the optimization algorithm tunes. In the example, the decisions of which roads to be used are decision variables. An optimization algorithm determines optimal values for variables in the problem.
2. **Objective:** An objective is the measure of performance that is to be maximized or minimized. An objective is a function of variables in a problem, meaning an objective value is obtained for given values of variables in an optimization problem. In the example, the objective function is the time to reach the airport. The optimization algorithm should decide which roads to use in order to minimize the travel time.
3. **Constraints:** Constraints are restrictions on variables that prevent illogical solutions. In the example, the amount of fuel in the car places a restriction on how far you can drive. You can force optimization algorithm to find a solution under a certain mileage, even if there are other solutions which could be shorter in terms of travel time.

In short, *optimization* is choosing **variable** values to maximize or minimize an **objective** function subject to certain **constraints**.

3.1.3 Simple Problem

Let us consider a simple example. The following problem (Brewer's Dilemma) is a simplified Resource Allocation problem, presented by Robert G. Bland³.

In the problem, a brewer has limited corn, hops, and barley malt inventory. The brewer wants to produce Ale and Beer that will maximize the total profit. Each product requires a certain amount of these three ingredients, as follows:

(per barrel)	Amount Required			
Product	Corn	Hops	Barley Malt	Profit
Ale	5 pounds	4 ounces	35 pounds	\$13
Beer	15 pounds	4 ounces	20 pounds	\$23
(Total Available)	480 pounds	160 ounces	1,190 pounds	

The **variables** in this problem are to decide how many barrels of ale and beer to produce. Let us call them *ale* and *beer*. It might be intuitive to prefer beer to ale due to its higher profit rate. However, doing so might deplete all the resources faster and might leave you with excess amount of hops and barley malt.

The **objective** in this problem is to maximize the total profit function, which is $13 \cdot \text{ale} + 23 \cdot \text{beer}$.

Each limitation on ingredients is a **constraint**. For corn, hops, and barley malt, the following constraints apply:

$$5 \cdot \text{ale} + 15 \cdot \text{beer} \leq 480$$

$$4 \cdot \text{ale} + 4 \cdot \text{beer} \leq 160$$

$$35 \cdot \text{ale} + 20 \cdot \text{beer} \leq 1,190$$

Combining all items, the optimization formulation is written as follows:

$$\begin{array}{llll} \text{maximize:} & 13 \cdot \text{ale} & + 23 \cdot \text{beer} & \\ \text{subject to:} & & & \\ & 5 \cdot \text{ale} & + 15 \cdot \text{beer} & \leq 480 \\ & 4 \cdot \text{ale} & + 4 \cdot \text{beer} & \leq 160 \\ & 35 \cdot \text{ale} & + 20 \cdot \text{beer} & \leq 1,190 \\ & \text{ale} & & \geq 0 \\ & \text{beer} & & \geq 0 \end{array}$$

³ Bland, Robert G. "The Allocation of Resources by Linear Programming." Scientific American 244 (1981): 126-144.

This problem is small enough to be solved by hand, but let us consider some alternatives.

#	Barrels produced		Profit
	Ale	Beer	
1	34	0	\$442
2	0	32	\$736
3	15	25	\$770
4	12	28	\$800

Producing only ale or beer is inferior to producing a combination of the two, for obvious reasons. Finding the exact ratio that will maximize the profit might be tricky, as seen in solutions 3 and 4. Indeed, solution 4 gives the optimal values that maximize the profit in this example.

Some additional examples of problems that can be formulated as optimization problems are as follows:

- Scheduling project steps to minimize total completion, where tasks might depend on completion of earlier tasks
- Choosing distribution centers for retailers to minimize total cost while satisfying customer demands on time
- Assigning soccer players to a squad to maximize the total rating of the team under foreign player rules
- Finding the cheapest travel option and shortest route between two cities
- Blending chemical products to minimize the total cost while achieving a certain efficiency of detergents
- Choosing a price that will maximize the total profit in a competitive market

See the related section of SAS Optimization 8.5 Mathematical Optimization Procedures⁴ for more information about optimization problems and examples.

3.1.4 Types of Optimization

The structure of a formulation affects which algorithms can be deployed to solve a problem. The most common optimization types are as follows:

- **Linear optimization:** If the objective function and all constraints of a problem can be described by linear mathematical relations, and if all decision variables are continuous, the formulation is called a Linear problem (LP). LPs are one of the easiest problems in terms of solution time and well-studied in literature.
- **Mixed integer linear optimization:** If a linear formulation involves binary (on/off type decisions) or integer variables, that problem is an Integer Linear Problem (ILP) or Mixed Integer Linear Problem (MILP) depending on variables. MILPs are very popular as many real-life problems can be represented as MILPs.
- **Nonlinear optimization:** If a problem involves nonlinear objectives or constraints (such as exponential, polynomial, absolute values) the problem is called a nonlinear problem (NLP).

⁴ https://go.documentation.sas.com/?cdcId=pgmsascdc&cdcVersion=9.4_3.5&docsetId=casmopt&docsetTarget=casmopt_intro_toc.htm&locale=en

3.2 Basic Functionality

Solving an optimization problem via *sasoptpy* starts with having a running CAS (SAS Viya) Server or having a SAS 9.4 installation. It is possible to model a problem without a connection but solving a problem requires access to SAS Optimization or SAS/OR solvers at runtime.

3.2.1 Creating a session

Creating a SAS Viya session

sasoptpy uses the CAS connection provided by the *swat* package. After installation simply use:

```
In [1]: from swat import CAS
In [2]: s = CAS(hostname, port, userid, password)
```

The last two parameters are optional for some use cases. See [swat Documentation](#) for more details.

Creating a SAS 9.4 session

To create a SAS 9.4 session, see [saspy Documentation](#). After customizing the configurations for your setup, you can create a session as follows:

```
import saspy
s = saspy.SASsession(cfgname='winlocal')
```

3.2.2 Initializing a model

After creating an active CAS or SAS session, you can create an empty model as follows:

```
In [3]: import sasoptpy as so
In [4]: m = so.Model(name='my_first_model', session=s)
NOTE: Initialized model my_first_model.
```

This command creates an empty model.

3.2.3 Processing input data

The easiest way to work with *sasoptpy* is to define problem inputs as Pandas DataFrames. You can define objective and cost coefficients, and lower and upper bounds by using the DataFrame and Series objects. See [Pandas Documentation](#) to learn more.

```
In [5]: import pandas as pd
In [6]: prob_data = pd.DataFrame([
...:     ['Period1', 30, 5],
...:     ['Period2', 15, 5],
...:     ['Period3', 25, 0]
...: ], columns=['period', 'demand', 'min_prod']).set_index(['period'])
...:
```

(continues on next page)

(continued from previous page)

```
In [7]: price_per_product = 10
```

```
In [8]: capacity_cost = 10
```

You can extract the set `PERIODS` and the other fields `demand` and `min_production` as follows:

```
In [9]: PERIODS = prob_data.index.tolist()
```

```
In [10]: demand = prob_data['demand']
```

```
In [11]: min_production = prob_data['min_prod']
```

3.2.4 Adding variables

You can add a single variable or a set of variables to *Model* objects.

- *Model.add_variable()* method is used to add a single variable.

```
In [12]: production_cap = m.add_variable(vartype=so.INT, name='production_cap', lb=0)
```

When working with multiple models, you can create a variable independent of the model, such as

```
>>> production_cap = so.Variable(name='production_cap', vartype=so.INT, lb=0)
```

and add it to an existing model by using

```
>>> m.include(production_cap)
```

- The *Model.add_variables()* method is used to add a set of variables.

```
In [13]: production = m.add_variables(PERIODS, vartype=so.INT, name='production', lb=min_production)
.....:
.....:
```

When passed as a set of variables, you can retrieve individual variables by using individual keys, such as `production['Period1']`. To create multidimensional variables, simply list all the keys as follows:

```
>>> multivar = m.add_variables(KEYS1, KEYS2, KEYS3, name='multivar')
```

3.2.5 Creating expressions

Expression objects hold mathematical expressions. Although these objects are mostly used under the hood when defining a model, it is possible to define a custom *Expression* to use later.

```
In [14]: totalRevenue = production.sum('*')*price_per_product
```

```
In [15]: totalCost = production_cap * capacity_cost
```

Note the use of the *VariableGroup.sum()* method over a variable group. This method returns the sum of variables inside the group as an *Expression* object. Its multiplication with a scalar `price_per_product` gives the final expression.

Similarly, `totalCost` is simply multiplication of a *Variable* object with a scalar.

3.2.6 Setting an objective function

You can define objective functions in terms of expressions. In this problem, the objective is to maximize the profit, so the `Model.set_objective()` method is used as follows:

```
In [16]: m.set_objective(totalRevenue-totalCost, sense=so.MAX, name='totalProfit')
Out[16]: sasoptpy.Expression(exp = 10 * production[Period1] + 10 *
↳ production[Period2] + 10 * production[Period3] - 10 * production_cap, name=
↳ 'totalProfit')
```

Notice that you can define the same objective by using:

```
>>> m.set_objective(production.sum('*')*price_per_product - production_cap*capacity_
↳ cost, sense=so.MAX, name='totalProfit')
```

The mandatory argument `sense` should be assigned the value of either `so.MIN` or `so.MAX` for minimization or maximization problems, respectively.

3.2.7 Adding constraints

In *sasoptpy*, constraints are simply expressions with a direction. It is possible to define an expression and add it to a model by defining which direction the linear relation should have.

There are two methods to add constraints. The first one is `Model.add_constraint()` where a single constraint can be added to a model.

The second one is `Model.add_constraints()` where multiple constraints can be added to a model.

```
In [17]: m.add_constraints((production[i] <= production_cap for i in PERIODS),
.....:                    name='capacity')
.....:
Out[17]: sasoptpy.ConstraintGroup([production[Period1] - production_cap <= 0,
↳ production[Period2] - production_cap <= 0, production[Period3] - production_cap <=
↳ 0], name='capacity')
```

```
In [18]: m.add_constraints((production[i] <= demand[i] for i in PERIODS),
.....:                    name='demand')
.....:
Out[18]: sasoptpy.ConstraintGroup([production[Period1] <= 30, production[Period2] <=
↳ 15, production[Period3] <= 25], name='demand')
```

Here, the first term provides a Python generator, which then gets translated into constraints in the problem. The symbols `<=`, `>=`, and `==` are used for less than or equal to, greater than or equal to, and equal to constraints, respectively. You can define range constraints by using `==` symbol and a list of two values that represent lower and upper bounds.

```
In [19]: m.add_constraint(production['Period1'] == [10, 100], name='production_bounds
↳ ')
Out[19]: sasoptpy.Constraint(production[Period1] == [10, 100], name='production_
↳ bounds')
```

3.2.8 Solving a problem

After a problem is defined, you can send it to the CAS server or SAS session by calling the `Model.solve()` method. The `Model.solve()` method returns the primal solution when available, and `None` otherwise.

```
In [20]: m.solve()
NOTE: Added action set 'optimization'.
NOTE: Converting model my_first_model to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 4 variables (0 free, 0 fixed).
NOTE: The problem has 0 binary and 4 integer variables.
NOTE: The problem has 7 linear constraints (6 LE, 0 EQ, 0 GE, 1 range).
NOTE: The problem has 10 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed all variables and constraints.
NOTE: Optimal.
NOTE: Objective = 400.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 4 rows and 6
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 7 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4
↳columns.
Out [20]:
Selected Rows from Table SOLUTION
```

	i	var	value	lb	ub	rc
0	1.0	production_cap	25.0	-0.0	1.797693e+308	NaN
1	2.0	production[Period1]	25.0	5.0	1.797693e+308	NaN
2	3.0	production[Period2]	15.0	5.0	1.797693e+308	NaN
3	4.0	production[Period3]	25.0	-0.0	1.797693e+308	NaN

At the end of the solve operation, the solver returns both Problem Summary and Solution Summary tables. These tables can later be accessed by using `m.get_problem_summary()` and `m.get_solution_summary()`.

```
In [21]: print(m.get_solution_summary())
Selected Rows from Table SOLUTIONSUMMARY
```

	Value
Label	
Solver	MILP
Algorithm	Branch and Cut
Objective Function	totalProfit
Solution Status	Optimal
Objective Value	400
Relative Gap	0
Absolute Gap	0
Primal Infeasibility	0
Bound Infeasibility	0
Integer Infeasibility	0
Best Bound	400

(continues on next page)

(continued from previous page)

Nodes	0
Solutions Found	3
Iterations	0
Presolve Time	0.01
Solution Time	0.02

3.2.9 Printing solutions

You can retrieve the solutions by using the `sasoptpy.get_solution_table()` method. It is strongly suggested to group variables and expressions that share the same keys in a call.

```
In [22]: print(so.get_solution_table(demand, production))
          demand  production
period
Period1      30         25.0
Period2      15         15.0
Period3      25         25.0
```

As seen, a Pandas Series and a Variable object that have the same index keys are printed in this example.

3.2.10 Initializing a workspace

If you would like to use extensive abstract modeling capabilities of *sasoptpy*, you can create a workspace. Workspaces support features like server-side for loops, cofor loops (parallel), read data, and create data. You can initialize a `sasoptpy.Workspace` by using Python's *with* keyword. As an example, you can create a workspace with a set and a variable group as follows:

```
In [23]: def create_workspace():
....:     with so.Workspace(name='my_workspace', session=s) as w:
....:         I = so.Set(name='I', value=range(1, 11))
....:         x = so.VariableGroup(I, name='x', lb=0)
....:         return w
....:
```

```
In [24]: workspace = create_workspace()
```

```
In [25]: print(so.to_optmodel(workspace))
proc optmodel;
    set I = 1..10;
    var x {{I}} >= 0;
quit;
```

You can submit a workspace to a CAS server and retrieve the response by using:

```
In [26]: workspace.submit()
NOTE: Added action set 'optimization'.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 10 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 0 rows and 4 columns.
Out[26]:
Selected Rows from Table SOLUTION

      i      var  value      lb      ub      rc
```

(continues on next page)

(continued from previous page)

```

0  1.0  x[1]    0.0  0.0  1.797693e+308 NaN
1  2.0  x[2]    0.0  0.0  1.797693e+308 NaN
2  3.0  x[3]    0.0  0.0  1.797693e+308 NaN
3  4.0  x[4]    0.0  0.0  1.797693e+308 NaN
4  5.0  x[5]    0.0  0.0  1.797693e+308 NaN
5  6.0  x[6]    0.0  0.0  1.797693e+308 NaN
6  7.0  x[7]    0.0  0.0  1.797693e+308 NaN
7  8.0  x[8]    0.0  0.0  1.797693e+308 NaN
8  9.0  x[9]    0.0  0.0  1.797693e+308 NaN
9 10.0  x[10]   0.0  0.0  1.797693e+308 NaN

```

3.2.11 Package configurations

You can change the default options regarding problem representation as follows:

```
In [27]: x = so.Variable(name='x')
```

```
In [28]: c = so.Constraint(10 / 3 * x + 1e-20 * x ** 2 <= 30 + 1e-11, name='c')
```

```
In [29]: print(so.to_definition(c))
con c : 3.333333333333 * x + 0.0 * ((x) ^ (2)) <= 30.000000000001;
```

```
In [30]: so.config['max_digits'] = 2
```

```
In [31]: print(so.to_definition(c))
con c : 3.33 * x + 0.0 * ((x) ^ (2)) <= 30.0;
```

```
In [32]: so.config['max_digits'] = None
```

```
In [33]: print(so.to_definition(c))
con c : 3.3333333333333335 * x + 1e-20 * ((x) ^ (2)) <= 30.000000000001;
```

You can reset the options as follows:

```
In [34]: del so.config['max_digits']
```

You can also create a new configuration to be used globally:

```
In [35]: so.config['myvalue'] = 2
```

All default configuration options are as follows:

- verbosity (default 3)
- max_digits (default 12)
- print_digits (default 6)
- default_sense (default so.minimization)
- default_bounds
- valid_outcomes

3.3 Sessions

3.3.1 CAS Sessions

A `swat.cas.connection.CAS` session is needed to solve optimization problems with *sasoptpy* by using SAS Viya optimization solvers. See the SAS documentation to learn more about CAS sessions and SAS Viya.

You can create a sample CAS Session as follows:

```
>>> import sasoptpy as so
>>> from swat import CAS
>>> s = CAS(hostname=cas_host, username=cas_username, password=cas_password, port=cas_
↳port)
>>> m = so.Model(name='demo', session=s)
>>> print(repr(m))
sasoptpy.Model(name='demo', session=CAS(hostname, port, username, protocol='cas',
↳name='py-session-1', session=session-no))
```

You can end the session and close the connection as follows:

```
>>> s.terminate()
```

3.3.2 SAS Sessions

A `saspy.SASsession` session is needed to solve optimization problems with *sasoptpy* by using SAS/OR solvers on SAS 9.4 clients.

You can create a sample SAS session as follows:

```
>>> import sasoptpy as so
>>> import saspy
>>> sas_session = saspy.SASsession(cfgname='winlocal')
>>> m = so.Model(name='demo', session=sas_session)
>>> print(repr(m))
sasoptpy.Model(name='demo', session=saspy.SASsession(cfgname='winlocal'))
```

It is possible to connect to a SAS session by using a configuration file

```
In [1]: sas = saspy.SASsession(cfgfile=config_file)
Using SAS Config named: sshsas
SAS Connection established. Subprocess id is 8719
```

```
In [2]: m = so.Model(name='demo', session=sas)
NOTE: Initialized model demo.
```

```
In [3]: print(m.get_session().sasver)
9.04.01M6P11072018
```

You can terminate the SAS session as follows:

```
In [4]: sas.endsas()
SAS Connection terminated. Subprocess id was 8719
```


3.4 Models

3.4.1 Creating a model

You can create an empty model by using the *Model* constructor:

```
In [1]: import sasoptpy as so

In [2]: m = so.Model(name='modell')
NOTE: Initialized model modell.
```

3.4.2 Adding new components to a model

Adding a variable:

```
In [3]: x = m.add_variable(name='x', vartype=so.BIN)

In [4]: print(m)
Model: [
  Name: modell
  Objective: MIN [0]
  Variables (1): [
    x
  ]
  Constraints (0): [
  ]
]

In [5]: y = m.add_variable(name='y', lb=1, ub=10)

In [6]: print(m)
Model: [
  Name: modell
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (0): [
  ]
]
```

Adding a constraint:

```
In [7]: c1 = m.add_constraint(x + 2 * y <= 10, name='c1')

In [8]: print(m)
Model: [
  Name: modell
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (1): [
```

(continues on next page)

(continued from previous page)

```
    x + 2 * y <= 10
]
]
```

3.4.3 Adding existing components to a model

A new model can use existing variables. The typical way to include a variable is to use the `Model.include()` method:

```
In [9]: new_model = so.Model(name='new_model')
NOTE: Initialized model new_model.

In [10]: new_model.include(x, y)

In [11]: print(new_model)
Model: [
  Name: new_model
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (0): [
  ]
]

In [12]: new_model.include(c1)

In [13]: print(new_model)
Model: [
  Name: new_model
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (1): [
    x + 2 * y <= 10
  ]
]

In [14]: z = so.Variable(name='z', vartype=so.INT, lb=3)

In [15]: new_model.include(z)

In [16]: print(new_model)
Model: [
  Name: new_model
  Objective: MIN [0]
  Variables (3): [
    x
    y
    z
  ]
  Constraints (1): [
```

(continues on next page)

(continued from previous page)

```

    x + 2 * y <= 10
]
]
```

Note that variables are added to *Model* objects by reference. Therefore, after *Model.solve()* is called, the values of variables are replaced with optimal values.

3.4.4 Accessing components

You can get a list of model variables by using the *Model.get_variables()* method:

```
In [17]: print(m.get_variables())
[sasoptpy.Variable(name='x', lb=0, ub=1, vartype='BIN'), sasoptpy.Variable(name='y',
↳ lb=1, ub=10, vartype='CONT')]
```

Similarly, you can access a list of constraints by using the *Model.get_constraints()* method:

```
In [18]: c2 = m.add_constraint(2 * x - y >= 1, name='c2')

In [19]: print(m.get_constraints())
[sasoptpy.Constraint(x + 2 * y <= 10, name='c1'), sasoptpy.Constraint(2 * x - y >=
↳ 1, name='c2')]
```

To access a certain constraint by using its name, you can use the *Model.get_constraint()* method:

```
In [20]: print(m.get_constraint('c2'))
2 * x - y >= 1
```

3.4.5 Dropping components

You can drop a variable inside a model by using *Model.drop_variable()* method. Similarly, you can drop a set of variables by using the *Model.drop_variables()* method.

```
In [21]: m.drop_variable(y)
```

```
In [22]: print(m)
Model: [
  Name: model1
  Objective: MIN [0]
  Variables (1): [
    x
  ]
  Constraints (2): [
    x + 2 * y <= 10
    2 * x - y >= 1
  ]
]
```

```
In [23]: m.include(y)
```

```
In [24]: print(m)
Model: [
  Name: model1
```

(continues on next page)

(continued from previous page)

```
Objective: MIN [0]
Variables (2): [
    x
    y
]
Constraints (2): [
    x + 2 * y <= 10
    2 * x - y >= 1
]
]
```

You can drop a constraint by using the `Model.drop_constraint()` method. Similarly, you can drop a set of constraints by using the `Model.drop_constraints()` method.

```
In [25]: m.drop_constraint(c1)
```

```
In [26]: m.drop_constraint(c2)
```

```
In [27]: print(m)
```

```
Model: [
  Name: model1
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (0): [
  ]
]
```

```
In [28]: m.include(c1)
```

```
In [29]: print(m)
```

```
Model: [
  Name: model1
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (1): [
    x + 2 * y <= 10
  ]
]
```

3.4.6 Copying a model

You can copy an existing model by including the *Model* object itself.

```
In [30]: copy_model = so.Model(name='copy_model')
NOTE: Initialized model copy_model.

In [31]: copy_model.include(m)

In [32]: print(copy_model)
Model: [
  Name: copy_model
  Objective: MIN [0]
  Variables (2): [
    x
    y
  ]
  Constraints (1): [
    x + 2 * y <= 10
  ]
]
```

Note that all variables and constraints are included by reference.

3.4.7 Solving a model

A model is solved by using the *Model.solve()* method. This method converts Python definitions into an MPS file and uploads it to a CAS server for the optimization action. The type of the optimization problem is determined based on the variable types and expressions.

```
>>> m.solve()
NOTE: Initialized model model_1
NOTE: Converting model model_1 to DataFrame
NOTE: Added action set 'optimization'.
...
NOTE: Optimal.
NOTE: Objective = 124.343.
NOTE: The Dual Simplex solve time is 0.01 seconds.
```

3.4.8 Solve options

Solver Options

You can pass both PROC OPTMODEL solve options and solveLp, solveMilp action options by using the options argument of the *Model.solve()* method.

```
>>> m.solve(options={'with': 'milp', 'maxtime': 600})
>>> m.solve(options={'with': 'lp', 'algorithm': 'ipm'})
```

The only special option for the *Model.solve()* method is with. If not passed, PROC OPTMODEL chooses a solver that depends on the problem type. Possible with options are listed in the [SAS/OR documentation](#).

You can find specific solver options in the SAS Optimization documentation:

- [LP solver options](#)

- MILP solver options
- NLP solver options
- QP solver options
- BLACKBOX solver options

The `options` argument can also pass `solveLp` and `solveMilp` action options when `frame=True` is used when calling the `Model.solve()` method.

- `solveLp` options
- `solveMilp` options

Package Options

Besides the `options` argument, you can pass following arguments into the `Model.solve()` method:

- `name`: Name of the uploaded problem information
- `drop`: Option for dropping the data from server after the solve
- `replace`: Option for replacing an existing data with the same name
- `primalin`: Option for using the current values of the variables as an initial solution
- `submit`: Option for calling the CAS / SAS action
- `frame`: Option for using frame (MPS) method (if `False`, it uses `OPTMODEL`)
- `verbose`: Option for printing the generated `OPTMODEL` code before solve

When `primalin` argument is `True`, it grabs `Variable` objects `_init` field. You can modify this field by using the `Variable.set_init()` method.

3.4.9 Getting solutions

After the solve is completed, all variable and constraint values are parsed automatically. You can access a summary of the problem by using the `Model.get_problem_summary()` method, and a summary of the solution by using the `Model.get_solution_summary()` method.

To print the values of any object, you can use the `get_solution_table()` method:

```
>>> print(so.get_solution_table(x, y))
```

All variables and constraints passed into this method are returned based on their indices. See [Examples](#) for more details.

3.4.10 Tuning MILP model parameters

SAS Optimization solvers provide a variety of settings. However, it might be difficult to find the best settings for a given model. In order to compare and obtain a good choice of parameters, you can use the `optimization.tune` action for mixed-integer linear optimization problems.

The `Model.tune_parameters()` method is a wrapper for the `tune` action. Consider the following knapsack problem example:

```

In [33]: def get_model():
.....:     m = so.Model(name='knapsack_with_tuner', session=cas_conn)
.....:     data = [
.....:         ['clock', 8, 4, 3],
.....:         ['mug', 10, 6, 5],
.....:         ['headphone', 15, 7, 2],
.....:         ['book', 20, 12, 10],
.....:         ['pen', 1, 1, 15]
.....:     ]
.....:     df = pd.DataFrame(data, columns=['item', 'value', 'weight', 'limit']).set_
↳index(['item'])
.....:     ITEMS = df.index
.....:     value = df['value']
.....:     weight = df['weight']
.....:     limit = df['limit']
.....:     total_weight = 55
.....:     get = m.add_variables(ITEMS, name='get', vartype=so.INT)
.....:     m.add_constraints((get[i] <= limit[i] for i in ITEMS), name='limit_con')
.....:     m.add_constraint(so.quick_sum(weight[i] * get[i] for i in ITEMS) <= total_
↳weight, name='weight_con')
.....:     total_value = so.quick_sum(value[i] * get[i] for i in ITEMS)
.....:     m.set_objective(total_value, name='total_value', sense=so.MAX)
.....:     return m
.....:

In [34]: m = get_model()
NOTE: Initialized model knapsack_with_tuner.

```

For this problem, you can compare configurations as follows:

```

In [35]: results = m.tune_parameters(tunerParameters={'maxConfigs': 10})
NOTE: Added action set 'optimization'.
NOTE: Uploading the problem DataFrame to the server.
NOTE: Cloud Analytic Services made the uploaded file available as table KNAPSACK_WITH_
↳TUNER in caslib CASUSER(casuser).
NOTE: The table KNAPSACK_WITH_TUNER has been created in caslib CASUSER(casuser) from_
↳binary data uploaded to Cloud Analytic Services.
NOTE: Start to tune the MILP

```

	SolveCalls	Configurations	BestTime	Time
	1	1	0.20	0.25
	2	2	0.17	0.45
	3	3	0.17	0.64
	4	4	0.17	0.83
	5	5	0.17	1.08
	6	6	0.17	1.27
	7	7	0.17	1.47
	8	8	0.17	1.67
	9	9	0.17	1.88
	10	10	0.17	2.07

```

NOTE: Configuration limit reached.
NOTE: The tuning time is 2.07 seconds.

```

```

In [36]: print(results)
Configuration conflictSearch cutGomory cutMiLifted cutStrategy \
0          0.0      automatic  automatic  automatic  automatic
1          1.0      moderate    none      automatic  moderate
2          2.0      automatic    none          none      moderate

```

(continues on next page)

(continued from previous page)

3	3.0	none	moderate	moderate	none	
4	4.0	aggressive	automatic	aggressive	none	
5	5.0	aggressive	none	none	aggressive	
6	6.0	none	none	moderate	aggressive	
7	7.0	moderate	none	automatic	automatic	
8	8.0	aggressive	automatic	aggressive	none	
9	9.0	aggressive	none	aggressive	none	
cutZeroHalf heuristics modelSel presolver probe restarts \						
0	automatic	automatic	automatic	automatic	automatic	automatic
1	aggressive	none	bestBound	moderate	automatic	none
2	moderate	automatic	automatic	none	automatic	none
3	aggressive	none	depth	automatic	automatic	automatic
4	moderate	automatic	bestEstimateddepth	moderate	none	automatic
5	moderate	none	depth	automatic	automatic	none
6	none	automatic	bestEstimateddepth	moderate	none	basic
7	none	automatic	automatic	none	none	basic
8	moderate	automatic	bestEstimateddepth	automatic	none	automatic
9	moderate	automatic	bestBound	moderate	automatic	none
symmetry varSel Mean of Run Times Sum of Run Times \						
0	automatic	automatic	0.20	0.20		
1	automatic	ryanFoster	0.16	0.16		
2	basic	minInfeas	0.16	0.16		
3	none	minInfeas	0.17	0.17		
4	aggressive	pseudo	0.17	0.17		
5	aggressive	minInfeas	0.17	0.17		
6	none	automatic	0.17	0.17		
7	automatic	pseudo	0.17	0.17		
8	aggressive	pseudo	0.18	0.18		
9	moderate	ryanFoster	0.18	0.18		
Percentage Successful						
0		100.0				
1		100.0				
2		100.0				
3		100.0				
4		100.0				
5		100.0				
6		100.0				
7		100.0				
8		100.0				
9		100.0				

`Model.tune_parameters()` accepts three main arguments

- `milpParameters`
- `tunerParameters`
- `tuningParameters`

For a full set of tuning parameters and acceptable values of these arguments, see the SAS Optimization documentation¹.

For the example problem, you can tune the *presolver*, *cutStrategy*, and *strongIter* settings, by using initial values and candidate values, and limit the maximum number of configurations and maximum running time as follows:

¹ https://go.documentation.sas.com/?cdcId=pgmsascdc&cdcVersion=9.4_3.5&docsetId=casactmopt&docsetTarget=casactmopt_optimization_details37.htm


```
In [37]: results = m.tune_parameters(
.....:     milpParameters={'maxtime': 10},
.....:     tunerParameters={'maxConfigs': 20, 'logfreq': 5},
.....:     tuningParameters=[
.....:         {'option': 'presolver', 'initial': 'none', 'values': ['basic',
↪ 'aggressive', 'none']},
.....:         {'option': 'cutStrategy'},
.....:         {'option': 'strongIter', 'initial': -1, 'values': [-1, 100, 1000]}
.....:     ])
.....:
```

NOTE: Added action set 'optimization'.

NOTE: Uploading the problem DataFrame to the server.

NOTE: Cloud Analytic Services made the uploaded file available as table KNAPSACK_WITH_TUNER in caslib CASUSER(casuser).

NOTE: The table KNAPSACK_WITH_TUNER has been created in caslib CASUSER(casuser) from ↪ binary data uploaded to Cloud Analytic Services.

NOTE: Start to tune the MILP

SolveCalls	Configurations	BestTime	Time
5	5	0.17	0.98
10	10	0.17	1.97
15	15	0.17	2.93
20	20	0.17	3.91

NOTE: Configuration limit reached.

NOTE: The tuning time is 3.91 seconds.

```
In [38]: print(results)
```

	Configuration	conflictSearch	cutGomory	cutMiLifted	cutStrategy	\
0	0.0	automatic	automatic	automatic	automatic	
1	1.0	moderate	moderate	automatic	none	
2	2.0	moderate	moderate	automatic	none	
3	3.0	moderate	moderate	aggressive	none	
4	4.0	moderate	moderate	automatic	none	
5	5.0	automatic	none	none	moderate	
6	6.0	moderate	moderate	automatic	none	
7	7.0	automatic	none	none	moderate	
8	8.0	automatic	none	none	moderate	
9	9.0	aggressive	none	aggressive	none	
10	10.0	aggressive	none	none	aggressive	
11	11.0	moderate	moderate	automatic	none	
12	12.0	moderate	moderate	automatic	none	
13	13.0	none	moderate	moderate	none	
14	14.0	moderate	none	automatic	moderate	
15	15.0	automatic	none	none	moderate	
16	16.0	none	none	moderate	aggressive	
17	17.0	moderate	moderate	automatic	none	
18	18.0	moderate	automatic	automatic	none	
19	19.0	moderate	none	automatic	automatic	

	cutZeroHalf	heuristics	modelSel	presolver	probe	\
0	automatic	automatic	automatic	automatic	automatic	
1	none	moderate	bestBound	none	none	
2	none	moderate	bestBound	moderate	none	
3	none	moderate	bestBound	none	none	
4	none	moderate	bestBound	none	basic	
5	moderate	automatic	bestBound	none	automatic	
6	none	moderate	automatic	none	none	
7	moderate	automatic	automatic	none	automatic	

(continues on next page)

(continued from previous page)

8	moderate	aggressive	automatic	none	automatic
9	moderate	automatic	bestBound	moderate	automatic
10	moderate	none	depth	automatic	automatic
11	none	moderate	bestBound	none	none
12	aggressive	moderate	bestBound	none	none
13	aggressive	none	depth	automatic	automatic
14	aggressive	none	bestBound	moderate	automatic
15	moderate	automatic	automatic	none	automatic
16	none	automatic	bestEstimateddepth	moderate	none
17	none	moderate	depth	none	none
18	none	moderate	bestBound	none	none
19	none	automatic	automatic	none	none
	restarts	symmetry	varSel	Mean of Run Times	Sum of Run Times \
0	automatic	automatic	automatic	0.17	0.17
1	automatic	automatic	maxInfeas	0.16	0.16
2	automatic	automatic	ryanFoster	0.16	0.16
3	automatic	automatic	ryanFoster	0.16	0.16
4	automatic	automatic	ryanFoster	0.16	0.16
5	none	basic	minInfeas	0.16	0.16
6	automatic	automatic	ryanFoster	0.16	0.16
7	none	basic	minInfeas	0.16	0.16
8	none	basic	minInfeas	0.17	0.17
9	none	moderate	ryanFoster	0.17	0.17
10	none	aggressive	minInfeas	0.17	0.17
11	automatic	automatic	ryanFoster	0.17	0.17
12	automatic	automatic	ryanFoster	0.17	0.17
13	automatic	none	minInfeas	0.17	0.17
14	none	automatic	ryanFoster	0.17	0.17
15	none	automatic	minInfeas	0.17	0.17
16	basic	none	automatic	0.17	0.17
17	automatic	automatic	ryanFoster	0.17	0.17
18	automatic	automatic	ryanFoster	0.18	0.18
19	basic	automatic	pseudo	0.18	0.18
	Percentage Successful				
0		100.0			
1		100.0			
2		100.0			
3		100.0			
4		100.0			
5		100.0			
6		100.0			
7		100.0			
8		100.0			
9		100.0			
10		100.0			
11		100.0			
12		100.0			
13		100.0			
14		100.0			
15		100.0			
16		100.0			
17		100.0			
18		100.0			
19		100.0			

You can retrieve full details by using the `Model.get_tuner_results()` method.

3.5 Model components

In this section, several model components are discussed with examples. See [Examples](#) to learn more about how you can use these components to define optimization models.

3.5.1 Expressions

Expression objects represent linear and nonlinear mathematical expressions in *sasoptpy*.

Creating expressions

You can create an *Expression* object as follows:

```
In [1]: profit = so.Expression(5 * sales - 3 * material, name='profit')

In [2]: print(repr(profit))
sasoptpy.Expression(exp = 5 * sales - 3 * material, name='profit')
```

Nonlinear expressions

Expression objects are linear by default. It is possible to create nonlinear expressions, but there are some limitations.

```
In [3]: nonexp = sales ** 2 + (1 / material) ** 3

In [4]: print(nonexp)
(sales) ** (2) + ((1) / (material)) ** (3)
```

Currently, it is not possible to get or print values of nonlinear expressions. Moreover, if your model includes a nonlinear expression, you need to use SAS Viya 3.4 or later or any SAS version for solving your problem.

To use mathematical operations, you need to import *sasoptpy.math* functions.

Mathematical expressions

sasoptpy provides mathematical functions for generating mathematical expressions to be used in optimization models.

You need to import *sasoptpy.math* to your code to start by using these functions. Available mathematical functions are listed in [Math Functions](#).

```
In [5]: import sasoptpy.math as sm

In [6]: newexp = sm.max(sales, 10) ** 2

In [7]: print(newexp._expr())
(max(sales , 10)) ^ (2)
```

```
In [8]: import sasoptpy.math as sm

In [9]: angle = so.Variable(name='angle')

In [10]: newexp = sm.sin(angle) ** 2 + sm.cos(angle) ** 2

In [11]: print(newexp._expr())
(sin(angle)) ^ (2) + (cos(angle)) ^ (2)
```

Operations

Getting the current value

After the solve is completed, you can obtain the current value of an expression by using the *Expression.get_value()* method:

```
>>> print(profit.get_value())
42.0
```

Getting the dual value

You can retrieve the dual values of *Expression* objects by using *Variable.get_dual()* and *Constraint.get_dual()* methods.

```
>>> m.solve()
>>> ...
>>> print(x.get_dual())
1.0
```

Addition

There are two ways to add elements to an expression. The first and simpler way creates a new expression at the end:

```
In [12]: tax = 0.5

In [13]: profit_after_tax = profit - tax

In [14]: print(repr(profit_after_tax))
sasoptpy.Expression(exp = 5 * sales - 3 * material - 0.5, name=None)
```

The second way, *Expression.add()* method, takes two arguments: the element to be added and the sign (1 or -1):

```
In [15]: profit_after_tax = profit.add(tax, sign=-1)

In [16]: print(profit_after_tax)
5 * sales - 3 * material - 0.5

In [17]: print(repr(profit_after_tax))
sasoptpy.Expression(exp = 5 * sales - 3 * material - 0.5, name=None)
```

If the expression is a temporary one, the addition is performed in place.

Multiplication

You can multiply expressions with scalar values:

```
In [18]: investment = profit.mult(0.2)
```

```
In [19]: print(investment)
sales - 0.6 * material
```

Summation

For faster summations compared to Python's native `sum` function, *sasoptpy* provides *sasoptpy.quick_sum()*.

```
In [20]: import time
```

```
In [21]: x = m.add_variables(1000, name='x')
```

```
In [22]: t0 = time.time()
```

```
In [23]: e = so.quick_sum(2 * x[i] for i in range(1000))
```

```
In [24]: print(time.time()-t0)
0.16195154190063477
```

```
In [25]: t0 = time.time()
```

```
In [26]: f = sum(2 * x[i] for i in range(1000))
```

```
In [27]: print(time.time()-t0)
1.0568652153015137
```

Renaming an expression

You can rename expressions by using the *Expression.set_name()* method:

```
In [28]: e = so.Expression(x[5] + 2 * x[6], name='e1')
```

```
In [29]: print(repr(e))
sasoptpy.Expression(exp = x[5] + 2 * x[6], name='e1')
```

```
In [30]: e.set_name('e2');
```

```
In [31]: print(repr(e))
sasoptpy.Expression(exp = x[5] + 2 * x[6], name='e2')
```

Copying an expression

You can copy an *Expression* by using the *Expression.copy()* method:

```
In [32]: copy_profit = profit.copy(name='copy_profit')
```

```
In [33]: print(repr(copy_profit))
sasoptpy.Expression(exp = 5 * sales - 3 * material, name='copy_profit')
```

3.5.2 Objective Functions

Setting and getting an objective function

You can use any valid *Expression* as the objective function of a model. You can also use an existing expression as an objective function by using the `Model.set_objective()` method. The objective function of a model can be obtained by using the `Model.get_objective()` method.

```
>>> profit = so.Expression(5 * sales - 2 * material, name='profit')
>>> m.set_objective(profit, so.MAX)
>>> print(m.get_objective())
- 2.0 * material + 5.0 * sales
```

Getting the value

After a solve, you can retrieve the objective value by using the `Model.get_objective_value()` method.

```
>>> m.solve()
>>> print(m.get_objective_value())
42.0
```

3.5.3 Variables

Creating variables

You can create variables either standalone or inside a model.

Creating a variable outside a model

The first way to create a variable uses the default constructor.

```
>>> x = so.Variable(vartype=so.INT, ub=5, name='x')
```

When created separately, a variable needs to be included (or added) inside the model:

```
>>> y = so.Variable(name='y', lb=5)
>>> m.add_variable(y)
```

Equivalently, you could do this in one step:

```
>>> y = m.add_variable(name='y', lb=5)
```

Creating a variable inside a model

The second way is to use `Model.add_variable()`. This method creates a *Variable* object and returns a pointer.

```
>>> x = m.add_variable(vartype=so.INT, ub=5, name='x')
```

Arguments

There are three types of variables: continuous variables, integer variables, and binary variables. Continuous variables are the default type and you can specify it by using the `vartype=so.CONT` argument. You can create Integer variables and binary variables by using the `vartype=so.INT` and `vartype=so.BIN` arguments, respectively.

The default lower bound for variables is 0, and the upper bound is infinity. Name is a required argument.

Changing bounds

The `Variable.set_bounds()` method changes the bounds of a variable.

```
>>> x = so.Variable(name='x', lb=0, ub=20)
>>> print(repr(x))
sasoptpy.Variable(name='x', lb=0, ub=20, vartype='CONT')
>>> x.set_bounds(lb=5, ub=15)
>>> print(repr(x))
sasoptpy.Variable(name='x', lb=5, ub=15, vartype='CONT')
```

Setting initial values

You can pass the initial values of variables to the solvers for certain problems. The `Variable.set_init()` method changes the initial value for variables. You can set this value at the creation of the variable as well.

```
>>> x.set_init(5)
>>> print(repr(x))
sasoptpy.Variable(name='x', ub=20, init=5, vartype='CONT')
```

Working with a set of variables

You can create a set of variables by using single or multiple indices. Valid index sets include list, dict, and `pandas.Index` objects. See [Handling Data](#) for more information about allowed index types.

Creating a set of variables outside a model

```
>>> production = VariableGroup(PERIODS, vartype=so.INT, name='production',
                               lb=min_production)
>>> print(repr(production))
sasoptpy.VariableGroup(['Period1', 'Period2', 'Period3'], name='production')
>>> m.include(production)
```

Creating a set of variables inside a model

```
>>> production = m.add_variables(PERIODS, vartype=so.INT,
                                name='production', lb=min_production)
>>> print(production)
>>> print(repr(production))
Variable Group (production) [
  Period1: production['Period1',]
  Period2: production['Period2',]
  Period3: production['Period3',]
]
sasoptpy.VariableGroup(['Period1', 'Period2', 'Period3'],
name='production')
```

3.5.4 Constraints

Creating constraints

Similar to *Variable* objects, you can create *Constraint* objects inside or outside optimization models.

Creating a constraint outside a model

```
>>> c1 = so.Constraint(3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint(- 5.0 * y + 3.0 * x <= 10, name='c1')
```

Creating a constraint inside a model

```
>>> c1 = m.add_constraint(3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint(- 5.0 * y + 3.0 * x <= 10, name='c1')
```

Modifying variable coefficients

You can update the coefficient of a variable inside a constraint by using the *Constraint.update_var_coef()* method:

```
>>> c1 = so.Constraint(exp=3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint(- 5.0 * y + 3.0 * x <= 10, name='c1')
>>> c1.update_var_coef(x, -1)
>>> print(repr(c1))
sasoptpy.Constraint(- 5.0 * y - x <= 10, name='c1')
```

Working with a set of constraints

You can add a set of constraints by using single or multiple indices. Valid index sets include list, dict, and *pandas.Index* objects. See *Handling Data* for more information about allowed index types.

Creating a set of constraints outside a model

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z', lb=0, ub=10)
>>> cg = so.ConstraintGroup((2 * z[i, j] + 3 * z[i-1, j] >= 2 for i in
                             [1] for j in ['a', 'b', 'c']), name='cg')
>>> print(cg)
Constraint Group (cg) [
  [(1, 'a'): 3.0 * z[0, 'a'] + 2.0 * z[1, 'a'] >= 2]
  [(1, 'b'): 3.0 * z[0, 'b'] + 2.0 * z[1, 'b'] >= 2]
  [(1, 'c'): 2.0 * z[1, 'c'] + 3.0 * z[0, 'c'] >= 2]
]
```

Creating a set of constraints inside a model

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z', lb=0, ub=10)
>>> cg2 = m.add_constraints((2 * z[i, j] + 3 * z[i-1, j] >= 2 for i in
                             [1] for j in ['a', 'b', 'c']), name='cg2')
>>> print(cg2)
Constraint Group (cg2) [
  [(1, 'a'): 2.0 * z[1, 'a'] + 3.0 * z[0, 'a'] >= 2]
```

(continues on next page)

(continued from previous page)

```
[ (1, 'b'): 3.0 * z[0, 'b'] + 2.0 * z[1, 'b'] >= 2]
[ (1, 'c'): 2.0 * z[1, 'c'] + 3.0 * z[0, 'c'] >= 2]
]
```

Range constraints

You can give a range for an expression by using a list of two value (lower and upper bound) with an == sign:

```
>>> x = m.add_variable(name='x')
>>> y = m.add_variable(name='y')
>>> c1 = m.add_constraint(x + 2*y == [2,9], name='c1')
>>> print(repr(c1))
sasoptpy.Constraint( x + 2.0 * y == [2, 9], name='c1')
```

3.6 Workspaces

One of the most powerful features of SAS Optimization and PROC OPTMODEL is the ability to combine several optimization models in a single call. You can read a common data set once, or parallelize solve steps for similar subproblems by using this ability.

The newly introduced *Workspace* provides this ability in a familiar syntax. Compared to *Model* objects, a *Workspace* can consist of several models and is able to use server-side data and OPTMODEL statements in a more detailed way.

3.6.1 Creating a workspace

A *Workspace* should be called by using the *with* keyword of Python as follows:

```
>>> with so.Workspace('my_workspace') as w:
>>> ...
```

You can define several models in the same workspace, and solve problems multiple times. All the statements are sent to the server after *Workspace.submit()* is called.

3.6.2 Adding components

Unlike *Model* objects, where components are added explicitly, objects defined inside a *Workspace* are added automatically.

For example, adding a new variable is performed as follows:

```
In [1]: with so.Workspace(name='my_workspace') as w:
...:     x = so.Variable(name='x', vartype=so.integer)
...:
```

You can display contents of a workspace by using the *Workspace.to_optmodel()* method:

```
In [2]: print(w.to_optmodel())
proc optmodel;
  var x integer;
quit;
```

See the following full example where data are loaded into the server, and a problem is solved by using a Workspace:

Create CAS session:

```
In [3]: import os

In [4]: hostname = os.getenv('CASHOST')

In [5]: port = os.getenv('CASPORT')

In [6]: from swat import CAS

In [7]: cas_conn = CAS(hostname, port)

In [8]: import sasoptpy as so

In [9]: import pandas as pd
```

Upload data:

```
In [10]: def send_data():
.....:     data = [
.....:         ['clock', 8, 4, 3],
.....:         ['mug', 10, 6, 5],
.....:         ['headphone', 15, 7, 2],
.....:         ['book', 20, 12, 10],
.....:         ['pen', 1, 1, 15]
.....:     ]
.....:     df = pd.DataFrame(data, columns=['item', 'value', 'weight', 'limit'])
.....:     cas_conn.upload_frame(df, casout={'name': 'mydata', 'replace': True})
.....:     send_data()
.....:
```

NOTE: Cloud Analytic Services made the uploaded file available as table MYDATA in `caslib CASUSER(casuser)`.

NOTE: The table MYDATA has been created in `caslib CASUSER(casuser)` from binary data uploaded to Cloud Analytic Services.

Model workspace:

```
In [11]: from sasoptpy.actions import read_data, solve

In [12]: def create_workspace():
.....:     with so.Workspace('my_knapsack', session=cas_conn) as w:
.....:         items = so.Set(name='ITEMS', settype=so.string)
.....:         value = so.ParameterGroup(items, name='value')
.....:         weight = so.ParameterGroup(items, name='weight')
.....:         limit = so.ParameterGroup(items, name='limit')
.....:         total_weight = so.Parameter(name='total_weight', value=55)
.....:         read_data(
.....:             table='mydata', index={'target': items, 'key': ['item']},
.....:             columns=[value, weight, limit]
.....:         )
.....:         get = so.VariableGroup(items, name='get', vartype=so.integer, lb=0)
.....:         limit_con = so.ConstraintGroup((get[i] <= limit[i] for i in items),
.....:                                         name='limit_con')
.....:         weight_con = so.Constraint(
.....:             so.expr_sum(weight[i] * get[i] for i in items) <= total_weight,
.....:             name='weight_con')
```

(continues on next page)

(continued from previous page)

```

.....:         total_value = so.Objective(
.....:             so.expr_sum(value[i] * get[i] for i in items), name='total_value',
.....:             sense=so.maximize)
.....:         solve()
.....:         return w
.....:

```

```
In [13]: my_workspace = create_workspace()
```

Print content:

```
In [14]: print(so.to_optmodel(my_workspace))
proc optmodel;
    set <str> ITEMS;
    num value {ITEMS};
    num weight {ITEMS};
    num limit {ITEMS};
    num total_weight = 55;
    read data mydata into ITEMS=[item] value weight limit;
    var get {{ITEMS}} integer >= 0;
    con limit_con {o72 in ITEMS} : get[o72] - limit[o72] <= 0;
    con weight_con : total_weight - (sum {i in ITEMS} (weight[i] * get[i])) >= 0;
    max total_value = sum {i in ITEMS} (value[i] * get[i]);
    solve;
quit;
```

Submit:

```
In [15]: my_workspace.submit()
NOTE: Added action set 'optimization'.
NOTE: There were 5 rows read from table 'MYDATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 5 variables (0 free, 0 fixed).
NOTE: The problem has 0 binary and 5 integer variables.
NOTE: The problem has 6 linear constraints (5 LE, 0 EQ, 1 GE, 0 range).
NOTE: The problem has 10 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 5 constraints.
NOTE: The MILP presolver removed 5 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 5 variables, 1 constraints, and 5 constraint_
↪coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.
```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	4	99.0000000	199.0000000	50.25%	0
0	1	4	99.0000000	102.3333333	3.26%	0
0	0	4	99.0000000	99.0000000	0.00%	0

```

NOTE: Optimal.
NOTE: Objective = 99.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 5 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 6 rows and 4 columns.

```

(continues on next page)

(continued from previous page)

Out [15]:

Selected Rows from Table SOLUTION

	i	var	value	lb	ub	rc
0	1.0	get[book]	2.0	-0.0	1.797693e+308	NaN
1	2.0	get[clock]	3.0	-0.0	1.797693e+308	NaN
2	3.0	get[headphone]	2.0	-0.0	1.797693e+308	NaN
3	4.0	get[mug]	-0.0	-0.0	1.797693e+308	NaN
4	5.0	get[pen]	5.0	-0.0	1.797693e+308	NaN

3.6.3 Abstract actions

As shown in the previous example, a *Workspace* can have statements such as `actions.read_data()` and `actions.solve()`.

These statements are called “Abstract Statements” and are fully supported inside *Workspace* objects.

Adding abstract actions

You can import abstract actions through `sasoptpy.actions` as follows:

```
>>> from sasoptpy.actions import read_data, create_data
```

These abstract actions are performed on the server side by generating equivalent OPTMODEL code at execution.

Grabbing results

In order to solve a problem, you need to use the `actions.solve()` function explicitly. Because *Workspace* objects allow several models and solve statements to be included, each of these solve statements are retrieved separately. You can return the solution after each solve by using the `actions.print()` function or creating a table by using the `actions.create_data()` function.

See the following example where a parameter is changed and the same problem solved twice:

```
In [16]: from sasoptpy.actions import read_data, solve, print_item

In [17]: def create_multi_solve_workspace():
....:     with so.Workspace('my_knapsack', session=cas_conn) as w:
....:         items = so.Set(name='ITEMS', settype=so.string)
....:         value = so.ParameterGroup(items, name='value')
....:         weight = so.ParameterGroup(items, name='weight')
....:         limit = so.ParameterGroup(items, name='limit')
....:         total_weight = so.Parameter(name='total_weight', init=55)
....:         read_data(table='mydata', index={'target': items, 'key': ['item']},
↳ columns=[value, weight, limit])
....:         get = so.VariableGroup(items, name='get', vartype=so.integer, lb=0)
....:         limit_con = so.ConstraintGroup((get[i] <= limit[i] for i in items),
↳ name='limit_con')
....:         weight_con = so.Constraint(
....:             so.expr_sum(weight[i] * get[i] for i in items) <= total_weight,
↳ name='weight_con')
....:         total_value = so.Objective(so.expr_sum(value[i] * get[i] for i in
↳ items), name='total_value', sense=so.MAX)
```

(continues on next page)

(continued from previous page)

```

.....:         s1 = solve()
.....:         p1 = print_item(get)
.....:         total_weight.set_value(40)
.....:         s2 = solve()
.....:         p2 = print_item(get)
.....:         return w, s1, p1, s2, p2
.....:

```

```

In [18]: (my_workspace, solve1, print1, solve2, print2) = create_multi_solve_
↳workspace()

```

Submit:

```

In [19]: my_workspace.submit()
NOTE: Added action set 'optimization'.
NOTE: There were 5 rows read from table 'MYDATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 5 variables (0 free, 0 fixed).
NOTE: The problem has 0 binary and 5 integer variables.
NOTE: The problem has 6 linear constraints (5 LE, 0 EQ, 1 GE, 0 range).
NOTE: The problem has 10 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 5 constraints.
NOTE: The MILP presolver removed 5 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 5 variables, 1 constraints, and 5 constraint_
↳coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.

```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	4	99.0000000	199.0000000	50.25%	0
0	1	4	99.0000000	102.3333333	3.26%	0
0	0	4	99.0000000	99.0000000	0.00%	0

```

NOTE: Optimal.
NOTE: Objective = 99.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 5 variables (0 free, 0 fixed).
NOTE: The problem has 0 binary and 5 integer variables.
NOTE: The problem has 6 linear constraints (5 LE, 0 EQ, 1 GE, 0 range).
NOTE: The problem has 10 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 5 constraints.
NOTE: The MILP presolver removed 5 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 5 variables, 1 constraints, and 5 constraint_
↳coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.

```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
------	--------	------	-------------	-----------	-----	------

(continues on next page)

(continued from previous page)

0	1	4	76.0000000	179.0000000	57.54%	0
0	1	4	76.0000000	77.3333333	1.72%	0
0	0	4	76.0000000	76.0000000	0.00%	0

NOTE: Optimal.

NOTE: Objective = 76.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 5 rows and 6 columns.

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 6 rows and 4 columns.

Out [19]:

Selected Rows from Table SOLUTION

	i	var	value	lb	ub	rc
0	1.0	get[book]	1.0	-0.0	1.797693e+308	NaN
1	2.0	get[clock]	3.0	-0.0	1.797693e+308	NaN
2	3.0	get[headphone]	2.0	-0.0	1.797693e+308	NaN
3	4.0	get[mug]	-0.0	-0.0	1.797693e+308	NaN
4	5.0	get[pen]	2.0	-0.0	1.797693e+308	NaN

Print results:

```
In [20]: print(solve1.get_solution_summary())
Solution Summary
```

	Value
Label	
Solver	MILP
Algorithm	Branch and Cut
Objective Function	total_value
Solution Status	Optimal
Objective Value	99
Relative Gap	0
Absolute Gap	0
Primal Infeasibility	0
Bound Infeasibility	0
Integer Infeasibility	0
Best Bound	99
Nodes	1
Solutions Found	4
Iterations	7
Presolve Time	0.00
Solution Time	0.18

```
In [21]: print(print1.get_response())
COL1 get
0 book 2.0
1 clock 3.0
2 headphone 2.0
3 mug -0.0
4 pen 5.0
```

```
In [22]: print(solve2.get_solution_summary())
Solution Summary
```

Value

(continues on next page)

(continued from previous page)

```

Label
Solver                               MILP
Algorithm                            Branch and Cut
Objective Function                    total_value
Solution Status                      Optimal
Objective Value                      76

Relative Gap                         0
Absolute Gap                        0
Primal Infeasibility                 0
Bound Infeasibility                  0
Integer Infeasibility                0

Best Bound                          76
Nodes                              1
Solutions Found                     4
Iterations                          3
Presolve Time                       0.00
Solution Time                       0.18

```

```

In [23]: print(print2.get_response())
          COL1  get
0        book  1.0
1        clock  3.0
2  headphone  2.0
3         mug -0.0
4         pen  2.0

```

List of abstract actions

A list of abstract actions is available in the [API section](#).

3.7 Handling Data

sasoptpy can work with native Python types and *pandas* objects for all data operations. Among *pandas* object types, *sasoptpy* works with `pandas.DataFrame` and `pandas.Series` objects to construct and manipulate model components.

3.7.1 Indices

Methods like `Model.add_variables()` can utilize native Python object types like list and range as variable and constraint indices. You can use `pandas.Index` objects as indices as well.

List

```
In [1]: m = so.Model(name='demo')
NOTE: Initialized model demo.

In [2]: SEASONS = ['Fall', 'Winter', 'Spring', 'Summer']

In [3]: prod_lb = {'Fall': 100, 'Winter': 200, 'Spring': 100, 'Summer': 400}

In [4]: production = m.add_variables(SEASONS, lb=prod_lb, name='production')

In [5]: print(production)
Variable Group (production) [
  [Fall: production[Fall]]
  [Winter: production[Winter]]
  [Spring: production[Spring]]
  [Summer: production[Summer]]
]

In [6]: print(repr(production['Summer']))
sasoptpy.Variable(name='production[Summer]', lb=400, vartype='CONT')
```

Note that if a list is being used as the index set, associated fields like *lb*, *ub* should be accessible by using the index keys. Accepted types are dict and `pandas.Series`.

Range

```
In [7]: link = m.add_variables(range(3), range(2), vartype=so.BIN, name='link')

In [8]: print(link)
Variable Group (link) [
  [(0, 0): link[0, 0]]
  [(0, 1): link[0, 1]]
  [(1, 0): link[1, 0]]
  [(1, 1): link[1, 1]]
  [(2, 0): link[2, 0]]
  [(2, 1): link[2, 1]]
]

In [9]: print(repr(link[2, 1]))
sasoptpy.Variable(name='link[2,1]', lb=0, ub=1, vartype='BIN')
```

pandas.Index

```
In [10]: import pandas as pd

In [11]: p_data = [[3, 5, 9],
.....:             [0, -1, 14],
.....:             [5, 6, 20]]
.....:

In [12]: df = pd.DataFrame(p_data, columns=['c1', 'col_lb', 'col_ub'])

In [13]: x = m.add_variables(df.index, lb=df['c1'], vartype=so.INT, name='x')
```



```
In [14]: print(x)
Variable Group (x) [
  [0: x[0]]
  [1: x[1]]
  [2: x[2]]
]
```

```
In [15]: df2 = df.set_index(['r1', 'r2', 'r3'])
```

```
In [16]: y = m.add_variables(df2.index, lb=df2['col_lb'], ub=df2['col_ub'], name='y')
```

```
In [17]: print(y)
Variable Group (y) [
  [r1: y[r1]]
  [r2: y[r2]]
  [r3: y[r3]]
]
```

```
In [18]: print(repr(y['r1']))
sasoptpy.Variable(name='y[r1]', lb=5, ub=9, vartype='CONT')
```

Set

sasoptpy can work with data on the server and generate abstract expressions. For this purpose, you can use *Set* objects to represent PROC OPTMODEL sets.

```
In [19]: m2 = so.Model(name='m2')
NOTE: Initialized model m2.

In [20]: I = m2.add_set(name='I')

In [21]: u = m2.add_variables(I, name='u')

In [22]: print(I, u)
I Variable Group (u) [
]
```

See [Workflows](#) for more information on working with server-side models.

3.7.2 Data

sasoptpy can work with both client-side and server-side data. Here are some options to load data into the optimization models.

pandas DataFrame

`pandas.DataFrame` is the preferred object type when passing data into *sasoptpy* models.

```
In [23]: data = [
.....:     ['clock', 8, 4, 3],
.....:     ['mug', 10, 6, 5],
.....:     ['headphone', 15, 7, 2],
.....:     ['book', 20, 12, 10],
.....:     ['pen', 1, 1, 15]
.....: ]

In [24]: df = pd.DataFrame(data, columns=['item', 'value', 'weight', 'limit']).set_
↳index(['item'])

In [25]: get = so.VariableGroup(df.index, ub=df['limit'], name='get')

In [26]: print(get)
Variable Group (get) [
  [clock: get[clock]]
  [mug: get[mug]]
  [headphone: get[headphone]]
  [book: get[book]]
  [pen: get[pen]]
]
```

Dictionaries

You can use lists and dictionaries in expressions and when creating variables.

```
In [27]: items = ['clock', 'mug', 'headphone', 'book', 'pen']

In [28]: limits = {'clock': 3, 'mug': 5, 'headphone': 2, 'book': 10, 'pen': 15}

In [29]: get2 = so.VariableGroup(items, ub=limits, name='get2')

In [30]: print(get2)
Variable Group (get2) [
  [clock: get2[clock]]
  [mug: get2[mug]]
  [headphone: get2[headphone]]
  [book: get2[book]]
  [pen: get2[pen]]
]
```

CASTable

When data are available on the server-side, you can pass a reference to the object. Note that, using `swat.cas.table.CASTable` and Abstract Data requires SAS Viya version 3.4 or later.

```
In [31]: m2 = so.Model(name='m2', session=session)
NOTE: Initialized model m2.
```

```
In [32]: table = session.upload_frame(df)
NOTE: Cloud Analytic Services made the uploaded file available as table TMP24OHK8WS_
↳in caslib CASUSER(casuser).
NOTE: The table TMP24OHK8WS has been created in caslib CASUSER(casuser) from binary_
↳data uploaded to Cloud Analytic Services.
```

```
In [33]: print(type(table), table)
<class 'swat.cas.table.CASTable'> CASTable('TMP24OHK8WS', caslib='CASUSER(casuser)')
```

```
In [34]: df = pd.DataFrame(data, columns=['item', 'value', 'weight', 'limit'])

In [35]: ITEMS = m.add_set(name='ITEMS')

In [36]: value = m.add_parameter(ITEMS, name='value')

In [37]: weight = m.add_parameter(ITEMS, name='weight')

In [38]: limit = m.add_parameter(ITEMS, name='limit')

In [39]: from sasoptpy.actions import read_data

In [40]: m.include(read_data(table=table, index={'target': ITEMS, 'key': None},
....:                               columns=[value, weight, limit]))
....:

In [41]: get3 = m2.add_variables(ITEMS, name='get3')

In [42]: print(get3)
Variable Group (get3) [
]
```

Abstract Data

If you would like to model your problem first and then load data, you can pass a string for the data sets that will be available later.

```
In [43]: from sasoptpy.actions import read_data

In [44]: m3 = so.Model(name='m3', session=session)
NOTE: Initialized model m3.

In [45]: ITEMS = m.add_set(name='ITEMS')

In [46]: limit = m.add_parameter(ITEMS, name='limit')

In [47]: m3.include(read_data(table='DF', index=['item'], columns=[limit]))
```

(continues on next page)

(continued from previous page)

```
In [48]: print(type(ITEMS), ITEMS)
<class 'sasoptpy.abstract.set.Set'> ITEMS
```

Note that the key set is created as a reference. You can later solve the problem after having the data available with the same name; for example, by using the *upload_frame* function.

```
In [49]: session.upload_frame(df, casout='DF')
NOTE: Cloud Analytic Services made the uploaded file available as table DF in caslib_
↳CASUSER(casuser).
NOTE: The table DF has been created in caslib CASUSER(casuser) from binary data_
↳uploaded to Cloud Analytic Services.
Out[49]: CASTable('DF', caslib='CASUSER(casuser)')
```

3.7.3 Operations

You can use lists, `pandas.Series`, and `pandas.DataFrame` objects for mathematical operations such as `VariableGroup.mult()`.

```
In [50]: sd = [3, 5, 6]
```

```
In [51]: z = m.add_variables(3, name='z')
```

```
In [52]: print(z)
Variable Group (z) [
  [0: z[0]]
  [1: z[1]]
  [2: z[2]]
]
```

```
In [53]: print(repr(z))
sasoptpy.VariableGroup([0, 1, 2], name='z')
```

```
In [54]: e1 = z.mult(sd)
```

```
In [55]: print(e1)
3 * z[0] + 5 * z[1] + 6 * z[2]
```

```
In [56]: ps = pd.Series(sd)
```

```
In [57]: e2 = z.mult(ps)
```

```
In [58]: print(e2)
3 * z[0] + 5 * z[1] + 6 * z[2]
```

3.8 Workflows

sasoptpy can work with both client-side data and server-side data. Some limitations to the functionalities might apply in terms of which workflow is being used. In this section, the overall flow of the package is explained.


3.8.1 Client-side models

If the data are on the client-side (Python), then a concrete model is generated on the client-side and uploaded by using one of the available CAS actions.


Using a client-side model brings several advantages, such as accessing variables, expressions, and constraints directly. You can do more intensive operations like filter data, sort values, change variable values, and print expressions more easily.

There are two main disadvantages of working with client-side models. First, if your model is relatively large, the generated MPS DataFrame or OPTMODEL code might allocate a large memory on your machine. Second, the information that needs to be passed from client to server might be larger compared to using a server-side model.

See the following representation of the client-side model workflow for CAS (Viya) servers:

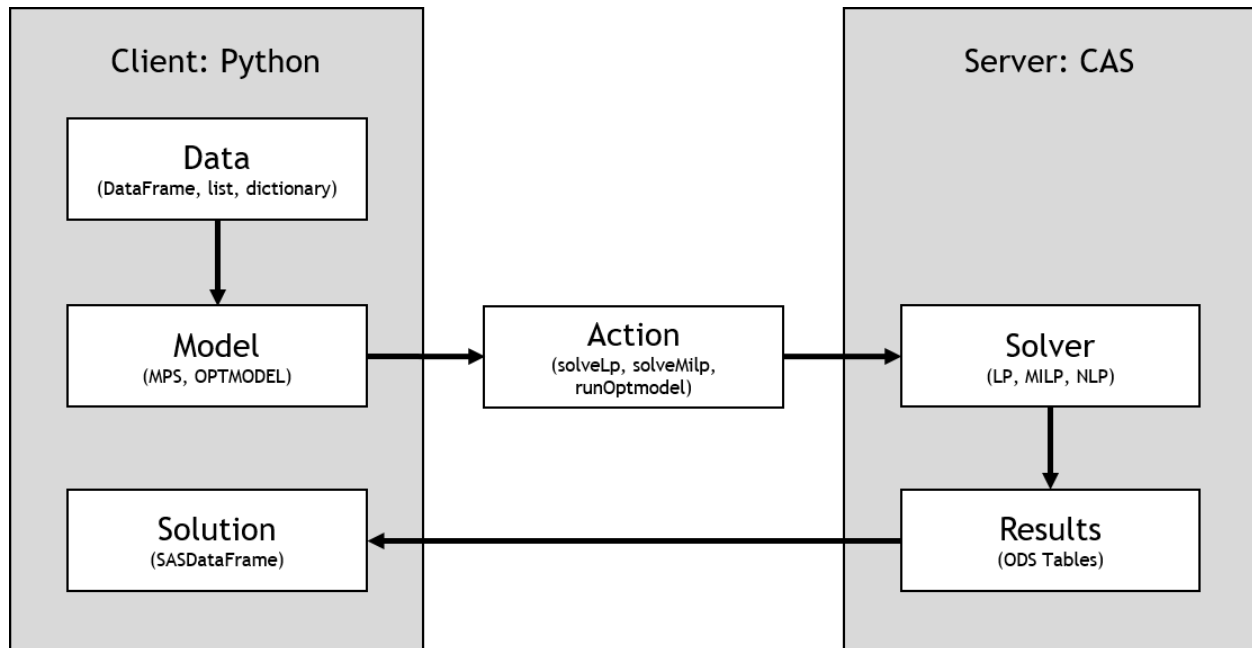

See the following representation of the client-side model workflow for SAS clients:

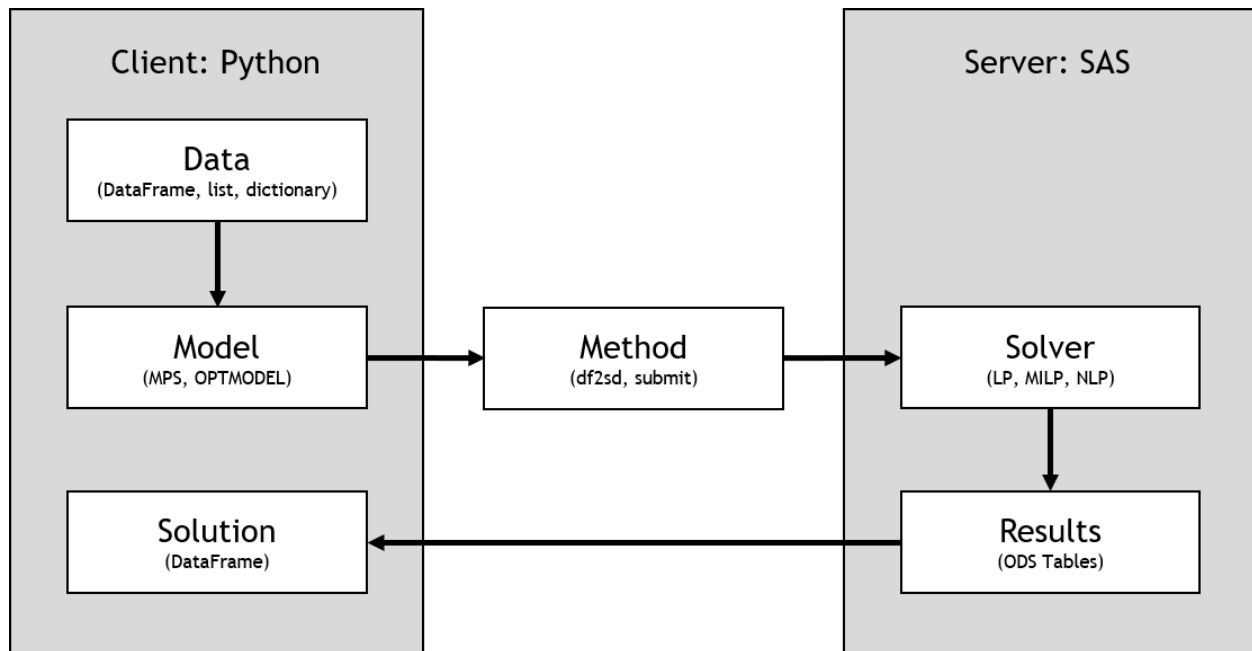

Steps of modeling a simple knapsack problem are shown in the following subsections.

Reading data

```

In [1]: import sasoptpy as so

In [2]: import pandas as pd

In [3]: from swat import CAS

In [4]: session = CAS(hostname, port)

In [5]: m = so.Model(name='client_CAS', session=session)
NOTE: Initialized model client_CAS.

In [6]: data = [
...:     ['clock', 8, 4, 3],
...:     ['mug', 10, 6, 5],
...:     ['headphone', 15, 7, 2],
...:     ['book', 20, 12, 10],
...:     ['pen', 1, 1, 15]
...: ]

In [7]: df = pd.DataFrame(data, columns=['item', 'value', 'weight', 'limit'])

In [8]: ITEMS = df.index

In [9]: value = df['value']

In [10]: weight = df['weight']

In [11]: limit = df['limit']
  
```

(continues on next page)

(continued from previous page)

```
In [12]: total_weight = 55
```

```
In [13]: print(type(ITEMS), ITEMS)
<class 'pandas.core.indexes.range.RangeIndex'> RangeIndex(start=0, stop=5, step=1)
```

```
In [14]: print(type(total_weight), total_weight)
<class 'int'> 55
```

Here, you can obtain the column values one by one:

```
>>> df = df.set_index('item')
>>> ITEMS = df.index.tolist()
>>> value = df['value']
>>> weight = df['weight']
>>> limit = df['limit']
```

Model

```
# Variables
In [15]: get = m.add_variables(ITEMS, name='get', vartype=so.INT, lb=0)

# Constraints
In [16]: m.add_constraints((get[i] <= limit[i] for i in ITEMS), name='limit_con');

In [17]: m.add_constraint(
.....:     so.quick_sum(weight[i] * get[i] for i in ITEMS) <= total_weight,
.....:     name='weight_con');
.....:

# Objective
In [18]: total_value = so.expr_sum(value[i] * get[i] for i in ITEMS)

In [19]: m.set_objective(total_value, name='total_value', sense=so.MAX);

# Solve
In [20]: m.solve(verbose=True)
NOTE: Added action set 'optimization'.
NOTE: Converting model client_CAS to OPTMODEL.
var get {{0,1,2,3,4}} integer >= 0;
con limit_con_0 : get[0] <= 3;
con limit_con_1 : get[1] <= 5;
con limit_con_2 : get[2] <= 2;
con limit_con_3 : get[3] <= 10;
con limit_con_4 : get[4] <= 15;
con weight_con : 4 * get[0] + 6 * get[1] + 7 * get[2] + 12 * get[3] + get[4] <= 55;
max total_value = 8 * get[0] + 10 * get[1] + 15 * get[2] + 20 * get[3] + get[4];
solve;
create data solution from [i]= {1..NVAR_} var=_VAR_.name value=_VAR_ lb=_VAR_.lb_
↳ub=_VAR_.ub rc=_VAR_.rc;
create data dual from [j] = {1..NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
↳dual;

NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
```

(continues on next page)

(continued from previous page)

```

NOTE: The problem has 5 variables (0 free, 0 fixed).
NOTE: The problem has 0 binary and 5 integer variables.
NOTE: The problem has 6 linear constraints (6 LE, 0 EQ, 0 GE, 0 range).
NOTE: The problem has 10 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 5 constraints.
NOTE: The MILP presolver removed 5 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 5 variables, 1 constraints, and 5 constraint_
↪coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.
      Node   Active   Sols   BestInteger   BestBound   Gap   Time
        0       1       4    99.0000000    199.0000000  50.25%    0
        0       1       4    99.0000000    102.3333333   3.26%    0
        0       1       4    99.0000000    102.3333333   3.26%    0
NOTE: The MILP presolver is applied again.
        0       1       4    99.0000000    102.3333333   3.26%    0
NOTE: Optimal.
NOTE: Objective = 99.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 5 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 6 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4_
↪columns.
Out [20]:
Selected Rows from Table SOLUTION

      i    var  value  lb          ub  rc
0  1.0  get[0]   2.0 -0.0  1.797693e+308 NaN
1  2.0  get[1]   5.0 -0.0  1.797693e+308 NaN
2  3.0  get[2]   2.0 -0.0  1.797693e+308 NaN
3  4.0  get[3]  -0.0 -0.0  1.797693e+308 NaN
4  5.0  get[4]   3.0 -0.0  1.797693e+308 NaN

```

You can display the generated OPTMODEL code at runtime by using the `verbose` option. Here, you can see the coefficient values of the parameters inside the model.

Parsing results

After the solve, the primal and dual solution tables are obtained. You can print the solution tables by using the `Model.get_solution()` method.

It is also possible to print the optimal solution by using the `get_solution_table()` function.

```

In [21]: print(m.get_solution())
Selected Rows from Table SOLUTION

      i    var  value  lb          ub  rc
0  1.0  get[0]   2.0 -0.0  1.797693e+308 NaN

```

(continues on next page)

(continued from previous page)

```

1  2.0  get[1]      5.0 -0.0  1.797693e+308 NaN
2  3.0  get[2]      2.0 -0.0  1.797693e+308 NaN
3  4.0  get[3]     -0.0 -0.0  1.797693e+308 NaN
4  5.0  get[4]      3.0 -0.0  1.797693e+308 NaN

```

```

In [22]: print(so.get_solution_table(get, key=ITEMS))
get
0  2.0
1  5.0
2  2.0
3 -0.0
4  3.0

```

```

In [23]: print('Total value:', total_value.get_value())
Total value: 99.0

```


3.8.2 Server-side models

If the data are on the server-side (CAS or SAS), then an abstract model is generated on the client-side. This abstract model is later converted to PROC OPTMODEL code, which reads the data on the server.


The main advantage of the server-side models is faster upload times compared to client-side. This is especially noticeable when using large numbers of variable and constraint groups.

The only disadvantage of using server-side models is that variables often need to be accessed directly from the resulting SASDataFrame objects. Because components of the models are abstract, accessing objects directly is often not possible.

See the following representation of the server-side model workflow for CAS (Viya) servers:

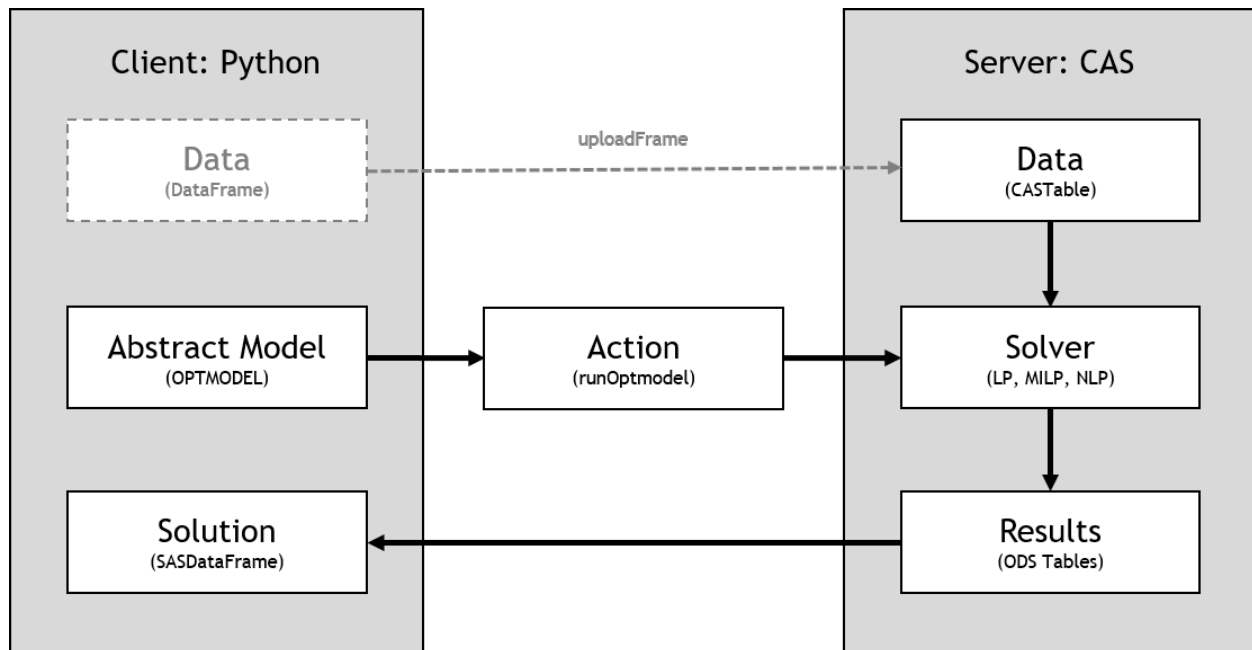

See the following representation of the server-side model workflow for SAS clients:

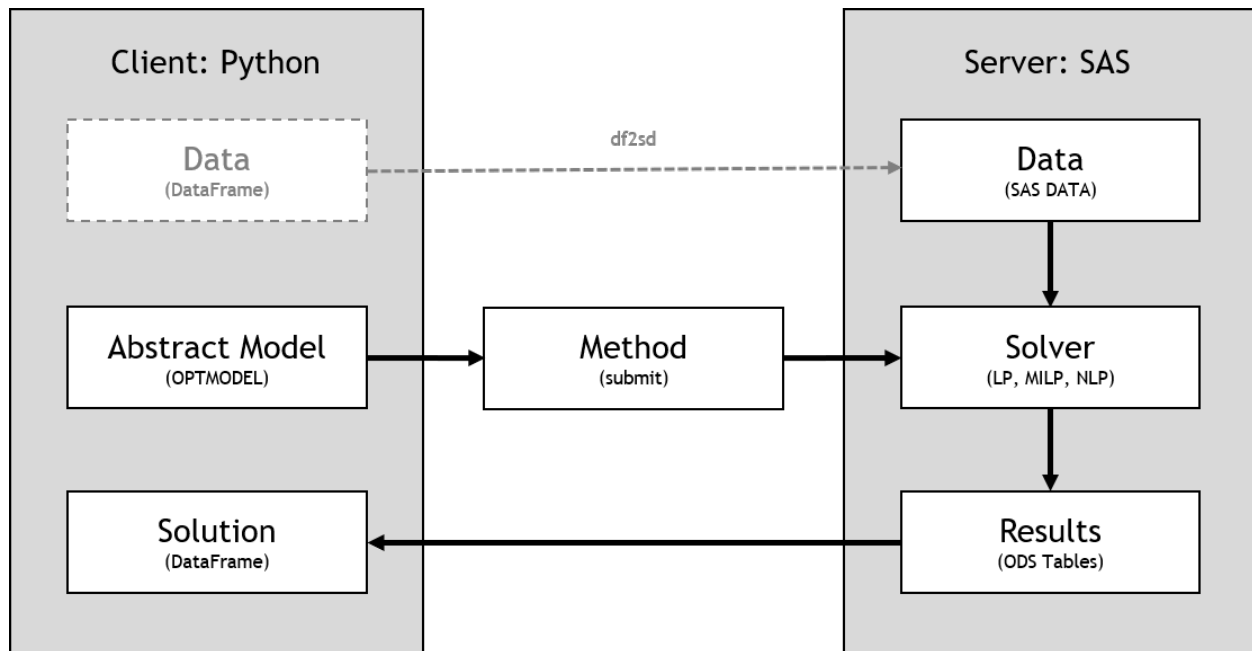

In the following subsections, the same example is solved by using server-side data.

Model

```
In [24]: from sasoptpy.actions import read_data
```

```
In [25]: m = so.Model(name='client_CAS', session=session)
```

NOTE: Initialized model client_CAS.

```
In [26]: cas_table = session.upload_frame(df, casout='data')
```

NOTE: Cloud Analytic Services made the uploaded file available as table DATA in

↳ caslib CASUSER(casuser).

NOTE: The table DATA has been created in caslib CASUSER(casuser) from binary data

↳ uploaded to Cloud Analytic Services.

```
In [27]: ITEMS = m.add_set(name='ITEMS', settype=so.STR)
```

```
In [28]: value = m.add_parameter(ITEMS, name='value')
```

```
In [29]: weight = m.add_parameter(ITEMS, name='weight')
```

```
In [30]: limit = m.add_parameter(ITEMS, name='limit')
```

```
In [31]: m.include(read_data(
.....:     table=cas_table, index={'target':ITEMS, 'key': 'item'},
.....:     columns=[value, weight, limit]))
.....:
```

Variables

```
In [32]: get = m.add_variables(ITEMS, name='get', vartype=so.INT, lb=0)
```

Constraints

```
In [33]: m.add_constraints((get[i] <= limit[i] for i in ITEMS), name='limit_con');
```

(continues on next page)

(continued from previous page)

```

In [34]: m.add_constraint(
.....:     so.quick_sum(weight[i] * get[i] for i in ITEMS) <= total_weight,
.....:     name='weight_con');
.....:

# Objective
In [35]: total_value = so.quick_sum(value[i] * get[i] for i in ITEMS)

In [36]: m.set_objective(total_value, name='total_value', sense=so.MAX);

# Solve
In [37]: m.solve(verbose=True)
NOTE: Added action set 'optimization'.
NOTE: Converting model client_CAS to OPTMODEL.
    set <str> ITEMS;
    num value {{ITEMS}};
    num weight {{ITEMS}};
    num limit {{ITEMS}};
    read data DATA into ITEMS=[item] value weight limit;
    var get {{ITEMS}} integer >= 0;
    con limit_con {o37 in ITEMS} : get[o37] - limit[o37] <= 0;
    con weight_con : sum {i in ITEMS} (weight[i] * get[i]) <= 55;
    max total_value = sum {i in ITEMS} (value[i] * get[i]);
    solve;
    create data solution from [i]= {1.._NVAR_} var=_VAR_.name value=_VAR_ lb=_VAR_.lb_
    ↳ub=_VAR_.ub rc=_VAR_.rc;
    create data dual from [j] = {1.._NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
    ↳dual;

NOTE: Submitting OPTMODEL code to CAS server.
NOTE: There were 5 rows read from table 'DATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 5 variables (0 free, 0 fixed).
NOTE: The problem has 0 binary and 5 integer variables.
NOTE: The problem has 6 linear constraints (6 LE, 0 EQ, 0 GE, 0 range).
NOTE: The problem has 10 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 5 constraints.
NOTE: The MILP presolver removed 5 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 5 variables, 1 constraints, and 5 constraint_
    ↳coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.

```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	4	99.0000000	199.0000000	50.25%	0
0	1	4	99.0000000	102.3333333	3.26%	0
0	0	4	99.0000000	99.0000000	0.00%	0

```

NOTE: Optimal.
NOTE: Objective = 99.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 5 rows and 6_
    ↳columns.

```

(continues on next page)

(continued from previous page)

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 6 rows and 4 columns.
 NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4

→columns.
 NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4

→columns.
Out [37] :

Selected Rows from Table SOLUTION

	i	var	value	lb	ub	rc
0	1.0	get[book]	2.0	-0.0	1.797693e+308	NaN
1	2.0	get[clock]	3.0	-0.0	1.797693e+308	NaN
2	3.0	get[headphone]	2.0	-0.0	1.797693e+308	NaN
3	4.0	get[mug]	-0.0	-0.0	1.797693e+308	NaN
4	5.0	get[pen]	5.0	-0.0	1.797693e+308	NaN

Parsing results

```
# Print results
```

```
In [38]: print(m.get_solution())
```

Selected Rows from Table SOLUTION

	i	var	value	lb	ub	rc
0	1.0	get[book]	2.0	-0.0	1.797693e+308	NaN
1	2.0	get[clock]	3.0	-0.0	1.797693e+308	NaN
2	3.0	get[headphone]	2.0	-0.0	1.797693e+308	NaN
3	4.0	get[mug]	-0.0	-0.0	1.797693e+308	NaN
4	5.0	get[pen]	5.0	-0.0	1.797693e+308	NaN

```
In [39]: print('Total value:', m.get_objective_value())
```

Total value: 99.0

Because there is no direct access to expressions and variables, the optimal solution is printed by using the server response.

3.8.3 Limitations

- In SAS Viya, nonlinear models can be solved only by using the runOptmodel action, which requires the SAS Viya version to be 3.4 or later.
- User-defined decomposition blocks are available only in MPS mode, and therefore only work with client-side data.
- Mixed usage (client-side and server-side data) might not work in some cases. A quick fix would be transferring the data in either direction.

EXAMPLES

Examples are provided from SAS/OR documentation.

4.1 Viya Examples / Concrete

4.1.1 Food Manufacture 1

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex1_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex01.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn):

    # Problem data
    OILS = ['veg1', 'veg2', 'oil1', 'oil2', 'oil3']
    PERIODS = range(1, 7)
    cost_data = [
        [110, 120, 130, 110, 115],
        [130, 130, 110, 90, 115],
        [110, 140, 130, 100, 95],
        [120, 110, 120, 120, 125],
        [100, 120, 150, 110, 105],
        [90, 100, 140, 80, 135]]
    cost = pd.DataFrame(cost_data, columns=OILS, index=PERIODS).transpose()
    hardness_data = [8.8, 6.1, 2.0, 4.2, 5.0]
    hardness = {OILS[i]: hardness_data[i] for i in range(len(OILS))}

    revenue_per_ton = 150
    veg_ub = 200
    nonveg_ub = 250
    store_ub = 1000
    storage_cost_per_ton = 5
```

(continues on next page)

(continued from previous page)

```

hardness_lb = 3
hardness_ub = 6
init_storage = 500

# Problem initialization
m = so.Model(name='food_manufacture_1', session=cas_conn)

# Problem definition
buy = m.add_variables(OILS, PERIODS, lb=0, name='buy')
use = m.add_variables(OILS, PERIODS, lb=0, name='use')
manufacture = m.add_implicit_variable((use.sum('*', p) for p in PERIODS),
                                     name='manufacture')

last_period = len(PERIODS)
store = m.add_variables(OILS, [0] + list(PERIODS), lb=0, ub=store_ub,
                       name='store')

for oil in OILS:
    store[oil, 0].set_bounds(lb=init_storage, ub=init_storage)
    store[oil, last_period].set_bounds(lb=init_storage, ub=init_storage)
VEG = [i for i in OILS if 'veg' in i]
NONVEG = [i for i in OILS if i not in VEG]
revenue = so.quick_sum(revenue_per_ton * manufacture[p] for p in PERIODS)
rawcost = so.quick_sum(cost.at[o, p] * buy[o, p]
                      for o in OILS for p in PERIODS)
storagecost = so.quick_sum(storage_cost_per_ton * store[o, p]
                          for o in OILS for p in PERIODS)
m.set_objective(revenue - rawcost - storagecost, sense=so.MAX,
               name='profit')

# Constraints
m.add_constraints((use.sum(VEG, p) <= veg_ub for p in PERIODS),
                 name='veg_ub')
m.add_constraints((use.sum(NONVEG, p) <= nonveg_ub for p in PERIODS),
                 name='nonveg_ub')
m.add_constraints((store[o, p-1] + buy[o, p] == use[o, p] + store[o, p]
                  for o in OILS for p in PERIODS),
                 name='flow_balance')
m.add_constraints((so.quick_sum(hardness[o]*use[o, p] for o in OILS) >=
                  hardness_lb * manufacture[p] for p in PERIODS),
                 name='hardness_ub')
m.add_constraints((so.quick_sum(hardness[o]*use[o, p] for o in OILS) <=
                  hardness_ub * manufacture[p] for p in PERIODS),
                 name='hardness_lb')

# Solver call
res = m.solve()

# With other solve options
m.solve(options={'with': 'lp', 'algorithm': 'PS'})
m.solve(options={'with': 'lp', 'algorithm': 'IP'})
m.solve(options={'with': 'lp', 'algorithm': 'NS'})

if res is not None:
    print(so.get_solution_table(buy, use, store))

return m.get_objective_value()

```

Output

```
In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.food_manufacture_1 import test

In [8]: test(cas_conn)
NOTE: Initialized model food_manufacture_1.
NOTE: Added action set 'optimization'.
NOTE: Converting model food_manufacture_1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 95 variables (0 free, 10 fixed).
NOTE: The problem has 54 linear constraints (18 LE, 30 EQ, 6 GE, 0 range).
NOTE: The problem has 210 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 44 variables and 4 constraints.
NOTE: The LP presolver removed 48 constraint coefficients.
NOTE: The presolved problem has 51 variables, 50 constraints, and 162 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
```

	Phase	Iteration	Objective Value	Time
	D	2	4.755480E+05	0
	P	2	1.078426E+05	0
		49		

```
NOTE: Optimal.
NOTE: Objective = 107842.59259.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 95 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 54 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
NOTE: Added action set 'optimization'.
NOTE: Converting model food_manufacture_1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 95 variables (0 free, 10 fixed).
NOTE: The problem has 54 linear constraints (18 LE, 30 EQ, 6 GE, 0 range).
NOTE: The problem has 210 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
```

(continues on next page)

(continued from previous page)

```

NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 44 variables and 4 constraints.
NOTE: The LP presolver removed 48 constraint coefficients.
NOTE: The presolved problem has 51 variables, 50 constraints, and 162 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Primal Simplex algorithm is used.

```

	Phase	Iteration	Objective Value	Time
	P	1	1.749040E+03	0
	P	2	3.638889E+04	0
	D	2	1.078426E+05	0

```

NOTE: Optimal.
NOTE: Objective = 107842.59259.
NOTE: The Primal Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 95 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 54 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
NOTE: Added action set 'optimization'.
NOTE: Converting model food_manufacture_1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 95 variables (0 free, 10 fixed).
NOTE: The problem has 54 linear constraints (18 LE, 30 EQ, 6 GE, 0 range).
NOTE: The problem has 210 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 44 variables and 4 constraints.
NOTE: The LP presolver removed 48 constraint coefficients.
NOTE: The LP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 51 variables, 50 constraints, and 162 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Interior Point algorithm is used.
NOTE: The deterministic parallel mode is enabled.
NOTE: The Interior Point algorithm is using up to 8 threads.

```

	Iter	Complement	Duality Gap	Primal Infeas	Bound Infeas	Dual Infeas	Time
	0	1.1003E+04	1.3994E+01	2.0602E-02	1.1145E-02	1.2444E+00	0
	1	1.0498E+04	4.1015E+01	1.7385E-02	9.4051E-03	1.0928E+00	0
	2	7.2084E+03	7.4551E+00	5.6703E-03	3.0675E-03	6.8365E-01	0
	3	1.7518E+03	1.1221E+00	1.5798E-03	8.5465E-04	1.1852E-01	0
	4	4.1038E+02	2.5544E-01	5.6092E-04	3.0344E-04	1.1852E-03	0
	5	3.9774E+01	2.2775E-02	7.2994E-05	3.9488E-05	1.9281E-05	0
	6	9.9400E-01	5.6526E-04	7.9112E-07	4.2798E-07	7.7185E-07	0
	7	9.9572E-03	5.6615E-06	7.9420E-09	4.2964E-09	7.7239E-09	0
	8	0.0000E+00	1.8686E-08	1.6613E-07	1.1864E-10	6.2833E-07	0

```

NOTE: The Interior Point solve time is 0.03 seconds.
NOTE: The CROSSOVER option is enabled.
NOTE: The crossover basis contains 11 primal and 3 dual superbasic variables.

```

	Objective

(continues on next page)

(continued from previous page)

Phase	Iteration	Value	Time
P C	1	1.014226E+03	0
D C	13	9.697429E+00	0
D 2	16	1.078426E+05	0
P 2	17	1.078426E+05	0
D 2	18	1.078426E+05	0

NOTE: The Crossover time is 0.01 seconds.
NOTE: Optimal.
NOTE: Objective = 107842.59259.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 95 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 54 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 16 rows and 4_
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↳columns.
NOTE: Added action set 'optimization'.
NOTE: Converting model food_manufacture_1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 95 variables (0 free, 10 fixed).
NOTE: The problem has 54 linear constraints (18 LE, 30 EQ, 6 GE, 0 range).
NOTE: The problem has 210 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 44 variables and 4 constraints.
NOTE: The LP presolver removed 48 constraint coefficients.
NOTE: The presolved problem has 51 variables, 50 constraints, and 162 constraint_
↳coefficients.
NOTE: The LP solver is called.
NOTE: The Network Simplex algorithm is used.
NOTE: The network has 20 rows (40.00%), 29 columns (56.86%), and 1 component.
NOTE: The network extraction and setup time is 0.01 seconds.

Iteration	Primal Objective	Primal Infeasibility	Dual Infeasibility	Time
1	3.750000E+03	5.000000E+02	1.551000E+03	0.01
24	7.125000E+04	0.000000E+00	0.000000E+00	0.01

NOTE: The Network Simplex solve time is 0.00 seconds.
NOTE: The total Network Simplex solve time is 0.01 seconds.
NOTE: The Dual Simplex algorithm is used.

Phase	Iteration	Objective Value	Time
D 2	1	2.240180E+05	0
P 2	43	1.078426E+05	0

NOTE: Optimal.
NOTE: Objective = 107842.59259.
NOTE: The Simplex solve time is 0.02 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 95 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 54 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 14 rows and 4_
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↳columns.

	buy	use	store
veg1 1	0.000000e+00	8.518519e+01	4.148148e+02

(continues on next page)

(continued from previous page)

```

veg1 2  0.000000e+00  1.592593e+02  2.555556e+02
veg1 3  2.842171e-14  0.000000e+00  2.555556e+02
veg1 4 -1.421085e-14  1.592593e+02  9.629630e+01
veg1 5  7.105427e-14  9.629630e+01  0.000000e+00
veg1 6  6.592593e+02  1.592593e+02  5.000000e+02
veg2 1 -5.684342e-14  1.148148e+02  3.851852e+02
veg2 2  0.000000e+00  4.074074e+01  3.444444e+02
veg2 3  2.842171e-14  2.000000e+02  1.444444e+02
veg2 4 -2.842171e-14  4.074074e+01  1.037037e+02
veg2 5  0.000000e+00  1.037037e+02  0.000000e+00
veg2 6  5.407407e+02  4.074074e+01  5.000000e+02
oil1 1  0.000000e+00  0.000000e+00  5.000000e+02
oil1 2  0.000000e+00  0.000000e+00  5.000000e+02
oil1 3  0.000000e+00  0.000000e+00  5.000000e+02
oil1 4  0.000000e+00 -1.744059e-14  5.000000e+02
oil1 5  0.000000e+00  0.000000e+00  5.000000e+02
oil1 6  0.000000e+00  0.000000e+00  5.000000e+02
oil2 1  0.000000e+00  0.000000e+00  5.000000e+02
oil2 2  2.500000e+02  2.500000e+02  5.000000e+02
oil2 3  0.000000e+00  2.273737e-13  5.000000e+02
oil2 4  2.842171e-14  2.500000e+02  2.500000e+02
oil2 5  0.000000e+00  2.500000e+02  0.000000e+00
oil2 6  7.500000e+02  2.500000e+02  5.000000e+02
oil3 1  0.000000e+00  2.500000e+02  2.500000e+02
oil3 2  0.000000e+00  0.000000e+00  2.500000e+02
oil3 3 -5.048710e-29  2.500000e+02 -2.842171e-13
oil3 4  2.842171e-13  0.000000e+00  0.000000e+00
oil3 5  5.000000e+02  0.000000e+00  5.000000e+02
oil3 6  0.000000e+00  0.000000e+00  5.000000e+02
veg1 0          NaN          NaN  5.000000e+02
veg2 0          NaN          NaN  5.000000e+02
oil1 0          NaN          NaN  5.000000e+02
oil2 0          NaN          NaN  5.000000e+02
oil3 0          NaN          NaN  5.000000e+02

```

Out [8]: 107842.59259259264

4.1.2 Food Manufacture 2

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex2_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex02.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn):

    # Problem data
    OILS = ['veg1', 'veg2', 'oil1', 'oil2', 'oil3']
    PERIODS = range(1, 7)
    cost_data = [
        [110, 120, 130, 110, 115],
        [130, 130, 110, 90, 115],
        [110, 140, 130, 100, 95],
        [120, 110, 120, 120, 125],
        [100, 120, 150, 110, 105],
        [90, 100, 140, 80, 135]]
    cost = pd.DataFrame(cost_data, columns=OILS, index=PERIODS).transpose()
    hardness_data = [8.8, 6.1, 2.0, 4.2, 5.0]
    hardness = {OILS[i]: hardness_data[i] for i in range(len(OILS))}

    revenue_per_ton = 150
    veg_ub = 200
    nonveg_ub = 250
    store_ub = 1000
    storage_cost_per_ton = 5
    hardness_lb = 3
    hardness_ub = 6
    init_storage = 500
    max_num_oils_used = 3
    min_oil_used_threshold = 20

    # Problem initialization
    m = so.Model(name='food_manufacture_2', session=cas_conn)

    # Problem definition
    buy = m.add_variables(OILS, PERIODS, lb=0, name='buy')
    use = m.add_variables(OILS, PERIODS, lb=0, name='use')
    manufacture = m.add_implicit_variable((use.sum('*', p) for p in PERIODS),
                                           name='manufacture')

    last_period = len(PERIODS)
    store = m.add_variables(OILS, [0] + list(PERIODS), lb=0, ub=store_ub,
                           name='store')

    for oil in OILS:
        store[oil, 0].set_bounds(lb=init_storage, ub=init_storage)
        store[oil, last_period].set_bounds(lb=init_storage, ub=init_storage)
    VEG = [i for i in OILS if 'veg' in i]
    NONVEG = [i for i in OILS if i not in VEG]
    revenue = so.quick_sum(revenue_per_ton * manufacture[p] for p in PERIODS)
    rawcost = so.quick_sum(cost.at[o, p] * buy[o, p]
                           for o in OILS for p in PERIODS)
    storagecost = so.quick_sum(storage_cost_per_ton * store[o, p]
                               for o in OILS for p in PERIODS)
    m.set_objective(revenue - rawcost - storagecost, sense=so.MAX,
                   name='profit')
```

(continues on next page)

(continued from previous page)

```

# Constraints
m.add_constraints((use.sum(VEG, p) <= veg_ub for p in PERIODS),
                  name='veg_ub')
m.add_constraints((use.sum(NONVEG, p) <= nonveg_ub for p in PERIODS),
                  name='nonveg_ub')
m.add_constraints((store[o, p-1] + buy[o, p] == use[o, p] + store[o, p]
                  for o in OILS for p in PERIODS),
                  name='flow_balance')
m.add_constraints((so.quick_sum(hardness[o]*use[o, p] for o in OILS) >=
                  hardness_lb * manufacture[p] for p in PERIODS),
                  name='hardness_ub')
m.add_constraints((so.quick_sum(hardness[o]*use[o, p] for o in OILS) <=
                  hardness_ub * manufacture[p] for p in PERIODS),
                  name='hardness_lb')

# Additions to the first problem
isUsed = m.add_variables(OILS, PERIODS, vartype=so.BIN, name='is_used')
for p in PERIODS:
    for o in VEG:
        use[o, p].set_bounds(ub=veg_ub)
    for o in NONVEG:
        use[o, p].set_bounds(ub=nonveg_ub)
m.add_constraints((use[o, p] <= use[o, p].ub * isUsed[o, p]
                  for o in OILS for p in PERIODS), name='link')
m.add_constraints((isUsed.sum('*', p) <= max_num_oils_used
                  for p in PERIODS), name='logical1')
m.add_constraints((use[o, p] >= min_oil_used_threshold * isUsed[o, p]
                  for o in OILS for p in PERIODS), name='logical2')
m.add_constraints((isUsed[o, p] <= isUsed['oil3', p]
                  for o in ['veg1', 'veg2'] for p in PERIODS),
                  name='logical3')

res = m.solve()
if res is not None:
    print(so.get_solution_table(buy, use, store, isUsed))

return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.food_manufacture_2 import test

```

(continues on next page)

(continued from previous page)

```
In [8]: test(cas_conn)
NOTE: Initialized model food_manufacture_2.
NOTE: Added action set 'optimization'.
NOTE: Converting model food_manufacture_2 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 125 variables (0 free, 10 fixed).
NOTE: The problem has 30 binary and 0 integer variables.
NOTE: The problem has 132 linear constraints (66 LE, 30 EQ, 36 GE, 0 range).
NOTE: The problem has 384 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 50 variables and 10 constraints.
NOTE: The MILP presolver removed 66 constraint coefficients.
NOTE: The MILP presolver modified 6 constraint coefficients.
NOTE: The presolved problem has 75 variables, 122 constraints, and 318 constraint_
↪coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.
```

	Node	Active	Sols	BestInteger	BestBound	Gap	Time
	0	1	5	36900.0000000	343250	89.25%	0
	0	1	5	36900.0000000	107333	65.62%	0
	0	1	5	36900.0000000	105799	65.12%	0
	0	1	5	36900.0000000	105650	65.07%	0
	0	1	5	36900.0000000	105650	65.07%	0
	0	1	5	36900.0000000	105650	65.07%	0
	0	1	5	36900.0000000	105650	65.07%	0
	0	1	5	36900.0000000	105650	65.07%	0
	0	1	5	36900.0000000	105650	65.07%	0
	0	1	6	99491.6666667	105650	5.83%	0

```
NOTE: The MILP solver added 15 cuts with 77 cut coefficients at the root.
```

10	6	7	99683.3343492	105090	5.15%	0
28	19	8	99908.3333333	104782	4.65%	0
68	45	9	99908.3333333	104564	4.45%	0
139	80	10	100054	104225	4.00%	0
145	75	11	100192	103683	3.37%	0
177	86	12	100192	103516	3.21%	0
183	87	13	100214	103516	3.19%	0
189	85	14	100279	103268	2.89%	0
283	40	15	100279	102053	1.74%	0
284	40	16	100279	102053	1.74%	0
333	0	16	100279	100279	0.00%	0

```
NOTE: Optimal.
NOTE: Objective = 100278.70577.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 125 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 132 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4_
↪columns.
```

	buy	use	store	is_used
veg1 1	0.000000e+00	8.518519e+01	4.148148e+02	1.000000e+00
veg1 2	0.000000e+00	8.518519e+01	3.296296e+02	1.000000e+00
veg1 3	0.000000e+00	0.000000e+00	3.296296e+02	0.000000e+00

(continues on next page)

(continued from previous page)

```

veg1 4  0.000000e+00  1.550000e+02  1.746296e+02  9.999948e-01
veg1 5  0.000000e+00  1.550000e+02  1.962960e+01  1.000000e+00
veg1 6  4.803704e+02  0.000000e+00  5.000000e+02  0.000000e+00
veg2 1  0.000000e+00  1.148148e+02  3.851852e+02  1.000000e+00
veg2 2  0.000000e+00  1.148148e+02  2.703704e+02  1.000000e+00
veg2 3  0.000000e+00  2.000000e+02  7.037037e+01  1.000000e+00
veg2 4 -1.421085e-14  0.000000e+00  7.037037e+01 -1.949310e-15
veg2 5  0.000000e+00  0.000000e+00  7.037037e+01 -0.000000e+00
veg2 6  6.296296e+02  2.000000e+02  5.000000e+02  1.000000e+00
oil1 1  0.000000e+00  0.000000e+00  5.000000e+02  0.000000e+00
oil1 2 -5.684342e-14  0.000000e+00  5.000000e+02  0.000000e+00
oil1 3  0.000000e+00  0.000000e+00  5.000000e+02 -0.000000e+00
oil1 4  5.684342e-14  0.000000e+00  5.000000e+02  0.000000e+00
oil1 5  0.000000e+00  0.000000e+00  5.000000e+02  0.000000e+00
oil1 6  0.000000e+00  0.000000e+00  5.000000e+02  0.000000e+00
oil2 1  0.000000e+00  0.000000e+00  5.000000e+02 -0.000000e+00
oil2 2  1.900001e+02  2.273737e-13  6.900001e+02  9.094947e-16
oil2 3  0.000000e+00  2.300000e+02  4.600001e+02  1.000000e+00
oil2 4 -2.842171e-14  2.300001e+02  2.300000e+02  1.000000e+00
oil2 5  2.842171e-14  2.300000e+02  0.000000e+00  1.000000e+00
oil2 6  7.300000e+02  2.300000e+02  5.000000e+02  1.000000e+00
oil3 1  0.000000e+00  2.500000e+02  2.500000e+02  1.000000e+00
oil3 2  0.000000e+00  2.500000e+02  2.557954e-13  1.000000e+00
oil3 3  5.799999e+02  2.000000e+01  5.599999e+02  1.000000e+00
oil3 4  0.000000e+00  1.999990e+01  5.400000e+02  9.999948e-01
oil3 5  0.000000e+00  2.000000e+01  5.200000e+02  1.000000e+00
oil3 6  0.000000e+00  2.000000e+01  5.000000e+02  1.000000e+00
veg1 0      NaN      NaN  5.000000e+02      NaN
veg2 0      NaN      NaN  5.000000e+02      NaN
oil1 0      NaN      NaN  5.000000e+02      NaN
oil2 0      NaN      NaN  5.000000e+02      NaN
oil3 0      NaN      NaN  5.000000e+02      NaN

```

Out [8]: 100278.70576513262

4.1.3 Factory Planning 1

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex3_toc.htm&docsetVersion=15.1&locale=en

https://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex03.html

Model

```

import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='factory_planning_1', session=cas_conn)

```

(continues on next page)

(continued from previous page)

```

# Input data
product_list = ['prod{}'.format(i) for i in range(1, 8)]
product_data = pd.DataFrame([10, 6, 8, 4, 11, 9, 3],
                             columns=['profit'], index=product_list)

demand_data = [
    [500, 1000, 300, 300, 800, 200, 100],
    [600, 500, 200, 0, 400, 300, 150],
    [300, 600, 0, 0, 500, 400, 100],
    [200, 300, 400, 500, 200, 0, 100],
    [0, 100, 500, 100, 1000, 300, 0],
    [500, 500, 100, 300, 1100, 500, 60]]
demand_data = pd.DataFrame(
    demand_data, columns=product_list, index=range(1, 7))
machine_types_data = [
    ['grinder', 4],
    ['vdrill', 2],
    ['hdrill', 3],
    ['borer', 1],
    ['planer', 1]]
machine_types_data = pd.DataFrame(machine_types_data, columns=[
    'machine_type', 'num_machines']).set_index(['machine_type'])
machine_type_period_data = [
    ['grinder', 1, 1],
    ['hdrill', 2, 2],
    ['borer', 3, 1],
    ['vdrill', 4, 1],
    ['grinder', 5, 1],
    ['vdrill', 5, 1],
    ['planer', 6, 1],
    ['hdrill', 6, 1]]
machine_type_period_data = pd.DataFrame(machine_type_period_data, columns=[
    'machine_type', 'period', 'num_down'])
machine_type_product_data = [
    ['grinder', 0.5, 0.7, 0, 0, 0.3, 0.2, 0.5],
    ['vdrill', 0.1, 0.2, 0, 0.3, 0, 0.6, 0],
    ['hdrill', 0.2, 0, 0.8, 0, 0, 0, 0.6],
    ['borer', 0.05, 0.03, 0, 0.07, 0.1, 0, 0.08],
    ['planer', 0, 0, 0.01, 0, 0.05, 0, 0.05]]
machine_type_product_data = \
    pd.DataFrame(machine_type_product_data, columns=['machine_type'] +
                 product_list).set_index(['machine_type'])

store_ub = 100
storage_cost_per_unit = 0.5
final_storage = 50
num_hours_per_period = 24 * 2 * 8

# Problem definition
PRODUCTS = product_list
PERIODS = range(1, 7)
MACHINE_TYPES = machine_types_data.index.values

num_machine_per_period = pd.DataFrame()
for i in range(1, 7):
    num_machine_per_period[i] = machine_types_data['num_machines']
for _, row in machine_type_period_data.iterrows():
    num_machine_per_period.at[row['machine_type'],
                              row['period']] -= row['num_down']

```

(continues on next page)

(continued from previous page)

```

make = m.add_variables(PRODUCTS, PERIODS, lb=0, name='make')
sell = m.add_variables(PRODUCTS, PERIODS, lb=0, ub=demand_data.transpose(),
                      name='sell')

store = m.add_variables(PRODUCTS, PERIODS, lb=0, ub=store_ub, name='store')
for p in PRODUCTS:
    store[p, 6].set_bounds(lb=final_storage, ub=final_storage+1)

storageCost = storage_cost_per_unit * store.sum('*', '*')
revenue = so.quick_sum(product_data.at[p, 'profit'] * sell[p, t]
                      for p in PRODUCTS for t in PERIODS)
m.set_objective(revenue-storageCost, sense=so.MAX, name='total_profit')

production_time = machine_type_product_data
m.add_constraints((
    so.quick_sum(production_time.at[mc, p] * make[p, t] for p in PRODUCTS)
    <= num_hours_per_period * num_machine_per_period.at[mc, t]
    for mc in MACHINE_TYPES for t in PERIODS), name='machine_hours')
m.add_constraints(((store[p, t-1] if t-1 in PERIODS else 0) + make[p, t] ==
                  sell[p, t] + store[p, t] for p in PRODUCTS
                  for t in PERIODS),
                  name='flow_balance')

res = m.solve()
if res is not None:
    print(so.get_solution_table(make, sell, store))

return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.factory_planning_1 import test

In [8]: test(cas_conn)
NOTE: Initialized model factory_planning_1.
NOTE: Added action set 'optimization'.
NOTE: Converting model factory_planning_1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 126 variables (0 free, 6 fixed).
NOTE: The problem has 72 linear constraints (30 LE, 42 EQ, 0 GE, 0 range).

```

(continues on next page)

(continued from previous page)

NOTE: The problem has 281 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 60 variables and 46 constraints.
 NOTE: The LP presolver removed 178 constraint coefficients.
 NOTE: The presolved problem has 66 variables, 26 constraints, and 103 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

	Phase	Iteration	Objective Value	Time	
	D	2	1	9.478510E+04	0
	P	2	21	9.371518E+04	0

NOTE: Optimal.
 NOTE: Objective = 93715.178571.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 126 rows and 6_
 ↪columns.
 NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 72 rows and 4 columns.
 NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
 ↪columns.
 NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
 ↪columns.

		make	sell	store
(prod1, 1)	500.000000	500.000000	0.0	
(prod1, 2)	700.000000	600.000000	100.0	
(prod1, 3)	0.000000	100.000000	0.0	
(prod1, 4)	200.000000	200.000000	0.0	
(prod1, 5)	0.000000	0.000000	0.0	
(prod1, 6)	550.000000	500.000000	50.0	
(prod2, 1)	888.571429	888.571429	0.0	
(prod2, 2)	600.000000	500.000000	100.0	
(prod2, 3)	0.000000	100.000000	0.0	
(prod2, 4)	300.000000	300.000000	0.0	
(prod2, 5)	100.000000	100.000000	0.0	
(prod2, 6)	550.000000	500.000000	50.0	
(prod3, 1)	382.500000	300.000000	82.5	
(prod3, 2)	117.500000	200.000000	0.0	
(prod3, 3)	0.000000	0.000000	0.0	
(prod3, 4)	400.000000	400.000000	0.0	
(prod3, 5)	600.000000	500.000000	100.0	
(prod3, 6)	0.000000	50.000000	50.0	
(prod4, 1)	300.000000	300.000000	0.0	
(prod4, 2)	0.000000	0.000000	0.0	
(prod4, 3)	0.000000	0.000000	0.0	
(prod4, 4)	500.000000	500.000000	0.0	
(prod4, 5)	100.000000	100.000000	0.0	
(prod4, 6)	350.000000	300.000000	50.0	
(prod5, 1)	800.000000	800.000000	0.0	
(prod5, 2)	500.000000	400.000000	100.0	
(prod5, 3)	0.000000	100.000000	0.0	
(prod5, 4)	200.000000	200.000000	0.0	
(prod5, 5)	1100.000000	1000.000000	100.0	
(prod5, 6)	0.000000	50.000000	50.0	
(prod6, 1)	200.000000	200.000000	0.0	

(continues on next page)

(continued from previous page)

```
(prod6, 2)  300.000000  300.000000  0.0
(prod6, 3)  400.000000  400.000000  0.0
(prod6, 4)   0.000000   0.000000  0.0
(prod6, 5)  300.000000  300.000000  0.0
(prod6, 6)  550.000000  500.000000  50.0
(prod7, 1)   0.000000   0.000000  0.0
(prod7, 2)  250.000000  150.000000 100.0
(prod7, 3)   0.000000  100.000000  0.0
(prod7, 4)  100.000000  100.000000  0.0
(prod7, 5)  100.000000   0.000000 100.0
(prod7, 6)   0.000000   50.000000  50.0
Out[8]: 93715.17857142858
```

4.1.4 Factory Planning 2

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex4_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex04.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='factory_planning_2', session=cas_conn)

    # Input data
    product_list = ['prod{}'.format(i) for i in range(1, 8)]
    product_data = pd.DataFrame([10, 6, 8, 4, 11, 9, 3],
                                columns=['profit'], index=product_list)

    demand_data = [
        [500, 1000, 300, 300, 800, 200, 100],
        [600, 500, 200, 0, 400, 300, 150],
        [300, 600, 0, 0, 500, 400, 100],
        [200, 300, 400, 500, 200, 0, 100],
        [0, 100, 500, 100, 1000, 300, 0],
        [500, 500, 100, 300, 1100, 500, 60]]
    demand_data = pd.DataFrame(
        demand_data, columns=product_list, index=range(1, 7))
    machine_type_product_data = [
        ['grinder', 0.5, 0.7, 0, 0, 0.3, 0.2, 0.5],
        ['vdrill', 0.1, 0.2, 0, 0.3, 0, 0.6, 0],
        ['hdrill', 0.2, 0, 0.8, 0, 0, 0, 0.6],
        ['borer', 0.05, 0.03, 0, 0.07, 0.1, 0, 0.08],
        ['planer', 0, 0, 0.01, 0, 0.05, 0, 0.05]]
    machine_type_product_data = \
        pd.DataFrame(machine_type_product_data, columns=['machine_type'] +
```

(continues on next page)

(continued from previous page)

```

        product_list).set_index(['machine_type'])
machine_types_data = [
    ['grinder', 4, 2],
    ['vdrill', 2, 2],
    ['hdrill', 3, 3],
    ['borer', 1, 1],
    ['planer', 1, 1]]
machine_types_data = pd.DataFrame(machine_types_data, columns=[
    'machine_type', 'num_machines', 'num_machines_needing_maintenance'])\
    .set_index(['machine_type'])

store_ub = 100
storage_cost_per_unit = 0.5
final_storage = 50
num_hours_per_period = 24 * 2 * 8

# Problem definition
PRODUCTS = product_list
profit = product_data['profit']
PERIODS = range(1, 7)
MACHINE_TYPES = machine_types_data.index.tolist()

num_machines = machine_types_data['num_machines']

make = m.add_variables(PRODUCTS, PERIODS, lb=0, name='make')
sell = m.add_variables(PRODUCTS, PERIODS, lb=0, ub=demand_data.transpose(),
    name='sell')

store = m.add_variables(PRODUCTS, PERIODS, lb=0, ub=store_ub, name='store')
for p in PRODUCTS:
    store[p, 6].set_bounds(lb=final_storage, ub=final_storage)

storageCost = so.quick_sum(
    storage_cost_per_unit * store[p, t] for p in PRODUCTS for t in PERIODS)
revenue = so.quick_sum(profit[p] * sell[p, t]
    for p in PRODUCTS for t in PERIODS)
m.set_objective(revenue-storageCost, sense=so.MAX, name='total_profit')

num_machines_needing_maintenance = \
    machine_types_data['num_machines_needing_maintenance']
numMachinesDown = m.add_variables(MACHINE_TYPES, PERIODS, vartype=so.INT,
    lb=0, name='numMachinesDown')

production_time = machine_type_product_data
m.add_constraints((
    so.quick_sum(production_time.at[mc, p] * make[p, t] for p in PRODUCTS)
    <= num_hours_per_period *
    (num_machines[mc] - numMachinesDown[mc, t])
    for mc in MACHINE_TYPES for t in PERIODS), name='machine_hours_con')

m.add_constraints((so.quick_sum(numMachinesDown[mc, t] for t in PERIODS) ==
    num_machines_needing_maintenance[mc]
    for mc in MACHINE_TYPES), name='maintenance_con')

m.add_constraints(((store[p, t-1] if t-1 in PERIODS else 0) + make[p, t] ==
    sell[p, t] + store[p, t]
    for p in PRODUCTS for t in PERIODS),

```

(continues on next page)

(continued from previous page)

```

        name='flow_balance_con')

    res = m.solve()
    if res is not None:
        print(so.get_solution_table(make, sell, store))
        print(so.get_solution_table(numMachinesDown).unstack(level=-1))

    print(m.get_solution_summary())
    print(m.get_problem_summary())

    return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.factory_planning_2 import test

In [8]: test(cas_conn)
NOTE: Initialized model factory_planning_2.
NOTE: Added action set 'optimization'.
NOTE: Converting model factory_planning_2 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 156 variables (0 free, 13 fixed).
NOTE: The problem has 0 binary and 30 integer variables.
NOTE: The problem has 77 linear constraints (30 LE, 47 EQ, 0 GE, 0 range).
NOTE: The problem has 341 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 27 variables and 15 constraints.
NOTE: The MILP presolver removed 63 constraint coefficients.
NOTE: The MILP presolver modified 16 constraint coefficients.
NOTE: The presolved problem has 129 variables, 62 constraints, and 278 constraint_
↪coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.

```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	2	92755.0000000	116455	20.35%	0
0	1	2	92755.0000000	116455	20.35%	0

(continues on next page)

(continued from previous page)

0	1	2	92755.0000000	116141	20.14%	0
0	1	2	92755.0000000	115660	19.80%	0
0	1	2	92755.0000000	114136	18.73%	0
0	1	2	92755.0000000	113334	18.16%	0
0	1	2	92755.0000000	112487	17.54%	0
0	1	2	92755.0000000	111392	16.73%	0
0	1	2	92755.0000000	111136	16.54%	0
0	1	2	92755.0000000	110056	15.72%	0
0	1	2	92755.0000000	109718	15.46%	0
0	1	2	92755.0000000	109122	15.00%	0
0	1	2	92755.0000000	108904	14.83%	0
0	1	2	92755.0000000	108868	14.80%	0
0	1	2	92755.0000000	108855	14.79%	0
0	1	3	108855	108855	0.00%	0

NOTE: The MILP solver added 38 cuts with 136 cut coefficients at the root.

NOTE: Optimal within relative gap.

NOTE: Objective = 108855.00961.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 156 rows and 6_
→columns.

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 77 rows and 4 columns.

NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
→columns.NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4_
→columns.

	make	sell	store
(prod1, 1)	500.000000	500.000000	0.000000
(prod1, 2)	600.000200	600.000000	0.000200
(prod1, 3)	399.999201	300.000000	99.999401
(prod1, 4)	0.001198	100.000599	0.000000
(prod1, 5)	0.000000	0.000000	0.000000
(prod1, 6)	550.000000	500.000000	50.000000
(prod2, 1)	1000.000000	1000.000000	0.000000
(prod2, 2)	500.000188	500.000000	0.000188
(prod2, 3)	699.998215	599.999002	99.999401
(prod2, 4)	0.001797	100.001198	0.000000
(prod2, 5)	100.002196	100.000000	0.002196
(prod2, 6)	549.997804	500.000000	50.000000
(prod3, 1)	300.000000	300.000000	0.000000
(prod3, 2)	200.000000	200.000000	0.000000
(prod3, 3)	100.000000	0.000000	100.000000
(prod3, 4)	0.001283	100.001283	0.000000
(prod3, 5)	500.000072	500.000000	0.000072
(prod3, 6)	149.999928	100.000000	50.000000
(prod4, 1)	300.000000	300.000000	0.000000
(prod4, 2)	0.000000	0.000000	0.000000
(prod4, 3)	99.999401	0.000000	99.999401
(prod4, 4)	0.002994	100.002396	0.000000
(prod4, 5)	100.000000	100.000000	0.000000
(prod4, 6)	350.000000	300.000000	50.000000
(prod5, 1)	800.000522	800.000000	0.000522
(prod5, 2)	399.999338	399.999460	0.000399
(prod5, 3)	599.998374	499.999201	99.999572
(prod5, 4)	0.001027	100.000599	0.000000
(prod5, 5)	1000.006512	1000.000000	0.006512
(prod5, 6)	1149.992981	1099.999493	50.000000
(prod6, 1)	200.000000	200.000000	0.000000
(prod6, 2)	300.000000	300.000000	0.000000

(continues on next page)

(continued from previous page)

```

(prod6, 3)  400.000000  400.000000  0.000000
(prod6, 4)   0.000000   0.000000  0.000000
(prod6, 5)  300.000000  300.000000  0.000000
(prod6, 6)  550.000000  500.000000  50.000000
(prod7, 1)  100.000000  100.000000  0.000000
(prod7, 2)  150.000000  150.000000  0.000000
(prod7, 3)  199.999572  100.000000  99.999572
(prod7, 4)   0.000428  100.000000  0.000000
(prod7, 5)   0.000000   0.000000  0.000000
(prod7, 6)  110.000000  60.000000  50.000000
numMachinesDown (grinder, 1) -0.000000e+00
numMachinesDown (grinder, 2) -0.000000e+00
numMachinesDown (grinder, 3) -0.000000e+00
numMachinesDown (grinder, 4)  2.000000e+00
numMachinesDown (grinder, 5) -0.000000e+00
numMachinesDown (grinder, 6) -0.000000e+00
numMachinesDown (vdrill, 1)  0.000000e+00
numMachinesDown (vdrill, 2) -0.000000e+00
numMachinesDown (vdrill, 3) -0.000000e+00
numMachinesDown (vdrill, 4)  1.999994e+00
numMachinesDown (vdrill, 5)  3.955573e-06
numMachinesDown (vdrill, 6)  2.033239e-06
numMachinesDown (hdrill, 1)  1.000000e+00
numMachinesDown (hdrill, 2)  2.000000e+00
numMachinesDown (hdrill, 3) -0.000000e+00
numMachinesDown (hdrill, 4) -0.000000e+00
numMachinesDown (hdrill, 5) -0.000000e+00
numMachinesDown (hdrill, 6) -0.000000e+00
numMachinesDown (borer, 1)  0.000000e+00
numMachinesDown (borer, 2) -0.000000e+00
numMachinesDown (borer, 3)  1.996271e-06
numMachinesDown (borer, 4)  9.999940e-01
numMachinesDown (borer, 5) -0.000000e+00
numMachinesDown (borer, 6)  3.992541e-06
numMachinesDown (planer, 1)  0.000000e+00
numMachinesDown (planer, 2)  1.798545e-06
numMachinesDown (planer, 3)  1.996271e-06
numMachinesDown (planer, 4)  9.999957e-01
numMachinesDown (planer, 5)  8.120488e-16
numMachinesDown (planer, 6)  4.829074e-07
dtype: float64

```

Selected Rows from Table SOLUTIONSUMMARY

	Value
Label	
Solver	MILP
Algorithm	Branch and Cut
Objective Function	total_profit
Solution Status	Optimal within Relative Gap
Objective Value	108855.00961
Relative Gap	3.0634424E-6
Absolute Gap	0.3334720743
Primal Infeasibility	5.684342E-14
Bound Infeasibility	0
Integer Infeasibility	5.9888119E-6

(continues on next page)

(continued from previous page)

```

Best Bound          108855.34308
Nodes                1
Solutions Found     3
Iterations           377
Presolve Time       0.00
Solution Time       0.33
Selected Rows from Table PROBLEMSUMMARY

```

	Value
Label	
Objective Sense	Maximization
Objective Function	total_profit
Objective Type	Linear

Number of Variables	156
Bounded Above	0
Bounded Below	72
Bounded Below and Above	71
Free	0
Fixed	13
Binary	0
Integer	30

Number of Constraints	77
Linear LE (\leq)	30
Linear EQ ($=$)	47
Linear GE (\geq)	0
Linear Range	0

```

Constraint Coefficients 341
Out [8]: 108855.00960810453

```

4.1.5 Manpower Planning

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex5_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex05.html

Model

```

import sasoptpy as so
import pandas as pd
import math

def test(cas_conn):
    # Input data
    demand_data = pd.DataFrame([
        [0, 2000, 1500, 1000],
        [1, 1000, 1400, 1000],

```

(continues on next page)

(continued from previous page)

```

    [2, 500, 2000, 1500],
    [3, 0, 2500, 2000]
], columns=['period', 'unskilled', 'semiskilled', 'skilled'])\
.set_index(['period'])
worker_data = pd.DataFrame([
    ['unskilled', 0.25, 0.10, 500, 200, 1500, 50, 500],
    ['semiskilled', 0.20, 0.05, 800, 500, 2000, 50, 400],
    ['skilled', 0.10, 0.05, 500, 500, 3000, 50, 400]
], columns=['worker', 'waste_new', 'waste_old', 'recruit_ub',
            'redundancy_cost', 'overmanning_cost', 'shorttime_ub',
            'shorttime_cost']).set_index(['worker'])
retrain_data = pd.DataFrame([
    ['unskilled', 'semiskilled', 200, 400],
    ['semiskilled', 'skilled', math.inf, 500],
], columns=['worker1', 'worker2', 'retrain_ub', 'retrain_cost'])\
.set_index(['worker1', 'worker2'])
downgrade_data = pd.DataFrame([
    ['semiskilled', 'unskilled'],
    ['skilled', 'semiskilled'],
    ['skilled', 'unskilled']
], columns=['worker1', 'worker2'])

semiskill_retrain_frac_ub = 0.25
downgrade_leave_frac = 0.5
overmanning_ub = 150
shorttime_frac = 0.5

# Sets
WORKERS = worker_data.index.tolist()
PERIODS0 = demand_data.index.tolist()
PERIODS = PERIODS0[1:]
RETRAIN_PAIRS = [i for i, _ in retrain_data.iterrows()]
DOWNGRADE_PAIRS = [(row['worker1'], row['worker2'])
                    for _, row in downgrade_data.iterrows()]

waste_old = worker_data['waste_old']
waste_new = worker_data['waste_new']
redundancy_cost = worker_data['redundancy_cost']
overmanning_cost = worker_data['overmanning_cost']
shorttime_cost = worker_data['shorttime_cost']
retrain_cost = retrain_data['retrain_cost'].unstack(level=-1)

# Initialization
m = so.Model(name='manpower_planning', session=cas_conn)

# Variables
numWorkers = m.add_variables(WORKERS, PERIODS0, name='numWorkers', lb=0)
demand0 = demand_data.loc[0]
for w in WORKERS:
    numWorkers[w, 0].set_bounds(lb=demand0[w], ub=demand0[w])
numRecruits = m.add_variables(WORKERS, PERIODS, name='numRecruits', lb=0)
worker_ub = worker_data['recruit_ub']
for w in WORKERS:
    for p in PERIODS:
        numRecruits[w, p].set_bounds(ub=worker_ub[w])
numRedundant = m.add_variables(WORKERS, PERIODS, name='numRedundant', lb=0)
numShortTime = m.add_variables(WORKERS, PERIODS, name='numShortTime', lb=0)

```

(continues on next page)

(continued from previous page)

```

shorttime_ub = worker_data['shorttime_ub']
for w in WORKERS:
    for p in PERIODS:
        numShortTime.set_bounds(ub=shorttime_ub[w])
numExcess = m.add_variables(WORKERS, PERIODS, name='numExcess', lb=0)

retrain_ub = pd.DataFrame()
for i in PERIODS:
    retrain_ub[i] = retrain_data['retrain_ub']
numRetrain = m.add_variables(RETRAIN_PAIRS, PERIODS, name='numRetrain',
                             lb=0, ub=retrain_ub)

numDowngrade = m.add_variables(DOWNGRADE_PAIRS, PERIODS,
                               name='numDowngrade', lb=0)

# Constraints
m.add_constraints((numWorkers[w, p]
                  - (1-shorttime_frac) * numShortTime[w, p]
                  - numExcess[w, p] == demand_data.loc[p, w]
                  for w in WORKERS for p in PERIODS), name='demand')
m.add_constraints((numWorkers[w, p] ==
                  (1 - waste_old[w]) * numWorkers[w, p-1]
                  + (1 - waste_new[w]) * numRecruits[w, p]
                  + (1 - waste_old[w]) * numRetrain.sum('*', w, p)
                  + (1 - downgrade_leave_frac) *
                  numDowngrade.sum('*', w, p)
                  - numRetrain.sum(w, '*', p)
                  - numDowngrade.sum(w, '*', p)
                  - numRedundant[w, p]
                  for w in WORKERS for p in PERIODS),
                  name='flow_balance')
m.add_constraints((numRetrain['semiskilled', 'skilled', p] <=
                  semiskill_retrain_frac_ub * numWorkers['skilled', p]
                  for p in PERIODS), name='semiskill_retrain')
m.add_constraints((numExcess.sum('*', p) <= overmanning_ub
                  for p in PERIODS), name='overmanning')

# Objectives
redundancy = so.Expression(numRedundant.sum('*', '*'), name='redundancy')
cost = so.Expression(so.quick_sum(redundancy_cost[w] * numRedundant[w, p] +
                                  shorttime_cost[w] * numShortTime[w, p] +
                                  overmanning_cost[w] * numExcess[w, p]
                                  for w in WORKERS for p in PERIODS)
                    + so.quick_sum(
                        retrain_cost.loc[i, j] * numRetrain[i, j, p]
                        for i, j in RETRAIN_PAIRS for p in PERIODS),
                    name='cost')

m.set_objective(redundancy, sense=so.MIN, name='redundancy_obj')
res = m.solve()
if res is not None:
    print('Redundancy:', redundancy.get_value())
    print('Cost:', cost.get_value())
    print(so.get_solution_table(
        numWorkers, numRecruits, numRedundant, numShortTime, numExcess))
    print(so.get_solution_table(numRetrain))
    print(so.get_solution_table(numDowngrade))

m.set_objective(cost, sense=so.MIN, name='cost_obj')

```

(continues on next page)

(continued from previous page)

```

res = m.solve()
if res is not None:
    print('Redundancy:', redundancy.get_value())
    print('Cost:', cost.get_value())
    print(so.get_solution_table(numWorkers, numRecruits, numRedundant,
                                numShortTime, numExcess))

    print(so.get_solution_table(numRetrain))
    print(so.get_solution_table(numDowngrade))

return m.get_objective_value()

```

Output

```
In [1]: import os
```

```
In [2]: hostname = os.getenv('CASHOST')
```

```
In [3]: port = os.getenv('CASPORT')
```

```
In [4]: from swat import CAS
```

```
In [5]: cas_conn = CAS(hostname, port)
```

```
In [6]: import sasoptpy
```

```
In [7]: from examples.client_side.manpower_planning import test
```

```
In [8]: test(cas_conn)
```

NOTE: Initialized model manpower_planning.

NOTE: Added action set 'optimization'.

NOTE: Converting model manpower_planning to OPTMODEL.

NOTE: Submitting OPTMODEL code to CAS server.

NOTE: Problem generation will use 8 threads.

NOTE: The problem has 63 variables (0 free, 3 fixed).

NOTE: The problem has 24 linear constraints (6 LE, 18 EQ, 0 GE, 0 range).

NOTE: The problem has 108 linear constraint coefficients.

NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The OPTMODEL presolver is disabled for linear problems.

NOTE: The LP presolver value AUTOMATIC is applied.

NOTE: The LP presolver time is 0.01 seconds.

NOTE: The LP presolver removed 36 variables and 12 constraints.

NOTE: The LP presolver removed 52 constraint coefficients.

NOTE: The presolved problem has 27 variables, 12 constraints, and 56 constraint_
 ↪coefficients.

NOTE: The LP solver is called.

NOTE: The Dual Simplex algorithm is used.

			Objective		
	Phase	Iteration	Value	Time	
	D	2	1	-1.032250E+03	0
	P	2	17	8.417969E+02	0

NOTE: Optimal.

NOTE: Objective = 841.796875.

NOTE: The Dual Simplex solve time is 0.01 seconds.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 63 rows and 6_
 ↪columns.

(continues on next page)

(continued from previous page)

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 24 rows and 4 columns.
 NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4 columns.

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4 columns.

Redundancy: 841.796875

Cost: 1668750.0

		numWorkers	numRecruits	numRedundant	numShortTime	numExcess
unskilled	0	2000.00000	NaN	NaN	NaN	NaN
unskilled	1	1157.03125	0.0	442.968750	50.0	132.03125
unskilled	2	675.00000	0.0	166.328125	50.0	150.00000
unskilled	3	175.00000	0.0	232.500000	50.0	150.00000
semiskilled	0	1500.00000	NaN	NaN	NaN	NaN
semiskilled	1	1442.96875	0.0	0.000000	50.0	17.96875
semiskilled	2	2025.00000	800.0	0.000000	50.0	0.00000
semiskilled	3	2500.00000	800.0	0.000000	0.0	0.00000
skilled	0	1000.00000	NaN	NaN	NaN	NaN
skilled	1	1025.00000	0.0	0.000000	50.0	0.00000
skilled	2	1500.00000	500.0	0.000000	0.0	0.00000
skilled	3	2000.00000	500.0	0.000000	0.0	0.00000

	numRetrain
(unskilled, semiskilled, 1)	200.000000
(unskilled, semiskilled, 2)	200.000000
(unskilled, semiskilled, 3)	200.000000
(semiskilled, skilled, 1)	256.250000
(semiskilled, skilled, 2)	262.276786
(semiskilled, skilled, 3)	364.285714

	numDowngrade
(semiskilled, unskilled, 1)	0.000000e+00
(semiskilled, unskilled, 2)	-1.421085e-14
(semiskilled, unskilled, 3)	0.000000e+00
(skilled, semiskilled, 1)	1.684375e+02
(skilled, semiskilled, 2)	1.729129e+02
(skilled, semiskilled, 3)	2.210714e+02
(skilled, unskilled, 1)	0.000000e+00
(skilled, unskilled, 2)	0.000000e+00
(skilled, unskilled, 3)	0.000000e+00

NOTE: Added action set 'optimization'.

NOTE: Converting model manpower_planning to OPTMODEL.

NOTE: Submitting OPTMODEL code to CAS server.

NOTE: Problem generation will use 8 threads.

NOTE: The problem has 63 variables (0 free, 3 fixed).

NOTE: The problem has 24 linear constraints (6 LE, 18 EQ, 0 GE, 0 range).

NOTE: The problem has 108 linear constraint coefficients.

NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The OPTMODEL presolver is disabled for linear problems.

NOTE: The LP presolver value AUTOMATIC is applied.

NOTE: The LP presolver time is 0.00 seconds.

NOTE: The LP presolver removed 38 variables and 13 constraints.

NOTE: The LP presolver removed 56 constraint coefficients.

NOTE: The presolved problem has 25 variables, 11 constraints, and 52 constraint coefficients.

NOTE: The LP solver is called.

NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	-4.018114E+04	0

(continues on next page)

(continued from previous page)

```

      D 2          6      4.986773E+05      0
NOTE: Optimal.
NOTE: Objective = 498677.28532.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 63 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 24 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↳columns.
Redundancy: 1423.7188365650968
Cost: 498677.2853185596
      numWorkers  numRecruits  numRedundant  numShortTime  numExcess
unskilled  0      2000.0      NaN      NaN      NaN      NaN
unskilled  1      1000.0      0.000000      812.500000      0.0      0.0
unskilled  2       500.0      0.000000      257.617729      0.0      0.0
unskilled  3        0.0      0.000000      353.601108      0.0      0.0
semiskilled 0      1500.0      NaN      NaN      NaN      NaN
semiskilled 1      1400.0      0.000000      0.000000      0.0      0.0
semiskilled 2      2000.0      800.000000      0.000000      0.0      0.0
semiskilled 3      2500.0      800.000000      0.000000      0.0      0.0
skilled    0      1000.0      NaN      NaN      NaN      NaN
skilled    1      1000.0      55.555556      0.000000      0.0      0.0
skilled    2      1500.0      500.000000      0.000000      0.0      0.0
skilled    3      2000.0      500.000000      0.000000      0.0      0.0
      numRetrain
(unskilled, semiskilled, 1)  0.000000
(unskilled, semiskilled, 2)  142.382271
(unskilled, semiskilled, 3)  96.398892
(semiskilled, skilled, 1)    0.000000
(semiskilled, skilled, 2)    105.263158
(semiskilled, skilled, 3)    131.578947
      numDowngrade
(semiskilled, unskilled, 1)  2.500000e+01
(semiskilled, unskilled, 2)  2.842171e-14
(semiskilled, unskilled, 3) -2.842171e-14
(skilled, semiskilled, 1)    0.000000e+00
(skilled, semiskilled, 2)    0.000000e+00
(skilled, semiskilled, 3)    0.000000e+00
(skilled, unskilled, 1)      0.000000e+00
(skilled, unskilled, 2)      1.136868e-13
(skilled, unskilled, 3)      1.421085e-14
Out [8]: 498677.2853185596

```

4.1.6 Refinery Optimization

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex6_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex06.html

Model

```
import sasoptpy as so
import pandas as pd
import numpy as np

def test(cas_conn, **kwargs):

    m = so.Model(name='refinery_optimization', session=cas_conn)

    crude_data = pd.DataFrame([
        ['crude1', 20000],
        ['crude2', 30000]
    ], columns=['crude', 'crude_ub']).set_index(['crude'])

    arc_data = pd.DataFrame([
        ['source', 'crude1', 6],
        ['source', 'crude2', 6],
        ['crude1', 'light_naphtha', 0.1],
        ['crude1', 'medium_naphtha', 0.2],
        ['crude1', 'heavy_naphtha', 0.2],
        ['crude1', 'light_oil', 0.12],
        ['crude1', 'heavy_oil', 0.2],
        ['crude1', 'residuum', 0.13],
        ['crude2', 'light_naphtha', 0.15],
        ['crude2', 'medium_naphtha', 0.25],
        ['crude2', 'heavy_naphtha', 0.18],
        ['crude2', 'light_oil', 0.08],
        ['crude2', 'heavy_oil', 0.19],
        ['crude2', 'residuum', 0.12],
        ['light_naphtha', 'regular_petrol', np.nan],
        ['light_naphtha', 'premium_petrol', np.nan],
        ['medium_naphtha', 'regular_petrol', np.nan],
        ['medium_naphtha', 'premium_petrol', np.nan],
        ['heavy_naphtha', 'regular_petrol', np.nan],
        ['heavy_naphtha', 'premium_petrol', np.nan],
        ['light_naphtha', 'reformed_gasoline', 0.6],
        ['medium_naphtha', 'reformed_gasoline', 0.52],
        ['heavy_naphtha', 'reformed_gasoline', 0.45],
        ['light_oil', 'jet_fuel', np.nan],
        ['light_oil', 'fuel_oil', np.nan],
        ['heavy_oil', 'jet_fuel', np.nan],
        ['heavy_oil', 'fuel_oil', np.nan],
        ['light_oil', 'light_oil_cracked', 2],
        ['light_oil_cracked', 'cracked_oil', 0.68],
        ['light_oil_cracked', 'cracked_gasoline', 0.28],
        ['heavy_oil', 'heavy_oil_cracked', 2],
        ['heavy_oil_cracked', 'cracked_oil', 0.75],
        ['heavy_oil_cracked', 'cracked_gasoline', 0.2],
        ['cracked_oil', 'jet_fuel', np.nan],
        ['cracked_oil', 'fuel_oil', np.nan],
        ['reformed_gasoline', 'regular_petrol', np.nan],
        ['reformed_gasoline', 'premium_petrol', np.nan],
        ['cracked_gasoline', 'regular_petrol', np.nan],
        ['cracked_gasoline', 'premium_petrol', np.nan],
        ['residuum', 'lube_oil', 0.5],
```

(continues on next page)

(continued from previous page)

```

    ['residuum', 'jet_fuel', np.nan],
    ['residuum', 'fuel_oil', np.nan],
    ], columns=['i', 'j', 'multiplier']).set_index(['i', 'j'])

octane_data = pd.DataFrame([
    ['light_naphtha', 90],
    ['medium_naphtha', 80],
    ['heavy_naphtha', 70],
    ['reformed_gasoline', 115],
    ['cracked_gasoline', 105],
    ], columns=['i', 'octane']).set_index(['i'])

petrol_data = pd.DataFrame([
    ['regular_petrol', 84],
    ['premium_petrol', 94],
    ], columns=['petrol', 'octane_lb']).set_index(['petrol'])

vapour_pressure_data = pd.DataFrame([
    ['light_oil', 1.0],
    ['heavy_oil', 0.6],
    ['cracked_oil', 1.5],
    ['residuum', 0.05],
    ], columns=['oil', 'vapour_pressure']).set_index(['oil'])

fuel_oil_ratio_data = pd.DataFrame([
    ['light_oil', 10],
    ['cracked_oil', 4],
    ['heavy_oil', 3],
    ['residuum', 1],
    ], columns=['oil', 'coefficient']).set_index(['oil'])

final_product_data = pd.DataFrame([
    ['premium_petrol', 700],
    ['regular_petrol', 600],
    ['jet_fuel', 400],
    ['fuel_oil', 350],
    ['lube_oil', 150],
    ], columns=['product', 'profit']).set_index(['product'])

vapour_pressure_ub = 1
crude_total_ub = 45000
naphtha_ub = 10000
cracked_oil_ub = 8000
lube_oil_lb = 500
lube_oil_ub = 1000
premium_ratio = 0.40

ARCS = arc_data.index.tolist()
arc_mult = arc_data['multiplier'].fillna(1)

FINAL_PRODUCTS = final_product_data.index.tolist()
final_product_data['profit'] = final_product_data['profit'] / 100
profit = final_product_data['profit']

ARCS = ARCS + [(i, 'sink') for i in FINAL_PRODUCTS]
flow = m.add_variables(ARCS, name='flow', lb=0)
NODES = np.unique([i for j in ARCS for i in j])

```

(continues on next page)

(continued from previous page)

```

m.set_objective(so.quick_sum(profit[i] * flow[i, 'sink']
                             for i in FINAL_PRODUCTS
                             if (i, 'sink') in ARCS),
               name='totalProfit', sense=so.MAX)

m.add_constraints((so.quick_sum(flow[a] for a in ARCS if a[0] == n) ==
                  so.quick_sum(arc_mult[a] * flow[a]
                              for a in ARCS if a[1] == n)
                  for n in NODES if n not in ['source', 'sink']),
                 name='flow_balance')

CRUDES = crude_data.index.tolist()
crudeDistilled = m.add_variables(CRUDES, name='crudesDistilled', lb=0)
crudeDistilled.set_bounds(ub=crude_data['crude_ub'])
m.add_constraints((flow[i, j] == crudeDistilled[i]
                  for (i, j) in ARCS if i in CRUDES), name='distillation')

OILS = ['light_oil', 'heavy_oil']
CRACKED_OILS = [i+'_cracked' for i in OILS]
oilCracked = m.add_variables(CRACKED_OILS, name='oilCracked', lb=0)
m.add_constraints((flow[i, j] == oilCracked[i] for (i, j) in ARCS
                  if i in CRACKED_OILS), name='cracking')

octane = octane_data['octane']
PETROLS = petrol_data.index.tolist()
octane_lb = petrol_data['octane_lb']
vapour_pressure = vapour_pressure_data['vapour_pressure']

m.add_constraints((so.quick_sum(octane[a[0]] * arc_mult[a] * flow[a]
                              for a in ARCS if a[1] == p)
                  >= octane_lb[p] *
                  so.quick_sum(arc_mult[a] * flow[a]
                              for a in ARCS if a[1] == p)
                  for p in PETROLS), name='blending_petrol')

m.add_constraint(so.quick_sum(vapour_pressure[a[0]] * arc_mult[a] * flow[a]
                              for a in ARCS if a[1] == 'jet_fuel') <=
                 vapour_pressure_ub *
                 so.quick_sum(arc_mult[a] * flow[a]
                              for a in ARCS if a[1] == 'jet_fuel'),
                 name='blending_jet_fuel')

fuel_oil_coefficient = fuel_oil_ratio_data['coefficient']
sum_fuel_oil_coefficient = sum(fuel_oil_coefficient)
m.add_constraints((sum_fuel_oil_coefficient * flow[a] ==
                  fuel_oil_coefficient[a[0]] * flow.sum('*', ['fuel_oil'])
                  for a in ARCS if a[1] == 'fuel_oil'),
                 name='blending_fuel_oil')

m.add_constraint(crudeDistilled.sum('*') <= crude_total_ub,
                 name='crude_total_ub')

m.add_constraint(so.quick_sum(flow[a] for a in ARCS
                              if a[0].find('naphtha') > -1 and
                              a[1] == 'reformed_gasoline')
                 <= naphtha_ub, name='naphtha_ub')

```

(continues on next page)

(continued from previous page)

```

m.add_constraint(so.quick_sum(flow[a] for a in ARCS if a[1] ==
                             'cracked_oil') <=
                cracked_oil_ub, name='cracked_oil_ub')

m.add_constraint(flow['lube_oil', 'sink'] == [lube_oil_lb, lube_oil_ub],
                name='lube_oil_range')

m.add_constraint(flow.sum('premium_petrol', '*') >= premium_ratio *
                flow.sum('regular_petrol', '*'), name='premium_ratio')

res = m.solve(**kwargs)
if res is not None:
    print(so.get_solution_table(crudeDistilled))
    print(so.get_solution_table(oilCracked))
    print(so.get_solution_table(flow))

    octane_sol = []
    for p in PETROLS:
        octane_sol.append(so.quick_sum(octane[a[0]] * arc_mult[a] *
                                       flow[a].get_value() for a in ARCS
                                       if a[1] == p) /
                          sum(arc_mult[a] * flow[a].get_value()
                              for a in ARCS if a[1] == p))
    octane_sol = pd.Series(octane_sol, name='octane_sol', index=PETROLS)
    print(so.get_solution_table(octane_sol, octane_lb))
    print(so.get_solution_table(vapour_pressure))
    vapour_pressure_sol = sum(vapour_pressure[a[0]] *
                              arc_mult[a] *
                              flow[a].get_value() for a in ARCS
                              if a[1] == 'jet_fuel') /\
        sum(arc_mult[a] * flow[a].get_value() for a in ARCS
            if a[1] == 'jet_fuel')
    print('Vapour_pressure_sol: {:.4f}'.format(vapour_pressure_sol))

    num_fuel_oil_ratio_sol = [arc_mult[a] * flow[a].get_value() /
                              sum(arc_mult[b] *
                                  flow[b].get_value()
                                  for b in ARCS if b[1] == 'fuel_oil')
                              for a in ARCS if a[1] == 'fuel_oil']
    num_fuel_oil_ratio_sol = pd.Series(num_fuel_oil_ratio_sol,
                                       name='num_fuel_oil_ratio_sol',
                                       index=[a[0] for a in ARCS
                                              if a[1] == 'fuel_oil'])
    print(so.get_solution_table(fuel_oil_coefficient,
                               num_fuel_oil_ratio_sol))

return m.get_objective_value()

```


Output

```
In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.refinery_optimization import test

In [8]: test(cas_conn)
NOTE: Initialized model refinery_optimization.
NOTE: Added action set 'optimization'.
NOTE: Converting model refinery_optimization to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 51 variables (0 free, 0 fixed).
NOTE: The problem has 46 linear constraints (4 LE, 38 EQ, 3 GE, 1 range).
NOTE: The problem has 158 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 29 variables and 30 constraints.
NOTE: The LP presolver removed 86 constraint coefficients.
NOTE: The presolved problem has 22 variables, 16 constraints, and 72 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2          1      9.878656E+05      0
      P 2          18      2.113651E+05      0
NOTE: Optimal.
NOTE: Objective = 211365.13477.
NOTE: The Dual Simplex solve time is 0.03 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 51 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 46 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
      crudesDistilled
crude1      15000.0
crude2      30000.0
      oilCracked
light_oil_cracked      4200.0
heavy_oil_cracked      3800.0
      flow
(source, crude1)      15000.000000
```

(continues on next page)

(continued from previous page)

```

(source, crude2)                30000.000000
(crude1, light_naphtha)         15000.000000
(crude1, medium_naphtha)        15000.000000
(crude1, heavy_naphtha)         15000.000000
(crude1, light_oil)             15000.000000
(crude1, heavy_oil)            15000.000000
(crude1, residuum)              15000.000000
(crude2, light_naphtha)         30000.000000
(crude2, medium_naphtha)        30000.000000
(crude2, heavy_naphtha)         30000.000000
(crude2, light_oil)             30000.000000
(crude2, heavy_oil)            30000.000000
(crude2, residuum)              30000.000000
(light_naphtha, regular_petrol)  3293.112993
(light_naphtha, premium_petrol) 2706.887007
(medium_naphtha, regular_petrol) 10500.000000
(medium_naphtha, premium_petrol) 0.000000
(heavy_naphtha, regular_petrol)  1315.334140
(heavy_naphtha, premium_petrol) 1677.804016
(light_naphtha, reformed_gasoline) 0.000000
(medium_naphtha, reformed_gasoline) 0.000000
(heavy_naphtha, reformed_gasoline) 5406.861844
(light_oil, jet_fuel)           0.000000
(light_oil, fuel_oil)           0.000000
(heavy_oil, jet_fuel)           4900.000000
(heavy_oil, fuel_oil)           0.000000
(light_oil, light_oil_cracked)  4200.000000
(light_oil_cracked, cracked_oil) 4200.000000
(light_oil_cracked, cracked_gasoline) 4200.000000
(heavy_oil, heavy_oil_cracked)  3800.000000
(heavy_oil_cracked, cracked_oil) 3800.000000
(heavy_oil_cracked, cracked_gasoline) 3800.000000
(cracked_oil, jet_fuel)         5706.000000
(cracked_oil, fuel_oil)         0.000000
(reformed_gasoline, regular_petrol) 0.000000
(reformed_gasoline, premium_petrol) 2433.087830
(cracked_gasoline, regular_petrol) 1936.000000
(cracked_gasoline, premium_petrol) 0.000000
(residuum, lube_oil)            1000.000000
(residuum, jet_fuel)            4550.000000
(residuum, fuel_oil)            0.000000
(premium_petrol, sink)          6817.778853
(regular_petrol, sink)          17044.447133
(jet_fuel, sink)                15156.000000
(fuel_oil, sink)                0.000000
(lube_oil, sink)                500.000000

      octane_sol octane_lb
petrol
regular_petrol      84.0      84
premium_petrol      94.0      94
      vapour_pressure
oil
light_oil           1.0
heavy_oil           0.6
cracked_oil         1.5
residuum            0.05
Vapour_pressure_sol: 0.7737

```

(continues on next page)

(continued from previous page)

```

            coefficient num_fuel_oil_ratio_sol
light_oil            10                nan
cracked_oil          4                nan
heavy_oil             3                nan
residuum              1                nan
Out[8]: 211365.13476893297

```

4.1.7 Mining Optimization

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex7_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex07.html

Model

```

import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='mining_optimization', session=cas_conn)

    mine_data = pd.DataFrame([
        ['mine1', 5, 2, 1.0],
        ['mine2', 4, 2.5, 0.7],
        ['mine3', 4, 1.3, 1.5],
        ['mine4', 5, 3, 0.5],
    ], columns=['mine', 'cost', 'extract_ub', 'quality']).\
        set_index(['mine'])

    year_data = pd.DataFrame([
        [1, 0.9],
        [2, 0.8],
        [3, 1.2],
        [4, 0.6],
        [5, 1.0],
    ], columns=['year', 'quality_required']).set_index(['year'])

    max_num_worked_per_year = 3
    revenue_per_ton = 10
    discount_rate = 0.10

    MINES = mine_data.index.tolist()
    cost = mine_data['cost']
    extract_ub = mine_data['extract_ub']
    quality = mine_data['quality']
    YEARS = year_data.index.tolist()
    quality_required = year_data['quality_required']

```

(continues on next page)

(continued from previous page)

```

isOpen = m.add_variables(MINES, YEARS, vartype=so.BIN, name='isOpen')
isWorked = m.add_variables(MINES, YEARS, vartype=so.BIN, name='isWorked')
extract = m.add_variables(MINES, YEARS, lb=0, name='extract')
[extract[i, j].set_bounds(ub=extract_ub[i]) for i in MINES for j in YEARS]

extractedPerYear = {j: extract.sum('*', j) for j in YEARS}
discount = {j: 1 / (1+discount_rate) ** (j-1) for j in YEARS}

totalRevenue = revenue_per_ton * \
    so.quick_sum(discount[j] * extractedPerYear[j] for j in YEARS)
totalCost = so.quick_sum(discount[j] * cost[i] * isOpen[i, j]
    for i in MINES for j in YEARS)
m.set_objective(totalRevenue-totalCost, sense=so.MAX, name='totalProfit')

m.add_constraints((extract[i, j] <= extract[i, j].ub * isWorked[i, j]
    for i in MINES for j in YEARS), name='link')

m.add_constraints((isWorked.sum('*', j) <= max_num_worked_per_year
    for j in YEARS), name='cardinality')

m.add_constraints((isWorked[i, j] <= isOpen[i, j] for i in MINES
    for j in YEARS), name='worked_implies_open')

m.add_constraints((isOpen[i, j] <= isOpen[i, j-1] for i in MINES
    for j in YEARS if j != 1), name='continuity')

m.add_constraints((so.quick_sum(quality[i] * extract[i, j] for i in MINES)
    == quality_required[j] * extractedPerYear[j]
    for j in YEARS), name='quality_con')

res = m.solve()
if res is not None:
    print(so.get_solution_table(isOpen, isWorked, extract))
    quality_sol = {j: so.quick_sum(quality[i] * extract[i, j].get_value()
        for i in MINES)
        / extractedPerYear[j].get_value() for j in YEARS}
    qs = so.dict_to_frame(quality_sol, ['quality_sol'])
    epy = so.dict_to_frame(extractedPerYear, ['extracted_per_year'])
    print(so.get_solution_table(epy, qs, quality_required))

return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

```

```
In [7]: from examples.client_side.mining_optimization import test
```

```
In [8]: test(cas_conn)
```

```
NOTE: Initialized model mining_optimization.
NOTE: Added action set 'optimization'.
NOTE: Converting model mining_optimization to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 60 variables (0 free, 0 fixed).
NOTE: The problem has 40 binary and 0 integer variables.
NOTE: The problem has 66 linear constraints (61 LE, 5 EQ, 0 GE, 0 range).
NOTE: The problem has 151 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 8 variables and 8 constraints.
NOTE: The MILP presolver removed 16 constraint coefficients.
NOTE: The MILP presolver modified 8 constraint coefficients.
NOTE: The presolved problem has 52 variables, 58 constraints, and 135 constraint_
↪coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.
```

	Node	Active	Sols	BestInteger	BestBound	Gap	Time
	0	1	14	96.5802313	157.7309278	38.77%	0
	0	1	14	96.5802313	150.9548680	36.02%	0
	0	1	14	96.5802313	147.3693449	34.46%	0
	0	1	15	146.8619974	146.8619974	0.00%	0
	0	0	15	146.8619974	146.8619974	0.00%	0

```
NOTE: The MILP solver added 7 cuts with 34 cut coefficients at the root.
NOTE: Optimal.
NOTE: Objective = 146.86199735.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 60 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 66 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4_
↪columns.
```

	isOpen	isWorked	extract
(mine1, 1)	1.000000	1.000000	2.000000e+00
(mine1, 2)	0.999994	0.000006	1.252000e-05
(mine1, 3)	0.999994	0.999994	1.950000e+00
(mine1, 4)	0.999994	0.999994	1.250007e-01
(mine1, 5)	0.999994	0.999994	1.999987e+00
(mine2, 1)	1.000000	0.000000	0.000000e+00
(mine2, 2)	1.000000	0.999995	2.499988e+00
(mine2, 3)	0.999998	-0.000000	0.000000e+00
(mine2, 4)	0.999998	0.999998	2.499994e+00
(mine2, 5)	0.999998	0.999998	2.166667e+00
(mine3, 1)	1.000000	1.000000	1.300000e+00
(mine3, 2)	1.000000	0.999998	1.299997e+00
(mine3, 3)	1.000000	1.000000	1.300000e+00
(mine3, 4)	1.000000	0.000001	3.477765e-07
(mine3, 5)	1.000000	1.000000	1.300000e+00
(mine4, 1)	1.000000	1.000000	2.450000e+00

(continues on next page)

(continued from previous page)

```
(mine4, 2)  1.000000  1.000000  2.200005e+00
(mine4, 3)  1.000000 -0.000000  0.000000e+00
(mine4, 4)  1.000000  1.000000  3.000000e+00
(mine4, 5) -0.000000 -0.000000  0.000000e+00
  extracted_per_year  quality_sol  quality_required
1             5.750000           0.9             0.9
2             6.000003           0.8             0.8
3             3.250000           1.2             1.2
4             5.624995           0.6             0.6
5             5.466654           1.0             1.0
Out[8]: 146.861997350257
```

4.1.8 Farm Planning

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex8_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex08.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='farm_planning', session=cas_conn)

    # Input Data

    cow_data_raw = []
    for age in range(12):
        if age < 2:
            row = {'age': age,
                  'init_num_cows': 10,
                  'acres_needed': 2/3.0,
                  'annual_loss': 0.05,
                  'bullock_yield': 0,
                  'heifer_yield': 0,
                  'milk_revenue': 0,
                  'grain_req': 0,
                  'sugar_beet_req': 0,
                  'labour_req': 10,
                  'other_costs': 50}
        else:
            row = {'age': age,
                  'init_num_cows': 10,
                  'acres_needed': 1,
                  'annual_loss': 0.02,
                  'bullock_yield': 1.1/2,
```

(continues on next page)

(continued from previous page)

```

        'heifer_yield': 1.1/2,
        'milk_revenue': 370,
        'grain_req': 0.6,
        'sugar_beet_req': 0.7,
        'labour_req': 42,
        'other_costs': 100}
    cow_data_raw.append(row)
cow_data = pd.DataFrame(cow_data_raw).set_index(['age'])
grain_data = pd.DataFrame([
    ['group1', 20, 1.1],
    ['group2', 30, 0.9],
    ['group3', 20, 0.8],
    ['group4', 10, 0.65]
], columns=['group', 'acres', 'yield']).set_index(['group'])
num_years = 5
num_acres = 200
bullock_revenue = 30
heifer_revenue = 40
dairy_cow_selling_age = 12
dairy_cow_selling_revenue = 120
max_num_cows = 130
sugar_beet_yield = 1.5
grain_cost = 90
grain_revenue = 75
grain_labour_req = 4
grain_other_costs = 15
sugar_beet_cost = 70
sugar_beet_revenue = 58
sugar_beet_labour_req = 14
sugar_beet_other_costs = 10
nominal_labour_cost = 4000
nominal_labour_hours = 5500
excess_labour_cost = 1.2
capital_outlay_unit = 200
num_loan_years = 10
annual_interest_rate = 0.15
max_decrease_ratio = 0.50
max_increase_ratio = 0.75

# Sets

AGES = cow_data.index.tolist()
init_num_cows = cow_data['init_num_cows']
acres_needed = cow_data['acres_needed']
annual_loss = cow_data['annual_loss']
bullock_yield = cow_data['bullock_yield']
heifer_yield = cow_data['heifer_yield']
milk_revenue = cow_data['milk_revenue']
grain_req = cow_data['grain_req']
sugar_beet_req = cow_data['sugar_beet_req']
cow_labour_req = cow_data['labour_req']
cow_other_costs = cow_data['other_costs']

YEARS = list(range(1, num_years+1))
YEARS0 = [0] + YEARS

# Variables

```

(continues on next page)

(continued from previous page)

```

numCows = m.add_variables(AGES + [dairy_cow_selling_age], YEARS0, lb=0,
                          name='numCows')
for age in AGES:
    numCows[age, 0].set_bounds(lb=init_num_cows[age],
                              ub=init_num_cows[age])
numCows[dairy_cow_selling_age, 0].set_bounds(lb=0, ub=0)

numBullocksSold = m.add_variables(YEARS, lb=0, name='numBullocksSold')
numHeifersSold = m.add_variables(YEARS, lb=0, name='numHeifersSold')

GROUPS = grain_data.index.tolist()
acres = grain_data['acres']
grain_yield = grain_data['yield']
grainAcres = m.add_variables(GROUPS, YEARS, lb=0, name='grainAcres')
for group in GROUPS:
    for year in YEARS:
        grainAcres[group, year].set_bounds(ub=acres[group])
grainBought = m.add_variables(YEARS, lb=0, name='grainBought')
grainSold = m.add_variables(YEARS, lb=0, name='grainSold')

sugarBeetAcres = m.add_variables(YEARS, lb=0, name='sugarBeetAcres')
sugarBeetBought = m.add_variables(YEARS, lb=0, name='sugarBeetBought')
sugarBeetSold = m.add_variables(YEARS, lb=0, name='sugarBeetSold')

numExcessLabourHours = m.add_variables(YEARS, lb=0,
                                       name='numExcessLabourHours')
capitalOutlay = m.add_variables(YEARS, lb=0, name='capitalOutlay')

yearly_loan_payment = (annual_interest_rate * capital_outlay_unit) /\
    (1 - (1+annual_interest_rate)**(-num_loan_years))

# Objective function

revenue = {year:
    bullock_revenue * numBullocksSold[year] +
    heifer_revenue * numHeifersSold[year] +
    dairy_cow_selling_revenue * numCows[dairy_cow_selling_age,
                                         year] +
    so.quick_sum(milk_revenue[age] * numCows[age, year]
                 for age in AGES) +
    grain_revenue * grainSold[year] +
    sugar_beet_revenue * sugarBeetSold[year]
    for year in YEARS}

cost = {year:
    grain_cost * grainBought[year] +
    sugar_beet_cost * sugarBeetBought[year] +
    nominal_labour_cost +
    excess_labour_cost * numExcessLabourHours[year] +
    so.quick_sum(cow_other_costs[age] * numCows[age, year]
                 for age in AGES) +
    so.quick_sum(grain_other_costs * grainAcres[group, year]
                 for group in GROUPS) +
    sugar_beet_other_costs * sugarBeetAcres[year] +
    so.quick_sum(yearly_loan_payment * capitalOutlay[y]
                 for y in YEARS if y <= year)

```

(continues on next page)

(continued from previous page)

```

        for year in YEARS}
profit = {year: revenue[year] - cost[year] for year in YEARS}

totalProfit = so.quick_sum(profit[year] -
                           yearly_loan_payment * (num_years - 1 + year) *
                           capitalOutlay[year] for year in YEARS)

m.set_objective(totalProfit, sense=so.MAX, name='totalProfit')

# Constraints

m.add_constraints((
    so.quick_sum(acres_needed[age] * numCows[age, year] for age in AGES) +
    so.quick_sum(grainAcres[group, year] for group in GROUPS) +
    sugarBeetAcres[year] <= num_acres
    for year in YEARS), name='num_acres')

m.add_constraints((
    numCows[age+1, year+1] == (1-annual_loss[age]) * numCows[age, year]
    for age in AGES if age != dairy_cow_selling_age
    for year in YEARS0 if year != num_years), name='aging')

m.add_constraints((
    numBullocksSold[year] == so.quick_sum(
        bullock_yield[age] * numCows[age, year] for age in AGES)
    for year in YEARS), name='numBullocksSold_def')

m.add_constraints((
    numCows[0, year] == so.quick_sum(
        heifer_yield[age] * numCows[age, year]
        for age in AGES) - numHeifersSold[year]
    for year in YEARS), name='numHeifersSold_def')

m.add_constraints((
    so.quick_sum(numCows[age, year] for age in AGES) <= max_num_cows +
    so.quick_sum(capitalOutlay[y] for y in YEARS if y <= year)
    for year in YEARS), name='max_num_cows_def')

grainGrown = {(group, year): grain_yield[group] * grainAcres[group, year]
               for group in GROUPS for year in YEARS}

m.add_constraints((
    so.quick_sum(grain_req[age] * numCows[age, year] for age in AGES) <=
    so.quick_sum(grainGrown[group, year] for group in GROUPS)
    + grainBought[year] - grainSold[year]
    for year in YEARS), name='grain_req_def')

sugarBeetGrown = {(year): sugar_beet_yield * sugarBeetAcres[year]
                  for year in YEARS}

m.add_constraints((
    so.quick_sum(sugar_beet_req[age] * numCows[age, year] for age in AGES)
    <=
    sugarBeetGrown[year] + sugarBeetBought[year] - sugarBeetSold[year]
    for year in YEARS), name='sugar_beet_req_def')

m.add_constraints((
    so.quick_sum(cow_labour_req[age] * numCows[age, year]
                 for age in AGES) +

```

(continues on next page)

(continued from previous page)

```

so.quick_sum(grain_labour_req * grainAcres[group, year]
              for group in GROUPS) +
sugar_beet_labour_req * sugarBeetAcres[year] <=
nominal_labour_hours + numExcessLabourHours[year]
for year in YEARS), name='labour_req_def')
m.add_constraints((profit[year] >= 0 for year in YEARS), name='cash_flow')

m.add_constraint(so.quick_sum(numCows[age, num_years] for age in AGES
                             if age >= 2) /
                sum(init_num_cows[age] for age in AGES if age >= 2) ==
                [1-max_decrease_ratio, 1+max_increase_ratio],
                name='final_dairy_cows_range')

res = m.solve()

if res is not None:
    so.pd.display_all()
    print(so.get_solution_table(numCows))
    revenue_df = so.dict_to_frame(revenue, cols=['revenue'])
    cost_df = so.dict_to_frame(cost, cols=['cost'])
    profit_df = so.dict_to_frame(profit, cols=['profit'])
    print(so.get_solution_table(numBullocksSold, numHeifersSold,
                               capitalOutlay, numExcessLabourHours,
                               revenue_df, cost_df, profit_df))
    gg_df = so.dict_to_frame(grainGrown, cols=['grainGrown'])
    print(so.get_solution_table(grainAcres, gg_df))
    sbg_df = so.dict_to_frame(sugarBeetGrown, cols=['sugarBeetGrown'])
    print(so.get_solution_table(
        grainBought, grainSold, sugarBeetAcres,
        sbg_df, sugarBeetBought, sugarBeetSold))
    num_acres = m.get_constraint('num_acres')
    na_df = num_acres.get_expressions()
    max_num_cows_con = m.get_constraint('max_num_cows_def')
    mnc_df = max_num_cows_con.get_expressions()
    print(so.get_solution_table(na_df, mnc_df))

return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.farm_planning import test

```

(continues on next page)

(continued from previous page)

```
In [8]: test(cas_conn)
NOTE: Initialized model farm_planning.
NOTE: Added action set 'optimization'.
NOTE: Converting model farm_planning to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 143 variables (0 free, 13 fixed).
NOTE: The problem has 101 linear constraints (25 LE, 70 EQ, 5 GE, 1 range).
NOTE: The problem has 780 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 86 variables and 71 constraints.
NOTE: The LP presolver removed 551 constraint coefficients.
NOTE: The presolved problem has 57 variables, 30 constraints, and 229 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
```

		Objective	
	Phase Iteration	Value	Time
D 1	1	4.195000E+02	0
D 2	37	1.971960E+05	0
D 2	55	1.217192E+05	0

```
NOTE: Optimal.
NOTE: Objective = 121719.17286.
NOTE: The Dual Simplex solve time is 0.03 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 143 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 101 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.
```

	numCows
(0, 0)	10.000000
(0, 1)	22.800000
(0, 2)	11.584427
(0, 3)	0.000000
(0, 4)	0.000000
(0, 5)	0.000000
(1, 0)	10.000000
(1, 1)	9.500000
(1, 2)	21.660000
(1, 3)	11.005205
(1, 4)	0.000000
(1, 5)	0.000000
(2, 0)	10.000000
(2, 1)	9.500000
(2, 2)	9.025000
(2, 3)	20.577000
(2, 4)	10.454945
(2, 5)	0.000000
(3, 0)	10.000000
(3, 1)	9.800000
(3, 2)	9.310000
(3, 3)	8.844500

(continues on next page)

(continued from previous page)

```
(3, 4) 20.165460
(3, 5) 10.245846
(4, 0) 10.000000
(4, 1) 9.800000
(4, 2) 9.604000
(4, 3) 9.123800
(4, 4) 8.667610
(4, 5) 19.762151
(5, 0) 10.000000
(5, 1) 9.800000
(5, 2) 9.604000
(5, 3) 9.411920
(5, 4) 8.941324
(5, 5) 8.494258
(6, 0) 10.000000
(6, 1) 9.800000
(6, 2) 9.604000
(6, 3) 9.411920
(6, 4) 9.223682
(6, 5) 8.762498
(7, 0) 10.000000
(7, 1) 9.800000
(7, 2) 9.604000
(7, 3) 9.411920
(7, 4) 9.223682
(7, 5) 9.039208
(8, 0) 10.000000
(8, 1) 9.800000
(8, 2) 9.604000
(8, 3) 9.411920
(8, 4) 9.223682
(8, 5) 9.039208
(9, 0) 10.000000
(9, 1) 9.800000
(9, 2) 9.604000
(9, 3) 9.411920
(9, 4) 9.223682
(9, 5) 9.039208
(10, 0) 10.000000
(10, 1) 9.800000
(10, 2) 9.604000
(10, 3) 9.411920
(10, 4) 9.223682
(10, 5) 9.039208
(11, 0) 10.000000
(11, 1) 9.800000
(11, 2) 9.604000
(11, 3) 9.411920
(11, 4) 9.223682
(11, 5) 9.039208
(12, 0) 0.000000
(12, 1) 9.800000
(12, 2) 9.604000
(12, 3) 9.411920
(12, 4) 9.223682
(12, 5) 9.039208
```

```
numBullocksSold numHeifersSold capitalOutlay numExcessLabourHours \
```

(continues on next page)

(continued from previous page)

```

1      53.735000      30.935000      0.0      0.0
2      52.341850      40.757423      0.0      0.0
3      57.435807      57.435807      0.0      0.0
4      56.964286      56.964286      0.0      0.0
5      50.853436      50.853436      0.0      0.0

      revenue      cost      profit
1  41494.530000  19588.466667  21906.063333
2  41153.336497  19264.639818  21888.696679
3  45212.490308  19396.435208  25816.055100
4  45860.056078  19034.285714  26825.770363
5  42716.941438  17434.354053  25282.587385

      grainAcres  grainGrown
(group1, 1)  20.000000  22.000000
(group1, 2)  20.000000  22.000000
(group1, 3)  20.000000  22.000000
(group1, 4)  20.000000  22.000000
(group1, 5)  20.000000  22.000000
(group2, 1)  0.000000  0.000000
(group2, 2)  0.000000  0.000000
(group2, 3)  3.134152  2.820737
(group2, 4)  0.000000  0.000000
(group2, 5)  0.000000  0.000000
(group3, 1)  0.000000  0.000000
(group3, 2)  0.000000  0.000000
(group3, 3)  0.000000  0.000000
(group3, 4)  0.000000  0.000000
(group3, 5)  0.000000  0.000000
(group4, 1)  0.000000  0.000000
(group4, 2)  0.000000  0.000000
(group4, 3)  0.000000  0.000000
(group4, 4)  0.000000  0.000000
(group4, 5)  0.000000  0.000000

      grainBought  grainSold  sugarBeetAcres  sugerBeetGrown  sugarBeetBought  \
1  36.620000      0.0      60.766667      91.150000      0.0
2  35.100200      0.0      62.670049      94.005073      0.0
3  37.836507      0.0      65.100304      97.650456      0.0
4  40.142857      0.0      76.428571      114.642857      0.0
5  33.476475      0.0      87.539208      131.308812      0.0

      sugarBeetSold
1  22.760000
2  27.388173
3  24.550338
4  42.142857
5  66.586258

      num_acres  max_num_cows_def
1  200.0      130.000000
2  200.0      128.411427
3  200.0      115.433945
4  200.0      103.571429
5  200.0      92.460792
Out [8]: 121719.17286133638

```

4.1.9 Economic Planning

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex9_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex09.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='economic_planning', session=cas_conn)

    industry_data = pd.DataFrame([
        ['coal', 150, 300, 60],
        ['steel', 80, 350, 60],
        ['transport', 100, 280, 30]
    ], columns=['industry', 'init_stocks', 'init_productive_capacity',
               'demand']).set_index(['industry'])

    production_data = pd.DataFrame([
        ['coal', 0.1, 0.5, 0.4],
        ['steel', 0.1, 0.1, 0.2],
        ['transport', 0.2, 0.1, 0.2],
        ['manpower', 0.6, 0.3, 0.2],
    ], columns=['input', 'coal',
               'steel', 'transport']).set_index(['input'])

    productive_capacity_data = pd.DataFrame([
        ['coal', 0.0, 0.7, 0.9],
        ['steel', 0.1, 0.1, 0.2],
        ['transport', 0.2, 0.1, 0.2],
        ['manpower', 0.4, 0.2, 0.1],
    ], columns=['input', 'coal',
               'steel', 'transport']).set_index(['input'])

    manpower_capacity = 470
    num_years = 5

    YEARS = list(range(1, num_years+1))
    YEARS0 = [0] + list(YEARS)
    INDUSTRIES = industry_data.index.tolist()

    init_stocks = industry_data['init_stocks']
    init_productive_capacity = industry_data['init_productive_capacity']
    demand = industry_data['demand']

    production_coeff = so.flatten_frame(production_data)
    productive_capacity_coeff = so.flatten_frame(productive_capacity_data)
```

(continues on next page)

(continued from previous page)

```

static_production = m.add_variables(INDUSTRIES, lb=0,
                                   name='static_production')
m.set_objective(0, sense=so.MIN, name='Zero')
m.add_constraints((static_production[i] == demand[i] +
                   so.quick_sum(
                       production_coeff[i, j] * static_production[j]
                       for j in INDUSTRIES) for i in INDUSTRIES),
                  name='static_con')

m.solve()
print(so.get_value_table(static_production))

final_demand = so.get_value_table(
    static_production)['static_production']

production = m.add_variables(INDUSTRIES, range(0, num_years+2), lb=0,
                             name='production')
stock = m.add_variables(INDUSTRIES, range(0, num_years+2), lb=0,
                        name='stock')
extra_capacity = m.add_variables(INDUSTRIES, range(2, num_years+3), lb=0,
                                name='extra_capacity')

productive_capacity = so.ImplicitVar(
    (init_productive_capacity[i] +
     so.quick_sum(extra_capacity[i, y] for y in range(2, year+1))
     for i in INDUSTRIES for year in range(1, num_years+2)),
    name='productive_capacity'
)

for i in INDUSTRIES:
    production[i, 0].set_bounds(ub=0)
    stock[i, 0].set_bounds(lb=init_stocks[i], ub=init_stocks[i])

total_productive_capacity = sum(productive_capacity[i, num_years]
                                for i in INDUSTRIES)
total_production = so.quick_sum(production[i, year] for i in INDUSTRIES
                                for year in [4, 5])
total_manpower = so.quick_sum(production_coeff['manpower', i] *
                              production[i, year+1] +
                              productive_capacity_coeff['manpower', i] *
                              extra_capacity[i, year+2]
                              for i in INDUSTRIES for year in YEARS)

continuity_con = m.add_constraints((
    stock[i, year] + production[i, year] ==
    (demand[i] if year in YEARS else 0) +
    so.quick_sum(production_coeff[i, j] * production[j, year+1] +
                 productive_capacity_coeff[i, j] *
                 extra_capacity[j, year+2] for j in INDUSTRIES) +
    stock[i, year+1]
    for i in INDUSTRIES for year in YEARS0), name='continuity_con')

manpower_con = m.add_constraints((
    so.quick_sum(production_coeff['manpower', j] * production[j, year] +
                 productive_capacity_coeff['manpower', j] *
                 extra_capacity[j, year+1]
                 for j in INDUSTRIES)

```

(continues on next page)

(continued from previous page)

```

    <= manpower_capacity for year in range(1, num_years+2)),
    name='manpower_con')

capacity_con = m.add_constraints((production[i, year] <=
                                productive_capacity[i, year]
                                for i in INDUSTRIES
                                for year in range(1, num_years+2))),
                                name='capacity_con')

for i in INDUSTRIES:
    production[i, num_years+1].set_bounds(lb=final_demand[i])

for i in INDUSTRIES:
    for year in [num_years+1, num_years+2]:
        extra_capacity[i, year].set_bounds(ub=0)

problem1 = so.Model(name='Problem1', session=cas_conn)
problem1.include(
    production, stock, extra_capacity, continuity_con, manpower_con,
    capacity_con, productive_capacity)
problem1.set_objective(total_productive_capacity, sense=so.MAX,
                       name='total_productive_capacity')

problem1.solve()
so.pd.display_dense()
print(so.get_value_table(production, stock, extra_capacity,
                        productive_capacity).sort_index())
print(so.get_value_table(manpower_con.get_expressions()))

# Problem 2

problem2 = so.Model(name='Problem2', session=cas_conn)
problem2.include(problem1)
problem2.set_objective(total_production, name='total_production',
                       sense=so.MAX)

for i in INDUSTRIES:
    for year in YEARS:
        continuity_con[i, year].set_rhs(0)
problem2.solve()
print(so.get_value_table(production, stock, extra_capacity,
                        productive_capacity).sort_index())
print(so.get_value_table(manpower_con.get_expressions()))

# Problem 3

problem3 = so.Model(name='Problem3', session=cas_conn)
problem3.include(production, stock, extra_capacity, continuity_con,
                 capacity_con)
problem3.set_objective(total_manpower, sense=so.MAX, name='total_manpower')
for i in INDUSTRIES:
    for year in YEARS:
        continuity_con[i, year].set_rhs(demand[i])
problem3.solve()
print(so.get_value_table(production, stock, extra_capacity,
                        productive_capacity).sort_index())
print(so.get_value_table(manpower_con.get_expressions()))

return problem3.get_objective_value()

```


Output

```
In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.economic_planning import test

In [8]: test(cas_conn)
NOTE: Initialized model economic_planning.
NOTE: Added action set 'optimization'.
NOTE: Converting model economic_planning to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 3 variables (0 free, 0 fixed).
NOTE: The problem has 3 linear constraints (0 LE, 3 EQ, 0 GE, 0 range).
NOTE: The problem has 9 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed all variables and constraints.
NOTE: Optimal.
NOTE: Objective = 0.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 3 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 3 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↳columns.
      static_production
coal              166.396761
steel             105.668016
transport         92.307692
NOTE: Initialized model Problem1.
NOTE: Added action set 'optimization'.
NOTE: Converting model Problem1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 60 variables (0 free, 12 fixed).
NOTE: The problem has 42 linear constraints (24 LE, 18 EQ, 0 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 15 variables and 3 constraints.
NOTE: The LP presolver removed 37 constraint coefficients.
```

(continues on next page)

(continued from previous page)

NOTE: The presolved problem has 45 variables, 39 constraints, and 218 constraint_↵
↵coefficients.

NOTE: The LP solver is called.

NOTE: The Dual Simplex algorithm is used.

	Phase	Iteration	Objective Value	Time
	D	2	2.683246E+04	0
	P	2	2.141875E+03	0

NOTE: Optimal.

NOTE: Objective = 2141.8751967.

NOTE: The Dual Simplex solve time is 0.03 seconds.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 60 rows and 6_↵
↵columns.

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 42 rows and 4 columns.

NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_↵
↵columns.

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_↵
↵columns.

		production	stock	extra_capacity	productive_capacity
coal	0	0.000000	1.500000e+02	NaN	NaN
coal	1	260.402615	0.000000e+00	NaN	300.000000
coal	2	293.406208	0.000000e+00	0.000000	300.000000
coal	3	300.000000	0.000000e+00	0.000000	300.000000
coal	4	17.948718	1.484480e+02	189.203132	489.203132
coal	5	166.396761	0.000000e+00	1022.672065	1511.875197
coal	6	166.396761	1.421085e-14	0.000000	1511.875197
coal	7	NaN	NaN	0.000000	NaN
steel	0	0.000000	8.000000e+01	NaN	NaN
steel	1	135.341540	1.228110e+01	NaN	350.000000
steel	2	181.659854	0.000000e+00	0.000000	350.000000
steel	3	193.090418	0.000000e+00	0.000000	350.000000
steel	4	105.668016	0.000000e+00	0.000000	350.000000
steel	5	105.668016	0.000000e+00	0.000000	350.000000
steel	6	105.668016	-1.456613e-13	0.000000	350.000000
steel	7	NaN	NaN	0.000000	NaN
transport	0	0.000000	1.000000e+02	NaN	NaN
transport	1	140.722422	6.240839e+00	NaN	280.000000
transport	2	200.580168	0.000000e+00	0.000000	280.000000
transport	3	267.152497	0.000000e+00	0.000000	280.000000
transport	4	92.307692	0.000000e+00	0.000000	280.000000
transport	5	92.307692	0.000000e+00	0.000000	280.000000
transport	6	92.307692	-3.907985e-14	0.000000	280.000000
transport	7	NaN	NaN	0.000000	NaN

manpower_con

1	224.988515
2	270.657715
3	367.038878
4	470.000000
5	150.000000
6	150.000000

NOTE: Initialized model Problem2.

NOTE: Added action set 'optimization'.

NOTE: Converting model Problem2 to OPTMODEL.

NOTE: Submitting OPTMODEL code to CAS server.

NOTE: Problem generation will use 8 threads.

NOTE: The problem has 60 variables (0 free, 12 fixed).

NOTE: The problem has 42 linear constraints (24 LE, 18 EQ, 0 GE, 0 range).

(continues on next page)

(continued from previous page)

NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 15 variables and 3 constraints.
 NOTE: The LP presolver removed 37 constraint coefficients.
 NOTE: The presolved problem has 45 variables, 39 constraints, and 218 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

	Phase	Iteration	Objective Value	Time	
	D	2	1	1.504360E+04	0
	P	2	46	2.618579E+03	0

NOTE: Optimal.
 NOTE: Objective = 2618.5791147.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 60 rows and 6_
 ↪columns.
 NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 42 rows and 4 columns.
 NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
 ↪columns.
 NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
 ↪columns.

		production	stock	extra_capacity	productive_capacity
coal	0	0.000000	150.000000	NaN	NaN
coal	1	184.818327	31.628509	NaN	300.000000
coal	2	430.504654	16.372454	1.305047e+02	430.504654
coal	3	430.504654	0.000000	0.000000e+00	430.504654
coal	4	430.504654	0.000000	-1.207321e-12	430.504654
coal	5	430.504654	0.000000	0.000000e+00	430.504654
coal	6	166.396761	324.107893	0.000000e+00	430.504654
coal	7	NaN	NaN	0.000000e+00	NaN
steel	0	0.000000	80.000000	NaN	NaN
steel	1	86.729504	11.532298	NaN	350.000000
steel	2	155.337478	0.000000	0.000000e+00	350.000000
steel	3	182.867219	0.000000	0.000000e+00	350.000000
steel	4	359.402270	0.000000	9.402270e+00	359.402270
steel	5	359.402270	176.535051	0.000000e+00	359.402270
steel	6	105.668016	490.269305	0.000000e+00	359.402270
steel	7	NaN	NaN	0.000000e+00	NaN
transport	0	0.000000	100.000000	NaN	NaN
transport	1	141.312267	0.000000	NaN	280.000000
transport	2	198.387943	0.000000	0.000000e+00	280.000000
transport	3	225.917684	0.000000	0.000000e+00	280.000000
transport	4	519.382633	0.000000	2.393826e+02	519.382633
transport	5	519.382633	293.464949	0.000000e+00	519.382633
transport	6	92.307692	750.539890	0.000000e+00	519.382633
transport	7	NaN	NaN	0.000000e+00	NaN
manpower_con					
1		217.374162			
2		344.581624			
3		384.165212			
4		470.000000			
5		470.000000			
6		150.000000			

(continues on next page)

(continued from previous page)

```

NOTE: Initialized model Problem3.
NOTE: Added action set 'optimization'.
NOTE: Converting model Problem3 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 60 variables (0 free, 12 fixed).
NOTE: The problem has 36 linear constraints (18 LE, 18 EQ, 0 GE, 0 range).
NOTE: The problem has 219 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 15 variables and 3 constraints.
NOTE: The LP presolver removed 31 constraint coefficients.
NOTE: The presolved problem has 45 variables, 33 constraints, and 188 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

		Objective	
Phase Iteration		Value	Time
D 2	1	1.464016E+05	0
D 2	54	2.450706E+03	0
P 2	56	2.450027E+03	0

```

NOTE: Optimal.
NOTE: Objective = 2450.0266228.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 60 rows and 6_
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 36 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↪columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↪columns.

```

		production	stock	extra_capacity	productive_capacity
coal	0	0.000000	150.000000	NaN	NaN
coal	1	251.792754	0.000000	NaN	300.000000
coal	2	316.015222	0.000000	16.015222	316.015222
coal	3	319.832020	0.000000	3.816798	319.832020
coal	4	366.349753	0.000000	46.517734	366.349753
coal	5	859.359606	0.000000	493.009853	859.359606
coal	6	859.359606	460.207993	0.000000	859.359606
coal	7	NaN	NaN	0.000000	NaN
steel	0	0.000000	80.000000	NaN	NaN
steel	1	134.794583	11.028028	NaN	350.000000
steel	2	175.041379	0.000000	0.000000	350.000000
steel	3	224.064039	0.000000	0.000000	350.000000
steel	4	223.136289	0.000000	0.000000	350.000000
steel	5	220.043787	0.000000	0.000000	350.000000
steel	6	350.000000	0.000000	0.000000	350.000000
steel	7	NaN	NaN	0.000000	NaN
transport	0	0.000000	100.000000	NaN	NaN
transport	1	143.558583	4.247230	NaN	280.000000
transport	2	181.676355	0.000000	0.000000	280.000000
transport	3	280.000000	0.000000	0.000000	280.000000
transport	4	279.072249	0.000000	0.000000	280.000000
transport	5	275.979748	0.000000	0.000000	280.000000
transport	6	195.539132	0.000000	0.000000	280.000000

(continues on next page)

(continued from previous page)

```

transport 7      NaN      NaN      0.000000      NaN
manpower_con
1    226.631832
2    279.983537
3    333.725517
4    539.769130
5    636.824849
6    659.723590
Out[8]: 2450.026622821294

```

4.1.10 Decentralization

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex10_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex10.html

Model

```

import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='decentralization', session=cas_conn)

    DEPTS = ['A', 'B', 'C', 'D', 'E']
    CITIES = ['Bristol', 'Brighton', 'London']

    benefit_data = pd.DataFrame([
        ['Bristol', 10, 15, 10, 20, 5],
        ['Brighton', 10, 20, 15, 15, 15]],
        columns=['city'] + DEPTS).set_index('city')

    comm_data = pd.DataFrame([
        ['A', 'B', 0.0],
        ['A', 'C', 1.0],
        ['A', 'D', 1.5],
        ['A', 'E', 0.0],
        ['B', 'C', 1.4],
        ['B', 'D', 1.2],
        ['B', 'E', 0.0],
        ['C', 'D', 0.0],
        ['C', 'E', 2.0],
        ['D', 'E', 0.7]], columns=['i', 'j', 'comm']).set_index(['i', 'j'])

    cost_data = pd.DataFrame([
        ['Bristol', 'Bristol', 5],
        ['Bristol', 'Brighton', 14],
        ['Bristol', 'London', 13],

```

(continues on next page)

(continued from previous page)

```

    ['Brighton', 'Brighton', 5],
    ['Brighton', 'London', 9],
    ['London', 'London', 10]], columns=['i', 'j', 'cost']).set_index(
        ['i', 'j'])

max_num_depts = 3

benefit = {}
for city in CITIES:
    for dept in DEPTS:
        try:
            benefit[dept, city] = benefit_data.loc[city, dept]
        except:
            benefit[dept, city] = 0

comm = {}
for row in comm_data.iterrows():
    (i, j) = row[0]
    comm[i, j] = row[1]['comm']
    comm[j, i] = comm[i, j]

cost = {}
for row in cost_data.iterrows():
    (i, j) = row[0]
    cost[i, j] = row[1]['cost']
    cost[j, i] = cost[i, j]

assign = m.add_variables(DEPTS, CITIES, vartype=so.BIN, name='assign')
IJKL = [(i, j, k, l)
         for i in DEPTS for j in CITIES for k in DEPTS for l in CITIES
         if i < k]
product = m.add_variables(IJKL, vartype=so.BIN, name='product')

totalBenefit = so.quick_sum(benefit[i, j] * assign[i, j]
                             for i in DEPTS for j in CITIES)

totalCost = so.quick_sum(comm[i, k] * cost[j, l] * product[i, j, k, l]
                          for (i, j, k, l) in IJKL)

m.set_objective(totalBenefit-totalCost, name='netBenefit', sense=so.MAX)

m.add_constraints((so.quick_sum(assign[dept, city] for city in CITIES)
                   == 1 for dept in DEPTS), name='assign_dept')

m.add_constraints((so.quick_sum(assign[dept, city] for dept in DEPTS)
                   <= max_num_depts for city in CITIES), name='cardinality')

product_def1 = m.add_constraints((assign[i, j] + assign[k, l] - 1
                                  <= product[i, j, k, l]
                                  for (i, j, k, l) in IJKL),
                                name='pd1')

product_def2 = m.add_constraints((product[i, j, k, l] <= assign[i, j]
                                  for (i, j, k, l) in IJKL),
                                name='pd2')

product_def3 = m.add_constraints((product[i, j, k, l] <= assign[k, l]

```

(continues on next page)

(continued from previous page)

```

        for (i, j, k, l) in IJKL),
        name='pd3')

m.solve()
print(m.get_problem_summary())

m.drop_constraints(product_def1)
m.drop_constraints(product_def2)
m.drop_constraints(product_def3)

m.add_constraints((
    so.quick_sum(product[i, j, k, l]
        for j in CITIES if (i, j, k, l) in IJKL) == assign[k, l]
    for i in DEPTS for k in DEPTS for l in CITIES if i < k),
    name='pd4')

m.add_constraints((
    so.quick_sum(product[i, j, k, l]
        for l in CITIES if (i, j, k, l) in IJKL) == assign[i, j]
    for k in DEPTS for i in DEPTS for j in CITIES if i < k),
    name='pd5')

m.solve()
print(m.get_problem_summary())
totalBenefit.set_name('totalBenefit')
totalCost.set_name('totalCost')
print(so.get_solution_table(totalBenefit, totalCost))
print(so.get_solution_table(assign).unstack(level=-1))

return m.get_objective_value()
```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.decentralization import test

In [8]: test(cas_conn)
NOTE: Initialized model decentralization.
NOTE: Added action set 'optimization'.
NOTE: Converting model decentralization to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 105 variables (0 free, 0 fixed).
```

(continues on next page)

(continued from previous page)

NOTE: The problem has 105 binary and 0 integer variables.
 NOTE: The problem has 278 linear constraints (183 LE, 5 EQ, 90 GE, 0 range).
 NOTE: The problem has 660 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The initial MILP heuristics are applied.
 NOTE: The MILP presolver value AUTOMATIC is applied.
 NOTE: The MILP presolver removed 0 variables and 120 constraints.
 NOTE: The MILP presolver removed 120 constraint coefficients.
 NOTE: The MILP presolver added 120 constraint coefficients.
 NOTE: The MILP presolver modified 0 constraint coefficients.
 NOTE: The presolved problem has 105 variables, 158 constraints, and 540 constraint
 ↪coefficients.

NOTE: The MILP solver is called.

NOTE: The parallel Branch and Cut algorithm is used.

NOTE: The Branch and Cut algorithm is using up to 8 threads.

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	2	-14.9000000	135.0000000	111.04%	0
0	1	2	-14.9000000	67.5000000	122.07%	0
0	1	2	-14.9000000	55.0000000	127.09%	0
0	1	3	8.1000000	55.0000000	85.27%	0
0	1	3	8.1000000	48.0000000	83.12%	0
0	1	3	8.1000000	44.8375000	81.93%	0
0	1	3	8.1000000	42.0000000	80.71%	0
0	1	3	8.1000000	39.0666667	79.27%	0
0	1	3	8.1000000	34.7500000	76.69%	0
0	1	3	8.1000000	33.3692308	75.73%	0
0	1	3	8.1000000	32.6500000	75.19%	0
0	1	3	8.1000000	31.9066667	74.61%	0
0	1	3	8.1000000	30.7000000	73.62%	0
0	1	3	8.1000000	30.1600000	73.14%	0
0	1	3	8.1000000	29.8800000	72.89%	0
0	1	3	8.1000000	29.8000000	72.82%	0
0	1	3	8.1000000	29.4722222	72.52%	0
0	1	3	8.1000000	28.9117647	71.98%	0
0	1	3	8.1000000	28.6716667	71.75%	0
0	1	3	8.1000000	28.5000000	71.58%	0
0	1	4	14.9000000	14.9000000	0.00%	0

NOTE: The MILP solver added 34 cuts with 185 cut coefficients at the root.

NOTE: Optimal.

NOTE: Objective = 14.9.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 105 rows and 6
 ↪columns.

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 278 rows and 4 columns.

NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4
 ↪columns.

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4
 ↪columns.

Selected Rows from Table PROBLEMSUMMARY

	Value
Label	
Objective Sense	Maximization
Objective Function	netBenefit
Objective Type	Linear
Number of Variables	105

(continues on next page)

(continued from previous page)

```

Bounded Above          0
Bounded Below          0
Bounded Below and Above 105
Free                   0
Fixed                  0
Binary                 105
Integer                0

Number of Constraints    278
Linear LE (<=)          183
Linear EQ (=)           5
Linear GE (>=)          90
Linear Range            0

Constraint Coefficients 660
NOTE: Added action set 'optimization'.
NOTE: Converting model decentralization to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 105 variables (0 free, 0 fixed).
NOTE: The problem has 105 binary and 0 integer variables.
NOTE: The problem has 68 linear constraints (3 LE, 65 EQ, 0 GE, 0 range).
NOTE: The problem has 270 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 0 constraints.
NOTE: The MILP presolver removed 0 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 105 variables, 68 constraints, and 270 constraint_
->coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.

```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	2	-28.1000000	135.0000000	120.81%	0
0	1	2	-28.1000000	30.0000000	193.67%	0
0	1	3	-16.3000000	30.0000000	154.33%	0
0	1	3	-16.3000000	30.0000000	154.33%	0

```

NOTE: The MILP solver added 4 cuts with 24 cut coefficients at the root.
      2      0      4      14.9000000      14.9000000      0.00%      0
NOTE: Optimal.
NOTE: Objective = 14.9.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 105 rows and 6_
->columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 68 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
->columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4_
->columns.
Selected Rows from Table PROBLEMSUMMARY

                                Value
Label
Objective Sense                 Maximization
Objective Function              netBenefit

```

(continues on next page)

(continued from previous page)

```

Objective Type          Linear
Number of Variables      105
Bounded Above           0
Bounded Below           0
Bounded Below and Above 105
Free                    0
Fixed                   0
Binary                  105
Integer                 0

Number of Constraints     68
Linear LE (<=)           3
Linear EQ (=)            65
Linear GE (>=)           0
Linear Range             0

Constraint Coefficients  270
  totalBenefit  totalCost
-      80.0      65.1
assign  (A, Bristol)    1.0
        (A, Brighton)   0.0
        (A, London)     0.0
        (B, Bristol)    0.0
        (B, Brighton)   1.0
        (B, London)     0.0
        (C, Bristol)    0.0
        (C, Brighton)   1.0
        (C, London)    -0.0
        (D, Bristol)    1.0
        (D, Brighton)   0.0
        (D, London)     0.0
        (E, Bristol)    0.0
        (E, Brighton)   1.0
        (E, London)     0.0
dtype: float64
Out [8]: 14.9

```

4.1.11 Optimal Wedding

Reference

SAS Blog: <https://blogs.sas.com/content/operations/2014/11/10/do-you-have-an-uncle-louie-optimal-wedding-seat-assignments/>

Model

```

import sasoptpy as so
import math

def test(cas_conn, num_guests=20, max_table_size=3, max_tables=None):

    m = so.Model("wedding", session=cas_conn)

    # Check max. tables
    if max_tables is None:
        max_tables = math.ceil(num_guests/max_table_size)

    # Sets
    guests = range(1, num_guests+1)
    tables = range(1, max_tables+1)
    guest_pairs = [[i, j] for i in guests for j in range(i+1, num_guests+1)]

    # Variables
    x = m.add_variables(guests, tables, vartype=so.BIN, name="x")
    unhappy = m.add_variables(tables, name="unhappy", lb=0)

    # Objective
    m.set_objective(unhappy.sum('*'), sense=so.MIN, name="obj")

    # Constraints
    m.add_constraints((x.sum(g, '*') == 1 for g in guests), name="assigncon")
    m.add_constraints((x.sum('*', t) <= max_table_size for t in tables),
                      name="tablesizecon")
    m.add_constraints((unhappy[t] >= abs(g-h)*(x[g, t] + x[h, t] - 1)
                      for t in tables for [g, h] in guest_pairs),
                      name="measurecon")

    # Solve
    res = m.solve(options={
        'with': 'milp', 'decomp': {'method': 'set'}, 'presolver': 'none'})

    if res is not None:

        print(so.get_solution_table(x))

        # Print assignments
        for t in tables:
            print('Table {} : [ '.format(t), end='')
            for g in guests:
                if x[g, t].get_value() == 1:
                    print('{} '.format(g), end='')
            print(']')

    return m.get_objective_value()

```

Output

```
In [1]: import os
```

```
In [2]: hostname = os.getenv('CASHOST')
```

```
In [3]: port = os.getenv('CASPORT')
```

```
In [4]: from swat import CAS
```

```
In [5]: cas_conn = CAS(hostname, port)
```

```
In [6]: import sasoptpy
```

```
In [7]: from examples.client_side.sas_optimal_wedding import test
```

```
In [8]: test(cas_conn)
```

```
NOTE: Initialized model wedding.
NOTE: Added action set 'optimization'.
NOTE: Converting model wedding to DataFrame.
NOTE: Uploading the problem DataFrame to the server.
NOTE: Cloud Analytic Services made the uploaded file available as table TMP2N24VK52_
↳in caslib CASUSER(casuser).
NOTE: The table TMP2N24VK52 has been created in caslib CASUSER(casuser) from binary_
↳data uploaded to Cloud Analytic Services.
NOTE: The problem wedding has 147 variables (140 binary, 0 integer, 0 free, 0 fixed).
NOTE: The problem has 1357 constraints (7 LE, 20 EQ, 1330 GE, 0 range).
NOTE: The problem has 4270 constraint coefficients.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value NONE is applied.
NOTE: The MILP solver is called.
NOTE: The Decomposition algorithm is used.
NOTE: The Decomposition algorithm is executing in the distributed computing_
↳environment in single-machine mode.
NOTE: The DECOMP method value SET is applied.
NOTE: All blocks are identical and the master model is set partitioning.
NOTE: The Decomposition algorithm is using an aggregate formulation and Ryan-Foster_
↳branching.
NOTE: The number of block threads has been reduced to 1 threads.
NOTE: The problem has a decomposable structure with 7 blocks. The largest block_
↳covers 14.08% of the constraints in the problem.
NOTE: The decomposition subproblems cover 147 (100%) variables and 1337 (98.53%)_
↳constraints.
NOTE: The deterministic parallel mode is enabled.
NOTE: The Decomposition algorithm is using up to 8 threads.
```

Iter	Best Bound	Master Objective	Best Integer	LP Gap	IP Gap	CPU Time	Real Time
.	0.0000	13.0000	13.0000	1.30e+01	1.30e+01	0	0
1	0.0000	13.0000	13.0000	1.30e+01	1.30e+01	0	0
.	0.0000	13.0000	13.0000	1.30e+01	1.30e+01	1	2
10	0.0000	13.0000	13.0000	1.30e+01	1.30e+01	1	2
18	4.2500	13.0000	13.0000	205.88%	205.88%	6	7
19	6.0000	13.0000	13.0000	116.67%	116.67%	6	7
.	6.0000	13.0000	13.0000	116.67%	116.67%	6	7
20	6.0000	13.0000	13.0000	116.67%	116.67%	6	7
21	9.5000	13.0000	13.0000	36.84%	36.84%	6	8
23	13.0000	13.0000	13.0000	0.00%	0.00%	7	8

(continues on next page)

(continued from previous page)

	Node	Active	Sols	Best Integer	Best Bound	Gap	CPU Time	Real Time
	0	1	3	13.0000	13.0000	0.00%	7	8
NOTE: The Decomposition algorithm used 8 threads.								
NOTE: The Decomposition algorithm time is 8.94 seconds.								
NOTE: Optimal.								
NOTE: Objective = 13.								
	x							
(1, 1)	1.0							
(1, 2)	0.0							
(1, 3)	0.0							
(1, 4)	0.0							
(1, 5)	0.0							
(1, 6)	0.0							
(1, 7)	0.0							
(2, 1)	1.0							
(2, 2)	0.0							
(2, 3)	0.0							
(2, 4)	0.0							
(2, 5)	0.0							
(2, 6)	0.0							
(2, 7)	0.0							
(3, 1)	1.0							
(3, 2)	0.0							
(3, 3)	0.0							
(3, 4)	0.0							
(3, 5)	0.0							
(3, 6)	0.0							
(3, 7)	0.0							
(4, 1)	0.0							
(4, 2)	1.0							
(4, 3)	0.0							
(4, 4)	0.0							
(4, 5)	0.0							
(4, 6)	0.0							
(4, 7)	0.0							
(5, 1)	0.0							
(5, 2)	1.0							
(5, 3)	0.0							
(5, 4)	0.0							
(5, 5)	0.0							
(5, 6)	0.0							
(5, 7)	0.0							
(6, 1)	0.0							
(6, 2)	1.0							
(6, 3)	0.0							
(6, 4)	0.0							
(6, 5)	0.0							
(6, 6)	0.0							
(6, 7)	0.0							
(7, 1)	0.0							
(7, 2)	0.0							
(7, 3)	1.0							
(7, 4)	0.0							
(7, 5)	0.0							
(7, 6)	0.0							
(7, 7)	0.0							

(continues on next page)

(continued from previous page)

```
(8, 1) 0.0
(8, 2) 0.0
(8, 3) 1.0
(8, 4) 0.0
(8, 5) 0.0
(8, 6) 0.0
(8, 7) 0.0
(9, 1) 0.0
(9, 2) 0.0
(9, 3) 1.0
(9, 4) 0.0
(9, 5) 0.0
(9, 6) 0.0
(9, 7) 0.0
(10, 1) 0.0
(10, 2) 0.0
(10, 3) 0.0
(10, 4) 1.0
(10, 5) 0.0
(10, 6) 0.0
(10, 7) 0.0
(11, 1) 0.0
(11, 2) 0.0
(11, 3) 0.0
(11, 4) 1.0
(11, 5) 0.0
(11, 6) 0.0
(11, 7) 0.0
(12, 1) 0.0
(12, 2) 0.0
(12, 3) 0.0
(12, 4) 1.0
(12, 5) 0.0
(12, 6) 0.0
(12, 7) 0.0
(13, 1) 0.0
(13, 2) 0.0
(13, 3) 0.0
(13, 4) 0.0
(13, 5) 1.0
(13, 6) 0.0
(13, 7) 0.0
(14, 1) 0.0
(14, 2) 0.0
(14, 3) 0.0
(14, 4) 0.0
(14, 5) 1.0
(14, 6) 0.0
(14, 7) 0.0
(15, 1) 0.0
(15, 2) 0.0
(15, 3) 0.0
(15, 4) 0.0
(15, 5) 1.0
(15, 6) 0.0
(15, 7) 0.0
(16, 1) 0.0
```

(continues on next page)

(continued from previous page)

```

(16, 2) 0.0
(16, 3) 0.0
(16, 4) 0.0
(16, 5) 0.0
(16, 6) 1.0
(16, 7) 0.0
(17, 1) 0.0
(17, 2) 0.0
(17, 3) 0.0
(17, 4) 0.0
(17, 5) 0.0
(17, 6) 1.0
(17, 7) 0.0
(18, 1) 0.0
(18, 2) 0.0
(18, 3) 0.0
(18, 4) 0.0
(18, 5) 0.0
(18, 6) 1.0
(18, 7) 0.0
(19, 1) 0.0
(19, 2) 0.0
(19, 3) 0.0
(19, 4) 0.0
(19, 5) 0.0
(19, 6) 0.0
(19, 7) 1.0
(20, 1) 0.0
(20, 2) 0.0
(20, 3) 0.0
(20, 4) 0.0
(20, 5) 0.0
(20, 6) 0.0
(20, 7) 1.0

```

```
Table 1 : [ 1 2 3 ]
```

```
Table 2 : [ 4 5 6 ]
```

```
Table 3 : [ 7 8 9 ]
```

```
Table 4 : [ 10 11 12 ]
```

```
Table 5 : [ 13 14 15 ]
```

```
Table 6 : [ 16 17 18 ]
```

```
Table 7 : [ 19 20 ]
```

```
Out [8]: 13.0
```

4.1.12 Kidney Exchange

Reference

SAS Blog: <https://blogs.sas.com/content/operations/2015/02/06/the-kidney-exchange-problem/>

Model

```
import sasoptpy as so
import random

def test(cas_conn, **kwargs):
    # Data generation
    n = 80
    p = 0.02

    random.seed(1)

    ARCS = {}
    for i in range(0, n):
        for j in range(0, n):
            if random.random() < p:
                ARCS[i, j] = random.random()

    max_length = 10

    # Model
    model = so.Model("kidney_exchange", session=cas_conn)

    # Sets
    NODES = set().union(*ARCS.keys())
    MATCHINGS = range(1, int(len(NODES)/2)+1)

    # Variables
    UseNode = model.add_variables(NODES, MATCHINGS, vartype=so.BIN,
                                  name="usenode")
    UseArc = model.add_variables(ARCS, MATCHINGS, vartype=so.BIN,
                                  name="usearc")
    Slack = model.add_variables(NODES, vartype=so.BIN, name="slack")

    print('Setting objective...')

    # Objective
    model.set_objective(so.quick_sum((ARCS[i, j] * UseArc[i, j, m]
                                       for [i, j] in ARCS for m in MATCHINGS)),
                        name="total_weight", sense=so.MAX)

    print('Adding constraints...')
    # Constraints
    Node_Packing = model.add_constraints((UseNode.sum(i, '*') + Slack[i] == 1
                                          for i in NODES), name="node_packing")
    Donate = model.add_constraints((UseArc.sum(i, '*', m) == UseNode[i, m]
                                    for i in NODES
                                    for m in MATCHINGS), name="donate")
    Receive = model.add_constraints((UseArc.sum('*', j, m) == UseNode[j, m]
                                    for j in NODES
                                    for m in MATCHINGS), name="receive")
    Cardinality = model.add_constraints((UseArc.sum('*', '*', m) <= max_length
                                       for m in MATCHINGS),
                                       name="cardinality")

    # Solve
```

(continues on next page)

(continued from previous page)

```

model.solve(options={'with': 'milp', 'maxtime': 300}, **kwargs)

# Define decomposition blocks
for i in NODES:
    for m in MATCHINGS:
        Donate[i, m].set_block(m-1)
        Receive[i, m].set_block(m-1)
for m in MATCHINGS:
    Cardinality[m].set_block(m-1)

model.solve(options={
    'with': 'milp', 'maxtime': 300, 'presolver': 'basic',
    'decomp': {'method': 'user'}}, **kwargs)

return model.get_objective_value()

```

Output

```
In [1]: import os
```

```
In [2]: hostname = os.getenv('CASHOST')
```

```
In [3]: port = os.getenv('CASPORT')
```

```
In [4]: from swat import CAS
```

```
In [5]: cas_conn = CAS(hostname, port)
```

```
In [6]: import sasoptpy
```

```
In [7]: from examples.client_side.sas_kidney_exchange import test
```

```
In [8]: test(cas_conn)
```

```
NOTE: Initialized model kidney_exchange.
```

```
Setting objective...
```

```
Adding constraints...
```

```
NOTE: Added action set 'optimization'.
```

```
NOTE: Converting model kidney_exchange to OPTMODEL.
```

```
NOTE: Submitting OPTMODEL code to CAS server.
```

```
NOTE: Problem generation will use 8 threads.
```

```
NOTE: The problem has 8133 variables (0 free, 0 fixed).
```

```
NOTE: The problem has 8133 binary and 0 integer variables.
```

```
NOTE: The problem has 5967 linear constraints (38 LE, 5929 EQ, 0 GE, 0 range).
```

```
NOTE: The problem has 24245 linear constraint coefficients.
```

```
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
```

```
NOTE: The remaining solution time after problem generation and solver initialization_
↪ is 299.85 seconds.
```

```
NOTE: The initial MILP heuristics are applied.
```

```
NOTE: The MILP presolver value AUTOMATIC is applied.
```

```
NOTE: The MILP presolver removed 6193 variables and 5357 constraints.
```

```
NOTE: The MILP presolver removed 17478 constraint coefficients.
```

```
NOTE: The MILP presolver modified 0 constraint coefficients.
```

```
NOTE: The presolved problem has 1940 variables, 610 constraints, and 6767 constraint_
↪ coefficients.
```

(continues on next page)

(continued from previous page)

```

NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 8 threads.
      Node   Active   Sols   BestInteger   BestBound   Gap   Time
        0      1      4    12.0775275    2279.8770216  99.47%   0
        0      1      4    12.0775275    18.3085704   34.03%   1
NOTE: The MILP solver's symmetry detection found 140 orbits. The largest orbit
↳ contains 37 variables.
      0      1      4    12.0775275    18.3085704   34.03%   1
      0      1      4    12.0775275    18.3085704   34.03%   1
      0      1      4    12.0775275    18.3085704   34.03%   1
      0      1      4    12.0775275    18.3085704   34.03%   1
NOTE: The MILP solver added 4 cuts with 196 cut coefficients at the root.
      11       8       5    17.1113590    18.1252274   5.59%   1
      28       6       6    17.1113590    18.0210902   5.05%   2
      30       5       7    17.1113590    18.0210902   5.05%   2
      40       6       8    17.1113590    18.0210902   5.05%   2
      66       0       8    17.1113590    17.1113590   0.00%   2
NOTE: Optimal.
NOTE: Objective = 17.111358985.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 8133 rows and 6
↳ columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 5967 rows and 4
↳ columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4
↳ columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4
↳ columns.
NOTE: Added action set 'optimization'.
NOTE: Converting model kidney_exchange to DataFrame.
NOTE: Cloud Analytic Services made the uploaded file available as table BLOCKSTABLE
↳ in caslib CASUSER(casuser).
NOTE: The table BLOCKSTABLE has been created in caslib CASUSER(casuser) from binary
↳ data uploaded to Cloud Analytic Services.
NOTE: Uploading the problem DataFrame to the server.
NOTE: Cloud Analytic Services made the uploaded file available as table TMPVJSPXXTL
↳ in caslib CASUSER(casuser).
NOTE: The table TMPVJSPXXTL has been created in caslib CASUSER(casuser) from binary
↳ data uploaded to Cloud Analytic Services.
NOTE: The problem kidney_exchange has 8133 variables (8133 binary, 0 integer, 0 free,
↳ 0 fixed).
NOTE: The problem has 5967 constraints (38 LE, 5929 EQ, 0 GE, 0 range).
NOTE: The problem has 24245 constraint coefficients.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value BASIC is applied.
NOTE: The MILP presolver removed 2685 variables and 1925 constraints.
NOTE: The MILP presolver removed 8005 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 5448 variables, 4042 constraints, and 16240
↳ constraint coefficients.
NOTE: The MILP solver is called.
NOTE: The Decomposition algorithm is used.
NOTE: The Decomposition algorithm is executing in the distributed computing
↳ environment in single-machine mode.
NOTE: The DECOMP method value USER is applied.
NOTE: All blocks are identical and the master model is set partitioning.
NOTE: The Decomposition algorithm is using an aggregate formulation and Ryan-Foster
↳ branching.

```

(continues on next page)

(continued from previous page)

NOTE: The number of block threads has been reduced to 1 threads.

NOTE: The problem has a decomposable structure with 38 blocks. The largest block covers 2.598% of the constraints in the problem.

NOTE: The decomposition subproblems cover 5396 (99.05%) variables and 3990 (98.71%) constraints.

NOTE: The deterministic parallel mode is enabled.

NOTE: The Decomposition algorithm is using up to 8 threads.

Iter	Best Bound	Master Objective	Best Integer	LP Gap	IP Gap	CPU Time	Real Time
.	283.4155	10.5814	10.5814	96.27%	96.27%	1	1
1	259.0121	10.5814	10.5814	95.91%	95.91%	1	1
2	230.6758	10.5814	10.5814	95.41%	95.41%	1	2
3	204.2627	10.5814	10.5814	94.82%	94.82%	1	2
4	192.9770	14.7394	14.7394	92.36%	92.36%	2	2
6	162.6582	15.6274	15.6274	90.39%	90.39%	6	6
7	140.2584	15.6274	15.6274	88.86%	88.86%	6	7
8	109.9454	15.6274	15.6274	85.79%	85.79%	6	7
9	65.4530	16.1007	15.6274	75.40%	76.12%	7	8
10	65.4530	16.1007	17.1114	75.40%	73.86%	7	8
11	51.8662	17.1114	17.1114	67.01%	67.01%	7	8
14	25.6849	17.1114	17.1114	33.38%	33.38%	7	9
15	17.1114	17.1114	17.1114	0.00%	0.00%	8	9
Node	Active	Sols	Best Integer	Best Bound	Gap	CPU Time	Real Time
0	1	9	17.1114	17.1114	0.00%	8	9

NOTE: The Decomposition algorithm used 8 threads.

NOTE: The Decomposition algorithm time is 9.93 seconds.

NOTE: Optimal.

NOTE: Objective = 17.111358985.

Out [8]: 17.11135898487

4.1.13 Multiobjective

Reference

https://go.documentation.sas.com/?cdcId=pgmsascdc&cdcVersion=9.4_3.4&docsetId=ormpug&docsetTarget=ormpug_lsosolver_examples07.htm&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/lsoe10.html

Model

```
import sasoptpy as so

def test(cas_conn, sols=False):

    m = so.Model(name='multiobjective', session=cas_conn)

    x = m.add_variables([1, 2], lb=0, ub=5, name='x')

    f1 = m.set_objective((x[1]-1)**2 + (x[1] - x[2])**2, name='f1', sense=so.MIN)
    f2 = m.append_objective((x[1]-x[2])**2 + (x[2] - 3)**2, name='f2', sense=so.MIN)
```

(continues on next page)

(continued from previous page)

```

m.solve(verbose=True, options={'with': 'blackbox', 'obj': (f1, f2), 'logfreq': 50}
↪)

print('f1', f1.get_value())
print('f2', f2.get_value())

if sols:
    return dict(solutions=cas_conn.CASTable('allsols').to_frame(),
                x=x, f1=f1, f2=f2)
else:
    return f1.get_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.multiobjective import test

In [8]: response = test(cas_conn, sols=True)
NOTE: Initialized model multiobjective.
NOTE: Added action set 'optimization'.
NOTE: Converting model multiobjective to OPTMODEL.
var x {{1,2}} >= 0 <= 5;
min f1 = (x[1] - 1) ^ (2) + (x[1] - x[2]) ^ (2);
min f2 = (x[1] - x[2]) ^ (2) + (x[2] - 3) ^ (2);
solve with blackbox obj (f1 f2) / logfreq=50;
create data solution from [i]= {1..NVAR_} var=_VAR_.name value=_VAR_ lb=_VAR_.lb_
↪ub=_VAR_.ub rc=_VAR_.rc;
create data dual from [j] = {1..NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
↪dual;
create data allsols from [s]=(1..NVAR_) name=_VAR_[s].name {j in 1..NSOL_} <col(
↪'sol_'||j)=_VAR_[s].sol[j]>;

NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 2 variables (0 free, 0 fixed).
NOTE: The problem has 0 linear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver removed 0 variables, 0 linear constraints, and 0_
↪nonlinear constraints.
NOTE: The black-box solver is using up to 8 threads.
NOTE: The black-box solver is using the EAGLS optimizer algorithm.
NOTE: The problem has 2 variables (0 integer, 2 continuous).

```

(continues on next page)

(continued from previous page)

NOTE: The problem has 0 constraints (0 linear, 0 nonlinear).

NOTE: The problem has 2 user-defined functions.

NOTE: The deterministic parallel mode is enabled.

Iteration	Nondom	Progress	Infeasibility	Evals	Time
1	4	.	0	84	0
51	877	0.0000811	0	2876	0
101	1654	0.0000123	0	5576	1
151	2290	0.000003230545	0	8181	1
201	2874	0.0000182	0	10796	2
251	3422	0.000003148003	0	13447	4
301	3847	0.000001559509	0	16046	5
351	4282	0.000001159917	0	18733	6
401	4712	0.000002423148	0	21315	7
428	4932	0.000000704951	0	22734	8

NOTE: Function convergence criteria reached.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 2 rows and 6 columns.

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 0 rows and 4 columns.

NOTE: The output table 'ALLSOLS' in caslib 'CASUSER(casuser)' has 2 rows and 4934 columns.

NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 14 rows and 4 columns.

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4 columns.

f1 0.01497094056129493

f2 4.721632618656377

```

In [9]: import matplotlib.pyplot as plt

In [10]: sols = response['solutions']

In [11]: x = response['x']

In [12]: f1 = response['f1']

In [13]: f2 = response['f2']

In [14]: tr = sols.transpose()

In [15]: scvalues = tr.iloc[2:]

In [16]: scvalues = scvalues.astype({0: float, 1: float})

In [17]: x[1].set_value(scvalues[0])

In [18]: x[2].set_value(scvalues[1])

In [19]: scvalues['f1'] = f1.get_value()


In [20]: scvalues['f2'] = f2.get_value()

In [21]: f = scvalues.plot.scatter(x='f1', y='f2')

In [22]: f.set_title('Multiobjective: Plot of Pareto-Optimal Set');

In [23]: f
Out[23]: <matplotlib.axes._subplots.AxesSubplot at 0x7f2fe96f6128>

```

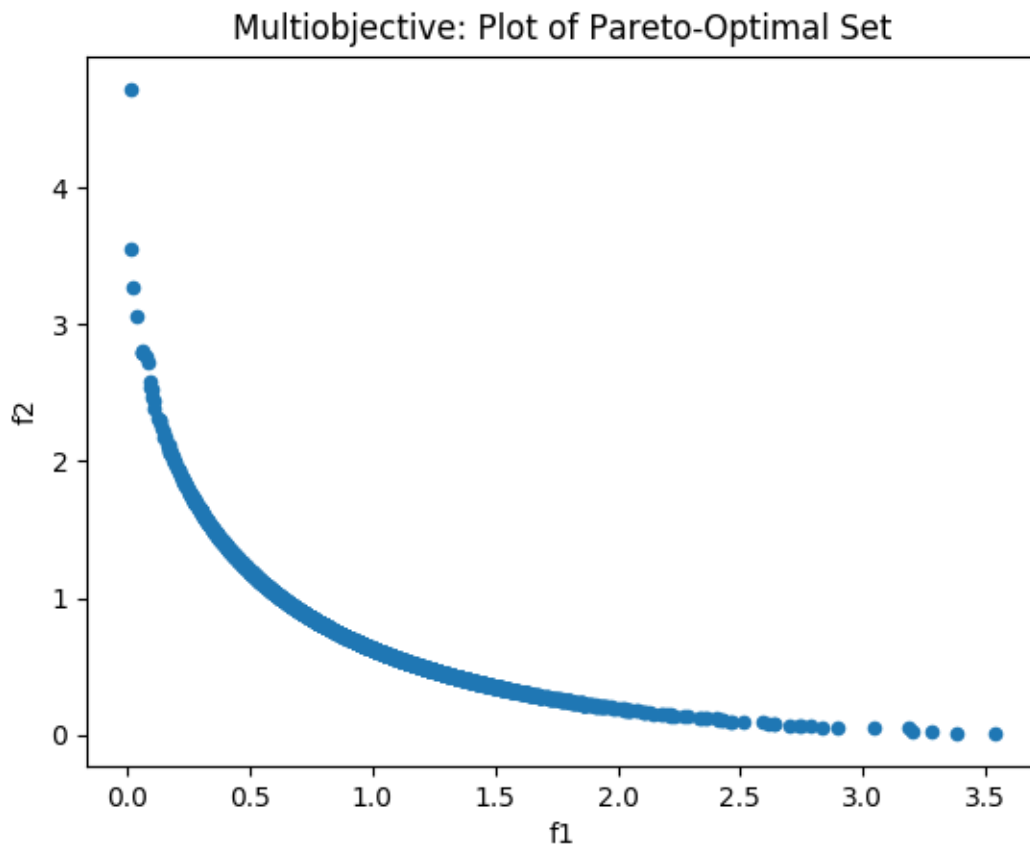

4.1.14 Least Squares

Reference

https://go.documentation.sas.com/?docsetId=ormpug&docsetTarget=ormpug_nlpsolver_gettingstarted05.htm&docsetVersion=15.1&locale=en

https://support.sas.com/documentation/onlinedoc/or/ex_code/151/nlpsg01.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn, data=None):

    # Use default data if not passed
    if data is None:
        data = pd.DataFrame([
            [4, 8, 43.71],
            [62, 5, 351.29],
```

(continues on next page)

(continued from previous page)

```

        [81, 62, 2878.91],
        [85, 75, 3591.59],
        [65, 54, 2058.71],
        [96, 84, 4487.87],
        [98, 29, 1773.52],
        [36, 33, 767.57],
        [30, 91, 1637.66],
        [3, 59, 215.28],
        [62, 57, 2067.42],
        [11, 48, 394.11],
        [66, 21, 932.84],
        [68, 24, 1069.21],
        [95, 30, 1770.78],
        [34, 14, 368.51],
        [86, 81, 3902.27],
        [37, 49, 1115.67],
        [46, 80, 2136.92],
        [87, 72, 3537.84],
    ], columns=['x1', 'x2', 'y'])

m = so.Model(name='least_squares', session=cas_conn)

# Regression model:  $L(a,b,c) = a * x1 + b * x2 + c * x1 * x2$ 
a = m.add_variable(name='a')
b = m.add_variable(name='b')
c = m.add_variable(name='c')

x1 = data['x1']
x2 = data['x2']
y = data['y']

err = m.add_implicit_variable((
    y[i] - (a * x1[i] + b * x2[i] + c * x1[i] * x2[i]) for i in data.index
), name='error')
m.set_objective(so.quick_sum(err[i]**2 for i in data.index),
                sense=so.MIN,
                name='total_error')
m.solve(verbose=True, options={'with': 'nlp'})
return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

```

```

In [7]: from examples.client_side.least_squares import test

In [8]: test(cas_conn)
NOTE: Initialized model least_squares.
NOTE: Added action set 'optimization'.
NOTE: Converting model least_squares to OPTMODEL.
    var a;
    var b;
    var c;
    impvar error_0 = - 4 * a - 8 * b - 32 * c + 43.71;
    impvar error_1 = - 62 * a - 5 * b - 310 * c + 351.29;
    impvar error_2 = - 81 * a - 62 * b - 5022 * c + 2878.91;
    impvar error_3 = - 85 * a - 75 * b - 6375 * c + 3591.59;
    impvar error_4 = - 65 * a - 54 * b - 3510 * c + 2058.71;
    impvar error_5 = - 96 * a - 84 * b - 8064 * c + 4487.87;
    impvar error_6 = - 98 * a - 29 * b - 2842 * c + 1773.52;
    impvar error_7 = - 36 * a - 33 * b - 1188 * c + 767.57;
    impvar error_8 = - 30 * a - 91 * b - 2730 * c + 1637.66;
    impvar error_9 = - 3 * a - 59 * b - 177 * c + 215.28;
    impvar error_10 = - 62 * a - 57 * b - 3534 * c + 2067.42;
    impvar error_11 = - 11 * a - 48 * b - 528 * c + 394.11;
    impvar error_12 = - 66 * a - 21 * b - 1386 * c + 932.84;
    impvar error_13 = - 68 * a - 24 * b - 1632 * c + 1069.21;
    impvar error_14 = - 95 * a - 30 * b - 2850 * c + 1770.78;
    impvar error_15 = - 34 * a - 14 * b - 476 * c + 368.51;
    impvar error_16 = - 86 * a - 81 * b - 6966 * c + 3902.27;
    impvar error_17 = - 37 * a - 49 * b - 1813 * c + 1115.67;
    impvar error_18 = - 46 * a - 80 * b - 3680 * c + 2136.92;
    impvar error_19 = - 87 * a - 72 * b - 6264 * c + 3537.84;
    min total_error = (- 4 * a - 8 * b - 32 * c + 43.71) ^ (2) + (- 62 * a - 5 * b -
    ↪ 310 * c + 351.29) ^ (2) + (- 81 * a - 62 * b - 5022 * c + 2878.91) ^ (2) + (- 85 *
    ↪ a - 75 * b - 6375 * c + 3591.59) ^ (2) + (- 65 * a - 54 * b - 3510 * c + 2058.71) ^
    ↪ (2) + (- 96 * a - 84 * b - 8064 * c + 4487.87) ^ (2) + (- 98 * a - 29 * b - 2842 *
    ↪ c + 1773.52) ^ (2) + (- 36 * a - 33 * b - 1188 * c + 767.57) ^ (2) + (- 30 * a - 91
    ↪ * b - 2730 * c + 1637.66) ^ (2) + (- 3 * a - 59 * b - 177 * c + 215.28) ^ (2) + (-
    ↪ 62 * a - 57 * b - 3534 * c + 2067.42) ^ (2) + (- 11 * a - 48 * b - 528 * c + 394.
    ↪ 11) ^ (2) + (- 66 * a - 21 * b - 1386 * c + 932.84) ^ (2) + (- 68 * a - 24 * b -
    ↪ 1632 * c + 1069.21) ^ (2) + (- 95 * a - 30 * b - 2850 * c + 1770.78) ^ (2) + (- 34
    ↪ * a - 14 * b - 476 * c + 368.51) ^ (2) + (- 86 * a - 81 * b - 6966 * c + 3902.27) ^
    ↪ (2) + (- 37 * a - 49 * b - 1813 * c + 1115.67) ^ (2) + (- 46 * a - 80 * b - 3680 *
    ↪ c + 2136.92) ^ (2) + (- 87 * a - 72 * b - 6264 * c + 3537.84) ^ (2);
    solve with nlp / ;
    create data solution from [i]= {1.._NVAR_} var=_VAR_.name value=_VAR_.lb=_VAR_.lb_
    ↪ ub=_VAR_.ub rc=_VAR_.rc;
    create data dual from [j] = {1.._NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
    ↪ dual;

NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 3 variables (3 free, 0 fixed).
NOTE: The problem has 0 linear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver removed 0 variables, 0 linear constraints, and 0
    ↪ nonlinear constraints.
NOTE: Using analytic derivatives for objective.
NOTE: The NLP solver is called.
NOTE: The Interior Point Direct algorithm is used.

```

(continues on next page)

(continued from previous page)

Iter	Objective Value	Infeasibility	Optimality Error
0	95424613	0	3.48646173
1	7.18629678	0	0.0000000055789

NOTE: Optimal.
 NOTE: Objective = 7.1862967833.
 NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 3 rows and 6_
 ↳columns.
 NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 0 rows and 4 columns.
 NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4_
 ↳columns.
 NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4_
 ↳columns.
Out [8]: 7.186296783293

Workspace Examples

4.1.15 Efficiency Analysis

Reference

https://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex22_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex22.html

Model

```
import sasoptpy as so
import pandas as pd
from sasoptpy.util import iterate, concat
from sasoptpy.actions import (
    read_data, create_data, cofor_loop, for_loop, solve, if_condition, diff,
    print_item, inline_condition)

def test(cas_conn, get_tables=False):

    input_list = pd.DataFrame(
        ['staff', 'showroom', 'pop1', 'pop2', 'alpha_enq', 'beta_enq'],
        columns=['input'])
    input_data = cas_conn.upload_frame(
        data=input_list, casout={'name': 'input_data', 'replace': True})

    output_list = pd.DataFrame(
        ['alpha_sales', 'beta_sales', 'profit'], columns=['output'])
    output_data = cas_conn.upload_frame(
        data=output_list, casout={'name': 'output_data', 'replace': True})

    problem_data = pd.DataFrame([
        ['Winchester', 7, 8, 10, 12, 8.5, 4, 2, 0.6, 1.5],
        ['Andover', 6, 6, 20, 30, 9, 4.5, 2.3, 0.7, 1.6],
        ['Basingstoke', 2, 3, 40, 40, 2, 1.5, 0.8, 0.25, 0.5],
        ['Poole', 14, 9, 20, 25, 10, 6, 2.6, 0.86, 1.9],
```

(continues on next page)

(continued from previous page)

```

['Woking', 10, 9, 10, 10, 11, 5, 2.4, 1, 2],
['Newbury', 24, 15, 15, 13, 25, 19, 8, 2.6, 4.5],
['Portsmouth', 6, 7, 50, 40, 8.5, 3, 2.5, 0.9, 1.6],
['Alresford', 8, 7.5, 5, 8, 9, 4, 2.1, 0.85, 2],
['Salisbury', 5, 5, 10, 10, 5, 2.5, 2, 0.65, 0.9],
['Guildford', 8, 10, 30, 35, 9.5, 4.5, 2.05, 0.75, 1.7],
['Alton', 7, 8, 7, 8, 3, 2, 1.9, 0.7, 0.5],
['Weybridge', 5, 6.5, 9, 12, 8, 4.5, 1.8, 0.63, 1.4],
['Dorchester', 6, 7.5, 10, 10, 7.5, 4, 1.5, 0.45, 1.45],
['Bridport', 11, 8, 8, 10, 10, 6, 2.2, 0.65, 2.2],
['Weymouth', 4, 5, 10, 10, 7.5, 3.5, 1.8, 0.62, 1.6],
['Portland', 3, 3.5, 3, 2, 2, 1.5, 0.9, 0.35, 0.5],
['Chichester', 5, 5.5, 8, 10, 7, 3.5, 1.2, 0.45, 1.3],
['Petersfield', 21, 12, 6, 8, 15, 8, 6, 0.25, 2.9],
['Petworth', 6, 5.5, 2, 2, 8, 5, 1.5, 0.55, 1.55],
['Midhurst', 3, 3.6, 3, 3, 2.5, 1.5, 0.8, 0.2, 0.45],
['Reading', 30, 29, 120, 80, 35, 20, 7, 2.5, 8],
['Southampton', 25, 16, 110, 80, 27, 12, 6.5, 3.5, 5.4],
['Bournemouth', 19, 10, 90, 12, 25, 13, 5.5, 3.1, 4.5],
['Henley', 7, 6, 5, 7, 8.5, 4.5, 1.2, 0.48, 2],
['Maidenhead', 12, 8, 7, 10, 12, 7, 4.5, 2, 2.3],
['Fareham', 4, 6, 1, 1, 7.5, 3.5, 1.1, 0.48, 1.7],
['Romsey', 2, 2.5, 1, 1, 2.5, 1, 0.4, 0.1, 0.55],
['Ringwood', 2, 3.5, 2, 2, 1.9, 1.2, 0.3, 0.09, 0.4],
], columns=['garage_name', 'staff', 'showroom', 'pop1', 'pop2', 'alpha_enq',
            'beta_enq', 'alpha_sales', 'beta_sales', 'profit'])
garage_data = cas_conn.upload_frame(
    data=problem_data, casout={'name': 'garage_data', 'replace': True})

with so.Workspace(name='efficiency_analysis', session=cas_conn) as w:
    inputs = so.Set(name='INPUTS', settype=so.string)
    read_data(table=input_data, index={'target': inputs, 'key': 'input'})

    outputs = so.Set(name='OUTPUTS', settype=so.string)
    read_data(table=output_data, index={'target': outputs, 'key': 'output'})

    garages = so.Set(name='GARAGES', settype=so.number)
    garage_name = so.ParameterGroup(garages, name='garage_name', ptype=so.string)
    input = so.ParameterGroup(inputs, garages, name='input')
    output = so.ParameterGroup(outputs, garages, name='output')
    r = read_data(table=garage_data, index={'target': garages, 'key': so.N},
                  columns=[garage_name])
    with iterate(inputs, 'i') as i:
        r.append({'index': i, 'target': input[i, so.N], 'column': i})
    with iterate(outputs, 'i') as i:
        r.append({'index': i, 'target': output[i, so.N], 'column': i})

    k = so.Parameter(name='k', ptype=so.number)
    efficiency_number = so.ParameterGroup(garages, name='efficiency_number')
    weight_sol = so.ParameterGroup(garages, garages, name='weight_sol')

    weight = so.VariableGroup(garages, name='Weight', lb=0)
    inefficiency = so.Variable(name='Inefficiency', lb=0)

    obj = so.Objective(inefficiency, name='Objective', sense=so.maximize)

    input_con = so.ConstraintGroup(

```

(continues on next page)

(continued from previous page)

```

        (so.expr_sum(input[i, j] * weight[j] for j in garages) <= input[i, k]
         for i in inputs), name='input_con')
    output_con = so.ConstraintGroup(
        (so.expr_sum(output[i, j] * weight[j] for j in garages) >= output[i, k] *
→ inefficiency
         for i in outputs), name='output_con')

    for kk in cofor_loop(garages):
        k.set_value(kk)
        solve()
        efficiency_number[k] = 1 / inefficiency.sol
        for j in for_loop(garages):
            def if_block():
                weight_sol[k, j] = weight[j].sol
            def else_block():
                weight_sol[k, j] = None
            if_condition(weight[j].sol > 1e-6, if_block, else_block)

    efficient_garages = so.Set(
        name='EFFICIENT_GARAGES',
        value=[j.sym for j in garages if j.sym.under_condition(efficiency_
→ number[j] >= 1)])
    inefficient_garages = so.Set(value=diff(garages, efficient_garages), name=
→ 'INEFFICIENT_GARAGES')

    p1 = print_item(garage_name, efficiency_number)
    ed = create_data(table='efficiency_data', index={'key': ['garage']}, columns=[
        garage_name, efficiency_number
    ])
    with iterate(inefficient_garages, 'inefficient_garage') as i:
        wd = create_data(table='weight_data_dense',
                        index={'key': [i], 'set': [i.get_set()]},
                        columns=[garage_name, efficiency_number])
        with iterate(efficient_garages, 'efficient_garage') as j:
            wd.append({
                'name': concat('w', j),
                'expression': weight_sol[i, j],
                'index': j
            })

    filtered_set = so.InlineSet(
        lambda: ((g1, g2)
                 for g1 in inefficient_garages
                 for g2 in efficient_garages
                 if inline_condition(weight_sol[g1, g2] != None)))
    wds = create_data(table='weight_data_sparse',
                    index={'key': ['i', 'j'], 'set': [filtered_set]},
                    columns=[weight_sol])

    print(w.to_optmodel())
    w.submit()

    print('Print Table:')
    print(p1.get_response())

    print('Efficiency Data:')
    print(ed.get_response())

```

(continues on next page)

(continued from previous page)

```

print('Weight Data (Dense):')
print(wd.get_response())

print('Weight Data (Sparse):')
print(wds.get_response())

if get_tables:
    return obj.get_value(), ed.get_response()
else:
    return obj.get_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.server_side.efficiency_analysis import test

```

```

In [8]: test(cas_conn)
NOTE: Cloud Analytic Services made the uploaded file available as table INPUT_DATA in
↳caslib CASUSER(casuser).
NOTE: The table INPUT_DATA has been created in caslib CASUSER(casuser) from binary
↳data uploaded to Cloud Analytic Services.
NOTE: Cloud Analytic Services made the uploaded file available as table OUTPUT_DATA
↳in caslib CASUSER(casuser).
NOTE: The table OUTPUT_DATA has been created in caslib CASUSER(casuser) from binary
↳data uploaded to Cloud Analytic Services.
NOTE: Cloud Analytic Services made the uploaded file available as table GARAGE_DATA
↳in caslib CASUSER(casuser).
NOTE: The table GARAGE_DATA has been created in caslib CASUSER(casuser) from binary
↳data uploaded to Cloud Analytic Services.
proc optmodel;
    set <str> INPUTS;
    read data INPUT_DATA into INPUTS=[input] ;
    set <str> OUTPUTS;
    read data OUTPUT_DATA into OUTPUTS=[output] ;
    set GARAGES;
    str garage_name {GARAGES};
    num input {INPUTS, GARAGES};
    num output {OUTPUTS, GARAGES};
    read data GARAGE_DATA into GARAGES=[_N_] garage_name {i in INPUTS} < input[i, _N_
↳]=col(i) > {i in OUTPUTS} < output[i, _N_]=col(i) >;
    num k;
    num efficiency_number {GARAGES};

```

(continues on next page)

(continued from previous page)

```

num weight_sol {GARAGES, GARAGES};
var Weight {{GARAGES}} >= 0;
var Inefficiency >= 0;
max Objective = Inefficiency;
con input_con {o21 in INPUTS} : input[o21, k] - (sum {j in GARAGES} (input[o21, j]_
↳ * Weight[j])) >= 0;
con output_con {o33 in OUTPUTS} : sum {j in GARAGES} (output[o33, j] * Weight[j]) -
↳ output[o33, k] * Inefficiency >= 0;
cofor {o46 in GARAGES} do;
    k = o46;
    solve;
    efficiency_number[k] = (1) / (Inefficiency.sol);
    for {o58 in GARAGES} do;
        if Weight[o58].sol > 1e-06 then do;
            weight_sol[k, o58] = Weight[o58].sol;
        end;
        else do;
            weight_sol[k, o58] = .;
        end;
    end;
end;
set EFFICIENT_GARAGES = {{o69 in GARAGES: efficiency_number[o69] >= 1}};
set INEFFICIENT_GARAGES = GARAGES diff EFFICIENT_GARAGES;
print garage_name efficiency_number;
create data efficiency_data from [garage] garage_name efficiency_number;
create data weight_data_dense from [inefficient_garage] = {{INEFFICIENT_GARAGES}}_
↳ garage_name efficiency_number {efficient_garage in EFFICIENT_GARAGES} < col('w' ||_
↳ efficient_garage)=(weight_sol[inefficient_garage, efficient_garage]) >;
create data weight_data_sparse from [i j] = {{o83 in INEFFICIENT_GARAGES, o85 in_
↳ EFFICIENT_GARAGES: weight_sol[o83, o85] ne .}} weight_sol;
quit;
NOTE: Added action set 'optimization'.
NOTE: There were 6 rows read from table 'INPUT_DATA' in caslib 'CASUSER(casuser)'.
NOTE: There were 3 rows read from table 'OUTPUT_DATA' in caslib 'CASUSER(casuser)'.
NOTE: There were 28 rows read from table 'GARAGE_DATA' in caslib 'CASUSER(casuser)'.
NOTE: The COFOR statement is executing in single-machine mode.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↳ coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

		Objective	
	Phase Iteration	Value	Time
	D 2	1	2.788571E+01
	P 2	6	1.000000E+00

```

NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.03 seconds.

```

(continues on next page)

(continued from previous page)

```

NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

	Phase	Iteration	Objective Value	Time
	D	2	6.185408E+01	0
	P	2	1.000000E+00	0

```

NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.03 seconds.
NOTE: Problem generation will use 6 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

	Phase	Iteration	Objective Value	Time
	D	2	6.669507E+01	0
	P	2	1.152977E+00	0

```

NOTE: Optimal.
NOTE: Objective = 1.1529771581.
NOTE: The Dual Simplex solve time is 0.02 seconds.
NOTE: Problem generation will use 5 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.01 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

(continues on next page)

(continued from previous page)

Phase	Iteration	Value	Time	
D	2	1	6.771196E+01	0
P	2	5	1.000000E+00	0

NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

Phase	Iteration	Objective Value	Time	
D	2	1	9.367804E+01	0
P	2	18	1.191606E+00	0

NOTE: Optimal.
NOTE: Objective = 1.1916056975.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

Phase	Iteration	Objective Value	Time	
D	2	1	6.282477E+01	0
P	2	7	1.000000E+00	0

NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.

(continues on next page)

(continued from previous page)

```

NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2          1      2.113425E+02      0
      P 2          7      1.141723E+00      0
NOTE: Optimal.
NOTE: Objective = 1.141723356.
NOTE: The Dual Simplex solve time is 0.00 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2          1      8.984164E+01      0
      P 2         20      1.190229E+00      0
NOTE: Optimal.
NOTE: Objective = 1.1902294108.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2          1      7.496160E+01      0
      P 2          7      1.000000E+00      0
NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).

```

(continues on next page)

(continued from previous page)

NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.

NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	6.137365E+01	0
P 2	9	1.011903E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.0119030842.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.

NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	5.430205E+01	0
P 2	18	1.018276E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.0182756046.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.

NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	9.121193E+01	0
P 2	17	1.170487E+00	0

(continues on next page)

(continued from previous page)

NOTE: Optimal.
 NOTE: Objective = 1.170487106.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	7.130206E+01	0
P 2	12	1.000000E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	7.942787E+01	0
P 2	15	1.090062E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.0900621118.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.

(continues on next page)

(continued from previous page)

```

NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2      1      3.333800E+01      0
      P 2      8      1.000000E+00      0
NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
      ↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2      1      3.269636E+01      0
      P 2      5      1.000000E+00      0
NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
      ↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
      Phase Iteration      Value      Time
      D 2      1      1.483009E+02      0
      P 2      12      1.000000E+00      0
NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.

```

(continues on next page)

(continued from previous page)

NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

	Phase	Iteration	Objective Value	Time	
	D	2	1	7.522880E+01	0
	P	2	9	1.000000E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

	Phase	Iteration	Objective Value	Time	
	D	2	1	8.552410E+01	0
	P	2	14	1.160239E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.1602389558.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
 ↪coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

	Phase	Iteration	Objective Value	Time	
	D	2	1	6.743350E+01	0
	P	2	20	1.029858E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.0298577511.
 NOTE: The Dual Simplex solve time is 0.01 seconds.

(continues on next page)

(continued from previous page)

```

NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

	Phase	Iteration	Objective Value	Time
	D	2	1.119904E+02	0
	P	2	1.000000E+00	0

```

NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

	Phase	Iteration	Objective Value	Time
	D	2	3.162476E+01	0
	P	2	1.000000E+00	0

```

NOTE: Optimal.
NOTE: Objective = 1.
NOTE: The Dual Simplex solve time is 0.00 seconds.
NOTE: Problem generation will use 7 threads.
NOTE: The problem has 29 variables (0 free, 0 fixed).
NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
NOTE: The problem has 255 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_
↪coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.

```

(continues on next page)

(continued from previous page)

Phase	Iteration	Value	Time	
D	2	1	1.462372E+02	0
P	2	9	1.205868E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.2058683067.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 8 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_↵
 ↵coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

Phase	Iteration	Objective Value	Time	
D	2	1	9.913941E+01	0
P	2	16	1.228251E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.2282514234.
 NOTE: The Dual Simplex solve time is 0.01 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.
 NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_↵
 ↵coefficients.
 NOTE: The LP solver is called.
 NOTE: The Dual Simplex algorithm is used.

Phase	Iteration	Objective Value	Time	
D	2	1	1.428026E+02	0
P	2	5	1.000000E+00	0

NOTE: Optimal.
 NOTE: Objective = 1.
 NOTE: The Dual Simplex solve time is 0.00 seconds.
 NOTE: Problem generation will use 7 threads.
 NOTE: The problem has 29 variables (0 free, 0 fixed).
 NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).
 NOTE: The problem has 255 linear constraint coefficients.
 NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
 NOTE: The OPTMODEL presolver is disabled for linear problems.
 NOTE: The LP presolver value AUTOMATIC is applied.
 NOTE: The LP presolver time is 0.00 seconds.
 NOTE: The LP presolver removed 0 variables and 0 constraints.

(continues on next page)

(continued from previous page)

NOTE: The LP presolver removed 0 constraint coefficients.
 NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_↵
 ↵coefficients.

NOTE: The LP solver is called.

NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	9.575369E+01	0
P 2	16	1.213087E+00	0

NOTE: Optimal.

NOTE: Objective = 1.2130872456.

NOTE: The Dual Simplex solve time is 0.01 seconds.

NOTE: Problem generation will use 7 threads.

NOTE: The problem has 29 variables (0 free, 0 fixed).

NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).

NOTE: The problem has 255 linear constraint coefficients.

NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The OPTMODEL presolver is disabled for linear problems.

NOTE: The LP presolver value AUTOMATIC is applied.

NOTE: The LP presolver time is 0.00 seconds.

NOTE: The LP presolver removed 0 variables and 0 constraints.

NOTE: The LP presolver removed 0 constraint coefficients.

NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_↵
 ↵coefficients.

NOTE: The LP solver is called.

NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	3.928295E+01	0
P 2	7	1.000000E+00	0

NOTE: Optimal.

NOTE: Objective = 1.

NOTE: The Dual Simplex solve time is 0.01 seconds.

NOTE: Problem generation will use 7 threads.

NOTE: The problem has 29 variables (0 free, 0 fixed).

NOTE: The problem has 9 linear constraints (0 LE, 0 EQ, 9 GE, 0 range).

NOTE: The problem has 255 linear constraint coefficients.

NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The OPTMODEL presolver is disabled for linear problems.

NOTE: The LP presolver value AUTOMATIC is applied.

NOTE: The LP presolver time is 0.00 seconds.

NOTE: The LP presolver removed 0 variables and 0 constraints.

NOTE: The LP presolver removed 0 constraint coefficients.

NOTE: The presolved problem has 29 variables, 9 constraints, and 255 constraint_↵
 ↵coefficients.

NOTE: The LP solver is called.

NOTE: The Dual Simplex algorithm is used.

		Objective	
Phase	Iteration	Value	Time
D 2	1	4.906079E+01	0
P 2	5	1.000000E+00	0

NOTE: Optimal.

NOTE: Objective = 1.

NOTE: The Dual Simplex solve time is 0.01 seconds.

NOTE: The output table 'EFFICIENCY_DATA' in caslib 'CASUSER(casuser)' has 28 rows and_↵
 ↵3 columns.

NOTE: The output table 'WEIGHT_DATA_DENSE' in caslib 'CASUSER(casuser)' has 17 rows_↵
 ↵and 14 columns.

(continues on next page)

(continued from previous page)

NOTE: The output table 'WEIGHT_DATA_SPARSE' in caslib 'CASUSER(casuser)' has 43 rows and 3 columns.

NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 29 rows and 6 columns.

NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 9 rows and 4 columns.

Print Table:

	COL1	garage_name	efficiency_number
0	1.0	Bournemouth	1.000000
1	2.0	Henley	1.000000
2	3.0	Woking	0.867320
3	4.0	Alton	1.000000
4	5.0	Dorchester	0.839204
5	6.0	Alresford	1.000000
6	7.0	Ringwood	0.875869
7	8.0	Winchester	0.840174
8	9.0	Weymouth	1.000000
9	10.0	Petworth	0.988237
10	11.0	Reading	0.982052
11	12.0	Weybridge	0.854345
12	13.0	Portsmouth	1.000000
13	14.0	Andover	0.917379
14	15.0	Newbury	1.000000
15	16.0	Maidenhead	1.000000
16	17.0	Basingstoke	1.000000
17	18.0	Salisbury	1.000000
18	19.0	Poole	0.861891
19	20.0	Bridport	0.971008
20	21.0	Portland	1.000000
21	22.0	Petersfield	1.000000
22	23.0	Midhurst	0.829278
23	24.0	Guildford	0.814166
24	25.0	Romsey	1.000000
25	26.0	Chichester	0.824343
26	27.0	Southampton	1.000000
27	28.0	Fareham	1.000000

Efficiency Data:

Selected Rows from Table EFFICIENCY_DATA

	garage	garage_name	efficiency_number
0	1.0	Bournemouth	1.000000
1	2.0	Henley	1.000000
2	3.0	Woking	0.867320
3	4.0	Alton	1.000000
4	5.0	Dorchester	0.839204
5	6.0	Alresford	1.000000
6	7.0	Ringwood	0.875869
7	8.0	Winchester	0.840174
8	9.0	Weymouth	1.000000
9	10.0	Petworth	0.988237
10	11.0	Reading	0.982052
11	12.0	Weybridge	0.854345
12	13.0	Portsmouth	1.000000
13	14.0	Andover	0.917379
14	15.0	Newbury	1.000000
15	16.0	Maidenhead	1.000000
16	17.0	Basingstoke	1.000000
17	18.0	Salisbury	1.000000

(continues on next page)

(continued from previous page)

```

18  19.0      Poole      0.861891
19  20.0      Bridport   0.971008
20  21.0      Portland   1.000000
21  22.0  Petersfield   1.000000
22  23.0      Midhurst   0.829278
23  24.0      Guildford  0.814166
24  25.0      Romsey     1.000000
25  26.0      Chichester 0.824343
26  27.0  Southampton   1.000000
27  28.0      Fareham    1.000000

```

Weight Data (Dense):

Selected Rows from Table WEIGHT_DATA_DENSE

	inefficient_garage	garage_name	efficiency_number	...	w22	w25	w27
0	1.0	Bournemouth	1.000000	...	NaN	NaN	NaN
1	3.0	Woking	0.867320	...	NaN	NaN	0.009093
2	5.0	Dorchester	0.839204	...	NaN	NaN	NaN
3	7.0	Ringwood	0.875869	...	NaN	NaN	NaN
4	8.0	Winchester	0.840174	...	NaN	NaN	NaN
5	10.0	Petworth	0.988237	...	0.015212	NaN	NaN
6	11.0	Reading	0.982052	...	NaN	NaN	NaN
7	12.0	Weybridge	0.854345	...	NaN	NaN	NaN
8	13.0	Portsmouth	1.000000	...	NaN	NaN	NaN
9	14.0	Andover	0.917379	...	NaN	NaN	NaN
10	17.0	Basingstoke	1.000000	...	NaN	NaN	NaN
11	19.0	Poole	0.861891	...	NaN	NaN	NaN
12	20.0	Bridport	0.971008	...	NaN	NaN	NaN
13	23.0	Midhurst	0.829278	...	0.043482	NaN	NaN
14	24.0	Guildford	0.814166	...	NaN	NaN	NaN
15	26.0	Chichester	0.824343	...	NaN	NaN	NaN
16	28.0	Fareham	1.000000	...	NaN	NaN	NaN

[17 rows x 14 columns]

Weight Data (Sparse):

Selected Rows from Table WEIGHT_DATA_SPARSE

	i	j	weight_sol
0	5.0	2.0	0.035318
1	7.0	2.0	0.146485
2	11.0	2.0	2.862469
3	19.0	2.0	0.434419
4	20.0	2.0	0.783097
5	26.0	2.0	0.236367
6	3.0	4.0	0.021078
7	3.0	6.0	0.952525
8	5.0	6.0	0.104478
9	8.0	6.0	0.416268
10	24.0	6.0	0.622715
11	26.0	6.0	0.096820
12	5.0	9.0	0.119287
13	8.0	9.0	0.333333
14	11.0	9.0	0.544410
15	12.0	9.0	0.796562
16	14.0	9.0	0.857143
17	23.0	9.0	0.066511
18	24.0	9.0	0.191804
19	26.0	9.0	0.335428

(continues on next page)

(continued from previous page)

```
20 10.0 15.0 0.066345
21 3.0 16.0 0.148376
22 10.0 16.0 0.034089
23 11.0 16.0 0.137534
24 12.0 16.0 0.145236
25 14.0 16.0 0.214286
26 19.0 16.0 0.344634
27 20.0 16.0 0.194894
28 23.0 16.0 0.008940
29 8.0 18.0 0.403284
30 23.0 18.0 0.059574
31 5.0 21.0 0.751632
32 7.0 21.0 0.319728
33 8.0 21.0 0.096138
34 11.0 21.0 1.199139
35 19.0 21.0 0.757330
36 20.0 21.0 0.469693
37 23.0 21.0 0.471893
38 24.0 21.0 0.168067
39 26.0 21.0 0.165227
40 10.0 22.0 0.015212
41 23.0 22.0 0.043482
42 3.0 27.0 0.009093
Out [8]: 1.0000000000000002
```

4.2 Viya Examples / Abstract

4.2.1 Curve Fitting

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex11_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex11.html

Model

```
import sasoptpy as so
import pandas as pd

def test(cas_conn, sols=False):

    # Upload data to server first
    xy_raw = pd.DataFrame([
        [0.0, 1.0],
        [0.5, 0.9],
        [1.0, 0.7],
        [1.5, 1.5],
        [1.9, 2.0],
        [2.5, 2.4],
```

(continues on next page)

(continued from previous page)

```

[3.0, 3.2],
[3.5, 2.0],
[4.0, 2.7],
[4.5, 3.5],
[5.0, 1.0],
[5.5, 4.0],
[6.0, 3.6],
[6.6, 2.7],
[7.0, 5.7],
[7.6, 4.6],
[8.5, 6.0],
[9.0, 6.8],
[10.0, 7.3]
], columns=['x', 'y'])
xy_data = cas_conn.upload_frame(xy_raw, casout={'name': 'xy_data',
                                              'replace': True})

# Read observations
from sasoptpy.actions import read_data
POINTS = so.Set(name='POINTS')
x = so.ParameterGroup(POINTS, name='x')
y = so.ParameterGroup(POINTS, name='y')
read_st = read_data(
    table=xy_data,
    index={'target': POINTS, 'key': so.N},
    columns=[
        {'target': x, 'column': 'x'},
        {'target': y, 'column': 'y'}
    ]
)

# Parameters and variables
order = so.Parameter(name='order')
beta = so.VariableGroup(so.exp_range(0, order), name='beta')
estimate = so.ImplicitVar(
    (beta[0] + so.quick_sum(beta[k] * x[i] ** k
                           for k in so.exp_range(1, order))
     for i in POINTS), name='estimate')

surplus = so.VariableGroup(POINTS, name='surplus', lb=0)
slack = so.VariableGroup(POINTS, name='slack', lb=0)

objective1 = so.Expression(
    so.quick_sum(surplus[i] + slack[i] for i in POINTS), name='objective1')
abs_dev_con = so.ConstraintGroup(
    (estimate[i] - surplus[i] + slack[i] == y[i] for i in POINTS),
    name='abs_dev_con')

minmax = so.Variable(name='minmax')
objective2 = so.Expression(minmax + 0.0, name='objective2')
minmax_con = so.ConstraintGroup(
    (minmax >= surplus[i] + slack[i] for i in POINTS), name='minmax_con')

order.set_init(1)
L1 = so.Model(name='L1', session=cas_conn)
L1.set_objective(objective1, sense=so.MIN, name='L1obj')
L1.include(POINTS, x, y, read_st)

```

(continues on next page)

(continued from previous page)

```

L1.include(order, beta, estimate, surplus, slack, abs_dev_con)
L1.add_postsolve_statement('print x y estimate surplus slack;')

L1.solve(verbose=True)
if sols:
    sol_data1 = L1.response['Print1.PrintTable'].sort_values('x')
    print(so.get_solution_table(beta))
    print(sol_data1.to_string())

Linf = so.Model(name='Linf', session=cas_conn)
Linf.include(L1, minmax, minmax_con)
Linf.set_objective(objective2, sense=so.MIN, name='Linfobj')

Linf.solve()
if sols:
    sol_data2 = Linf.response['Print1.PrintTable'].sort_values('x')
    print(so.get_solution_table(beta))
    print(sol_data2.to_string())

order.set_init(2)

L1.solve()
if sols:
    sol_data3 = L1.response['Print1.PrintTable'].sort_values('x')
    print(so.get_solution_table(beta))
    print(sol_data3.to_string())

Linf.solve()
if sols:
    sol_data4 = Linf.response['Print1.PrintTable'].sort_values('x')
    print(so.get_solution_table(beta))
    print(sol_data4.to_string())

if sols:
    return (sol_data1, sol_data2, sol_data3, sol_data4)
else:
    return Linf.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.server_side.curve_fitting import test

```

(continues on next page)

(continued from previous page)

```
In [8]: (s1, s2, s3, s4) = test(cas_conn, sols=True)
NOTE: Cloud Analytic Services made the uploaded file available as table XY_DATA in
↳caslib CASUSER(casuser).
NOTE: The table XY_DATA has been created in caslib CASUSER(casuser) from binary data
↳uploaded to Cloud Analytic Services.
NOTE: Initialized model L1.
NOTE: Added action set 'optimization'.
NOTE: Converting model L1 to OPTMODEL.
    set POINTS;
    num x {POINTS};
    num y {POINTS};
    read data XY_DATA into POINTS=[_N_] x y;
    num order init 1;
    var beta {{0..order}};
    impvar estimate {o8 in POINTS} = beta[0] + sum {k in 1..order} (beta[k] * (x[o8]) ^
↳(k));
    var surplus {{POINTS}} >= 0;
    var slack {{POINTS}} >= 0;
    con abs_dev_con {o32 in POINTS} : y[o32] - estimate[o32] + surplus[o32] -
↳slack[o32] = 0;
    min L1obj = sum {i in POINTS} (surplus[i] + slack[i]);
    solve;
    create data solution from [i]= {1.._NVAR_} var=_VAR_.name value=_VAR_.lb=_VAR_.lb
↳ub=_VAR_.ub rc=_VAR_.rc;
    create data dual from [j] = {1.._NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
↳dual;
    print x y estimate surplus slack;

NOTE: Submitting OPTMODEL code to CAS server.
NOTE: There were 19 rows read from table 'XY_DATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 40 variables (2 free, 0 fixed).
NOTE: The problem uses 19 implicit variables.
NOTE: The problem has 19 linear constraints (0 LE, 19 EQ, 0 GE, 0 range).
NOTE: The problem has 75 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.01 seconds.
NOTE: The LP presolver removed 38 variables and 0 constraints.
NOTE: The LP presolver removed 38 constraint coefficients.
NOTE: The LP presolver formulated the dual of the problem.
NOTE: The presolved problem has 19 variables, 2 constraints, and 37 constraint
↳coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
```

			Objective		
	Phase	Iteration	Value	Time	
	D	2	1	6.160000E+01	0
	D	2	5	1.146625E+01	0

```
NOTE: Optimal.
NOTE: Objective = 11.46625.
NOTE: The Dual Simplex solve time is 0.04 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 40 rows and 6
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 19 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4
↳columns.
```

(continues on next page)

(continued from previous page)

```

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4
↳columns.
    beta
0  0.58125
1  0.63750
    COL1      x      y estimate      surplus      slack
10  11.0      0.0      1.0  0.58125  0.000000e+00  0.41875
18  19.0      0.5      0.9  0.90000  5.551115e-17  0.00000
12  13.0      1.0      0.7  1.21875  5.187500e-01  0.00000
4   5.0      1.5      1.5  1.53750  3.750000e-02  0.00000
0   1.0      1.9      2.0  1.79250  0.000000e+00  0.20750
15  16.0      2.5      2.4  2.17500  0.000000e+00  0.22500
1   2.0      3.0      3.2  2.49375  0.000000e+00  0.70625
11  12.0      3.5      2.0  2.81250  8.125000e-01  0.00000
5   6.0      4.0      2.7  3.13125  4.312500e-01  0.00000
3   4.0      4.5      3.5  3.45000  0.000000e+00  0.05000
8   9.0      5.0      1.0  3.76875  2.768750e+00  0.00000
14  15.0      5.5      4.0  4.08750  8.750000e-02  0.00000
13  14.0      6.0      3.6  4.40625  8.062500e-01  0.00000
7   8.0      6.6      2.7  4.78875  2.088750e+00  0.00000
9   10.0      7.0      5.7  5.04375  0.000000e+00  0.65625
17  18.0      7.6      4.6  5.42625  8.262500e-01  0.00000
2   3.0      8.5      6.0  6.00000  0.000000e+00  0.00000
6   7.0      9.0      6.8  6.31875  0.000000e+00  0.48125
16  17.0     10.0      7.3  6.95625  0.000000e+00  0.34375
NOTE: Initialized model Linf.
NOTE: Added action set 'optimization'.
NOTE: Converting model Linf to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: There were 19 rows read from table 'XY_DATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 41 variables (3 free, 0 fixed).
NOTE: The problem uses 19 implicit variables.
NOTE: The problem has 38 linear constraints (0 LE, 19 EQ, 19 GE, 0 range).
NOTE: The problem has 132 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 41 variables, 38 constraints, and 132 constraint
↳coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
Phase Iteration      Value      Time
D 2           1  -1.900000E+00      0
P 2          26   1.725000E+00      0
NOTE: Optimal.
NOTE: Objective = 1.725.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 41 rows and 6
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 38 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4
↳columns.

```

(continues on next page)

(continued from previous page)

```

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4
  columns.
  beta
0 -0.400
1 0.625
  COL1      x      y estimate surplus slack
10 11.0    0.0    1.0  -0.4000    0.000 1.4000
18 19.0    0.5    0.9  -0.0875    0.000 0.9875
12 13.0    1.0    0.7   0.2250    0.000 0.4750
4   5.0    1.5    1.5   0.5375    0.000 0.9625
0   1.0    1.9    2.0   0.7875    0.000 1.2125
15 16.0    2.5    2.4   1.1625    0.000 1.2375
1   2.0    3.0    3.2   1.4750    0.000 1.7250
11 12.0    3.5    2.0   1.7875    0.000 0.2125
5   6.0    4.0    2.7   2.1000    0.000 0.6000
3   4.0    4.5    3.5   2.4125    0.000 1.0875
8   9.0    5.0    1.0   2.7250    1.725 0.0000
14 15.0    5.5    4.0   3.0375    0.000 0.9625
13 14.0    6.0    3.6   3.3500    0.000 0.2500
7   8.0    6.6    2.7   3.7250    1.025 0.0000
9  10.0    7.0    5.7   3.9750    0.000 1.7250
17 18.0    7.6    4.6   4.3500    0.000 0.2500
2   3.0    8.5    6.0   4.9125    0.000 1.0875
6   7.0    9.0    6.8   5.2250    0.000 1.5750
16 17.0   10.0    7.3   5.8500    0.000 1.4500
NOTE: Added action set 'optimization'.
NOTE: Converting model L1 to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: There were 19 rows read from table 'XY_DATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 41 variables (3 free, 0 fixed).
NOTE: The problem uses 19 implicit variables.
NOTE: The problem has 19 linear constraints (0 LE, 19 EQ, 0 GE, 0 range).
NOTE: The problem has 93 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 38 variables and 0 constraints.
NOTE: The LP presolver removed 38 constraint coefficients.
NOTE: The LP presolver formulated the dual of the problem.
NOTE: The presolved problem has 19 variables, 3 constraints, and 55 constraint
  coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
Phase Iteration      Value      Time
D 2          1  6.160000E+01      0
D 2          5  1.045896E+01      0
NOTE: Optimal.
NOTE: Objective = 10.458964706.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 41 rows and 6
  columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 19 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4
  columns.

```

(continues on next page)

(continued from previous page)

```

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_
↳columns.
      beta
0  0.982353
1  0.294510
2  0.033725
      COL1      x      y estimate      surplus      slack
10  11.0      0.0      1.0  0.982353  0.000000e+00  0.017647
18  19.0      0.5      0.9  1.138039  2.380392e-01  0.000000
12  13.0      1.0      0.7  1.310588  6.105882e-01  0.000000
4   5.0      1.5      1.5  1.500000 -6.938894e-17  0.000000
0   1.0      1.9      2.0  1.663671  0.000000e+00  0.336329
15  16.0      2.5      2.4  1.929412  0.000000e+00  0.470588
1   2.0      3.0      3.2  2.169412  0.000000e+00  1.030588
11  12.0      3.5      2.0  2.426275  4.262745e-01  0.000000
5   6.0      4.0      2.7  2.700000 -1.110223e-16  0.000000
3   4.0      4.5      3.5  2.990588  0.000000e+00  0.509412
8   9.0      5.0      1.0  3.298039  2.298039e+00  0.000000
14  15.0      5.5      4.0  3.622353  0.000000e+00  0.377647
13  14.0      6.0      3.6  3.963529  3.635294e-01  0.000000
7   8.0      6.6      2.7  4.395200  1.695200e+00  0.000000
9   10.0      7.0      5.7  4.696471  0.000000e+00  1.003529
17  18.0      7.6      4.6  5.168612  5.686118e-01  0.000000
2   3.0      8.5      6.0  5.922353  0.000000e+00  0.077647
6   7.0      9.0      6.8  6.364706  0.000000e+00  0.435294
16  17.0     10.0      7.3  7.300000  4.440892e-16  0.000000
NOTE: Added action set 'optimization'.
NOTE: Converting model Linf to OPTMODEL.
NOTE: Submitting OPTMODEL code to CAS server.
NOTE: There were 19 rows read from table 'XY_DATA' in caslib 'CASUSER(casuser)'.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 42 variables (4 free, 0 fixed).
NOTE: The problem uses 19 implicit variables.
NOTE: The problem has 38 linear constraints (0 LE, 19 EQ, 19 GE, 0 range).
NOTE: The problem has 150 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The LP presolver value AUTOMATIC is applied.
NOTE: The LP presolver time is 0.00 seconds.
NOTE: The LP presolver removed 0 variables and 0 constraints.
NOTE: The LP presolver removed 0 constraint coefficients.
NOTE: The presolved problem has 42 variables, 38 constraints, and 150 constraint_
↳coefficients.
NOTE: The LP solver is called.
NOTE: The Dual Simplex algorithm is used.
      Objective
Phase Iteration      Value      Time
D 2          1 -1.900000E+00      0
P 2          29  1.475000E+00      0
NOTE: Optimal.
NOTE: Objective = 1.475.
NOTE: The Dual Simplex solve time is 0.01 seconds.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 42 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 38 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 13 rows and 4_
↳columns.

```

(continues on next page)

(continued from previous page)

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 18 rows and 4_→columns.

```

    beta
0  2.475
1 -0.625
2  0.125
    COL1      x      y estimate    surplus    slack
10  11.0    0.0    1.0   2.47500   1.475000   0.000000
18  19.0    0.5    0.9   2.19375   1.293750   0.000000
12  13.0    1.0    0.7   1.97500   1.275000   0.000000
 4   5.0    1.5    1.5   1.81875   0.318750   0.000000
0   1.0    1.9    2.0   1.73875   0.606875   0.868125
15  16.0    2.5    2.4   1.69375   0.000000   0.706250
 1   2.0    3.0    3.2   1.72500   0.000000   1.475000
11  12.0    3.5    2.0   1.81875   0.000000   0.181250
 5   6.0    4.0    2.7   1.97500   0.000000   0.725000
 3   4.0    4.5    3.5   2.19375   0.000000   1.306250
 8   9.0    5.0    1.0   2.47500   1.475000   0.000000
14  15.0    5.5    4.0   2.81875   0.000000   1.181250
13  14.0    6.0    3.6   3.22500   0.000000   0.375000
 7   8.0    6.6    2.7   3.79500   1.095000   0.000000
 9  10.0    7.0    5.7   4.22500   0.000000   1.475000
17  18.0    7.6    4.6   4.94500   0.345000   0.000000
 2   3.0    8.5    6.0   6.19375   0.193750   0.000000
 6   7.0    9.0    6.8   6.97500   0.175000   0.000000
16  17.0   10.0    7.3   8.72500   1.425000   0.000000

```

```

# Plots
In [9]: import matplotlib.pyplot as plt

In [10]: p1 = s1.plot.scatter(x='x', y='y', c='g')

In [11]: s1.plot.line(ax=p1, x='x', y='estimate', label='Line1');

In [12]: s2.plot.line(ax=p1, x='x', y='estimate', label='Line2');

In [13]: p1
Out[13]: <matplotlib.axes._subplots.AxesSubplot at 0x7f2fe9b98b38>


In [14]: p2 = s3.plot.scatter(x='x', y='y', c='g')


In [15]: s3.plot.line(ax=p2, x='x', y='estimate', label='Curve1');

In [16]: s4.plot.line(ax=p2, x='x', y='estimate', label='Curve2');

In [17]: p2
Out[17]: <matplotlib.axes._subplots.AxesSubplot at 0x7f2fe9a0c6d8>

```

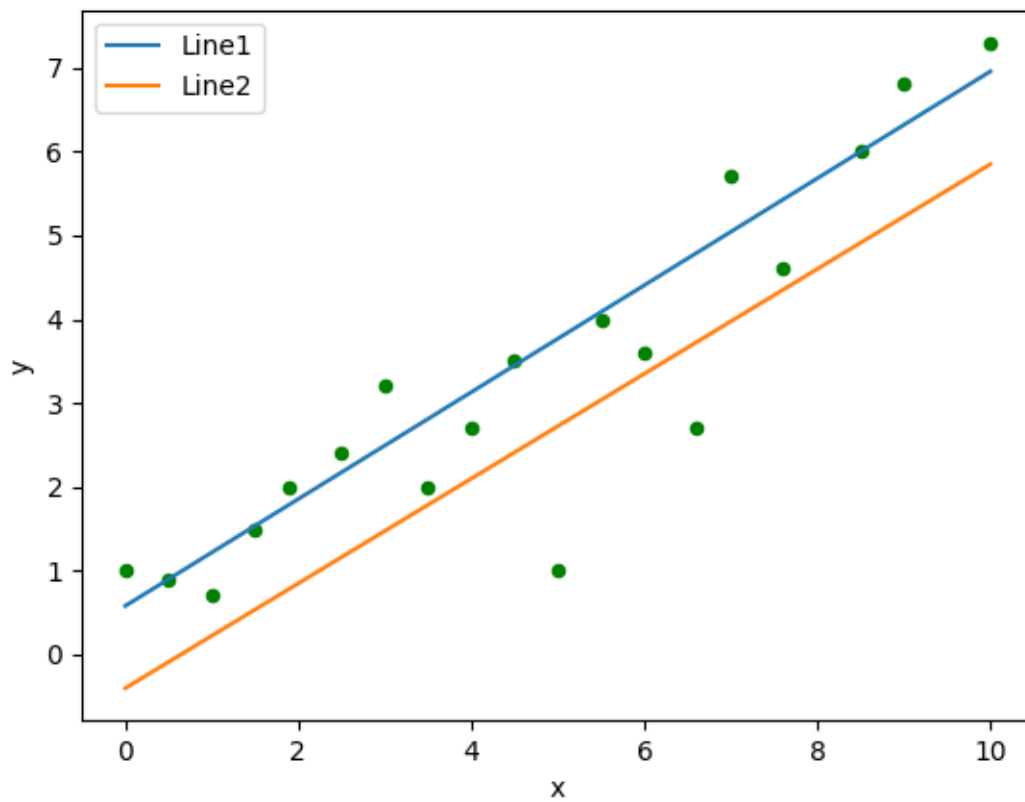

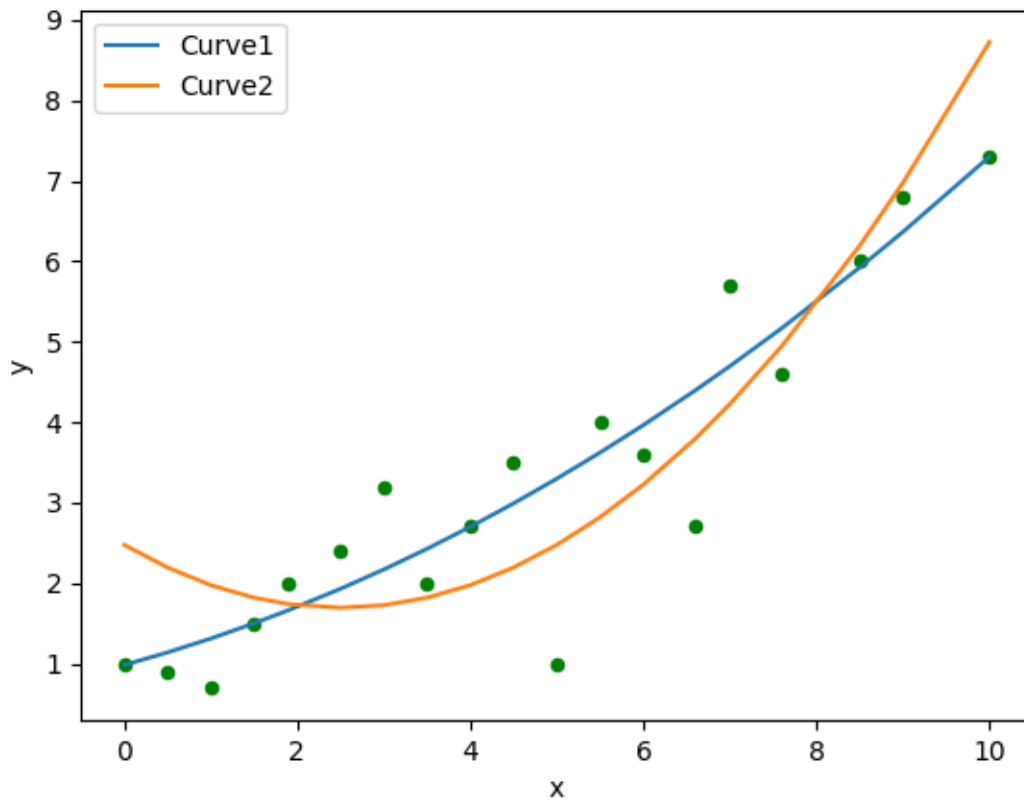

4.2.2 Nonlinear 1

Reference

http://go.documentation.sas.com/?docsetId=ormpug&docsetTarget=ormpug_nlp solver_examples01.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/nlpse01.html

Model

```
import sasoptpy as so

def test(cas_conn):

    m = so.Model(name='nlpse01', session=cas_conn)
    x = m.add_variables(range(1, 9), lb=0.1, ub=10, name='x')

    f = so.Expression(0.4 * (x[1]/x[7]) ** 0.67 + 0.4 * (x[2]/x[8]) ** 0.67 + 10 -
    ↪ x[1] - x[2], name='f')
    m.set_objective(f, sense=so.MIN, name='f1')
```

(continues on next page)

(continued from previous page)

```

m.add_constraint(1 - 0.0588*x[5]*x[7] - 0.1*x[1] >= 0, name='c1')
m.add_constraint(1 - 0.0588*x[6]*x[8] - 0.1*x[1] - 0.1*x[2] >= 0, name='c2')
m.add_constraint(1 - 4*x[3]/x[5] - 2/(x[3]**0.71 * x[5]) - 0.0588*(x[7]/x[3]**1.
↪3) >= 0, name='c3')
m.add_constraint(1 - 4*x[4]/x[6] - 2/(x[4]**0.71 * x[6]) - 0.0588*(x[8]/x[4]**1.
↪3) >= 0, name='c4')
m.add_constraint(f == [0.1, 4.2], name='frange')

x[1].set_init(6)
x[2].set_init(3)
x[3].set_init(0.4)
x[4].set_init(0.2)
x[5].set_init(6)
x[6].set_init(6)
x[7].set_init(1)
x[8].set_init(0.5)

m.solve(verbose=True, options={'with': 'nlp', 'algorithm': 'activeset'})

print(m.get_problem_summary())
print(m.get_solution_summary())
if m.get_session_type() == 'CAS':
    print(m.get_solution()[['var', 'value']])

return m.get_objective_value()

```

Output

```
In [1]: import os
```

```
In [2]: hostname = os.getenv('CASHOST')
```

```
In [3]: port = os.getenv('CASPORT')
```

```
In [4]: from swat import CAS
```

```
In [5]: cas_conn = CAS(hostname, port)
```

```
In [6]: import sasoptpy
```

```
In [7]: from examples.client_side.nonlinear_1 import test
```

```
In [8]: test(cas_conn)
```

```
NOTE: Initialized model nlpse01.
```

```
NOTE: Added action set 'optimization'.
```

```
NOTE: Converting model nlpse01 to OPTMODEL.
```

```
var x {{1,2,3,4,5,6,7,8}} >= 0.1 <= 10;
```

```
x[1] = 6;
```

```
x[2] = 3;
```

```
x[3] = 0.4;
```

```
x[4] = 0.2;
```

```
x[5] = 6;
```

(continues on next page)

(continued from previous page)

```

x[6] = 6;
x[7] = 1;
x[8] = 0.5;
min f1 = 0.4 * (((x[1]) / (x[7])) ^ (0.67)) + 0.4 * (((x[2]) / (x[8])) ^ (0.67)) -
↳ x[1] - x[2] + 10.0;
con c1 : - 0.0588 * x[5] * x[7] - 0.1 * x[1] >= -1.0;
con c2 : - 0.0588 * x[6] * x[8] - 0.1 * x[1] - 0.1 * x[2] >= -1.0;
con c3 : - ((4 * x[3]) / (x[5])) - ((2) / ((x[3]) ^ (0.71) * x[5])) - 0.0588 *
↳ ((x[7]) / ((x[3]) ^ (1.3))) >= -1.0;
con c4 : - ((4 * x[4]) / (x[6])) - ((2) / ((x[4]) ^ (0.71) * x[6])) - 0.0588 *
↳ ((x[8]) / ((x[4]) ^ (1.3))) >= -1.0;
con frange : -9.9 <= 0.4 * (((x[1]) / (x[7])) ^ (0.67)) + 0.4 * (((x[2]) / (x[8]))
↳ ^ (0.67)) - x[1] - x[2] <= -5.8;
solve with nlp / algorithm=activeset;
create data solution from [i]= {1..NVAR_} var=_VAR_.name value=_VAR_ lb=_VAR_.lb_
↳ ub=_VAR_.ub rc=_VAR_.rc;
create data dual from [j] = {1..NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
↳ dual;

```

NOTE: Submitting OPTMODEL code to CAS server.

NOTE: Problem generation will use 8 threads.

NOTE: The problem has 8 variables (0 free, 0 fixed).

NOTE: The problem has 0 linear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The problem has 5 nonlinear constraints (0 LE, 0 EQ, 4 GE, 1 range).

NOTE: The OPTMODEL presolver removed 0 variables, 0 linear constraints, and 0

↳ nonlinear constraints.

NOTE: Using analytic derivatives for objective.

NOTE: Using analytic derivatives for nonlinear constraints.

NOTE: The NLP solver is called.

NOTE: The Active Set algorithm is used.

Iter	Objective		Optimality Error
	Value	Infeasibility	
0	3.65736570	0.41664483	0.24247905
1	3.65736570	0.41664483	0.24247905
2	3.40486061	0.10284726	0.18904638
3	3.51178229	0.07506389	0.18860455
4	4.23595983	0.03595983	0.60088809
5	4.16334906	0	0.47130008
6	4.03168584	0.00791810	0.13742971
7	3.88912660	0.11248991	0.06129662
8	3.89579714	0.09534670	0.05994916
9	3.95046640	0.02649207	0.06776850
10	3.92833580	0.03517161	0.06442935
11	3.95179326	0.00494247	0.05837915
12	3.94741555	0.00651989	0.05477333
13	3.95209064	0.00058609	0.05265725
14	3.95058104	0.00122758	0.04772557
15	3.95055959	0.00099113	0.04613473
16	3.95141460	0.00000381	0.04497006
17	3.95132211	0.0000005999371	0.07584723
18	3.95114031	0.00000941	0.04093117
19	3.95027690	0.00011307	0.00020755
20	3.95115797	0.0000007730235	0.00018707
21	3.95116558	0	0.00001366
22	3.95116364	0.0000000153799	0.00000814
23	3.95116355	0.0000000228326	0.00000595
24	3.95116352	0.0000000257138	0.00000337

(continues on next page)

(continued from previous page)

```

                25          3.95116349    0.0000000200547          0.00000132
                26          3.95116349    0.0000000192412          0.0000002015918
NOTE: Optimal.
NOTE: Objective = 3.9511634887.
NOTE: Objective of the best feasible solution found = 3.9511579677.
NOTE: The best feasible solution found is returned.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 8 rows and 6
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 5 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 20 rows and 4
↳columns.
Selected Rows from Table PROBLEMSUMMARY

                                Value
Label
Objective Sense          Minimization
Objective Function              f1
Objective Type              Nonlinear

Number of Variables              8
Bounded Above                  0
Bounded Below                  0
Bounded Below and Above        8
Free                           0
Fixed                           0

Number of Constraints           5
Linear LE (<=)                 0
Linear EQ (=)                  0
Linear GE (>=)                  0
Linear Range                   0
Nonlinear LE (<=)              0
Nonlinear EQ (=)               0
Nonlinear GE (>=)              4
Nonlinear Range                1
Selected Rows from Table SOLUTIONSUMMARY

                                Value
Label
Solver                      NLP
Algorithm                    Active Set
Objective Function              f1
Solution Status              Best Feasible
Objective Value                3.9511579677

Optimality Error              0.0001050714
Infeasibility                  7.7302351E-7

Iterations                    26
Presolve Time                  0.00
Solution Time                  0.05
Selected Rows from Table SOLUTION

    var    value
0  x[1]  6.463315

```

(continues on next page)

(continued from previous page)

```

1  x[2]  2.234530
2  x[3]  0.667455
3  x[4]  0.595820
4  x[5]  5.932980
5  x[6]  5.527231
6  x[7]  1.013787
7  x[8]  0.400664
Out [8]: 3.951157967716

```

4.2.3 Nonlinear 2

Reference

http://go.documentation.sas.com/?docsetId=ormpug&docsetTarget=ormpug_nlpsolver_examples02.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/nlpse02.html

Model

```

import sasoptpy as so
import sasoptpy.abstract.math as sm

def test(cas_conn):

    m = so.Model(name='nlpse02', session=cas_conn)
    N = m.add_parameter(name='N', init=1000)
    x = m.add_variables(so.exp_range(1, N), name='x', init=1)
    m.set_objective(
        so.quick_sum(-4*x[i]+3 for i in so.exp_range(1, N-1)) +
        so.quick_sum((x[i]**2 + x[N]**2)**2 for i in so.exp_range(1, N-1)),
        name='f', sense=so.MIN)

    m.add_statement('print x;', after_solve=True)
    m.solve(options={'with': 'nlp'}, verbose=True)
    print(m.get_solution_summary())
    if m.get_session_type() == 'CAS':
        print(m.response['Print1.PrintTable'].head())

    # Model 2
    so.reset()
    m = so.Model(name='nlpse02_2', session=cas_conn)
    N = m.add_parameter(name='N', init=1000)
    x = m.add_variables(so.exp_range(1, N), name='x', lb=1, ub=2)
    m.set_objective(
        so.quick_sum(sm.cos(-0.5*x[i+1] - x[i]**2) for i in so.exp_range(
            1, N-1)), name='f2', sense=so.MIN)
    m.add_statement('print x;', after_solve=True)
    m.solve(verbose=True, options={'with': 'nlp', 'algorithm': 'activeset'})
    print(m.get_solution_summary())

    return m.get_objective_value()

```

Output

```

In [1]: import os

In [2]: hostname = os.getenv('CASHOST')

In [3]: port = os.getenv('CASPORT')

In [4]: from swat import CAS

In [5]: cas_conn = CAS(hostname, port)

In [6]: import sasoptpy

In [7]: from examples.client_side.nonlinear_2 import test

In [8]: test(cas_conn)
NOTE: Initialized model nlpse02.
NOTE: Added action set 'optimization'.
NOTE: Converting model nlpse02 to OPTMODEL.
    num N init 1000;
    var x {{1..N}} init 1;
    min f = sum {i in 1..N-1} (- 4 * x[i] + 3) + sum {i in 1..N-1} ((x[i]) ^ (2) +
↪(x[N]) ^ (2)) ^ (2));
    solve with nlp / ;
    create data solution from [i]= {1.._NVAR_} var=_VAR_.name value=_VAR_ lb=_VAR_.lb
↪ub=_VAR_.ub rc=_VAR_.rc;
    create data dual from [j] = {1.._NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
↪dual;
    print x;

NOTE: Submitting OPTMODEL code to CAS server.
NOTE: Problem generation will use 8 threads.
NOTE: The problem has 1000 variables (1000 free, 0 fixed).
NOTE: The problem has 0 linear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver removed 0 variables, 0 linear constraints, and 0
↪nonlinear constraints.
NOTE: Using analytic derivatives for objective.
NOTE: Using 2 threads for nonlinear evaluation.
NOTE: The NLP solver is called.
NOTE: The Interior Point Direct algorithm is used.

          Objective
      Iter      Value      Infeasibility      Optimality
          0      2997.00000000      0      2.66666667
          1      561.93750000      0      4.44444444
          2      41.17478400      0      12.76397516
          3       0.41230550      0      43.37933609
          4       0.00005471      0      0.47005128
          5  2.2737367544E-13      0      0.00006316
          6              0      0  1.1527477269E-12

NOTE: Optimal.
NOTE: Objective = 0.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 1000 rows and 6
↪columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 0 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4
↪columns.

```

(continues on next page)

(continued from previous page)

NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4 columns.

Selected Rows from Table SOLUTIONSUMMARY

	Value
Label	
Solver	NLP
Algorithm	Interior Point Direct
Objective Function	f
Solution Status	Optimal
Objective Value	0

Optimality Error	1.152748E-12
Infeasibility	0

Iterations	6
Presolve Time	0.00
Solution Time	0.04

COL1	x
------	---

0	1.0 1.0
1	2.0 1.0
2	3.0 1.0
3	4.0 1.0
4	5.0 1.0

NOTE: Initialized model nlpse02_2.

NOTE: Added action set 'optimization'.

NOTE: Converting model nlpse02_2 to OPTMODEL.

```

num N init 1000;
var x {{1..N}} >= 1 <= 2;
min f2 = sum {i in 1..N-1} (cos(- 0.5 * (x[i + 1]) - ((x[i]) ^ (2)))));
solve with nlp / algorithm=activeset;
create data solution from [i]= {1..NVAR_} var=_VAR_.name value=_VAR_ lb=_VAR_.lb
ub=_VAR_.ub rc=_VAR_.rc;
create data dual from [j] = {1..NCON_} con=_CON_.name value=_CON_.body dual=_CON_.
dual;
print x;

```

NOTE: Submitting OPTMODEL code to CAS server.

NOTE: Problem generation will use 8 threads.

NOTE: The problem has 1000 variables (0 free, 0 fixed).

NOTE: The problem has 0 linear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).

NOTE: The OPTMODEL presolver removed 0 variables, 0 linear constraints, and 0 nonlinear constraints.

NOTE: Using analytic derivatives for objective.

NOTE: Using 3 threads for nonlinear evaluation.

NOTE: The NLP solver is called.

NOTE: The Active Set algorithm is used.

NOTE: Initial point was changed to be feasible to bounds.

	Objective	Infeasibility	Optimality
Iter	Value		Error
0	70.66646447	0	1.24686873
1	70.66646439	0	1.24686873
2	-996.26893548	0	0.23815533
3	-998.99328004	0	0.10718277
4	-998.99999439	0	0.00379400
5	-999.00000000	0	0.00000393

(continues on next page)

(continued from previous page)

```

        6      -999.00000000      0  1.7018480129E-12
NOTE: Optimal.
NOTE: Objective = -999.
NOTE: The output table 'SOLUTION' in caslib 'CASUSER(casuser)' has 1000 rows and 6_
↳columns.
NOTE: The output table 'DUAL' in caslib 'CASUSER(casuser)' has 0 rows and 4 columns.
NOTE: The CAS table 'solutionSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4_
↳columns.
NOTE: The CAS table 'problemSummary' in caslib 'CASUSER(casuser)' has 12 rows and 4_
↳columns.
Selected Rows from Table SOLUTIONSUMMARY

              Value
Label
Solver              NLP
Algorithm          Active Set
Objective Function      f2
Solution Status      Optimal
Objective Value        -999

Optimality Error    1.701848E-12
Infeasibility        0

Iterations           6
Presolve Time        0.00
Solution Time        0.05
Out [8]: -999.0

```

4.3 SAS (saspy) Examples

4.3.1 Decentralization (saspy)

Reference

http://go.documentation.sas.com/?docsetId=ormpex&docsetTarget=ormpex_ex10_toc.htm&docsetVersion=15.1&locale=en

http://support.sas.com/documentation/onlinedoc/or/ex_code/151/mpex10.html

Model

```

import sasoptpy as so
import pandas as pd

def test(cas_conn):

    m = so.Model(name='decentralization', session=cas_conn)

    DEPTS = ['A', 'B', 'C', 'D', 'E']
    CITIES = ['Bristol', 'Brighton', 'London']

```

(continues on next page)

(continued from previous page)

```

benefit_data = pd.DataFrame([
    ['Bristol', 10, 15, 10, 20, 5],
    ['Brighton', 10, 20, 15, 15, 15]],
    columns=['city'] + DEPTS).set_index('city')

comm_data = pd.DataFrame([
    ['A', 'B', 0.0],
    ['A', 'C', 1.0],
    ['A', 'D', 1.5],
    ['A', 'E', 0.0],
    ['B', 'C', 1.4],
    ['B', 'D', 1.2],
    ['B', 'E', 0.0],
    ['C', 'D', 0.0],
    ['C', 'E', 2.0],
    ['D', 'E', 0.7]], columns=['i', 'j', 'comm']).set_index(['i', 'j'])

cost_data = pd.DataFrame([
    ['Bristol', 'Bristol', 5],
    ['Bristol', 'Brighton', 14],
    ['Bristol', 'London', 13],
    ['Brighton', 'Brighton', 5],
    ['Brighton', 'London', 9],
    ['London', 'London', 10]], columns=['i', 'j', 'cost']).set_index(
    ['i', 'j'])

max_num_depts = 3

benefit = {}
for city in CITIES:
    for dept in DEPTS:
        try:
            benefit[dept, city] = benefit_data.loc[city, dept]
        except:
            benefit[dept, city] = 0

comm = {}
for row in comm_data.iterrows():
    (i, j) = row[0]
    comm[i, j] = row[1]['comm']
    comm[j, i] = comm[i, j]

cost = {}
for row in cost_data.iterrows():
    (i, j) = row[0]
    cost[i, j] = row[1]['cost']
    cost[j, i] = cost[i, j]

assign = m.add_variables(DEPTS, CITIES, vartype=so.BIN, name='assign')
IJKL = [(i, j, k, l)
         for i in DEPTS for j in CITIES for k in DEPTS for l in CITIES
         if i < k]
product = m.add_variables(IJKL, vartype=so.BIN, name='product')

totalBenefit = so.quick_sum(benefit[i, j] * assign[i, j]
                             for i in DEPTS for j in CITIES)

```

(continues on next page)

(continued from previous page)

```

totalCost = so.quick_sum(comm[i, k] * cost[j, l] * product[i, j, k, l]
                        for (i, j, k, l) in IJKL)

m.set_objective(totalBenefit-totalCost, name='netBenefit', sense=so.MAX)

m.add_constraints((so.quick_sum(assign[dept, city] for city in CITIES)
                  == 1 for dept in DEPTS), name='assign_dept')

m.add_constraints((so.quick_sum(assign[dept, city] for dept in DEPTS)
                  <= max_num_depts for city in CITIES), name='cardinality')

product_def1 = m.add_constraints((assign[i, j] + assign[k, l] - 1
                                <= product[i, j, k, l]
                                for (i, j, k, l) in IJKL),
                                name='pd1')

product_def2 = m.add_constraints((product[i, j, k, l] <= assign[i, j]
                                for (i, j, k, l) in IJKL),
                                name='pd2')

product_def3 = m.add_constraints((product[i, j, k, l] <= assign[k, l]
                                for (i, j, k, l) in IJKL),
                                name='pd3')

m.solve()
print(m.get_problem_summary())

m.drop_constraints(product_def1)
m.drop_constraints(product_def2)
m.drop_constraints(product_def3)

m.add_constraints((
    so.quick_sum(product[i, j, k, l]
                  for j in CITIES if (i, j, k, l) in IJKL) == assign[k, l]
    for i in DEPTS for k in DEPTS for l in CITIES if i < k),
    name='pd4')

m.add_constraints((
    so.quick_sum(product[i, j, k, l]
                  for l in CITIES if (i, j, k, l) in IJKL) == assign[i, j]
    for k in DEPTS for i in DEPTS for j in CITIES if i < k),
    name='pd5')

m.solve()
print(m.get_problem_summary())
totalBenefit.set_name('totalBenefit')
totalCost.set_name('totalCost')
print(so.get_solution_table(totalBenefit, totalCost))
print(so.get_solution_table(assign).unstack(level=-1))

return m.get_objective_value()

```

Output

```
In [1]: import os

In [2]: import saspy

In [3]: config_file = os.path.abspath('../tests/examples/saspy_config.py')

In [4]: sas_conn = saspy.SASsession(cfgfile=config_file)
Using SAS Config named: sshsas
SAS Connection established. Subprocess id is 8717

In [5]: import sasoptpy

In [6]: from examples.client_side.decentralization import test

In [7]: test(sas_conn)
NOTE: Initialized model decentralization.
NOTE: Converting model decentralization to OPTMODEL.
NOTE: Submitting OPTMODEL code to SAS instance.

NOTE: Writing HTML5(SASPY_INTERNAL) Body file: STDOUT
NOTE: Problem generation will use 4 threads.
NOTE: The problem has 105 variables (0 free, 0 fixed).
NOTE: The problem has 105 binary and 0 integer variables.
NOTE: The problem has 278 linear constraints (183 LE, 5 EQ, 90 GE, 0 range).
NOTE: The problem has 660 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 120 constraints.
NOTE: The MILP presolver removed 120 constraint coefficients.
NOTE: The MILP presolver added 120 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 105 variables, 158 constraints, and 540 constraint_
↪coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.
NOTE: The Branch and Cut algorithm is using up to 4 threads.
```

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	2	-14.9000000	135.0000000	111.04%	0
0	1	2	-14.9000000	67.5000000	122.07%	0
0	1	2	-14.9000000	52.0000000	128.65%	0
0	1	3	8.1000000	52.0000000	84.42%	0
0	1	3	8.1000000	50.0000000	83.80%	0
0	1	3	8.1000000	48.2500000	83.21%	0
0	1	3	8.1000000	40.0000000	79.75%	0
0	1	3	8.1000000	39.2500000	79.36%	0
0	1	3	8.1000000	34.2000000	76.32%	0
0	1	3	8.1000000	33.6187500	75.91%	0
0	1	3	8.1000000	33.0761905	75.51%	0
0	1	3	8.1000000	32.6521739	75.19%	0
0	1	3	8.1000000	32.0142857	74.70%	0
0	1	3	8.1000000	31.8222222	74.55%	0
0	1	3	8.1000000	31.3333333	74.15%	0

(continues on next page)

(continued from previous page)

0	1	3	8.1000000	30.0000000	73.00%	0
0	1	3	8.1000000	28.5000000	71.58%	0
0	1	4	14.9000000	14.9000000	0.00%	0

NOTE: The MILP solver added 28 cuts with 146 cut coefficients at the root.
NOTE: Optimal.
NOTE: Objective = 14.9.
NOTE: The data set WORK.PROB_SUMMARY has 20 observations and 3 variables.
NOTE: The data set WORK.SOL_SUMMARY has 18 observations and 3 variables.
NOTE: The data set WORK.SOLUTION has 105 observations and 6 variables.
NOTE: The data set WORK.DUAL has 278 observations and 4 variables.
NOTE: PROCEDURE OPTMODEL used (Total process time):
real time 0.18 seconds
cpu time 0.15 seconds

	Value
Label	
Objective Sense	Maximization
Objective Function	netBenefit
Objective Type	Linear
Number of Variables	105
Bounded Above	0
Bounded Below	0
Bounded Below and Above	105
Free	0
Fixed	0
Binary	105
Integer	0
Number of Constraints	278
Linear LE (<=)	183
Linear EQ (=)	5
Linear GE (>=)	90
Linear Range	0
Constraint Coefficients	660

NOTE: Converting model decentralization to OPTMODEL.
NOTE: Submitting OPTMODEL code to SAS instance.

NOTE: Writing HTML5(SASPY_INTERNAL) Body file: STDOUT
NOTE: Problem generation will use 4 threads.
NOTE: The problem has 105 variables (0 free, 0 fixed).
NOTE: The problem has 105 binary and 0 integer variables.
NOTE: The problem has 68 linear constraints (3 LE, 65 EQ, 0 GE, 0 range).
NOTE: The problem has 270 linear constraint coefficients.
NOTE: The problem has 0 nonlinear constraints (0 LE, 0 EQ, 0 GE, 0 range).
NOTE: The OPTMODEL presolver is disabled for linear problems.
NOTE: The initial MILP heuristics are applied.
NOTE: The MILP presolver value AUTOMATIC is applied.
NOTE: The MILP presolver removed 0 variables and 0 constraints.
NOTE: The MILP presolver removed 0 constraint coefficients.
NOTE: The MILP presolver modified 0 constraint coefficients.
NOTE: The presolved problem has 105 variables, 68 constraints, and 270 constraint_
→coefficients.
NOTE: The MILP solver is called.
NOTE: The parallel Branch and Cut algorithm is used.

(continues on next page)

(continued from previous page)

NOTE: The Branch and Cut algorithm is using up to 4 threads.

Node	Active	Sols	BestInteger	BestBound	Gap	Time
0	1	2	-28.1000000	135.0000000	120.81%	0
0	1	2	-28.1000000	30.0000000	193.67%	0
0	1	3	-16.3000000	30.0000000	154.33%	0
0	1	4	14.9000000	14.9000000	0.00%	0

NOTE: Optimal.

NOTE: Objective = 14.9.

NOTE: The data set WORK.PROB_SUMMARY has 20 observations and 3 variables.

NOTE: The data set WORK.SOL_SUMMARY has 18 observations and 3 variables.

NOTE: The data set WORK.SOLUTION has 105 observations and 6 variables.

NOTE: The data set WORK.DUAL has 68 observations and 4 variables.

NOTE: PROCEDURE OPTMODEL used (Total process time):

real time 0.10 seconds

cpu time 0.09 seconds

Label	Value
Objective Sense	Maximization
Objective Function	netBenefit
Objective Type	Linear

Number of Variables	105
Bounded Above	0
Bounded Below	0
Bounded Below and Above	105
Free	0
Fixed	0
Binary	105
Integer	0

Number of Constraints	68
Linear LE (<=)	3
Linear EQ (=)	65
Linear GE (>=)	0
Linear Range	0

Constraint Coefficients 270

	totalBenefit	totalCost
-	80.0	65.1
assign (A, Bristol)	1.0	
(A, Brighton)	0.0	
(A, London)	0.0	
(B, Bristol)	0.0	
(B, Brighton)	1.0	
(B, London)	0.0	
(C, Bristol)	0.0	
(C, Brighton)	1.0	
(C, London)	0.0	
(D, Bristol)	1.0	
(D, Brighton)	0.0	
(D, London)	0.0	
(E, Bristol)	0.0	
(E, Brighton)	1.0	
(E, London)	0.0	

dtype: float64

(continues on next page)

(continued from previous page)

```
Out [7]: 14.9
```


API REFERENCE

5.1 Core

5.1.1 Model

Constructor

<code>Model(**kwargs)</code>	Creates an optimization model
------------------------------	-------------------------------

`sasoptpy.Model`

class `Model` (***kwargs*)

Bases: `object`

Creates an optimization model

Parameters

name [string] Name of the model

session [`swat.cas.connection.CAS` or `saspy.SASsession`, optional] CAS or SAS Session object

Examples

```
>>> from swat import CAS
>>> import sasoptpy as so
>>> s = CAS('cas.server.address', port=12345)
>>> m = so.Model(name='my_model', session=s)
NOTE: Initialized model my_model
```

```
>>> mip = so.Model(name='mip')
NOTE: Initialized model mip
```

Components

<code>Model.get_name(self)</code>	Returns model name
<code>Model.set_session(self, session)</code>	Sets the session of model (SAS Viya via swat or SAS 9.4 via saspy)
<code>Model.get_session(self)</code>	Returns the session of the model
<code>Model.get_session_type(self)</code>	Tests if the model session is defined and still active
<code>Model.set_objective(self, expression, name)</code>	Sets the objective function for the model
<code>Model.append_objective(self, expression, name)</code>	Appends a new objective to the model
<code>Model.get_objective(self)</code>	Returns the objective function as an <i>Expression</i> object
<code>Model.get_all_objectives(self)</code>	Returns a list of objectives in the model
<code>Model.add_variable(self, name[, vartype, ...])</code>	Adds a new variable to the model
<code>Model.add_variables(self, *argv[, name, ...])</code>	Adds a group of variables to the model
<code>Model.add_implicit_variable(self[, argv, name])</code>	Adds an implicit variable to the model
<code>Model.get_variable(self, name)</code>	Returns the reference to a variable in the model
<code>Model.get_variables(self)</code>	Returns a list of variables
<code>Model.get_grouped_variables(self)</code>	Get an ordered dictionary of variables, grouped based on creation
<code>Model.get_implicit_variables(self)</code>	Returns a list of implicit variables
<code>Model.get_variable_coef(self, var)</code>	Returns the objective value coefficient of a variable
<code>Model.drop_variable(self, variable)</code>	Drops a variable from the model
<code>Model.drop_variables(self, variables)</code>	Drops a variable group from the model
<code>Model.add_constraint(self, c, name)</code>	Adds a single constraint to the model
<code>Model.add_constraints(self, argv[, name])</code>	Adds a set of constraints to the model
<code>Model.get_constraint(self, name)</code>	Returns the reference to a constraint in the model
<code>Model.get_constraints(self)</code>	Returns a list of constraints in the model
<code>Model.get_grouped_constraints(self)</code>	Get an ordered dictionary of constraints, grouped based on creation
<code>Model.drop_constraint(self, constraint)</code>	Drops a constraint from the model
<code>Model.drop_constraints(self, constraints)</code>	Drops a constraint group from the model
<code>Model.add_set(self, name[, init, value, settype])</code>	Adds a set to the model
<code>Model.add_parameter(self, *argv[, name, ...])</code>	Adds a parameter to the model
<code>Model.add_statement(self, statement[, ...])</code>	Adds a PROC OPTMODEL statement to the model
<code>Model.get_sets(self)</code>	Returns a list of Set objects in the model
<code>Model.get_parameters(self)</code>	Returns a list of Parameter objects in the model
<code>Model.get_statements(self)</code>	Returns a list of all abstract statements inside the model.
<code>Model.include(self, *argv)</code>	Adds existing variables and constraints to a model

sasoptpy.Model.get_name

`Model.get_name(self)`
Returns model name

sasoptpy.Model.set_session

`Model.set_session(self, session)`
Sets the session of model (SAS Viya via swat or SAS 9.4 via saspy)

Parameters

session [`swat.cas.connection.CAS` or `saspy.SASsession`] CAS or SAS Session object

Notes

- Session of a model can be set at initialization. See [Model](#).

sasoptpy.Model.get_session

`Model.get_session(self)`
Returns the session of the model

Returns

session [`swat.cas.connection.CAS` or `saspy.SASsession`] Session of the model, or None

sasoptpy.Model.get_session_type

`Model.get_session_type(self)`
Tests if the model session is defined and still active

Returns

session [string] 'CAS' for CAS sessions, 'SAS' for SAS sessions, None otherwise

sasoptpy.Model.set_objective

`Model.set_objective(self, expression, name, sense=None)`
Sets the objective function for the model

Parameters

expression [Expression] The objective function as an Expression

name [string] Name of the objective value

sense [string, optional] Objective value direction, 'MIN' or 'MAX'

Returns

objective [Expression] Objective function as an [Expression](#) object

See also:

Model.append_objective()

Notes

- Default objective sense is minimization (MIN)
- This method replaces the existing objective of the model. When working with multiple objectives, use *Model.append_objective()* method.

Examples

```
>>> profit = so.Expression(5 * sales - 2 * material, name='profit')
>>> m.set_objective(profit, so.MAX)
>>> print(m.get_objective())
- 2.0 * material + 5.0 * sales
```

```
>>> m.set_objective(4 * x - 5 * y, name='obj')
>>> print(repr(m.get_objective()))
sasoptpy.Expression(exp = 4.0 * x - 5.0 * y, name='obj')
```

```
>>> f1 = m.set_objective(2 * x + y, sense=so.MIN, name='f1')
>>> f2 = m.append_objective((x - y) ** 2, sense=so.MIN, name='f2')
>>> print(m.to_optmodel(options={'with': 'blackbox', 'obj': (f1, f2)}))
proc optmodel;
var x;
var y;
min f1 = 2 * x + y;
min f2 = (x - y) ^ (2);
solve with blackbox obj (f1 f2);
print _var_.name _var_.lb _var_.ub _var_ _var_.rc;
print _con_.name _con_.body _con_.dual;
quit;
```

sasoptpy.Model.append_objective

Model.append_objective (*self*, *expression*, *name*, *sense=None*)

Appends a new objective to the model

Parameters

expression [Expression] The objective function as an Expression

name [string] Name of the objective value

sense [string, optional] Objective value direction, 'MIN' or 'MAX'

Returns

objective [Expression] Objective function as an *Expression* object

See also:

Model.set_objective()

Notes

- Default objective sense is minimization (MIN)

Examples

```
>>> f1 = m.set_objective(2 * x + y, sense=so.MIN, name='f1')
>>> f2 = m.append_objective( (x - y) ** 2, sense=so.MIN, name='f2')
>>> print(m.to_optmodel(options={'with': 'blackbox', 'obj': (f1, f2)}))
proc optmodel;
var x;
var y;
min f1 = 2 * x + y;
min f2 = (x - y) ^ (2);
solve with blackbox obj (f1 f2);
print _var_.name _var_.lb _var_.ub _var_ _var_.rc;
print _con_.name _con_.body _con_.dual;
quit;
```

sasoptpy.Model.get_objective

`Model.get_objective(self)`

Returns the objective function as an *Expression* object

Returns

objective [Expression] Objective function

Examples

```
>>> m.set_objective(4 * x - 5 * y, name='obj')
>>> print(repr(m.get_objective()))
sasoptpy.Expression(exp = 4.0 * x - 5.0 * y, name='obj')
```

sasoptpy.Model.get_all_objectives

`Model.get_all_objectives(self)`

Returns a list of objectives in the model

Returns

all_objectives [list] A list of *Objective* objects

Examples

```
>>> m = so.Model(name='test_set_get_objective')
>>> x = m.add_variable(name='x')
>>> obj1 = m.set_objective(2 * x, sense=so.MIN, name='obj1')
>>> obj2 = m.set_objective(5 * x, sense=so.MIN, name='obj2') # Overrides obj1
>>> obj3 = m.append_objective(10 * x, sense=so.MIN, name='obj3')
>>> assertEquals(m.get_all_objectives(), [obj2, obj3])
True
```

sasoptpy.Model.add_variable

`Model.add_variable(self, name, vartype=None, lb=None, ub=None, init=None)`

Adds a new variable to the model

New variables can be created via this method or existing variables can be added to the model.

Parameters

- name** [string, optional] Name of the variable to be created
- vartype** [string, optional] Type of the variable, either 'BIN', 'INT' or 'CONT'
- lb** [float, optional] Lower bound of the variable
- ub** [float, optional] Upper bound of the variable
- init** [float, optional] Initial value of the variable

Returns

- var** [Variable] Variable that is added to the model

See also:

Variable, *Model.include()*

Notes

- If argument *var* is not None, then all other arguments are ignored.
- A generic variable name is generated if name argument is None.

Examples

Adding a variable on the fly

```
>>> m = so.Model(name='demo')
>>> x = m.add_variable(name='x', vartype=so.INT, ub=10, init=2)
>>> print(repr(x))
NOTE: Initialized model demo
sasoptpy.Variable(name='x', lb=0, ub=10, init=2, vartype='INT')
```

Adding an existing variable to a model

```
>>> y = so.Variable(name='y', vartype=so.BIN)
>>> m = so.Model(name='demo')
>>> m.include(y)
```

sasoptpy.Model.add_variables

`Model.add_variables` (*self*, **argv*, *name=None*, *vartype=None*, *lb=None*, *ub=None*, *init=None*)

Adds a group of variables to the model

Parameters

argv [list, dict, `pandas.Index`] Loop index for variable group

name [string, optional] Name of the variables

vartype [string, optional] Type of variables, *BIN*, *INT*, or *CONT*

lb [list, dict, `pandas.Series`] Lower bounds of variables

ub [list, dict, `pandas.Series`] Upper bounds of variables

init [list, dict, `pandas.Series`] Initial values of variables

See also:

VariableGroup, *Model.include()*

Notes

If *vg* argument is passed, all other arguments are ignored.

Examples

```
>>> production = m.add_variables(PERIODS, vartype=so.INT,
                                name='production', lb=min_production)
>>> print(production)
>>> print(repr(production))
Variable Group (production) [
  [Period1: production['Period1',]]
  [Period2: production['Period2',]]
  [Period3: production['Period3',]]
]
sasoptpy.VariableGroup(['Period1', 'Period2', 'Period3'],
name='production')
```

sasoptpy.Model.add_implicit_variable

`Model.add_implicit_variable` (*self*, *argv=None*, *name=None*)

Adds an implicit variable to the model

Parameters

argv [Generator-type object] Generator object where each item is an entry

name [string, optional] Name of the implicit variable

Notes

- Based on whether generated by a regular expression or an abstract one, implicit variables may appear in generated OPTMODEL codes.

Examples

```
>>> x = m.add_variables(range(5), name='x')
>>> y = m.add_implicit_variable((
>>>     x[i] + 2 * x[i+1] for i in range(4)), name='y')
>>> print(y[2])
x[2] + 2 * x[3]
```

```
>>> I = m.add_set(name='I')
>>> z = m.add_implicit_variable((x[i] * 2 + 2 for i in I), name='z')
>>> print(z._defn())
impvar z {i_1 in I} = 2 * x[i_1] + 2;
```

sasoptpy.Model.get_variable

`Model.get_variable(self, name)`

Returns the reference to a variable in the model

Parameters

name [string] Name or key of the variable requested

Returns

variable [Variable] Reference to the variable

Examples

```
>>> m.add_variable(name='x', vartype=so.INT, lb=3, ub=5)
>>> var1 = m.get_variable('x')
>>> print(repr(var1))
sasoptpy.Variable(name='x', lb=3, ub=5, vartype='INT')
```

sasoptpy.Model.get_variables

`Model.get_variables(self)`

Returns a list of variables

Returns

variables [list] List of variables in the model

Examples

```
>>> x = m.add_variables(2, name='x')
>>> y = m.add_variable(name='y')
>>> print(m.get_variables())
[sasoptpy.Variable(name='x_0', vartype='CONT'),
 sasoptpy.Variable(name='x_1', vartype='CONT'),
 sasoptpy.Variable(name='y', vartype='CONT')]
```

sasoptpy.Model.get_grouped_variables

`Model.get_grouped_variables(self)`

Get an ordered dictionary of variables, grouped based on creation

Returns

grouped_vars [OrderedDict] Dictionary of variables and variable groups in the model

See also:

[`Model.get_variables\(\)`](#), [`Model.get_grouped_constraints\(\)`](#)

Examples

```
>>> m1 = so.Model(name='test_copy_model_1')
>>> x = m1.add_variable(name='x')
>>> y = m1.add_variables(2, name='y')
>>> vars = OrderedDict([('x', x), ('y', y)])
>>> self.assertEqual(m1.get_grouped_variables(), vars)
True
```

sasoptpy.Model.get_implicit_variables

`Model.get_implicit_variables(self)`

Returns a list of implicit variables

Returns

implicit_variables [list] List of implicit variables in the model

Examples

```
>>> m = so.Model(name='test_add_impvar')
>>> x = m.add_variables(5, name='x')
>>> y = m.add_implicit_variable((i * x[i] + x[i] ** 2 for i in range(5)),
                                name='y')
>>> assertEquals([y], m.get_implicit_variables())
True
```

sasoptpy.Model.get_variable_coef

`Model.get_variable_coef(self, var)`

Returns the objective value coefficient of a variable

Parameters

var [Variable or string] Variable whose objective value is requested or its name

Returns

coef [float] Objective value coefficient of the given variable

Examples

```
>>> x = m.add_variable(name='x')
>>> y = m.add_variable(name='y')
>>> m.set_objective(4 * x - 5 * y, name='obj', sense=so.MAX)
>>> print(m.get_variable_coef(x))
4.0
>>> print(m.get_variable_coef('y'))
-5.0
```

sasoptpy.Model.drop_variable

`Model.drop_variable(self, variable)`

Drops a variable from the model

Parameters

variable [Variable] The variable to be dropped from the model

See also:

`Model.drop_variables()`

`Model.drop_constraint()`

`Model.drop_constraints()`

Examples

```
>>> x = m.add_variable(name='x')
>>> y = m.add_variable(name='y')
>>> print(m.get_variable('x'))
x
>>> m.drop_variable(x)
>>> print(m.get_variable('x'))
None
```

sasoptpy.Model.drop_variables**Model.drop_variables** (*self, variables*)

Drops a variable group from the model

Parameters**variables** [VariableGroup] The variable group to be dropped from the model**See also:***Model.drop_variable()**Model.drop_constraint()**Model.drop_constraints()***Examples**

```
>>> x = m.add_variables(3, name='x')
>>> print(m.get_variables())
[sasoptpy.Variable(name='x_0', vartype='CONT'),
 sasoptpy.Variable(name='x_1', vartype='CONT')]
>>> m.drop_variables(x)
>>> print(m.get_variables())
[]
```

sasoptpy.Model.add_constraint**Model.add_constraint** (*self, c, name*)

Adds a single constraint to the model

Parameters**c** [Constraint] Constraint to be added to the model**name** [string, optional] Name of the constraint**Returns****c** [Constraint] Reference to the constraint**See also:***Constraint, Model.include()***Examples**

```
>>> x = m.add_variable(name='x', vartype=so.INT, lb=0, ub=5)
>>> y = m.add_variables(3, name='y', vartype=so.CONT, lb=0, ub=10)
>>> c1 = m.add_constraint(x + y[0] >= 3, name='c1')
>>> print(c1)
x + y[0] >= 3
```

```
>>> c2 = m.add_constraint(x - y[2] == [4, 10], name='c2')
>>> print(c2)
- y[2] + x = [4, 10]
```

sasoptpy.Model.add_constraints

`Model.add_constraints` (*self, argv, name=None*)

Adds a set of constraints to the model

Parameters

argv [Generator-type object] List of constraints as a Generator-type object

name [string, optional] Name for the constraint group and individual constraint prefix

Returns

cg [ConstraintGroup] Reference to the ConstraintGroup

See also:

[*ConstraintGroup*](#), [*Model.include\(\)*](#)

Examples

```
>>> x = m.add_variable(name='x', vartype=so.INT, lb=0, ub=5)
>>> y = m.add_variables(3, name='y', vartype=so.CONT, lb=0, ub=10)
>>> c = m.add_constraints((x + 2 * y[i] >= 2 for i in [0, 1, 2]),
                          name='c')
>>> print(c)
Constraint Group (c) [
  [0:  2.0 * y[0] + x >= 2]
  [1:  2.0 * y[1] + x >= 2]
  [2:  2.0 * y[2] + x >= 2]
]
```

```
>>> t = m.add_variables(3, 4, name='t')
>>> ct = m.add_constraints((t[i, j] <= x for i in range(3)
                           for j in range(4)), name='ct')
>>> print(ct)
Constraint Group (ct) [
  [(0, 0): - x + t[0, 0] <= 0]
  [(0, 1): t[0, 1] - x <= 0]
  [(0, 2): - x + t[0, 2] <= 0]
  [(0, 3): t[0, 3] - x <= 0]
  [(1, 0): t[1, 0] - x <= 0]
  [(1, 1): t[1, 1] - x <= 0]
  [(1, 2): - x + t[1, 2] <= 0]
  [(1, 3): - x + t[1, 3] <= 0]
  [(2, 0): - x + t[2, 0] <= 0]
  [(2, 1): t[2, 1] - x <= 0]
  [(2, 2): t[2, 2] - x <= 0]
  [(2, 3): t[2, 3] - x <= 0]
]
```

sasoptpy.Model.get_constraint

`Model.get_constraint(self, name)`

Returns the reference to a constraint in the model

Parameters

name [string] Name of the constraint requested

Returns

constraint [Constraint] Reference to the constraint

Examples

```
>>> m.add_constraint(2 * x + y <= 15, name='c1')
>>> print(m.get_constraint('c1'))
2.0 * x + y <= 15
```

sasoptpy.Model.get_constraints

`Model.get_constraints(self)`

Returns a list of constraints in the model

Returns

constraints [list] A list of Constraint objects

Examples

```
>>> m.add_constraint(x[0] + y <= 15, name='c1')
>>> m.add_constraints((2 * x[i] - y >= 1 for i in [0, 1]), name='c2')
>>> print(m.get_constraints())
[sasoptpy.Constraint( x[0] + y <= 15, name='c1'),
 sasoptpy.Constraint( 2.0 * x[0] - y >= 1, name='c2_0'),
 sasoptpy.Constraint( 2.0 * x[1] - y >= 1, name='c2_1')]
```

sasoptpy.Model.get_grouped_constraints

`Model.get_grouped_constraints(self)`

Get an ordered dictionary of constraints, grouped based on creation

Returns

grouped_cons [OrderedDict] Dictionary of constraints and constraint groups in the model

See also:

`Model.get_constraints()`, `Model.get_grouped_variables()`

Examples

```
>>> m1 = so.Model(name='test_copy_model_1')
>>> x = m1.add_variable(name='x')
>>> y = m1.add_variables(2, name='y')
>>> c1 = m1.add_constraint(x + y[0] >= 2, name='c1')
>>> c2 = m1.add_constraints((x - y[i] <= 10 for i in range(2)), name='c2')
>>> cons = OrderedDict([('c1', c1), ('c2', c2)])
>>> self.assertEqual(m1.get_grouped_constraints(), cons)
True
```

`sasoptpy.Model.drop_constraint`

`Model.drop_constraint` (*self*, *constraint*)

Drops a constraint from the model

Parameters

constraint [Constraint] The constraint to be dropped from the model

See also:

`Model.drop_constraints()`

`Model.drop_variable()`

`Model.drop_variables()`

Examples

```
>>> c1 = m.add_constraint(2 * x + y <= 15, name='c1')
>>> print(m.get_constraint('c1'))
2 * x + y <= 15
>>> m.drop_constraint(c1)
>>> print(m.get_constraint('c1'))
None
```

`sasoptpy.Model.drop_constraints`

`Model.drop_constraints` (*self*, *constraints*)

Drops a constraint group from the model

Parameters

constraints [ConstraintGroup] The constraint group to be dropped from the model

See also:

`Model.drop_constraints()`

`Model.drop_variable()`

`Model.drop_variables()`

Examples

```
>>> c1 = m.add_constraints((x[i] + y <= 15 for i in [0, 1]), name='c1')
>>> print(m.get_constraints())
[sasoptpy.Constraint( x[0] + y <= 15, name='c1_0'),
 sasoptpy.Constraint( x[1] + y <= 15, name='c1_1')]
>>> m.drop_constraints(c1)
>>> print(m.get_constraints())
[]
```

sasoptpy.Model.add_set

`Model.add_set(self, name, init=None, value=None, settype=None)`

Adds a set to the model

Parameters

name [string, optional] Name of the set

init [Set, optional] Initial value of the set

value [list, float, optional] Exact value of the set

settype [list, optional] Types of the set, a list consists of 'num' and 'str' values

Examples

```
>>> I = m.add_set(name='I')
>>> print(I._defn())
set I;
```

```
>>> J = m.add_set(name='J', settype=['str'])
>>> print(J._defn())
set <str> J;
```

```
>>> N = m.add_parameter(name='N', init=4)
>>> K = m.add_set(name='K', init=so.exp_range(1, N))
>>> print(K._defn())
set K = 1..N;
```

sasoptpy.Model.add_parameter

`Model.add_parameter(self, *argv, name=None, init=None, value=None, p_type=None)`

Adds a parameter to the model

Parameters

argv [Set, optional] Key set of the parameter

name [string, optional] Name of the parameter

init [float or expression, optional] Initial value of the parameter

p_type [string, optional] Type of the parameter, 'num' for floats or 'str' for strings

Examples

```
>>> I = m.add_set(name='I')
>>> a = m.add_parameter(I, name='a', init=5)
>>> print(a._defn())
num a {I} init 5 ;
```

sasoptpy.Model.add_statement

`Model.add_statement` (*self*, *statement*, *after_solve=None*)

Adds a PROC OPTMODEL statement to the model

Parameters

statement [Expression or string] Statement object

Notes

- If the statement string includes ‘print’, then it is automatically placed after solve.
- The first parameter, *statement* could be a Statement object when internally used.

Examples

```
>>> I = m.add_set(name='I')
>>> x = m.add_variables(I, name='x', vartype=so.INT)
>>> a = m.add_parameter(I, name='a')
>>> c = m.add_constraints((x[i] <= 2 * a[i] for i in I), name='c')
>>> m.add_statement('print x;', after_solve=True)
>>> print(m.to_optmodel())
proc optmodel;
min m_obj = 0;
set I;
var x {I} integer >= 0;
num a {I};
con c {i_1 in I} : x[i_1] - 2.0 * a[i_1] <= 0;
solve;
print _var_.name _var_.lb _var_.ub _var_.rc;
print _con_.name _con_.body _con_.dual;
print x;
quit;
```

sasoptpy.Model.get_sets

`Model.get_sets` (*self*)

Returns a list of Set objects in the model

sasoptpy.Model.get_parameters

`Model.get_parameters(self)`

Returns a list of `Parameter` objects in the model

sasoptpy.Model.get_statements

`Model.get_statements(self)`

Returns a list of all abstract statements inside the model.

sasoptpy.Model.include

`Model.include(self, *argv)`

Adds existing variables and constraints to a model

Parameters

argv : Objects to be included in the model

Notes

- Valid argument types:
 - `Model`
 - `Variable`
 - `Constraint`
 - `VariableGroup`
 - `ConstraintGroup`
 - `Objective`
 - `Set`
 - `Parameter`
 - `ParameterGroup`
 - `Statement` and all subclasses
 - `ImplicitVar`
- Including a model causes all variables and constraints inside the original model to be included.

Examples

Adding an existing variable

```
>>> x = so.Variable(name='x', vartype=so.CONT)
>>> m.include(x)
```

Adding an existing constraint

```
>>> c1 = so.Constraint(x + y <= 5, name='c1')
>>> m.include(c1)
```

Adding an existing set of variables

```
>>> z = so.VariableGroup(3, 5, name='z', ub=10)
>>> m.include(z)
```

Adding an existing set of constraints

```
>>> c2 = so.ConstraintGroup((x + 2 * z[i, j] >= 2 for i in range(3)
                             for j in range(5)), name='c2')
>>> m.include(c2)
```

Adding an existing model (including all of its elements)

```
>>> new_model = so.Model(name='new_model')
>>> new_model.include(m)
```

Solver calls

<code>Model.solve(self, **kwargs)</code>	Solves the model by calling CAS or SAS optimization solvers
<code>Model.tune_parameters(self, **kwargs)</code>	Uses model tuner to find ideal parameters for given model
<code>Model.get_solution(self[, vtype, solution, ...])</code>	Returns the solution details associated with the primal or dual solution
<code>Model.get_variable_value(self, var)</code>	Returns the value of a variable.
<code>Model.get_objective_value(self)</code>	Returns the optimal objective value, if it exists
<code>Model.get_solution_summary(self)</code>	Returns the solution summary table to the user
<code>Model.get_problem_summary(self)</code>	Returns the problem summary table to the user
<code>Model.get_tuner_results(self)</code>	Returns the tuner responses for the model
<code>Model.print_solution(self)</code>	Prints the current values of the variables
<code>Model.clear_solution(self)</code>	Clears the cached solution of the model

sasoptpy.Model.solve

`Model.solve(self, **kwargs)`

Solves the model by calling CAS or SAS optimization solvers

Parameters

- options** [dict, optional] A dictionary solver options
- submit** [boolean, optional] Switch for calling the solver instantly
- name** [string, optional] Name of the table name
- frame** [boolean, optional] Switch for uploading problem as a MPS DataFrame format
- drop** [boolean, optional] Switch for dropping the MPS table after solve (only CAS)
- replace** [boolean, optional] Switch for replacing an existing MPS table (only CAS and MPS)
- primalin** [boolean, optional] Switch for using initial values (only MILP)
- verbose** [boolean, optional (experimental)] Switch for printing generated OPTMODEL code

Returns

solution [`pandas.DataFrame`] Solution of the optimization model

See also:

`Model.solve_on_cas()`, `Model.solve_on_mva()`

Notes

- This method is essentially a wrapper for two other methods.
- Some of the options listed under `options` argument may not be passed based on which CAS Action is being used.
- The `option` argument should be a dictionary, where keys are option names. For example, `m.solve(options={'maxtime': 600})` limits the solution time to 600 seconds.
- See *Solver Options* for a list of solver options.

Examples

```
>>> m.solve()
NOTE: Initialized model food_manufacture_1
NOTE: Converting model food_manufacture_1 to DataFrame
NOTE: Added action set 'optimization'.
...
NOTE: Optimal.
NOTE: Objective = 107842.59259.
NOTE: The Dual Simplex solve time is 0.01 seconds.
```

```
>>> m.solve(options={'maxtime': 600})
```

```
>>> m.solve(options={'algorithm': 'ipm'})
```

`sasoptpy.Model.tune_parameters`

`Model.tune_parameters(self, **kwargs)`

Uses model tuner to find ideal parameters for given model

Parameters

kwargs : Keyword arguments as defined in the `optimization.tuner` action Acceptable values are:

- `milpParameters` : Parameters for the `solveMilp` action, such as *maxTime*, *heuristics*, *feasTol*
- `tunerParameters` : Parameters for tuner itself, such as *maxConfigs*, *printLevel*, *logFreq*
- `tuningParameters` : List of parameters to be tuned, such as *cutStrategy*, *presolver*, *restarts*

Returns

tunerResults [`swat.dataframe.SASDataFrame`] Results of tuner as a table

See also:

`Model.get_tuner_results()`

Notes

- See SAS Optimization documentation for a full list of tunable parameters: <https://go.documentation.sas.com/?docsetId=casactmopt&docsetTarget=cas-optimization-tuner.htm&docsetVersion=8.5&locale=en#PYTHON.cas-optimization-tuner-tunerparameters>
- See full documentation at: https://go.documentation.sas.com/?docsetId=casactmopt&docsetTarget=casactmopt_optimization_details35.htm&docsetVersion=8.5&locale=en

Examples

```
>>> m = so.Model(name='model11')
>>> ...
>>> results = m.tune_parameters(tunerParameters={'maxConfigs': 10})
NOTE: Initialized model knapsack_with_tuner.
NOTE: Added action set 'optimization'.
NOTE: Uploading the problem DataFrame to the server.
NOTE: Cloud Analytic Services made the uploaded file available as table KNAPSACK_
↪WITH_TUNER in caslib CASUSER(casuser).
NOTE: The table KNAPSACK_WITH_TUNER has been created in caslib CASUSER(casuser)
↪from binary data uploaded to Cloud Analytic Services.
NOTE: Start to tune the MILP
```

	SolveCalls	Configurations	BestTime	Time
	1	1	0.21	0.26
	2	2	0.19	0.50
	3	3	0.19	0.72
	4	4	0.19	0.95
	5	5	0.19	1.17
	6	6	0.19	1.56
	7	7	0.18	1.76
	8	8	0.17	1.96
	9	9	0.17	2.16
	10	10	0.17	2.35

```
NOTE: Configuration limit reached.
NOTE: The tuning time is 2.35 seconds.
>>> print(results)
```

	Configuration	conflictSearch	...	Sum of Run Times	Percentage Successful
0	0.0	automatic	...	0.20	100.0
1	1.0	none	...	0.17	100.0
2	2.0	none	...	0.17	100.0
3	3.0	moderate	...	0.17	100.0
4	4.0	none	...	0.18	100.0
5	5.0	none	...	0.18	100.0
6	6.0	aggressive	...	0.18	100.0
7	7.0	moderate	...	0.18	100.0
8	8.0	aggressive	...	0.19	100.0
9	9.0	automatic	...	0.36	100.0

```
>>> results = m.tune_parameters(
    milpParameters={'maxtime': 10},
    tunerParameters={'maxConfigs': 20, 'logfreq': 5},
    tuningParameters=[
        {'option': 'presolver', 'initial': 'none', 'values': ['basic',
↪'aggressive', 'none']},
        {'option': 'cutStrategy'},
        {'option': 'strongIter', 'initial': -1, 'values': [-1, 100, 1000]}
    ])

```

(continues on next page)

(continued from previous page)

```

    ])
NOTE: Added action set 'optimization'.
NOTE: Uploading the problem DataFrame to the server.
NOTE: Cloud Analytic Services made the uploaded file available as table KNAPSACK_
↪WITH_TUNER in caslib CASUSER(casuser).
NOTE: The table KNAPSACK_WITH_TUNER has been created in caslib CASUSER(casuser) ↪
↪from binary data uploaded to Cloud Analytic Services.
NOTE: Start to tune the MILP
      SolveCalls  Configurations  BestTime      Time
           5           5         0.17      1.01
          10          10         0.17      2.00
          15          15         0.17      2.98
          20          20         0.17      3.95
NOTE: Configuration limit reached.
NOTE: The tuning time is 3.95 seconds.
>>> print(results)
      Configuration  conflictSearch  ... Sum of Run Times Percentage Successful
0                0.0      automatic  ...          0.17          100.0
1                1.0             none  ...          0.16          100.0
2                2.0             none  ...          0.16          100.0
3                3.0             none  ...          0.16          100.0
4                4.0             none  ...          0.16          100.0
5                5.0             none  ...          0.17          100.0
6                6.0             none  ...          0.17          100.0
7                7.0             none  ...          0.17          100.0
8                8.0             none  ...          0.17          100.0
9                9.0             none  ...          0.17          100.0
10               10.0             none  ...          0.17          100.0
11               11.0      aggressive  ...          0.17          100.0
12               12.0             none  ...          0.17          100.0
13               13.0      aggressive  ...          0.17          100.0
14               14.0      automatic  ...          0.17          100.0
15               15.0             none  ...          0.17          100.0
16               16.0             none  ...          0.17          100.0
17               17.0      moderate  ...          0.17          100.0
18               18.0      moderate  ...          0.17          100.0
19               19.0             none  ...          0.17          100.0

```

sasoptpy.Model.get_solution

`Model.get_solution(self, vtype='Primal', solution=None, pivot=False)`

Returns the solution details associated with the primal or dual solution

Parameters

vtype [string, optional] 'Primal' or 'Dual'

solution [integer, optional] Solution number to be returned (for MILP)

pivot [boolean, optional] Switch for returning multiple solutions in columns as a pivot table

Returns

solution [pandas.DataFrame] Primal or dual solution table returned from the CAS Action

Notes

- If `Model.solve()` method is used with `frame=True` option, MILP solver returns multiple solutions. You can obtain different results using `solution` parameter.

Examples

```
>>> m.solve()
>>> print(m.get_solution('Primal'))
```

	var	lb	ub	value	solution
0	x[clock]	0.0	1.797693e+308	0.0	1.0
1	x[pc]	0.0	1.797693e+308	5.0	1.0
2	x[headphone]	0.0	1.797693e+308	2.0	1.0
3	x[mug]	0.0	1.797693e+308	0.0	1.0
4	x[book]	0.0	1.797693e+308	0.0	1.0
5	x[pen]	0.0	1.797693e+308	1.0	1.0
6	x[clock]	0.0	1.797693e+308	0.0	2.0
7	x[pc]	0.0	1.797693e+308	5.0	2.0
8	x[headphone]	0.0	1.797693e+308	2.0	2.0
9	x[mug]	0.0	1.797693e+308	0.0	2.0
10	x[book]	0.0	1.797693e+308	0.0	2.0
11	x[pen]	0.0	1.797693e+308	0.0	2.0
12	x[clock]	0.0	1.797693e+308	1.0	3.0
13	x[pc]	0.0	1.797693e+308	4.0	3.0
...					

```
>>> print(m.get_solution('Primal', solution=2))
```

	var	lb	ub	value	solution
6	x[clock]	0.0	1.797693e+308	0.0	2.0
7	x[pc]	0.0	1.797693e+308	5.0	2.0
8	x[headphone]	0.0	1.797693e+308	2.0	2.0
9	x[mug]	0.0	1.797693e+308	0.0	2.0
10	x[book]	0.0	1.797693e+308	0.0	2.0
11	x[pen]	0.0	1.797693e+308	0.0	2.0

```
>>> print(m.get_solution(pivot=True))
```

solution	1.0	2.0	3.0	4.0	5.0
var					
x[book]	0.0	0.0	0.0	1.0	0.0
x[clock]	0.0	0.0	1.0	1.0	0.0
x[headphone]	2.0	2.0	1.0	1.0	0.0
x[mug]	0.0	0.0	0.0	1.0	0.0
x[pc]	5.0	5.0	4.0	1.0	0.0
x[pen]	1.0	0.0	0.0	1.0	0.0

```
>>> print(m.get_solution('Dual'))
```

	con	value	solution
0	weight_con	20.0	1.0
1	limit_con[clock]	0.0	1.0
2	limit_con[pc]	5.0	1.0
3	limit_con[headphone]	2.0	1.0
4	limit_con[mug]	0.0	1.0
5	limit_con[book]	0.0	1.0
6	limit_con[pen]	1.0	1.0
7	weight_con	19.0	2.0

(continues on next page)

(continued from previous page)

```

8      limit_con[clock]    0.0    2.0
9      limit_con[pc]      5.0    2.0
10     limit_con[headphone] 2.0    2.0
11     limit_con[mug]      0.0    2.0
12     limit_con[book]     0.0    2.0
13     limit_con[pen]      0.0    2.0
...

```

```

>>> print(m.get_solution('dual', pivot=True))
solution      1.0    2.0    3.0    4.0    5.0
con
limit_con[book]    0.0    0.0    0.0    1.0    0.0
limit_con[clock]   0.0    0.0    1.0    1.0    0.0
limit_con[headphone] 2.0    2.0    1.0    1.0    0.0
limit_con[mug]     0.0    0.0    0.0    1.0    0.0
limit_con[pc]      5.0    5.0    4.0    1.0    0.0
limit_con[pen]     1.0    0.0    0.0    1.0    0.0
weight_con        20.0   19.0   20.0   19.0    0.0

```

sasoptpy.Model.get_variable_value

`Model.get_variable_value(self, var)`

Returns the value of a variable.

Parameters

var [Variable or string] Variable reference

Notes

- It is possible to get a variable's value by using the `Variable.get_value()` method, if the variable is not abstract.
- This method is a wrapper around `Variable.get_value()` and an overlook function for model components

sasoptpy.Model.get_objective_value

`Model.get_objective_value(self)`

Returns the optimal objective value, if it exists

Returns

objective_value [float] Objective value at current solution

Notes

- This method should be used for getting the objective value after solve. Using `m.get_objective().get_value()` actually evaluates the expression using optimal variable values. This may not be available for nonlinear expressions.

Examples

```
>>> m.solve()
>>> print(m.get_objective_value())
42.0
```

`sasoptpy.Model.get_solution_summary`

`Model.get_solution_summary(self)`

Returns the solution summary table to the user

Returns

`ss [swat.dataframe.SASDataFrame]` Solution summary obtained after solve

Examples

```
>>> m.solve()
>>> soln = m.get_solution_summary()
>>> print(type(soln))
<class 'swat.dataframe.SASDataFrame'>
```

```
>>> print(soln)
Solution Summary

```

	Value
Label	
Solver	LP
Algorithm	Dual Simplex
Objective Function	obj
Solution Status	Optimal
Objective Value	10
Primal Infeasibility	0
Dual Infeasibility	0
Bound Infeasibility	0
Iterations	2
Presolve Time	0.00
Solution Time	0.01

```
>>> print(soln.index)
Index(['Solver', 'Algorithm', 'Objective Function', 'Solution Status',
      'Objective Value', '', 'Primal Infeasibility',
      'Dual Infeasibility', 'Bound Infeasibility', '', 'Iterations',
      'Presolve Time', 'Solution Time'],
      dtype='object', name='Label')
```

```
>>> print(soln.loc['Solution Status', 'Value'])
Optimal
```


sasoptpy.Model.get_problem_summary**Model.get_problem_summary** (*self*)

Returns the problem summary table to the user

Returns**ps** [swat.dataframe.SASDataFrame] Problem summary obtained after *Model.solve()***Examples**

```
>>> m.solve()
>>> ps = m.get_problem_summary()
>>> print(type(ps))
<class 'swat.dataframe.SASDataFrame'>
```

```
>>> print(ps)
Problem Summary
                                Value
Label
Problem Name                    modell
Objective Sense                 Maximization
Objective Function                obj
RHS                             RHS
Number of Variables              2
Bounded Above                   0
Bounded Below                   2
Bounded Above and Below         0
Free                            0
Fixed                           0
Number of Constraints            2
LE (<=)                         1
EQ (=)                          0
GE (>=)                         1
Range                           0
Constraint Coefficients         4
```

```
>>> print(ps.index)
Index(['Problem Name', 'Objective Sense', 'Objective Function', 'RHS',
      '', 'Number of Variables', 'Bounded Above', 'Bounded Below',
      'Bounded Above and Below', 'Free', 'Fixed', '',
      'Number of Constraints', 'LE (<=)', 'EQ (=)', 'GE (>=)', 'Range', '',
      'Constraint Coefficients'],
      dtype='object', name='Label')
```

```
>>> print(ps.loc['Number of Variables'])
Value      2
Name: Number of Variables, dtype: object
```

```
>>> print(ps.loc['Constraint Coefficients', 'Value'])
4
```

sasoptpy.Model.get_tuner_results

`Model.get_tuner_results(self)`

Returns the tuner responses for the model

Returns

tunerResults [dict] Returns tuner results as a dictionary. Its members are - Performance Information - Tuner Information - Tuner Summary - Tuner Results

See also:

`Model.tune_parameters()`

Examples

```
>>> m.tune_parameters(tunerParameters={'maxConfigs': 10})
>>> results = m.get_tuner_results()
```

sasoptpy.Model.print_solution

`Model.print_solution(self)`

Prints the current values of the variables

See also:

`Model.get_solution()`

Notes

- This function may not work for abstract variables and nonlinear models.

Examples

```
>>> m.solve()
>>> m.print_solution()
x: 2.0
y: 0.0
```

sasoptpy.Model.clear_solution

`Model.clear_solution(self)`

Clears the cached solution of the model

Notes

- This method only cleans model's own parameters, not its components'

Export

```
Model.to_mps(self, \*\*kwargs)
```

```
Model.to_optmodel(self, \*\*kwargs)
```

sasoptpy.Model.to_mps

```
Model.to_mps (self, **kwargs)
```

sasoptpy.Model.to_optmodel

```
Model.to_optmodel (self, **kwargs)
```

Internal functions

```
Model._is_linear(self)
```

Checks if the model can be written as a linear model (in MPS format)

sasoptpy.Model._is_linear

```
Model._is_linear (self)
```

Checks if the model can be written as a linear model (in MPS format)

Returns

is_linear [boolean] True if model does not have any nonlinear components or abstract operations, False otherwise

Deprecated

Deprecated since version 1.0.0.

The following method(s) are deprecated and will be removed in future minor updates.

```
Model.to_frame(self, \*\*kwargs)
```

sasoptpy.Model.to_frame

`Model.to_frame(self, **kwargs)`

5.1.2 Expression

Constructor

<code>Expression([exp, name])</code>	Creates a mathematical expression to represent model components
<code>Auxiliary(base[, prefix, suffix, operator, ...])</code>	Represents an auxiliary expression, often as a symbolic attribute
<code>Symbol(name)</code>	Represents a symbolic string, to be evaluated on server-side

sasoptpy.Expression

class Expression (*exp=None, name=None*)

Bases: `object`

Creates a mathematical expression to represent model components

Parameters

- exp** [Expression, optional] An existing expression where arguments are being passed
- name** [string, optional] A local name for the expression
- temp** [boolean, optional] A boolean shows whether expression is temporary or permanent

Notes

- Two other classes (*Variable* and *Constraint*) are subclasses of this class.
- Expressions are created automatically after linear math operations with variables.
- An expression object can be called when defining constraints and other expressions.

Examples

```
>>> x = so.Variable(name='x')
>>> y = so.VariableGroup(3, name='y')
>>> e = so.Expression(exp=x + 3 * y[0] - 5 * y[1], name='exp1')
>>> print(e)
- 5.0 * y[1] + 3.0 * y[0] + x
>>> print(repr(e))
sasoptpy.Expression(exp = - 5.0 * y[1] + 3.0 * y[0] + x ,
                    name='exp1')
```

```
>>> sales = so.Variable(name='sales')
>>> material = so.Variable(name='material')
>>> profit = 5 * sales - 3 * material
```

(continues on next page)

(continued from previous page)

```
>>> print(profit)
5.0 * sales - 3.0 * material
>>> print(repr(profit))
sasoptpy.Expression(exp = 5.0 * sales - 3.0 * material , name=None)
```

```
>>> import sasoptpy.abstract.math as sm
>>> f = sm.sin(x) + sm.min(y[1],1) ** 2
>>> print(type(f))
<class 'sasoptpy.core.Expression'>
>>> print(f)
sin(x) + (min(y[1] , 1)) ** (2)
```

sasoptpy.Auxiliary

class Auxiliary (*base, prefix=None, suffix=None, operator=None, value=None*)

Bases: `sasoptpy.core.expression.Expression`

Represents an auxiliary expression, often as a symbolic attribute

Parameters

- base** [*Expression*] Original owner of the auxiliary value
- prefix** [string, optional] Prefix of the expression
- suffix** [string, optional] Suffix of the expression
- operator** [string, optional] Wrapping operator
- value** [float, optional] Initial value of the symbolic object

Notes

- Auxiliary objects are for internal use

sasoptpy.Symbol

class Symbol (*name*)

Bases: `sasoptpy.core.expression.Expression`

Represents a symbolic string, to be evaluated on server-side

Parameters

- name** [string] String to be symbolized

Notes

- Symbol objects can be used for values that does not translate to a value on client-side, but have meaning on execution. For example, `_N_` is a SAS symbol, which can be used in OPTMODEL strings.

General methods

<code>Expression.set_name(self[, name])</code>	Sets the name of the expression
<code>Expression.set_permanent(self)</code>	Converts a temporary expression into a permanent one
<code>Expression.set_temporary(self)</code>	Converts expression into temporary to enable in-place operations
<code>Expression.get_name(self)</code>	Returns the name of the expression
<code>Expression.get_value(self)</code>	Calculates and returns the value of the linear expression
<code>Expression.get_dual(self)</code>	Returns the dual value if exists

`sasoptpy.Expression.set_name`

`Expression.set_name(self, name=None)`

Sets the name of the expression

Parameters

name [string] Name of the expression

Returns

name [string] Name of the expression after resolving conflicts

Examples

```
>>> x = so.Variable(name='x')
>>> e = x**2 + 2*x + 1
>>> e.set_name('expansion')
```

`sasoptpy.Expression.set_permanent`

`Expression.set_permanent(self)`

Converts a temporary expression into a permanent one

Parameters

name [string, optional] Name of the expression

Returns

name [string] Name of the expression in the namespace

`sasoptpy.Expression.set_temporary`

`Expression.set_temporary(self)`

Converts expression into temporary to enable in-place operations

`sasoptpy.Expression.get_name`

`Expression.get_name(self)`

Returns the name of the expression

Returns

name [string] Name of the expression

Examples

```
>>> m = so.Model()
>>> var1 = m.add_variables(name='x')
>>> print(var1.get_name())
x
```

`sasoptpy.Expression.get_value`

`Expression.get_value(self)`

Calculates and returns the value of the linear expression

Returns

v [float] Value of the expression

Examples

```
>>> sales = so.Variable(name='sales', init=10)
>>> material = so.Variable(name='material', init=3)
>>> profit = so.Expression(5 * sales - 3 * material)
>>> print(profit.get_value())
41
```

`sasoptpy.Expression.get_dual`

`Expression.get_dual(self)`

Returns the dual value if exists

Returns

dual [float] Dual value of the variable

Operations

<code>Expression.add(self, other[, sign])</code>	Combines two expressions and produces a new one
<code>Expression.copy(self[, name])</code>	Returns a copy of the <i>Expression</i> object
<code>Expression.mult(self, other)</code>	Multiplies the <i>Expression</i> with a scalar value
<code>Expression.get_member(self, key)</code>	Returns the requested member using the key
<code>Expression.get_member_dict(self)</code>	Returns an ordered dictionary of elements
<code>Expression.get_member_value(self, key)</code>	Returns coefficient of requested member
<code>Expression.get_constant(self)</code>	Returns the constant term in the expression
<code>Expression.set_member(self, key, ref, val[, op])</code>	Adds a new member or changes an existing member
<code>Expression.set_member_value(self, key, value)</code>	Changes the coefficient of the requested member
<code>Expression.add_to_member_value(self, key, value)</code>	Adds given value to the coefficient of the requested member
<code>Expression.mult_member_value(self, key, value)</code>	Multiplies coefficient of the requested member with given value
<code>Expression.copy_member(self, key, exp)</code>	Copies member of another expression
<code>Expression.delete_member(self, key)</code>	Deletes the requested member from the core dictionary

sasoptpy.Expression.add

`Expression.add(self, other, sign=1)`

Combines two expressions and produces a new one

Parameters

other [float or Expression] Second expression or constant value to be added

sign [int, optional] Sign of the addition, 1 or -1

Returns

r [Expression] Reference to the outcome of the operation

Notes

- Adding an expression is equivalent to calling this method: $(x-y)+(3*x-2*y)$ and $(x-y).add(3*x-2*y)$ result the same.

sasoptpy.Expression.copy

`Expression.copy(self, name=None)`

Returns a copy of the *Expression* object

Parameters

name [string, optional] Name for the copy

Returns

r [Expression] Copy of the object

Examples

```
>>> x = so.Variable(name='x')
>>> y = so.VariableGroup(1, name='y')
>>> e = so.Expression(7 * x - y[0], name='e')
>>> print(repr(e))
sasoptpy.Expression(exp = - y[0] + 7.0 * x , name='e')
>>> f = e.copy(name='f')
>>> print(repr(f))
sasoptpy.Expression(exp = - y[0] + 7.0 * x , name='f')
```

sasoptpy.Expression.mult

`Expression.mult(self, other)`

Multiplies the *Expression* with a scalar value

Parameters

other [Expression or int] Second expression to be multiplied

Returns

r [Expression] A new *Expression* that represents the multiplication

Notes

- This method is mainly for internal use.
- Multiplying an expression is equivalent to calling this method: $3*(x-y)$ and $(x-y).mult(3)$ are interchangeable.

sasoptpy.Expression.get_member

`Expression.get_member(self, key)`

Returns the requested member using the key

Parameters

key [string] Identifier of the member, name for single objects

Returns

member [dict] A dictionary of coefficient, operator, and reference of member

sasoptpy.Expression.get_member_dict

`Expression.get_member_dict(self)`

Returns an ordered dictionary of elements

sasoptpy.Expression.get_member_value

`Expression.get_member_value(self, key)`

Returns coefficient of requested member

Parameters

key [string] Identifier of the member

Returns

value [float] Coefficient value of the requested member

sasoptpy.Expression.get_constant

`Expression.get_constant(self)`

Returns the constant term in the expression

Examples

```
>>> x = so.Variable(name='x')
>>> e = 2 * x + 5
>>> print(e.get_constant())
5
```

sasoptpy.Expression.set_member

`Expression.set_member(self, key, ref, val, op=None)`

Adds a new member or changes an existing member

Parameters

key [string] Identifier of the member

ref [Object] A reference to the new member

val [float] Initial coefficient of the element

op [string, optional] Operator, if member consists of multiple children

sasoptpy.Expression.set_member_value

`Expression.set_member_value(self, key, value)`

Changes the coefficient of the requested member

Parameters

key [string] Identifier of the member

value [float] New coefficient value of the member

sasoptpy.Expression.add_to_member_value

`Expression.add_to_member_value` (*self*, *key*, *value*)
Adds given value to the coefficient of the requested member

Parameters

key [string] Identifier of the member
value [float] Value to be added

sasoptpy.Expression.mult_member_value

`Expression.mult_member_value` (*self*, *key*, *value*)
Multiplies coefficient of the requested member with given value

Parameters

key [string] Identifier of the member
value [float] Value to be multiplied with

sasoptpy.Expression.copy_member

`Expression.copy_member` (*self*, *key*, *exp*)
Copies member of another expression

Parameters

key [string] Identifier of the member
exp [*Expression*] Other expression to be copied from

sasoptpy.Expression.delete_member

`Expression.delete_member` (*self*, *key*)
Deletes the requested member from the core dictionary

Class methods

`Expression.to_expression`(obj)

sasoptpy.Expression.to_expression

classmethod Expression.to_expression(*obj*)

Private Methods

<code>Expression._expr(self)</code>	Generates the OPTMODEL compatible string representation of the object.
<code>Expression._is_linear(self)</code>	Checks if the expression is composed of linear components
<code>Expression._relational(self, other, direction_)</code>	Creates a logical relation between <i>Expression</i> objects
<code>Expression.__repr__(self)</code>	Returns a string representation of the object.
<code>Expression.__str__(self)</code>	Generates a representation string that is Python compatible

sasoptpy.Expression._expr

Expression._expr(*self*)
Generates the OPTMODEL compatible string representation of the object.

Examples

```
>>> x = so.Variable(name='x')
>>> y = so.Variable(name='y')
>>> f = x + y ** 2
>>> print(f)
x + (y) ** (2)
>>> print(f._expr())
x + (y) ^ (2)
```

sasoptpy.Expression._is_linear

Expression._is_linear(*self*)
Checks if the expression is composed of linear components

Returns

is_linear [boolean] True if the expression is linear, False otherwise

Examples

```
>>> x = so.Variable()
>>> e = x*x
>>> print(e.is_linear())
False
```

```
>>> f = x*x + x*x - 2*x*x + 5
>>> print(f.is_linear())
True
```

sasoptpy.Expression._relational

Expression.**_relational** (*self*, *other*, *direction_*)
Creates a logical relation between *Expression* objects

Parameters

- other** [Expression] Expression on the other side of the relation wrt self
- direction_** [string] Direction of the logical relation, either 'E', 'L', or 'G'

Returns

- generated_constraint** [Constraint] Constraint generated as a result of linear relation

sasoptpy.Expression.__repr__

Expression.**__repr__** (*self*)
Returns a string representation of the object.

Examples

```
>>> x = so.Variable(name='x')
>>> y = so.Variable(name='y')
>>> f = x + y ** 2
>>> print(repr(f))
sasoptpy.Expression(exp = x + (y) ** (2), name=None)
```

sasoptpy.Expression.__str__

Expression.**__str__** (*self*)
Generates a representation string that is Python compatible

Examples

```
>>> f = x + y ** 2
>>> print(str(f))
x + (y) ** (2)
```

5.1.3 Variable

Constructor

<code>Objective(**kwargs)</code>	Objective represents expressions with sense and used as target value in optimization
----------------------------------	--

`sasoptpy.Objective`

class Objective (***kwargs*)

Bases: `sasoptpy.core.expression.Expression`

Objective represents expressions with sense and used as target value in optimization

Parameters

exp [*Expression*] Objective as an expression

name [string] Unique name of the expression

sense [string, optional] Direction of the objective, `sasoptpy.MIN` (default) or `sasoptpy.MAX`

Examples

```
>>> m = so.Model(name='test_objective')
>>> x = m.add_variable(name='x')
>>> obj = m.set_objective(2 * x - x ** 3, sense=so.MIN, name='new_obj')
>>> str(m.get_objective())
2 * x - (x) ** (3)
>>> type(obj)
sasoptpy.Objective
```

Methods

<code>Objective.set_sense(self, sense)</code>	Sets the objective sense (direction)
<code>Objective.get_sense(self)</code>	Returns the objective sense (direction)

sasoptpy.Objective.set_sense

`Objective.set_sense(self, sense)`
 Sets the objective sense (direction)

Parameters

sense [string] sasoptpy.MIN or sasoptpy.MAX

sasoptpy.Objective.get_sense

`Objective.get_sense(self)`
 Returns the objective sense (direction)

5.1.4 Variable**Constructor**

<code>Variable(**kwargs)</code>	Creates an optimization variable to be used inside models
---------------------------------	---

sasoptpy.Variable

class Variable (***kwargs*)
 Bases: `sasoptpy.core.expression.Expression`
 Creates an optimization variable to be used inside models

Parameters

name [string] Name of the variable
vartype [string, optional] Type of the variable, default is continuous
lb [float, optional] Lower bound of the variable, default is -inf
ub [float, optional] Upper bound of the variable, default is inf
init [float, optional] Initial value of the variable
abstract [boolean, optional] Indicator of whether the variable is abstract or not
shadow [boolean, optional] Indicator of whether the variable is shadow or not Used for internal purposes

See also:

`sasoptpy.Model.add_variable()`

Examples

```
>>> x = so.Variable(name='x', lb=0, ub=20, vartype=so.CONT)
>>> print(repr(x))
sasoptpy.Variable(name='x', lb=0, ub=20, vartype='CONT')
```

```
>>> y = so.Variable(name='y', init=1, vartype=so.INT)
>>> print(repr(y))
sasoptpy.Variable(name='y', lb=0, ub=inf, init=1, vartype='INT')
```

Attributes

lb Lower bound of the variable

ub Upper bound of the variable

Attributes

<code>Variable.lb</code>	Lower bound of the variable
<code>Variable.ub</code>	Upper bound of the variable

`sasoptpy.Variable.lb`

property `Variable.lb`
Lower bound of the variable

`sasoptpy.Variable.ub`

property `Variable.ub`
Upper bound of the variable

Methods

<code>Variable.set_bounds(self, *[, lb, ub])</code>	Changes bounds on a variable
<code>Variable.set_init(self[, init])</code>	Changes initial value of a variable
<code>Variable.get_type(self)</code>	Returns the type of variable, valid values are:
<code>Variable.get_attributes(self)</code>	Returns an OrderedDict of main attributes

`sasoptpy.Variable.set_bounds`

`Variable.set_bounds(self, *, lb=None, ub=None)`
Changes bounds on a variable

Parameters

lb [float or *Expression*] Lower bound of the variable

ub [float or *Expression*] Upper bound of the variable

Examples

```
>>> x = so.Variable(name='x', lb=0, ub=20)
>>> print(repr(x))
sasoptpy.Variable(name='x', lb=0, ub=20, vartype='CONT')
>>> x.set_bounds(lb=5, ub=15)
>>> print(repr(x))
sasoptpy.Variable(name='x', lb=5, ub=15, vartype='CONT')
```

sasoptpy.Variable.set_init

Variable.**set_init** (*self*, *init=None*)

Changes initial value of a variable

Parameters

init [float or None] Initial value of the variable

Examples

```
>>> x = so.Variable(name='x')
>>> x.set_init(5)

>>> y = so.Variable(name='y', init=3)
>>> y.set_init()
```

sasoptpy.Variable.get_type

Variable.**get_type** (*self*)

Returns the type of variable, valid values are:

- sasoptpy.CONT
- sasoptpy.INT
- sasoptpy.BIN

sasoptpy.Variable.get_attributes

Variable.**get_attributes** (*self*)

Returns an OrderedDict of main attributes

Returns

attributes [dict] OrderedDict consists of *init*, *lb*, and *ub* attributes

Inherited Methods

<code>Variable.copy(self[, name])</code>	Returns a copy of the <i>Expression</i> object
<code>Variable.get_dual(self)</code>	Returns the dual value if exists
<code>Variable.get_name(self)</code>	Returns the name of the expression
<code>Variable.get_value(self)</code>	Returns value of a variable

sasoptpy.Variable.copy

`Variable.copy(self, name=None)`

Returns a copy of the *Expression* object

Parameters

name [string, optional] Name for the copy

Returns

r [Expression] Copy of the object

Examples

```
>>> x = so.Variable(name='x')
>>> y = so.VariableGroup(1, name='y')
>>> e = so.Expression(7 * x - y[0], name='e')
>>> print(repr(e))
sasoptpy.Expression(exp = - y[0] + 7.0 * x , name='e')
>>> f = e.copy(name='f')
>>> print(repr(f))
sasoptpy.Expression(exp = - y[0] + 7.0 * x , name='f')
```

sasoptpy.Variable.get_dual

`Variable.get_dual(self)`

Returns the dual value if exists

Returns

dual [float] Dual value of the variable

sasoptpy.Variable.get_name

`Variable.get_name(self)`

Returns the name of the expression

Returns

name [string] Name of the expression

Examples

```
>>> m = so.Model()
>>> var1 = m.add_variables(name='x')
>>> print(var1.get_name())
x
```

sasoptpy.Variable.get_value

`Variable.get_value(self)`
Returns value of a variable

5.1.5 Variable Group

Constructor

<code>VariableGroup(**kwargs)</code>	Creates a group of <i>Variable</i> objects
--------------------------------------	--

sasoptpy.VariableGroup

class `VariableGroup(**kwargs)`
Bases: `sasoptpy.core.group.Group`
Creates a group of *Variable* objects

Parameters

argv [list, dict, int, `pandas.Index`] Loop index for variable group
name [string, optional] Name (prefix) of the variables
vartype [string, optional] Type of variables, *BIN*, *INT*, or *CONT*
lb [list, dict, `pandas.Series`, optional] Lower bounds of variables
ub [list, dict, `pandas.Series`, optional] Upper bounds of variables
init [float, optional] Initial values of variables

See also:

`sasoptpy.Model.add_variables()`
`sasoptpy.Model.include()`

Notes

- When working with a single model, use the `sasoptpy.Model.add_variables()` method.
- If a variable group object is created, it can be added to a model using the `sasoptpy.Model.include()` method.
- An individual variable inside the group can be accessed using indices.

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z', lb=0, ub=10)
>>> print(repr(z[0, 'a']))
sasoptpy.Variable(name='z_0_a', lb=0, ub=10, vartype='CONT')
```

Examples

```
>>> PERIODS = ['Period1', 'Period2', 'Period3']
>>> production = so.VariableGroup(PERIODS, vartype=so.INT,
                                name='production', lb=10)

>>> print(production)
Variable Group (production) [
  [Period1: production['Period1']]
  [Period2: production['Period2']]
  [Period3: production['Period3']]
]
```

```
>>> x = so.VariableGroup(4, vartype=so.BIN, name='x')
>>> print(x)
Variable Group (x) [
  [0: x[0]]
  [1: x[1]]
  [2: x[2]]
  [3: x[3]]
]
```

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z')
>>> print(z)
Variable Group (z) [
  [(0, 'a'): z[0, 'a']]
  [(0, 'b'): z[0, 'b']]
  [(0, 'c'): z[0, 'c']]
  [(1, 'a'): z[1, 'a']]
  [(1, 'b'): z[1, 'b']]
  [(1, 'c'): z[1, 'c']]
]
>>> print(repr(z))
sasoptpy.VariableGroup([0, 1], ['a', 'b', 'c'], name='z')
```

Methods

<code>VariableGroup.get_name(self)</code>	Returns the name of the variable group
<code>VariableGroup.get_attributes(self)</code>	Returns an OrderedDict of main attributes
<code>VariableGroup.get_type(self)</code>	Returns the type of variable, valid values are:
<code>VariableGroup.get_members(self)</code>	Returns a dictionary of members
<code>VariableGroup.set_bounds(self[, lb, ub, members])</code>	Sets / updates bounds for the given variable
<code>VariableGroup.set_init(self, init)</code>	Sets / updates initial value for the given variable
<code>VariableGroup.mult(self, vector)</code>	Quick multiplication method for the variable groups
<code>VariableGroup.sum(self, *argv)</code>	Quick sum method for the variable groups

sasoptpy.VariableGroup.get_name

`VariableGroup.get_name(self)`
Returns the name of the variable group

Returns

name [string] Name of the variable group

Examples

```
>>> m = so.Model(name='m')
>>> var1 = m.add_variables(4, name='x')
>>> print(var1.get_name())
x
```

sasoptpy.VariableGroup.get_attributes

`VariableGroup.get_attributes(self)`
Returns an OrderedDict of main attributes

Returns

attributes [dict] OrderedDict consists of *init*, *lb*, and *ub* attributes

sasoptpy.VariableGroup.get_type

`VariableGroup.get_type(self)`
Returns the type of variable, valid values are:

- `sasoptpy.CONT`
- `sasoptpy.INT`
- `sasoptpy.BIN`

`sasoptpy.VariableGroup.get_members`

`VariableGroup.get_members` (*self*)
Returns a dictionary of members

`sasoptpy.VariableGroup.set_bounds`

`VariableGroup.set_bounds` (*self*, *lb=None*, *ub=None*, *members=True*)
Sets / updates bounds for the given variable

Parameters

lb [float, `pandas.Series`, optional] Lower bound

ub [float, `pandas.Series`, optional] Upper bound

Examples

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z', lb=0, ub=10)
>>> print(repr(z[0, 'a']))
sasoptpy.Variable(name='z_0_a', lb=0, ub=10, vartype='CONT')
>>> z.set_bounds(lb=3, ub=5)
>>> print(repr(z[0, 'a']))
sasoptpy.Variable(name='z_0_a', lb=3, ub=5, vartype='CONT')
```

```
>>> u = so.VariableGroup(['a', 'b', 'c', 'd'], name='u')
>>> lb_vals = pd.Series([1, 4, 0, -1], index=['a', 'b', 'c', 'd'])
>>> u.set_bounds(lb=lb_vals)
>>> print(repr(u['b']))
sasoptpy.Variable(name='u_b', lb=4, ub=inf, vartype='CONT')
```

`sasoptpy.VariableGroup.set_init`

`VariableGroup.set_init` (*self*, *init*)
Sets / updates initial value for the given variable

Parameters

init [float, list, dict, `pandas.Series`] Initial value of the variables

Examples

```
>>> m = so.Model(name='m')
>>> y = m.add_variables(3, name='y')
>>> print(y._defn())
var y {{0,1,2}};
>>> y.set_init(5)
>>> print(y._defn())
var y {{0,1,2}} init 5;
```

sasoptpy.VariableGroup.multVariableGroup.**mult** (*self*, *vector*)

Quick multiplication method for the variable groups

Parameters**vector** [list, dictionary, `pandas.Series`, or `pandas.DataFrame`] Vector to be multiplied with the variable group**Returns****r** [Expression] An expression that is the product of the variable group with the given vector**Examples**

Multiplying with a list

```
>>> x = so.VariableGroup(4, vartype=so.BIN, name='x')
>>> e1 = x.mult([1, 5, 6, 10])
>>> print(e1)
10.0 * x[3] + 6.0 * x[2] + x[0] + 5.0 * x[1]
```

Multiplying with a dictionary

```
>>> y = so.VariableGroup([0, 1], ['a', 'b'], name='y', lb=0, ub=10)
>>> dvals = {(0, 'a'): 1, (0, 'b'): 2, (1, 'a'): -1, (1, 'b'): 5}
>>> e2 = y.mult(dvals)
>>> print(e2)
2.0 * y[0, 'b'] - y[1, 'a'] + y[0, 'a'] + 5.0 * y[1, 'b']
```

Multiplying with a `pandas.Series` object

```
>>> u = so.VariableGroup(['a', 'b', 'c', 'd'], name='u')
>>> ps = pd.Series([0.1, 1.5, -0.2, 0.3], index=['a', 'b', 'c', 'd'])
>>> e3 = u.mult(ps)
>>> print(e3)
1.5 * u['b'] + 0.1 * u['a'] - 0.2 * u['c'] + 0.3 * u['d']
```

Multiplying with a `pandas.DataFrame` object

```
>>> data = np.random.rand(3, 3)
>>> df = pd.DataFrame(data, columns=['a', 'b', 'c'])
>>> print(df)
NOTE: Initialized model model1
      a      b      c
0  0.966524  0.237081  0.944630
1  0.821356  0.074753  0.345596
2  0.065229  0.037212  0.136644
>>> y = m.add_variables(3, ['a', 'b', 'c'], name='y')
>>> e = y.mult(df)
>>> print(e)
0.9665237354418064 * y[0, 'a'] + 0.23708064143289442 * y[0, 'b'] +
0.944629500537536 * y[0, 'c'] + 0.8213562592159828 * y[1, 'a'] +
0.07475256894157478 * y[1, 'b'] + 0.3455957019116668 * y[1, 'c'] +
0.06522945752546017 * y[2, 'a'] + 0.03721153533250843 * y[2, 'b'] +
0.13664422498043194 * y[2, 'c']
```

sasoptpy.VariableGroup.sum

`VariableGroup.sum(self, *argv)`

Quick sum method for the variable groups

Parameters

argv [Arguments] List of indices for the sum

Returns

r [Expression] Expression that represents the sum of all variables in the group

Examples

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z', lb=0, ub=10)
>>> e1 = z.sum('*', '*')
>>> print(e1)
z[1, 'c'] + z[1, 'a'] + z[1, 'b'] + z[0, 'a'] + z[0, 'b'] +
z[0, 'c']
>>> e2 = z.sum('*', 'a')
>>> print(e2)
z[1, 'a'] + z[0, 'a']
>>> e3 = z.sum('*', ['a', 'b'])
>>> print(e3)
z[1, 'a'] + z[0, 'b'] + z[1, 'b'] + z[0, 'a']
```

5.1.6 Constraint

Constructor

<code>Constraint(**kwargs)</code>	Creates a linear or quadratic constraint for optimization models
-----------------------------------	--

sasoptpy.Constraint

class Constraint (***kwargs*)

Bases: `sasoptpy.core.expression.Expression`

Creates a linear or quadratic constraint for optimization models

Constraints should be created by adding logical relations to *Expression* objects.

Parameters

exp [Expression] A logical expression that forms the constraint

direction [string] Direction of the logical expression, 'E' (=), 'L' (<=) or 'G' (>=)

name [string, optional] Name of the constraint object

crange [float, optional] Range for ranged constraints

See also:

`sasoptpy.Model.add_constraint()`

Notes

- A constraint can be generated in multiple ways:

1. Using the `sasoptpy.Model.add_constraint()` method

```
>>> m = so.Model(name='m')
>>> c1 = m.add_constraint(3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint( - 5.0 * y + 3.0 * x <= 10, name='c1')
```

2. Using the constructor

```
>>> c1 = sasoptpy.Constraint(3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint( - 5.0 * y + 3.0 * x <= 10, name='c1')
```

- The same constraint can be included into other models using the `Model.include()` method.

Examples

```
>>> x = so.Variable(name='x')
>>> y = so.Variable(name='y')
>>> c1 = so.Constraint( 3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint( - 5.0 * y + 3.0 * x <= 10, name='c1')
```

```
>>> c2 = so.Constraint( - x + 2 * y - 5, direction='L', name='c2')
sasoptpy.Constraint( - x + 2.0 * y <= 5, name='c2')
```

Methods

<code>Constraint.get_value(self[, rhs])</code>	Returns the current value of the constraint
<code>Constraint.set_block(self, block_number)</code>	Sets the decomposition block number for a constraint
<code>Constraint.set_direction(self, direction)</code>	Changes the direction of a constraint
<code>Constraint.set_rhs(self, value)</code>	Changes the RHS of a constraint
<code>Constraint.update_var_coef(self, var, value)</code>	Updates the coefficient of a variable inside the constraint

sasoptpy.Constraint.get_value

`Constraint.get_value(self, rhs=False)`

Returns the current value of the constraint

Parameters

rhs [boolean, optional] Whether constant values (RHS) will be included in the value or not.
Default is false

Examples

```
>>> x = so.Variable(name='x', init=2)
>>> c = so.Constraint(x ** 2 + 2 * x <= 15, name='c')
>>> print(c.get_value())
8
>>> print(c.get_value(rhs=True))
-7
```

sasoptpy.Constraint.set_block

`Constraint.set_block(self, block_number)`

Sets the decomposition block number for a constraint

Parameters

block_number [int] Block number of the constraint

Examples

```
>>> c1 = m.add_constraints((x + 2 * y[i] <= 5 for i in NODES),
                           name='c1')
>>> for i in NODES:
    c1[i].set_block(i)
```

sasoptpy.Constraint.set_direction

`Constraint.set_direction(self, direction)`

Changes the direction of a constraint

Parameters

direction [string] Direction of the constraint, 'E', 'L', or 'G' for equal to, less than or equal to, and greater than or equal to, respectively

Examples

```
>>> c1 = so.Constraint(exp=3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint( 3.0 * x - 5.0 * y <= 10, name='c1')
>>> c1.set_direction('G')
>>> print(repr(c1))
sasoptpy.Constraint( 3.0 * x - 5.0 * y >= 10, name='c1')
```

sasoptpy.Constraint.set_rhs`Constraint.set_rhs(self, value)`

Changes the RHS of a constraint

Parameters**value** [float] New RHS value for the constraint**Examples**

```

>>> x = m.add_variable(name='x')
>>> y = m.add_variable(name='y')
>>> c = m.add_constraint(x + 3*y <= 10, name='con_1')
>>> print(c)
x + 3.0 * y <= 10
>>> c.set_rhs(5)
>>> print(c)
x + 3.0 * y <= 5

```

sasoptpy.Constraint.update_var_coef`Constraint.update_var_coef(self, var, value)`

Updates the coefficient of a variable inside the constraint

Parameters**var** [Variable] Variable to be updated**value** [float] Coefficient of the variable in the constraint

See also:

sasoptpy.Model.set_coef()**Examples**

```

>>> c1 = so.Constraint(exp=3 * x - 5 * y <= 10, name='c1')
>>> print(repr(c1))
sasoptpy.Constraint(- 5.0 * y + 3.0 * x <= 10, name='c1')
>>> c1.update_var_coef(x, -1)
>>> print(repr(c1))
sasoptpy.Constraint(- 5.0 * y - x <= 10, name='c1')

```

5.1.7 Constraint Group

Constructor

<code>ConstraintGroup(**kwargs)</code>	Creates a group of <i>Constraint</i> objects
--	--

`sasoptpy.ConstraintGroup`

class `ConstraintGroup` (***kwargs*)

Bases: `sasoptpy.core.group.Group`

Creates a group of *Constraint* objects

Parameters

argv [Generator-type object] A Python generator that includes *Expression* objects

name [string, optional] Name (prefix) of the constraints

See also:

`sasoptpy.Model.add_constraints()`

`sasoptpy.Model.include()`

Notes

Use `sasoptpy.Model.add_constraints()` when working with a single model.

Examples

```
>>> var_ind = ['a', 'b', 'c', 'd']
>>> u = so.VariableGroup(var_ind, name='u')
>>> t = so.Variable(name='t')
>>> cg = so.ConstraintGroup((u[i] + 2 * t <= 5 for i in var_ind), name='cg')
>>> print(cg)
Constraint Group (cg) [
  [a: 2.0 * t + u['a'] <= 5]
  [b: u['b'] + 2.0 * t <= 5]
  [c: 2.0 * t + u['c'] <= 5]
  [d: 2.0 * t + u['d'] <= 5]
]
```

```
>>> z = so.VariableGroup(2, ['a', 'b', 'c'], name='z', lb=0, ub=10)
>>> cg2 = so.ConstraintGroup((2 * z[i, j] + 3 * z[i-1, j] >= 2 for i in
                             [1] for j in ['a', 'b', 'c']), name='cg2')
>>> print(cg2)
Constraint Group (cg2) [
  [(1, 'a'): 3.0 * z[0, 'a'] + 2.0 * z[1, 'a'] >= 2]
  [(1, 'b'): 2.0 * z[1, 'b'] + 3.0 * z[0, 'b'] >= 2]
  [(1, 'c'): 2.0 * z[1, 'c'] + 3.0 * z[0, 'c'] >= 2]
]
```

Methods

<code>ConstraintGroup.get_name(self)</code>	Returns the name of the constraint group
<code>ConstraintGroup.get_all_keys(self)</code>	Returns a list of all keys (indices) in the group
<code>ConstraintGroup.get_expressions(self[, rhs])</code>	Returns constraints as a list of expressions
<code>ConstraintGroup.get_members(self)</code>	Returns a dictionary of members

sasoptpy.ConstraintGroup.get_name

`ConstraintGroup.get_name(self)`
Returns the name of the constraint group

Returns

name [string] Name of the constraint group

Examples

```
>>> m = so.Model(name='m')
>>> x = m.add_variable(name='x')
>>> indices = ['a', 'b', 'c']
>>> y = m.add_variables(indices, name='y')
>>> c1 = m.add_constraints((x + y[i] <= 4 for i in indices),
                           name='con1')
>>> print(c1.get_name())
con1
```

sasoptpy.ConstraintGroup.get_all_keys

`ConstraintGroup.get_all_keys(self)`
Returns a list of all keys (indices) in the group

sasoptpy.ConstraintGroup.get_expressions

`ConstraintGroup.get_expressions(self, rhs=False)`
Returns constraints as a list of expressions

Parameters

rhs [boolean, optional] Whether to pass the constant part (rhs) of the constraint or not

Returns

df [pandas.DataFrame] Returns a DataFrame consisting of constraints as expressions

Examples

```
>>> m = so.Model(name='m')
>>> var_ind = ['a', 'b', 'c', 'd']
>>> u = m.add_variables(var_ind, name='u')
>>> t = m.add_variable(name='t')
>>> cg = so.ConstraintGroup((u[i] + 2 * t <= 5 for i in var_ind),
                             name='cg')
>>> ce = cg.get_expressions()
>>> print(ce)
              cg
a  u[a] + 2 * t
b  u[b] + 2 * t
c  u[c] + 2 * t
d  u[d] + 2 * t
>>> ce_rhs = cg.get_expressions(rhs=True)
>>> print(ce_rhs)
              cg
a  u[a] + 2 * t - 5
b  u[b] + 2 * t - 5
c  u[c] + 2 * t - 5
d  u[d] + 2 * t - 5
```

sasoptpy.ConstraintGroup.get_members

`ConstraintGroup.get_members(self)`
Returns a dictionary of members

5.1.8 Workspace

Constructor

<code>Workspace(name[, session])</code>	Workspace represents an OPTMODEL block that allows multiple solves
---	--

sasoptpy.Workspace

class `Workspace(name, session=None)`

Bases: `object`

Workspace represents an OPTMODEL block that allows multiple solves

Parameters

name [string] Name of the workspace

session [`saspy.SASsession` or `swat.cas.connection.CAS`, optional] Session to be submitted

Methods

<code>Workspace.get_elements(self)</code>	Returns a list of elements in the Workspace
<code>Workspace.set_active_model(self, model)</code>	Marks given model as active, to be used in solve statements
<code>Workspace.append(self, element)</code>	Appends a new element (operation or statement) to the Workspace
<code>Workspace.submit(self, <i>**kwargs</i>)</code>	Submits the Workspace as an OPTMODEL block and returns solutions
<code>Workspace.parse_solve_responses(self)</code>	Grabs the solutions to all solve statements
<code>Workspace.parse_print_responses(self)</code>	Grabs responses to all print statements
<code>Workspace.get_variable(self, name)</code>	Obtains the value of a given variable name
<code>Workspace.set_variable_value(self, name, value)</code>	Sets variable value
<code>Workspace.to_optmodel(self)</code>	Returns equivalent OPTMODEL code of given workspace

`sasoptpy.Workspace.get_elements`

`Workspace.get_elements(self)`
Returns a list of elements in the Workspace

`sasoptpy.Workspace.set_active_model`

`Workspace.set_active_model(self, model)`
Marks given model as active, to be used in solve statements

Parameters

model [*Model*] Model to be activated

`sasoptpy.Workspace.append`

`Workspace.append(self, element)`
Appends a new element (operation or statement) to the Workspace

Parameters

element [*sasoptpy.abstract.Statement*] Any statement that can be appended

`sasoptpy.Workspace.submit`

`Workspace.submit(self, **kwargs)`
Submits the Workspace as an OPTMODEL block and returns solutions

sasoptpy.Workspace.parse_solve_responses

`Workspace.parse_solve_responses (self)`
Grabs the solutions to all solve statements

sasoptpy.Workspace.parse_print_responses

`Workspace.parse_print_responses (self)`
Grabs responses to all print statements

sasoptpy.Workspace.get_variable

`Workspace.get_variable (self, name)`
Obtains the value of a given variable name

Parameters

name [string] Name of the variable

sasoptpy.Workspace.set_variable_value

`Workspace.set_variable_value (self, name, value)`
Sets variable value

Parameters

name [string] Name of the variable

value [float] New value of the variable

sasoptpy.Workspace.to_optmodel

`Workspace.to_optmodel (self)`
Returns equivalent OPTMODEL code of given workspace

Returns

optmodel [string] Generated OPTMODEL code of the workspace object

5.2 Abstract

5.2.1 Abstract

Main classes

<code>Parameter(**kwargs)</code>	
<code>ParameterGroup(**kwargs)</code>	
<code>Set(**kwargs)</code>	Creates an index set to be represented inside PROC OPTMODEL

Continued on next page

Table 26 – continued from previous page

<i>SetIterator</i> (initset[, name, datatype])	Creates an iterator object for a given Set
<i>SetIteratorGroup</i> (initset[, datatype, names])	
<i>Statement</i> ()	

sasoptpy.abstract.Parameter**class** **Parameter** (**kwargs)Bases: `sasoptpy.core.expression.Expression`**sasoptpy.abstract.ParameterGroup****class** **ParameterGroup** (**kwargs)Bases: `object`**sasoptpy.abstract.Set****class** **Set** (**kwargs)Bases: `object`

Creates an index set to be represented inside PROC OPTMODEL

Parameters**name** [string] Name of the parameter**init** [Expression, optional] Initial value expression of the parameter**settype** [list, optional] List of types for the set, consisting of ‘num’ and ‘str’ values**Examples**

```
>>> I = so.Set('I')
>>> print(I._defn())
set I;
```

```
>>> J = so.Set('J', settype=['num', 'str'])
>>> print(J._defn())
set <num, str> J;
```

```
>>> N = so.Parameter(name='N', init=5)
>>> K = so.Set('K', init=so.exp_range(1,N))
>>> print(K._defn())
set K = 1..N;
```

sasoptpy.abstract.SetIterator

class SetIterator (*initset, name=None, datatype=None*)
Bases: `sasoptpy.core.expression.Expression`

Creates an iterator object for a given Set

Parameters

- initset** [Set] Set to be iterated on
- name** [string, optional] Name of the iterator
- datatype** [string, optional] Type of the iterator

Notes

- SetIterator objects are automatically created when looping over a *Set*.
- This class is mainly intended for internal use.
- The `group` parameter consists of following keys
 - **order** : int Order of the parameter inside the group
 - **outof** : int Total number of indices inside the group
 - **id** : int ID number assigned to group by Python

sasoptpy.abstract.SetIteratorGroup

class SetIteratorGroup (*initset, datatype=None, names=None*)
Bases: `collections.OrderedDict`, `sasoptpy.core.expression.Expression`

sasoptpy.abstract.Statement

class Statement
Bases: `abc.ABC`

Statements

Assignment(identifier, expression[, keyword])

CoForLoopStatement(*args)

CreateDataStatement(table, index[, columns])

DropStatement(**kwargs)

ForLoopStatement(*args)

IfElseStatement(logic_expression, if_statement)

LiteralStatement(**kwargs)

ObjectiveStatement(expression, **kwargs)

ReadDataStatement(table, index[, columns])

SolveStatement(*args, **kwargs)

FixStatement(*elements)

UnfixStatement(*elements)

Continued on next page

Table 27 – continued from previous page

`PrintStatement(*args)`

sasoptpy.abstract.statement.Assignment

class Assignment (*identifier, expression, keyword=None*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

__init__ (*self, identifier, expression, keyword=None*)

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, identifier, expression[, keyword])</code>	Initialize self.
<code>append(self, *args, **kwargs)</code>	
<code>fix_value(obj, value)</code>	
<code>get_response(self)</code>	
<code>is_internal(self)</code>	
<code>set_bounds(var, **kwargs)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	
<code>set_value(obj, value)</code>	

sasoptpy.abstract.statement.CoForLoopStatement

class CoForLoopStatement (**args*)

Bases: `sasoptpy.abstract.statement.for_loop.ForLoopStatement`

__init__ (*self, *args*)

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, *args)</code>	Initialize self.
<code>append(self, element)</code>	
<code>cofor_loop(*args)</code>	
<code>for_loop(*args)</code>	
<code>get_response(self)</code>	
<code>is_internal(self)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	

sasoptpy.abstract.statement.CreateDataStatement**class CreateDataStatement** (*table, index, columns=None*)Bases: `sasoptpy.abstract.statement.statement_base.Statement`**__init__** (*self, table, index, columns=None*)Initialize self. See `help(type(self))` for accurate signature.**Methods**

<code>__init__(self, table, index[, columns])</code>	Initialize self.
<code>append(self, element, <i>**kwargs</i>)</code>	
<code>create_data(<i>*args</i>, <i>**kwargs</i>)</code>	
<code>get_column_str(c)</code>	
<code>get_columns_expr(self)</code>	
<code>get_index_expr(self)</code>	
<code>get_response(self)</code>	
<code>get_table_expr(self)</code>	
<code>get_table_name(self)</code>	
<code>is_internal(self)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	

sasoptpy.abstract.statement.DropStatement**class DropStatement** (*****kwargs***)Bases: `sasoptpy.abstract.statement.statement_base.Statement`**__init__** (**args, ****kwargs***)**Methods**

<code>__init__(<i>*args</i>, <i>**kwargs</i>)</code>	
<code>append(self, element)</code>	
<code>drop_constraint(<i>*constraints</i>)</code>	
<code>get_response(self)</code>	
<code>is_internal(self)</code>	
<code>model_drop_constraint(_, c)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	

sasoptpy.abstract.statement.ForLoopStatement**class ForLoopStatement** (*args)

Bases: sasoptpy.abstract.statement.statement_base.Statement

__init__ (self, *args)

Initialize self. See help(type(self)) for accurate signature.

Methods

__init__ (self, *args)	Initialize self.
append(self, element)	
for_loop(*args)	
get_response(self)	
is_internal(self)	
set_internal(self, value)	
set_response(self, response)	

sasoptpy.abstract.statement.IfElseStatement**class IfElseStatement** (logic_expression, if_statement, else_statement=None)

Bases: sasoptpy.abstract.statement.if_else.NestedConditions

__init__ (self, logic_expression, if_statement, else_statement=None)

Initialize self. See help(type(self)) for accurate signature.

Methods

__init__ (self, logic_expression, if_statement)	Initialize self.
append(self, element)	
get_response(self)	
if_condition(logic_expression, if_statement)	
is_internal(self)	
set_internal(self, value)	
set_response(self, response)	

sasoptpy.abstract.statement.LiteralStatement**class LiteralStatement** (**kwargs)

Bases: sasoptpy.abstract.statement.statement_base.Statement

__init__ (*args, **kwargs)

Methods

<code>__init__</code>	<code>(*args, **kwargs)</code>
<code>append</code>	<code>(self, literal)</code>
<code>diff</code>	<code>(*args)</code>
<code>expand</code>	<code>()</code>
<code>get_response</code>	<code>(self)</code>
<code>is_internal</code>	<code>(self)</code>
<code>set_internal</code>	<code>(self, value)</code>
<code>set_response</code>	<code>(self, response)</code>
<code>substring</code>	<code>(main_string, first_pos, last_pos)</code>
<code>union</code>	<code>(*args)</code>
<code>use_problem</code>	<code>(problem)</code>

sasoptpy.abstract.statement.ObjectiveStatement

class **ObjectiveStatement** (*expression*, ***kwargs*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

`__init__` (*self*, *expression*, ***kwargs*)

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__</code>	<code>(self, expression, **kwargs)</code>	Initialize self.
<code>append</code>	<code>(self)</code>	
<code>get_response</code>	<code>(self)</code>	
<code>is_internal</code>	<code>(self)</code>	
<code>set_internal</code>	<code>(self, value)</code>	
<code>set_objective</code>	<code>(expression, name, sense)</code>	
<code>set_response</code>	<code>(self, response)</code>	

sasoptpy.abstract.statement.ReadDataStatement

class **ReadDataStatement** (*table*, *index*, *columns=None*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

`__init__` (*self*, *table*, *index*, *columns=None*)

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, table, index[, columns])</code>	Initialize self.
<code>append(self, element, <i>**kwargs</i>)</code>	
<code>flatten_column(col)</code>	
<code>get_column_str(c)</code>	
<code>get_columns_expr(self)</code>	
<code>get_index_expr(self)</code>	
<code>get_response(self)</code>	
<code>get_table_expr(self)</code>	
<code>get_target_expr(target)</code>	
<code>is_internal(self)</code>	
<code>read_data(<i>*args</i>, <i>**kwargs</i>)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	

sasoptpy.abstract.statement.SolveStatement

class SolveStatement (**args*, ***kwargs*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

`__init__(self, *args, **kwargs)`

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, <i>*args</i>, <i>**kwargs</i>)</code>	Initialize self.
<code>append(self, element)</code>	
<code>get_problem_summary(self)</code>	
<code>get_response(self)</code>	
<code>get_solution_summary(self)</code>	
<code>is_internal(self)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, problem_summary, ...)</code>	
<code>solve(<i>*args</i>, <i>**kwargs</i>)</code>	
<code>solve_model(model, <i>**kwargs</i>)</code>	

sasoptpy.abstract.statement.FixStatement

class FixStatement (**elements*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

`__init__(self, *elements)`

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, *elements)</code>	Initialize self.
<code>append(self, element)</code>	
<code>fix(*items)</code>	
<code>get_response(self)</code>	
<code>is_internal(self)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	

sasoptpy.abstract.statement.UnfixStatement

class UnfixStatement (**elements*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

`__init__(self, *elements)`

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, *elements)</code>	Initialize self.
<code>append(self, element)</code>	
<code>get_response(self)</code>	
<code>is_internal(self)</code>	
<code>set_internal(self, value)</code>	
<code>set_response(self, response)</code>	
<code>unfix(*items)</code>	

sasoptpy.abstract.statement.PrintStatement

class PrintStatement (**args*)

Bases: `sasoptpy.abstract.statement.statement_base.Statement`

`__init__(self, *args)`

Initialize self. See `help(type(self))` for accurate signature.

Methods

<code>__init__(self, *args)</code>	Initialize self.
<code>allow_print_names(self)</code>	
<code>append(self, arg)</code>	
<code>get_response(self)</code>	
<code>is_internal(self)</code>	
<code>print_item(*args)</code>	
<code>put_item(*args[, names])</code>	
<code>set_internal(self, value)</code>	
<code>set_print_type(self, print_type)</code>	

Continued on next page

Table 40 – continued from previous page

<code>set_response(self, response)</code>	
---	--

5.3 Interface

5.3.1 Interface

CAS (Viya)

<code>CASMediator</code> (<i>caller</i> , <i>cas_session</i>)	Handles the connection between sasoptpy and SAS Viya (CAS) server
---	---

`sasoptpy.interface.CASMediator`

class `CASMediator` (*caller*, *cas_session*)

Bases: `sasoptpy.interface.solver.mediator.Mediator`

Handles the connection between sasoptpy and SAS Viya (CAS) server

Parameters

caller [`Model` or `Workspace`] Model or workspace that mediator belongs to

cas_session [`swat.cas.connection.CAS`] CAS connection

Notes

- CAS Mediator is used by `Model` and `Workspace` objects internally.

Model

<code>CASMediator.solve</code> (<i>self</i> , <i>**kwargs</i>)	Solve action for <code>Model</code> objects
<code>CASMediator.tune</code> (<i>self</i> , <i>**kwargs</i>)	Checks if CAS session has <code>optimizaiton.tuner</code> capability and calls <code>tune_problem()</code>
<code>CASMediator.tune_problem</code> (<i>self</i> , <i>**kwargs</i>)	Calls <code>optimization.tuner</code> CAS action to find out ideal configuration
<code>CASMediator.solve_with_mps</code> (<i>self</i> , <i>**kwargs</i>)	Submits the problem in MPS (<code>DataFrame</code>) format, supported by old versions
<code>CASMediator.solve_with_optmodel</code> (<i>self</i> , <i>**kwargs</i>)	Submits the problem in OPTMODEL format
<code>CASMediator.parse_cas_solution</code> (<i>self</i>)	Performs post-solve operations
<code>CASMediator.parse_cas_table</code> (<i>self</i> , <i>table</i>)	Converts requested <code>swat.cas.table.CASTable</code> objects to <code>swat.dataframe.SASDataFrame</code>
<code>CASMediator.set_variable_values</code> (<i>self</i> , <i>solution</i>)	Performs post-solve assignment of variable values
<code>CASMediator.set_constraint_values</code> (<i>self</i> , <i>solution</i>)	Performs post-solve assignment of constraint values
<code>CASMediator.set_model_objective_value</code> (<i>self</i> , <i>value</i>)	Performs post-solve assignment of objective values

Continued on next page

Table 42 – continued from previous page

<code>CASMediator.set_variable_init_values(self)</code>	Performs post-solve assignment of variable initial values
<code>CASMediator.upload_user_blocks(self)</code>	Uploads user-defined decomposition blocks to the CAS server
<code>CASMediator.upload_model(self[, name, ...])</code>	Converts internal model to MPS table and upload to CAS session

sasoptpy.interface.CASMediator.solve

`CASMediator.solve(self, **kwargs)`
Solve action for `Model` objects

sasoptpy.interface.CASMediator.tune

`CASMediator.tune(self, **kwargs)`
Checks if CAS session has optimization.tuner capability and calls `tune_problem()`

sasoptpy.interface.CASMediator.tune_problem

`CASMediator.tune_problem(self, **kwargs)`
Calls optimization.tuner CAS action to find out ideal configuration

sasoptpy.interface.CASMediator.solve_with_mps

`CASMediator.solve_with_mps(self, **kwargs)`
Submits the problem in MPS (`DataFrame`) format, supported by old versions

Parameters

kwargs [dict] Keyword arguments for solver settings and options

Returns

primal_solution [`swat.dataframe.SASDataFrame`] Solution of the model or None

sasoptpy.interface.CASMediator.solve_with_optmodel

`CASMediator.solve_with_optmodel(self, **kwargs)`
Submits the problem in OPTMODEL format

Parameters

kwargs [dict] Keyword arguments for solver settings and options

Returns

primal_solution [`swat.dataframe.SASDataFrame`] Solution of the model or None

sasoptpy.interface.CASMediator.parse_cas_solution

`CASMediator.parse_cas_solution(self)`

Performs post-solve operations

Returns

solution [`swat.dataframe.SASDataFrame`] Solution of the problem

sasoptpy.interface.CASMediator.parse_cas_table

`CASMediator.parse_cas_table(self, table)`

Converts requested `swat.cas.table.CASTable` objects to `swat.dataframe.SASDataFrame`

sasoptpy.interface.CASMediator.set_variable_values

`CASMediator.set_variable_values(self, solution)`

Performs post-solve assignment of variable values

Parameters

solution [`class:swat.dataframe.SASDataFrame`] Primal solution of the problem

sasoptpy.interface.CASMediator.set_constraint_values

`CASMediator.set_constraint_values(self, solution)`

Performs post-solve assignment of constraint values

Parameters

solution [`class:swat.dataframe.SASDataFrame`] Primal solution of the problem

sasoptpy.interface.CASMediator.set_model_objective_value

`CASMediator.set_model_objective_value(self)`

Performs post-solve assignment of objective values

Parameters

solution [`class:swat.dataframe.SASDataFrame`] Primal solution of the problem

sasoptpy.interface.CASMediator.set_variable_init_values

`CASMediator.set_variable_init_values(self)`

Performs post-solve assignment of variable initial values

Parameters

solution [`class:swat.dataframe.SASDataFrame`] Primal solution of the problem

sasoptpy.interface.CASMediator.upload_user_blocks

`CASMediator.upload_user_blocks` (*self*)
Uploads user-defined decomposition blocks to the CAS server

Returns
name [string] CAS table name of the user-defined decomposition blocks

Examples

```
>>> userblocks = m.upload_user_blocks()
>>> m.solve(milp={'decomp': {'blocks': userblocks}})
```

sasoptpy.interface.CASMediator.upload_model

`CASMediator.upload_model` (*self*, *name=None*, *replace=True*, *constant=False*, *verbose=False*)
Converts internal model to MPS table and upload to CAS session

Parameters
name [string, optional] Desired name of the MPS table on the server
replace [boolean, optional] Option to replace the existing MPS table

Returns
frame [`swat.cas.table.CASTable`] Reference to the uploaded CAS Table

Notes

- This method returns `None` if the model session is not valid.
- Name of the table is randomly assigned if `name` argument is `None` or not given.
- This method should not be used if `Model.solve()` is going to be used. `Model.solve()` calls this method internally.

Workspace

<code>CASMediator.submit</code> (<i>self</i> , <i>kwargs</i>)	Submit action for custom input and Workspace objects
<code>CASMediator.submit_optmodel_code</code> (<i>self</i> , ...)	Converts caller into OPTMODEL code and submits using <code>optimization.runOptmodel</code> action
<code>CASMediator.parse_cas_workspace_response</code> (<i>self</i>)	Parses results of workspace submission
<code>CASMediator.set_workspace_variable_value</code> (<i>self</i> , ...)	Performs post-solve assignment of Workspace variable values

sasoptpy.interface.CASMediator.submit

`CASMediator.submit(self, **kwargs)`
Submit action for custom input and `Workspace` objects

sasoptpy.interface.CASMediator.submit_optmodel_code

`CASMediator.submit_optmodel_code(self, **kwargs)`
Converts caller into `OPTMODEL` code and submits using `optimization.runOptmodel` action

Parameters

kwargs : Solver settings and options

sasoptpy.interface.CASMediator.parse_cas_workspace_response

`CASMediator.parse_cas_workspace_response(self)`
Parses results of workspace submission

sasoptpy.interface.CASMediator.set_workspace_variable_values

`CASMediator.set_workspace_variable_values(self, solution)`
Performs post-solve assignment of `Workspace` variable values

SAS

<code>SASMediator</code> (caller, sas_session)	Handles the connection between sasoptpy and SAS instance
--	--

sasoptpy.interface.SASMediator

class `SASMediator`(caller, sas_session)
Bases: `sasoptpy.interface.solver.mediator.Mediator`

Handles the connection between sasoptpy and SAS instance

Parameters

caller [`Model` or `Workspace`] Model or workspace that mediator belongs to

sas_session [`saspy.SASsession`] SAS session object

Notes

- SAS Mediator is used by `Model` and `Workspace` objects internally.

Model

<code>SASMediator.solve(self, **kwargs)</code>	Solve action for <code>Model</code> objects
<code>SASMediator.solve_with_mps(self, **kwargs)</code>	Submits the problem in MPS (<code>DataFrame</code>) format, supported by old versions
<code>SASMediator.solve_with_optmodel(self, **kwargs)</code>	Submits the problem in OPTMODEL format
<code>SASMediator.parse_sas_mps_solution(self)</code>	Parses MPS solution after <i>solve</i> and returns solution
<code>SASMediator.parse_sas_solution(self)</code>	Performs post-solve operations
<code>SASMediator.parse_sas_table(self, table_name)</code>	Converts requested table name into <code>pandas.DataFrame</code>
<code>SASMediator.convert_to_original(self, table)</code>	Converts variable names to their original format if a placeholder gets used
<code>SASMediator.perform_postsolve_operations(self)</code>	Performs post-solve operations for proper output display

`sasoptpy.interface.SASMediator.solve`

`SASMediator.solve(self, **kwargs)`
Solve action for `Model` objects

`sasoptpy.interface.SASMediator.solve_with_mps`

`SASMediator.solve_with_mps(self, **kwargs)`
Submits the problem in MPS (`DataFrame`) format, supported by old versions

Parameters

kwargs [dict] Keyword arguments for solver settings and options

Returns

primal_solution [`pandas.DataFrame`] Solution of the model or `None`

`sasoptpy.interface.SASMediator.solve_with_optmodel`

`SASMediator.solve_with_optmodel(self, **kwargs)`
Submits the problem in OPTMODEL format

Parameters

kwargs [dict] Keyword arguments for solver settings and options

Returns

primal_solution [`pandas.DataFrame`] Solution of the model or `None`

sasoptpy.interface.SASMediator.parse_sas_mps_solution

`SASMediator.parse_sas_mps_solution(self)`
 Parses MPS solution after *solve* and returns solution

sasoptpy.interface.SASMediator.parse_sas_solution

`SASMediator.parse_sas_solution(self)`
 Performs post-solve operations

Returns

solution [`pandas.DataFrame`] Solution of the problem

sasoptpy.interface.SASMediator.parse_sas_table

`SASMediator.parse_sas_table(self, table_name)`
 Converts requested table name into `pandas.DataFrame`

sasoptpy.interface.SASMediator.convert_to_original

`SASMediator.convert_to_original(self, table)`
 Converts variable names to their original format if a placeholder gets used

sasoptpy.interface.SASMediator.perform_postsolve_operations

`SASMediator.perform_postsolve_operations(self)`
 Performs post-solve operations for proper output display

Workspace

<code>SASMediator.submit(self, **kwargs)</code>	Submit action for custom input and Workspace objects
<code>SASMediator.submit_optmodel_code(self, ...)</code>	Submits given Workspace object in OPTMODEL format
<code>SASMediator.parse_sas_workspace_response(self)</code>	Parses results of workspace submission
<code>SASMediator.set_workspace_variable_value(self, ...)</code>	Performs post-solve assignment of Workspace variable values

sasoptpy.interface.SASMediator.submit

`SASMediator.submit` (*self*, ***kwargs*)
Submit action for custom input and `Workspace` objects

sasoptpy.interface.SASMediator.submit_optmodel_code

`SASMediator.submit_optmodel_code` (*self*, ***kwargs*)
Submits given `Workspace` object in `OPTMODEL` format

Parameters

kwargs : Solver settings and options

sasoptpy.interface.SASMediator.parse_sas_workspace_response

`SASMediator.parse_sas_workspace_response` (*self*)
Parses results of workspace submission

sasoptpy.interface.SASMediator.set_workspace_variable_values

`SASMediator.set_workspace_variable_values` (*self*, *solution*)
Performs post-solve assignment of `Workspace` variable values

5.4 Functions

5.4.1 Functions

Utility Functions

<code>dict_to_frame(dictobj[, cols])</code>	Converts dictionaries to <code>DataFrame</code> objects for pretty printing
<code>exp_range(start, stop[, step])</code>	Creates a set within given range
<code>flatten_frame(df[, swap])</code>	Converts a <code>pandas.DataFrame</code> object into <code>pandas.Series</code>
<code>get_solution_table(*argv[, key, rhs])</code>	
<code>quick_sum(argv)</code>	
<code>reset()</code>	Resets package configs and internal counters

sasoptpy.dict_to_frame**dict_to_frame** (*dictobj*, *cols=None*)

Converts dictionaries to DataFrame objects for pretty printing

Parameters**dictobj** [dict] Dictionary to be converted**cols** [list, optional] Column names**Returns****frobj** [DataFrame] DataFrame representation of the dictionary**Examples**

```
>>> d = {'coal': {'period1': 1, 'period2': 5, 'period3': 7},
>>>       'steel': {'period1': 8, 'period2': 4, 'period3': 3},
>>>       'copper': {'period1': 5, 'period2': 7, 'period3': 9}}
>>> df = so.dict_to_frame(d)
>>> print(df)
```

	period1	period2	period3
coal	1	5	7
copper	5	7	9
steel	8	4	3

sasoptpy.exp_range**exp_range** (*start*, *stop*, *step=1*)

Creates a set within given range

Parameters**start** [Expression] First value of the range**stop** [Expression] Last value of the range**step** [Expression, optional] Step size of the range**Returns****exset** [Set] Set that represents the range**Examples**

```
>>> N = so.Parameter(name='N')
>>> p = so.exp_range(1, N)
>>> print(p._defn())
set 1..N;
```

sasoptpy.flatten_frame

flatten_frame (*df*, *swap=False*)

Converts a `pandas.DataFrame` object into `pandas.Series`

Parameters

df [`pandas.DataFrame`] DataFrame to be flattened

swap [boolean, optional] Option to use columns as first index

Returns

new_frame [`pandas.DataFrame`] A new DataFrame where indices consist of index and columns names as tuples

Examples

```
>>> price = pd.DataFrame([
>>>     [1, 5, 7],
>>>     [8, 4, 3],
>>>     [5, 7, 9]], columns=['period1', 'period2', 'period3']).\
>>>     set_index(['coal', 'steel', 'copper'])
>>> print('Price data: \n{}'.format(price))
>>> price_f = so.flatten_frame(price)
>>> print('Price data: \n{}'.format(price_f))
Price data:
      period1  period2  period3
coal         1         5         7
steel        8         4         3
copper        5         7         9
Price data:
(coal, period1)      1
(coal, period2)      5
(coal, period3)      7
(steel, period1)     8
(steel, period2)     4
(steel, period3)     3
(copper, period1)    5
(copper, period2)    7
(copper, period3)    9
dtype: int64
```

sasoptpy.get_solution_table

get_solution_table (**argv*, *key=None*, *rhs=False*)

sasoptpy.quick_sum**quick_sum** (*argv*)**sasoptpy.reset****reset** ()

Resets package configs and internal counters

Abstract Actions

<i>actions.read_data</i> (table, index, columns)	Reads data tables inside Set and Parameter objects
<i>actions.create_data</i> (table, index, columns)	Creates data tables from variables, parameters and expressions
<i>actions.solve</i> ([options, primalin])	Solves the active optimization problem and generates results
<i>actions.for_loop</i> (<i>*args</i>)	Creates a for-loop container that is to be executed on server-side
<i>actions.cofor_loop</i> (<i>*args</i>)	Creates a cofor-loop that is to be executed on server-side concurrently
<i>actions.if_condition</i> (logic_expression, ...)	Creates an if-else block
<i>actions.switch_conditions</i> (<i>*args</i>)	Creates several if-else blocks using given arguments
<i>actions.set_value</i> (left, right)	Creates an assignment statement
<i>actions.fix</i> (<i>*args</i>)	Fixes values of variables to given values
<i>actions.unfix</i> (<i>*args</i>)	Unfixes values of variables
<i>actions.set_objective</i> (expression, name, sense)	Sets objective function
<i>actions.print_item</i> (<i>*args</i>)	Prints given argument list on server-side
<i>actions.put_item</i> (<i>*args</i> [, names])	Prints given item values to output log
<i>actions.expand</i> ()	Prints expanded problem to output
<i>actions.drop</i> (<i>*args</i>)	Drops given constraints or constraint groups from model
<i>actions.restore</i> (<i>*args</i>)	Restores dropped constraint and constraint groups
<i>actions.union</i> (<i>*args</i>)	Aggregates given sets and set expressions
<i>actions.diff</i> (left, right)	Gets the difference between set and set expressions
<i>actions.substring</i> (main_string, first_pos, ...)	Gets the substring of given positions
<i>actions.use_problem</i> (problem)	Changes the currently active problem

sasoptpy.actions.read_data**read_data** (*table*, *index*, *columns*)

Reads data tables inside Set and Parameter objects

Parameters**table** [string or `swat.cas.table.CASTable`] Table object or name to be read, case insensitive**index** [dict] Index properties of the table

Has two main members:

- **target** [*sasoptpy.abstract.Set*] Target Set object to be read into
- **key** [string, list or None] Column name that will be read from.

For multiple indices it should be a list of string or *sasoptpy.abstract.SetIterator* objects

For a given Set *YEAR* and column name *year_no*, the index dictionary should be written as:

```
>>> {'target': YEAR, 'key': 'year_no'}
```

If index is simply the row number, use 'key': *so.N* which is equivalent to special *_N_* character at SAS language.

columns [list] A list of dictionaries, each holding column properties.

Columns are printed in given order. Each column should be represented as a dictionary with following fields:

- **target** [*sasoptpy.abstract.ParameterGroup*] Target parameter object to be read into
- **column** [string] Column name to be read from
- **index** [*sasoptpy.SetIterator*, optional] Sub-index for specific column, needed for complex operations

If the name of the *sasoptpy.abstract.Parameter* object is same as the column name, calling

```
>>> p = so.Parameter(name='price')
>>> read_data(..., columns=[{'target': p}])
```

is enough. For reading a different column name, *column* field should be given:

```
>>> {'target': p, 'column': 'price_usd'}
```

When working with Parameter Group objects, sometimes a secondary loop is needed. This is achieved by using *index* field, along with *sasoptpy.abstract.statement.ReadDataStatement.append()* method.

Returns

- r** [*sasoptpy.abstract.statement.ReadDataStatement*] Read data statement object, that includes all properties

Additional columns can be added using *sasoptpy.abstract.statement.ReadDataStatement.append()* function.

See also:

tests.abstract.statement.test_read_data.TestReadData

Examples

Reading a regular set

```
>>> with Workspace('test_workspace') as ws:
>>>     ITEMS = Set(name='ITEMS')
>>>     value = ParameterGroup(ITEMS, name='value', init=0)
>>>     get = VariableGroup(ITEMS, name='get', vartype=so.INT, lb=0)
>>>     read_data(
...         table="values",
...         index={'target': ITEMS, 'key': None},
...         columns=[{'target': value}])
>>> print(so.to_optmodel(w))
proc optmodel;
    set ITEMS;
    num value {ITEMS} init 0;
    var get {{ITEMS}} integer >= 0;
    read data values into ITEMS value;
quit;
```

Reading with row index

```
>>> with so.Workspace('test_read_data_n') as ws:
>>>     ASSETS = so.Set(name='ASSETS')
>>>     ret = so.ParameterGroup(ASSETS, name='return', ptype=so.NUM)
>>>     read_data(
...         table='means',
...         index={'target': ASSETS, 'key': so.N},
...         columns=[{'target': ret}])
...     )
>>> print(so.to_optmodel(w))
proc optmodel;
    set ASSETS;
    num return {ASSETS};
    read data means into ASSETS=[_N_] return;
quit;
```

Reading with no index set and subindex

```
>>> with so.Workspace('test_read_data_no_index_expression') as ws:
>>>     ASSETS = so.Set(name='ASSETS')
>>>     cov = so.ParameterGroup(ASSETS, ASSETS, name='cov', init=0)
>>>     with iterate(ASSETS, 'asset1') as asset1, iterate(ASSETS, 'asset2') as _
↪ asset2:
>>>         read_data(
...             table='covdata',
...             index={'key': [asset1, asset2]},
...             columns=[
...                 {'target': cov},
...                 {'target': cov[asset2, asset1],
...                  'column': 'cov'}])
>>> print(so.to_optmodel(w))
proc optmodel;
    set ASSETS;
    num cov {ASSETS, ASSETS} init 0;
    read data covdata into [asset1 asset2] cov cov[asset2, asset1]=cov;
quit;
```

Reading a column with multiple indices

```
>>> with so.Workspace(name='test_read_data_idx_col') as ws:
>>>     dow = so.Set(name='DOW', value=so.exp_range(1, 6))
>>>     locs = so.Set(name='LOCS', settype=so.STR)
>>>     demand = so.ParameterGroup(locs, dow, name='demand')
>>>     with iterate(locs, name='loc') as loc:
>>>         r = read_data(
...             table='dmnd',
...             index={'target': locs, 'key': loc}
...         )
>>>         with iterate(dow, name='d') as d:
>>>             r.append({
...                 'index': d,
...                 'target': demand[loc, d],
...                 'column': concat('day', d)
...             })
>>> optmodel_code = so.to_optmodel(ws)
proc optmodel;
  set DOW = 1..5;
  set <str> LOCS;
  num demand {LOCS, DOW};
  read data dmnd into LOCS=[loc] {d in DOW} < demand[loc, d]=col('day' || d) >;
quit;
```

sasoptpy.actions.create_data

create_data (*table, index, columns*)

Creates data tables from variables, parameters and expressions

Parameters

table [string] Name of the table to be created

index [dict] Table index properties

This dictionary can be empty if no index is needed. It can have following fields:

- **key** [list] List of index keys. Keys can be string or *sasoptpy.abstract.SetIterator* objects
- **set** [list] List of sets, that is being assigned to keys

columns [list] List of columns. Columns can be *sasoptpy.abstract.Parameter*, *sasoptpy.abstract.ParameterGroup* objects or dictionaries. If given as a dictionary, each can have following keys:

- **name** [string] Name of the column in output table
- **expression** [*sasoptpy.core.Expression*] Any expression
- **index** [list or *sasoptpy.abstract.SetIterator*] Index for internal loops

The *index* field can be used when a subindex is needed. When given as a list, members should be *sasoptpy.abstract.SetIterator* objects. See examples for more details.

See also:

tests.abstract.statement.test_create_data.TestCreateData

Examples

Regular column

```
>>> with so.Workspace('w') as w:
>>>     m = so.Parameter(name='m', value=7)
>>>     n = so.Parameter(name='n', value=5)
>>>     create_data(table='example', index={}, columns=[m, n])
>>> print(so.to_optmodel(w))
proc optmodel;
    num m = 7;
    num n = 5;
    create data example from m n;
quit;
```

Column with name

```
>>> with so.Workspace('w') as w:
>>>     m = so.Parameter(name='m', value=7)
>>>     n = so.Parameter(name='n', value=5)
>>>     create_data(table='example', index={}, columns=[
...         {'name': 'ratio', 'expression': m/n}
...     ])
>>> print(so.to_optmodel(w))
proc optmodel;
    num m = 7;
    num n = 5;
    create data example from ratio=((m) / (n));
quit;
```

Column name with concat

```
>>> from sasoptpy.util import concat
>>> with so.Workspace('w') as w:
>>>     m = so.Parameter(name='m', value=7)
>>>     n = so.Parameter(name='n', value=5)
>>>     create_data(table='example', index={}, columns=[
...         {'name': concat('s', n), 'expression': m+n}
...     ])
>>> print(so.to_optmodel(w))
proc optmodel;
    num m = 7;
    num n = 5;
    create data example from col('s' || n)=(m + n);
quit;
```

Table with index

```
>>> with so.Workspace('w') as w:
>>>     m = so.ParameterGroup(
>>>         so.exp_range(1, 6), so.exp_range(1, 4), name='m', init=0)
>>>     m[1, 1] = 1
>>>     m[4, 1] = 1
>>>     S = so.Set(name='ISET', value=[i**2 for i in range(1, 3)])
>>>     create_data(
...         table='example',
...         index={'key': ['i', 'j'], 'set': [S, [1, 2]]},
...         columns=[m]
```

(continues on next page)

(continued from previous page)

```

...     )
>>> print(so.to_optmodel(w))
proc optmodel;
    num m {1..5, 1..3} init 0;
    m[1, 1] = 1;
    m[4, 1] = 1;
    set ISET = {1,4};
    create data example from [i j] = {{ISET,{1,2}}} m;
quit;

```

Index over Python range

```

>>> with so.Workspace('w') as w:
>>>     s = so.Set(name='S', value=so.exp_range(1, 6))
>>>     x = so.VariableGroup(s, name='x')
>>>     x[1] = 1
>>>     create_data(table='example',
...                 index={'key': ['i'], 'set': so.exp_range(1, 4)}, columns=[x])
>>> print(so.to_optmodel(w))
proc optmodel;
    set S = 1..5;
    var x {{S}};
    x[1] = 1;
    create data example from [i] = {1..3} x;
quit;

```

Append column with index

```

>>> from sasoptpy.util import iterate, concat
>>> with so.Workspace('w', session=session) as w:
>>>     alph = so.Set(name='alph', settype=so.string, value=['a', 'b', 'c'])
>>>     x = so.VariableGroup([1, 2, 3], alph, name='x', init=2)
>>>     with iterate(so.exp_range(1, 4), name='i') as i:
>>>         c = create_data(
...             table='example',
...             index={'key': [i], 'set': [i.get_set()]})
>>>         with iterate(alph, name='j') as j:
>>>             c.append(
...                 {'name': concat('x', j),
...                  'expression': x[i, j],
...                  'index': j})
>>> print(so.to_optmodel(w))
proc optmodel;
    set <str> alph = {'a','b','c'};
    var x {{1,2,3}, {alph}} init 2;
    create data example from [i] = {{1..3}} {j in alph} < col('x' || j)=(x[i, j])_
↪>;
quit;

```

Multiple column indices

```

>>> from sasoptpy.util import concat, iterate
>>> with so.Workspace('w') as w:
>>>     S = so.Set(name='S', value=[1, 2, 3])
>>>     T = so.Set(name='T', value=[1, 3, 5])
>>>     x = so.VariableGroup(S, T, name='x', init=1)
>>>     with iterate(S, name='i') as i, iterate(T, name='j') as j:

```

(continues on next page)

(continued from previous page)

```

>>>         create_data(
...             table='out',
...             index={},
...             columns=[
...                 {'name': concat('x', concat(i, j)), 'expression': x[i, j],
...                  'index': [i, j]})
>>> print(so.to_optmodel(w))
proc optmodel;
    set S = {1,2,3};
    set T = {1,3,5};
    var x {{S},{T}} init 1;
    create data out from {i in S, j in T} < col('x' || i || j)=(x[i, j]) >;
quit;

```

sasoptpy.actions.solve

solve (*options=None, primalin=False*)

Solves the active optimization problem and generates results

Parameters

options [dict, optional] Solver options

This dictionary can have several fields.

- **with** [string] Name of the solver, see possible values under Notes.

See [Solver Options](#) for a list of solver options. All fields in options (except *with*) is passed directly to the solver.

primalin [bool, optional] Switch for using existing variable values as an initial point in MILP solver

Returns

ss [[sasoptpy.abstract.statement.SolveStatement](#)] Solve statement object.

Contents of the response can be grabbed using *get_response* function.

Notes

Possible solver names for *with* parameter:

- *lp* : Linear programming
- *milp* : Mixed integer linear programming
- *nlp* : General nonlinear programming
- *qp* : Quadratic programming
- *blackbox* : Black-box optimization

SAS Optimization also has Constraint Programming (clp) and Network Solver (network) but they are not currently supported.

Examples

Regular solve

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x', lb=1, ub=10)
>>>     o = so.Objective(2*x, sense=so.maximize, name='obj')
>>>     s = solve()
>>>     p = print_item(x)
>>> print(so.to_optmodel(w))
proc optmodel;
    var x >= 1 <= 10;
    max obj = 2 * x;
    solve;
    print x;
quit;
```

Option alternatives

```
>>> with so.Workspace('w') as w:
>>>     # Problem declaration, etc..
>>>     solve()
>>>     solve(options={'with': 'milp'})
>>>     solve(options={'with': 'milp'}, primalin=True)
>>>     solve(options={'with': 'milp', 'presolver': None, 'feastol': 1e-6,
>>>                     'logfreq': 2, 'maxsols': 3, 'scale': 'automatic',
>>>                     'restarts': None, 'cutmir': 'aggressive'})
>>> print(so.to_optmodel(w))
proc optmodel;
    solve;
    solve with milp;
    solve with milp / primalin;
    solve with milp / presolver=None feastol=1e-06 logfreq=2 maxsols=3_
↪scale=automatic restarts=None cutmir=aggressive;
quit;
```

sasoptpy.actions.for_loop

for_loop(*args)

Creates a for-loop container that is to be executed on server-side

Parameters

args [*sasoptpy.abstract.Set* objects] Any number of Set objects can be given

Returns

set_iterator [*sasoptpy.abstract.SetIterator*, *sasoptpy.abstract.SetIteratorGroup*] Set iterators to be used inside for-loop

See also:

sasoptpy.actions.cofor_loop()

Notes

For tasks that can be run concurrently, consider using `sasoptpy.actions.cofor_loop()`

Examples

Regular for loop

```
>>> with so.Workspace('w') as w:
>>>     r = so.exp_range(1, 11)
>>>     x = so.VariableGroup(r, name='x')
>>>     for i in for_loop(r):
>>>         x[i] = 1
>>> print(so.to_optmodel(w))
proc optmodel;
    var x {{1,2,3,4,5,6,7,8,9,10}};
    for {o13 in 1..10} do;
        x[o13] = 1;
    end;
quit;
```

Nested for loops

```
>>> from sasoptpy.actions import put_item
>>> with so.Workspace('w') as w:
>>>     for i in for_loop(range(1, 3)):
>>>         for j in for_loop(['a', 'b']):
>>>             put_item(i, j)
>>> print(so.to_optmodel(w))
proc optmodel;
    for {o2 in 1..2} do;
        for {o5 in {'a','b'}} do;
            put o2 o5;
        end;
    end;
quit;
```

Multiple set for-loops

```
>>> with so.Workspace('w') as w:
>>>     r = so.Set(name='R', value=range(1, 11))
>>>     c = so.Set(name='C', value=range(1, 6))
>>>     a = so.ParameterGroup(r, c, name='A', ptype=so.number)
>>>     for (i, j) in for_loop(r, c):
>>>         a[i, j] = 1
>>> print(so.to_optmodel(w))
proc optmodel;
    set R = 1..10;
    set C = 1..5;
    num A {R, C};
    for {o5 in R, o7 in C} do;
        A[o5, o7] = 1;
    end;
quit;
```

sasoptpy.actions.cofor_loop

cofor_loop (*args)

Creates a cofor-loop that is to be executed on server-side concurrently

Parameters

args [*sasoptpy.abstract.Set* objects] Any number of Set objects can be given

Returns

set_iterator [*sasoptpy.abstract.SetIterator*, *sasoptpy.abstract.SetIteratorGroup*] Set iterators to be used inside cofor-loop

See also:

sasoptpy.actions.for_loop()

Notes

A cofor-loop runs its content concurrently. For tasks that depend on each other, consider using *sasoptpy.actions.for_loop()*

Examples

```
>>> with so.Workspace('w') as w:
>>>     x = so.VariableGroup(6, name='x', lb=0)
>>>     so.Objective(
>>>         so.expr_sum(x[i] for i in range(6)), name='z', sense=so.MIN)
>>>     a1 = so.Constraint(x[1] + x[2] + x[3] <= 4, name='a1')
>>>     for i in cofor_loop(so.exp_range(3, 6)):
>>>         fix(x[1], i)
>>>         solve()
>>>         put_item(i, x[1], so.Symbol('_solution_status_'), names=True)
>>> print(so.to_optmodel(w))
proc optmodel;
  var x {{0,1,2,3,4,5}} >= 0;
  min z = x[0] + x[1] + x[2] + x[3] + x[4] + x[5];
  con a1 : x[1] + x[2] + x[3] <= 4;
  cofor {o13 in 3..5} do;
    fix x[1]=o13;
    solve;
    put o13= x[1]= _solution_status_;
  end;
quit;
```

sasoptpy.actions.if_condition

if_condition (*logic_expression*, *if_statement*, *else_statement=None*)

Creates an if-else block

Parameters

logic_expression [*sasoptpy.Constraint* or *sasoptpy.abstract.Condition*]

Logical condition for the True case

For the condition, it is possible to combine constraints, such as

```
>>> a = so.Parameter(value=5)
>>> if_condition((a < 3) | (a > 6), func1, func2)
```

Constraints should be combined using bitwise operators (& for *and*, | for *or*).

if_statement [function or *IfElseStatement*] Python function or if-else statement to be called if the condition is True

else_statement [function or *IfElseStatement*, optional] Python function or if-else statement to be called if the condition is False

Examples

Regular condition

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x')
>>>     x.set_value(0.5)
>>>     def func1():
>>>         x.set_value(1)
>>>     def func2():
>>>         x.set_value(0)
>>>     if_condition(x > 1e-6, func1, func2)
>>> print(so.to_optmodel(w))
proc optmodel;
  var x;
  x = 0.5;
  if x > 1e-06 then do;
    x = 1;
  end;
  else do;
    x = 0;
  end;
quit;
```

Combined conditions

```
>>> with so.Workspace('w') as w:
>>>     p = so.Parameter(name='p')
>>>     def case1():
>>>         p.set_value(10)
>>>     def case2():
>>>         p.set_value(20)
>>>     r = so.Parameter(name='r', value=10)
>>>     if_condition((r < 5) | (r > 10), case1, case2)
>>> print(so.to_optmodel(w))
```

(continues on next page)

(continued from previous page)

```

proc optmodel;
  num p;
  num r = 10;
  if (r < 5) or (r > 10) then do;
    p = 10;
  end;
  else do;
    p = 20;
  end;
quit;

```

sasoptpy.actions.switch_conditions

switch_conditions (**args)

Creates several if-else blocks using given arguments

Parameters

args : Several arguments can be passed to the function

If an argument is a Constraint or Condition (combined Constraints) the following callable argument is used as a case

Examples

```

>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x')
>>>     p = so.Parameter(name='p')
>>>     x.set_value(2.5)
>>>     def func1():
>>>         p.set_value(1)
>>>     def func2():
>>>         p.set_value(2)
>>>     def func3():
>>>         p.set_value(3)
>>>     def func4():
>>>         p.set_value(0)
>>>     switch_conditions(x < 1, func1, x < 2, func2, x < 3, func3, func4)
>>> print(to.optmodel(w))
proc optmodel;
  var x;
  num p;
  x = 2.5;
  if x < 1 then do;
    p = 1;
  end;
  else if x < 2 then do;
    p = 2;
  end;
  else if x < 3 then do;
    p = 3;
  end;
  else do;
    p = 0;
  end;
quit;

```

(continues on next page)

(continued from previous page)

```
end;
quit;
```

sasoptpy.actions.set_value

set_value (*left*, *right*)

Creates an assignment statement

Parameters

left [*sasoptpy.Expression*] Any expression (variable or parameter)

right [*sasoptpy.Expression* or float] Right-hand-side expression

Examples

```
>>> with so.Workspace('ex_9_1_matirx_sqrt', session=None) as w:
>>>     so.LiteralStatement('call streaminit(1);')
>>>     n = so.Parameter(name='n', value=5)
>>>     rn = so.Set(name='RN', value=so.exp_range(1, n))
>>>     A = so.ParameterGroup(rn, rn, name='A', value="10-20*rand('UNIFORM')")
>>>     P = so.ParameterGroup(rn, rn, name='P')
>>>     for i in for_loop(rn):
>>>         for j in for_loop(so.exp_range(i, n)):
>>>             set_value(P[i, j], so.expr_sum(A[i, k] * A[j, k] for k in rn))
>>> print(so.to_optmodel(w))
proc optmodel;
  call streaminit(1);
  num n = 5;
  set RN = 1..n;
  num A {RN, RN} = 10-20*rand('UNIFORM');
  num P {RN, RN};
  for {o7 in RN} do;
    for {o10 in o7..n} do;
      P[o7, o10] = sum {k in RN} (A[o7, k] * A[o10, k]);
    end;
  end;
quit;
```

sasoptpy.actions.fix

fix (*args)

Fixes values of variables to given values

Parameters

args [*sasoptpy.Variable*, float, *sasoptpy.Expression*, tuple] Set of arguments to be fixed

Arguments get paired (if not given in tuples) to allow several fix operations

See also:

sasoptpy.actions.unfix()

tests.abstract.statement.test_fix_unfix.TestFix

Examples

Regular fix statement

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x')
>>>     fix(x, 1)
>>>     solve()
>>>     unfix(x)
>>> print(so.to_optmodel(w))
proc optmodel;
    var x;
    fix x=1;
    solve;
    unfix x;
quit;
```

Multiple fix-unfix

```
>>> with so.Workspace('w') as w:
>>>     x = so.VariableGroup(4, name='x')
>>>     for i in cofor_loop(range(4)):
>>>         fix((x[0], i), (x[1], 1))
>>>         solve()
>>>         unfix(x[0], (x[1], 2))
>>> print(so.to_optmodel(w))
proc optmodel;
    var x {{0,1,2,3}};
    cofor {o7 in 0..3} do;
        fix x[0]=o7 x[1]=1;
        solve;
        unfix x[0] x[1]=2;
    end;
quit;
```

sasoptpy.actions.unfix

unfix (*args)

Unfixes values of variables

Parameters

args [*sasoptpy.Variable* objects] Set of arguments to be unfixed

See also:

sasoptpy.actions.fix()

tests.abstract.statement.test_fix_unfix.TestFix

Examples

Regular unfix statement

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x')
>>>     fix(x, 1)
>>>     solve()
>>>     unfix(x)
>>> print(so.to_optmodel(w))
proc optmodel;
    var x;
    fix x=1;
    solve;
    unfix x;
quit;
```

Multiple fix-unfix

```
>>> with so.Workspace('w') as w:
>>>     x = so.VariableGroup(4, name='x')
>>>     for i in cofor_loop(range(4)):
>>>         fix((x[0], i), (x[1], 1))
>>>         solve()
>>>         unfix(x[0], (x[1], 2))
>>> print(so.to_optmodel(w))
proc optmodel;
    var x {{0,1,2,3}};
    cofor {o7 in 0..3} do;
        fix x[0]=o7 x[1]=1;
        solve;
        unfix x[0] x[1]=2;
    end;
quit;
```

sasoptpy.actions.set_objective

set_objective (*expression, name, sense*)

Sets objective function

Parameters

expression [*sasoptpy.Expression*] Objective function

name [string] Name of the objective function

sense [string] Direction of the objective function, *so.MAX* or *so.MIN*

Examples

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x', lb=1)
>>>     set_objective(x ** 3, name='xcube', sense=so.minimize)
>>>     solve()
>>> print(so.to_optmodel(w))
proc optmodel;
  var x >= 1;
  MIN xcube = (x) ^ (3);
  solve;
quit;
```

sasoptpy.actions.print_item

print_item(*args)

Prints given argument list on server-side

Parameters

args [*sasoptpy.Variable*, *sasoptpy.Expression*] Arbitrary number of arguments to be printed

These values are printed on server-side, but can be grabbed after execution

Returns

ps [*sasoptpy.abstract.statement.PrintStatement*] Print statement object.

Contents of the response can be grabbed using *get_response* function.

Examples

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x', lb=1, ub=10)
>>>     o = so.Objective(2*x, sense=so.maximize, name='obj')
>>>     s = solve()
>>>     p = print_item(x)
>>> print(so.to_optmodel(w))
proc optmodel;
  var x >= 1 <= 10;
  max obj = 2 * x;
  solve;
  print x;
quit;
>>> print(p.get_response())
      x
0  10.0
```

sasoptpy.actions.put_item**put_item** (*args, names=None)

Prints given item values to output log

Parameters**args** [*sasoptpy.Expression*, string] Arbitrary elements to be put into log

Variables, variable groups, expressions can be printed to log

names [bool, optional] Whether name of the arguments be printed in the log**Examples**

Regular operation

```
>>> with so.Workspace('w') as w:
>>>     for i in for_loop(range(1, 3)):
>>>         for j in for_loop(['a', 'b']):
>>>             put_item(i, j)
>>> print(so.to_optmodel(w))
proc optmodel;
  for {o2 in 1..2} do;
    for {o5 in {'a', 'b'}} do;
      put o2 o5;
    end;
  end;
quit;
```

Print with names

```
>>> with so.Workspace('w') as w:
>>>     x = so.VariableGroup(6, name='x', lb=0)
>>>     so.Objective(
>>>         so.expr_sum(x[i] for i in range(6)), name='z', sense=so.MIN)
>>>     a1 = so.Constraint(x[1] + x[2] + x[3] <= 4, name='a1')
>>>     for i in cofor_loop(so.exp_range(3, 6)):
>>>         fix(x[1], i)
>>>         solve()
>>>         put_item(i, x[1], so.Symbol('_solution_status_'), names=True)
proc optmodel;
  var x {{0,1,2,3,4,5}} >= 0;
  min z = x[0] + x[1] + x[2] + x[3] + x[4] + x[5];
  con a1 : x[1] + x[2] + x[3] <= 4;
  cofor {o13 in 3..5} do;
    fix x[1]=o13;
    solve;
    put o13= x[1]= _solution_status_;
  end;
quit;
```

sasoptpy.actions.expand

expand()

Prints expanded problem to output

Examples

```
>>> with so.Workspace(name='w') as w:
>>>     x = so.VariableGroup(3, name='x')
>>>     self.assertEqual(x[0].sym.get_conditions_str(), '')
>>>     # solve
>>>     x[0].set_value(1)
>>>     x[1].set_value(5)
>>>     x[2].set_value(0)
>>>     c = so.ConstraintGroup(None, name='c')
>>>     with iterate([0, 1, 2], 's') as i:
>>>         with condition(x[i].sym > 0):
>>>             c[i] = x[i] >= 1
>>>     set_objective(x[0], name='obj', sense=so.MIN)
>>>     expand()
>>>     solve()
>>> print(so.to_optmodel(w))
proc optmodel;
  var x {{0,1,2}};
  x[0] = 1;
  x[1] = 5;
  x[2] = 0;
  con c {s in {0,1,2}: x[s].sol > 0} : x[s] >= 1;
  MIN obj = x[0];
  expand;
  solve;
quit;
```

sasoptpy.actions.drop

drop(*args)

Drops given constraints or constraint groups from model

Parameters

args [*sasoptpy.Constraint*, *sasoptpy.ConstraintGroup*] Constraints to be dropped

See also:

sasoptpy.actions.restore()

Examples

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x', lb=1)
>>>     y = so.Variable(name='y', lb=0)
>>>     c = so.Constraint(sm.sqrt(x) >= 5, name='c')
>>>     o = so.Objective(x + y, sense=so.MIN, name='obj')
>>>     s = solve()
>>>     drop(c)
>>>     o2 = so.Objective(x, sense=so.MIN, name='obj2')
>>>     s2 = solve()
>>> print(so.to_optmodel(w))
proc optmodel;
  var x >= 1;
  var y >= 0;
  con c : sqrt(x) >= 5;
  min obj = x + y;
  solve;
  drop c;
  min obj2 = x;
  solve;
quit;
```

sasoptpy.actions.restore

restore(*args)

Restores dropped constraint and constraint groups

Parameters

args [*sasoptpy.Constraint*, *sasoptpy.ConstraintGroup*] Constraints to be restored

See also:

sasoptpy.actions.drop()

Examples

```
>>> with so.Workspace('w') as w:
>>>     x = so.Variable(name='x', lb=-1)
>>>     set_objective(x**3, name='xcube', sense=so.minimize)
>>>     c = so.Constraint(x >= 1, name='xbound')
>>>     solve()
>>>     drop(c)
>>>     solve()
>>>     restore(c)
>>>     solve()
>>> print(so.to_optmodel(w))
proc optmodel;
  var x >= -1;
  MIN xcube = (x) ^ (3);
  con xbound : x >= 1;
  solve;
  drop xbound;
```

(continues on next page)

(continued from previous page)

```
solve;  
restore xbound;  
solve;  
quit;
```

sasoptpy.actions.union

union (*args)

Aggregates given sets and set expressions

Parameters

args [*sasoptpy.abstract.Set* and *sasoptpy.abstract.InlineSet*] Objects to be aggregated

Examples

```
>>> from sasoptpy.actions import union, put_item  
>>> with so.Workspace('w') as w:  
>>>     n = so.Parameter(name='n', value=11)  
>>>     S = so.Set(name='S', value=so.exp_range(1, n))  
>>>     T = so.Set(name='T', value=so.exp_range(n+1, 20))  
>>>     U = so.Set(name='U', value=union(S, T))  
>>>     put_item(U, names=True)  
>>> print(so.to_optmodel(w))  
proc optmodel;  
    num n = 11;  
    set S = 1..n;  
    set T = n+1..20;  
    set U = S union T;  
    put U=;  
quit;
```

sasoptpy.actions.diff

diff (left, right)

Gets the difference between set and set expressions

Parameters

left [*sasoptpy.abstract.Set*] Left operand

right [*sasoptpy.abstract.Set*] Right operand

Examples

```
>>> from sasoptpy.actions import diff, put_item
>>> with so.Workspace('w') as w:
>>>     S = so.Set(name='S', value=so.exp_range(1, 20))
>>>     T = so.Set(name='T', value=so.exp_range(1, 15))
>>>     U = so.Set(name='U', value=diff(S, T))
>>>     put_item(U, names=True)
>>> print(so.to_optmodel(w))
proc optmodel;
  set S = 1..19;
  set T = 1..14;
  set U = S diff T;
  put U;
quit;
```

sasoptpy.actions.substring

substring (*main_string*, *first_pos*, *last_pos*)

Gets the substring of given positions

Parameters

main_string [*sasoptpy.abstract.Parameter* or string] Main string

first_pos [integer] First position of the substring, starting from 1

last_pos [integer] Last position of the substring

Examples

```
>>> with so.Workspace('w') as w:
>>>     p = so.Parameter(name='p', value='random_string', ptype=so.STR)
>>>     r = so.Parameter(name='r', value=substring(p, 1, 6), ptype=so.STR)
>>>     put_item(r)
>>> print(so.to_optmodel(w))
proc optmodel;
  str p = 'random_string';
  str r = substr(p, 1, 6);
  put r;
quit;
```

sasoptpy.actions.use_problem

use_problem (*problem*)

Changes the currently active problem

Parameters

problem [*sasoptpy.Model*] Model to be activated

Examples

```
>>> from sasoptpy.actions import use_problem
>>> with so.Workspace('w') as w:
>>>     m = so.Model(name='m')
>>>     m2 = so.Model(name='m2')
>>>     use_problem(m)
>>>     x = so.Variable(name='x')
>>>     use_problem(m2)
>>>     m.solve()
>>>     m2.solve()
>>> print(so.to_optmodel(w))
proc optmodel;
    problem m;
    problem m2;
    use problem m;
    var x;
    use problem m2;
    use problem m;
    solve;
    use problem m2;
    solve;
quit;
```

Math Functions

<i>math.math_func</i> (exp, op, *args)	Function wrapper for math functions
<i>math.abs</i> (exp)	Absolute value function
<i>math.log</i> (exp)	Natural logarithm function
<i>math.log2</i> (exp)	Logarithm function to the base 2
<i>math.log10</i> (exp)	Logarithm function to the base 10
<i>math.exp</i> (exp)	Exponential function
<i>math.sqrt</i> (exp)	Square root function
<i>math.mod</i> (exp, divisor)	Modulo function
<i>math.int</i> (exp)	Integer value function
<i>math.sign</i> (exp)	Sign value function
<i>math.max</i> (exp, *args)	Largest value function
<i>math.min</i> (exp, *args)	Smallest value function
<i>math.sin</i> (exp)	Sine function
<i>math.cos</i> (exp)	Cosine function
<i>math.tan</i> (exp)	Tangent function

sasoptpy.math.math_func

math_func (exp, op, *args)

Function wrapper for math functions

Parameters

exp [Expression] Expression where the math func will be applied

op [string] String representation of the math function

args [float, optional] Additional arguments

sasoptpy.math.abs

abs (*exp*)
Absolute value function

sasoptpy.math.log

log (*exp*)
Natural logarithm function

sasoptpy.math.log2

log2 (*exp*)
Logarithm function to the base 2

sasoptpy.math.log10

log10 (*exp*)
Logarithm function to the base 10

sasoptpy.math.exp

exp (*exp*)
Exponential function

sasoptpy.math.sqrt

sqrt (*exp*)
Square root function

sasoptpy.math.mod

mod (*exp*, *divisor*)
Modulo function

Parameters

exp [Expression] Dividend

divisor [Expression] Divisor

sasoptpy.math.int

int (*exp*)
Integer value function

sasoptpy.math.sign

sign (*exp*)
Sign value function

sasoptpy.math.max

max (*exp*, **args*)
Largest value function

sasoptpy.math.min

min (*exp*, **args*)
Smallest value function

sasoptpy.math.sin

sin (*exp*)
Sine function

sasoptpy.math.cos

cos (*exp*)
Cosine function

sasoptpy.math.tan

tan (*exp*)
Tangent function

5.5 Tests

5.5.1 Unit Tests

Core

```
test_expression.  
TestExpression([methodName])  
test_objective.TestObjective([methodName])
```

Continued on next page

Table 50 – continued from previous page

<code>test_model.TestModel([methodName])</code>
<code>test_variable.TestVariable([methodName])</code>
<code>test_variable_group. TestVariableGroup([...])</code>
<code>test_constraint. TestConstraint([methodName])</code>
<code>test_constraint_group. TestConstraintGroup([...])</code>
<code>test_util.TestUtil([methodName])</code>

tests.core.test_expression.TestExpression

```
class TestExpression (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.core.test_objective.TestObjective

```
class TestObjective (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.core.test_model.TestModel

```
class TestModel (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.core.test_variable.TestVariable

```
class TestVariable (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.core.test_variable_group.TestVariableGroup

```
class TestVariableGroup (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.core.test_constraint.TestConstraint

```
class TestConstraint (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.core.test_constraint_group.TestConstraintGroup

class TestConstraintGroup (*methodName='runTest'*)
Bases: `unittest.case.TestCase`

tests.core.test_util.TestUtil

class TestUtil (*methodName='runTest'*)
Bases: `unittest.case.TestCase`

Abstract

<code>test_math.TestAbstractMath([methodName])</code>
<code>test_set.TestSet([methodName])</code>
<code>test_set_iterator.</code>
<code>TestSetIterator([methodName])</code>
<code>test_parameter.TestParameter([methodName])</code>
<code>test_implicit_variable.</code>
<code>TestImplicitVariable([...])</code>
<code>test_condition.TestCondition([methodName])</code>
<code>statement.test_assignment.</code>
<code>TestAssignment([...])</code>
<code>statement.test_cofor_loop.</code>
<code>TestCoforLoop([...])</code>
<code>statement.test_create_data.</code>
<code>TestCreateData([...])</code>
<code>statement.test_drop_restore.</code>
<code>TestDropRestore([...])</code>
<code>statement.test_fix_unfix.</code>
<code>TestFix([methodName])</code>
<code>statement.test_for_loop.</code>
<code>TestForLoop([methodName])</code>
<code>statement.test_literal.</code>
<code>TestLiteral([methodName])</code>
<code>statement.test_read_data.</code>
<code>TestReadData([...])</code>
<code>statement.test_solve.</code>
<code>TestSolve([methodName])</code>

tests.abstract.test_math.TestAbstractMath

```
class TestAbstractMath (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.test_set.TestSet

```
class TestSet (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.test_set_iterator.TestSetIterator

```
class TestSetIterator (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.test_parameter.TestParameter

```
class TestParameter (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.test_implicit_variable.TestImplicitVariable

```
class TestImplicitVariable (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.test_condition.TestCondition

```
class TestCondition (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_assignment.TestAssignment

```
class TestAssignment (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_cofor_loop.TestCoforLoop

```
class TestCoforLoop (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_create_data.TestCreateData

```
class TestCreateData (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_drop_restore.TestDropRestore

```
class TestDropRestore (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_fix_unfix.TestFix

```
class TestFix (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_for_loop.TestForLoop

```
class TestForLoop (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_literal.TestLiteral

```
class TestLiteral (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_read_data.TestReadData

```
class TestReadData (methodName='runTest')
    Bases: unittest.case.TestCase
```

tests.abstract.statement.test_solve.TestSolve

```
class TestSolve (methodName='runTest')
    Bases: unittest.case.TestCase
```

Interface

```
test_cas_interface.
TestCASInterface([methodName])
test_sas_interface.
TestSASInterface([methodName])
```

tests.interface.test_cas_interface.TestCASInterface

```
class TestCASInterface (methodName='runTest')  
    Bases: unittest.case.TestCase
```

tests.interface.test_sas_interface.TestSASInterface

```
class TestSASInterface (methodName='runTest')  
    Bases: unittest.case.TestCase
```

Session

```
test_workspace.TestWorkspace([methodName])
```

tests.session.test_workspace.TestWorkspace

```
class TestWorkspace (methodName='runTest')  
    Bases: unittest.case.TestCase
```


VERSION HISTORY

This page outlines changes from each release.

6.1 v0.2.1 (February 26, 2019)

6.1.1 New Features

- Support for evaluating nonlinear expressions is added, see `Expression.get_value()` and `utils._evaluate()`
- Support for multiple objectives is added for LSO solver, see `Model.set_objective()` and *Multiobjective* example
- Support for spaces inside variable indices is added
- Experimental RESTful API is added

6.1.2 Changes

- Dictionaries inside components are replaced with ordered dictionaries to preserve deterministic behavior
- Math operators are added into the keys of linear coefficient dictionaries
- Some iterators are rewritten by using the *yield* keyword for performance
- `key_name` and `col_names` parameters are added into `read_table()`

6.1.3 Bug Fixes

- Fixed: Using a single variable as an objective is producing incorrect input
- Fixed: `Expression.get_value()` fails to evaluate expressions with operators
- Fixed: `Expression.add()` overrides operators in some instances
- Fixed: Expressions with same components but different operators get summed incorrectly
- Fixed: New version of Viya complains about `pandas.DataFrame` column types
- Syntax fixes for **PEP 8** compliance

6.1.4 Notes

- A Jupyter notebook example of the Diet Problem is added
- A new example is added to show usage of experiment RESTful API
- Unit tests are added for development repository
- CD/CI integration is added for the development repository on Gitlab
- Generated models can be checked by using the hash values inside tests.responses

6.2 v0.2.0 (July 30, 2018)

6.2.1 New Features

- Support for the new *runOptmodel* CAS action is added
- Nonlinear optimization model building support is added for both SAS 9.4 and SAS Viya solvers
- Abstract model building support is added when by using SAS Viya solvers
- New object types, `Set`, `SetIterator`, `Parameter`, `ParameterValue`, `ImplicitVar`, `ExpressionDict`, and `Statement` are added for abstract model building
- `Model.to_optmodel()` method is added for exporting model objects into PROC OPTMODEL codes as a string
- Wrapper functions `read_table()` and `read_data()` are added to read CASTable and DataFrame objects into the models
- Math function wrappers are added
- `__expr` and `__defn` methods are added to all object types for producing OPTMODEL expression and definitions
- Multiple solutions are now being returned when by using *solveMilp* action and can be retrieved by using `Model.get_solution()` method
- `Model.get_variable_value()` is added to get solution values of abstract variables

6.2.2 Changes

- Variable and constraint naming schemes are replaced with OPTMODEL equivalent versions
- Variables and constraints now preserve the order they are inserted to the problem
- `Model.to_frame()` method is updated to reflect changes to VG and CG orderings
- Two `solve` methods, `Model.solve_on_cas()` and `Model.solve_on_viya()` are merged into `Model.solve()`
- `Model.solve()` method checks the available CAS actions and uses *runOptmodel* whenever possible
- As part of the merging process, `lp` and `milp` arguments are replaced with `options` argument in `Model.solve()` and `Model.to_optmodel()`
- An optional argument `frame` is added to `Model.solve()` for forcing to use MPS mode and *solveLp-solveMilp* actions
- Minor changes are applied to `__str__` and `__repr__` methods
- Creation indices for objects are being kept by using the return of the `register_name()` function

- Objective constant values are now being passed by using new CAS action arguments when possible
- A linearity check is added for models
- Test folder is added to the repository

6.2.3 Bug Fixes

- Nondeterministic behavior when generating MPS files is fixed.

6.2.4 Notes

- Abstract and nonlinear models can be solved on Viya only if *runOptmodel* action is available on the CAS server.
- Three new examples are added which demonstrate abstract model building.
- Some minor changes are applied to the existing examples.

6.3 v0.1.2 (April 24, 2018)

6.3.1 New Features

- As an experimental feature, *sasoptpy* supports *saspy* connections now
- `Model.solve_local()` method is added for solving optimization problems by using SAS 9.4 installations
- `Model.drop_variable()`, `Model.drop_variables()`, `Model.drop_constraint()`, `Model.drop_constraints()` methods are added
- `Model.get_constraint()` and `Model.get_constraints()` methods are added to grab *Constraint* objects in a model
- `Model.get_variables()` method is added
- `_dual` attribute is added to the *Expression* objects
- `Variable.get_dual()` and `Constraint.get_dual()` methods are added
- `Expression.set_name()` method is added

6.3.2 Changes

- Session argument accepts *saspy.SASsession* objects
- `VariableGroup.mult()` method now supports *pandas.DataFrame*
- Type check for the `Model.set_session()` is removed to support new session types
- Problem and solution summaries are not being printed by default anymore, see `Model.get_problem_summary()` and `Model.get_solution_summary()`
- The default behavior of dropping the table after each solve is changed, but can be controlled with the `drop` argument of the `Model.solve()` method

6.3.3 Bug Fixes

- Fixed: Variables do not appear in MPS files if they are not used in the model
- Fixed: `Model.solve()` primalin argument does not pass into options

6.3.4 Notes

- A `.gitignore` file is added to the repository.
- A new example is added: Decentralization.
- Both *CAS/Viya* and *SAS* versions of the new example are available.
- There is a known issue with the nondeterministic behavior when creating MPS tables. This will be fixed with a hotfix after the release.
- A new option (no-ex) is added to makedocs script for skipping examples when building docs.

6.4 v0.1.1 (February 26, 2018)

6.4.1 New Features

- Initial value argument 'init' is added for *Variable* objects
- `Variable.set_init()` method is added for variables
- Initial value option 'primalin' is added to `Model.solve()` method
- Table name argument 'name', table drop option 'drop' and replace option 'replace' are added to `Model.solve()` method
- Decomposition block implementation is rewritten, block numbers does not need to be consecutive and ordered
`Model.upload_user_blocks()`
- `VariableGroup.get_name()` and `ConstraintGroup.get_name()` methods are added
- `Model.test_session()` method is added for checking if session is defined for models
- `quick_sum()` function is added for faster summation of *Expression* objects

6.4.2 Changes

- `methods.py` is renamed to `utils.py`

6.4.3 Bug Fixes

- Fixed: Crash in VG and CG when a key not in the list is called
- Fixed: `get_value` of pandas is depreceated
- Fixed: Variables can be set as temporary expressions
- Fixed: Ordering in `get_solution_table()` is incorrect for multiple entries

6.5 v0.1.0 (December 22, 2017)

- Initial release

PYTHON MODULE INDEX

S

`sasoptpy`, [1](#)

Symbols

__init__() (Assignment method), 223
 __init__() (CoForLoopStatement method), 223
 __init__() (CreateDataStatement method), 224
 __init__() (DropStatement method), 224
 __init__() (FixStatement method), 227
 __init__() (ForLoopStatement method), 225
 __init__() (IfElseStatement method), 225
 __init__() (LiteralStatement method), 225
 __init__() (ObjectiveStatement method), 226
 __init__() (PrintStatement method), 228
 __init__() (ReadDataStatement method), 226
 __init__() (SolveStatement method), 227
 __init__() (UnfixStatement method), 228
 __repr__() (Expression method), 201
 __str__() (Expression method), 201
 _expr() (Expression method), 200
 _is_linear() (Expression method), 200
 _is_linear() (Model method), 191
 _relational() (Expression method), 201

A

abs() (in module sasoptpy.math), 261
 add() (Expression method), 196
 add_constraint() (Model method), 175
 add_constraints() (Model method), 176
 add_implicit_variable() (Model method), 171
 add_parameter() (Model method), 179
 add_set() (Model method), 179
 add_statement() (Model method), 180
 add_to_member_value() (Expression method), 199
 add_variable() (Model method), 170
 add_variables() (Model method), 171
 append() (Workspace method), 219
 append_objective() (Model method), 168
 Assignment (class in sasoptpy.abstract.statement), 223
 Auxiliary (class in sasoptpy), 193

C

CASMediator (class in sasoptpy.interface), 229
 clear_solution() (Model method), 190

cofor_loop() (in module sasoptpy.actions), 248
 CoForLoopStatement (class in sasoptpy.abstract.statement), 223
 Constraint (class in sasoptpy), 212
 ConstraintGroup (class in sasoptpy), 216
 convert_to_original() (SASMediator method), 235
 copy() (Expression method), 196
 copy() (Variable method), 206
 copy_member() (Expression method), 199
 cos() (in module sasoptpy.math), 262
 create_data() (in module sasoptpy.actions), 242
 CreateDataStatement (class in sasoptpy.abstract.statement), 224

D

delete_member() (Expression method), 199
 dict_to_frame() (in module sasoptpy), 237
 diff() (in module sasoptpy.actions), 258
 drop() (in module sasoptpy.actions), 256
 drop_constraint() (Model method), 178
 drop_constraints() (Model method), 178
 drop_variable() (Model method), 174
 drop_variables() (Model method), 175
 DropStatement (class in sasoptpy.abstract.statement), 224

E

exp() (in module sasoptpy.math), 261
 exp_range() (in module sasoptpy), 237
 expand() (in module sasoptpy.actions), 256
 Expression (class in sasoptpy), 192

F

fix() (in module sasoptpy.actions), 251
 FixStatement (class in sasoptpy.abstract.statement), 227
 flatten_frame() (in module sasoptpy), 238
 for_loop() (in module sasoptpy.actions), 246
 ForLoopStatement (class in sasoptpy.abstract.statement), 225

G

[get_all_keys\(\)](#) (*ConstraintGroup method*), 217
[get_all_objectives\(\)](#) (*Model method*), 169
[get_attributes\(\)](#) (*Variable method*), 205
[get_attributes\(\)](#) (*VariableGroup method*), 209
[get_constant\(\)](#) (*Expression method*), 198
[get_constraint\(\)](#) (*Model method*), 177
[get_constraints\(\)](#) (*Model method*), 177
[get_dual\(\)](#) (*Expression method*), 195
[get_dual\(\)](#) (*Variable method*), 206
[get_elements\(\)](#) (*Workspace method*), 219
[get_expressions\(\)](#) (*ConstraintGroup method*), 217
[get_grouped_constraints\(\)](#) (*Model method*), 177
[get_grouped_variables\(\)](#) (*Model method*), 173
[get_implicit_variables\(\)](#) (*Model method*), 173
[get_member\(\)](#) (*Expression method*), 197
[get_member_dict\(\)](#) (*Expression method*), 197
[get_member_value\(\)](#) (*Expression method*), 198
[get_members\(\)](#) (*ConstraintGroup method*), 218
[get_members\(\)](#) (*VariableGroup method*), 210
[get_name\(\)](#) (*ConstraintGroup method*), 217
[get_name\(\)](#) (*Expression method*), 195
[get_name\(\)](#) (*Model method*), 167
[get_name\(\)](#) (*Variable method*), 206
[get_name\(\)](#) (*VariableGroup method*), 209
[get_objective\(\)](#) (*Model method*), 169
[get_objective_value\(\)](#) (*Model method*), 187
[get_parameters\(\)](#) (*Model method*), 181
[get_problem_summary\(\)](#) (*Model method*), 189
[get_sense\(\)](#) (*Objective method*), 203
[get_session\(\)](#) (*Model method*), 167
[get_session_type\(\)](#) (*Model method*), 167
[get_sets\(\)](#) (*Model method*), 180
[get_solution\(\)](#) (*Model method*), 185
[get_solution_summary\(\)](#) (*Model method*), 188
[get_solution_table\(\)](#) (*in module sasoptpy*), 238
[get_statements\(\)](#) (*Model method*), 181
[get_tuner_results\(\)](#) (*Model method*), 190
[get_type\(\)](#) (*Variable method*), 205
[get_type\(\)](#) (*VariableGroup method*), 209
[get_value\(\)](#) (*Constraint method*), 213
[get_value\(\)](#) (*Expression method*), 195
[get_value\(\)](#) (*Variable method*), 207
[get_variable\(\)](#) (*Model method*), 172
[get_variable\(\)](#) (*Workspace method*), 220
[get_variable_coef\(\)](#) (*Model method*), 174
[get_variable_value\(\)](#) (*Model method*), 187
[get_variables\(\)](#) (*Model method*), 172

I

[if_condition\(\)](#) (*in module sasoptpy.actions*), 249

[IfElseStatement](#) (*class in sasoptpy.abstract.statement*), 225
[include\(\)](#) (*Model method*), 181
[int\(\)](#) (*in module sasoptpy.math*), 262

L

[lb\(\)](#) (*Variable property*), 204
[LiteralStatement](#) (*class in sasoptpy.abstract.statement*), 225
[log\(\)](#) (*in module sasoptpy.math*), 261
[log10\(\)](#) (*in module sasoptpy.math*), 261
[log2\(\)](#) (*in module sasoptpy.math*), 261

M

[math_func\(\)](#) (*in module sasoptpy.math*), 260
[max\(\)](#) (*in module sasoptpy.math*), 262
[min\(\)](#) (*in module sasoptpy.math*), 262
[mod\(\)](#) (*in module sasoptpy.math*), 261
[Model](#) (*class in sasoptpy*), 165
[mult\(\)](#) (*Expression method*), 197
[mult\(\)](#) (*VariableGroup method*), 211
[mult_member_value\(\)](#) (*Expression method*), 199

O

[Objective](#) (*class in sasoptpy*), 202
[ObjectiveStatement](#) (*class in sasoptpy.abstract.statement*), 226

P

[Parameter](#) (*class in sasoptpy.abstract*), 221
[ParameterGroup](#) (*class in sasoptpy.abstract*), 221
[parse_cas_solution\(\)](#) (*CASMediator method*), 231
[parse_cas_table\(\)](#) (*CASMediator method*), 231
[parse_cas_workspace_response\(\)](#) (*CASMediator method*), 233
[parse_print_responses\(\)](#) (*Workspace method*), 220
[parse_sas_mps_solution\(\)](#) (*SASMediator method*), 235
[parse_sas_solution\(\)](#) (*SASMediator method*), 235
[parse_sas_table\(\)](#) (*SASMediator method*), 235
[parse_sas_workspace_response\(\)](#) (*SASMediator method*), 236
[parse_solve_responses\(\)](#) (*Workspace method*), 220
[perform_postsolve_operations\(\)](#) (*SASMediator method*), 235
[print_item\(\)](#) (*in module sasoptpy.actions*), 254
[print_solution\(\)](#) (*Model method*), 190
[PrintStatement](#) (*class in sasoptpy.abstract.statement*), 228

`put_item()` (in module *sasoptpy.actions*), 255

Python Enhancement Proposals

PEP 498, 5

PEP 8, 269

Q

`quick_sum()` (in module *sasoptpy*), 239

R

`read_data()` (in module *sasoptpy.actions*), 239

`ReadDataStatement` (class in *sasoptpy.abstract.statement*), 226

`reset()` (in module *sasoptpy*), 239

`restore()` (in module *sasoptpy.actions*), 257

S

`SASMediator` (class in *sasoptpy.interface*), 233

sasoptpy (module), 1

`Set` (class in *sasoptpy.abstract*), 221

`set_active_model()` (*Workspace method*), 219

`set_block()` (*Constraint method*), 214

`set_bounds()` (*Variable method*), 204

`set_bounds()` (*VariableGroup method*), 210

`set_constraint_values()` (*CASMediator method*), 231

`set_direction()` (*Constraint method*), 214

`set_init()` (*Variable method*), 205

`set_init()` (*VariableGroup method*), 210

`set_member()` (*Expression method*), 198

`set_member_value()` (*Expression method*), 198

`set_model_objective_value()` (*CASMediator method*), 231

`set_name()` (*Expression method*), 194

`set_objective()` (in module *sasoptpy.actions*), 253

`set_objective()` (*Model method*), 167

`set_permanent()` (*Expression method*), 194

`set_rhs()` (*Constraint method*), 215

`set_sense()` (*Objective method*), 203

`set_session()` (*Model method*), 167

`set_temporary()` (*Expression method*), 195

`set_value()` (in module *sasoptpy.actions*), 251

`set_variable_init_values()` (*CASMediator method*), 231

`set_variable_value()` (*Workspace method*), 220

`set_variable_values()` (*CASMediator method*), 231

`set_workspace_variable_values()` (*CASMediator method*), 233

`set_workspace_variable_values()` (*SASMediator method*), 236

`SetIterator` (class in *sasoptpy.abstract*), 222

`SetIteratorGroup` (class in *sasoptpy.abstract*), 222

`sign()` (in module *sasoptpy.math*), 262

`sin()` (in module *sasoptpy.math*), 262

`solve()` (*CASMediator method*), 230

`solve()` (in module *sasoptpy.actions*), 245

`solve()` (*Model method*), 182

`solve()` (*SASMediator method*), 234

`solve_with_mps()` (*CASMediator method*), 230

`solve_with_mps()` (*SASMediator method*), 234

`solve_with_optmodel()` (*CASMediator method*), 230

`solve_with_optmodel()` (*SASMediator method*), 234

in `SolveStatement` (class in *sasoptpy.abstract.statement*), 227

`sqrt()` (in module *sasoptpy.math*), 261

`Statement` (class in *sasoptpy.abstract*), 222

`submit()` (*CASMediator method*), 233

`submit()` (*SASMediator method*), 236

`submit()` (*Workspace method*), 219

`submit_optmodel_code()` (*CASMediator method*), 233

`submit_optmodel_code()` (*SASMediator method*), 236

`substring()` (in module *sasoptpy.actions*), 259

`sum()` (*VariableGroup method*), 212

`switch_conditions()` (in module *sasoptpy.actions*), 250

`Symbol` (class in *sasoptpy*), 193

T

`tan()` (in module *sasoptpy.math*), 262

`TestAbstractMath` (class in *tests.abstract.test_math*), 265

`TestAssignment` (class in *tests.abstract.statement.test_assignment*), 265

`TestCASInterface` (class in *tests.interface.test_cas_interface*), 267

`TestCoforLoop` (class in *tests.abstract.statement.test_cofor_loop*), 265

`TestCondition` (class in *tests.abstract.test_condition*), 265

`TestConstraint` (class in *tests.core.test_constraint*), 263

`TestConstraintGroup` (class in *tests.core.test_constraint_group*), 264

`TestCreateData` (class in *tests.abstract.statement.test_create_data*), 266

`TestDropRestore` (class in *tests.abstract.statement.test_drop_restore*), 266

`TestExpression` (class in *tests.core.test_expression*), 263

TestFixture (*class in tests.abstract.statement.test_fix_unfix*), [266](#)

TestForLoop (*class in tests.abstract.statement.test_for_loop*), [266](#)

TestImplicitVariable (*class in tests.abstract.test_implicit_variable*), [265](#)

TestLiteral (*class in tests.abstract.statement.test_literal*), [266](#)

TestModel (*class in tests.core.test_model*), [263](#)

TestObjective (*class in tests.core.test_objective*), [263](#)

TestParameter (*class in tests.abstract.test_parameter*), [265](#)

TestReadData (*class in tests.abstract.statement.test_read_data*), [266](#)

TestSASInterface (*class in tests.interface.test_sas_interface*), [267](#)

TestSet (*class in tests.abstract.test_set*), [265](#)

TestSetIterator (*class in tests.abstract.test_set_iterator*), [265](#)

TestSolve (*class in tests.abstract.statement.test_solve*), [266](#)

TestUtil (*class in tests.core.test_util*), [264](#)

TestVariable (*class in tests.core.test_variable*), [263](#)

TestVariableGroup (*class in tests.core.test_variable_group*), [263](#)

TestWorkspace (*class in tests.session.test_workspace*), [267](#)

to_expression() (*Expression class method*), [200](#)

to_frame() (*Model method*), [192](#)

to_mps() (*Model method*), [191](#)

to_optmodel() (*Model method*), [191](#)

to_optmodel() (*Workspace method*), [220](#)

tune() (*CASMediator method*), [230](#)

tune_parameters() (*Model method*), [183](#)

tune_problem() (*CASMediator method*), [230](#)

U

ub() (*Variable property*), [204](#)

unfix() (*in module sasoptpy.actions*), [252](#)

UnfixStatement (*class in sasoptpy.abstract.statement*), [228](#)

union() (*in module sasoptpy.actions*), [258](#)

update_var_coef() (*Constraint method*), [215](#)

upload_model() (*CASMediator method*), [232](#)

upload_user_blocks() (*CASMediator method*), [232](#)

use_problem() (*in module sasoptpy.actions*), [259](#)

V

Variable (*class in sasoptpy*), [203](#)

VariableGroup (*class in sasoptpy*), [207](#)

W

Workspace (*class in sasoptpy*), [218](#)