

Data Mining Association Analysis: Basic Concepts and Algorithms

Thanks to [Tan, Steinbach, Kumar]

Association Rule Mining

- Given a set of transactions, find rules that will predict the occurrence of an item based on the occurrences of other items in the transaction

Market-Basket transactions

TID	Items
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

Example of Association Rules

$\{\text{Diaper}\} \rightarrow \{\text{Beer}\}$,
 $\{\text{Milk, Bread}\} \rightarrow \{\text{Eggs, Coke}\}$,
 $\{\text{Beer, Bread}\} \rightarrow \{\text{Milk}\}$,

Implication means co-occurrence, not causality!

Definition: Frequent Itemset

- Itemset**
 - A collection of one or more items
 - Example: {Milk, Bread, Diaper}
 - k-itemset
 - An itemset that contains k items
- Support count (σ)**
 - Frequency of occurrence of an itemset
 - E.g. $\sigma(\{\text{Milk, Bread, Diaper}\}) = 2$
- Support**
 - Fraction of transactions that contain an itemset
 - E.g. $s(\{\text{Milk, Bread, Diaper}\}) = 2/5$
- Frequent Itemset**
 - An itemset whose support is greater than or equal to a *minsup* threshold

TID	Items
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

2个同时出现

Definition: Association Rule

- Association Rule**
 - An implication expression of the form $X \rightarrow Y$, where X and Y are itemsets
 - Example: $\{\text{Milk, Diaper}\} \rightarrow \{\text{Beer}\}$

XY 应该为空集

TID	Items
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

Rule Evaluation Metrics

- Support (s)**
 - Fraction of transactions that contain both X and Y
- Confidence (c)**
 - Measures how often items in Y appear in transactions that contain X

Example:

$\{\text{Milk, Diaper}\} \Rightarrow \text{Beer}$

$$s = \frac{\sigma(\text{Milk, Diaper, Beer})}{|T|} = \frac{2}{5} = 0.4$$

$$c = \frac{\sigma(\text{Milk, Diaper, Beer})}{\sigma(\text{Milk, Diaper})} = \frac{2}{3} = 0.67$$

Association Rule Mining Task

- Given a set of transactions T , the goal of association rule mining is to find all rules having
 - support $\geq \text{minsup}$ threshold
 - confidence $\geq \text{minconf}$ threshold
- Brute-force approach:
 - List all possible association rules
 - Compute the support and confidence for each rule
 - 删除 Prune rules that fail the minsup and minconf thresholds

\Rightarrow Computationally prohibitive!

禁止

Mining Association Rules

TID	Items
1	Bread, Milk
2	Bread, Diaper, Beer, Eggs
3	Milk, Diaper, Beer, Coke
4	Bread, Milk, Diaper, Beer
5	Bread, Milk, Diaper, Coke

Example of Rules:

$\{\text{Milk, Diaper}\} \rightarrow \{\text{Beer}\}$ ($s=0.4, c=0.67$)
 $\{\text{Milk, Beer}\} \rightarrow \{\text{Diaper}\}$ ($s=0.4, c=1.0$)
 $\{\text{Diaper, Beer}\} \rightarrow \{\text{Milk}\}$ ($s=0.4, c=0.67$)
 $\{\text{Beer}\} \rightarrow \{\text{Milk, Diaper}\}$ ($s=0.4, c=0.67$)
 $\{\text{Diaper}\} \rightarrow \{\text{Milk, Beer}\}$ ($s=0.4, c=0.5$)
 $\{\text{Milk}\} \rightarrow \{\text{Diaper, Beer}\}$ ($s=0.4, c=0.5$)

Observations:


$2^k - 2$ 总共有这么些规则

- All the above rules are binary partitions of the same itemset: $\{\text{Milk, Diaper, Beer}\}$
- Rules originating from the same itemset have identical support but can have different confidence
- Thus, we may decouple the support and confidence requirements

Mining Association Rules

- Two-step approach:
 - Frequent Itemset Generation**
 - Generate all itemsets whose support $\geq \text{minsup}$
 - Rule Generation**
 - Generate high confidence rules from each frequent itemset, where each rule is a binary partitioning of a frequent itemset
- Frequent itemset generation is still computationally expensive

Frequent Itemset Generation

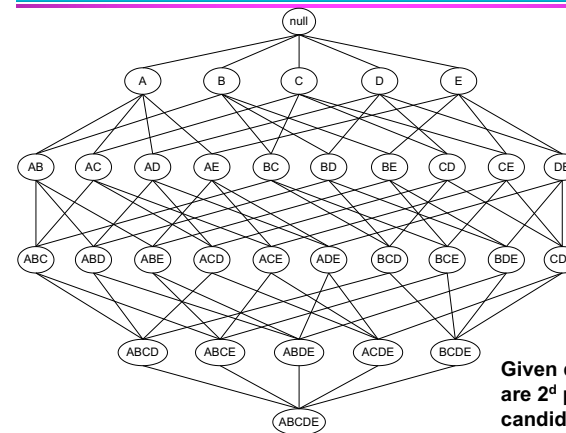


Given d items, there are 2^d possible candidate itemsets

Frequent Itemset Generation

● Brute-force approach:

- Each itemset in the lattice is a **candidate** frequent itemset
- Count the support of each candidate by scanning the database

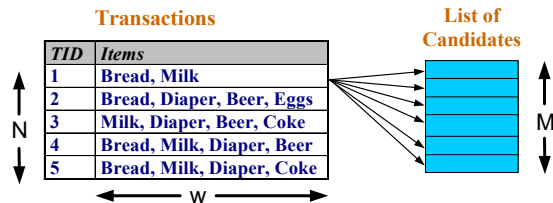


- Match each transaction against every candidate
- Complexity $\sim O(NMw) \Rightarrow$ **Expensive since $M = 2^d$!!!**

Computational Complexity

● Given d unique items:

- Total number of itemsets $= 2^d$
- Total number of possible association rules:

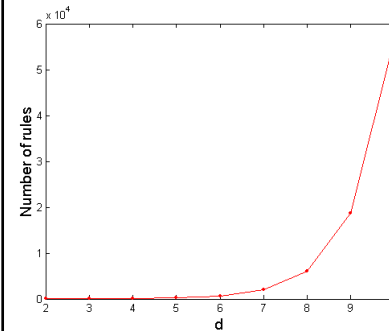

$$R = \sum_{k=1}^{d-1} \left[\binom{d}{k} \times \sum_{j=1}^{d-k} \binom{d-k}{j} \right]$$

$$= 3^d - 2^{d+1} + 1$$

If $d=6$, $R = 602$ rules

Frequent Itemset Generation Strategies

● Reduce the **number of candidates** (M)

- Complete search: $M=2^d$ LCM 用于生成 itemset
- Use pruning techniques to reduce M

● Reduce the **number of transactions** (N)

- Reduce size of N as the size of itemset increases
- Used by DHP and vertical-based mining algorithms

● Reduce the **number of comparisons** (NM)

- Use efficient data structures to store the candidates or transactions
- No need to match every candidate against every transaction

Reducing Number of Candidates

● Apriori principle:

- If an itemset is frequent, then all of its **subsets** must also be frequent

作业之一，证明这个是否成立。因为可能会出现在考试中

- Apriori principle holds due to the following property of the support measure:


$$\forall X, Y : (X \subseteq Y) \Rightarrow s(X) \geq s(Y)$$

- Support of an itemset never exceeds the support of its subsets
- This is known as the **anti-monotone** property of support

反相关

Illustrating Apriori Principle

就是根据上面的原则，对树进行减除

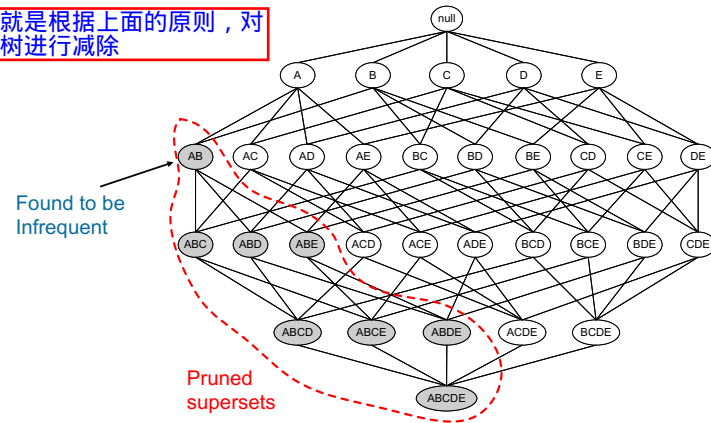

Illustrating Apriori Principle

Item	Count
Bread	4
Coke	2
Milk	4
Beer	3
Diaper	4
Eggs	1

Items (1-itemsets)

上一个进行组合生成下一个，逐渐进行的，从1到2到3。 bread beer diaper

Itemset	Count
{Bread,Milk}	3
{Bread,Beer}	2
{Bread,Diaper}	3
{Milk,Beer}	2
{Milk,Diaper}	3
{Beer,Diaper}	3

Pairs (2-itemsets)

(No need to generate candidates involving Coke or Eggs)

Minimum Support = 3

If every subset is considered,
 ${}^6C_1 + {}^6C_2 + {}^6C_3 = 41$
 With support-based pruning,
 $6 + 6 + 1 = 13$

Triplets (3-itemsets)

Itemset	Count
{Bread,Milk,Diaper}	3

要生成k itemset那么至少需要k-1 个记录

Apriori Algorithm

● Method:

- Let k=1 这里可以进行优化
- Generate frequent itemsets of length 1
- Repeat until no new frequent itemsets are identified
 - ◆ Generate length (k+1) candidate itemsets from length k frequent itemsets
 - ◆ Prune candidate itemsets containing **subsets** of length k that are infrequent
 - ◆ Count the support of each candidate by scanning the DB
 - ◆ Eliminate candidates that are infrequent, leaving only those that are frequent

Factors Affecting Complexity

- Choice of minimum support threshold
 - lowering support threshold results in more frequent itemsets
 - this may increase number of candidates and max length of frequent itemsets
- Dimensionality (number of items) of the data set
 - more space is needed to store support count of each item
 - if number of frequent items also increases, both computation and I/O costs may also increase
- Size of database
 - since Apriori makes multiple passes, run time of algorithm may increase with number of transactions
- Average transaction width
 - transaction width increases with denser data sets
 - This may increase max length of frequent itemsets and traversals of hash tree (number of subsets in a transaction increases with its width)

Compact Representation of Frequent Itemsets


- Some itemsets are redundant because they have identical support as their supersets

TID	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
9	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1
15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1

- Number of frequent itemsets = $3 \times \sum_{k=1}^{10} \binom{10}{k}$
- Need a compact representation

Maximal Frequent Itemset

An itemset is maximal frequent if none of its immediate supersets is frequent

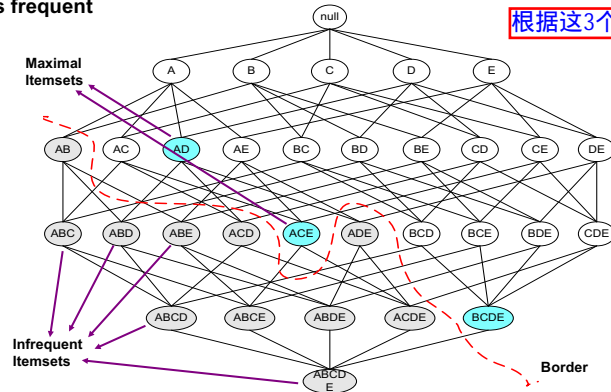

根据这3个就能够获得整体

负边界，自身是 infrequent 但是它的父集都是 frequency. AB、ACD、ADE 是 minimal infrequent itemset。与图中蓝色的 maximal。考试题2，如何根据这两个进行相应的集合的生成。

Closed Itemset

- An itemset is closed if none of its immediate supersets has the same support as the itemset

挨个找

B、AB、BD、ABD、BCD 是一个 closed Itemset

TID	Items
1	{A,B}
2	{B,C,D}
3	{A,B,C,D}
4	{A,B,D}
5	{A,B,C,D}


Itemset	Support
{A}	4
{B}	5
{C}	3
{D}	4
{A,B}	4
{A,C}	2
{A,D}	3
{B,C}	3
{B,D}	4
{C,D}	3

Itemset	Support
{A,B,C}	2
{A,B,D}	3
{A,C,D}	2
{B,C,D}	3
{A,B,C,D}	2


通过 closed Itemset 可以找到每个项的 exact support

Maximal vs Closed Itemsets


这个地方不是很懂啊

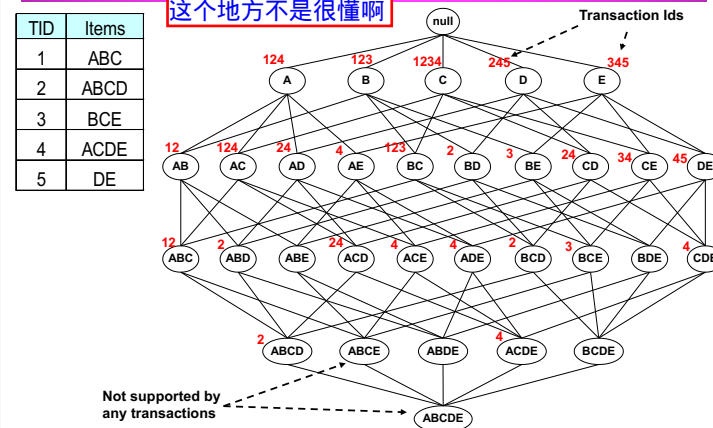

Maximal vs Closed Frequent Itemsets

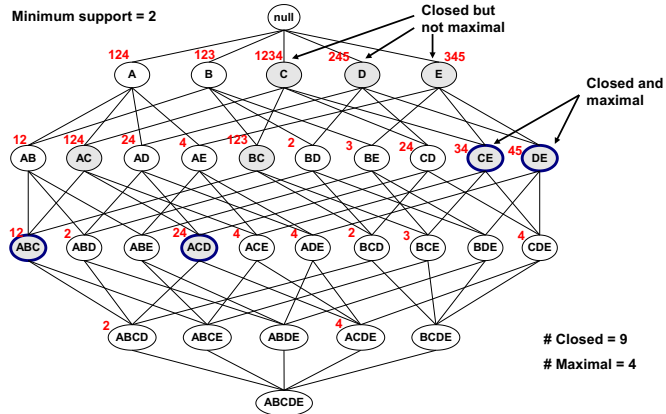

Maximal vs Closed Itemsets

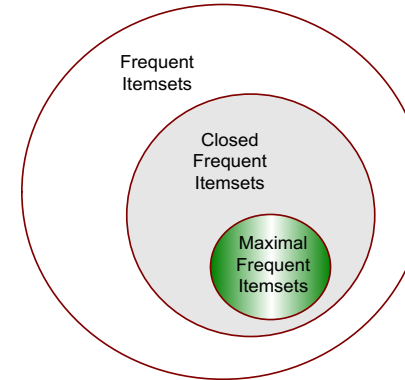

Alternative Methods for Frequent Itemset Generation

- Representation of Database
 - horizontal vs vertical data layout

Horizontal Data Layout

TID	Items
1	A,B,E
2	B,C,D
3	C,E
4	A,C,D
5	A,B,C,D
6	A,E
7	A,B
8	A,B,C
9	A,C,D
10	B

Vertical Data Layout

	A	B	C	D	E
1	1		2	2	1
4	2		3	4	3
5	5	5	4	5	6
6	7		8	9	
7	8		9		
8		10			
9					

Rule Generation

- Given a frequent itemset L , find all non-empty subsets $f \subset L$ such that $f \rightarrow L - f$ satisfies the minimum confidence requirement
 - If $\{A,B,C,D\}$ is a frequent itemset, candidate rules:

$ABC \rightarrow D,$	$ABD \rightarrow C,$	$ACD \rightarrow B,$	$BCD \rightarrow A,$
$A \rightarrow BCD,$	$B \rightarrow ACD,$	$C \rightarrow ABD,$	$D \rightarrow ABC$
$AB \rightarrow CD,$	$AC \rightarrow BD,$	$AD \rightarrow BC,$	$BC \rightarrow AD,$
$BD \rightarrow AC,$	$CD \rightarrow AB,$		
- If $|L| = k$, then there are $2^k - 2$ candidate association rules (ignoring $L \rightarrow \emptyset$ and $\emptyset \rightarrow L$)

Rule Generation

- How to efficiently generate rules from frequent itemsets?

- In general, confidence does not have an anti-monotone property
 $c(ABC \rightarrow D)$ can be larger or smaller than $c(AB \rightarrow D)$


- But confidence of rules generated from the same itemset has an anti-monotone property
- e.g., $L = \{A, B, C, D\}$:

$$c(ABC \rightarrow D) \geq c(AB \rightarrow CD) \geq c(A \rightarrow BCD)$$

- Confidence is anti-monotone w.r.t. number of items on the RHS of the rule

Rule Generation for Apriori Algorithm

Lattice of rules

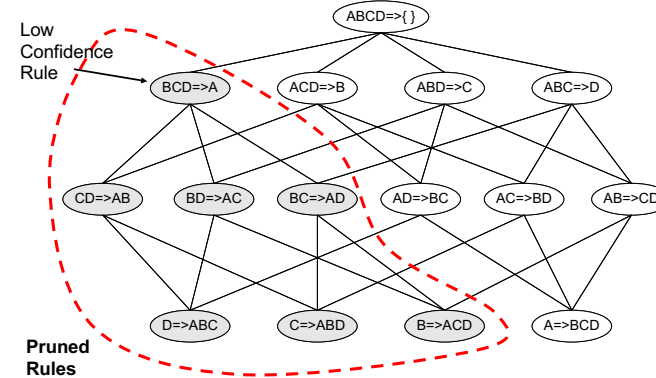


Rule Generation for Apriori Algorithm

- Candidate rule is generated by merging two rules that share the same prefix in the rule consequent


- $\text{join}(CD \Rightarrow AB, BD \Rightarrow AC)$ would produce the candidate rule $D \Rightarrow ABC$

- Prune rule $D \Rightarrow ABC$ if its subset $AD \Rightarrow BC$ does not have high confidence



Effect of Support Distribution

- Many real data sets have skewed support distribution

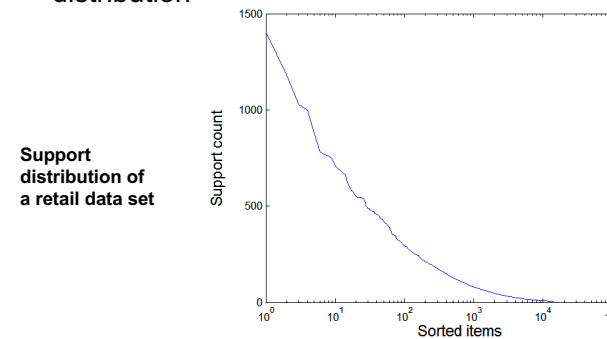


Effect of Support Distribution

- How to set the appropriate *minsup* threshold?
 - If *minsup* is set too high, we could miss itemsets involving interesting rare items (e.g., expensive products)
 - If *minsup* is set too low, it is computationally expensive and the number of itemsets is very large
- Using a single minimum support threshold may not be effective

Pattern Evaluation

- Association rule algorithms tend to produce too many rules
 - many of them are uninteresting or redundant
 - Redundant if $\{A,B,C\} \rightarrow \{D\}$ and $\{A,B\} \rightarrow \{D\}$ have same support & confidence
- Interestingness measures can be used to prune/rank the derived patterns
- In the original formulation of association rules, support & confidence are the only measures used

Application of Interestingness Measure

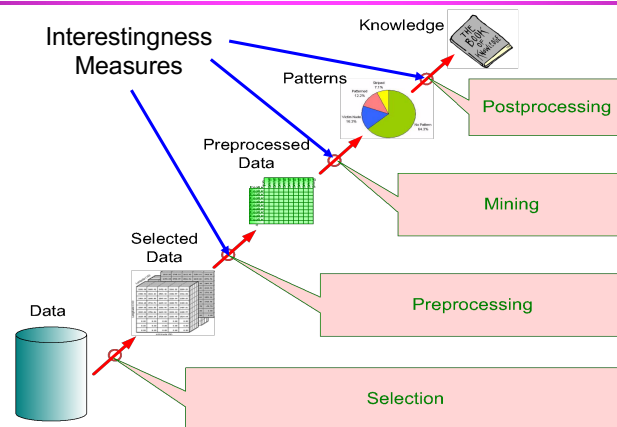

Computing Interestingness Measure

- Given a rule $X \rightarrow Y$, information needed to compute rule interestingness can be obtained from a contingency table

Contingency table for $X \rightarrow Y$

	Y	\bar{Y}	
X	f_{11}	f_{10}	f_{1+}
\bar{X}	f_{01}	f_{00}	f_{0+}
	f_{+1}	f_{+0}	$ T $

f_{11} : support of X and Y
 f_{10} : support of \bar{X} and \bar{Y}
 f_{01} : support of X and \bar{Y}
 f_{00} : support of \bar{X} and Y

Used to define various measures

♦ support, confidence, lift, Gini, J-measure, etc.

Statistical Independence

- Population of 1000 students
 - 600 students know how to swim (S)
 - 700 students know how to bike (B)
 - 420 students know how to swim and bike (S,B)
- $P(S \wedge B) = 420/1000 = 0.42$
- $P(S) \times P(B) = 0.6 \times 0.7 = 0.42$
- $P(S \wedge B) = P(S) \times P(B) \Rightarrow$ Statistical independence
- $P(S \wedge B) > P(S) \times P(B) \Rightarrow$ Positively correlated
- $P(S \wedge B) < P(S) \times P(B) \Rightarrow$ Negatively correlated

Statistical-based Measures

- Measures that take into account statistical dependence

$$Lift = \frac{P(Y | X)}{P(Y)}$$

$$Interest = \frac{P(X, Y)}{P(X)P(Y)}$$

$$PS = P(X, Y) - P(X)P(Y)$$

$$\phi - coefficient = \frac{P(X, Y) - P(X)P(Y)}{\sqrt{P(X)[1 - P(X)]P(Y)[1 - P(Y)]}}$$

#	Measure	Formula
1	ϕ -coefficient	$\frac{P(A, B) - P(A)P(B)}{\sqrt{P(A)P(B)(1 - P(A))(1 - P(B))}}$
2	Goodman-Kruskal's λ	$\frac{\sum_{i,j} \max_k P(A_i, B_k) + \sum_{i,j} \max_k P(A_j, B_k) - \max_j P(A_j) - \max_k P(B_k)}{2 - \max_j P(A_j) - \max_k P(B_k)}$
3	Odds ratio (α)	$\frac{P(A, B)P(\bar{A}, \bar{B})}{P(A, \bar{B})P(\bar{A}, B)}$
4	Yule's Q	$\frac{P(A, B)P(\bar{A}\bar{B}) - P(A, \bar{B})P(\bar{A}, B)}{P(A, B)P(\bar{A}\bar{B}) + P(A, \bar{B})P(\bar{A}, B)} = \frac{q-1}{q+1}$
5	Yule's Y	$\frac{\sqrt{P(A, B)P(\bar{A}\bar{B})} - \sqrt{P(A, \bar{B})P(\bar{A}, B)}}{\sqrt{P(A, B)P(\bar{A}\bar{B})} + \sqrt{P(A, \bar{B})P(\bar{A}, B)}} = \frac{\sqrt{q}-1}{\sqrt{q}+1}$
6	Kappa (κ)	$\frac{P(A, B) + P(\bar{A}, \bar{B}) - P(A)P(B) - P(\bar{A})P(\bar{B})}{1 - P(A)P(B) - P(\bar{A})P(\bar{B})}$
7	Mutual Information (M)	$\frac{\sum_{i,j} \sum_k P(A_i, B_k) \log \frac{P(A_i, B_k)}{P(A_i)P(B_k)}}{\min(-\sum_i P(A_i) \log P(A_i), -\sum_j P(B_j) \log P(B_j))}$
8	J-Measure (J)	$\max \left(P(A, B) \log \left(\frac{P(A, B)}{P(A)P(B)} \right) + P(\bar{A}, \bar{B}) \log \left(\frac{P(\bar{A}, \bar{B})}{P(\bar{A})P(\bar{B})} \right), \right. \\ \left. P(A, B) \log \left(\frac{P(A, B)}{P(A)P(B)} \right) + P(\bar{A}, B) \log \left(\frac{P(\bar{A}, B)}{P(\bar{A})P(B)} \right) \right)$
9	Gini index (G)	$\max \left(P(A)[P(B A)^2 + P(\bar{B} A)^2] + P(\bar{A})[P(B \bar{A})^2 + P(\bar{B} \bar{A})^2] \right. \\ \left. - P(B)^2 - P(\bar{B})^2, \right. \\ \left. P(B)[P(A B)^2 + P(\bar{A} B)^2] + P(\bar{B})[P(A \bar{B})^2 + P(\bar{A} \bar{B})^2] \right. \\ \left. - P(A)^2 - P(\bar{A})^2 \right)$
10	Support (s)	$P(A, B)$
11	Confidence (c)	$\max \{P(B A), P(A B)\}$
12	Laplace (L)	$\max \left(\frac{NP(A, B) + 1}{NP(A) + 2}, \frac{NP(A, B) + 1}{NP(B) + 2} \right)$
13	Conviction (V)	$\max \left(\frac{P(A)P(B)}{P(A, B)}, \frac{P(B)P(\bar{A})}{P(\bar{A}, B)} \right)$
14	Interest (I)	$\frac{P(A, B)}{P(A)P(B)}$
15	cosine (IS)	$\frac{P(A, B)}{\sqrt{P(A)P(B)}}$
16	Piatetsky-Shapiro's (PS)	$P(A, B) - P(A)P(B)$
17	Certainty factor (F)	$\max \left(\frac{P(B A) - P(B)}{1 - P(B)}, \frac{P(A B) - P(A)}{1 - P(A)} \right)$
18	Added Value (AV)	$\max \{P(B A) - P(B), P(A B) - P(A)\}$
19	Collective strength (S)	$\frac{P(A, B) + P(\bar{A}, \bar{B})}{P(A)P(B) + P(\bar{A})P(\bar{B})} \times \frac{1 - P(A)P(B) - P(\bar{A})P(\bar{B})}{1 - P(A, B) - P(\bar{A}, \bar{B})}$
20	Jaccard (G)	$\frac{P(A, B)}{P(A) + P(B) - P(A, B)}$
21	Kloogren (K)	$\sqrt{P(\bar{A}, B)} \max \{P(B A) - P(B), P(A B) - P(A)\}$

There are lots of measures proposed in the literature

Some measures are good for certain applications, but not for others

What criteria should we use to determine whether a measure is good or bad?

What about Apriori-style support based pruning? How does it affect these measures?