



CHULA **ENGINEERING**
Foundation toward Innovation

COMPUTER



Practical Machine Learning

Assoc. Prof. Peerapon Vateekul, Ph.D.
Department of Computer Engineering,
Faculty of Engineering, Chulalongkorn University
Peerapon.v@chula.ac.th
www.cp.eng.chula.ac.th/~peerapon/



Outlines

- Introduction
- Supervised Learning
- Unsupervised Learning
- Special Tasks
- Demo (colab)



Introduction



Retail's Adapt-Or-Die Moment: How Artificial Intelligence Is Reshaping Commerce

July 18, 2019



[Artificial Intelligence](#)

[Retail](#)

<https://www.cbinsights.com/research/artificial-intelligence-reshaping-commerce/>

WHERE IS THIS DATA COMING FROM?

Start your free trial today

Email

SIGN UP

Traditional and new-school retailers alike are using AI and robotics to automate various parts of the retail chain, from manufacturing to last-mile delivery.

Retail is under pressure to crack the AI code.

After all, corporations in every industry are scrambling to adapt and integrate artificial intelligence into their products — and retail is no exception. Between Q1'13 and Q2'19, retail AI startups looking to address retailers' AI needs raised a total of \$2.67B across 564 deals.

2019

2019



2018



2017



Bankruptcy!




Consumer channels: selling online vs. in-store personalized experience & direct targeted marketing



Brands partner with startups to understand consumers

Appier



ESTĒE LAUDER



AXE.



DYNAMIC YIELD



URBAN
OUTFITTERS



Hallmark

lamoda

STITCH FIX



CBINSIGHTS



Products ▾

Introducing our March Expo 2020!

NEW



Search

 Sign In
Join Free Messages Orders Cart

Categories ▾ | Ready to Ship MARCH Trade Shows Services ▾ Sell on Alibaba ▾ Help ▾

Get the App | English - USD ▾

 See FAQs on the coronavirus (COVID-19) and Alibaba.com shipments [learn more >](#)

MARCH EXPO

300,000+ New products
from 40 distinct categories35,000+ Featured suppliers
from various countries6,000,000+ Items with
50% Off shipping[View more](#)

MY MARKETS

MARCH EXPO



Consumer Electronics



Apparel

amazon

All ▾

 Deliver to Thailand

Today's Deals Help Registry Gift Cards Sell Your Amazon.com

Selected Products

Tools & Hardware

[View more](#)

Selected suppliers



EN

Hello, Sign in
Account & Lists ▾

Returns & Orders

 0 Cart

Shop Today's Deals



Welcome to Amazon.com

We ship over 45 million products
around the world

Shop by Category



Like-new Cellphones



AmazonBasics

Sign in for the best
experience[Sign in securely](#)





AI, Machine Learning, and Deep Learning

- Machine Learning (ML) is a subfield in AI focusing on making to learn by itself without human intervention.

“Machine learning is the science of getting computers to act without being explicitly programmed.” — Stanford University

<https://towardsdatascience.com/cousins-of-artificial-intelligence-dda4edc27b55>

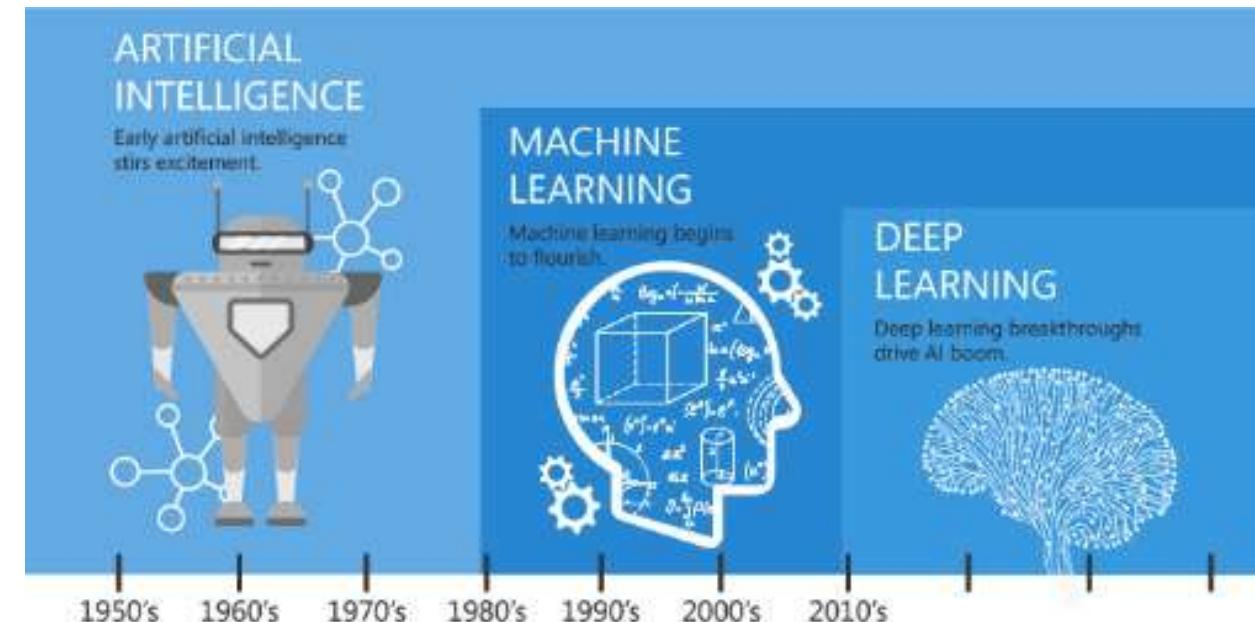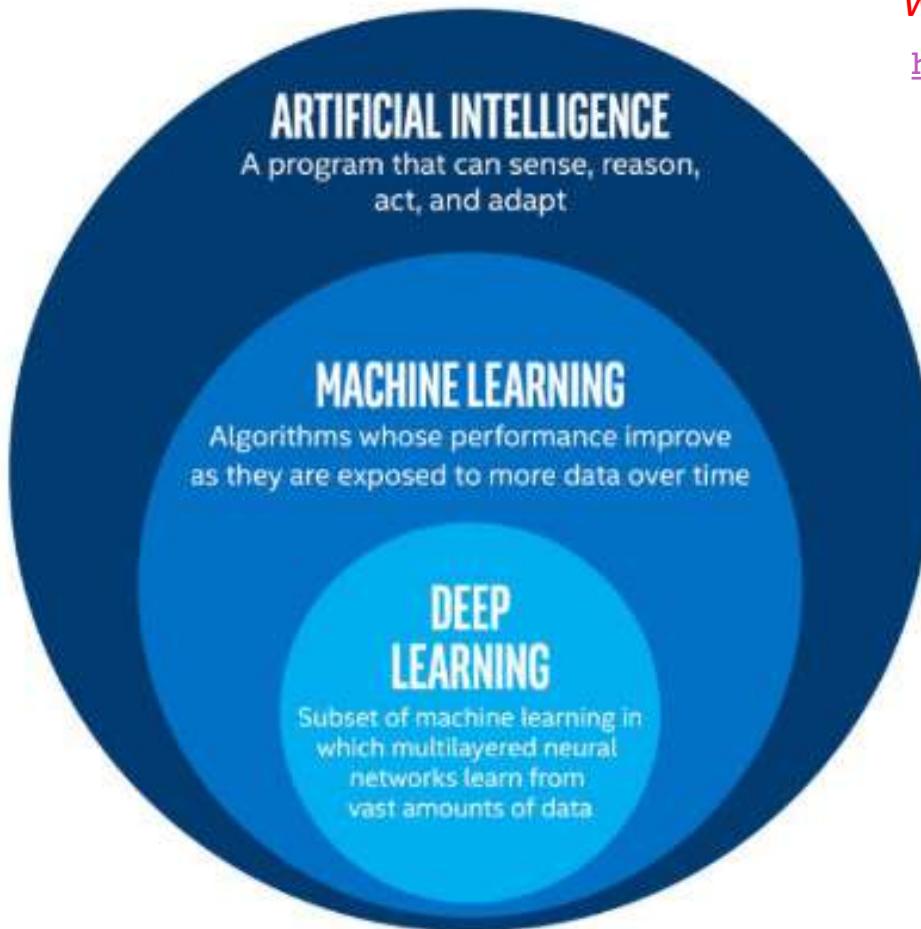


Since an early flush of optimism in the 1950's, smaller subsets of artificial intelligence - first machine learning, then deep learning, a subset of machine learning - have created ever larger disruptions.





AI = Automation

- 1) Rule-based AI (Symbolic AI)
- 2) Machine Learning

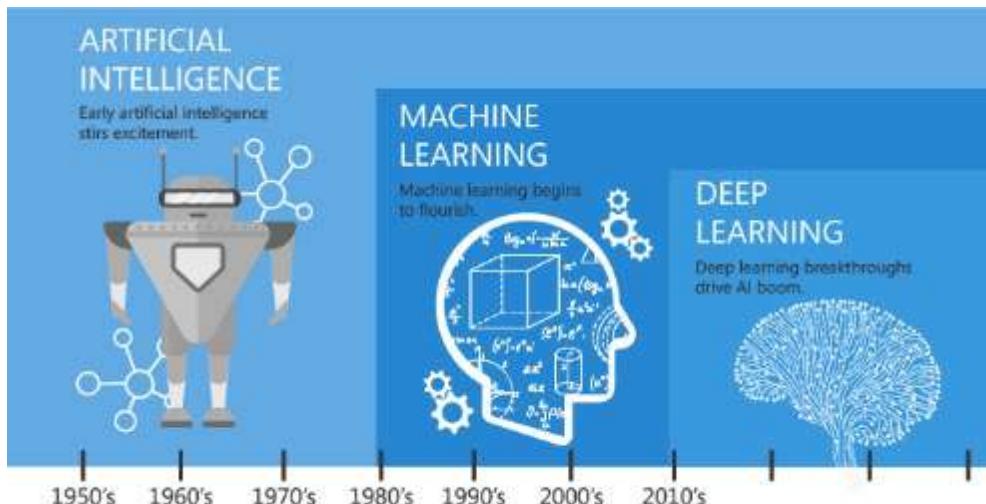

Rule base AI

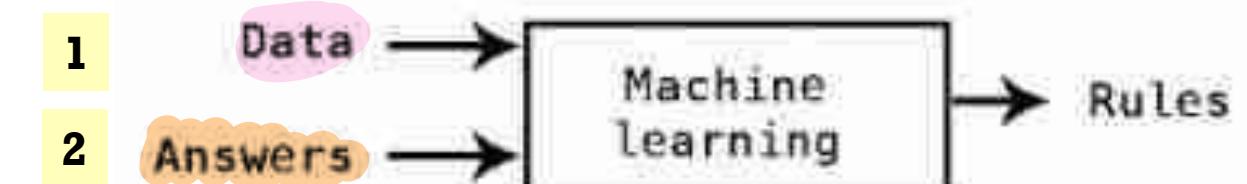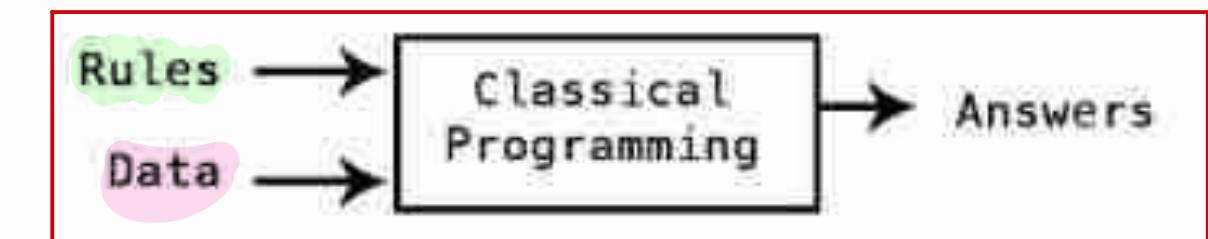

<https://mc.ai/machine-learning-basics-artificial-intelligence-machine-learning-and-deep-learning/>



Sample of ML Application: Finding Waldo

10

THERE'S WALDO

FINDING WALDOS WITH GOOGLE AUTOML VISION



PROTOTYPE VO.1
redpepper.land/innovation



+ Machine Learning (cont.)

11

- Supervise learning (predictive task)
- Unsupervise learning (descriptive task)
- Reinforcement (optimization task)

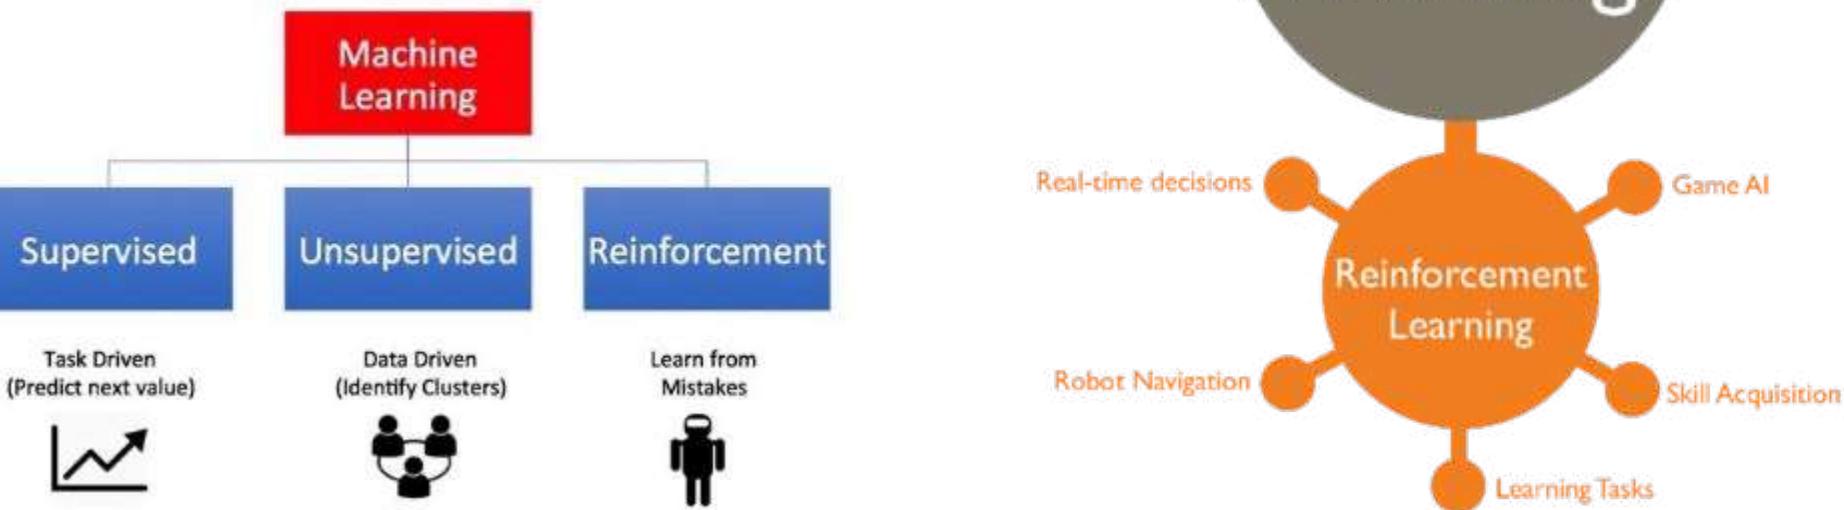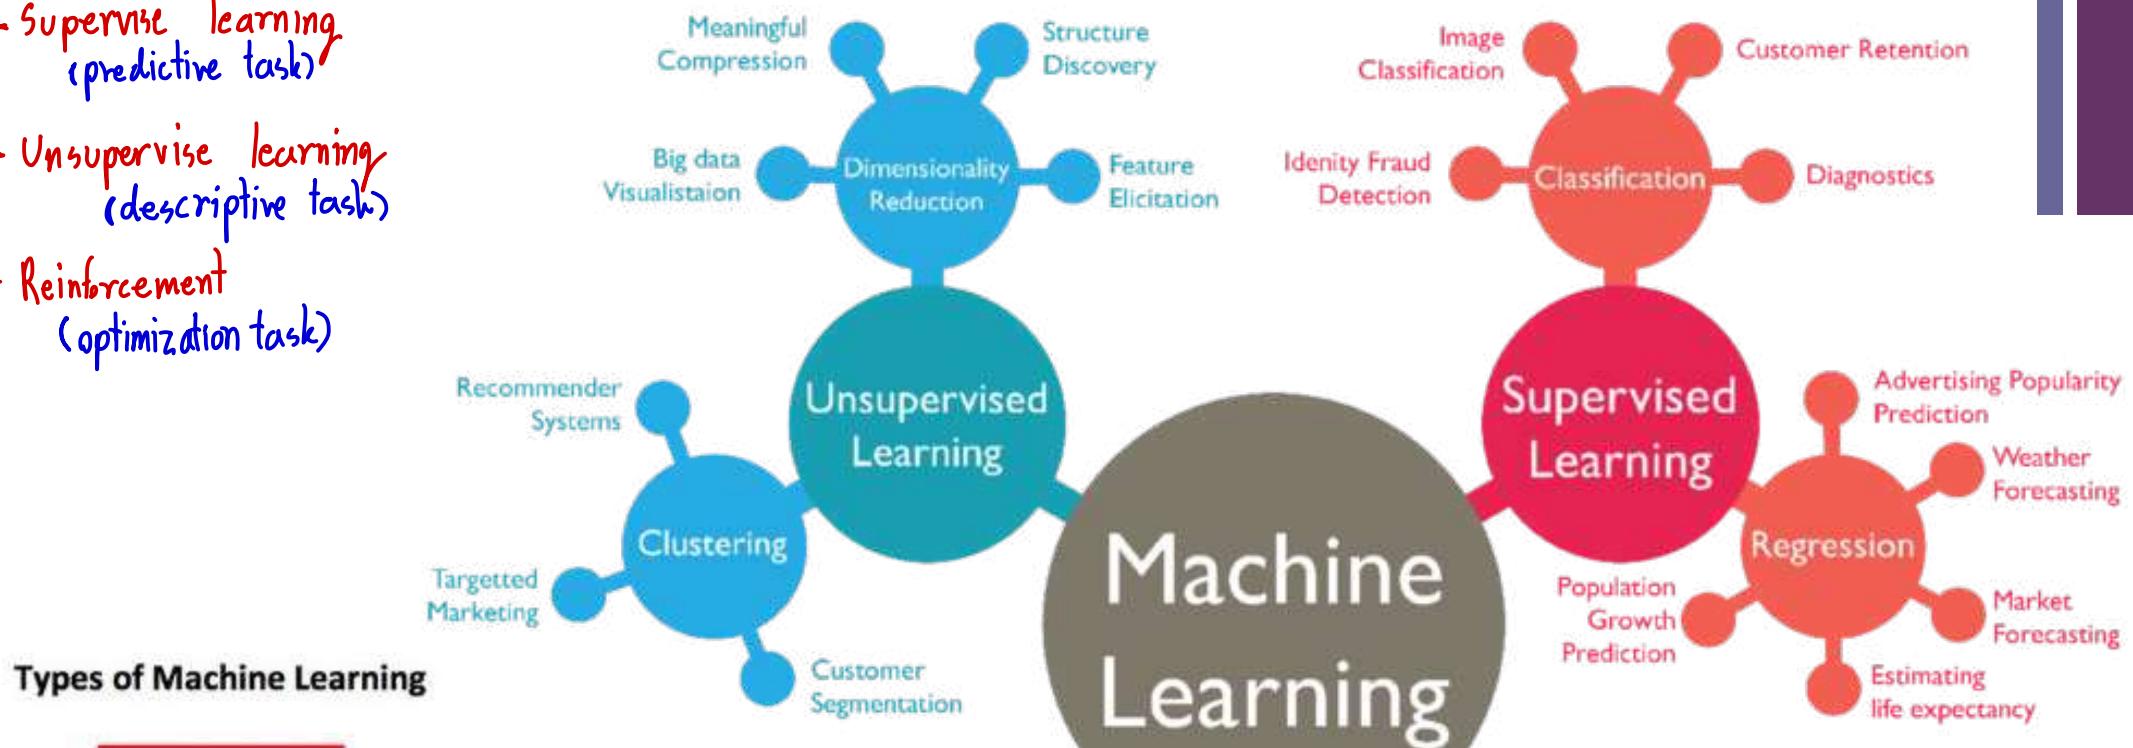

scikit-learn

Machine Learning in Python

[Getting Started](#)[What's New in 0.22.2](#)[GitHub](#)


- Simple and efficient tools for predictive data analysis
- Accessible to everybody, and reusable in various contexts
- Built on NumPy, SciPy, and matplotlib
- Open source, commercially usable - BSD license

Classification

Identifying which category an object belongs to.

Applications: Spam detection, image recognition.

Algorithms: SVM, nearest neighbors, random forest, and more...

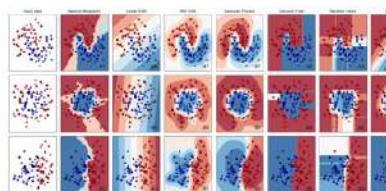
[Examples](#)

Dimensionality reduction

Reducing the number of random variables to consider.

Applications: Visualization, Increased efficiency

Algorithms: k-Means, feature selection, non-negative matrix factorization, and more...

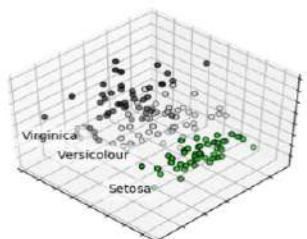
[Examples](#)

Regression

Predicting a continuous-valued attribute associated with an object.

Applications: Drug response, Stock prices.

Algorithms: SVR, nearest neighbors, random forest, and more...

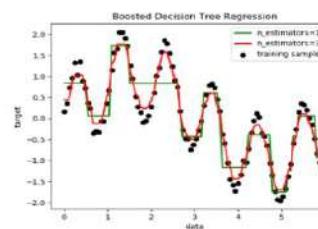[Examples](#)

Clustering

Automatic grouping of similar objects into sets.

Applications: Customer segmentation, Grouping experiment outcomes

Algorithms: k-Means, spectral clustering, mean-shift, and more...


[Examples](#)

Model selection

Comparing, validating and choosing parameters and models.

Applications: Improved accuracy via parameter tuning

Algorithms: grid search, cross validation, metrics, and more...


[Examples](#)

Preprocessing

Feature extraction and normalization.

Applications: Transforming input data such as text for use with machine learning algorithms.

Algorithms: preprocessing, feature extraction, and more...

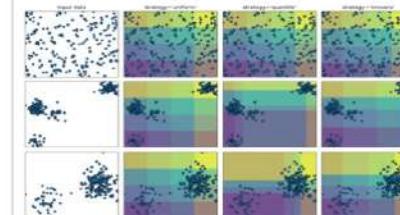[Examples](#)


+ Terminology: Data table

inputs				target
Age	Income	Gender	Province	Purchase
25	25,000	Female	Bangkok	Yes
35	50,000	Female	Nontaburi	Yes
32	35,000	Male	Bangkok	No

- Row
 - Example, instance, case, observation, subject
- Column
 - Feature, variable, attribute
- Input
 - Predictor, independent, explanatory variable
- Target
 - Output, outcome, response, dependent variable



Terminology: Kinds of data

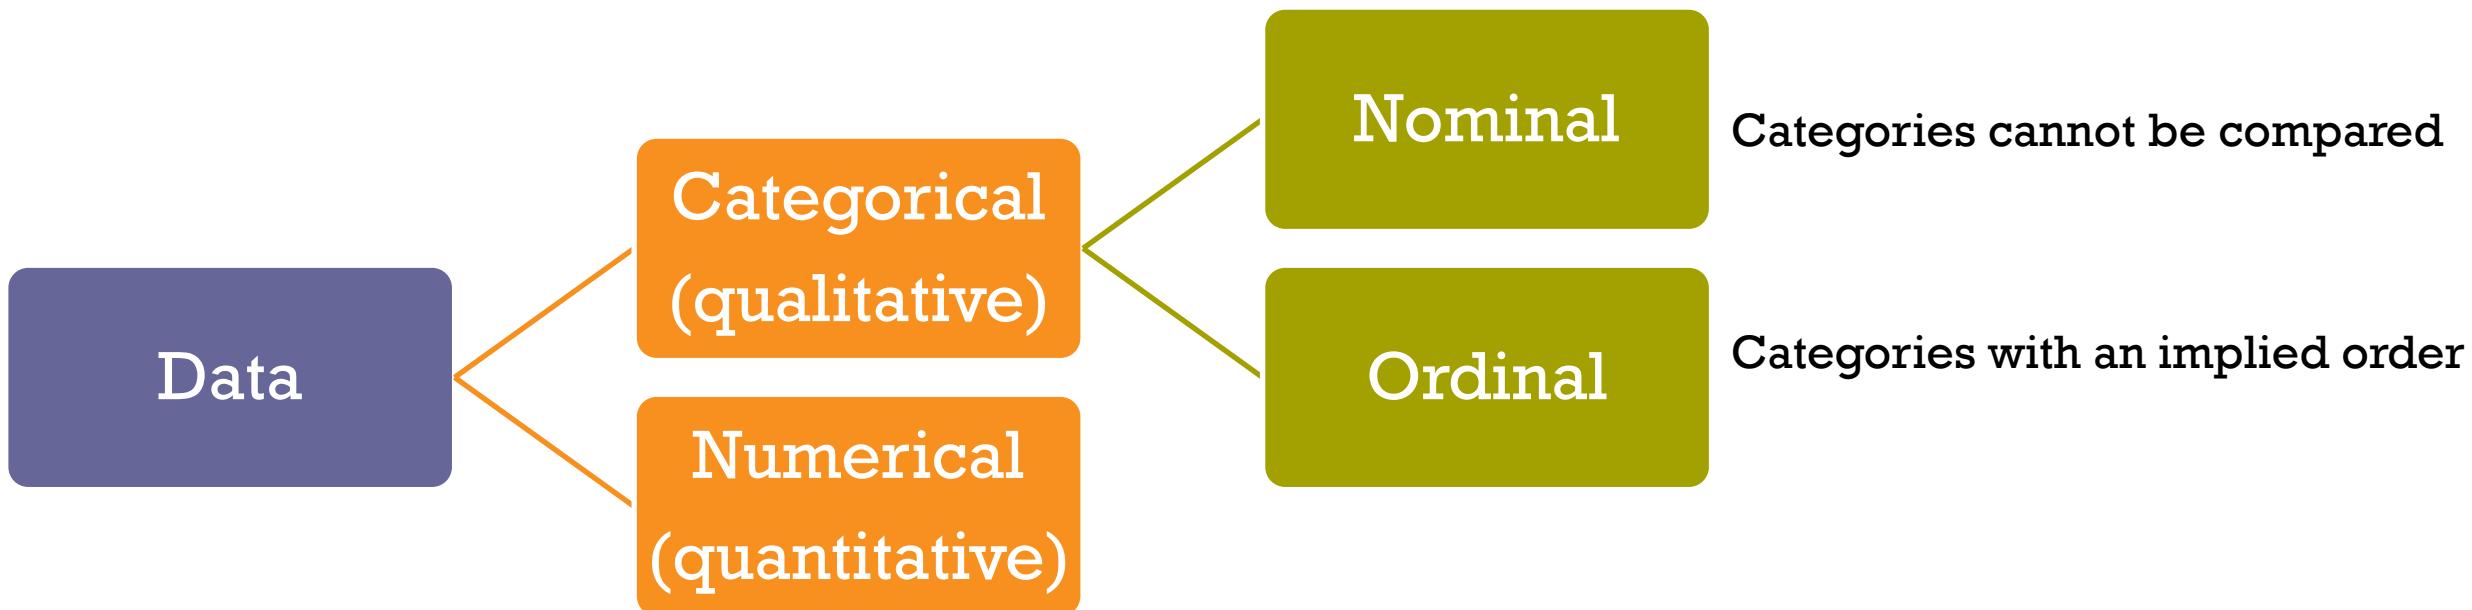




Supervised Learning (Predictive Task)

+ Machine Learning (cont.)

16

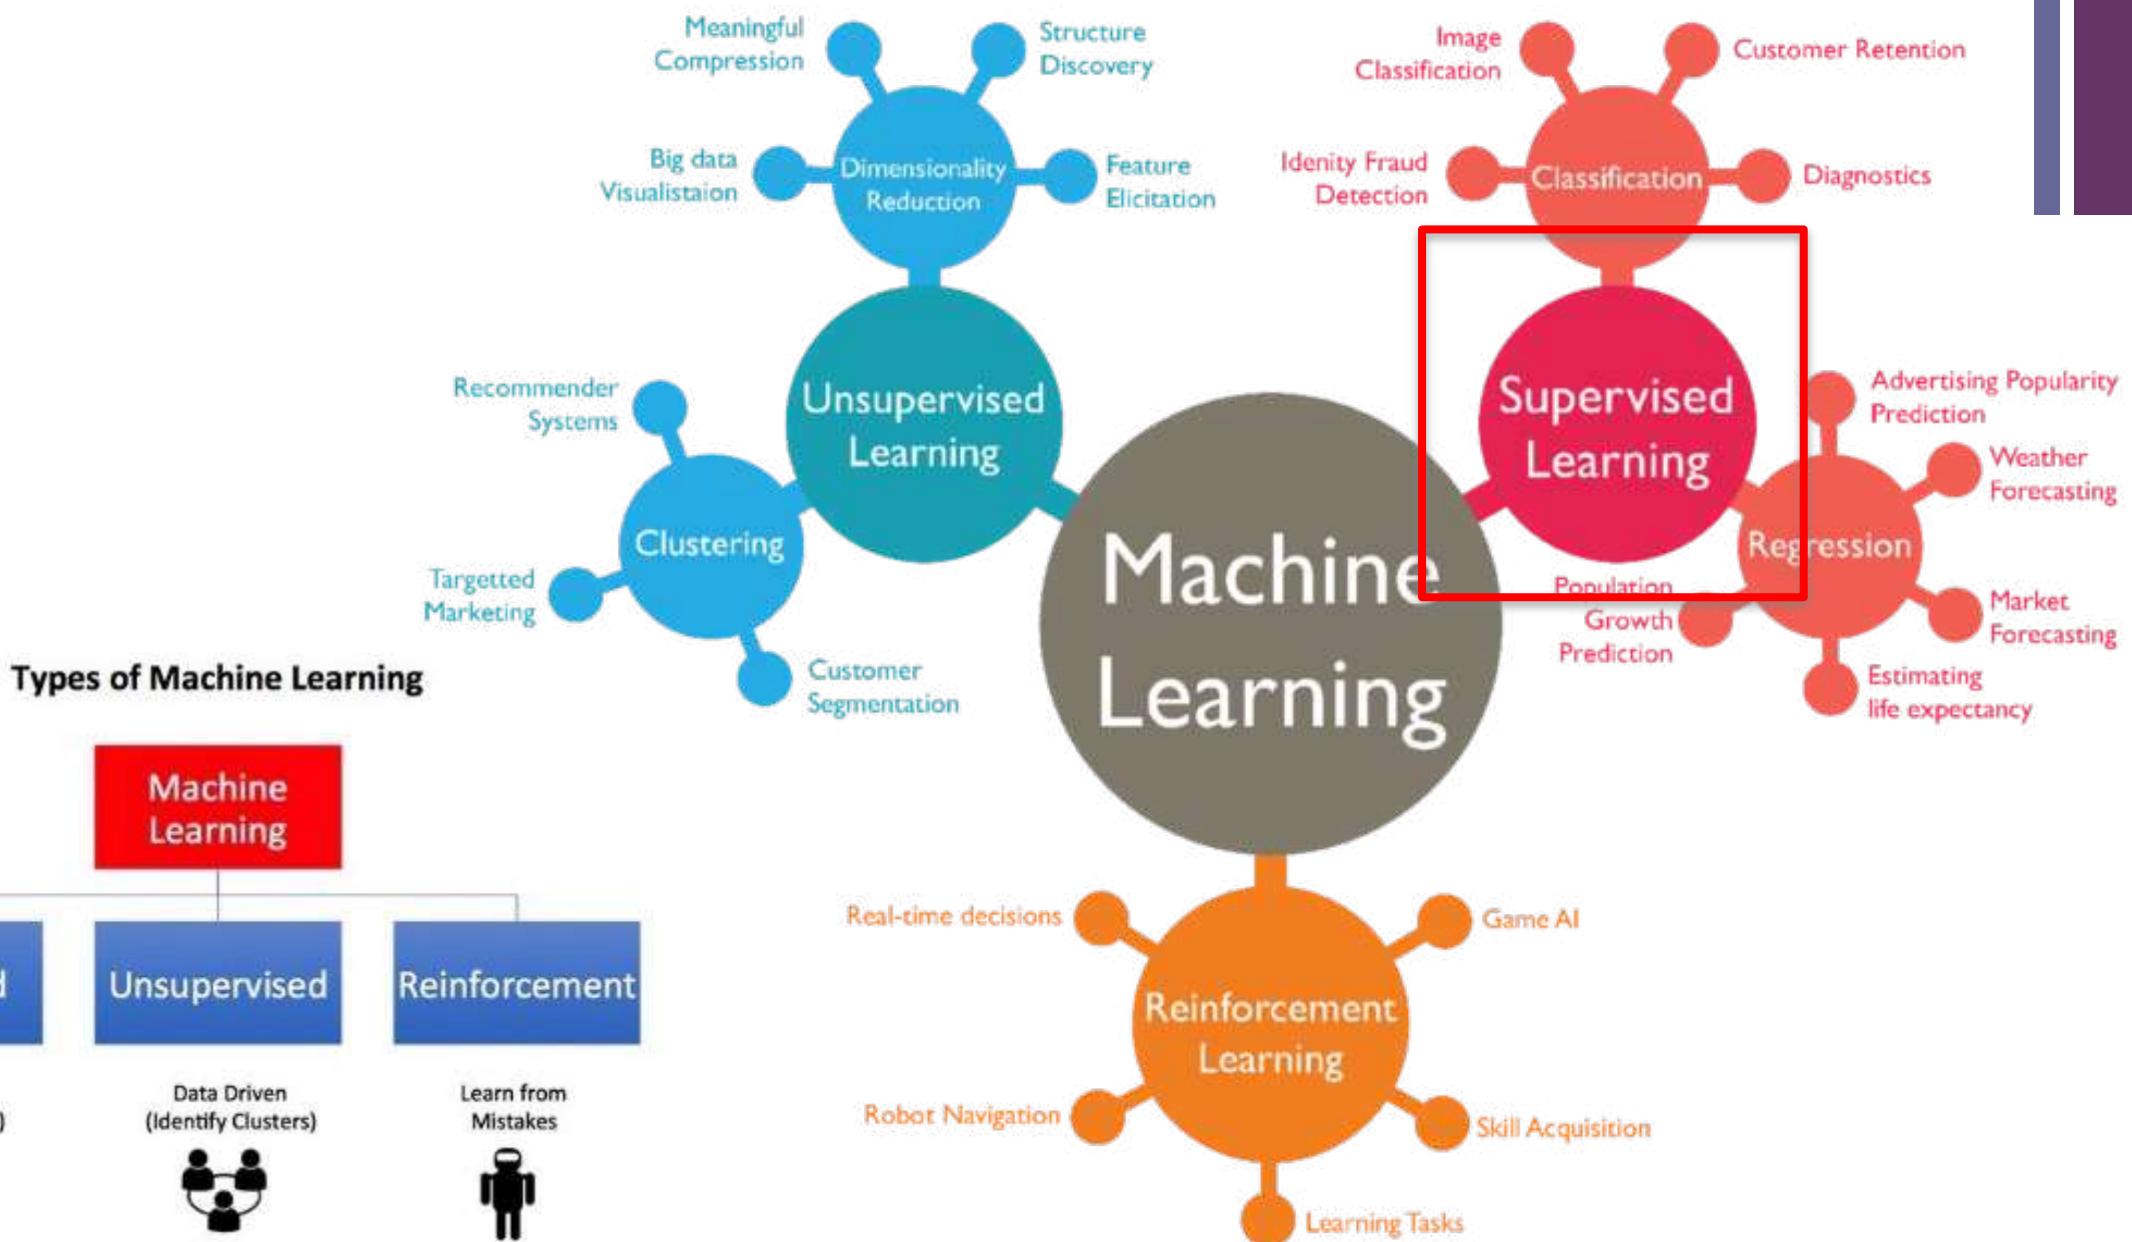



Task1: Supervised learning

Handcrafted features

Training Data



inputs				target
Age	Income	Gender	Province	Purchase
25	25,000	Female	Bangkok	Yes
35	50,000	Female	Nontaburi	Yes
32	35,000	Male	Bangkok	No

Testing Data




Age	Income	Gender	Province	Purchase
25	25,000	Female	Bangkok	?

Application: Direct Target Marketing



Classification: predicting a category

Logistic Regression

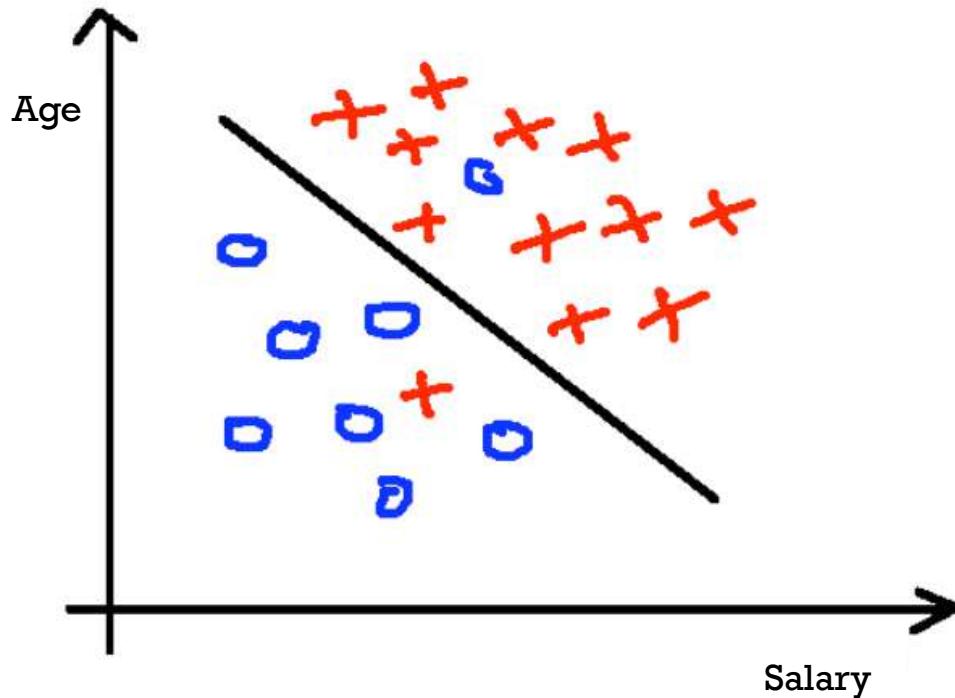

Predict targeted customers who
tend to buy our product (yes/no)

- Some techniques:

- Naïve Bayes
- Decision Tree
- Logistic Regression
- Support Vector Machines
- Neural Network
- Ensembles


- Sample Applications

- Database marketing
- Fraud detection
- Pattern detection
- Churn customer detection



Regression: predict a continuous value

Linear Regression

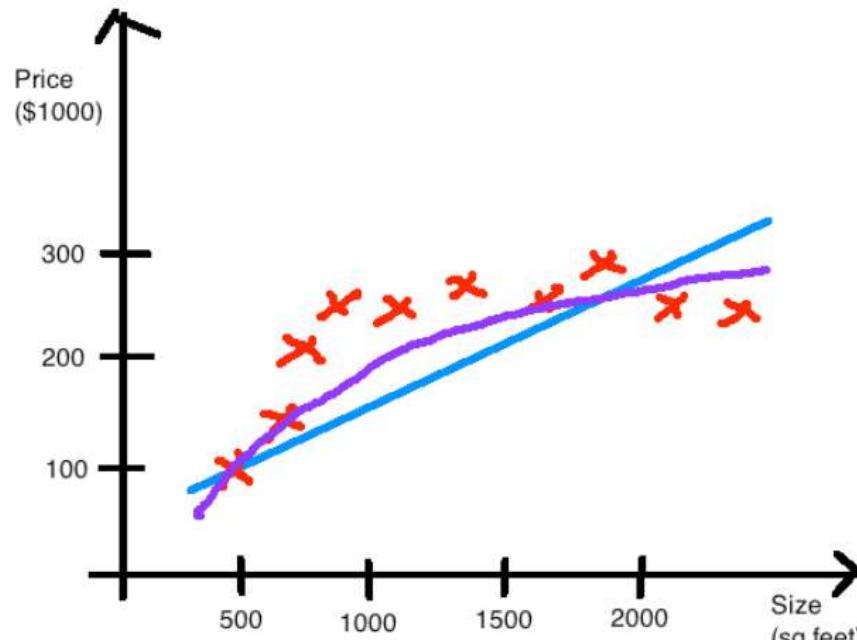

Predict a sale price of each house

- Some techniques:

- Linear Regression / GLM
- Decision Trees
- Support vector regression
- Neural Network
- Ensembles

- Sample Applications

- Financial risk management
- Revenue forecasting





Scikit-learn: Machine learning library in Python

- Provides many machine learning tools with a common **Estimator interface**
- Built in helpers for common **ML tasks** (e.g., metrics, preprocessing)
- Easily combine algorithms to make a **complex pipeline**
- Relies heavily on numpy and scipy, often used with **pandas**



How do you pronounce the project name?

sy-kit learn. sci stands for science!

Why scikit?

There are multiple scikits, which are scientific toolboxes built around SciPy. You can find a list at <https://scikits.appspot.com/scikits>. Apart from scikit-learn, another popular one is scikit-image.

Classification

Identifying to which category an object belongs to.

Applications: Spam detection, Image recognition.

Algorithms: SVM, nearest neighbors, random forest, ...

Regression

Predicting a continuous-valued attribute associated with an object.

Applications: Drug response, Stock prices.

Algorithms: SVR, ridge regression, Lasso, ...

— Examples

Clustering

Automatic grouping of similar objects into sets.

Applications: Customer segmentation, Grouping experiment outcomes

Algorithms: k-Means, spectral clustering, mean-shift, ...

— Examples

Dimensionality reduction

Reducing the number of random variables to consider.

Applications: Visualization, Increased efficiency

Algorithms: PCA, feature selection, non-negative matrix factorization.

— Examples

Model selection

Comparing, validating and choosing parameters and models.

Goal: Improved accuracy via parameter tuning

Modules: grid search, cross validation, metrics.

— Examples

Preprocessing

Feature extraction and normalization.

Application: Transforming input data such as text for use with machine learning algorithms.

Modules: preprocessing, feature extraction.

— Examples

<http://scikit-learn.org/stable/index.html>



Estimator Interface

Decision Trees

We'll start just by training a single decision tree.

```
In [8]: from sklearn.tree import DecisionTreeClassifier  
  
In [9]: dtree = DecisionTreeClassifier(min_samples_leaf=10, criterion='entropy')  
  
In [10]: dtree.fit(X_train,y_train)  
  
Out[10]: DecisionTreeClassifier(class_weight=None, criterion='entropy', max_depth=None,  
max_features=None, max_leaf_nodes=None,  
min_impurity_decrease=0.0, min_impurity_split=None,  
min_samples_leaf=10, min_samples_split=2,  
min_weight_fraction_leaf=0.0, presort=False, random_state=None,  
splitter='best')
```


miss train ↗

Prediction and Evaluation

Let's evaluate our decision tree.

```
[11]: predictions = dtree.predict(X_test)  
  
[12]: from sklearn.metrics import classification_report,confusion_matrix  
  
[13]: print(classification_report(y_test,predictions))
```

	precision	recall	f1-score	support
absent	0.85	0.85	0.85	20
present	0.40	0.40	0.40	5
avg / total	0.76	0.76	0.76	25

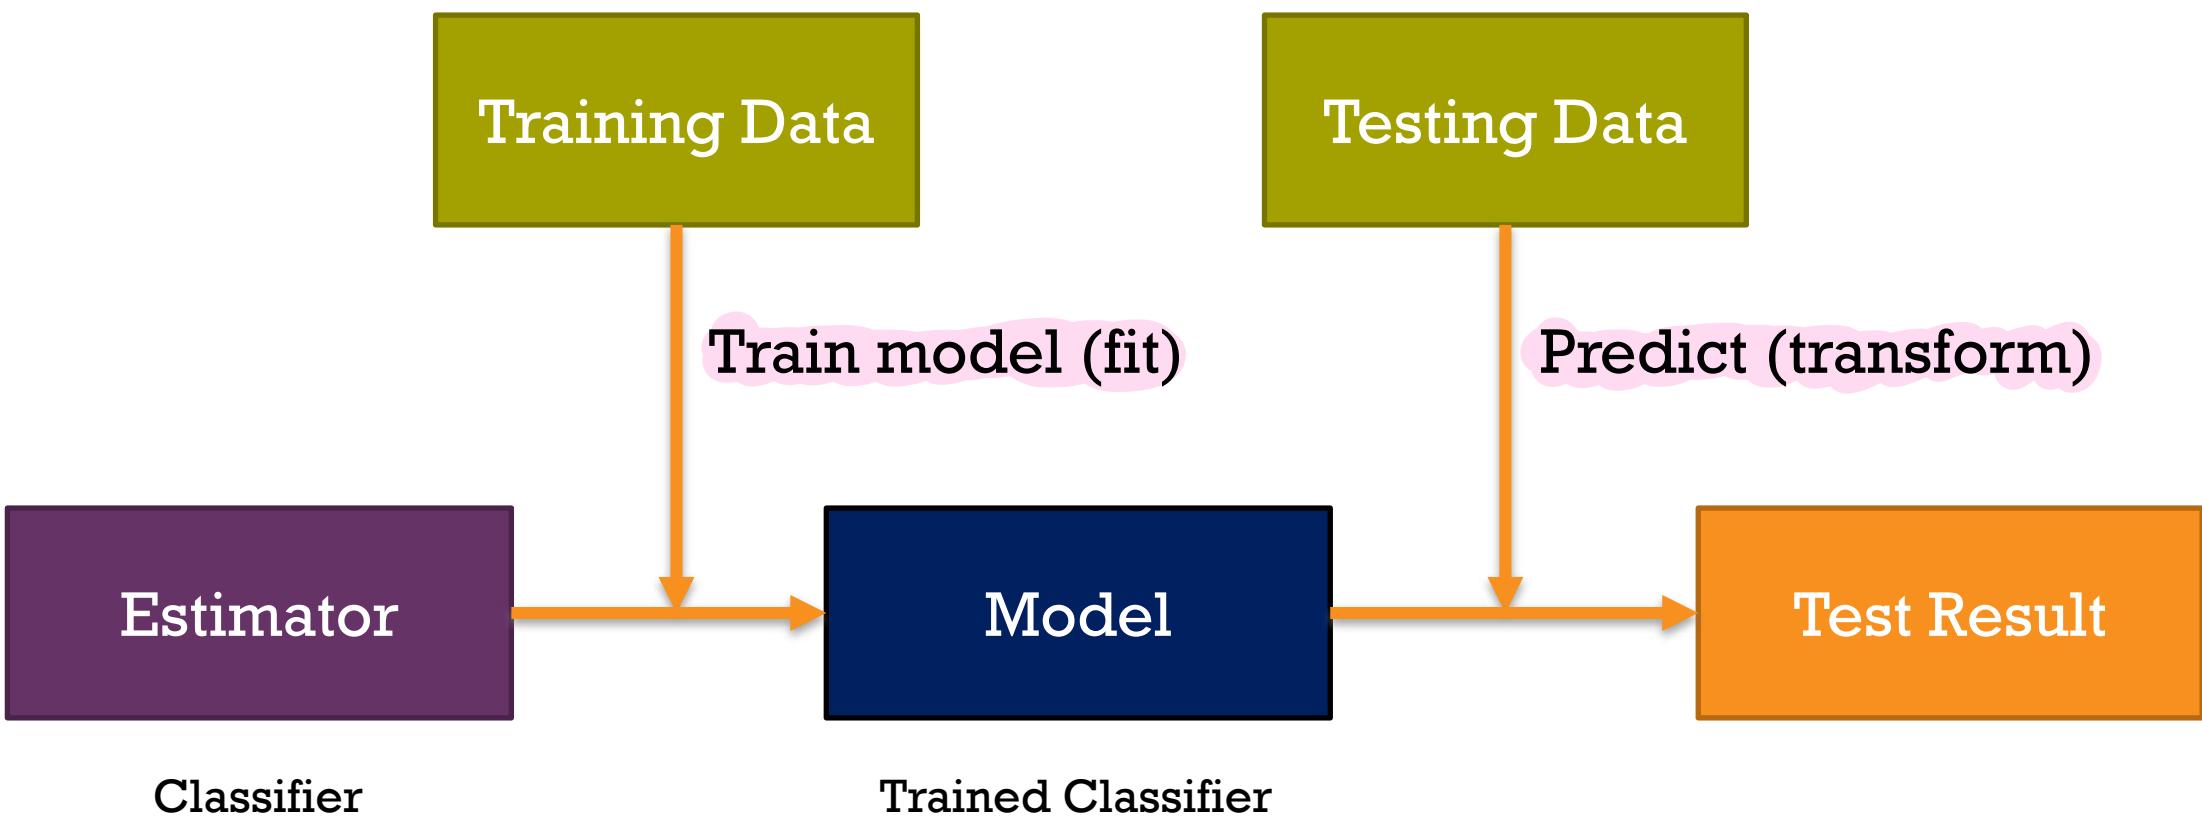



Training Phase

```
from sklearn.tree import DecisionTreeClassifier
from sklearn.datasets import load_breast_cancer
from sklearn.model_selection import train_test_split

cancer = load_breast_cancer()      # Get some data
X_train, X_test, y_train, y_test = train_test_split(
    cancer.data, cancer.target,
    stratify=cancer.target, random_state=1337)

tree = DecisionTreeClassifier(random_state=7331)
tree.fit(X_train, y_train) # Learn a Decision Function
```



Testing Phase (Prediction)

```
y_pred = tree.predict(x_test)
```


```
>>> from sklearn.metrics import classification_report
>>> y_true = [0, 1, 2, 2, 2]
>>> y_pred = [0, 0, 2, 2, 1]
>>> target_names = ['class 0', 'class 1', 'class 2']
>>> print(classification_report(y_true, y_pred, target_names=target_names))
          precision    recall  f1-score   support
class 0       0.50    1.00     0.67      1
class 1       0.00    0.00     0.00      1
class 2       1.00    0.67     0.80      3

micro avg   0.60    0.60     0.60      5
macro avg   0.50    0.56     0.49      5
weighted avg 0.70    0.60     0.61      5
```

+ Prediction Algorithms

- Decision Tree
- (Logistic) Regression
- Neural Networks (NN)
- kNN
- Support Vector Machine
- Deep Learning

BASIC REGRESSION

- **LINEAR** linear_model.LinearRegression()
Lots of numerical data 
- **LOGISTIC** linear_model.LogisticRegression()
Target variable is categorical 

CLASSIFICATION


- **NEURAL NET** neural_network.MLPClassifier()
Complex relationships. Prone to overfitting
Basically magic. 
- **K-NN** neighbors.KNeighborsClassifier()
Group membership based on proximity 
- **DECISION TREE** tree.DecisionTreeClassifier()
If/then/else. Non-contiguous data
Can also be regression 
- **RANDOM FOREST** ensemble.RandomForestClassifier()
Find best split randomly
Can also be regression 
- **SVM** svm.SVC() svm.LinearSVC()
Maximum margin classifier. Fundamental
Data Science algorithm 
- **NAIVE BAYES** GaussianNB() MultinomialNB() BernoulliNB()
Updating knowledge step by step with new info 




1) Decision Tree

1) Decision Tree Prediction Rules

Test Phase

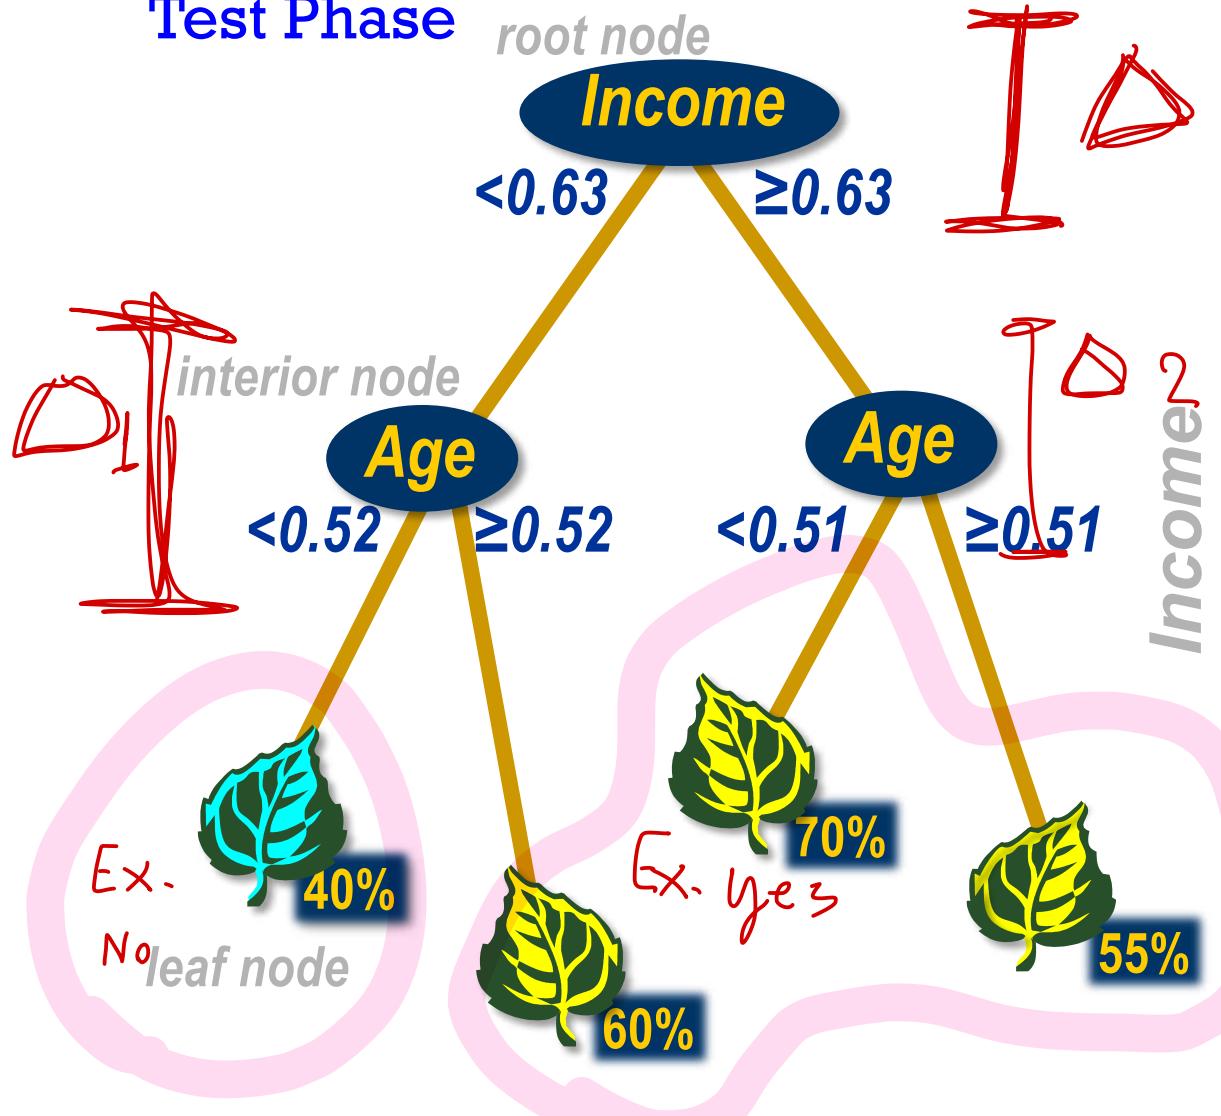

Predict:

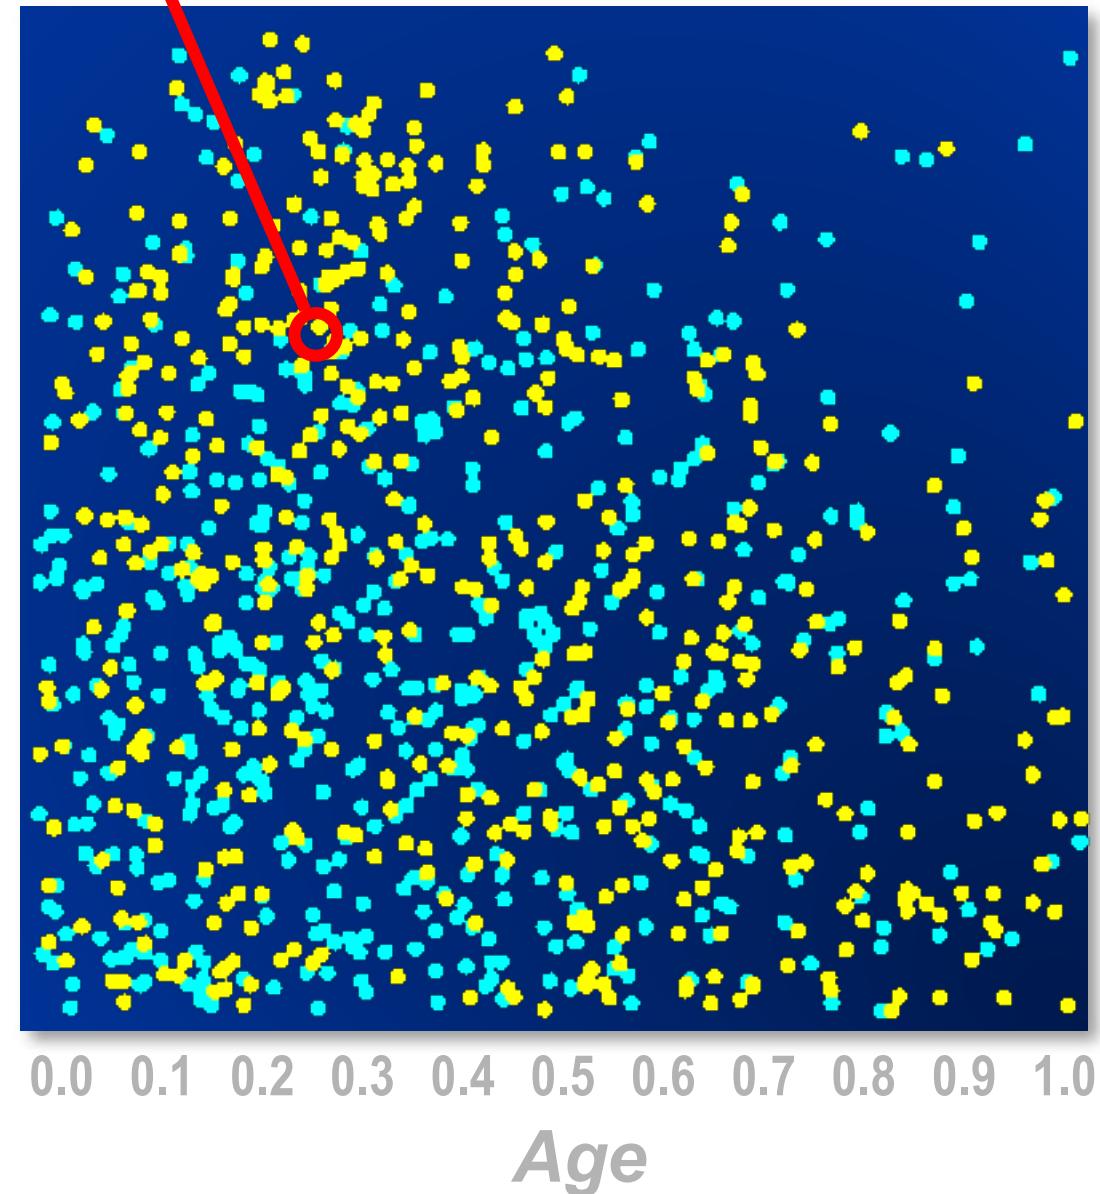



1) Entropy (impurity)

Entropy in မြတ်စွာ \rightarrow Entropy မြတ်စွာ: ဒါ impure မြတ်စွာ:

- **Entropy** is a measure of disorder or uncertainty and the goal of machine learning models and general is to reduce uncertainty.

$$\text{Entropy} = \sum_{i=1}^n -p_i \log_2 p_i$$

`scipy.stats.entropy`

`scipy.stats.entropy(pk, qk=None, base=None, axis=0)`


Calculate the entropy of a distribution for given probability values.



If only probabilities pk are given, the entropy is calculated as $S = -\sum(pk * \log(pk), axis=axis)$.

If qk is not None, then compute the Kullback-Leibler divergence $S = \sum(pk * \log(pk / qk), axis=axis)$.

This routine will normalize pk and qk if they don't sum to 1.

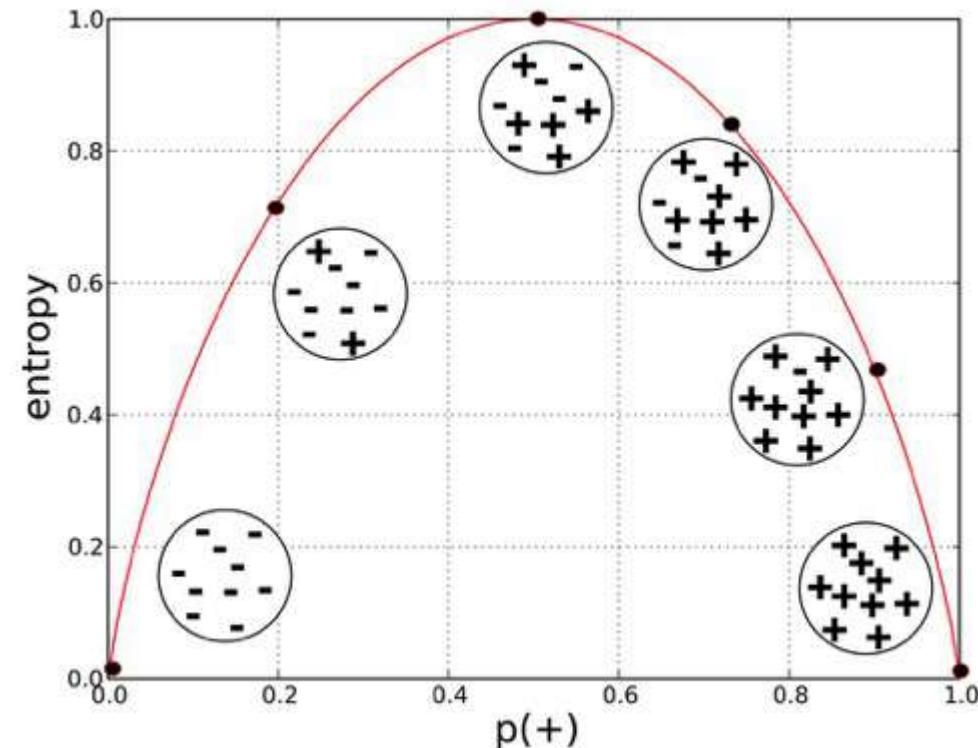

Source: Data Science for Business: What You Need to Know about Data Mining and Data-Analytic Thinking



Information Gain

Before - After

- Which one is Better ?

Split w/ Age: 70
 \sum Entropy: 0.350

Split w/ Age: 50
 \sum Entropy: 0.348

- Information Gain: measure the reduction of this disorder in our target variable/class given additional information

$$\text{InformationGain} = \text{Entropy}(\text{before}) - \sum \text{Entropy}(\text{after})$$

- “Before” = Entropy of Parent Node
“After” = Entropy of Child Nodes



2) Gini Impurity


Gini Entropy ↘

Gini Reduction = Before - After


- Another way to measure how well a splitting feature.

$$Gini = 1 - \sum_{i=1}^n (P_i)^2$$

When P is the probability of class i in data-set.

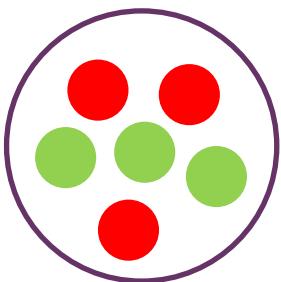

$$\begin{aligned} Gini &= 1 - ((3/6)^2 + (3/6)^2) \\ &= 0.5 \end{aligned}$$

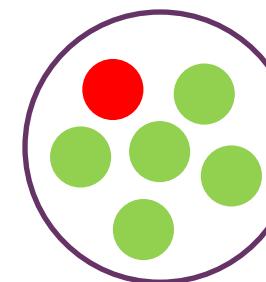


$$\begin{aligned} Gini &= 1 - ((5/6)^2 + (1/6)^2) \\ &= 0.28 \end{aligned}$$

- Easy to calculation, may take less time to build in large dataset.

+ Variable Importance

↳ ດີເລັກ : ນິທີ່ Variable Importance

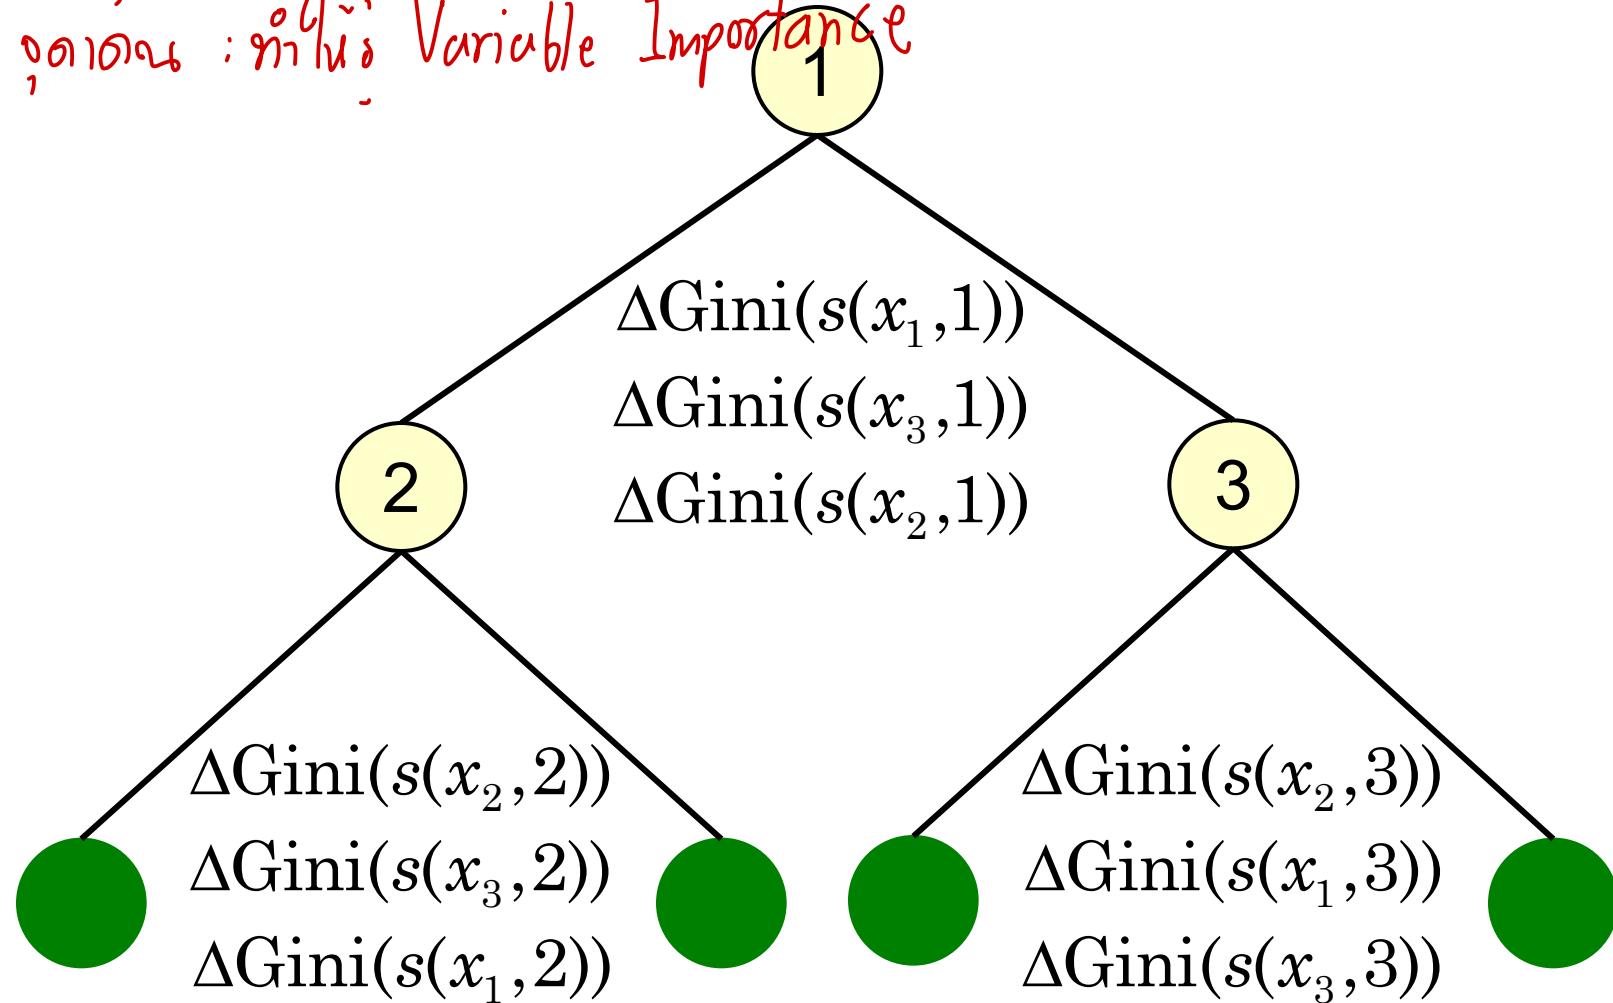

Types of Decision Tree

Algorithm	Splitting Measure
ID3	Entropy
C4.5	Gain Ratio
CART	Gini index
CHAID	Chi-squared test



sklearn.tree.DecisionTreeClassifier

```
class sklearn.tree.DecisionTreeClassifier(criterion='gini', splitter='best', max_depth=None, min_samples_split=2,  
min_samples_leaf=1, min_weight_fraction_leaf=0.0, max_features=None, random_state=None, max_leaf_nodes=None,  
min_impurity_decrease=0.0, min_impurity_split=None, class_weight=None, presort='deprecated', ccp_alpha=0.0)
```

[\[source\]](#)

A decision tree classifier.

Read more in the [User Guide](#).

Parameters:**criterion : {"gini", "entropy"}, default="gini"**

The function to measure the quality of a split. Supported criteria are "gini" for the Gini impurity and "entropy" for the information gain.

splitter : {"best", "random"}, default="best"

The strategy used to choose the split at each node. Supported strategies are "best" to choose the best split and "random" to choose the best random split.

*min leaf node***max_depth : int, default=None**

The maximum depth of the tree. If None, then nodes are expanded until all leaves are pure or until all leaves contain less than `min_samples_split` samples.

min_samples_split : int or float, default=2

The minimum number of samples required to split an internal node:



Decision Tree with Regression

`sklearn.tree.DecisionTreeRegressor`

```
class sklearn.tree.DecisionTreeRegressor(criterion='mse', splitter='best', max_depth=None, min_samples_split=2,
min_samples_leaf=1, min_weight_fraction_leaf=0.0, max_features=None, random_state=None, max_leaf_nodes=None,
min_impurity_decrease=0.0, min_impurity_split=None, presort='deprecated', ccp_alpha=0.0)
```

[source]


A decision tree regressor.

Read more in the [User Guide](#).

Parameters: `criterion : {"mse", "friedman_mse", "mae"},`

MSE: Mean Square Error

MAE: Mean Absolute Error

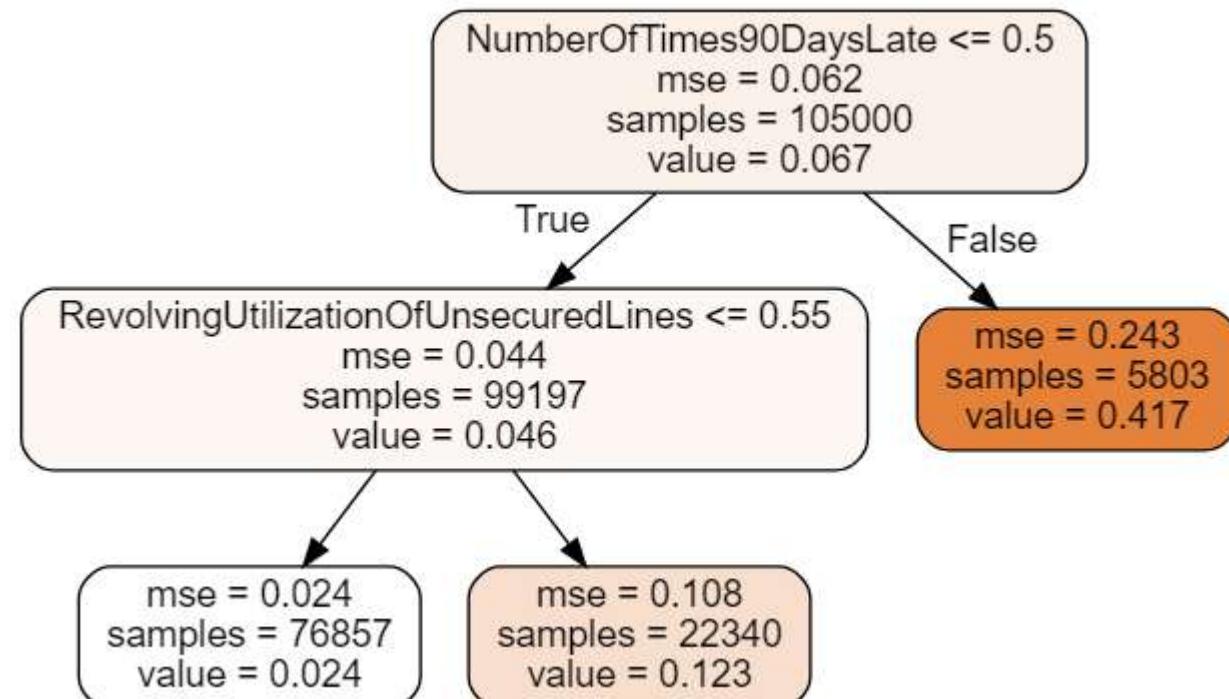



Build your Decision Tree (cont.)

Code Section 2.4

```
select_features = 'age' #@param ['age']
target_column = 'SeriousDlqin2yrs' #@param ['SeriousDlqin2yrs']

select_features = [select_features]
# Setup Features & Target
features = train_df[select_features]
target = train_df[target_col]

# Setup Parameters
Criterion = 'Entropy' #@param ['Entropy', 'Gini']
max_depth = 1
dtree = tree.DecisionTreeClassifier(
    criterion=Criterion.lower(),
    max_depth=max_depth,
)

# Training your tree
dtree.fit(features, target)
```

DecisionTreeClassifier(ccp_alpha=0.0, class_weight=None, criterion='entropy',
max_depth=1, max_features=None, max_leaf_nodes=None,
min_impurity_decrease=0.0, min_impurity_split=None,
min_samples_leaf=1, min_samples_split=2,
min_weight_fraction_leaf=0.0, presort='deprecated',
random_state=None, splitter='best')



Model Visualization (read the model)

Basic Description

1. `get_params` : Get all model parameters
2. `get_depth` : Get depth of trained tree
3. `get_n_leaves` : Get number of nodes
4. `tree_.impurity` : Get Gini/Entropy values

```
1 Parameters: {  
    "ccp_alpha": 0.0,  
    "class_weight": null,  
    "criterion": "entropy",  
    "max_depth": 1,  
    "max_features": null,  
    "max_leaf_nodes": null,  
    "min_impurity_decrease": 0.0,  
    "min_impurity_split": null,  
    "min_samples_leaf": 1,  
    "min_samples_split": 2,  
    "min_weight_fraction_leaf": 0.0,  
    "presort": "deprecated",  
    "random_state": null,  
    "splitter": "best"  
}  
2 Tree Depth: 1  
Number of Node: 2  
3  
4 Entropy of Nodes: [0.35401168 0.42690946 0.2175608 ]
```



Model Visualization (cont.)

`sklearn.tree.plot_tree`

```
sklearn.tree.plot_tree(decision_tree, *, max_depth=None, feature_names=None, class_names=None, label='all', filled=False, impurity=True, node_ids=False, proportion=False, rounded=False, precision=3, ax=None, fontsize=None) [source]
```


Plot a decision tree.

The sample counts that are shown are weighted with any `sample_weights` that might be provided.

The visualization is fit automatically to the size of the axis. Use the `figsize` or `dpi` parameters to control the size of the rendering.


Read more in the [User Guide](#).

New in version 0.21.

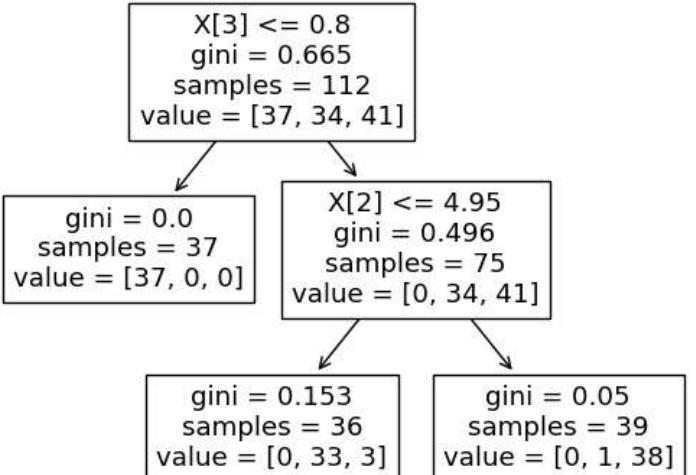



Overfitting

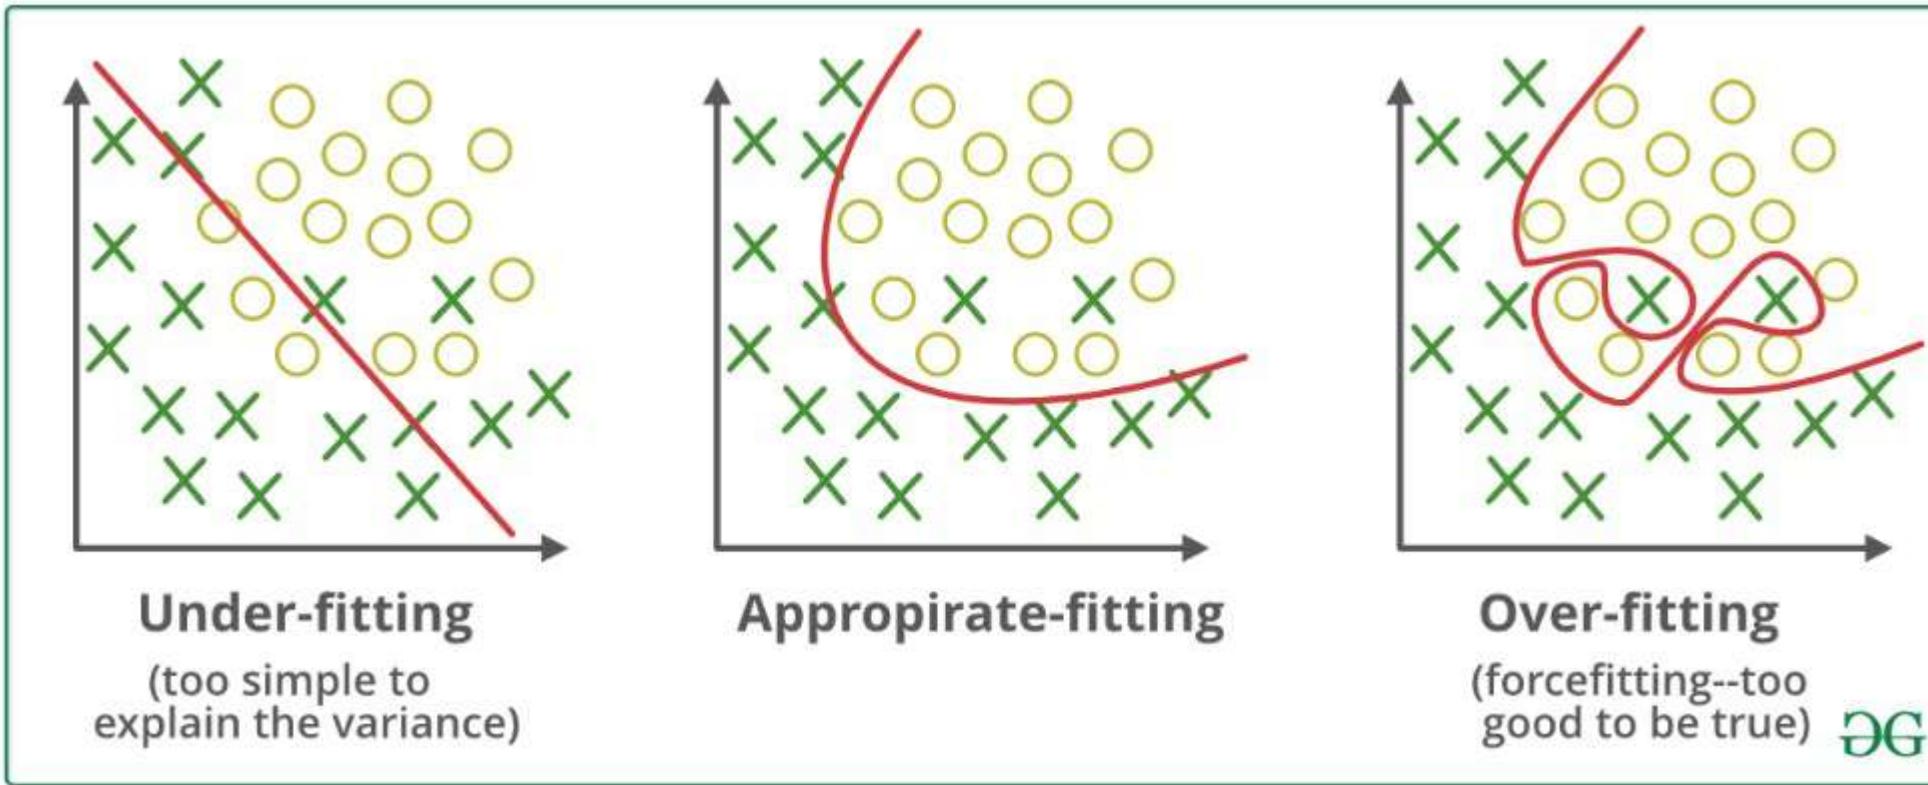

Source: <https://towardsdatascience.com/underfitting-and-overfitting-in-machine-learning-and-how-to-deal-with-it-6fe4a8a49dbf>

** regularization → acc + complexity of model


+ Pruning Tree

`ccp_alpha : non-negative float, default=0.0`

Complexity parameter used for Minimal Cost-Complexity Pruning. The subtree with the largest cost complexity that is smaller than `ccp_alpha` will be chosen. By default, no pruning is performed. See [Minimal Cost-Complexity Pruning](#) for details.

New in version 0.22.

More

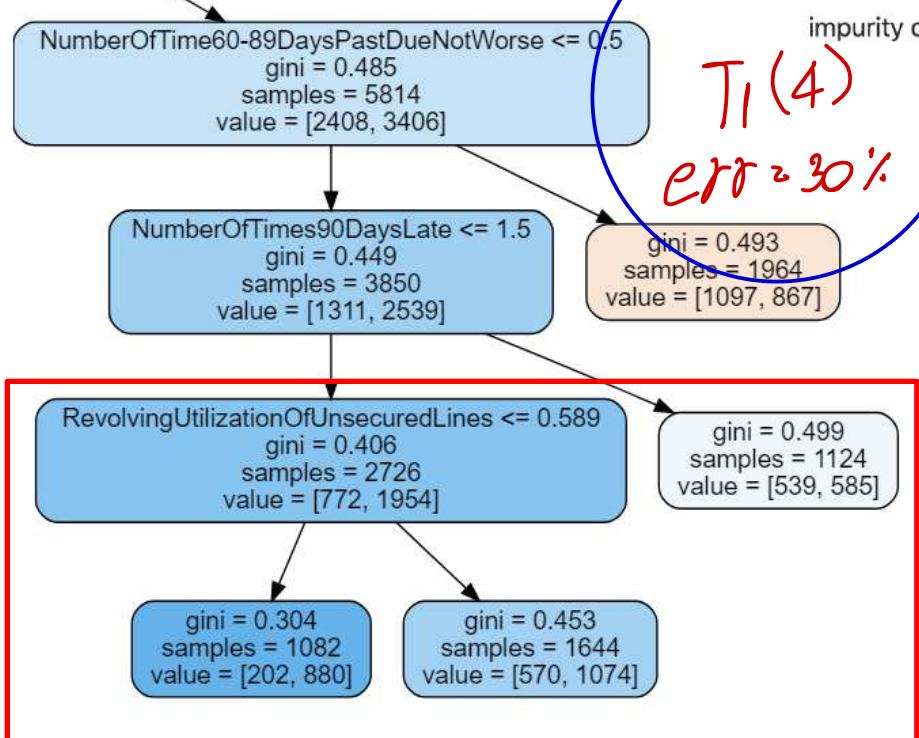

choose this

<https://scikit-learn.org/stable/modules/tree.html#minimal-cost-complexity-pruning/>

จะเลือกนี่

$$R_{\alpha}(T) = R(T) + \alpha|T|$$

regularization

α leads to Tree minimization


model complexity

where $|T|$ is the number of terminal nodes in T and $R(T)$ is traditionally defined as the total misclassification rate of the terminal nodes. Alternatively, scikit-learn uses the total sample weighted impurity of the terminal nodes for $R(T)$. As shown above, the impurity of a node depends on the criterion. Minimal cost-complexity pruning finds the subtree of T that minimizes $R_{\alpha}(T)$.

$T_1(4)$ error 30%
 $T_2(1000)$ error 29%.

err = 29%.

Prune

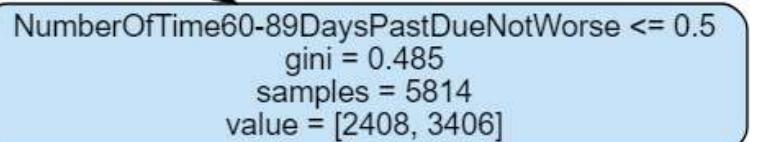

Test pruning parameter by `.cost_complexity_pruning_path`

`dtree.cost_complexity_pruning_path(features, target)`

```
{
  'ccp_alphas': array([0.0000000e+00, 8.91619910e-05, 1.17039010e-04, 1.29787452e-04,
  1.94525732e-04, 3.18283592e-04, 4.15157131e-04, 5.84363721e-04,
  6.81710606e-04, 1.05951846e-03, 1.17765555e-03, 1.83295138e-03,
  3.24166605e-03, 1.41432990e-02]),
  'impurities': array([0.10075641, 0.10084557, 0.10096261, 0.1010924 , 0.10128692,
  0.10160521, 0.10202036, 0.10260473, 0.10328644, 0.10434596,
  0.10552361, 0.10735656, 0.11059823, 0.12474153])}
}
```

Less

When impurity is too low, it cause more overfitting

`ccp_alpha`: Values which affect pruning (use lower bound value)
`Impurities`: Impurity after pruning (default=0; no pruning)

Important Parameters in Decision Tree




- Splitting measure (criterion) : gini / entropy
- Maximum depth : ~5-10 (depend on number of feature)
- Maximum leaf nodes : depend on number of class (target) and feature
- Minimum sample split : 5 – 20% (depend on number of data)
- Minimum impurity decrease : (default 0)
- Pruning adjustment (ccp_alpha) : 0.001 - 0.01 (depend on size of tree)




Which features are important ?

- Check how important by `.feature_importances_`
- The importance of a feature is computed as the (normalized) total reduction of the criterion brought by that feature. It is also known as **the gini importance**.

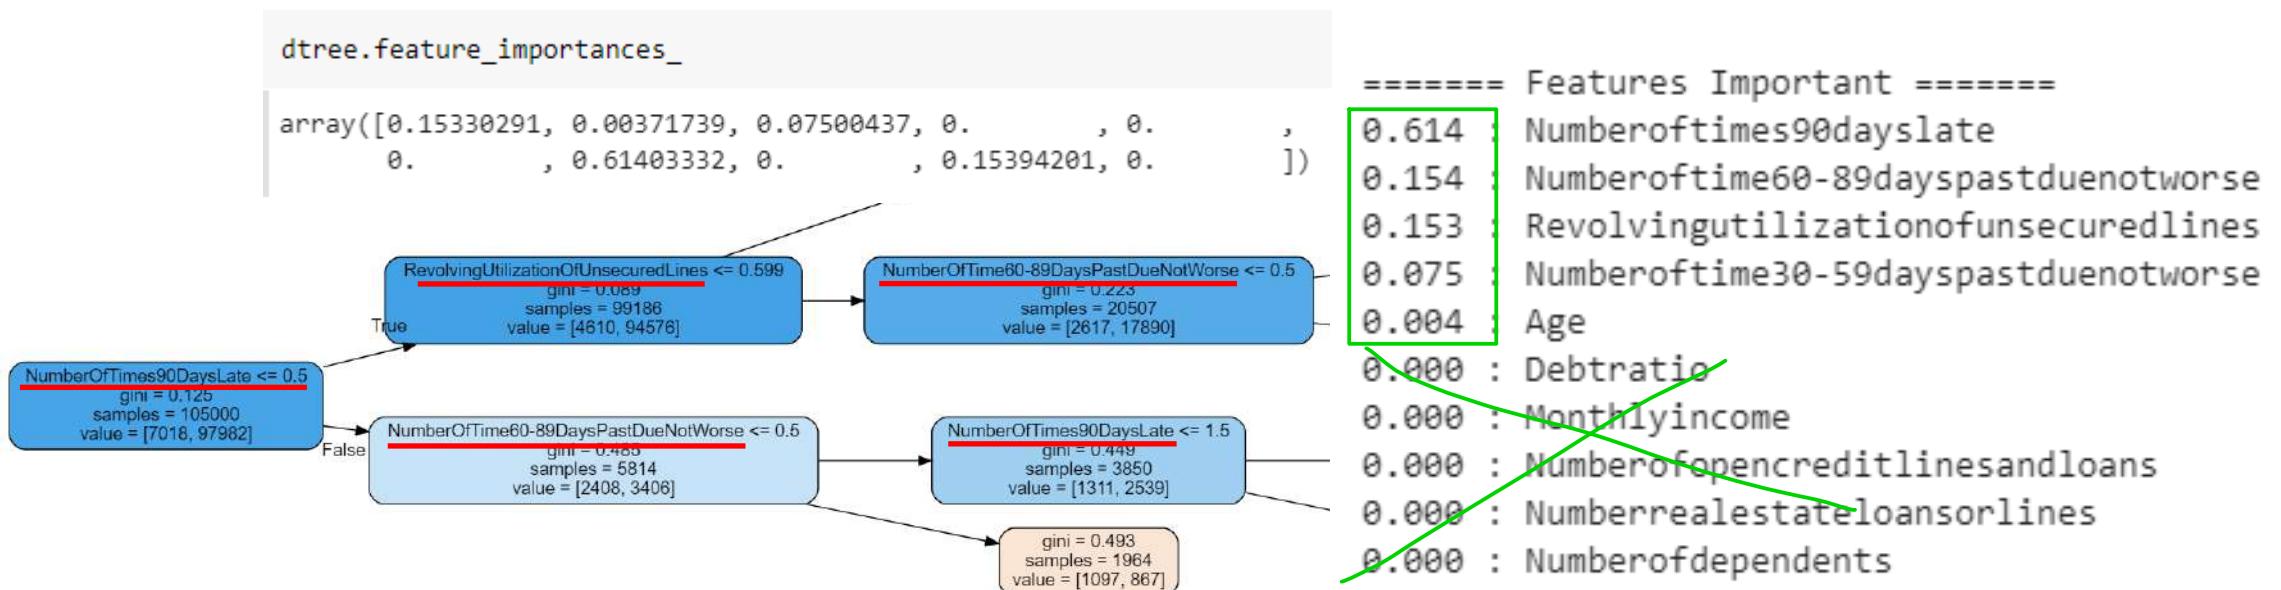


+ Instability *according tree*

One reversal

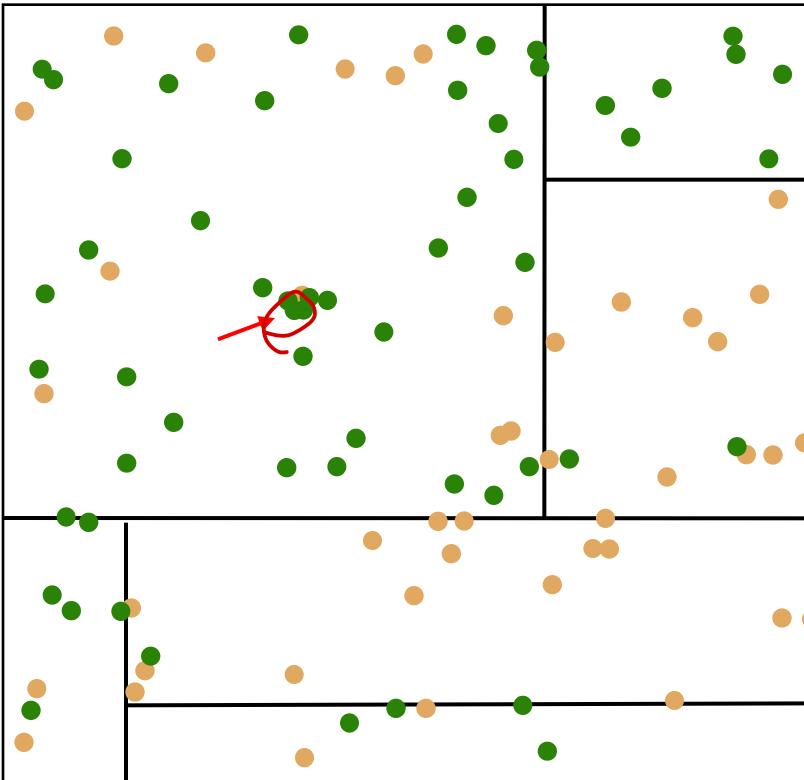

Accuracy = 81%

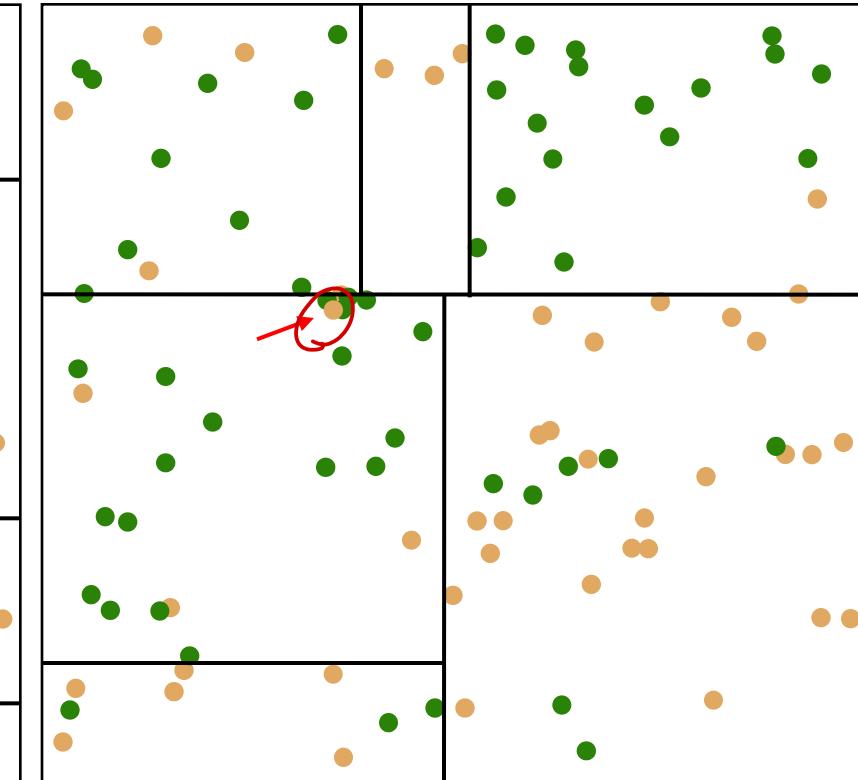


Accuracy = 80%



random with replacement

Bagging (Bootstrap Aggregation)

** Ensemble tree

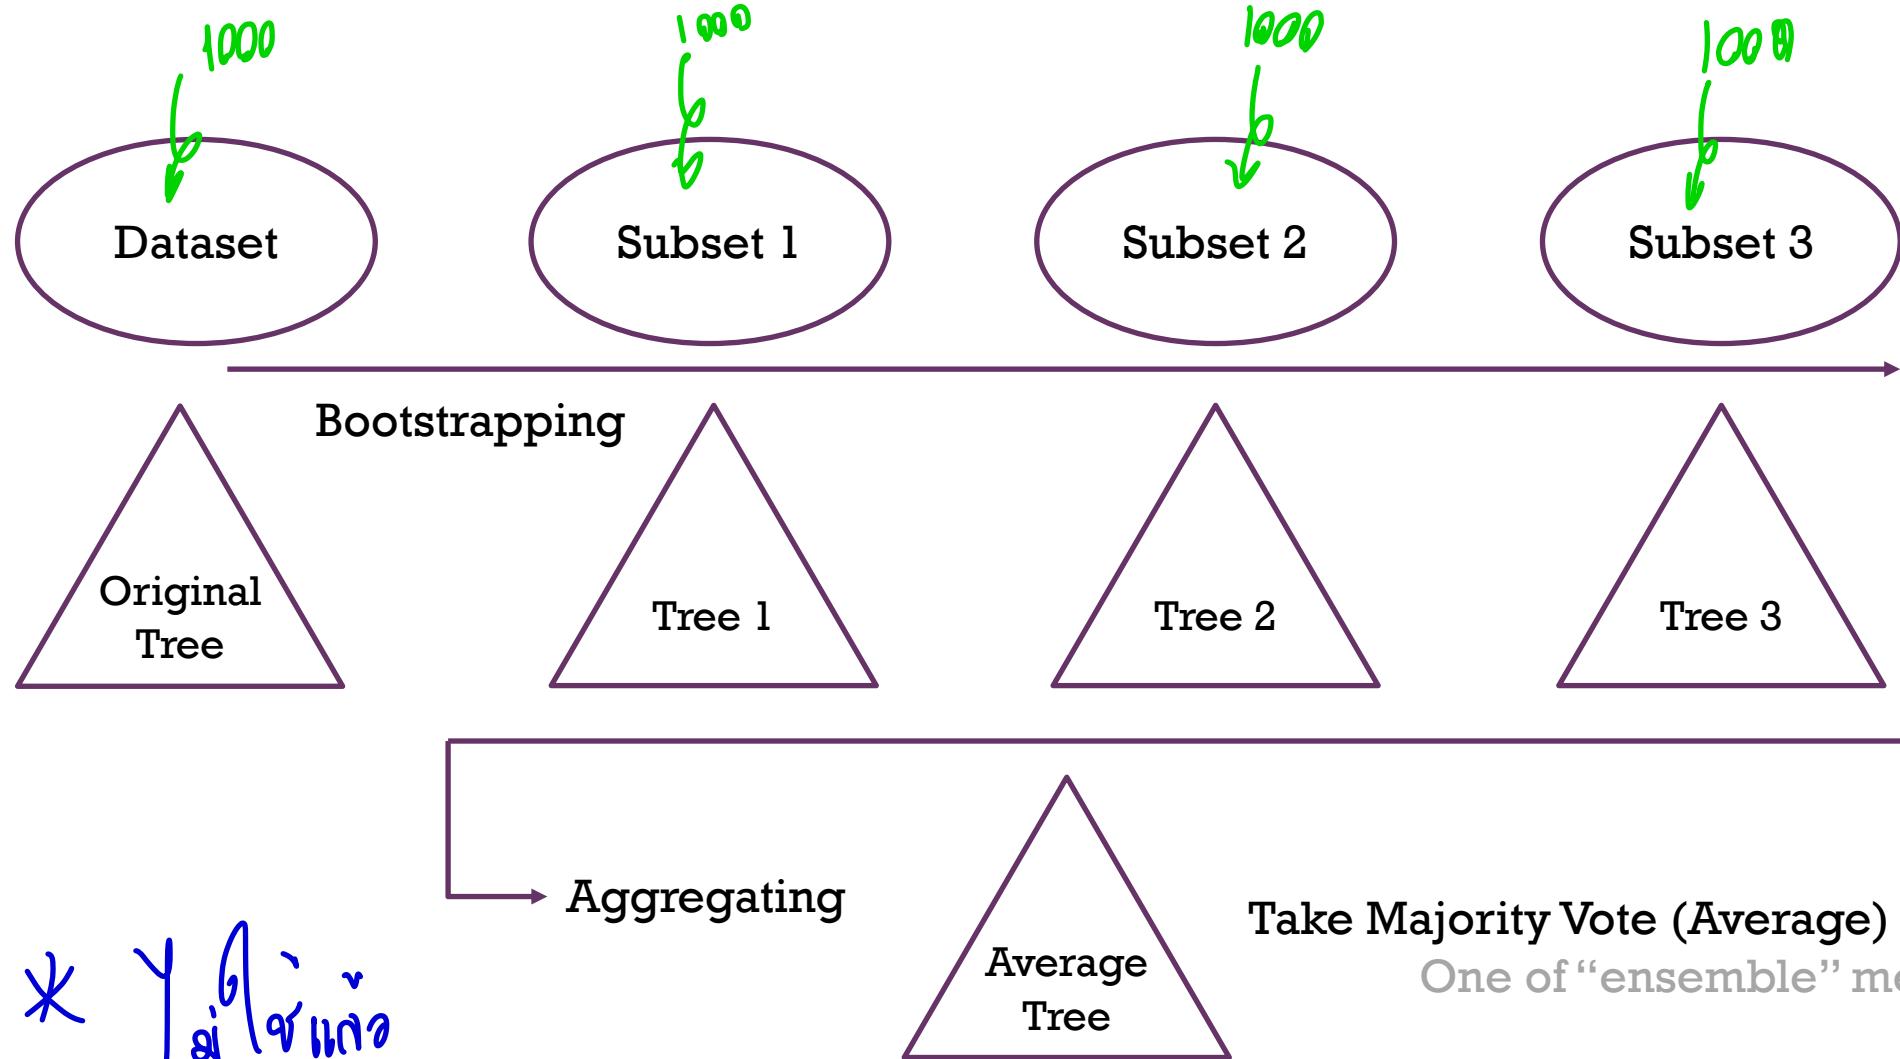



Bagging Method in sklearn

sklearn.ensemble.BaggingClassifier

```
class sklearn.ensemble.BaggingClassifier(base_estimator=None, n_estimators=10, *, max_samples=1.0, max_features=1.0,  
bootstrap=True, bootstrap_features=False, oob_score=False, warm_start=False, n_jobs=None, random_state=None, verbose=0)
```

[\[source\]](#)

sklearn.ensemble.BaggingRegressor

```
class sklearn.ensemble.BaggingRegressor(base_estimator=None, n_estimators=10, *, max_samples=1.0, max_features=1.0,  
bootstrap=True, bootstrap_features=False, oob_score=False, warm_start=False, n_jobs=None, random_state=None, verbose=0)
```

[\[source\]](#)

Example



```
>>> from sklearn.ensemble import BaggingClassifier  
>>> from sklearn.tree import DecisionTreeClassifier  
>>> bagging = BaggingClassifier(DecisionTreeClassifier(),  
...                                max_samples=0.5, max_features=0.5)
```

>>>

Random Forest Algorithm (RF)

(Random without replacement)

- Forest algorithm samples the **rows** and the **columns** at each step.
- Forest takes bootstrap samples of the **rows** in training data (sampling with replacement)
- At each step, a set of variables (**columns**) is sampled.
- This increases variation among trees in the **ensemble** often leads to improved prediction accuracy.

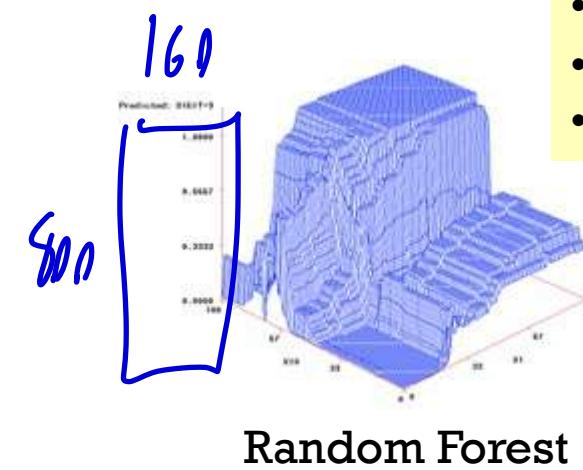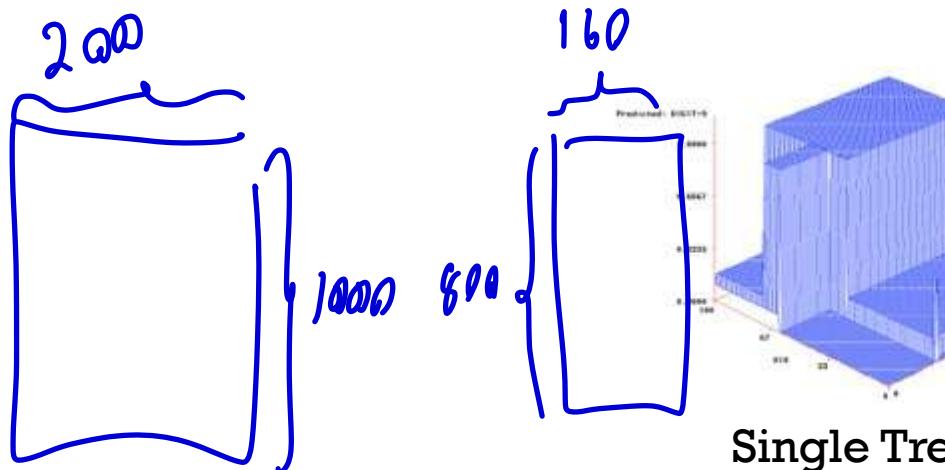


Important Params:

- #Tree
- #Columns (variables)
- #Rows (examples)


hyper parameter

Combine


T_1

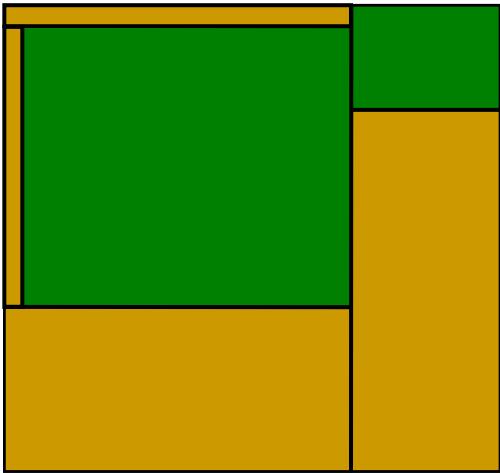


T_2

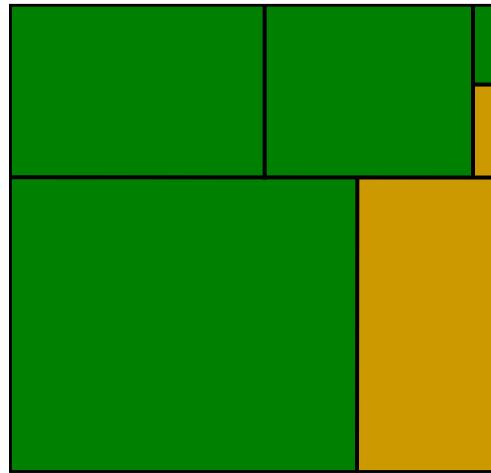


T_3

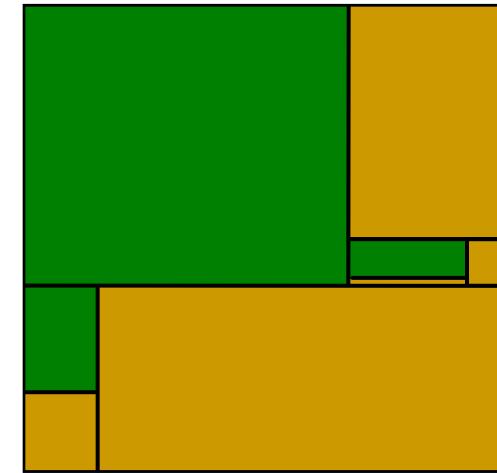

$$\text{avg}(T_1, T_2, T_3) =$$

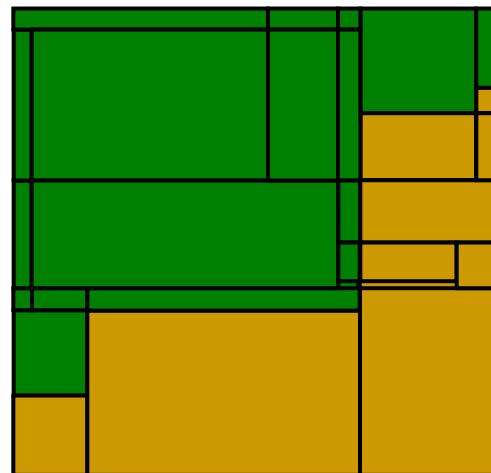

Truth

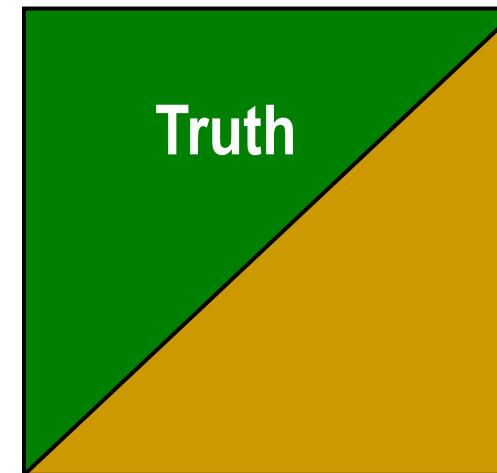

...



3.2.4.3.1.

[sklearn.ensemble.RandomForestClassifier](#)3.2.4.3.1.1. Examples using [sklearn.ensemble.RandomForestClassifier](#)

max_feature: default(sqrt)

3.2.4.3.1. `sklearn.ensemble.RandomForestClassifier`

```
class sklearn.ensemble.RandomForestClassifier(n_estimators=100, criterion='gini', max_depth=None, min_samples_split=2,
min_samples_leaf=1, min_weight_fraction_leaf=0.0, max_features='auto', max_leaf_nodes=None, min_impurity_decrease=0.0,
min_impurity_split=None, bootstrap=True, oob_score=False, n_jobs=None, random_state=None, verbose=0, warm_start=False,
class_weight=None, ccp_alpha=0.0, max_samples=None)
```

[\[source\]](#)

A random forest classifier.

A random forest is a meta estimator that fits a number of decision tree classifiers on various sub-samples of the dataset and uses averaging to improve the predictive accuracy and control over-fitting. The sub-sample size is always the same as the original input sample size but the samples are drawn with replacement if `bootstrap=True` (default).

Read more in the [User Guide](#).

Parameters:

`n_estimators : integer, optional (default=100)`

The number of trees in the forest.

→ n_estimators
tree

Changed in version 0.22: The default value of `n_estimators` changed from 10 to 100 in 0.22.

`criterion : string, optional (default="gini")`

The function to measure the quality of a split. Supported criteria are "gini" for the Gini impurity and "entropy" for the information gain. Note: this parameter is tree-specific.

parameter
of tree



3.2.4.3.2.

sklearn.ensemble.RandomForestRegressor

3.2.4.3.2.1. Examples using `sklearn.ensemble.RandomForestRe`

3.2.4.3.2. `sklearn.ensemble.RandomForestRegressor`

```
class sklearn.ensemble.RandomForestRegressor(n_estimators=100, criterion='mse', max_depth=None, min_samples_split=2,
min_samples_leaf=1, min_weight_fraction_leaf=0.0, max_features='auto', max_leaf_nodes=None, min_impurity_decrease=0.0,
min_impurity_split=None, bootstrap=True, oob_score=False, n_jobs=None, random_state=None, verbose=0, warm_start=False,
ccp_alpha=0.0, max_samples=None) ¶
```

[\[source\]](#)

A random forest regressor.

A random forest is a meta estimator that fits a number of classifying decision trees on various sub-samples of the dataset and uses averaging to improve the predictive accuracy and control over-fitting. The sub-sample size is always the same as the original input sample size but the samples are drawn with replacement if `bootstrap=True` (default).

Read more in the [User Guide](#).

Parameters: `n_estimators : integer, optional (default=10)`

The number of trees in the forest.

Changed in version 0.22: The default value of `n_estimators` changed from 10 to 100 in 0.22.

criterion : string, optional (default="mse")


The function to measure the quality of a split. Supported criteria are "mse" for the mean squared error, which is equal to variance reduction as feature selection criterion, and "mae" for the mean absolute error.

New in version 0.18: Mean Absolute Error (MAE) criterion.







Boosting

- Boosting is a method of converting **weak learners into strong learners**.
- In boosting, each new tree is a fit on a modified version of the original data set.

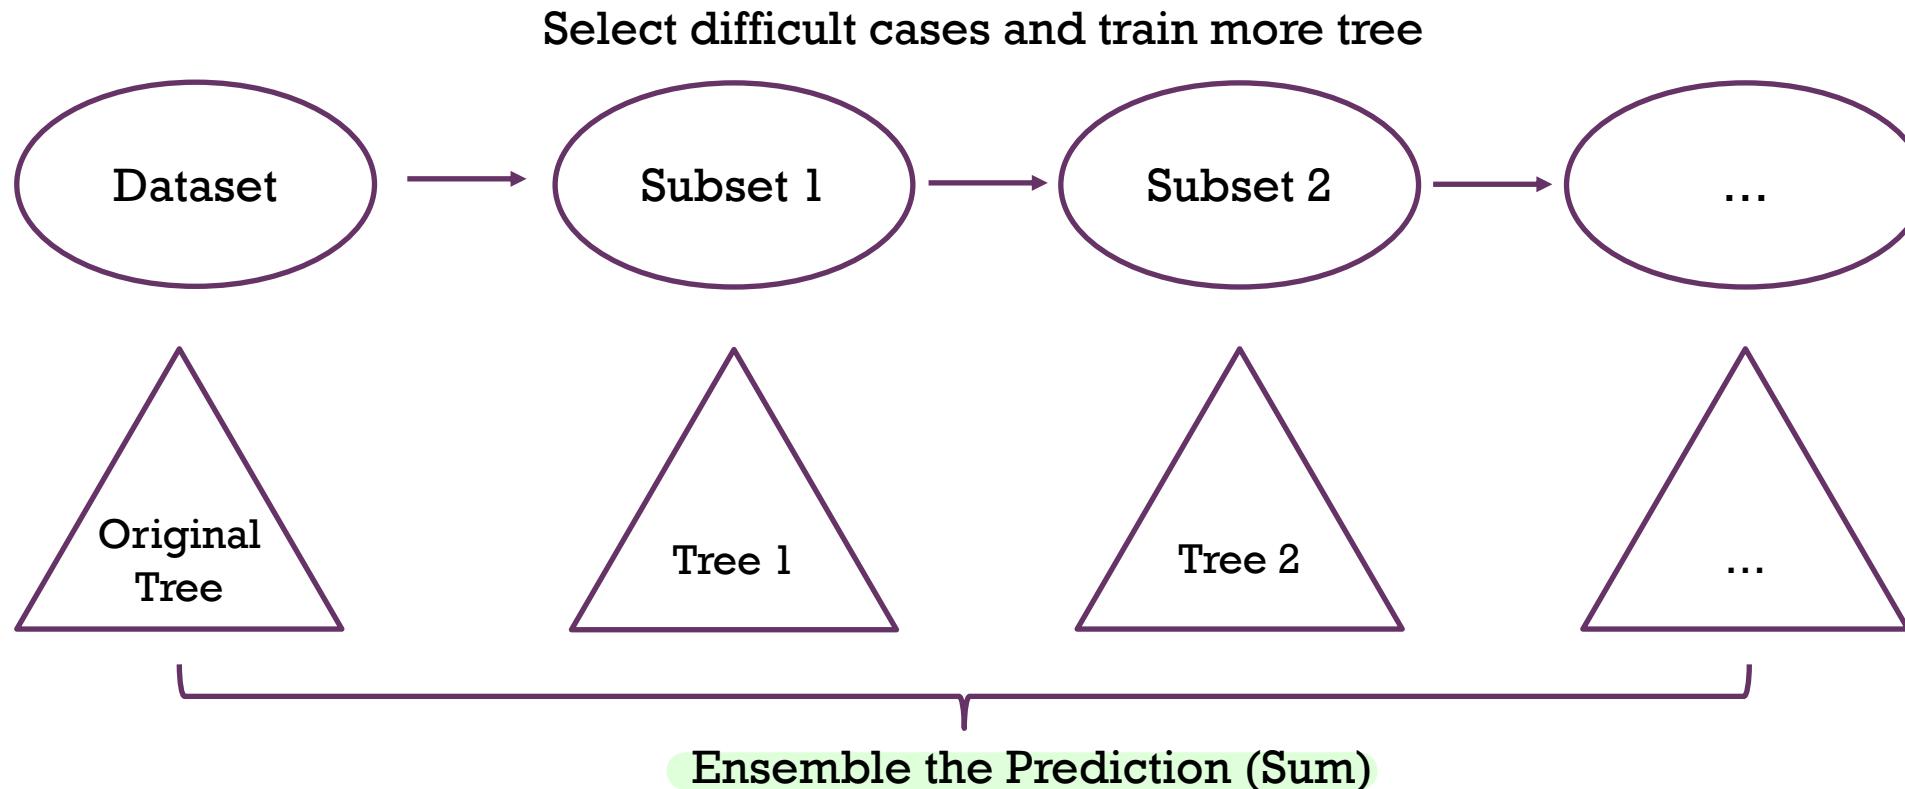

Boosting (cont.)

<u>case</u>	<u>freq</u>	<u>m</u>	<u>freq</u>	<u>m</u>	<u>freq</u>	<u>m</u>	<u>freq</u>
1	1	1	1.5	1	.5	2	.97
2	1	0	.75	0	.25	0	.06
3	1	1	1.5	2	4.25	3	4.69
4	1	0	.75	1	.5	1	.11
5	1	0	.75	0	.25	0	.06
6	1	0	.75	0	.25	1	.11

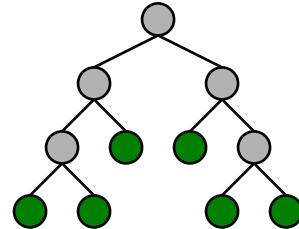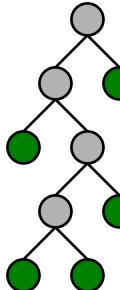

*Shown is Arc-x4, one method of boosting



Boosting in sklearn

- AdaBoost, short for “Adaptive Boosting”

sklearn.ensemble.AdaBoostClassifier

```
class sklearn.ensemble.AdaBoostClassifier(base_estimator=None, *, n_estimators=50, learning_rate=1.0, algorithm='SAMME.R', random_state=None)
```

[\[source\]](#)

sklearn.ensemble.AdaBoostRegressor

```
class sklearn.ensemble.AdaBoostRegressor(base_estimator=None, *, n_estimators=50, learning_rate=1.0, loss='linear', random_state=None)
```

[\[source\]](#)

Example

```
>>> from sklearn.ensemble import AdaBoostClassifier
>>> from sklearn.tree import DecisionTreeClassifier
>>> boosting = AdaBoostClassifier(DecisionTreeClassifier(),
...                                max_samples=0.5, max_features=0.5)
```

[>>>](#)


<https://towardsdatascience.com/boosting-algorithm-adaboost-b6737a9ee60c#:~:text=AdaBoost,classification%20can%20be%20represented%20as>



Gradient Boosting Tree (ກົມາບັນຫຼວງ)

- Boosting the performance by using **ensemble trees**
- Each tree in the next step aims to **predict error**.
- So, the prediction result is **the summation of all trees** (not average any more).
- In the final step, **weights** are assigned to all leaf nodes using **gradient descent** in order to finally reduce errors.

$$T_1 + T_2 + T_3 + \dots$$

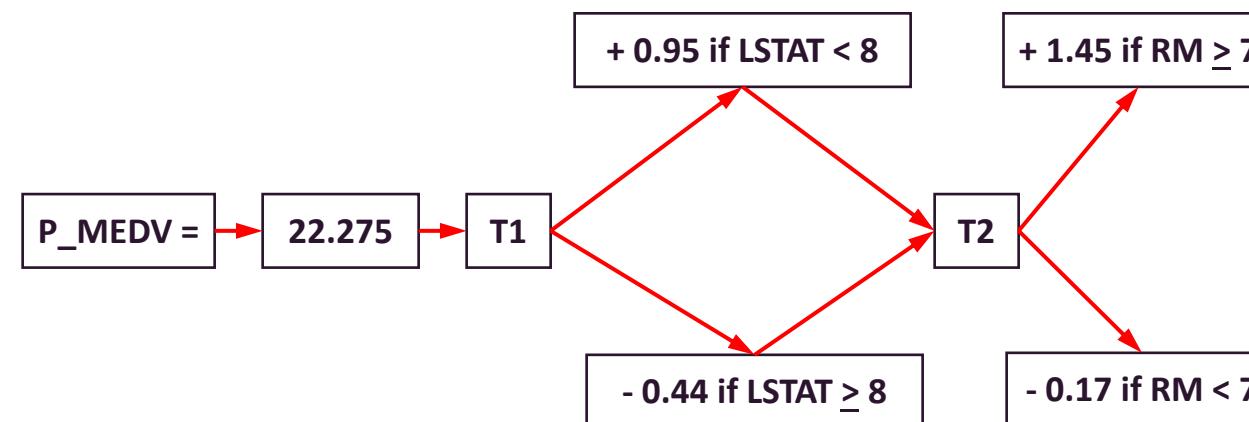

Boston House Price Prediction

- 'RM' is the average number of rooms among homes in the neighborhood.
- 'LSTAT' is the percentage of homeowners in the neighborhood considered "lower class" (working poor).




Intro to Gradient Boosting Tree

■ Decision Tree

Input: age, gender, occupation, ...


Like the computer game X

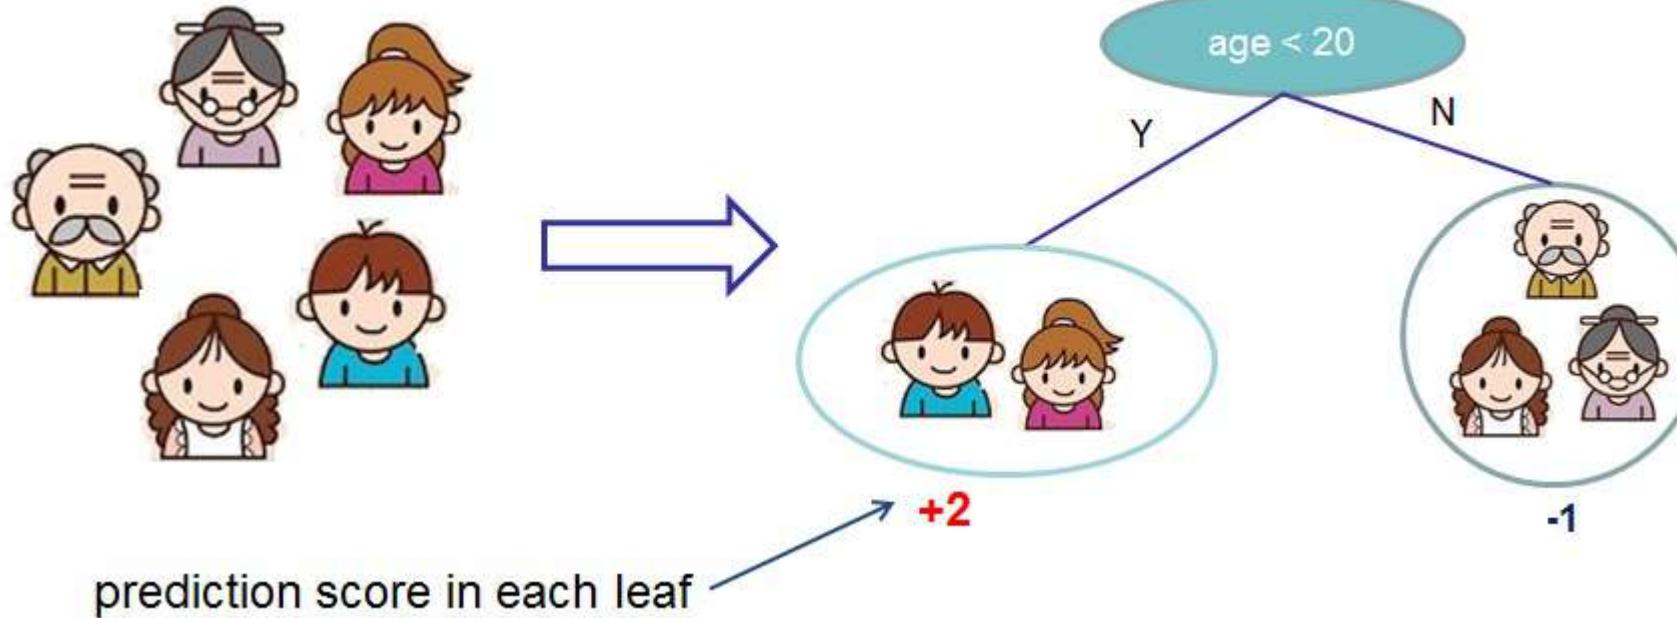



Intro to Gradient Boosting Tree (cont.)

- Ensemble by weight on leaf nodes

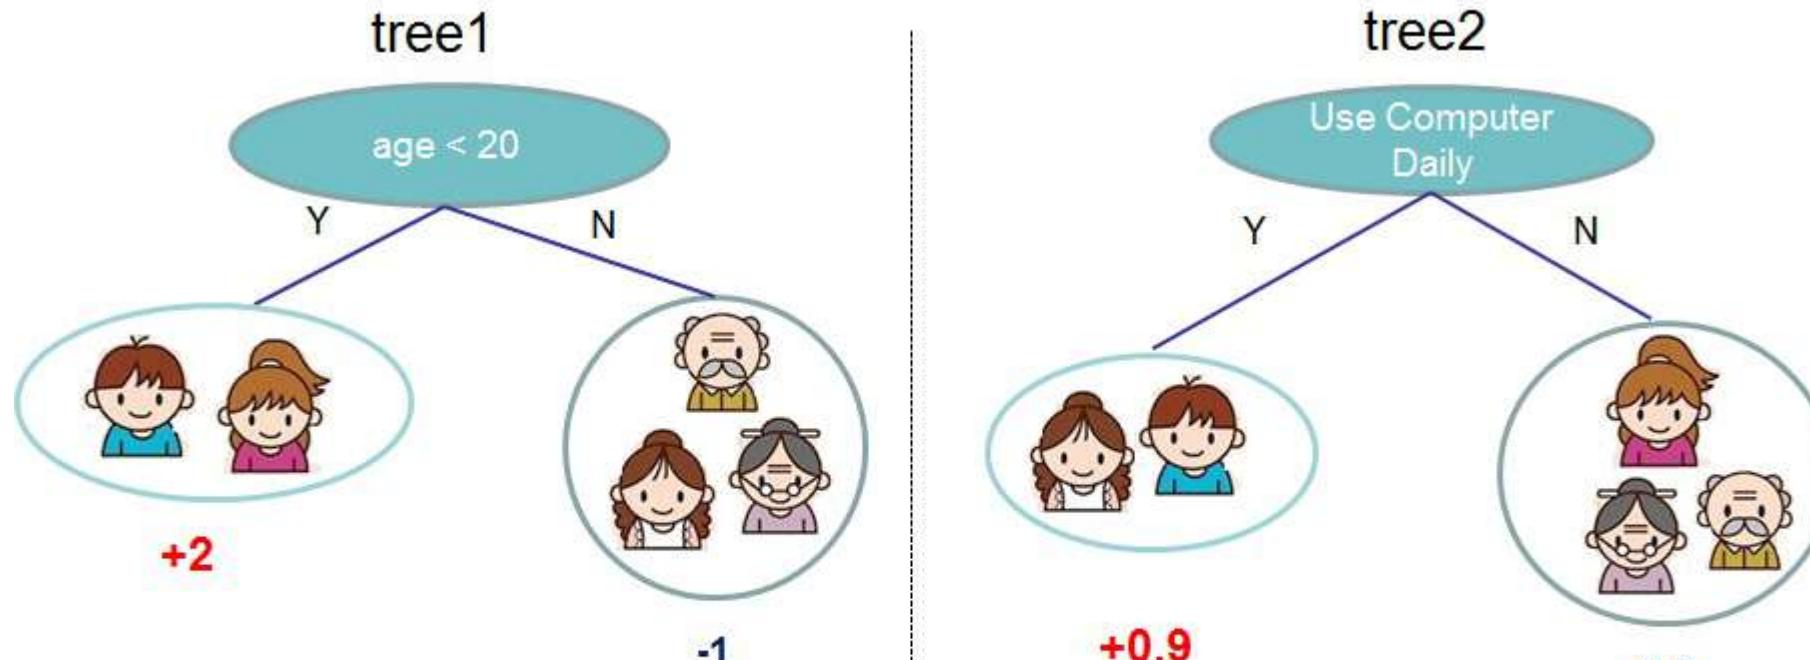


$$f(\text{boy}) = 2 + 0.9 = 2.9$$

$$f(\text{old man}) = -1 - 0.9 = -1.9$$



Intro to Gradient Boosting Tree (cont.)

- Optimize weight of leaf nodes by gradient descent

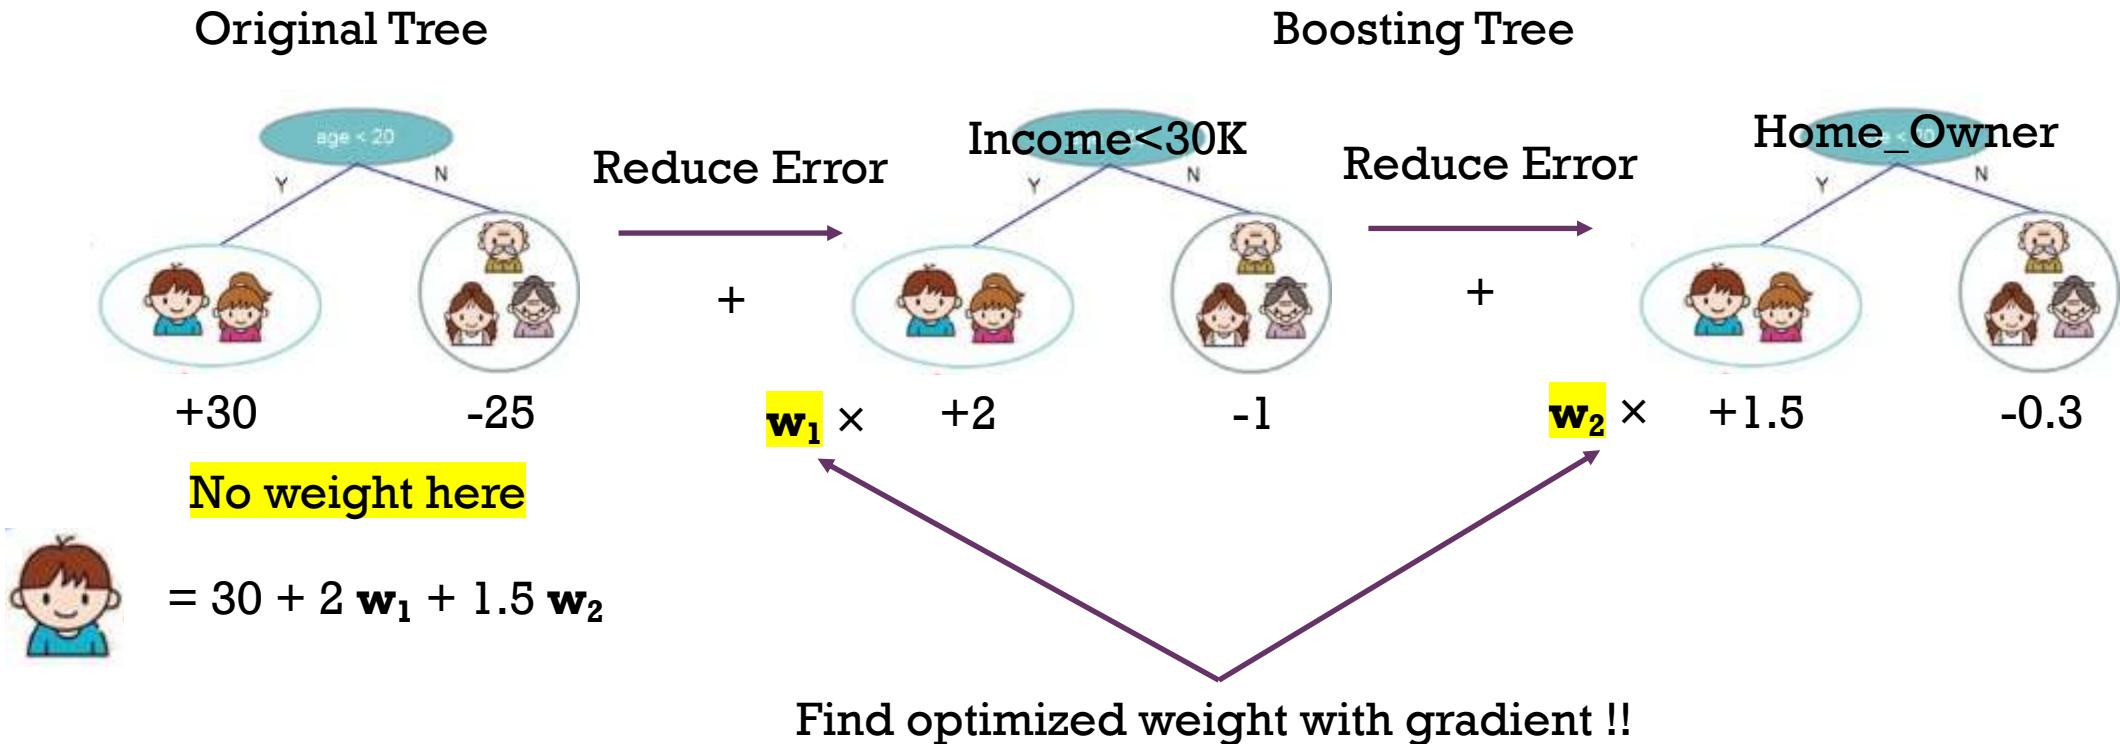



Gradient Boosting Tree in sklearn

3.2.4.3.5. `sklearn.ensemble.GradientBoostingClassifier`

```
class sklearn.ensemble.GradientBoostingClassifier(*, loss='deviance', learning_rate=0.1, n_estimators=100, subsample=1.0,  
criterion='friedman_mse', min_samples_split=2, min_samples_leaf=1, min_weight_fraction_leaf=0.0, max_depth=3,  
min_impurity_decrease=0.0, min_impurity_split=None, init=None, random_state=None, max_features=None, verbose=0,  
max_leaf_nodes=None, warm_start=False, presort='deprecated', validation_fraction=0.1, n_iter_no_change=None, tol=0.0001,  
ccp_alpha=0.0)
```


[\[source\]](#)

ก่อตัวเป็น → Sequential Process



eXtreme Gradient Boosting Tree (XGBoost)

- XGBoost stands for “**Extreme** Gradient Boosting”, where the term “Gradient Boosting” originates from the paper *Greedy Function Approximation: A Gradient Boosting Machine*, by Friedman.
- XGBoost is exactly a tool motivated by the formal principle introduced in this tutorial! More importantly, it is developed with both deep consideration in terms of **systems optimization** and **principles in machine learning**. The goal of this library is to push the extreme of the computation limits of machines to provide a **scalable, portable and accurate** library

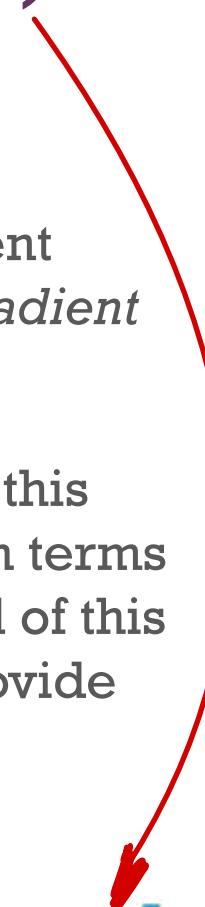


dmlc
XGBoost



Models Performance

Performance Comparison using SKLearn's 'Make_Classification' Dataset

(5 Fold Cross Validation, 1MM randomly generated data sample, 20 features)

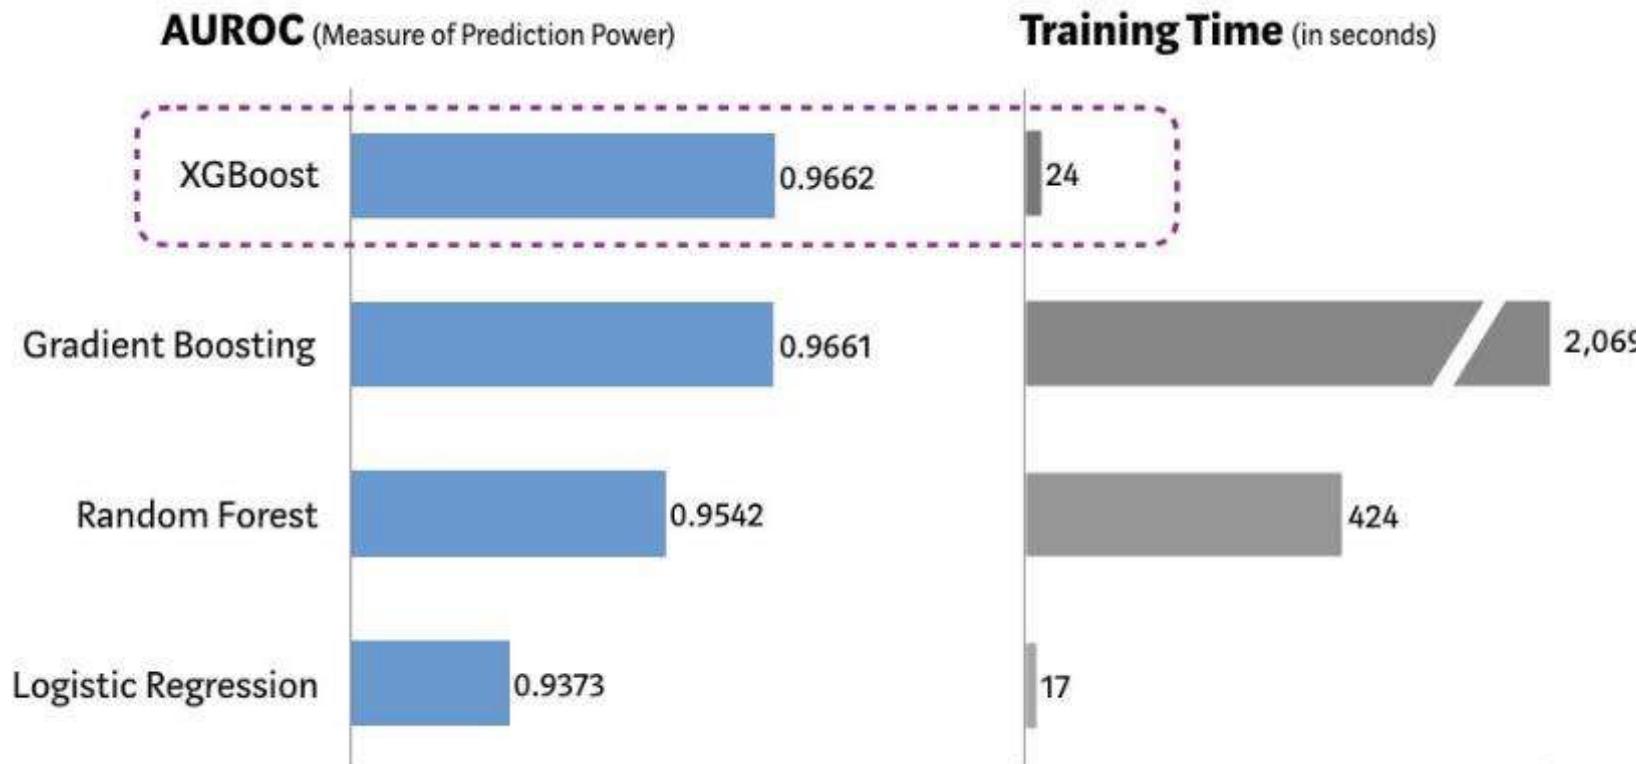



XGBoost Package

- Multiple Language Support 
- Distributed Model on Cloud
 - AWS
 - Kubernetes
 - Spark
 - Dask
- Compatible with sklearn interface

Python package

R package

JVM package

Ruby package

Swift package

Julia package

C Package



XGBoost Important Parameter




- `n_jobs` : Number of parallel tasks (`-1 = all cores`)
- `objective` : Type of Prediction
 - for Classification `binary:hinge`, `binary:logistic` (prob) or `multi:softmax` (multi-class)
 - for Regression `reg:squarederror`
- `learning_rate` : Step size used in update weights
- `n_estimators` : Number of trees
- `subsample (0, 1]`: Number of training data to growing trees, will prevent overfitting
- `importance_type` : Get feature importance of each feature.
 - ‘weight’: the number of times a feature is used to split the data across all trees.
 - ‘gain’: the average gain across all splits the feature is used in.
 - ‘cover’: the average coverage across all splits the feature is used in.
 - ‘total_gain’: the total gain across all splits the feature is used in.
 - ‘total_cover’: the total coverage across all splits the feature is used in.



Evolution of Decision Trees

Performance
(Accuracy, Time)

Method
(Based method)

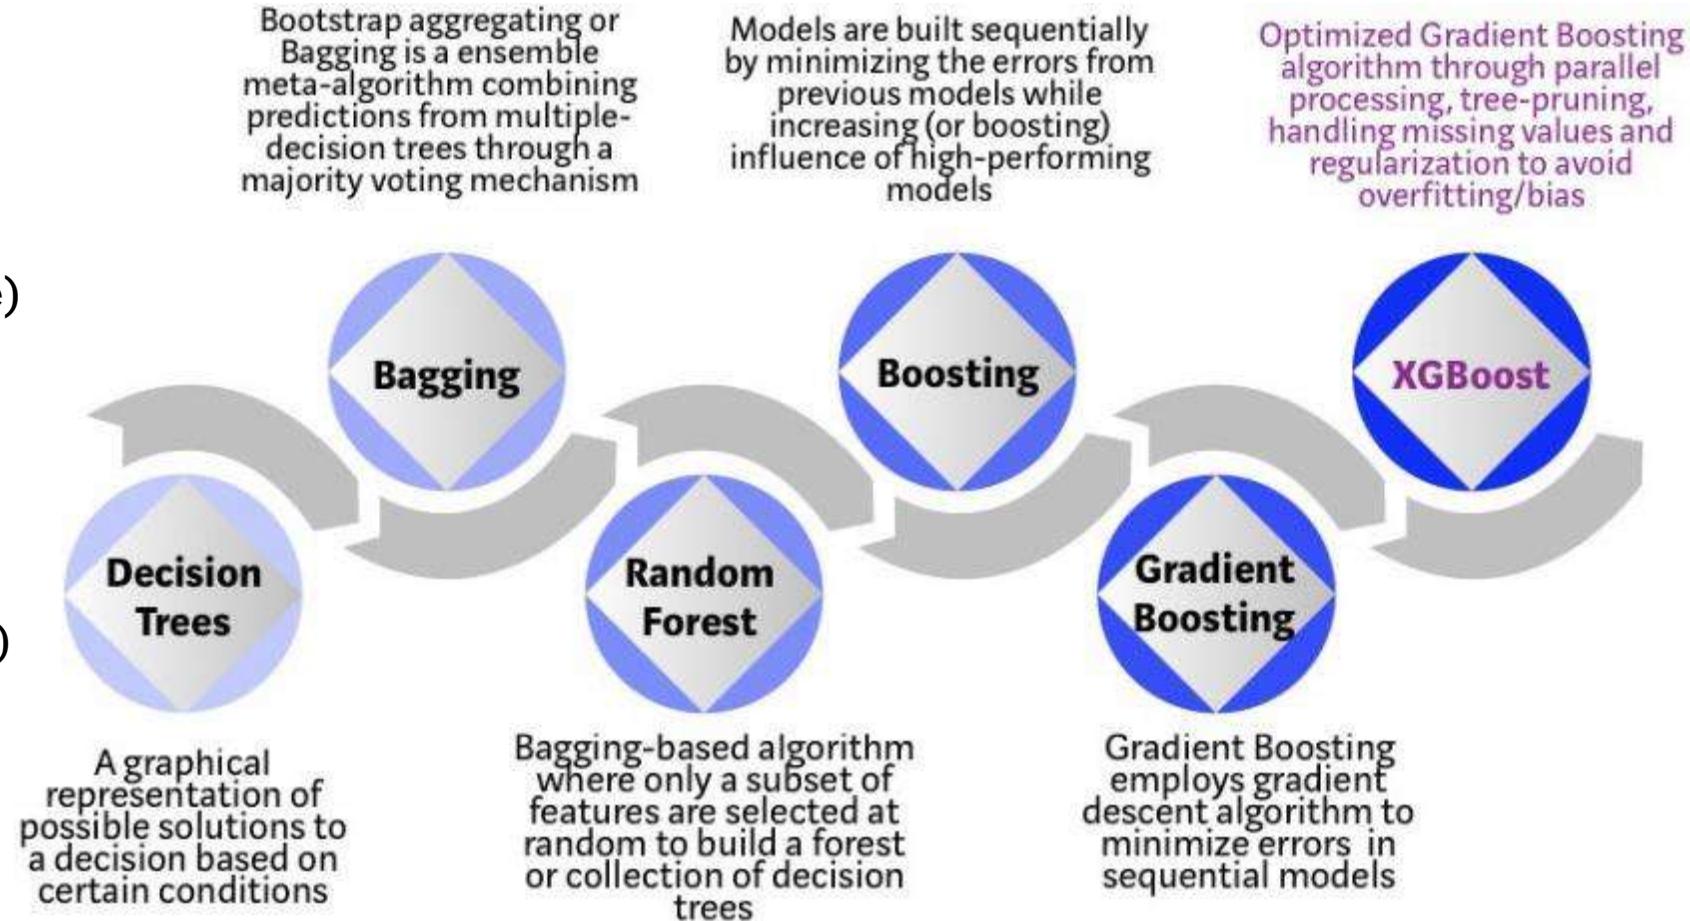

ຄົມ ອິນໄຕ → ມີການອະນຸມວັດລົດ




2) Regression





2) Regression

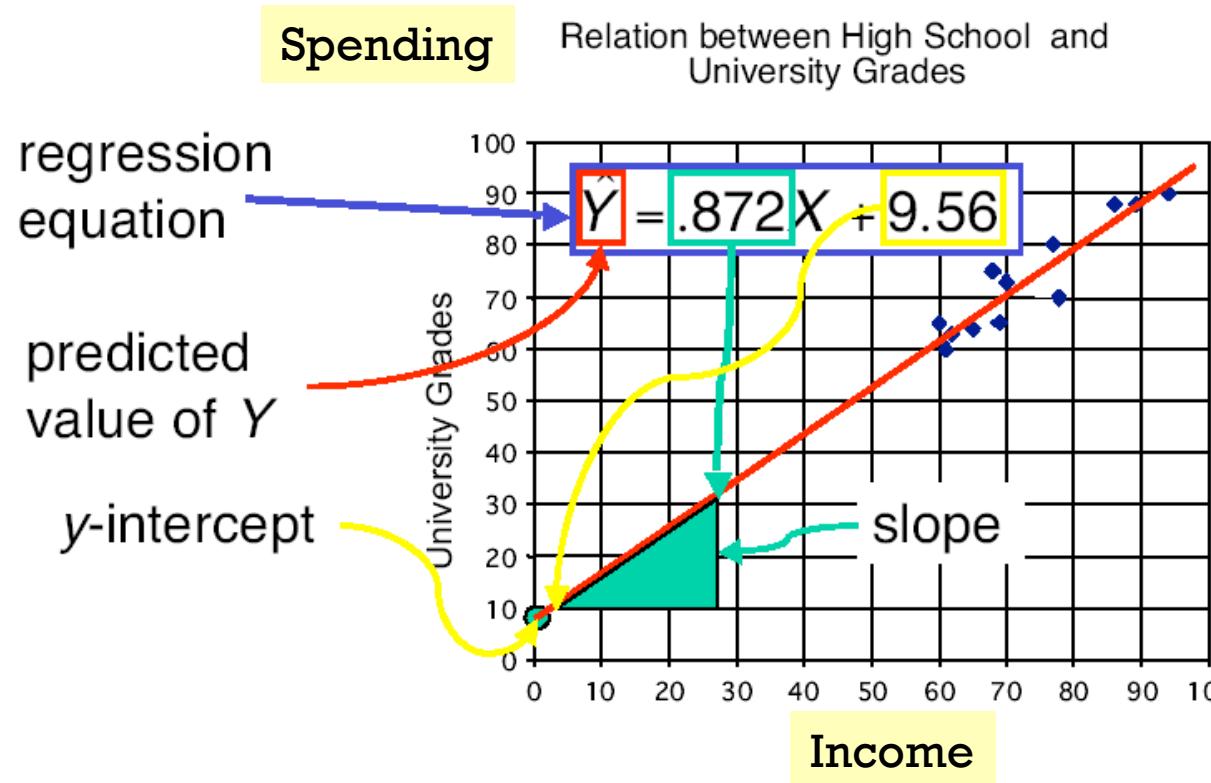

weight, coefficient

$$\hat{y} = \hat{w}_0 + \hat{w}_1 x_1 + \hat{w}_2 x_2$$


target intercept
(\nwarrow Bias)

input

- The least square method aims to minimize the following term

$$\sum_{\text{training data}} (y_i - \hat{y}_i)^2$$

Ordinary Least Squares (OLS) Regression

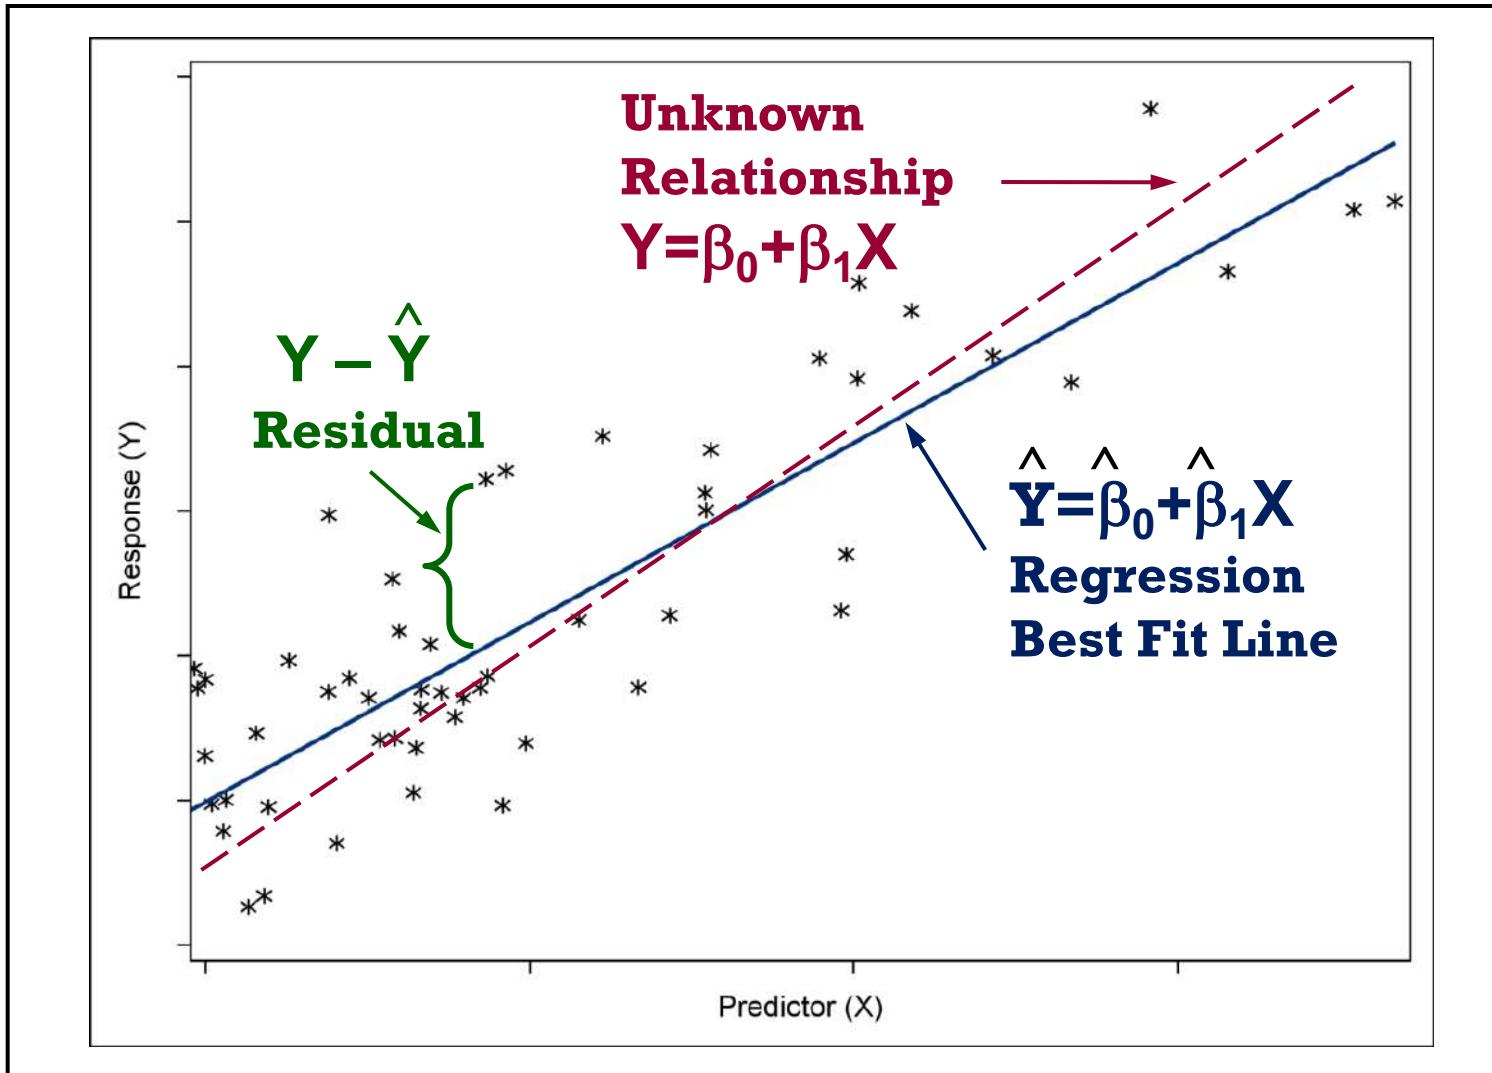



Multiple Linear Regression Model

Matrix Multiplication Approach

inputs		target
Age	Income	Spending
25	25,000	400
35	50,000	500
32	35,000	550

$$Y = \beta_0(1) + \beta_1 X_1 + \beta_2 X_2 + \varepsilon$$

$$[Y] = [X][\beta]$$


$$[\beta] = [X]^{-1}[Y]$$

* *missed moving Linear motion* *

Linear Regression Assumption

$$\ln(\text{Spending}) = 500 + 10 * \text{Income}10K + 2 * \text{Age}$$

in Plot on this linear

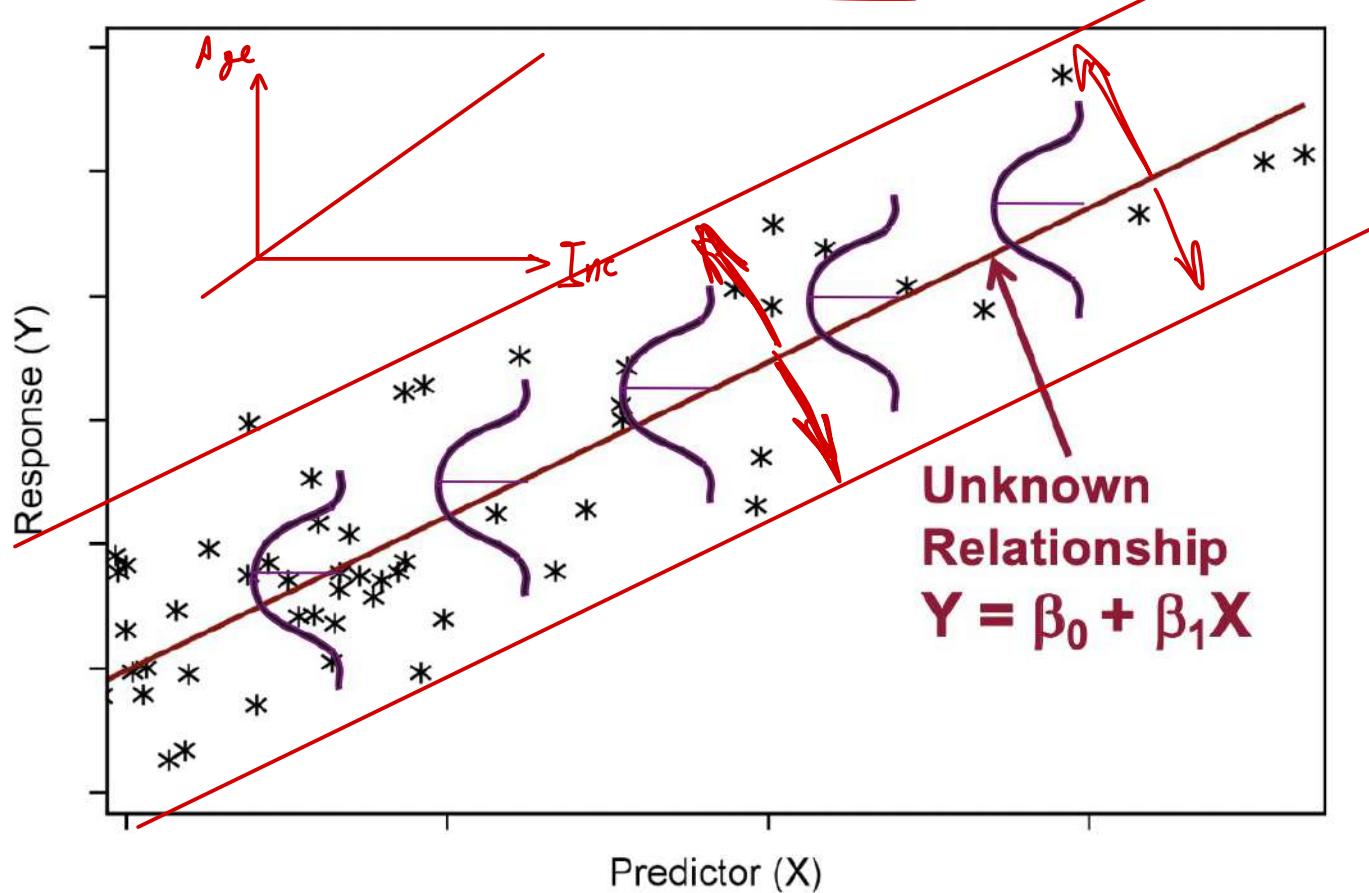

- Linear relationship between (y, x_i) . [Pearson correlation]
- Error is normal distributed. [remove outliers, log-transformation]
- Error has equal variance (homoscedasticity) [remove outliers, log-transformation]
- Errors are independent from each other. [design new data correction]

ເຖິງໄລຍະນີ້ → ລາຍນີ້

sklearn.linear_model.LinearRegression

```
class sklearn.linear_model.LinearRegression(fit_intercept=True, normalize=False, copy_X=True, n_jobs=None) [source]
```

Ordinary least squares Linear Regression.

LinearRegression fits a linear model with coefficients $w = (w_1, \dots, w_p)$ to minimize the residual sum of squares between the observed targets in the dataset, and the targets predicted by the linear approximation.

Parameters:

- fit_intercept : bool, optional, default True**
Whether to calculate the intercept for this model. If set to False, no intercept will be used in calculations (i.e. data is expected to be centered).
- normalize : bool, optional, default False**
This parameter is ignored when `fit_intercept` is set to False. If True, the regressors X will be normalized before regression by subtracting the mean and dividing by the l2-norm. If you wish to standardize, please use `StandardScaler` before calling `fit` on an estimator with `normalize=False`.

Attributes::

- coef_ : array of shape (n_features,) or (n_targets, n_features)**
Estimated coefficients for the linear regression problem. If multiple targets are passed during the fit (y 2D), only one target is passed, this is a 1D array of for $n_{targets} > 1$ and sufficient
- intercept_ : float or array of shape (n_targets,)**
Independent term in the linear model. Set to 0.0 if `fit_intercept = False`.
`None` means 1 unless in a `joblib.parallel_backend` context. `-1` means using all processors.
- n_features_in_ : int**
Number of features seen during `fit`.
`None` means 1 unless in a `joblib.parallel_backend` context. `-1` means using all processors.
- New in version 0.24.**
- feature_names_in_ : ndarray of shape (n_features_in_,)**
Names of features seen during `fit`. Defined only when `X` has feature names that are all strings.
`None` means 1 unless in a `joblib.parallel_backend` context. `-1` means using all processors.
- New in version 1.0.**



Regression with Regularization

linear regression ธรรมดาก็ไม่สามารถเลือก feature ได้ แต่ Lasso มีตัวแปร alpha สามารถทำ feature selection ได้

Lasso Regression (L₁ Regularization) (|β_i|, absolute value)

Lasso Regression (Least Absolute Shrinkage and Selection Operator) adds “absolute value of magnitude” of coefficient as penalty term to the loss function.

$$\sum_{i=1}^n (Y_i - \sum_{j=1}^p X_{ij}\beta_j)^2 + \lambda \sum_{j=1}^p |\beta_j|$$

Cost function

estimator = lasso()
selector = SelectFromModel(estimator)

Regularization parameter

Ridge Regression (L₂ Regularization) (β_i², square value)

Ridge regression adds “squared magnitude” of coefficient as penalty term to the loss function. Here the *highlighted* part represents L2 regularization element.

$$\sum_{i=1}^n (y_i - \sum_{j=1}^p x_{ij}\beta_j)^2 + \lambda \sum_{j=1}^p \beta_j^2$$

Cost function

estimator = Ridge()
selector = SelectFromModel(estimator, threshold = ??)

The function of both the regularization methods are almost the same. The key difference between these techniques is that Lasso shrinks the less important feature's coefficient to zero thus, removing some feature altogether. So, this works well for **feature selection** in case we have a huge number of features.

lasso | L1 → ใช้ผลลัพธ์คัดลับ feature selection
บาง feature 0: ก็จะถูกตัดไป


ElasticNet

(α \in L1 ||| L2)

`l1_ratio : float, default=0.5`

The ElasticNet mixing parameter, with $0 \leq l1_ratio \leq 1$. For $l1_ratio = 0$ the penalty is an L2 penalty. For $l1_ratio = 1$ it is an L1 penalty. For $0 < l1_ratio < 1$, the penalty is a combination of L1 and L2.

$\hookrightarrow l1_ratio = 0.6 \rightsquigarrow L1:60$
 $L2:40$

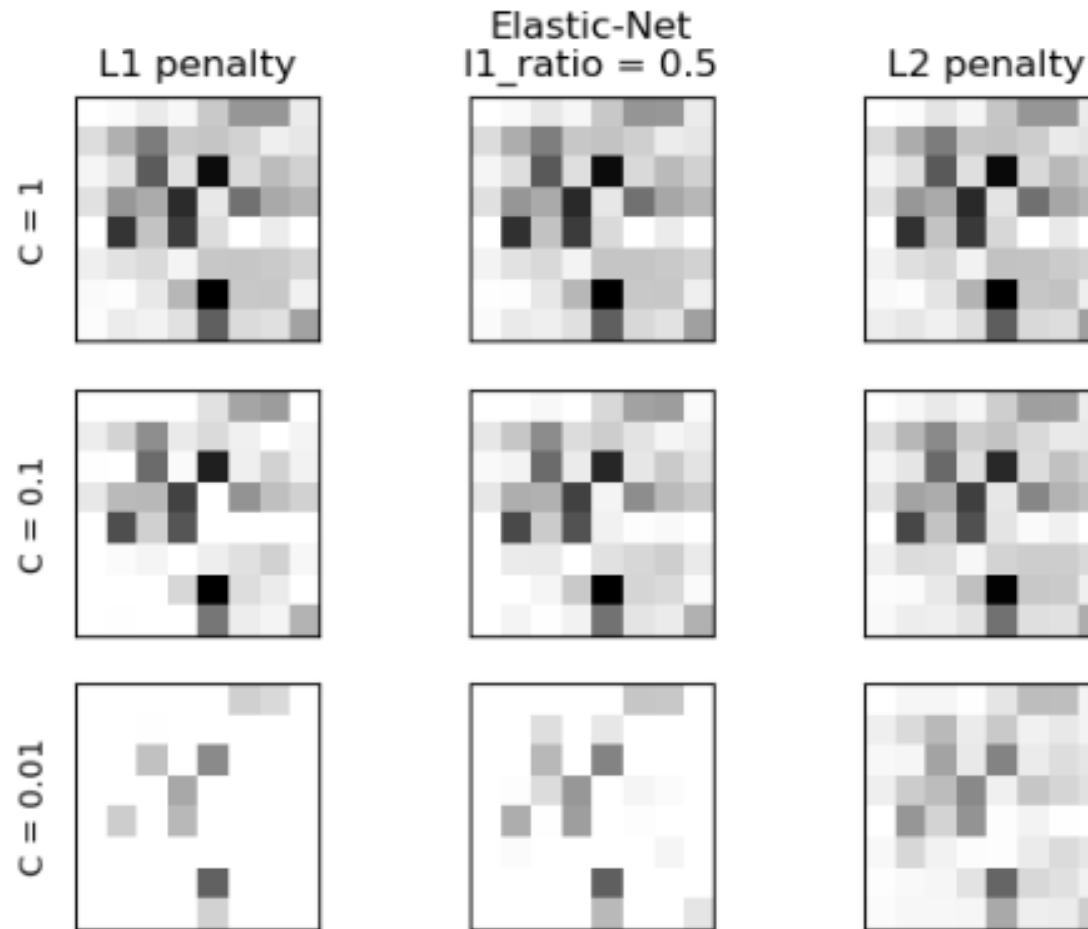

[https://scikit-learn.org/stable/auto_examples/linear_model/plot_logistic_l1_l2_sparsity.html#:~:text=Comparison%20of%20the%20sparsity%20\(percentage,C%20constrain%20the%20model%20more.](https://scikit-learn.org/stable/auto_examples/linear_model/plot_logistic_l1_l2_sparsity.html#:~:text=Comparison%20of%20the%20sparsity%20(percentage,C%20constrain%20the%20model%20more.)

See also:

Ridge

Ridge regression addresses some of the problems of Ordinary Least Squares by imposing a penalty on the size of the coefficients with L2 regularization.

Lasso

The Lasso is a linear model that estimates sparse coefficients with L1 regularization.

ElasticNet

Elastic-Net is a linear regression model trained with both L1 and L2 -norm regularization of the coefficients.

sklearn.linear_model.Ridge

```
class sklearn.linear_model.Ridge(alpha=1.0, *, fit_intercept=True, max_iter=None, tol=0.001, solver='auto', positive=False, random_state=None)
```

Linear least squares with L2 regularization.

Minimizes the objective function:

$$\|y - Xw\|^2_2 + \alpha * \|w\|^2_2$$

This model solves a regression model where the loss function is the L2-norm. Also known as Ridge Regression or Tikhonov regularization (i.e., when y is a 2d-array of shape (n_samples, n_targets)).

Read more in the [User Guide](#).

Parameters: **alpha : float, ndarray of shape (n_targets, n_features)**
Constant that multiplies the L2 term, controlling regularization strength. alpha must be a float i.e. in [0, inf].

When alpha = 0, the objective is equivalent to ordinary least squares, solved by the `LinearRegression` object. For numerical reasons, using alpha = 0 with the Lasso object is not advised. Use the `LinearRegression` object.

If an array is passed, penalties are assumed to be column-wise (i.e. number).

fit_intercept : bool, default=True
Whether to fit the intercept for this model. If set to False, no intercept will be used (i.e. data is expected to be centered).

normalize : bool, default=False
This parameter is ignored when `fit_intercept` is set to True. The regressor will standardize the data before regression by subtracting the mean and dividing by the L2-norm. If you wish to standardize the data yourself before calling `fit` on an estimator with `normalize=False`.

sklearn.linear_model.Lasso

```
class sklearn.linear_model.Lasso(alpha=1.0, *, fit_intercept=True, normalize='deprecated', precompute=False, max_iter=1000, copy_X=True, tol=0.0001, warm_start=False, positive=False, random_state=None, selection='cyclic')
```

Linear Model trained with L1 prior as regularizer (aka the Lasso).

The optimization objective for Lasso is:

$$(1 / (2 * n_samples)) * \|y - Xw\|^2_2 + \alpha * \|w\|_1$$

Technically the Lasso model is optimizing the same objective function as the Elastic Net with `l1_ratio=1`.

Read more in the [User Guide](#).

Parameters: **alpha : float, default=1.0**

Constant that multiplies the L1 term, controlling regularization strength. alpha must be a float i.e. in [0, inf].

When alpha = 0, the objective is equivalent to ordinary least squares, solved by the `LinearRegression` object. For numerical reasons, using alpha = 0 with the Lasso object is not advised. Use the `LinearRegression` object.

fit_intercept : bool, default=True

Whether to calculate the intercept for this model. If set to False, no intercept will be used (i.e. data is expected to be centered).

normalize : bool, default=False

This parameter is ignored when `fit_intercept` is set to False. If True, the regressor will standardize the data before regression by subtracting the mean and dividing by the L2-norm. If you wish to standardize the data yourself before calling `fit` on an estimator with `normalize=False`.

Deprecated since version 1.0: normalize was deprecated in version 1.0 and will be removed in 2.0.

sklearn.linear_model.ElasticNet

```
class sklearn.linear_model.ElasticNet(alpha=1.0, *, l1_ratio=0.5, fit_intercept=True, normalize='deprecated', precompute=False, max_iter=1000, copy_X=True, tol=0.0001, warm_start=False, positive=False, random_state=None, selection='cyclic')
```

[source]

Linear regression with combined L1 and L2 priors as regularizer.

Minimizes the objective function:

$$1 / (2 * n_samples) * \|y - Xw\|^2_2 + \alpha * \|w\|_1 + 0.5 * \alpha * (1 - l1_ratio) * \|w\|^2_2$$

If you are interested in controlling the L1 and L2 penalty separately, keep in mind that this is equivalent to:

$$a * \|w\|_1 + 0.5 * b * \|w\|^2_2$$

where:

$$\alpha = a + b \text{ and } l1_ratio = a / (a + b)$$

The parameter `l1_ratio` corresponds to alpha in the glmnet R package while alpha corresponds to the lambda parameter in glmnet. Specifically, `l1_ratio = 1` is the lasso penalty. Currently, `l1_ratio <= 0.01` is not reliable, unless you supply your own sequence of alpha.

Read more in the [User Guide](#).

Parameters: **alpha : float, default=1.0**

Constant that multiplies the penalty terms. Defaults to 1.0. See the notes for the exact mathematical meaning of this parameter. alpha = 0 is equivalent to an ordinary least square, solved by the `LinearRegression` object. For numerical reasons, using alpha = 0 with the Lasso object is not advised. Given this, you should use the `LinearRegression` object.

l1_ratio : float, default=0.5

The ElasticNet mixing parameter, with $0 \leq l1_ratio \leq 1$. For `l1_ratio = 0` the penalty is an L2 penalty. For `l1_ratio = 1` it is an L1 penalty. For $0 < l1_ratio < 1$, the penalty is a combination of L1 and L2.

fit_intercept : bool, default=True


Whether the intercept should be estimated or not. If `False`, the data is assumed to be already centered.

normalize : bool, default=False

+

Classification Problem


Prob. of purchase	Age	Income	Gender	Province	Purchase
	25	25,000	Female	Bangkok	Yes (1)
	35	50,000	Female	Nontaburi	Yes (1)
	32	35,000	Male	Bangkok	No (0)

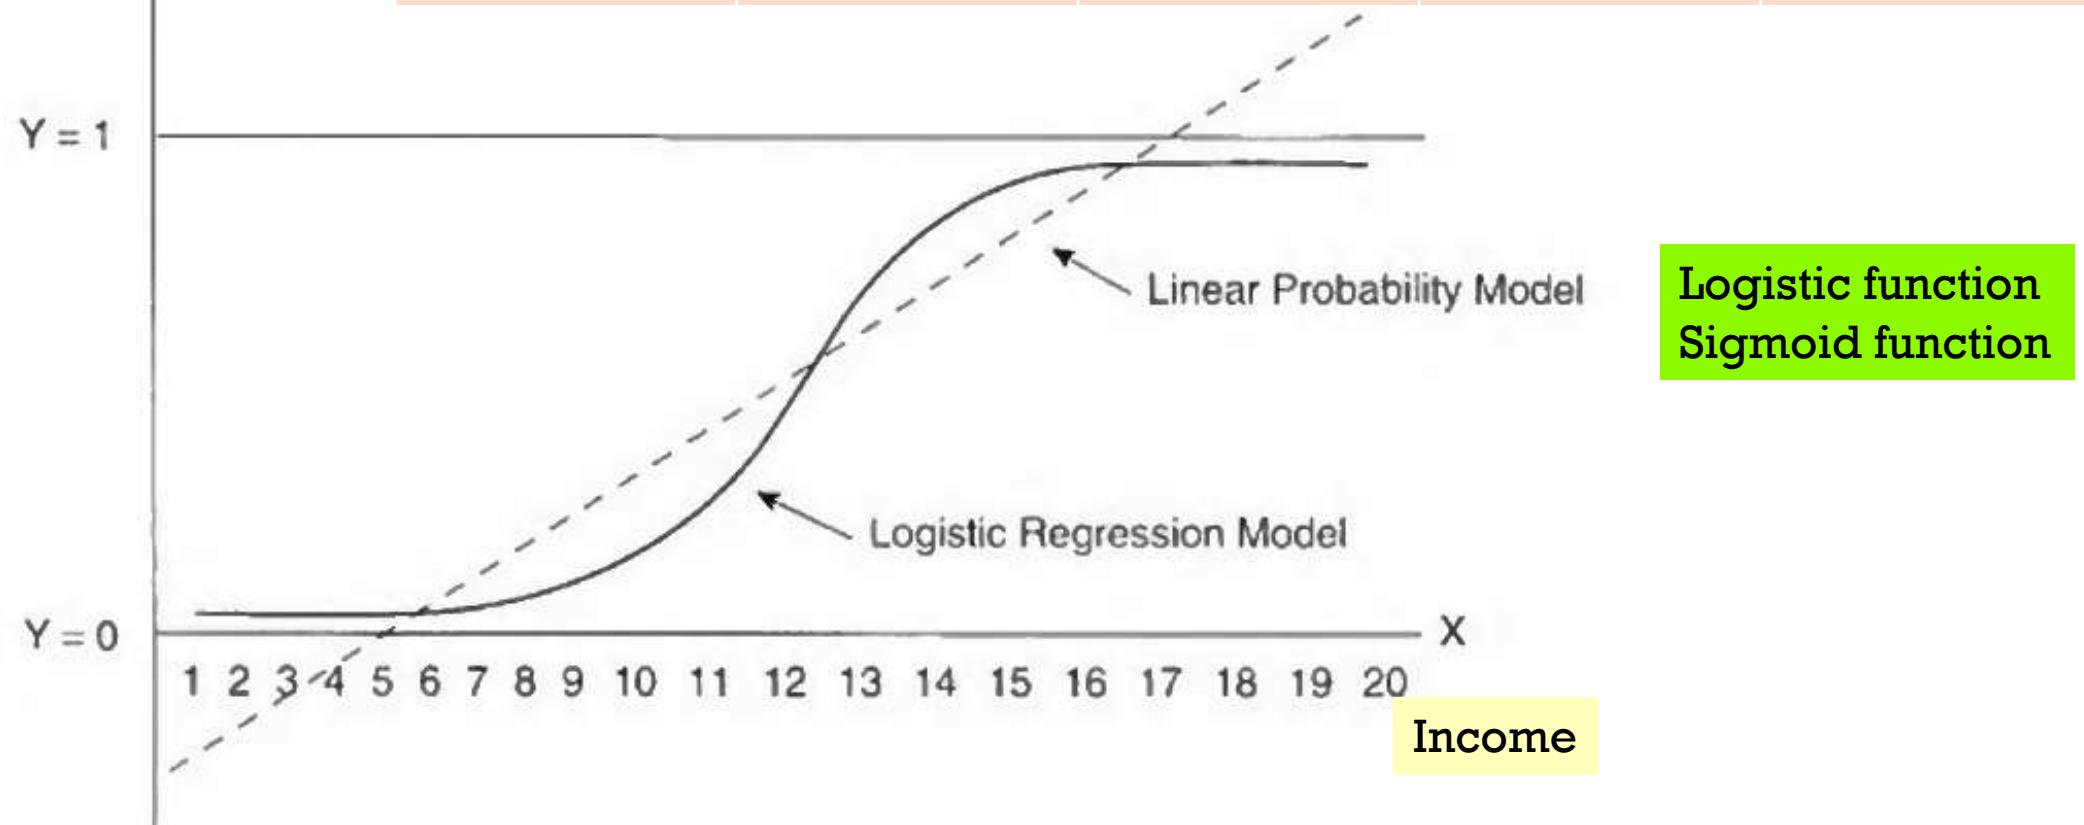



Logistic Regression (forward pass)

Logit link function: Non-linear to Linear

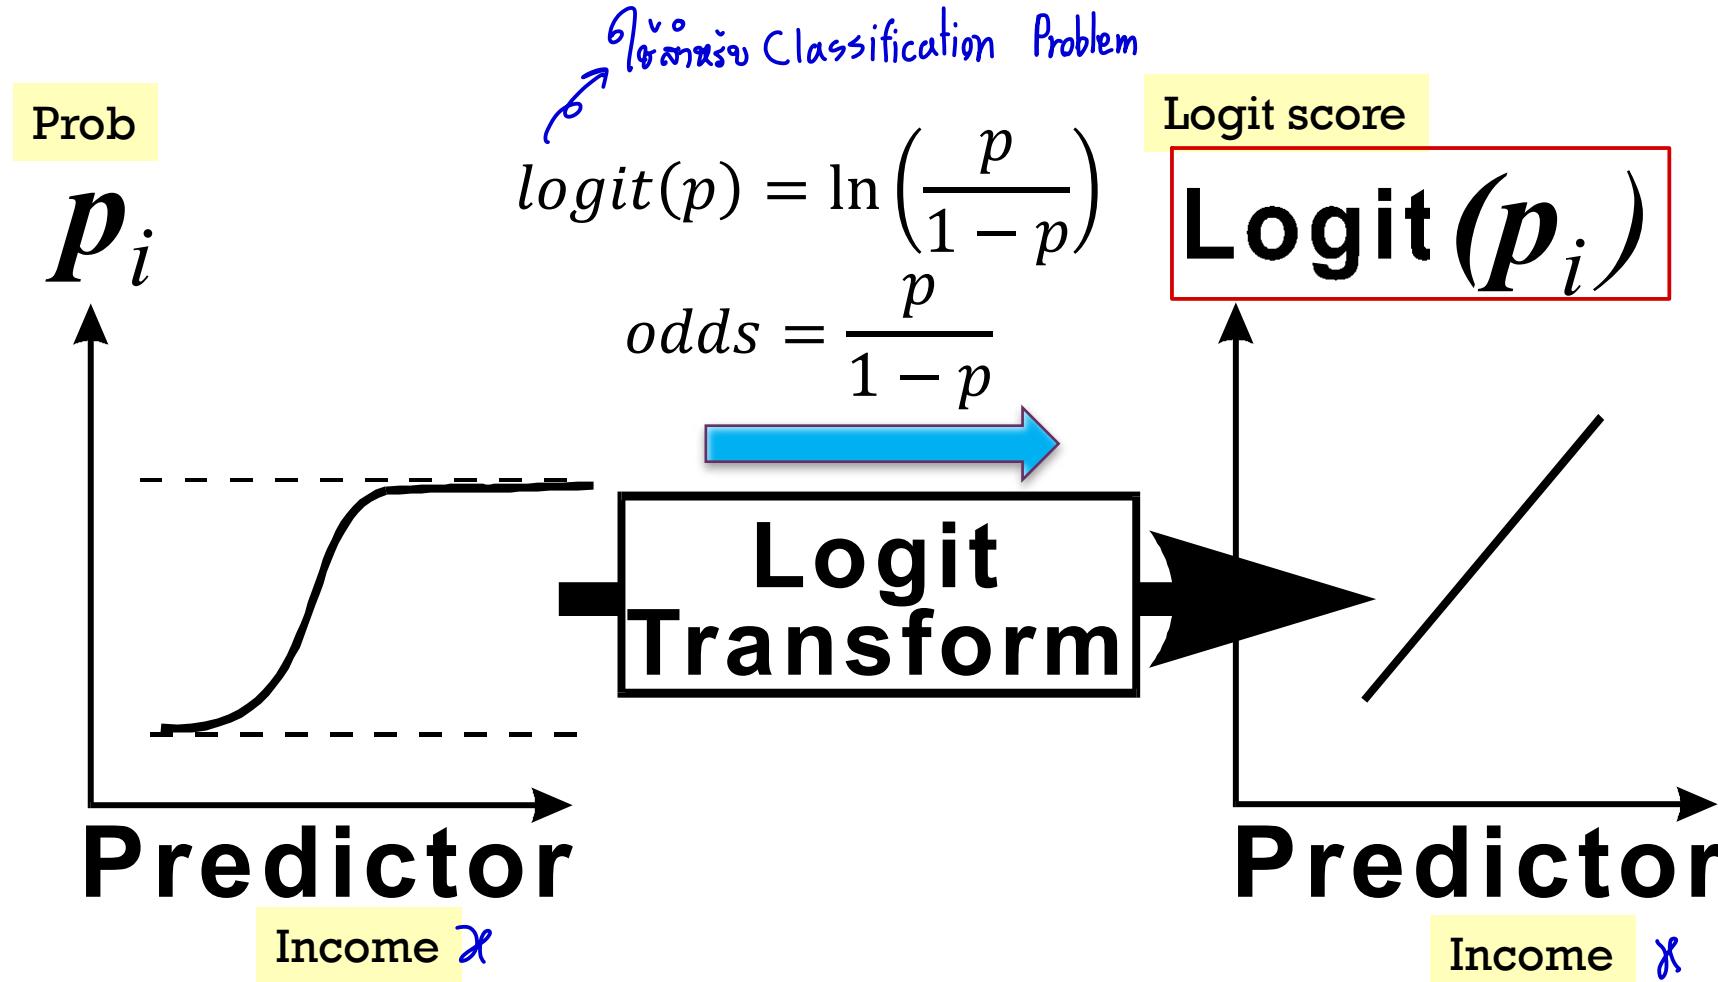




Logit Link Function (backward pass)

$$\log\left(\frac{\hat{p}}{1-\hat{p}}\right) = \hat{w}_0 + \hat{w}_1 x_1 + \hat{w}_2 x_2 = \text{logit}(\hat{p})$$

- Maximum likelihood estimates


$$\hat{p} = \frac{1}{1 + e^{-\text{logit}(\hat{p})}}$$

To obtain prediction estimates, the logit equation is solved for \hat{p} .

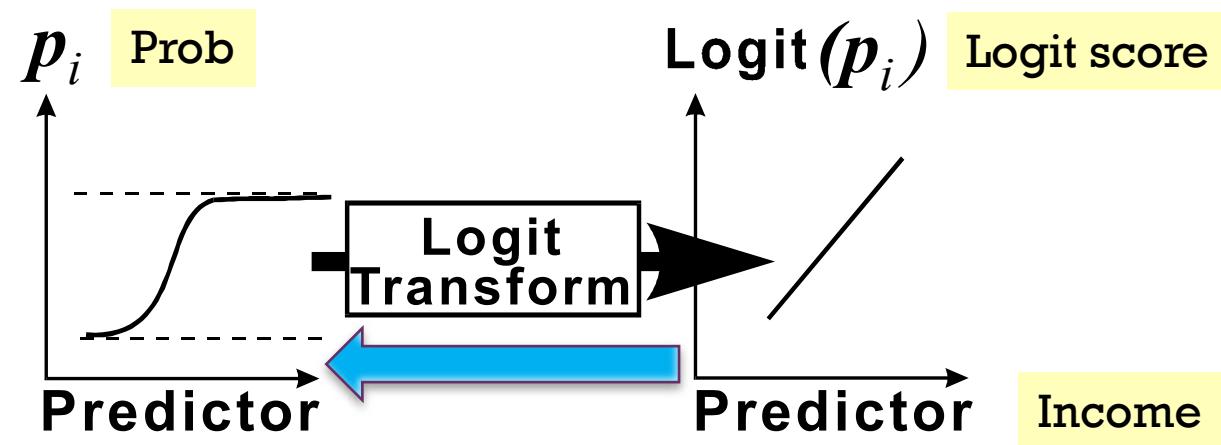

Assumptions for Logistic Regression


- The mean of the logit is accurately modeled by a linear function of the X_i .
 - $(\text{logit}, x_i) = \text{linear relationship}$
- The random error term, ε , is assumed to have a normal distribution with a mean of zero.
- The random error term, ε , is assumed to have a constant variance, σ^2 .
 - Not skew
- The errors are independent.

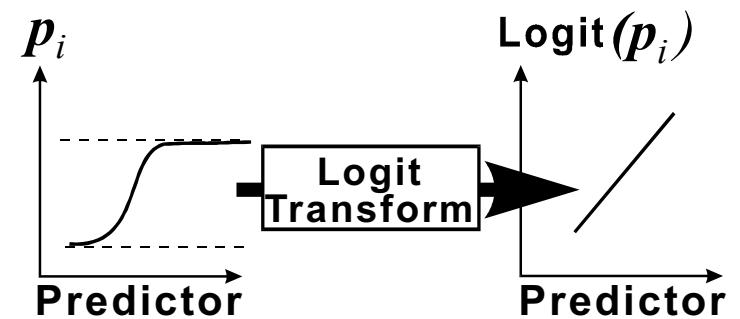



Quiz

Logistic regression → regression for binary classification

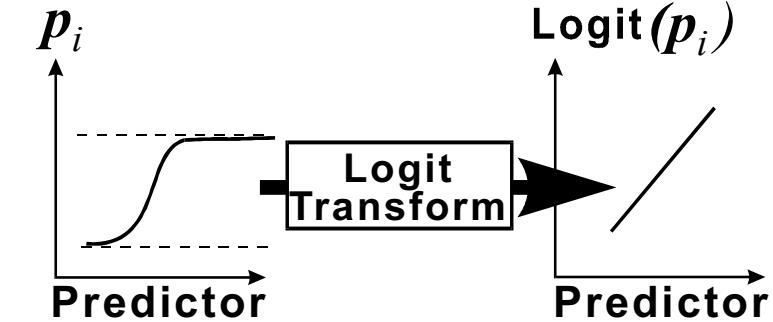


- What is the logistic regression prediction for the indicated point?

- a. 0.243
- b. 0.56
- c. yellow
- d. It depends.

$$\text{logit}(\hat{p}) = -0.81 + 0.92x_1 + 1.11x_2$$

$$\hat{p} = \frac{1}{1 + e^{-\text{logit}(\hat{p})}}$$

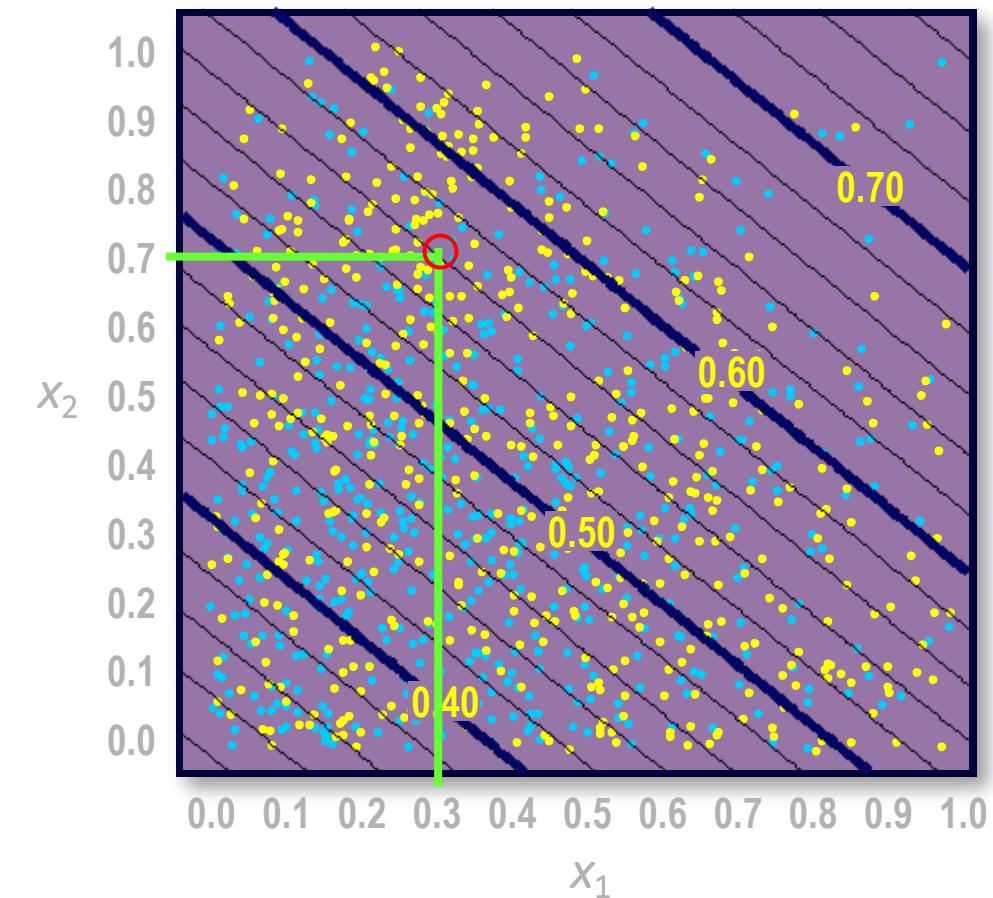

sklearn.linear_model.LogisticRegression

```
class sklearn.linear_model.LogisticRegression(penalty='l2', dual=False, tol=0.0001, C=1.0, fit_intercept=True, intercept_scaling=1, class_weight=None, random_state=None, solver='lbfgs', max_iter=100, multi_class='auto', verbose=0, warm_start=False, n_jobs=None, l1_ratio=None) ¶
```

[\[source\]](#)

Logistic Regression (aka logit, MaxEnt) classifier.

In the multiclass case, the training algorithm uses the one-vs-rest (OvR) scheme if the 'multi_class' option is set to 'ovr', and uses the cross-entropy loss if the 'multi_class' option is set to 'multinomial'. (Using the 'multinomial' option for multinomial logistic regression is supported by the 'newton-cg', 'sag', 'saga' and 'newton-cg' solvers.)

This class implements regularized logistic regression using Liblinear solver. It supports both L1 and L2 regularization. By default, it uses L2 regularization and the Liblinear solver. If 'solver' is set to 'sag', it uses the sag solver. If 'solver' is set to 'saga', it uses the saga solver. It also supports multi-class classification using OvR or multinomial loss functions. The 'newton-cg', 'sag', and 'lbfgs' solvers support only L2 regularization. The 'liblinear' solver supports both L1 and L2 regularization, with a dual formulation for the L1 penalty. The 'saga' solver supports both L1 and L2 regularization, with a dual formulation for the L1 penalty. The 'saga' solver is the most efficient solver for sparse data. The 'newton-cg' solver is only suitable for small datasets.

The 'newton-cg', 'sag', and 'lbfgs' solvers support only L2 regularization. The 'liblinear' solver supports both L1 and L2 regularization, with a dual formulation for the L1 penalty. The 'saga' solver supports both L1 and L2 regularization, with a dual formulation for the L1 penalty. The 'saga' solver is the most efficient solver for sparse data. The 'newton-cg' solver is only suitable for small datasets.

Read more in the [User Guide](#).

Parameters:

penalty : {‘l1’, ‘l2’, ‘elasticnet’, ‘none’}, default=‘l2’

Used to specify the norm used in the penalization. The 'newton-cg', 'sag' and 'lbfgs' solvers support only L2 penalties. 'elasticnet' is only supported by the 'saga' solver. If 'none' (not supported by the liblinear solver), no regularization is applied.

New in version 0.19: l1 penalty with SAGA solver (allowing ‘multinomial’ + L1)

l1_ratio : float, default=None

The Elastic-Net mixing parameter, with $0 \leq l1_ratio \leq 1$. Only used if `penalty='elasticnet'`. Setting `l1_ratio=0` is equivalent to using `penalty='l2'`, while setting `l1_ratio=1` is equivalent to using `penalty='l1'`. For $0 < l1_ratio < 1$, the penalty is a combination of L1 and L2.

C : float, default=1.0

Inverse of regularization strength; must be a positive float. Like in support vector machines, smaller values specify stronger regularization.

Here, we are going to check how sparsity increases as we increase lambda (or decrease C, as $C = 1/\lambda$) when L1 Regularizer is used.

```
from sklearn.linear_model import LogisticRegression  
  
clf = LogisticRegression(C= 1000, penalty= 'l1')  
clf.fit(x_train,y_train)  
pred = clf.predict(x_test)  
print("Non Zero weights:",np.count_nonzero(clf.coef_))
```

Non Zero weights: 50470

```
clf = LogisticRegression(C= 1, penalty= 'l1')  
clf.fit(x_train,y_train)  
pred = clf.predict(x_test)  
print("Non Zero weights:",np.count_nonzero(clf.coef_))
```

Non Zero weights: 8228

```
clf = LogisticRegression(C= 0.01, penalty= 'l1')  
clf.fit(x_train,y_train)  
pred = clf.predict(x_test)  
print("Non Zero weights:",np.count_nonzero(clf.coef_))
```

Non Zero weights:396

潦倒のまゝに、
class unbalance \rightarrow 10%, 90%

class_weight : dict or 'balanced', default=None

Weights associated with classes in the form {class_label: weight}. If not given, all classes are supposed to have weight one.

The "balanced" mode uses the values of y to automatically adjust weights inversely proportional to class frequencies in the input data as n_samples / (n_classes * np.bincount(y)).

Note that these weights will be multiplied with sample_weight (passed through the fit method) if sample_weight is specified.

New in version 0.17: class_weight='balanced'

random_state : int, RandomState instance, default=None

Used when solver == 'sag', 'saga' or 'liblinear' to shuffle the data. See [Glossary](#) for details.

Examples

```
>>> np.bincount(np.arange(5))
array([1, 1, 1, 1, 1])
>>> np.bincount(np.array([0, 1, 1, 3, 2, 1, 7]))
array([1, 3, 1, 1, 0, 0, 0, 1])
```

- 100 (20:80)
- $W_{c1} = 100 / (2 * 20) = 2.5$
- $W_{c2} = 100 / (2 * 80) = 0.625$



Linear Regression Limitation

- Manage missing value
- Handle outliers (skewness)
- Handle categorical variables (dummy codes)
- Variable selection:
 - Forward, Backward, Stepwise (**not exist in scikit-learn**)
- Accounted for nonlinearities




Important Params:

- Require good data preparation
- Variable selection



Terminology: Kinds of data (recap)

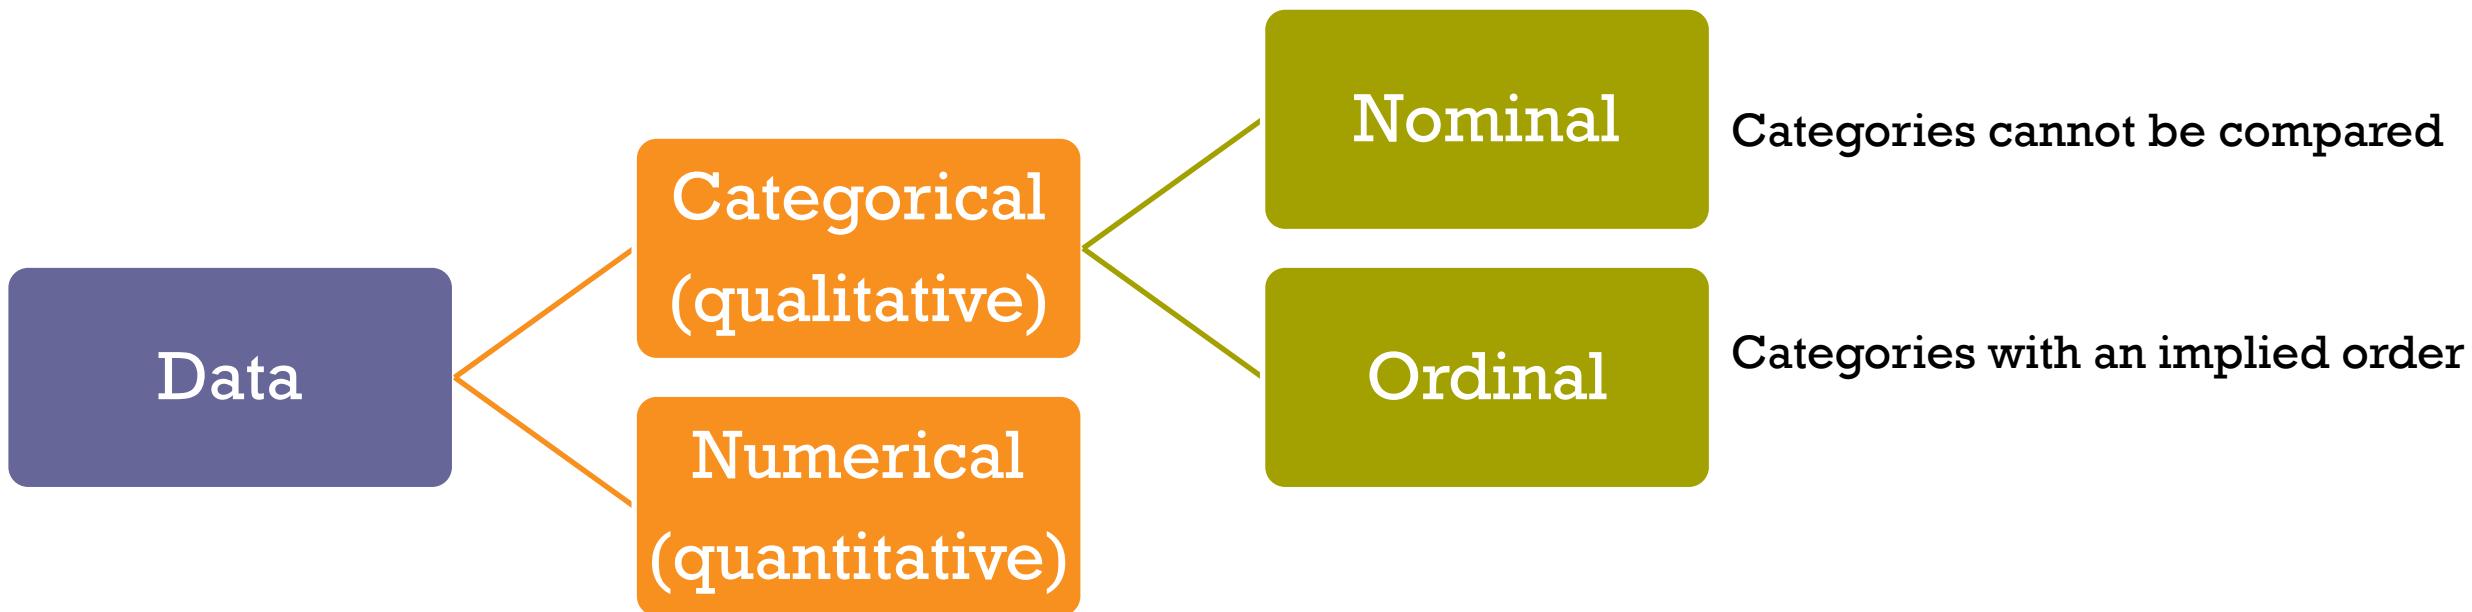



Ordinal: Recode

Grade	GradeNum
A	4.00
B+	3.50
B	3.00
C+	2.50
C	2.00
D+	1.50
D	1.00
F	0.00

Size	SizeNum
XL	5
L	4
M	3
S	2
XS	1



Categorical

- Dummy coding = $(n-1)$ dummy codes

Branch	BranchNum	D_BKK	B_Patum	D_Non	D_BKK	B_Patum
BKK	1	1	0	0	1	0
Patumtani	2	0	1	0	0	1
Nontaburi	3	0	0	1	0	0 reference

[Input/output](#)[General functions](#)[Series](#)[DataFrame](#)[Pandas arrays](#)[Panel](#)[Index objects](#)[Date offsets](#)[Window](#)[GroupBy](#)[Resampling](#)[Style](#)

pandas.get_dummies

`pandas.get_dummies(data, prefix=None, prefix_sep='_', dummy_na=False, columns=None, sparse=False, drop_first=False, dtype=None) → 'DataFrame'` [\[source\]](#)

Convert categorical variable into dummy/indicator variables.

Parameters: `data : array-like, Series, or DataFrame`

Data of which to get dummy indicators.

`prefix : str, list of str, or dict of str, default None`

String to append DataFrame column names. Pass a list with length equal to the number of columns when calling `get_dummies` on a DataFrame. Alternatively, `prefix` can be a dictionary mapping column names to prefixes.

`prefix_sep : str, default '_'`

If appending prefix, separator/delimiter to use. Or pass a list or dictionary as with `prefix`.

`dummy_na : bool, default False`

Add a column to indicate NaNs, if False NaNs are ignored.

```
>>> pd.get_dummies(pd.Series(list('abcaa')), drop_first=True)
   b   c
0  0   0
1  1   0
2  0   1
3  0   0
4  0   0
```

`ke, default None`

es in the DataFrame to be encoded. If `columns` is None then all the columns with `object` or `category` converted.

`efault False`


dummy-encoded columns should be backed by a `SparseArray` (True) or a regular NumPy array (False).



3) Neural Networks



3) Neural Networks (universal approximator)

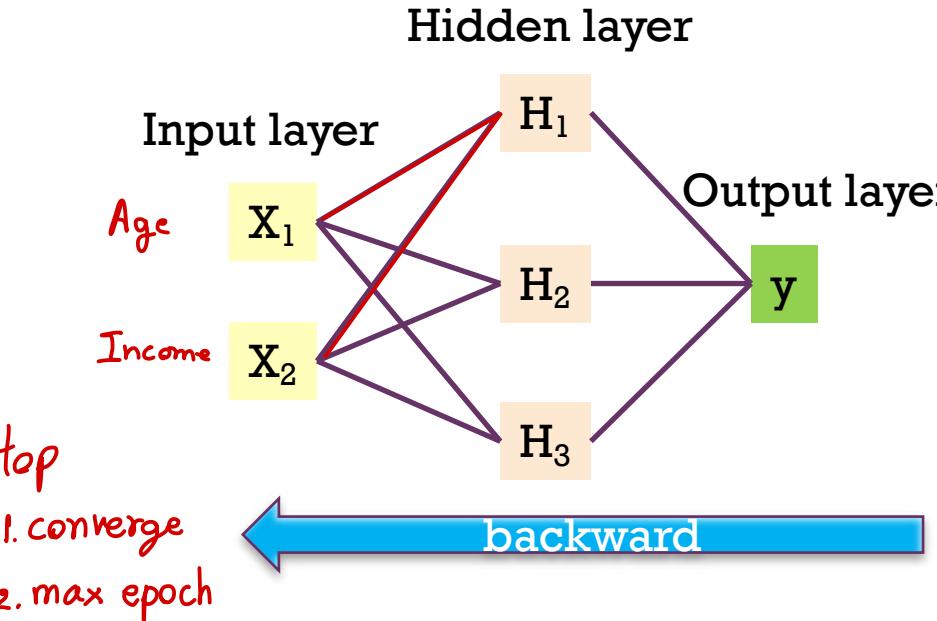 y



$$\log \left(\frac{\hat{p}}{1-\hat{p}} \right) = \hat{w}_0 + \hat{w}_1 H_1 + \hat{w}_2 H_2 + \hat{w}_3 H_3$$

↑
Category

$$H_1 = \tanh(\hat{w}_{10} + \hat{w}_{11}x_1 + \hat{w}_{12}x_2)$$

$$H_2 = \tanh(\hat{w}_{20} + \hat{w}_{21}x_1 + \hat{w}_{22}x_2)$$

$$H_3 = \tanh(\hat{w}_{30} + \hat{w}_{31}x_1 + \hat{w}_{32}x_2)$$

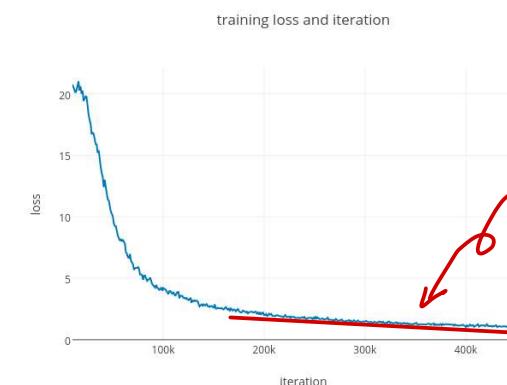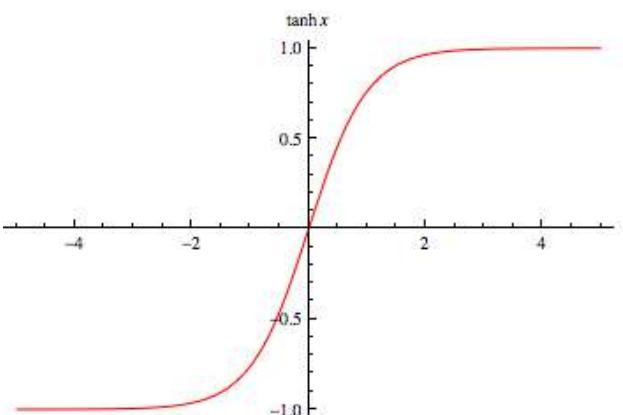


How to update weight

<https://mattmazur.com/2015/03/17/a-step-by-step-backpropagation-example/>



forward

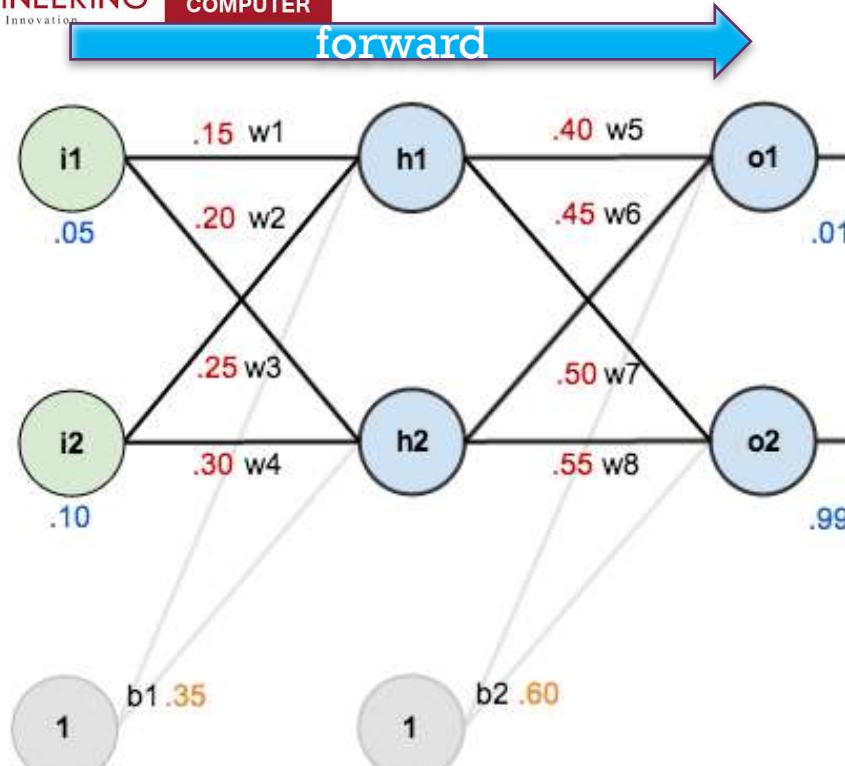

$$E_{total} = \sum \frac{1}{2}(target - output)^2$$

$$E_{o1} = \frac{1}{2}(target_{o1} - out_{o1})^2 = \frac{1}{2}(0.01 - 0.75136507)^2 = 0.274811083$$


Repeating this process for o_2 (remembering that the target is 0.99) we get:

$$E_{o2} = 0.023560026$$

The total error for the neural network is the sum of these errors:

$$E_{total} = E_{o1} + E_{o2} = 0.274811083 + 0.023560026 = 0.298371109$$

$$\begin{aligned}\frac{\partial E_{total}}{\partial w_1} &= \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1} \\ \downarrow \\ \frac{\partial E_{total}}{\partial out_{h1}} &= \frac{\partial E_{o1}}{\partial out_{h1}} + \frac{\partial E_{o2}}{\partial out_{h1}}\end{aligned}$$

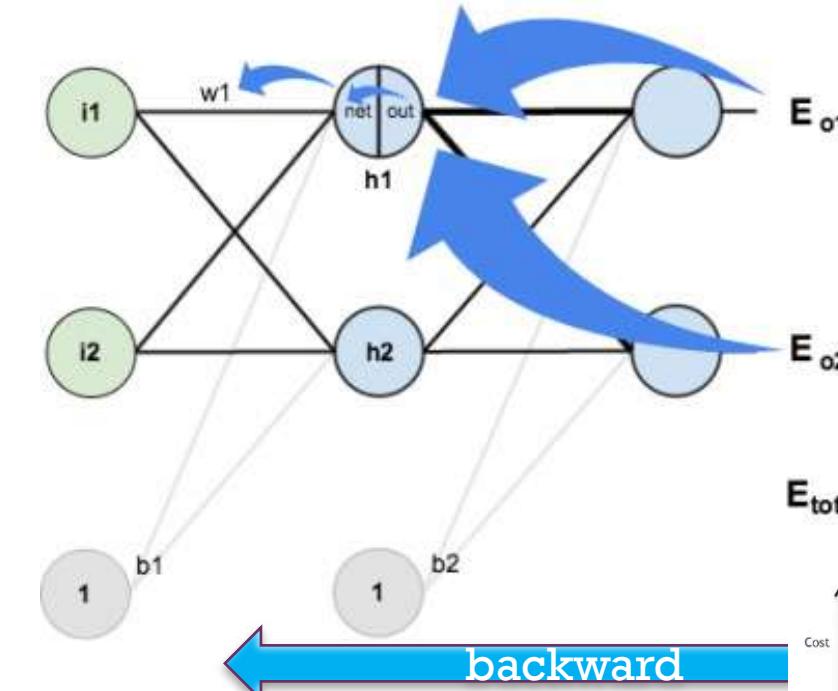

Putting it all together:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

$$\frac{\partial E_{total}}{\partial w_5} = 0.74136507 * 0.186815602 * 0.593269992 = 0.082167041$$

Learning rate η

$$w_5^+ = w_5 - \eta * \frac{\partial E_{total}}{\partial w_5} = 0.4 - 0.5 * 0.082167041 = 0.35891648$$






Loss function

- Mean Squared Error (MSE) : Regression Problem


Classification

- Binary Crossentropy (BCE)
- Categorical Crossentropy (CC)
- Sparse Categorical Crossentropy (SCC)

- <https://shiva-verma.medium.com/understanding-different-loss-functions-for-neural-networks-dd1ed0274718>
- <https://programmatically.com/an-introduction-to-neural-network-loss-functions/>

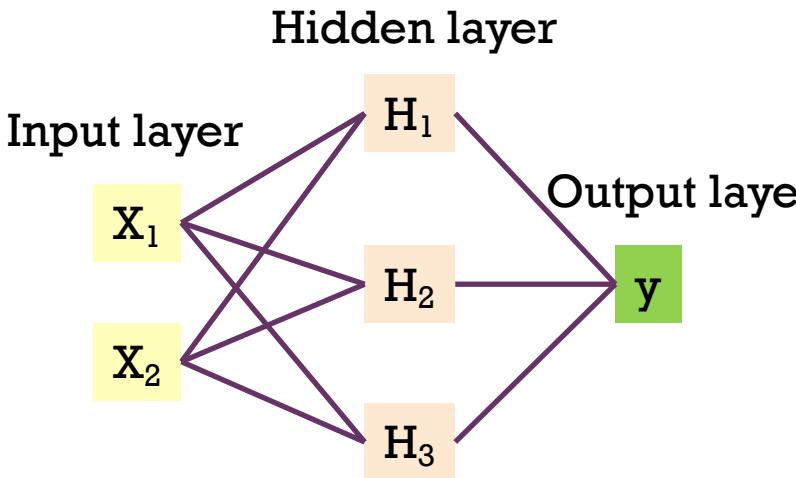

training loss and iteration

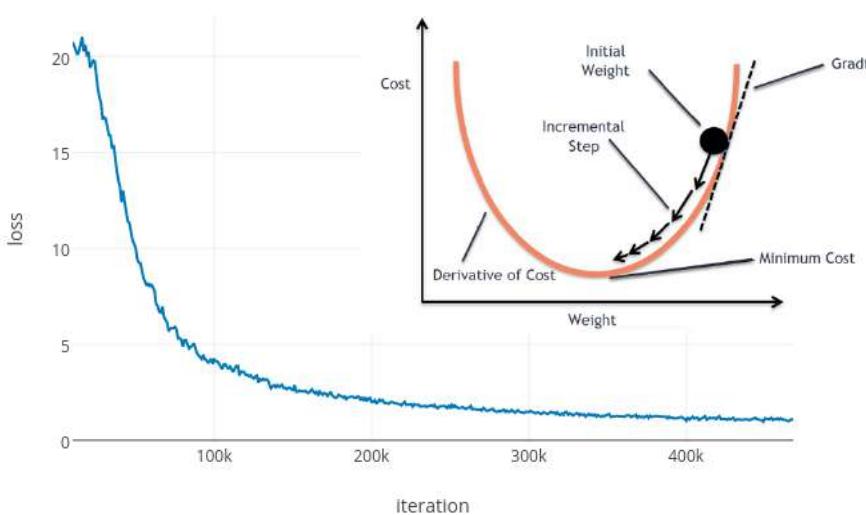

Stop when?

- Converge (no change in loss)
- Max epochs

Important Params:

- #hidden units, #hidden layers
- Learning rate, Momentum, decay
- Seed number, etc.



cce vs. scce

Simply:

- `categorical_crossentropy` (`cce`) produces a one-hot array containing the probability for each category,
- `sparse_categorical_crossentropy` (`scce`) produces a category index of the most matching category.

Categorical Cross Entropy [Doc]:

Use this crossentropy loss function when there are two or more label classes. We expect labels to be provided in a one_hot representation.

```
>>> y_true = [[0, 1, 0], [0, 0, 1]]  
>>> y_pred = [[0.05, 0.95, 0], [0.1, 0.8, 0.1]]  
>>> # Using 'auto'/'sum_over_batch_size' reduction type.  
>>> cce = tf.keras.losses.CategoricalCrossentropy()  
>>> cce(y_true, y_pred).numpy()  
1.177
```

Many categorical models produce `scce` output because you save space, but lose A LOT of information (for example, in the 2nd example, index 2 was also very close.) I generally prefer `cce` output for model reliability.

Sparse Categorical Cross Entropy [Doc]:

Use this crossentropy loss function when there are two or more label classes. We expect labels to be provided as integers.

```
>>> y_true = [1, 2]  
>>> y_pred = [[0.05, 0.95, 0], [0.1, 0.8, 0.1]]  
>>> # Using 'auto'/'sum_over_batch_size' reduction type.  
>>> scce = tf.keras.losses.SparseCategoricalCrossentropy()  
>>> scce(y_true, y_pred).numpy()  
1.177
```

One good example of the sparse-categorical-cross-entropy is the fasion-mnist dataset.

```
import tensorflow as tf  
from tensorflow import keras  
  
fashion_mnist = keras.datasets.fashion_mnist  
(X_train_full, y_train_full), (X_test, y_test) = fashion_mnist.load_data()  
  
print(y_train_full.shape) # (60000,)  
print(y_train_full.dtype) # uint8  
  
y_train_full[:10]  
# array([9, 0, 0, 3, 0, 2, 7, 2, 5, 5], dtype=uint8)
```



sklearn.neural_network.MLPClassifier

```
class sklearn.neural_network.MLPClassifier(hidden_layer_sizes=(100,), activation='relu', solver='adam', alpha=0.0001, batch_size='auto', learning_rate='constant', learning_rate_init=0.001, power_t=0.5, max_iter=200, shuffle=True, random_state=None, tol=0.0001, verbose=False, warm_start=False, momentum=0.9, nesterovs_momentum=True, early_stopping=False, validation_fraction=0.1, beta_1=0.9, beta_2=0.999, epsilon=1e-08, n_iter_no_change=10, max_fun=15000) ¶
```

[\[source\]](#)

Multi-layer Perceptron classifier.

This model optimizes the log-loss function using LBFGS or stochastic gradient descent.

New in version 0.18.

Parameters:

hidden_layer_sizes : tuple, length = n_layers - 2, default=(100,)

The ith element represents the number of neurons in the ith hidden layer.

activation : {'identity', 'logistic', 'tanh', 'relu'}, default='relu'

Activation function for the hidden layer.

- 'identity', no-op activation, useful to implement linear bottleneck, returns $f(x) = x$
- 'logistic', the logistic sigmoid function, returns $f(x) = 1 / (1 + \exp(-x))$.
- 'tanh', the hyperbolic tan function, returns $f(x) = \tanh(x)$.
- 'relu', the rectified linear unit function, returns $f(x) = \max(0, x)$

solver : {'lbfgs', 'sgd', 'adam'}, default='adam'

The solver for weight optimization.



sklearn.neural_network.MLPRegressor

```
class sklearn.neural_network.MLPRegressor(hidden_layer_sizes=(100,), activation='relu', solver='adam', alpha=0.0001,  
batch_size='auto', learning_rate='constant', learning_rate_init=0.001, power_t=0.5, max_iter=200, shuffle=True, random_state=None,  
tol=0.0001, verbose=False, warm_start=False, momentum=0.9, nesterovs_momentum=True, early_stopping=False,  
validation_fraction=0.1, beta_1=0.9, beta_2=0.999, epsilon=1e-08, n_iter_no_change=10, max_fun=15000) ¶
```

[\[source\]](#)

Multi-layer Perceptron regressor.

This model optimizes the squared-loss using LBFGS or stochastic gradient descent.

New in version 0.18.

Parameters: `hidden_layer_sizes : tuple, length = n_layers - 2, default=(100,`

The i th element represents the number of neurons in the i th hidden layer.

`activation : {'identity', 'logistic', 'tanh', 'relu'}, default='relu'`


Activation function for the hidden layer.

- 'identity', no-op activation, useful to implement linear bottleneck, returns $f(x) = x$
- 'logistic', the logistic sigmoid function, returns $f(x) = 1 / (1 + \exp(-x))$.
- 'tanh', the hyperbolic tan function, returns $f(x) = \tanh(x)$.
- 'relu', the rectified linear unit function, returns $f(x) = \max(0, x)$

`solver : {'lbfgs', 'sgd', 'adam'}, default='adam'`

The solver for weight optimization.

Exmaple

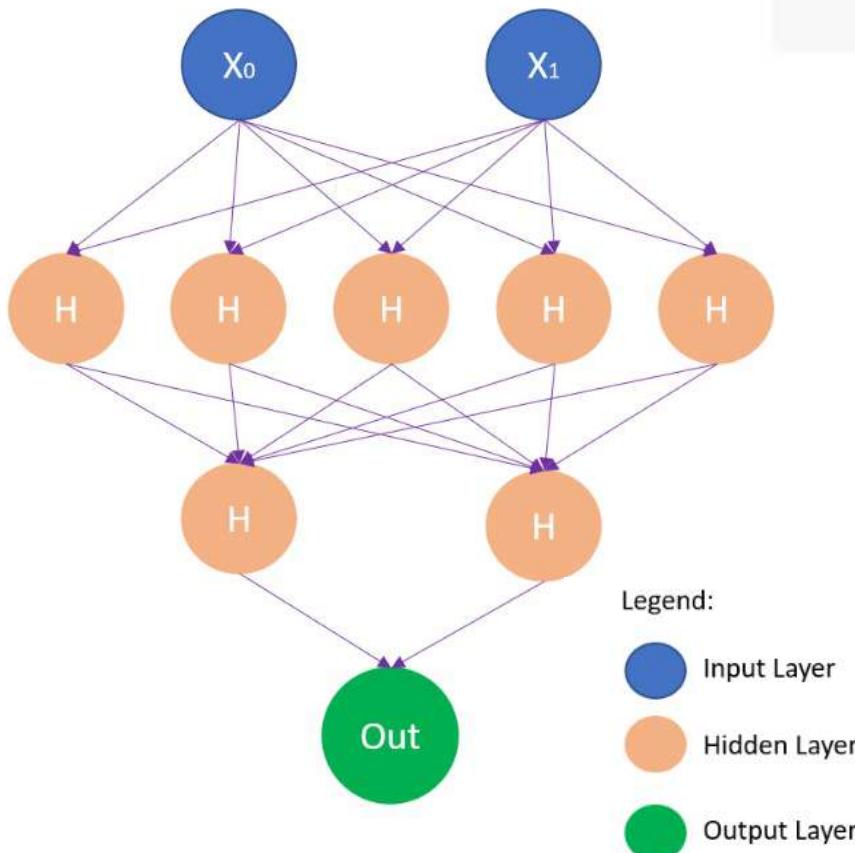

```
mlp_clf = MLPClassifier(hidden_layer_sizes=(5,2),  
                         max_iter = 300, activation = 'relu',  
                         solver = 'adam')
```

```
param_grid = {  
    'hidden_layer_sizes': [(150,100,50), (120,80,40), (100,50)],  
    'max_iter': [50, 100, 150],  
    'activation': ['tanh', 'relu'],  
    'solver': ['sgd', 'adam'],  
    'alpha': [0.0001, 0.05],  
    'learning_rate': ['constant','adaptive'],  
}
```

```
grid = GridSearchCV(mlp_clf, param_grid, n_jobs= -1, cv=5)  
grid.fit(trainX_scaled, trainY)
```

```
print(grid.best_params_)
```

+

4) kNN




4) k-Nearest Neighbors (kNN)

Important Params:
• k
• Distance function

107

- Memory based learning
- Suitable for small data sets
- Merge
 - Voting
 - Average
 - Maximum prob
- Cautions:
 - Support only numerical variables
 - Need to adjust variable range

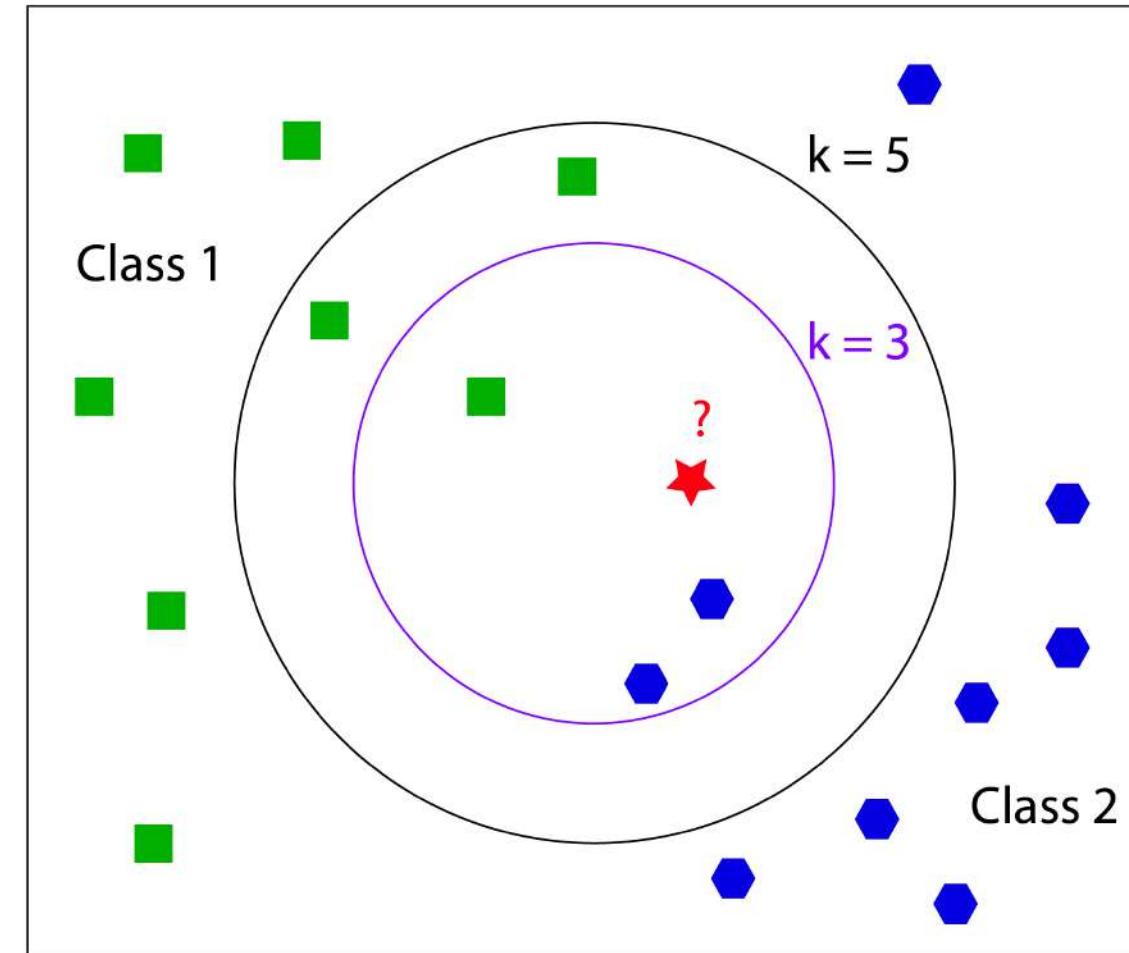



Distance Function

■ Euclidean Distance


$$\sqrt{\sum_{i=1}^k (x_i - y_i)^2}$$

■ Manhattan Distance

$$\sum_{i=1}^k |x_i - y_i|$$

■ Minkowski Distance

$$\left(\sum_{i=1}^k (|x_i - y_i|)^q \right)^{1/q}$$

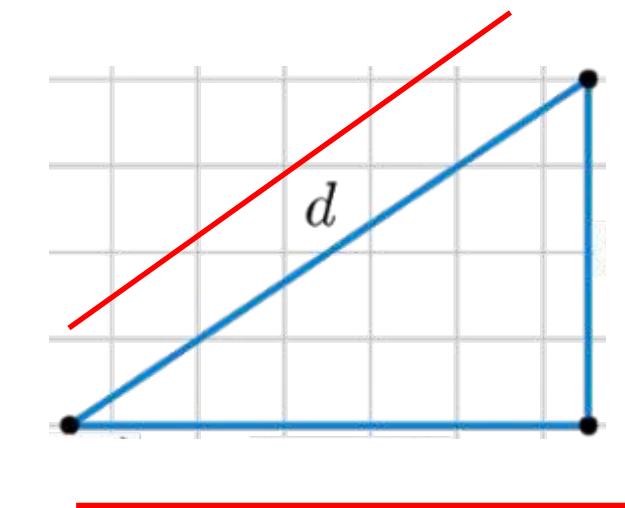

$q = 1$ is Manhattan Distance
 $q = 2$ is Euclidean Distance



Distance Function (cont.)

- Hamming distance: same (0) vs diff (1)
- It still supports only numeric variable.

$$D_H = \sum_{i=1}^k |x_i - y_i|$$

$$x = y \Rightarrow D = 0$$

$$x \neq y \Rightarrow D = 1$$

X	Y	Distance
Male	Male	0
Male	Female	1



Nearest Neighbors

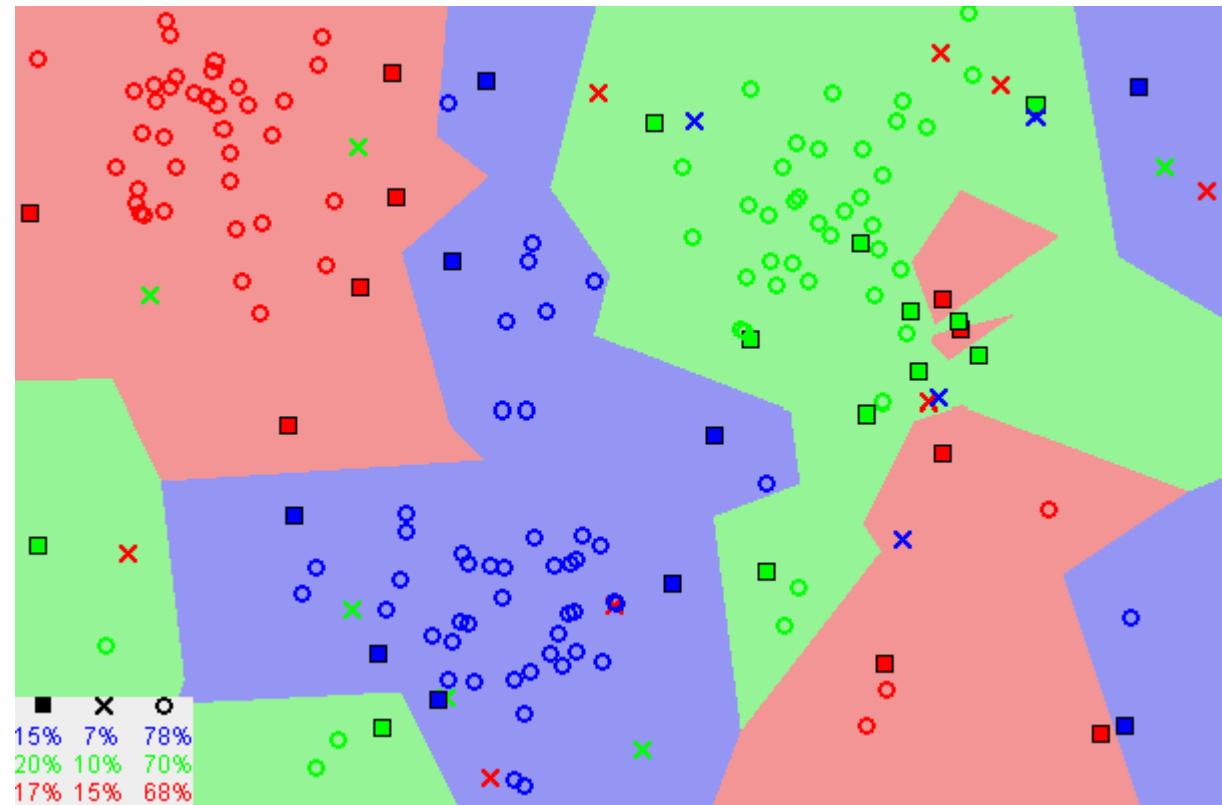


Image showing how similar data points typically exist close to each other

sklearn.neighbors.KNeighborsClassifier

```
class sklearn.neighbors.KNeighborsClassifier(n_neighbors=5, weights='uniform', algorithm='auto', leaf_size=30, p=2,  
metric='minkowski', metric_params=None, n_jobs=None, **kwargs)
```

[\[source\]](#)

Classifier implementing the k-nearest neighbors vote.

Read more in the [User Guide](#).

Parameters: **n_neighbors : int, optional (default = 5)**

Number of neighbors to use by default for `kneighbors` queries.

weights : str or callable, optional (default = 'uniform')

weight function used in prediction. Possible values:

- 'uniform' : uniform weights. All points in each neighborhood are weighted equally.
- 'distance' : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
- [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.

algorithm : {'auto', 'ball_tree', 'kd_tree', 'brute'}, optional

Algorithm used to compute the nearest neighbors:

- 'ball_tree' will use `BallTree`

- 'kd_tree' will use `KDTree`

- 'brute' will use a brute-force search.

'auto' will attempt to decide the most appropriate algorithm based on the values passed to the `fit` method.

sklearn.neighbors.KNeighborsRegressor

```
class sklearn.neighbors.KNeighborsRegressor(n_neighbors=5, weights='uniform', algorithm='auto', leaf_size=30, p=2,  
metric='minkowski', metric_params=None, n_jobs=None, **kwargs)
```

[source]

Regression based on k-nearest neighbors.

The target is predicted by local interpolation of the targets associated of the nearest neighbors in the training set.

[Read more in the User Guide.](#)

New in version 0.9.

Parameters:

n_neighbors : int, optional (default = 5)

Number of neighbors to use by default for `kneighbors` queries.

weights : str or callable

weight function used in prediction. Possible values:


- 'uniform' : uniform weights. All points in each neighborhood are weighted equally.
- 'distance' : weight points by the inverse of their distance. in this case, closer neighbors of a query point will have a greater influence than neighbors which are further away.
- [callable] : a user-defined function which accepts an array of distances, and returns an array of the same shape containing the weights.

Uniform weights are used by default.



Choosing the right value of K

Too Underfitted

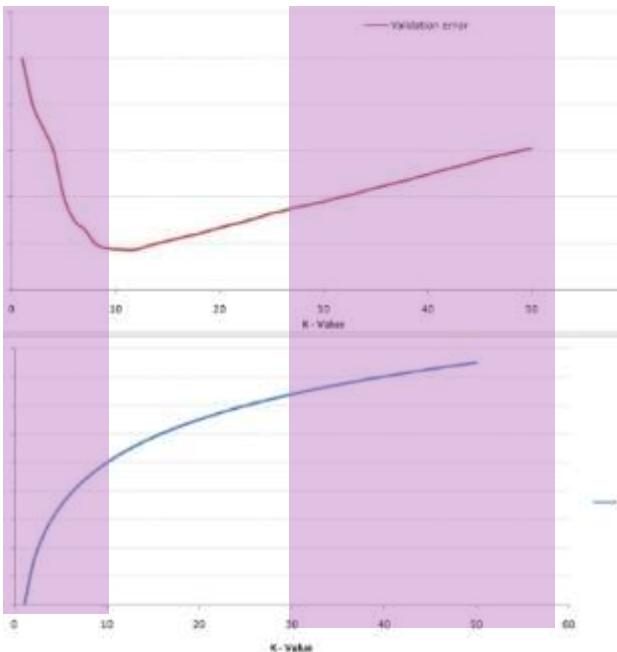

Too Overfitted

Search the best parameters with ...

sklearn.model_selection.GridSearchCV

```
class sklearn.model_selection.GridSearchCV(estimator, param_grid, *, scoring=None, n_jobs=None, iid='deprecated', refit=True, cv=None, verbose=0, pre_dispatch='2*n_jobs', error_score=np.nan, return_train_score=False) [source]
```

sklearn.model_selection.RandomizedSearchCV

```
class sklearn.model_selection.RandomizedSearchCV(estimator, param_distributions, *, n_iter=10, scoring=None, n_jobs=None, iid='deprecated', refit=True, cv=None, verbose=0, pre_dispatch='2*n_jobs', random_state=None, error_score=np.nan, return_train_score=False) [source]
```

```
param_grid=dict(  
    n_neighbors=[1,2,3,4,5,6,7,8,9,10],  
    weights=['uniform', 'distance'],  
) ,
```

Search with **k: 1-10**
on **uniform/distance** weights







5) Support Vector Machine

Adapt from ML Class by David Sontag, New York University
<https://people.csail.mit.edu/dsontag/courses/ml16/slides/>



Linear Separators



- If training data is linearly separable, perceptron is guaranteed to find some linear separator
- Which of these is optimal?

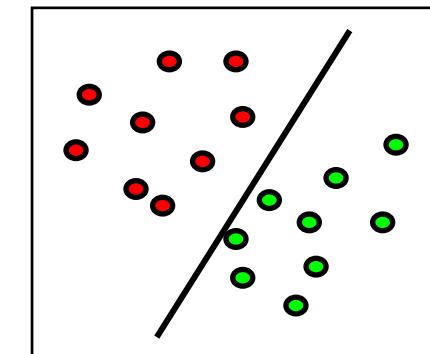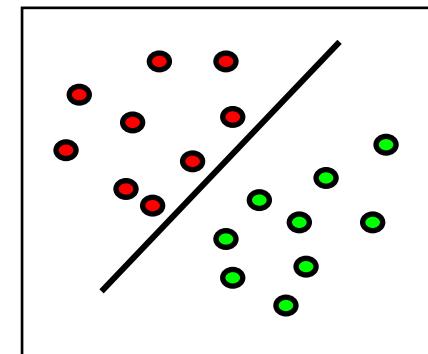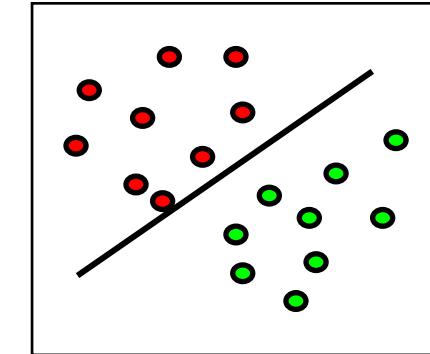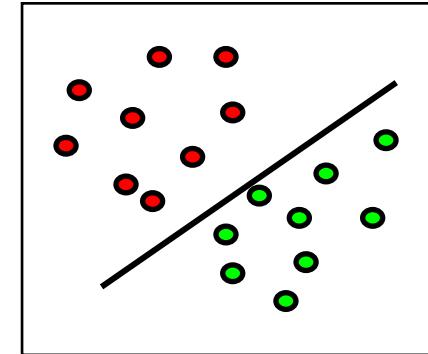



Support Vector Machine (SVM)

- SVMs (Vapnik, 1990's) choose the linear separator with the largest margin

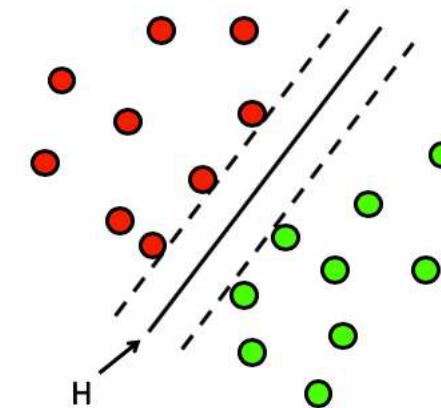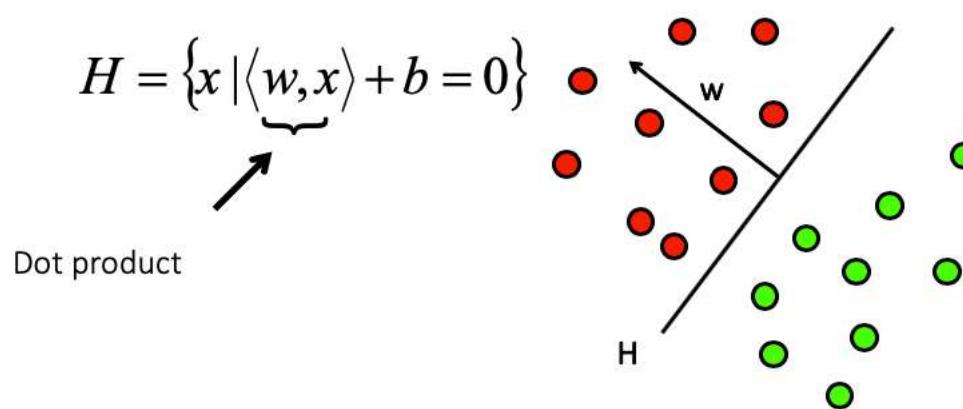

- Good according to intuition, theory, practice
- SVM became famous when, using images as input, it gave accuracy comparable to neural-network with hand-designed features in a handwriting recognition task




Support vector machines: 3 key ideas

1. Use **optimization** to find solution (i.e., a hyperplane) with few errors
2. Seek **large margin** separator to improve generalization
3. Use **kernel trick** to make large feature spaces computationally efficient



Key 1: Optimization

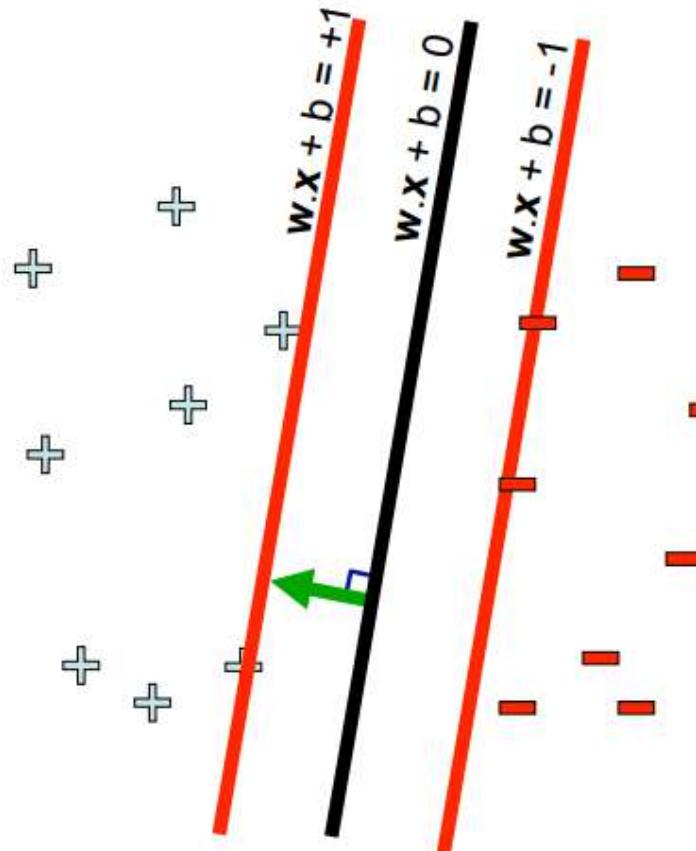

For every data point (x_t, y_t) , enforce the constraint

$$\text{for } y_t = +1, \quad w \cdot x_t + b \geq 1$$

$$\text{and for } y_t = -1, \quad w \cdot x_t + b \leq -1$$

Equivalently, we want to satisfy all of the linear constraints


$$y_t (w \cdot x_t + b) \geq 1 \quad \forall t$$

This *linear program* can be efficiently solved using algorithms such as simplex, interior point, or ellipsoid



Key 2: Seek Large Margin

- Allow for slack to improve generalization.

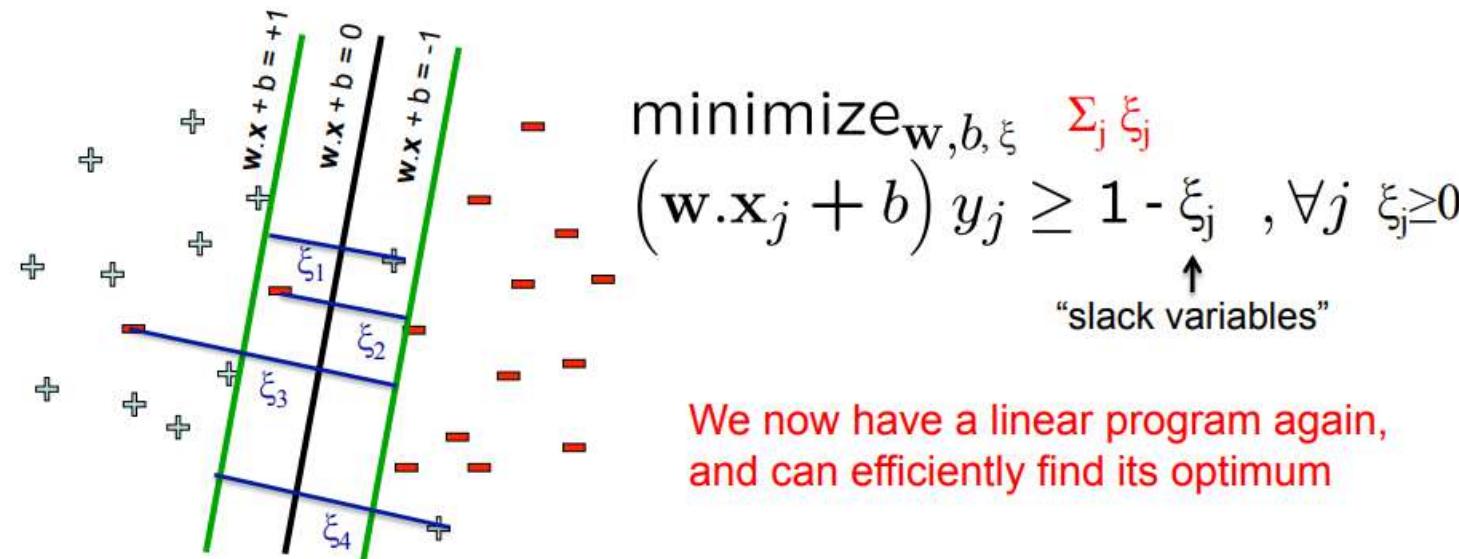

For each data point:


- If functional margin ≥ 1 , don't care
- If functional margin < 1 , pay linear penalty

Minimize $\| w \|^2 + C \cdot \sum_i \xi_i$

+ What Are the Support Vectors?

- “Carrying vectors”
- The points, located closest to the hyperplane
- Determining the location of the hyperplane
- All other data points have $\alpha_i = 0$.


$$w = \sum_{i=1}^{\#sv} \alpha_i y_i x_i^{sv}$$

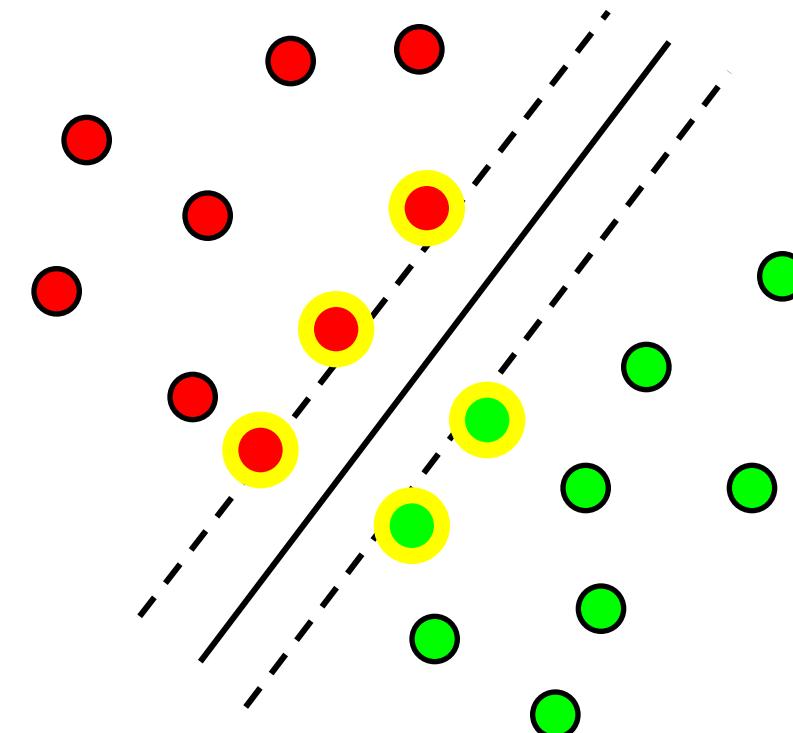






Key 3: Kernel

- Kernel allows us to operate in the original feature space without computing the coordinates of the data in a higher dimensional space.

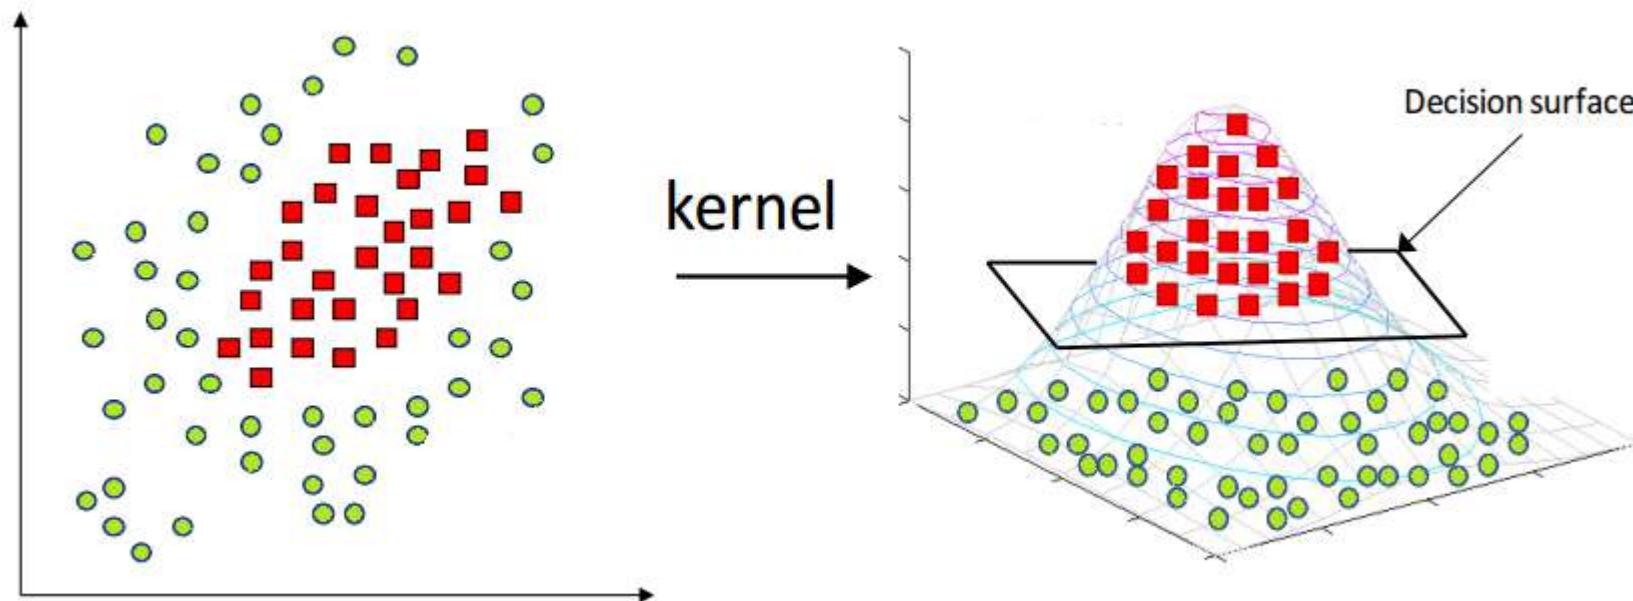



Different Kernel on iris dataset

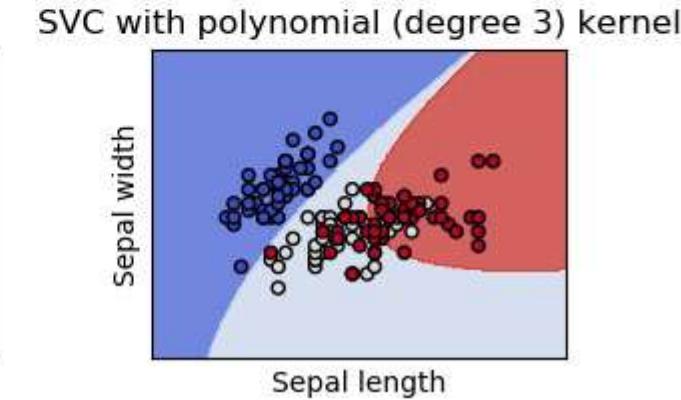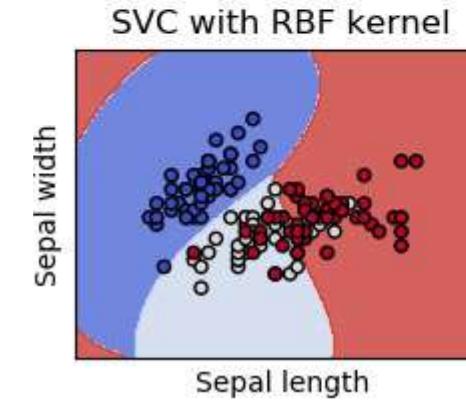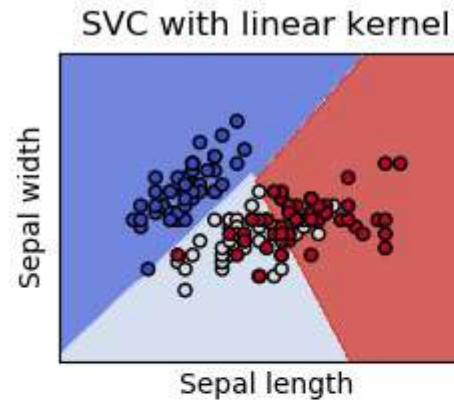

RBF: Radial Basis Function

$$K(x_i, x_j) = e^{-\gamma(x_i - x_j)^2}$$

Polynomial

$$K(x_i, x_j) = (x_i \cdot x_j + 1)^p$$



SVM in sklearn (Classifier)

sklearn.svm.SVC

```
class sklearn.svm.SVC(*, C=1.0, kernel='rbf', degree=3, gamma='scale', coef0=0.0, shrinking=True, probability=False, tol=0.001,  
cache_size=200, class_weight=None, verbose=False, max_iter=-1, decision_function_shape='ovr', break_ties=False,  
random_state=None)
```

[\[source\]](#)

C-Support Vector Classification.

■ Parameters

- **kernel** : Can be ‘linear’, ‘poly’, ‘rbf’, ‘sigmoid’ or callable function (custom).
- **C** : For regularization. A larger value creates a larger of margin hyperplane.
- **gamma** : Determine how model fit to training data.



Evaluation Measures



Evaluation (Train/Test Split)

Training Data




Age	Income	Purchase
25	25,000	Yes
35	50,000	Yes
32	35,000	No

Testing Data



Age	Income	Purchase
27	35,000	Yes
23	20,000	No
45	34,000	No

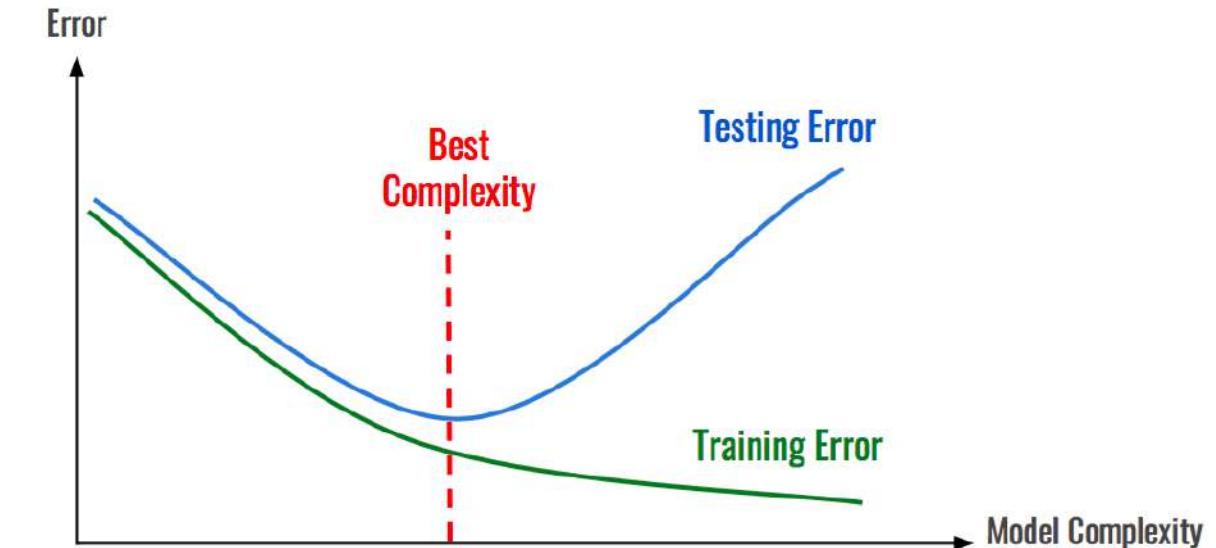



Prev Up Next

scikit-learn 0.22.2

Other versions

Please [cite us](#) if you use the software.

[sklearn.model_selection.train_test_split](#)

Examples using

[sklearn.model_selection.train_](#)

[Toggle Menu](#)

sklearn.model_selection.train_test_split

`sklearn.model_selection.train_test_split(*arrays, **options)`

[\[source\]](#)

Split arrays or matrices into random train and test subsets

Quick utility that wraps input validation and `next(ShuffleSplit().split(X, y))` and application to input data into a single call for splitting (and optionally subsampling) data in a oneliner.

Read more in the [User Guide](#).

Parameters:

***arrays : sequence of indexables with same length / shape[0]**

Allowed inputs are lists, numpy arrays, scipy-sparse matrices or pandas dataframes.

test_size : float, int or None, optional (default=None)

If float, should be between 0.0 and 1.0 and represent the proportion of the dataset to include in the test split. If int, represents the absolute number of test samples. If None, the value is set to the complement of the train size. If `train_size` is also None, it will be set to 0.25.

train_size : float, int, or None, (default=None)

If float, should be between 0.0 and 1.0 and represent the proportion of the dataset to include in the train split. If int, represents the absolute number of train samples. If None, the value is automatically set to the complement of the test size.

random_state : int, RandomState instance or None, optional (default=None)

If int, `random_state` is the seed used by the random number generator; If RandomState instance, `random_state` is the random number generator; If None, the random number generator is the RandomState instance used by `np.random`.




Model Evaluation

- Regression
 - Sum Squared Error (SSE)
 - Average Squared Error (ASE)
- Classification
 - **Accuracy**
 - Misclassification
 - Precision
 - Recall
 - F1
- Graph
 - ROC Curve
 - Area Under ROC (c-statistic)
 - Lift
 - Gain
 - Response



Precision, Recall, F1

n=165	Predicted: NO	Predicted: YES	
Actual: NO	TN = 50	FP = 10	60
Actual: YES	FN = 5	TP = 100	105
	55	110	

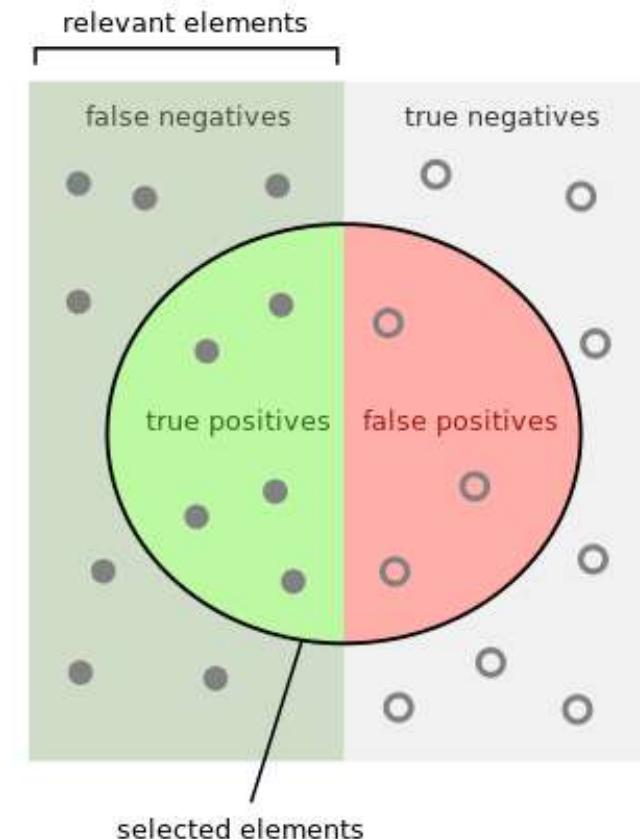

- ↳ **precision**: correctly predict = $TP / (TP + FP)$ → ពិនិត្យការ predict
- ↳ **recall**: coverage = $TP / (TP + FN)$ → ការរៀបចំទាំងអស់
- ↳ **F1** = $(2 * \text{pre} * \text{rec}) / (\text{pre} + \text{rec})$

Precision Recall

How many selected items are relevant?

$$\text{Precision} = \frac{\text{True Positives}}{\text{True Positives} + \text{False Positives}}$$

How many relevant items are selected?

$$\text{Recall} = \frac{\text{True Positives}}{\text{True Positives} + \text{False Negatives}}$$

3.5.1. The scoring parameter: defining model evaluation rules

Model selection and evaluation using tools, such as `grid_search.GridSearchCV` and `cross_validation.cross_val_score`, take a `scoring` parameter that controls what metric they apply to estimators evaluated.

3.5.1.1. Common cases: predefined values

For the most common usecases, you can simply provide a string as the `scoring` parameter. Possible values are:

Scoring	Function
Classification	
'accuracy'	<code>sklearn.metrics.accuracy_score</code>
'average_precision'	<code>sklearn.metrics.average_precision_score</code>
'f1'	<code>sklearn.metrics.f1_score</code>
'precision'	<code>sklearn.metrics.precision_score</code>
'recall'	<code>sklearn.metrics.recall_score</code>
'roc_auc'	<code>sklearn.metrics.roc_auc_score</code>
Clustering	
'adjusted_rand_score'	<code>sklearn.metrics.adjusted_rand_score</code>
Regression	
'mean_absolute_error'	<code>sklearn.metrics.mean_absolute_error</code>
'mean_squared_error'	<code>sklearn.metrics.mean_squared_error</code>
'r2'	<code>sklearn.metrics.r2_score</code>



Prev Up Next

scikit-learn 0.22.1

[Other versions](#)

Please [cite us](#) if you use the software.

[sklearn.metrics.confusion_matrix](#)

Examples using

[sklearn.metrics.confusion_matrix](#)

sklearn.metrics.confusion_matrix

`sklearn.metrics.confusion_matrix(y_true, y_pred, labels=None, sample_weight=None, normalize=None)`

[\[source\]](#)

Compute confusion matrix to evaluate the accuracy of a classification.

By definition a confusion matrix C is such that $C_{i,j}$ is equal to the number of observations known to be in group i and predicted to be in group j .

Thus in binary classification, the count of true negatives is $C_{0,0}$, false negatives is $C_{1,0}$, true positives is $C_{1,1}$ and false positives is $C_{0,1}$.

Read more in the [User Guide](#).

Parameters: `y_true : array-like of shape (n_samples,)`

Ground truth (correct) target values.

```
>>> from sklearn.metrics import confusion_matrix
>>> y_true = [2, 0, 2, 2, 0, 1]
>>> y_pred = [0, 0, 2, 2, 0, 2]
>>> confusion_matrix(y_true, y_pred)
array([[2, 0, 0],
       [0, 0, 1],
       [1, 0, 2]])
```

`shape (n_samples,`

`)`
s returned by a classifier.

`shape (n_classes), default=None`

ex the matrix. This may be used to reorder or select a subset of labels. If `None` is given, those once in `y_true` or `y_pred` are used in sorted order.

`array-like of shape (n_samples,), default=None`

`normalize : {'true', 'pred', 'all'}, default=None`

Normalizes confusion matrix over the true (rows) predicted (columns) conditions or all the population. If `None`, confusion matrix will not be normalized.

Prev Up Next

scikit-learn 0.22.1

[Other versions](#)Please [cite us](#) if you use the software.[sklearn.metrics.classification_report](#)

Examples using

[sklearn.metrics.classification_](#)

Build a text report showing the main

Read more in the [User Guide](#).**Parameters:** `y_true : 1d array`

Ground truth (correct)

`y_pred : 1d array`

Estimated target

`labels : array, shape`

Optional list of

`target_names : list`

Optional display

`sample_weight : array`

Sample weight

`digits : int`

Number of digits

the returned val

MW גורן
לונינגרט נו^ר
ריאנ כהן

Examples

```
>>> from sklearn.metrics import classification_report
>>> y_true = [0, 1, 2, 2, 2]
>>> y_pred = [0, 0, 2, 2, 1]
>>> target_names = ['class 0', 'class 1', 'class 2']
>>> print(classification_report(y_true, y_pred, target_names=target_names))
          precision    recall  f1-score   support
 <BLANKLINE>
      class 0       0.50      1.00      0.67      1
      class 1       0.00      0.00      0.00      1
      class 2       1.00      0.67      0.80      3
 <BLANKLINE>
  accuracy         -         -         -      0.60
  macro avg       0.50      0.56      0.49      5
 weighted avg     0.70      0.60      0.61      5
 <BLANKLINE>
>>> y_pred = [1, 1, 0]
>>> y_true = [1, 1, 1]
>>> print(classification_report(y_true, y_pred, labels=[1, 2, 3]))
          precision    recall  f1-score   support
 <BLANKLINE>
      1       1.00      0.67      0.80      3
      2       0.00      0.00      0.00      0
      3       0.00      0.00      0.00      0
 <BLANKLINE>
  micro avg       1.00      0.67      0.80      3
  macro avg       0.33      0.22      0.27      3
 weighted avg     1.00      0.67      0.80      3
 <BLANKLINE>
```

↳ **1st max class**

↳ **Overall**



Previous
sklearn.metrics....

Next
sklearn.metrics....

Up
Reference

This documentation is for
scikit-learn **version 0.15-**

[git](#) — Other versions

If you use the software,
please consider citing
scikit-learn.

[sklearn.metrics.mean_absolut
e_error](#)

«

sklearn.metrics.mean_absolute_error

`sklearn.metrics.mean_absolute_error(y_true, y_pred, sample_weight=None)` ¶

Mean absolute error regression loss

Parameters: `y_true` : array-like of shape = [n_samples] or [n_samples, n_outputs]

Ground truth (correct) target values.

`y_pred` : array-like of shape = [n_samples] or [n_samples, n_outputs]

Estimated target values.

`sample_weight` : array-like of

Sample weights.

Returns: `loss` : float

A positive floating point

Examples

```
>>> from sklearn.metrics import mean_absolute_error
>>> y_true = [3, -0.5, 2, 7]
>>> y_pred = [2.5, 0.0, 2, 8]
>>> mean_absolute_error(y_true, y_pred)
0.5
>>> y_true = [[0.5, 1], [-1, 1], [7, -6]]
>>> y_pred = [[0, 2], [-1, 2], [8, -5]]
>>> mean_absolute_error(y_true, y_pred)
0.75
```



Previous
sklearn.metrics....

Next
sklearn.metrics....

Up
Reference

This documentation is for
scikit-learn **version 0.15-**
[git](#) — Other versions

If you use the software,
please consider [citing](#)
scikit-learn.

[sklearn.metrics.mean_squared_error](#)

Examples using

[sklearn.metrics.mean_squared_error](#)

«

sklearn.metrics.mean_squared_error

```
sklearn.metrics.mean_squared_error(y_true, y_pred, sample_weight=None)
```

Mean squared error regression loss

Parameters: **y_true** : array-like of shape = [n_samples] or [n_samples, n_outputs]

Ground truth (correct) target values.

y_pred : array-like of shape = [n_samples] or [n_samples, n_outputs]

Estimated target values.

sample_weight : array-like of shape =

Sample weights.

Returns: **loss** : float

A positive floating point value (th

Examples

```
>>> from sklearn.metrics import mean_squared_error
>>> y_true = [3, -0.5, 2, 7]
>>> y_pred = [2.5, 0.0, 2, 8]
>>> mean_squared_error(y_true, y_pred)
0.375
>>> y_true = [[0.5, 1], [-1, 1], [7, -6]]
>>> y_pred = [[0, 2], [-1, 2], [8, -5]]
>>> mean_squared_error(y_true, y_pred)
0.708...
```

Previous: [sklearn.metrics....](#) Next: [sklearn.metrics....](#) Up: [Reference](#)

This documentation is for
scikit-learn **version 0.15-**
[git](#) — [Other versions](#)

If you use the software,
please consider citing
scikit-learn.

[sklearn.metrics.r2_score](#)
Examples using
[sklearn.metrics.r2_score](#)

sklearn.metrics.r2_score

`sklearn.metrics.r2_score(y_true, y_pred, sample_weight=None)`

R² (coefficient of determination) regression score function.

Best possible score is 1.0, lower values are worse.

Parameters: `y_true` : array-like of shape = [n_samples] or [n_samples, n_outputs]

Ground truth (correct) target values.

`y_pred` : array-like of shape = [n_samples] or [n_samples, n_outputs]

Estimated target values.

`sample_weight` : array-like of sh:

Sample weights.

Returns: `r2` : float

The R² score.

Examples


```
>>> from sklearn.metrics import r2_score
>>> y_true = [3, -0.5, 2, 7]
>>> y_pred = [2.5, 0.0, 2, 8]
>>> r2_score(y_true, y_pred)
0.948...
>>> y_true = [[0.5, 1], [-1, 1], [7, -6]]
>>> y_pred = [[0, 2], [-1, 2], [8, -5]]
>>> r2_score(y_true, y_pred)
0.938...
```



Part3: Unsupervised Learning (Descriptive Task)

+ Machine Learning (cont.)

136

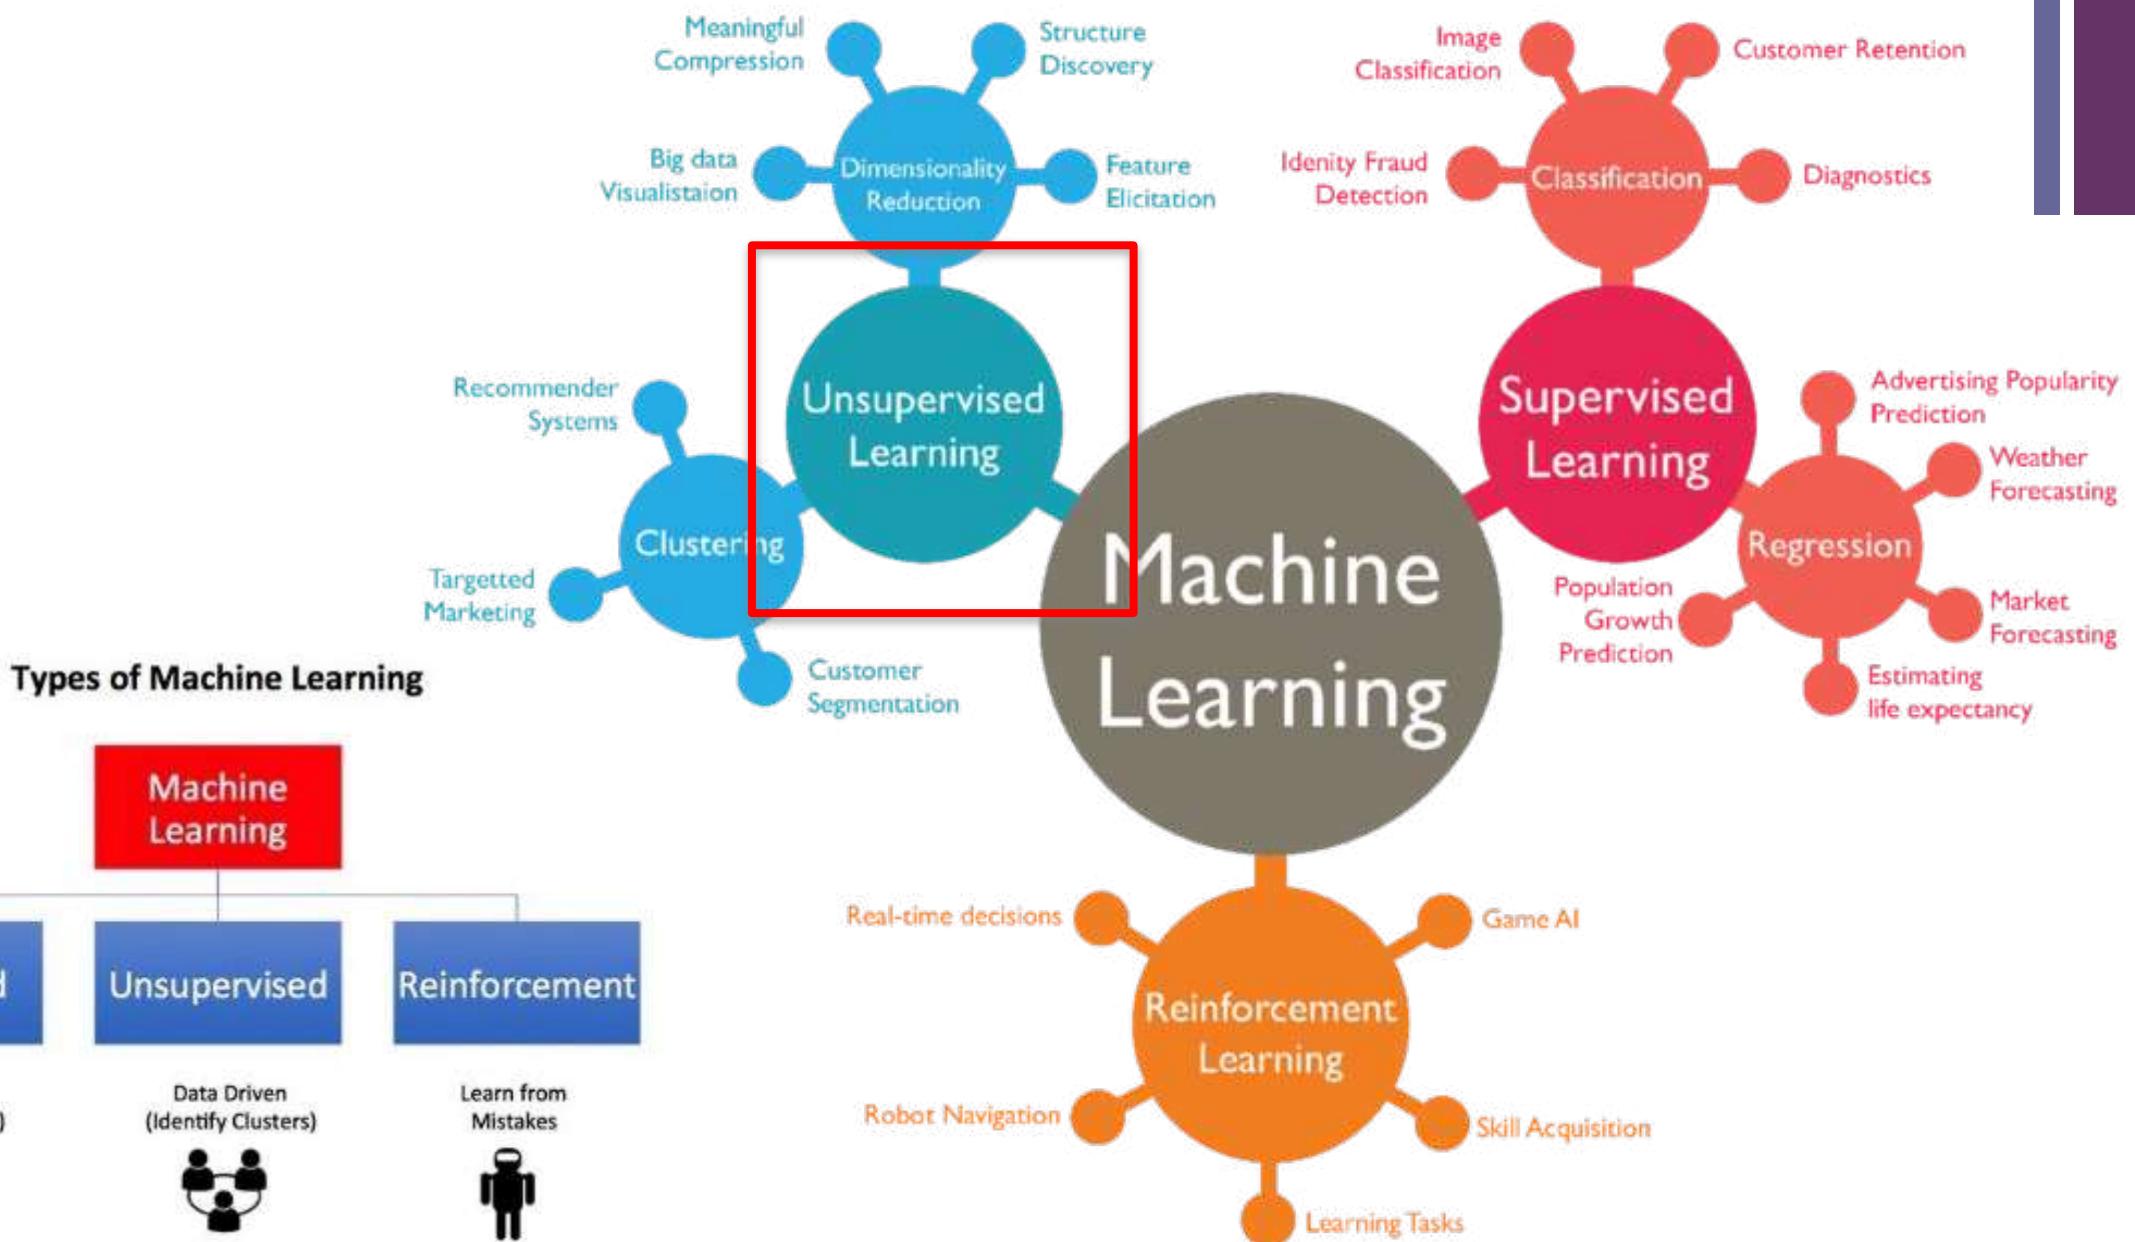



Task2: Unsupervised learning (descriptive task)

Training Data



Age	Income	Gender	Province	inputs	target
				Purchase	?
25	25,000	Female	Bangkok	Yes	
35	50,000	Female	Nontaburi	Yes	
32	35,000	Male	Bangkok	No	



INSIGHT

Testing Data



Age	Income	Gender	Province	Purchase
25	25,000	Female	Bangkok	?





Clustering





- In our class, there are many participants. Should we teach them using the same method?
- **May be not!** Since they may have different learning behaviors and backgrounds.
- Inputs
 - Education field
 - Level of English communication
 - Level of computer skills
 - Age range
 - Gender



K-means Clustering

- <http://web.stanford.edu/class/ee103/visualizations/kmeans/kmeans.html>

Visualizing K-Means Clustering

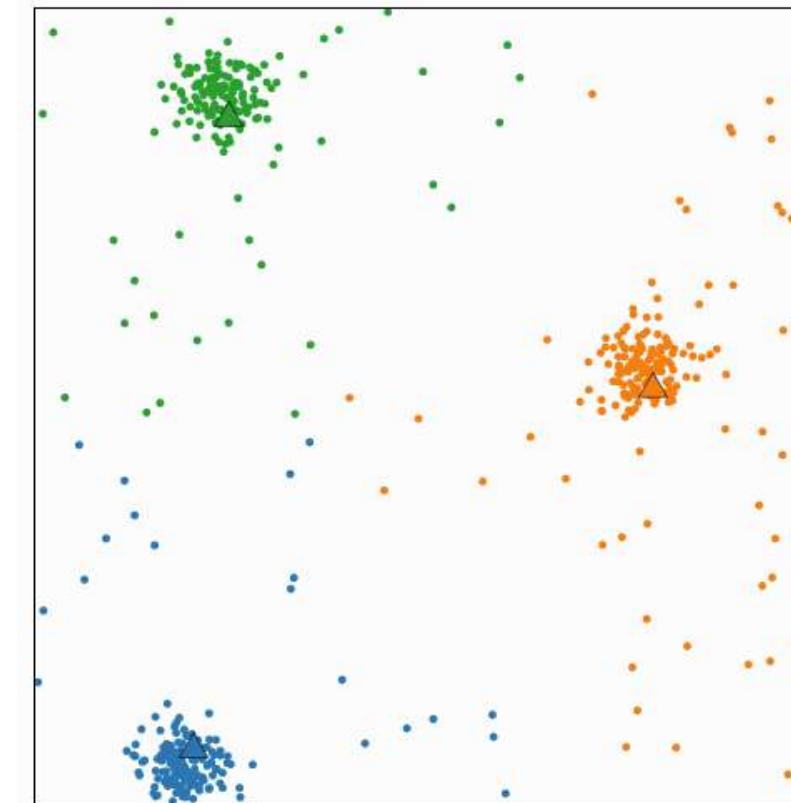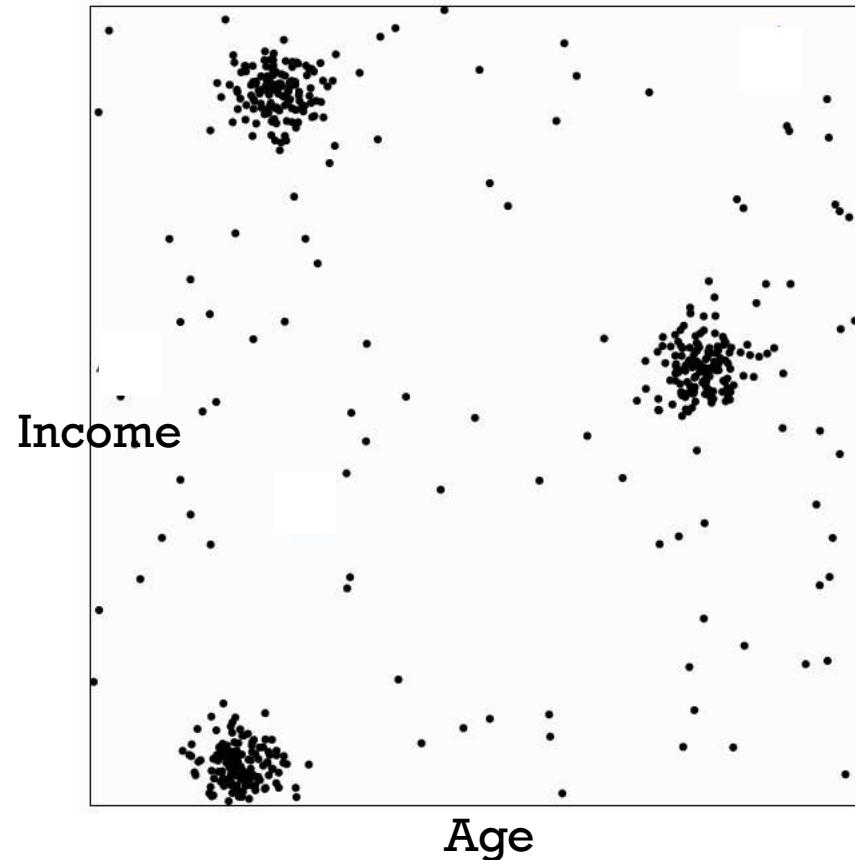

Mean square point-centroid distance: 6191.49

The k -means algorithm is an iterative method for clustering a set of N points (vectors) into k groups or clusters of points.

Algorithm

Repeat until convergence:

Find closest centroid

Find the closest centroid to each point, and group points that share the same closest centroid.

Update centroid

Update each centroid to be the mean of the points in its group.

[Update centroid](#)

Data

Clustered points Random

Number of clusters :


Number of centroids:

[New points](#)

[New centroids](#)




K-means: Step0

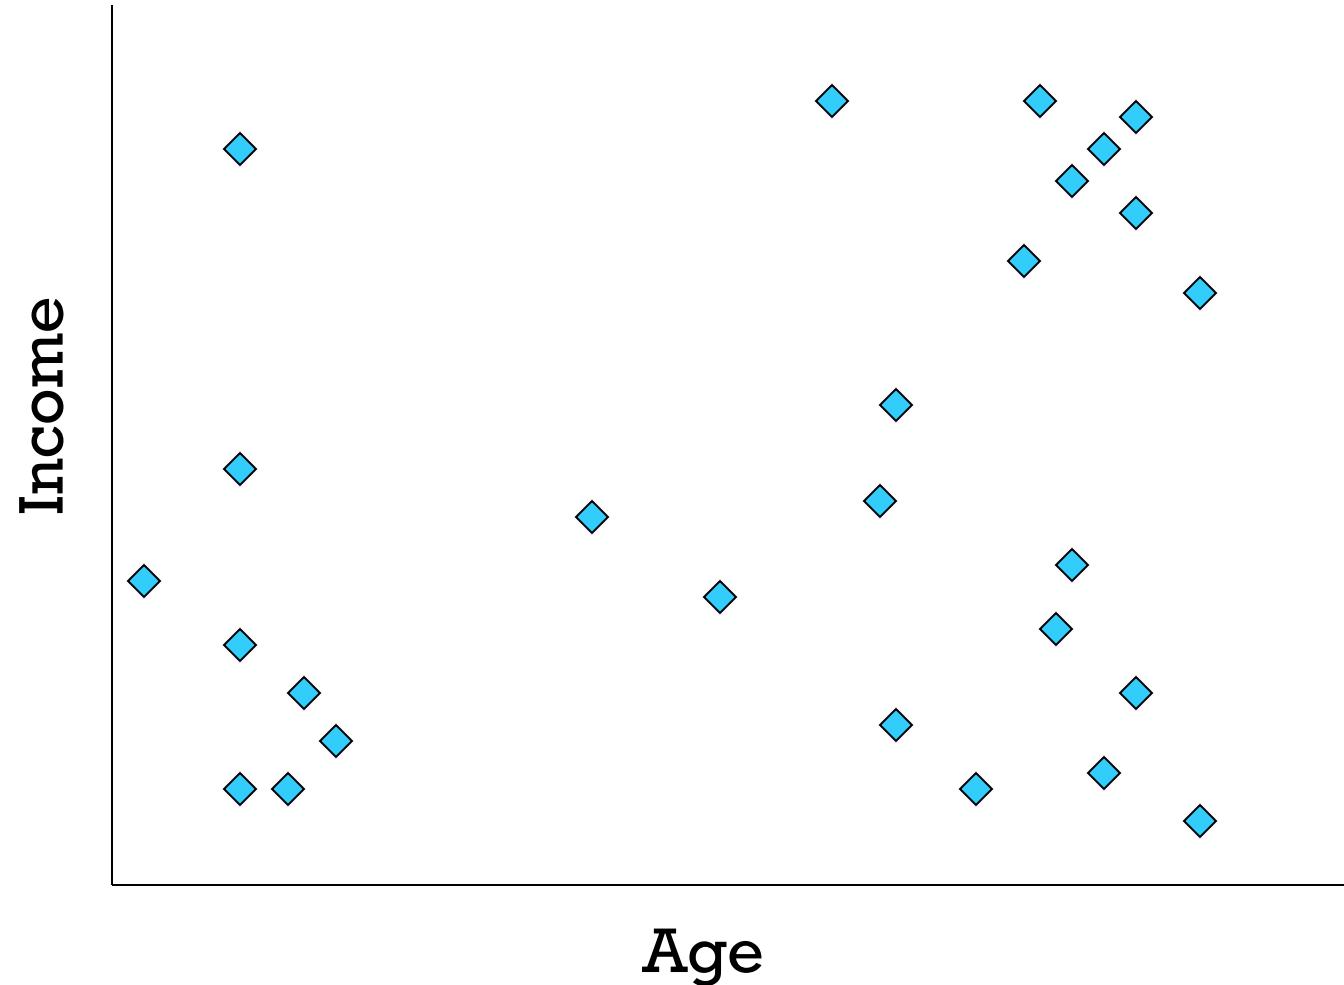




K-means: Step 1

Pick 3
initial
cluster
centers
(randomly)

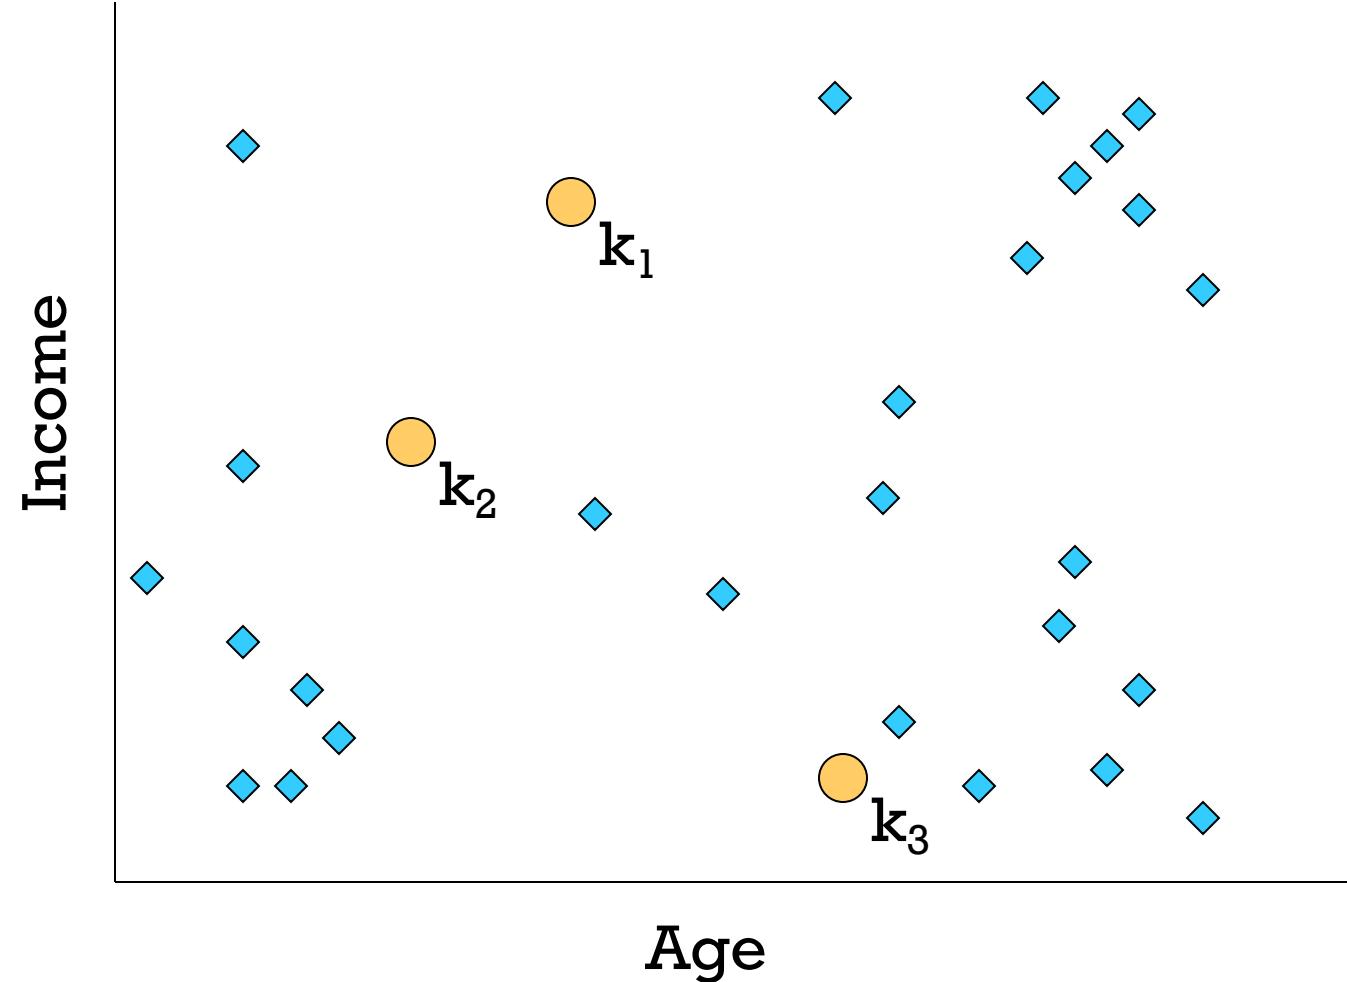




K-means: Step2

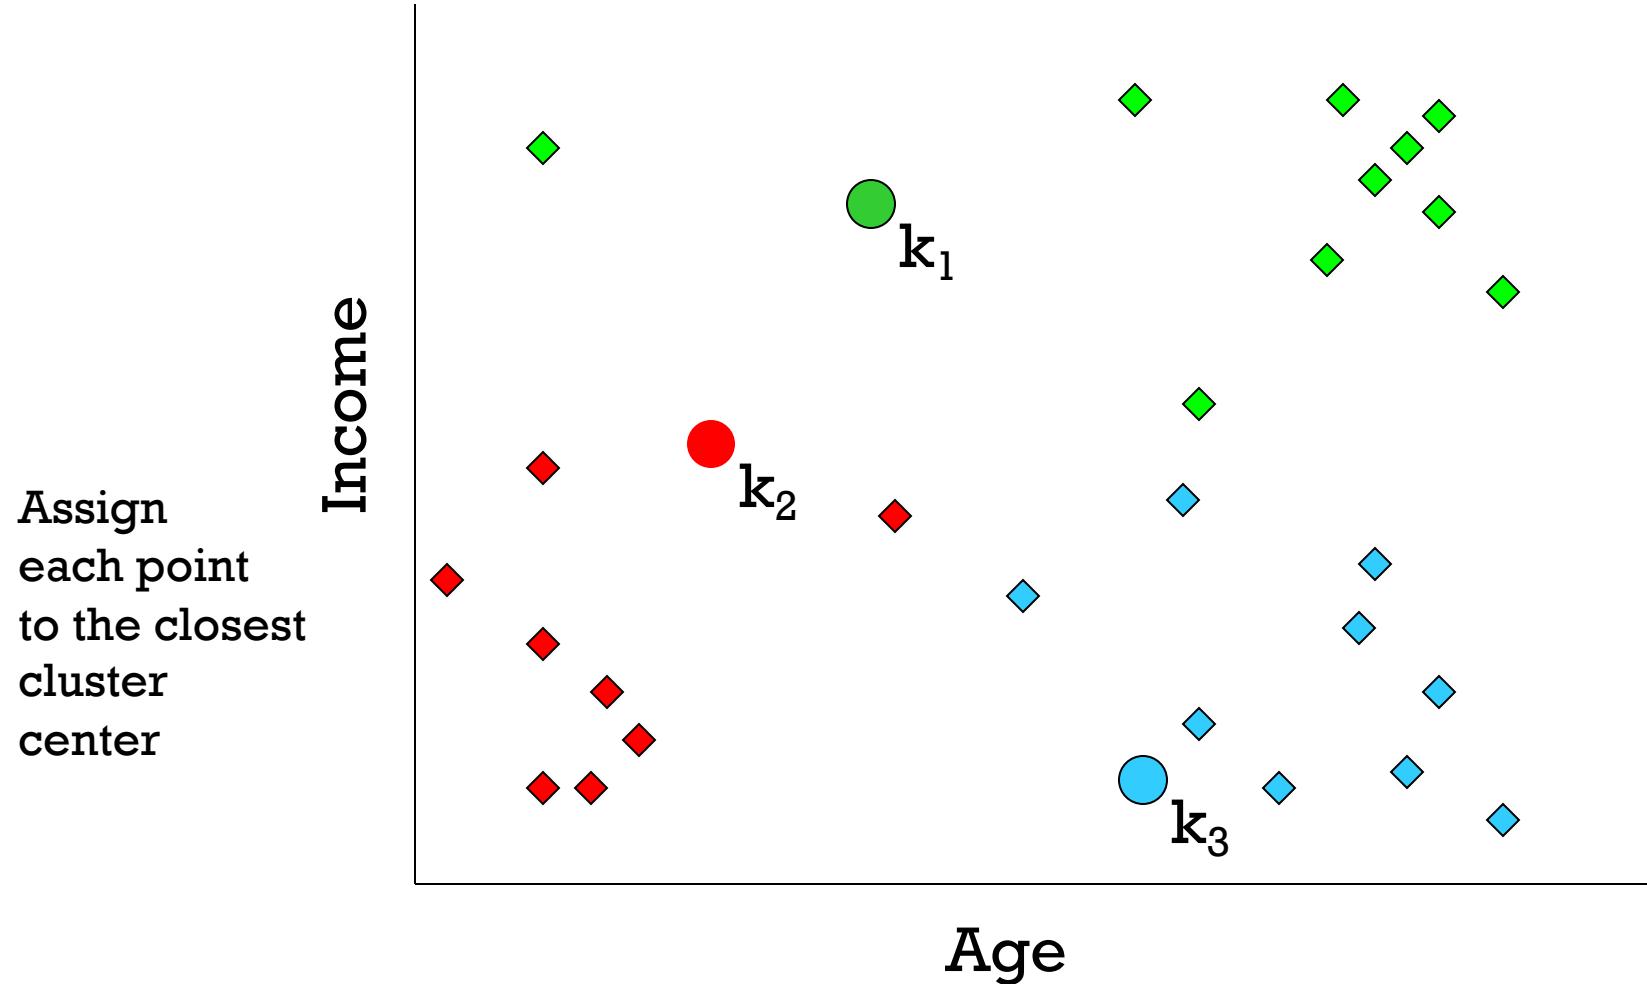



K-means: Step3

Move
each cluster
center
to the mean
of each cluster

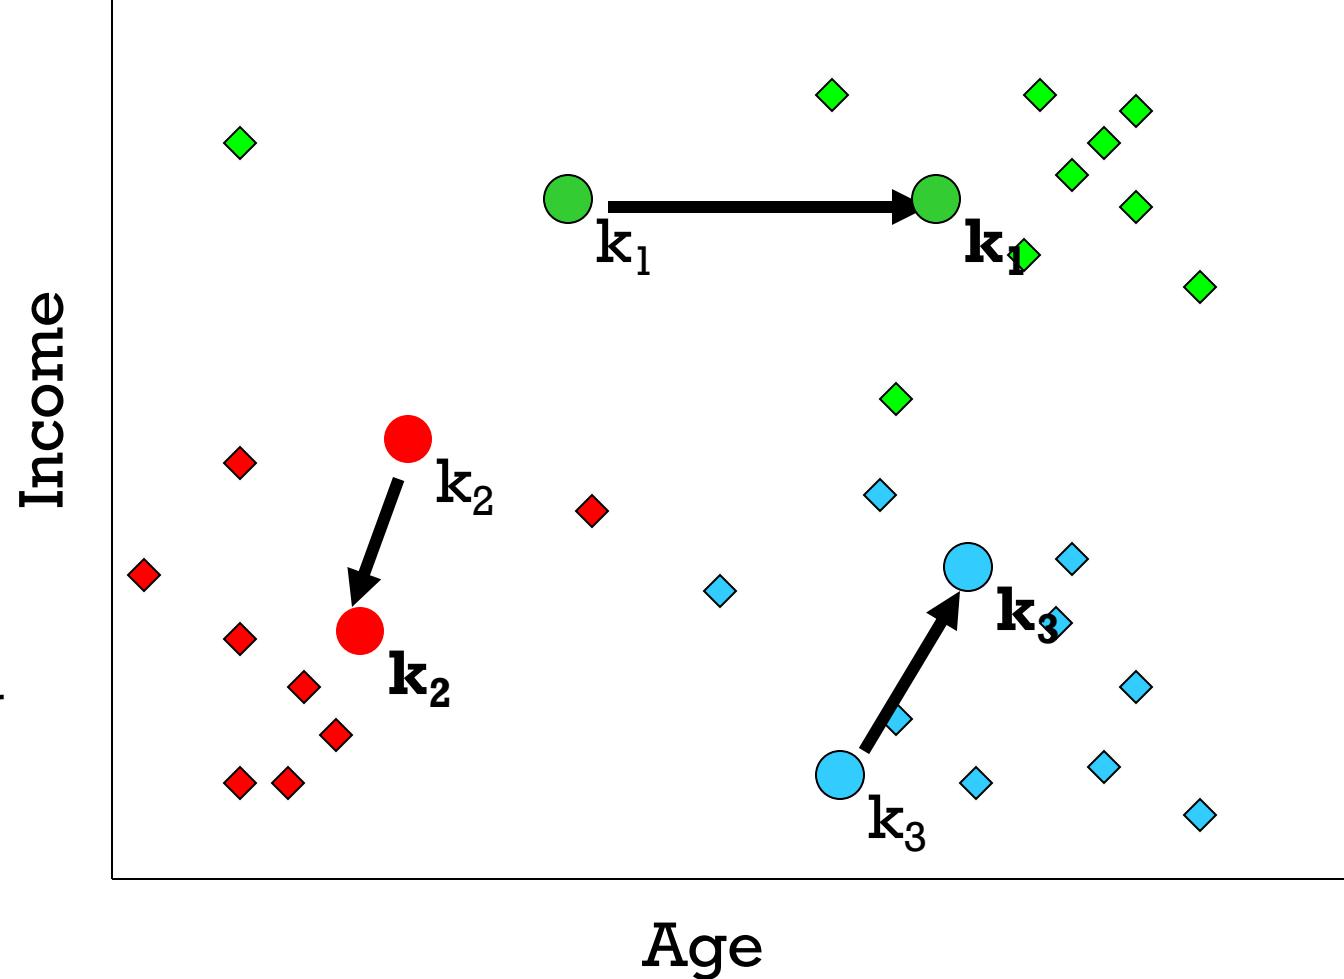




K-means: Step4


Reassign
points
closest to a
different new
cluster center

*Q: Which points
are reassigned?*

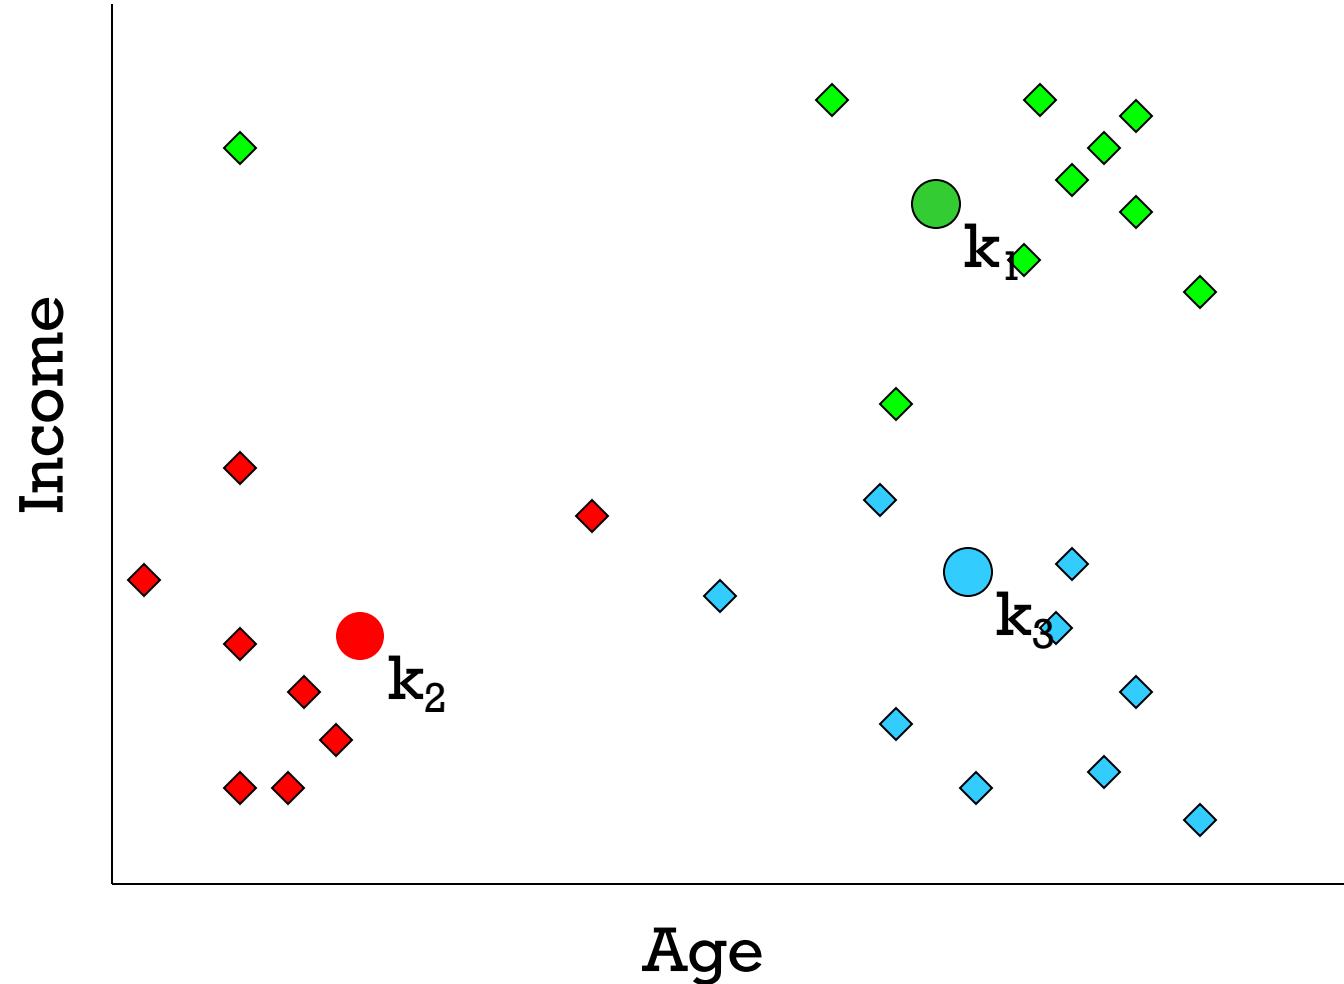




K-means: Step4(a)

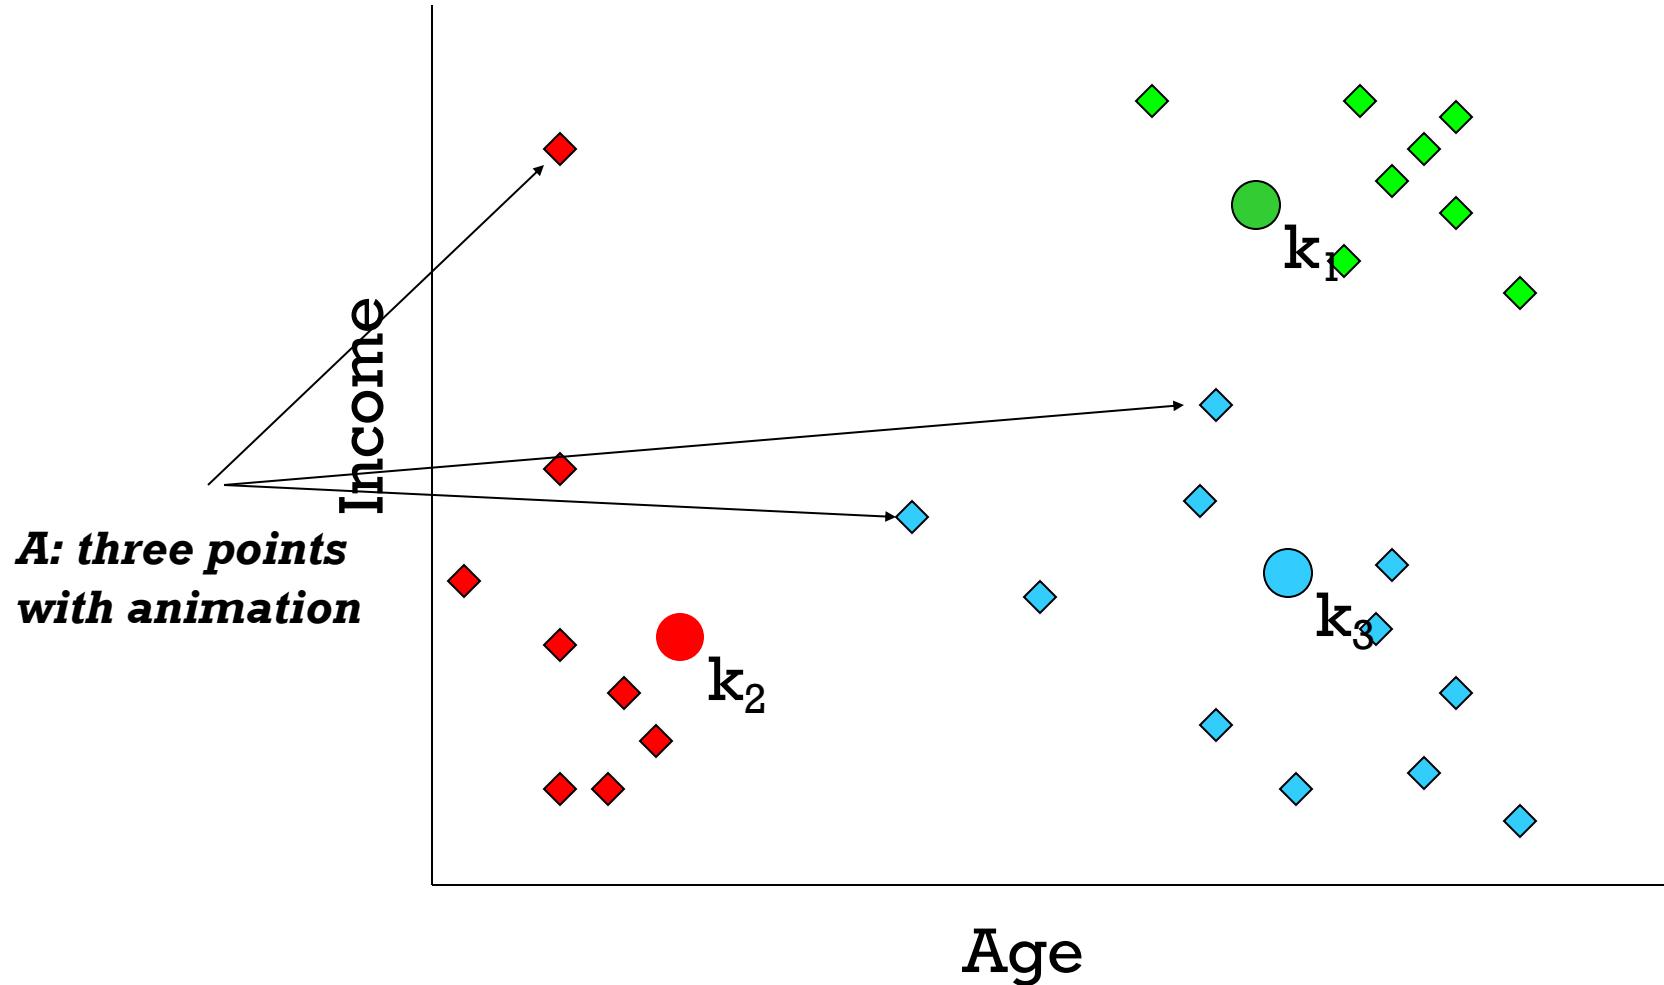



K-means: Step5

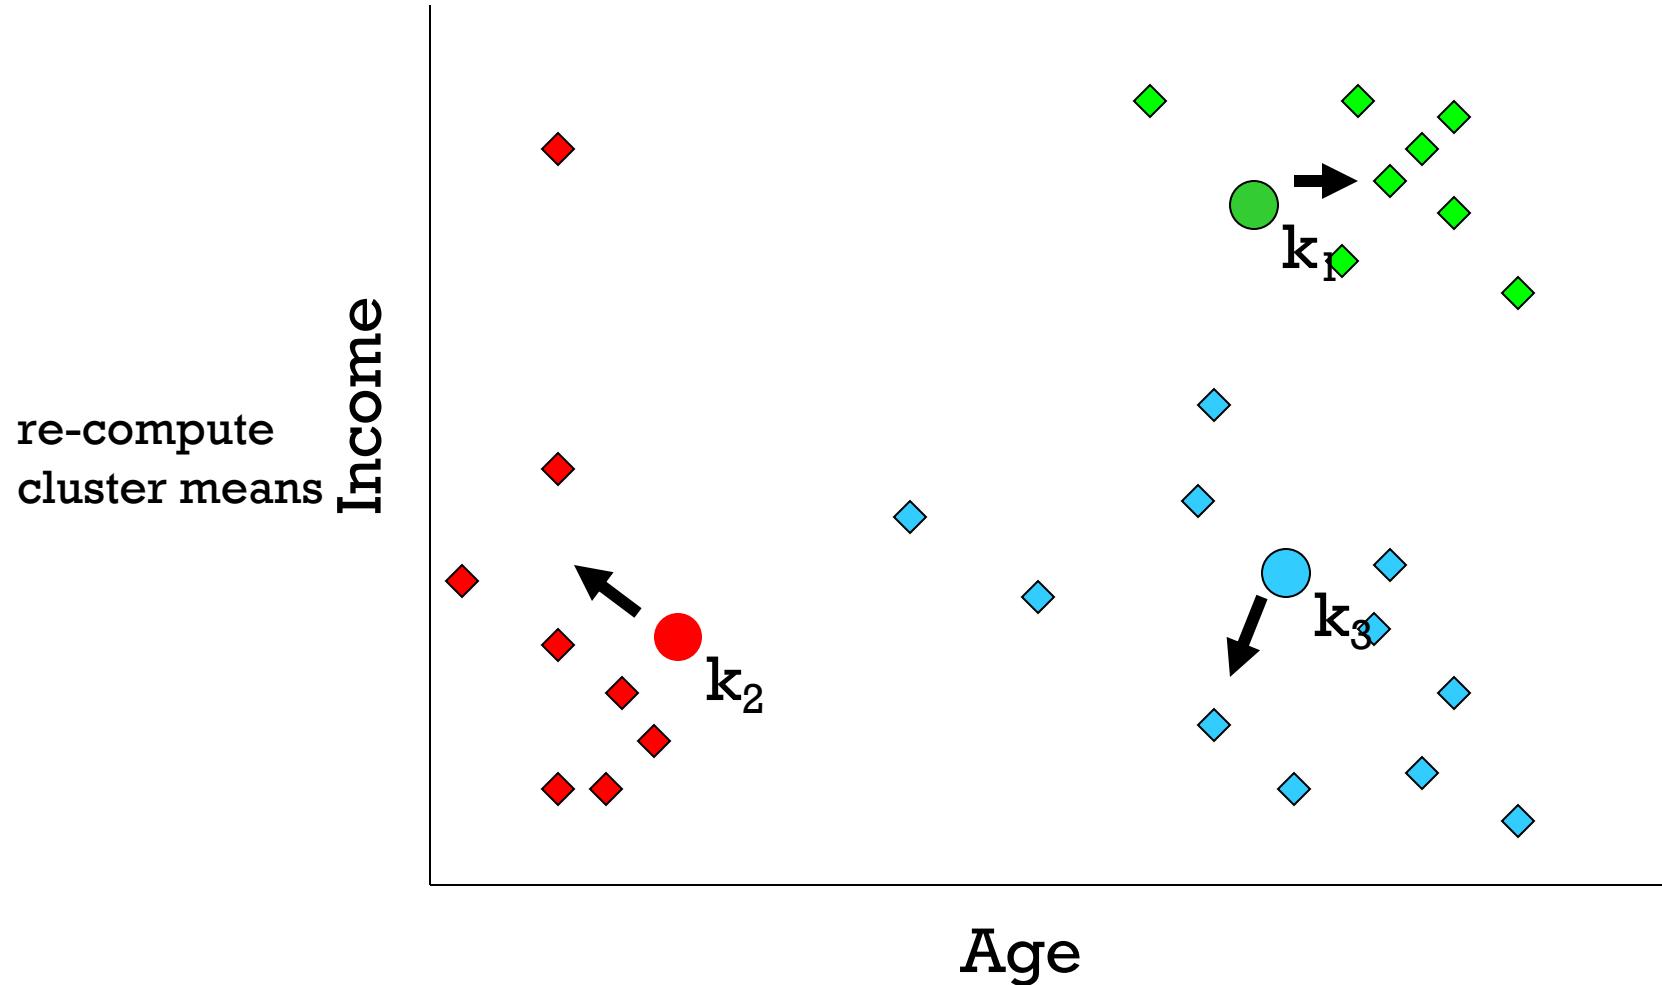



K-means: Step5(a)

Cautions:

- Support only numerical variables
- Need to adjust variable range

Important Params:


- k, Distance function
- Maximum epochs

147

Stop

- Converge (no change)
- Maximum epochs



move cluster
centers to
cluster means

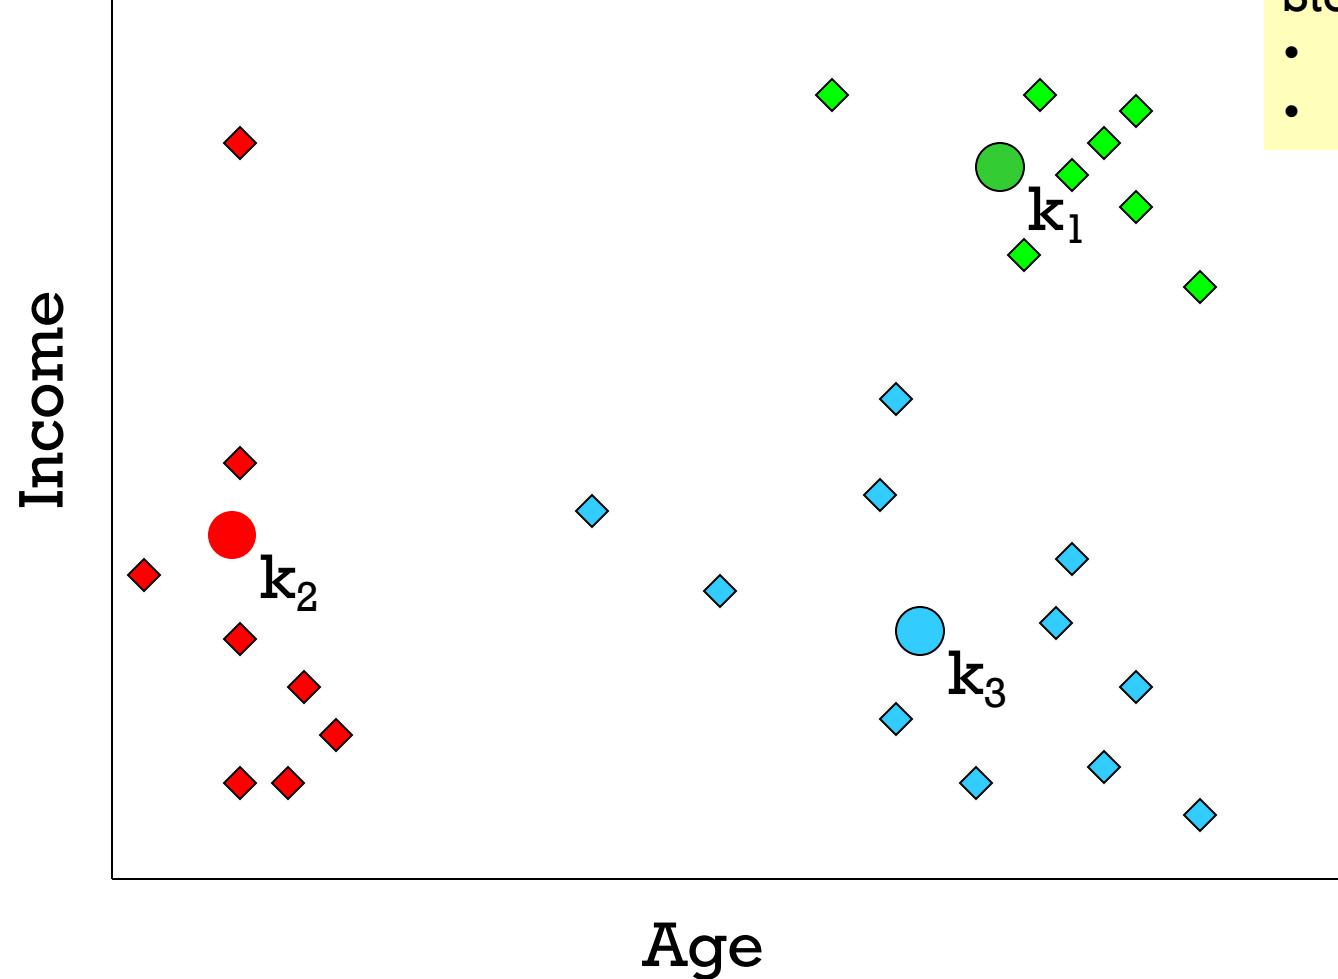



Determine the number of k : Elbow Method

<https://www.packtpub.com/books/content/clustering-k-means>

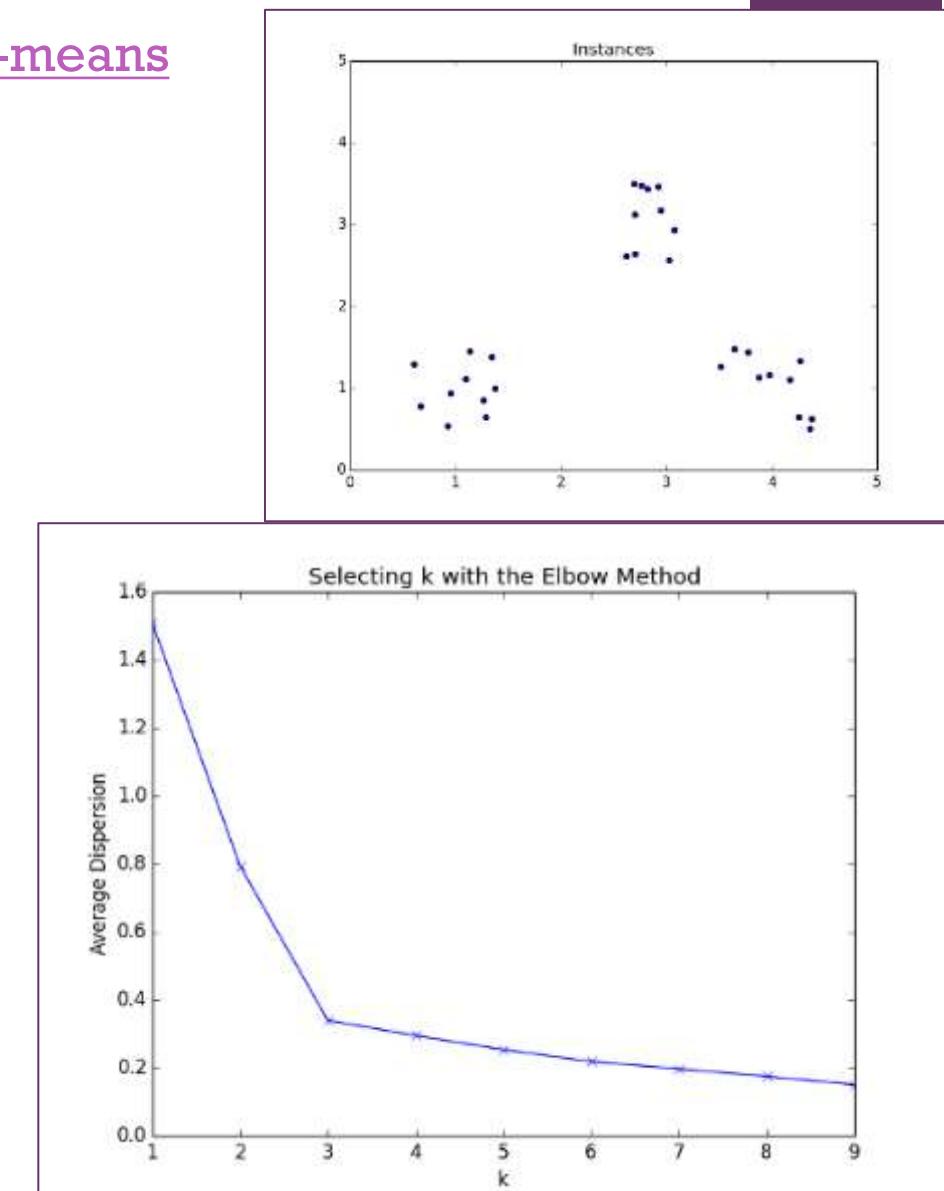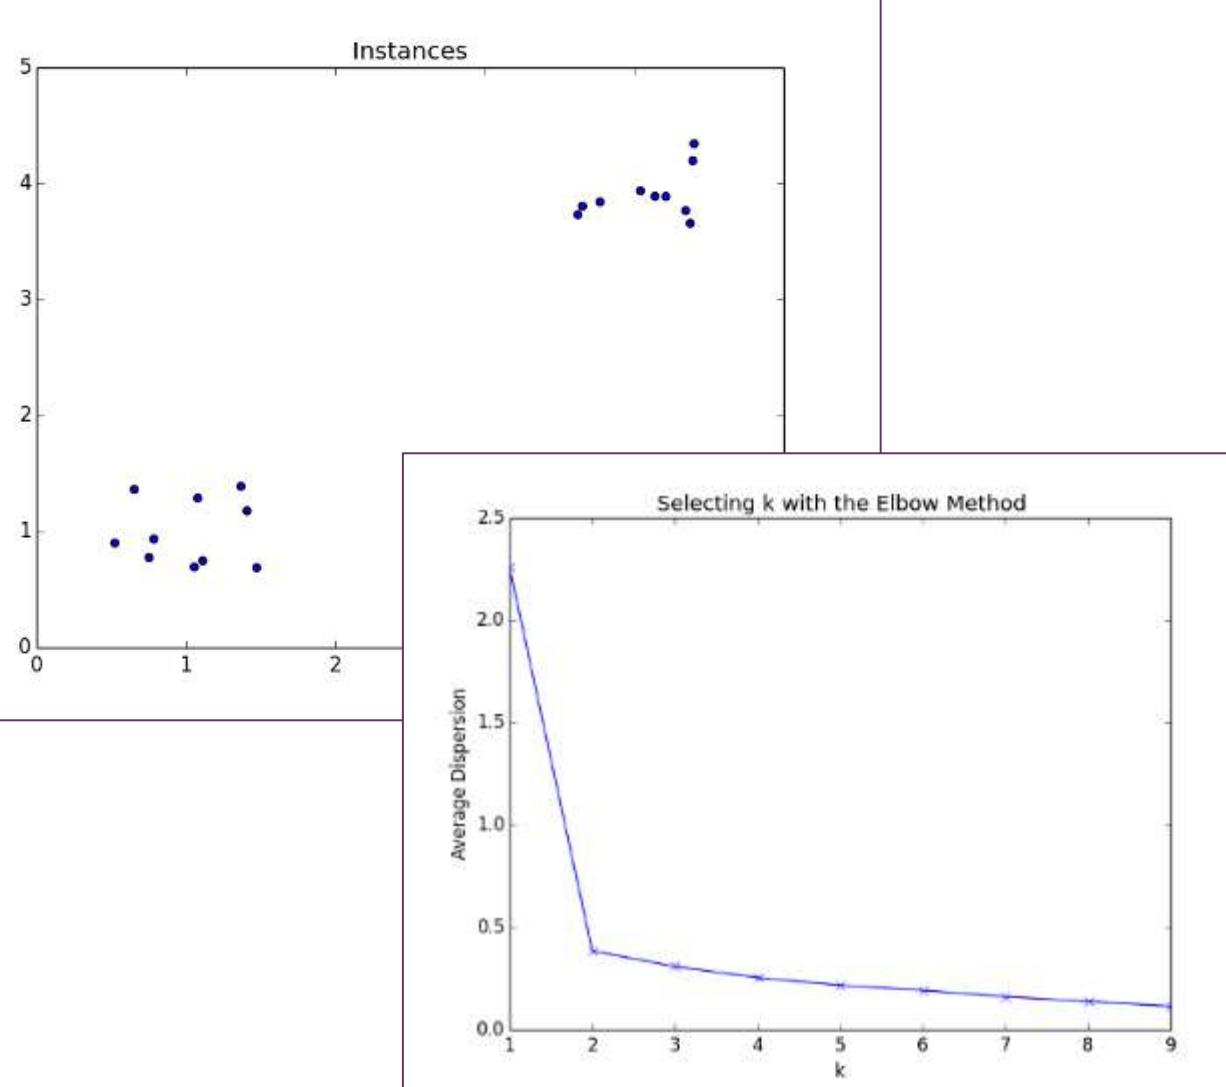



Prev Up Next

scikit-learn 0.22.2

Other versions

Please [cite us](#) if you use the software.

[sklearn.preprocessing.StandardScaler](#)
Examples using
[sklearn.preprocessing.StandardScaler](#)

sklearn.preprocessing.StandardScaler

```
class sklearn.preprocessing.StandardScaler(copy=True, with_mean=True, with_std=True)
```

[\[source\]](#)

Standardize features by removing the mean and scaling to unit variance

The standard score of a sample x is calculated as:

$$z = (x - u) / s$$

where u is the mean of the training samples or zero if `with_mean=False`, and s is the standard deviation of the training samples or one if `with_std=False`.

Centering and scaling happen independently on each feature by computing the relevant statistics on the samples in the training set. Mean and standard deviation are then stored to be used on later data using `transform`.

Standardization of a dataset is a common requirement for many machine learning estimators: they might behave badly if the individual features do not more or less look like standard normally distributed data (e.g. Gaussian with 0 mean and unit variance).

For instance many elements used in the objective function of a learning algorithm (such as the RBF kernel of Support Vector Machines or the L1 and L2 regularizers of linear models) assume that all features are centered around 0 and have variance in the same order. If a feature has a variance that is orders of magnitude larger than others, it might dominate the objective function and make the estimator unable to learn from other features correctly as expected.

This scaler can also be applied to sparse CSR or CSC matrices by passing `with_mean=False` to avoid breaking the sparsity structure of the data.



Clustering - K-means

```
>>> from sklearn.cluster import KMeans
>>> import numpy as np
>>> X = np.array([[1, 2], [1, 4], [1, 0],
...               [10, 2], [10, 4], [10, 0]])
>>> kmeans = KMeans(n_clusters=2, random_state=0).fit(X)
>>> kmeans.labels_
array([1, 1, 1, 0, 0, 0], dtype=int32)
>>> kmeans.predict([[0, 0], [12, 3]])
array([1, 0], dtype=int32)
>>> kmeans.cluster_centers_
array([[10.,  2.],
       [1.,  2.]])
```

sklearn.cluster.KMeans

```
class sklearn.cluster.KMeans(n_clusters=8, *, init='k-means++', n_init=10, max_iter=300, tol=0.0001,
precompute_distances='deprecated', verbose=0, random_state=None, copy_x=True, n_jobs='deprecated', algorithm='auto') [source]
```

K-Means clustering.

Read more in the [User Guide](#).

Parameters:

n_clusters : int, default=8

The number of clusters to form as well as the number of centroids to generate.

init : {'k-means++', 'random', ndarray, callable}, default='k-means++'

Method for initialization:

'k-means++' : selects initial cluster centers for k-mean clustering in a smart way to speed up convergence. See section Notes in `k_init` for more details.

'random': choose `n_clusters` observations (rows) at random from data for the initial centroids.

If an ndarray is passed, it should be of shape (n_clusters, n_features) and gives the initial centers.

If a callable is passed, it should take arguments `X`, `n_clusters` and a random state and return an initialization.

n_init : int, default=10

Number of time the k-means algorithm will be run with different centroid seeds. The final results will be the best output of `n_init` consecutive runs in terms of inertia.

max_iter : int, default=300

Maximum number of iterations of the k-means algorithm for a single run.



Please [cite us](#) if you use the software.

[sklearn.metrics.silhouette_sco](#)

re

Examples using

[sklearn.metrics.silhouette_sco](#)

sklearn.metrics.silhouette_score

`sklearn.metrics.silhouette_score(X, labels, *, metric='euclidean', sample_size=None, random_state=None, **kwds)`

[source]

Compute the mean Silhouette Coefficient of all samples.

The Silhouette Coefficient is calculated using the mean intra-cluster distance (a) and the mean nearest-cluster distance (b) for each sample. The Silhouette Coefficient for a sample is $(b - a) / \max(a, b)$. To clarify, b is the distance between a sample and the nearest cluster that the sample is not a part of. Note that Silhouette Coefficient is only defined if number of labels is $2 \leq n_labels \leq n_samples - 1$.

This function returns the mean Silhouette Coefficient over all samples. To obtain the values for each sample, use `silhouette_samples`.

The best value is 1 and the worst value is -1. Values near 0 indicate overlapping clusters. Negative values generally indicate that a sample has been assigned to the wrong cluster, as a different cluster is more similar.

Read more in the [User Guide](#).

Parameters: `X : array-like of shape (n_samples_a, n_samples_a) if metric == "precomputed" or (n_samples_a, n_features) otherwise`

An array of pairwise distances between samples, or a feature array.

`labels : array-like of shape (n_samples,)`

Predicted labels for each sample.

`metric : str or callable, default='euclidean'`

The metric to use when calculating distance between instances in a feature array. If metric is a string, it must be one of the options allowed by `metrics.pairwise.pairwise_distances`. If `X` is the distance array itself, use `metric="precomputed"`.

`sample_size : int, default=None`

The size of the sample to use when computing the Silhouette Coefficient on a random subset of the data. If `sample_size is None`, no sampling is used.



Clustering

- DBSCAN

- Density based algorithm
- **Density-Based Spatial Clustering of Applications with Noise**
- It groups points that are closely packed together
- Then expanding clusters in any direction where there are nearby points
- this algorithm **does not requires** the **number of clusters** to be specified
- Can identify outliers as noises
- Doesn't perform well when the clusters are of varying density
- Can form any shape of cluster
- Expensive computation to high-dimensional data



Clustering

- DBSCAN

Step

1. Initial starting point that has not been visited
2. All points which are within **the r distance (eps)** are neighborhood points
3. If (number of neighborhood points > **minPoints**)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”

Else

- the point will be labeled as noise
- marked all of these point as “visited”

4. Repeat step 1-3 until all points are visited



Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited

2. All points which are within the r distance are neighborhood points


3. If (number of neighborhood points > minPoints)

- Assign all neighborhood points to same cluster
- Repeat step 2 – 3 on all neighborhood points
- marked all of these point as “visited”

Else

- the point will be labeled as noise
- marked all of these point as “visited”

4. Repeat step 1-3 until all points are visited

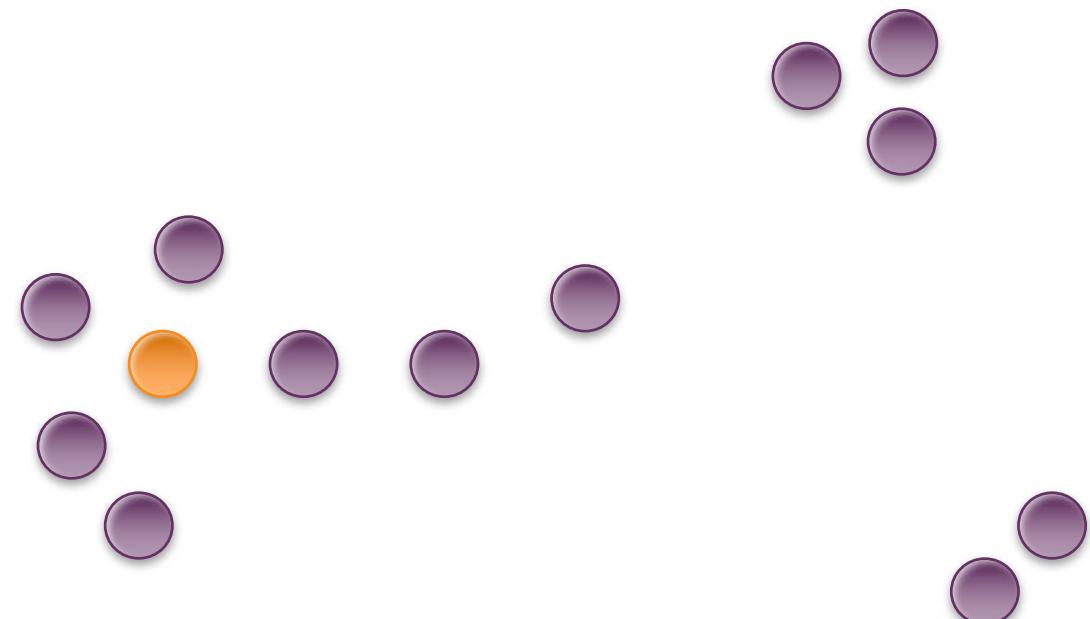



Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited

2. All points which are within the r distance are neighborhood points


3. If (number of neighborhood points > minPoints)

- Assign all neighborhood points to same cluster
- Repeat step 2 – 3 on all neighborhood points
- marked all of these point as “visited”

Else

- the point will be labeled as noise
- marked all of these point as “visited”

4. Repeat step 1-3 until all points are visited

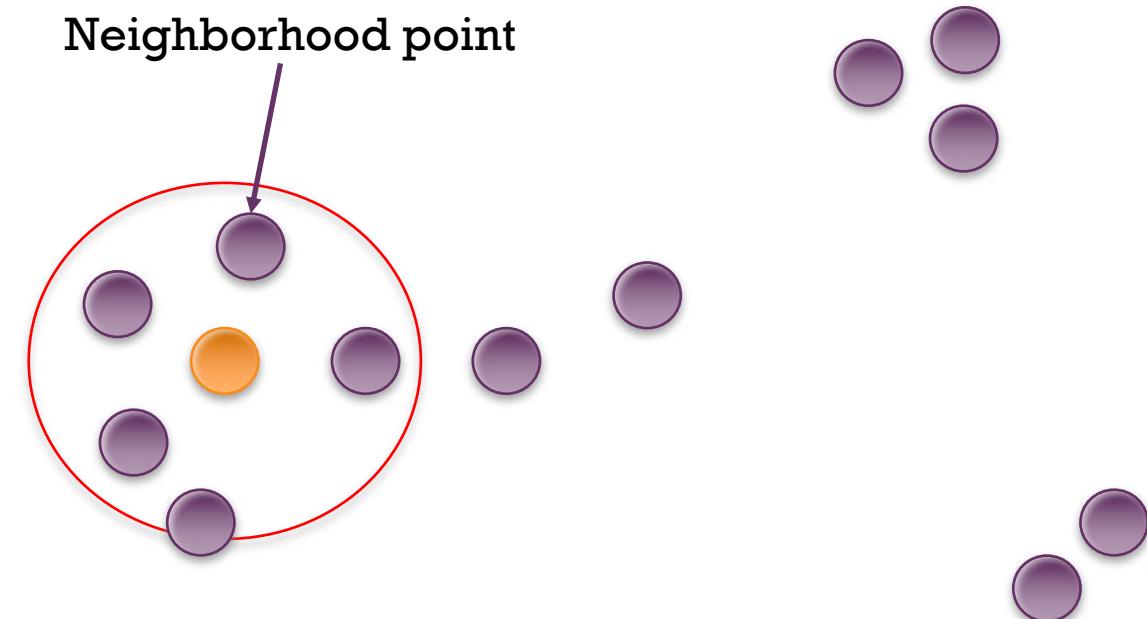




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

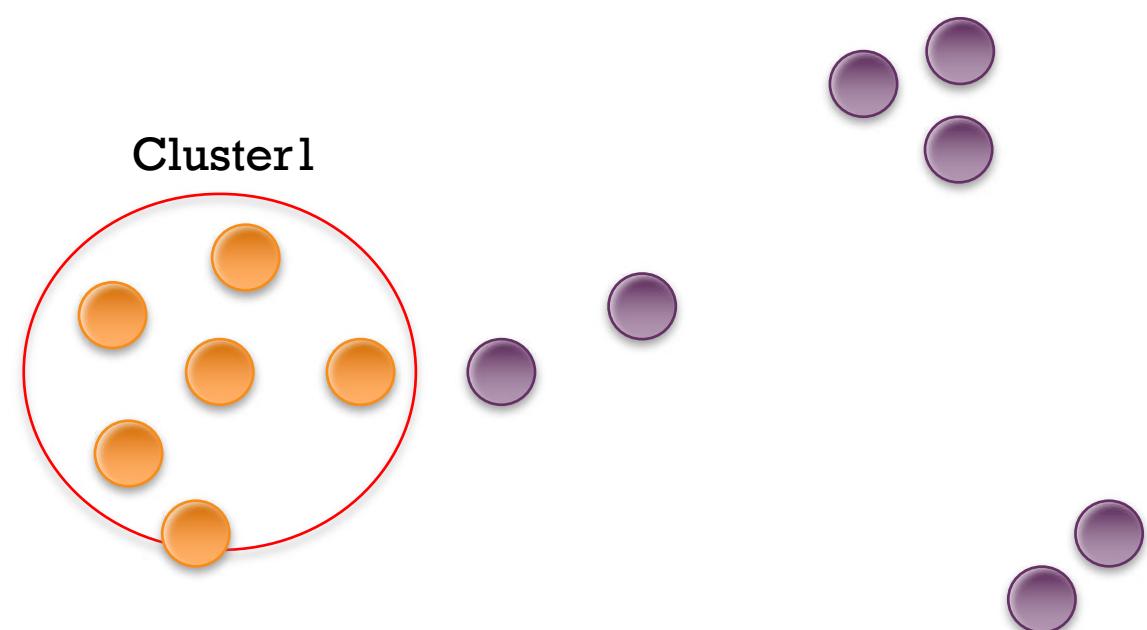




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

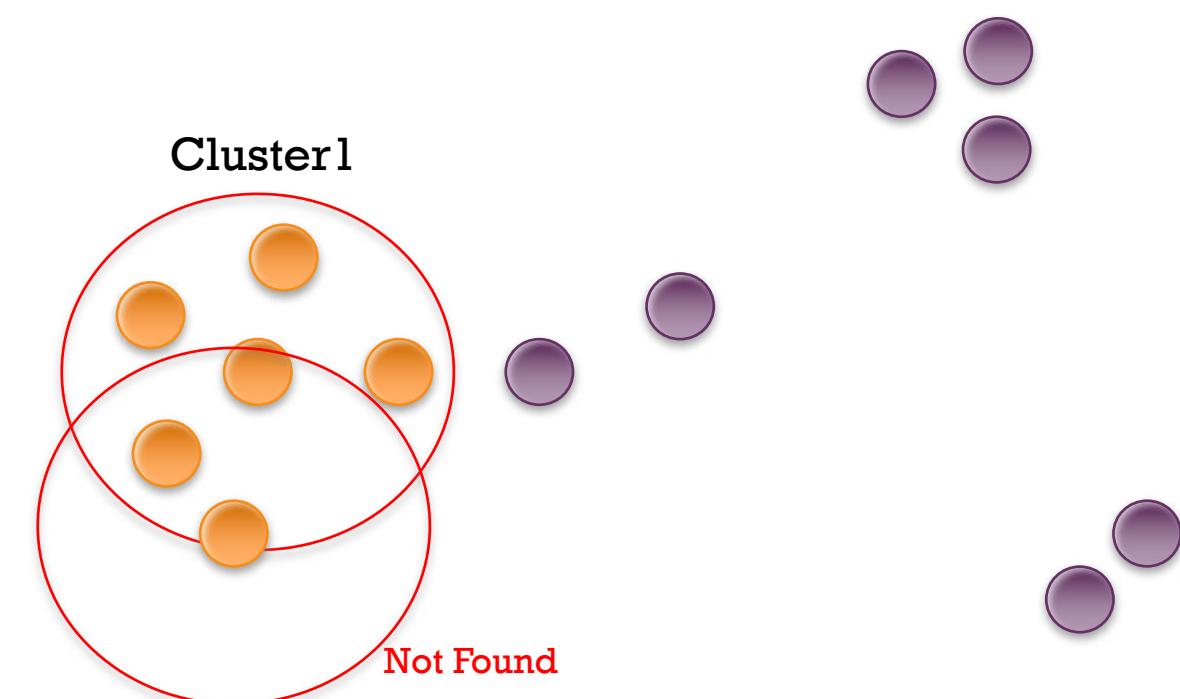




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

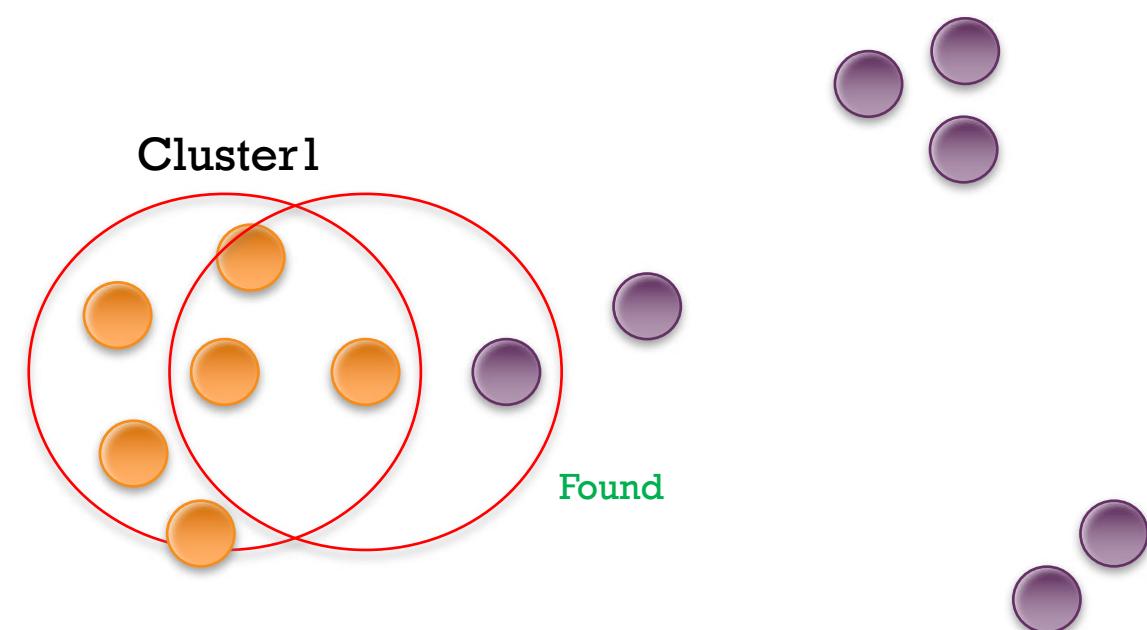




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

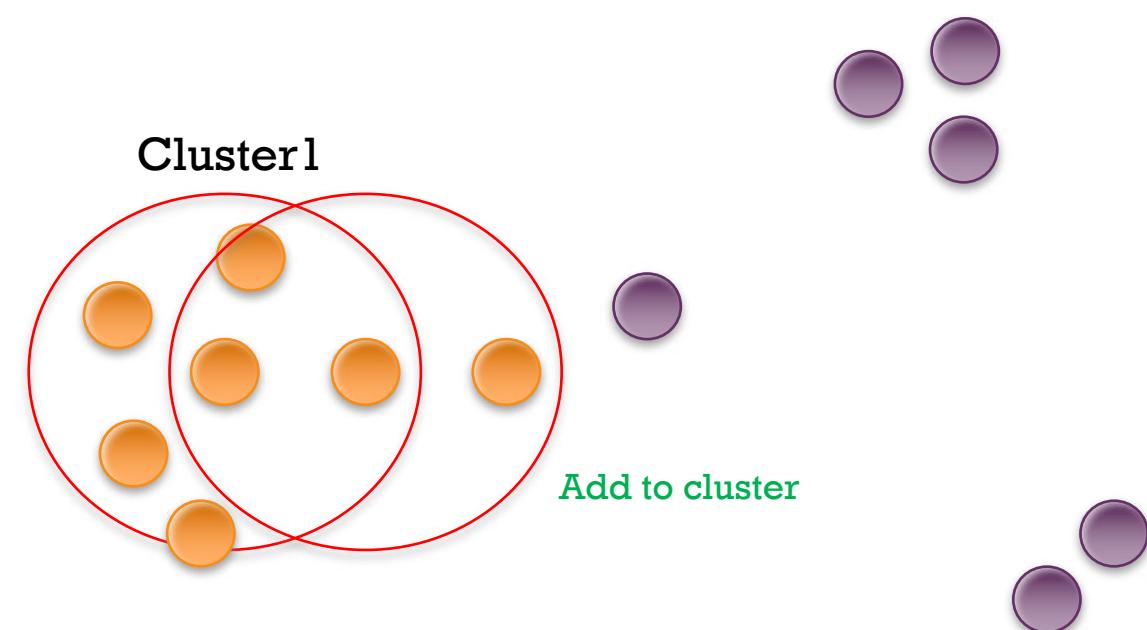




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

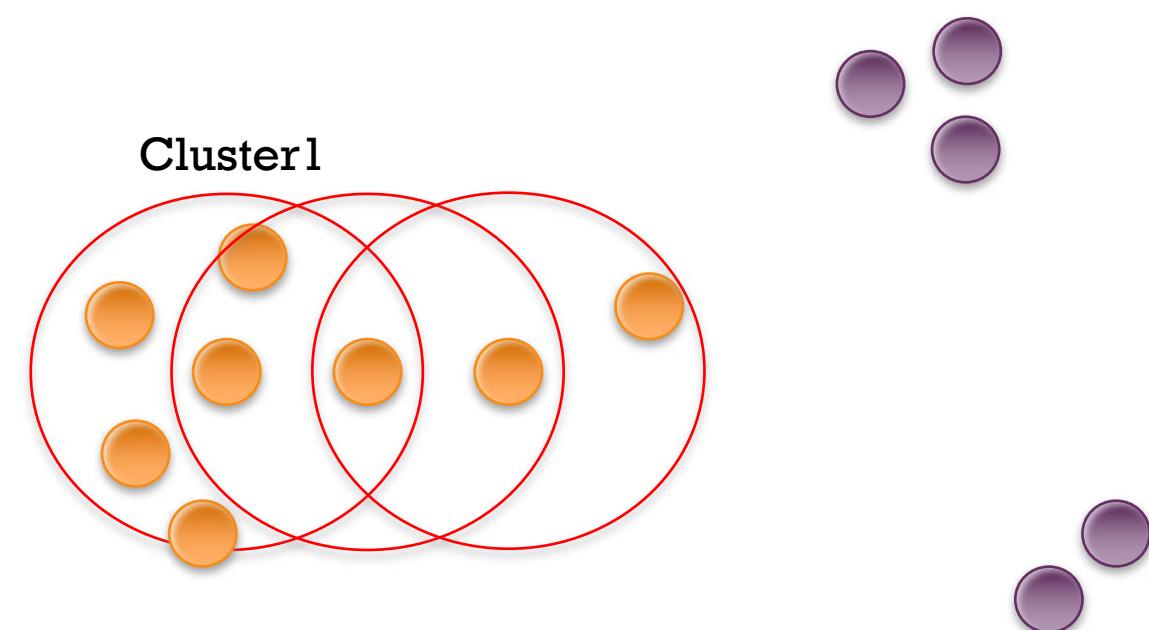




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

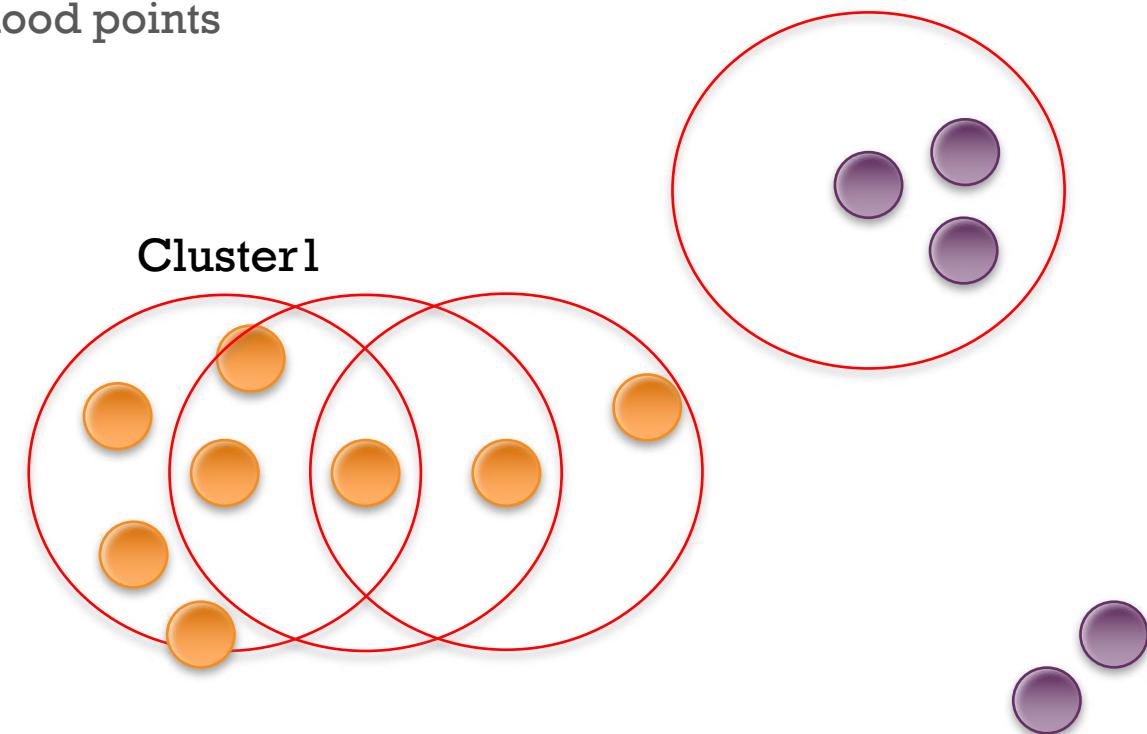




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
3. If (number of neighborhood points > minPoints)
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else
 - the point will be labeled as noise
 - marked all of these point as “visited”
4. Repeat step 1-3 until all points are visited

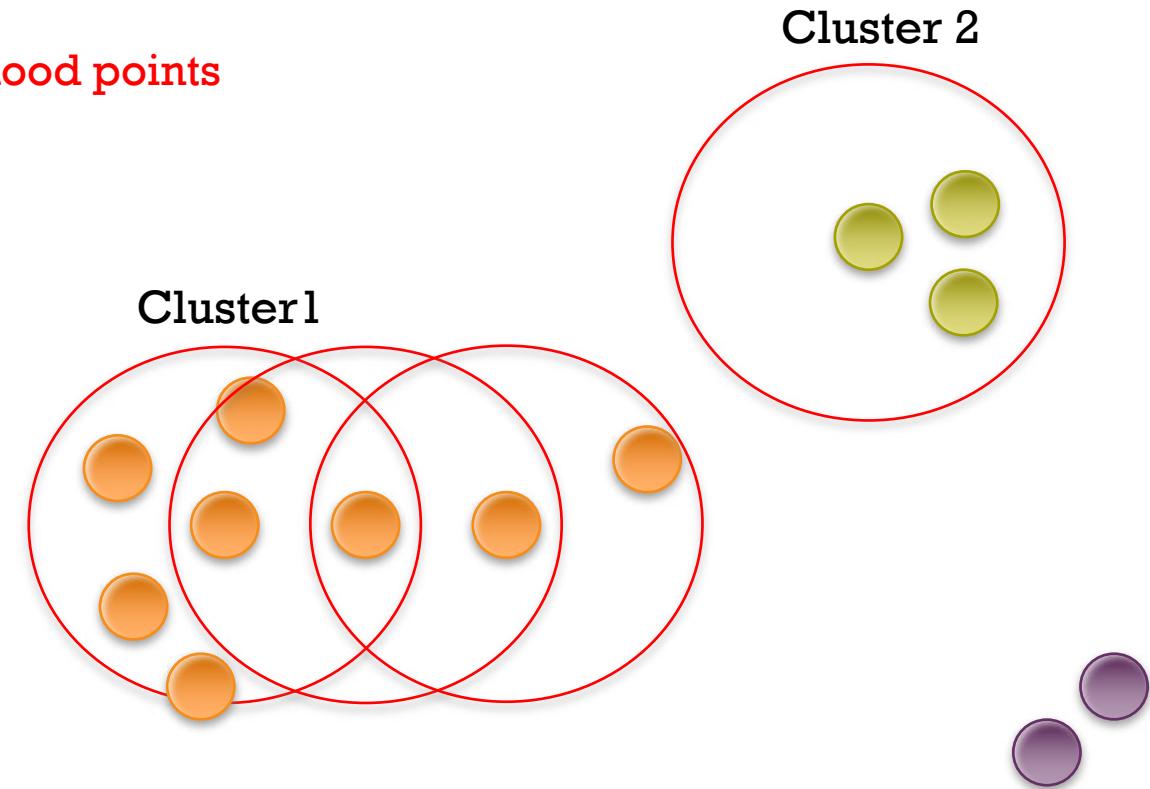




Clustering

- DBSCAN

Step

$\text{minPoints} = 3$

1. Initial starting point that has not been visited
2. All points which are within the r distance are neighborhood points
- 3. If (number of neighborhood points > minPoints)**
 - Assign all neighborhood points to same cluster
 - Repeat step 2 – 3 on all neighborhood points
 - marked all of these point as “visited”
- Else**
 - the point will be labeled as noise
 - marked all of these point as “visited”
- 4. Repeat step 1-3 until all points are visited**

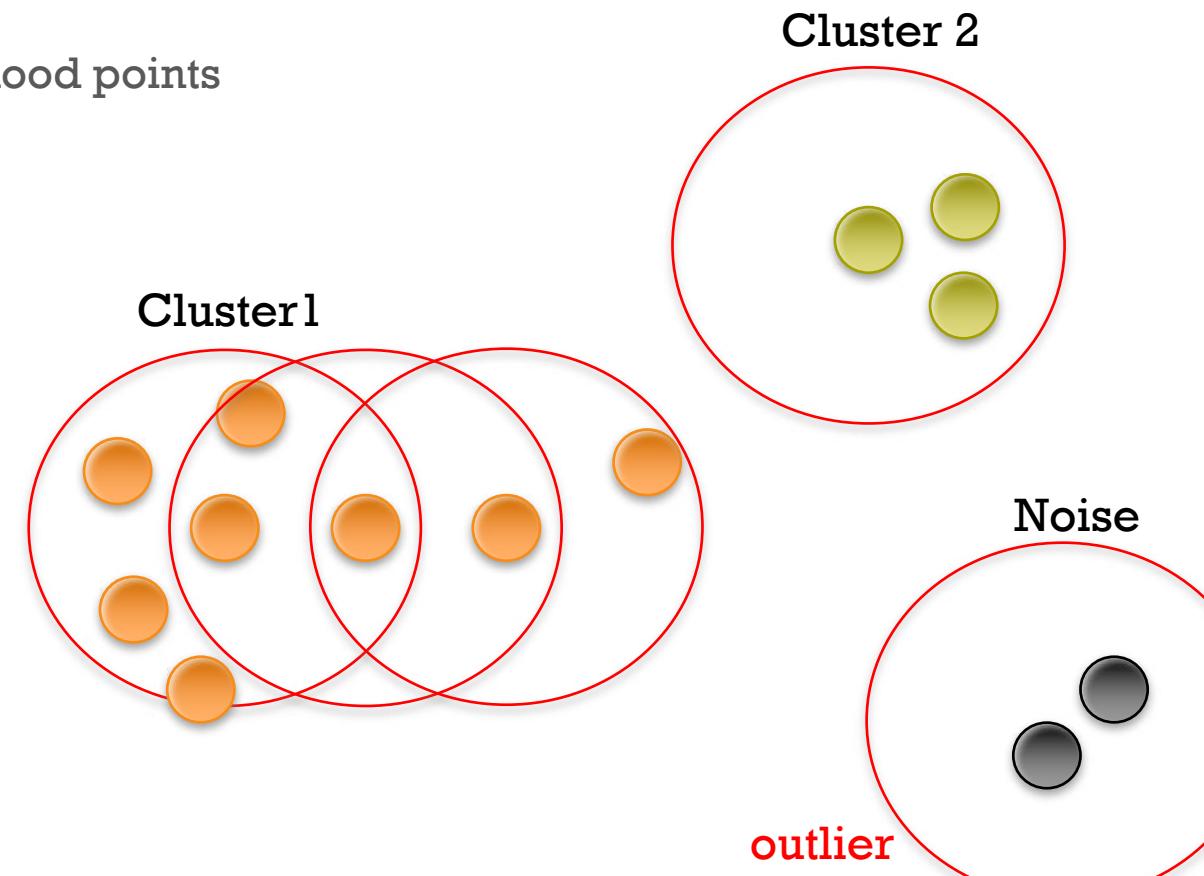




Clustering


- DBSCAN

- Try yourself
- Round 1
 - Epsilon = 1
 - minPoints = 4
- Round 1
 - Epsilon = 1
 - minPoints = 2
- Round 1
 - Epsilon = 1.5
 - minPoints = 4

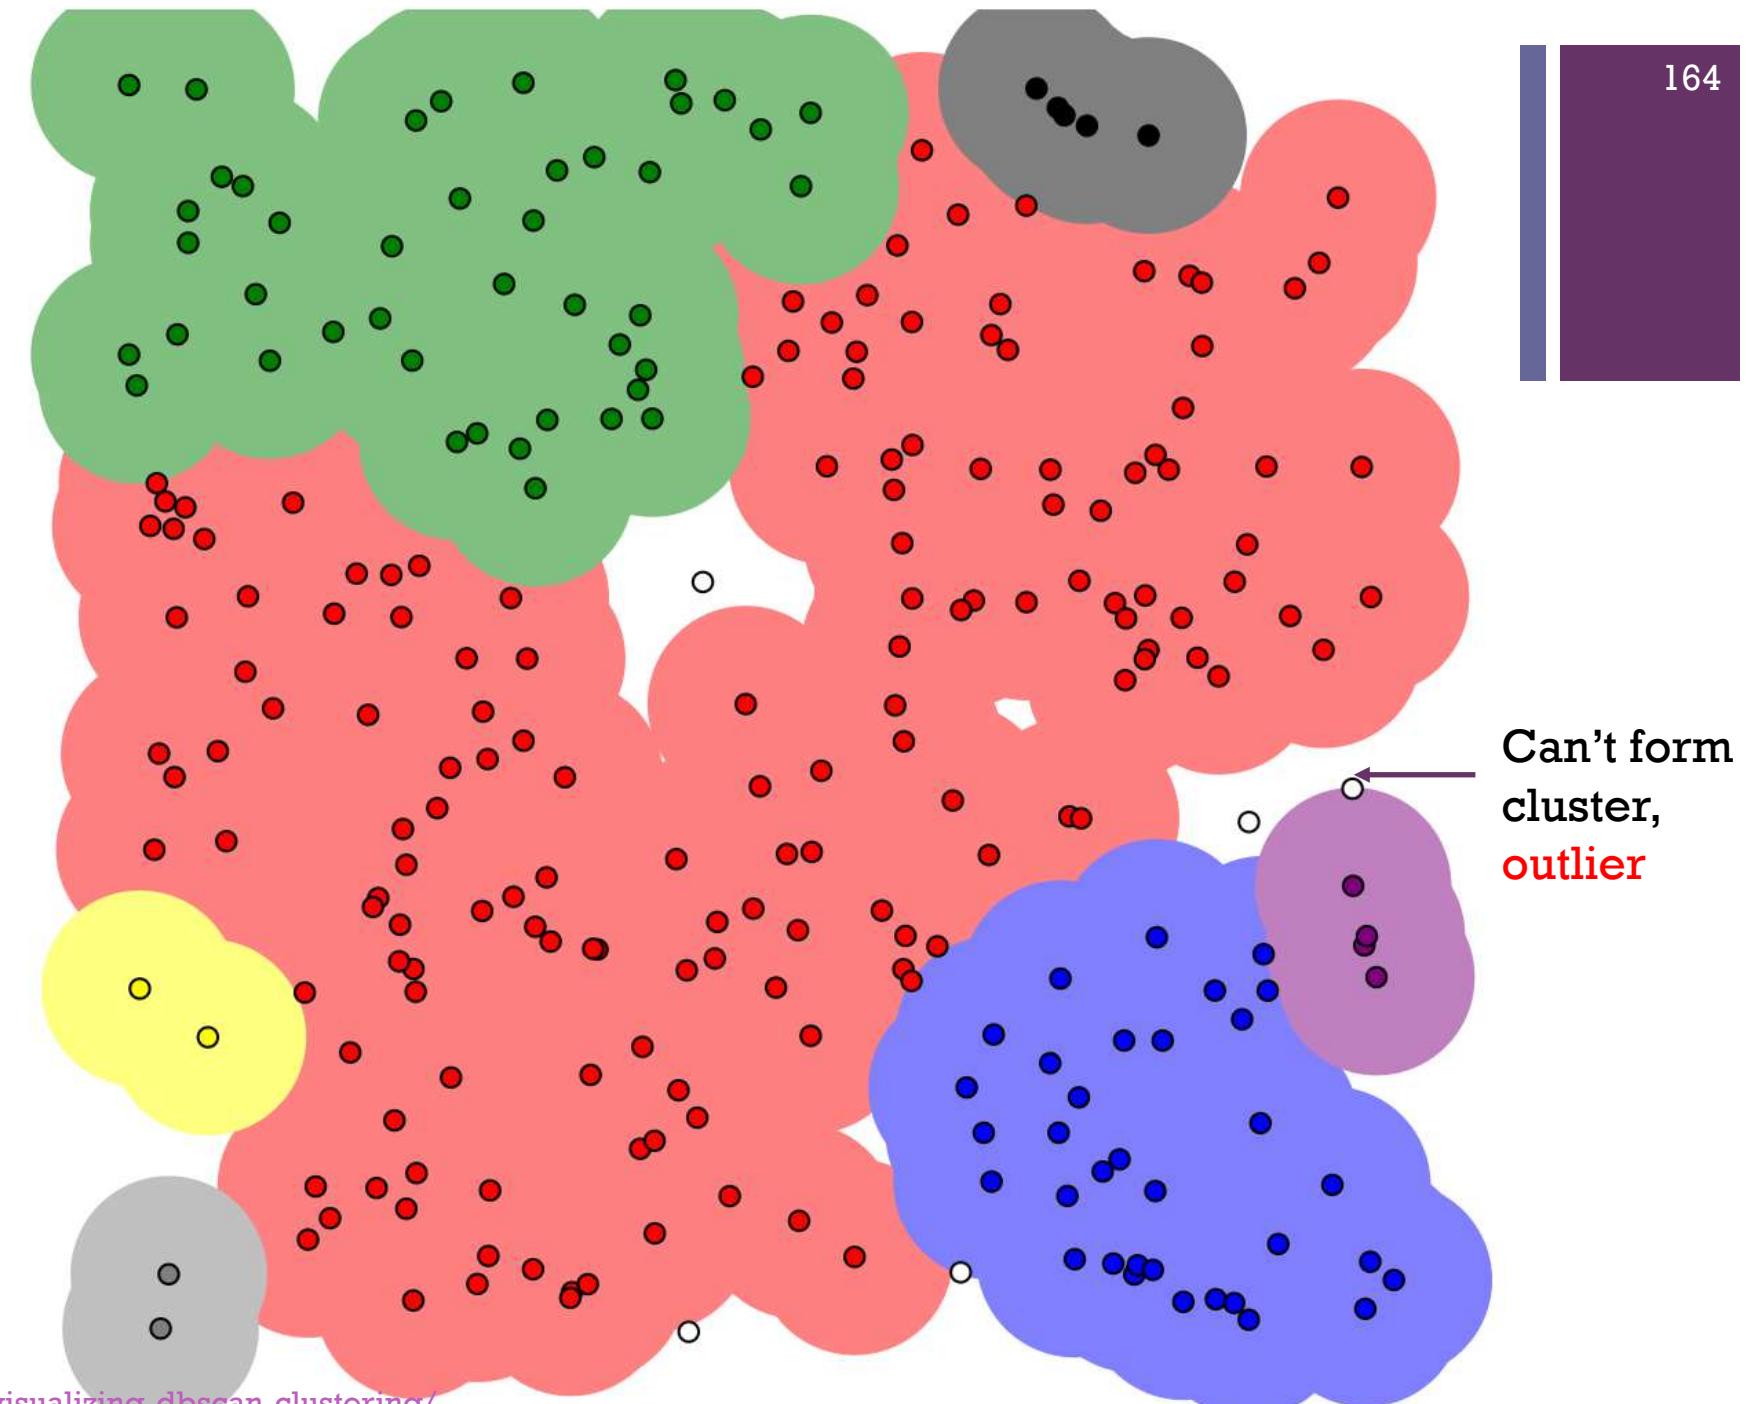




Clustering - DBSCAN

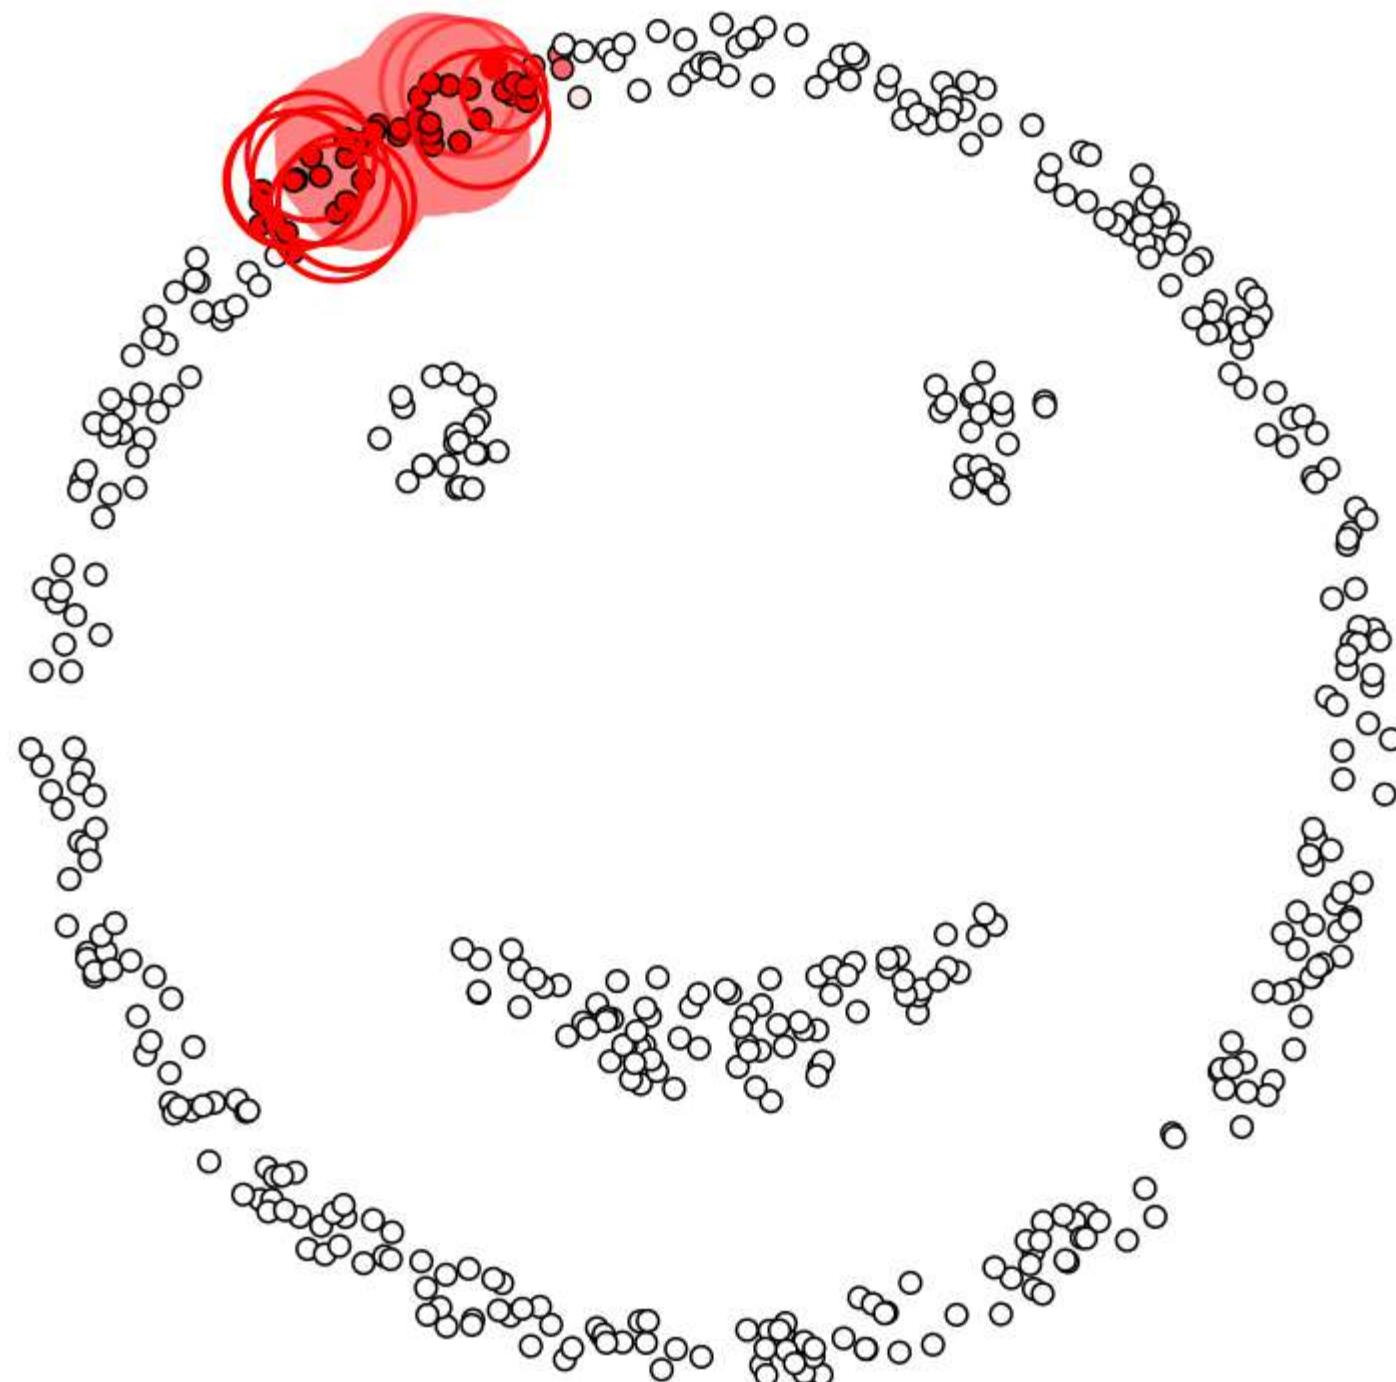

+

Clustering


- DBSCAN

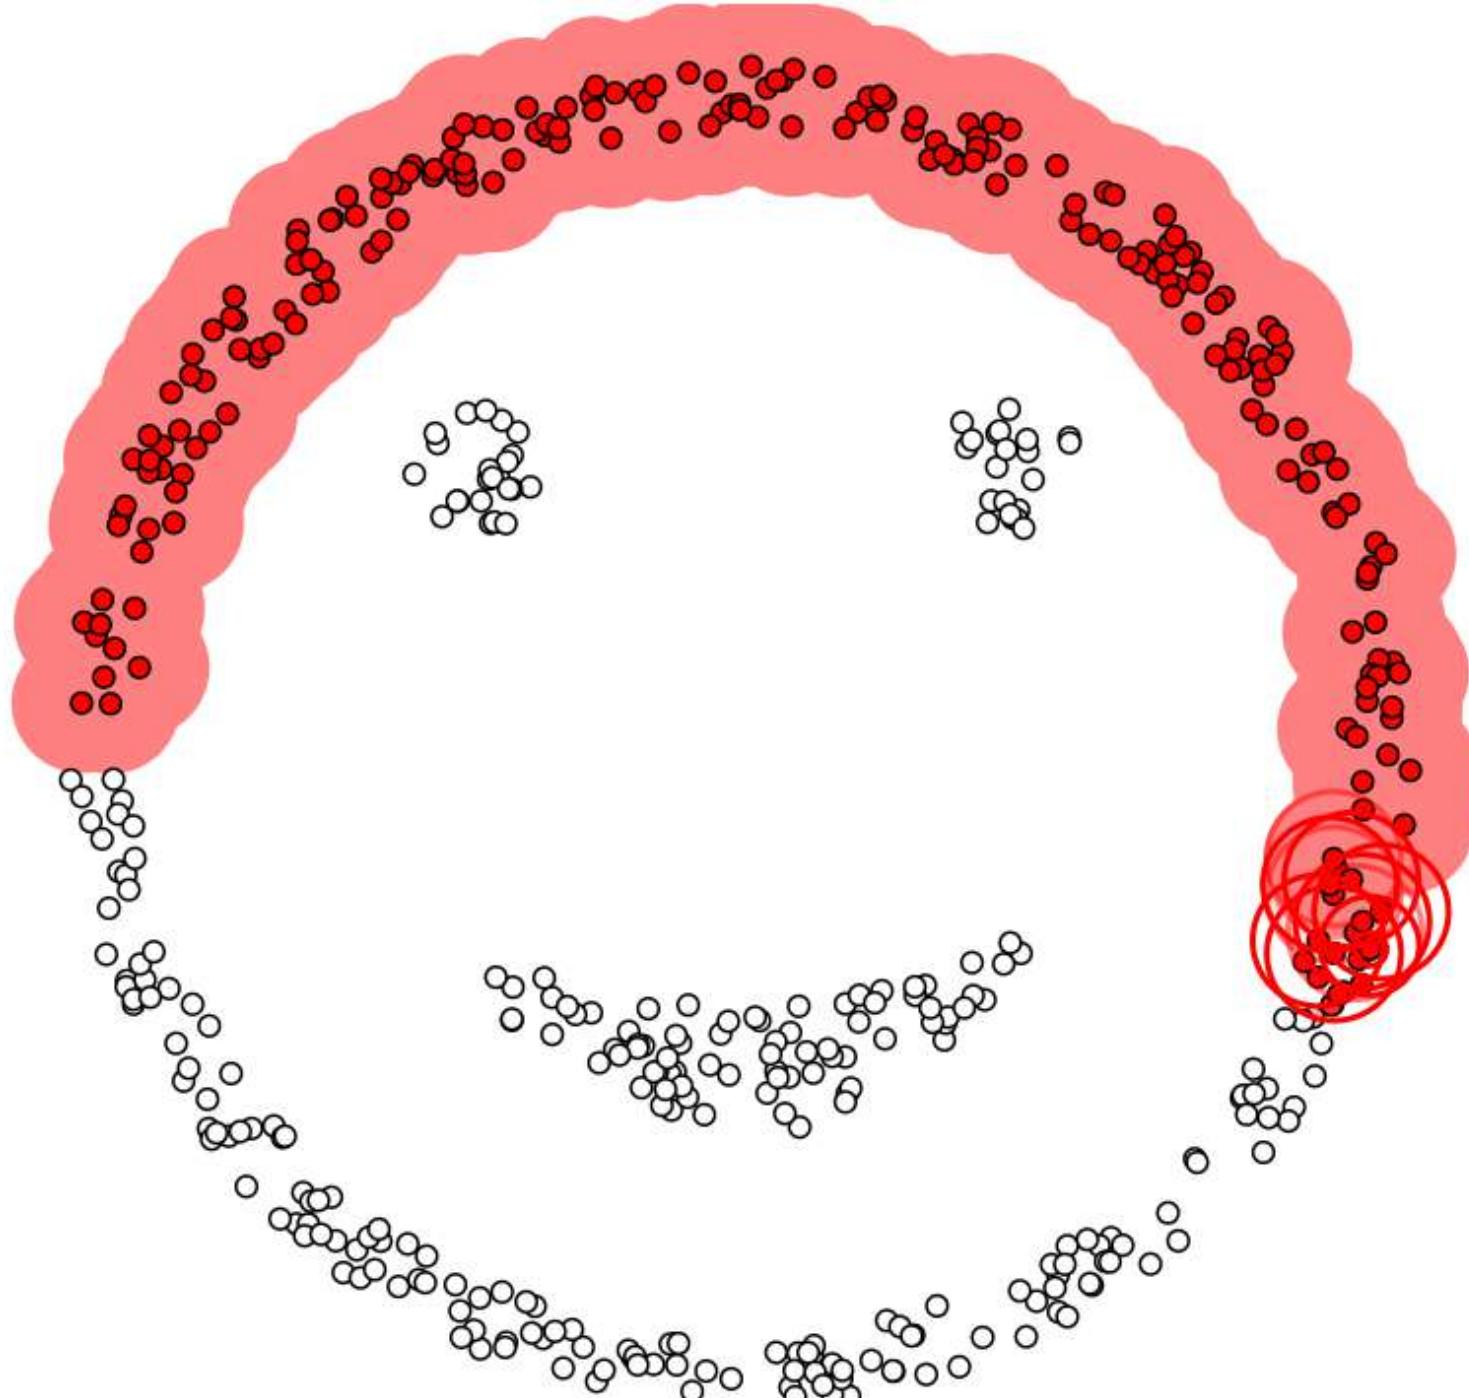

+


Clustering

- DBSCAN

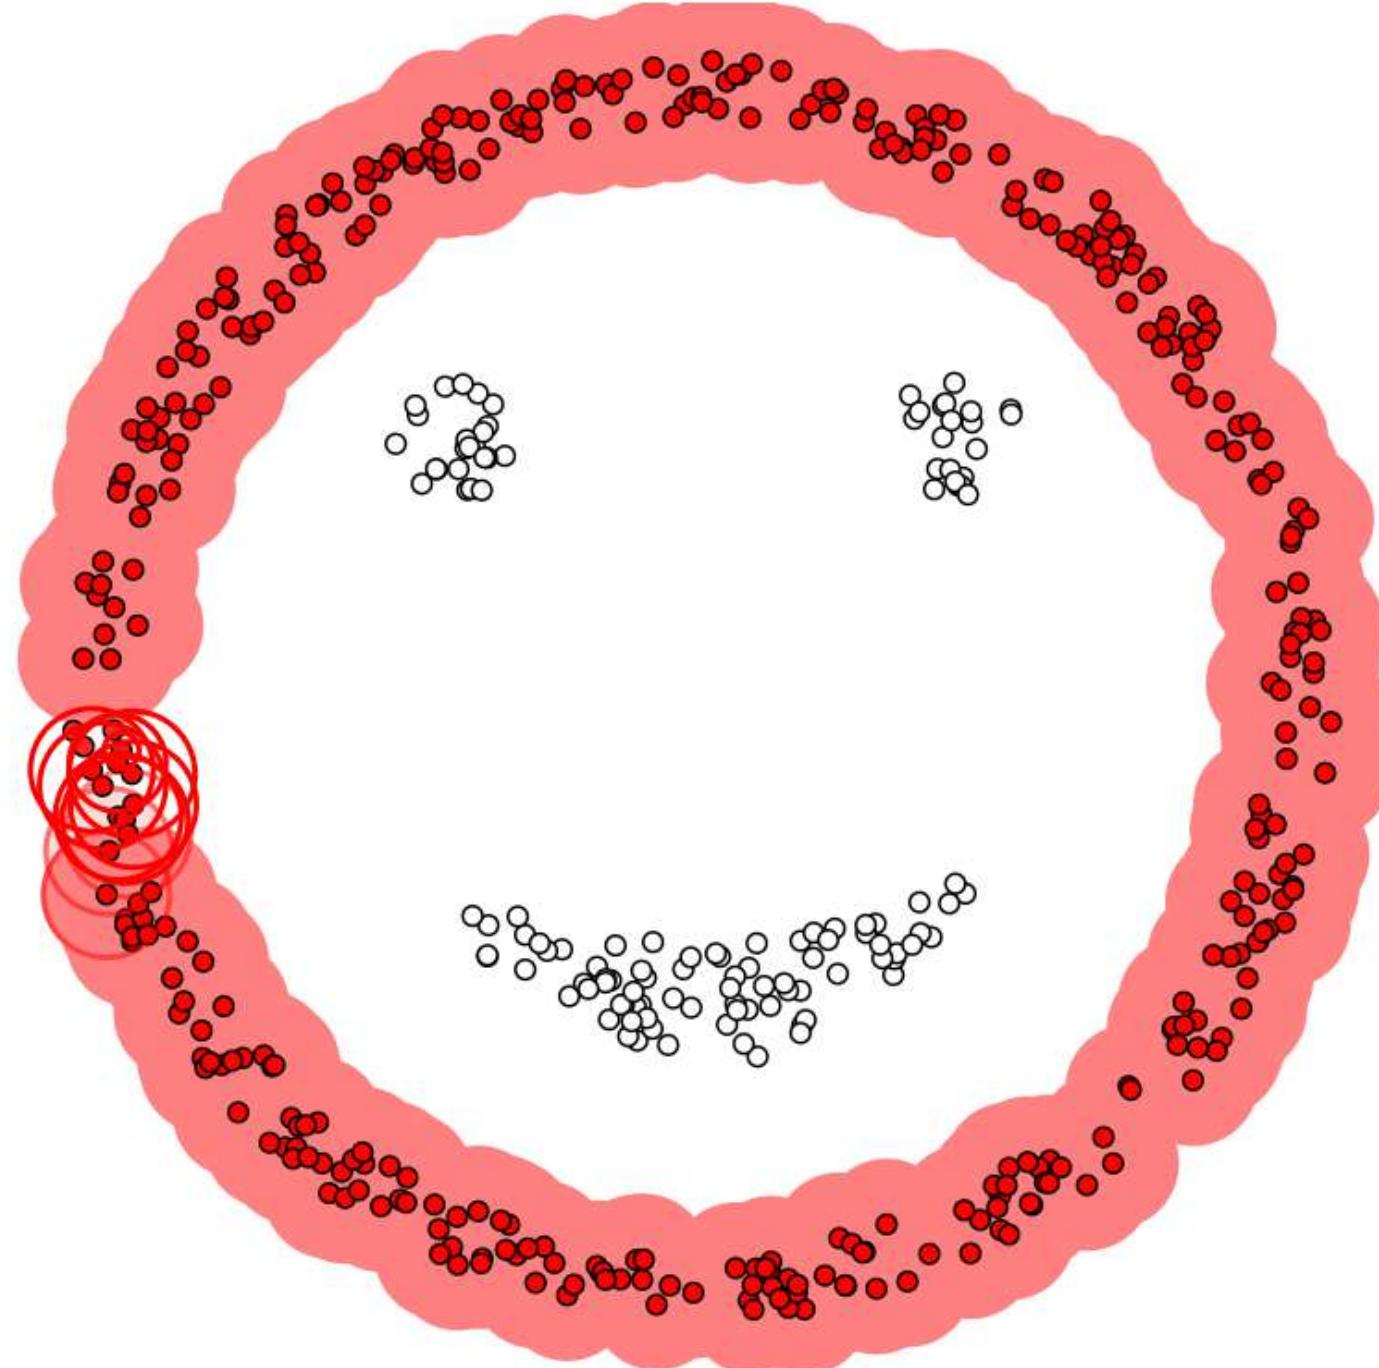



Clustering - DBSCAN

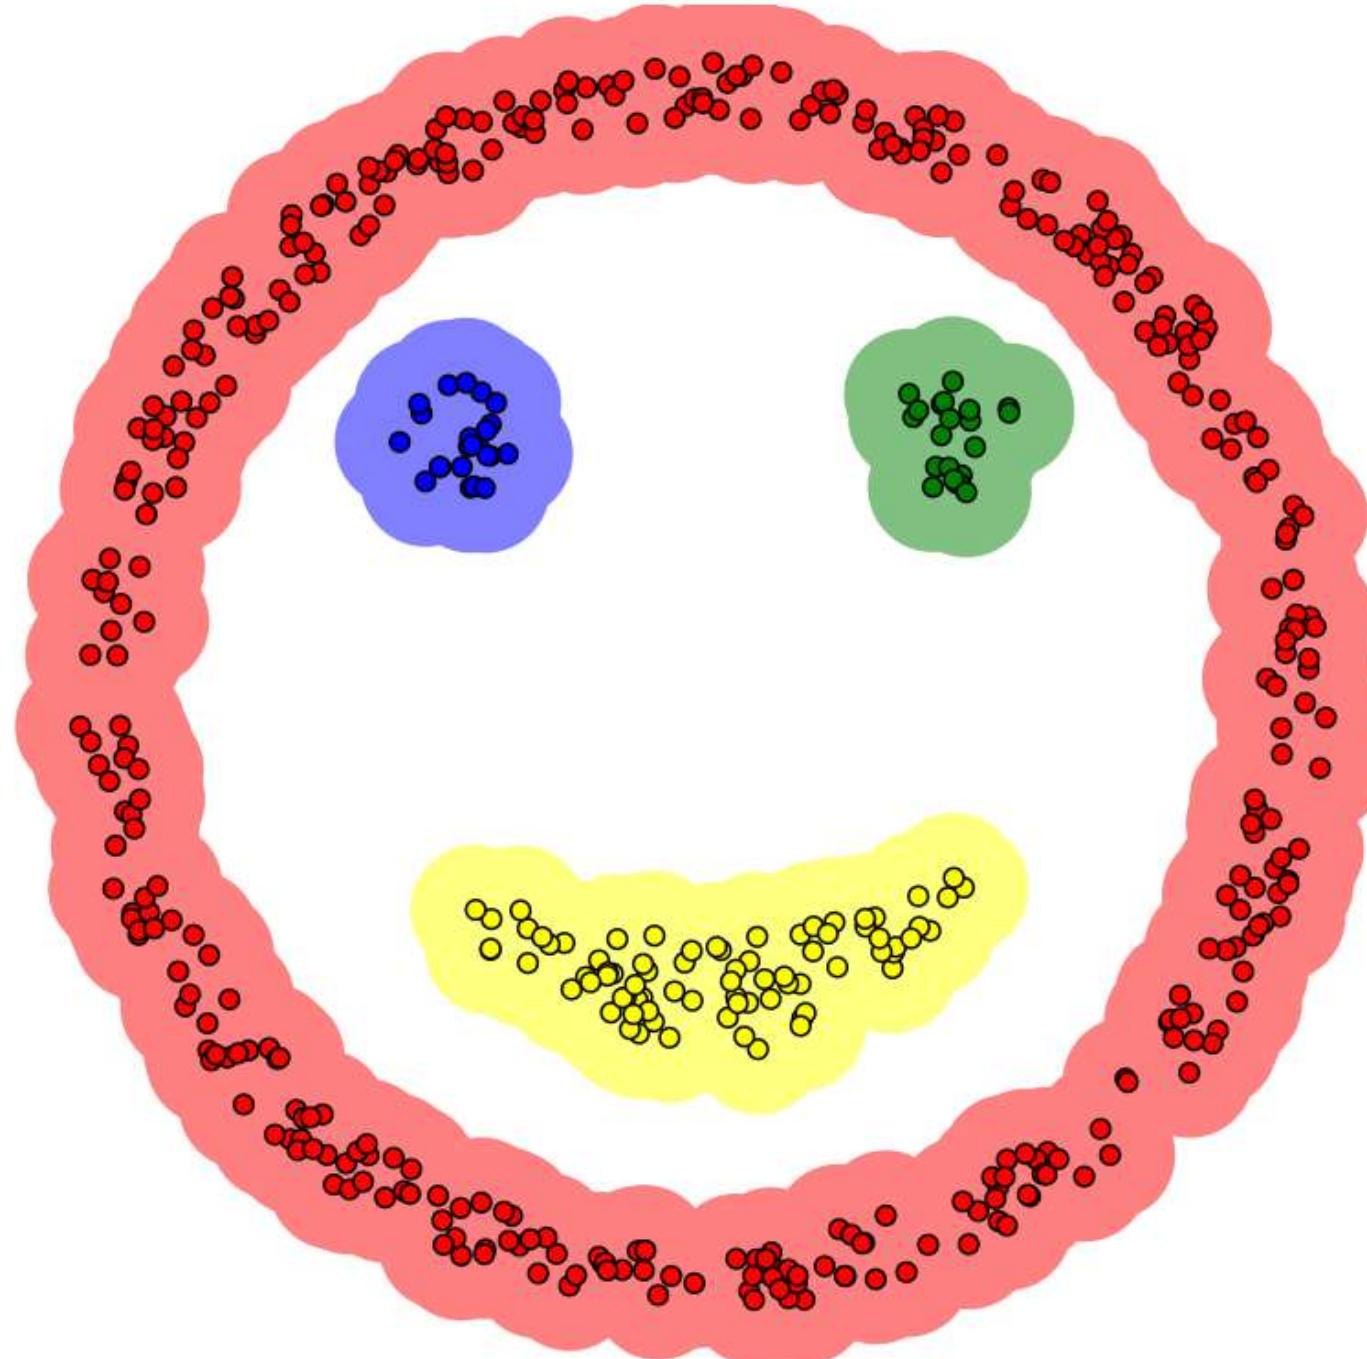

Clustering - DBSCAN

```
class sklearn.cluster.DBSCAN(eps=0.5, *, min_samples=5, metric='euclidean', metric_params=None, algorithm='auto',  
leaf_size=30, p=None, n_jobs=None)
```

[\[source\]](#)

Perform DBSCAN clustering from vector array or distance matrix.

DBSCAN - Density-Based Spatial Clustering of Applications with Noise. Finds core samples of high density and expands clusters from them. Good for data which contains clusters of similar density.

Read more in the [User Guide](#).

Parameters:**eps : float, default=0.5**

The maximum distance between two samples for one to be considered as in the neighborhood of the other. This is not a maximum bound on the distances of points within a cluster. This is the most important DBSCAN parameter to choose appropriately for your data set and distance function.

min_samples : int, default=5

The number of samples (or total weight) in a neighborhood for a point to be considered as a core point. This includes the point itself.

metric : string, or callable, default='euclidean'

The metric to use when calculating distance between instances in a feature array. If metric is a string or callable, it must be one of the options allowed by [sklearn.metrics.pairwise_distances](#) for its metric parameter. If metric is "precomputed", X is assumed to be a distance matrix and must be square. X may be a [Glossary](#), in which case only "nonzero" elements may be considered neighbors for DBSCAN.

New in version 0.17: metric `precomputed` to accept precomputed sparse matrix.

metric_params : dict, default=None

Additional keyword arguments for the metric function.

New in version 0.19.

algorithm : {'auto', 'ball_tree', 'kd_tree', 'brute'}, default='auto'

The algorithm to be used by the NearestNeighbors module to compute pointwise distances and find nearest neighbors. See [NearestNeighbors](#) module documentation for details.



Market Basket Analysis



- Discover associations between items
- Count combinations of items that occur together frequently in transactions

$$\text{Support}(\{X\} \rightarrow \{Y\}) = \frac{\text{Transactions containing both } X \text{ and } Y}{\text{Total number of transactions}}$$

$$\text{Confidence}(\{X\} \rightarrow \{Y\}) = \frac{\text{Transactions containing both } X \text{ and } Y}{\text{Transactions containing } X}$$

$$\text{Lift}(\{X\} \rightarrow \{Y\}) = \frac{(\text{Transactions containing both } X \text{ and } Y) / (\text{Transactions containing } X)}{\text{Fraction of transactions containing } Y}$$



Market Basket Analysis (Association Rule Mining)



Rule	Support	Confidence
Apple => Donut	2/5	2/3
Coconut => Apple	2/5	2/4
Apple => Coconut	2/5	2/3
Banana & Coconut => Donut	1/5	1/3



Association Rule Mining (cont.)

- Wal-Mart customers who purchase Barbie dolls have a 60% likelihood of also purchasing one of three types of candy bars [Forbes, Sept 8, 1997]
- Strategies?
 1. Put them closer together in the store.
 2. Put them far apart in the store.
 3. Package candy bars with the dolls.
 4. Package Barbie + candy + poorly selling item.
 5. Raise the price on one and lower it on the other.
 6. Offer Barbie accessories for proofs of purchase.
 7. Do not advertise candy and Barbie together.
 8. Offer candies in the shape of a Barbie doll.





Caution in Association Rule Mining



- Basket size: per bill, customer, day
- Item level: SKU, product category



mlxtend version: 0.17.2

[apriori](#)[association_rules](#)[fpgrowth](#)[fpmax](#)

apriori

apriori(df, min_support=0.5, use_colnames=False, max_len=None, verbose=0, low_memory=False)

Get frequent itemsets from a one-hot DataFrame

Parameters

- **df** : pandas DataFrame

pandas DataFrame the encoded format. Also supports DataFrames with sparse data; for more info, please see (https://pandas.pydata.org/pandas-docs/stable/user_guide/sparse.html#sparse-data-structures)

Please note that the old pandas SparseDataFrame format is no longer supported in mlxtend >= 0.17.2.

The allowed values are either 0/1 or True/False. For example,

	Apple	Bananas	Beer	Chicken	Milk	Rice
0	True	False	True	True	False	True
1	True	False	True	False	False	True
2	True	False	True	False	False	False

[apriori](#)[association_rules](#)[fpgrowth](#)[fpmax](#)

association_rules

`association_rules(df, metric='confidence', min_threshold=0.8, support_only=False)`

Generates a DataFrame of association rules including the metrics 'score', 'confidence', and 'lift'

Parameters

- `df` : pandas DataFrame

pandas DataFrame of frequent itemsets with columns ['support', 'itemsets']

- `metric` : string (default: 'confidence')

Metric to evaluate if a rule is of interest. **Automatically set to 'support' if `support_only=True`.**

Otherwise, supported metrics are 'support', 'confidence', 'lift',

'leverage', and 'conviction'. These metrics are computed as follows:

- `support(A->C) = support(A+C) [aka 'support']`, range: [0, 1]

- `confidence(A->C) = support(A+C) / support(A)`, range: [0, 1]

- `lift(A->C) = confidence(A->C) / support(C)`, range: [0, inf]

- `leverage(A->C) = support(A->C) - support(A)*support(C)`,
range: [-1, 1]




- `conviction = [1 - support(C)] / [1 - confidence(A->C)]`,



Part4: Special Tasks



Special task

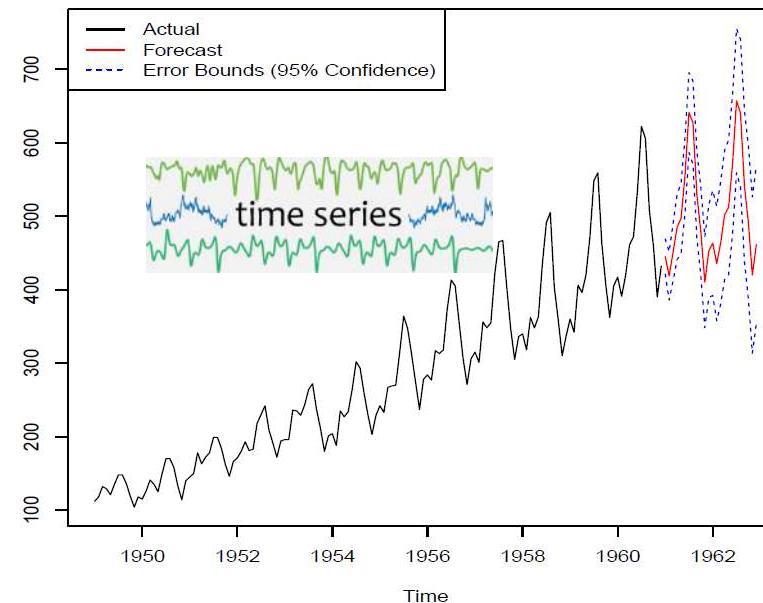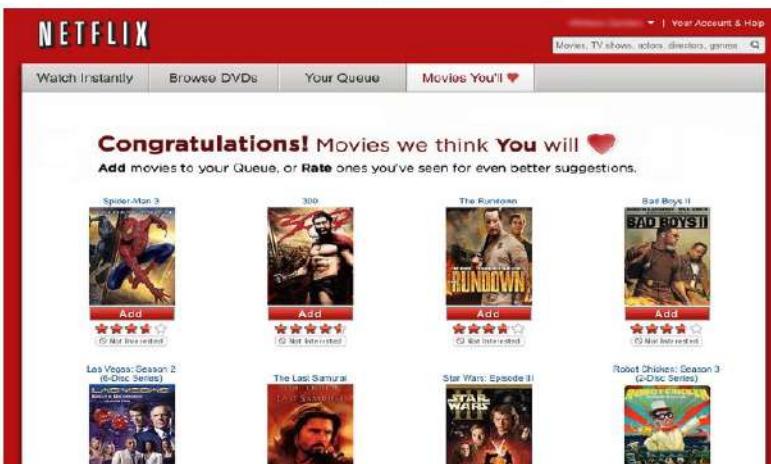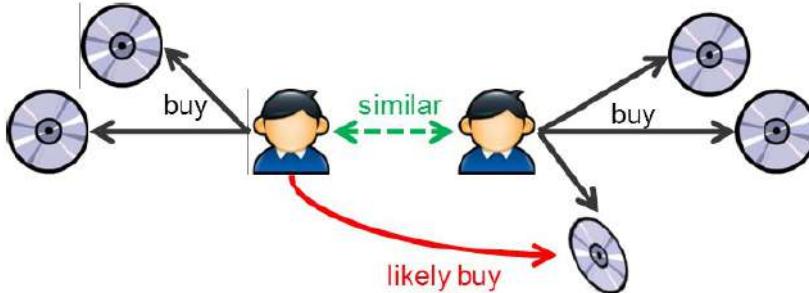

The screenshot shows a social media interface with a yellow header. On the left, a yellow box displays '65.00%' and a list of 10 tweets. On the right, a red box displays '35.00%' and a list of 10 tweets. A large yellow smiley face icon is centered between the two boxes. At the bottom, it says 'POWERED BY S-SENSE' and features the logos for SPT and NECTEC.

Left Box (65.00%)

- @Kobken_ សូមអាជីវបែនពិភ័យ សារុណា //ភ្នំពេញ នៅក្នុង ទី // 555555 សូមអាជីវបែនពិភ័យ ^~
- សំណើជាបួនរាយរាជរាជីជាមួយខ្លួន ដើម្បីអាជីវបែនពិភ័យ និងបានរាយរាជរាជីជាមួយខ្លួន និងខ្លួន)
- សិរីភាព 3
- សារុណា_A9ma_teethoth សារុណាដឹកនោះគេបានចូលរួមទៅក្នុង តុលាតំណើន D
- សំណើជាបួនរាយរាជរាជី និង ;)
- @Zinger_MONice ដឹកនោះគេបានចូលរួមទៅក្នុង តុលាតំណើន ^~
- @BubblyBubble @richieme សារុណាដឹកនោះគេបានចូលរួមទៅក្នុង តុលាតំណើន ^~



Right Box (35.00%)

- និងអាជីវបែនពិភ័យ - * // អាស http://t.co/VUyGKJUD
- និងអាជីវបែនពិភ័យ - *
- ចំណាត់ថ្នាក់ 8 ខែការមែនអាជីវបែនពិភ័យ និង - * - តុលាតំណើន
- សំណើជាបួនរាយរាជរាជី ; សូមអាជីវបែនពិភ័យ
- សូមអាជីវបែនពិភ័យ - *
- និងអាជីវបែនពិភ័យ - #men 555
- និង (សំណើជាបួនរាយរាជរាជី @BoWorst
- សំណើជាបួនរាយរាជរាជី នៅក្នុង តុលាតំណើនរាយរាជរាជីជាមួយខ្លួន)
- សំណើជាបួនរាយរាជរាជី និង






Recommendation system

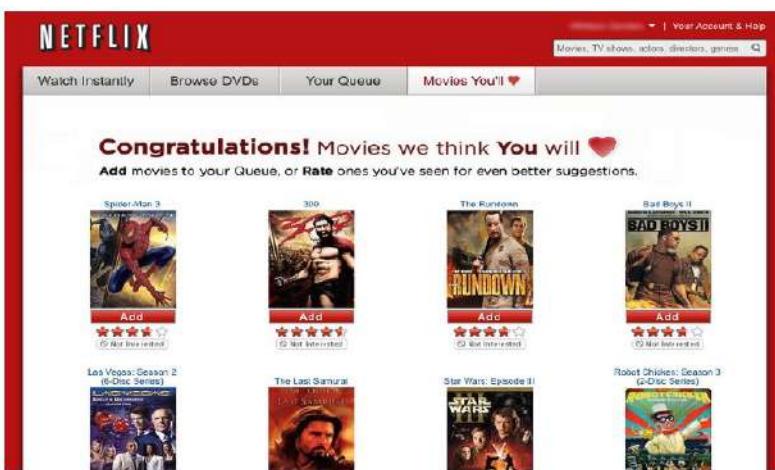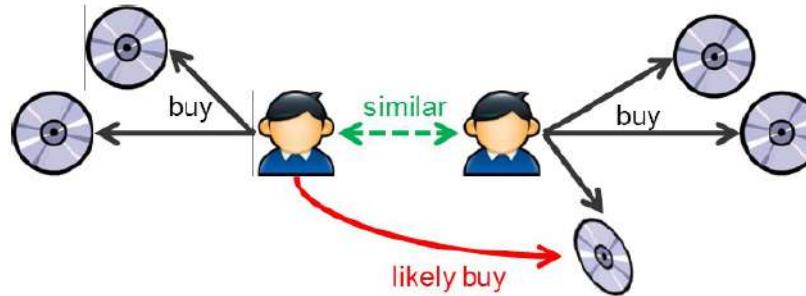


	Harry potter	X-Men	Hobbit	Argo	Pirates
101	5	2	4	?	?
102	?	?	5	2	?
103	1	2	?	?	3
104					
105					
...					

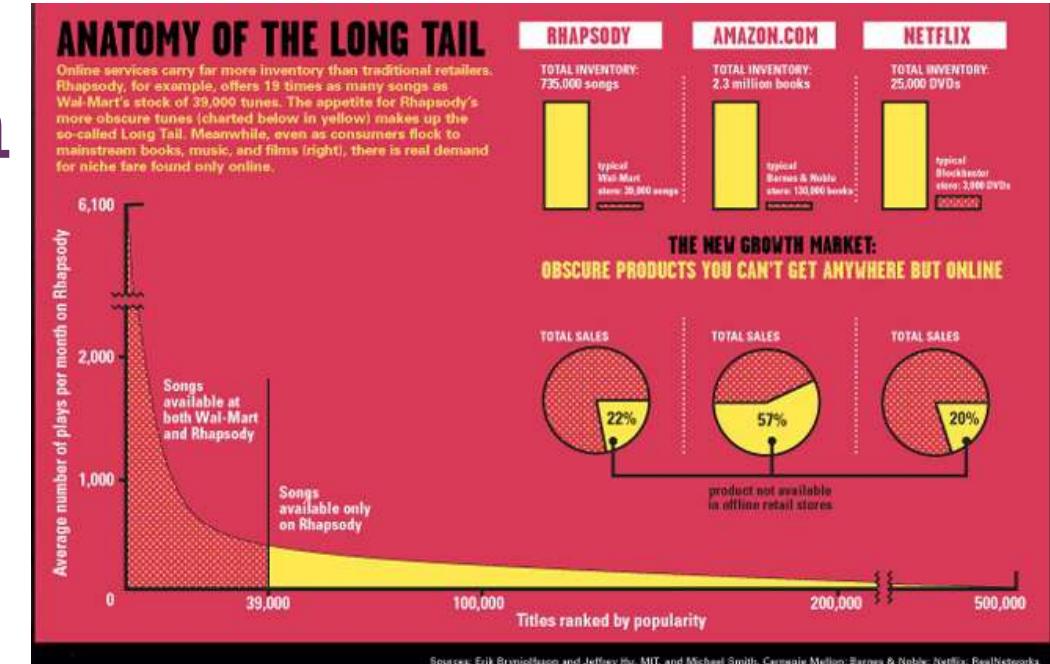

	Harry potter	X-Men	Hobbit	Argo	Pirates
101	5	2	4	1	3
102	4	1	5	2	3
103	1	2	4	1	3
104					
105					
...					



Time Series Analysis (Trend Forecasting)

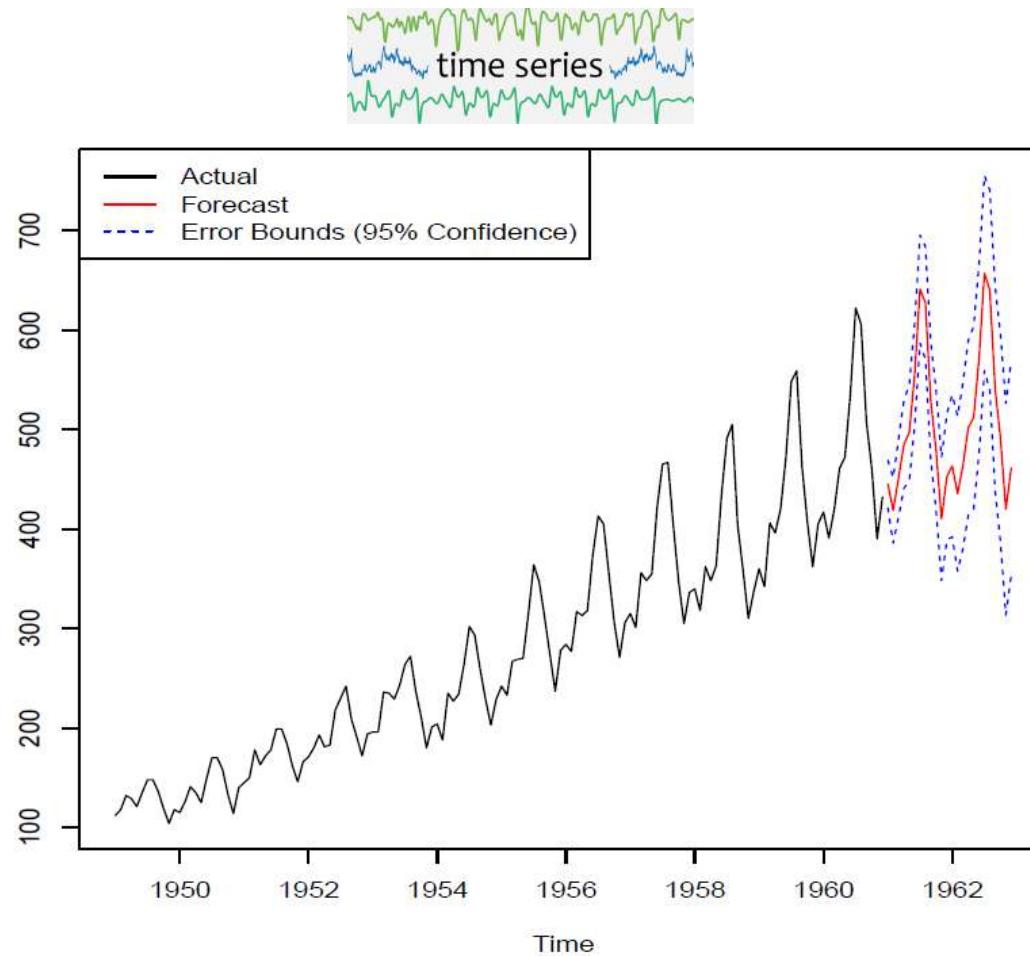

■ Techniques

- **ARIMA (Autoregressive integrated moving average)**

- Exponential Smoothing
- Neural Networks
- Deep Learning

■ Sample Applications

- Customer trend forecasting
- Revenue trend forecasting
- Rainfall forecasting
- Remaining useful life forecasting (preventive maintenance)



Text Mining

<https://ischool.syr.edu/infospace/2013/04/23/what-is-text-mining/>



- Text mining, which is sometimes referred to “text analytics” is one way to make qualitative or “unstructured” data **usable by a computer**.
- Convert from unstructured to structured data

NBC Nightly News (@nbcnightlynews) - Following: America's #1 evening news broadcast. Tweets by @newsdel & @braddjaffy. Join us on Facebook <http://facebook.com/nbcnightlynews>

NBC News (@NBCNews) - Following: A leading source of global news and information for more than 75 years. Have a news tip or question? Ask @rozzy, @lou_dubois, @jbaiata or @anthonyquintano.

CNN Breaking News (@cnnbrk) - Following: CNN.com is among the world's leaders in online news and information delivery.



Comments	Good	Like	Hate	Sentiment
Tweet1	7	8	0	😊
Tweet2	1	0	10	😢
Tweet3	2	9	1	😊





Text Mining (cont.): Sentiment Analysis

<http://pop.ssense.in.th/>






Text Mining (cont.): Emerging Trend Analysis

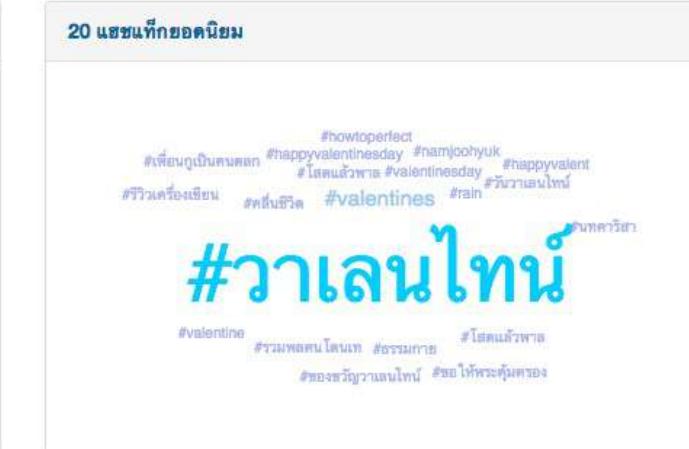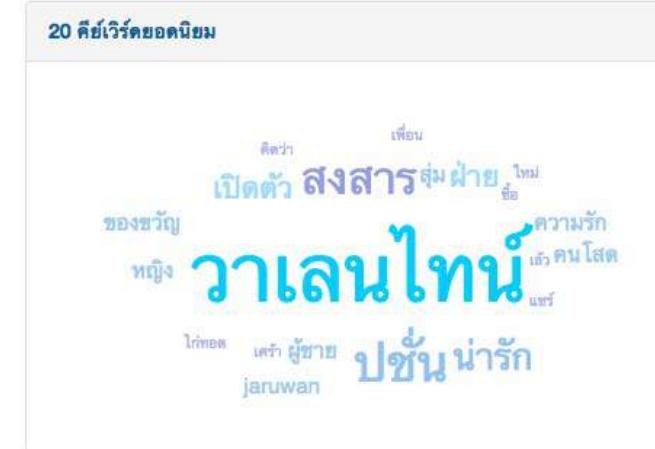

Social Network Analysis

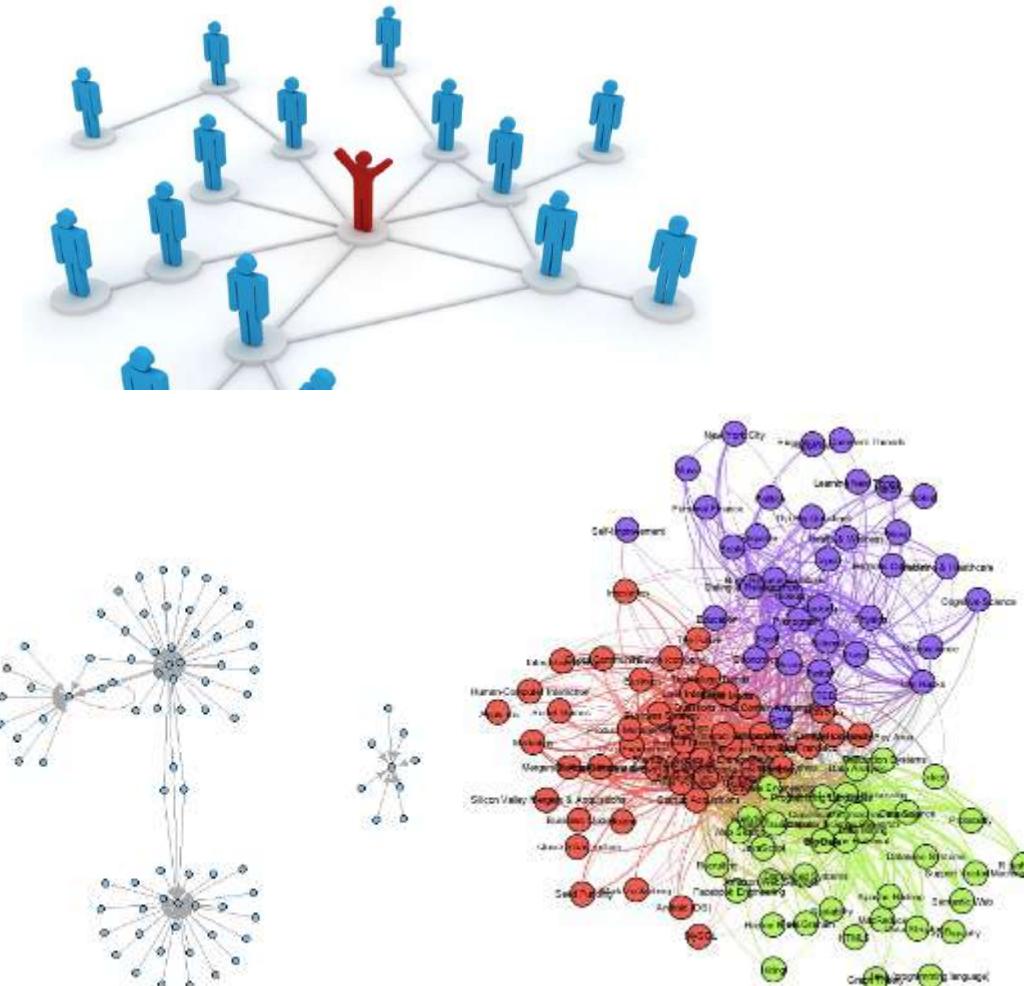

■ Techniques

- Centrality: degree, closeness, betweenness, transitivity
- Community detection
- Graph Clustering

■ Sample Applications

- Influencer detection
- Community detection



Part5: Demo



Demo

- 1_Decision-Trees_Random-Forests.ipynb
- 2_Linear-Regression.ipynb
- 3_Logistic-Regression.ipynb
- 4_Neural-Network.ipynb
- 5_K_Nearest_Neighbors
- 6_Support_Vector_Machine
- 7_Save_Load_Model

- 8_K-Means-Clustering.ipynb
- 9_Market_Basket_Intro.ipynb



Exercise

Target=y - has the client subscribed a term deposit? (binary: 'yes', 'no')

Bank Direct Target Marketing

M1: Simple Logistic Regression

1) data prep

2) Model

- Logistic Regression
- print model (coef, intercept)

3) Evaluation

- confusion matrix
- classification report

M2: Categorical

- dummy code
- recode - ordinal

M3: Model Selection

- backward selection



The data is related with direct marketing campaigns (phone calls) of a Portuguese banking institution. The classification goal is to predict if the client will subscribe a term deposit (variable y).

Data Set Information: The data is related with direct marketing campaigns of a Portuguese banking institution. The marketing campaigns were based on phone calls. Often, more than one contact to the same client was required, in order to access if the product (bank term deposit) would be ('yes') or not ('no') subscribed.

Attribute Information:

Bank client data:

- Age (numeric)
- Job : type of job (categorical: 'admin.', 'blue-collar', 'entrepreneur', 'housemaid', 'management', 'retired', 'self-employed', 'services', 'student', 'technician', 'unemployed', 'unknown')
- Marital : marital status (categorical: 'divorced', 'married', 'single', 'unknown'; note: 'divorced' means divorced or widowed)



Thank you
& any questions