


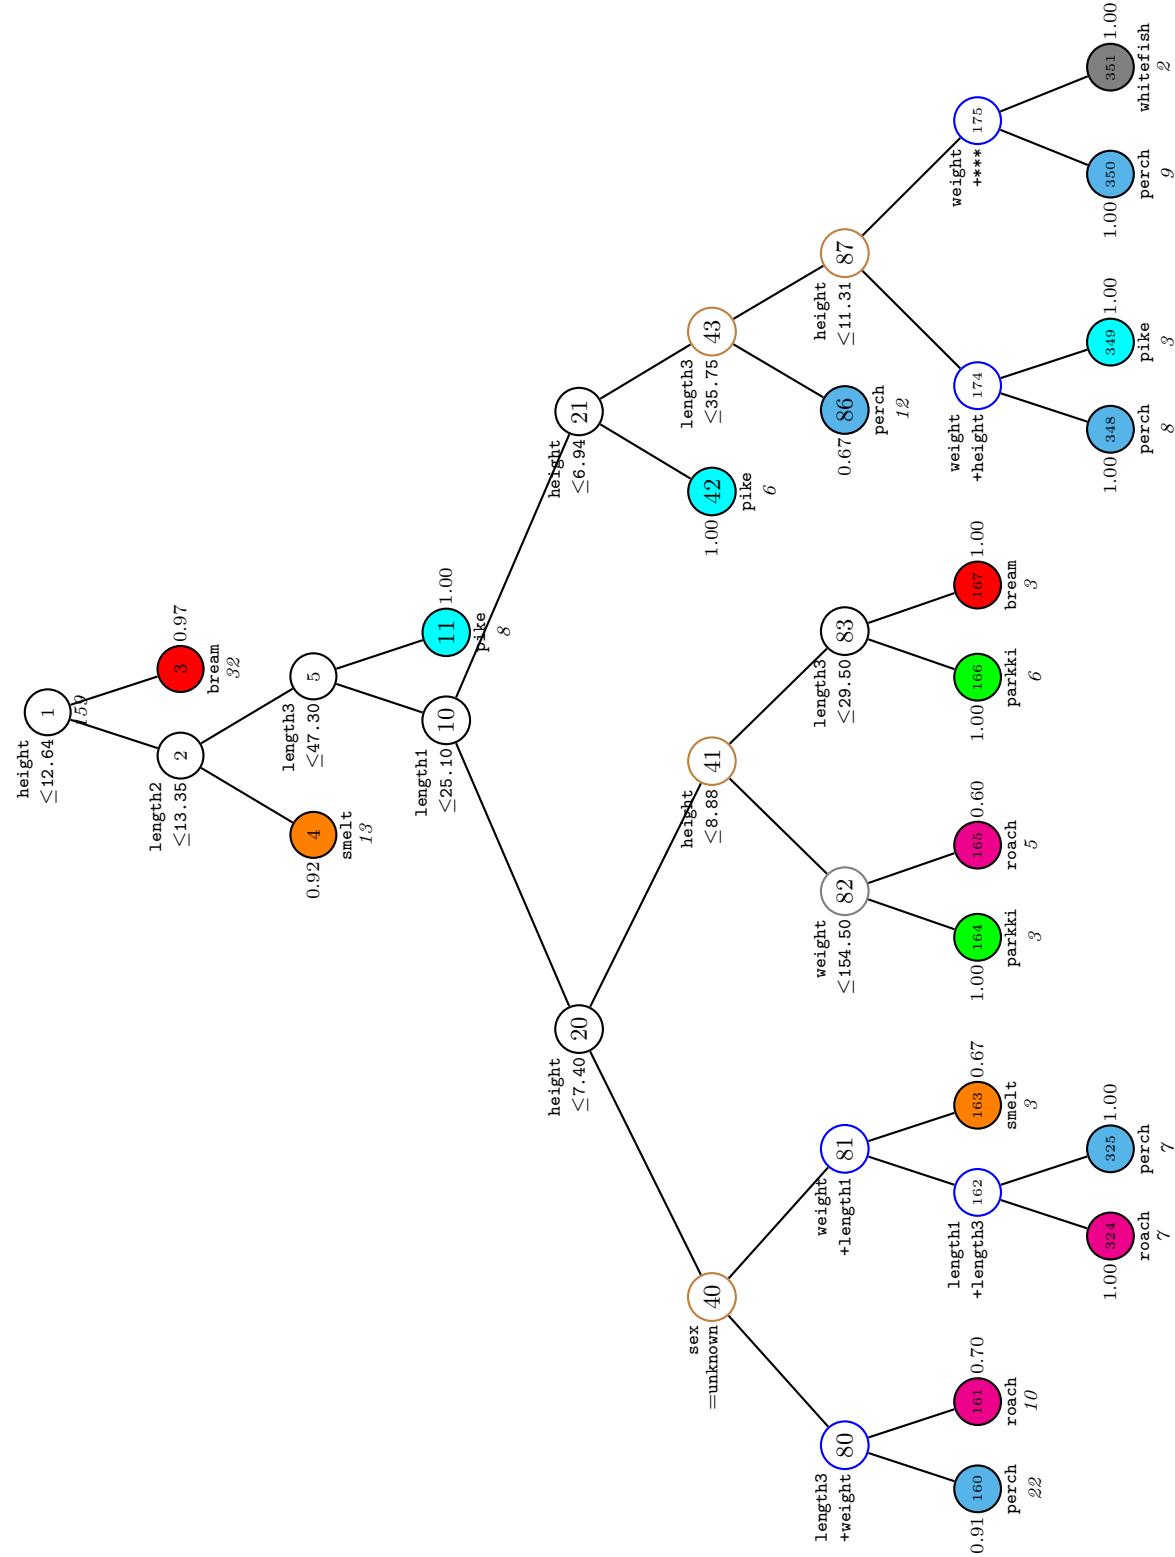

GUIDE v.46.2 0.250-SE classification tree for predicting **species** using estimated priors and unit misclassification costs. At each split, an observation goes to the left branch if and only if the condition is satisfied. Splits at nodes drawn with **gray** circles are not statistically significant. Splits at nodes drawn with **brown** circles are interaction splits. Splits at nodes drawn with **blue** circles are linear splits. Predicted class and total sample size (in *italics*) printed below each terminal node; highest class posterior probability beside node. Second best split variable at root node is `length3`.