

# Indian Institute of Technology, Madras - BS in Data Science and Applications

## Notations :

- 1.Options shown in green color and with ✓ icon are correct.
- 2.Options shown in red color and with ✗ icon are incorrect.

**Question Paper Name :**

IIT M FOUNDATION AN4 EXAM QPF4 16  
JULY 2023

**Subject Name :**

2023 July: IIT M FOUNDATION AN4 EXAM  
QPF4

**Creation Date :**

2023-07-10 18:54:05

**Duration :**

240

**Total Marks :**

705

**Display Marks:**

Yes

**Share Answer Key With Delivery Engine :**

Yes

**Actual Answer Key :**

Yes

**Calculator :**

Scientific

**Magnifying Glass Required? :**

No

**Ruler Required? :**

No

**Eraser Required? :**

No

**Scratch Pad Required? :**

No

**Rough Sketch/Notepad Required? :**

No

**Protractor Required? :**

No

**Show Watermark on Console? :**

Yes

**Highlighter :**

No

**Auto Save on Console?**

Yes

**Change Font Color :**

No

**Text Areas :** PlainText

**Possible Answers :**

4

**Question Number : 180 Question Id : 640653577624 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

Question Label : Short Answer Question

Find the value of  $P\left(\frac{1}{4} \leq X \leq \frac{3}{4}\right)$ . Enter

the answer correct to two decimal places.

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Range

**Text Areas :** PlainText

**Possible Answers :**

0.66 to 0.72

## DBMS

<b>Section Id :</b>	64065339059
<b>Section Number :</b>	9
<b>Section type :</b>	Online
<b>Mandatory or Optional :</b>	Mandatory
<b>Number of Questions :</b>	18
<b>Number of Questions to be attempted :</b>	18
<b>Section Marks :</b>	50
<b>Display Number Panel :</b>	Yes
<b>Group All Questions :</b>	No

Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065382508
Question Shuffling Allowed :	No
Is Section Default? :	null

Question Number : 181 Question Id : 640653577625 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL : DATABASE MANAGEMENT SYSTEMS (COMPUTER BASED EXAM)"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?  
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE [TOP](#) FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531928942.  YES

6406531928943.  NO

Sub-Section Number :	2
Sub-Section Id :	64065382509
Question Shuffling Allowed :	Yes
Is Section Default? :	null

Question Number : 182 Question Id : 640653577626 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

**Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

The lowest level of data abstraction is

**Options :**

6406531928944. ✔ physical level

6406531928945. ✘ logical level

6406531928946. ✘ view level

6406531928947. ✘ application level

**Question Number : 183 Question Id : 640653577627 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction**

**Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

Suppose a company wants to determine whether the 'price' of the commodity will be an attribute in the shopping database or not. Which of the following holds good about this?

**Options :**

6406531928948. ✘ This is a physical-level decision.

6406531928949. ✔ This is a logical level decision.

6406531928950. ✘ This is an application-level decision.

6406531928951. ✘ This is a view-level decision.

**Question Number : 184 Question Id : 640653577632 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction**

**Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

Consider the following scenario:

The Reserve Bank of India (RBI) has issued guidelines declaring that the Rs. 2000 note will no longer be considered legal tender, starting from a specific date. The RBI wants to update its database to reflect this change and ensure that transactions involving the Rs. 2000 note are flagged as invalid.

Which DBMS concept would be most relevant for the RBI to update its database and flag transactions involving the Rs. 2000 note as invalid after the specified date?

**Options :**

6406531928965. ✖ CASCADE

6406531928966. ✖ Data Definition Language (DDL)

6406531928967. ✔ Triggers

6406531928968. ✖ Indexing

**Question Number : 185 Question Id : 640653577636 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

Consider the schema given below :

Emp (eid, *ename*, *age*, *salary*)

Works (eid, *did*, *pct\_time*)

Dept (did, *budget*, *managerid*)

Identify the correct SQL command to create a view named, **EMPLOYEE**, by selecting attributes like *eid*, *salary*, and *managerid*. Select those employees whose *salary* is greater than 1,00,000 and are atleast 45 years old.

**Options :**

```
SELECT E.eid, E.salary, D.managerid
FROM Emp E, Works W, Dept D
WHERE E.eid = W.eid AND W.did = D.did
AND E.salary > 100000 AND E.age > = 45 AS VIEW
```

6406531928975. ✖

```
CREATE TABLE EMPLOYEE (emp_id, salary, managerid)
ON SELECT E.eid, E.salary, D.managerid
FROM Emp E, Works W, Dept D
WHERE E.eid = W.eid AND W.did = D.did
AND E.salary > = 100000 AND E.age > 45 AS VIEW
```

6406531928976. ✖

```
CREATE VIEW EMPLOYEE (emp_id, salary, managerid)
ON SELECT E.eid, E.salary, D.managerid
FROM Emp E, Works W, Dept D
WHERE E.eid = W.eid AND W.did = D.did
AND E.salary > 100000 AND E.age > 45
```

6406531928977. ✖

```
CREATE VIEW EMPLOYEE (emp_id, salary, managerid)
AS SELECT E.eid, E.salary, D.managerid
FROM Emp E, Works W, Dept D
WHERE E.eid = W.eid AND W.did = D.did
AND E.salary > 100000 AND E.age > = 45
```

6406531928978. ✔

**Question Number : 186 Question Id : 640653577637 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 2**

Question Label : Multiple Choice Question

An instance of the relation **students** is given below.

sid	name	age	gpa
53831	Madayan	11	1.8
53832	Guldu	12	2
53666	Jones	18	3.4
53688	Smith	19	3.2
53650	Smith	19	3.8

Figure 3: Relation students

Which of the following query executed on relation **students** would result in the output given below ?

sid	name	age	gpa
53832	Guldu	12	2
53666	Jones	18	3.4
53831	Madayan	11	1.8
53650	Smith	19	3.8
53688	Smith	19	3.2

Figure 4: Output

**Options :**

6406531928979. ✖ `SELECT * FROM students`

6406531928980. ✖ `SELECT * FROM students ORDER BY name`

6406531928981. ✔ `SELECT * FROM students ORDER BY name, sid`

6406531928982. ✖ `SELECT * FROM students ORDER BY name, sid desc`

**Sub-Section Number :** 3

**Sub-Section Id :** 64065382510

**Question Shuffling Allowed :** Yes

**Is Section Default? :** null

**Question Number : 187 Question Id : 640653577628 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

**Question Label : Multiple Choice Question**



Consider two relations **R** and **S** as shown below.

A	B	C
1	2	3
2	4	6
3	7	3
4	3	4

Table 1: **R**

B	C	D
7	3	4
2	3	5
3	7	6
2	3	7

Table 2: **S**

The number of tuples in **R**  $\bowtie$  **S** are : [Note :  $\bowtie$  denotes left outer join.]

**Options :**

6406531928952. ✖ 3

6406531928953. ✖ 4

6406531928954. ✔ 5

6406531928955. ✖ 16

**Question Number : 188 Question Id : 640653577629 Question Type : MCQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 3**

Question Label : Multiple Choice Question

Consider the relation schema **company**(*name*, *area*, *city*) and **project**(*pid*, *budget*, *location*). The domain of attributes *city* and *location* is the same i.e. Indian cities. Which of the following relational algebra expression would list all cities that are common in company and project?

**Options :**

6406531928956. ✖  $\Pi_{city}(\text{company}) \cup \Pi_{location}(\text{project})$



6406531928957. ✖  $\Pi_{city}(\text{company}) - \Pi_{location}(\text{project})$

6406531928958. ✖  $\Pi_{city}(\text{company}) \bowtie \Pi_{location}(\text{project})$

6406531928959. ✔  $\Pi_{city}(\text{company}) - (\Pi_{city}(\text{company}) - \Pi_{location}(\text{project}))$


Sub-Section Number :	4
Sub-Section Id :	64065382511
Question Shuffling Allowed :	Yes
Is Section Default? :	null

Question Number : 189 Question Id : 640653577642 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0


Correct Marks : 4

Question Label : Multiple Choice Question

Consider the ER Diagram given below. Identify the correct statements from the ER diagram.

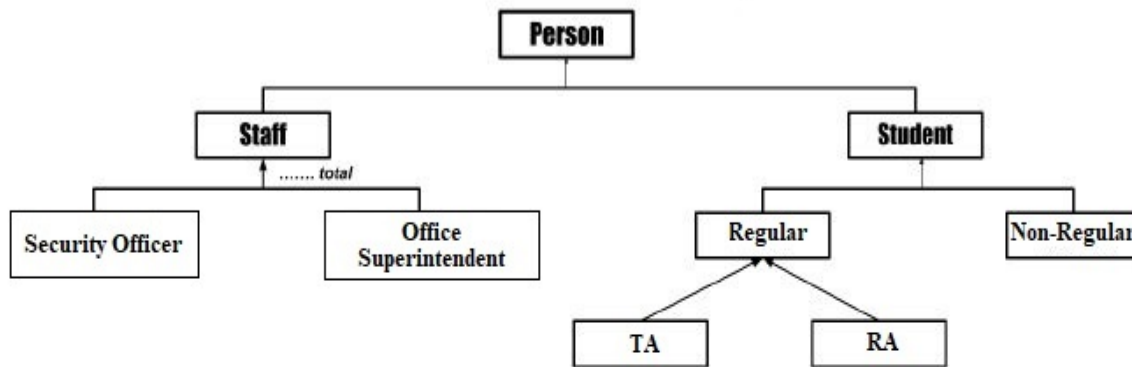

- a A Student is a person.
- b A TA student can be an RA as well.
- c A staff can either be a Security Officer or Office Superintendent but not both.

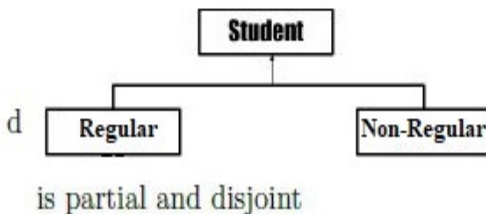

**Options :**

- 6406531928993. ✖ Only a and b are correct
- 6406531928994. ✖ Only b, c, and d are correct
- 6406531928995. ✖ Only a, c and d are correct
- 6406531928996. ✔ All a, b, c, d are correct

**Sub-Section Number :**

5

**Sub-Section Id :**

64065382512

**Question Shuffling Allowed :**

Yes

**Is Section Default? :**

null

**Question Number : 190 Question Id : 640653577630 Question Type : MSQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 4 Max. Selectable Options : 0**

**Question Label : Multiple Select Question**

Consider the relation G20(country\_name, foreign\_minister\_name, events, date, venue)

Questions:

1. Find the name of foreign ministers whose names start with 'j' and have at least 5 characters.
2. Find out the number of events taking place in venue 'GIFT City'.
3. Find out the venue name and number of events taking place in each venue

SQL queries:

- a. Select foreign\_minister\_name from G20  
where foreign\_minister\_name like 'j\_\_\_\_'
- b. Select foreign\_minister\_name from G20  
where foreign\_minister\_name like 'j\_\_\_\_%'
- c. Select count(events) from G20 where venue = 'GIFT City'
- d. Select count(events) from G20 where venue = 'GIFT City'  
Group By venue
- e. Select venue, count(events) from G20  
Group By venue
- f. Select venue, count(events) from G20

Match the correct SQL queries with the corresponding Questions.

**Options :**

6406531928960. ✖ 1-a, 2-c, 3-f

6406531928961. ✔ 1-b, 2-c, 3-e

6406531928962. ✖ 1-a, 2-d, 3-f

6406531928963. ✔ 1-b, 2-d, 3-e

**Question Number : 191 Question Id : 640653577634 Question Type : MSQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 4 Max. Selectable Options : 0**

**Question Label : Multiple Select Question**

Consider the relation `product(p_id, name, price)`. Assume that no two product have the same price.

Choose the appropriate query/queries to find the names of three most expensive product.

**Options :**

6406531928970. ✖ `SELECT name FROM product  
ORDER BY price  
FETCH FIRST 3 ROWS ONLY`

6406531928971. ✔ `SELECT name FROM product  
ORDER BY price DESC  
FETCH FIRST 3 ROWS ONLY`

6406531928972. ✔ `SELECT name FROM product a  
WHERE  
(SELECT COUNT(price)  
FROM product b  
WHERE b.price>a.price) < 3`

6406531928973. ✖ `SELECT name FROM product a  
WHERE  
(SELECT COUNT(price)  
FROM product b  
WHERE b.price>a.price) > 3`

**Question Number : 192 Question Id : 640653577641 Question Type : MSQ Is Question**

**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 4 Max. Selectable Options : 0**

**Question Label : Multiple Select Question**

Consider the schema given below.

`Customer(Cid,Cname,Area,Phone)`

`Orders(Cid,Id)`

`Item(Id,Iname,cuisine)`

Which of the following is/are correct TRC to find the names of customers who have ordered an item 'Indian' cuisine ?

Options :

6406531928989. ✖  $\{ \exists P \mid C \in Customer, O \in Orders, I \in Item (O.Iid = P.Cid \wedge I.Iid = O.Iid \wedge I.cuisine = 'Indian' \wedge P.Cname = C.Cname) \}$

6406531928990. ✔  $\{ P \mid \exists C \in Customer \exists O \in Orders (O.cid = C.cid \wedge P.Cname = C.Cname \wedge \exists I \in Item (I.Iid = O.Iid \wedge I.cuisine = 'Indian')) \}$

6406531928991. ✖  $\{ P \mid \exists C \in Customer \exists O \in Orders (O.cid = C.cid \wedge P.Cname = C.Cname ) \wedge (\exists I \in Item \wedge I.cuisine = 'Indian') \}$

6406531928992. ✔  $\{ P \mid \exists C \in Customer \exists O \in Orders \exists I \in Item (O.Cid = C.Cid \wedge I.Iid = O.Iid \wedge I.cuisine = 'Indian' \wedge P.Cname = C.Cname) \}$

Sub-Section Number :

6

Sub-Section Id :

64065382513

Question Shuffling Allowed :

Yes

Is Section Default? :

null

Question Number : 193 Question Id : 640653577640 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2 Max. Selectable Options : 0

Question Label : Multiple Select Question

Consider the **student** relation given below. Select the correct query/queries to obtain the *last name* of students whose *age* is more than 25.

Student			
Fname	Lname	Age	Course
David	Sharma	27	DBMS
Aaron	Lilly	17	JAVA
Sahil	Khan	19	Python
Sachin	Rao	20	DBMS
Varun	George	23	JAVA
Simi	Verma	22	JAVA

Options :

6406531928985. ✓  $\{ t.Lname \mid Student(t) \wedge t.Age > 25 \}$

6406531928986. ✖  $\sigma_{Lname}(\Pi_{Age>25}(Student))$

6406531928987. ✓  $\Pi_{Lname}(\sigma_{Age>25}(Student))$

6406531928988. ✓  $\{ t \mid \exists s \in Student(s.Age > 25 \wedge t.Lname = s.Lname) \}$

Sub-Section Number : 7

Sub-Section Id : 64065382514

Question Shuffling Allowed : Yes

Is Section Default? : null

Question Number : 194 Question Id : 640653577631 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Consider the two relations R and S.

A	B	C
0	9	0
2	2	2
1	1	1

A	B	C
0	Cat	0
2	Dog	2
1	Lion	1

Figure 1: R and S

Let 'X' be the number of columns and 'Y' be the number of rows of the  $(R \bowtie S)$  relations.

What is the value of  $(X + Y)$  ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes



Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Question Number : 195 Question Id : 640653577639 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Consider the relation **student** shown in Table 3

Roll_no	Name	marks
1	Ram	50
2	Rakesh	65
3	Ram	45
4	Pranav	89
5	Rakesh	99
6	Emily	99
7	Grace	100
8	Lily	95

Table 3: student

What is the number of tuples returned by the following relational algebra expression  $\Pi_{name}(\sigma_{marks>50}(student))$

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

5

Sub-Section Number :

8

Sub-Section Id :

64065382515

Question Shuffling Allowed :

Yes

Is Section Default? :

null



**Question Number : 196 Question Id : 640653577633 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 4**

Question Label : Short Answer Question

Consider the following table which has four attributes: *A*, *B*, *C*, and *D* where *A* is the primary key and *C* is the foreign key referencing to *A*.

A	B	C	D
1	1	5	6
2	2	5	7
8	4	7	4
3	1	5	8
4	2	4	9
5	2	4	1
6	1	1	2
7	4	1	3

How many tuples will be left in the table if the tuple (1,1,5,6) is deleted and ON DELETE CASCADE construct is applied over the table?

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Equal

**Text Areas :** PlainText

**Possible Answers :**

4

**Question Number : 197 Question Id : 640653577635 Question Type : SA Calculator : None**

**Response Time : N.A Think Time : N.A Minimum Instruction Time : 0**

**Correct Marks : 4**

Question Label : Short Answer Question

Consider the relational schema given in Figure 2.

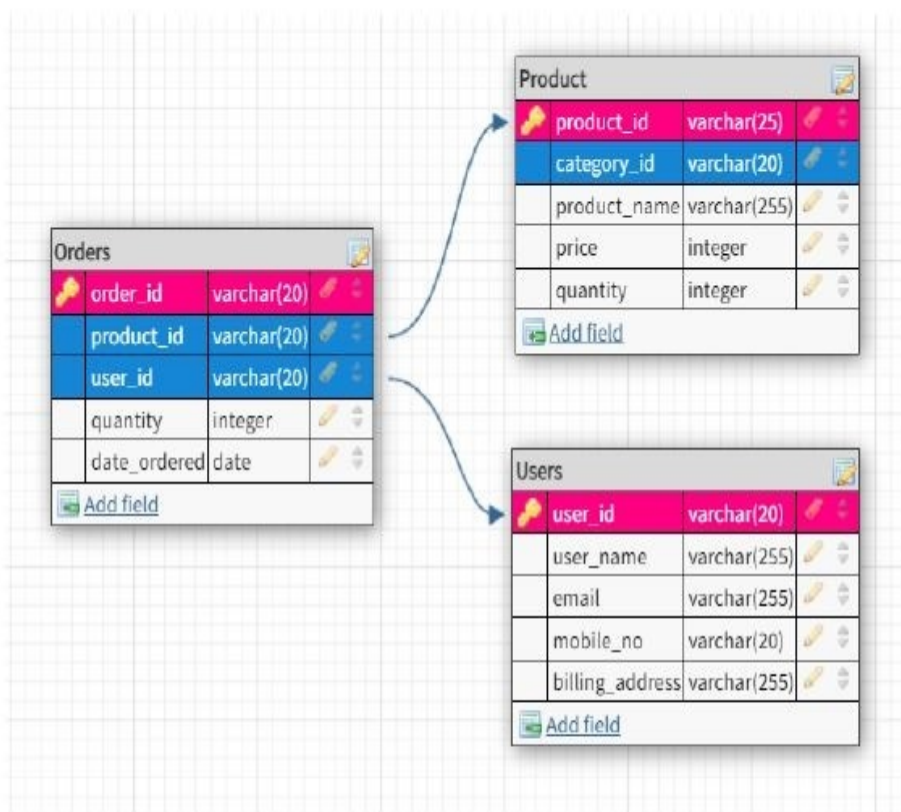


Figure 2: eshop Schema

If the relations **Orders**, **Product** and **Users** have 10, 6, 8 rows respectively, what is the maximum number of rows returned by the following query?

(Note: Consider all the attributes are having NOT NULL constraint.)

```
SELECT * FROM Orders RIGHT OUTER JOIN Users
ON orders.user_id = Users.user_id;
```

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Equal

**Text Areas :** PlainText

**Possible Answers :**

17

**Question Number :** 198 **Question Id :** 640653577638 **Question Type :** SA **Calculator :** None

**Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

**Correct Marks :** 4

Question Label : Short Answer Question

Consider the E-R diagram in Figure 5.

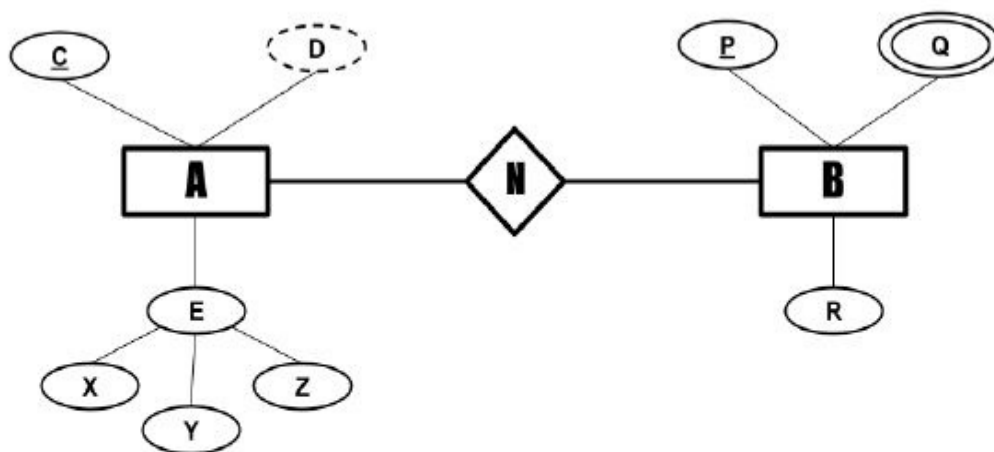


Figure 5: ERD

Consider the following assumptions :

a : denotes the number of attributes in entity set A

b : denotes the minimum number of table(s) required to represent this E-R diagram?

What is the value of  $a + b$  ?

**Response Type :** Numeric

**Evaluation Required For SA :** Yes

**Show Word Count :** Yes

**Answers Type :** Equal

**Text Areas :** PlainText

**Possible Answers :**

8

## PDSA

Section Id :	64065339060
Section Number :	10
Section type :	Online
Mandatory or Optional :	Mandatory