Oracle Eloqua Bulk API v2.0 Developer Guide

©2014 Oracle Corporation. All rights reserved
02/12/2014

ORACLE | eloqua

Contents

1 Eloqua's Bulk API Documentation 6

2 Getting Started with the Bulk API 7

2.1 Requirements 7

2.2 Considerations 7

2.2.1 Use Case 7

2.2.2 Authentication and Security 7

2.3 Accessible Elements 8

2.4 API Call Format 8

2.5 Introduction to Eloqua Elements 8

2.5.1 Eloqua Elements 9

2.5.2 Bulk API Elements 9

2.6 API Call Format 10

2.6.1 Pattern 10

2.6.2 Basic Structure 10

2.6.3 Example Call & Response 13

2.7 Filtering 13

2.7.1 Simple Filters 14

2.7.2 Complex Filters 14

2.8 Troubleshooting 16

2.8.1 View Sync Logs 16

2.8.2 Check for Import Errors 17

2.8.3 Retrieve Past Data Files 18

2.9 Migrate from Bulk 1.0 to Bulk 2.0 18

2.9.1 Core Changes 18

2.9.2 Feature Differences 19

3 Tutorials 20

3.1 Authenticate using HTTP Basic Authentication 20

3.2 Authenticate Using OAuth2 20

3.2.1 Introduction 21

3.2.2 Sample Flows with Eloqua Endpoints 21

©2014 Oracle Corporation. All rights reserved

3.3 Import Data Into Eloqua 26
3.3.1 Create the Import Definition 26
3.3.2 Push Data to Staging Area 28
3.3.3 Synchronize the Imported Data 29
3.4 Export Data from Eloqua 30
3.4.1 Create the Export Definition 30
3.4.2 Synchronize the Data for Export 32
3.4.3 Retrieve the Exported Data 33
3.5 Search for Field Names 34
3.6 Create a New Entity with POST 35
3.6.1 Create a Contacts Import Entity 36
3.7 Retrieve Entities from Eloqua with GET 36
3.7.1 Basic Request 37
3.7.2 Retrieve a List of Entities 37
3.8 Update an Existing Import or Export with PUT 39
3.8.1 Update Account Import Definition with PUT 39
3.9 Delete an Entity with DELETE 40
4 Reference 42
4.1 Bulk API Endpoint Reference 42
4.1.1 /accounts/ 42
4.1.2 /activities/ 66
4.1.3 /contacts/ 88
4.1.4 /customObjects/ 117
4.1.5 /emailGroups/ 143
4.1.6 /exports/ 146
4.1.7 /imports/ 149
4.1.8 /syncs/ 151
4.2 Eloqua Markup Language version 3 160
4.2.1 Available Entities 161
4.2.2 Access Patterns 161
4.2.3 Syntax Examples 161

©2014 Oracle Corporation. All rights reserved

4.2.4 Changes In Version 3 163
4.2.5 Grammar 163
4.3 Eloqua Expression Language 167
4.3.1 Operators 167
4.3.2 Examples 168
4.3.3 Grammar 169
4.4 Eloqua Status Codes 172
4.5 HTTP Status Codes 173
4.6 Activity Fields 174
4.6.1 EmailOpen 174
4.6.2 EmailClickthrough 174
4.6.3 EmailSend 175
4.6.4 Unsubscribe 176
4.6.5 Bounceback 176
4.6.6 WebVisit 176
4.6.7 PageView 177
4.6.8 FormSubmit 177
4.7 Import Characteristics 178
4.8 Sync Actions 178
4.8.1 Format 178
4.8.2 Example 179
4.9 Sync Status Types 180
4.10 Update RuleTypes 180
4.11 Discovery 180
4.11.1 Request URL 181
4.11.2 Response 181
4.12 Bulk API Limits 184
4.12.1 General Limits 184
4.12.2 Import and Export Limits 184
4.13 OAuth Responses: Authorization Code Grant Request 184
4.13.1 Acceptance 184

©2014 Oracle Corporation. All rights reserved

4.13.2 Rejection 185
4.13.3 Failure Before client_id or redirect_url Validation 185
4.13.4 Failure After client_id and redirect_uri Validation 187
4.14 OAuth Responses: Exchanging Authorization Code for Access Token 189
4.14.1 Success 189
4.14.2 Failure 189
4.15 OAuth Responses: Exchanging Refresh Token for New Access Token 193
4.15.1 Success 193
4.15.2 Failure 194
4.16 OAuth Responses: Implicit Grant 195
4.16.1 Acceptance 195
4.16.2 Rejection 196
4.16.3 Failure before client_id or redirect_uri validation 196
4.16.4 Failure After client_id and redirect_uri Validation 199
4.17 OAuth Responses: Resource Owner Password Credentials Grant 201
4.17.1 Success 201
4.17.2 Failure 201

©2014 Oracle Corporation. All rights reserved

1 Eloqua's Bulk API Documentation

Eloqua's Bulk API enables you to import and export contact, activity, account, and custom object data into and out of Eloqua at scale. The Bulk API uses the same general pattern for all calls: once you are comfortable with the workflow, you're good to go.

The Bulk API is *scalable*, working efficiently on large data sets and in multi-tenant systems. Its design provides straightforward setup, a simple and consistent interface using REST principles, and it provides granular feedback for troubleshooting.

The Concepts section discusses core concepts related to Eloqua's Bulk API: the API call format, descriptions of the assets and entiteis you will be working with, and provides some troubleshooting guidance. The Tutorials provide step-by-step instructions for common tasks you may want to accomplish with the Bulk API: importing and exporting data, searcing for fields, and so on. Finally, the Reference section provides detailed reference materials for the API itself, detailed explanations of Eloqua's status codes, Eloqua Expression Language, and Eloqua Markup Language.

©2014 Oracle Corporation. All rights reserved

2 Getting Started with the Bulk API

While the Bulk API is designed for ease of use, there are things to bear in mind when determining how you will interact with the Bulk API.

2.1 Requirements

The Bulk API is designed to let developers start developing with minimal setup or configuration effort. At a minimum, you need an Eloqua instance, and an account on that instance. In order to be able to interact with your Eloqua data, your account needs adequate permissions to access contact fields, secondary assets, an so on.

Some Eloqua instances enable contact-level security, which restricts access to data based on different user roles. Users might only have access to contacts located in their geographical region, for instance. Because these permissions affect what data the user can access, it is important that the Eloqua user accessing the API have the appropriate permissions.

2.2 Considerations

2.2.1 Use Case

The Bulk API does not constrain how you interact with it, but your use case should determine how you develop your integration.

For example, if you are importing data into Eloqua, you should consider *resiliency*: if an item fails to import, can you send it again in 15 minutes, or do you need to deal with the failure immediately? Your use case will determine what measures you need to put into place to deal with this.

Similarly, if you are exporting data from Eloqua, how large a data set are you working with? Larger exports will be time consuming, so you can break the export up into smaller chunks using a `filter`. Be aware of the data volumes you expect to deal with and create your export definitions accordingly.

The Troubleshooting section discusses ways you can monitor your imports and exports and leverage this data to improve your integration. The Bulk API Limits documentation can also help guide you when designing your interaction with the Bulk API.

2.2.2 Authentication and Security

Eloqua uses SSL with 128-bit encryption to securely transmit traffic in all API calls.

For authentication, Eloqua's Bulk API supports HTTP Basic Authentication as well as OAuth 2.0.

©2014 Oracle Corporation. All rights reserved

OAuth is the preferred method of authenticating. OAuth allows Bulk API-powered applications to access resources on behalf of a resource owner without needing the resource owner's credentials.

The Bulk API supports 2-legged OAuth for second party apps, and 3-legged OAuth for apps in the AppCloud™.

In cases where implementing OAuth is not feasible, you can use HTTP Basic Authentication. This approach requires that you obtain the user's credentials, which is not ideal. For example, if a user changes their password, you will need to obtain the new password. If feasible, use OAuth over basic authentication.

The Authenticate Using OAuth and Authenticate using HTTP Basic Authentication tutorials provide step-by-step instructions for authenticating to Eloqua using each method.

2.3 Accessible Elements

The Bulk API is gives you access to contacts, accounts, custom data objects, email groups, and external activities. See: Introduction to Eloqua Elements for a full description of each element.

2.4 API Call Format

Interactions with the Bulk API follow a consistent pattern: you create a record definition that tells Eloqua what data you are importing or exporting, move that data into a staging area, and either retrieve the data, in the case of an export, or push that data into Eloqua, in the case of an import.

The API Call Format document explores this pattern in detail, touching on the rationale behind the three-step workflow. It also discusses data formatting requirements, header requirements, and so on.

You should familiarize yourself with the API call format before starting to work with the Bulk API.

2.5 Introduction to Eloqua Elements

The Bulk API enables you to import and export data for numerous elements within Eloqua. The Bulk AP also has its own elements that it uses to interact with Eloqua.

The following sections describe all of the elements encountered when using the Bulk API, and highlights the different interaction patterns associated with each type.

©2014 Oracle Corporation. All rights reserved

2.5.1 Eloqua Elements

The “Eloqua Elements” are elements stored in Eloqua. Each element type has its own set of associated fields.

The Bulk API exists to allow you to import and export data related to these elements. However, due to the asynchronous design of the Bulk API, you never interact directly with the Eloqua Elements. Rather, you move data into a *"staging area"* and then synchronize the data into Eloqua or out for your use.

The Eloqua elements are:

- Contacts
- Accounts
- Custom Objects
- Activity
- External activities

With the exception of Activity and External Activities, you can use a `/fields` endpoint to retrieve the list of fields associated with each element in your Eloqua instance. See: Search for Field Names for more information.

Activity behaves differently than the other Eloqua elements. Each **Activity Type** has its own set of fields. Refer to Activity Fields for a full description of the Activity types that the Bulk API supports and their specific fields.

2.5.2 Bulk API Elements

The “Bulk API Elements” are objects that you create in order to interact with Eloqua through the Bulk API. The are, essentially, metadata elements: elements that provide context to Eloqua and to the Bulk API to allow them to perform the appropriate actions.

These bulk elements are:

- Imports
- Exports
- Syncs

Unlike the “Eloqua Elements”, which you interact with indirectly, the Bulk API enables you to perform direct CRUD operations on the metadata. If you `GET` an import or an export, Eloqua returns its data. In contrast, you cannot directly `GET` contact or activity data: you have to go through the export steps to obtain it.

©2014 Oracle Corporation. All rights reserved

2.6 API Call Format

All Bulk API calls use the same general call pattern: whether you are importing or exporting data, the structure of your call will be consistent.

2.6.1 Pattern

Importing and Exporting data with the Bulk API follows a three-step pattern:

1. Define the import or export. The definition describes how Eloqua's fields map to your own. For example, your 'email' field might map to Eloqua's `Contact.Field(C_EmailAddress)`. You can also give the definition a name, so that you can reuse it later, specify how to filter the data, and define any additional actions you want to perform. The import or export definition tells Eloqua what kind of operation to prepare to perform.
2. Move data into the staging area. For Imports, this means `POST`-ing your data to the staging area; for Exports, this means telling Eloqua to move its data into the staging area. The staging area is a middle ground that allows read and write operations to occur asynchronously from the HTTP requests you send.
3. Move the data to its final destination. For Imports, this means telling Eloqua to sync the data from the staging area into its database; for Exports, this involves retrieving the data from the staging area.

This design allows for fast client requests, while longer actions are performed asynchronously. By not interacting with the Eloqua database during the HTTP request, you gain a consistent expectation of how long I/O operations will take. The asynchronous pattern also enables scalability: were I/O operations and merges performed inline, database locks would impact the performance of your Eloqua instance.

The staging area system allows data to be written to disk, and then processed in the background without affecting performance.

2.6.2 Basic Structure

Familiarizing yourself with the common URI parameters, required HTML headers, and JSON patterns will give you a strong foundation from which to start using the Bulk API.

Call URL

The URL you need to call to access Eloqua's Bulk API depends on which "pod" your Eloqua instance is hosted on. The base url is:
`https://<host>.eloqua.com/api/bulk/2.0`, where `<host>` can be

©2014 Oracle Corporation. All rights reserved

> `secure`, `www02.secure`, or `secure.p03`. To find your URL, see: Determining Endpoint URLs on Topliners.

URL Parameters

The Bulk API's HTTP `GET` endpoints support a variety of URL parameters that you can use to control what data you retrieve.

- `limit` : specifies the maximum number of records to return
- `offset`: specifies an offset that allows you to retrieve the next batch of records. For example, if your `limit` is 1000, specifying an `offset` of 1000 will return records 1000 through 2000.
- `q`: specifies query criteria used to filter results.

  The `q` format is `<term><operator><value>`. For example: `name='Email*''`.
- `orderBy`: specifies the name of the property to order the results by.

  The `orderBy` format is `<term> ASC | DESC`. For example, `orderBy=name ASC`.

HTML Headers

Eloqua's Bulk API supports most common HTML Headers: in addition to the authentication headers for users of *Basic Authentication*, the `Content-Type` and `Accept` headers specify data formats for the data you import into Eloqua and the Bulk API's response data.

Content-Type

The Bulk API supports both JSON and CSV file formats as data sources for `PUT` and `POST` requests. The Bulk API **does not** support XML.

For `PUT` and `POST` requests, you **must** specify either `application/json` or `text/csv` in the `Content-Type` header: if you do not include the Content-Type header an error will occur. The Content-Type header is not required for `GET` and `DELETE` requests, since these do not accept data inputs.

Accept

The `Accept` parameter specifies what file formats you, the client, are willing to accept from the server: either JSON or CSV. Use of the Accept header is optional: if you do not specify a parameter for `Accept`, the response will default to JSON.

The following call requests the list of Contact fields in CSV format:

```
GET https://<host>.eloqua.com/api/bulk/2.0/contacts/fields
Accept: text/csv
```

The response would resemble:

©2014 Oracle Corporation. All rights reserved

```
name,internalName,dataType,defaultValue,hasReadOnlyConstraint,ha
sNotNullConstraint
Email Address,C_EmailAddress,emailAddress,,False,False
First Name,C_FirstName,string,,False,False
```

The following requests the list of Contact fields in JSON format:

```
GET https://<host>.eloqua.com/api/bulk/2.0/contacts/fields
Accept: application/json
```

The response resembles:


```
{
    "count": 82,
    "hasMore": false,
    "items": [
        {
            "createdAt": "1900-01-01T05:00:00.0000000Z",
            "dataType": "emailAddress",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
            "hasUniquenessConstraint": true,
            "internalName": "C_EmailAddress",
            "name": "Email Address",
            "statement": "{{Contact.Field(C_EmailAddress)}}",
            "updatedAt": "1900-01-01T05:00:00.0000000Z",
            "uri": "/contacts/fields/100001"
        },
        {
            "createdAt": "1900-01-01T05:00:00.0000000Z",
            "dataType": "string",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
            "hasUniquenessConstraint": false,
            "internalName": "C_FirstName",
            "name": "First Name",
            "statement": "{{Contact.Field(C_FirstName)}}",
            "updatedAt": "2013-03-26T21:32:13.2530000Z",
            "updatedBy": "Docs.Example",
            "uri": "/contacts/fields/100002"
        }
    ]
}
```


©2014 Oracle Corporation. All rights reserved

2.6.3 Example Call & Response

You can create Bulk API requests using whatever language you wish. The examples and tutorials in this guide show the basic request that you need to send to perform your request, ignoring language-specific code examples.

Request:

```
https://<host>.eloqua.com/API/Bulk/2.0/contact/import/123
```

Response:


```
{
    "createdAt": "2014-05-13T18:25:32.0270000Z",
    "createdBy": "Docs.Example",
    "fields": {
        "C_EmailAddress": "{{Contact.Field(C_EmailAddress)}}",
        "C_FirstName": "{{Contact.Field(C_FirstName)}}",
        "C_LastName": "{{Contact.Field(C_LastName)}}"
    },
    "identifierFieldName": "C_EmailAddress",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "name": "Docs Import Example",
    "syncActions": [],
    "updatedAt": "2014-05-13T18:25:32.0270000Z",
    "updatedBy": "Docs.Example",
    "uri": "/contacts/imports/1183"
}
```


2.7 Filtering

The Bulk API allows you to create filter statements in export definitions. Filters enable you to select the exact data that you wish to export. Filters use the comparison, logic, and existence operators specified by Eloqua Expression Language to filter export data based on Eloqua field values. Eloqua uses the SQL Server implementation of the LIKE operator.

The correct syntax format is:

```
'{{EML_field_statement}}' <operator> '<value>'
```

Note that the **field**, expressed in Eloqua Markup Language, and the **value** are both wrapped in single quotes.

©2014 Oracle Corporation. All rights reserved

2.7.1 Simple Filters

Simple filters include one predicate, filtering on a single field, such as a contact's country or an activity type. The following export definitions illustrate simple filters:

Export contacts whose country is Belgium:

```
{
    "name": "Belgian Contacts Export",
    "fields": {
        "ID": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}",
        "LastName": "{{Contact.Field(C_LastName)}}",
        "Country": "{{Contact.Field(C_Country)}}"
    },
    "filter": "'{{Contact.Field(C_Country)}}' = 'Belgium'"
}
```

Export activities of type "EmailClickthrough":

```
{
   "name":"EmailClickthrough Activity Export",
   "fields":{
      "ActivityId":"{{Activity.Id}}",
      "AssetName":"{{Activity.Asset.Name}}",
      "ActivityType":"{{Activity.Type}}",
      "ActivityDate":"{{Activity.CreatedAt}}",
      "EmailAddress":"{{Activity.Field(EmailAddress)}}",
      "ContactId":"{{Activity.Contact.Id}}",
      "VisitorId":"{{Activity.Visitor.Id}}",
      "AssetType":"{{Activity.Asset.Type}}",
      "AssetId":"{{Activity.Asset.Id}}"
   },
   "filter":"'{{Activity.Type}}'='EmailClickthrough'"
}
```

2.7.2 Complex Filters

The Bulk API also supports complex filters that filter based on multiple criteria using the AND, OR, and NOT operators.

©2014 Oracle Corporation. All rights reserved

You can only use one STATUS operator in a filter. You can use multiple EXISTS operators, but they must be linked by AND operators to the remaining predicates.

The Bulk API processes complex filters much like a `WHERE` clause in a SQL environment. You can use parentheses to group predicates together. The following export definitions illustrate some complex filters:

Export contacts whose country is Belgium or France:

```
{
    "name": "Belgian and French Contacts Export",
    "fields": {
        "ID": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}",
        "LastName": "{{Contact.Field(C_LastName)}}",
        "Country": "{{Contact.Field(C_Country)}}"
    },
    "filter": "'{{Contact.Field(C_Country)}}' = 'Belgium'
OR '{{Contact.Field(C_Country)}}' = 'France'"
}
```

Export activities of type "`EmailClickedThrough`" that occurred in August 2014:

```
{
   "name":"EmailClickedThrough Activity Export - Sept 5",
   "fields":{
      "ActivityId":"{{Activity.Id}}",
      "AssetName":"{{Activity.Asset.Name}}",
      "ActivityType":"{{Activity.Type}}",
      "ActivityDate":"{{Activity.CreatedAt}}",
      "EmailAddress":"{{Activity.Field(EmailAddress)}}",
      "ContactId":"{{Activity.Contact.Id}}",
      "VisitorId":"{{Activity.Visitor.Id}}",
      "AssetType":"{{Activity.Asset.Type}}",
      "AssetId":"{{Activity.Asset.Id}}",
      "RawData":"{{Activity.Field(RawData)}}"
   },
   "filter":"'{{Activity.Type}}'='EmailClickedThrough' AND '
{{Activity.CreatedAt}}' >= '2014-08-01' AND '
{{Activity.CreatedAt}}' <= '2014-08-31'"
}
```

Export contacts whose `CreatedAt` field is greater than 2013-12-31 and whose Account's

©2014 Oracle Corporation. All rights reserved

company name is not Oracle and whose `C_Country` field is not Canada or United States:

```
{
    "name": "2014 non-Canada non-US Contacts",
    "fields": {
        "firstName": "{{Contact.Field(C_FirstName)}}",
        "lastName": "{{Contact.Field(C_LastName)}}",
        "email": "{{Contact.Field(C_EmailAddress)}}",
        "country": "{{Contact.Field(C_Country)}}"
    },
    "filter": "('{{Contact.CreatedAt}}' > '2013-12-31' AND '
{{Contact.Account.Field(M_CompanyName)}}' != 'Oracle' AND
NOT ('{{Contact.Field(C_Country)}}' = 'Canada' OR '
{{Contact.Field(C_Country)}}' = 'United States')"
}
```

2.8 Troubleshooting

Eloqua's Bulk API includes endpoints to help you troubleshoot your imports and exports. Specifically, these endpoints provide insight into what happened during the sync phase of an import or export.

In order to control for different data access permissions, Eloqua associates imports and exports with the user who creates them. Thus, only the user who synchronizes an export is able to retrieve the exported data: any other user who attempts to retrieve it will receive an error.
If you wish to retrieve data for a given export definition, you will need to re-sync that data yourself, and then retrieve it.

2.8.1 View Sync Logs

Sync Logs provide aggregate data detailing what happened during a specific sync. Unlike the sync's `status` field which simply indicates success, failure, and errors, the `/syncs/{id}/logs` endpoint response includes the Eloqua Status Codes and a human-readable message.

For example, calling `https://<host>.eloqua.com/API/Bulk/2.0/syncs/1196/logs` yields:

```
{
    "count": 3,
    "hasMore": false,
    "items": [
        {
```

©2014 Oracle Corporation. All rights reserved

```
            "count": 4149,
            "createdAt": "2014-05-12T14:23:05.9100000Z",
            "message": "Successfully exported members to csv
file.",
            "severity": "information",
            "statusCode": "ELQ-00102",
            "syncUri": "/syncs/1196"
        },
        {
            "count": 0,
            "createdAt": "2014-05-12T14:23:07.2670000Z",
            "message": "Deleted internal staging for data
transfer.",
            "severity": "information",
            "statusCode": "ELQ-00131",
            "syncUri": "/syncs/1196"
        },
        {
            "count": 0,
            "createdAt": "2014-05-12T14:23:07.7630000Z",
            "message": "Successfully converted csv file to
sqlite, taking 264 kb.",
            "severity": "information",
            "statusCode": "ELQ-00106",
            "syncUri": "/syncs/1196"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 3
}
```


This provides more granular information and can help you debug where an unsuccessful sync went wrong.

2.8.2 Check for Import Errors

The `/syncs/{id}/rejects` endpoint gives raw data about validation failures during **imports**.

Eloqua performs validation on some data. If you attempt to import a non-valid email address using the Bulk API, that record will be rejected. The `/syncs/{id}/rejects` endpoint allows you to see what records were not imported, so that you can correct any issues and try again.

©2014 Oracle Corporation. All rights reserved

2.8.3 Retrieve Past Data Files

In some cases, you may choose to reuse an export definition: if you are performing routine exports, for example, reusing an existing definition saves time and effort. However, when you re-sync the export, the exported data may have changed. Last week's output from `/contacts/exports/123/data` may be different from today's.

The `/syncs/{id}/data` endpoint enables you to retrieve the data associated with a *specific sync*. This can be useful to retrieve past data or debug issues retroactively.

2.9 Migrate from Bulk 1.0 to Bulk 2.0

Bulk v.2.0 present a major, breaking revision of the Bulk 1.0 API. Bulk 2.0 is more stable, conforms more closely to REST principles, and adds new functionality that was not present in Bulk 1.0. This document will help you in your transition from using the Bulk 1.0 API to using Bulk 2.0.

2.9.1 Core Changes

At their cores, Bulk 1.0 and Bulk 2.0 follow the same patterns for importing and exporting data. As with Bulk 1.0, Bulk 2.0 follows an asynchronous model, where you create an import or export definition, move data into a staging area, and then push it into Eloqua or download it onto your computer. The general pattern remains unchanged.

There are, however, some very important changes:

- **All new endpoints**. You cannot simply change the base URL from `/api/bulk/1.0` to `/api/bulk/2.0` and have your code work. The syntax changes are an important step toward bringing Eloqua's APIs closer to the principles of REST, and toward a uniform syntax pattern for all Eloqua APIs. See "Bulk API Endpoint Reference" on page 42 for full descriptions of all of Bulk 2.0's endpoints. Some import and export fields have also been modified in Bulk 2.0.

  > You will need to change all endpoints in your integration when you transition from Bulk 1.0 to Bulk 2.0.

- **Changes to sync action syntax**. In Bulk 2.0, you must specify and action, destination, and , for some action types, a status. This permits a wider range of sync action possibilities, and supports the actions of the Oracle Eloqua AppCloud Developer Framework. See "Sync Actions" on page 178 for a full explanation of sync actions in Bulk 2.0.
- **New filtering mechanism**. In Bulk 1.0, you use an Export Filter to filter records. Bulk 2.0 introduces Eloqua Expression Language, which adds support for incorporating logic into decision making and filtering within Eloqua. Eloqua Expression Language includes comparison

©2014 Oracle Corporation. All rights reserved

operators, logical operators, and existence operators that you can use to create complex filtering criteria.

- **New Eloqua Markup Language**. Eloqua Markup Language v3 adds support for visitors, and activities. See "Eloqua Markup Language version 3" on page 160 for full reference.

2.9.2 Feature Differences

The majority of the functionality available in Bulk 1.0 is also available in Bulk 2.0, though through updated endpoints. The exception is Cloud Connectors: Cloud Connectors can only be accessed with Bulk 1.0. The AppCloud Developer Framework provides new ways to integrate with Eloqua using Bulk 2.0, that can replace existing Cloud Connectors. Check out the Oracle Eloqua AppCloud Developer Framework developer's guide for more information.

Significantly, Bulk 2.0 also **adds support for exporting activity data**. It is not possible to export activity data using Bulk 1.0. See "Activity Fields" on page 174 for a full listing of the activity types and associated fields you can now export with the Bulk API.

©2014 Oracle Corporation. All rights reserved

3 Tutorials

The following tutorials detail common operations with Eloqua's Bulk API. Eloqua has a number of APIs that support different use cases. If you cannot do what you wish to do with the Bulk API, consider one of the other APIs.

3.1 Authenticate using HTTP Basic Authentication

For HTTP basic authentication, each request must include an Authentication header, with a base-64 encoded value.

Your authentication token is of the format:

```
siteName + '\' + username + ':' + password
```

Where `siteName` is the company name you use to log in to Eloqua, and `username` and `password` are your Eloqua username and password.

For example, for a user whose company name is “COMPANYX”, username is “user1”, and password is “password123”, the base string is:

```
COMPANYX\user1:password123
```

Running base-64 encoding on that string gives the token for the Authentication header:
`Q09NUEFOWVhcdXNlcjE6cGFzc3dvcmQxMjM=`

The authentication header would then be:

```
Authorization: Basic Q09NUEFOWVhcdXNlcjE6cGFzc3dvcmQxMjM=
```

3.2 Authenticate Using OAuth2

OAuth 2.0 authorization enables applications to act on behalf of another user without having to have that user’s username and password credentials.

As an App Provider, you can use OAuth at any point that you need it: some Apps may need to authenticate during the configuration phase when a user installs the App in an instance of Eloqua; others may need OAuth when a user invokes a service. You can request as many access tokens as you need.

©2014 Oracle Corporation. All rights reserved

3.2.1 Introduction

The OAuth 2.0 Spec describes the original vision for OAuth2, which includes four possible flows that an application can use to obtain access on behalf of a resource owner: Authorization Code grant, Implicit grant, Resource Owner Password Credentials grant, and Client Credentials grant.

Eloqua's implementation of OAuth supports all of the grant types **except** Client Credentials grant.

General Flow

In general, OAuth authentication follows a six step pattern:

1. An application requires access to a protected resource and requests authorization from the resource owner.

   For example, Sally has installed an App in her instance of Eloqua that needs to interact with Eloqua's Bulk API on Sally's behalf. The App requests access to act on Sally's behalf.

2. The application obtains an Authorization Grant, either though the Authorization Code grant, Implicit grant, or Resource Owner Password Credentials grant.
3. The client requests an Access Token by authenticating with the authorization server using the authorization grant.
4. The authorization server validates the grant and issues an Access Token and a Refresh Token.
5. The client requests the protected resource, authenticating using the Access Token.
6. The resource server verifies the Access Token and if so, serves the request.

Endpoints

Authorization endpoint: `https://login.eloqua.com/auth/oauth2/authorize`

Token endpoint: `https://login.eloqua.com/auth/oauth2/token`

3.2.2 Sample Flows with Eloqua Endpoints

There are three general flows that you can use to authenticate with OAuth. Each flow, or grant type, has its own strengths. In general, you should use the Authorization Code grant for Apps that extend Eloqua's functionality.

Eloqua also supports Implicit grant and Resource Owner Password Credential grant for use cases where those are more appropriate.

> The following examples assume that all requests are successful. For a detailed description of possible request responses (including a variety of failure types), see: the OAuth Reference.

©2014 Oracle Corporation. All rights reserved

Authorization Code Grant

1. The Application needs to interact with Eloqua on Sally's behalf. The App directs Sally to `login.eloqua.com` at the `/auth/oauth2/authorize` endpoint.

   `/auth/oauth2/authorize` has five possible URL parameters:

Parameter	Value	Required?
`response_type`	Must be `code`	Yes
`client_id`	Your App's client identifier	Yes
`redirect_uri`	Your App's registered redirection endpoint	Yes[1]
`scope`	Must be "full" or not supplied	No
`state`	An optional value that has meaning for your App	No

   So, for example, the URL that the App directs Sally to might resemble:

```
https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=a1b2c3d4&redirect_
uri=https://client.example.com/cb
&scope=full&state=xyz
```

2. Sally accepts your App's request to access Eloqua on her behalf. She is then redirected to your app's redirection endpoint, the `redirect_url`, with an authorization code in the `code` URL parameter, as in the following example authorization dialog:

```
HTTP/1.1 302 Found
Location:
https://client.example.com/cb?code=SplxlOBeZQQYbYS6WxSbIA&st
ate=xyz
```

3. Your App can now use the Authentication Code to obtain *Access and Refresh Tokens* using a `POST` request to the `login.eloqua.com/auth/oauth2/token` endpoint. The `POST` request should include a **JSON body** with the following parameters:

Parameter	Value	Required?
`grant_type`	Must be `authorization_code`	Yes
`code`	The authorization code	Yes
`redirect_uri`	Your App's registered redirection endpoint	Yes

   The request must also authenticate your app using HTTP basic authentication using your App's client identifier as the username and your App's client secret as the password. The format is:

```
client_id:client_secret
```

   Encode the string with base-64 encoding, and you can pass it as an authentication header.

[1] Eloqua requires that all Apps register their redirection endpoint.

©2014 Oracle Corporation. All rights reserved

> The system **does not** support passing `client_id` or `client_secret` parameters in the JSON body. In addition, Unlike basic authentication for Eloqua's other APIs, you **must not** include the `site name`.

The following call requests an Access Token using the authorization code obtained previously.

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic Q09NUEFOWVhcdXNlcjE6cGFzc3dvcmQxMjM=
{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA",
   "redirect_uri":"https://client.example.com/cb"
}
```

4. The authorization server validates the authorization code and, if valid, responds with a JSON body containing the access token, refresh token, access token expiration time, and token type, as in the following:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
   "access_token":"2YotnFZFEjr1zCsicMWpAA",
   "token_type":"bearer",
   "expires_in":3600,
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA"
}
```

5. When the App needs a protected resource, it authenticates during the request with the access token.

   The following call to Eloqua's Rest API uses the access token to authenticate:

```
GET /resource/1 HTTP/1.1
Host: api.eloqua.com
Authorization: Bearer 2YotnFZFEjr1zCsicMWpAA
```

6. `api.eloqua.com` verifies the access token, and supplies the requested resource if the access token is valid. If the access token has expired, the App can send the *refresh token* to `login.eloqua.com/auth/oauth2/token` to obtain a new access token,as in the following example:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3
{
   "grant_type":"refresh_token",
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA",
   "scope":"full",
   "redirect_uri":"https://client.example.com/cb"
```

©2014 Oracle Corporation. All rights reserved

```
}
```

If the request is successful, the response is a JSON body containing a new access token, refresh token, access token expiration time and token type:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
   "access_token":"2YotnFZFEjr1zCsicMWpAA",
   "token_type":"bearer",
   "expires_in":3600,
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA"
}
```

And then proceed to request the resource again using the new access token.

Implicit Grant

Obtaining an access token using implicit grant varies slightly from the general flow. Implicit grant is a browser-based authentication, and instead of issuing an authorization code that is exchanged for an access token, the App is issued an access token directly.

This authentication approach is best used for in-browser applications, but authorization code grant is preferred and has fewer potentially negative security implications.

1. The Application needs to interact with Eloqua on Sally's behalf. To obtain an access token, the App initiates the authorization process through a `GET` request to `login.eloqua.com/auth/oauth2/authorize` with the following URL parameters:

Parameter	Value	Required?
`response_type`	Must be `token`	Yes
`client_id`	Your App's client identifier	Yes
`redirect_uri`	Your App's registered redirection endpoint	Yes
`scope`	Must be "full" or not supplied	No
`state`	An optional value that has meaning for your App	No

For example:

```
https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&client_id=s6BhdRkqt3&redirect_
uri=https://client.example.com/app
&scope=full&state=xyz
```

2. Sally accepts the App's request to access Eloqua on her behalf. She is then redirected to the App's redirection endpoint, the `redirect_url`, with an authorization code in the `access_token` fragment parameter, as in the following example authorization dialog:

©2014 Oracle Corporation. All rights reserved

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb#access_
token=2YotnFZFEjr1zCsicMWpAA
&token_type=bearer&expires_in=86400&state=xyz
```

The App can then use this access token to request resources on Sally's behalf.

Resource Owner Password Credentials Grant

With the resource owner password credential grant, the App provides the resource owner's username and password to the authorization server in order to obtain an access token. This grant type is ideal when an App already has usernames and passwords, and wants to start using access tokens instead.

To obtain access and refresh tokens, your app must `POST` to `/auth/oauth2/token` with a JSON body containing the following parameters:

Parameter	Value	Required?
`grant_type`	Must be `password`	Yes
`scope`	Must be `full` or not supplied	No
`username`	The user's site name and username in the form `sitename` + '/' + `username`	Yes
`password`	The user's password	Yes

The request must also authenticate your app using HTTP basic authentication using your App's client identifier as the username and your App's client secret as the password. The format is:

```
client_id:client_secret
```

Encode the string with base-64 encoding, and you can pass it as an authentication header.

> The system **does not** support passing `client_id` or `client_secret` parameters in the JSON body. In addition, Unlike basic authentication for Eloqua's other APIs, you **must not** include the `site name`.

The following call requests an Access Token using the username and password.

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic Q09NUEFOWVhcdXNlcjE6cGFzc3dvcmQxMjM=
{
   "grant_type":"password",
   "scope":"full",
   "username":"testsite\\sally",
   "password":"sally123"
}
```

If the request is successful, the response is a JSON body containing the access token, refresh token, access token expiration time, and token type:

```
HTTP/1.1 200 OK
Content-Type: application/json
```

©2014 Oracle Corporation. All rights reserved

```
{
    "access_token":"2YotnFZFEjr1zCsicMWpAA",
    "token_type":"bearer",
    "expires_in":3600,
    "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA"
}
```

3.3 Import Data Into Eloqua

If you are working with a large volume of data, break your dataset up into smaller chunks. This will help mitigate performance problems on your Eloqua instance and help you to avoid reaching the API limits.

Import operations with Eloqua's Bulk API follow a general pattern:

1. Create the import definition. The import definition describes how Eloqua's fields map to the data you are importing. This is also where you can specify any *Sync Actions* that Eloqua should perform when importing the data.
2. Push your data into the staging area. The Bulk API supports JSON and CSV file formats.
3. Synchronize the data from the staging area into Eloqua.

When you import data, Eloqua performs an `UPSERT` operation. An `UPSERT` checks if a record already exists in Eloqua and updates it with the new data if it does exist, or creates a brand new record containing the inserted data if there is not already a record in the database.

Eloqua's Bulk API supports importing *contacts*, *accounts*, *custom objects*, and *external activities*. While the types of data you are importing may vary, the import workflow remains the same.

3.3.1 Create the Import Definition

An import definition includes what type of data you are importing, defines how the external data maps to Eloqua's entity fields, and chooses the *identifier field* that you will use to check the imported data against existing records within the system. The import definition can also include information about *sync actions* and configuration options for the import. The endpoint reference for each entity import provides detailed instructions:

- POST /accounts/imports
- POST /activities/imports
- POST /contacts/imports
- POST /customObjects/{parentId}/imports

1. Choose what type of data you will import: contact data, account data, custom object data, or external activity data. Each element type has different associated fields, so you need to know what kind of data you are importing before you can determine what fields you will map your data to. The maximum size for a single import is 32MB. See: Bulk API Limits for more information.

   The sample data is Contact data, and resembles the following:

©2014 Oracle Corporation. All rights reserved

```
[
    {
        "firstName": "Juan",
        "lastName": "Garcia",
        "emailAddress": "juan@example.com"
    },
    {
        "firstName": "Tatiana",
        "lastName": "Smirnov",
        "emailAddress": "tatiana@example.com"
    }
]
```

2. Determine the field mapping. Field mappings describe how external data maps to Eloqua's entity fields. The Bulk API uses *Eloqua Markup Language (EML)* statements to define mappings between external entities and Eloqua entities.

To determine the entity fields within Eloqua that you will need, as well as the appropriate EML statement, the Bulk API provides `/fields` endpoints: for detailed instructions on searching for field names, see the Search for Field Names tutorial.

1. Optionally, specify *Sync Actions*. Sync actions are actions performed when the Bulk API syncs your data into Eloqua. For example, adding or removing a contact from a campaign, or changing a contact's status in an email group from "unsubscribed" to "subscribed".

2. Send the request:

> The URL you need to call to access Eloqua's Bulk API depends on which "pod" your Eloqua instance is hosted on. The base url is: `https://<host>.eloqua.com/api/bulk/2.0`, where `<host>` can be `secure`, `www02.secure`, or `secure.p03`. To find your URL, see: Determining Endpoint URLs on Topliners.

```
POST
https://<host>.eloqua.com/api/bulk/2.0/contacts/imports/
{
  "name": "Docs Import Example",
  "fields": {
      "firstName": "{{Contact.Field(C_FirstName)}}",
      "lastName": "{{Contact.Field(C_LastName)}}",
      "emailAddress": "{{Contact.Field(C_EmailAddress)}}"
   },
   "identifierFieldName": "emailAddress",
   "isSyncTriggeredOnImport" : "false"
}
```

The import definition **must** include the `fields` and `identifierFieldName` parameters.

©2014 Oracle Corporation. All rights reserved

The import definition maps the source data's `firstName`, `lastName`, and `emailAddress` fields to Eloqua's `{{Contact.Field(C_FirstName)}}`, `{{Contacts.Field(C_LastName))}}`, and `{{Contacts.Field(C_EmailAddress)}}` fields.

The `identifierFieldName` specifies what field Eloqua should use to match your data to the data in Eloqua. Choose a field that is likely to be **unique** to avoid updating the wrong record. **Do not** use a large text field as the `identifierFieldName` as this can produce errors.

Any other field is an "import characteristic". For the full list of import characteristics, see: *Import Characteristics*

The `name` parameter describes the import definition, to facilitate reuse and locating the import in the future.

`isSyncTriggeredOnImport` is an important parameter: if set to `true`, the Bulk API automatically syncs your data into Eloqua when you upload it to the staging area. If set to `false`, you must manually create the sync operation that merges your data into Eloqua. Manually syncing the data provides more control over the timing of the syncs, and allows you to break large sync operations into smaller batches. This can mitigate performance issues in your Eloqua instance. By default, `isSyncTriggeredOnImport` is set to `true`.

3. Receive the response. If successful, the response should resemble:

```
{
    "name": "Docs Import Example",
    "fields": {
        "firstName": "{{Contact.Field(C_FirstName)}}",
        "lastName": "{{Contact.Field(C_LastName)}}",
        "emailAddress": "{{Contact.Field(C_EmailAddress)}}"
    },
    "identifierFieldName": "emailAddress",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "uri": "/contacts/imports/1182",
    "createdBy": "Docs.Example",
    "createdAt": "2014-05-13T14:13:30.0402961Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-05-13T14:13:30.0402961Z"
}
```

You will use the returned `uri` parameter to send your data into Eloqua.

3.3.2 Push Data to Staging Area

The `/imports/{id}/data` endpoints exist to push data into Eloqua. The Bulk API supports JSON and CSV-formatted data sources. Specify your data format in the `Content-Type` HTML header. See: the reference for `POST /contacts/imports/{id}/data` for more information.

©2014 Oracle Corporation. All rights reserved

The request should resemble:

```
POST
https://<host>.eloqua.com/api/bulk/2.0/contacts/imports/1182/dat
a
Content-Type: application/json
[
    {
        "firstName": "Juan",
        "lastName": "Garcia",
        "emailAddress": "juan@example.com"
    },
    {
        "firstName": "Tatiana",
        "lastName": "Smirnov",
        "emailAddress": "tatiana@example.com"
    }
]
```

The response, if successful is an `HTTP 204 No Content` message. The data is now in the staging area, ready to be synced into Eloqua.

3.3.3 Synchronize the Imported Data

The last step is to synchronize the data from the staging area into the Eloqua database. If the import `isSyncTriggeredOnImport` import characteristic is set to `true`, the sync occurs automatically. If `isSyncTriggeredOnImport` is set to false, you must manually create the sync.

The following is an example of how to `sync` the data from the import into the Eloqua database. To sync the import with uri `/contacts/imports/1182`:

```
POST https://<host>.eloqua.com/api/bulk/2.0/syncs
{
   "syncedInstanceUri": "/contacts/imports/1182"
}
```

The response to the above HTTP request will include a URI for the sync, as in the following:

```
{
   "syncedInstanceUri": "/contacts/imports/1182",
   "status": "pending",
   "createdAt": "2014-05-13T17:58:34.0176959Z",
   "createdBy": "Docs.Example",
   "uri": "/syncs/1208"
}
```

©2014 Oracle Corporation. All rights reserved

Then, to check the status of the sync, perform a `GET` on the sync's URI.

For example:

```
GET https://<host>.eloqua.com/api/bulk/2.0/syncs/1208
```

Yields:

```
{
    "syncedInstanceUri": "/contacts/imports/1182",
    "syncStartedAt": "2014-05-13T17:58:34.2770000Z",
    "status": "success",
    "createdAt": "2014-05-13T17:58:33.8130000Z",
    "createdBy": "Docs.Example",
    "uri": "/syncs/1208"
}
```

See also If you have problems with your import, refer to the Troubleshooting document for ways you can debug the issue.

3.4 Export Data from Eloqua

Exporting data from Eloqua using the Bulk API follows the same pattern as data imports:

1. Create the export definition. The export definition describes how Eloqua's fields map to the output fields you require. This is also where you can specify if and how you want to filter the data.
2. Synchronize the data for export using the export URI provided in the export definition response.
3. Retrieve the exported data.

If you are working with a large volume of data, break your dataset up into smaller chunks. This will help mitigate performance problems on your Eloqua instance and help you to avoid reaching the API limits.

3.4.1 Create the Export Definition

> The URL you need to call to access Eloqua's Bulk API depends on which "pod" your Eloqua instance is hosted on. The base url is: `https://<host>.eloqua.com/api/bulk/2.0`, where `<host>` can be `secure`, `www02.secure`, or `secure.p03`. To find your URL, see: Determining Endpoint URLs on Topliners.

An export definition includes what data you are exporting and defines how Eloqua data maps to your fields. The export definition can also include information about *sync actions* and configuration options for the export. The endpoint reference for each entity export type provides detailed instructions:

©2014 Oracle Corporation. All rights reserved

- POST /accounts/exports
- POST /activities/exports
- POST /contacts/exports
- POST /customObjects/{parentId}/exports

Request

The following export definition requests activity data and filters it based on the Activity Type, in this case, `FormSubmit`.

```
POST https://<host>.eloqua.com/api/bulk/2.0/activities/exports
```

```
{
   "name":"Example Activity Export",
   "fields":{
      "ActivityId":"{{Activity.Id}}",
      "AssetName":"{{Activity.Asset.Name}}",
      "ActivityType":"{{Activity.Type}}",
      "ActivityDate":"{{Activity.CreatedAt}}",
      "EmailAddress":"{{Activity.Field(EmailAddress)}}",
      "ContactId":"{{Activity.Contact.Id}}",
      "VisitorId":"{{Activity.Visitor.Id}}",
      "AssetType":"{{Activity.Asset.Type}}",
      "AssetId":"{{Activity.Asset.Id}}",
      "RawData":"{{Activity.Field(RawData)}}"
   },
   "filter":"'{{Activity.Type}}'='FormSubmit'"
}
```

The `fields` map Eloqua's terminology to the terminology to use in the exported data: essentially, you are telling Eloqua what to call the exported fields so that the data is usable in your other applications. To see the list of fields for Activities, see: *Activity Fields*. For other entity types, see: *Search for Field Names*. You can include at most 100 fields in an export definition. See: Bulk API Limits for more information.

The `filter` parameter enables you to choose which fields to export based on criteria. The `filter` parameter is **optional**. However, you should use filters to ensure that you retrieve the correct data, and to avoid creating excessively large exports that can cause performance problems. See "Filtering" on page 13 for more information about constructing filters.

The `name` parameter describes the export definition, to facilitate reuse and locating the export in the future.

Response

Provided the request was successful, the response will be a `201Created` that includes the Bulk Export's `name`, `fields` and `filter` fields, along with the new `uri` field, the name of the user who created and updated it, and timestamps for the creation and update:

```
{
```

©2014 Oracle Corporation. All rights reserved

```
    "name":"ATD - Example Activity Export",
    "fields":{
       "ActivityId":"{{Activity.Id}}",
       "AssetName":"{{Activity.Asset.Name}}",
       "ActivityType":"{{Activity.Type}}",
       "ActivityDate":"{{Activity.CreatedAt}}",
       "EmailAddress":"{{Activity.Field(EmailAddress)}}",
       "ContactId":"{{Activity.Contact.Id}}",
       "VisitorId":"{{Activity.Visitor.Id}}",
       "AssetType":"{{Activity.Asset.Type}}",
       "AssetId":"{{Activity.Asset.Id}}",
    },
    "filter":"'{{Activity.Type}}'='FormSubmit'",
    "uri":"/activities/exports/1",
    "createdBy":"Docs.Example",
    "createdAt":"2014-01-28T21:18:06.5184689Z",
    "updatedBy":"Docs.Example",
    "updatedAt":"2014-01-28T21:18:06.5184689Z"
}
```

The `uri` field is particularly important, as you will use it to synchronize the data for export and to retrieve the data when the export is complete.

3.4.2 Synchronize the Data for Export

Once you have set up created the export's record definition, you need to synchronize the data using the `/syncs` endpoint and the export's `uri`.

In this example, the request is:

```
POST https://<host>.eloqua.com/api/bulk/2.0/syncs
```

```
{
    "syncedInstanceUri" : "/activities/exports/1"
}
```

The response will be a `201 Created` and include a `status` field that reflects the status of the export, creation metadata, and the sync `uri`:

```
{
    "syncedInstanceUri":"/activities/exports/1",
    "status":"pending",
    "createdAt":"2014-01-28T21:18:07.5792689Z",
    "createdBy":"Docs.Example",
    "uri":"/syncs/123"
}
```

©2014 Oracle Corporation. All rights reserved

The sync `status` is `pending`. As the sync progresses, the `status` message will change. To check the status of the sync, you can use the sync `uri` with a GET request:

```
GET htt[s://<host>.eloqua.com/api/bulk/2.0/syncs/123
```

When the sync is complete the response will be a `200 OK` that resembles the following:

```
{
    "syncedInstanceUri":"/activities/exports/1",
    "syncStartedAt":"2014-01-28T21:18:27.3600000Z",
    "status":"success",
    "createdAt":"2014-01-28T21:18:07.5730000Z",
    "createdBy":"Docs.Example",
    "uri":"/syncs/123"
}
```

3.4.3 Retrieve the Exported Data

Finally, you can retrieve the data you have exported using the export's `uri`, in this case `/activities/exports/1` and the activities//exports/{id}/data endpoint:

```
GET /api/bulk/2.0/activities/exports/1/data
Accept: application/json
```

The response will include the data in the `items` field:

```
{
    "Count": 1,
    "hasMore": false,
    "limit": 1000,
    "offset": 1,
    "totalResults": 1,
    "items": [
        {
            "ActivityId": "999",
            "AssetName": "Forms-BulkActivity",
            "ActivityType": "FormSubmit",
            "ActivityDate": "2014-01-29 13:45:31",
            "EmailAddress": "allison@example.com",
            "ContactId": "123",
            "VisitorId": "1",
            "AssetType": "Form",
            "AssetId": "1",
        }
    ]
}
```

©2014 Oracle Corporation. All rights reserved

If you do not specify a `limit` when you send your `GET` request, the `limit` defaults to 1000. You can specify any limit up to 50000, though requesting larger volumes may create performance issues.

If there were more than 1000 matching items, `hasMore` would be `true` and you would be able to request the next batch of items using an appropriate `offset`. For example, if there were 1500 items, the following call would request items 1000 through 1500:

```
GET
https://<host>.eloqua.com/api/bulk/2.0/contacts/exports/8/data?offset=1000
```

See: URL Parameters for a full list of parameters you can use to modify what data you request.

3.5 Search for Field Names

Every field in Eloqua has two names: the *Display Name* and the *Internal Name*. The Display Name is the name that Eloqua users see when they are editing a contact form; the Internal Name is a unique name for that field. For example, Contacts and accounts both have email address fields: Eloqua may use “Email Address” as the display name for both entity types, but they have distinct Internal Names.

To narrow down the list of parameters to ones that are relevant for you, use query parameters to search for the fields that you need.

For example, the following request searches for contact fields whose names being with ‘Email’:

```
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/fields?q="name=Email*"
```

Important

Search terms are *case sensitive*: if you search for ‘email’, you will not find any fields, as Eloqua’s field names are capitalized.

The results should resemble:


```
{
   "count": 3,
   "hasMore": false,
   "items": [
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "emailAddress",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": true,
           "internalName": "C_EmailAddress",
           "name": "Email Address",
           "statement": "{{Contact.Field(C_EmailAddress)}}",
           "updatedAt": "1900-01-01T05:00:00.0000000Z",
```


©2014 Oracle Corporation. All rights reserved

```
            "uri": "/contacts/fields/100001"
        },
        {
            "createdAt": "1900-01-01T05:00:00.0000000Z",
            "dataType": "string",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
            "hasUniquenessConstraint": false,
            "internalName": "C_EmailDisplayName",
            "name": "Email Display Name",
            "statement": "{{Contact.Field(C_EmailDisplayName)}}",
            "updatedAt": "1900-01-01T05:00:00.0000000Z",
            "uri": "/contacts/fields/100005"
        },
        {
            "createdAt": "1900-01-01T05:00:00.0000000Z",
            "dataType": "string",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
            "hasUniquenessConstraint": false,
            "internalName": "C_SFDC_EmailOptOut1",
            "name": "SFDC Email Opt-Out",
            "statement": "{{Contact.Field(C_SFDC_EmailOptOut1)}}
",
            "updatedAt": "1900-01-01T05:00:00.0000000Z",
            "uri": "/contacts/fields/100043"
        }
    ]
}
```


The `statement` field shows the Eloqua Markup Language representation of that field, which you can then use in an import or export definition.

3.6 Create a New Entity with `POST`

HTTP `POST` requests enable you to create a new entity within Eloqua. Essentially, the Bulk API's `POST` endpoints create imports and exports and upload data for import, and trigger the `sync` that actually imports data into Eloqua, or exports data out of Eloqua.

For detailed instructions on importing and exporting data with Eloqua see: Import Data Into Eloqua and Export Data from Eloqua.

©2014 Oracle Corporation. All rights reserved

3.6.1 Create a Contacts Import Entity

To create a contact import entity, simply `POST` to the `/contacts/imports` endpoints, as in the following example:

```
POST https://<host>.eloqua.com/API/Bulk/2.0/contacts/imports/
{
   "fields" : {
      "firstName" : "{{Contact.Field(C_FirstName)}}",
      "lastName" : "{{Contact.Field(C_LastName)}}",
      "email" : "{{Contact.Field(C_EmailAddress)}}"
   },
   "identifierFieldName" : "email",
   "name" : "Docs Example Contact Import"
}
```

The successful response returns the import:

```
{
    "createdAt": "2014-04-22T18:58:16.5500000Z",
    "createdBy": "Docs.Example",
    "fields": {
        "email": "{{Contact.Field(C_EmailAddress)}}",
        "firstName": "{{Contact.Field(C_FirstName)}}",
        "lastName": "{{Contact.Field(C_LastName)}}"
    },
    "identifierFieldName": "email",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "name": "Docs Example Contact Import",
    "syncActions": [],
    "updatedAt": "2014-04-22T18:58:16.5500000Z",
    "updatedBy": "Docs.Example",
    "uri": "/contacts/imports/1056"
}
```

A `POST` request to `/contacts/imports/1056/data` endpoint is then used to send the data to Eloqua.

3.7 Retrieve Entities from Eloqua with `GET`

You can execute HTTP `GET` to retrieve account, activity, contact, email group, and custom object entities from Eloqua, as well as import definitions, export definitions, logs, and syncs.

©2014 Oracle Corporation. All rights reserved

3.7.1 Basic Request

The basic GET request simply specifies the id of the entity that you wish to retrieve from Eloqua in the request. For example, the following call requests the contact import with id of 1:

```
GET https://<host>.eloqua.com/api/bulk/2.0/contacts/imports/1
```

The response might resemble:

```
{
    "createdAt": "2014-05-13T18:25:32.0270000Z",
    "createdBy": "Docs.Example",
    "fields": {
        "C_EmailAddress": "{{Contact.Field(C_EmailAddress)}}",
        "C_FirstName": "{{Contact.Field(C_FirstName)}}",
        "C_LastName": "{{Contact.Field(C_LastName)}}"
    },
    "identifierFieldName": "C_EmailAddress",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "name": "Docs Import Example",
    "syncActions": [],
    "updatedAt": "2014-05-13T18:25:32.0270000Z",
    "updatedBy": "Docs.Example",
    "uri": "/contacts/imports/1"
}
```

Note

Many Eloqua's Bulk API GET endpoints include optional parameters that you can use to sort, order, and filter the results of the GET request. See: *URL Parameters* for more information.

3.7.2 Retrieve a List of Entities

In some cases, you may already know the id of the element you wish to retrieve from Eloqua, but if you do not, you can retrieve a list to choose from.

1. Obtain the list of entities available at your endpoint. For example, if you wanted to retrieve a contact import, but did not know its id, you would call:

   ```
   GET https://<host>.eloqua.com/api/bulk/2.0/contacts/imports?
   ```

2. Select the appropriate element from the list. The response to the /contacts/imports? get request will resemble:

©2014 Oracle Corporation. All rights reserved

```
{
    "items": [
        {
            "createdAt": "2013-04-17T16:40:43.0270000Z",
            "createdBy": "Docs.Example",
            "dataRetentionDuration": "PT1H",
            "fields": {
                "C_EmailAddress": "{{Contact.Field(C_
EmailAddress)}}",
                "C_FirstName": "{{Contact.Field(C_FirstName)}}
",
                "C_LastName": "{{Contact.Field(C_LastName)}}"
            },
            "identifierFieldName": "C_EmailAddress",
            "isSyncTriggeredOnImport": true,
            "isUpdatingMultipleMatchedRecords": false,
            "name": "Example 1",
            "syncActions": [],
            "updateRule": "always",
            "updatedAt": "2013-04-17T16:40:43.0270000Z",
            "updatedBy": "Docs.Example",
            "uri": "/contacts/imports/1"
        },
        {
            "createdAt": "2014-04-11T18:43:37.4430000Z",
            "createdBy": "Docs.Example",
            "dataRetentionDuration": "PT1H",
            "fields": {
                "C_Lead_Status1": "{{Contact.Field(C_Lead_
Status1)}}"
            },
            "identifierFieldName": "C_Lead_Status1",
            "isSyncTriggeredOnImport": true,
            "isUpdatingMultipleMatchedRecords": false,
            "name": "Example 2",
            "syncActions": [
                {
                    "action": "add",
                    "destination": "{{ContactList[123]}}"
                }
            ],
            "updateRule": "always",
            "updatedAt": "2014-04-11T18:43:37.4430000Z",
            "updatedBy": "Docs.Example",
            "uri": "/contacts/imports/2"
        }
```


©2014 Oracle Corporation. All rights reserved

```
    ]
}
```

Locate the `uri` of the element you wish to access.

3. Request the element:

```
GET
https://<host>.eloqua.com/api/bulk/2.0/contacts/imports/2
```

You can also filter lists based on query criteria using the `q` url parameter. For an example, see: Search for Field Names.

3.8 Update an Existing Import or Export with PUT

HTTP `PUT` requests provide the ability to update existing imports and exports using Eloqua's Bulk API.

3.8.1 Update Account Import Definition with PUT

Consider the following account import:

```
{
    "createdAt": "2014-01-07T16:03:08.8030000Z",
    "createdBy": "Docs.Example",
    "dataRetentionDuration": "PT1H",
    "fields": {
        "CompanyName": "{{Account.Field(M_CompanyName)}}"
    },
    "identifierFieldName": "CompanyName",
    "isSyncTriggeredOnImport": true,
    "isUpdatingMultipleMatchedRecords": false,
    "kbUsed": 0,
    "name": "This Import Name is Not Helpful",
    "syncActions": [],
    "updateRule": "always",
    "updatedAt": "2014-01-07T16:03:08.8030000Z",
    "updatedBy": "Docs.Example",
    "uri": "/accounts/imports/892"
}
```

The `name`, "This Import Name is Not Helpful" is not as descriptive as it should be to be useful in the future. So, we can use a `PUT` request to update it to "Docs Account Import Example":

```
PUT https://<host>.eloqua.com/API/Bulk/2.0/accounts/imports/892
```

©2014 Oracle Corporation. All rights reserved

```
{
    "fields" : {
        "CompanyName": "{{Account.Field(M_CompanyName)}}"
    },
    "identifierFieldName": "CompanyName",
    "name" : "Docs Example Account Import"
}
```

The `identifierFieldName` and `fields` fields are required for the call to be successful. Since we wanted to update the `name` field, that is also included.

When we `GET` the import info, the response reflects the updated name: `GET https://<host>.eloqua.com/API/Bulk/2.0/accounts/imports/892` returns:

```
{
    "createdAt": "2014-01-07T16:03:08.8030000Z",
    "createdBy": "Docs.Example",
    "fields": {
        "CompanyName": "{{Account.Field(M_CompanyName)}}"
    },
    "identifierFieldName": "M_CompanyName",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "kbUsed": 0,
    "name": "Docs Example Account Import",
    "syncActions": [],
    "updatedAt": "2014-04-22T17:56:34.2530000Z",
    "updatedBy": "Docs.Example",
    "uri": "/accounts/imports/892"
}
```

To add fields to the import, you follow the same pattern, simply adding additional fields in the `fields` parameter, and leaving out the `name` update:

```
PUT https://<host>.eloqua.com/API/Bulk/2.0/accounts/imports/892
{
    "fields": {
        "CompanyName": "{{Account.Field(M_CompanyName)}}",
        "Country": "{{Account.Field(M_Country)}}",
        "Website": "{{Account.Field(M_Website1)}}"
    },
    "identifierFieldName": "CompanyName"
}
```

3.9 Delete an Entity with `DELETE`

You can delete import and export entities from Eloqua using an HTTP `DELETE` request.

©2014 Oracle Corporation. All rights reserved

To request that an entity be delete, create an HTTP `DELETE` request, specifying the entity you wish to delete using its `{id}` as a URL parameter. The following example requests the deletion of the data from the contacts export with `id` 7:

```
DELETE
https://<host>.eloqua.com/api/bulk/2.0/contacts/exports/7/data
```

If the request is successful, Eloqua returns a `204` response. Refer to *the status codes reference* for other possible responses.

©2014 Oracle Corporation. All rights reserved

4 Reference

- Bulk API Endpoint Reference

4.1 Bulk API Endpoint Reference

4.1.1 /accounts/

DELETE /accounts/exports/{id}

Deletes the specified accounts export definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Delete the export with id 186:

```
DELETE/accounts/exports/186
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
```

©2014 Oracle Corporation. All rights reserved

```
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports/186
```

DELETE /accounts/exports/{id}/data

Deletes the data for the export with the specified `id`.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Delete the export with `id` 186:

```
DELETE /accounts/exports/188/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -header "Accept: application/json" -X DELETE https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports/188/data
```

DELETE /accounts/imports/{id}

Deletes the specified accounts import definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

©2014 Oracle Corporation. All rights reserved

URL Parameters

None.

Request Body

None.

Example

Delete the import with `id` 186:

```
DELETE/accounts/imports/186
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/imports/
186
```

DELETE /accounts/imports/{id}/data

Deletes the data for the import with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Delete the import with `id` 186:

```
DELETE /accounts/imports/188/data
```

©2014 Oracle Corporation. All rights reserved

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/imports/
188/data
```

GET /accounts/exports

Retrieves all export definitions that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Retrieves all account export definitions that were created after 2014-01-01.

```
GET /accounts/exports/188?q="createdAt>2014-01-01"
```

Response:

```
HTTP/1.1 200 OK

[list of account export definitions]
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports?
q=CreatedAt>2014-01-01
```

`GET /accounts/exports/{id}`

Retrieves the account export definition with id `{id}`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieve the export with `id` 188:

```
GET /accounts/exports/188
```

Response:

```
HTTP/1.1 200 OK

{
    "Account Export Example",
```

©2014 Oracle Corporation. All rights reserved

```
    "fields": {
        "accountId": "{{Account.Id}}",
        "FirstName": "{{Account.Field(C_FirstName)}}"
    },
    "syncActions": [],
    "uri": "/accounts/exports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:59:04.5070000Z"
}
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports/
188
```

Delete this text and replace it with your own content.

GET /accounts/exports/{id}/data

Retrieves the data for the account export with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 50,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Requests at most 10,000 records from the account export with id 188.

```
GET /accounts/exports/188/data?limit=10000
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
header "Accept: application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/accounts/exports/
188/data?limit=10000
```

GET /accounts/fields

Retrieves all account fields that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Retrieves all account fields whose `name` includes “Email”

```
GET /accounts/fields?q=name='Email'
```

Response:

```
HTTP/1.1 200 OK
```


```
{
   "count": 3,
   "hasMore": false,
   "items": [
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "emailAddress",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": true,
           "internalName": "C_EmailAddress",
           "name": "Email Address",
           "statement": "{{Account.Field(C_EmailAddress)}}",
           "updatedAt": "1900-01-01T05:00:00.0000000Z",
           "uri": "/accounts/fields/100001"
       },
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "string",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": false,
           "internalName": "C_EmailDisplayName",
           "name": "Email Display Name",
           "statement": "{{Account.Field(C_
EmailDisplayName)}}",
           "updatedAt": "1900-01-01T05:00:00.0000000Z",
           "uri": "/accounts/fields/100005"
       },
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "string",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": false,
           "internalName": "C_SFDC_EmailOptOut1",
           "name": "SFDC Email Opt-Out",
```


©2014 Oracle Corporation. All rights reserved

```
            "statement": "{{Account.Field(C_SFDC_
EmailOptOut1)}}",
            "updatedAt": "1900-01-01T05:00:00.0000000Z",
            "uri": "/accounts/fields/100043"
        }
    ]
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports?
q=name=\u0027*Email*\u0027
```

GET /accounts/fields/{id}

Retrieves the account field with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the account field with id `100085`:

```
GET /accounts/fields/100085
```

Response:

```
HTTP/1.1 200 OK
{
    "createdAt": "1900-01-01T05:00:00.0000000Z",
    "dataType": "string",
    "hasNotNullConstraint": true,
    "hasReadOnlyConstraint": false,
    "hasUniquenessConstraint": false,
```

©2014 Oracle Corporation. All rights reserved

```
    "internalName": "M_CompanyName",
    "name": "Company Name",
    "statement": "{{Account.Field(M_CompanyName)}}",
    "updatedAt": "1900-01-01T05:00:00.0000000Z",
    "uri": "/accounts/fields/100085"
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/fields/100085
```

GET /accounts/imports

Retrieves all import definitions that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

©2014 Oracle Corporation. All rights reserved

Request Body

None.

Example

Requests at most 1 account import definitions that were created after 2014-01-01.

```
GET /accounts/imports?q="createdAt>2014-01-01"&limit=1
```

Response:

```
HTTP/1.1 200 OK
{
    "items": [
        {
            "name": "Docs Example AccountImport",
            "fields": {
                "M_CompanyName": "{{Account.Field(M_
CompanyName)}}"
            },
            "identifierFieldName": "M_CompanyName",
            "syncActions": [],
            "isSyncTriggeredOnImport": false,
            "kbUsed": 0,
            "isUpdatingMultipleMatchedRecords": false,
            "uri": "/accounts/imports/892",
            "createdBy": "Docs.Example",
            "createdAt": "2014-01-07T16:03:08.8030000Z",
            "updatedBy": "Docs.Example",
            "updatedAt": "2014-04-22T17:56:34.2530000Z"
        }
    ],
    "totalResults": 1,
    "limit": 1000,
    "offset": 0,
    "count": 1,
    "hasMore": false
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
header "Accept: application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/accounts/imports?
q="CreatedAt>2014-01-01"&limit=1
```

GET /accounts/imports/{id}

Retrieves the account import definition with id `{id}`

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieve the import with id 188:

```
GET /accounts/imports/188
```

Response:

```
HTTP/1.1 200 OK
{
    "name": "Account Import Example",
    "fields": {
        "accountId": "{{Account.Id}}",
        "FirstName": "{{Account.Field(C_FirstName)}}"
    },
    "syncActions": [],
    "uri": "/accounts/imports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:59:04.5070000Z"
}
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/imports/
188
```

GET /accounts/lists

Retrieves all account lists that match the criteria specified by the URL parameters.

URL Components

None.

©2014 Oracle Corporation. All rights reserved

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all account fields whose name includes “Email”

```
GET /accounts/lists?q=name='CRM'
```

Response:

```
HTTP/1.1 200 OK
{
   "items": [
      {
          "name": "SYSTEM - CRM accounts",
          "count": 0,
          "statement": "{{accountList[1]}}",
          "uri": "/accounts/lists/1",
          "createdBy": "Deploy.User",
```

©2014 Oracle Corporation. All rights reserved

```
            "createdAt": "2005-11-11T16:39:05.0000000Z",
            "updatedBy": "Deploy.User",
            "updatedAt": "2011-05-27T15:16:08.9800000Z"
        }
    ],
    "totalResults": 1,
    "limit": 1000,
    "offset": 0,
    "hasMore": false,
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" --header "Content-Type: application/json" https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports?q=name=\u0027*Email*\u0027
```

GET /accounts/lists/{id}

Retrieves the account list with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the account list with id `1`:

```
GET /accounts/lists/1
```

Response:


```
HTTP/1.1 200 OK
{
    "name": "SYSTEM - CRM accounts",
    "count": 0,
```


©2014 Oracle Corporation. All rights reserved

```
    "statement": "{{AccountList[1]}}",
    "uri": "/accounts/lists/1",
    "createdBy": "Deploy.User",
    "createdAt": "2005-11-11T16:39:05.0000000Z",
    "updatedBy": "Deploy.User",
    "updatedAt": "2011-05-27T15:16:08.9800000Z"
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/lists/10085
```

POST /accounts/exports

Creates a new account export definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

none

Request Body

Name	Type	Description	Constraints
autoDeleteDuration	Duration	Time until the definition will be deleted	
createdAt	DateTime	Timestamp when the definition was created.	
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match /^[_a-zA-Z][_0-9a-zA-Z]

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
			*$/). Value must be a string of 1 to 100 characters.
filter	String	Specifies what data should be included in the export.	
kbUsed	Long	The amount of space required to store staged data	
maxRecords	Integer	Specifies the maximum number of records to export.	
name	String	Name of the definition. Useful for reusing definitions.	
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Creates a new account export, requesting the account ID and first name for all accounts.

```
POST /accounts/exports
{
"name": "Account Export Example",
   "fields": {
      "accountId": "{{Account.Id}}",
      "FirstName": "{{Account.Field(C_FirstName)}}"
   }
}
```

Response:

```
HTTP/1.1 201 Created
```

©2014 Oracle Corporation. All rights reserved

```
{
    "name": "account Export Example",
    "fields": {
        "accountId": "{{Account.Id}}",
        "FirstName": "{{Account.Field(C_FirstName)}}"
    },
    "uri": "/accounts/exports/186",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:41:09.1379185Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:41:09.1379185Z"
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://<host>.eloqua.com/API/Bulk/2.0/accounts/exports -d '
{
   "name": "Account Export Example",
   "fields": {
       "accountId": "{{Account.Id}}",
       "FirstName": "{{Account.Field(C_FirstName)}}"
   }
}'
```

POST /accounts/imports

Creates a new account import definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

none

Request Body

Name	Type	Description	Constraints
autoDeleteDuration	Duration	Time until the definition will be deleted	
createdAt	DateTime	Timestamp when the	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		definition was created.	
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match /^[_a-zA-Z][_0-9a-zA-Z]*$/). Value must be a string of 1 to 100 characters.
identifierFieldName	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
isUpdatingMultipleMatchedRecords	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the identifierFieldName.	
kbUsed	Long	The amount of space required to store staged data	
name	String	Name of the definition. Useful for reusing definitions.	**Requred.**
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Creates a new account import, specifying the account ID and first name for all accounts.

```
POST /accounts/imports
```

```
{
   "name": "Account import Example",
   "fields": {
      "accountId": "{{Account.Id}}",
      "FirstName": "{{Account.Field(C_FirstName)}}"
   }
}
```

Response:

```
{
    "name": "Account import Example",
    "fields": {
        "accountId": "{{Account.Id}}",
        "FirstName": "{{Account.Field(C_FirstName)}}"
    },
    "uri": "/accounts/imports/186",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:41:09.1379185Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:41:09.1379185Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://<host>.eloqua.com/API/Bulk/2.0/accounts/imports -d '
{
   "name": "Account import Example",
   "fields": {
       "accountId": "{{Account.Id}}",
       "FirstName": "{{Account.Field(C_FirstName)}}"
   }
}'
```

POST /accounts/imports/{id}/data

©2014 Oracle Corporation. All rights reserved

Submits data for the account import with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

Array of dictionaries of strings.

Example

Submit data for import:

```
POST /accounts/imports/892/data
[
    {
        "M_CompanyName": "Company One"
    },
    {
        "M_CompanyName": "Company Two"
    }
]
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Content-Type: application/json" --header "Accept:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/accounts/imports/
892/data -d '
[
        {
                "M_CompanyName": "Company One"
        },
        {
                "M_CompanyName": "Company Two"
        }
]
```

PUT /accounts/exports/{id}

©2014 Oracle Corporation. All rights reserved

Updates the account export definition with the specified `id`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/)`. Value must be a string of 1 to 100 characters.
`filter`	String	Specifies what data should be included in the export.	
`kbUsed`	Long	The amount of space required to store staged data	
`maxRecords`	Integer	Specifies the maximum number of records to export.	
`name`	String	Name of the definition. Useful for reusing definitions.	
`syncActions`	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
`updatedAt`	DateTime	Timestamp when the	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		definition was updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the account export with `id` 188 to include an additional field.

```
PUT /accounts/exports/188
```

```
{
   "name":"Account Export Example",
   "fields":{
        "accountId":"{{Account.Id}}",
        "FirstName":"{{Account.Field(C_FirstName)}}",
        "LastName":"{{Account.Field(C_LastName)}}"
   }
}
```

Response:

```
{
   "name":"Account Export Example",
   "fields":{
        "accountId":"{{Account.Id}}",
        "FirstName":"{{Account.Field(C_FirstName)}}",
        "LastName":"{{Account.Field(C_LastName)}}"
   },
   "syncActions":[],
   "uri":"/accounts/exports/188",
   "createdBy":"Docs.Example",
   "createdAt":"2014-08-10T12:59:04.5070000Z",
   "updatedBy":"Docs.Example",
   "updatedAt":"2014-08-10T13:08:45.0889544Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
```

©2014 Oracle Corporation. All rights reserved

```
application/json" -X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/exports/
188 -d '
{
   "Account Export Example",
   "fields": {
       "accountId": "{{Account.Id}}",
       "FirstName": "{{Account.Field(C_FirstName)}}",
       "LastName": "{{Account.Field(C_LastName)}}"
   }
}'
```

PUT /accounts/imports/{id}

Updates the account import definition with the specified `id`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/`. Value must be a string of 1 to 100

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
			characters.
identifierFieldName	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
isUpdatingMultipleMatchedRecords	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the identifierFieldName.	
kbUsed	Long	The amount of space required to store staged data	
name	String	Name of the definition. Useful for reusing definitions.	**Requred.**
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the account import with id 188 to include an additional field.

```
PUT /accounts/imports/188
```

```
{
    "name": "Account import Example",
    "fields": {
        "accountId": "{{Account.Id}}",
        "FirstName": "{{Account.Field(C_FirstName)}}",
```

©2014 Oracle Corporation. All rights reserved

```
        "LastName": "{{Account.Field(C_LastName)}}"
    }
}
```

Response:

```
{
    "name": "Account import Example",
    "fields": {
        "accountId": "{{Account.Id}}",
        "FirstName": "{{Account.Field(C_FirstName)}}",
        "LastName": "{{Account.Field(C_LastName)}}"
    },
    "syncActions": [],
    "uri": "/accounts/imports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T13:08:45.0889544Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json" -X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/accounts/imports/
188 -d '
{
   "name": "Account import Example",
   "fields": {
       "accountId": "{{Account.Id}}",
       "FirstName": "{{Account.Field(C_FirstName)}}",
       "LastName": "{{Account.Field(C_LastName)}}"
   }
}'
```

4.1.2 /activities/

DELETE /activities/exports/{id}

Deletes the specified activities export definition.

URL Components

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the export with id 186:

```
DELETE/activities/exports/186
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/export
s/186
```

DELETE /activities/exports/{id}/data

Deletes the data for the export with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the export with id 186:

©2014 Oracle Corporation. All rights reserved

```
DELETE /activities/exports/188/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/export
s/188/data
```

DELETE /activities/imports/{id}

Deletes the specified activities import definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the import with id 186:

```
DELETE/activities/imports/186
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/import
s/186
```

DELETE /activities/imports/{id}/data

Deletes the data for the import with the specified id.

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the import with id 186:

```
DELETE /activities/imports/188/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/import
s/188/data
```

GET /activities/exports/{id}

Retrieves the activity export definition with id {id}

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieve the export with id 188:

©2014 Oracle Corporation. All rights reserved

```
GET /activities/exports/191
```

Response:

```
HTTP/1.1 200 OK
{
    "createdAt": "2014-08-15T16:01:06.3300000Z",
    "createdBy": "Allison.Moore",
    "fields": {
        "email": "{{Activity.Field(EmailAddress)}}"
    },
    "filter": "'{{Activity.Type}}'='Subscribe'",
    "name": "testing",
    "syncActions": [],
    "updatedAt": "2014-08-15T16:01:06.3300000Z",
    "updatedBy": "Allison.Moore",
    "uri": "/activities/exports/191"
}
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/export
s/191
```

GET /activities/exports/{id}/data

Retrieves the data for the activity export with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 50,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

©2014 Oracle Corporation. All rights reserved

Request Body

None.

Example

Requests at most 10,000 records from the account export with id 188.

```
GET /activities/exports/188/data?limit=10000
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
header "Accept: application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/activities/export
s/188/data?limit=10000
```

GET /activities/imports

Retrieves all import definitions that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
`limit`	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
`offset`	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
`orderBy`	String	Term to order the results by. Available terms: `uri`, `id`, `name`, `dataRetentionDuration`, `maxRecords`, `autoDeleteDuration`, `kbUsed`, `createdBy`, `createdAt`, `updatedBy`, `updatedAt`	Must match the pattern `"^.*(ASC|DESC)$"`
`q`	String	Specifies query criteria used to filter results	format is `q="<term><operator><value>"`
`totalResults`	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server	None.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		side.	

Request Body

None.

Example

Requests at most 1 account import definition.

```
GET /activities/imports?limit=1
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 1,
    "hasMore": true,
    "items": [
        {
            "createdAt": "2014-01-29T18:29:18.4430000Z",
            "createdBy": "Docs.Example",
            "fields": {
                "ActivityType": "{{Activity.Type}}",
                "AssetName": "{{Activity.Asset.Name}}",
                "CampaignID": "{{Activity.Campaign.Id}}",
                "Email": "{{Activity.Contact.Field(C_
EmailAddress)}}"
            },
            "isSyncTriggeredOnImport": true,
            "isUpdatingMultipleMatchedRecords": false,
            "name": "Docs Example",
            "syncActions": [],
            "updateRule": "always",
            "updatedAt": "2014-01-29T18:29:18.4430000Z",
            "updatedBy": "Docs.Example",
            "uri": "/activities/imports/896"
        }
    ],
    "limit": 1,
    "offset": 0,
    "totalResults": 3
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/import
s?q=CreatedAt>2014-01-01
```

GET /activities/imports/{id}

Retrieves the activity import definition with id `{id}`

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieve the import with `id` 188:

```
GET /activities/imports/188
```

Response:

```
HTTP/1.1 200 OK

{
    "name": "Activity import Example",
    "fields": {
        "activityId": "{{Activity.Id}}",
        "FirstName": "{{Activity.Field(C_FirstName)}}"
    },
    "syncActions": [],
    "uri": "/activities/imports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:59:04.5070000Z"
}
```

Try it yourself with cURL:

©2014 Oracle Corporation. All rights reserved

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/import
s/188
```

GET /activities/types

Retrieves all activity types that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all activity types that were created during the base Eloqua installation. These are

©2014 Oracle Corporation. All rights reserved

included by default in all Eloqua installs.

```
GET /activities/types?q="createdBy=BaseInstall"
```

Response:


```
HTTP/1.1 200 OK
{
    "count": 4,
    "hasMore": false,
    "items": [
        {
            "createdAt": "2009-10-25T16:01:57.4330000Z",
            "createdBy": "BaseInstall",
            "name": "Registered",
            "updatedAt": "2009-10-25T16:01:57.4330000Z",
            "updatedBy": "BaseInstall",
            "uri": "/activities/types/1000"
        },
        {
            "createdAt": "2009-10-25T16:01:57.4330000Z",
            "createdBy": "BaseInstall",
            "name": "Attended",
            "updatedAt": "2009-10-25T16:01:57.4330000Z",
            "updatedBy": "BaseInstall",
            "uri": "/activities/types/1001"
        },
        {
            "createdAt": "2009-10-25T16:01:57.4370000Z",
            "createdBy": "BaseInstall",
            "name": "Visited Booth",
            "updatedAt": "2013-10-21T04:53:27.8200000Z",
            "updatedBy": "Egan.Cheung",
            "uri": "/activities/types/1002"
        },
        {
            "createdAt": "2009-10-25T16:01:57.4370000Z",
            "createdBy": "BaseInstall",
            "name": "Viewed a Demo",
            "updatedAt": "2013-10-21T04:53:27.8170000Z",
            "updatedBy": "Egan.Cheung",
            "uri": "/activities/types/1003"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 4
```


©2014 Oracle Corporation. All rights reserved

```
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/types?
q="createdBy=BaseInstal
```

GET /activities/fields/{id}

Retrieves the activity type with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the activity type with id `1000`:

```
GET /activities/fields/1000
```

Response:

```
HTTP/1.1 200 OK
{
    "createdAt": "2009-10-25T16:01:57.4330000Z",
    "createdBy": "BaseInstall",
    "name": "Registered",
    "updatedAt": "2009-10-25T16:01:57.4330000Z",
    "updatedBy": "BaseInstall",
    "uri": "/activities/types/1000"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/types/
1000
```

POST /activities/exports

Creates a new activity export definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

none

Request Body

Activity exports must include a filter that filters by exactly one Activity Type. Valid options are EmailOpen, EmailClickthrough, EmailSend, Subscribe, Unsubscribe, BounceBack, FormSubmit, WebVisit, and PageView. See "Activity Fields" on page 174 for more information.

Name	Type	Description	Constraints
autoDeleteDuration	Duration	Time until the definition will be deleted	
createdAt	DateTime	Timestamp when the definition was created.	
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match /^[_a-zA-Z][_0-9a-zA-Z]*$/). Value must be a string of 1 to 100 characters.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
filter	String	Specifies what data should be included in the export.	
kbUsed	Long	The amount of space required to store staged data	
maxRecords	Integer	Specifies the maximum number of records to export.	
name	String	Name of the definition. Useful for reusing definitions.	
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Creates a new activity export, requesting the email address for all activities of the type "Subscribe".

```
POST /activities/exports
{
        "name":"Activity Export Test",
        "fields":{
                "email":"{{Activity.Field(EmailAddress)}}"
        },
        "filter":"'{{Activity.Type}}'='Subscribe'"
}
```

Response:

```
HTTP/1.1 201 Created
{
    "name": "Activity Export Test",
    "fields": {
```

©2014 Oracle Corporation. All rights reserved

```
        "email": "{{Activity.Field(EmailAddress)}}"
    },
    "filter": "'{{Activity.Type}}'='Subscribe'",
    "uri": "/activities/exports/191",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-15T16:01:06.3314368Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-15T16:01:06.3314368Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/export
s/ -d '
{
        "name":"Activity Export Test",
        "fields":{
                "email":"{{Activity.Field(EmailAddress)}}"}
        },
        "filter":"\u0027{{Activity.Type}}
\u0027=\u0027Subscribe\u0027"
}'
```

POST /activities/imports

Creates a new activity import definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

none

Request Body

Name	Type	Description	Constraints
autoDeleteDuration	Duration	Time until the definition will be deleted	
createdAt	DateTime	Timestamp when the definition was created.	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match /^[_a-zA-Z][_0-9a-zA-Z]*$/). Value must be a string of 1 to 100 characters.
identifierFieldName	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
isUpdatingMultipleMatchedRecords	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the identifierFieldName.	
kbUsed	Long	The amount of space required to store staged data	
name	String	Name of the definition. Useful for reusing definitions.	**Requred.**
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		the definition for future referencing.	

Example

When creating an activity import you **must** include the `Activity.Type` field.

Creates a new activity import, specifying activity ID, activity type, and the related email address for all activities.

```
POST /activities/imports
{
   "name": "Docs Activities Import",
   "fields": {
      "id": "{{Activity.Id}}",
      "email": "{{Activity.Field(EmailAddress)}}",
      "type":"{{Activity.Type}}",
   }
}
```

Response:

```
HTTP/1.1 201 Created
{
    "name": "Docs Activities Import",
    "fields": {
        "id": "{{Activity.Id}}",
        "email": "{{Activity.Field(EmailAddress)}}",
        "type": "{{Activity.Type}}"
    },
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "uri": "/activities/imports/1673",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-15T15:23:57.3406252Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-15T15:23:57.3406252Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
```

©2014 Oracle Corporation. All rights reserved

```
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/imports -d '
{
        "name":"Docs Activities Import",
        "fields":{
                "id":"{{Activity.Id}}",
                "email"="{{Activity.Field(EmailAddress)}}",
                "type"="{{Activity.Type}}"
        }
}'
```

POST /activities/imports/{id}/data

Submits the data for the activity import with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

Array of dictionaries of strings.

Example

Submit data for import:

```
POST /activities/imports/1673/data
[
   {
        "activityId": "1000",
        "email": "sean.butler@example.com",
        "type":"Registered",
   },
   {
        "activityId": "1000",
        "FirstName": "nikita.robertson@example.com",
        "type":"Registered",
   }
]
```

Response:

©2014 Oracle Corporation. All rights reserved

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Content-Type: application/json" --header "Accept:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/activities/import
s/1673/data -d '
[
   {
      "activityId": "1000",
      "email": "sean.butler@example.com",
      "type":"Registered"
   },
   {
      "activityId": "1000",
      "FirstName": "nikita.robertson@example.com",
      "type":"Registered"
   }
]'
```

`PUT /activities/exports/{id}`

Updates the activity export definition with the specified `id`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/)`. Value must be a string of 1 to 100 characters.
`filter`	String	Specifies what data should be included in the export.	
`kbUsed`	Long	The amount of space required to store staged data	
`maxRecords`	Integer	Specifies the maximum number of records to export.	
`name`	String	Name of the definition. Useful for reusing definitions.	
`syncActions`	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
`updatedAt`	DateTime	Timestamp when the definition was updated.	
`updatedBy`	String	User who updated the definition.	
`uri`	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the activity export with `id` 191 to include an additional field.

```
PUT /activities/exports/191
{
    "name": "Activity Export Example",
    "fields": {
        "email": "{{Activity.Field(EmailAddress}}",
        "date": "{{Activity.CreatedAt)}}"
    },
```

©2014 Oracle Corporation. All rights reserved

```
    "filter":"'{{Activity.Type}}'='Subscribe'"
}
```

Response:

```
HTTP/1.1 200 OK
{
    "name": "Activity Export Example",
    "fields": {
        "email": "{{Activity.Field(EmailAddress)}}",
        "date": "{{Activity.CreatedAt}}"
    },
    "filter": "'{{Activity.Type}}'='Subscribe'",
    "syncActions": [],
    "uri": "/activities/exports/191",
    "createdBy": "Allison.Moore",
    "createdAt": "2014-08-15T16:01:06.3300000Z",
    "updatedBy": "Allison.Moore",
    "updatedAt": "2014-08-15T16: 33: 11.8182812Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"-X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/export
s/191 -d '
{
        "name":"Activity Export Test",
        "fields":{
                "email":"{{Activity.Field(EmailAddress)}}",
                "date":"{{Activity.CreatedAt)}}" }
        },
        "filter":"\u0027{{Activity.Type}}
\u0027=\u0027Subscribe\u0027"
}'
```

PUT /activities/imports/{id}

Updates the activity import definition with the specified `id`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

©2014 Oracle Corporation. All rights reserved

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/)`. Value must be a string of 1 to 100 characters.
`identifierFieldName`	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
`isUpdatingMultipleMatchedRecords`	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the `identifierFieldName`.	
`kbUsed`	Long	The amount of space required to store staged data	
`name`	String	Name of the definition. Useful for reusing definitions.	**Required.**
`syncActions`	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
			most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Activity imports **must** include the `Activity.Type` field.

Updates the activity import with `id` 1673 to remove the id field:.

```
PUT /activities/imports/188
{
    "name": "Docs Activities Import",
    "fields": {
        "email": "{{Activity.Field(EmailAddress)}}",
        "type": "{{Activity.Type}}"
    }
}
```

Response:

```
{
    "name": "Docs Activities Import",
    "fields": {
        "email": "{{Activity.Field(EmailAddress)}}",
        "type": "{{Activity.Type}}"
    },
    "syncActions": [],
    "uri": "/activities/imports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T13:08:45.0889544Z"
}
```

Try it yourself with cURL:

©2014 Oracle Corporation. All rights reserved

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json" -X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/activities/import
s/188 -d '
{
   "name": "Docs Activities Import",
   "fields": {
       "email": "{{activity.Field(C_FirstName)}}",
       "type": "{{activity.Field(C_LastName)}}"
   }
}'
```

4.1.3 /contacts/

DELETE /contacts/exports/{id}

Deletes the specified contacts export definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the export with id 186:

```
DELETE /contacts/exports/186
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports/
186
```

DELETE /contacts/exports/{id}/data

Deletes the data for the export with the specified `id`.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the export with `id` 186:

```
DELETE /contacts/exports/188/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports/
188/data
```

DELETE /contacts/imports/{id}

Deletes the specified import definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

©2014 Oracle Corporation. All rights reserved

Request Body

None.

Example

Delete the import with `id` 186:

```
DELETE/contacts/imports/186
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/imports/
186
```

DELETE /contacts/imports/{id}/data

Deletes the data for the import with the specified `id`.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints

Request Body

None.

Example

Delete the import with `id` 186:

```
DELETE /contacts/imports/188/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

©2014 Oracle Corporation. All rights reserved

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/imports/
188/data
```

GET /contacts/exports

Retrieves all export definitions that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Requests the list of contact export definitions created since January 1, 2014.

©2014 Oracle Corporation. All rights reserved

```
GET /contacts/exports/188?q="createdAt>2014-01-
01"&limit=10000
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports?
q=CreatedAt>\u00272014-01-01\u0027
```

GET /contacts/exports/{id}

Retrieves the contact export definition with id `{id}`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieve the export with `id` 188:

```
GET /contacts/exports/188
```

Response:

```
HTTP/1.1 200 OK

{
    "name": "Contact Export Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}"
    },
    "syncActions": [],
    "uri": "/contacts/exports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
```

©2014 Oracle Corporation. All rights reserved

```
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:59:04.5070000Z"
}
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports/
188
```

GET /contacts/exports/{id}/data

Retrieves the data for the contact export with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 50,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Requests the data for the export with id 188

```
GET /contacts/exports/188/data
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
header "Content-Type: application/json" --header "Accept:
```

©2014 Oracle Corporation. All rights reserved

```
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/contacts/exports/
188/data
```

GET /contacts/fields

Retrieves all contact fields that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all contact fields whose name includes “Email”

©2014 Oracle Corporation. All rights reserved

```
GET /contacts/fields?q=name='Email'
```

Response:


```
HTTP/1.1 200 OK
{
   "count": 3,
   "hasMore": false,
   "items": [
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "emailAddress",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": true,
           "internalName": "C_EmailAddress",
           "name": "Email Address",
           "statement": "{{Contact.Field(C_EmailAddress)}}",
           "updatedAt": "1900-01-01T05:00:00.0000000Z",
           "uri": "/contacts/fields/100001"
       },
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "string",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": false,
           "internalName": "C_EmailDisplayName",
           "name": "Email Display Name",
           "statement": "{{Contact.Field(C_
EmailDisplayName)}}",
           "updatedAt": "1900-01-01T05:00:00.0000000Z",
           "uri": "/contacts/fields/100005"
       },
       {
           "createdAt": "1900-01-01T05:00:00.0000000Z",
           "dataType": "string",
           "hasNotNullConstraint": false,
           "hasReadOnlyConstraint": false,
           "hasUniquenessConstraint": false,
           "internalName": "C_SFDC_EmailOptOut1",
           "name": "SFDC Email Opt-Out",
           "statement": "{{Contact.Field(C_SFDC_
EmailOptOut1)}}",
           "updatedAt": "1900-01-01T05:00:00.0000000Z",
           "uri": "/contacts/fields/100043"
       }
```


©2014 Oracle Corporation. All rights reserved

```
    ]
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports?
q=name=\u0027*Email*\u0027
```

GET /contacts/fields/{id}

Retrieves the contact field with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the contact field with id `100085`:

```
GET /contacts/fields/100085
```

Response:

```
HTTP/1.1 200 OK
{
    "createdAt": "1900-01-01T05:00:00.0000000Z",
    "dataType": "emailAddress",
    "hasNotNullConstraint": false,
    "hasReadOnlyConstraint": false,
    "hasUniquenessConstraint": true,
    "internalName": "C_EmailAddress",
    "name": "Email Address",
    "statement": "{{Contact.Field(C_EmailAddress)}}",
    "updatedAt": "1900-01-01T05:00:00.0000000Z",
    "uri": "/contacts/fields/100001"
```

©2014 Oracle Corporation. All rights reserved

```
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/fields/1
00001
```

GET /contacts/filters

Retrieves all contact filters that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Retrieves all contact filters whose `name` includes "Example"

```
GET /contacts/filters?q="name=*Example*"
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 1,
    "hasMore": false,
    "items": [
        {
            "count": 0,
            "createdAt": "2014-08-15T16:55:53.3130000Z",
            "createdBy": "Allison.Moore",
            "name": "Docs Example Filter",
            "statement": "{{ContactFilter[100073]}}",
            "updatedAt": "2014-08-15T16:56:07.0270000Z",
            "updatedBy": "Allison.Moore",
            "uri": "/contacts/filters/100073"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 1
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/filters?
q="name=*Example*"
```

GET /contacts/filters/{id}

Retrieves the contact filter with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

©2014 Oracle Corporation. All rights reserved

Request Body

None.

Example

Retrieves the contact filter with id 100085:

```
GET /contacts/filters/100073
```

Response:

```
HTTP/1.1 200 OK
{
        "count": 0,
        "createdAt": "2014-08-15T16:55:53.3130000Z",
        "createdBy": "Allison.Moore",
        "name": "Docs Example Filter",
        "statement": "{{ContactFilter[100073]}}",
        "updatedAt": "2014-08-15T16:56:07.0270000Z",
        "updatedBy": "Allison.Moore",
        "uri": "/contacts/filters/100073"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/filters/
100073
```

GET /contacts/imports

Retrieves all import definitions that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name,	Must match the pattern "^.*(ASC|DESC)$"

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		`dataRetentionDuration`, `maxRecords`, `autoDeleteDuration`, `kbUsed`, `createdBy`, `createdAt`, `updatedBy`, `updatedAt`	
`q`	String	Specifies query criteria used to filter results	format is `q="<term><operator><value>"`
`totalResults`	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Requests all import definitions created since January 1, 2014

```
GET /contacts/imports?q="createdAt>2014-01-01"
```

Response:

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" --header "Content-Type: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/imports?q="CreatedAt>2014-01-01"
```

`GET /contacts/imports/{id}`

Retrieves the contact import definition with id `{id}`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

©2014 Oracle Corporation. All rights reserved

Request Body

None.

Example

Retrieve the import with `id` 188:

```
GET /contacts/imports/188
```

Response:

```
HTTP/1.1 200 OK

{
    "name": "Contact import Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}"
    },
    "syncActions": [],
    "uri": "/contacts/imports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:59:04.5070000Z"
}
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/imports/
188
```

GET /contacts/lists

Retrieves all contact lists that match the criteria specified by the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
`limit`	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
`offset`	Integer	Specifies an offset that allows to retrieve the next batch of	None.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		records	
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all contact fields whose name includes “Email”

```
GET /contacts/lists?q=name='CRM'
```

Response:

```
HTTP/1.1 200 OK
{
   "items": [
      {
           "name": "SYSTEM - CRM Accounts",
           "count": 0,
           "statement": "{{AccountList[1]}}",
           "uri": "/contacts/lists/1",
           "createdBy": "Deploy.User",
           "createdAt": "2005-11-11T16:39:05.0000000Z",
           "updatedBy": "Deploy.User",
           "updatedAt": "2011-05-27T15:16:08.9800000Z"
      }
   ],
```

©2014 Oracle Corporation. All rights reserved

```
    "totalResults": 1,
    "limit": 1000,
    "offset": 0,
    "hasMore": false,
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" --header "Content-Type: application/json" https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports?q=name=\u0027*Email*\u0027
```

GET /contacts/lists/{id}

Retrieves the contact list with the specified `id`.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the contact list with id `1`:

```
GET /contacts/lists/1
```

Response:

```
HTTP/1.1 200 OK

{
    "name": "SYSTEM - CRM Accounts",
    "count": 0,
    "statement": "{{AccountList[1]}}",
    "uri": "/contacts/lists/1",
    "createdBy": "Deploy.User",
    "createdAt": "2005-11-11T16:39:05.0000000Z",
```

©2014 Oracle Corporation. All rights reserved

```
    "updatedBy": "Deploy.User",
    "updatedAt": "2011-05-27T15:16:08.9800000Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/fields/10085
```

GET /contacts/segments

Retrieves all contact segments that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Retrieves all contact segments whose `name` includes “Sale”

```
GET /contacts/segments?q="name=*Example*"
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 1,
    "hasMore": false,
    "items": [
        {
            "count": 0,
            "createdAt": "2014-05-29T17:09:53.7370000Z",
            "createdBy": "Docs.Example",
            "executedAt": "2014-05-29T17:09:55.0100000Z",
            "name": "Docs Example",
            "statement": "{{ContactSegment[29]}}",
            "updatedAt": "2014-05-29T17:09:54.8770000Z",
            "updatedBy": "Allison.Moore",
            "uri": "/contacts/segments/29"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 1
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/segments
?q="name=*Example*"
```

GET /contacts/segments/{id}

Retrieves the contact segment with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

©2014 Oracle Corporation. All rights reserved

Request Body

None.

Example

Retrieves the contact segment with id 29:

```
GET /contacts/segments/29
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 0,
    "createdAt": "2014-05-29T17:09:53.7370000Z",
    "createdBy": "Allison.Moore",
    "executedAt": "2014-05-29T17:09:55.0100000Z",
    "name": "Docs Example",
    "statement": "{{ContactSegment[29]}}",
    "updatedAt": "2014-05-29T17:09:54.8770000Z",
    "updatedBy": "Allison.Moore",
    "uri": "/contacts/segments/29"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/segments
/29
```

POST /contacts/exports

Creates a new contact export definition.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

none

©2014 Oracle Corporation. All rights reserved

Request Body

Name	Type	Description	Constraints
autoDeleteDuration	Duration	Time until the definition will be deleted	
createdAt	DateTime	Timestamp when the definition was created.	
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/`. Value must be a string of 1 to 100 characters.
filter	String	Specifies what data should be included in the export.	
kbUsed	Long	The amount of space required to store staged data	
maxRecords	Integer	Specifies the maximum number of records to export.	
name	String	Name of the definition. Useful for reusing definitions.	
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

©2014 Oracle Corporation. All rights reserved

Example

Creates a new contact export, requesting the contact ID and first name for all contacts.

```
POST /contacts/exports
```

```
{
   "name": "Account Export Example",
   "fields": {
      "ContactId": "{{Contact.Id}}",
      "FirstName": "{{Contact.Field(C_FirstName)}}"
   }
}
```

Response:

```
HTTP/1.1 201 Created
{
    "name": "Contact Export Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}"
    },
    "uri": "/contacts/exports/186",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:41:09.1379185Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:41:09.1379185Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://<host>.eloqua.com/API/Bulk/2.0/contacts/exports -d '
{
   "name": "Contact Export Example",
   "fields": {
       "ContactId": "{{Contact.Id}}",
       "FirstName": "{{Contact.Field(C_FirstName)}}"
   }
}'
```

POST /contacts/imports

Creates a new contact export definition.

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

none

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/)`. Value must be a string of 1 to 100 characters.
`identifierFieldName`	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
`isUpdatingMultipleMatchedRecords`	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the `identifierFieldName`.	
`kbUsed`	Long	The amount of space required to store staged data	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
name	String	Name of the definition. Useful for reusing definitions.	**Requred.**
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Creates a new contact import, requesting the contact ID and first name for all contacts.

```
POST /contacts/imports
```

```
{
   "name": "Contact import Example",
   "fields": {
      "ContactId": "{{Contact.Id}}",
      "FirstName": "{{Contact.Field(C_FirstName)}}"
   }
}
```

Response:

```
{
    "name": "Contact import Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}"
    },
    "uri": "/contacts/imports/186",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:41:09.1379185Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T12:41:09.1379185Z"
```

©2014 Oracle Corporation. All rights reserved

```
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/imports
-d '
{
   "name": "Contact import Example",
   "fields": {
       "ContactId": "{{Contact.Id}}",
       "FirstName": "{{Contact.Field(C_FirstName)}}"
   }
}'
```

POST /contacts/imports/{id}/data

Submits the data for the contact import with the specified id.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

None.

Request Body

Array of dictionary of strings.

Example

Submit data for import:

```
POST /contacts/imports/186/data
[
        {
                "ContactId": "1",
                "FirstName": "Harry"
        },
        {
                "ContactId": "2",
                "FirstName": "Lisanne"
```

©2014 Oracle Corporation. All rights reserved

```
        }
]
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Content-Type: application/json" --header "Accept:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/contacts/exports/
186/data -d '
[
        {
                "ContactId": "1",
                "FirstName": "Harry"
        },
        {
                "ContactId": "2",
                "FirstName": "Lisanne"
        }
]'
```

PUT /contacts/exports/{id}

Updates the contact export definition with the specified `id`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match /^[_a-zA-Z][_0-9a-zA-Z]*$/). Value must be a string of 1 to 100 characters.
filter	String	Specifies what data should be included in the export.	
kbUsed	Long	The amount of space required to store staged data	
maxRecords	Integer	Specifies the maximum number of records to export.	
name	String	Name of the definition. Useful for reusing definitions.	
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the contact export with id 188 to include an additional field.

```
PUT /contacts/exports/188
```

```
{
    "name": "Contact Export Example",
    "fields": {
```

©2014 Oracle Corporation. All rights reserved

```
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}",
        "LastName": "{{Contact.Field(C_LastName)}}"
    }
}
```

Response:

```
{
    "name": "Contact Export Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}",
        "LastName": "{{Contact.Field(C_LastName)}}"
    },
    "syncActions": [],
    "uri": "/contacts/exports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T13:08:45.0889544Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json" -X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/exports/
188 -d '
{
   "name": "Contact Export Example",
   "fields": {
       "ContactId": "{{Contact.Id}}",
       "FirstName": "{{Contact.Field(C_FirstName)}}",
       "LastName": "{{Contact.Field(C_LastName)}}"
   }
}'
```

PUT /contacts/imports/{id}

Updates the contact import definition with the specified `id`

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

©2014 Oracle Corporation. All rights reserved

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/)`. Value must be a string of 1 to 100 characters.
`identifierFieldName`	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
`isUpdatingMultipleMatchedRecords`	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the `identifierFieldName`.	
`kbUsed`	Long	The amount of space required to store staged data	
`name`	String	Name of the definition. Useful for reusing definitions.	**Required.**
`syncActions`	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
			most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the contact import with `id` 188 to include an additional field.

```
PUT /contacts/imports/188
```

```
{
    "name": "Contact import Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}",
        "LastName": "{{Contact.Field(C_LastName)}}"
   }
}
```

Response:

```
{
    "name": "Contact import Example",
    "fields": {
        "ContactId": "{{Contact.Id}}",
        "FirstName": "{{Contact.Field(C_FirstName)}}",
        "LastName": "{{Contact.Field(C_LastName)}}"
    },
    "syncActions": [],
    "uri": "/contacts/imports/188",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-10T12:59:04.5070000Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-10T13:08:45.0889544Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json" --header "Content-Type:
application/json" -X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/contacts/imports/
188 -d '
{
   "name": "Contact import Example",
   "fields": {
       "ContactId": "{{Contact.Id}}",
       "FirstName": "{{Contact.Field(C_FirstName)}}",
       "LastName": "{{Contact.Field(C_LastName)}}"
   }
}'
```

4.1.4 /customObjects/

DELETE /customObjects/{parentId}/exports/{id}

Deletes a stored export definition for a specified custom object.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

Example

Delete the export with id 2:

```
DELETE/customObjects/5/exports/2
```

Response:

```
HTTP/1.1 204 No Content
```

©2014 Oracle Corporation. All rights reserved

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/5/e
xports/2
```

DELETE /customObjects/{parentId}exports/{id}/data

Deletes a specific custom object export's data.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

Example

Delete the data for the export with `id` 12:

```
DELETE /customObjects/5/exports/2/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/5/e
xports/2/data
```

DELETE /customObjects/{parentId}/imports/{id}

Deletes a stored import definition for a specified custom object.

URL Components

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

Example

Delete the import with id 12:

```
DELETE /customObjects/5/imports/12
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/5/i
mports/12
```

DELETE /customObjects/{parentId}/imports/{id}/data

Deletes a specific custom object import's data.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Delete the data for the import with `id` 12:

```
DELETE /customObjects/5/imports/12/data
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json" -X DELETE
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/5/i
mports/12/data
```

GET /customObjects

Retrieves all custom objects that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
`limit`	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
`offset`	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
`orderBy`	String	Term to order the results by. Available terms: `uri`, `id`, `name`, `dataRetentionDuration`, `maxRecords`, `autoDeleteDuration`, `kbUsed`, `createdBy`, `createdAt`, `updatedBy`, `updatedAt`	Must match the pattern `"^.*(ASC|DESC)$"`
`q`	String	Specifies query criteria used to filter results	format is `q="<term><operator><value>"`
`totalResults`	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server	None.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		side.	

Request Body

None.

Example

Requests a list of at most two custom objects.

```
GET /customObjects?limit=2
```

Response:


```
HTTP/1.1 200 OK

{
    "count": 2,
    "hasMore": true,
    "items": [
        {
            "createdAt": "2013-03-26T21:32:06.6130000Z",
            "createdBy": "Example",
            "displayNameFieldUri":
"/customObjects/1/fields/70",
            "emailAddressFieldUri":
"/customObjects/1/fields/71",
            "name": "Opportunity",
            "uniqueFieldUri": "/customObjects/1/fields/12",
            "updatedAt": "2013-03-26T21:32:07.7430000Z",
            "updatedBy": "Example",
            "uri": "/customObjects/1"
        },
        {
            "createdAt": "2013-03-26T21:32:07.7900000Z",
            "createdBy": "Example",
            "name": "Purchase History",
            "uniqueFieldUri": "/customObjects/2/fields/10",
            "updatedAt": "2013-03-26T21:32:08.0330000Z",
            "updatedBy": "Example",
            "uri": "/customObjects/2"
        }
    ],
    "limit": 2,
    "offset": 0,
    "totalResults": 107
```


©2014 Oracle Corporation. All rights reserved

```
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects?lim
it=2
```

GET /customObjects/{id}

Retrieves the custom object with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the custom object with id `1`:

```
GET /customObjects/1
```

Response:

```
HTTP/1.1 200 OK

{
   "name": "Opportunity",
   "displayNameFieldUri": "/customObjects/1/fields/70",
   "emailAddressFieldUri": "/customObjects/1/fields/71",
   "uniqueFieldUri": "/customObjects/1/fields/12",
   "uri": "/customObjects/1",
   "createdBy": "Example",
   "createdAt": "2013-03-26T21:32:06.6130000Z",
   "updatedBy": "Example",
   "updatedAt": "2013-03-26T21:32:07.7430000Z"
}
```

©2014 Oracle Corporation. All rights reserved

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/1
```

GET /customObjects/{id}/exports

Retrieves the list of export definitions that match the query parameters for the custom object with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
`limit`	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
`offset`	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
`orderBy`	String	Term to order the results by. Available terms: `uri`, `id`, `name`, `dataRetentionDuration`, `maxRecords`, `autoDeleteDuration`, `kbUsed`, `createdBy`, `createdAt`, `updatedBy`, `updatedAt`	Must match the pattern `"^.*(ASC|DESC)$"`
`q`	String	Specifies query criteria used to filter results	format is `q="<term><operator><value>"`
`totalResults`	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Retrieve the export definitions for the custom object with `id` 5:

```
GET /customObjects/5/exports
{
    "count": 1,
    "hasMore": false,
    "items": [
        {
            "createdAt": "2014-08-12T18:30:46.5070000Z",
            "createdBy": "Docs.Example",
            "fields": {
                "ID": "{{CustomObject[5].Field[70]}}",
                "email": "{{CustomObject[5].Field[73]}}",
                "name": "{{CustomObject[5].Field[74]}}"
            },
            "name": "Example Custom Object Export",
            "syncActions": [],
            "updatedAt": "2014-08-12T18:30:46.5070000Z",
            "updatedBy": "Docs.Example",
            "uri": "/customObjects/5/exports/189"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 1
}
```

Try it yourself with cURL:

```
curl -v -header "Authorization: Basic [your token here]" -
header "Accept: application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/5/e
xports/188
```

GET /customObjects/{id}/fields

Retrieves all custom object fields that match the criteria specified in the URL parameters for the custom object with the given `id` .

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

©2014 Oracle Corporation. All rights reserved

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all fields whose name includes “ID”

```
GET /customObjects/fields?q="name=*ID*"
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 3,
    "hasMore": false,
    "items": [
        {
            "dataType": "string",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
```

©2014 Oracle Corporation. All rights reserved

```
            "hasUniquenessConstraint": true,
            "internalName": "Opportunity_ID1",
            "name": "Opportunity ID",
            "statement": "{{CustomObject[5].Field[70]}}",
            "uri": "/customObjects/5/fields/70"
        },
        {
            "dataType": "string",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
            "hasUniquenessConstraint": false,
            "internalName": "Contact_Role_ID1",
            "name": "Contact Role ID",
            "statement": "{{CustomObject[5].Field[71]}}",
            "uri": "/customObjects/5/fields/71"
        },
        {
            "dataType": "string",
            "hasNotNullConstraint": false,
            "hasReadOnlyConstraint": false,
            "hasUniquenessConstraint": false,
            "internalName": "Contact_ID1",
            "name": "Contact ID",
            "statement": "{{CustomObject[5].Field[72]}}",
            "uri": "/customObjects/5/fields/72"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 3
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/exp
orts?q="name=*ID*"
```

GET /customObjects/{id}/imports

Retrieves the list of import definitions that match the query parameters for the custom object with the specified `id`.

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Requests a single import definitions for the c ustom object with id 26.

```
GET /customObjects/26/imports?limit=1
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 1,
    "hasMore": false,
```

©2014 Oracle Corporation. All rights reserved

```
    "items": [
        {
            "createdAt": "2014-08-13T14:20:21.3430000Z",
            "createdBy": "Docs.Example",
            "fields": {
                "email": "{{CustomObject[26].Field[510]}}"
            },
            "identifierFieldName": "email",
            "isSyncTriggeredOnImport": false,
            "isUpdatingMultipleMatchedRecords": false,
            "name": "Example Custom Object Import",
            "syncActions": [],
            "updatedAt": "2014-08-13T14:20:21.3430000Z",
            "updatedBy": "Docs.Example",
            "uri": "/customObjects/26/imports/1672"
        }
    ],
    "limit": 1,
    "offset": 0,
    "totalResults": 1
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" https://secure.p03.eloqua.com/api/bulk/2.0/customObjects/26/imports?limit=1
```

GET /customObjects/{parentId}/exports/{id}

Retrieves the specified custom object export definition. The `{parentId}` defines which custom object, while the `{id}` defines the export.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Requests the custom object export definition with `id` 2:

```
GET /customObjects/5/exports/189
```

```
HTTP/1.1 200 OK
{
    "createdAt": "2014-08-12T18:30:46.5070000Z",
    "createdBy": "Docs.Example",
    "fields": {
        "ID": "{{CustomObject[5].Field[70]}}",
        "email": "{{CustomObject[5].Field[73]}}",
        "name": "{{CustomObject[5].Field[74]}}"
    },
    "name": "Example Custom Object Export",
    "syncActions": [],
    "updatedAt": "2014-08-12T18:30:46.5070000Z",
    "updatedBy": "Docs.Example",
    "uri": "/customObjects/5/exports/189"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
header "Accept: application/json"
https://secure.p03.eloqua.com/API/BULK/2.0/customObjects/5/e
xports/2
```

GET /customObjects/{parentId}/exports/{id}/data

Retrieves the data for the custom object export with the specified id. The `{parentId}` defines which custom object, while the `{id}` defines the export.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

Name	Type	Description	Constraints
`limit`	Integer	Specifies maximum number of records to return.	Must be between 1 and 50,000 inclusive
`offset`	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
`totalResults`	Boolean	This captures the total number of records that	None.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		satisfy the request. This is not the count returned in the current response, but total count on the server side.	

Request Body

None.

Example

Requests the data for the export with `id` 2:

```
GET /customObjects/5/exports/2/data
```

Response:

```
HTTP/1.1 200 OK
{
        "totalResults": 10,
        "limit": 3,
        "offset": 0,
        "count": 0,
        "hasMore": true,
        "items": [
                {
                        "ID": "123456789 (zafar.manal@example.com)",
                        "email": "zafar.manal@example.com",
                        "name": "Zafar Manal"
                },
                {
                        "ID": "456789123 (lena.wilkinson@example.com)",
                        "email": "lena.wilkinson@example.com",
                        "name": "Lena Wilkinson"
                },
                {
                        "ID": "789456123 (joana.mendes@example.com)",
                        "email": "joana.mendes@example.com",
                        "name": "Joana Mendes"
                }
        ]
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json"
https://secure.p03.eloqua.com/API/BULK/2.0/customObjects/5/exports/2/data
```

GET /customObjects/{parentId}/imports/{id}

Retrieves the specified custom object export definition. The `{parentId}` defines which custom object, while the `{id}` defines the import.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

Example

By their nature, custom objects are unique to your Eloqua installation. As such, this example is unlikely to map directly to your custom objects and fields. You can view your custom objects within Eloqua by selecting Contacts, and then choosing Custom Objects.You can also obtain a list of all custom objects using the GET /customObjects endpoint.

Requests the export with `id` 2:

```
GET /customObjects/26/imports/1672
```

Response:


```
{

    "createdAt": "2014-08-13T14:20:21.3430000Z",
    "createdBy": "Docs.Example",
    "fields": {
        "email": "{{CustomObject[26].Field[510]}}"
    },
    "identifierFieldName": "email",
    "isSyncTriggeredOnImport": false,
```


©2014 Oracle Corporation. All rights reserved

```
    "isUpdatingMultipleMatchedRecords": false,
    "name": "Example Custom Object Import",
    "syncActions": [],
    "updatedAt": "2014-08-13T14:20:21.3430000Z",
    "updatedBy": "Docs.Example",
    "uri": "/customObjects/26/imports/1672"
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here] --
header "Accept: application/json"
https://secure.p03.eloqua.com/API/BULK/2.0/customObjects/26/
imports/1672
```

POST /customObjects/{parentId}/imports/{id}/data

Submit the data for the specified custom object import. The `{parentId}` defines which custom object, while the `{id}` defines the import.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

Array of dictionaries of strings.

Example

Submits custom object data for the export with ID 1672.

```
POST /customObjects/26/imports/1672/data
[
   {
        "email": "silvia.rubio@example.com",
        "firstName": "Silvia"
   },
   {
        "email": "arthur.pedersen@example.com",
```

©2014 Oracle Corporation. All rights reserved

```
        "firstName": "Arthur"
    }
]
```

Response:

```
HTTP/1.1 204 No Content
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/customObjects/26/
imports/1672/data -d'
[
        {
                "email": "silvia.rubio@example.com",
                "firstName": "Silvia"
        },
        {
                "email": "arthur.pedersen@example.com",
                "firstName": "Arthur"
        }

]
```

POST /customObjects/{parentId}/exports

Creates a new export definition to export data for the specified custom object. The `{parentId}` defines which custom object.

URL Components

Name	Type	Description	Constraints
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
createdAt	DateTime	Timestamp when the definition was created.	
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/`). Value must be a string of 1 to 100 characters.
filter	String	Specifies what data should be included in the export.	
kbUsed	Long	The amount of space required to store staged data	
maxRecords	Integer	Specifies the maximum number of records to export.	
name	String	Name of the definition. Useful for reusing definitions.	
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

By their nature, custom objects are unique to your Eloqua installation. As such, this example is unlikely to map directly to your custom objects and fields. You can view your custom objects

©2014 Oracle Corporation. All rights reserved

within Eloqua by selecting Contacts, and then choosing Custom Objects. You can also obtain a list of all custom objects using the GET /customObjects endpoint.

Creates a new custom object export, requesting the ID, email address, and name fields:

```
                                    POST
/customObjects/5/exports
{
   "name": "Example Custom Object Export",
   "fields": {
        "ID": "{{CustomObject[5].Field[70]}}",
        "email": "{{CustomObject[5].Field[73]}}",
        "name": "{{CustomObject[5].Field[74]}}"
   }
}
```

Response:

```
                                    HTTP/1.1 201 Created



{

    "name": "Example Custom Object Export",
    "fields": {
        "ID": "{{CustomObject[5].Field[70]}}",
        "email": "{{CustomObject[5].Field[73]}}",
        "name": "{{CustomObject[5].Field[74]}}"
    },
    "uri": "/customObjects/5/exports/189",
    "createdBy": "DocsExample",
    "createdAt": "2014-08-12T18:30:46.5050218Z",
    "updatedBy": "DocsExample",
    "updatedAt": "2014-08-12T18:30:46.5050218Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Content-Type: application/json" --header "Accept:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/customObjects/5/e
xports -d '
{
        "name": "Example Custom Object Export",
        "fields": {
```

©2014 Oracle Corporation. All rights reserved

```
                "ID": "{{CustomObject[5].Field[70]}}",
                "email": "{{CustomObject[5].Field[73]}}",
                "name": "{{CustomObject[5].Field[74]}}"
        }
}'
```

POST /customObjects/{parentId}/imports

Creates a new import definition to import data for the specified custom object. The `{parentId}` defines which custom object.

URL Components

Name	Type	Description	Constraints
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-zA-Z]*$/`. Value must be a string of 1 to 100 characters.
`identifierFieldName`	String	Specifies which field to use to match the imported data	**Required**. Must be a

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		to existing Eloqua data.	string value of 1 to 100 characters.
isUpdatingMultipleMatchedRecords	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the identifierFieldName.	
kbUsed	Long	The amount of space required to store staged data	
name	String	Name of the definition. Useful for reusing definitions.	**Requred.**
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

By their nature, custom objects are unique to your Eloqua installation. As such, this example is unlikely to map directly to your custom objects and fields. You can view your custom objects within Eloqua by selecting Contacts, and then choosing Custom Objects.You can also obtain a list of all custom objects using the GET /customObjects endpoint.

Creates a new custom object import, specifying the email address field.

```
                                POST
/customObjects/26/imports
{
    "name": "Example Custom Object Import",
```

©2014 Oracle Corporation. All rights reserved

```
    "fields": {
        "email": "{{CustomObject[26].Field[510]}}"
    },
    "identifierFieldName": "email"
}
```

Response:

```
{

    "name": "Example Custom Object Import",
    "fields": {
        "email": "{{CustomObject[26].Field[510]}}"
    },
    "identifierFieldName": "email",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "uri": "/customObjects/26/imports/1672",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-13T14:20:21.3449897Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-13T14:20:21.3449897Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/customObjects/26/
imports -d '
{
    "name": "Example Custom Object Import",
    "fields": {
        "email": "{{CustomObject[26].Field[510]}}"
    },
        "identifierFieldName": "email"
}'
```

PUT /customObjects/{parentId}/exports/{id}

Updates the specified custom object export definition. The `{parentId}` defines which custom object, while the `{id}` defines the export.

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
autoDeleteDuration	Duration	Time until the definition will be deleted	
createdAt	DateTime	Timestamp when the definition was created.	
createdBy	String	User who created the definition.	
dataRetentionDuration	Duration	Time until the staged data will be deleted	
fields	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match /^[_a-zA-Z][_0-9a-zA-Z]*$/). Value must be a string of 1 to 100 characters.
filter	String	Specifies what data should be included in the export.	
kbUsed	Long	The amount of space required to store staged data	
maxRecords	Integer	Specifies the maximum number of records to export.	
name	String	Name of the definition. Useful for reusing definitions.	
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was	

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		updated.	
updatedBy	String	User who updated the definition.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the custom object export with id 188 to include an additional field.

```
PUT /customObjects/5/exports/189
{
    "name": "Custom Object Export Example",
    "fields":{
        "ID":"{{CustomObject[5].Field[70]}}",
        "email":"{{CustomObject[5].Field[73]}}",
        "name":"{{CustomObject[5].Field[74]}}",
        "account":"{{CustomObject[5].Field[97]}}"
   },
}
```

Response:

```
HTTP/1.1 200 OK

{
   "name":"Example Custom Object Export",
   "fields":{
        "ID":"{{CustomObject[5].Field[70]}}",
        "email":"{{CustomObject[5].Field[73]}}",
        "name":"{{CustomObject[5].Field[74]}}"
       "account":"{{CustomObject[5].Field[97]}}"
   },
   "uri":"/customObjects/5/exports/189",
   "createdBy":"DocsExample",
   "createdAt":"2014-08-12T18:30:46.5050218Z",
   "updatedBy":"DocsExample",
   "updatedAt":"2014-08-12T19:30:46.5050218Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json" --header "Content-Type:
application/json" -X PUT
https://secure.p03.eloqua.com/api/bulk/2.0/customObjects/5/e
xports/189/ -d '
{
    "name": "Example Custom Object Export",
    "fields": {
        "ID": "{{CustomObject[5].Field[70]}}",
        "email": "{{CustomObject[5].Field[73]}}",
        "name": "{{CustomObject[5].Field[74]}}",
               "account":"{{CustomObject[5].Field[75]}}"
    }
}'
```

PUT /customObjects/{projectId}/imports/{id}

Updates the specified custom object import definition. The `{parentId}` defines which custom object, while the `{id}` defines the import.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None
`parentId`	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
`autoDeleteDuration`	Duration	Time until the definition will be deleted	
`createdAt`	DateTime	Timestamp when the definition was created.	
`createdBy`	String	User who created the definition.	
`dataRetentionDuration`	Duration	Time until the staged data will be deleted	
`fields`	Dictionary of strings	List of fields to be included in the operation.	**Required**. May contain at most 100 elements. Key must match `/^[_a-zA-Z][_0-9a-`

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
			zA-Z] *$/). Value must be a string of 1 to 100 characters.
identifierFieldName	String	Specifies which field to use to match the imported data to existing Eloqua data.	**Required**. Must be a string value of 1 to 100 characters.
isUpdatingMultipleMatchedRecords	Boolean	Specifies whether Eloqua should update multiple records if multiple records match the identifierFieldName.	
kbUsed	Long	The amount of space required to store staged data	
name	String	Name of the definition. Useful for reusing definitions.	**Requred.**
syncActions	List of Sync Actions	Specifies additional operations to perform during the import or export.	Must not contain duplicates. May contain at most 10 elements.
updatedAt	DateTime	Timestamp when the definition was updated.	
updatedBy	String	User who updated the definition.	
updateRule	RuleType	Specifies how updates should be handled.	
uri	URI	System-generated URI that defines the definition for future referencing.	

Example

Updates the custom object import with id 1672 to include an additional field.

```
POST /customObjects/26/imports
{
```

©2014 Oracle Corporation. All rights reserved

```
    "name": "Example Custom Object Import",
    "fields": {
        "email": "{{CustomObject[26].Field[510]}}",
        "firstName":"{{CustomObject[26].Field[511]}}"
    },
    "identifierFieldName": "email"
}
```

Response:

```
{
    "name": "Example Custom Object Import",
    "fields": {
        "email": "{{CustomObject[26].Field[510]}}",
        "firstName":"{{CustomObject[26].Field[511]}}"
    },
    "identifierFieldName": "email",
    "isSyncTriggeredOnImport": false,
    "isUpdatingMultipleMatchedRecords": false,
    "uri": "/customObjects/26/imports/1672",
    "createdBy": "Docs.Example",
    "createdAt": "2014-08-13T14:20:21.3449897Z",
    "updatedBy": "Docs.Example",
    "updatedAt": "2014-08-13T14:20:21.3449897Z"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json" -X PUT
https://secure.p03.eloqua.com/API/Bulk/2.0/customObjects/26/
imports/1672 -d '
{
   "name": "customObject import Example",
   "fields": {
       "email": "{{CustomObject[26].Field[510]}}",
       "firstName": "{{CustomObject[26].Field[511]}}"
   }
}'
```

4.1.5 /emailGroups/

GET /emailGroups

Retrieves all email groups that match the criteria specified in the URL parameters.

©2014 Oracle Corporation. All rights reserved

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
`limit`	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
`offset`	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
`orderBy`	String	Term to order the results by. Available terms: `uri`, `id`, `name`, `dataRetentionDuration`, `maxRecords`, `autoDeleteDuration`, `kbUsed`, `createdBy`, `createdAt`, `updatedBy`, `updatedAt`	Must match the pattern `"^.*(ASC|DESC)$"`
`q`	String	Specifies query criteria used to filter results	format is `q="<term><operator><value>"`
`totalResults`	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all fields whose `name` includes “News”

```
GET /emailGroups?q="name=*News*"
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 1,
    "hasMore": false,
    "items": [
```

©2014 Oracle Corporation. All rights reserved

```
        {
            "name": "Newsletter",
            "statement": "{{EmailGroup[2]}}",
            "updatedAt": "2013-05-14T03:19:11.0370000Z",
            "updatedBy": "Docs.Example",
            "uri": "/emailGroups/2"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 1
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/emailGroups?q
="name=*News*"
```

GET /emailGroups/{id}

Retrieves the email group with the specified `id`.

URL Components

Name	Type	Description	Constraints
`id`	Integer	The id of the element	None

URL Parameters

None.

Request Body

None.

Example

Retrieves the email group with id `1`:

```
GET /emailGroups/1
```

Response:


```
HTTP/1.1 200 OK
{
```


©2014 Oracle Corporation. All rights reserved

```
    "name": "My Emails",
    "statement": "{{EmailGroup[1]}}",
    "uri": "/emailGroups/1"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/emailGroups/1
```

4.1.6 /exports/

GET /exports

Retrieves all exports that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response,	None.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		but total count on the server side.	

Request Body

None.

Example

Retrieves all exports created after 2014-08-12 and before 2014-08-14.

```
GET /exports?q="createdAt>2014-08-12"&q="createdAt<2014-08-14"
```

Response:

```
HTTP/1.1 200 OK
{
    "items": [
        {
            "name": "Example Custom Object Export",
            "fields": {
                "ID": "{{CustomObject[5].Field[70]}}",
                "email": "{{CustomObject[5].Field[73]}}",
                "name": "{{CustomObject[5].Field[74]}}",
                "account": "{{CustomObject[5].Field[75]}}"
            },
            "syncActions": [],
            "uri": "/customObjects/5/exports/189",
            "createdBy": "Docs.Example",
            "createdAt": "2014-08-12T18:30:46.5070000Z",
            "updatedBy": "Docs.Example",
            "updatedAt": "2014-08-12T20:35:00.1930000Z"
        },
        {
            "name": "test export",
            "fields": {
                "test": "{{CustomObject[21].Field[456]}}"
            },
            "syncActions": [],
            "uri": "/customObjects/21/exports/190",
            "createdBy": "Docs.Example",
            "createdAt": "2014-08-12T19:50:28.7330000Z",
            "updatedBy": "Docs.Example",
            "updatedAt": "2014-08-12T19:50:28.7330000Z"
        }
```

©2014 Oracle Corporation. All rights reserved

```
    ],
    "totalResults": 2,
    "limit": 1000,
    "offset": 0,
    "count": 2,
    "hasMore": false
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/exports?q="create
dAt>2014-08-12"&q="createdAt<2014-08-14"
```

GET /exports/data

Returns the size of the staging area available for exports, and the amount currently used.

URL Components

Name	Type	Description	Constraints

URL Parameters

None.

Request Body

None.

Example

Retrieves all syncs created by users with "Docs" in their name.

```
GET /exports/data
```

Response:

```
HTTP/1.1 200 OK
{
    "kbAllowed": 250000,
    "kbUsed": 0
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
```

©2014 Oracle Corporation. All rights reserved

```
header "Accept: application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/exports/data
```

4.1.7 /imports/

GET /imports

Retrieves all imports that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

©2014 Oracle Corporation. All rights reserved

Example

Retrieves all imports created after 2014-08-12 and before 2014-08-14.

```
GET /imports?q="createdAt>2014-08-12"&q="createdAt<2014-08-14"
```

Response:

```
HTTP/1.1 200 OK
{
    "items": [
        {
            "name": "Example Custom Object Import",
            "fields": {
                "email": "{{CustomObject[26].Field[510]}}"
            },
            "identifierFieldName": "email",
            "syncActions": [],
            "isSyncTriggeredOnImport": false,
            "isUpdatingMultipleMatchedRecords": false,
            "uri": "/customObjects/26/imports/1672",
            "createdBy": "Docs.Example",
            "createdAt": "2014-08-13T14:20:21.3430000Z",
            "updatedBy": "Docs.Example",
            "updatedAt": "2014-08-13T14:20:21.3430000Z"
        }
    ],
    "totalResults": 1,
    "limit": 1000,
    "offset": 0,
    "count": 1,
    "hasMore": false
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" --header "Content-Type: application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/imports?q="createdAt>2014-08-12"&q="createdAt<2014-08-14"
```

GET /imports/data

Returns the size of the staging area available for imports, and the amount currently used.

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None
parentId	Integer	The ID of the custom object	None.

URL Parameters

None.

Request Body

None.

Example

Retrieves all syncs created by users with "Docs" in their name.

```
GET /imports/data
```

Response:

```
HTTP/1.1 200 OK
{
    "kbAllowed": 250000,
    "kbUsed": 0
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/imports/data
```

4.1.8 /syncs/

GET /syncs

Retrieves all syncs that match the criteria specified in the URL parameters.

URL Components

None.

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves all syncs created by users with "Docs" in their name.

```
GET /syncs?q="createdBy=*Docs*"
```

Response:

```
HTTP/1.1 200 OK
{
    "count": 25,
    "hasMore": false,
    "items": [
        {
            "createdAt": "2014-01-07T16:03:17.6000000Z",
            "createdBy": "Docs.Example",
            "status": "success",
            "syncEndedAt": "2014-01-07T16:03:20.3800000Z",
            "syncStartedAt": "2014-01-07T16:03:17.7730000Z",
            "syncedInstanceUri": "/accounts/imports/892",
```

©2014 Oracle Corporation. All rights reserved

```
            "uri": "/syncs/891"
        },
        {
            "createdAt": "2014-04-23T19:39:37.7670000Z",
            "createdBy": "Docs.Example",
            "status": "success",
            "syncEndedAt": "2014-04-23T19:39:39.5270000Z",
            "syncStartedAt": "2014-04-23T19:39:38.8400000Z",
            "syncedInstanceUri": "/contacts/exports/5",
            "uri": "/syncs/1038"
        },
        ...
        {
            "createdAt": "2014-08-12T19:51:17.1800000Z",
            "createdBy": "Docs.Example",
            "status": "success",
            "syncEndedAt": "2014-08-12T19:51:18.8200000Z",
            "syncStartedAt": "2014-08-12T19:51:18.4000000Z",
            "syncedInstanceUri":
"/customObjects/21/exports/190",
            "uri": "/syncs/1445"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 25
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/syncs?q
="createdBy=*Docs*"
```

GET /syncs/{id}

Retrieves the specified sync.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

©2014 Oracle Corporation. All rights reserved

URL Parameters

None.

Request Body

None.

Example

Retrieves the sync with id 1444

```
GET /syncs/1444
```

Response:

```
HTTP/1.1 200 OK
{
    "createdAt": "2014-08-12T19:41:51.5830000Z",
    "createdBy": "Docs.Example",
    "status": "success",
    "syncEndedAt": "2014-08-12T19:41:54.1270000Z",
    "syncStartedAt": "2014-08-12T19:41:53.2700000Z",
    "syncedInstanceUri": "/customObjects/5/exports/189",
    "uri": "/syncs/1444"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/syncs/1444
```

GET /syncs/{id}/data

Retrieves the data for the specified sync. This allows you to retrieve data from an import or export that you have sync'd more than once.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 50,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next	None.

©2014 Oracle Corporation. All rights reserved

Name	Type	Description	Constraints
		batch of records	
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves the data for the sync with id 1444

```
GET /syncs/1444/data?limit=2
```

Response:

```
HTTP/1.1 200 OK
{
        "totalResults": 10,
        "limit": 2,
        "offset": 0,
        "count": 0,
        "hasMore": true,
        "items": [
                {
                        "ID": "123456789 (zafar.manal@example.com)",
                        "email": "zafar.manal@example.com",
                        "name": "Zafar Manal"
                },
                {
                        "ID": "789456123 (joana.mendes@example.com)",
                        "email": "joana.mendes@example.com",
                        "name": "Joana Mendes"
                }
        ]
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
```

©2014 Oracle Corporation. All rights reserved

```
https://secure.p03.eloqua.com/api/bulk/2.0/syncs/1444/data?limit=2
```

GET /syncs/{id}/logs

Retrieves the logs for the specified sync that match the criteria in the URL paramters. This can be useful when troubleshooting.

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves the logs for the sync with id 1445

©2014 Oracle Corporation. All rights reserved

```
GET /syncs/1445/logs
```

Response:


```
HTTP/1.1 200 OK
{
    "count": 2,
    "hasMore": false,
    "items": [
        {
            "count": 1,
            "createdAt": "2014-08-12T19:51:18.4130000Z",
            "message": "Successfully exported members to csv
file.",
            "severity": "information",
            "statusCode": "ELQ-00102",
            "syncUri": "/syncs/1445"
        },
        {
            "count": 0,
            "createdAt": "2014-08-12T19:51:18.8200000Z",
            "message": "Successfully converted csv file to
sqlite, taking 2 kb.",
            "severity": "information",
            "statusCode": "ELQ-00106",
            "syncUri": "/syncs/1445"
        }
    ],
    "limit": 1000,
    "offset": 0,
    "totalResults": 2
}
```


Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Accept: application/json" --header "Content-Type:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/syncs/1445/logs
```

GET /syncs/{id}/rejects

Retrieves raw data about validation failures during the specified import sync. Use URL parameters to filter the results.

©2014 Oracle Corporation. All rights reserved

URL Components

Name	Type	Description	Constraints
id	Integer	The id of the element	None

URL Parameters

Name	Type	Description	Constraints
limit	Integer	Specifies maximum number of records to return.	Must be between 1 and 1,000 inclusive
offset	Integer	Specifies an offset that allows to retrieve the next batch of records	None.
orderBy	String	Term to order the results by. Available terms: uri, id, name, dataRetentionDuration, maxRecords, autoDeleteDuration, kbUsed, createdBy, createdAt, updatedBy, updatedAt	Must match the pattern "^.*(ASC|DESC)$"
q	String	Specifies query criteria used to filter results	format is q="<term><operator><value>"
totalResults	Boolean	This captures the total number of records that satisfy the request. This is not the count returned in the current response, but total count on the server side.	None.

Request Body

None.

Example

Retrieves the rejects for the sync with id 1445

```
GET /syncs/1445/rejects
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --header "Accept: application/json" --header "Content-Type: application/json"
```

©2014 Oracle Corporation. All rights reserved

```
https://secure.p03.eloqua.com/api/bulk/2.0/syncs/1445/rejects
```

POST /syncs

Triggers a sync on the import or export specified in the request body.

URL Components

None.

URL Parameters

None.

Request Body

Name	Type	Description	Constraints
callbackUrl	String		
createdAt	DateTime		
createdBy	String		
status	SyncStatusType		
syncedInstanceUri	URI		**Required**. Must specify an existing `/accounts/imports/{id}`, `/activities/imports/{id}`, `/contacts/imports/{id}`, `/customObjects/{parentId}/imports/{id}`, `/accounts/exports/{id}`, `/activities/exports/{id}`, `/contacts/exports/{id}`, `/customObjects/{parentId}/exports/{id}`.
syncEndedAt	DateTime		
syncStartedAt	DateTime		
uri	URI		

©2014 Oracle Corporation. All rights reserved

Example

Triggersa sync for the specified custom object export:

```
POST/syncs
{
        "syncedInstanceUri": "/customObjects/5/exports/189"
}
```

Response:

```
HTTP/1.1 201 Created
{
    "syncedInstanceUri": "/customObjects/5/exports/189",
    "status": "pending",
    "createdAt": "2014-08-12T19:41:51.7797130Z",
    "createdBy": "Docs.Example",
    "uri": "/syncs/1444"
}
```

Try it yourself with cURL:

```
curl -v --header "Authorization: Basic [your token here]" --
header "Content-Type: application/json" --header "Accept:
application/json"
https://secure.p03.eloqua.com/api/bulk/2.0/syncs -d '
{
        "syncedInstanceUri": "/customObjects/5/exports/189"
}'
```

4.2 Eloqua Markup Language version 3

This document discusses Eloqua Markup Language v3. If you are looking for documentation of Eloqua Markup Language v2, see: TopLiners.

Eloqua Markup Language (EML) is a text-based language you can use to access data in the Eloqua system that provides a consistent view of the data you care about.

EML uses text to identify fields and data relationships for data-centric entities. This way, you can easily describe and access the field values, entity attributes and relations that are important to you, using intuitive language.

©2014 Oracle Corporation. All rights reserved

4.2.1 Available Entities

EML allows you to access Contact, Account, and Custom Object data within your Eloqua database. You can also access related assets, providing the relationship resolves to a single entity.

4.2.2 Access Patterns

The general access format is `{{EntityName.InfoYouWant}})`, where `InfoYouWant` is a field name or attribute. The syntax varies slightly between those two types of data: for *named fields*, the syntax is `{{EntityName.Field(FieldName)}}`, while for *attributes*, the syntax is `{{EntityName.AttributeName}}`.

EML also uses dot notation to connect related assets, in the form `{{EntityName.RelatedAssetName.InfoYouWant}}`.

There are some syntax requirements to bear in mind:


- The system resolves all statements enclosed in `{{` and `}}` if it can parse them. You must put statements that require resolution between double braces.
- To access *attributes*, use brackets `[ ]` to delimit the requested attribute. To access *fields*, use parentheses `( )` to delimit the named field.
- When specifying a field or asset using ELM, you must refer to the *internal name*, rather than the *display name*. The display name is the name that appears in the Eloqua UI, while the internal name is the identifier used by the system. The Contact Entity's email address field, for example, has the display name: "Email Address" and the internal name "C_EmailAddress". See: *Search for Field Names* for more information.

You can only access a related asset that resolves to a single record. For instance, since a Contact is associated with at most one Account, you can retrieve a Contact's related Account information. Conversely, since Accounts are linked to many Contacts, you cannot retrieve related Contact information for an Account.

4.2.3 Syntax Examples

These examples use a fictional contact called Bob Smith throughout. Bob's contact information resembles the following:

©2014 Oracle Corporation. All rights reserved

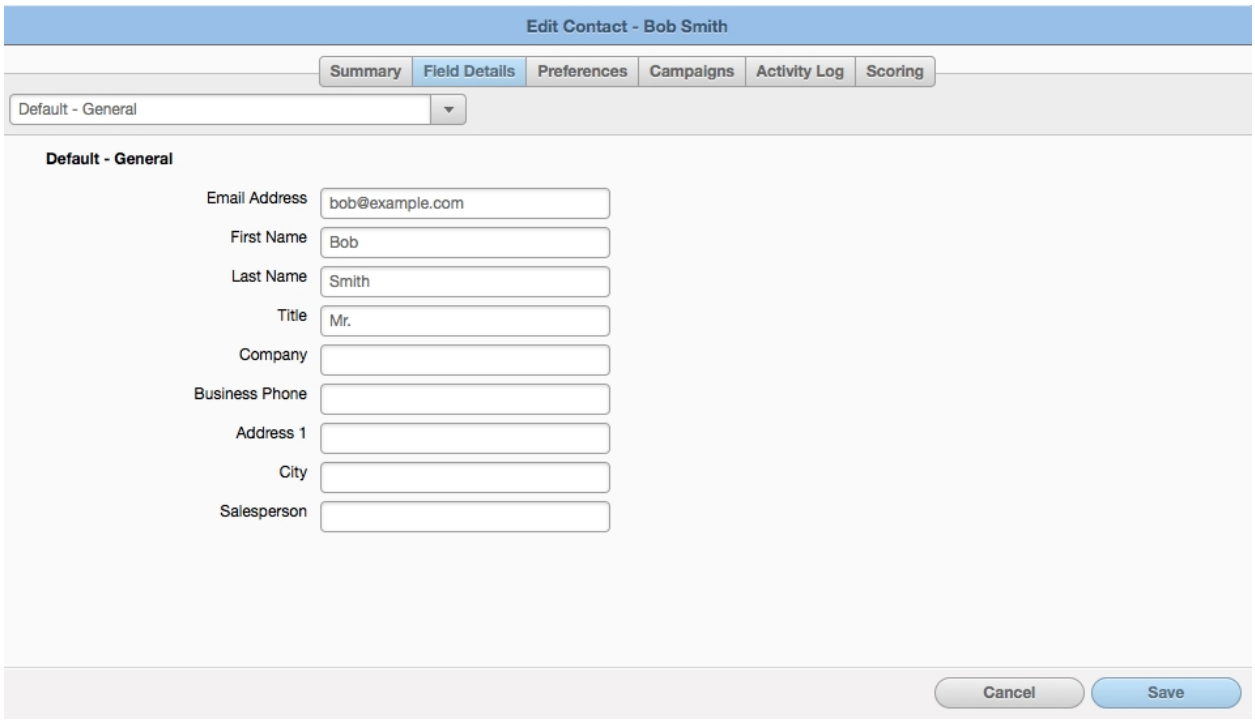

Static Text

Static text is the most straightforward scenario: the EML definition `This is static text` simply resolves to *This is static text*.

Field Values

To access field values, the format is `{{Type.Field(fieldName)}}` For instance, to access the `C_FirstName` field in a Contact, the markup would resemble:

```
{{Contact.Field(C_FirstName)}}
```

For contact Bob Smith, the definition resolves to *Bob*.

Entity Attributes

You can also access an entity's attributes. The definition is extremely similar to the markup for accessing entity fields. To access a contact's `Id`, the internal contact identifier that Eloqua generates and stores when you add a new contact, you would input:

```
{{Contact.Id}}
```

For Bob Smith, whose internal contact identifier is 123456, `{{Contact.Id}}` resolves to *123456*.

Related Entities

To access a Contact's linked Account information, in this case, `M_CompanyName`, the definition is:

```
{{Contact.Account.Field(M_CompanyName)}}
```

©2014 Oracle Corporation. All rights reserved

For Bob Smith, who is a contact of Eloqua, this resolves to *Eloqua*.

4.2.4 Changes In Version 3

Eloqua Markup Language v3 builds on the previous version of EML to simplify and streamline the ways you describe and access data within Eloqua. EML v3 adds support for accessing visitor information for activities coming in from the web: for example, when someone opens an email sent through Eloqua. The changes are primarily structural, making it easier to access the data you want. To that end, v3 introduces three new tokens: `ASSET_TYPE_ATTRIBUTE`, `VISITOR_ID_ATTRIBUTE`, and `VISITOR_EXTERNAL_ID_ATTRIBUTE`.

4.2.5 Grammar

```
grammarEml;

options{
    language=CSharp3;
    output=AST;
    backtrack=true;
}

tokens{
    FIELD_NAME;
    FIELD_INDEX;
    ACTIVITY_TYPE_ATTRIBUTE;
    ASSET_TYPE_ATTRIBUTE;
    ASSET_NAME_ATTRIBUTE;
    ASSET_ID_ATTRIBUTE;
    CAMPAIGN_ID_ATTRIBUTE;
    VISITOR_ID_ATTRIBUTE;
    VISITOR_EXTERNAL_ID_ATTRIBUTE;

}

@modifier{public}
@parser::namespace{ Eloqua.Markup.Version3.Grammar }
@lexer::namespace{ Eloqua.Markup.Version3.Grammar }

publicdynamicEntity
    :DYNAMICSTART!(dataEntity|assetEntity)DYNAMICEND!
    ;

assetEntity
```

©2014 Oracle Corporation. All rights reserved

```
    :contactContainerAsset
    |emailGroupAsset
    |accountContainerAsset
    |cloudInstanceAsset
    ;

contactContainerAsset
    :CONTACTLISTINDEXED_ID
    |CONTACTFILTERINDEXED_ID
    |CONTACTSEGMENTINDEXED_ID
;

emailGroupAsset
    :EMAILGROUPINDEXED_ID
    |EMAILINDEXED_IDDOT!GROUP
    ;

accountContainerAsset
    :ACCOUNTLISTINDEXED_ID
    ;

cloudInstanceAsset
    :CONTENTINSTANCENAMED_ID(DOT!execution)?
    |ACTIONINSTANCENAMED_ID(DOT!execution)?
    |DECISIONINSTANCENAMED_ID(DOT!execution)?
    |FEEDERINSTANCENAMED_ID
    ;

dataEntity
    :relationshipToContactDOT!contactAttribute
    |relationshipToAccountDOT!accountAttribute
    |relationshipToCustomObjectDOT!customObjectAttribute
    |relationshipToActivityDOT!activityAttribute
    ;

relationshipToContact
    :CONTACT
    |customObjectDOT!CONTACT
    |ACTIVITYDOT!CONTACT
    ;

relationshipToAccount
    :ACCOUNT
    |CONTACTDOT!ACCOUNT
    |customObjectDOT!ACCOUNT
    ;

relationshipToCustomObject
```

©2014 Oracle Corporation. All rights reserved

```
    :customObject
    ;

relationshipToActivity
    :ACTIVITY
    ;

contactAttribute
    :field
    |ID_ATTRIBUTE
    |CREATEDAT_ATTRIBUTE
    |UPDATEDAT_ATTRIBUTE
    |EMAIL!DOT!(
        |EMAIL_ISSUBSCRIBED_ATTRIBUTE
        |EMAIL_ISBOUNCED_ATTRIBUTE
        |EMAIL_FORMAT_ATTRIBUTE
    );

accountAttribute
    :field
    |ID_ATTRIBUTE
    |CREATEDAT_ATTRIBUTE
    |UPDATEDAT_ATTRIBUTE
    ;

customObjectAttribute
    :field
    |ID_ATTRIBUTE
    |CREATEDAT_ATTRIBUTE
    |UPDATEDAT_ATTRIBUTE
    ;

activityAttribute
    :field
    |ID_ATTRIBUTE
    |TYPE_ATTRIBUTE->ACTIVITY_TYPE_ATTRIBUTE
    |CREATEDAT_ATTRIBUTE
    |CAMPAIGNDOTID_ATTRIBUTE->CAMPAIGN_ID_ATTRIBUTE
    |VISITORDOT(
        |ID_ATTRIBUTE->VISITOR_ID_ATTRIBUTE
        |EXTERNAL_ID_ATTRIBUTE->VISITOR_EXTERNAL_ID_ATTRIBUTE
    )
    |ASSETDOT(
        |TYPE_ATTRIBUTE->ASSET_TYPE_ATTRIBUTE
        |NAME_ATTRIBUTE->ASSET_NAME_ATTRIBUTE
        |ID_ATTRIBUTE->ASSET_ID_ATTRIBUTE
    );
```

©2014 Oracle Corporation. All rights reserved

```
execution
    :EXECUTIONINDEXED_ID
    ;

field
    :FIELD(
          NAMED_ID->FIELD_NAMENAMED_ID
        |INDEXED_ID->FIELD_INDEXINDEXED_ID
    );

customObject
    :CUSTOMOBJECTINDEXED_ID
    ;

// Lexer tokens
DYNAMICSTART:'{{';
DYNAMICEND   :'}}';
DOT          :'.'  ;

// roots
CONTACT                         :'Contact';
ACCOUNT                         :'Account';
CUSTOMOBJECT                    :'CustomObject';
ACTIVITY                        :'Activity';
CONTACTLIST                     :'ContactList';
CONTACTFILTER                   :'ContactFilter';
CONTACTSEGMENT                  :'ContactSegment';
ACCOUNTLIST                     :'AccountList';
EMAIL                           :'Email';
EMAILGROUP                      :'EmailGroup';
CONTENTINSTANCE                 :'ContentInstance';
ACTIONINSTANCE                  :'ActionInstance';
DECISIONINSTANCE                :'DecisionInstance';
FEEDERINSTANCE                  :'FeederInstance';

// attributes
GROUP                           :'Group';
CAMPAIGN                        :'Campaign';
FIELD                           :'Field';
ASSET                           :'Asset';
VISITOR                         :'Visitor';
ID_ATTRIBUTE                    :'Id';
EXTERNAL_ID_ATTRIBUTE           :'ExternalId';
EMAIL_ISSUBSCRIBED_ATTRIBUTE:'IsSubscribed';
EMAIL_ISBOUNCED_ATTRIBUTE       :'IsBounced';
EMAIL_FORMAT_ATTRIBUTE          :'Format';
TYPE_ATTRIBUTE                  :'Type';
NAME_ATTRIBUTE                  :'Name';
```

©2014 Oracle Corporation. All rights reserved

```
CREATEDAT_ATTRIBUTE          :'CreatedAt';
UPDATEDAT_ATTRIBUTE          :'UpdatedAt';
EXECUTION                    :'Execution';

NAMED_ID:'('('a'..'z'|'A'..'Z'|'0'..'9'|'_'|' ')+')';
INDEXED_ID:'['('1'..'9')('0'..'9')*']';
```

4.3 Eloqua Expression Language

The Eloqua Expression Language (EEL) support for incorporating logic into decision making and filtering within Eloqua. replaces the `ExportFilter` data transfer object that was present in Bulk 1.0. EEL simplifies and formalizes the syntax, providing a consistent way to interact with your data.

4.3.1 Operators

Comparison Operators

- `>`
- `>=`
- `<`
- `<=`
- `!=`
- `=`
- `~`: this is the SQL Server LIKE operator. See: Like (Transact-SQL) on the Microsoft Developer Network documentation for appropriate syntax.

Logical Operators

- `AND`
- `OR`
- `NOT`

Existence Operators

EEL includes the `EXISTS` and `STATUS` operators as ways to filter based on a contacts' presence or absence in a container, or on the status of associated containers. Unlike the comparison and logical operators, `EXISTS` and `STATUS` can only act on certain entities.

©2014 Oracle Corporation. All rights reserved

EXISTS

EXISTS is analogous to an IN operator. It determines if the object or entity exists within a container. The valid entities are: Contact Filters, Contact Segments, Contact Lists, and Account Lists, as in the following examples:

```
EXISTS('ContactFilter[<locator>]')
EXISTS('ContactSegment[<locator>]')
EXISTS('ContactList[<locator>]')
EXISTS('AccountList[<locator>]')
```

The <locator> can be either the entity id (e.g. 12), or the entity uri (e.g. /contact/filter/12)

STATUS

STATUS describes the current status of a CloudConnector, or AppCloud Action, Content, or Decision service. STATUS does not currently support accessing Email Groups, campaigns, etc.

For Cloud Connectors, use the following format:

```
STATUS('CloudConnectorStatus(<instanceid>)') = '<status>'
```

Where the <instanceid> is the instance's ID, and <status> is either "active" or "pending".

For AppCloud Actions, Decisions and Content, the following format is correct:

```
STATUS('ActionInstance(instanceGuid)') = '<status>'
STATUS('ContentInstance(instanceGuid)') = '<status>'
STATUS('DecisionInstance(instanceGuid)') = '<status>'
```

The <instanceGuid> is the unique GUID that describes that AppCloud service instance. The <status> can be "active", "pending", "complete", or "errored".

4.3.2 Examples

Important

Wrap all operands in single quotes.

Comparison

Select contacts whose CreatedAt field is greater that 2013-12-31:

```
"filter" : "'{{Contact.CreatedAt}}' > '2013-12-31'"
```

Select contacts whose Account's Company Name is not Eloqua:

```
"filter" : "'{{Contact.Account.Field(M_CompanyName)}}' !=
'Eloqua'"
```

©2014 Oracle Corporation. All rights reserved

Logical

Select contacts whose `CreatedAt` field is greater that 2013-12-31 and whose Account's company name is not Eloqua:

```
"filter" : "'{{Contact.CreatedAt}}' > '2013-12-31' AND
'{{Contact.Account.Field(M_CompanyName)}}' != 'Eloqua'"
```

Select contacts whose `CreatedAt` field is greater than 2013-12-31 and whose Account's company name is not Eloqua and whose `C_Country` field is not Canada or United States:

```
"filter" : "('{{Contact.CreatedAt}}' > '2013-12-31'
         AND
         '{{Contact.Account.Field(M_CompanyName)}}' != 'Eloqua'
         AND NOT
         ('{{Contact.Field(C_Country)}}' = 'Canada'
         OR '{{Contact.Field(C_Country)}}' = 'United States')"
```

Existence

`EXISTS` refers specifically to a container. The following filters contacts based on their presence in the ContactList with `id` 123:

```
"filter" : "EXISTS('{{ContactList[123]}}')"
```

`STATUS`. The following filter selects records for which the AppCloud Action instance with GUID 1234's status is 'pending':

```
"filter" : "STATUS(`{{ActionInstance(1234)}}’) = 'pending'"
```

4.3.3 Grammar

```
grammar  Ebl;

options  {
    language  =  CSharp3;
    output  =  AST;
    backtrack  =  true;
}

@modifier{public}
@parser::namespace  { Eloqua.Expression.Version1.Grammar }
@lexer::namespace  { Eloqua.Expression.Version1.Grammar }

public  expression
    :  WS!?  orExpression  WS!?  EOF
    ;
```

©2014 Oracle Corporation. All rights reserved

```
orExpression
    :  andExpression  (WS!?  OR^  WS!?  andExpression)*
    ;

andExpression
    :  notExpression  (WS!?  AND^  WS!?  notExpression)*
    ;

notExpression
    :  (NOT  WS!?)?  atom
    ;

subExpression
    :  OPENPAREN!  orExpression  WS!?  CLOSEPAREN!
    ;

atom
    :  comparison
    |  subExpression
    ;

comparison
    :  STRING  WS!?  GREATERTHAN  WS!?  STRING
    |  STRING  WS!?  GREATERTHANOREQUAL  WS!?  STRING
    |  STRING  WS!?  LESSTHAN  WS!?  STRING
    |  STRING  WS!?  LESSTHANOREQUAL  WS!?  STRING
    |  STRING  WS!?  NOTEQUAL  WS!?  STRING
    |  STRING  WS!?  EQUAL  WS!?  STRING
    |  STRING  WS!?  LIKE  WS!?  STRING
    |  EXISTS  WS!?  OPENPAREN!  WS!?  STRING  WS!?  CLOSEPAREN!
    |  STATUS  WS!?  OPENPAREN!  WS!?  STRING  WS!?  CLOSEPAREN!
 WS!?  EQUAL!  WS!?  STRING
    ;

// Lexer tokens

// Comparison Operators
GREATERTHAN          :  '>'  ;
GREATERTHANOREQUAL   :  '>='  ;
LESSTHAN             :  '<'  ;
LESSTHANOREQUAL      :  '<='  ;
NOTEQUAL             :  '!='  ;
EQUAL                :  '='  ;
LIKE                 :  '~'  ;

// Existence Operators
EXISTS               :  E  X  I  S  T  S  ;
```

©2014 Oracle Corporation. All rights reserved

```
STATUS              :  S  T  A  T  U  S  ;

// Binary
AND                 :  A  N  D;
OR                  :  O  R;

// Unary
NOT                    :  N  O  T;

// Grouping
OPENPAREN           :  '('  ;
CLOSEPAREN          :  ')'  ;

// Lexer rules
STRING     :  QUOTE  (  ESC_SEQ  |  ~('\\'|'\'')  )*  QUOTE;
WS         :  (' '|'\t'|'\n'|'\r')+  ;

fragment
ESC_SEQ
    :   '\\'  ('b'|'t'|'n'|'f'|'r'|'\"'|'\''|'\\')
    |   '\\'  'u'  HEX_DIGIT  HEX_DIGIT  HEX_DIGIT  HEX_DIGIT
    ;

fragment  QUOTE      :  '\''  ;
fragment  HEX_DIGIT  :  ('0'..'9'|'a'..'f'|'A'..'F')  ;

fragment  A:('a'|'A');
fragment  B:('b'|'B');
fragment  C:('c'|'C');
fragment  D:('d'|'D');
fragment  E:('e'|'E');
fragment  F:('f'|'F');
fragment  G:('g'|'G');
fragment  H:('h'|'H');
fragment  I:('i'|'I');
fragment  J:('j'|'J');
fragment  K:('k'|'K');
fragment  L:('l'|'L');
fragment  M:('m'|'M');
fragment  N:('n'|'N');
fragment  O:('o'|'O');
fragment  P:('p'|'P');
fragment  Q:('q'|'Q');
fragment  R:('r'|'R');
fragment  S:('s'|'S');
fragment  T:('t'|'T');
fragment  U:('u'|'U');
fragment  V:('v'|'V');
```

©2014 Oracle Corporation. All rights reserved

```
fragment  W:('w'|'W');
fragment  X:('x'|'X');
fragment  Y:('y'|'Y');
fragment  Z:('z'|'Z');
```

4.4 Eloqua Status Codes

In addition to the standard HTTP status codes, Eloqua includes specific status codes to help inform you when performing operations with the Bulk API. Each status code has a number, as well as a human-readable message.

- ELQ-00001: Total records processed.
- ELQ-00002: Invalid email addresses.
- ELQ-00003: Total records remaining after duplicates are rejected.
- ELQ-00004: Contacts created.
- ELQ-00005: Accounts created.
- ELQ-00007: CustomObject data created.
- ELQ-00011: Duplicate email addresses.
- ELQ-00012: CustomObject data updated.
- ELQ-00013: Contacts deleted.
- ELQ-00014: Accounts deleted.
- ELQ-00016: Contacts email marked as bounced.
- ELQ-00017: Contacts email marked as unsubscribed.
- ELQ-00022: Contacts updated.
- ELQ-00023: Accounts updated.
- ELQ-00025: ustomObject data linked.
- ELQ-00026: Duplicate identifier.
- ELQ-00032: Malformed records.
- ELQ-00034: Total unmatched records.
- ELQ-00040: Invalid data.
- ELQ-00048: Contact already exists.
- ELQ-00049: Total new records.
- ELQ-00055: Campaign not found.
- ELQ-00059: Empty records.
- ELQ-00060: Total rejected records.
- ELQ-00061: Rejected records (missing fields).
- ELQ-00062: Duplicate account linkage.
- ELQ-00067: CustomObject data deleted.
- ELQ-00068: Assets created.
- ELQ-00069: Activities created.
- ELQ-00070: Activity Type not found.
- ELQ-00072: Asset Type not found.
- ELQ-00101: Sync processed for sync {syncId}, resulting in {status} status.
- ELQ-00102: Successfully exported members to csv file.
- ELQ-00103: Membership snapshot for export.
- ELQ-00104: Successfully converted file {file} ({kbUsed} kb) with {converter} converter.

©2014 Oracle Corporation. All rights reserved

- ELQ-00105: Error processing import staging file {file} on sync {syncId} for user {userId}.
- ELQ-00106: Successfully converted csv file to sqlite, taking {kbUsed} kb.
- ELQ-00107: There was an error processing the {type}.
- ELQ-00109: Unable to convert file {file} with {converter} converter. File will remain locked and will NOT be processed.
- ELQ-00110: Trying to unlock file {file} on import {importId} for user {userId}. File has been {lockedState}.
- ELQ-00111: Field ({field}) is not part of import definition, and will be ignored.
- ELQ-00112: identifierFieldName ({field}) must be contained within Fields, if specified.
- ELQ-00114: Added members to Account List ({listId}).
- ELQ-00115: Subscribed members to Email Group ({groupId}).
- ELQ-00116: Unsubscribed members from Email Group ({groupId}).
- ELQ-00117: Removed members from Account List ({listId}).
- ELQ-00118: Removed members from Contact List ({listId}).
- ELQ-00119: Added members to Contact List ({listId}).
- ELQ-00120: Updated members status to {status} in Cloud Connector Instance ({instanceId}).
- ELQ-00121: Field ({field}) is part of import definition, but not included in file {file}.
- ELQ-00122: Validation errors found on sync {syncId} for user {userId}. Sync will NOT proceed.
- ELQ-00123: identifierField will be ignored since Activities are never updated.
- ELQ-00124: There was no data available to process.
- ELQ-00125: {field} ({value}): {constraint}
- ELQ-00126: There are no fields to process in the file {file}.
- ELQ-00127: There are no mapped fields in the file {file}.

4.5 HTTP Status Codes

In order to provide more insight into errors and failures during API calls, Eloqua uses the following HTTP status codes.

- 200: “Success”
- 201: “Success”
- 204: “Success”
- 301: “Login required”
- 400: “There was a parsing error.”
- 400: “There was a missing reference.”
- 400: “There was a serialization error.”
- 400: “There was a validation error”
- 401: “Login required”
- 401: “You are not authorized to make this request”
- 403: “This service has not been enabled for your site.”
- 403: “XSRF Protection Failure”
- 404: “The requested resource was not found.”
- 409: “There was a conflict.”
- 412: “The resource you are attempting to delete has dependencies, and cannot be deleted”
- 413: “Storage space exceeded.”

©2014 Oracle Corporation. All rights reserved

- 500: “The service has encountered an error.”
- 503: “Service is unavailable.”
- 503: “There was a timeout processing the request”

4.6 Activity Fields

The Fall '14 release rolls out to different users at different times. To check when you will receive the Fall '14 release, see: Release Resource Center on Topliners.

4.6.1 EmailOpen

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "EmailAddress":"{{Activity.Field(EmailAddress)}}",
   "ContactId":"{{Activity.Contact.Id}}",
   "IpAddress":"{{Activity.Field(IpAddress)}}",
   "VisitorId":"{{Activity.Visitor.Id}}",
   "EmailRecipientId":"{{Activity.Field(EmailRecipientId)}}",
   "AssetType":"{{Activity.Asset.Type}}",
   "AssetName":"{{Activity.Asset.Name}}",
   "AssetId":"{{Activity.Asset.Id}}",
   "SubjectLine":"{{Activity.Field(SubjectLine)}}",
   "EmailWebLink":"{{Activity.Field(EmailWebLink)}}",
   "VisitorExternalId":"{{Activity.Visitor.ExternalId}}",
   "CampaignId":"{{Activity.Campaign.Id}}"
}
```

4.6.2 EmailClickthrough

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "EmailAddress":"{{Activity.Field(EmailAddress)}}",
   "ContactId":"{{Activity.Contact.Id}}",
   "IpAddress":"{{Activity.Field(IpAddress)}}",
   "VisitorId":"{{Activity.Visitor.Id}}",
```

©2014 Oracle Corporation. All rights reserved

```
    "EmailRecipientId":"{{Activity.Field(EmailRecipientId)}}",
    "AssetType":"{{Activity.Asset.Type}}",
    "AssetName":"{{Activity.Asset.Name}}",
    "AssetId":"{{Activity.Asset.Id}}",
    "SubjectLine":"{{Activity.Field(SubjectLine)}}",
    "EmailWebLink":"{{Activity.Field(EmailWebLink)}}",
    "EmailClickedThruLink":"{{Activity.Field
(EmailClickedThruLink)}}",
    "VisitorExternalId":"{{Activity.Visitor.ExternalId}}",
    "CampaignId":"{{Activity.Campaign.Id}}"
}
```

4.6.3 EmailSend

```
{
    "ActivityId":"{{Activity.Id}}",
    "ActivityType":"{{Activity.Type}}",
    "ActivityDate":"{{Activity.CreatedAt}}",
    "EmailAddress":"{{Activity.Field(EmailAddress)}}",
    "ContactId":"{{Activity.Contact.Id}}",
    "EmailRecipientId":"{{Activity.Field(EmailRecipientId)}}",
    "AssetType":"{{Activity.Asset.Type}}",
    "AssetId":"{{Activity.Asset.Id}}",
    "AssetName":"{{Activity.Asset.Name}}",
    "SubjectLine":"{{Activity.Field(SubjectLine)}}",
    "EmailWebLink":"{{Activity.Field(EmailWebLink)}}",
    "CampaignId":"{{Activity.Campaign.Id}}"
}
```

Subscribe

```
{
    "ActivityId":"{{Activity.Id}}",
    "ActivityType":"{{Activity.Type}}",
    "AssetId":"{{Activity.Asset.Id}}",
    "ActivityDate":"{{Activity.CreatedAt}}",
    "EmailAddress":"{{Activity.Field(EmailAddress)}}",
    "EmailRecipientId":"{{Activity.Field(EmailRecipientId)}}",
    "AssetType":"{{Activity.Asset.Type}}",
    "AssetName":"{{Activity.Asset.Name}}",
    "CampaignId":"{{Activity.Campaign.Id}}"
}
```

©2014 Oracle Corporation. All rights reserved

4.6.4 Unsubscribe

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "AssetId":"{{Activity.Asset.Id}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "EmailAddress":"{{Activity.Field(EmailAddress)}}",
   "EmailRecipientId":"{{Activity.Field(EmailRecipientId)}}",
   "AssetType":"{{Activity.Asset.Type}}",
   "AssetName":"{{Activity.Asset.Name}}",
   "CampaignId":"{{Activity.Campaign.Id}}"
}
```

4.6.5 Bounceback

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "EmailAddress":"{{Activity.Field(EmailAddress)}}",
   "AssetId":"{{Activity.Asset.Id}}",
   "AssetType":"{{Activity.Asset.Type}}",
   "AssetName":"{{Activity.Asset.Name}}",
   "CampaignId":"{{Activity.Campaign.Id}}"
}
```

4.6.6 WebVisit

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "ContactId":"{{Activity.Contact.Id}}",
   "VisitorId":"{{Activity.Visitor.Id}}",
   "VisitorExternalId":"{{Activity.Visitor.ExternalId}}",
   "ReferrerUrl":"{{Activity.Field(ReferrerUrl)}}",
   "IpAddress":"{{Activity.Field(IpAddress)}}",
   "NumberOfPages":"{{Activity.Field(NumberOfPages)}}",
   "FirstPageViewUrl":"{{Activity.Field(FirstPageViewUrl)}}",
   "Duration":"{{Activity.Field(Duration)}}"
```

©2014 Oracle Corporation. All rights reserved

```
}
```

4.6.7 PageView

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "ContactId":"{{Activity.Contact.Id}}",
   "CampaignId":"{{Activity.Campaign.Id}}",
   "VisitorId":"{{Activity.Visitor.Id}}",
   "VisitorExternalId":"{{Activity.Visitor.ExternalId}}",
   "WebVisitId":"{{Activity.Field(WebVisitId)}}",
   "Url":"{{Activity.Field(Url)}}",
   "ReferrerUrl":"{{Activity.Field(ReferrerUrl)}}",
   "IpAddress":"{{Activity.Field(IpAddress)}}",
   "IsWebTrackingOptedIn":"{{Activity.Field
(IsWebTrackingOptedIn)}}"
}
```

4.6.8 FormSubmit

New in version Fall-2014: `CampaignId`

```
{
   "ActivityId":"{{Activity.Id}}",
   "ActivityType":"{{Activity.Type}}",
   "ActivityDate":"{{Activity.CreatedAt}}",
   "ContactId":"{{Activity.Contact.Id}}",
   "VisitorId":"{{Activity.Visitor.Id}}",
   "VisitorExternalId":"{{Activity.Visitor.ExternalId}}",
   "AssetType":"{{Activity.Asset.Type}}",
   "AssetId":"{{Activity.Asset.Id}}",
   "AssetName":"{{Activity.Asset.Name}}",
   "RawData":"{{Activity.Field(RawData)}}",
   "CampaignId":"{{Activity.Campaign.Id}}"
}
```

©2014 Oracle Corporation. All rights reserved

4.7 Import Characteristics

Import characteristics are properties you use to control and describe an import with the Bulk API. They are **optional**

- `name` (**string**): name of this import (maximum 100 characters).
- `isSyncTriggeredOnImport` (**boolean**): whether a sync is automatically created by the system during import.

  By default, `isSyncTriggeredOnImport` is `true`. If you set it to `false`, data that you push into the system will not be processed until you explicitly create a sync step for this import.
- `updateRule`: indicates whether to update values in the Eloqua database from values imported with this import definition. The available options are:
  - `Always`: Always update
  - `ifNewIsNotNull`: Update if the new value is not blank
  - `ifExistingIsNull`: Update if the existing value is not blank
  - `useFieldRule`: Use the rule defined at the field level
- `dataRetentionDuration` (**duration**): the length of time that unsync'd data from this import should remain in the staging area, in seconds. Valid values are anything from 3600 (1 hour) to 1209600 (2 weeks).
- `autoDeleteDuration` (**duration**): the length of time (in seconds) before the import definition will be automatically deleted [from somewhere]. If the property is not set, automatic deletion will not occur. This is typically used for *one-time-use* export definitions.
- `isUpdatingMultipleMatchedRecords` (**boolean**): when set to `true`, if Eloqua finds multiple matching records for the identifier field, Eloqua will update all of the fields that match. If set to `false`, Eloqua updates based on its internal algorithm.

4.8 Sync Actions

Sync Actions are parameters that you declare in an import or export definition that specify additional actions Eloqua should take when you import or export data.

4.8.1 Format

The `syncActions` field has three parameters: `action`, `destination`, and `status`.

- `action` specifies what action to perform: either `add`, `remove`, or `setStatus`.

©2014 Oracle Corporation. All rights reserved

- `destination` specifies where the action should take place. For `add` or `remove` actions, this would be the `uri` of a list or email group. For `setStatus` it might the `uri` of an AppCloud Action or Decision service.
- `status` specifies to what the status should be set for a `setStatus` action. The AppCloud Developer Framework uses these statuses extensively to determine what stages contacts are at in a campaign. There are 8 possible statuses:
  - `subscribed`
  - `unsubscribed`
  - `active`
  - `complete`
  - `pending`
  - `errored`
  - `yes`
  - `no`

You can specify multiple sync actions in a single import or export definition.

4.8.2 Example

The following import definition uses the `add` sync action to add the imported contacts to the contact list with ID 12345 and the `setStatus` sync action to set the status of the AppCloud decision with instance id 123 to "yes":

```
{
   "fields": {
      "C_EmailAddress": "{{Contact.Field(C_EmailAddress)}}",
      "C_FirstName": "{{Contact.Field(C_FirstName)}}",
      "C_LastName": "{{Contact.Field(C_LastName)}}"
   },
   "syncActions": [
      {
         "action": "add",
         "destination": "{{ContactList[12345]}}",
      },
      {
         "action" : "setStatus",
         "destination" : "{{CloudDecision(123)}}",
         "status" : "yes"
      }
   ],
   "identifierFieldName": "C_EmailAddress"
}
```

©2014 Oracle Corporation. All rights reserved

4.9 Sync Status Types

When you perform a sync on an import or export, Eloqua includes the `status` parameter in the sync, which specifies its status.

The following status values are possible:

- `pending`: the sync is queued to execute
- `active`: the sync is currently in progress
- `success`: the sync has completed successfully
- `warning`:
- `error`: the sync has failed

If you encounter an error, you may be able to gain additional information on why the sync was unsuccessful. See "Troubleshooting" on page 16 for more information.

4.10 Update `RuleTypes`

Import definitions include an `updateRule` parameter, which specifies how Eloqua should handle updating records when you import a new value for an existing field. For example, if contact Sally Jones's email address in Eloqua is `sally.jones9@example.com`, and you import a new email address for Sally Jones, the `updateRule` determines whether Eloqua should retain the existing email address or replace it with the new one.

The following rule types are available:

- `always`:always update
- `ifNewIsNotNull`: update if the new value is not blank
- `ifExistingIsNull`: update if the existing value is blank
- `useFieldRule`: use the rule defined at the field level

If you do not specify an `updateRule`, the rule type defaults to `always`.

4.11 Discovery

The URL you need to call to access Eloqua's Bulk API depends on which "pod" your Eloqua instance is hosted on. The base url is: `https://<host>.eloqua.com/api/bulk/2.0`, where `<host>` can be `secure`, `www02.secure`, or `secure.p03`. To find your URL, see: Determining Endpoint URLs on Topliners.

©2014 Oracle Corporation. All rights reserved

Eloqua uses Web Application Description Language (WADL) to describe the Bulk API. WADL is a machine-readable XML description commonly used to describe REST web services. The WADL description lists the resources that make up the Bulk API, and specifies how to interact with them.

4.11.1 Request URL

Eloqua's Bulk API's WADL description is located at: `https://<host>.eloqua.com/api/bulk/2.0/wadl`. You do not need to be logged into your Eloqua instance to access it.

4.11.2 Response

The response lists the resources available in the Bulk API, their inputs, available methods, and possible request responses.

In addition, Eloqua's custom-defined status codes provide deeper insight into errors than HTTP response codes can. The HTTP Status Codes reference page describes each code in detail.

The following code block shows a subset of the response to an `https://<host>.eloqua.com/api/bulk/2.0/wadl` request. Specifically, it provides the definition for the `GetAccountExportSearch` method of the `/accounts/exports/` resource:

```
<?xml version="1.0"?>
<application xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance"
xmlns:api="http://eloqua.com/bulk/2.0/schema"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://wadl.dev.java.net/2009/02">
  <grammars>
    <include href="wadl.xsd" />
  </grammars>
  <resources base="https://secure.eloqua.com/api/bulk/2.0">
    <resource path="accounts">
      <resource path="exports">
        <method id="GetAccountExportSearch" name="GET">
          <doc />
          <request>
            <param name="limit"
type="api:positiveIntegerTo1000">
              <doc />
            </param>
            <param name="links" type="xsd:string">
              <doc />
            </param>
```

©2014 Oracle Corporation. All rights reserved

```
            <param name="offset" type="xsd:int">
              <doc />
            </param>
            <param name="orderBy" type="api:orderBy">
              <doc>
                <appInfo xmlns="">
                  <Constraints>
                    <Constraint>Available Ordering Terms: uri,
id, name,
                    dataRetentionDuration, maxRecords,
autoDeleteDuration,
                    kbUsed, createdBy, createdAt, updatedBy,
updatedAt.</Constraint>
                  </Constraints>
                </appInfo>
              </doc>
            </param>
            <param name="q" type="xsd:string">
              <doc />
            </param>
            <param name="totalResults" type="xsd:boolean">
              <doc />
            </param>
          </request>
          <response status="200">
            <representation
element="api:AccountExportSearchResponse"
            mediaType="application/json" />
          </response>
          <response status="301">
            <doc title="Login required." />
          </response>
          <response status="400">
            <doc title="There was a parsing error." />
            <representation element="api:FailureResponse"
mediaType="application/json" />
          </response>
          <response status="400">
            <doc title="There was a missing reference." />
            <representation element="api:FailureResponse"
mediaType="application/json" />
          </response>
          <response status="400">
            <doc title="There was a serialization error." />
            <representation element="api:FailureResponse"
mediaType="application/json" />
          </response>
          <response status="400">
```

©2014 Oracle Corporation. All rights reserved

```
            <doc title="There was a validation error." />
            <representation element="api:FailureResponse"
mediaType="application/json" />
          </response>
          <response status="401">
            <doc title="Login required." />
          </response>
          <response status="401">
            <doc title="You are not authorized to make this
request." />
          </response>
          <response status="401">
            <doc title="Authentication error." />
          </response>
          <response status="403">
            <doc title="This service has not been enabled for
your site." />
          </response>
          <response status="403">
            <doc title="XSRF Protection Failure." />
          </response>
          <response status="404">
            <doc title="The requested resource was not found."
/>
          </response>
          <response status="409">
            <doc title="There was a conflict." />
            <representation element="api:FailureResponse"
mediaType="application/json" />
          </response>
          <response status="412">
            <doc title="The resource you are attempting to
delete has dependencies, and cannot be deleted." />
          </response>
          <response status="413">
            <doc title="Storage space exceeded." />
          </response>
          <response status="500">
            <doc title="The service has encountered an error."
/>
          </response>
          <response status="503">
            <doc title="Service is unavailable." />
          </response>
          <response status="503">
            <doc title="There was a timeout processing the
request." />
          </response>
```

©2014 Oracle Corporation. All rights reserved

```
</method>
```

Each method has a `request` description that itemizes the parameters the request accepts and any constraints on those parameters, and `response` descriptions that lists each possible response type.

4.12 Bulk API Limits

4.12.1 General Limits

- **Number of syncs permitted per 24hr period**: 2000 *This limit is **not currently enforced**, but is logged and monitored.*
- **Staging Area size**: # of contacts allowed for the client x 50, in Kb. For a client with 10 M contacts, this would result in 500Gb limit for the staging area. The staging area size is measured separately for imports and exports. *You will receive an error message if the staging area reaches capacity.*

4.12.2 Import and Export Limits

- **Maximum import size**: 32MB *The import will fail if the data source is larger than 32MB*
- **Maximum export size**: 50,000 records per page *The export will fail if you attempt to export more than 50,000 records in a single page at one time.*
- **Maximum fields that can be included in one export**: 100 fields *The export will fail if you include more than 100 fields in the export definition.*
- **Maximum sync size**: 5,000,000 records *The sync will fail if you attempt to sync more than 5 million records*

4.13 OAuth Responses: Authorization Code Grant Request

4.13.1 Acceptance

If the user accepts your App's request to access Eloqua on their behalf, their user agent is eventually redirected to your app's redirection endpoint with an authorization code in the `code` URL parameter, as in the following example authorization dialog:

```
HTTP/1.1 302 Found
Location:
```

©2014 Oracle Corporation. All rights reserved

```
https://client.example.com/cb?code=SplxlOBeZQQYbYS6WxSbIA&state=
xyz
```

4.13.2 Rejection

If the user rejects your app's request to access Eloqua on their behalf, their user agent is eventually redirected to your App's registered redirection endpoint with the error `access_denied` in the `error` URL parameter, as in the following:

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=access_
denied&state=xyz
```

4.13.3 Failure Before `client_id` or `redirect_url` Validation

If a failure occurs before the supplied client_id or redirect_uri are validated, we can't safely redirect the user agent back to the redirect URI to report the failure, and so we return the details of the failure in the body of the response.

Missing `client_id`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;client_id&quot; parameter is required.
```

Unknown `client_id`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=00000000000000000000000000000000
&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;client_id&quot; value is not a known client
```

©2014 Oracle Corporation. All rights reserved

identifier.

Malformed `client_id`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=malformed&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &amp;quot;client_id&amp;quot; value is not a valid client
identifier.
```

Missing `redirect_uri`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=s6BhdRkqt3&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &amp;quot;redirect_uri&amp;quot; parameter is required.
```

Malformed `redirect_uri`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=s6BhdRkqt3&redirect_
uri=malformed&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &amp;quot;redirect_uri&amp;quot; value is not a valid URI.
```

Mismatched `redirect_uri`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2attacker.com%2fapp
&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html
```

©2014 Oracle Corporation. All rights reserved

```
The &quot;redirect_uri&quot; value doesn&#39;t start with the
client redirect URI.
```

Non-HTTPS `redirect_uri`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=s6BhdRkqt3&redirect_
uri=http%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; value is not an HTTPS URI.
```

`redirect_uri` with fragment

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp%23fragment
&scope=full&state=xyz
```

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; value has a fragment.
```

4.13.4 Failure After `client_id` and `redirect_uri` Validation

If a failure occurs after the `client_id` and `redirect_uri` have been validated, Eloqua can safely redirect user agent back to the redirect URI to report the failure. In this case, the Authorization Dialog returns the details of the failure in the `error` and `error_description` URL parameters.

Internal server error

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=server_error
&error_
description=The+server+encountered+an+unexpected+condition+that+
prevented
+it+from+fulfilling+the+request.&state=xyz
```

©2014 Oracle Corporation. All rights reserved

Missing `response_type`

```
GET https://login.eloqua.com/auth/oauth2/authorize?
client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz

HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=invalid_request
&error_description=The+%22response_
type%22+parameter+is+required.&state=xyz
```

Unknown `response_type`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=unknown
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz

HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=unsupported_
response_type
&error_description=The+%22response_
type%22+parameter+must+be+either+%22code%22
+or+%22token%22.&state=xyz
```

Unknown `scope`

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=code
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=unknown&state=xyz

HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=invalid_scope
&error_
description=The+%22scope%22+parameter+must+be+either+%22full%22+
or
+not+supplied.&state=xyz
```

©2014 Oracle Corporation. All rights reserved

4.14 OAuth Responses: Exchanging Authorization Code for Access Token

4.14.1 Success

If the request is successful, the response will be a JSON body containing the access token, refresh token, access token expiration time, and token type:

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "access_token":"2YotnFZFEjr1zCsicMWpAA",
   "token_type":"bearer",
   "expires_in":3600,
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA"
}
```

4.14.2 Failure

Missing, unknown, or malformed `client_id`, or missing or mismatched `client_secret`

We return the same response regardless of whether the `client_id` is missing, unknown, or malformed, or the `client_secret` is missing or mismatched.

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic ...
{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA",
   "redirect_uri":"https://client.example.com/cb"
}
```

Yields:

```
HTTP/1.1 401 Unauthorized
Content-Type: application/json
{
   "error":"invalid_client",
```

©2014 Oracle Corporation. All rights reserved

```
   "error_description":"The client is invalid or was not
supplied with basic authentication."
}
```

Missing code

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"authorization_code",
   "redirect_uri":"https://client.example.com/cb"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_request",
   "error_description":"The \"code\" parameter is required."
}
```

Unknown, malformed, expired, or invalidated code

Eloqua returns the same response regardless of whether the authorization code is unknown, malformed, expired, or invalid.

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3
{
   "grant_type":"authorization_code",
   "code":"...",
   "redirect_uri":"https://client.example.com/cb"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_grant",
   "error_description":"The authorization code is incorrect,
```

©2014 Oracle Corporation. All rights reserved

```
malformed, expired,
   or has been invalidated."
}
```

Missing `redirect_uri`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json
{
   "error":"invalid_request",
   "error_description":"The \"redirect_uri\" parameter is
required."
}
```

Malformed `redirect_uri`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA",
   "redirect_uri":"malformed"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_grant",
   "error_description":"The \"redirect_uri\" value is not a
valid URI."
}
```

©2014 Oracle Corporation. All rights reserved

Mismatched `redirect_uri`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA",
   "redirect_uri":"https://attacker.com/cb"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_grant",
   "error_description":"The \"redirect_uri\" value doesn\u0027t
start with the client
   redirect URI."
}
```

Non-HTTPS `redirect_uri`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3
{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA",
   "redirect_uri":"http://client.example.com/cb"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_grant",
   "error_description":"The \"redirect_uri\" value is not an
HTTPS URI."
}
```

©2014 Oracle Corporation. All rights reserved

`redirect_uri` with fragment

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3
```

```
{
   "grant_type":"authorization_code",
   "code":"SplxlOBeZQQYbYS6WxSbIA",
   "redirect_uri":"https://client.example.com/cb#fragment"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json
```

```
{
   "error":"invalid_grant",
   "error_description":"The \"redirect_uri\" value has a
fragment."
}
```

4.15 OAuth Responses: Exchanging Refresh Token for New Access Token

4.15.1 Success

```
HTTP/1.1 200 OK
Content-Type: application/json
```

```
{
   "access_token":"2YotnFZFEjr1zCsicMWpAA",
   "token_type":"bearer",
   "expires_in":3600,
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA"
}
```

The refresh token returned may be different from the refresh token supplied. If this happens, the refresh token that was supplied will have been invalidated, and the refresh token returned must be used for all subsequent requests.

©2014 Oracle Corporation. All rights reserved

4.15.2 Failure

Missing, unknown, or malformed `client_id`, or missing or mismatched `client_secret`

We return the same response regardless of whether the `client_id` is missing, unknown, or malformed, or the `client_secret` is missing or mismatched.

Call:

```
Authorization: Basic ...

{
   "grant_type":"refresh_token",
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA",
   "scope":"full",
   "redirect_uri":"https://client.example.com/cb"
}
```

Yield response:

```
HTTP/1.1 401 Unauthorized
Content-Type: application/json

{
   "error":"invalid_client",
   "error_description":"The client is invalid or was not
supplied with
   basic authentication."
}
```

Unknown, malformed, expired, or invalidated `refresh_token`

We return the same response regardless of whether the `refresh_token` is unknown, malformed, expired, or has been invalidated.

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"refresh_token",
   "refresh_token":"...",
   "scope":"full",
   "redirect_uri":"https://client.example.com/cb"
}
```

©2014 Oracle Corporation. All rights reserved

Yields response:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_grant",
   "error_description":"The refresh token is incorrect,
malformed, expired,
   or has been invalidated."
}
```

Unknown `scope`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"refresh_token",
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA",
   "scope":"unknown",
   "redirect_uri":"https://client.example.com/cb"
}
```

Yields response:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_scope",
   "error_description":"The \"scope\" parameter must be either
\"full\" or not supplied."
}
```

4.16 OAuth Responses: Implicit Grant

4.16.1 Acceptance

If the user accepts your app's request to access Eloqua on their behalf, their user agent will eventually be redirected to your app's registered redirection endpoint with an authorization code in the `access_`

©2014 Oracle Corporation. All rights reserved

`token` fragment parameter:

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb#access_
token=2YotnFZFEjr1zCsicMWpAA
&token_type=bearer&expires_in=86400&state=xyz
```

4.16.2 Rejection

If the user rejects your app's request to access Eloqua on their behalf, their user agent will eventually be redirected to your app's registered redirection endpoint with the error `access_denied` in the `error` fragment parameter:

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb#error=access_
denied&state=xyz
```

4.16.3 Failure before `client_id` or `redirect_uri` validation

If a failure occurs before the supplied `client_id` or `redirect_uri` are validated, we can't safely redirect the user agent back to the redirect URI to report the failure, and so we return the details of the failure in the body of the response.

Missing `client_id`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &amp;quot;client_id&amp;quot; parameter is required.
```

Unknown `client_id`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
```

©2014 Oracle Corporation. All rights reserved

```
type=token
&client_id=00000000000000000000000000000000
&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;client_id&quot; value is not a known client
identifier.
```

Malformed `client_id`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&client_id=malformed&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;client_id&quot; value is not a valid client
identifier.
```

Missing `redirect_uri`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&client_id=s6BhdRkqt3&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; parameter is required.
```

Malformed `redirect_uri`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
```

©2014 Oracle Corporation. All rights reserved

```
type=token
&client_id=s6BhdRkqt3&redirect_
uri=malformed&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; value is not a valid URI.
```

Mismatched `redirect_uri`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2attacker.com%2fapp
&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; value doesn&#39;t start with the
client redirect URI.
```

Non-HTTPS `redirect_uri`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&client_id=s6BhdRkqt3&redirect_
uri=http%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; value is not an HTTPS URI.
```

`redirect_uri` with fragment

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
```

©2014 Oracle Corporation. All rights reserved

```
type=token
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp%23fragment
&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 200 OK
Content-Type: text/html

The &quot;redirect_uri&quot; value has a fragment.
```

4.16.4 Failure After `client_id` and `redirect_uri` Validation

If a failure occurs after the supplied `client_id` and `redirect_uri` are validated, we can safely redirect the user agent back to the redirect URI to report the failure, and so we return the details of the failure in the `error` and `error_description` fragment parameters.

Internal server error

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb#error=server_error
&error_
description=The+server+encountered+an+unexpected+condition
+that+prevented+it+from+fulfilling+the+request.&state=xyz
```

Missing `response_type`

If `response_type` is missing, we don't know whether to return the details of the failure in URL parameters or in fragment parameters. We've chosen to always return the details in URL parameters.

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?client_
id=s6BhdRkqt3
&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=invalid_request
&error_description=The+%22response_
type%22+parameter+is+required.&state=xyz
```

©2014 Oracle Corporation. All rights reserved

Unknown `response_type`

If `response_type` is unknown, we don't know whether to return the details of the failure in URL parameters or in fragment parameters. We've chosen to always return the details in URL parameters.

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=unknown
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=full&state=xyz
```

Yields:

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb?error=unsupported_
response_type
&error_description=The+%22response_
type%22+parameter+must+be+either+%22code%22
+or+%22token%22.&state=xyz
```

Unknown `scope`

Call:

```
GET https://login.eloqua.com/auth/oauth2/authorize?response_
type=token
&client_id=s6BhdRkqt3&redirect_
uri=https%3a%2f%2fclient.example.com%2fapp
&scope=unknown&state=xyz
```

Yields:

```
HTTP/1.1 302 Found
Location: https://client.example.com/cb#error=invalid_scope
&error_
description=The+%22scope%22+parameter+must+be+either+%22full%22
+or+not+supplied.&state=xyz
```

©2014 Oracle Corporation. All rights reserved

4.17 OAuth Responses: Resource Owner Password Credentials Grant

4.17.1 Success

```
HTTP/1.1 200 OK
Content-Type: application/json

{
   "access_token":"2YotnFZFEjr1zCsicMWpAA",
   "token_type":"bearer",
   "expires_in":3600,
   "refresh_token":"tGzv3JOkF0XG5Qx2TlKWIA"
}
```

4.17.2 Failure

Missing, unknown, or malformed `client_id`, or missing or mismatched `client_secret`

We return the same response regardless of whether the `client_id` is missing, unknown, or malformed, or the `client_secret` is missing or mismatched.

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic ...

{
   "grant_type":"password",
   "scope":"full",
   "username":"testsite\\testuser",
   "password":"Eloqua123"
}
```

Yields:

```
HTTP/1.1 401 Unauthorized

{
   "error":"invalid_client",
```

©2014 Oracle Corporation. All rights reserved

```
   "error_description":"The client is invalid or was not
supplied with basic authentication."
}
```

Missing `username`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"password",
   "scope":"full",
   "password":"Eloqua123"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_request",
   "error_description":"The \"username\" parameter is required."
}
```

Missing `password`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"password",
   "scope":"full",
   "username":"testsite\\testuser"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_request",
   "error_description":"The \"password\" parameter is required."
```

©2014 Oracle Corporation. All rights reserved

```
}
```

Unknown site name, `username`, or `password`

We return the same response regardless of whether the site name, `username`, or `password` are unknown..

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"password",
   "scope":"full",
   "username":"...",
   "password":"..."
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json

{
   "error":"invalid_grant",
   "error_description":"The site, username, or password are
invalid."
}
```

Invalid `scope`

Call:

```
POST https://login.eloqua.com/auth/oauth2/token
Authorization: Basic
czZCaGRSa3F0Mzo3RmpmcDBaQnIxS3REUmJuZlZkbUl3

{
   "grant_type":"password",
   "scope":"invalid",
   "username":"testsite\\testuser",
   "password":"Eloqua123"
}
```

Yields:

```
HTTP/1.1 400 Bad Request
Content-Type: application/json
```

©2014 Oracle Corporation. All rights reserved

```
{
   "error":"invalid_scope",
   "error_description":"The \"scope\" parameter must be either
\"full\" or not supplied."
}
```


©2014 Oracle Corporation. All rights reserved