

src/main/java/com/cognizant/account/model/

Account.java:

```
package com.cognizant.account.model;

public class Account {
    private String number;
    private String type;
    private double balance;

    public Account(String number, String type, double balance) {
        this.number = number;
        this.type = type;
        this.balance = balance;
    }

    // Getters and Setters
    public String getNumber() { return number; }
    public void setNumber(String number) { this.number = number; }

    public String getType() { return type; }
    public void setType(String type) { this.type = type; }

    public double getBalance() { return balance; }
    public void setBalance(double balance) { this.balance = balance; }
}
```

src/main/java/com/cognizant/account/controller

AccountController.java:


```
package com.cognizant.account.controller;

import com.cognizant.account.model.Account;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class AccountController {

    @GetMapping("/accounts/{number}")
    public Account getAccountDetails(@PathVariable String number) {
        // Returning a dummy response without backend connectivity
        return new Account(number, "savings", 234343);
    }
}
```

Output:

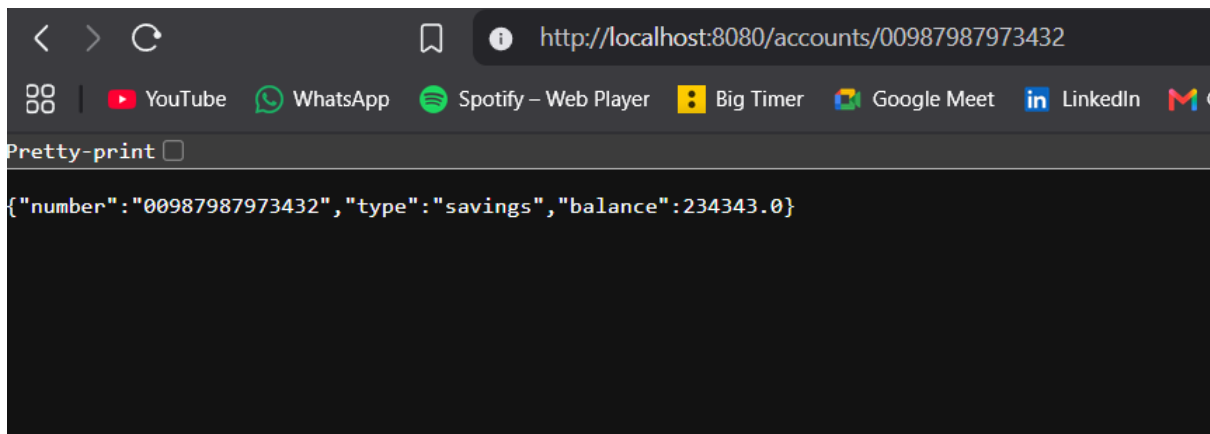

The screenshot shows a web browser window with the address bar displaying `http://localhost:8080/accounts/00987987973432`. The browser's top bar includes navigation icons and a row of application shortcuts: YouTube, WhatsApp, Spotify – Web Player, Big Timer, Google Meet, LinkedIn, and Gmail. Below the address bar, a tab labeled "Pretty-print" is active. The main content area of the browser displays a JSON object: `{"number": "00987987973432", "type": "savings", "balance": 234343.0}`.

```
{ "number": "00987987973432", "type": "savings", "balance": 234343.0 }
```