

EXPERIMENT - 8

Privilege Escalation Using TryHackMe

Step 1: Login to Platform

Open TryHackMe and log in

Step 2: Open Room

Search for **Linux Privilege Escalation** and join the room.

Step 3: Start AttackBox

Launch the AttackBox and open the terminal.

Step 4: Perform Enumeration

Check user details, system information, and permissions to identify possible vulnerabilities.

Step 5: Identify Vulnerabilities


Look for misconfigurations such as sudo permissions, SUID files, weak file access, or cron jobs.

Step 6: Escalate Privileges

Exploit the identified vulnerability to gain higher privileges (root access).

Step 7: Verify and Complete Tasks

Confirm root access and capture required flags to complete the exercise.

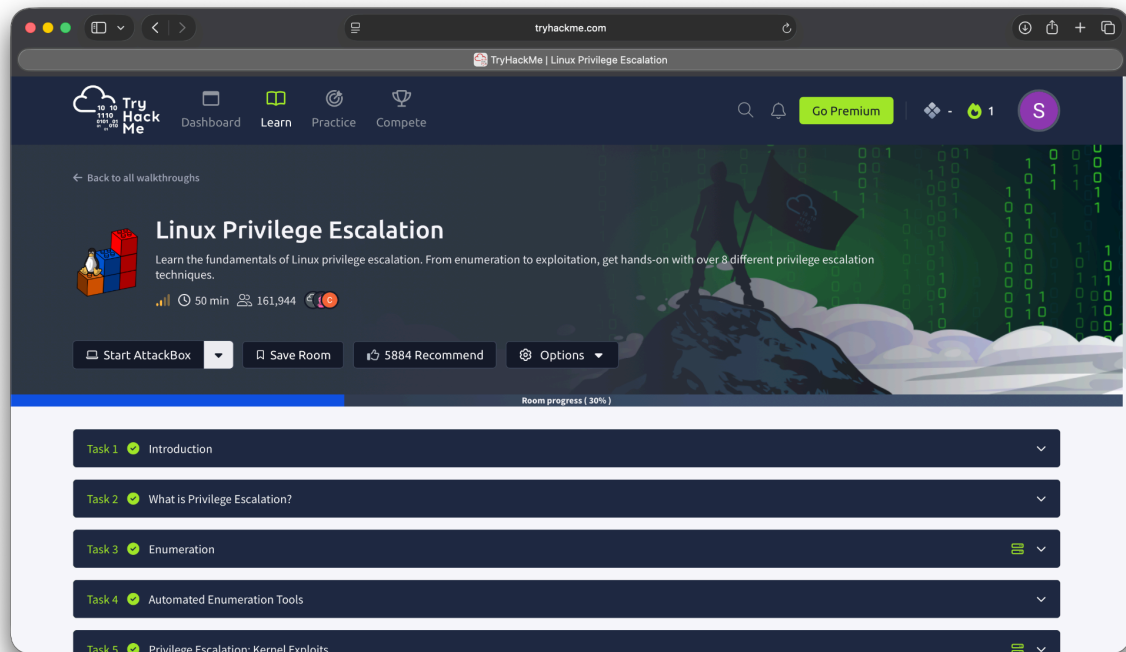

- `find / -perm -o+s -type f 2>>/dev/null` finds files with the SUID bit, which allows us to run the file with a higher privilege level than the current user.

General Linux Commands

As we are in the Linux realm, familiarity with Linux commands, in general, will be very useful. Please spend some time getting comfortable with commands such as `find`, `locate`, `grep`, `cut`, `sort`, etc.

Answer the questions below

What is the hostname of the target system?

wade7363

✓ Correct Answer

What is the Linux kernel version of the target system?

3.13.0-24-generic

✓ Correct Answer

What Linux is this?

Ubuntu 14.04 LTS

✓ Correct Answer

What version of the Python language is installed on the system?

2.7.6

✓ Correct Answer

What vulnerability seem to affect the kernel of the target system? (Enter a CVE number)

CVE-2015-1328

✓ Correct Answer

Research sources:

1. Based on your findings, you can use Google to search for an existing exploit code.
2. Sources such as <https://www.cvedetails.com/> can also be useful.
3. Another alternative would be to use a script like LES (Linux Exploit Suggester) but remember that these tools can generate false positives (report a kernel vulnerability that does not affect the target system) or false negatives (not report any kernel vulnerabilities although the kernel is vulnerable).

Hints/Notes:

1. Being too specific about the kernel version when searching for exploits on Google, Exploit-db, or searchsploit
2. Be sure you understand how the exploit code works BEFORE you launch it. Some exploit codes can make changes on the operating system that would make them unsecured in further use or make irreversible changes to the system, creating problems later. Of course, these may not be great concerns within a lab or CTF environment, but these are absolute no-nos during a real penetration testing engagement.
3. Some exploits may require further interaction once they are run. Read all comments and instructions provided with the exploit code.
4. You can transfer the exploit code from your machine to the target system using the `SimpleHTTPServer` Python module and `wget` respectively.

Answer the questions below

find and use the appropriate kernel exploit to gain root privileges on the target system.

No answer needed

✓ Correct Answer



What is the content of the flag1.txt file?

THM-28392872729920

✓ Correct Answer

Result

Privilege escalation was successfully performed, demonstrating how system misconfigurations can lead to unauthorized access and highlighting the importance of secure system practices.