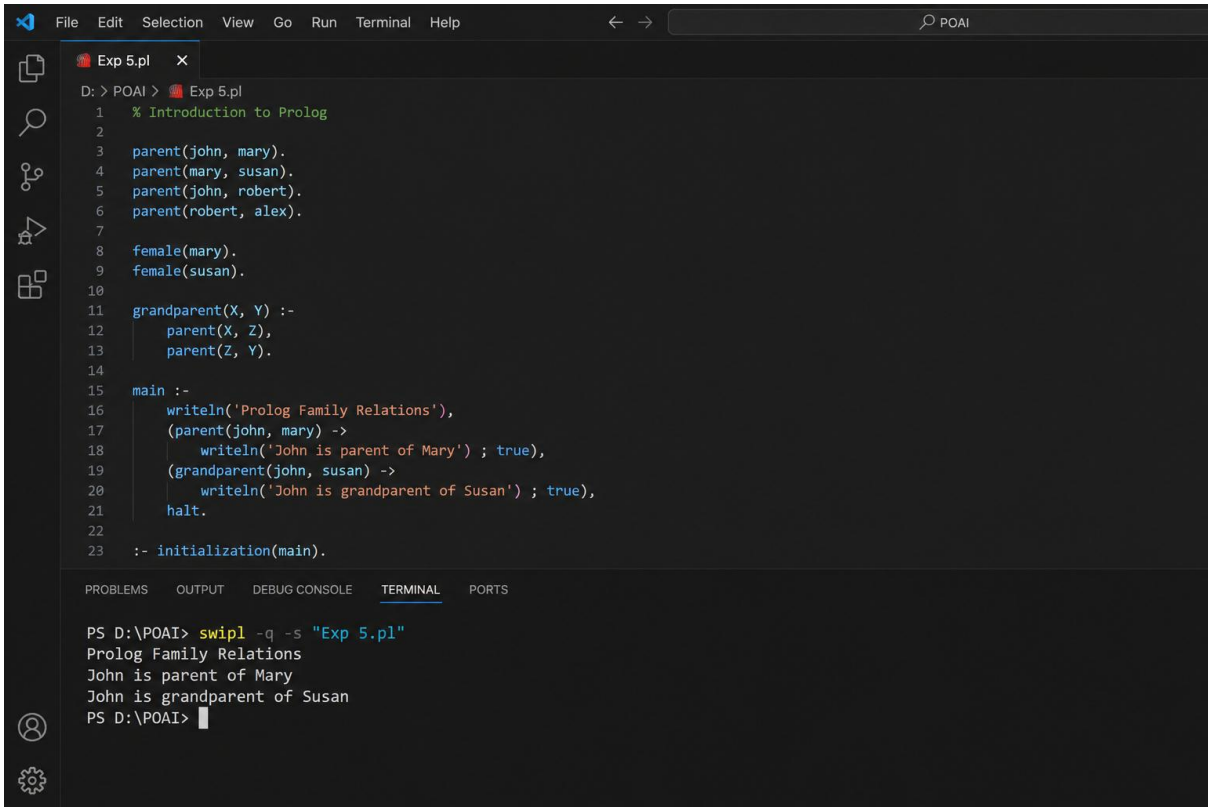

File Edit Selection View Go Run Terminal Help
POAI
Exp 5.pl
D: > POAI > Exp 5.pl
% Introduction to Prolog
parent(john, mary).
parent(mary, susan).
parent(john, robert).
parent(robert, alex).
female(mary).
female(susan).
grandparent(X, Y) :-
parent(X, Z),
parent(Z, Y).
main :-
writeln('Prolog Family Relations'),
(parent(john, mary) ->
writeln('John is parent of Mary') ; true),
(grandparent(john, susan) ->
writeln('John is grandparent of Susan') ; true),
halt.
:- initialization(main).
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS D:\POAI> swipl -q -s "Exp 5.pl"
Prolog Family Relations
John is parent of Mary
John is grandparent of Susan
PS D:\POAI>