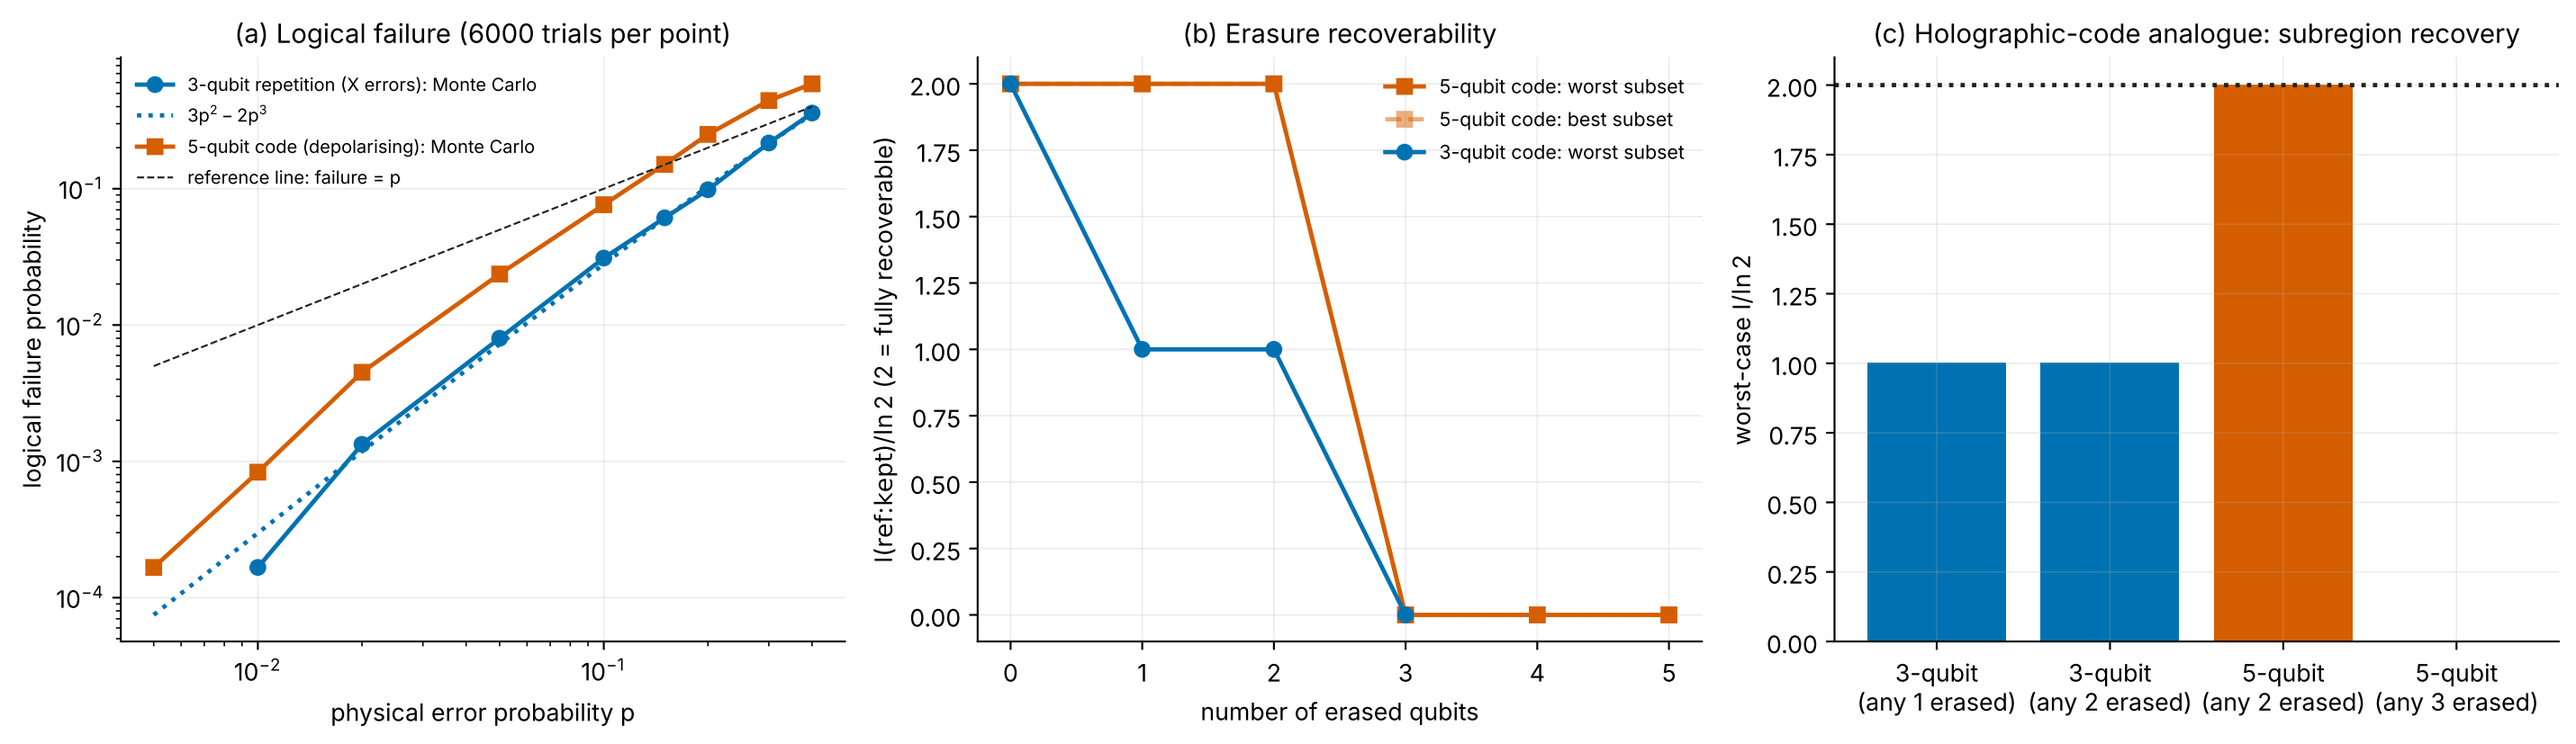
(a) Logical failure (6000 trials per point)
3-qubit repetition (X errors): Monte Carlo
3p² – 2p³
5-qubit code (depolarising): Monte Carlo
reference line: failure = p
logical failure probability
physical error probability p
(b) Erasure recoverability
5-qubit code: worst subset
5-qubit code: best subset
3-qubit code: worst subset
I(ref:kept)/ln 2 (2 = fully recoverable)
number of erased qubits
(c) Holographic-code analogue: subregion recovery
worst-case I/ln 2
3-qubit (any 1 erased)
3-qubit (any 2 erased)
5-qubit (any 2 erased)
5-qubit (any 3 erased)