

# RODOS

## How to get started with RODOS in 9 easy steps

Version: 2.1  
Date: March. 2020  
Author: S. Montenegro



### 1. Before start

#### 1.1. Notes on this tutorials

- A “\$” means that the following command has to be executed in a terminal

#### 1.2. RODOS directory structure

- api API and implementations for many different hardware platforms
- build Compiled libraries
- doc Documentation
- scripts Scripts for compilations on many different hardware platforms
- src Implementations for various platforms
- support Programmes and libs often used in space applications
- tutorials Examples, for you

#### 1.3. Steps to compile and execute a RODOS program

1. Open a Terminal using the **bash** shell
2. Enter the **RODOS root** directory
3. Set some shell variables that are needed by the compile scripts  
\$ source [setenvs.sh](#)  
It has to be executed **every time** when **opening a new terminal!**
4. Compile the RODOS library for a Linux x86 PC  
\$ [rodos-lib.sh](#) LinuxMC  
Has to be done **only once** for every RODOS version, unless something in folder src or api has been modified.

5. Enter the folder with the user program  
\$ cd tutorials/10-first-steps
6. You may use different ports and target architectures. In these examples we will use linux-make-context (**linuxMC**). To see the list of alternatives, see in the build-scrips directory the files xxxx-set-vars.sh, where xxxx is the name of the target architecture.
7. Compile the user programme  
\$ **rodos-executable.sh linuxMC** usercode1.cpp  
usercode2.cpp...  
or/and, read and execute the scripts **execute-example-\*.sh**
8. Execute the binary  
\$ ./tst
9. Exit the program with Ctrl+C

As a **shortcut**, a file has been created for every example that compiles the necessary code-files and executes it (e.g. **execute-example-01.sh** for the example in chapter 1). Attention: Don't forget to do step 1 to 5 beforehand.

At the end of the paper, there is a short summary about all programmes.

## 2. Hello World

The Hello World tutorial is the most simple RODOS program. It only prints the string "Hello World!" in one thread.

### 2.1. Used RODOS functions

- **PRINTF( )**  
basically the same as the standard C printf() function – prints characters and numbers to terminal

### 2.2. Programme helloworld.cpp

```
#include "rodos.h"

class HelloWorld : public StaticThread<> {
    void run(){
        PRINTF("Hello World!\n");
    }
} helloworld;
```

includes the RODOS API

defines a Thread named HelloWorld

implements the code for the main task of the thread  
In this case: print "Hello World!"

instantiates one thread of type HelloWorld

## 2.3. Compiling

Compile the tutorial as described in chapter 2, in the following steps:

1. Open a Terminal
2. Enter the **RODOS** root directory
3. Set some shell variables that are needed by the compile scripts  
\$ source [setenvs.sh](#)  
It has to be executed **every time** when **opening a new terminal!**
4. Compile the RODOS library for a Linux x86 PC  
\$ [rodos-lib.sh](#) [linuxMC](#)  
Has to be done **only once** for every RODOS version, unless something in folder src or api has been modified.
5. Enter the folder with the hello world tutorial  
\$ cd tutorials/10-first-steps
6. Compile the user program  
\$ [rodos-executable.sh](#) [linuxMC](#) helloworld.cpp
7. Execute the binary called tst  
\$ ./tst
8. Exit the program with Ctrl+C

## 2.4. Console output

After some RODOS Information:

----- application running -----

**Hello World!**

printout of run() method

## 2.5. Several Threads

Try now helloworld-multiple.cpp. Do you see the difference?

## 2.6. Annotation

For several programmes exist shell scripts that compile and execute their programme. Just have a look into the scripts.

### 3. Basic structure

The Basic structure tutorial is an extension to the Hello World tutorial. It prints the string "Hello World!" and implements the basic structure of a RODOS program consistent of one application and one thread.

#### 3.1. Used RODOS functions

- **PRINTF()**  
basically the same as the standard C printf() function – prints characters and numbers to terminal

#### 3.2. Programme basic.cpp

```
#include "rodos.h"
static Application appHW("HelloWorld");
class HelloWorld : public StaticThread<> {
public:
    HelloWorld() : StaticThread<>("HelloWorld") { }
    void init() {
        PRINTF("Printing Hello World");
    }
    void run(){
        PRINTF("Hello World!\n");
    }
}
static HelloWorld helloworld;
```

includes the RODOS API

application that wraps all threads, events,... in this file

defines a thread named HelloWorld

thread constructor with definition of the thread name

is called before the scheduler starts

implements the code for the main task of the thread  
In this case: print "Hello World!"

instantiates one thread of type HelloWorld

#### 3.3. Compiling

Compile the tutorial as described in 2.3, in the following steps:

1. Open a Terminal
2. Enter the **RODOS root** directory
3. Set some shell variables that are needed by the compile scripts  
\$ source [setenvs.sh](#)

It has to be executed **every time** when **opening a new terminal!**

4. Compile the RODOS library for a Linux x86 PC  
\$ `rodos-lib.sh` linuxMC  
Has to be done **only once** for every RODOS version, unless something in folder src or api has been modified.
5. Enter the folder with the hello world tutorial  
\$ `cd tutorials/10-first-steps`
6. Compile the user program  
\$ `rodos-executable.sh` linuxMC basic.cpp
7. Execute the binary  
\$ `./tst`
8. Exit the program with Ctrl+C
9. Modify the run() method in basic.cpp
10. Repeat step 6 to 8 and see the difference

### 3.4. Console output

RODOS version

RODOS RODOS-100.0 OS Version RODOS-linux-8

Loaded **Applications:**

10 -> 'Topics & Middleware'

1000 -> 'HelloWorld'

all applications in this programm

Calling Initiators

Distribute Subscribers to Topics

List of Middleware Topics:

CharInput Id = 28449 len = 12. -- Subscribers:

SigTermInterrupt Id = 16716 len = 4. -- Subscribers:

UartInterrupt Id = 15678 len = 4. -- Subscribers:

TimerInterrupt Id = 25697 len = 4. -- Subscribers:

gatewayTopic Id = 0 len = 12. -- Subscribers:

Event servers:

**Threads** in System:

shows defined threads and printout of init method

Prio = 0 Stack = 32000 IdleThread: yields all the time

Prio = 100 Stack = 32000 HelloWorld: Printing Hello World

BigEndianity = 0, cpu-Arc = x86, Basis-0s = baremetal, Cpu-Speed

(K-Loops/sec) = 350000

Default internal MAIN

----- application running -----

**Hello World!**

printout of run() method

## 4. Time

This tutorial shows how time dependent processes can be modelled in RODOS. It demonstrates how to do something at a specific **point in time**, after a defined **amount of time** and **periodically**. While the thread waits for the defined time, other threads can be executed. **Time in RODOS** is defined with a long long type "TTime" and represents the number of **nanoseconds elapsed since start-up**.

### 4.1. RODOS time functions

- **NOW()**  
Returns the current time (in nanoseconds)
- **SECONDS\_NOW()**  
Returns the current time in seconds
- **AT(time)**  
Suspends (interrupts) the thread that has called this method, until the given point in time is reached
- **TIME\_LOOP(firstExecution, Period) { ... }**  
Almost each control loop has a start time and a period. This macro provides this loop with no end.

### 4.2. Time macros

In order to use the time functions comfortably there are some time macros defined: NANOSECONDS , MICROSECONDS , MILLISECONDS , SECONDS , MINUTES, HOURS , DAYS , WEEKS , END\_OF\_TIME

To use them, just multiply them to the amount of time, e.g. AT(3\*SECONDS) .  
END\_OF\_TIME is the highest time possible (about 293 years).

### 4.3. Programme time.cpp

```
...
PRINTF("waiting until 3rd second after start\n");
AT(3*SECONDS);           waits for the point in time: 3 seconds after start
PRINTF("after 3rd second\n");

PRINTF("waiting until 1 second has passed\n");
AT(NOW()+1*SECONDS);     waits for 1 second
PRINTF("1 second has passed\n");

PRINTF("print every 2 seconds, start at 5 seconds\n");
TIME_LOOP(5*SECONDS, 2*SECONDS){
    PRINTF("current time: %3.9f\n", SECONDS_NOW());
}
...
```

code in the loop will be executed every 2 seconds; the first execution will be at 5 seconds after start

#### 4.4. Compiling and console output

Compile the tutorial `time.cpp` in `tutorials/10-first-steps` as described in 2.3 and execute it. The output should be the following:

```
waiting until 3rd second after start
after 3rd second
waiting until 1 second has passed
1 second has passed
print every 2 seconds, start at 5 seconds
current time:  5.000003995
current time:  7.000004191 ...
```

## 5. Thread Communication

The communication between two threads can be realized via a CommBuffer or a FiFo (First in first out). For that a CommBuffer or a FiFo has to be defined outside a thread so that both threads can access it.

### 5.1. CommBuffer

A CommBuffer is a double buffer with **only one writer** and **only one reader**. Both can work concurrently. The writer may write at any time. The reader gets the newest consistent data (eg. the last complete written record). The type of the CommBuffer can be defined. Not using a CommBuffer is risky, because maybe the data is half written in the shared variable while the thread is interrupted. In this case the receiver thread gets inconsistent data.

#### 5.1.1. Programme commbuffer.cpp

```
CommBuffer<int> buf;
class Sender : public StaticThread<> {
...
    PRINTF("Writing %d\n", cnt);
    buf.put(cnt);
...
}

class Receiver : public StaticThread<> {
...
    buf.get(cnt);
    PRINTF("Reading %d\n", cnt);
...
}
```

CommBuffer of type Integer

thread puts local counter data into the CommBuffer

thread gets counter data from the CommBuffer and saves it into local variable

Compile the tutorial commbuffer.cpp in tutorials/first-steps as described in 2.3 and execute it.

### 5.2. FiFo

A FiFo is used for synchronous communication from one single writer to one single reader. Writing to a full FiFo has no effect and returns 0. Reading from an empty FiFo returns 0. The first value inserted into the FiFo will be the first value to be read.



### 5.2.1. Programme fifo.cpp

```
Fifo<int, 10> fifo; ————— FiFo for 10 Integer values
```

```
class Sender : public StaticThread<> {
```

```
...     bool ok = fifo.put(cnt); ————— puts the current counter value into the fifo  
...                                           and checks whether the fifo is full
```

```
}
```

```
class Receiver : public StaticThread<> {
```

```
...     bool ok = fifo.get(cnt); ————— receives the current counter value from the fifo  
...                                           and checks whether the fifo is empty
```

```
}
```

Compile the tutorial fifo.cpp in tutorials/first-steps as described in 2.3 and execute it.

### 5.3. Synchronous FiFo

A SyncFiFo is basically the same as FiFo, but in this case the sender will be suspended if the FiFo is full and the receiver will be **suspended until data is ready**.

Compile the tutorial fifo\_sync.cpp in tutorials/10-first-steps as described in 2.3 and execute it.

### 5.4. Which is best for what?

If the receiver needs only the latest data a Commbuffer should be used. If the receiver needs all the data from the sender and in the right order, a FiFo is the way to do it. A SyncFiFo is a good option if the data has to be processed short times after sending it, but take notice that the thread cannot do anything until new data is available.

## 6. Critical sections

To avoid concurrent access of critical sections semaphores have to be used. To enter a semaphore use `sema.enter()` and to leave use `sema.leave()`. I

### 6.1. RODOS functions

- **Semaphore::enter()**  
Makes a thread enter a semaphore. All other threads trying to enter the same semaphore will wait until it has been left again.
- **Semaphore::leave()**  
Leaves the semaphore and allows other threads entering it.
- **{ PROTECT\_IN\_SCOPE(sema); ... }**  
A macro entering the semaphore "sema" when entering in the current scope (between surrounded { and } ). and leaving it when leaving the scope, It is only a short cut, which may be useful .... or maybe not.
- **yield()**  
Interrupts the current thread and calls the scheduler that looks for a thread to execute. If no other thread wants to be executed, the thread continues.

### 6.2. Programme semaphore.cpp

```
Semaphore onlyOne;
...
onlyOne.enter();
PRINTF(" only one, I am -- %02d -- ", myId);
yield();
PRINTF("time %3.9f\n", SECONDS_NOW());
onlyOne.leave();
...
```

semaphore definition outside the threads

enters semaphore "onlyone"

printout interrupted by yield, but because of the semaphore no other thread can print between the id and the time printout

leaves semaphore "onlyone"

### 6.3. Programme semaphore\_macro.cpp

The same functionality but using the macro short cut.

```
{
    PROTECT_IN_SCOPE(onlyOne);
    PRINTF(" only one, I am -- %02d -- ", myId);
    yield();
    PRINTF("time %3.9f\n", SECONDS_NOW());
}
...
```

protection with semaphore "onlyone"

end of the critical section

## 6.4. Compiling and console output

Compile the tutorial semaphore.cpp in tutorials/10-first-steps as described in 2.3 and execute it. The output should be the following:

```
only one, I am -- A -- ,time    3.000056382
only one, I am -- B -- ,time    3.000077366
only one, I am -- C -- ,time    3.000094338
only one, I am -- D -- ,time    3.000111110
only one, I am ---E -- ,time    3.000128005
only one, I am -- F -- ,time    3.000157338
only one, I am -- G -- ,time    3.000180353
...
```

Remove the protection in semaphore.cpp, compile again and see the difference.

## 6.5. Attention: A deadlock may occur!

Compile and have a look at the tutorial semaphore\_deadlock.cpp. The programme will stop when a deadlock has occurred.

## 7. Events

Events can be used to react to interrupts from timers and signals from devices. Do not use them for complex actions, because they cannot be interrupted. Just use them to trigger threads that handle the interrupts. Implement them as short as possible.

An event has basically two methods: The `init()` method similar to threads and the `handle()` method in which the code is defined that handles the event.

### 7.1. RODOS functions

- **activatePeriodic(startTime, period)**  
Activates an event periodically after the first activation at startTime.
- **activateAt(time)**  
Activates an event at the given point in time.
- **thread.resume()**  
Resumes a thread that is suspended.

### 7.2. Programme event.cpp

```
class TestWaiter: public StaticThread<> {
...
    PRINTF("Suspend and wait until some one resumes me\n");
    AT(END_OF_TIME);
    PRINTF("testwaiter running again at %3.9f\n", SECONDS_NOW());
...
}

class TimeEventTest : public TimeEvent {
public:
    void handle(){
        xprintf("    Time Event at %3.9f\n", SECONDS_NOW());
        testWaiter.resume();
        xprintf("    Testwaiter resumed from me\n");
    }

    void init() { activatePeriodic(5*SECONDS, 3*SECONDS); }
};
...
```

suspends the thread forever

defines an event

handles the event

resumes the suspendend thread

defines when the event is beeing raised  
could also use activateAt(time)

### 7.3. Compiling and console output

Compile the tutorial event.cpp in tutorials/10-first-steps as described in 2.3 and execute it. The output should be the following:

```
Suspend and wait until some one resumes me
  Time Event at 5.000107974
  Testwaiter resumed from me
testwaiter running again at 5.000135475
Suspend and wait until some one resumes me
  Time Event at 8.000168306
  Testwaiter resumed from me
```

...

Try the example with `activateAt(time)` instead of `activatePeriodic(startTime, period)`.

## 8. Middleware

Up to here, we had "normal" programming. Now assume we are in a big team with a big project. You do not know the details of what others are programming, just the format of the data you need from them or you produce for them. Now you have to get and distribute this data without notion of the other side of this generic interface which we call the middleware.

The middleware is used to communicate between tasks and even between tasks of different RODOS nodes. This communication is based on a **publisher/subscriber protocol** and there is no connection from a sender to a receiver.

Any thread can publish messages under a given topic, while subscribers of the same topic receive the published data.

There can be 0, 1 or many publishers for one topic. The same goes for subscribers.

### 8.1. Required files

For this example you will need following files:

sender.cpp	The one who sends test message: a publisher
topics.h, topics.cpp	communication channels to send and receive data
receiver_*	different methods to subscribe and get data: Subscribers

You will need to compile several source files together. Every compilation needs to include the file topics.cpp

for example:

```
$ rodos-executable.sh linuxMC topics.cpp sender.cpp  
receiver_commbuff.cpp
```

or another receiver:

```
$ rodos-executable.sh topics.cpp sender.cpp  
receiver_putter.cpp
```


or all receivers together:

```
$ rodos-executable.sh topics.cpp sender.cpp receiver_*.cpp
```

### 8.2. Topic, program topics.cpp

A topic is a pair of a data-type and the topic id, e.g.:

```
Topic<long>    counter1(10, "counter1");
```

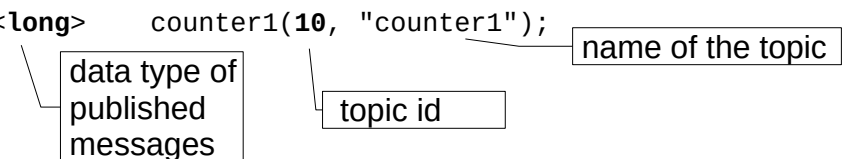

If the topic id is "-1" the id will be generated.

### 8.2.1. Sample topics

Some sample topics are defined in topics.cpp. To use these topics in a RODOS programme include topics.h.

## 8.3. Publisher

A publisher is easy to implement. To publish data under the topic “counter” just use counter.publish(data) in any thread.

### 8.3.1. Programme sender.cpp

```
...
#include "topics.h" — includes the topics
...
    TIME_LOOP(3*SECONDS, 3*SECONDS) {
        PRINTF("Publisher01 sending Counter1 %ld\n", ++cnt);
        counter1.publish(cnt); — publishes every 3 seconds the
    }                               incremented counter
...
```

## 8.4. Subscriber

There are many possibilities to implement a receiver of middleware data.

### 8.4.1. Subscriber put() method, program receiver\_simple.cpp

Define a new subscriber by inheriting from “Subscriber”:

```
class SimpleSub : public Subscriber {
public:
    SimpleSub() : Subscriber(counter1, "simplesub") { } — subscribing for counter1

    long put(const long topicId, const long len, const void* data, ...) {
        PRINTF("SimpleSub - Length: %ld Data: %ld ...
        return 1; — the put function is called everytime new data has been published;
    }               receive the data in this method and send it to a thread via
} simpleSub;       CommBuffer or Fifo (it is also possible to resume a thread when
                    new data is available)
```

Compile the tutorial receiver\_simple.cpp in tutorials/first-steps as described in chapter 2 and execute it. Do not forget to compile it with topics.cpp and sender.cpp:

```
$ rodos-executable.sh topics.cpp sender.cpp
receiver_simple.cpp
```

### 8.4.2. Subscriber and a CommBuffer, program receiver\_combuf.cpp

Define a CommBuffer that is going to be filled by a Subscriber. The thread gets periodically the latest data from the CommBuffer.

```
static CommBuffer<long> buf;
static Subscriber receiverBuf(counter1, buf, "receiverbuf");
```

subscriber that fills the CommBuffer  
with values from topic counter1

```
class ReceiverBuf : public StaticThread<> {
    void run () {
        long cnt;
        TIME_LOOP(0, 1.1*SECONDS) {
            buf.get(cnt);
            PRINTF( "ReciverComBuffer - counter1: %ld\n",cnt);
        }
    }
} recbuf;
```

the thread gets the latest value

Compile the tutorial receiver\_commbuff.cpp in tutorials/10-first-steps as described in chapter 2 and execute it. Do not forget to compile it with topics.cpp and sender.cpp:

```
$ rodos-executable.sh topics.cpp sender.cpp
receiver_commbuff.cpp
```

To get synchronised data transfer use a SyncFiFo like in tutorial receiver\_sync.cpp

### 8.4.3. Putter, program receiver\_putter.cpp

Define a new Putter by inheriting from "Putter":

```
class JustPrint : public Putter {
    bool putGeneric(const long topicId, unsigned int msgLen, ...) {
        PRINTF("%d %d %ld\n", msgLen, *(long*)msg, topicId);
        return true;
    }
} justPrint;
```

is called every time new data is available on defined topics

```
static Subscriber nameNotImportant01(counter1, justPrint, "justprint01");
static Subscriber nameNotImportant02(counter2, justPrint, "justprint02");
```

subscriber with topic definition – both, counter1 and  
counter2 will call the putter method of "justprint"

Compile the tutorial receiver\_putter.cpp in tutorials/first-steps as described in chapter 2 and execute it. Do not forget to compile it with topics.cpp and sender.cpp:

```
$ rodos-executable.sh topics.cpp sender.cpp
receiver_putter.cpp
```

To receive two counters, implement a sender of the second counter.

### 8.4.4. Which subscriber is best for what?

If the receiver needs only the latest data and has to be executed periodically, the CommBuffer solution should be used. For synchronized communication the subscriber put method in combination with resuming a thread is the way to do it. A SyncFiFo is also good for this. To receive from multiple topics with one method a



Putter should be used.

For more information and tutorials about the middleware check out the folders  
tutorials/30-communication-and-bbs20-/middleware and  
tutorials/30-communication/10-alice\_bob\_charly

## 9. More Middleware

To see a little more about using the middleware and multicasting, please have a look at the example in the directory tutorials/10-first-steps/middleware. Here, we have an example of topics with more than one subscribers and of subscribers of more than one topic. A position sensor measures and publishes data of the position (3D) of a flying object. A speed calculator receives those data and calculates and publishes the object's speed. Finally, a display subscribing both topics, position and speed, and prints the data.

Executeit.sh: shell script to compile and execute the whole example

topics.h: interface of the topics

topics.cpp: definition of the topics position and speed

positionsensor.cpp generates and publishes random position data

speedcalc.cpp subscribes position topic and publishes speed data

display.cpp subscribes position and speed topic and prints the data

Compile all \*.cpp and see the execution.

Then try to compile without speedcalc.cpp. Do you see the difference?

### 9.1. Programme positionsensor.cpp

```
class PositionSensor : public StaticThread<> {
...
    TIME_LOOP(2*SECONDS, 3*SECONDS) {
        p.x+= (randomTT800Positive() % 40)*0.05-1;
        p.y+= (randomTT800Positive() % 40)*0.05-1;
        p.z+= (randomTT800Positive() % 40)*0.05-1;
        position.publish(p);
    }
...
}
```

calculate random movement

publish new position in topic „position“

## 9.2. Programme speedcalc.cpp

```
class SpeedCalc : public Subscriber {
public:
    SpeedCalc() : Subscriber(position, "SpeedCalc") { }
    Pos p0,p1;
    long put(...) {
        p0=p1;
        p1=(Pos*)data;
        double v = sqrt((p0.x-p1.x)*(p0.x-p1.x)+...);
        speed.publish(v);
        return 1;
    }
} speedCalc;
```

subscribe topic position

calculate and publish speed  
whenever new position data is  
published

## 9.3. Programme display.cpp

```
static CommBuffer<Pos>    posbuf;
static CommBuffer<double> speedbuf;
static Subscriber namenotimportant1(position, posbuf, "posreceiverbuf");
static Subscriber namenotimportant2(speed, speedbuf,
"speedreceiverbuf");

class Display : public StaticThread<> {
    void run () {
        TIME_LOOP(1*SECONDS, 1*SECONDS) {
            Pos p;
            double v;
            posbuf.get(p);
            speedbuf.get(v);
            PRINTF( "Position (%3.2f;%3.2f;%3.2f) speed %3.2f\n", .....);
        }
    }
} display;
```

fill buffers with published data

get data from buffers

print data

## 10. Deprecated HelloWorld

The deprecated Thread class is still available. If you have used RODOS before you will find the direct usage of the Thread class (instead of the new StaticThread<>).

This deprecated usage is shown in helloworld-old-fashioned.cpp. You can still build and execute it, but will get a deprecate warning while building the project.

### 10.1. Programme

```
#include "rodos.h"
class HelloWorld : public Thread {
    void run(){
        PRINTF("Hello World!\n");
    }
} helloworld;
```

includes the RODOS API

defines a Thread named HelloWorld

implements the code for the main task of the thread  
In this case: print "Hello World!"

instantiates one thread of type HelloWorld

## 11. Summary

File name	Content
basic.cpp	A basic 'Hello World!' programme
commbuffer.cpp	A simple example for thread communication
event.cpp	A suspended thread is restarted
helloworld-multiple.cpp	Prints several 'Hello World!' at once
helloworld-old-fashioned.cpp	Prints 'Hello World!'. This is deprecated!
helloworld.cpp	Prints 'Hello World!'
mem-test.cpp	Prints memory location of some variables
priority-ceiling.cpp	2 threads print at the same time
priority.cpp	2 threads print at the same time (a bit different)

All other file names should be self explaining