











Performance

Accessibility

Best Practices

SEO

PWA



# Performance

Values are estimated and may vary. The <u>performance score</u> <u>is calculated</u> directly from these metrics. <u>See calculator.</u>

▲ 0-49

**METRICS** 

50-89

90-100



5.8 s

▲ Time to Interactive

7.2 s

▲ Speed Index

5.8 s

Total Blocking Time

80 ms

▲ Largest Contentful Paint

First Contentful Paint

7.2 s

**Cumulative Layout Shift** 

0.079





















Expand view

Show audits relevant to: All FCP TBT LCP CLS

**OPPORTUNITIES** 

Opportunity Estimated Savings

Enable text compression

5 s ^

1/30

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. <u>Learn</u> <u>more</u>. <u>FCP</u> <u>LCP</u>

| URL                       | Transfer<br>Size | Potential<br>Savings |
|---------------------------|------------------|----------------------|
| /vendor.js (localhost)    | 5,039.6 KiB      | 4,052.8 KiB          |
| /scripts.js (localhost)   | 1,066.6 KiB      | 776.5 KiB            |
| /main.js (localhost)      | 679.3 KiB        | 573.4 KiB            |
| /styles.css (localhost)   | 357.9 KiB        | 306.8 KiB            |
| /polyfills.js (localhost) | 297.0 KiB        | 223.6 KiB            |
| /styles.js (localhost)    | 173.8 KiB        | 126.1 KiB            |
| /runtime.js (localhost)   | 6.5 KiB          | 4.8 KiB              |

# ▲ Reduce unused JavaScript 3.08 s ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. <u>Learn more</u>. <u>[LCP]</u>

### ✓ Show 3rd-party resources (1)

| URL                                                  | Transfer Size | Potential<br>Savings |
|------------------------------------------------------|---------------|----------------------|
| /vendor.js (localhost)                               | 5,039.9 KiB   | 2,460.7 KiB          |
| @ng-bootstrap/ng-bootstrap/fesm2015/ng-bootstrap.mjs | 605.9 KiB     | 395.1 KiB            |
| @angular/core/fesm2015/core.mjs                      | 1,128.5 KiB   | 374.7 KiB            |
| chart.js/dist/chart.esm.js                           | 358.6 KiB     | 334.5 KiB            |
| @angular/animations/fesm2015/browser.mjs             | 164.3 KiB     | 141.8 KiB            |
| @angular/cdk/fesm2015/overlay.mjs                    | 133.1 KiB     | 93.7 KiB             |
| /scripts.js (localhost)                              | 1,066.9 KiB   | 680.2 KiB            |
| datatables.net\js\jquery.dataTables.js               | 443.1 KiB     | 225.6 KiB            |
| jquery\dist\jquery.js                                | 279.9 KiB     | 200.3 KiB            |
| bootstrap\dist\js\bootstrap.js                       | 144.4 KiB     | 97.0 KiB             |
| datatables.net\js\jquery.dataTables.min.js           | 88.2 KiB      | 73.4 KiB             |
| jquery\dist\jquery.min.js                            | 87.4 KiB      | 63.7 KiB             |

| URL                                                                       | Transfer Size | Potential<br>Savings |
|---------------------------------------------------------------------------|---------------|----------------------|
| /main.js (localhost)                                                      | 679.6 KiB     | 295.7 KiB            |
| src/app/User Pages/homepage/homepage.component.html                       | 12.8 KiB      | 12.8 KiB             |
| src/app/User Pages/create-article-page/create-article-page.component.html | 10.6 KiB      | 10.6 KiB             |
| src/app/User Pages/my-articles/my-articles.component.html                 | 9.4 KiB       | 9.4 KiB              |
| src/app/User Pages/update-article-page/update-article-page.component.html | 9.2 KiB       | 9.2 KiB              |
| src/app/User Pages/my-queries/my-queries.component.html                   | 8.8 KiB       | 8.8 KiB              |
| /styles.js (localhost)                                                    | 174.1 KiB     | 167.2 KiB            |
| /node_modules/html-entities/lib/named-references.js                       | 68.4 KiB      | 68.4 KiB             |
| /node_modules/webpack-dev-server/client/modules/logger/index.js           | 26.8 KiB      | 26.8 KiB             |
| /node_modules/events.js                                                   | 15.1 KiB      | 15.1 KiB             |
| /node_modules/webpack-dev-server/client/index.js                          | 8.3 KiB       | 8.3 KiB              |
| /node_modules/html-entities/lib/index.js                                  | 8.0 KiB       | 8.0 KiB              |
| standard/ckeditor.js (cdn.ckeditor.com)                                   | 190.8 KiB     | 165.8 KiB            |
| /polyfills.js (localhost)                                                 | 297.3 KiB     | 66.2 KiB             |
| node_modules/zone.js/fesm2015/zone.js                                     | 124.9 KiB     | 26.8 KiB             |
| node_modules/events/events.js                                             | 14.8 KiB      | 11.5 KiB             |
| node_modules/webpack-dev-server/client/modules/logger/index.js            | 26.3 KiB      | 7.7 KiB              |
| node_modules/html-entities/lib/index.js                                   | 7.8 KiB       | 5.5 KiB              |
| node_modules/webpack-dev-server/client/overlay.js                         | 6.7 KiB       | 5.2 KiB              |

▲ Minify JavaScript 2.2 s ヘ

Minifying JavaScript files can reduce payload sizes and script parse time. <u>Learn more</u>. FCP <u>LCP</u>

| URL                       | Transfer<br>Size | Potential<br>Savings |
|---------------------------|------------------|----------------------|
| /vendor.js (localhost)    | 5,039.9 KiB      | 2,092.2 KiB          |
| /scripts.js (localhost)   | 1,066.9 KiB      | 508.6 KiB            |
| /polyfills.js (localhost) | 297.3 KiB        | 98.8 KiB             |
| /main.js (localhost)      | 679.6 KiB        | 74.7 KiB             |

| URL                     | Transfer<br>Size | Potential<br>Savings |
|-------------------------|------------------|----------------------|
| /styles.js (localhost)  | 174.1 KiB        | 36.4 KiB             |
| /runtime.js (localhost) | 6.8 KiB          | 3.8 KiB              |

#### Eliminate render-blocking resources

0.65 s ^

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. Learn more. (FCP) (LCP)

### ✓ Show 3rd-party resources (2)

| URL                                             | Transfer<br>Size | Potential<br>Savings |
|-------------------------------------------------|------------------|----------------------|
| css/bootstrap.min.css (localhost)               | 0.0 KiB          | 70 ms                |
| css/font-awesome.min.css (cdnjs.cloudflare.com) | 6.2 KiB          | 260 ms               |
| /styles.css (localhost)                         | 358.2 KiB        | 1,470 ms             |
| standard/ckeditor.js (cdn.ckeditor.com)         | 190.8 KiB        | 1,060 ms             |

## Reduce unused CSS 0.4 s ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. Learn more. FCP (LCP)

| URL                     | Transfer<br>Size | Potential<br>Savings |
|-------------------------|------------------|----------------------|
| /styles.css (localhost) | 358.2 KiB        | 347.1 KiB            |

#### Remove duplicate modules in JavaScript bundles

0.24 s ^

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. [TBT]

| Source                     | Transfer Size | Potential Savings |
|----------------------------|---------------|-------------------|
| node_modules/html-entities |               | 150.75 KiB        |

| 9.50 AW                          |               |                   |
|----------------------------------|---------------|-------------------|
| Source                           | Transfer Size | Potential Savings |
| /polyfills.js (localhost)        | 75.50 KiB     |                   |
| /vendor.js (localhost)           | 73.85 KiB     |                   |
| /styles.js (localhost)           | 76.90 KiB     |                   |
| node_modules/webpack-dev-server  |               | 119.00 KiB        |
| /polyfills.js (localhost)        | 59.60 KiB     |                   |
| /vendor.js (localhost)           | 58.30 KiB     |                   |
| /styles.js (localhost)           | 60.70 KiB     |                   |
| node_modules/events              |               | 29.60 KiB         |
| /polyfills.js (localhost)        | 14.85 KiB     |                   |
| /vendor.js (localhost)           | 14.50 KiB     |                   |
| /styles.js (localhost)           | 15.10 KiB     |                   |
| node_modules/ansi-html-community |               | 8.45 KiB          |
| /polyfills.js (localhost)        | 4.25 KiB      |                   |
| /vendor.js (localhost)           | 4.15 KiB      |                   |
| /styles.js (localhost)           | 4.30 KiB      |                   |
| node_modules/webpack             |               | 2.75 KiB          |
| /polyfills.js (localhost)        | 1.35 KiB      |                   |
| /vendor.js (localhost)           | 1.35 KiB      |                   |
| /styles.js (localhost)           | 1.40 KiB      |                   |

These suggestions can help your page load faster. They don't <u>directly affect</u> the Performance score.

### DIAGNOSTICS

|                                                                                    | Serve static assets with an efficient cache policy — 9 resources found |                 | ^                |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------|------------------|
| A long cache lifetime can speed up repeat visits to your page. <u>Learn more</u> . |                                                                        |                 |                  |
|                                                                                    |                                                                        | ✓ Show 3rd-part | y resources (1)  |
|                                                                                    | URL                                                                    | Cache<br>TTL    | Transfer<br>Size |
|                                                                                    | /vendor.js (localhost)                                                 | None            | 5,040 KiB        |
|                                                                                    | /scripts.js (localhost)                                                | None            | 1,067 KiB        |

| URL                                     | Cache<br>TTL | Transfer<br>Size |
|-----------------------------------------|--------------|------------------|
| /main.js (localhost)                    | None         | 680 KiB          |
| /styles.css (localhost)                 | None         | 358 KiB          |
| /polyfills.js (localhost)               | None         | 297 KiB          |
| /styles.js (localhost)                  | None         | 174 KiB          |
| /assets/Logo.png (localhost)            | None         | 24 KiB           |
| /runtime.js (localhost)                 | None         | 7 KiB            |
| standard/ckeditor.js (cdn.ckeditor.com) | 7 d          | 191 KiB          |

▲ Avoid enormous network payloads — Total size was 7,848 KiB

Large network payloads cost users real money and are highly correlated with long load times. <u>Learn more</u>. <u>LCP</u>

✓ Show 3rd-party resources (2)

| URL                                             | Transfer<br>Size |
|-------------------------------------------------|------------------|
| /vendor.js (localhost)                          | 5,039.9 KiB      |
| /scripts.js (localhost)                         | 1,066.9 KiB      |
| /main.js (localhost)                            | 679.6 KiB        |
| /styles.css (localhost)                         | 358.2 KiB        |
| /polyfills.js (localhost)                       | 297.3 KiB        |
| standard/ckeditor.js (cdn.ckeditor.com)         | 190.8 KiB        |
| /styles.js (localhost)                          | 174.1 KiB        |
| /assets/Logo.png (localhost)                    | 24.5 KiB         |
| /runtime.js (localhost)                         | 6.8 KiB          |
| css/font-awesome.min.css (cdnjs.cloudflare.com) | 6.2 KiB          |

Avoid chaining critical requests — 8 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn more. FCP LCP

Maximum critical path latency: 550 ms

Initial Navigation

/Register (localhost)

- ...css/bootstrap.min.css (localhost) 10 ms, 0.00 KiB
- ...css/font-awesome.min.css (cdnjs.cloudflare.com) 240 ms, 6.23 KiB

/styles.css (localhost) - 10 ms, 358.22 KiB

...standard/ckeditor.js (cdn.ckeditor.com) - 520 ms, 190.83 KiB

/runtime.js (localhost) - 10 ms, 6.82 KiB

/polyfills.js (localhost) - 20 ms, 297.30 KiB

/vendor.js (localhost) - 70 ms, 5,039.86 KiB

/main.js (localhost) - 30 ms, 679.56 KiB

#### User Timing marks and measures — 36 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more</u>.

| Name                       | Туре    | Start Time | Duration |
|----------------------------|---------|------------|----------|
| Zone                       | Measure | 744.68 ms  | 0.32 ms  |
| Zone:ZoneAwarePromise      | Measure | 745.12 ms  | 0.57 ms  |
| Zone:toString              | Measure | 745.74 ms  | 0.06 ms  |
| Zone:util                  | Measure | 745.87 ms  | 0.43 ms  |
| Zone:legacy                | Measure | 746.35 ms  | 0.05 ms  |
| Zone:queueMicrotask        | Measure | 746.38 ms  | 0.12 ms  |
| Zone:timers                | Measure | 746.43 ms  | 0.17 ms  |
| Zone:requestAnimationFrame | Measure | 746.67 ms  | 0.03 ms  |
| Zone:blocking              | Measure | 746.74 ms  | 0.16 ms  |
| Zone:EventTarget           | Measure | 746.83 ms  | 0.87 ms  |

| Name                       | Туре    | Start Time | Duration |
|----------------------------|---------|------------|----------|
| Zone:MutationObserver      | Measure | 747.7 ms   | 0.2 ms   |
| Zone:IntersectionObserver  | Measure | 747.87 ms  | 0.03 ms  |
| Zone:FileReader            | Measure | 747.97 ms  | 0.03 ms  |
| Zone:on_property           | Measure | 748.04 ms  | 13.96 ms |
| Zone:customElements        | Measure | 762.09 ms  | 0.31 ms  |
| Zone:XHR                   | Measure | 762.38 ms  | 0.42 ms  |
| Zone:geolocation           | Measure | 762.71 ms  | 0.19 ms  |
| Zone:PromiseRejectionEvent | Measure | 762.86 ms  | 0.04 ms  |
| Zone                       | Mark    | 744.7 ms   |          |
| Zone:ZoneAwarePromise      | Mark    | 745.13 ms  |          |
| Zone:toString              | Mark    | 745.75 ms  |          |
| Zone:util                  | Mark    | 745.87 ms  |          |
| Zone:legacy                | Mark    | 746.35 ms  |          |
| Zone:queueMicrotask        | Mark    | 746.39 ms  |          |
| Zone:timers                | Mark    | 746.44 ms  |          |
| Zone:requestAnimationFrame | Mark    | 746.68 ms  |          |
| Zone:blocking              | Mark    | 746.74 ms  |          |
| Zone:EventTarget           | Mark    | 746.83 ms  |          |
| Zone:MutationObserver      | Mark    | 747.7 ms   |          |
| Zone:IntersectionObserver  | Mark    | 747.88 ms  |          |
| Zone:FileReader            | Mark    | 747.97 ms  |          |
| Zone:on_property           | Mark    | 748.04 ms  |          |

| Name                       | Туре | Start Time Duration |
|----------------------------|------|---------------------|
| Zone:customElements        | Mark | 762.11 ms           |
| Zone:XHR                   | Mark | 762.38 ms           |
| Zone:geolocation           | Mark | 762.72 ms           |
| Zone:PromiseRejectionEvent | Mark | 762.86 ms           |

O Keep request counts low and transfer sizes small — 18 requests • 7,846 KiB

To set budgets for the quantity and size of page resources, add a budget.json file. <u>Learn more</u>.

| Resource Type | Requests | Transfer Size |
|---------------|----------|---------------|
| Total         | 18       | 7,846.4 KiB   |
| Script        | 7        | 7,455.3 KiB   |
| Stylesheet    | 3        | 364.4 KiB     |
| Image         | 1        | 24.5 KiB      |
| Document      | 1        | 1.4 KiB       |
| Other         | 6        | 0.7 KiB       |
| Media         | 0        | 0.0 KiB       |
| Font          | 0        | 0.0 KiB       |
| Third-party   | 2        | 197.1 KiB     |

| <ul> <li>Largest Contentful Paint element —</li> </ul> | 1 | element found |
|--------------------------------------------------------|---|---------------|
|--------------------------------------------------------|---|---------------|

This is the largest contentful element painted within the viewport. <u>Learn More (LCP)</u>

Element

|   | Element                         |                                                                                   |                  |
|---|---------------------------------|-----------------------------------------------------------------------------------|------------------|
| 0 | Avoid large layout shifts —     | 3 elements found                                                                  | ^                |
| - | These DOM elements contribu     | te most to the CLS of the page. CLS                                               |                  |
|   | Element                         |                                                                                   | CLS Contribution |
|   | div.col-xl-5.mx                 | r-auto                                                                            | 0.07             |
|   |                                 | span.Title.h1.fw-bold.mb-0                                                        | 0.009            |
|   |                                 | label.form-label                                                                  | 0                |
| 0 | Avoid long main-thread tasks    | s — 2 long tasks found                                                            | ^                |
| I | ists the longest tasks on the r | nain thread, useful for identifying worst contributors to input delay. <u>Lea</u> | rn more (TBT)    |
|   | URL                             | Start<br>Time                                                                     | Duration         |
|   | /styles.js (localhost)          | 7,250 ms                                                                          | 133 ms           |
|   | Unattributable                  | 210 ms                                                                            | 61 ms            |

More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

PASSED AUDITS (26)

Properly size images — Potential savings of 23 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. Learn more.



Defer offscreen images

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. <u>Learn more</u>.

Minify CSS


Minifying CSS files can reduce network payload sizes. Learn more. FCP [LCP]

Efficiently encode images

Optimized images load faster and consume less cellular data. Learn more.

Serve images in next-gen formats — Potential savings of 13 KiB

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <u>Learn more</u>.

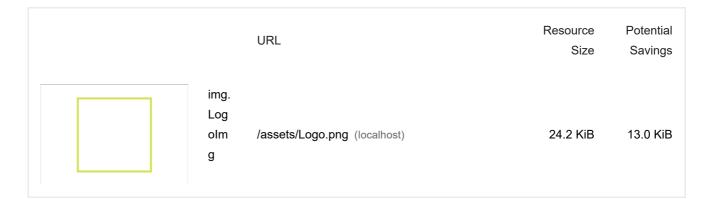

Preconnect to required origins

| Consider adding `preconnect` or `dns-prefered Learn more. FCP LCP                          | etch` resource hints to establish early connections to important third-party origins.                                                                                                                                               |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Initial server response time was short —                                                   | - Root document took 10 ms                                                                                                                                                                                                          |
| Keep the server response time for the main LCP                                             | n document short because all other requests depend on it. <u>Learn more</u> . <u>FCP</u>                                                                                                                                            |
| URL                                                                                        | Time Spent                                                                                                                                                                                                                          |
| /Register (localhost)                                                                      | 10 ms                                                                                                                                                                                                                               |
| Avoid multiple page redirects                                                              | ^                                                                                                                                                                                                                                   |
| Redirects introduce additional delays before                                               | e the page can be loaded. <u>Learn more</u> . <u>FCP</u> <u>LCP</u>                                                                                                                                                                 |
| O Preload key requests                                                                     | ^                                                                                                                                                                                                                                   |
| Consider using ` <li>k rel=preload&gt;` to prior more. FCP (LCP)</li>                      | itize fetching resources that are currently requested later in page load. <u>Learn</u>                                                                                                                                              |
| Use HTTP/2                                                                                 | ^                                                                                                                                                                                                                                   |
| HTTP/2 offers many benefits over HTTP/1.                                                   | 1, including binary headers and multiplexing. <u>Learn more</u> .                                                                                                                                                                   |
| Use video formats for animated content                                                     | ^                                                                                                                                                                                                                                   |
| Large GIFs are inefficient for delivering animal PNG/WebP for static images instead of GIF | mated content. Consider using MPEG4/WebM videos for animations and to save network bytes. Learn more LCP                                                                                                                            |
| Avoid serving legacy JavaScript to mode                                                    | rn browsers — Potential savings of 27 KiB                                                                                                                                                                                           |
| modern browsers. For your bundled JavaSo                                                   | vsers to use new JavaScript features. However, many aren't necessary for cript, adopt a modern script deployment strategy using module/nomodule feature pped to modern browsers, while retaining support for legacy browsers. Learn |
| URL                                                                                        | Potential Savings                                                                                                                                                                                                                   |
| /scripts.js (localhost)                                                                    | 26.1 KiB                                                                                                                                                                                                                            |
| scripts.js:117                                                                             | Array.isArray                                                                                                                                                                                                                       |
| scripts.js:117                                                                             | Array.prototype.includes                                                                                                                                                                                                            |
| <u>scripts.js:31709</u>                                                                    | @babel/plugin-transform-classes                                                                                                                                                                                                     |

URL

| URL                                                                                          |                                                                    | Potential Saving                            |
|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------|
| /styles.js (localhost)                                                                       |                                                                    | 0.2 Ki                                      |
| styles.js:944                                                                                | @babel/plugin-transform-classes                                    |                                             |
| /polyfills.js (localhost)                                                                    |                                                                    | 0.2 Ki                                      |
| polyfills.js:1054                                                                            | @babel/plugin-transform-classes                                    |                                             |
| /vendor.js (localhost)                                                                       |                                                                    | 0.2 Ki                                      |
| vendor.js:25705                                                                              | @babel/plugin-transform-classes                                    |                                             |
| Preload Largest Contentful Pain                                                              | t image                                                            |                                             |
| Preload the image used by the LC                                                             | P element in order to improve your LCP time. <u>Learn more</u> .   | LCP                                         |
| Avoids an excessive DOM size                                                                 | — 74 elements                                                      |                                             |
| \ large DOM will increase memory<br>TBT)                                                     | / usage, cause longer <u>style calculations</u> , and produce cost | ly <u>layout reflows</u> . <u>Learn mor</u> |
|                                                                                              |                                                                    |                                             |
| Statistic                                                                                    | Element                                                            | Valu                                        |
| Statistic  Total DOM Elements                                                                | Element                                                            | Valu                                        |
|                                                                                              | Element label.form-labe                                            | 7                                           |
|                                                                                              |                                                                    | 7                                           |
| Total DOM Elements                                                                           |                                                                    | 7<br>el                                     |
| Total DOM Elements                                                                           |                                                                    | 7<br>el                                     |
| Total DOM Elements                                                                           | label.form-labe                                                    | રો<br>ng-invalid                            |
| Total DOM Elements  Maximum DOM Depth                                                        | form.ng-untouched.ng-pristine.                                     | 7<br>el                                     |
| Total DOM Elements  Maximum DOM Depth  Maximum Child Elements  JavaScript execution time — 0 | form.ng-untouched.ng-pristine.                                     | 7<br>el<br>ng-invalid                       |

Total CPU

Time

Script Evaluation

Script Parse

| URL                    | Total CPU<br>Time | Script Evaluation | Script Parse |
|------------------------|-------------------|-------------------|--------------|
| /styles.js (localhost) | 203 ms            | 188 ms            | 3 ms         |
| /Register (localhost)  | 136 ms            | 29 ms             | 0 ms         |
| Unattributable         | 122 ms            | 4 ms              | 0 ms         |

Minimizes main-thread work — 0.6 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn more (TBT)

| Category                     | Time Spent |
|------------------------------|------------|
| Script Evaluation            | 294 ms     |
| Other                        | 156 ms     |
| Style & Layout               | 50 ms      |
| Parse HTML & CSS             | 42 ms      |
| Script Parsing & Compilation | 34 ms      |
| Rendering                    | 5 ms       |
| Garbage Collection           | 4 ms       |

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. Learn more. FCP [LCP]

Minimize third-party usage  $\,$  — Third-party code blocked the main thread for 0 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. <u>Learn more</u>. (TBT)

| Third-Party                                     | Transfer Size | Main-Thread Blocking Time |
|-------------------------------------------------|---------------|---------------------------|
| Cloudflare CDN                                  | 6 KiB         | 0 ms                      |
| css/font-awesome.min.css (cdnjs.cloudflare.com) | 6 KiB         | 0 ms                      |


| Lazy load third-party resources with facades                                                                                                                         | ^          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. Learn r                                                   | more.      |
| Largest Contentful Paint image was not lazily loaded                                                                                                                 | ^          |
| Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful <a href="Learn more"><u>Learn more</u></a> . | paint.     |
| Uses passive listeners to improve scrolling performance                                                                                                              | ^          |
| Consider marking your touch and wheel event listeners as `passive` to improve your page's scroll performance. <u>Lea more</u> .                                      | <u>ırn</u> |
| Avoids document.write()                                                                                                                                              | ^          |
| For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by t seconds. <u>Learn more</u> .                    | ens of     |
| <ul> <li>Avoid non-composited animations</li> </ul>                                                                                                                  | ^          |
| Animations which are not composited can be janky and increase CLS. <u>Learn more</u> <u>CLS</u>                                                                      |            |
| Image elements have explicit width and height                                                                                                                        | ^          |
| Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn more</u> <u>CLS</u>                                             |            |
| Has a <meta name="viewport"/> tag With width or initial-scale                                                                                                        | ^          |
| A ` <meta name="viewport"/> ` not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecor                                                | nd delay   |
| to user input. Learn more. (TBT)                                                                                                                                     |            |
| to user input. Learn more. TBT  Avoids unload event listeners                                                                                                        | ^          |
|                                                                                                                                                                      |            |



, 10000010111ty


These checks highlight opportunities to improve the accessibility of your web app. Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

#### NAMES AND LABELS

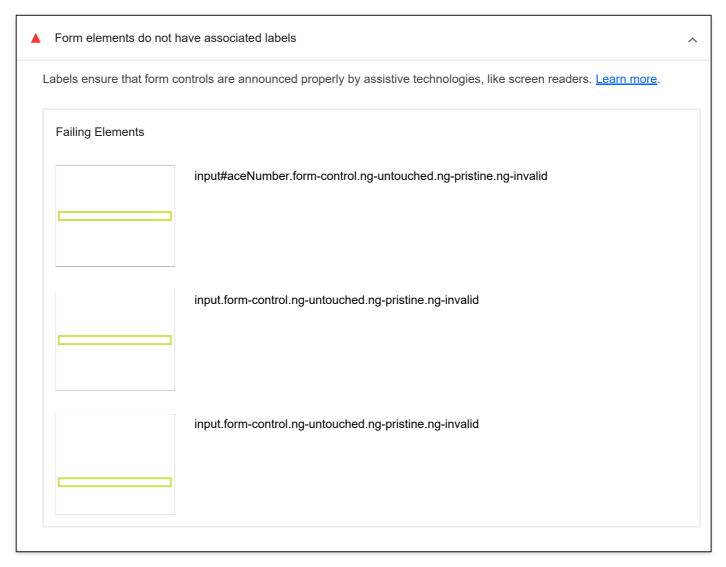

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

#### CONTRAST

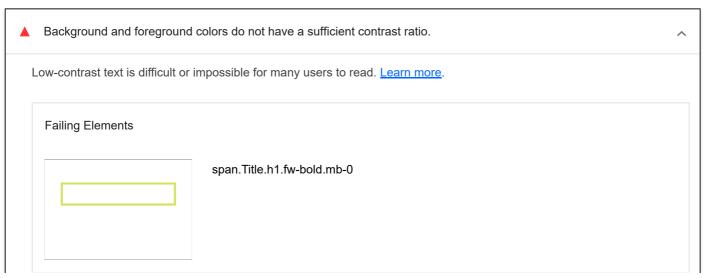

| Failing Elements |    |  |  |  |
|------------------|----|--|--|--|
| bo               | dy |  |  |  |
|                  |    |  |  |  |
|                  |    |  |  |  |
|                  |    |  |  |  |

These are opportunities to improve the legibility of your content.

| ADDITIONAL ITEMS TO MANUALLY CHECK (10)                                                                                                                | Hide |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| The page has a logical tab order                                                                                                                       | ^    |
| Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more</u> .                                |      |
| Interactive controls are keyboard focusable                                                                                                            | ^    |
| Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn more</u> .                                                  |      |
| Interactive elements indicate their purpose and state                                                                                                  | ^    |
| Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. <u>Learn more</u> . |      |
| The user's focus is directed to new content added to the page                                                                                          | ^    |
| If new content, such as a dialog, is added to the page, the user's focus is directed to it. <u>Learn more</u> .                                        |      |
| O User focus is not accidentally trapped in a region                                                                                                   | ^    |
| A user can tab into and out of any control or region without accidentally trapping their focus. <u>Learn more</u> .                                    |      |
| Custom controls have associated labels                                                                                                                 | ^    |
| Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more.                                             |      |
| O Custom controls have ARIA roles                                                                                                                      | ^    |
| Custom interactive controls have appropriate ARIA roles. <u>Learn more</u> .                                                                           |      |
| O Visual order on the page follows DOM order                                                                                                           | ^    |
| DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more</u> .                                                 |      |

| Offscreen content is hidden from assistive technology                                                                                                                                | ^           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Offscreen content is hidden with display: none or aria-hidden=true. <u>Learn more</u> .                                                                                              |             |
| O HTML5 landmark elements are used to improve navigation                                                                                                                             | ^           |
| Landmark elements ( <main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technolog<br/>Learn more.</nav></main>                                | ЭУ.         |
| These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibit review.                                                  | <u>lity</u> |
| PASSED AUDITS (13)                                                                                                                                                                   | Hide        |
| [aria-*] attributes match their roles                                                                                                                                                | ^           |
| Each ARIA `role` supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. <a href="Leaenger: 1.5">Lea</a> <a href="more">more</a> . | <u>rn</u>   |
| [aria-hidden="true"] is not present on the document <body></body>                                                                                                                    | ^           |
| Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document ` <body> <u>Learn more</u>.</body>                                 | `.          |
| [aria-*] attributes have valid values                                                                                                                                                | ^           |
| Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <u>Learn more</u> .                                                                |             |
| [aria-*] attributes are valid and not misspelled                                                                                                                                     | ^           |
| Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <u>Learn more</u> .                                                                 |             |
| Buttons have an accessible name                                                                                                                                                      | ^           |
| When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users wherely on screen readers. Learn more.                           | 10          |
| ARIA IDs are unique                                                                                                                                                                  | ^           |
| The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Lear more</u> .                                                | <u>'n</u>   |
| Image elements have [alt] attributes                                                                                                                                                 | ^           |

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. <a href="Learn more">Learn more</a>.

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. <u>Learn more</u>.

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more</u>.

[id] attributes on active, focusable elements are unique

All focusable elements must have a unique 'id' to ensure that they're visible to assistive technologies. Learn more.

<html> element has a [lang] attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. <u>Learn more</u>.

<html> element has a valid value for its [lang] attribute

Specifying a valid BCP 47 language helps screen readers announce text properly. Learn more.

Heading elements appear in a sequentially-descending order

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <u>Learn more</u>.

NOT APPLICABLE (29)

[accesskey] values are unique

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <u>Learn</u> more.

O button, link, and menuitem elements have accessible names

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more</u>.

| [aria-hidden="true"] elements do not contain focusable descendents                                                                                                                              | ^           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available users of assistive technologies like screen readers. <u>Learn more</u> . | able to     |
| ARIA input fields have accessible names                                                                                                                                                         | ^           |
| When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it un for users who rely on screen readers. <u>Learn more</u> .                     | nusable     |
| ARIA meter elements have accessible names                                                                                                                                                       | ^           |
| When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unufor users who rely on screen readers. <u>Learn more</u> .                         | usable      |
| ARIA progressbar elements have accessible names                                                                                                                                                 | ^           |
| When a `progressbar` element doesn't have an accessible name, screen readers announce it with a generic name, it unusable for users who rely on screen readers. <u>Learn more</u> .             | making      |
| [role]s have all required [aria-*] attributes                                                                                                                                                   | ^           |
| Some ARIA roles have required attributes that describe the state of the element to screen readers. <u>Learn more</u> .                                                                          |             |
| Elements with an ARIA [role] that require children to contain a specific [role] have all required children.                                                                                     | ^           |
| Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn mo                                                                            | <u>re</u> . |
| O [role]s are contained by their required parent element                                                                                                                                        | ^           |
| Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility fur <a href="Learn more"><u>Learn more</u></a> .                              | nctions.    |
| O [role] values are valid                                                                                                                                                                       | ^           |
| ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more.                                                                                       |             |
| ARIA toggle fields have accessible names                                                                                                                                                        | ^           |
| When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it un for users who rely on screen readers. <u>Learn more</u> .                     | nusable     |
| ARIA tooltip elements have accessible names                                                                                                                                                     | ^           |
|                                                                                                                                                                                                 |             |


| When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusal for users who rely on screen readers. <u>Learn more</u> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ole |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| ARIA treeitem elements have accessible names                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ^   |
| When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusate for users who rely on screen readers. <u>Learn more</u> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ole |
| The page contains a heading, skip link, or landmark region                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ^   |
| Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |     |
| O <dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</td><td>^</td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn mo</td><td><u>ore</u>.</td></tr><tr><td>O Definition list items are wrapped in <d1> elements</td><td>^</td></tr><tr><td>Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. <u>Learn more</u>.</td><td></td></tr><tr><td>No form fields have multiple labels</td><td>^</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. <u>Learn more</u>.</td><td></td></tr><tr><td><frame> or <iframe> elements have a title</td><td>^</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more</u>.</td><td></td></tr><tr><td>O <input type="image"> elements have [alt] text</td><td>^</td></tr><tr><td>When an image is being used as an `<input>` button, providing alternative text can help screen reader users understan the purpose of the button. <u>Learn more</u>.</td><td>d</td></tr><tr><td>O Links have a discernible name</td><td>^</td></tr><tr><td>Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. <u>Learn more</u>.</td><td></td></tr><tr><td>Lists contain only <1i> elements and script supporting elements (<script> and <template>).</td><td>^</td></tr><tr><td>Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. <u>Learn</u> more.</td><td></td></tr></tbody></table></script></dd></dt></dl> |     |

| O List items (<1i>) are contained within <ul> or <ol> parent elements</ol></ul>                                                                                                                                              | ^   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Screen readers require list items (` <li>`) to be contained within a parent `<ul>` or `<ol>` to be announced properly. Learn more.</ol></ul></li>                                                                            |     |
| The document does not use <meta http-equiv="refresh"/>                                                                                                                                                                       | ^   |
| Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. <u>Learn more</u> .                                    |     |
| O <object> elements have alternate text</object>                                                                                                                                                                             | ^   |
| Screen readers cannot translate non-text content. Adding alternate text to ` <object>` elements helps screen readers convened meaning to users. Learn more.</object>                                                         | /ey |
| No element has a [tabindex] value greater than 0                                                                                                                                                                             | ^   |
| A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more</u> .                     |     |
| Cells in a  element that use the [headers] attribute refer to table cells within the same table.                                                                                                                             | ^   |
| Screen readers have features to make navigating tables easier. Ensuring `` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more. |     |
| elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.                                                                                                                                  | ^   |
| Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. <u>Learn more</u> .                              |     |
| [lang] attributes have a valid value                                                                                                                                                                                         | ^   |
| Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn more.                                                                                                | 1   |
|                                                                                                                                                                                                                              | ^   |
| When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more.                                                                                                      |     |



### **Best Practices**

#### **GENERAL**



Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. <u>Learn more</u>

| Source         | Description                                                                                                                                                                                           |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Regist<br>er:1 | Refused to apply style from 'http://localhost:4200/bootstrap/css/bootstrap.min.css' because its MIME type ('text/html') is not a supported stylesheet MIME type, and strict MIME checking is enabled. |
| Regist<br>er:1 | Refused to apply style from 'http://localhost:4200/bootstrap/css/bootstrap.min.css' because its MIME type ('text/html') is not a supported stylesheet MIME type, and strict MIME checking is enabled. |

#### Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. Learn more.

| Name      | Version |
|-----------|---------|
| Bootstrap | 5.1.3   |
| jQuery    | 3.6.0   |
| Angular   | 13.3.11 |

### ▲ Missing source maps for large first-party JavaScript

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <u>Learn more</u>.

✓ Show 3rd-party resources (1)

| URL                                           | Map URL                     |
|-----------------------------------------------|-----------------------------|
| standard/ckeditor.js (cdn.ckeditor.com)       |                             |
| Large JavaScript file is missing a source map |                             |
| /runtime.js (localhost)                       | /runtime.js.map (localhost) |
| Warning: missing 3 items in `.sourcesContent` |                             |

| URL                       | Map URL                       |
|---------------------------|-------------------------------|
| /vendor.js (localhost)    | /vendor.js.map (localhost)    |
| /styles.js (localhost)    | /styles.js.map (localhost)    |
| /scripts.js (localhost)   | /scripts.js.map (localhost)   |
| /polyfills.js (localhost) | /polyfills.js.map (localhost) |
| /main.js (localhost)      | /main.js.map (localhost)      |

#### TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. Learn more

| Description                      | Directive | Severity |
|----------------------------------|-----------|----------|
| No CSP found in enforcement mode |           | High     |

PASSED AUDITS (11) Hide

Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. <u>Learn more</u>.

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. <u>Learn more</u>.

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. <u>Learn more</u>.

| Some third-party scripts may contain known security vulnerabilities that are easily identified and exploited b <a href="Learn more"><u>Learn more</u></a> .                                                                                       | y attackers.         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Allows users to paste into password fields                                                                                                                                                                                                        | ^                    |
| Preventing password pasting undermines good security policy. <u>Learn more</u> .                                                                                                                                                                  |                      |
| Displays images with correct aspect ratio                                                                                                                                                                                                         | ^                    |
| Image display dimensions should match natural aspect ratio. <u>Learn more</u> .                                                                                                                                                                   |                      |
| Serves images with appropriate resolution                                                                                                                                                                                                         | ^                    |
| Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image of more.                                                                                                                                | larity. <u>Learn</u> |
| Page has the HTML doctype                                                                                                                                                                                                                         | ^                    |
| Specifying a doctype prevents the browser from switching to quirks-mode. <u>Learn more</u> .                                                                                                                                                      |                      |
| Properly defines charset                                                                                                                                                                                                                          | ^                    |
| A character encoding declaration is required. It can be done with a ` <meta/> ` tag in the first 1024 bytes of the Content-Type HTTP response header. Learn more.                                                                                 | e HTML or in         |
| Avoids deprecated APIs                                                                                                                                                                                                                            | ^                    |
| Deprecated APIs will eventually be removed from the browser. <u>Learn more</u> .                                                                                                                                                                  |                      |
| No issues in the Issues panel in Chrome Devtools                                                                                                                                                                                                  | ^                    |
| Issues logged to the `Issues` panel in Chrome Devtools indicate unresolved problems. They can come from request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chromore details on each issue. |                      |
| OT APPLICABLE (1)                                                                                                                                                                                                                                 | Hide                 |
| Fonts with font-display: optional are preloaded                                                                                                                                                                                                   | ^                    |
| Preload `optional` fonts so first-time visitors may use them. Learn more                                                                                                                                                                          |                      |



These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on <a href="Core Web Vitals">Core Web Vitals</a>. <a href="Learn more">Learn more</a>.

#### CONTENT BEST PRACTICES

| ▲ Document does not have a meta description                                                                                                                                                            | ^              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Meta descriptions may be included in search results to concisely summarize page content. <u>Learn more</u> .                                                                                           |                |
| Format your HTML in a way that enables crawlers to better understand your app's content.                                                                                                               |                |
| CRAWLING AND INDEXING                                                                                                                                                                                  |                |
| ▲ Links are not crawlable                                                                                                                                                                              | ^              |
| Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor to an appropriate destination, so more pages of the site can be discovered. Learn More | elements links |
| Uncrawlable Link                                                                                                                                                                                       |                |
| a                                                                                                                                                                                                      |                |
| To appear in search results, crawlers need access to your app.                                                                                                                                         |                |
| ADDITIONAL ITEMS TO MANUALLY CHECK (1)                                                                                                                                                                 | Hide           |
| Structured data is valid                                                                                                                                                                               | ^              |
| Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn more</u> .                                                                     |                |

 $\label{prop:conditional} \mbox{Run these additional validators on your site to check additional SEO best practices.}$ 

PASSED AUDITS (8)

Has a <meta name="viewport"> tag with width or initial-scale A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more. (TBT) Document has a <title> element The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more. Page has successful HTTP status code Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more. Links have descriptive text Descriptive link text helps search engines understand your content. Learn more. Page isn't blocked from indexing Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more. Image elements have [alt] attributes Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more. Document has a valid hreflang hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more Document avoids plugins Search engines can't index plugin content, and many devices restrict plugins or don't support them. Learn more. NOT APPLICABLE (4) Hide robots.txt is valid If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more. Document has a valid rel=canonical

7/12/22, 9:36 AM Canonical links suggest which URL to show in search results. Learn more. O Document uses legible font sizes Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. Learn more. Tap targets are sized appropriately Interactive elements like buttons and links should be large enough (48x48px), and have enough space around them, to be easy enough to tap without overlapping onto other elements. Learn more. These checks validate the aspects of a Progressive Web App. Learn more. **INSTALLABLE** Web app manifest or service worker do not meet the installability requirements — 1 reason Service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. With proper service worker and manifest implementations, browsers can proactively prompt users to add your app to their homescreen, which can lead to higher engagement. Learn more.

Failure reason

Page has no manifest <link> URL

#### PWA OPTIMIZED

Does not register a service worker that controls page and start\_url

The service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. Learn more.

Is not configured for a custom splash screen Failures: No manifest was fetched.

| <u>more</u> .                                                                                                                                                                                      |              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Does not set a theme color for the address bar.  Failures: No manifest was fetched, No ` <meta name="theme-color"/> ` tag found.                                                                   | ^            |
| The browser address bar can be themed to match your site. <u>Learn more</u> .                                                                                                                      |              |
| Content is sized correctly for the viewport                                                                                                                                                        | ^            |
| If the width of your app's content doesn't match the width of the viewport, your app might not be optimized for mobile screens. <u>Learn more</u> .                                                |              |
| Has a <meta name="viewport"/> tag with width or initial-scale                                                                                                                                      | ^            |
| A ` <meta name="viewport"/> ` not only optimizes your app for mobile screen sizes, but also prevents <u>a 300 millisecond</u> to user input. <u>Learn more</u> . TBT                               | <u>delay</u> |
| ▲ Does not provide a valid apple-touch-icon                                                                                                                                                        | ^            |
| For ideal appearance on iOS when users add a progressive web app to the home screen, define an `apple-touch-icon` must point to a non-transparent 192px (or 180px) square PNG. <u>Learn More</u> . | . It         |
| ▲ Manifest doesn't have a maskable icon No manifest was fetched                                                                                                                                    | ^            |
| A maskable icon ensures that the image fills the entire shape without being letterboxed when installing the app on a de Learn more.                                                                | evice.       |
| ADDITIONAL ITEMS TO MANUALLY CHECK (3)                                                                                                                                                             | Hide         |
| O Site works cross-browser                                                                                                                                                                         | ^            |
| To reach the most number of users, sites should work across every major browser. <u>Learn more</u> .                                                                                               |              |
| Page transitions don't feel like they block on the network                                                                                                                                         | ^            |
| Transitions should feel snappy as you tap around, even on a slow network. This experience is key to a user's perception performance. Learn more.                                                   | on of        |
| Each page has a URL                                                                                                                                                                                | ^            |
| Ensure individual pages are deep linkable via URL and that URLs are unique for the purpose of shareability on social media. <u>Learn more</u> .                                                    |              |

A themed splash screen ensures a high-quality experience when users launch your app from their homescreens. <u>Learn</u>

#### 7/12/22, 9:36 AM

These checks are required by the baseline <u>PWA Checklist</u> but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.

Captured at Jul 12, 2022, 9:33 AM GMT+5:30

Initial page load

Emulated Desktop with Lighthouse 9.6.1

Custom throttling

Single page load

Using Chromium 103.0.0.0

with devtools

Generated by Lighthouse 9.6.1 | File an issue