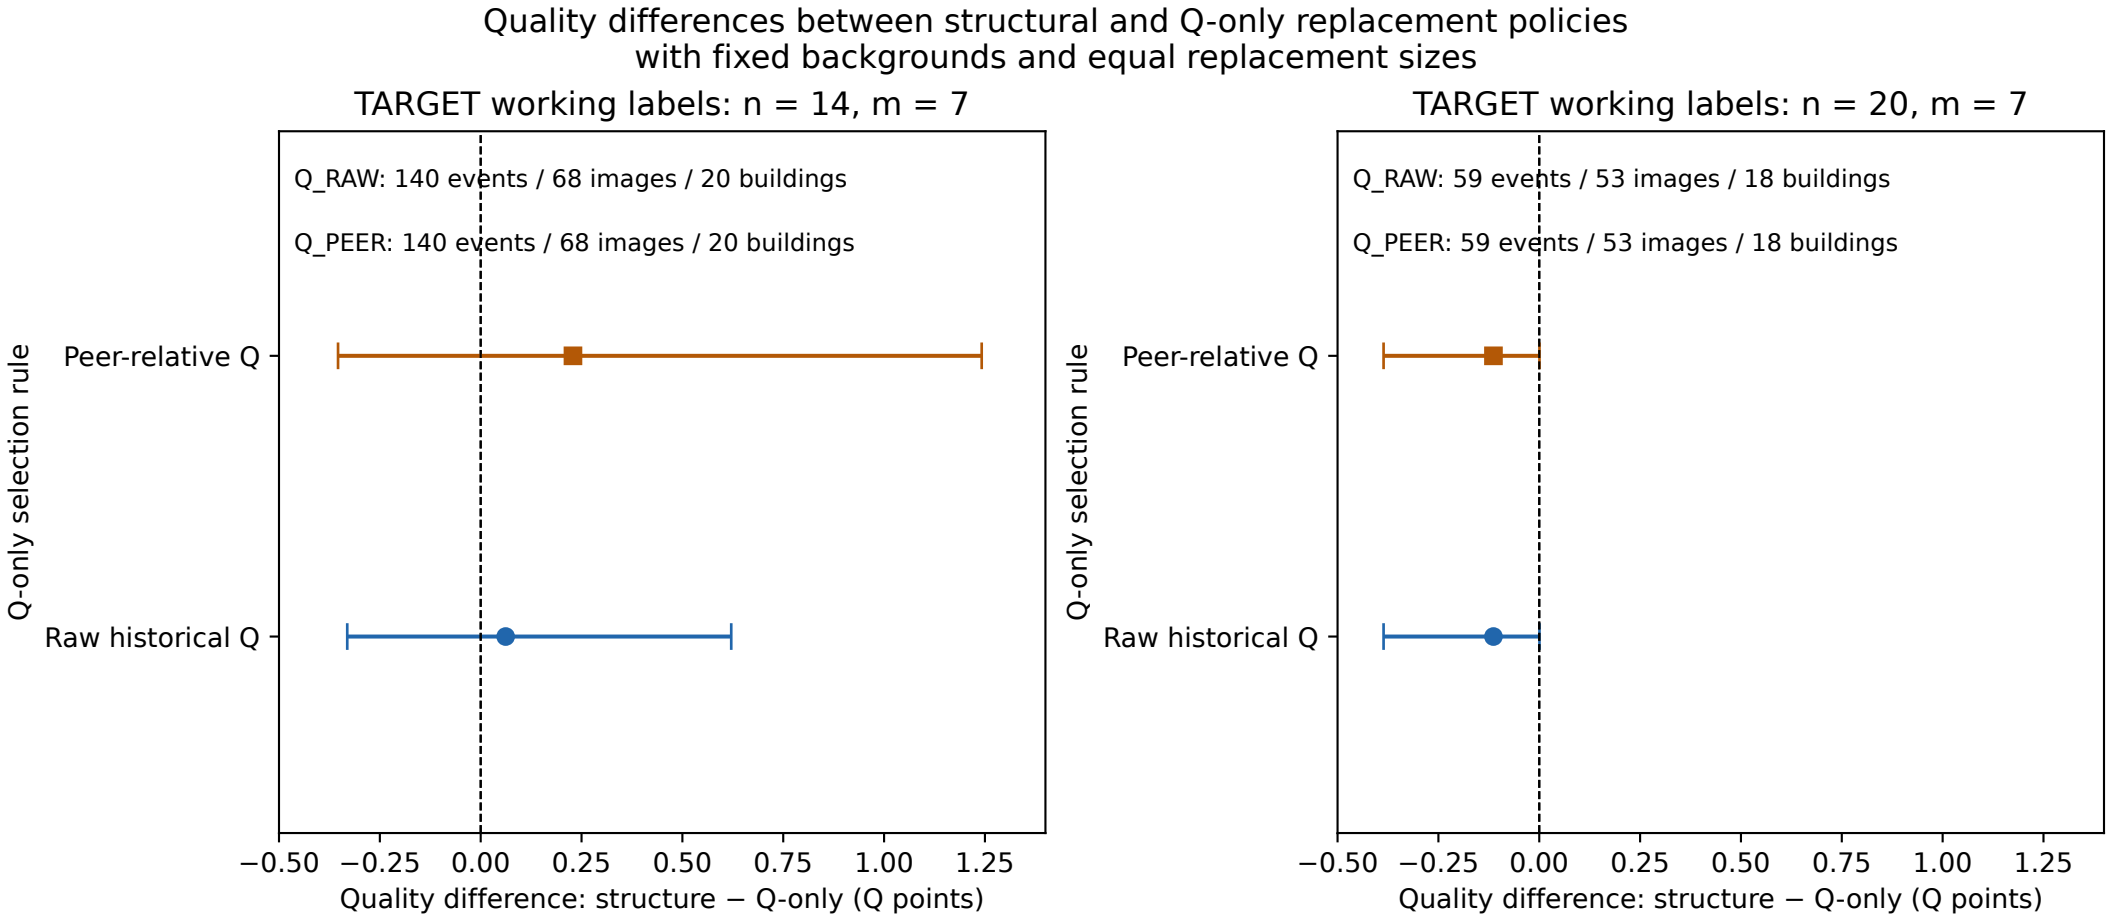
Quality differences between structural and Q-only replacement policies
with fixed backgrounds and equal replacement sizes
TARGET working labels: n = 14, m = 7
Q_RAW: 140 events / 68 images / 20 buildings
Q_PEER: 140 events / 68 images / 20 buildings
Peer-relative Q
Raw historical Q
Q-only selection rule
−0.50 −0.25 0.00 0.25 0.50 0.75 1.00 1.25
Quality difference: structure − Q-only (Q points)
TARGET working labels: n = 20, m = 7
Q_RAW: 59 events / 53 images / 18 buildings
Q_PEER: 59 events / 53 images / 18 buildings
Peer-relative Q
Raw historical Q
Q-only selection rule
−0.50 −0.25 0.00 0.25 0.50 0.75 1.00 1.25
Quality difference: structure − Q-only (Q points)