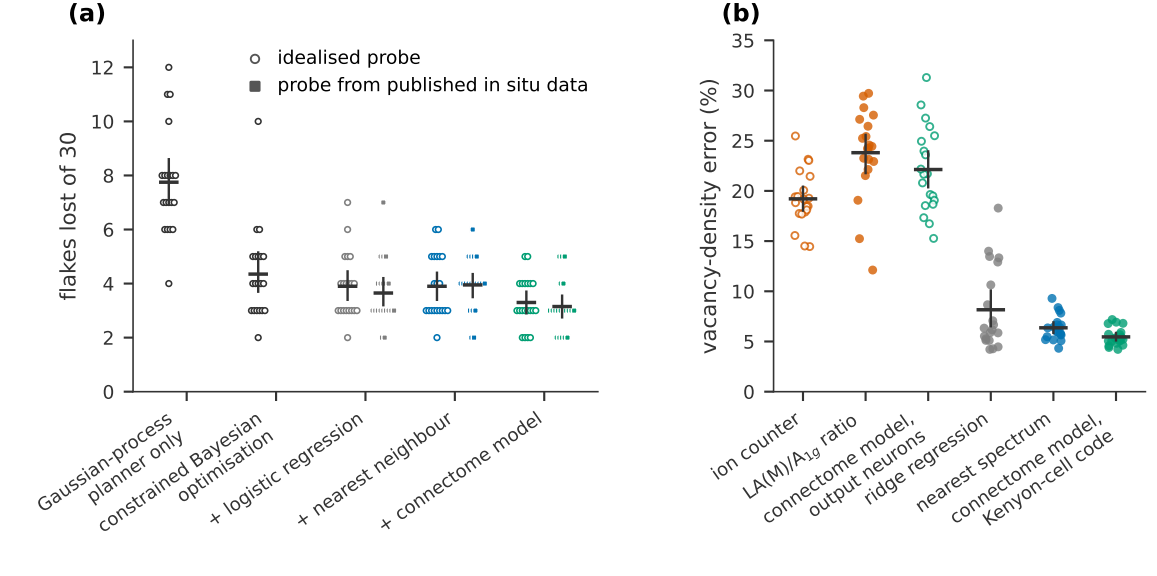
(a)
idealised probe
probe from published in situ data
flakes lost of 30
0
2
4
6
8
10
12
Gaussian-process planner only
constrained Bayesian optimisation
+ logistic regression
+ nearest neighbour
+ connectome model
(b)
vacancy-density error (%)
0
5
10
15
20
25
30
35
ion counter
LA(M)/A1g ratio
connectome model, output neurons
ridge regression
nearest spectrum
connectome model, Kenyon-cell code