

Banner appropriate to article type will appear here in typeset article

Supplementary material for “Strain-coupled one-dimensional turbulence: a single-line closure for rapid distortion, its measured limits, and the consequence for leading-edge noise”

Sparsh Sharma¹ and Alan R. Kerstein²

¹German Aerospace Center (DLR), 38108 Braunschweig, Germany

²Consultant, Danville, CA 94526, USA

Corresponding author: Sparsh Sharma, sparsh.sharma@dlr.de

(Received xx; revised xx; accepted xx)

This supplement carries two blocks of supporting material referenced from the main text: the validation against the strained-turbulence experiment of [Chen *et al.* \(2006\)](#) (§ S1), summarised in the main text’s validation section, and the complete set of intervention categories of the main text’s measured-limits section (§ S2), each carrying the category.variant label introduced there.

S1. Validation against the strained-turbulence experiment of Chen, Meneveau & Katz

The strain-on/strain-off comparison of the main text is model-internal; an external benchmark must confirm that both the rapid-distortion limit and the departure from it are physical. We use the plane-strain experiment of [Chen *et al.* \(2006\)](#) (CMK), in which initially near-isotropic turbulence at $R_\lambda \approx 400$ is subjected to a controlled planar straining cycle and the one-dimensional component spectra are compared with rapid-distortion theory. We reproduce the *straining* phase of their cycle (the destraining phases involve a strain reversal outside the present monotonic configuration); its end corresponds to a total deformation $D = \exp(\frac{1}{2} \int S dt) \approx 3$, i.e. $e \approx 2.20$ in the notation of the main text.

In the rapid-distortion limit (eddy events suppressed, inviscid) the model must reproduce the analytic reference of [Lee *et al.* \(1986\)](#) that CMK use. Figure S1 shows that it does: the component spectral centroids follow the rigid-translation law, reaching the deformation ratio 3.00 at $e = 2.20$ with the components coincident, and the kinetic energy reaches 1.72 against the exact rapid-distortion amplification 1.69—the residual being the moment closure’s, not the implementation’s (main text, verification section), since with the events suppressed the solver evolves the closure trajectory (1.72) exactly. The truly inviscid setting is required: any nonzero viscosity dissipates the compressed small scales and degrades the rigid translation, an effect we verified directly.

With the eddy events and viscosity active, the full model (SC-ODT, C0.2) is no longer constrained to rigid translation, and the strain drives a measurable anisotropy between the components. Figure S2 shows the strain-induced migration of the streamwise and upwash component centroids, each measured against the matched no-strain reference (the per-component form of the strain-on/strain-off construction, which cancels the initialisation

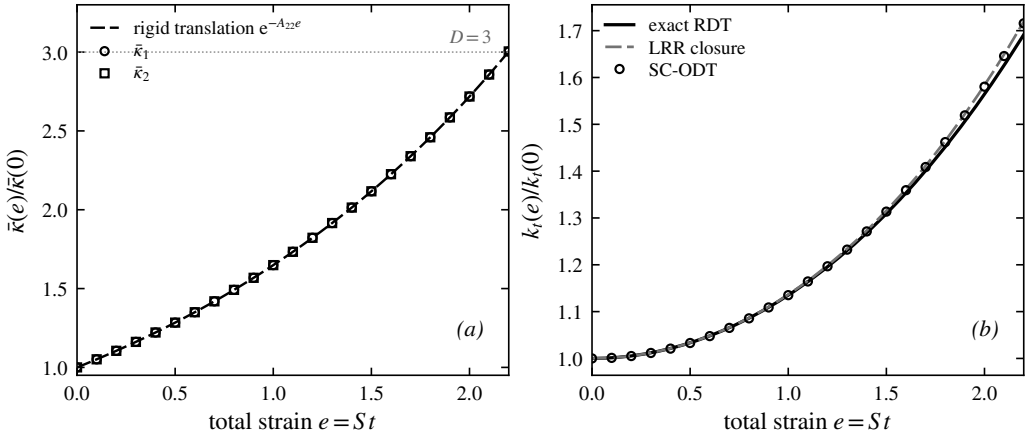


Figure S1. Rapid-distortion limit (eddy events suppressed, inviscid) against the analytic reference of Lee et al. (1986) used by Chen et al. (2006). (a) Component spectral-centroid migration follows the rigid-translation law, reaching the deformation ratio $D = 3$ at the end of the straining phase. (b) Kinetic-energy amplification: the solver follows the closure trajectory, within 2% of the exact rapid-distortion value at $e = 2.20$.

transient and the eddies' own relaxation): the components diverge progressively under continued strain—the streamwise migration reaching 1.9 at the end of the straining phase against 1.5 for the upwash, both far below the rigid value 3—so the upwash component is held back most. This is the qualitative behaviour CMK report—the strained spectrum departs from the isotropic-translation expectation with the components responding differently—and it is the spectral signature of the broadband distortion analysed in the main text. The comparison is restricted to its qualitative content, for three reasons stated plainly: the band-limited initial spectrum differs from CMK's, so absolute levels are not comparable; the line-resolved one-dimensional spectra and the experiment's transverse/longitudinal projections are not the same projection of the spectrum tensor; and the scale separation achieved here ($\mathcal{L}/\eta \approx 250$) is below the experimental ≈ 930 , whose compressed dissipation range exceeds feasible line resolution. Within these limits the model reproduces the rapid-distortion reference and the qualitative departure mechanism of the benchmark; the quantitative spectral assessment is carried out in the main text against the strained-box DNS, where the projection and the initial spectrum are matched by construction. A direct numerical simulation of the same straining–destraining cycle (Gualtieri & Meneveau 2010), at a Reynolds number below the experiment's, reports the component variances and the pressure–strain budget through the cycle and compares them with a Launder–Reece–Rodi closure; it is the DNS counterpart against which the present model can be set quantitatively on this configuration. A direct overlay is not attempted here: their observable is the anisotropy through the full straining–destraining cycle, whereas the monotonic straining phase reproduced above does not include the strain reversal, so the comparison is kept at the level of the independent confirmation their DNS provides for the experiment.

S2. The intervention categories and variants

Table S1 records every intervention variant of the measured-limits campaign—its measured fine-scale effect on the transmission diagnostic and the reading, keyed by the category.variant label—and figure S3 shows the eddy-locked categories on all four diagnostic panels. The variant descriptions, together with the reference configurations C0.1 (standard

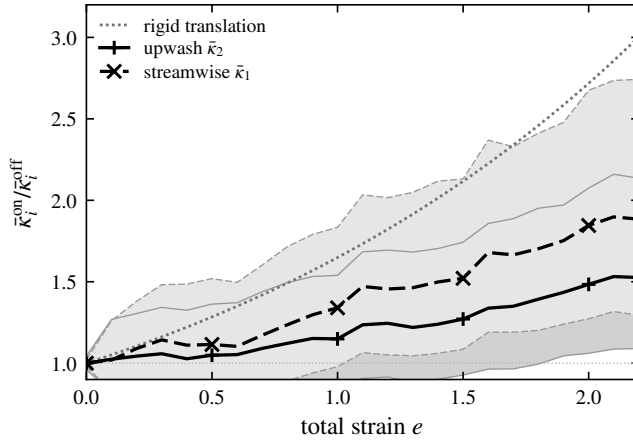


Figure S2. Full model (eddies and viscosity active; ensembles over 128 realisations at $\nu = 10^{-5}$): strain-induced migration of the streamwise and upwash component centroids, each as the ratio of the strained ensemble to the matched no-strain reference, against the rigid-translation law (grey dotted); the shaded bands are the 95% bootstrap confidence intervals of the median ratio. The line configuration is that of Appendix B of the main text. The components diverge under strain—the upwash held back most—reproducing the qualitative departure-from-RDT mechanism of [Chen *et al.* \(2006\)](#). The comparison is qualitative; see text.

ODT) and C0.2 (SC-ODT), are collected in Appendix B of the main text. Each case was run at 1024 realisations with seeds paired to the SC-ODT (C0.2) reference; effects are median paired same-seed contrasts, with “significant” meaning the 95% bootstrap confidence interval excludes zero. The main text sets out the reading these results establish and retains the two figures that decide it (the relaxation-clock figure and the five-way benchmark comparison).

S3. The relaxation clock in the strained spectra

Figure S4 shows the spectral counterpart of the transmission-diagnostic results of the main text, on the 1024-realisation strained line spectrum ensembles at both rapidities (Appendix B of the main text): the size-capped relaxation clock (C5.2) roughly halves the distance between the model’s strained line spectra and the exact rapid-distortion reference family, and—unlike SC-ODT (C0.2)—holds that distance *constant in strain*. A frozen isotropic spectrum is included for reference; it stands for any frozen-inflow practice, which cannot represent the strained anisotropy at all, so its distance from the reference family grows to 45–51% by $e = 2$. The component-ratio panel localises the improvement: exact rapid distortion drives the fine scales towards component equality, SC-ODT (C0.2) over-transmits the anisotropy there, and the clock (C5.2) moves the measured ratio towards the linear reference precisely below its size cap ℓ^* .

S4. Operational steps of the leading-edge-noise chain

This section collects, in operational order, the steps of Part III of the main text, from strained line ensembles to radiated level; every step restates the main text.

1. *Inflow representation.* For each total strain e and strain-rate parameter, fit the exact-RDT-distorted von Kármán family to the median component line spectra of the 1024-realisation ensemble—SC-ODT and, identically, the clock-relaxed variant—jointly in the upwash and transverse components, with the pre-distortion amplitude A_0 and energy wavenumber

label	fine-scale effect	reading
<i>C1 acceptance gating</i>		
C1.1	null at all thresholds; harshest drifts to eddy-free limit	gate is scale-blind: modulates eddy rate, not the scale allocation
C1.2	null, including band <i>energy</i>	fine scales are fed by large-eddy maps directly
<i>C2 map-image geometry</i>		
C2.1	null (one-point statistics move: $\mathcal{A}_{lo}$ 2.85 $\rightarrow$ 2.50 at $e = 3.9$)	outer images feed the band in one step; channels trade off
<i>C3 sub-scale relaxation kernels (depth)</i>		
C3.1	null within confidence intervals	$\ell/3$ sits above the measured band
C3.2	$\mathcal{A}_{hi}$: 1.43 $\rightarrow$ 1.27 at $e = 1$ (significant, both bands)	first significant fine-scale isotropisation
C3.3	significant at $e = 1$ and $e = 3$ (–12% paired)	deepest levels reach the band
C3.4	significant in both bands at $e = 1$; no late-strain reversal	best of the categories: gains without the deep-strain overshoot
C3.5	strongest at $e = 1$ (1.29); overshoots at deep strain	per-event amplitude is not the limiter
<i>C4 concurrent relaxation</i>		
C4.1	null	location alone is not the lever
C4.2	significant in both bands at $e = 1$, strongest at the energy-containing scales; fade persists	the sampled intervals act at eddy scale, so delocalising the events does not reach the fine scales
C4.3	strongest early effect of the eddy-locked categories ($\mathcal{A}_{hi}$ 1.43 $\rightarrow$ 1.26); low band significant even at $e = 3.9$; fine scales overshoot depth-only at deep strain	dosage helps early and at large scales, and harms deep-strain fine scales wherever it is applied
<i>C5 independent relaxation clock</i>		
C5.1	significant in both bands at <i>every</i> strain, growing with strain—the fade broken—but the one-point anisotropy is suppressed ($u_s^2/2k_t$ 0.58 $\rightarrow$ 0.41 at $e = 3.9$)	event-locked timing was the deep-strain limiter; a scale-blind event sequence fights the strain itself
C5.2	fine scales significant at every strain with no fade ($\mathcal{A}_{hi}$ held at 1.30–1.44); one-point trajectory intact for $e \lesssim 2$, mildly reduced beyond	timing + scale selectivity: the working form of the mechanism
C5.3	fine scales significant at every strain, held below the matched-rate clock ($\mathcal{A}_{hi}$ 1.15–1.40); one-point anisotropy reduced further ($u_s^2/2k_t$ to 0.48 at $e = 3.9$ against SC-ODT's 0.58)	the clock rate is a control: more relaxation holds the fine scales harder, at a proportionate one-point cost

Table S1. The intervention categories on the transmission diagnostic, labelled by category.variant; variant descriptions and the reference configurations C0.1 (standard ODT) and C0.2 (SC-ODT) are in Appendix B of the main text. Each case: 1024 paired-seed realisations; effects are median paired same-seed contrasts, “significant” meaning the 95% bootstrap confidence interval excludes zero. The size-capped clock **C5.2** (the clock-relaxed ODT of the main text), with C0.1 and C0.2, forms the five-way comparison.

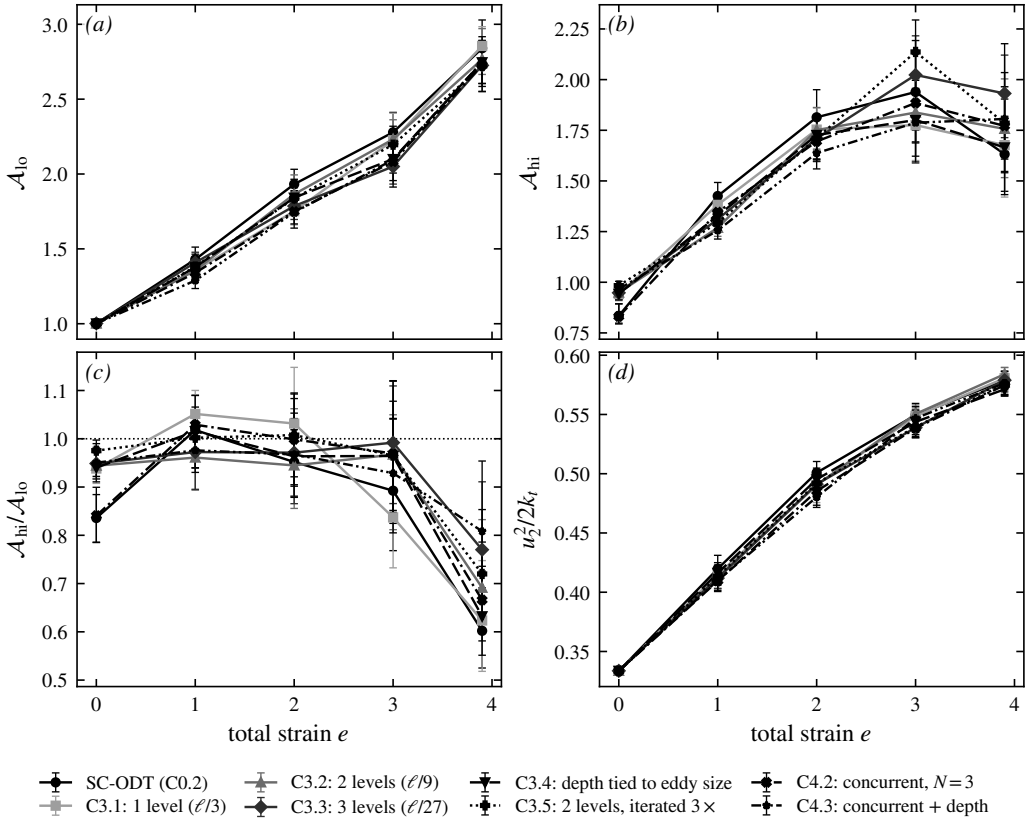


Figure S3. Scale-local relaxation on the transmission diagnostic: (a) energy-containing-band imbalance $\mathcal{A}_{lo}$, (b) fine-scale-band imbalance $\mathcal{A}_{hi}$, (c) transmission $\mathcal{A}_{hi}/\mathcal{A}_{lo}$, (d) upwash energy fraction, against total strain: the SC-ODT reference (C0.2), sub-scale relaxation kernels at fixed depth (C3.1–C3.3), depth tied to eddy size (C3.4), the per-event iterated variant (C3.5), concurrent relaxation (C4.2, $N = 3$ randomly placed same-size intervals per event), and the stacked variant (C4.3, concurrent intervals each running the adaptive hierarchy). Medians over 1024 paired-seed realisations; error bars are the 95% bootstrap confidence intervals of the median.

κ_e the only free parameters. The rms log-residual of the fit is the distance envelope of the main text, carried through the chain as the input uncertainty.

2. *Two-dimensional upwash spectrum.* Form $\Phi_{ww}(K_x, K_y; e) = A_0 \int \Phi_{22}^{\text{RDT}}(K_x, \kappa_2, K_y; e) d\kappa_2$ by direct integration of the distorted components of the fitted family; the integration is verified against the wavevector-ensemble integrator of the main text (upwash-variance growth reproduced to under 1%).

3. *Level and shape.* The noise kernel is linear in the upwash variance, so the variance ratio $\overline{u_2^2}(e)/\overline{u_2^2}(0)$ is taken from the measured line spectra and applied as the level; the fitted family supplies only the shape.

4. *Geometry-free ratio.* Form $\mathcal{K}(K_x) = \pi \Phi_{ww}(K_x, 0)^2 / \int \Phi_{ww}(K_x, K_y) dK_y$ for the distorted and for the frozen ($e = 0$) input; $\Delta \text{SPL}(K_x) = 10 \log_{10}[\mathcal{K}^{\text{distorted}}/\mathcal{K}^{\text{frozen}}]$, from which aerofoil geometry, response and observer cancel.

5. *Absolute prediction.* At the reference configuration, physical units enter through two matching conditions only—the integral scale through $\kappa_e = 0.7468/\mathcal{L}$ and the $e = 0$ upwash variance—and the far-field spectrum is assembled from the compact lift-dipole

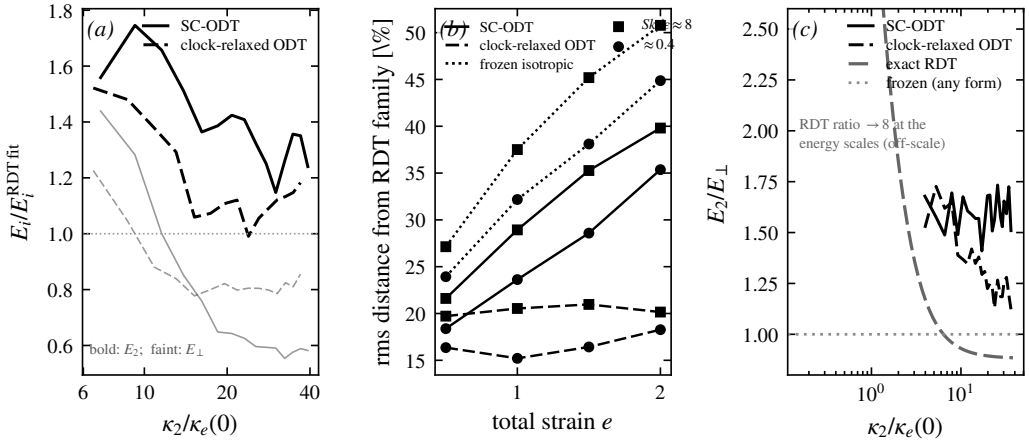


Figure S4. (a) Binned component spectra over their best exact-RDT-family curves at $e = 2$, $Sk_t/\varepsilon \approx 8$ (solid: E_2 ; dashed: $E_\perp$): the SC-ODT (C0.2) misallocation (upwash high, transverse low) and its reduction by the clock (C5.2). (b) rms log-distance from the exact-RDT family against total strain at both rapidities: frozen isotropic representation (gold), SC-ODT (C0.2, black), size-capped clock (C5.2, red); the clock's distance is strain-independent. (c) Component ratio $E_2/E_\perp(\kappa_2)$ at $e = 1$, rapid: measured SC-ODT (C0.2) and clock (C5.2) ensembles against the exact-RDT reference; any frozen form predicts the ratio 1 identically.

form of Amiet (1975) with the exact Sears response (Sears 1941); the frozen baseline is then the standard Amiet–von Kármán prediction with no recalibration.

6. *Validation chain.* Against the published measurements, all four inflows (frozen von Kármán, frozen Liepmann, SC-ODT, clock-relaxed ODT) pass through the identical non-compact response, with the Gershfeld thickness admittance applied to all four chains on the NACA0012 cases and the effective strain taken as the potential-flow stagnation-line accumulation truncated at the eddy scale.

REFERENCES

- AMIET, R. K. 1975 Acoustic radiation from an airfoil in a turbulent stream. *Journal of Sound and Vibration* **41** (4), 407–420.
- CHEN, JUN, MENEVEAU, CHARLES & KATZ, JOSEPH 2006 Scale interactions of turbulence subjected to a straining–relaxation–destraining cycle. *Journal of Fluid Mechanics* **562**, 123–150.
- GUALTIERI, P. & MENEVEAU, C. 2010 Direct numerical simulations of turbulence subjected to a straining and destraining cycle. *Physics of Fluids* **22** (6), 065104.
- LEE, MOON J., PIOMELLI, UGO & REYNOLDS, WILLIAM C. 1986 Useful formulas in the rapid distortion theory of homogeneous turbulence. *Physics of Fluids* **29** (10), 3471–3474.
- SEARS, WILLIAM R. 1941 Some aspects of non-stationary airfoil theory and its practical application. *Journal of the Aeronautical Sciences* **8** (3), 104–108.