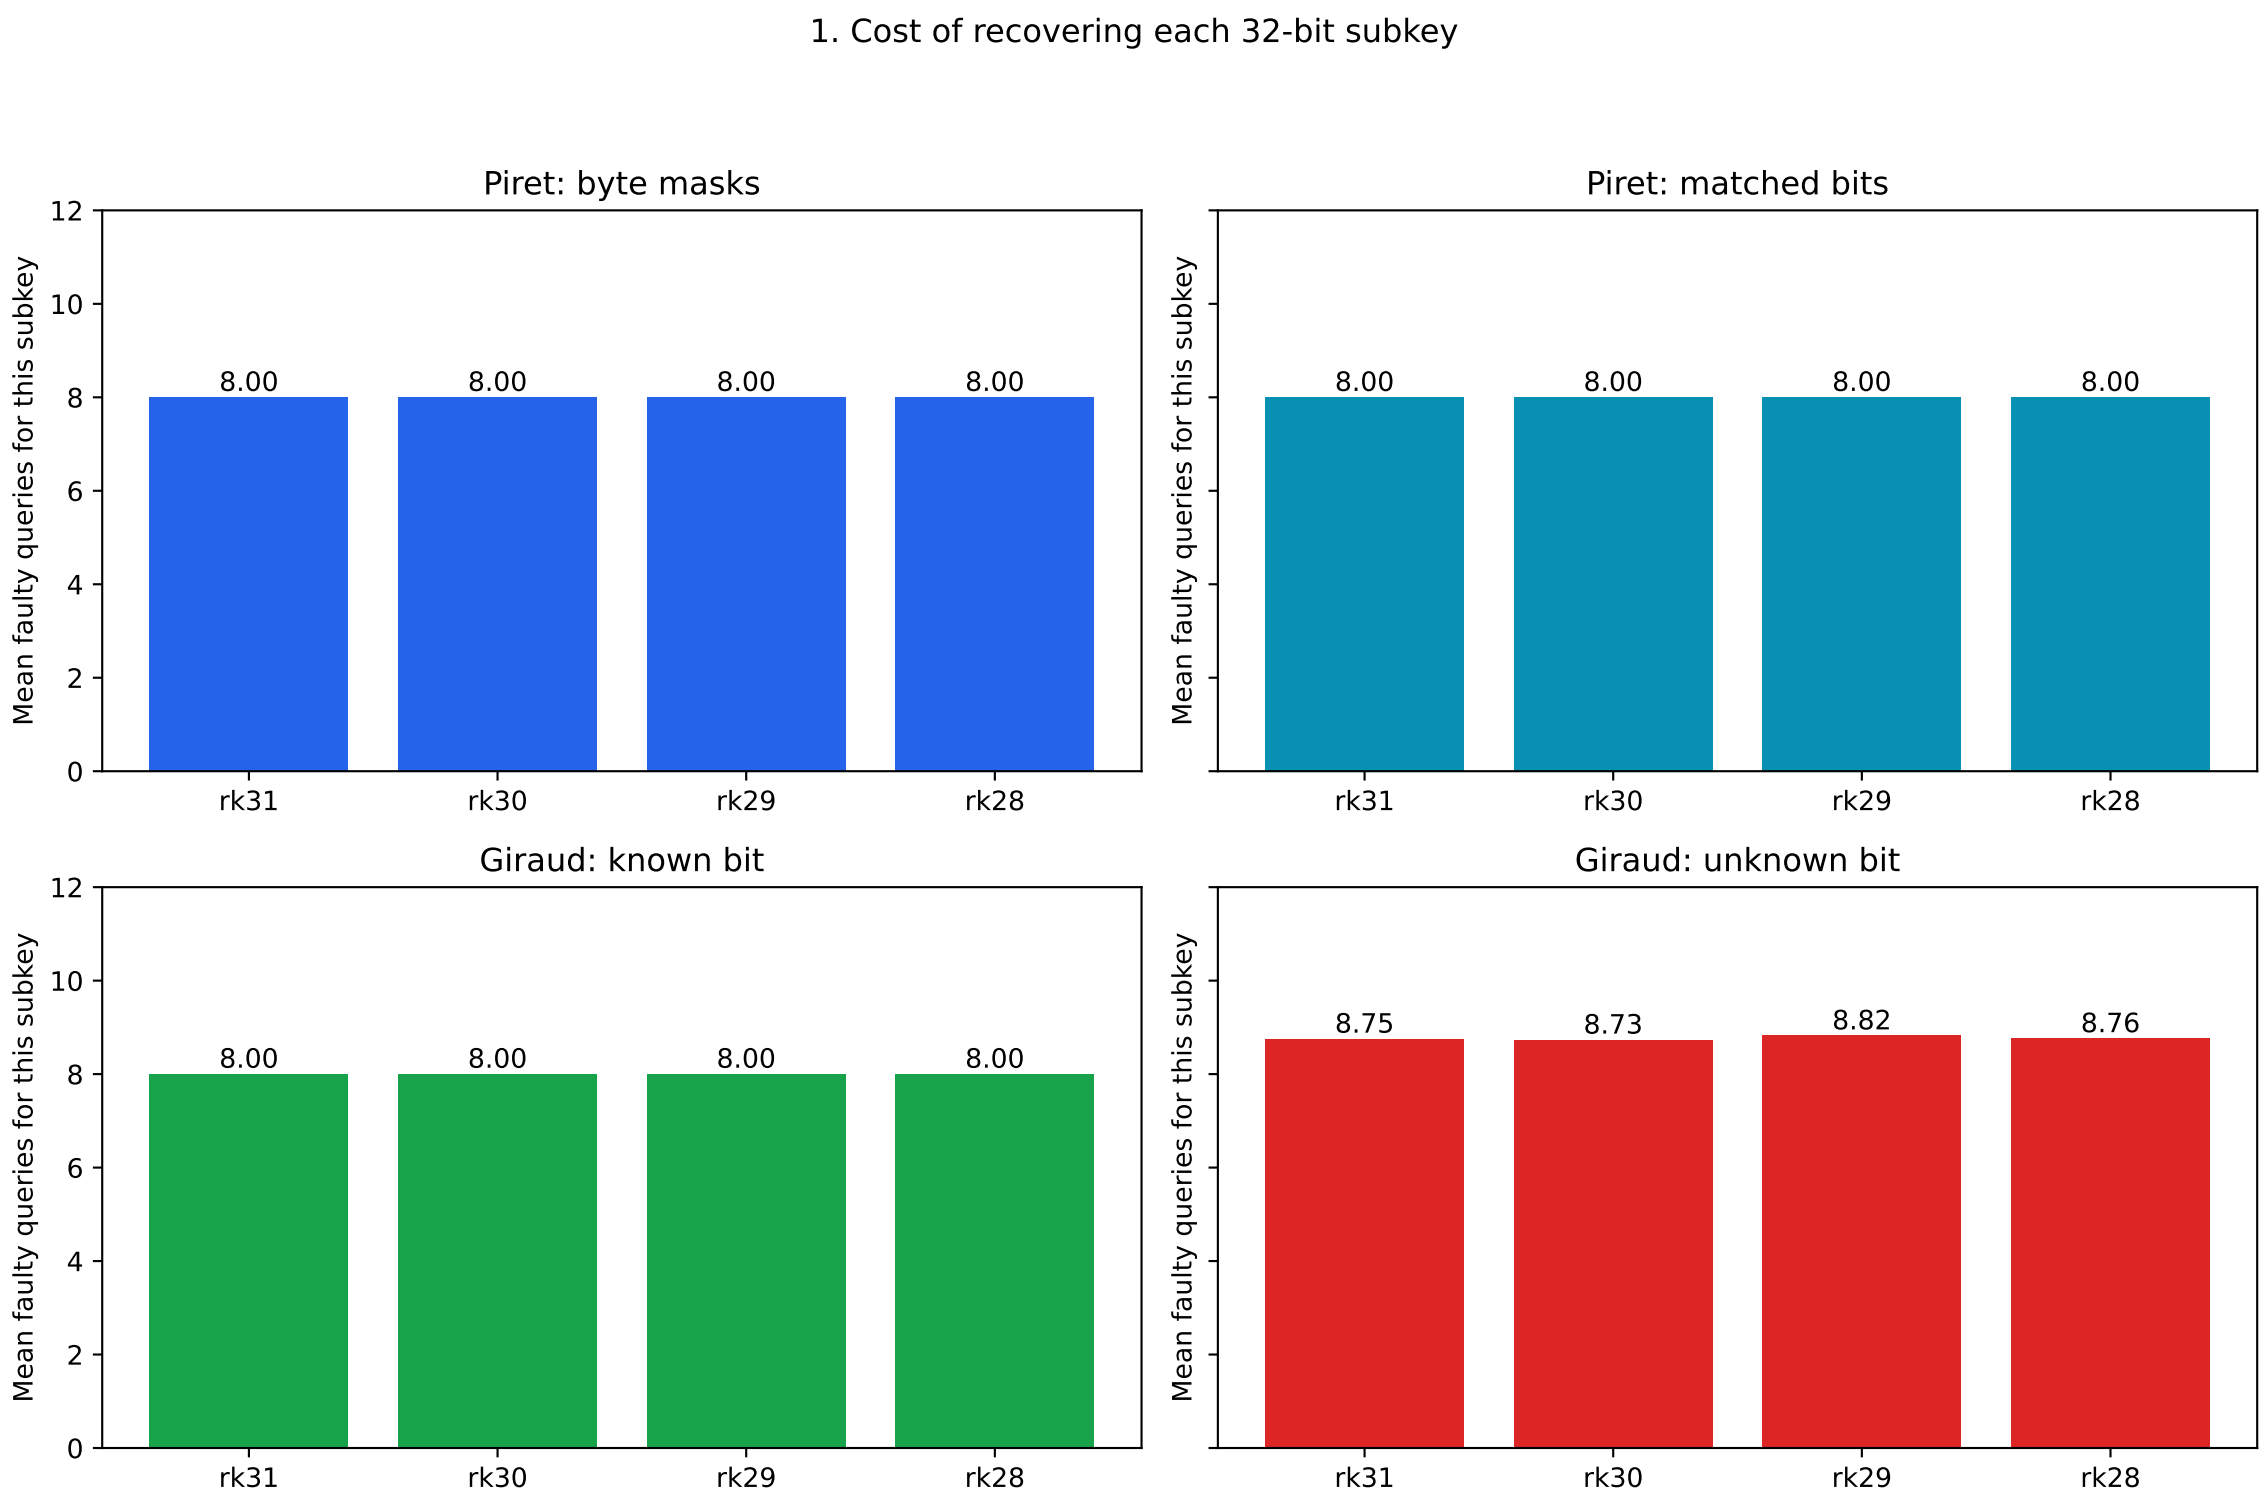
1. Cost of recovering each 32-bit subkey
Piret: byte masks
Piret: matched bits
Giraud: known bit
Giraud: unknown bit
Mean faulty queries for this subkey
0
2
4
6
8
10
12
8.00
8.00
8.00
8.00
8.75
8.73
8.82
8.76
rk31
rk30
rk29
rk28

2. Where observations are spent: four bytes per subkey

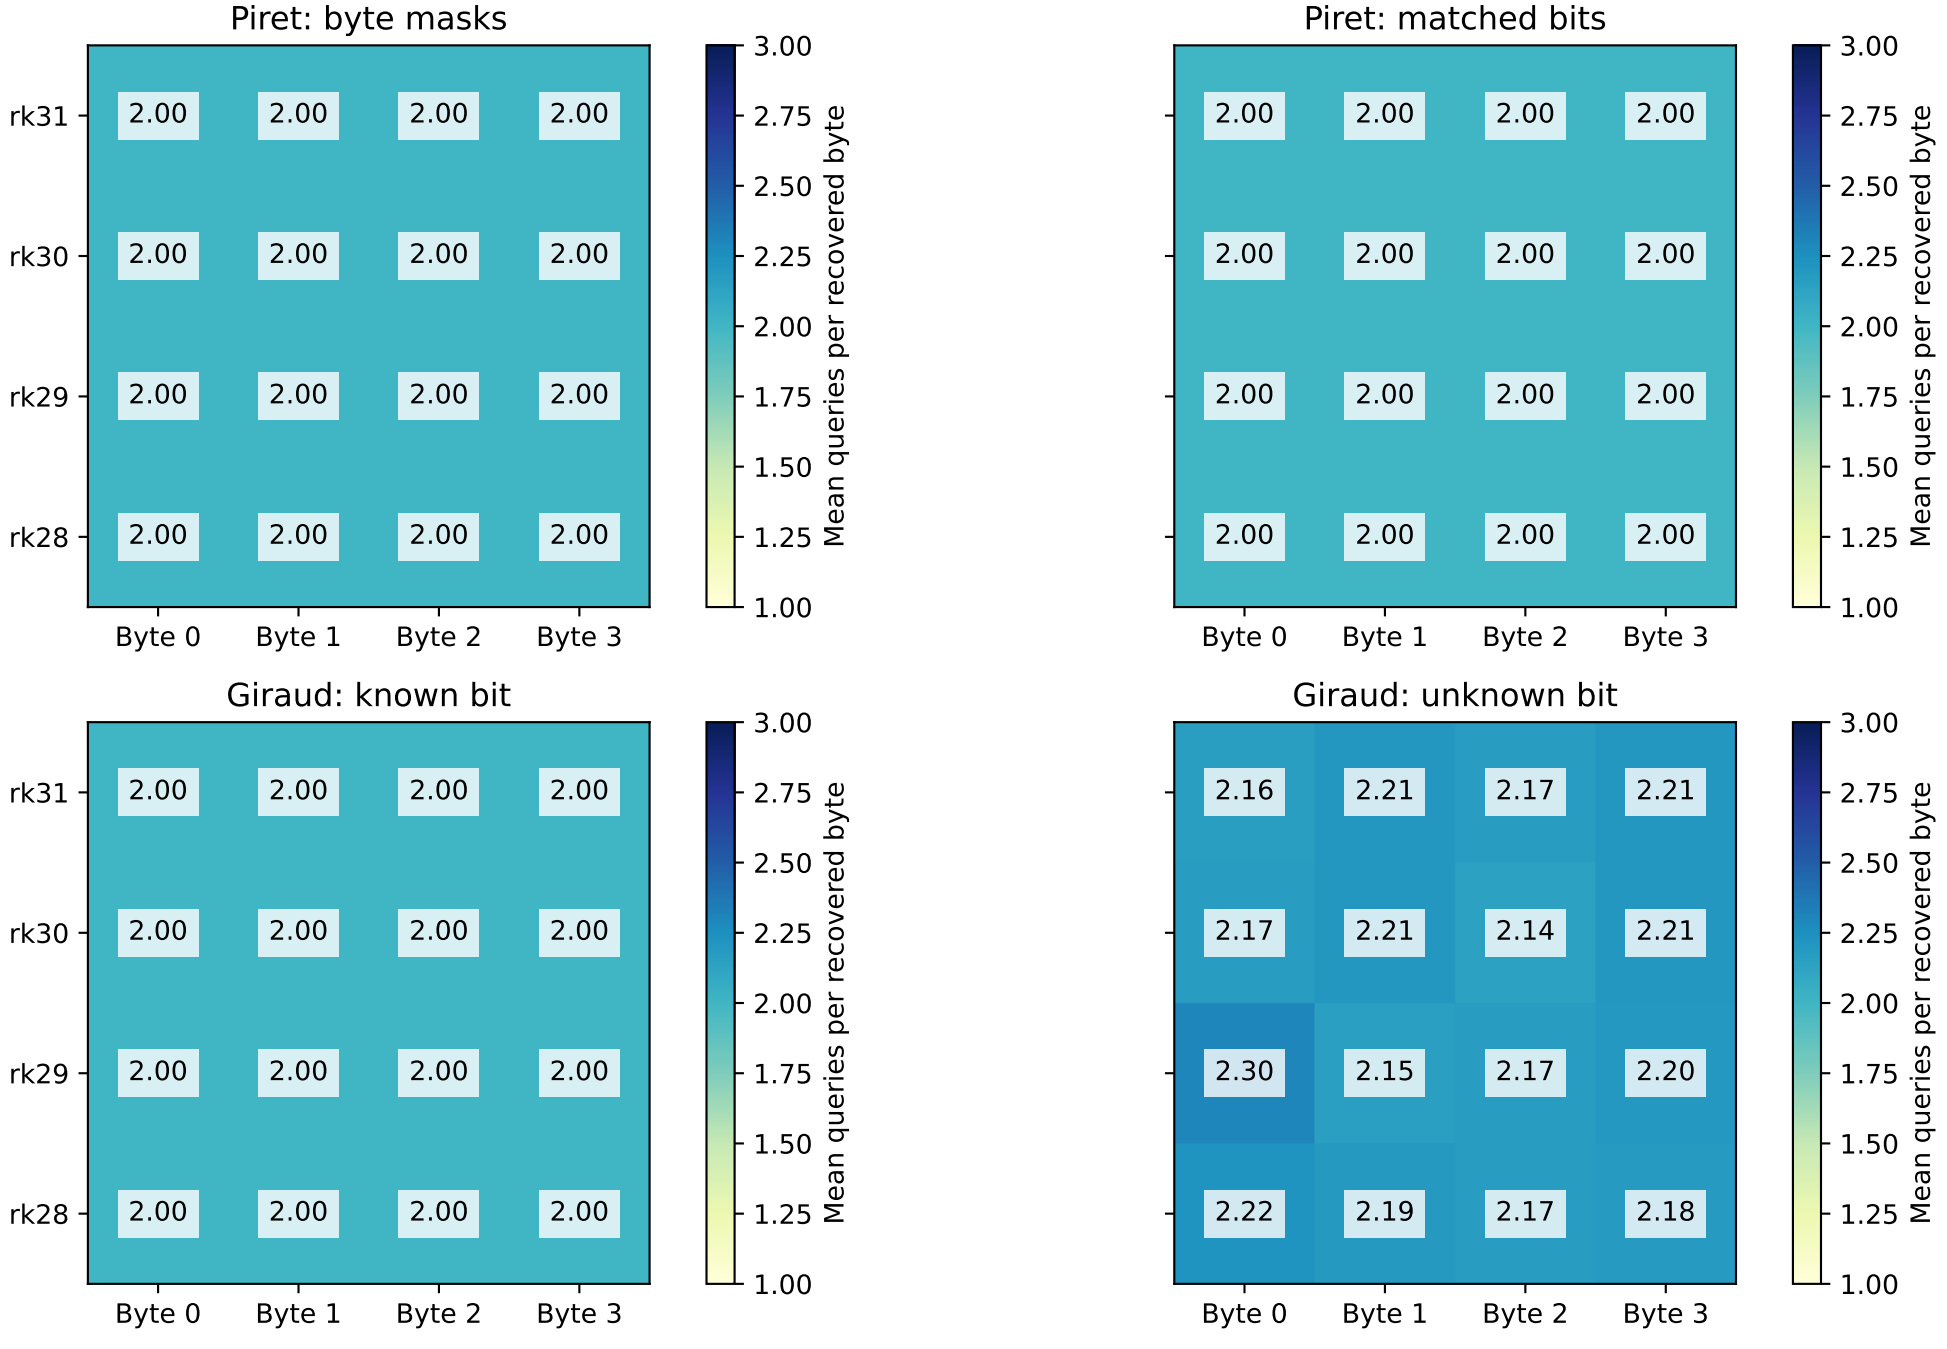

3. Recovery milestones: median and observed range

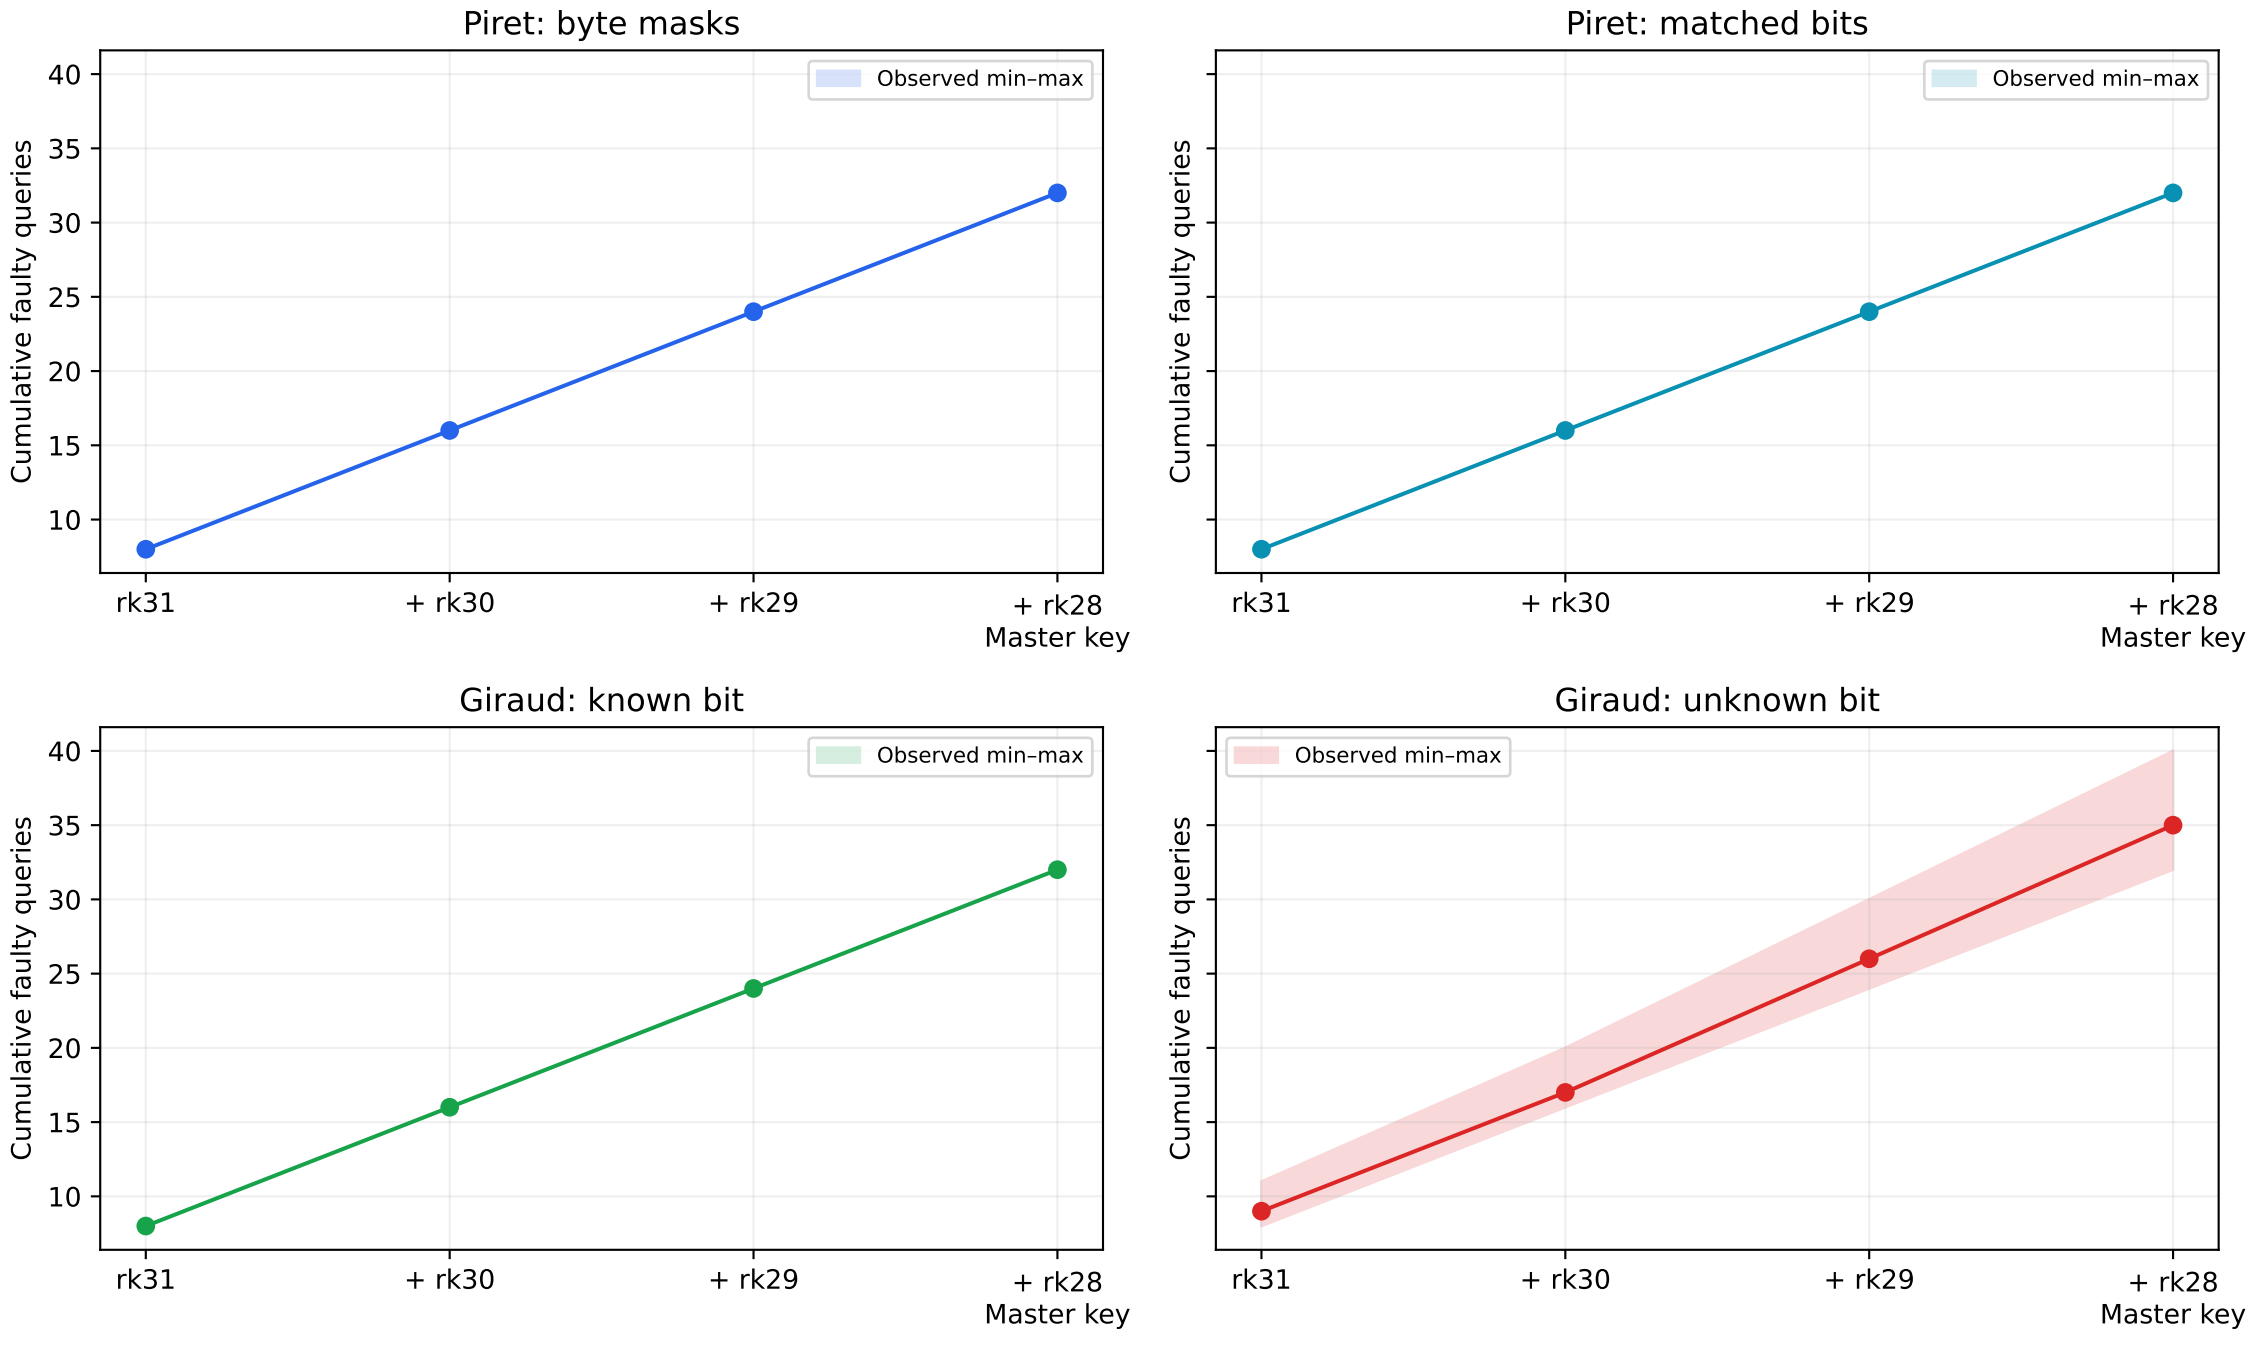
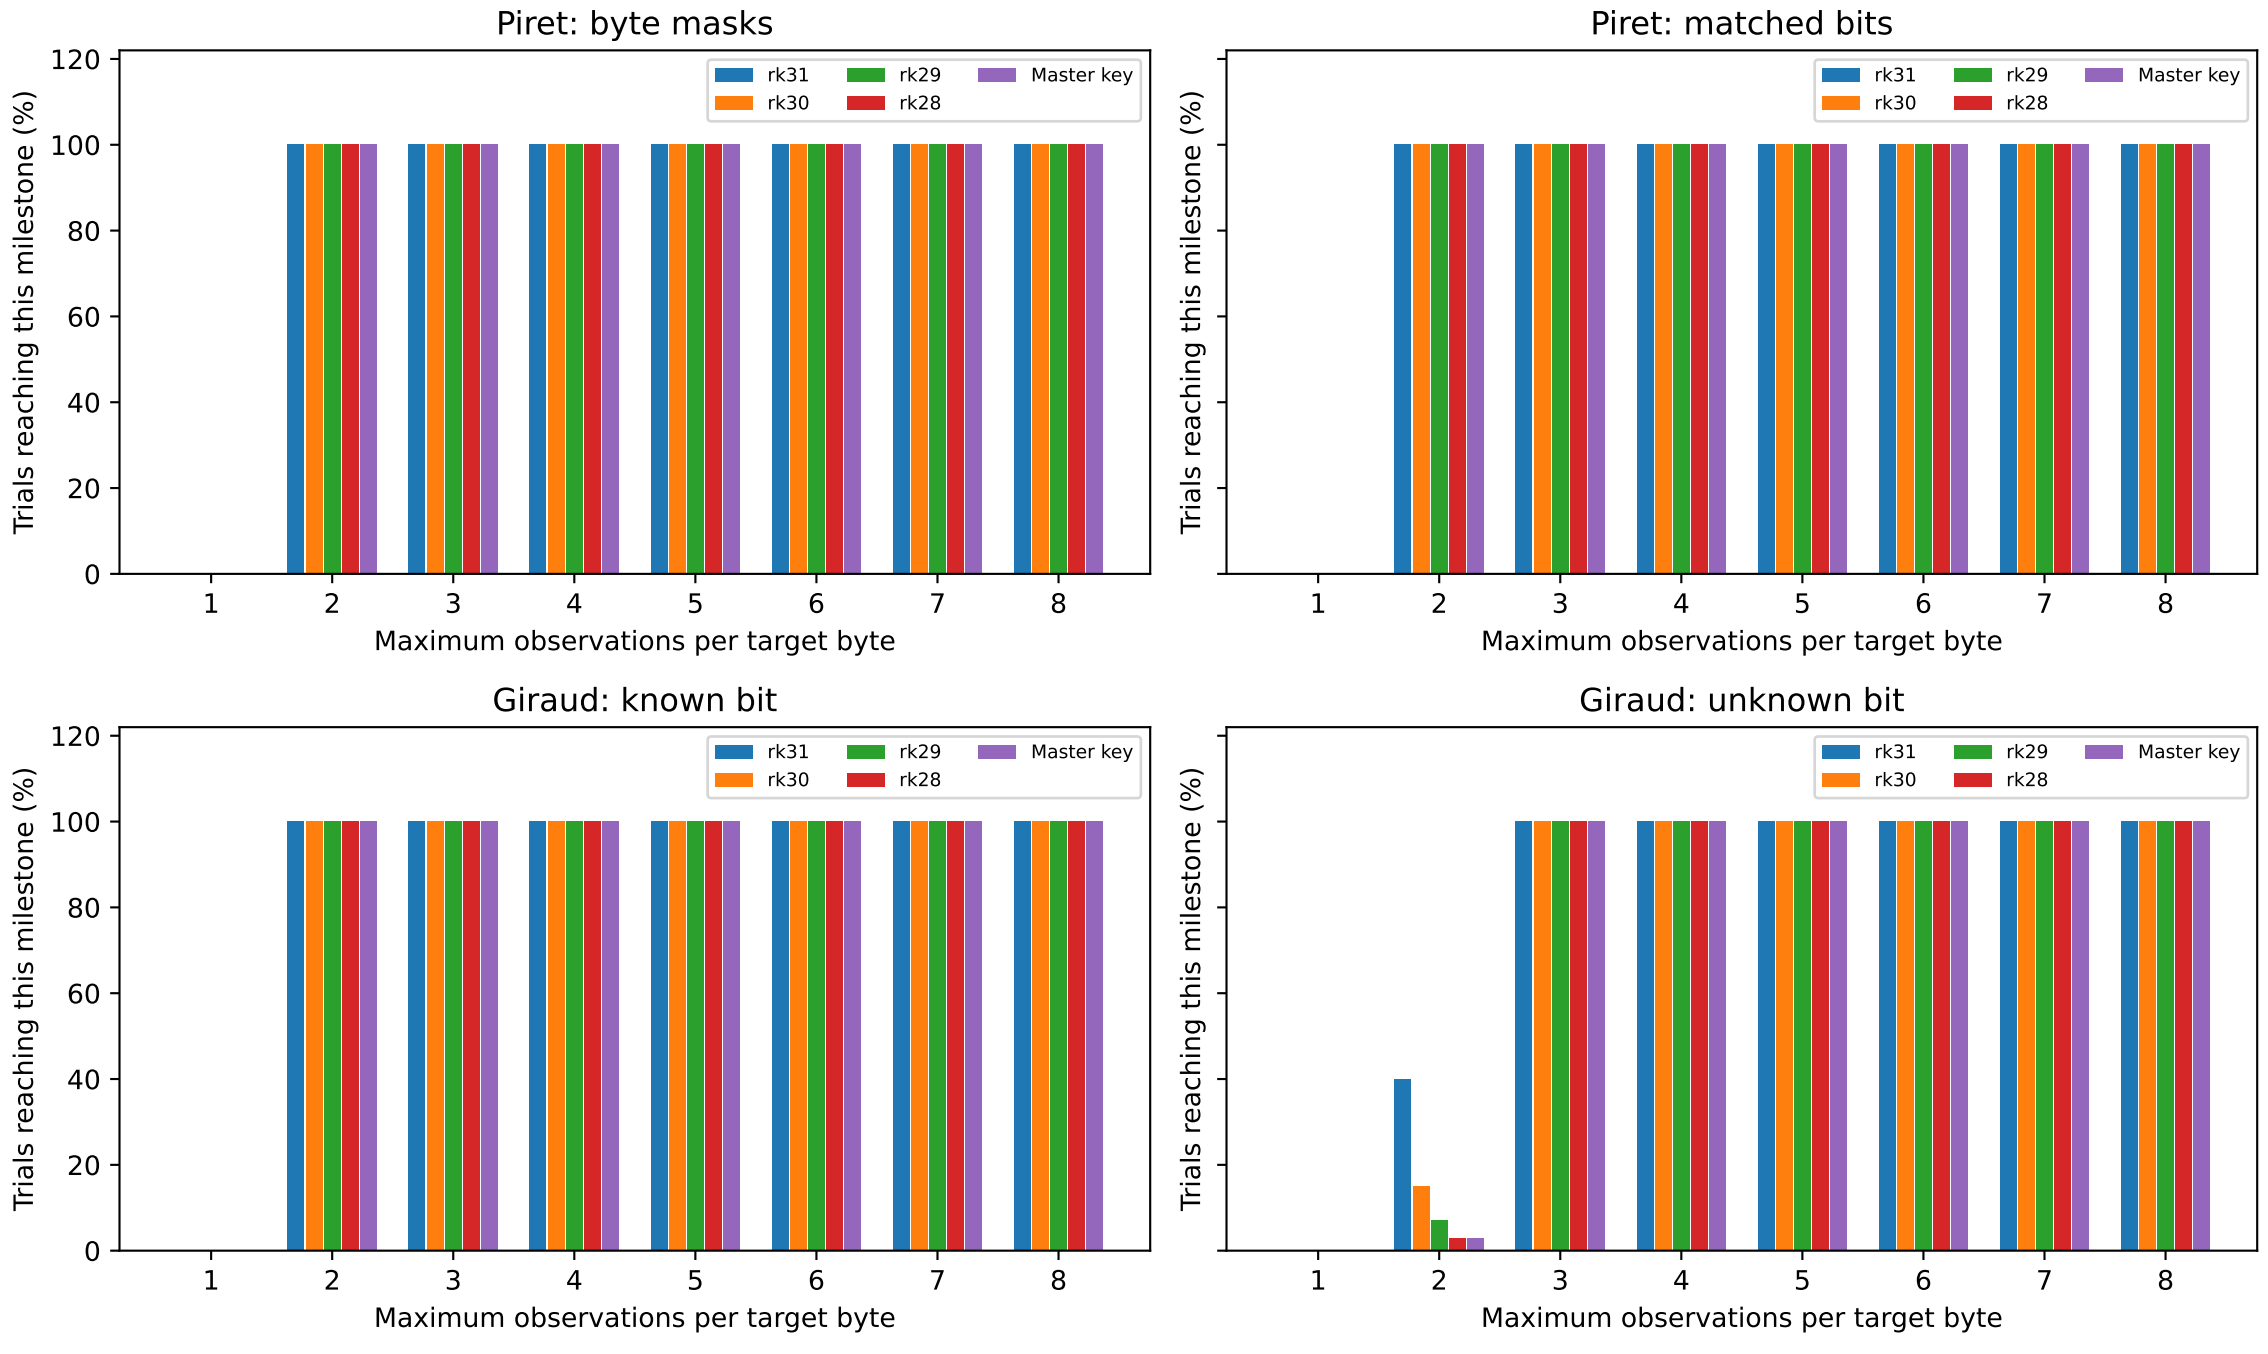
4. Partial subkey recovery versus complete master-key recovery