

## Project Cover Sheet

---

Student IDs : 58276105 /58316899/58340501  
Student Names : LIANG Tianyi /NIE Zhinie /CHEN Meng  
Student Emails :  
mchen288-c@my.cityu.edu.hk  
tyliang6-c@my.cityu.edu.hk  
zhinienie2-c@my.cityu.edu.hk

---

**Title:**

Categorizing and Visualizing Computer Science Research Paper with ArXiv Data

**Highlights: (maximum: 5 items)**

- Dataset analysis: Research papers from arXiv used to uncover trends.
  - Powerful computing resources: Hadoop, Spark for thorough analyses.
  - Techniques used: TF-IDF, data clustering, advanced visualization.
  - Mapping scholarly territory: Visualizing focal points of interest.
  - Highlighting research progress: Identifying crucial areas of advancement.
- 

## List of Deliverables

File Name	Description
report.pdf	Main Project Report
Bigdata.pptx	Project Powerpoint
TFIDFclustering.scala	Scala file used to generate TFIDF vectors and conduct K-means clustering
Knowledgegraph.ipynb	Ipynb file used to generate knowledge graph with and without parallel
ArticleAnalysis.ipynb	All records related to the project environment configuration, data cleaning, word cloud production process, including code and steps

----- END -----

**Title:**

Categorizing and Visualizing Computer Science Research Paper with ArXiv Data

**Abstract:**

This report, founded on a dataset of research papers from arXiv, categorizes papers within the computer science domain and visualizes the focal points of interest, with the aim of uncovering trends in the discipline and seeking inspiration for our future academic and career paths. Throughout the project, potent parallel computing resources like Hadoop and Spark, along with Python and R, were harnessed to conduct thorough analyses, unveiling the predominant trends in the arena. Employing techniques such as TF-IDF processing, data clustering, and cutting-edge visualization, the study sketches a map of the current scholarly territory, accentuating crucial research and technological progress areas.

---

## Introduction

Computer science is an ever-evolving discipline, burgeoning since its inception with a plethora of papers contributed by researchers around the globe. To decrypt the focal points of this subject in recent years, this report centers on categorizing research papers organized from the ArXiv repository. It specifically targets papers related to computer science, undertaking data processing and visualization. The mission of the project is twofold: on one hand, to reveal the trends that define the current state of computer science; on the other hand, as students of the School of Computer Science, we intend to draw on the conclusions from the identified trends to offer insights and guidance for our future academic pursuits and career trajectories. Harnessing the powerful parallel computing capabilities of Hadoop and Spark, and utilizing TF-IDF for hotspot analysis, combined with the analytical prowess of Python and R, the project conducts a meticulous analysis to identify the significant trends that shape the field.

## Motivation

As students deeply engaged with computer science, we have been voracious readers and learners within this expansive field. Despite our keen interest, the sheer breadth of computer science can be overwhelming. Limited by the information we can access through our coursework, we often find ourselves questioning which specific areas might best align with our future aspirations. This uncertainty fuels our motivation to seek a comprehensive view of the current research landscape in computer science. We aim to discern not just what the academic sphere is focusing on, but also how these focal points could influence our own academic and professional choices. In essence, we believe that a well-rounded understanding of the field's direction is crucial as we continue to cultivate our expertise in this discipline. Therefore, we embark on this project to gain clarity and hope to potentially illuminate a path forward for ourselves and others in similar

## Objective

The main objective of this project is to leverage the capabilities of big data analytics, particularly parallel computing based on Hadoop and Spark, to analyze and visualize current trends in computer science research. By meticulously collecting, processing, and analyzing a vast array of research papers from ArXiv, we will apply data mining techniques such as natural language processing and machine learning to systematically categorize topics and identify emerging patterns. This methodology enables us not only to pinpoint which areas are drawing significant scholarly attention but also to comprehend the dynamics behind these trends. Our ultimate goal is to provide ourselves and our peers with actionable insights that can inform our academic focus and career planning in an era marked by rapid technological advancement.

## Data Sources

The dataset employed for this project is sourced from the ArXiv repository, a distinguished archive for electronic preprints of scientific papers in areas such as mathematics, physics, astronomy, computer science, quantitative biology, statistics, and quantitative finance. For our specific investigation, we have selected the titles and abstracts of ArXiv papers spanning from 1993 to 2019 as our dataset<sup>1</sup>. The specific description of the dataset is shown in Table 1. This extensive time frame provides us with ample data, enabling a more rational and accurate analysis and understanding of the hotspots in the field of computer science.

Table 1 descriptions of data file

File Name	Data Attributes	Description
arxiv-abstracts-all.txt	Format	TXT
	Size	1.79GB
	Record Count	1578655
arxiv-titles-all.txt	Format	TXT
	Size	114.14MB
	Record Count	1578655

## Methodology

### Overall workflow

Our methodology harnesses big data tools and technologies. Initially, the research papers sourced from ArXiv are ingested into our data processing pipeline, where they are stored using Hadoop's Distributed File

---

<sup>1</sup> Data Source: <https://www.kaggle.com/datasets/tayorm/arxiv-papers-metadata>

Categorizing and Visualizing Computer Science Research Paper with ArXiv Data System (HDFS). Subsequently, Spark's robust data processing capabilities are employed to clean and structure the data. Natural language processing (NLP) techniques, including TF-IDF, are applied to extract meaningful topics and conduct topic modeling. Post clustering, the data is visualized using various tools to elucidate and display trends clearly.

For the visualization aspect, we utilize tools like word clouds to represent the most frequent research terms in the computer science field. This approach allows us to visually capture and highlight the predominant themes and vocabularies in the discipline. By analyzing these word clouds, we can readily identify the most prominent keywords, shedding light on the areas that are receiving significant academic focus. For example, terms like 'artificial intelligence', 'machine learning', 'data mining', and 'neural networks' may emerge as some of the most recurrent words, indicating prevailing interests and research directions in computer science. Our overall workflow is shown in Figure 1.

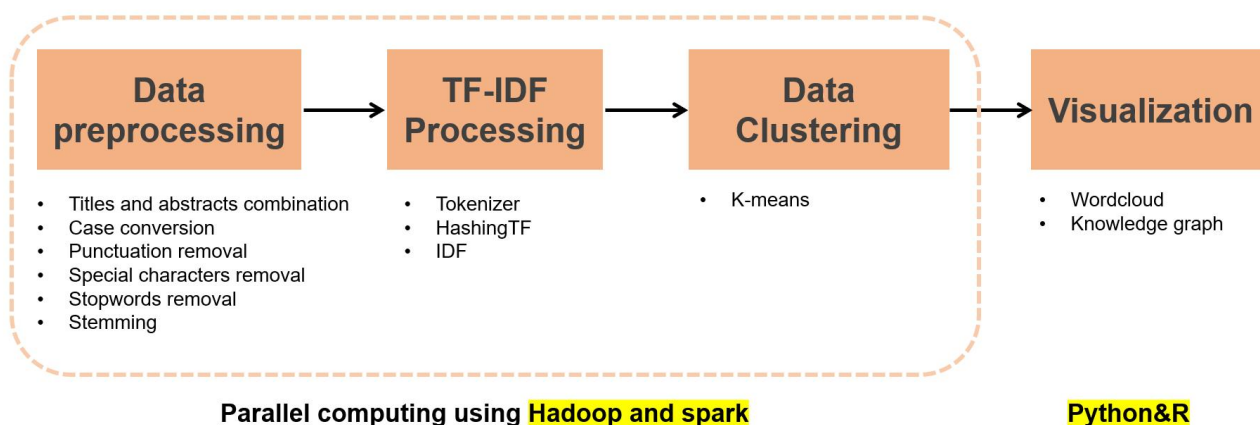


Figure 1 overall workflow

## Specific implementation

### Data preprocessing

Given that the text data is raw and unprocessed, containing original formatting with no stemming, punctuation removal, or case normalization applied, shown in figure 2, we conducted data preprocessing before analyzing.

```

Lindblad rate equations
Grand Unified Theories From Superstrings
Scaling limits for the threshold window: When does a monotone Boolean function flip its outcome?
Coexistence of double alternating antiferromagnetic chains in (V0)_2P_2O_7 : NMR study
The Giant Gemini GMOS survey of z>4.4 quasars – I. Measuring the mean free path across cosmic time
Y-type Flux-Tube Formation and Gluonic Excitations in Baryons: From QCD to Quark Model
"Stress Driven Morphological Instabilities in Rocks, Glass, and Ceramics"
Anomaly-free scalar perturbations with holonomy corrections in loop quantum cosmology
Evaluation of Harmonic Sums with Integral

```

Figure 2 raw text data

**Configuring environment:** We deployed Apache Spark 3.5.0 on our virtual machine due to the old version of Spark lacks equivalent support for Natural Language Processing (NLP) and Machine Learning (ML). Using Spark version 3.5.0 made it easier for us to process text data.

**Data loading:** Abstracts and titles of papers were read and analyzed from HDFS.

Categorizing and Visualizing Computer Science Research Paper with ArXiv Data

**Combination** : The title file and abstracts file were merged together for each record.

**Conversion to Lowercase**: By invoking the toLowerCase() function, we converted the text to lowercase.

**Removal of Non-Alphanumeric Characters**: We used regular expressions to remove all non-alphanumeric characters, such as punctuation.

**Removal of Stopwords**: Common stop words were removed using the StopWordsRemover from the Spark ML library.

**Stemming**: Stemming was performed using the Spark NLP library, which reduced words to their base form.

The preprocessed data is shown in the figure 3:

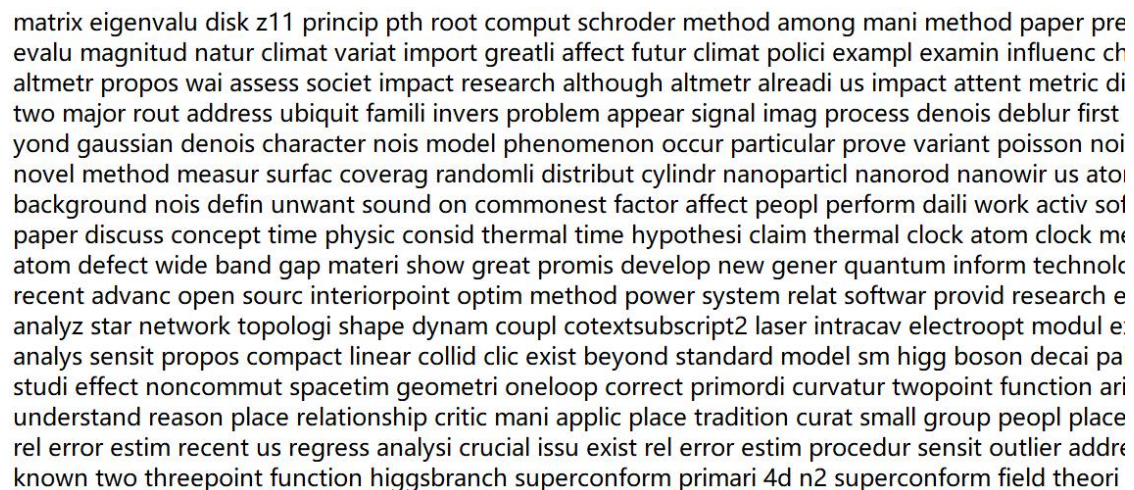


Figure 3 the preprocessed data

## TF-IDF Processing

**Tokenization**: We utilized the Tokenizer to segment text data into a list of words, transforming each abstract into a series of individual words.

**Frequency Transformation**: We applied HashingTF to calculate the frequency of each word and mapping these words to a fixed-size vector space. After the HashingTF transformation, Spark internally converted DataFrames into RDDs for processing.

**Inverse Document Frequency Transformation**: We used IDF to transform term frequency features, thereby generating TF-IDF vectors.

Compared to traditional TF-IDF techniques, we utilized HashingTF and IDF methods for text processing, which are better suited for large datasets and can reduce computing time.

However, we also encountered situations where HashingTF mapped different texts to the same feature index, resulting in information loss.

RDD was used to transform TF-IDF vectors into dense vectors, which was to meet the formatting requirements of the K-Means input. RDD is particularly effective in handling complex data transformations that require large-scale parallel computing.

The result of TFIDF processing is shown in the figure 4.



```
(10000,[551,735,1073,1182,1614,1785,1804,1904,1990,2025,2062,2158,2324,3599,4241,4757,4835,5617,5649,6002,6192,6313,6342,6403,
16021672739,3.6088483911298717])
(10000,[1376,1828,2372,2996,3123,3320,3348,3471,3614,3690,3886,4265,4506,5452,5664,6052,6313,6660,6967,6985,7055,7785,7873,84
439768033892,15.659523520555924,3.7042413815257187,3.0022516084883093,3.0701969797787583,3.19558161782554,7.163978975
(10000,[941,1000,1073,1594,2402,2833,3061,3519,3686,3691,4344,4364,4416,4445,4599,5591,6260,6621,7102,7150,7445,7689,7698,781
(10000,[161,531,576,606,787,907,924,1216,1472,1484,1516,1721,1797,1924,2069,2093,2549,2802,2894,2926,3193,3349,3783,3792,3899,
1228945845,2.0921651851741045,6.78433070806825,7.283442622102655,0.9635115597481017,3.3260627999954924,2.315672224156
(10000,[239,382,536,696,1268,1372,1491,1573,1594,1671,1720,1810,2188,2598,2628,2828,3519,3645,3886,3996,4019,4056,4344,4416,4
56962056672472,4.8655050830839865,1.62990851713811,2.217375199996995,4.315857902172191,2.8240298665837993,3.189846639
(10000,[39,264,620,763,922,1055,1073,1541,1769,2831,2890,2954,3024,3497,3550,3768,3996,4165,4189,4267,4416,4472,4649,4651,504
26,3.775108365322853,8.27120514070241,12.232945168459956,1.7155967626626698,7.16792973498081,7.094341378323321,3.74325
(10000,[263,264,303,343,476,532,587,635,740,1161,1491,1532,1896,1964,2345,2402,2403,2490,2753,2918,2958,3048,3107,3305,3487,36
655,6.342160666179183,4.205153427071787,3.8352058791694197,3.333298408854644,9.389210098932844,3.6970932260534957,2.69
(10000,[399,585,662,1923,2436,2945,3601,3949,4019,5346,6142,6228,6242,6355,6505,7336,7369,7844,8076,8159,8512,8572,8786,8877,9
(10000,[257,585,668,1268,1895,2093,2410,2613,2828,2923,3348,3382,3599,3700,3783,3921,4267,4770,4881,4929,5342,5378,5415,5756,6
(10000,[28,572,617,652,1195,1390,1424,1695,1720,1921,1994,2082,2158,2254,2722,2844,3348,3349,3495,3702,3883,4019,4032,4179,419
5,2.7861758647765016,5.520670689747852,3.2901594400560734,3.6064705145894322,5.839649768921547,8.655789582492478,6.881
(10000,[157,735,1073,1182,1614,1785,1804,1904,1990,2025,2062,2158,2324,3599,4241,4757,4835,5617,5649,6002,6192,6313,6342,6403,
16021672739,3.6088483911298717])
```

Figure 4 the TFIDF data

## Data Clustering

When performing clustering with K-means, we chose 8 clusters, based on the main academic fields of ArXiv. ArXiv encompasses a range of key areas from mathematics and physics to computer science, representing the most active and extensively researched topics on the platform.

We found that the output results from Spark can be unordered, so we paired the samples and labels during the Spark runtime in order to generate the desired output. We have also adopted this approach in data preprocessing and vectorization.

The clustering results are shown in the figure 5.

```
scala>
scala> // Show the cluster assignments
scala> finalPredictions.show()
+-----+-----+
|_c0|prediction|
+-----+-----+
|order minim envir...|1|
|revisit connect t...|0|
|appli unitar boun...|0|
|find fe iilambda...|7|
|whether neural ne...|2|
|matrix eigenvalu...|0|
|background nois d...|2|
|review aspect cut...|0|
|import unsolv pro...|0|
|paper describ des...|0|
|studi collect ann...|0|
|energi evolut flu...|0|
|cosmologi larg an...|4|
|paper deal homoge...|0|
|geometr flow theo...|0|
|metric space phyl...|2|
|studi experiment...|4|
|unpair imagoitoima...|2|
|give simpl proof...|0|
|a3cr208 sr ba cr5...|4|
+-----+-----+
only showing top 20 rows
scala>
```

Figure 5 the clustering results

We reviewed the abstracts of different clusters and identified clusters related to computer science. We used the corresponding abstracts for data visualization later. The abstracts of the CS field are shown in Figure 6.

## Categorizing and Visualizing Computer Science Research Paper with ArXiv Data

	A	B	C	D	E	F	G	H	I	J	K
1	Because of	their occasional need to return to shallow points in a search tree, existing backtracking methods can sometimes era									
2	Market price systems constitute a well-understood class of mechanisms that under certain conditions provide effective decentr										
3	We describe an extensive study of search in GSAT, an approximation procedure for propositional satisfiability. GSAT performs										
4	As real logic programmers normally use cut (!), an effective learning procedure for logic programs should be able to deal with										
5	To support the goal of allowing users to record and retrieve information, this paper describes an interactive note-taking system										
6	Terminological knowledge representation systems (TKRSs) are tools for designing and using knowledge bases that make use o										
7	A formalism is presented for computing and organizing actions for autonomous agents in dynamic environments. We introdu										
8	Learning the past tense of English verbs - a seemingly minor aspect of language acquisition - has generated heated debates s										
9	The ability to identify interesting and repetitive substructures is an essential component to discovering knowledge in structural										
10	The theory revision problem is the problem of how best to go about revising a deficient domain theory using information cont										
11	We report on a series of experiments in which all decision trees consistent with the training data are constructed. These experin										
12	This paper analyzes the correctness of the subsumption algorithm used in CLASSIC, a description logic-based knowledge repr										
13	In this paper we describe how to modify GSAT so that it can be applied to non-clausal formulas. The idea is to use a particular										
14	Given a knowledge base KB containing first-order and statistical facts, we consider a principled method, called the random-wc										
15	Information extraction is the task of automatically picking up information of interest from an unconstrained text. Information o										
16	This article describes a new system for induction of oblique decision trees. This system, OC1, combines deterministic hill-climb										
17	This paper introduces a framework for Planning while Learning where an agent is given a goal to achieve in an environment wh										
18	This paper is a multidisciplinary review of empirical, statistical learning from a graphical model perspective. Well-known exam										
19	For many years, the intuitions underlying partial-order planning were largely taken for granted. Only in the past few years has t										
20	The vast amounts of on-line text now available have led to renewed interest in information extraction (IE) systems that analyze										
21	Multiclass learning problems involve finding a definition for an unknown function f(x) whose range is a discrete set containing k										
22	The paradigms of transformational planning, case-based planning, and plan debugging all involve a process known as plan ac										
23	Temporal difference (TD) methods constitute a class of methods for learning predictions in multi-step prediction problems, pa										
24	The DNA promoter sequences domain theory and database have become popular for testing systems that integrate empirical										
25	This paper introduces ICET, a new algorithm for cost-sensitive classification. ICET uses a genetic algorithm to evolve a populati										

Figure 6 the cs abstracts

The TFIDF and clustering codes are shown in figure 7.

```
import org.apache.spark.ml.feature.{HashingTF, IDF, Tokenizer}
import org.apache.spark.ml.clustering.KMeans
import org.apache.spark.mllib.linalg.Vector
import org.apache.spark.sql.{Row, SparkSession}
import org.apache.spark.sql.functions._

val spark = SparkSession.builder.appName("TFIDFClustering").getOrCreate()

// Read the CSV file
val data = spark.read.option("header", "false").csv("hdfs://arxiv_data/combined_abstracts.csv")
// Assuming the column name in the CSV is "_c0" (default column name for CSV without header)
val textColumn = "_c0"
// Tokenize the text column
val tokenizer = new Tokenizer().setInputCol(textColumn).setOutputCol("words")
val wordsData = tokenizer.transform(data)

// Apply TF (term frequency) on the tokenized words
val hashingTF = new HashingTF().setInputCol("words").setOutputCol("rawFeatures").setNumFeatures(10000)
val featurizedData = hashingTF.transform(wordsData)
// Apply IDF (inverse document frequency) on the TF features
val idf = new IDF().setInputCol("rawFeatures").setOutputCol("features")
val idfModel = idf.fit(featurizedData)
val tfidfData = idfModel.transform(featurizedData)

// Save the TF-IDF vectors to a file
// val outputData = tfidfData.select("features").rdd.map { case Row(features) => features }
// outputData.saveAsTextFile("hdfs://arxiv_data/jieguo")

// Convert the TF-IDF features to dense vectors
val denseVectorData = tfidfData.select("features").rdd.map { case Row(features: Vector) => features.toDense }.toDF("denseFeatures")
// Set the number of clusters
val k = 8
// Create a K-means instance
val kmeans = new KMeans().setK(k).setSeed(1L)

// Fit the model to the data
val model = kmeans.fit(denseVectorData)
// Get the cluster assignments for the data
val predictions = model.transform(denseVectorData)

val wordsDataWithId = wordsData.withColumn("id", monotonicallyIncreasingId())
val predictionsWithId = predictions.withColumn("id", monotonicallyIncreasingId())
val finalPredictions = wordsDataWithId.join(predictionsWithId, Seq("id")).select(textColumn, "prediction")
// Join the original data with the predictions
val finalPredictions = wordsData.zip(predictions).map { case (wordsRow, predictionsRow) => (wordsRow.getAs[String], predictionsRow.getAs[Int]) }.toDF(textColumn, "prediction")
// Show the cluster assignments
finalPredictions.show()
// Save the cluster assignments to a file
finalPredictions.select(textColumn, "prediction").write.csv("hdfs://arxiv_data/finalPredictions.csv")
spark.stop()
```

Figure 7 TFIDF and Clustering codes

## Visualization

### Wordcloud

To create Wordcloud Visualization and the resultant figure, we utilized the R language with RStudio, where we based it on the abstracts' most frequent words. First, we installed and loaded the relevant R packages which include: wordcloud2 used in the creation of a word cloud, tm for text mining, readr for data read, and

All the summarized abstracts were put together in one huge text. We do this by reading blocks of data from a CSV and then merging the generated summaries from these chunks. Hence, we made sure to handle the information bit by bit in order to minimize memory consumed.

After that, we created the word cloud. We uploaded a PNG file to serve as a template for the shape of our word cloud, transforming the text into a visually appealing display. We carefully adjusted its size, shape, color, and background to enhance readability and visual impact.

The usage of this approach allowed us to offer the major ones by terms of the computer science abstracts in readable manner. This helped us to concentrate on main topics and important keyword in the dataset. The last result of the word cloud is shown in figure 11 of the report.

### **Knowledge graph**

Based on the entity library `en_core_web_sm` in NLTK, we selected the top 70 entities with the highest frequency from the cs abstracts, and used them to create a knowledge graph.

We used the Python to build the knowledge graph, and due to the input of over 100000 records, it took a long time to run. We also tried Python's Multiprocessing library for parallelism, which reduced the runtime but was not significant. We also tried the Joblib library, but it couldn't run successfully. In fact, this task is not particularly suitable for parallel computing in Python, because there are some logical dependencies between the code. The python code with multiprocessing is shown in Figure 8. The code runtime is shown in Figure 9.



文件(F) 编辑(E) 格式(O) 查看(V) 帮助(H)

```
import csv
import spacy
import networkx as nx
import matplotlib.pyplot as plt
from collections import Counter
from multiprocessing import Pool
# 加载预训练的英文模型
nlp = spacy.load('en_core_web_sm')
# 读取CSV文件
abstracts = []
with open('cs-abstracts-sample.csv', 'r', encoding='utf-8') as file:
    reader = csv.reader(file)
    for row in reader:
        abstracts.extend(row)
# 提取实体
def extract_entities(abstract):
    doc = nlp(abstract)
    entities = [ent.text for ent in doc.ents if ent.label_ in ['PRODUCT', 'CONCEPT', 'ORG', 'LANGUAGE', 'SOFTWARE', 'TECHNOLOGY', 'WORK_OF_ART']] # 仅提取人名、组织机构和地名实体
    return entities
# 并行提取实体
with Pool() as pool:
    all_entities = pool.map(extract_entities, abstracts)
# 合并实体列表
all_entities = [entity for entities in all_entities for entity in entities]
# 统计实体出现次数
entity_counts = Counter(all_entities)
# 选择前70个频率最高的实体
top_50_entities = [entity for entity, count in entity_counts.most_common(70)]
# 创建知识图谱
graph = nx.Graph()
# 构建边
for abstract in abstracts:
    doc = nlp(abstract)
    entities = [ent.text for ent in doc.ents if ent.text in top_50_entities]
    for i, entity1 in enumerate(entities):
        for j, entity2 in enumerate(entities):
            if i != j:
                graph.add_edge(entity1, entity2)
# 可视化图谱
plt.figure(figsize=(30, 24))
cmap = plt.cm.get_cmap('Reds') # 选择颜色映射, 这里使用蓝色调色板
# 生成颜色列表
colors = [cmap(i / 70) for i in range(70)]
pos = nx.spring_layout(graph)
nx.draw_networkx_nodes(graph, pos, node_color=colors, node_size=1700)
nx.draw_networkx_edges(graph, pos, edge_color='lightblue')
nx.draw_networkx_labels(graph, pos, font_size=15, font_family='sans-serif')
plt.axis('off')
# 保存图谱为PNG图像
plt.savefig('knowledge_graph2.png', dpi=300)
```

Figure 8 the python with multiprocessing code

Tool used	Run time
Python only	1h 28min 38sec
Python with Multiprocessing	55 min 5sec

Figure 9 the python runtime

## Results and Analysis

This study, through a meticulous analysis of the ArXiv dataset, constructs a knowledge graph (shown in figure 10) and word cloud (shown in figure 11) that illuminates the core topics commanding widespread attention in the field of computer science.



**Knowledge Graph Insights:** The frequent occurrence of terms such as "CNN", "RNN", and "GAN" within the knowledge graph underscores the pivotal role of deep learning techniques in contemporary research. Their prevalence in specialized domains like image and speech processing, as well as in the generation of new types of data, speaks to the depth of their integration into current scientific inquiry. Moreover, the graph's emphasis on "GPU" showcases the indispensable role of high-performance computing, particularly in the computationally intensive training phase of deep learning models.

# Categorizing and Visualizing Computer Science Research Paper with ArXiv Data

Figure 11 the word cloud

Other frequently occurring terms, such as "gradient descent," "classifier," and "convolutional network," demonstrate the cross-disciplinary application of deep learning techniques. They offer a window into the methods employed by researchers to expand the horizons of computer science and provide indicators of potential future trajectories.

## Discussion

Categorizing and Visualizing Computer Science Research Paper with ArXiv Data  
the stemmed words may be necessary to improve the overall quality of our results.

Another problem we faced was the information loss caused by using HashingTF in Hadoop and Spark. HashingTF is a technique commonly employed for feature extraction in text mining tasks, but it has the drawback of potential collisions, where different words may map to the same hash value, leading to loss of information. To mitigate this issue, we can consider using alternative feature extraction methods that preserve the original representation of words, such as term frequency-inverse document frequency (TF-IDF) or word embeddings. These methods can provide richer and more accurate representations of the text data, reducing the risk of information loss during the clustering process.

While our arXiv paper repository covers a wide range of eight different domains, we encountered difficulties in accurately clustering the abstracts into distinct clusters representing each field. Specifically, we noticed that the computer science domain had two separate clusters, while the mathematics and physics domains seemed to be intertwined. Since our focus was primarily on the computer science domain, we did not delve into the reasons behind this issue. To address this limitation, we could explore domain-specific clustering techniques or consider incorporating additional features, such as author affiliations or citation networks, to improve the clustering performance in different fields. Conducting further analysis and investigation into the clustering results would provide a more comprehensive understanding of the relationships between different research areas.

A discrepancy was observed between the entities presented in the knowledge graph (created using Python) and the words displayed in the word cloud (created using R). The lack of correspondence between the entities and the words in the word cloud raises questions about the consistency and accuracy of our data processing pipeline. To investigate this issue, we need to carefully examine the data transformation and preprocessing steps in both the Python and R components. Potential reasons for the mismatch could include differences in data sources, processing methods, or inconsistencies in data representation between the two tools. By identifying and addressing these discrepancies, we can ensure that the entities in the knowledge graph align with the words displayed in the word cloud, improving the overall coherence and reliability of our project's visualizations.

In conclusion, while our project generated some general insights using the knowledge graph and word cloud, several issues need to be addressed. These include the lack of reasonable outcomes after word stemming, information loss due to HashingTF, difficulties in accurately clustering abstracts into distinct domains, and a discrepancy between the entities in the knowledge graph and the words in the word cloud. By exploring alternative techniques, conducting further analysis, and ensuring consistency in data processing, we can enhance the quality and reliability of our project's results.



## Conclusion

In summary, we conclude that the focal points of current computer science research are primarily on the development of deep learning and the exploration of advanced algorithms within the field of machine learning. The research in these areas captivates not only due to its technical complexity but also for its potential in real-world applications. Our analysis underlines the importance of computing power and algorithmic innovation in driving the frontiers of research, and can also offer valuable guidance to students and researchers seeking their niche in the advancement of technology.

More specifically, the studies into deep learning and neural networks present us with new methodologies to tackle complex problems across various domains, including medical diagnosis, autonomous vehicles, and personalized learning. These insights can guide our academic pursuits and aid in making more informed career choices, gravitating towards technology sectors with high growth potential and societal impact.

--- END ---