


Practical Task (L3T10)

1. The “macdonalds.com” domain is reachable. As the screenshot shows, a ping test from the Kali Linux terminal successfully sent 16 packets to macdonalds.com with 0% packet loss. A nslookup query also confirmed successful DNS resolution, returning a non-authoritative answer with the same IP Address: 64.190.63.222

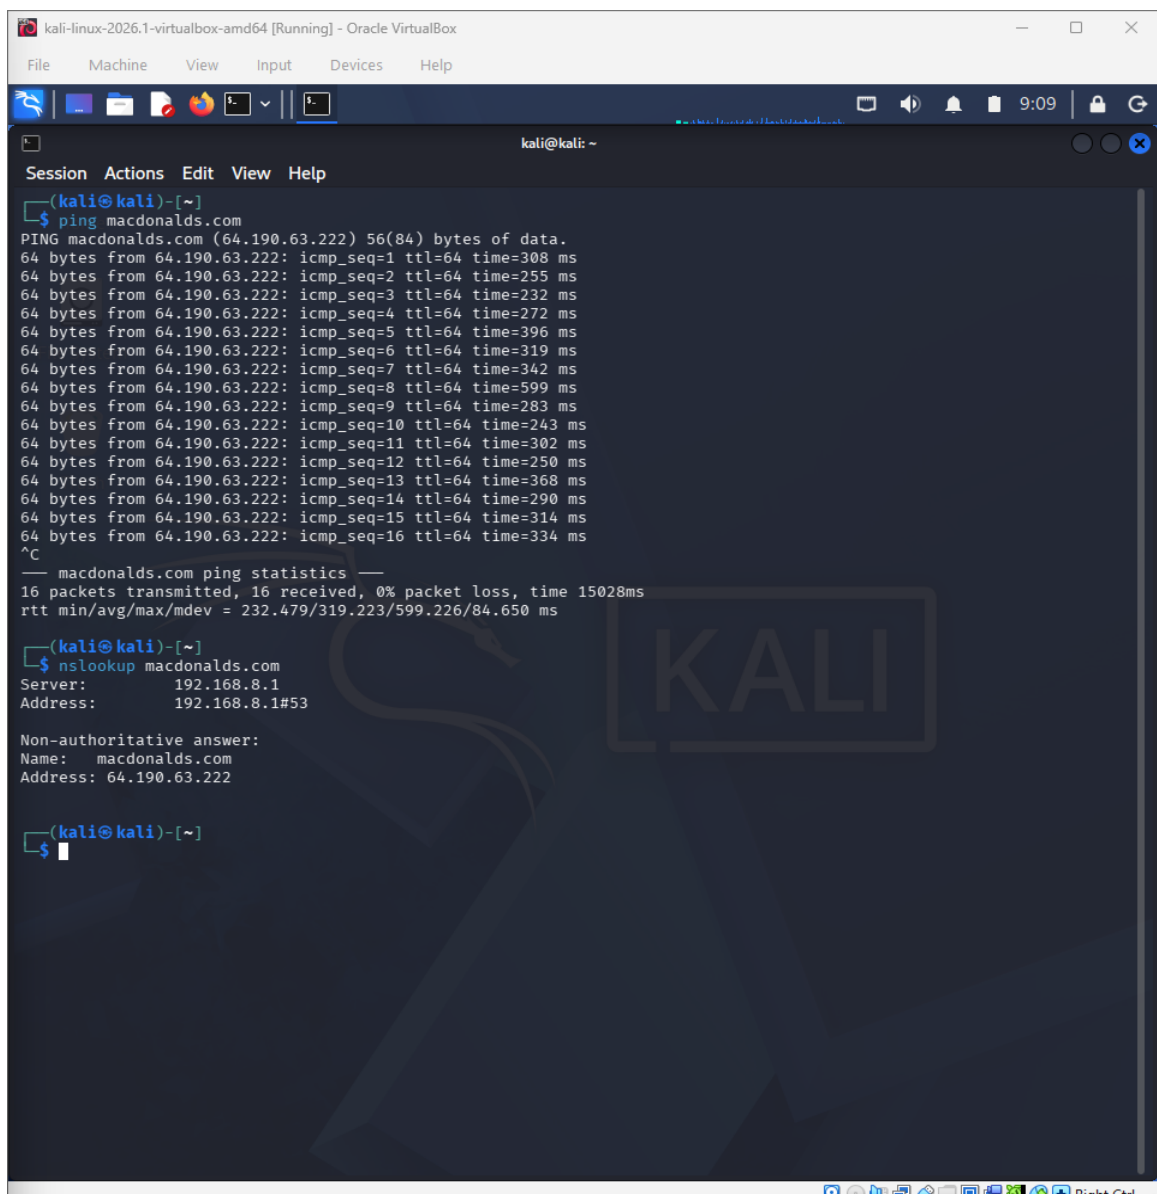

```
kali-linux-2026.1-virtualbox-amd64 [Running] - Oracle VirtualBox
File Machine View Input Devices Help

kali@kali: ~
Session Actions Edit View Help

(kali@kali)-[~]
$ ping macdonalds.com
PING macdonalds.com (64.190.63.222) 56(84) bytes of data:
64 bytes from 64.190.63.222: icmp_seq=1 ttl=64 time=308 ms
64 bytes from 64.190.63.222: icmp_seq=2 ttl=64 time=255 ms
64 bytes from 64.190.63.222: icmp_seq=3 ttl=64 time=232 ms
64 bytes from 64.190.63.222: icmp_seq=4 ttl=64 time=272 ms
64 bytes from 64.190.63.222: icmp_seq=5 ttl=64 time=396 ms
64 bytes from 64.190.63.222: icmp_seq=6 ttl=64 time=319 ms
64 bytes from 64.190.63.222: icmp_seq=7 ttl=64 time=342 ms
64 bytes from 64.190.63.222: icmp_seq=8 ttl=64 time=599 ms
64 bytes from 64.190.63.222: icmp_seq=9 ttl=64 time=283 ms
64 bytes from 64.190.63.222: icmp_seq=10 ttl=64 time=243 ms
64 bytes from 64.190.63.222: icmp_seq=11 ttl=64 time=302 ms
64 bytes from 64.190.63.222: icmp_seq=12 ttl=64 time=250 ms
64 bytes from 64.190.63.222: icmp_seq=13 ttl=64 time=368 ms
64 bytes from 64.190.63.222: icmp_seq=14 ttl=64 time=290 ms
64 bytes from 64.190.63.222: icmp_seq=15 ttl=64 time=314 ms
64 bytes from 64.190.63.222: icmp_seq=16 ttl=64 time=334 ms
^C
--- macdonalds.com ping statistics ---
16 packets transmitted, 16 received, 0% packet loss, time 15028ms
rtt min/avg/max/mdev = 232.479/319.223/599.226/84.650 ms

(kali@kali)-[~]
$ nslookup macdonalds.com
Server:      192.168.8.1
Address:     192.168.8.1#53

Non-authoritative answer:
Name:   macdonalds.com
Address: 64.190.63.222

(kali@kali)-[~]
$
```

2. The “macdonalds.com” IP Address is: 64.190.63.222 (IPv4 address).

3. Solutions:

- Change/reset password immediately to a different unique password and activate 2-factor authentication.
- Check if your password was reused elsewhere and change those too as sometimes emails can be used as login credentials across other websites and accounts.
- Monitor your email for further phishing and suspicious activity. Services such as “Have I Been Pwned” to check what data was exposed and monitor for future breaches.

4. The first 7 subdomains are:

- www.burgerking.com
- burgerking.com
- captainasshead.com
- burger-king.com
- altmedhealth.com
- android.burgerking.eu
- burgerking.co.at

5. It is **core-js**

6. Amanda Sue won a Samsung Galaxy A20