

Instructions for setting up SonarQube and analysing the Saleor code

Make sure you have Java installed

Download the SonarQube community edition:

<https://www.sonarsource.com/products/sonarqube/downloads/>

Unzip the file.


Run SonarQube:

```
cd sonarqube-10.2.1.78527
./bin/linux-x86-64/sonar.sh      # for Linux
./bin/windows-x86-64/StartSonar.bat # for Windows
./bin/macosx-universal-64/sonar.sh # for MacOS
```


Access SonarQube using your browser (it may take a while before it becomes accessible):

<http://localhost:9000/>


Follow the steps in the following screenshots to create a project and analyse the SonarQube source code.

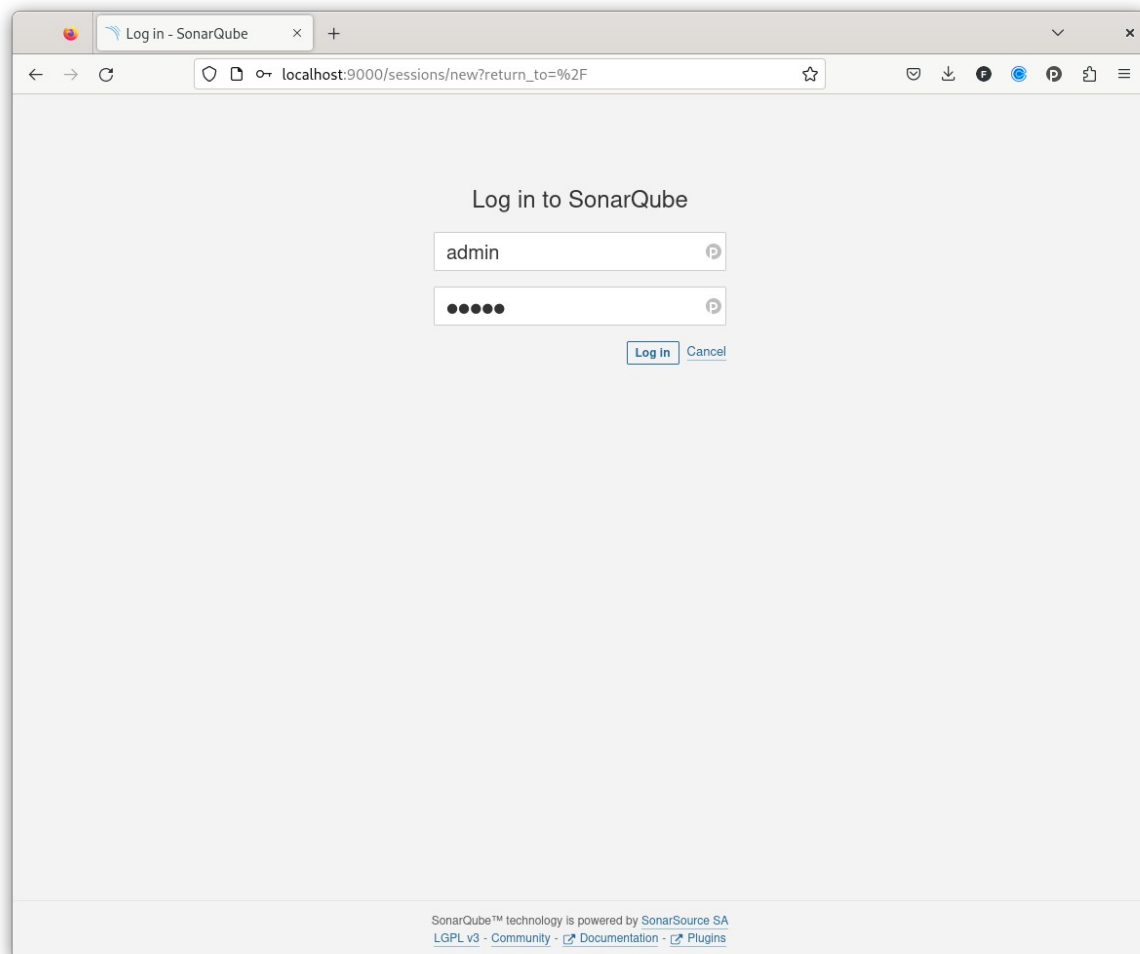

Log in. The username and password are admin / admin.

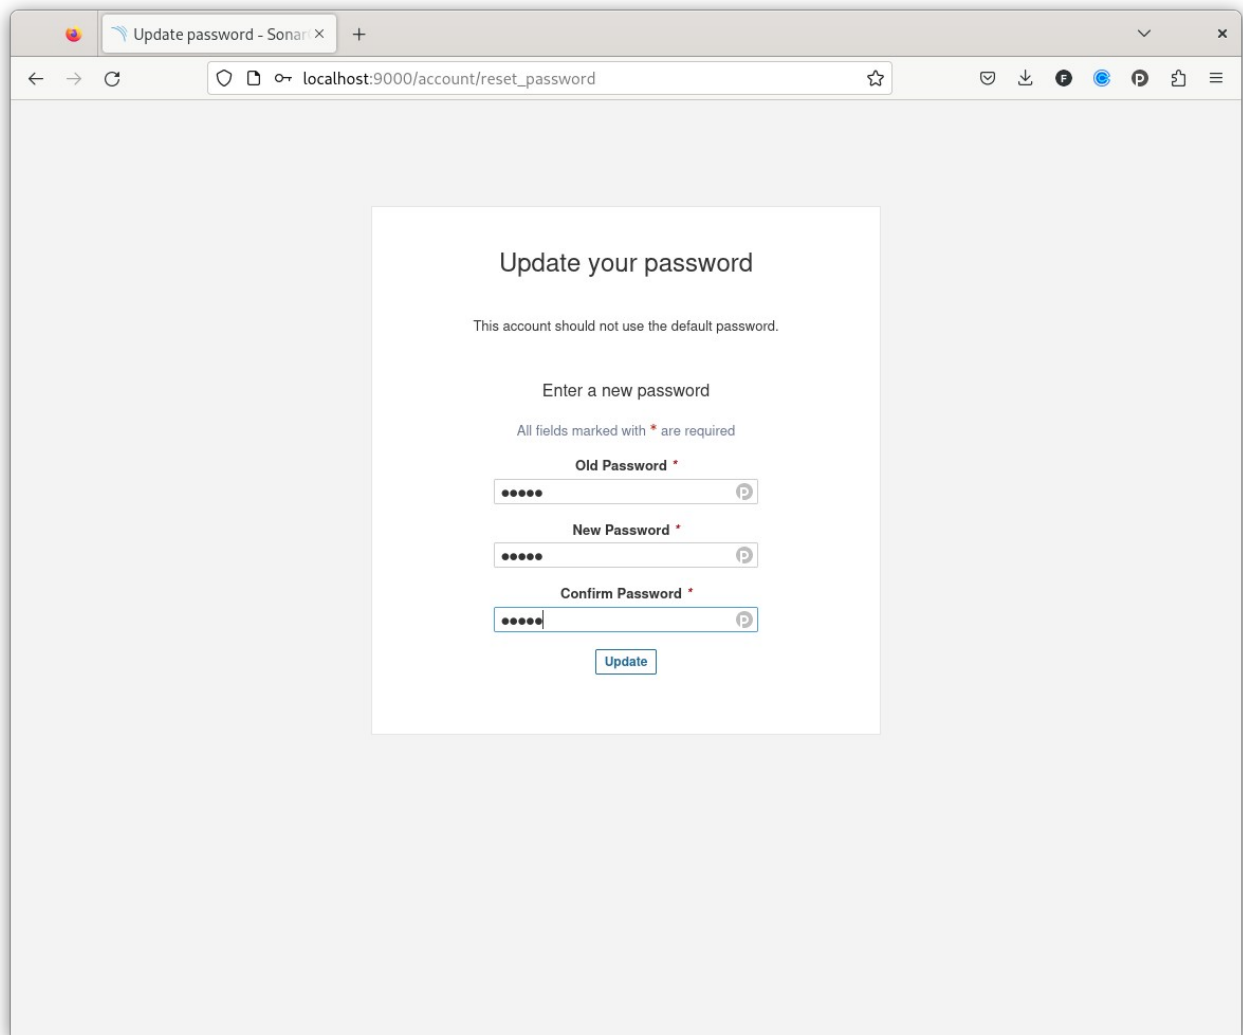

Set a new password of your choice.

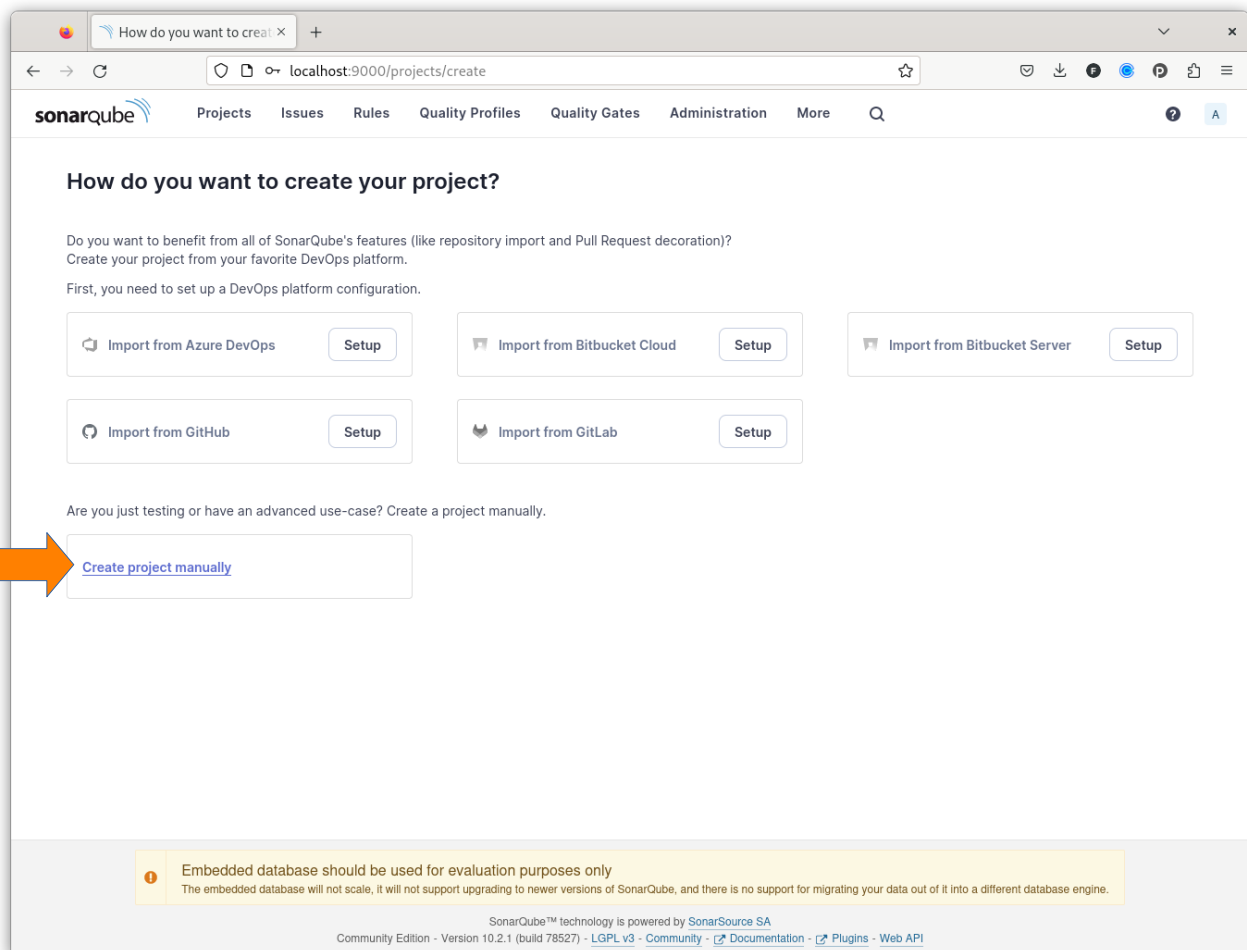

Create a new project manually.

Create a project

Project display name *

saleor

Up to 255 characters. Some scanners might override the value you provide.

Project key *

saleor

The project key is a unique identifier for your project. It may contain up to 400 characters. Allowed characters are alphanumeric, '-' (dash), '_' (underscore), '.' (period) and ':' (colon), with at least one non-digit.

Main branch name *

main


The name of your project's default branch [Learn More](#)

Next


Embedded database should be used for evaluation purposes only
The embedded database will not scale, it will not support upgrading to newer versions of SonarQube, and there is no support for migrating your data out of it into a different database engine.

SonarQube™ technology is powered by SonarSource SA
Community Edition - Version 10.2.1 (build 78527) - [LGPL v3](#) - [Community](#) - [Documentation](#) - [Plugins](#) - [Web API](#)


Type the project name “saleor” and press Next.

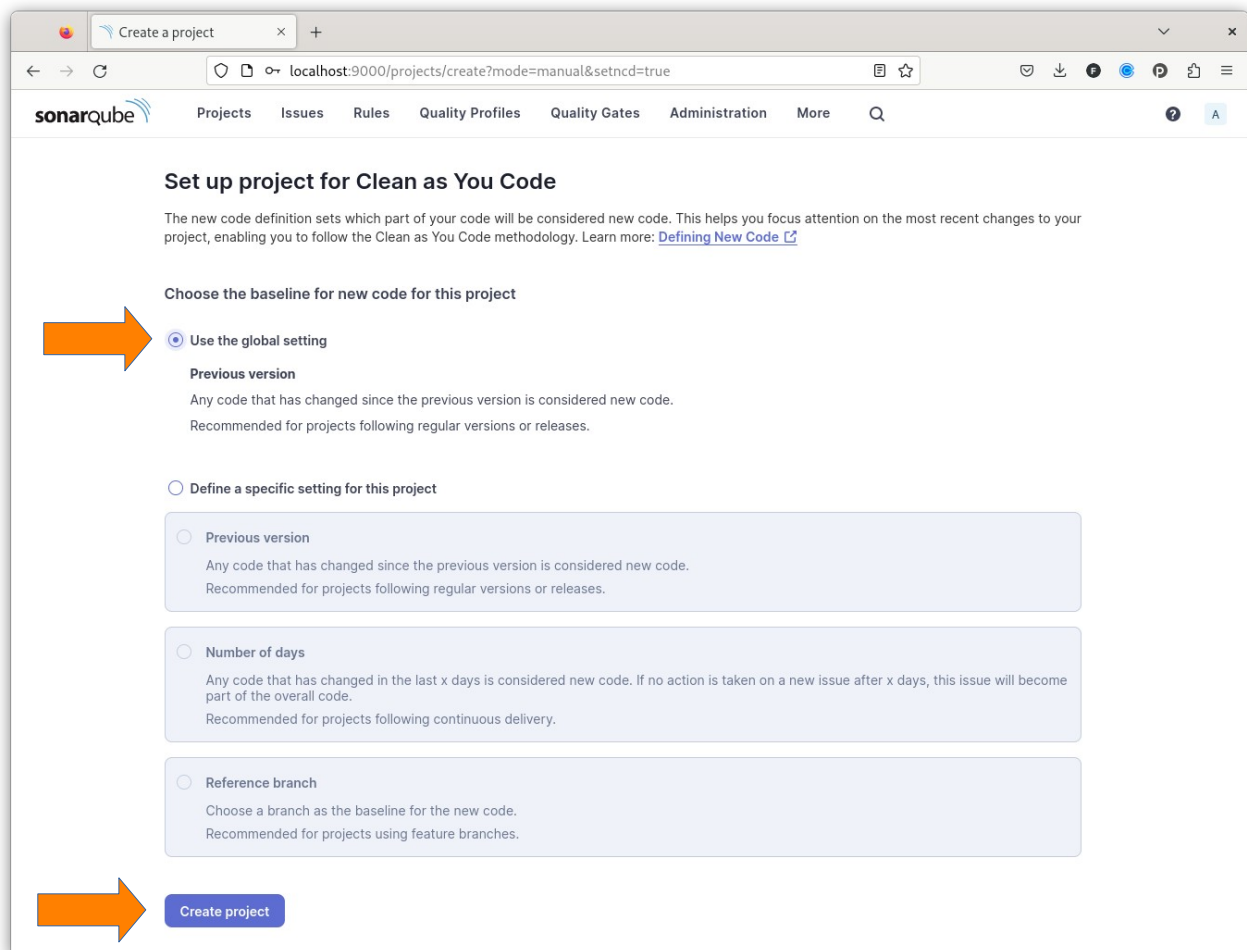


Choose to use the global setting for the baseline.

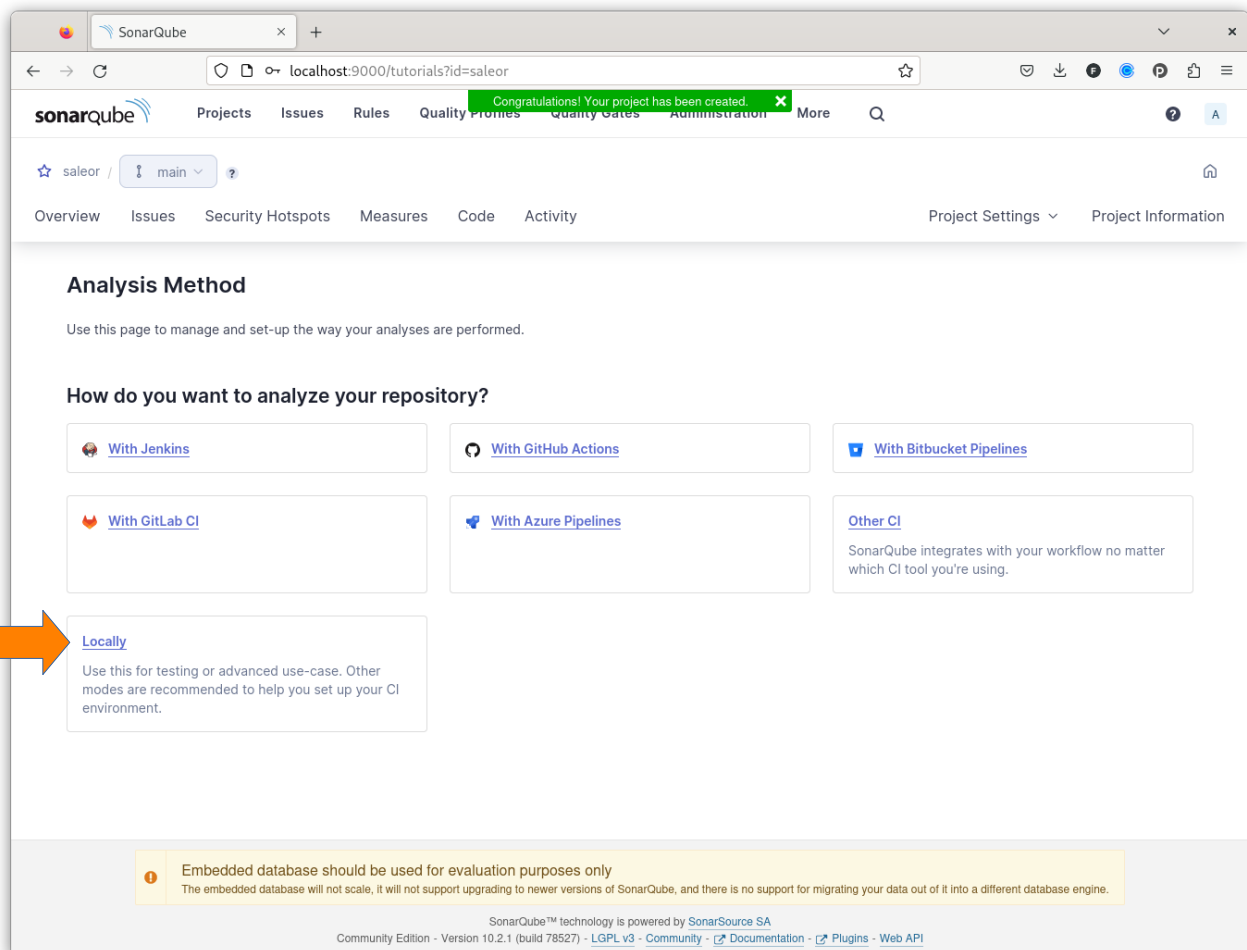


Your project is now created and you can proceed to analyse some code. Choose the local option.

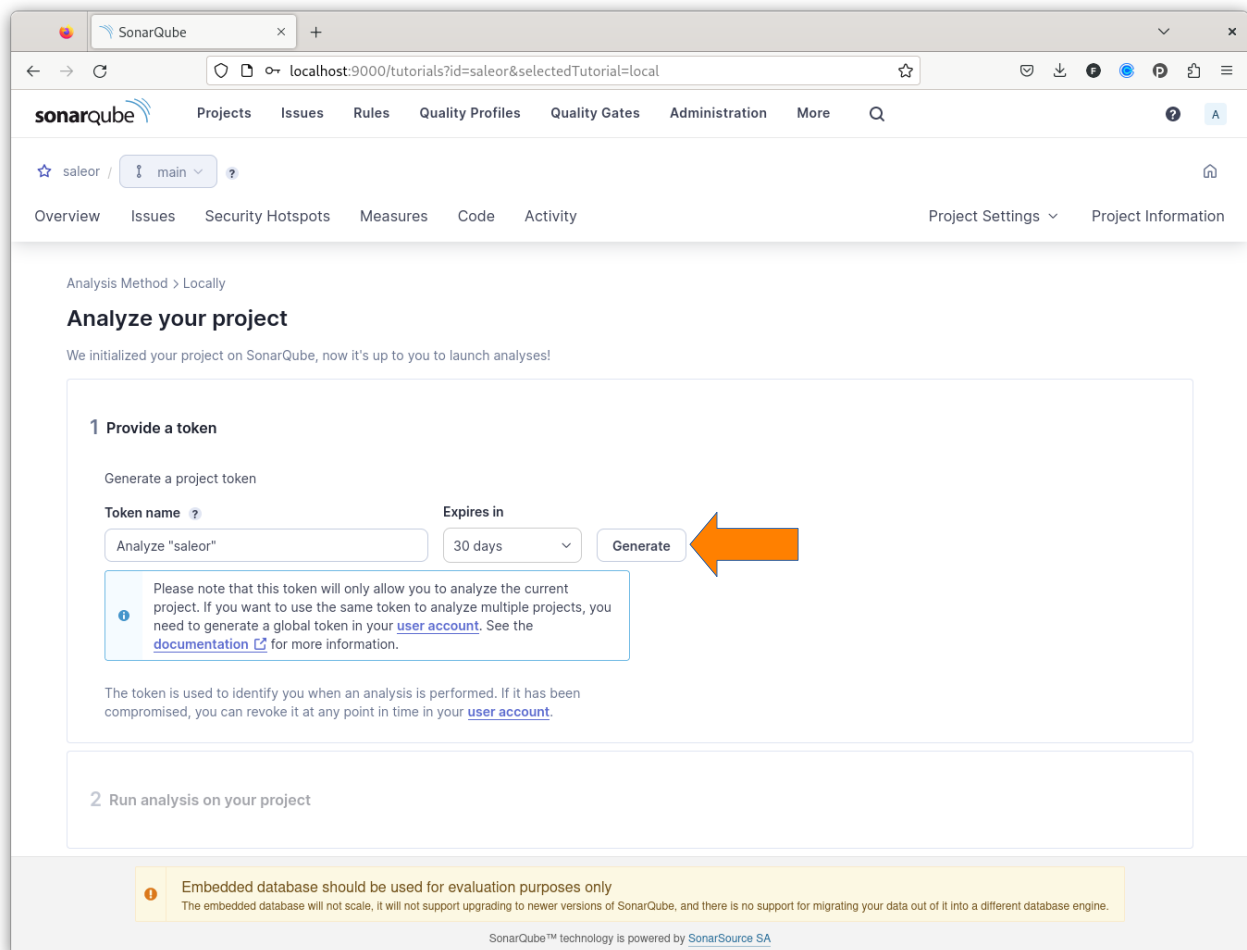


Generate a project token with the default settings.

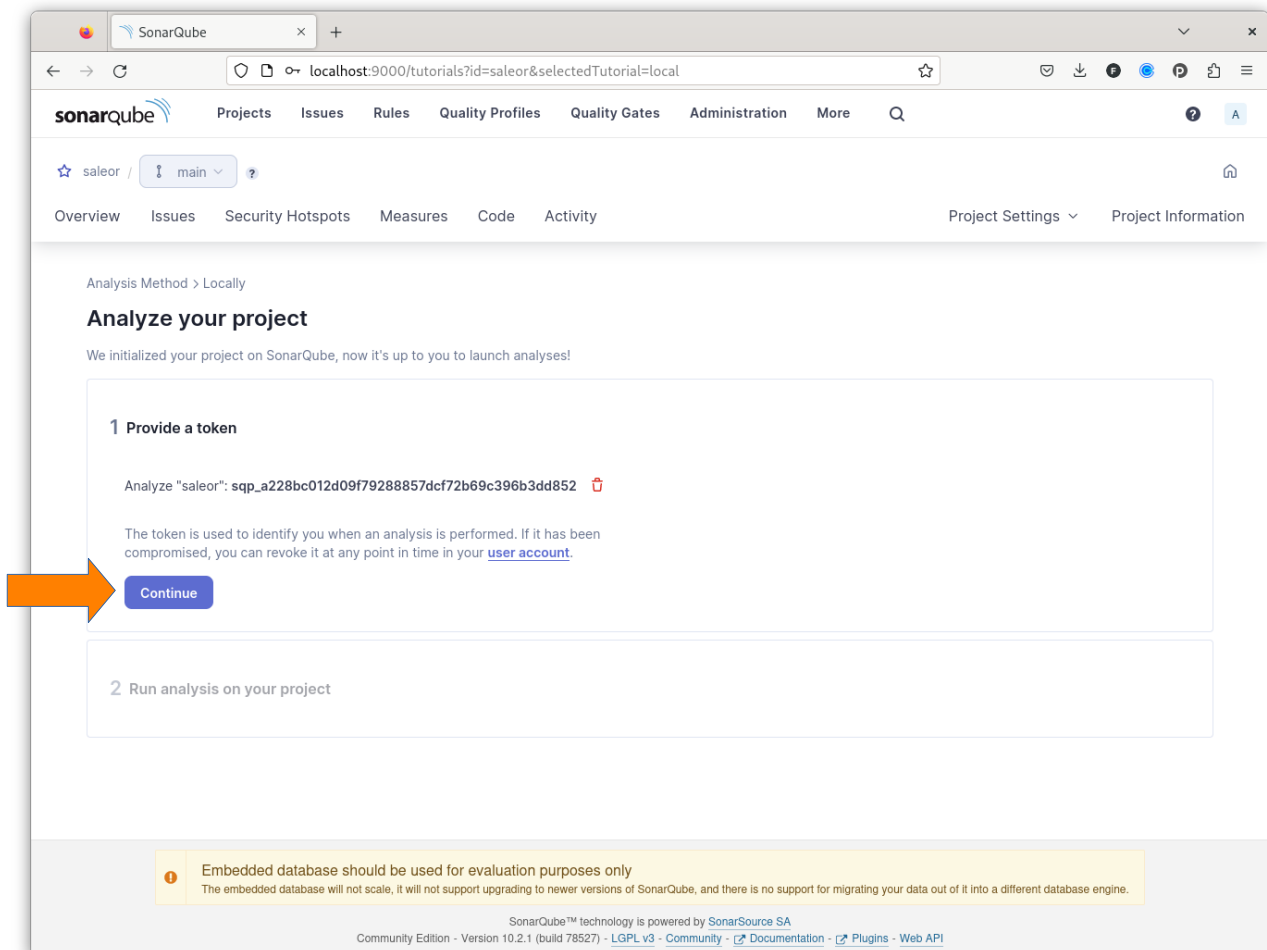

SonarQube will show the token. You don't have to note it down, just click Continue.

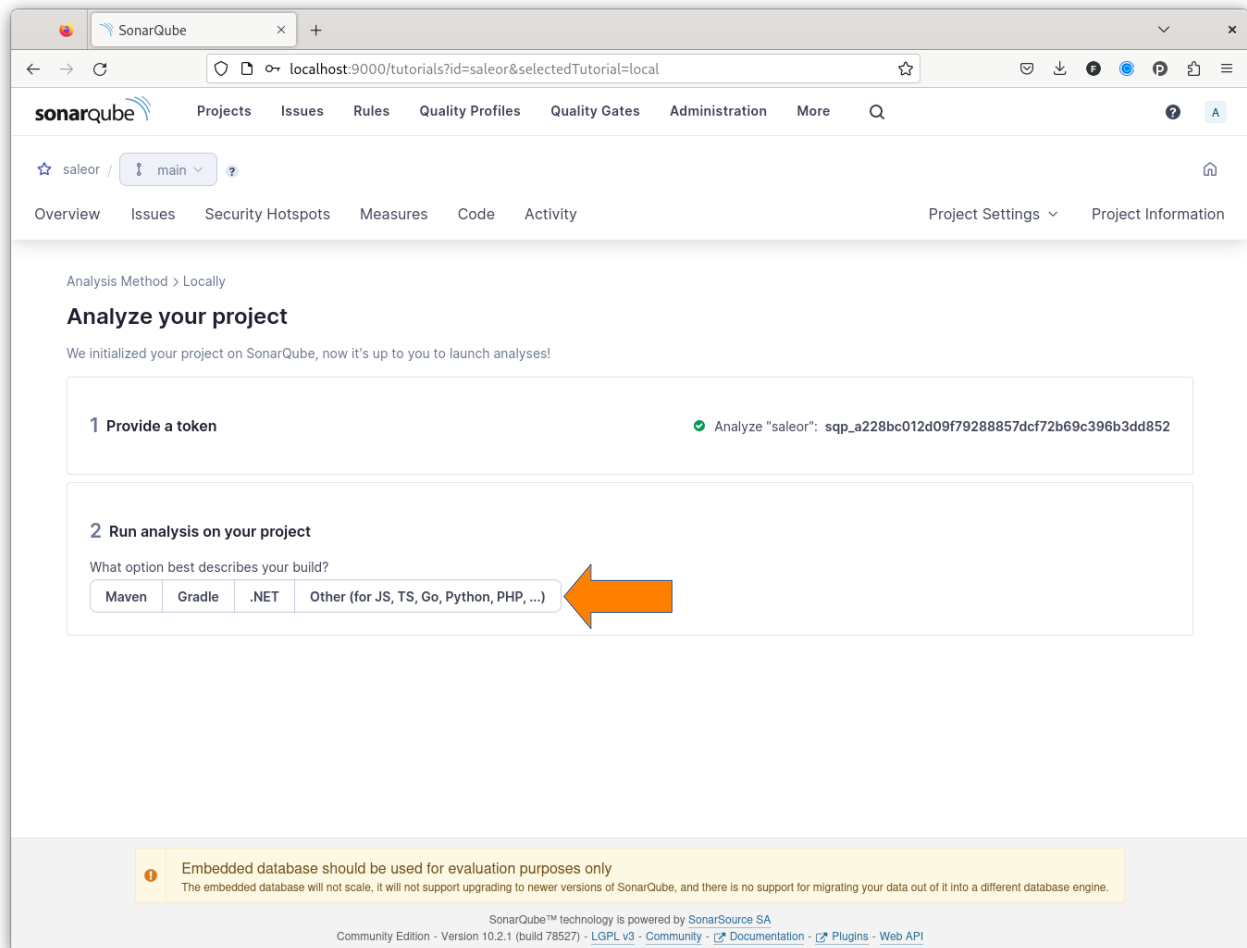

Choose the Other option because Saleor is mainly Python code.

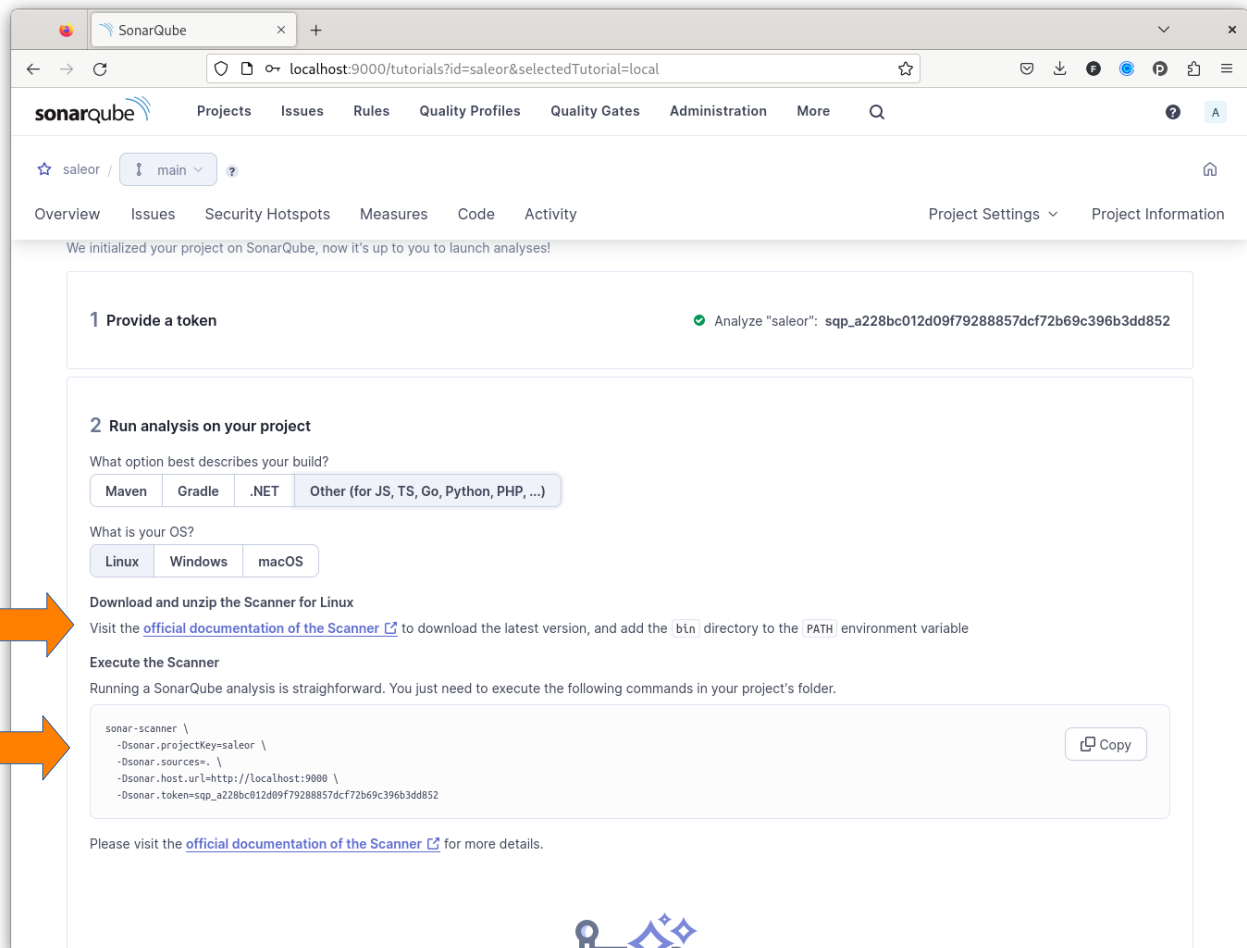


The actual analysis is run by a separate SonarQube scanner that will communicate with the SonarQube server that you have running.

Download the scanner via the link provided (“official documentation of the Scanner”) in the screenshot. Unzip it.

Note the command to execute the scanner. It includes the token you created earlier.

The screenshot shows the SonarQube web interface in a browser window. The address bar shows `localhost:9000/tutorials?id=saleor&selectedTutorial=local`. The page title is "sonarqube". The navigation bar includes "Projects", "Issues", "Rules", "Quality Profiles", "Quality Gates", "Administration", and "More". The breadcrumb trail is "saleor / main". The main content area has tabs for "Overview", "Issues", "Security Hotspots", "Measures", "Code", and "Activity". The "Overview" tab is active, showing a message: "We initialized your project on SonarQube, now it's up to you to launch analyses!". Below this, there are two main sections: "1 Provide a token" and "2 Run analysis on your project". The "1 Provide a token" section shows a green checkmark and the token: "Analyze 'saleor': sqp_a228bc012d09f79288857dcf72b69c396b3dd852". The "2 Run analysis on your project" section has a heading "What option best describes your build?" with buttons for "Maven", "Gradle", ".NET", and "Other (for JS, TS, Go, Python, PHP, ...)". Below this is "What is your OS?" with buttons for "Linux", "Windows", and "macOS". The "Windows" button is selected. The section "Download and unzip the Scanner for Windows" provides instructions to download the scanner and add the `bin` directory to the `%PATH%` environment variable. The "Execute the Scanner" section states: "Running a SonarQube analysis is straightforward. You just need to execute the following commands in your project's folder." Below this, a code block contains the command for Windows: `sonar-scanner.bat -D"sonar.projectKey=saleor" -D"sonar.sources=." -D"sonar.host.url=http://localhost:9000" -D"sonar.token=sqp_a228bc012d09f79288857dcf72b69c396b3dd852"`. An orange arrow points to this command block. A "Copy" button is next to the code. At the bottom, there is a link to the "official documentation of the Scanner" and a small illustration of a person with a lightbulb.

The scanner command looks different on Windows...

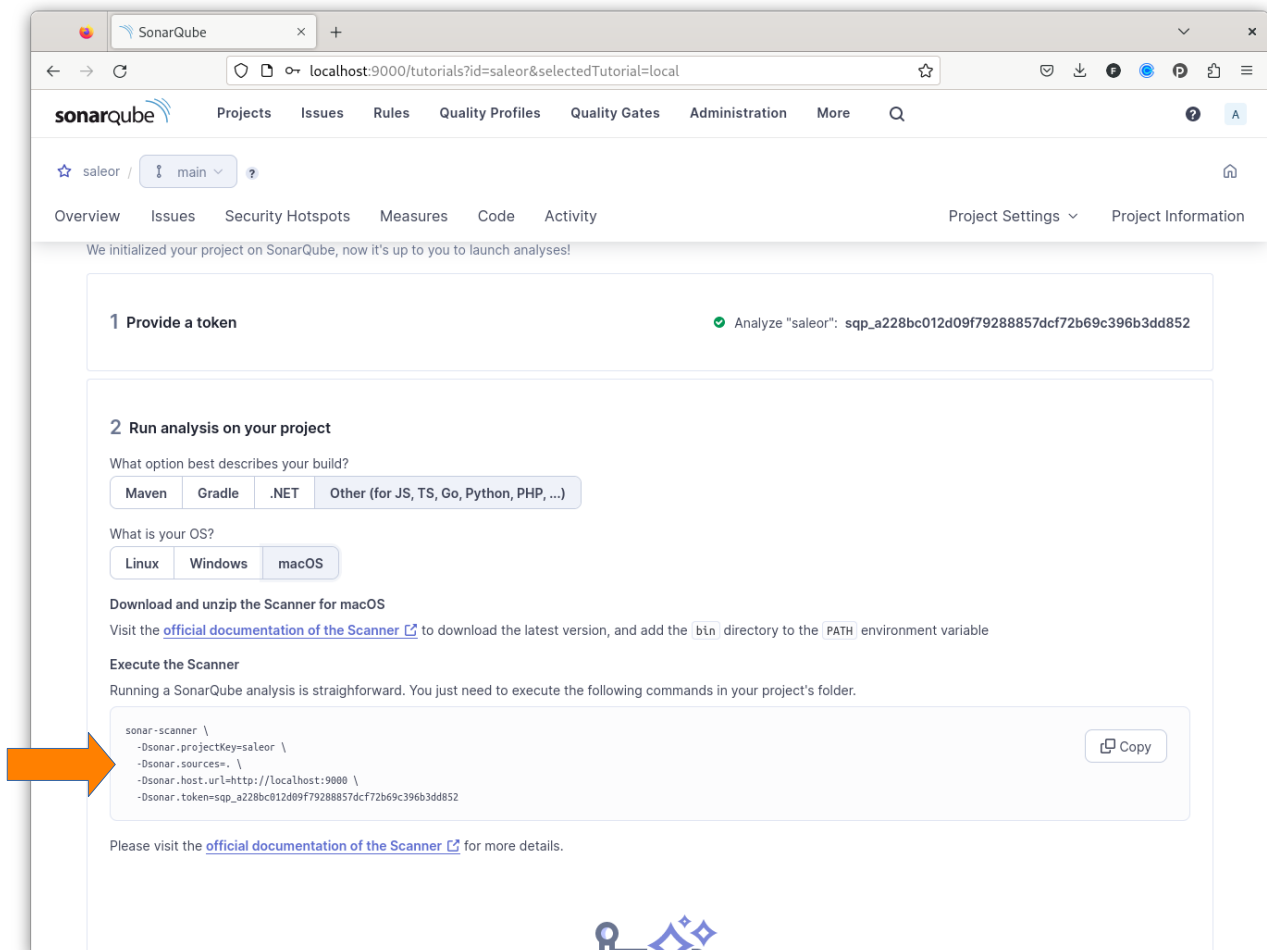

... and Mac.


Download the Saleor source code that is provided with this assignment and unzip it.

Change directory to the Saleor source code directory:

```
cd saleor-f354d5b80f0924dac6c8b7d5851995ddbfb48a22
```

Run the scanner from the Saleor source code directory. Note that you have to provide a relative path to the scanner. Modify the Linux, Windows, or Mac OS command that you see in the web browser. For example, if you are in the saleor source code directory and the scanner was unzipped in its own directory next to the saleor directory, the command would be:

```
../sonar-scanner-5.0.1.3006-linux/bin/sonar-scanner -Dsonar.projectKey=saleor
-Dsonar.sources=. -Dsonar.host.url=http://localhost:9000
-Dsonar.token=sqp_a228bc012d09f79288857dcf72b69c396b3dd852
```

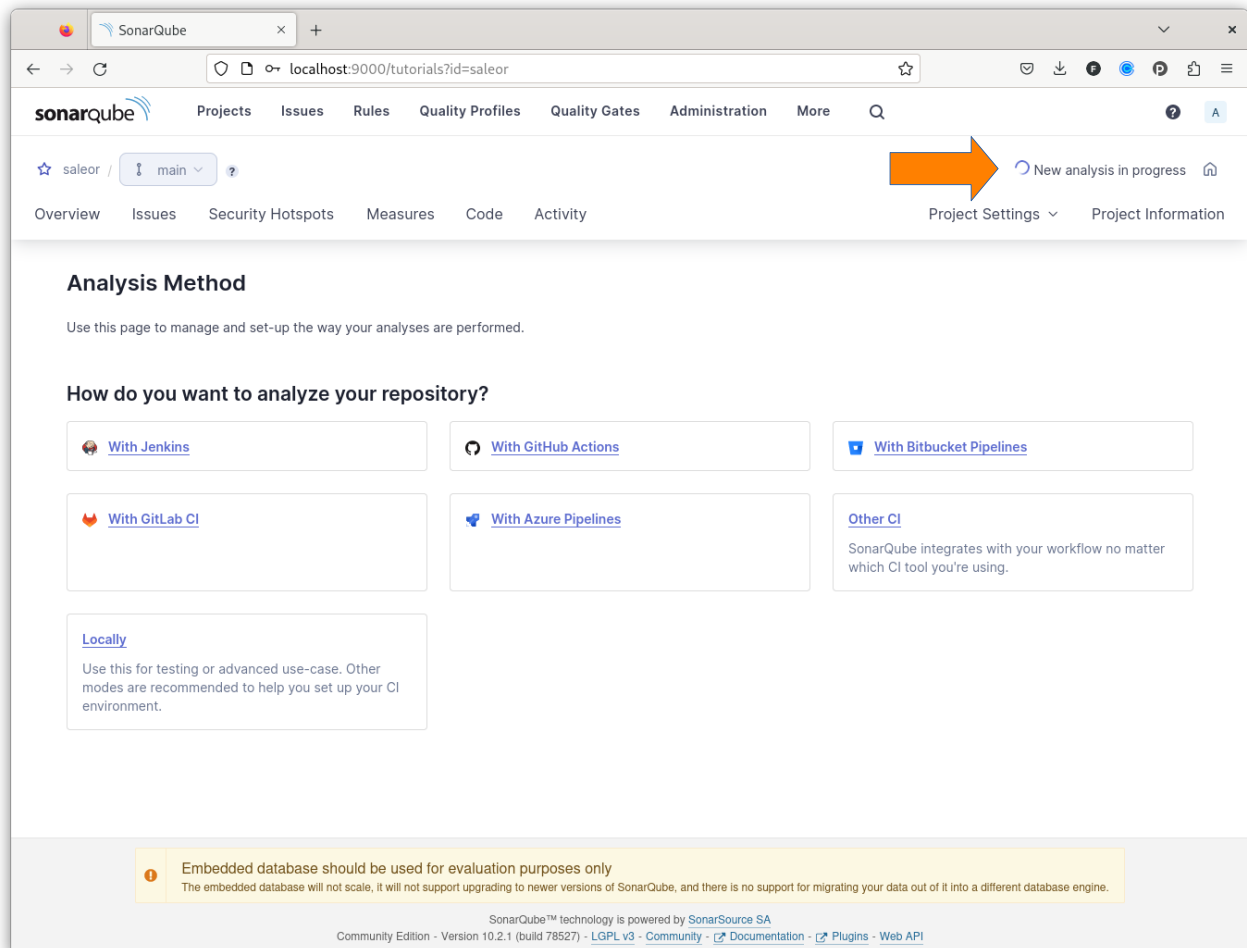

While the scanner is running, you will see “New analysis in progress” in the web interface.

Once the analysis is done, the web interface will show you an overview of the analysis. You can switch between the analysis tabs, e.g. Issues, Security Hotspots, Measures, etc.

You are now ready to perform the actual assignment!