

UZH-CL at ArA-DF 2026: Prompt-Tuned Foundation Models and Track-Adaptive Score Fusion for Arabic Speech Deepfake Detection

Aref Farhadipour¹, Teodora Vukovic¹, Petr Motlicek^{2,3}

¹Department of Computational Linguistics, University of Zurich, Switzerland

²Idiap Research Institute, Switzerland

³Brno University of Technology, Czech Republic

aref.farhadipour@uzh.ch

Abstract

Detecting synthetic and voice-converted speech remains difficult for low-resource languages with dialectal diversity, where systems must generalize across regional dialects and unseen acoustic channels. We present the UZH-CL submission to the ArA-DF 2026 Shared Task on Arabic speech deepfake detection, covering Track 1 (dialect generalization) and Track 2 (acoustic robustness). We freeze a W2V-BERT-2.0 backbone and adapt it with *Wavelet Prompt Tuning*, updating under 1% of parameters, and aggregate multi-layer representations with cross-layer attention and a general attentive-statistics pooling head rather than a specialized graph backend. Complementary detectors are obtained by varying adaptation strategy, training data, augmentation, and encoder family. We find that the two shift types require different fusion regimes: a broad multi-window ensemble for dialect generalization, and a compact, channel-matched, center-crop ensemble for acoustic robustness. Official evaluation yields 1.96% EER on Track 1 (6th place) and 1.04% EER on Track 2 (3rd place), corresponding to 87% and 96% relative reductions over the XLS-R+AASIST baselines.

1 Introduction

Neural text-to-speech (TTS) and voice conversion (VC) can generate synthetic Arabic speech that can be used for media forgery, impersonation, and fraud. Detecting such speech is more difficult than in English-centric settings, because Arabic includes Modern Standard Arabic (MSA) and regional dialects that differ in phonology, morphology, and prosody, and because recordings may include codec compression, background noise, room reverberation, and transmission filtering. The ArA-DF 2026 Shared Task evaluates these conditions in two tracks: Track 1 (*dialect generalization*) and Track 2 (*acoustic robustness*).

We address both tracks with parameter-efficient

adaptation of a speech foundation model and with score fusion that depends on the type of shift. Fine-tuning a large speech model on a small in-domain set can overfit and overwrite pre-trained features. We freeze W2V-BERT-2.0 (Barrault et al., 2023) and train *Wavelet Prompt Tuning* (WPT) (Farhadipour et al., 2026). WPT prepends standard prompts and Haar-wavelet prompts to the input of each transformer layer, so less than 1% of the parameters are updated.

Many anti-spoofing systems, including the official baseline, take features from a single SSL layer and classify them with AASIST (Jung et al., 2022). We instead combine all transformer layers with cross-layer attention and a multi-head attentive-statistics pooling head. Lower layers tend to carry spectral artifacts; higher layers carry more linguistic content. Using all layers lets us keep a general pooling head rather than a graph backend such as AASIST.

We also train detectors that differ in adaptation, training data, and augmentation, and that use other encoders besides W2V-BERT: XLS-R 300M, Dasheng 1.2B, and the Qwen3-Omni audio encoder. Score fusion is set separately for each track. Track 1 benefits from overlapping windows and a larger set of less correlated detectors; Track 2 benefits from a short center crop and a smaller set of channel-augmented models.

2 Background and Task Setup

Related work. Speech anti-spoofing systems typically combine a self-supervised learning (SSL) frontend (such as wav2vec 2.0 (Baevski et al., 2020) or XLS-R (Babu et al., 2022)) with graph neural network backends such as AASIST (Jung et al., 2022; Tak et al., 2022b). However, full fine-tuning of large SSL backbones is computationally expensive and prone to overfitting on small target datasets. Parameter-efficient fine-tuning (PEFT)

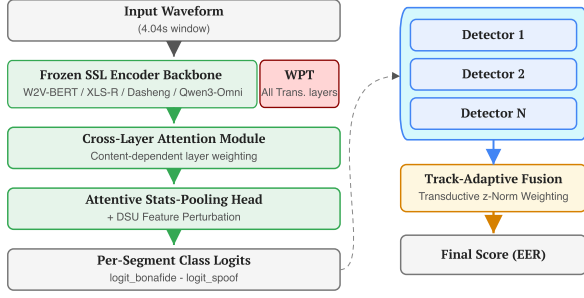


Figure 1: System architecture: per-detector scoring followed by track-adaptive late fusion.

methods, including prefix tuning (Li and Liang, 2021) and visual prompt tuning (Jia et al., 2022), address this by inserting small trainable prompt vectors into transformer blocks while freezing backbone weights. WPT (Farhadipour et al., 2026) extends prompt tuning to speech signals by incorporating multi-resolution frequency subbands via discrete wavelet transforms.

Task and corpus setup. The ArA-DF 2026 Shared Task evaluates binary classification of 16 kHz single-channel audio recordings into *bonafide* (authentic) or *spoofed* (synthetic or voice-converted) speech. The dataset provides 22.5k labeled training utterances and 21k labeled development utterances covering MSA and regional Arabic dialects. Evaluation is divided into two tracks, each featuring an unlabeled development-test set (16.0k files for Track 1; 14.2k for Track 2) used during challenge development, and an unlabeled final-test set (144.2k files for Track 1; 127.7k for Track 2) for official benchmark ranking. The evaluation metric is Equal Error Rate (EER). The official baseline system (XLS-R 300M + AASIST) yields final-test EERs of 14.54% on Track 1 and 27.11% on Track 2. Ground-truth test labels were released post-evaluation, enabling the per-detector diagnostics in Section 5.2.

3 System Architecture

Figure 1 shows the two-stage pipeline. Each detector adapts a frozen SSL backbone (WPT or FTN), aggregates layers with cross-layer attention and attentive-statistics pooling, and outputs a scalar score. Late fusion then z -normalizes and weights those scores: multi-window averaging on Track 1 and a center crop on Track 2.

3.1 WPT Core Detector

The primary core detector uses a frozen W2V-BERT-2.0 backbone (Barrault et al., 2023) consisting of $L = 24$ Conformer layers with hidden dimension $d = 1024$. At layer ℓ , given input frame representations $H_{\ell-1} \in \mathbb{R}^{T \times d}$, WPT prepends $n_p = 6$ standard prompt vectors $P_\ell \in \mathbb{R}^{n_p \times d}$ and $n_w = 4$ wavelet prompt vectors derived from trainable parameters $Q_\ell \in \mathbb{R}^{n_w \times d}$ via a discrete Haar wavelet transform block Ψ :

$$(A_\ell, D_\ell) = \text{DWT}_{\text{haar}}(Q_\ell),$$

$$\Psi(Q_\ell) = \text{Proj}([A_\ell; D_\ell]), \quad (1)$$

$$H'_{\ell-1} = [\Psi(Q_\ell); P_\ell; H_{\ell-1}], \quad (2)$$

where $A_\ell, D_\ell \in \mathbb{R}^{n_w \times (d/2)}$ denote low-frequency approximation and high-frequency detail subbands, and Proj projects the concatenated subbands back to dimension d . The modified sequence $H'_{\ell-1}$ passes through transformer block f_ℓ , after which prompt representations are removed prior to layer $\ell + 1$: $H_\ell = f_\ell(H'_{\ell-1})_{[n_w+n_p:]}$. During training, backbone weights f_ℓ remain frozen; only prompt parameters $\{P_\ell, Q_\ell, \Psi\}$, cross-layer modules, and downstream pooling heads are optimized ($< 1\%$ of parameters).

To aggregate representations across depth, a 4-head *cross-layer attention* module computes content-dependent weights over layer outputs $\{H_\ell\}_{\ell=1}^{24}$, reflecting that spectral artifacts and high-level linguistic content concentrate at different encoder layers. The aggregated representation is processed by a multi-head attentive-statistics pooling head (Okabe et al., 2018; Desplanques et al., 2020) (4 heads, 128-d bottleneck, 256-d embedding) to produce binary class logits. Feature perturbation via Domain-Shift-with-Uncertainty (DSU) (Li et al., 2022) is applied inside the pooling head during training alongside a class-weighted cross-entropy loss (weight 3.0 on bonafide). The scalar detection score for an input x is defined as $g(x) = \text{logit}_{\text{bonafide}}(x) - \text{logit}_{\text{spoof}}(x)$.

3.2 Detector Ensemble Diversification

To obtain complementary error patterns across constituent models, we diversify detectors along four operational axes (Table 1):

1. **Adaptation strategy:** We contrast frozen WPT against *partial backbone fine-tuning* (FTN), unfreezing the top $N \in \{12, 16\}$ layers at 10^{-5} from a pre-trained WPT model.

ID	Encoder	Adapt.	Training Data	Augmentation	dev	Track 1 EER (%)		Track 2 EER (%)	
					in-dist	dev-test	final	dev-test	final
T1	W2V-BERT-2.0	WPT	ArA-DF (22.5k)	DSU	0.04	9.06	9.34	16.81	17.32
T2	W2V-BERT-2.0	WPT	ArA-DF (22.5k)	DSU + RB + MR	0.22	2.86	3.01	1.99	1.83
S123	W2V-BERT-2.0	WPT	ArA-DF (22.5k)	DSU + RB	0.23	2.76	3.15	1.80	1.76
S456	W2V-BERT-2.0	WPT	ArA-DF (22.5k)	DSU + RB	0.19	2.98	3.06	2.08	1.98
C123	W2V-BERT-2.0	WPT	Arabic ($\approx 100k$)	DSU + RB + MR	0.58	3.10	3.31	2.73	2.68
C456	W2V-BERT-2.0	WPT	Arabic ($\approx 100k$)	DSU + RB + MR	0.22	3.32	3.53	1.63	1.58
FTBB	W2V-BERT-2.0	FT16	Arabic ($\approx 100k$)	DSU + RB + MR	0.28	3.34	3.37	1.57	1.46
FTX	W2V-BERT-2.0	FT16	Multi ($\approx 264k$)	DSU + RB + MR	0.43	3.80	3.66	1.76	1.59
FTXA	W2V-BERT-2.0	FT12	Multi ($\approx 264k$)	DSU + RB + MR	0.22	3.23	3.29	1.45	1.39
MEGA	W2V-BERT-2.0	WPT	Multi ($\approx 264k$)	DSU + RB + MR	0.45	3.61	3.56	2.14	2.08
DIA	W2V-BERT-2.0	FT16	Arabic ($\approx 100k$)	Speed + DSU	0.27	6.73	6.53	11.68	11.63
CDEV	W2V-BERT-2.0	WPT	ArA-DF + dev	DSU + RB + MR	0.62	4.54	4.66	2.11	2.13
XLSR	XLS-R 300M	WPT	Arabic ($\approx 100k$)	DSU + RB + MR	1.15	5.64	5.84	5.50	5.49
DSH	Dasheng 1.2B	WPT	Arabic ($\approx 100k$)	DSU + RB + MR	1.37	11.35	12.10	3.42	3.60
QWN	Qwen3-Omni	WPT	Arabic ($\approx 100k$)	DSU + RB + MR	1.07	9.15	8.88	3.03	3.03
<i>Best single model</i>					–	2.76	3.01	1.45	1.39
Track-adaptive fusion (ours)					–	1.83	1.96	1.17	1.04

Table 1: Constituent base detector specifications and per-split EER (%). Adaptation: WPT (frozen backbone) or FTN (top- N layers fine-tuned). Training data: ArA-DF = official training set (22.5k clips); Arabic = expanded Arabic pool ($\approx 100k$ clips); Multi = multilingual pool ($\approx 264k$ clips). Augmentation: RB = RawBoost, MR = MUSAN/RIR noise/reverberation. Column “dev” reflects in-distribution validation EER (single 4 s crop). Track 1 and Track 2 test columns report scores under track-specific segment aggregation (multi-window vs. center-crop).

FTBB, FTX, and FTXA in Table 1 are detector IDs using FT16 or FT12.

2. **Encoder family:** Beyond W2V-BERT, we evaluate XLS-R 300M (Babu et al., 2022) (waveform frontend), Dasheng-1.2B (Dinkel et al., 2024) (spectrogram ViT), and the audio encoder extracted from Qwen3-Omni-30B-A3B (Qwen Team, 2025) (32 layers, mel-spectrogram frontend).
3. **Training data composition:** We evaluate three training pools: official ArA-DF; an expanded *Arabic pool* ($\approx 100k$ clips) incorporating ArFake (Elsetohy et al., 2025), AFAD-MSA (Issa, 2026), an Arabic deepfake corpus (DeepFake-Audio-Rangers, 2024), and Arabic splits from MLAAD (Müller et al., 2024); and a *multilingual pool* ($\approx 264k$ clips) adding SpoofCeleb (Jung et al., 2025) and ASVspoof 5 (Wang et al., 2024), which covers a range of codecs.
4. **Data augmentation pipelines:** Combinations of DSU, RawBoost (Tak et al., 2022a), MUSAN noise (Snyder et al., 2015), RIR reverberation (Ko et al., 2017), lossy compression (MP3/OGG), and speed perturbation ($0.9\text{--}1.1\times$). A specialized dialect model (DIA) applies speed perturbation and DSU without acoustic filtering.

3.3 Track-Adaptive Scoring and Fusion

Segment aggregation. For an input utterance u and detector i , scoring uses either multi-window averaging or center cropping. *Multi-segment scoring* divides u into K_u overlapping windows $\{c_1, \dots, c_{K_u}\}$ of 4.04 s (stride 2.02 s) and computes the mean score, providing stable estimates over variable-length dialectal recordings in Track 1. Conversely, *center-crop scoring* evaluates a single 4 s window, which performed better under Track 2 channel distortions where averaging across clean and distorted segments reduced performance.

Late score fusion. To handle score calibration differences across models, raw output scores s_i are normalized via transductive z -score standardization over the evaluation set $\mathcal{E}$ and aggregated using non-negative fusion weights $\{w_i\}$:

$$z_i(u) = \frac{s_i(u) - \mu_i}{\sigma_i}, \quad S(u) = \frac{\sum_i w_i z_i(u)}{\sum_i w_i}, \quad (3)$$

where μ_i and σ_i denote the mean and standard deviation of detector i over $\mathcal{E}$. This z -norm is transductive: a fused score depends on the rest of $\mathcal{E}$ and would not be reproduced by scoring files one at a time.

Track-adaptive weighting. The weight distribution differs between evaluation tracks. For *Track 1* (dialect generalization), fusion uses a broad ensemble of decorrelated detectors, with complemen-

tary models (FTX, MEGA, FTXA) up-weighted ($w_i = 1.5$). For *Track 2* (acoustic robustness), performance is highest with a compact core ensemble of channel-matched detectors at $w_i = 1.0$, with auxiliary models (FTX, MEGA, QWN) included at reduced weights ($w_i = 0.5$). Including track-mismatched detectors at full weight increased Track 2 EER.

4 Experimental Setup

Audio clips are resampled to 16 kHz and padded or cropped to 64,600 samples (≈ 4.04 s) during training. WPT models are trained for 8 epochs using AdamW (Loshchilov and Hutter, 2019) ($\beta_1 = 0.9$, $\beta_2 = 0.999$, weight decay 10^{-4}) with an initial learning rate of 10^{-4} , a batch size of 8, and a 500-step linear warmup followed by cosine decay. Partially fine-tuned models (FTBB, FTX, FTXA) train for 4 epochs with learning rates of 5×10^{-5} for the pooling head and 10^{-5} for unfrozen backbone layers. DSU perturbation probability is set between 0.5 and 0.7. Checkpoints are selected by minimum official-development EER, except CDEV (trained on train+dev), for which we use the final epoch. Fusion weights and segment aggregation were chosen after training from cached scores on the development set and the dev-test leaderboard, without final-test labels.

5 Results and Discussion

5.1 Official Submission Results

On the official final tests, fusion of the detectors in Table 1 yields **1.96% EER** on Track 1 and **1.04% EER** on Track 2, against XLS-R+AASIST base-lines of 14.54% and 27.11% (87% and 96% relative reductions). On Track 1, a six-model W2V-BERT ensemble (T2, S123, S456, C123, C456, FTBB) scores 2.16%; adding and up-weighting less correlated models trained on external data (FTX, MEGA, FTXA) lowers EER to 1.96%. On Track 2, a compact core (FTBB, C456, T2) scores 1.06% and reaches 1.04% when FTX, MEGA, and QWN are added at $w=0.5$. Full-weight auxiliaries (1.10%) or the dialect-only DIA model (1.09%) raise EER.

5.2 Per-Detector Cross-Split Analysis

Following the release of ground-truth test labels, we evaluate base detectors across challenge splits (Table 1).

First, score fusion outperforms every individual constituent detector across all test splits (Track 1 fi-

nal: 3.01% $\rightarrow$ 1.96%; Track 2 final: 1.39% $\rightarrow$ 1.04%). 1,000-sample bootstrap resampling on the final-test splits yields non-overlapping 95% confidence intervals for fusion vs. the best single model on Track 1 ([1.88, 2.05] vs. [2.90, 3.12]) and Track 2 ([0.97, 1.10] vs. [1.33, 1.47]).

Second, W2V-BERT models consistently outperform alternative backbones. XLS-R (5.84%) and Dasheng (12.10%) struggle under Track 1 dialect shift, while Qwen3-Omni reaches 3.03% EER on Track 2 and is useful in that fusion. We hypothesize that Dasheng and Qwen3-Omni, both spectrogram frontends pre-trained on general audio, preserve channel cues more than dialectal structure, which matches their weak Track 1 EERs (12.10%, 8.88%) and stronger Track 2 EERs (3.60%, 3.03%).

Third, in-distribution dev EER (0.04–1.37%) is not a proxy for out-of-distribution robustness: base-detector test EERs rise to 2.76–17.32% (5–200 $\times$ depending on model and shift).

5.3 Asymmetric Fusion Dynamics

Dialect shift and acoustic channel shift respond to different fusion strategies:

- **Track 1 (Dialect shift):** Benefits from multi-window utterance averaging and an ensemble of decorrelated detectors. W2V-BERT models form correlated clusters ($r = 0.85$ – 0.97), whereas models trained on external corpora (FTX, MEGA) yield less correlated predictions ($r = 0.46$ – 0.62). Up-weighting these decorrelated candidates improves Track 1 performance.
- **Track 2 (Acoustic shift):** Benefits from center-crop scoring and a compact core ensemble anchored by channel-augmented models. Adding auxiliary detectors at full weight increases variance, whereas down-weighting them ($w = 0.5$) maintains performance under channel distortions.

6 Conclusion

We described the UZH-CL systems for the ArA-DF 2026 Shared Task. Frozen W2V-BERT-2.0 with Wavelet Prompt Tuning, combined with track-specific score fusion, reached 1.96% EER on Track 1 and 1.04% EER on Track 2. Dialect shift and acoustic channel shift did not favor the same ensemble: a broader multi-window fusion helped Track 1, and a smaller channel-matched set with center-crop scoring helped Track 2.

7 Limitations

Fusion uses transductive z -norm over the evaluation set, so a file’s fused score depends on the rest of the batch; we do not report an inductive variant with development-set statistics. Each detector is a single training run, and close Track 1 EERs in Table 1 (e.g., 3.01–3.15) should not be read as stable without seed variance. We did not deduplicate the external Arabic and multilingual pools against ArA-DF evaluation material by speaker, recording, or synthesis system, because those identities were not released under blind evaluation; the Track 1 fusion includes external-data models (FTX, MEGA, FTXA) and should be interpreted with that caveat. We also do not report the task’s secondary metrics (Accuracy and macro-F1).

8 Ethics Statement

This work is a defensive deepfake detector for Arabic speech. We use official ArA-DF data and publicly cited corpora under their licenses, and we do not release a generation system. Speech can identify speakers; we do not attempt re-identification. Reported EERs apply only to the shared-task conditions and are not a guarantee of unconstrained robustness.

References

- Arun Babu, Changan Wang, Andros Tjandra, Kushal Lakhotia, Qiantong Xu, Naman Goyal, et al. 2022. [XLS-R: Self-supervised cross-lingual speech representation learning at scale](#). In *Proc. Interspeech*, pages 2278–2282.
- Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. 2020. wav2vec 2.0: A framework for self-supervised learning of speech representations. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Loïc Barrault, Yu-An Chung, Mariano Coria Meglioli, David Dale, Ning Dong, Mark Duppenthaler, et al. 2023. Seamless: Multilingual expressive and streaming speech translation. *arXiv preprint arXiv:2312.05187*.
- DeepFake-Audio-Rangers. 2024. Arabic audio deepfake dataset. https://huggingface.co/datasets/DeepFake-Audio-Rangers/Arabic_Audio_Deepfake.
- Brecht Desplanques, Jenthe Thienpondt, and Kris Demuynck. 2020. ECAPA-TDNN: Emphasized channel attention, propagation and aggregation in tdnn based speaker verification. In *Proc. Interspeech*, pages 3830–3834.
- Heinrich Dinkel, Zhiyong Yan, Yongqing Wang, Junbo Zhang, Yujun Wang, and Bin Wang. 2024. Scaling up masked audio encoder learning for general audio classification. In *Proc. Interspeech*.
- Mohamed Elsetohy, Alhassan Ehab, Ali Mekky, Beshar Hassan, and Shady Shehata. 2025. ArFake: A robust framework for multi-dialect arabic speech spoofing detection benchmark. *arXiv preprint arXiv:2509.22808*.
- Aref Farhadipour, Mengjie Jin, Veronika Vyshnevetska, Xin Li, Elisa Pellegrino, and Srikanth Madikeri. 2026. Spoofing-aware speaker verification via wavelet prompt tuning and multi-model ensembles. *arXiv preprint arXiv:2601.17557*.
- Elsayed Issa. 2026. AFAD-MSA: Dataset and models for arabic fake audio detection. *Computation*, 14(1):20.
- Menglin Jia, Luming Tang, Bor-Chun Chen, Claire Cardie, Serge Belongie, Bharath Hariharan, and Ser-Nam Lim. 2022. Visual prompt tuning. In *European Conference on Computer Vision (ECCV)*, pages 709–727.
- Jee-weon Jung, Hee-Soo Heo, Hemlata Tak, Hye-jin Shim, Joon Son Chung, Bong-Jin Lee, Ha-Jin Yu, and Nicholas Evans. 2022. AASIST: Audio anti-spoofing using integrated spectro-temporal graph attention networks. In *Proc. IEEE ICASSP*, pages 6367–6371.
- Jee-weon Jung, Xin Wang, Nicholas Evans, Shinji Watanabe, Hye-jin Shim, Hemlata Tak, et al. 2025. SpoofCeleb: Speech deepfake detection and SASV in the wild. *IEEE Open Journal of Signal Processing*.
- Tom Ko, Vijayaditya Peddinti, Daniel Povey, Michael L Seltzer, and Sanjeev Khudanpur. 2017. A study on data augmentation of reverberant speech for robust speech recognition. In *Proc. IEEE ICASSP*, pages 5220–5224.
- Xiang Lisa Li and Percy Liang. 2021. Prefix-tuning: Optimizing continuous prompts for generation. In *Proc. ACL-IJCNLP*, pages 4582–4597.
- Xiaotong Li, Yongxing Dai, Yixiao Ge, Jun Liu, Ying Shan, and Ling-Yu Duan. 2022. Uncertainty modeling for out-of-distribution generalization. In *International Conference on Learning Representations (ICLR)*.
- Ilya Loshchilov and Frank Hutter. 2019. Decoupled weight decay regularization. In *International Conference on Learning Representations (ICLR)*.
- Nicolas M Müller, Piotr Kawa, Wei Herng Choong, Edresson Casanova, Eren Gölge, Thorsten Müller, Piotr Syga, Philip Sperl, and Konstantin Böttinger. 2024. MLAAD: The multi-language audio anti-spoofing dataset. In *International Joint Conference on Neural Networks (IJCNN)*.

- Koji Okabe, Takafumi Koshinaka, and Koichi Shinoda. 2018. Attentive statistics pooling for deep speaker embedding. In *Proc. Interspeech*, pages 2252–2256.
- Qwen Team. 2025. Qwen3-Omni technical report. *arXiv preprint arXiv:2509.17765*.
- David Snyder, Guoguo Chen, and Daniel Povey. 2015. MUSAN: A music, speech, and noise corpus. *arXiv preprint arXiv:1510.08484*.
- Hemlata Tak, Madhu Kamble, Jose Patino, Massimiliano Todisco, and Nicholas Evans. 2022a. RawBoost: A raw data boosting and augmentation method applied to automatic speaker verification anti-spoofing. In *Proc. IEEE ICASSP*, pages 6382–6386.
- Hemlata Tak, Massimiliano Todisco, Xin Wang, Jee-weon Jung, Junichi Yamagishi, and Nicholas Evans. 2022b. Automatic speaker verification spoofing and deepfake detection using wav2vec 2.0 and data augmentation. In *Proc. The Speaker and Language Recognition Workshop (Odyssey)*, pages 112–119.
- Xin Wang, Héctor Delgado, Hemlata Tak, Jee-weon Jung, Hye-jin Shim, Massimiliano Todisco, et al. 2024. ASVspoof 5: Crowdsourced speech data, deepfakes, and adversarial attacks at scale. In *Proc. ASVspoof Workshop*.