


Chapter 1

Lint Rules

```
RBEqualNilRule>>initialize
super initialize.
self rewriteRule
  replace: ``@object = nil' with: ``@object isNil';
  replace: ``@object == nil' with: ``@object isNil';
  replace: ``@object ~= nil' with: ``@object notNil';
  replace: ``@object ~~ nil' with: ``@object notNil'

RBEqualNilRule>>group
  ↑ 'Transformations'

RBEqualNilRule>>name
  ↑ '= nil -> isNil AND ~= nil -> notNil'
```

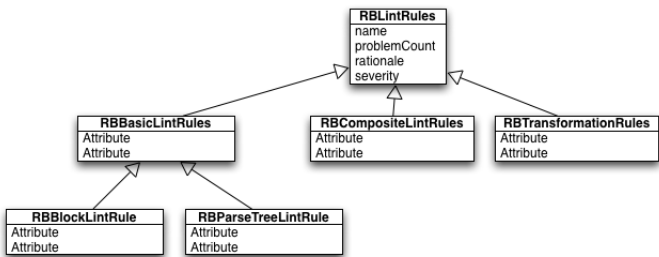

1.1 Conclusion

• .

- .