

Chapter 1

Basic Widgets

This chapter is about the basic window gadgets (aka widgets) used to compose Graphic User Interfaces in Pharo using the Morphic layer. Since Morphic is based on a composite pattern, you can easily assemble different widgets to build complex interfaces. So we will explain how the basic widgets (the one that should be mainly used) work and then how to assemble them together. To help you to understand such mechanisms, an example will be used through the whole chapter.

1.1 The window

Jannik ► explain the basis of Widget ? What is a widget in pharo ? Which classes should I know ?



Opening a window

The basic class for managing a window is `StandardWindow`. Let's start with an empty one.



To create and open an empty window just try the following:

```
StandardWindow new openInWorld
```

You should see a window with a top bar **Jannik** ► title bar ? ◀ that you can move with the mouse (see Figure 1.1).

On one side, the topbar has three buttons for closing, collapsing and expanding the window. On the other side, the topbar has a menu button with a default set of items **Jannik** ► which ones ? ◀.

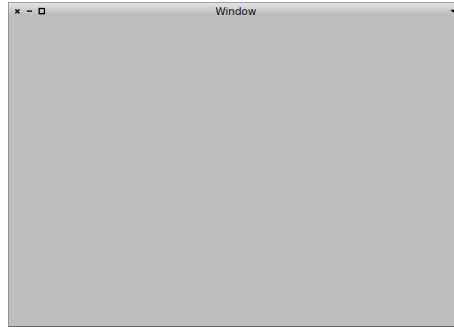


Figure 1.1: An empty window

A window and its model

Benjamin ► *introduce MVC* ◀ To set a model to a window **Jannik** ► *what is a model ? why should I set a model to a window ?* ◀, it's quite easy:

```
StandardWindow new model: myModel
```

By specifying a model to a window, and by providing specifics methods, the model will be able to control some of the window's behaviors.

Example:

First, let's create the model class

Class 1.1: Defining a specific Model.

```
Object subclass: #MyModel
  instanceVariableNames: ""
  classVariableNames: ""
  poolDictionaries: ""
  category: 'PBE2-Examples'
```

```
MyModel>>#initialExtent
```

```
↑ 200@200
```

Let's see the result:

```
StandardWindow new openInWorld.
StandardWindow new model: (MyModel new); openInWorld.
```

So you see a window with the same size than the previous one, and a small window which size is exactly what you have specified in the method

initialExtent (see Figure 1.2). **Stéf** ▶ *should we always specifies a model?* ◀ **Benjamin** ▶ *If you want to specify the initial extent, either you define a model or you subclass (as far as I know)* ◀ **Stéf** ▶ *what should be put in the model vs. the Morph itself?* ◀ **Benjamin** ▶ *I think/hope it will be clear when the API section will be complete* ◀ **Jannik** ▶ *if you are sure about your answers, just include them in the real text.* ◀

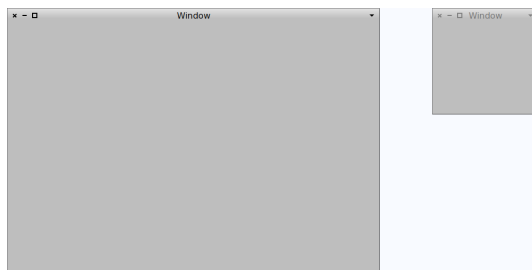


Figure 1.2: Two windows: one without a model and one with a model

Benjamin ▶ *move that into Model API part* ◀ You can also override this method
Jannik ▶ *what is the goal ? I do not want to define a method for nothing... you are writing a story* :◀◀

Method 1.2: *Define if the model is ok to change or not*

```
MyModel>>#okToChange
```

```
↑ false
```

Now, when you try to close the small window the window will not be closed since the model explicitly precise (through the method `okToChange` that we just override) that the widget is not ok to be changed.

Your own topbar menu

Here, we will show you how to easily add direct and simple shortcuts in the window's menu.

First, your window must have a model **Jannik** ▶ *blah blah... why must have a model* ◀, then you simply have to override the method `addModelItemsToWindowMenu`: aMenu and to fill up the menu provided as parameter as following: **Alain** ▶ *addModelItemsToWindowMenu: is in Object !!* ◀

Method 1.3:

```
MyModel>>#addModelItemsToWindowMenu: aMenu
  "Add model-related items to the window menu"
```

"First, we add a separator"
 aMenu addLine.

"Then, we add our items"
 aMenu
 add: 'Label of the entry'
 target: receiverOfTheFollowingSelector
 action: #selectorWeWantToBeExecuted.

Example:

Method 1.4: *Define the extra entries of the menu*

```
MyModel>>#addModelItemsToWindowMenu: aMenu
  "Add model-related items to the window menu"
  super addModelItemsToWindowMenu: aMenu.
  aMenu addLine.
  aMenu
    add: 'Open an inspector on me'
    target: self
    action: #inspect.
```

So when you click on the menu button, you see at the end of the list the label we typed just before in the method **Benjamin** ► *how to ref to method env* ◀ (see Figure 1.3), and when you click on it, an inspector is opened (see Figure 1.4)

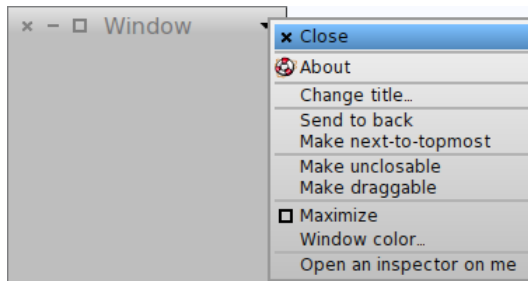


Figure 1.3: Menu with our extra item at the end

Main Window API

Jannik ► *some blahblah* ◀ Here is the list of the main API for a window

- Title

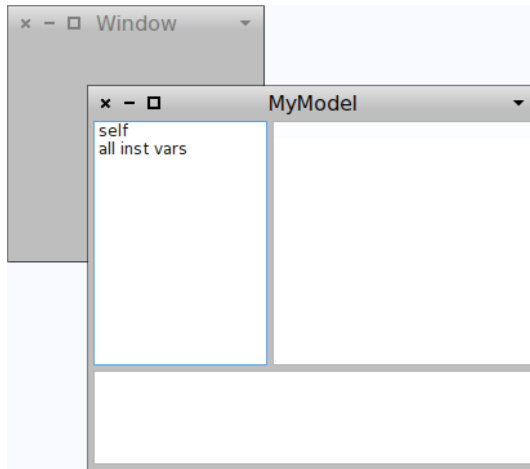


Figure 1.4: The inspector is well opened

- Color
- roundcorners?
- minimalExtent

```

•
SystemWindow new
  maximumExtent: 200@100; openInWorld

pareil pour

StandardWindow new
  unexpandedFrame: (0@0 extent: 200@100) ; openInWorld

```

je ne comprends pas pourquoi je peux alors avoir une fenetre immense?

Jannik ► what ?◀

- unresizable? Jannik ► what ?◀
- Action on close? Jannik ► what ?◀

Title. title: The default title of the window is simply 'Window'. You can change this title by sending title: to a window with a String as argument:

```

w := StandardWindow new title: 'My first window'.
w openInWorld

```

Position and size. In order to change the position and the size of a window, you can send the messages `extent:` and `position:` to a newly opened window.

```
w := StandardWindow new title: 'My first window'.
w openInWorld.
w extent: 100@50.
w position: 0@0
```

🕒 *Now try the following: first create a window but without opening it; then set its size and its position and then open it by sending `openInWorld` to it.*

```
w := StandardWindow new title: 'My first window'.
w extent: 100@50.
w position: 0@0
w openInWorld.
```

You should observe that the size and the position are not set with your values. Don't worry, you did nothing wrong, its a normal behavior regarding the way window opening is implemented in Morphic. In fact you have to know that a window internal state is overwritten with default values when it is opened. This is one of the responsibilities of `RealEstateAgent`.

1.2 Buttons

Push button

Button is the simplest common GUI element. Button shows information what it will do by showing texts and images. Button sends message when clicked by the user. The simplest button is a button that shows nothing nor does anything.

```
b := PluggableButtonMorph new openInWorld.
b bounds: (100@100 extent: 40@30).
```




Figure 1.5: simple button

If you click this button, you will notice the button does nothing. That's because we haven't told it what to do. We can set up the button to send

a message to an object when it is clicked. The object who will receive a message is called "target" sometimes "model". For now it is called "model". The selector of the message is called "action". Let's set up the model and action, so the button itself be deleted when it is clicked.

```
b model: b.  
b action: #delete.
```

 *click the button*

Ok. The button is deleted. Since, block is an object and block is a chunk of operation that can be evaluated later. We can make a button do more complicated operations by setting model with a block and action with #value .

```
b := PluggableButtonMorph new openInWorld.  
b bounds: (100@100 extent: 40@30).  
b model: [ self inform: 'you pressed me' ].  
b action: #value.
```




Figure 1.6: simple button with block

To give our user some hint what the button will do, it will be nice put a label on the button.

```
b label: 'press me'.
```



Figure 1.7: simple button with label

Let's delete the button and move on to the next subject.

```
b delete.
```

Last button we played with had a label. But maybe our model for the button changed its state by pressing the button or by other events. User must be informed with correct information. Button has a `getLabelSelector` which is a selector used for asking the model what the new label should it be. To use `getLabelSelector`, we must send a message `#on:getState:action:label:menu;`, which is a very typical form of method used in Morphic. It sets a bunch of required selectors with its model. Put your model for keyword `on:` and your button action for keyword `action:` and `getLabelSelector` for keyword `#label:`.

Evaluate the code below in your workspace. You will see a button with label showing an `OrderedCollection` which is the model for the button.

```
m := OrderedCollection withAll: {1. 2. 3. 4. 5}.

b := PluggableButtonMorph new openInWorld.
b addDependent: m.
b bounds: (100@100 extent: 40@30).
b on: m getState: nil action: #myButtonAction label: #printString menu: nil.
```

Since we assigned the `getLabelSelector` with `#printString`, label of the button will be the result of `#printString` on `m`.

If you press the button, you will get a `#dontUnderstandMessage: error`. That is because `OrderedCollection` does not have method `myButtonAction`. Define one as code below.

```
myButtonAction

self removeFirst.
self changed: #printString.
```

Now if you press the button you will see the the `m` is being `#removeFirst` and its label is updated. Button does not update the label of itself even though the `getLabelSelector` is set. It need to be asked the update itself. To do that `#changed:` in the `#myButtonAction` method and `#addDependent:` is used. To learn more about dependency system read section HwaJong ► *is there one?*◀




Figure 1.8: self updating button

Since the size of the collection is 5, more than five clicks, it will raise error. To avoid this, we need make it unpressable when collection gets empty. To do this, it is time to use `#getEnabledSelector`. Set a selector that will be used for asking the model whether the button may be enabled.


```
b getEnabledSelector: #notEmpty.
```

To trigger the enabling update, add another `#changed:` send inside the `#myButtonAction` method.

```
myButtonAction
```

```
self removeFirst.  
self changed: #printString.  
self changed: #notEmpty
```

 *click the button more than 5 time*

Checkbox

Checkbox is a button that can show on and off state, and toggles it when clicked. Filled box means on state, empty box means off state. In Pharo, checkbox can be made with `ThreePhaseButtonMorph` or `CheckboxButtonMorph`.

```
c := CheckboxButtonMorph new.  
c openInWorld.
```

Send `#selected:` message with boolean object to change its state.

```
c selected: true. "turn on"  
c selected: false. "turn off"
```

If target, and actionSelector is set(setting arguments is an option), checkbox can send message to its target.

```
m := Morph new.  
m openInWorld.  
  
c := CheckboxButtonMorph new.  
c openInWorld.  
c target: m.  
c actionSelector: #toggleCornerRounding.
```

Radio button

Radio button in Pharo is sharing same classes with checkbox. Only difference is that it draws a circle than square box if it is sent a message `beRadioButton`. It does not implement any behavior(logic) of radio button, so

it is our responsibility to write a good radio button model object that makes sure only one button is turned on, and at least one button is turned on.

Pharo has a model class that is for demonstrating radio buttons, named `ExampleRadioButtonModel`.

```
radioModel := ExampleRadioButtonModel new.
r1 := (CheckboxMorph on: radioModel selected: #isLeft changeSelected: #beLeft)
    label: 'left'.
r2 := (CheckboxMorph on: radioModel selected: #isCenter changeSelected: #beCenter)
    label: 'center'.
r3 := (CheckboxMorph on: radioModel selected: #isRight changeSelected: #beRight)
    label: 'right'.
r1 openInWorld.
r2 openInWorld.
r3 openInWorld.
r1 bounds: (440@10 extent: 80@30).
r2 bounds: (440@40 extent: 80@30).
r3 bounds: (440@70 extent: 80@30).
```

As explained earlier, we are using the same class `CheckboxMorph`, but it works perfectly as radio buttons. Radio buttons are asking the model whether they should turn themselves on with selectors `#isLeft`, `#isCenter`, `#isRight`. And when the user press the radio button it send message like `#beLeft`, `#beCenter`, `beRight` to the model. Then the model sends message back to the buttons so the they turned on and off property.

Following codes will change their appearance, too.

```
r1 beRadioButton.
r2 beRadioButton.
r3 beRadioButton.
2 timesRepeat: [
    r1 toggleEnabled.
    r2 toggleEnabled.
    r3 toggleEnabled.
].
\hjo{Hmm... Hope there is easier why to do this...}
```

Delete morphs after you are finished using them.

```
r1 delete.
r2 delete.
r3 delete.
```

1.3 Text fields

get text

set text

selection

1.4 Text editor

1.5 Panes and layout managing

newRow:

newColumn:

newGroup:

1.6 List widgets

getting list

getting selections

setting selections

1.7 Tree widgets

getting list

getting selections

setting selections

collapsing and expanding

1.8 Layout management

Benjamin ► Maybe we should write a section about layouts to describe their API ? ◀ **Stéf** ► yes excellent idea. Do you know that luarent and hilaire wrote some text ◀ **Benjamin** ► in fact, only `TableLayout` have a specific API ◀

A morph is basically a composite. As such it can be composed of sub-morphs. As it is explained below, adding a morph into a parent is very simple: just use the `addMorph:` message which is sent to a parent morph with a sub-morph passed as argument. The problem is to understand how a morph can manage its own layout according to its size and the morphs that it contains. There are two main possibilities: (1) a morph can be added to another morph with a fixed position or (2) the placement of a morph is automatically managed with regards to its parent morph.

Of course, the second solution is predominantly chosen. In this case, a layout manager is to be used to manage the space of a morph. But one have to decide if the placement is managed from the parent-morph or from the sub-morph point of view:

top-down placement: the placement is managed from the point of view of the parent morph which makes use of a layout manager that decides how to place the sub-morphs;

bottom-up placement: the placement is managed locally from the point of view of each sub-morph, the layout manager decides how to place a sub-morph according the parent extent.

Historically, these two possibilities are respectively provided by the `TableLayout` and by the `ProportionalLayout` classes. As it is explained in this chapter, each of these layout manager has its own variants and now a lot of possibilities are offered by the morphic framework.

Composing a morph

To add a morph into a parent morph, just make use of the `addMorph: message`. Together with the use of the `extent: and of the position: messages`, it is straightforward to compose a morph.

🕒 *Declare a morph with a small extent and its parent with a bigger extent, then assign a color to the parent (different from blue), set the position of the parent, add the first morph to the parent and open the parent morph*

As an example, you can try with the following code:

```
sub := Morph new extent: 30 @ 30. "the sub-morph with a small extent"
parent := Morph new extent: 100 @ 80. "the parent morph with a bigger extent"
parent position: 10 @ 10; color: Color orange. "set the parent position and color"
parent addMorph: sub. "add the sub-morph"
parent openInWorld "open the parent morph"
```



Figure 1.9: Composing a morph: a first try

The result is shown in Figure 1.8. You may be surprised because the sub-morph is drawn outside it's parent. There are two reasons for this:

- first, you must recall that a particularity of the morph system is to consider a morph's position as an absolute one. Here, the sub-morph position is 0@0 because it has not been explicitly changed. It implies that the sub-morph is drawn starting at the top left of the world.
- second, the parent position has been set **before** the sub-morph has been added to it.

🕒 *To be convinced, try the same experiment but this time, set the parent morph before adding the sub-morph*


```
sub := Morph new extent: 30 @ 30.
parent := Morph new extent: 100 @ 80.
parent addMorph: sub. "add the sub-morph"
parent position: 10 @ 10; color: Color orange. "set the parent position after"
parent openInWorld
```

The result of this second try is shown in Figure 1.9.




Figure 1.10: Composing a morph: a second try

For this second solution, the sub-morph is well physically inside its parent.

 *Move the parent morph with the mouse or by sending to it the message position: with a point as argument. Do this for the two solutions*

You can observe that the sub-morph is also moved whatever the solution you consider. If you inspect the sub-morph after having moved its parent you can see that its position has changed accordingly. So we can say that the sub-morph is logically in its parent but this doesn't mean that it is physically inside its parent. The reason why the second solution sub-morph is drawn inside its parent is only because the parent position has been changed after the sub-morph adding.

The consequence is that if you want a submorph to be placed inside the area occupied by its parent then you have to explicitly calculate its position according to the parent position.

 *Open the morph halo on the parent morph, then change the parent extent by clicking on the bottom right yellow button and moving the mouse around with the mouse button down. Do the same but with the sub-morph*

You observe that, if you change the parent morph extent, then the sub-morph extent stays unchanged and that you can make the parent morph smaller than its sub-morph. The same thing occurs if you change the sub-morph extent. It means that sub-morph and parent morph extents are managed independently.

So, if you want a morph extent to be changed according to a particular rule, for example according to a parent or a sub-morph extent change, then you have to implement it.


 *To exercise yourself, try to implement the following: a red morph containing one row with three adjacent white sub-morphs, each containing itself a StringMorph showing its position. see Figure 1.10*



Figure 1.11: Composing a morph with a row of sub-morphs

Here is a solution:

```
parent := Morph new color: Color red.
1 to: 3
do: [:i | | sub |
    sub := Morph new color: Color white; borderWidth: 1; extent: 20 @ 20; yourself.
    sub addMorphCentered: (StringMorph contents: i asString).
    parent addMorph: sub.
    sub position: (Point x: i - 1 * sub width y: 0)].
parent openInWorld
```

Now, imagine that you want the parent morph extent to exactly fit its row extent, that you want to be able to add a sub-morph and have the parent morph extent updated accordingly. It is clear that one can't implement it like that. But don't be despaired of this, don't give up!. Of course, there are many way do automatically manage morph positions and area extents as it is explained in next sections.

With the default layout into a window

This section explains how to add morph into a window with the default layout. **Alain** ► *Se serait mieux d'utiliser un parent Morph plutot qu'un Window* ◀ The default layout is ProportionalLayout. To use it, you have to use the method addMorph: aMorph frame: aFrame

```
aWindow
addMorph: morphToAdd
frame: (x0@y0 corner: x1@y1)
```

where x0, y0, x1 and y1 are defined as shown in Figure 1.11. Note that their values are floats between 0 and 1.

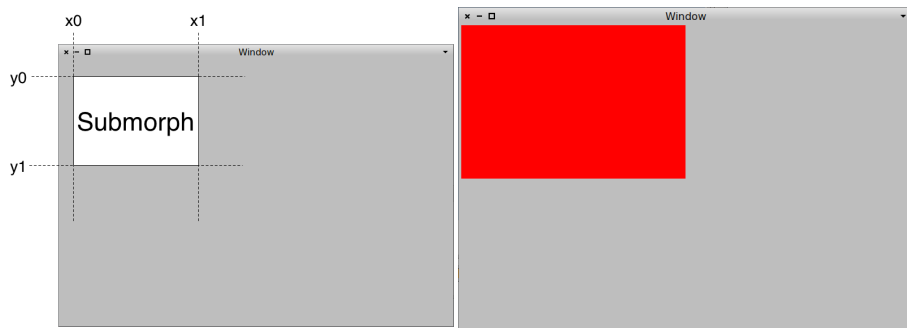


Figure 1.12: An example with a frame 0@0 corner: 0.5@0.5.

Some Morphs

First, let's define some morphs to illustrate and experiment with.

```
| container redMorph blueMorph greenMorph |
redMorph := Morph new color: Color red; yourself.
blueMorph := Morph new color: Color blue; yourself.
greenMorph := Morph new color: Color green; yourself.
container := PanelMorph new.
```

We will not repeat their definition in the future except in the first code snippet so that you can get its full definition.

A first configuration. The following snippet of code asks the red morph to occupy all the space of its container.

```
| window |
window := SystemWindow new.
redMorph := Morph new color: Color red; yourself.
window
  addMorph: redMorph
  frame: (0@0 corner: 1@1).

redMorph color: Color red.
window openInWorld
```

Note: you have to reset the color of the morph after having added it because the window set the default color. Here it seems strange but for more complicated morphs (like buttons, list ...) it sets the background color for a better integration.

As a result, you can see that the red morph is stretched the fill the space both vertically and horizontally (see Figure 1.12).

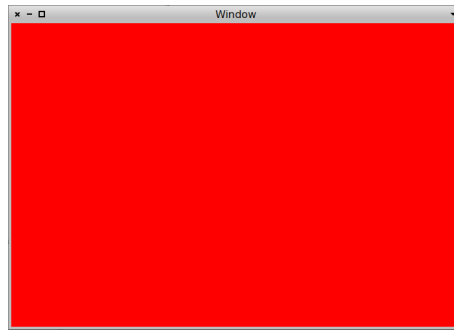


Figure 1.13: The red morph fill the whole space.

A little more complicated configuration. Now we add three morphs of different colors.

```
window
  addMorph: redMorph
  frame: (0@0 corner: 0.33@1).
window
  addMorph: blueMorph
  frame: (0.33@0 corner: 0.66@1).
window
  addMorph: greenMorph
  frame: (0.66@0 corner: 1@1).
```

As a result, you can see three stripes of color where each is horizontally a third of the window size and fills the space vertically (see Figure 1.13).

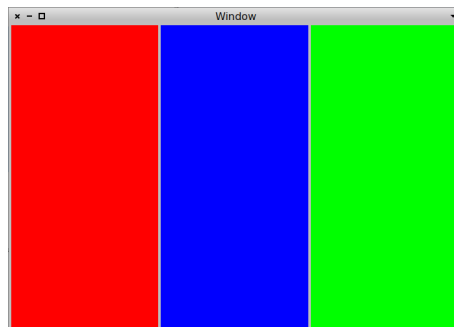


Figure 1.14: Three color stripes

Note that if you resize the window, proportions are kept. Also note that each stripe can be resized horizontally.

A last example. Now we change the configuration of

```
window
  addMorph: redMorph
  frame: (0@0 corner: 0.5@0.5).

window
  addMorph: blueMorph
  frame: (0.5@0 corner: 1@0.5).

window
  addMorph: greenMorph
  frame: (0@0.5 corner: 1@1).
```

As you may guess, the result is composed by two squares above a green rectangle (see Figure 1.14).

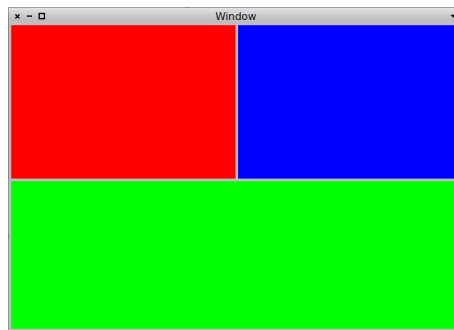


Figure 1.15: Two squares above and a rectangle below

Note that like for the previous example, you can resize each part. So basically, you now know everything about the default layout.

More complicated layouts

This section explains how to use different layouts and to use them to add morphs into another morph, which is a window or not.

Now that we have seen the default layout, we introduce you quickly the other layouts:

- `LayoutFrame`
- `RowLayout`
- `StackLayout`
- `TableLayout`

LayoutFrame

This layout is used when you have to specified both a fix part ¹ and a proportional part².

This layout is used by example to add a toolbar.

To use this layout, you will have to use the method `addMorph: aMorph fullFrame: aLayout` as follows:

```

toolBarHeight := 100.
window
  addMorph: redMorph
  fullFrame: (LayoutFrame
    fractions: (0@0 corner: 1@0) "proportional part"
    offsets: (0@0 corner: 0@toolBarHeight)). "fix part"

    "Here, fractions: (0@0 corner: 1@0) means that the morph will fit the while
    width of the morph, but that the height is not dynamic (both y values are 0)"
    "and offsets: (0@0 corner: 0@toolBarHeight) means that the height is static
    and values toolBarHeight"

window
  addMorph: blueMorph
  fullFrame: (LayoutFrame
    fractions: (0@0 corner: 1@1) "proportional part"
    offsets: (0@toolBarHeight corner: 0@0)). "fix part"

    "Here fractions: (0@0 corner: 1@1) means that the morph will fit the whole
    container"
    "but offsets: (0@toolBarHeight corner: 0@0) precise that the top of the morph will
    always be at toolBarHeight from the top of the container"

```

As a result, you can see the red static part and the blue part which fill the space. When you resize the window, the red part will always stay the same (see Figure 1.15).

Here is another example showing the fixed sized bar at the bottom of the window.

```

toolBarHeight := 100.
window
  addMorph: redMorph
  fullFrame: (LayoutFrame
    fractions: (0@0 corner: 1@1) "proportional part"
    offsets: (0@0 corner: 0@(toolBarHeight negated))). "fix part"
window
  addMorph: blueMorph

```

¹independent of the size of the window

²like the `ProportionalLayout`

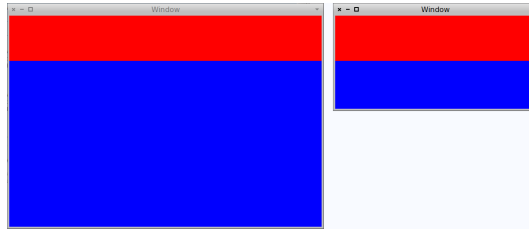


Figure 1.16: Fix red part and dynamic blue part

```
fullFrame: (LayoutFrame
  fractions: (0@1 corner: 1@1) "proportional part"
  offsets: (0@(toolBarHeight negated) corner: 0@0)). "fix part"
```

Here you can see that the fix part (the blue one) is below (see Figure 1.16).

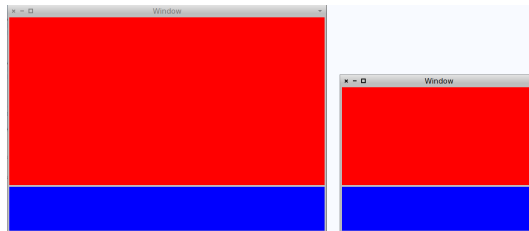


Figure 1.17: Fix blue part and red blue part

Let's try a bit more complicated example:

```
toolBarHeight := 100.
window
  addMorph: redMorph
  fullFrame: (LayoutFrame
    fractions: (0@0 corner: 1@0.4) "proportional part"
    offsets: (0@0 corner: 0@0)). "fix part"
window
  addMorph: greenMorph
  fullFrame: (LayoutFrame
    fractions: (0@0.4 corner: 1@0.4)
    offsets: (0@0 corner: 0@toolBarHeight)).
window
  addMorph: blueMorph
  fullFrame: (LayoutFrame
    fractions: (0@0.4 corner: 1@1) "proportional part"
    offsets: (0@toolBarHeight corner: 0@0)). "fix part"
window openInWorld.
```

So now, the fix part is the green morph which stick in the middle of the window (see Figure 1.17).



Figure 1.18: Dynamic red and blue parts and green fix part

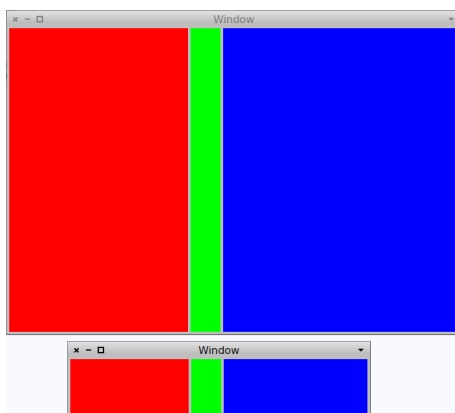


Figure 1.19: Dynamic red and blue parts and green fix part

Of course, you can do the same vertically:

```

toolBarWidth := 50.
window
  addMorph: redMorph
  fullFrame: (LayoutFrame
    fractions: (0@0 corner: 0.4@1) "proportional part"
    offsets: (0@0 corner: 0@0)). "fix part"
window
  addMorph: greenMorph
  fullFrame: (LayoutFrame
    fractions: (0.4@0 corner: 0.4@1)
    offsets: (0@0 corner: toolBarWidth@0)).
window
  addMorph: blueMorph
  fullFrame: (LayoutFrame
    fractions: (0.4@0 corner: 1@1) "proportional part"
    offsets: (toolBarWidth@0 corner: 0@0)). "fix part"

```

So the result is the same but vertically (see Figure 1.18).

RowLayout

The row layout is used to add submorphs in a single row where each submorph will be equally dispatched.

So let's try to use it. The message `layoutPolicy: RowLayout new.` specifies the new layout.

```
window layoutPolicy: RowLayout new.
```

```
window  
  addMorph: redMorph;  
  addMorph: blueMorph;  
  addMorph: greenMorph.
```

```
window openInWorld.
```

As you can see, the window title bar is misplaced because it is added by the system using the same method once the layout has been changed (see Figure 1.19).



Figure 1.20: The title bar is misplaced

To fix that, we will use a container instance of `PanelMorph`.

```
container := PanelMorph new.  
container layoutPolicy: RowLayout new.  
container  
  addMorph: redMorph;  
  addMorph: blueMorph;  
  addMorph: greenMorph.  
window  
  addMorph: container
```

```
frame: (0@0 corner: 1@1).  
window openInWorld.
```

As you can see, it's a bit better, but the morphs do not fill the whole space (see FIG 1.20).



Figure 1.21: The title bar is well placed, but morphs do not fill the whole space

So let's fix that using `hResizing:` and `vResizing:`.

```
container := PanelMorph new.  
container layoutPolicy: RowLayout new.  
redMorph  
  hResizing: #spaceFill;  
  vResizing: #spaceFill.  
blueMorph  
  hResizing: #spaceFill;  
  vResizing: #spaceFill.  
greenMorph  
  hResizing: #spaceFill;  
  vResizing: #spaceFill.  
container  
  addMorph: redMorph;  
  addMorph: blueMorph;  
  addMorph: greenMorph.  
window  
  addMorph: container  
  frame: (0@0 corner: 1@1).  
window openInWorld.
```

So for each submorph we have specified that both vertically and horizontally it should fill the space. The result is what we have expected (see Figure 1.21).

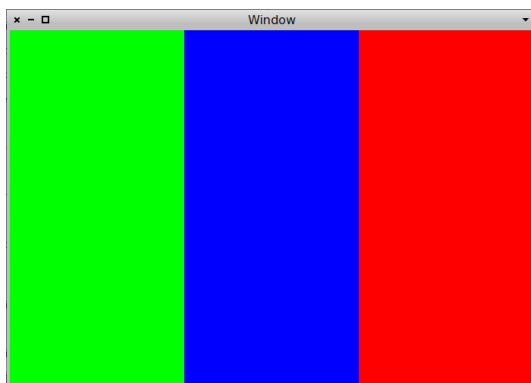


Figure 1.22: Finally what we expected

Note that contrary to the `ProportionalLayout`, here you can't resize any part.

StackLayout

Benjamin ► I do not know how it works ... Should ask Igor ◀ **Stéf** ► or may be we should drop it.
Ask Igor ◀

TableLayout

This layout is used to align submorphs following a row or a column and taking in account a direction. So by default, the layout builds a column directed from top to bottom.

```
container := PanelMorph new.
container
  layoutPolicy: TableLayout new;
  listDirection: #topToBottom.
{ redMorph. blueMorph. greenMorph } do: [:each |
  each
    hResizing: #spaceFill;
    vResizing: #spaceFill ].
container
  addMorph: redMorph;
  addMorph: blueMorph;
  addMorph: greenMorph.
window
  addMorph: container
  frame: (0@0 corner: 1@1).
window openInWorld.
```


So we obtain a column where any morph is dispatched equally (see Figure 1.22).



Figure 1.23: TableLayout by default

Note that you can't resize any submorph and that you have add in order: red, blue and green and you get green, blue and red.

The explanation is that when you add a morph following the direction, it's done like in Tetris, you make them fall following the direction. But the direction is kept when there is space to keep.

The following example show a situation where we do not force each morph to expand vertically

```
container := PanelMorph new.
container
  layoutPolicy: TableLayout new;
  listDirection: #topToBottom.
{ redMorph. blueMorph. greenMorph } do: [:each |
  each hResizing: #spaceFill ].
container
  addMorph: redMorph;
  addMorph: blueMorph;
  addMorph: greenMorph.
window
  addMorph: container
  frame: (0@0 corner: 1@1).
window openInWorld.
```

Here you see that the space is kept below submorphs (see Figure 1.23).

You can also experiment the other directions

TableLayout is also good to get a FlowLayout using its wrapDirection. By flow layout we mean which works the same way usually text is handled: All

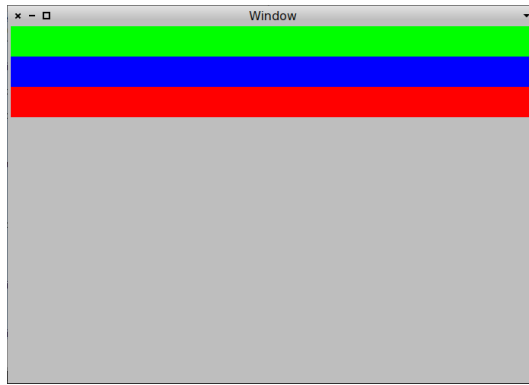


Figure 1.24: The space is left below submorphs

submorphs are put on a single line and wrapped when the border is hit.

HwaJong ► Does reader know about *UITheme* here? ◀

```
|builder|
builder := UITheme builder.
(builder newRow: {
  Morph new color: Color red.
  Morph new color: Color yellow.
  Morph new color: Color green.
  Morph new color: Color blue.
  Morph new color: Color orange})
  cellInset: 10;
  wrapDirection: #topToBottom;
  openInWindow
```




Figure 1.25: Bottom To Top




Figure 1.26: Left To Right




Figure 1.27: Right To Left

1.9 Some Examples

I would like to create a Text Morph that wraps the text horizontally, and expands the height to fit the text. Thus, this morph would never offer scrolling. Figure 1.28.

```
| textMorph |
textMorph := UITheme builder newText: ".
textMorph
  hResizing: #spaceFill;
  borderWidth: 1.
(UITheme builder newColumn: {textMorph}) openInWindow.
textMorph contentsWrapped: 'Some text here'
```

Get a halo and inspect the text morph
then use #contentsWrapped: to change text'




Figure 1.28: TableLayout can be used to implement FlowLayout To Left

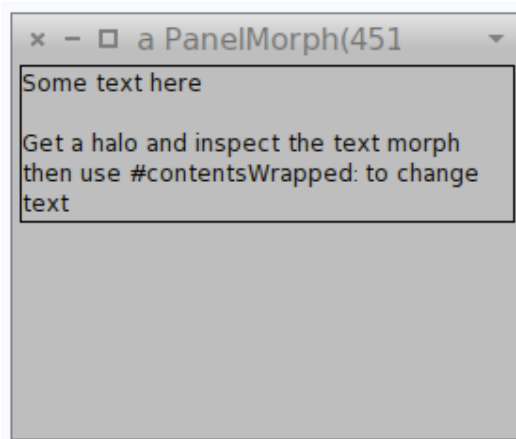


Figure 1.29: PaneMorph

If I place this one in a surrounding pane / expander / tab, how do I get the surrounding morph to resize when the text changes? See Figure 1.29.

```
|textMorph|
textMorph := UITheme builder newText: ".
textMorph
  hResizing: #spaceFill;
  borderWidth: 1.
(UITheme builder newColumn: {
  UITheme builder newExpander: 'One' for: textMorph.
  UITheme builder newExpander: 'Two' for: Morph new}) openInWindow.

textMorph contentsWrapped: 'Some text here
use #contentsWrapped: to change text'
```

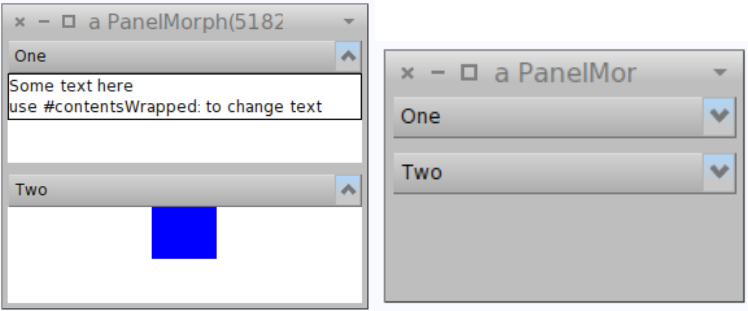


Figure 1.30: Two Expanders

In general, if the surrounding morph has #shrinkWrap constraints then changes to the (minimum) dimensions of its submorphs will propagate resulting in a change of size for the surrounding morph.

1.10 Conclusion