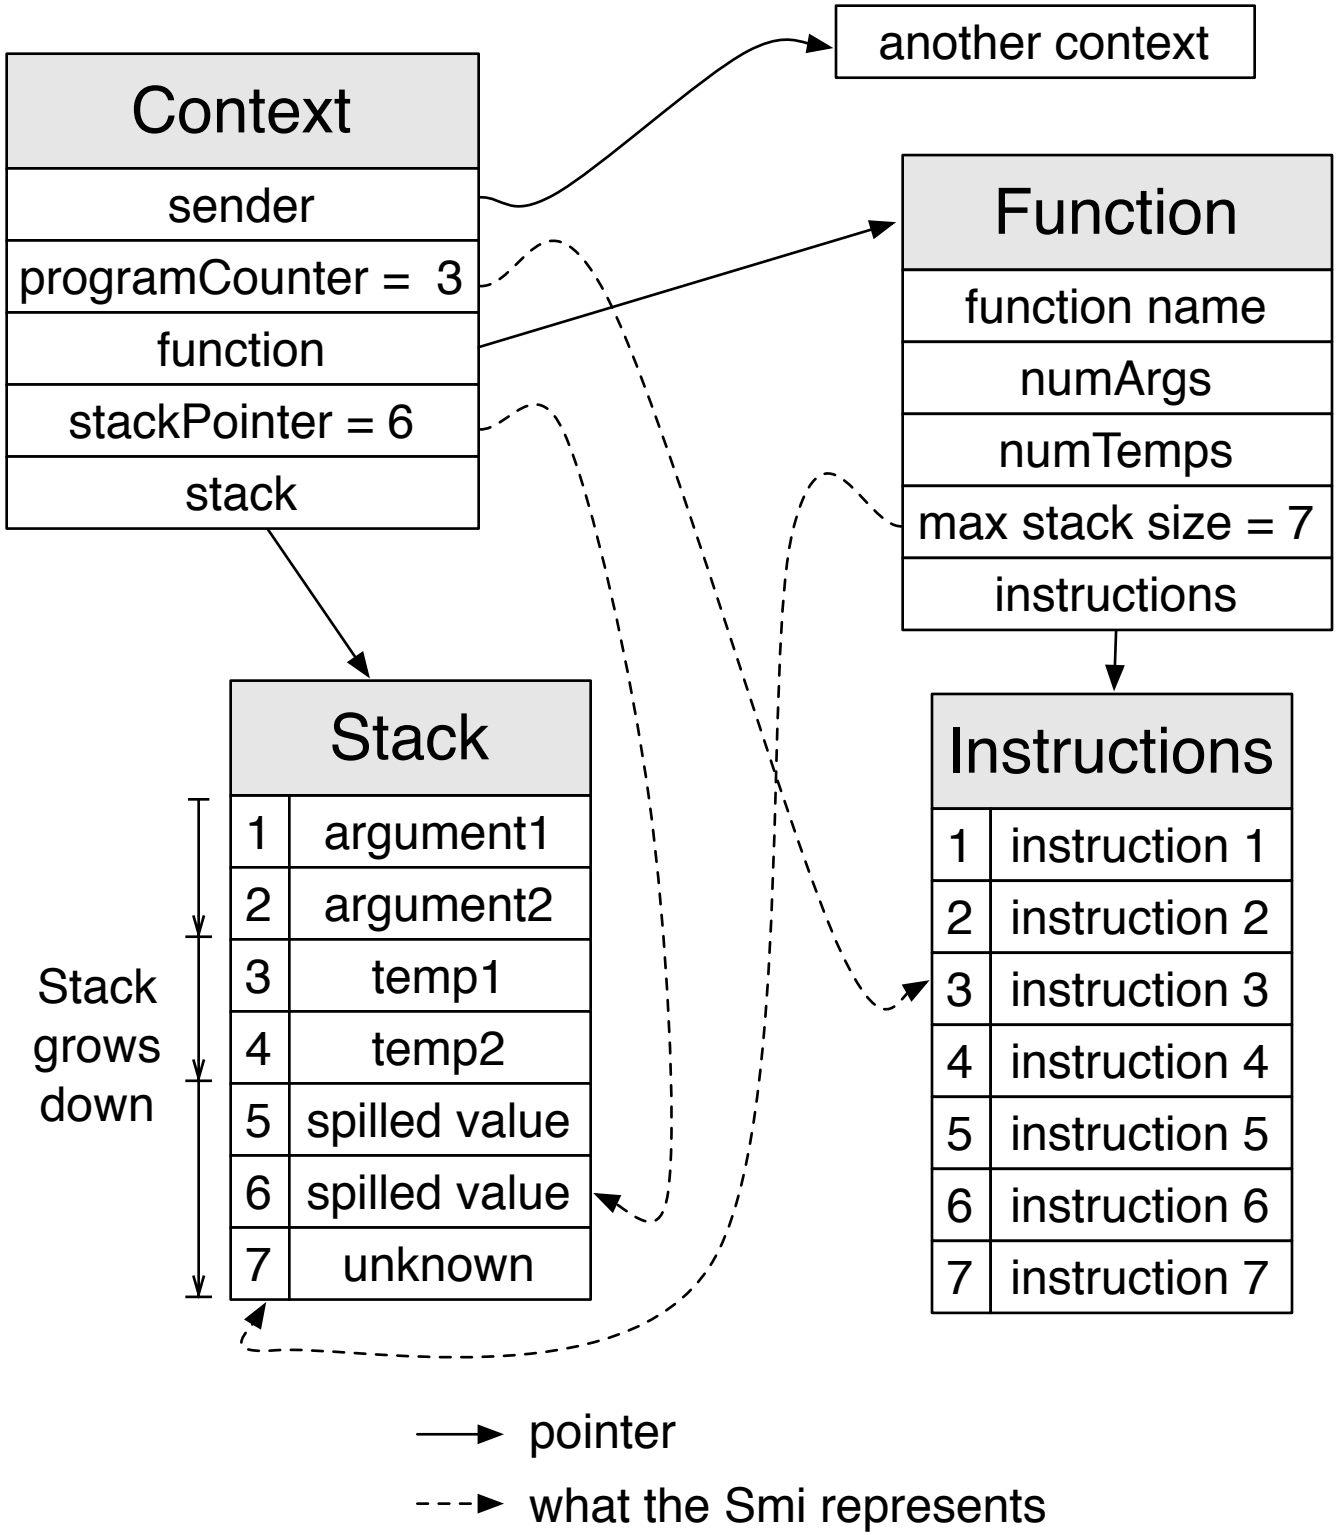
another context
Context
sender
programCounter = 3
function
stackPointer = 6
stack
Function
function name
numArgs
numTemps
max stack size = 7
instructions
Stack
1 argument1
2 argument2
3 temp1
4 temp2
5 spilled value
6 spilled value
7 unknown
Stack grows down
Instructions
1 instruction 1
2 instruction 2
3 instruction 3
4 instruction 4
5 instruction 5
6 instruction 6
7 instruction 7
pointer
what the Smi represents