
Learning to Pivot with Adversarial Networks

Anonymous Author(s)

Affiliation

Address

email

Abstract

1 In a scientific context, the presence of several plausible data generation processes
2 is often associated to systematic uncertainties. Robust inference is possible if it is
3 based on a pivot – a quantity whose distribution does not depend on the unknown
4 value of the (typically continuous) nuisance parameters that parametrize this family
5 of generation processes. In this work, we introduce a training procedure based
6 on adversarial networks for enforcing the pivotal property on a predictive model.
7 We derive theoretical results showing that the procedure tends towards a minimax
8 solution corresponding to a predictive model that is both optimal and independent
9 of the nuisance parameters (if that model exists) or for which one can tune a trade-
10 off between accuracy and robustness. We demonstrate the effectiveness of this
11 approach with a toy example and an example from particle physics.

12 1 Introduction

13 Machine learning techniques have been used to enhance a number of scientific disciplines, and they
14 have the potential to transform even more of the scientific process. One of the challenges of applying
15 machine learning to scientific problems is the need to incorporate systematic uncertainties, which
16 affect both the robustness of inference and the metrics used to evaluate a particular analysis strategy.

17 In this work, we focus on supervised learning systematic uncertainty can be associated to the fact
18 that the data generation process is not uniquely specified. In other words, the lack of systematic
19 uncertainties corresponds to the (rare) case that the process that generates training data is unique,
20 fully specified, and an accurate representative of the real world data. By contrast, a common situation
21 when systematic uncertainty is present is when the training data are not representative of the real data.
22 Several techniques for domain adaptation have been developed to create models that are more robust
23 to this binary type of uncertainty. A more generic situation is that there are several plausible data
24 generation processes, specified as a family parametrized by continuous nuisance parameters, as is
25 typically found in scientific domains. In this broader context, statisticians have for long been working
26 on robust inference techniques based on the concept of a pivot – a quantity whose distribution is
27 invariant with the nuisance parameters (see e.g., (Degroot and Schervish, 1975)).

28 Assuming a probability model $p(X, Y, Z)$, where X are the data, Y are the target labels, and Z are the
29 nuisance parameters, we consider the problem of learning a predictive model $f(X)$ for Y conditional
30 on the observed values of X that is robust to uncertainty in the unknown value of Z . We introduce a
31 flexible learning procedure based on adversarial networks (Goodfellow et al., 2014) for enforcing that
32 $f(X)$ is a pivot with respect to Z . We derive theoretical results proving that the procedure converges
33 towards a model that is both optimal and statistically independent of the nuisance parameters (if
34 that model exists) or for which one can tune a trade-off between accuracy and robustness (e.g., as
35 driven by a higher level objective). In particular, and to the best of our knowledge, our contribution is
36 the first solution for imposing pivotal constraints on a predictive model, working regardless of the
37 type of the nuisance parameter (discrete or continuous) or of its prior. Finally, we demonstrate the
38 effectiveness of the approach with a toy example and an example from particle physics.

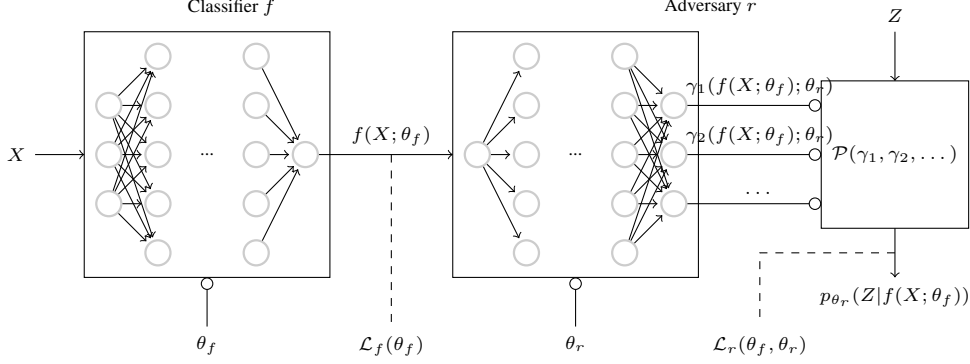


Figure 1: Architecture for the adversarial training of a binary classifier f against a nuisance parameters Z . The adversary r models the distribution $p(z|f(X; \theta_f) = s)$ of the nuisance parameters as observed only through the output $f(X; \theta_f)$ of the classifier. By maximizing the antagonistic objective $\mathcal{L}_r(\theta_f, \theta_r)$, the classifier f forces $p(z|f(X; \theta_f) = s)$ towards the prior $p(z)$, which happens when $f(X; \theta_f)$ is independent of the nuisance parameter Z and therefore pivotal.

2 Problem statement

We begin with a family of data generation processes $p(X, Y, Z)$, where $X \in \mathcal{X}$ are the data, $Y \in \mathcal{Y}$ are the target labels, and $Z \in \mathcal{Z}$ are the nuisance parameters that can be continuous or categorical. Let us assume that prior to incorporating the effect of uncertainty in Z , our goal is to learn a regression function $f : \mathcal{X} \rightarrow \mathcal{S}$ with parameters θ_f (e.g., a neural network-based probabilistic classifier) that minimizes a loss $\mathcal{L}_f(\theta_f)$ (e.g., the cross-entropy). In classification, values $s \in \mathcal{S} = \mathbb{R}^{|\mathcal{Y}|}$ correspond to scores used for mapping hard predictions $y \in \mathcal{Y}$, while $\mathcal{S} = \mathcal{Y}$ for regression.

We augment our initial objective so that inference based on $f(X; \theta_f)$ will be robust to the value $z \in \mathcal{Z}$ of the nuisance parameter Z – which remains unknown at test time. A formal way of enforcing robustness is to require that the distribution of $f(X; \theta_f)$ conditional on Z (and possibly Y) be invariant with the nuisance parameter Z . Thus, we wish to find a function f such that

$$p(f(X; \theta_f) = s | z) = p(f(X; \theta_f) = s | z') \quad (1)$$

for all $z, z' \in \mathcal{Z}$ and all values $s \in \mathcal{S}$ of $f(X; \theta_f)$. In words, we are looking for a predictive function f which is a pivotal quantity with respect to the nuisance parameters. This implies that $f(X; \theta_f)$ and Z are independent random variables.

As stated in Eqn. 1, the pivotal quantity criterion is imposed with respect to $p(X|Z)$ where Y is marginalized out. In some situations however (see e.g., Sec. 5.2), class conditional independence of $f(X; \theta_f)$ on the nuisance Z is preferred, which can then be stated as requiring

$$p(f(X; \theta_f) = s | z, y) = p(f(X; \theta_f) = s | z', y) \quad (2)$$

for one or several specified values $y \in \mathcal{Y}$.

3 Method

Joint training of adversarial networks was first proposed by (Goodfellow et al., 2014) as a way to build a generative model capable of producing samples from random noise z . More specifically, the authors pit a generative model $g : \mathbb{R}^n \rightarrow \mathbb{R}^p$ against an adversarial classifier $d : \mathbb{R}^p \rightarrow [0, 1]$ whose antagonistic objective is to recognize real data X from generated data $g(Z)$. Both models g and d are trained simultaneously, in such a way that g learns to produce samples that are difficult to identify by d , while d incrementally adapts to changes in g . At the equilibrium, g models a distribution whose samples can be identified by d only by chance. That is, assuming enough capacity in d and g , the distribution of $g(Z)$ eventually converges towards the real distribution of X .

In this work, we repurpose adversarial networks as a means to constrain the predictive model f in order to satisfy Eqn. 1. As illustrated in Fig. 1, we pit f against an adversarial model $r := p_{\theta_r}(z|f(X; \theta_f) = s)$ with parameters θ_r and associated loss $\mathcal{L}_r(\theta_f, \theta_r)$. This model takes as input

Algorithm 1 Adversarial training of a classifier f against an adversary r .

Inputs: training data $\{x_i, y_i, z_i\}_{i=1}^N$; *Outputs:* $\hat{\theta}_f, \hat{\theta}_r$.

```

1: for  $t = 1$  to  $T$  do
2:   for  $k = 1$  to  $K$  do
3:     Sample minibatch  $\{x_m, z_m, s_m = f(x_m; \theta_f)\}_{m=1}^M$  of size  $M$ ;
4:     With  $\theta_f$  fixed, update  $r$  by ascending its stochastic gradient  $\nabla_{\theta_r} E(\theta_f, \theta_r) :=$ 

```

$$\nabla_{\theta_r} \sum_{m=1}^M \log p_{\theta_r}(z_m | s_m);$$

```

5:   end for
6:   Sample minibatch  $\{x_m, y_m, z_m, s_m = f(x_m; \theta_f)\}_{m=1}^M$  of size  $M$ ;
7:   With  $\theta_r$  fixed, update  $f$  by descending its stochastic gradient  $\nabla_{\theta_f} E(\theta_f, \theta_r) :=$ 

```

$$\nabla_{\theta_f} \sum_{m=1}^M [-\log p_{\theta_f}(y_m | x_m) + \log p_{\theta_r}(z_m | s_m)],$$

where $p_{\theta_f}(y_m | x_m)$ denotes $\mathbf{1}(y_m = 0)(1 - s_m) + \mathbf{1}(y_m = 1)s_m$;

```

8: end for

```

69 realizations s of $f(X; \theta_f)$ and produces as output a function modeling the posterior probability
70 density $p_{\theta_r}(z | f(X; \theta_f) = s)$. Intuitively, if $p(f(X; \theta_f) = s | z)$ varies with z , then the corresponding
71 correlation can be captured by r . By contrast, if $p(f(X; \theta_f) = s | z)$ is invariant with z , as we require,
72 then r should perform poorly and be close to random guessing. Training f such that it additionally
73 minimizes the performance of r therefore acts as a regularization towards Eqn. 1.

74 If Z takes discrete values, then p_{θ_r} can be represented as a probabilistic classifier $\mathbb{R} \rightarrow \mathbb{R}^{|Z|}$ whose
75 j^{th} output (for $j = 1, \dots, |Z|$) is the estimated probability mass $p_{\theta_r}(z_j | f(X; \theta_f) = s)$. Similarly, if
76 Z takes continuous values, then we can model the posterior probability density $p(z | f(X; \theta_f) = s)$
77 with a sufficiently flexible parametric family of distributions $\mathcal{P}(\gamma_1, \gamma_2, \dots)$, where the parameters γ_j
78 depend on $f(X, \theta_f)$ and θ_r . The adversary r may take any form, i.e. it does not need to be a neural
79 network, as long as it exposes a differentiable function $p_{\theta_r}(z | f(X; \theta_f) = s)$ of sufficient capacity
80 to represent the true distribution. Fig. 1 illustrates a concrete example where $p_{\theta_r}(z | f(X; \theta_f) = s)$
81 is a mixture of gaussians, as modeled with a mixture density network (Bishop, 1994)). The j^{th}
82 output corresponds to the estimated value of the corresponding parameter γ_j of that distribution (e.g.,
83 the mean, variance and mixing coefficients of its components). The estimated probability density
84 $p_{\theta_r}(z | f(X; \theta_f) = s)$ can then be evaluated for any $z \in \mathcal{Z}$ and any score $s \in \mathcal{S}$.

85 As with generative adversarial networks, we propose to train f and r simultaneously, which we carry
86 out by considering the value function

$$E(\theta_f, \theta_r) = \mathcal{L}_f(\theta_f) - \mathcal{L}_r(\theta_f, \theta_r) \quad (3)$$

87 that we optimize by finding the minimax solution

$$\hat{\theta}_f, \hat{\theta}_r = \arg \min_{\theta_f} \max_{\theta_r} E(\theta_f, \theta_r). \quad (4)$$

88 Without loss of generality, the adversarial training procedure to obtain $(\hat{\theta}_f, \hat{\theta}_r)$ is formally presented
89 in Algorithm 1 in the case of a binary classifier $f : \mathbb{R}^p \rightarrow [0, 1]$ modeling $p(Y = 1 | X)$. For reasons
90 further explained in Sec. 4, \mathcal{L}_f and \mathcal{L}_r are respectively set to the expected value of the negative
91 log-likelihood of $Y | X$ under f and of $Z | f(X; \theta_f)$ under r :

$$\mathcal{L}_f(\theta_f) = \mathbb{E}_{x \sim X} \mathbb{E}_{y \sim Y | x} [-\log p_{\theta_f}(y | x)], \quad (5)$$

$$\mathcal{L}_r(\theta_f, \theta_r) = \mathbb{E}_{s \sim f(X; \theta_f)} \mathbb{E}_{z \sim Z | s} [-\log p_{\theta_r}(z | s)]. \quad (6)$$

92 The optimization algorithm consists in using stochastic gradient descent alternatively for solving
93 Eqn. 4. Finally, in the case of a class conditional pivot, the settings are the same, except that the
94 adversarial term $\mathcal{L}_r(\theta_f, \theta_r)$ is restricted to $Y = y$.

95 4 Theoretical results

96 In this section, we show that in the setting of Algorithm 1 where \mathcal{L}_f and \mathcal{L}_r are respectively set
 97 to expected value of the negative log-likelihood of $Y|X$ under f and of $Z|f(X; \theta_f)$ under r , the
 98 minimax solution of Eqn. 4 corresponds to a classifier f which is a pivotal quantity.

99 In this setting, the nuisance parameter Z is considered as a random variable of prior $p(Z)$, and
 100 our goal is to find a function $f(\cdot; \theta_f)$ such that $f(X; \theta_f)$ and Z are independent random variables.
 101 Importantly, classification of Y with respect to X is considered in the context where Z is marginalized
 102 out, which means that the classifier minimizing \mathcal{L}_f is optimal with respect to $Y|X$, but not necessarily
 103 with $Y|X, Z$ (unless Z is made explicit and is included among the input variables in X). Results
 104 hold for a nuisance parameters Z taking either categorical or continuous values. By abuse of notation,
 105 $H(Z)$ denotes the differential entropy in this latter case. Finally, the proposition below is derived in a
 106 non-parametric setting, by assuming that both f and r have enough capacity.

107 **Proposition 1.** *If there exists a minimax solution $(\hat{\theta}_f, \hat{\theta}_r)$ for Eqn. 4 such that $E(\hat{\theta}_f, \hat{\theta}_r) =$
 108 $H(Y|X) - H(Z)$, then $f(\cdot; \hat{\theta}_f)$ is both an optimal classifier and a pivotal quantity.*

109 *Proof.* For fixed θ_f , the adversary r is optimal at

$$\hat{\theta}_r = \arg \max_{\theta_r} E(\theta_f, \theta_r) = \arg \min_{\theta_r} \mathcal{L}_r(\theta_f, \theta_r), \quad (7)$$

110 in which case $p_{\hat{\theta}_r}(z|f(X; \theta_f) = s) = p(z|f(X; \theta_f) = s)$ for all z and all s , and \mathcal{L}_r reduces to the
 111 expected entropy $\mathbb{E}_{s \sim f(X; \theta_f)}[H(Z|f(X; \theta_f) = s)]$ of the conditional distribution of the nuisance
 112 parameters. This expectation is nothing else than the conditional entropy of the random variables
 113 Z and $f(X; \theta_f)$ and can be written as $H(Z|f(X; \theta_f))$. Accordingly, the value function E can be
 114 restated as a function depending on θ_f only:

$$E'(\theta_f) = \mathcal{L}_f(\theta_f) - H(Z|f(X; \theta_f)). \quad (8)$$

115 In particular, we have the lower bound

$$H(Y|X) - H(Z) \leq \mathcal{L}_f(\theta_f) - H(Z|f(X; \theta_f)) \quad (9)$$

116 where the equality holds at $\hat{\theta}_f = \arg \min_{\theta_f} E'(\theta_f)$ when:

- 117 • $\hat{\theta}_f$ minimizes the negative log-likelihood of $Y|X$ under f , which happens when $\hat{\theta}_f$ are the
 118 parameters of an optimal classifier. In this case, \mathcal{L}_f reduces to its minimum value $H(Y|X)$.
- 119 • $\hat{\theta}_f$ maximizes the conditional entropy $H(Z|f(X; \theta_f))$, since $H(Z|f(X; \theta)) \leq H(Z)$ from
 120 the properties of entropy. Note that this latter inequality holds for both the discrete and the
 121 differential definitions of entropy.

122 By assumption, the lower bound is active, thus we have $H(Z|f(X; \theta_f)) = H(Z)$ because of the
 123 second condition, which happens exactly when Z and $f(X; \theta_f)$ are independent variables. In other
 124 words, the optimal classifier $f(\cdot; \hat{\theta}_f)$ is also a pivotal quantity. \square

125 Proposition 1 suggests that if at each step of Algorithm 1 the adversary r is allowed to reach its
 126 optimum given f (e.g., by setting K sufficiently high) and if f is updated to improve $\mathcal{L}_f(\theta_f) -$
 127 $H(Z|f(X; \theta_f))$ with sufficiently small steps, then f should converge to a classifier that is both
 128 optimal and pivotal, provided such a classifier exists. Therefore, the adversarial term \mathcal{L}_r can be
 129 regarded as a way to select among the class of all optimal classifiers a function f that is also pivotal.
 130 Despite the former theoretical characterization of the minimax solution of Eqn. 4, let us note that
 131 formal guarantees of convergence towards that solution by Algorithm 1 in the case where a finite
 132 number K of steps is taken for r remains to be proven.

133 In practice, the assumption of existence of an optimal and pivotal classifier may not hold because the
 134 nuisance parameter directly shapes the decision boundary. In this case, the lower bound

$$H(Y|X) - H(Z) < \mathcal{L}_f(\theta_f) - H(Z|f(X; \theta_f)) \quad (10)$$

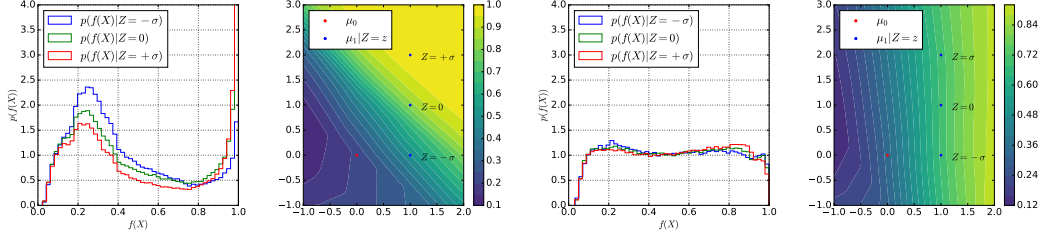


Figure 2: Toy example. (Left) Conditional probability densities of the decision scores at $Z = -\sigma, 0, \sigma$ without adversarial training. The resulting densities are dependent on the continuous parameter Z , indicating that f is not pivotal. (Middle left) The associated decision surface, highlighting the fact that samples are easier to classify for values of Z above σ , hence explaining the dependency. (Middle right) Conditional probability densities of the decision scores at $Z = -\sigma, 0, \sigma$ when f is built with adversarial training. The resulting densities are now almost identical to each other, indicating only a small dependency on Z . (Right) The associated decision surface, illustrating how adversarial training bends the decision function vertically to erase the dependency on Z .

is strict: f can either be an optimal classifier or a pivotal quantity, but not both simultaneously. In this situation, it is natural to rewrite the value function E as

$$E_\lambda(\theta_f, \theta_r) = \mathcal{L}_f(\theta_f) - \lambda \mathcal{L}_r(\theta_f, \theta_r), \quad (11)$$

where $\lambda \geq 0$ is a hyper-parameter controlling the trade-off between the performance of f and its independence with respect to the nuisance parameter. Setting λ to a large value will preferably enforces f to be pivotal while setting λ close to 0 will rather constraint f to be optimal. When the lower bound is strict, let us note however that there may exist distinct but equally good solutions θ_f, θ_r minimizing Eqn. 11. In this zero-sum game, an increase in accuracy would exactly be compensated by a decrease in pivotality and vice-versa. How to best navigate this Pareto frontier to maximize a higher-level objective remains a question open for future works.

Interestingly, let us finally emphasize that our results hold using only the (1D) output s of $f(\cdot; \theta_f)$ as input to the adversary. We could similarly enforce an intermediate representation of the data to be pivotal, e.g. as in (Ganin and Lempitsky, 2014), but this is not necessary.

5 Experiments

5.1 A toy example with a continuous nuisance parameter

As a guiding toy example, let us consider the binary classification of 2D data drawn from multivariate gaussians with equal priors, such that

$$x \sim \mathcal{N}\left((0, 0), \begin{bmatrix} 1 & -0.5 \\ -0.5 & 1 \end{bmatrix}\right) \quad \text{when } Y = 0, \quad (12)$$

$$x|Z = z \sim \mathcal{N}\left((1, 1 + z), \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}\right) \quad \text{when } Y = 1. \quad (13)$$

The continuous nuisance parameter Z here represents our uncertainty about the location of the mean of the second gaussian. Our goal is to build a classifier $f(\cdot; \theta_f)$ for predicting Y given X , but such that the probability distribution of $f(X; \theta_f)$ is invariant with respect to the nuisance parameter Z .

Assuming a gaussian prior $z \sim \mathcal{N}(0, 1)$, we generate data $\{x_i, y_i, z_i\}_{i=1}^N$, from which we train a neural network f minimizing $\mathcal{L}_f(\theta_f)$ without considering its adversary r . The network architecture comprises 2 dense hidden layers of 20 nodes respectively with tanh and ReLU activations, followed by a dense output layer with a single node with a sigmoid activation. As shown in Fig. 2, the resulting classifier is not pivotal, as the conditional probability densities of its decision scores $f(X; \theta_f)$ show large discrepancies between values z of the nuisance parameters. While not shown here, a classifier trained only from data generated at the nominal value $Z = 0$ would also not be pivotal.

Let us now consider the joint training of f against an adversary r implemented as a mixture density network modeling $Z|f(X; \theta_f)$ as a mixture of five gaussians. The network architecture of r comprises

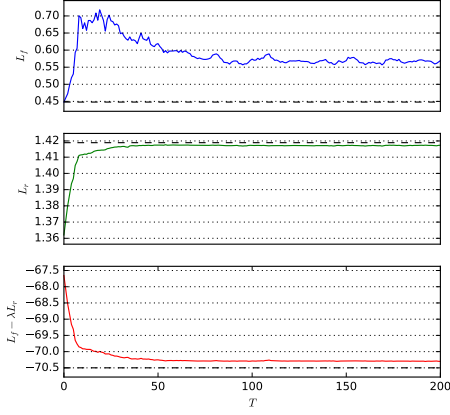


Figure 3: Toy example. Training curves for $\mathcal{L}_f(\theta_f)$, $\mathcal{L}_r(\theta_f, \theta_r)$ and $\mathcal{L}_f(\theta_f) - \lambda \mathcal{L}_r(\theta_f, \theta_r)$. Initialized with a pre-trained classifier f , adversarial training was performed for 200 iterations, mini-batches of size $M = 128$, $K = 500$ and $\lambda = 50$.

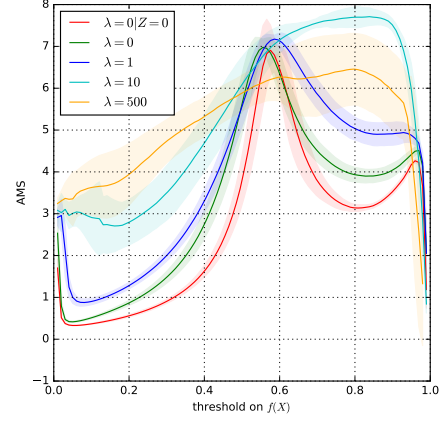


Figure 4: Physics example. Approximate median significance as a function of the decision threshold on the output of f . At $\lambda = 10$, trading accuracy for independence to pileup results in a net benefit in terms of statistical significance.

2 dense hidden layers of 20 nodes with ReLU activations, followed by an output layer of 15 nodes corresponding to the means, standard deviations and mixture coefficients of the gaussians. Output nodes for the mean values come with linear activations, output nodes for the standard deviations with exponential activations to ensure positivity, while output nodes for the mixture coefficients implement the softmax function to ensure positivity and normalization. When running Algorithm 1 as initialized with the classifier f obtained previously, adversarial training effectively reshapes the decision function so it that becomes almost independent on the nuisance parameter, as shown in Fig. 2. The conditional probability densities of the decision scores $f(X; \theta_f)$ are now very similar to each other, indicating only a residual dependency on the nuisance, as theoretically expected. The dynamics of adversarial training is illustrated in Fig. 3, where the losses \mathcal{L}_f , \mathcal{L}_r and $\mathcal{L}_f - \lambda \mathcal{L}_r$ are evaluated after each iteration. In the first iterations, we observe that the global objective $\mathcal{L}_f - \lambda \mathcal{L}_r$ is minimized by making the classifier less accurate, hence the corresponding increase of \mathcal{L}_f , but which results in a classifier that is more pivotal, hence the associated increase of \mathcal{L}_r and the total net benefit. As learning goes, minimizing E requires making predictions that are more accurate, hence decreasing \mathcal{L}_f , or that are even less dependent on Z , hence shaping p_{θ_r} towards the prior $p(Z)$. Indeed, \mathcal{L}_f eventually starts decreasing, while remaining bounded from below by $\min_{\theta_f} \mathcal{L}_f(\theta_f)$ as approximated by the dashed line in the first plot. Similarly, \mathcal{L}_r tends towards the differential entropy $H(Z)$ of the prior (where $H(Z) = \log(\sigma\sqrt{2\pi e}) = 1.419$ in the case of a standard normal), as shown by the dashed line in the second plot. Finally, let us note that the ideal situation of a classifier that is both optimal and pivotal is unreachable for this problem, as shown in the third plot by the offset between $\mathcal{L}_f - \lambda \mathcal{L}_r$ and the dashed line approximating $H(Y|X) - \lambda H(Z)$.

5.2 High energy physics examples

Binary Case Experiments at high energy colliders like the LHC (Evans and Bryant, 2008) are searching for evidence of new particles beyond those described by the Standard Model (SM) of particle physics. A wide array of theories predict the existence of new massive particles that would decay to known particles in the SM such as the W boson. The W boson is unstable and can decay to two quarks, each of which produce collimated sprays of particles known as jets. If the exotic particle is heavy, then the W boson will be moving very fast, and relativistic effects will cause the two jets from its decay to merge into a single ‘ W -jet’. These W -jets have a rich internal substructure (see e.g. (Altheimer et al., 2012, 2014)). However, jets are also produced ubiquitously at high energy colliders through more mundane processes in the SM, which leads to a challenging classification problem that is beset with a number of sources of systematic uncertainty. The classification challenge used here is common in jet substructure studies (see e.g. (CMS Collaboration, 2014; ATLAS Collaboration, 2015, 2014)): we aim to distinguish normal jets produced copiously at the LHC ($Y = 0$) and from

197 W -jets ($Y = 1$) potentially coming from an exotic process. We reuse the datasets used in (Baldi
198 et al., 2016a).

199 Challenging in its own right, this classification problem is made all the more difficult by the presence
200 of pileup, or multiple proton-proton interactions occurring simultaneously with the primary interaction.
201 These pileup interactions produce additional particles that can contribute significant energies to jets
202 unrelated to the underlying discriminating information. The number of pileup interactions can vary
203 with the running conditions of the collider, and we want the classifier to be robust to these conditions.
204 Taking some liberty, we consider an extreme case with a categorical nuisance parameter, where
205 $Z = 0$ corresponds to events without pileup and $Z = 1$ corresponds to events with pileup, for which
206 there are an average of 50 independent pileup interactions overlaid.

207 We do not expect that we will be able to find a function f that simultaneously minimizes the
208 classification loss \mathcal{L}_f and is pivotal. Thus, we need to optimize the hyper-parameter λ of Eqn. 11 with
209 respect to a higher-level objective. In this case, the natural higher-level context is a hypothesis test of
210 a null hypothesis with no $Y = 1$ events against an alternate hypothesis that is a mixture of $Y = 0$ and
211 $Y = 1$ events. In the absence of systematic uncertainties, optimizing \mathcal{L}_f simultaneously optimizes
212 the power of a classical hypothesis test in the Neyman-Pearson sense. When we include systematic
213 uncertainties we need to balance the classification performance against the robustness to uncertainty
214 in Z . Since we are still performing a hypothesis test against the null, we only wish to impose the
215 pivotal property on $Y = 0$ events. To this end, we use as a higher level objective the Approximate
216 Median Significance (AMS), which is a natural generalization of the power of a hypothesis test when
217 systematic uncertainties are taken into account (see Eqn. 20 of Adam-Bourdarios et al. (2014)).

218 For several values of λ , we train a classifier using Algorithm 1 but consider the adversarial term
219 \mathcal{L}_r conditioned on $Y = 0$ only, as outlined in Sec. 2. The architecture of f comprises 3 hidden
220 layers of 64 nodes respectively with tanh, ReLU and ReLU activations, and is terminated by a single
221 final output node with a sigmoid activation. The architecture of r is the same, but uses only ReLU
222 activations in its hidden nodes. As in the previous example, adversarial training is initialized with
223 f pre-trained. Experiments are performed on a subset of 150000 samples for training while AMS
224 is evaluated on an independent test set of 5000000 samples. Both training and testing samples are
225 weighted such that the null hypothesis corresponded to 1000 of $Y = 0$ events and the alternate
226 hypothesis included an additional 100 $Y = 1$ events prior to any thresholding on f . This allows us
227 to probe the efficacy of the method proposed here in a representative background-dominated high
228 energy physics environment. Results reported below are averages over 5 runs.

229 As Fig. 4 illustrates, without adversarial training (at $\lambda = 0|Z = 0$ when building a classifier at the
230 nominal value $Z = 0$ only, or at $\lambda = 0$ when building a classifier on data sampled from $p(X, Y, Z)$),
231 the AMS peaks at 7. By contrast, as the pivotal constraint is made stronger (for $\lambda > 0$) the AMS
232 peak moves higher, with a maximum value around 7.8 for $\lambda = 10$. Trading classification accuracy
233 for robustness to pileup thereby results in a net benefit in terms of the power of the hypothesis
234 test. Setting λ too high however (e.g. $\lambda = 500$) results in a decrease of the maximum AMS, by
235 focusing the capacity of f too strongly on independence with Z , at the expense of accuracy. In effect,
236 optimizing λ yields a principled and effective approach to control the trade-off between accuracy and
237 robustness that ultimately maximizes the power of the enveloping hypothesis test.

238 **Continuous Case** Recently, an independent group has used our approach to learn jet classifiers that
239 are independent of the jet mass, which is a continuous attribute (Shimmin et al., 2017). The results of
240 their studies show that the adversarial training strategy works very well for real-world problems with
241 continuous attributes, thus enhancing the sensitivity of searches for new physics at the LHC.

242 6 Related work

243 Learning a pivotal quantity can be related to the problem of domain adaptation (Blitzer et al., 2006;
244 Pan et al., 2011; Gopalan et al., 2011; Gong et al., 2013; Baktashmotlagh et al., 2013; Ajakan et al.,
245 2014; Ganin and Lempitsky, 2014), where the goal is often stated as trying to learn a domain-invariant
246 representation of the data. Likewise, our method also relates to the problem of enforcing fairness
247 in classification (Kamishima et al., 2012; Zemel et al., 2013; Feldman et al., 2015; Edwards and
248 Storkey, 2015; Zafar et al., 2015; Louizos et al., 2015), which is stated as learning a classifier that is
249 independent of some chosen attribute such as gender, color or age. For both families of methods, the

problem can equivalently be stated as learning a classifier which is a pivotal quantity with respect to either the domain or the selected feature. As an example, unsupervised domain adaptation with labeled data from a source domain and unlabeled data from a target domain can be recast as learning a predictive model f (i.e., trained to minimize \mathcal{L}_f evaluated on labeled source data only) that is also a pivot with respect to the domain Z (i.e., trained to maximize \mathcal{L}_r evaluated on both source and target data). In this context, (Ganin and Lempitsky, 2014; Edwards and Storkey, 2015) are certainly among the closest to our work, in which domain invariance and fairness are enforced through an adversarial minimax setup composed of a classifier and an adversarial discriminator. Following this line of work, our method can be regarded as a unified generalization that also supports a continuously parametrized family of domains or as enforcing fairness over continuous attributes.

Most related work is based on the strong and limiting assumption that Z is a binary random variable (e.g., $Z = 0$ for the source domain, and $Z = 1$ for the target domain). In particular, (Pan et al., 2011; Gong et al., 2013; Baktashmotlagh et al., 2013; Zemel et al., 2013; Ganin and Lempitsky, 2014; Ajakan et al., 2014; Edwards and Storkey, 2015; Louizos et al., 2015) are all based on the minimization of some form of divergence between the two distributions of $f(X)|Z = 0$ and $f(X)|Z = 1$. For this reason, these works cannot directly be generalized to non-binary or continuous nuisance parameters, both from a practical and theoretical point of view. Notably, Kamishima et al. (2012) enforces fairness through a prejudice regularization term based on empirical estimates of $p(f(X)|Z)$. While this approach is in principle sufficient for handling non-binary nuisance parameters Z , it requires accurate empirical estimates of $p(f(X)|Z = z)$ for all values z , which quickly becomes impractical as the cardinality of Z increases. By contrast, our approach models the conditional dependence through an adversarial network, which allows for generalization without necessarily requiring a growing number of training examples.

A common approach to account for systematic uncertainties in a scientific context (e.g. in high energy physics) is to take as fixed a classifier f built from training data for a nominal value z_0 of the nuisance parameter, and then propagate uncertainty by estimating $p(f(x)|z)$ with a parametrized calibration procedure. Clearly, this classifier is however not optimal for $z \neq z_0$. To overcome this issue, the classifier f is sometimes built instead on a mixture of training data generated from several plausible values z_0, z_1, \dots of the nuisance parameter. While this certainly improves classification performance with respect to the marginal model $p(X, Y)$, there is no reason to expect the resulting classifier to be pivotal, as shown previously in Sec. 5.1. As an alternative, parametrized classifiers (Cranmer et al., 2015; Baldi et al., 2016b) directly take (nuisance) parameters as additional input variables, hence ultimately providing the most statistically powerful approach for incorporating the effect of systematics on the underlying classification task. In practice, parametrized classifiers are also computationally expensive to build and evaluate. In particular, calibrating their decision function, i.e. approximating $p(f(x, z)|y, z)$ as a continuous function of z , remains an open challenge. By contrast, constraining f to be pivotal yields a classifier that can be directly used in a wider range of applications, since the dependence on the nuisance parameter Z has already been eliminated.

7 Conclusions

In this work, we proposed a flexible learning procedure for building a predictive model that is independent of continuous or categorical nuisance parameters by jointly training two neural networks in an adversarial fashion. From a theoretical perspective, we motivated the proposed algorithm by showing that the minimax value of its value function corresponds to a predictive model that is both optimal and pivotal (if that models exists) or for which one can tune the trade-off between power and robustness. From an empirical point of view, we confirmed the effectiveness of our method on a toy example and a particle physics example.

In terms of applications, the proposed solution can be used in any situation where the training data may not be representative of the real data the predictive model will be applied to in practice. In the scientific context, the presence of systematic uncertainty can be incorporated by considering a family of data generation processes, and it would be worth revisiting those scientific problems that utilize machine learning in light of this technique. Moreover, the approach also extends to cases where independence of the predictive model with respect to observed random variables is desired, as in domain adaptation or fairness in classification (e.g. (Shimmin et al., 2017)).

References

- Adam-Bourdarios, C., Cowan, G., Germain, C., Guyon, I., Kégl, B., and Rousseau, D. (2014). The higgs boson machine learning challenge. In *NIPS 2014 Workshop on High-energy Physics and Machine Learning*, volume 42, page 37.
- Ajakan, H., Germain, P., Larochelle, H., Laviolette, F., and Marchand, M. (2014). Domain-adversarial neural networks. *arXiv preprint arXiv:1412.4446*.
- Altheimer, A. et al. (2012). Jet Substructure at the Tevatron and LHC: New results, new tools, new benchmarks. *J. Phys.*, G39:063001.
- Altheimer, A. et al. (2014). Boosted objects and jet substructure at the LHC. Report of BOOST2012, held at IFIC Valencia, 23rd-27th of July 2012. *Eur. Phys. J.*, C74(3):2792.
- ATLAS Collaboration (2014). Performance of Boosted W Boson Identification with the ATLAS Detector. Technical Report ATL-PHYS-PUB-2014-004, CERN, Geneva.
- ATLAS Collaboration (2015). Identification of boosted, hadronically-decaying W and Z bosons in $\sqrt{s} = 13$ TeV Monte Carlo Simulations for ATLAS. Technical Report ATL-PHYS-PUB-2015-033, CERN, Geneva.
- Baktashmotlagh, M., Harandi, M., Lovell, B., and Salzmann, M. (2013). Unsupervised domain adaptation by domain invariant projection. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 769–776.
- Baldi, P., Bauer, K., Eng, C., Sadowski, P., and Whiteson, D. (2016a). Jet substructure classification in high-energy physics with deep neural networks. *Physical Review D*, 93(9):094034.
- Baldi, P., Cranmer, K., Faucett, T., Sadowski, P., and Whiteson, D. (2016b). Parameterized neural networks for high-energy physics. *Eur. Phys. J.*, C76(5):235.
- Bishop, C. M. (1994). Mixture density networks.
- Blitzer, J., McDonald, R., and Pereira, F. (2006). Domain adaptation with structural correspondence learning. In *Proceedings of the 2006 conference on empirical methods in natural language processing*, pages 120–128. Association for Computational Linguistics.
- CMS Collaboration (2014). Identification techniques for highly boosted W bosons that decay into hadrons. *JHEP*, 12:017.
- Cranmer, K., Pavez, J., and Louppe, G. (2015). Approximating likelihood ratios with calibrated discriminative classifiers. *arXiv preprint arXiv:1506.02169*.
- Degroot, M. H. and Schervish, M. J. (1975). *Probability and statistics*. 1st edition.
- Edwards, H. and Storkey, A. J. (2015). Censoring representations with an adversary. *arXiv preprint arXiv:1511.05897*.
- Evans, L. and Bryant, P. (2008). LHC Machine. *JINST*, 3:S08001.
- Feldman, M., Friedler, S. A., Moeller, J., Scheidegger, C., and Venkatasubramanian, S. (2015). Certifying and removing disparate impact. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 259–268. ACM.
- Ganin, Y. and Lempitsky, V. (2014). Unsupervised Domain Adaptation by Backpropagation. *arXiv preprint arXiv:1409.7495*.
- Gong, B., Grauman, K., and Sha, F. (2013). Connecting the dots with landmarks: Discriminatively learning domain-invariant features for unsupervised domain adaptation. In *Proceedings of The 30th International Conference on Machine Learning*, pages 222–230.
- Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., Courville, A., and Bengio, Y. (2014). Generative adversarial nets. In *Advances in Neural Information Processing Systems*, pages 2672–2680.

- 348 Gopalan, R., Li, R., and Chellappa, R. (2011). Domain adaptation for object recognition: An
349 unsupervised approach. In *Computer Vision (ICCV), 2011 IEEE International Conference on*,
350 pages 999–1006. IEEE.
- 351 Kamishima, T., Akaho, S., Asoh, H., and Sakuma, J. (2012). Fairness-aware classifier with prejudice
352 remover regularizer. *Machine Learning and Knowledge Discovery in Databases*, pages 35–50.
- 353 Louizos, C., Swersky, K., Li, Y., Welling, M., and Zemel, R. (2015). The variational fair autoencoder.
354 *arXiv preprint arXiv:1511.00830*.
- 355 Neal, R. M. (2007). Computing likelihood functions for high-energy physics experiments when
356 distributions are defined by simulators with nuisance parameters. In *Proceedings of PhyStat2007*,
357 *CERN-2008-001*, pages 111–118.
- 358 Pan, S. J., Tsang, I. W., Kwok, J. T., and Yang, Q. (2011). Domain adaptation via transfer component
359 analysis. *Neural Networks, IEEE Transactions on*, 22(2):199–210.
- 360 Shimmin, C., Sadowski, P., Baldi, P., Weik, E., Whiteson, D., Goul, E., and Sjøgaard, A. (2017).
361 Decorrelated Jet Substructure Tagging using Adversarial Neural Networks.
- 362 Zafar, M. B., Valera, I., Rodriguez, M. G., and Gummadi, K. P. (2015). Fairness constraints: A
363 mechanism for fair classification. *arXiv preprint arXiv:1507.05259*.
- 364 Zemel, R. S., Wu, Y., Swersky, K., Pitassi, T., and Dwork, C. (2013). Learning fair representations.
365 *ICML (3)*, 28:325–333.