

Objectives

- List the features of ES6
- Explain JavaScript let
- Identify the differences between var and let
- Explain JavaScript const
- Explain ES6 class fundamentals
- Explain ES6 class inheritance
- Define ES6 arrow functions
- Identify set(), map()

In this hands-on lab, you will learn how to:

- Use map() method of ES6
- Apply arrow functions of ES6
- Implement Destructuring features of ES6

Prerequisites

The following is required to complete this hands-on lab:

- Node.js
- NPM
- Visual Studio Code

Notes

Estimated time to complete this lab: **60 minutes.**

Create a React Application named “cricketapp” with the following components:

1. ListofPlayers
 - Declare an array with 11 players and store details of their names and scores using the map feature of ES6

```
return(  
  players.map((item)=>  
    {  
      return(  
        <div>  
          <li>Mr. {item.name}<span> {item.score} </span></li>  
        </div>  
      )  
    }  
  ))  
)
```

- Filter the players with scores below 70 using arrow functions of ES6.

```
return(  
  players.map((item)=>  
    {  
      if(item.score<=70)  
      {  
        players70.push(item);  
      }  
    }  
  )),
```

2. IndianPlayers

- a. Display the Odd Team Player and Even Team players using the Destructuring features of ES6


```
export function OddPlayers([first,, third,,fifth]) {  
  return(  
    <div>  
      <li> First : {first} </li>  
      <li> Third : {third} </li>  
      <li> Fifth : {fifth}</li>  
    </div>))
```

- b. Declare two arrays T20players and RanjiTrophy players and merge the two arrays and display them using the Merge feature of ES6

```
const T20Players=['First Player','Second Player','Third Player'];  
const RanjiTrophyPlayers=['Fourth Player','Fifth Player','Sixth Player'];  
export const IndianPlayers=[...T20Players, ...RanjiTrophyPlayers]
```

Display these two components in the same home page using a simple if else in the flag variable.

Output:

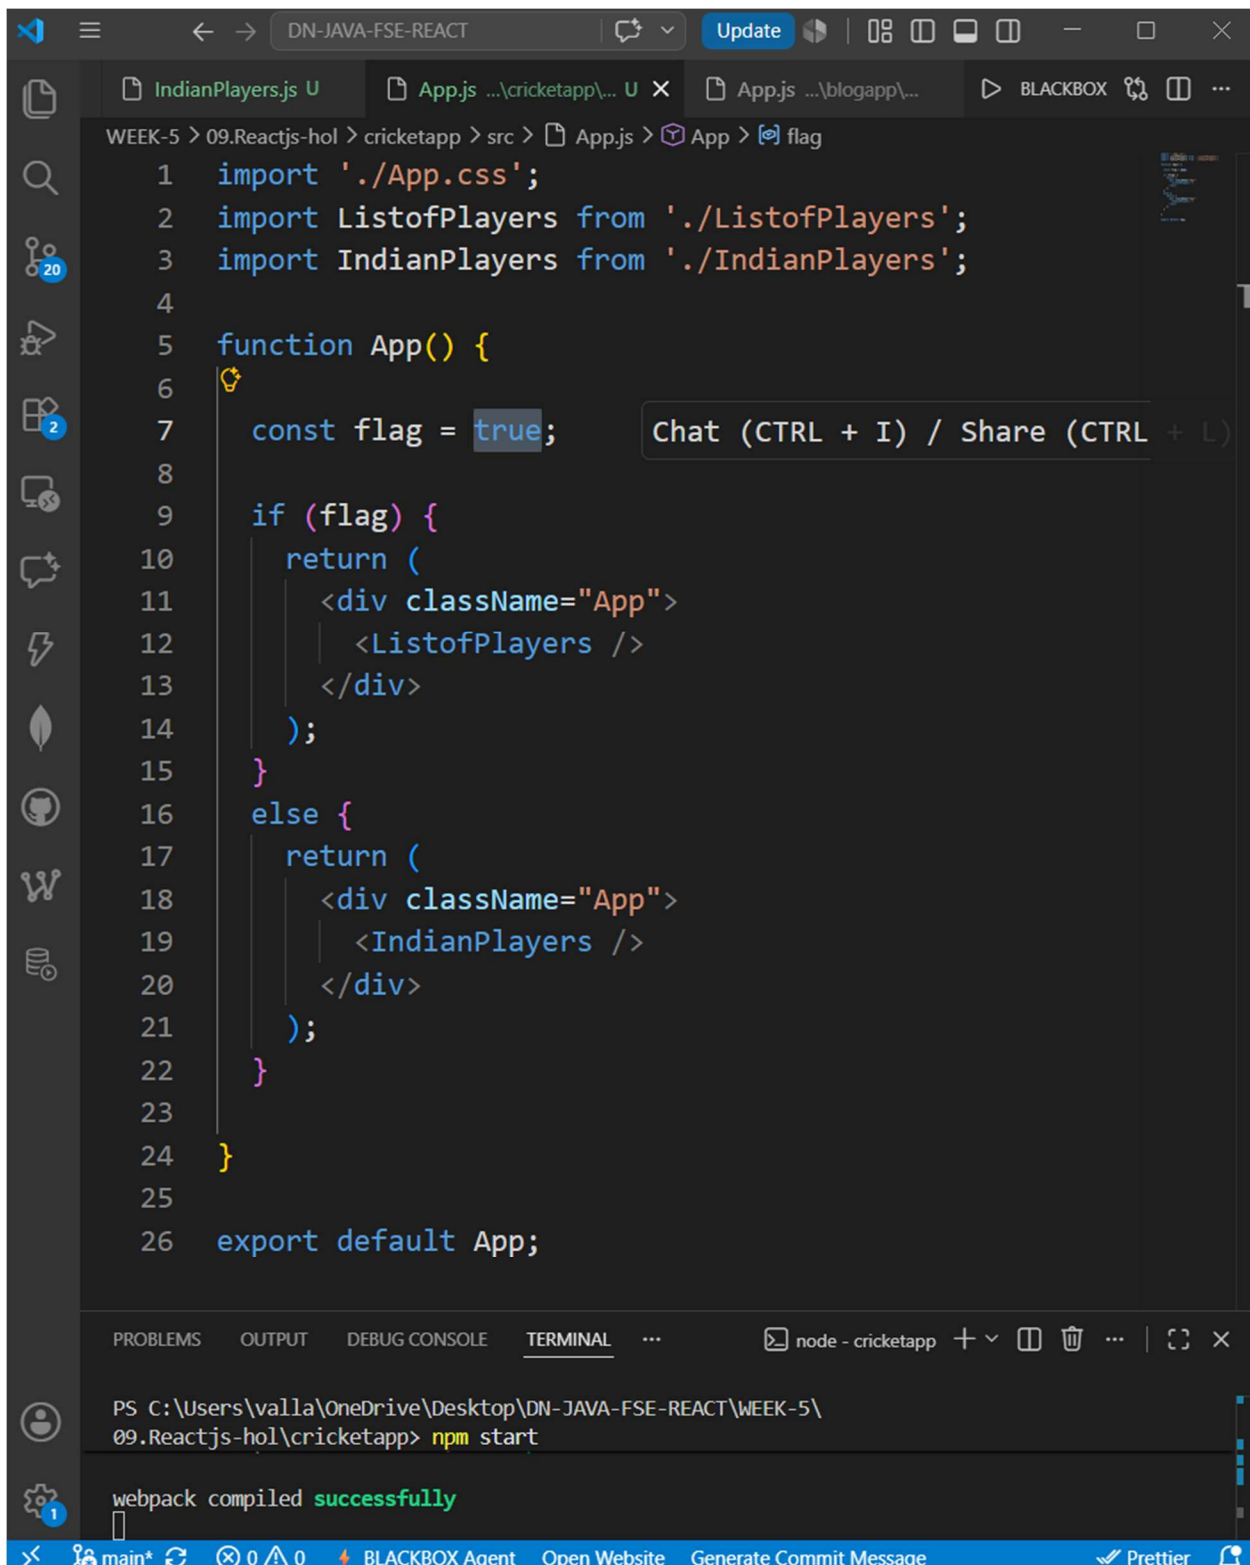

WEEK-5 > 09.Reactjs-hol > cricketapp > src > App.js > App > flag

```
1 import './App.css';
2 import ListofPlayers from './ListofPlayers';
3 import IndianPlayers from './IndianPlayers';
4
5 function App() {
6
7   const flag = true;
8
9   if (flag) {
10     return (
11       <div className="App">
12         <ListofPlayers />
13       </div>
14     );
15   }
16   else {
17     return (
18       <div className="App">
19         <IndianPlayers />
20       </div>
21     );
22   }
23
24 }
25
26 export default App;
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** ... node - cricketapp + v [trash] [refresh] [close]

PS C:\Users\valla\OneDrive\Desktop\DN-JAVA-FSE-REACT\WEEK-5\09.Reactjs-hol\cricketapp> npm start

webpack compiled **successfully**

main* 0 0 BLACKBOX Agent Open Website Generate Commit Message Prettier



List of Players

Virat Kohli - 95
Rohit Sharma - 88
Shubman Gill - 65
KL Rahul - 72
Hardik Pandya - 60
Ravindra Jadeja - 80
R Ashwin - 55
Mohammed Shami - 78
Jasprit Bumrah - 68
Surya Kumar Yadav - 91
Ishan Kishan - 50

Players with score below 70

Shubman Gill - 65
Hardik Pandya - 60
R Ashwin - 55
Jasprit Bumrah - 68
Ishan Kishan - 50

When Flag=false

DN-JAVA-FSE-REACT

Update

IndianPlayers.js U

App.js ...\cricketapp\... U X

App.js ...\blogapp\...

BLACKBOX

WEEK-5 > 09.Reactjs-hol > cricketapp > src > App.js > App > flag

```
1 import './App.css';
2 import ListofPlayers from './ListofPlayers';
3 import IndianPlayers from './IndianPlayers';
4
5 function App() {
6
7   const flag = false;
8
9   if (flag) {
10     return (
11       <div className="App">
12         <ListofPlayers />
13       </div>
14     );
15   }
16   else {
17     return (
18       <div className="App">
19         <IndianPlayers />
20       </div>
21     );
22   }
23
24 }
25
26 export default App;
```

Chat (CTRL + I) / Share (CTRL + L)

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

node - cricketapp

PS C:\Users\valla\OneDrive\Desktop\DN-JAVA-FSE-REACT\WEEK-5\09.Reactjs-hol\cricketapp> npm start

webpack compiled successfully

main* 0 0 BLACKBOX Agent Open Website Generate Commit Message Prettier

