

SIMATS ENGINEERING (SAVEETHA SCHOOL OF ENGINEERING)
Department of Computer Science and Engineering

ASSESSMENT TOOL 3 – SHORT ANSWER TEST

Course Code:	CSA0305	Course Title:	Data Structures
CO Assessed:	CO5 – Manipulation (BL3, BL4)	Assessment:	Assessment Tool 3 – Short Answer Test
Weightage:	30% of CIA	Total Marks:	100
CO2 Statement:	Construct MST using shortest path algorithms and traverse the graph to model and analyse real-world problem.		
Student Name:	Sareeb	Reg. No.:	192524023
Section / Batch:	AI and DS / 2025	Date:	04/09/2026

Code of Conduct

I Sareeb (192524023) (Name / Reg No)

certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment. I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the Student: R. S.

Instructions

- This test contains 10 short answer test questions. Total: 100 Marks.
- When a student answer using an Analytical problem-solving, in evaluation the answer should be with following five requirements: Understanding of problem, select appropriate data structure, Design the solution, analyze, Clarity of representation.
- No negative marking. Unanswered questions carry zero marks.
- No DTP printouts or electronic devices permitted. They should provide written materials.

Section / Topic	Focus	Q Nos	Marks
Minimum Spanning Tree	Kruskal's Algorithm	1	20
Graph Sorting	Topological Sort	2	20
Shortest Path Algorithm	MST & Dijkstra's Algorithm	3	20
Shortest Path Algorithm	Dijkstra's Algorithm	4	20
Minimum Spanning Tree	Prim's or Kruskal's Algorithm	5	20
GRAND TOTAL:			100 Marks

Annexure A – Short Answer Test

- Perform the following operations using stack. Assume the size of the stack is 5 and have a value of 22, 55, 33, 66, 88 in the stack from 0 position to size-1. Now perform the following operations: 1) Invert the elements in the stack, 2) Pop (), 3) Pop (), 3) Pop Construct AVL tree for the following elements. Mention the
- Given a collection of elements 10,20,30,40,50,60,70,80. The Key element to be search 70. Compare how searching is performed in Linear Search and Binary Search. Identify the efficient search method. Justify.
- What is the postfix and prefix forms of the following expression? $A+B*(C-D)/(P-R)$
- Construct AVL tree for the following elements. Mention the Rotations in each step of insertion. 1,2,3,4,5,6,7,8,9,10
- Construct a heap by inserting 10, 15, 12, 23, 21, 1, 6, 43, 34, 56, 78, 23, 45 into a binary heap.
- Construct a B-Tree of Order 3 by inserting numbers 34,26,45,12,87,56,78,22,23,24,65,85,95.
- Perform the merge sort for the following inputs. Also, show the result for each step of iteration. 40,20,70,14,60,61,97,30.
- How the following data set can be sorted by quick sort. Show each step-in sorting. 78,23,31,88,43,55,67,55.
- Perform Open Hashing & Linear Probing for the given set of 0,1,81, 4,64,25,16,36, 9 and 49.
- Consider the following graph & construct BFS.



Graph with six nodes

Rubrics for Calculation

Criteria	Weightage	Level 4 – Exemplary	Level 3 – Proficient	Level 2 – Developing	Level 1 – Beginning
Conceptual Understanding	30	Demonstrates complete and accurate understanding of concepts	Good understanding with minor gaps	Basic understanding	Limited understanding
Accuracy of Answer	25	Answers are completely correct and relevant	Mostly correct with minor errors	Partially correct	Mostly incorrect
Problem-Solving & Reasoning	20	Provides logical reasoning and appropriate steps	Good reasoning with minor gaps	Basic reasoning	Lacks logical reasoning
Clarity & Relevance	15	Answers are precise, clear, concise, and directly address the question	Mostly clear and relevant	Somewhat unclear or incomplete	Irrelevant or unclear answers
Time Management & Completion	10	Completes all questions accurately within the allotted time	Completes most questions on time	Requires additional time	Unable to complete the test

Faculty In-charge	Course Coordinator	Program Director
Signature: 	Signature: _____	Signature: _____
Date: _____	Date: _____	Date: _____

1. Case Operations

From 00-0 20, 0 2-20, 20, 20

Answer on to the other engine movement

Page 2
 00
 20
 20
 20
 20
 20

operation 10 Forward into closed

After assembly into closed

Page 2
 00
 20
 20
 20
 20
 20

operation 20 20 20

Page 2 00 20 20

Case 20 20 20
 20
 20
 20
 20

operation 2 20 20

Page 2 00

Case 20 20 20
 20
 20
 20

Operation: 4: Pop ()

Popped = 33

Final Stack: Top $\rightarrow$ 66
88

Final answer

* Inverted stack = 22, 55, 33, 66, 88.

* First Pop = 22

* Second Pop = 55

* Third Pop = 33

* Remaining stack = 66, 88

The original question specifies the five elements stack and the three Pop operations.

⑤. Linear Search vs Binary Search

Given! 10, 20, 30, 40, 50, 60, 70, 80

Search key: 70.

The data is already sorted, so both searches can be demonstrated.

Linear Search! Linear search checks elements one by one

Step	Element	Comparison
1	10	$10 \neq 70$
2	20	$20 \neq 70$
3	30	$30 \neq 70$
4	40	$40 \neq 70$
5	50	$50 \neq 70$
6	60	$60 \neq 70$
7	70	$70 = 70$ Found

Therefore: $\therefore$ 7 comparisons

Linear Search Complexity.

- * Best case: $O(1)$,
- * Average case: $O(n)$,
- * Worst case: $O(n)$,

Binary Search : Array :

10	20	30	40	50	60	70	80
----	----	----	----	----	----	----	----

Step: 1 Low = 0, High = 7

$$\text{Mid} = (0 + 7) / 2 = 3$$

Element at Index 3 is 40

Since $70 > 40$ Search right half.

Step: 2 Search:

50	60	70	80
----	----	----	----

$$\text{Mid} = 5 \Rightarrow 60$$

Since: $70 > 60$ Search right half

Step: 3 :

70	80
----	----

$$\text{Mid} = 6$$

70 = 70

Element found.

Therefore : 3 Comparisons

Binary Search Complexity

* Best case = $O(1)$

* Average case = $O(\log n)$

* Worst case = $O(\log n)$.

Efficient Method: Binary Search is more efficient

For this example.

Linear search = 7 Comparisons

Binary search = 3 Comparisons

Justification: Binary Search eliminates approximately half of the remaining search space ^{after} every comparison, but it requires the data to be stored

③ Postfix and Prefix

Expression: $A + B * (C - D) / (P - R)$

Step: 1 Parentheses : $(C - D)$
 $(P - R)$

Step: 2 Multiplication $B * (C - D)$

Step: 3 Division $[B * (C - D)] / (P - R)$

Step: 4 Addition $A + [B * (C - D) / (P - R)]$

Convert operators after their operands:

$ABCD - * PR - / +$

Therefore Postfix: $ABCD - * PR - / +$

Prefix: Convert operators before their operands.

$+ A / * B - CD - PR$

Therefore

Prefix = $+ A / * B - CD - PR$


The expression specified in the paper is

$A + B * (C - D) / (P - R)$


④ AVL Tree

Elements 1, 2, 3, 4, 5, 6, 7, 8, 9, 10

Insert 1

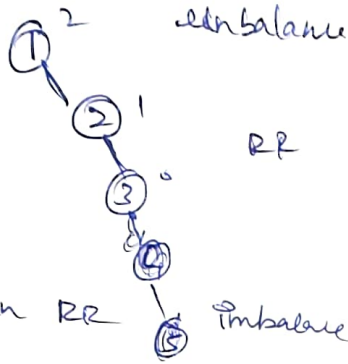


This is an RR imbalance at 1




Insert 5




Insert 6

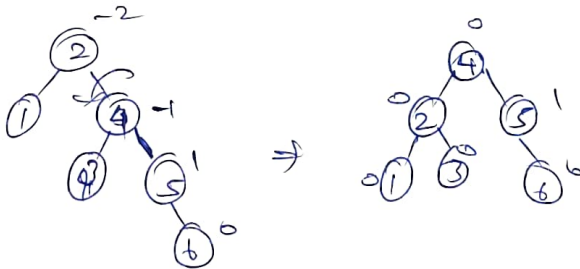




Insert 7

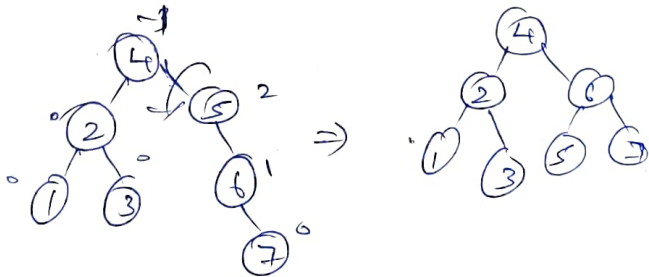



Insert 8:

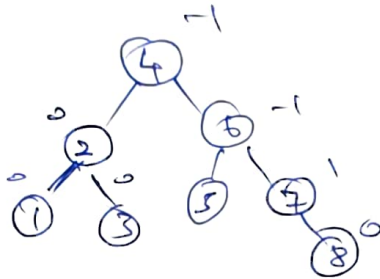

Insect : 9

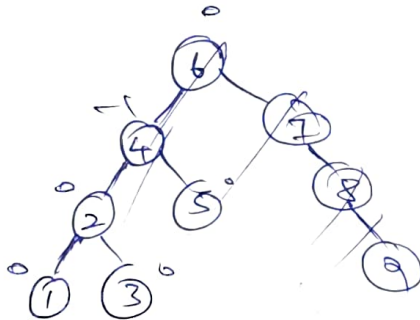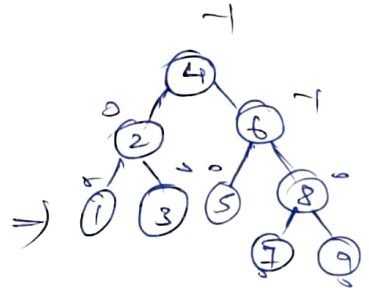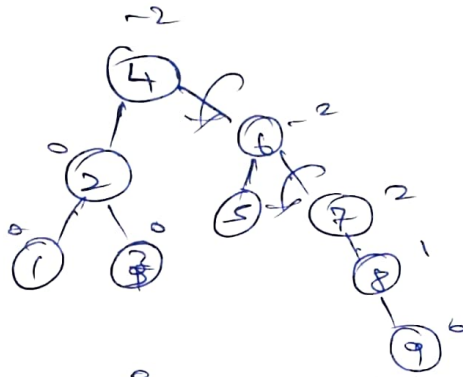



Insert 10

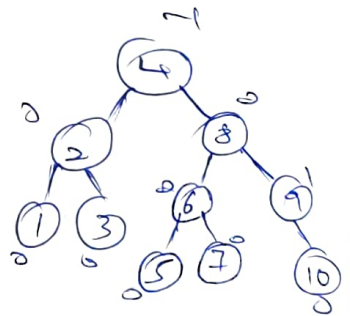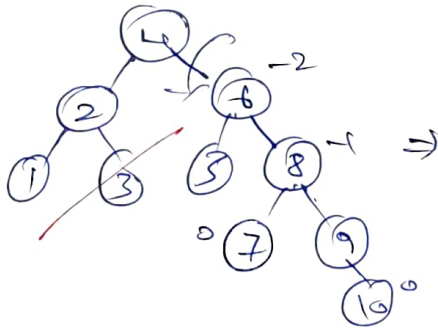



⑤ Binary Heap.


Elements: 10, 15, 12, 23, 21, 1, 6, 43, 34, 56, 78, 23, 4

max Heap:

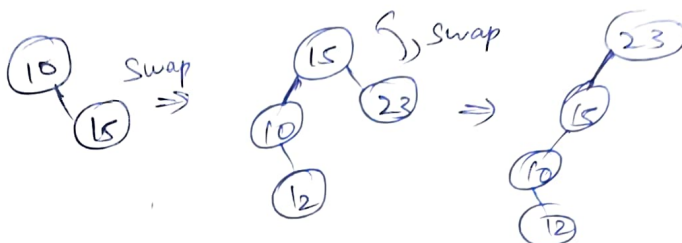


Step: 1

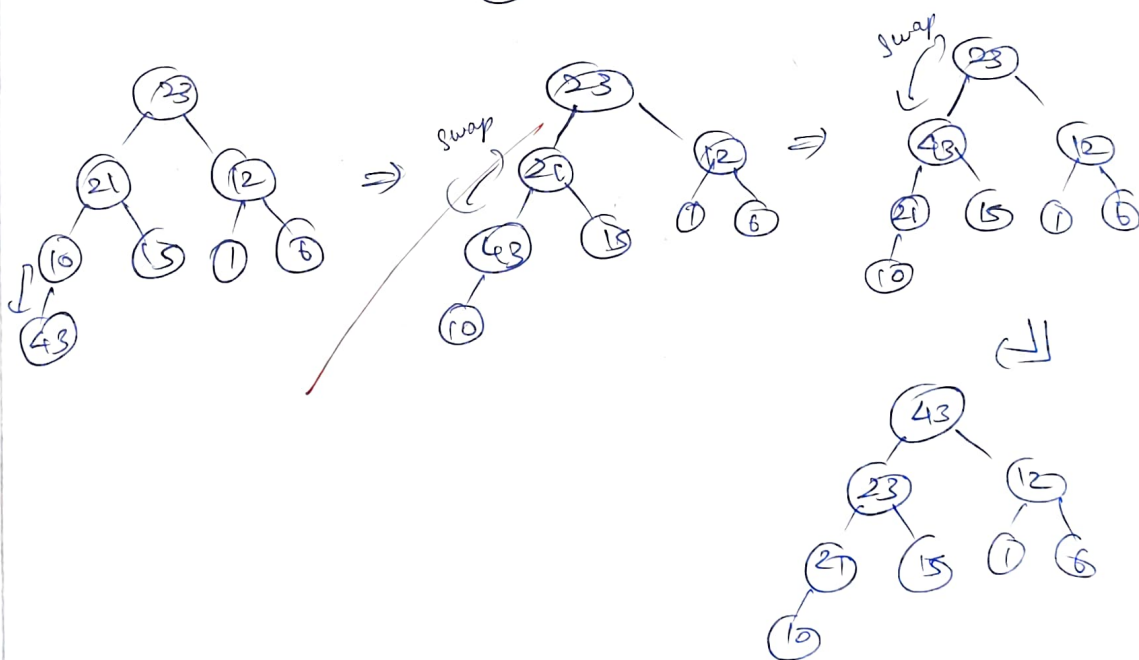
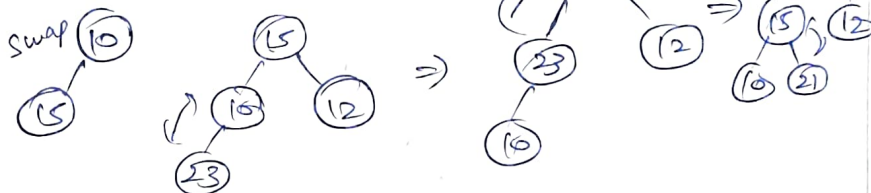


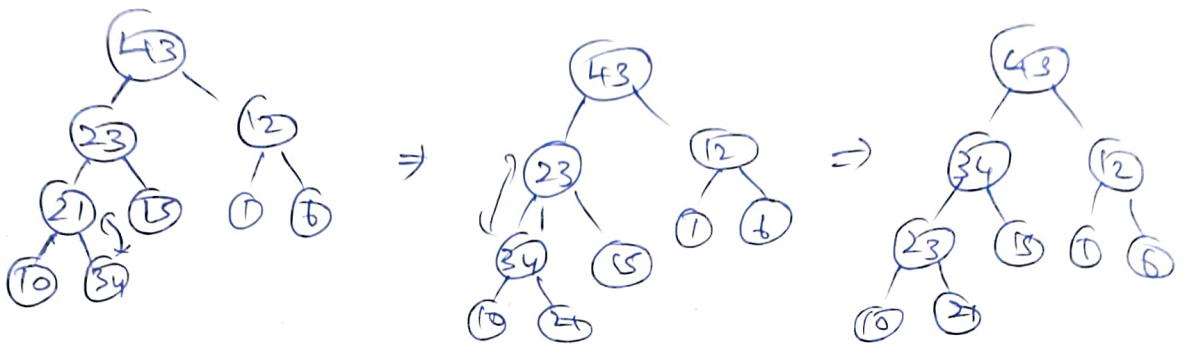


Insert 56

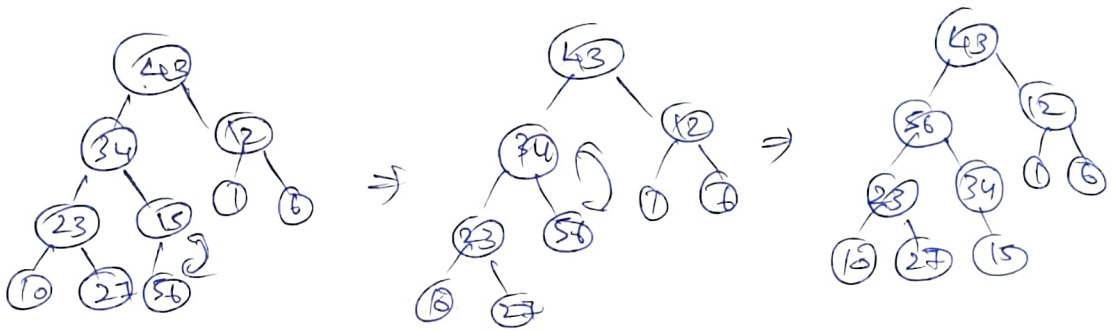


Insert 78

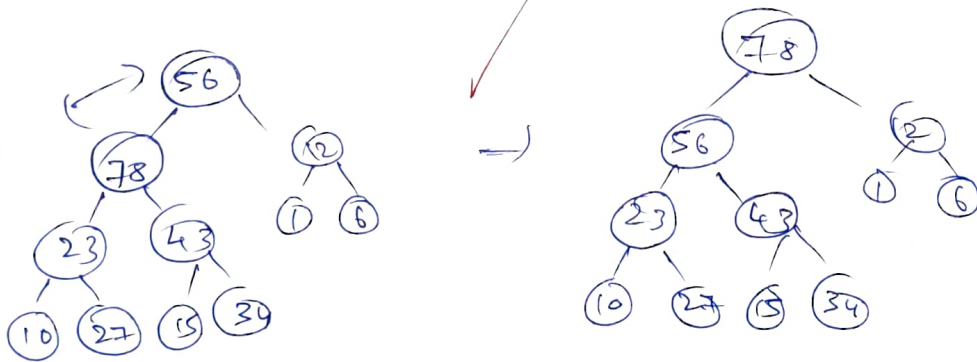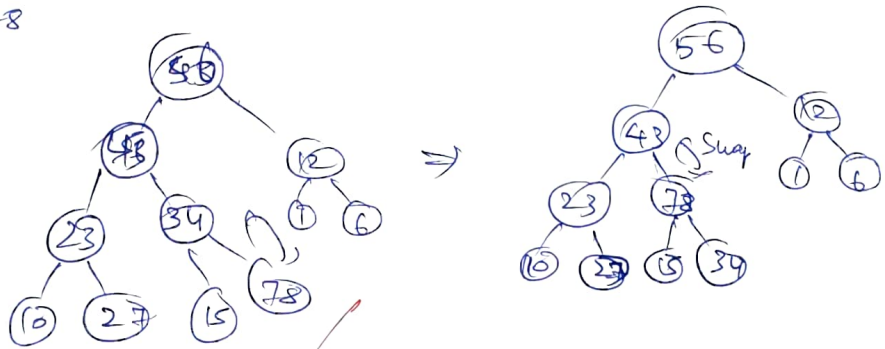

Insert 23

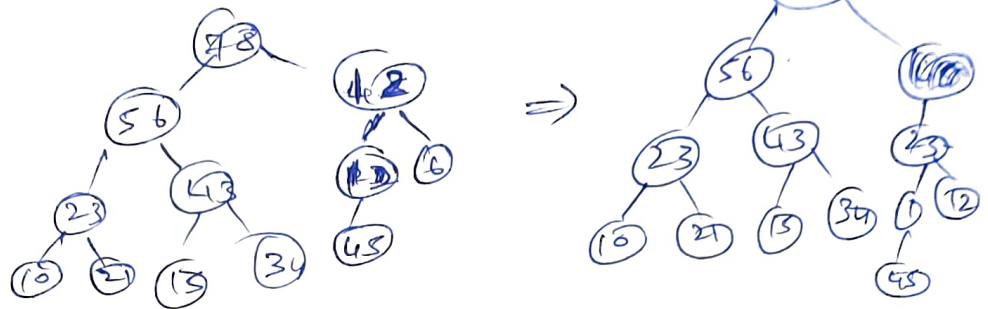

Insert 45

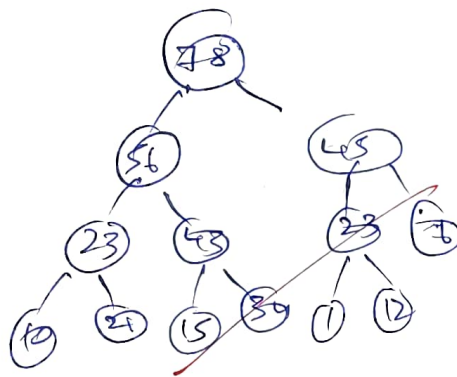

Handwritten signature